

# Triac dimmable driver---Constant Voltage PWM output series 200W

## ■Features



- Output constant voltage
- Range AC input: 200-240VA
- Built-in active PFC function
- Efficiency :up to 87%
- Protections:short circuit/over loading/over temperature
- Full protection aluminum housing easy installation
- IP66 design for outdoor installation
- Cooling by free air convection
- Work with leading edge and trailing edge TRIAC dimmers
- Strong compatibility, flicker-free dimming
- Suitable for LED lighting and moving sign applications

## ■ Specification



Model		KVF-12200-TDH	KVF-24200-TDH	KVF-48200-TDH
Output	DC Voltage	12V	24V	48V
	Voltage Tolerance	±0.5V		
	Rated current	16.6A	8.3A	4.17A
	Rated power	200W		
Input	Voltage Range	200-240V AC		
	Frequency Range	47-63HZ		
	Power Factor	PF ≥ 0.95/200VAC   PF ≥ 0.95/230VAC   PF ≥ 0.95/240VAC(Full loading)		
	Full Load Efficiency(Typ.)	86%	87%	87%
	AC Current (Max.)	1.4A	1.4A	≤1.3 A
	Leakage current	<0.50mA		
Protection	Short Circuit	shut down o/p voltage, re-power on to recover after fault condition is removed		
	Over load	≤120%    constant current limiting, auto-recovery		
	Over Temperature	100℃±10℃ shut down o/p voltage, re-power on to recover		
Environment	Working TEMP.	-40~+60℃ (Refer to Derating Curve -- Page 4)		
	Working Humidity	20~95%RH,non-condensing		
	Storage TEM.,Humidity	-40~+80℃,10~95%RH		
	TEMP.coefficient	±0.03%/℃(0~40℃)		
	Vibration	10 - 500Hz, 5G 12min./1 cycle, period for 72min.each along X,Y,Z axes.		
Safety&EMC	Safety standards	EN61347-1 EN61347-2-13		
	Withstand voltage	I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC		
	Isolation resistance	I/P-O/P I/P-FG O/P-FG:100MΩ/500VDC/25℃/70%RH		
	EMC EMISSION	EN55015,EN61000-3-2,3 (≥60%loading)		
	EMC Immunity	EN61000-4-2,3,4,5,6 ,11,EN61547		
Others	Weight	1.45kg		
	Size	265*78*47mm(L*W*H)		
	packing	265*83*65mm inner box, 340*280*185mm outside carton 10PCS /CTN		
Notes	1. All parameters NOT specially mentioned are measured at 230VAC input , rated load and 25℃			


## Triac dimmable driver---Constant Voltage PWM output series 200W

of ambient temperature.


2. To extend the driver's using life ,please reduce the loading at lower input voltage.

3.Loading range from 10% to 100%

### ■Mechanical Specification

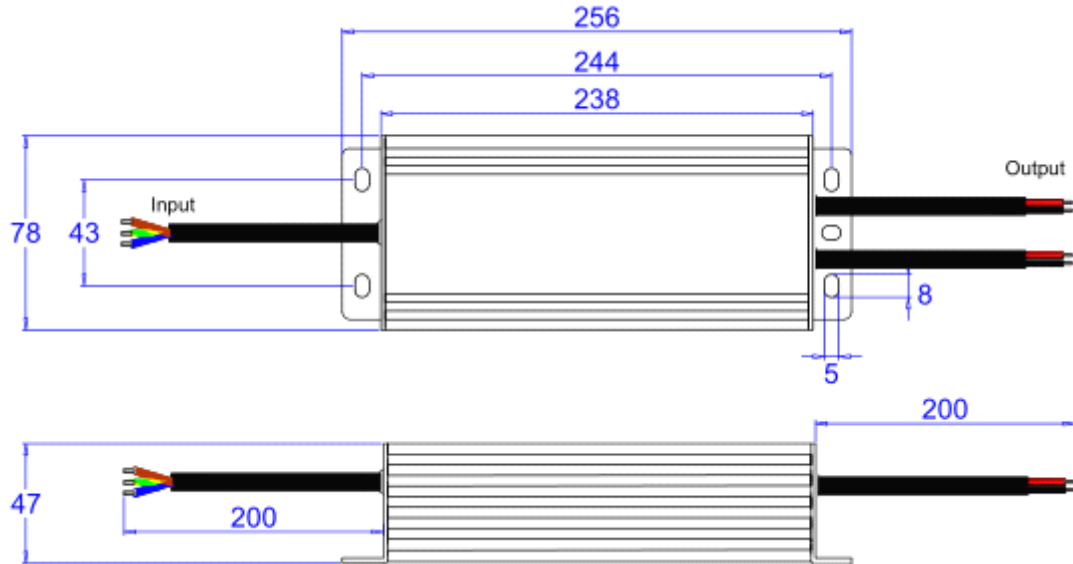

KVF-12200-TDH

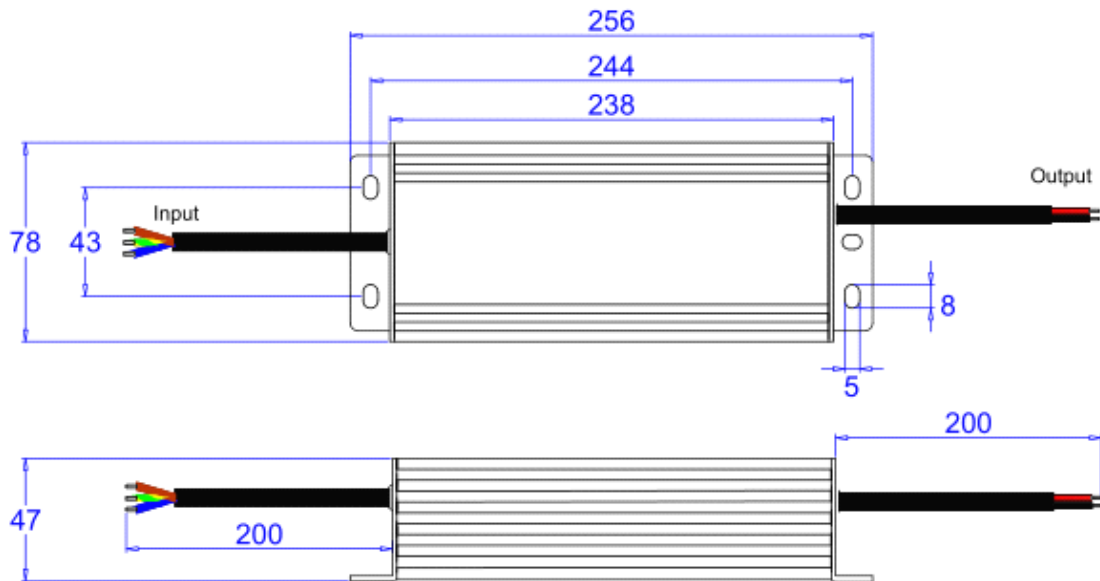

KVF-24200-TDH

● L Brown

Input



Y/G

● N Blue

ZHUHAI SHENGCHANG  
ELECTRONICS CO.,LTD.

Made in China

**LED Driver (Triac Dimming - Leading edge and trailing edge)**  
**Constant Voltage**

Model: KVF- -TDH

Input: 200-240V~ A 50/60Hz

Output: -

ta:40℃ tc:85℃ For LED module only

Building 3, No.19, Yongtian Road, Qianshan Industrial Zone, Zhuhai City, Guangdong Province, China SAA-171650-EA

● tc



SELV

10

M

M

IP66

+ Red ●

Output

- Black ●

※Input Rubber cable H05RN-F 3\*1.0mm<sup>2</sup> ,the green /yellow cable connect with (FG),Brown with AC (L),Blue with

## Triac dimmable driver---Constant Voltage PWM output series 200W

AC(N)

※Output Rubber cable H07RN-F 2\*1.5mm<sup>2</sup>,Red is output(V+) Positive,Black is output (V-) negative.Connected to LED Lamps.

※Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.

※Note: If you have any other requests, we can customized for you.



### ■Dimming Operation

※Output constant current level can be adjusted through input terminal of the AC phase line(L) by connection a triac dimmer.


※Compatible with Leading edge and tailing edge triac dimmers.

※Please use a dimmer with max. power at least 1.5 times than the load.


### ■ Connecting Diagram

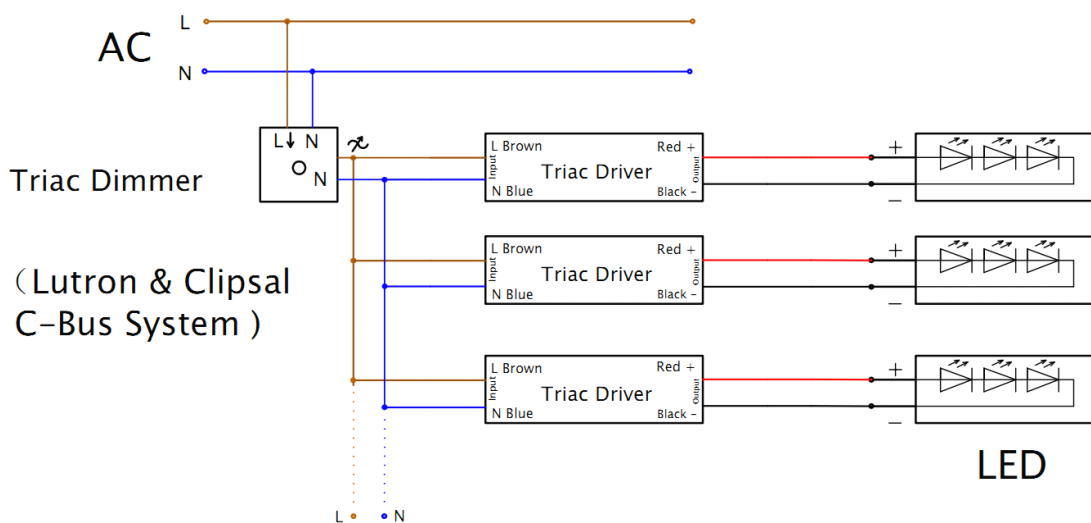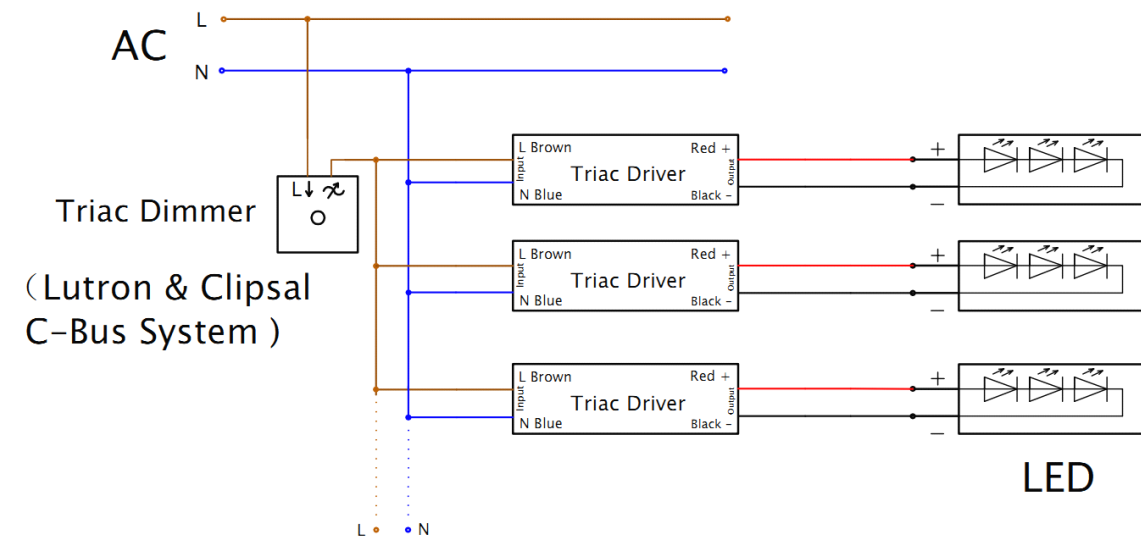

## Triac dimmable driver---Constant Voltage PWM output series 200W

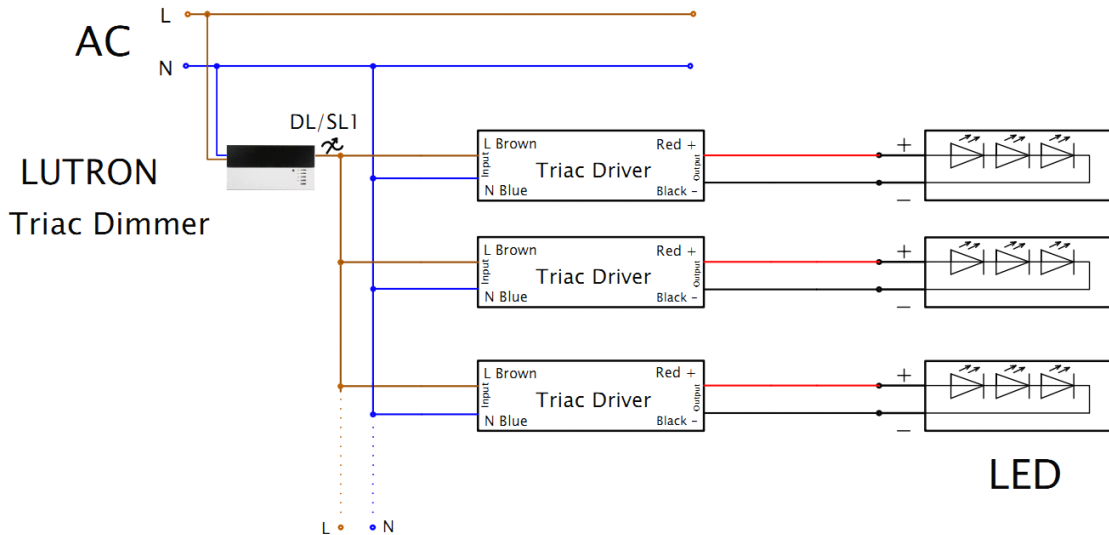

### Derating Curve

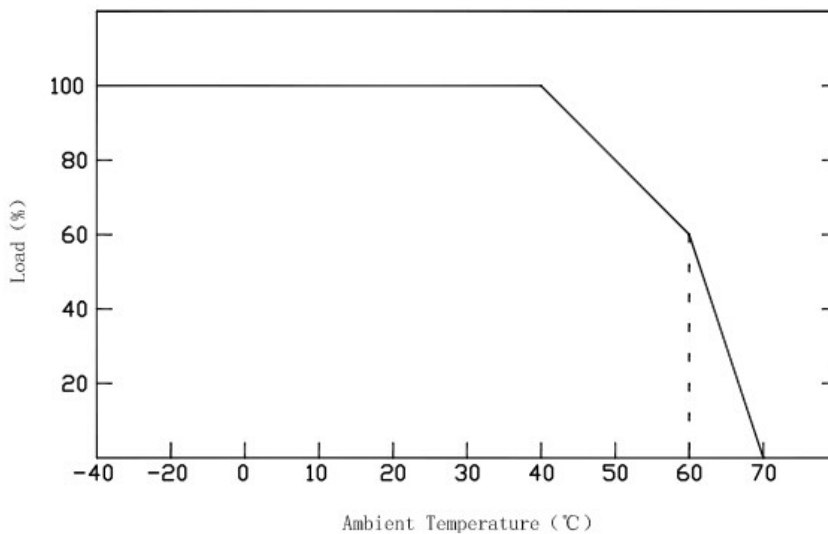

※To extend their life, please refer to the Derating Curve and derate according to the temperature.

### Instruction

- 1) This driver should be installed by qualified and professional person;
- 2) Please make sure the transformer is installed with adequate ventilation around it allow for heat dissipation.
- 3) Ensure that wiring is correct before test in order to avoid light and power supply damage;
- 4) If driver cannot work normally, don't maintain privately, please contact with Shengchang.

If you have any other questions, please feel free to contact with ZHUHAI SHENGCHANG ELECTRONICS CO., LTD.