



LED Control Card

User Manual



Before you use the LED controller, please read this file first and save it for future.

We will struggle and serve for the booming development of LED industry!

BX-V75LS receiving card

Statement

Any companies or privates cannot copy, transcribe or translate part or whole content of this file without our written permission. And cannot use it on any business or benefit filed with any forms.

The specifications and information which are mentioned on the file is for reference only, if there' s update, we will not inform you. This file is only for guidance, and all information will not be for any promises.

CATALOG

| | |
|-------------------------------------|----|
| Brief Introduction..... | 2 |
| About Software | 2 |
| Characteristics..... | 2 |
| Guiding | 3 |
| Safety Note..... | 3 |
| Function Introduction..... | 4 |
| Simple install..... | 4 |
| Interface | 4 |
| Split mode | 4 |
| Data direction can be changed..... | 4 |
| Support special-shaped screens..... | 4 |
| Many scan modes..... | 4 |
| Compatible with many chips | 5 |
| Better effects..... | 5 |
| Clock adjustment..... | 5 |
| Blanking adjustment..... | 5 |
| Maintenance | 5 |
| Control Size | 6 |
| Adjustment Guiding..... | 7 |
| Choose Parameters | 7 |
| Specification..... | 8 |
| Interface Photo..... | 9 |
| Interface Definition | 10 |
| Size Photo..... | 11 |
| FAQ | 12 |

Brief Introduction

Thanks for choosing LED control card. The design of the control card is according to the international and industrial standard, but if the operations are incorrect, it will probably bring you personal injury and financial harm. As to avoid these and win more from your equipment, please obey the specifications of this file.

About Software

Cannot do any modification, decompilation, disassembling, decoding or reverse engineering on our software, it' s illegal.

Characteristics

- ◆ Simple construct; Convenient to install;
- ◆ Gigabit receiving card mode, be compatible with synchronous sending card and asynchronous YQ player;
- ◆ High refreshment; Abundant display effect; Support high refreshment and high gray scale;
- ◆ Simple operations;
- ◆ Support the normal chip, PWM chip, etc.
- ◆ Support any scan mode in 64 scan, and support 595 serial decoding scan;
- ◆ 16 nos RGB;
- ◆ Support "configure file" read back;
- ◆ Support detect on Ethernet communication;
- ◆ Can be used for all kinds of full color LED screens

Guiding

Safety Note

- ◆ Input voltage is 5V, voltage range is from 3V-6V, please make sure the quality of the power supply of BX-V75LS series.
- ◆ Please make sure that all the power supply cables are plugged off when you want to connect or plug off any signal or controlling cables.
- ◆ Please make sure that all the power supply cables and signal cables are plugged off when you need to put in or take off the hardware equipment.
- ◆ Please take off the power supply of LED video processor before you do any hardware operations, and ESD by touching the ground.
- ◆ Please make sure the environment is clean, dry and ventilated when you use this product, also, do not put this product to a high temperature and wet environment.
- ◆ This product is electronic products, please keep away from fire, water source and flammable & combustible products.
- ◆ There' s high pressure components in this products, please do not open the box and repair it by yourself.
- ◆ Turn off the power supply immediately when you find smoking, peculiar smell or something unusual. And contact with us soon.

Function Introduction

BX-V75LS receiving cards used for all kinds of full color LED display screen, support most of the module chip. 8nos T75 port on board, data, refresh rate can be reached to 5000Hz. Support Gigabit mode, asynchronous player and BX-VS/VSE/VHE synchronous sending card. Users can update the firmware online.

Simple install

8nos T75 on board, supports E signal, maximum 64 scan, 16 nos RGB signal output. Exchange from all ports, exchange from the numbers of RGB colors, as to arrange

Interface

8nos T75 port on board, support E signal, maximum 64 scan mode, 16 nos RGB signal outputs. Support exchange the data from any interface, RGB colors will exchange in orders.

Split mode

Support 2 split modes, 3 split modes and 4 split modes, for width, can be different. Example: 2 split modes: first one is 128 pixels, another one is 64 pixels; 3 split modes: first one is 128 pixels, middle one is 128 pixels, last one is 64 pixels.

Data direction can be changed

Default is from right to left. According to your requirements, you can set as "left to right" " top to bottom" " bottom to top" . We suggest from right to left and top to bottom.

Support special-shaped screens

Support excursion of display data (from range 0-511 pixels). And maximum, you can set 384 in height for excursion.

Many scan modes

Use LedshowTV software, and support 64, 32, 16, 8, 4 scan modes; Support without 138, and support 595, RT958 etc. By smart scan function, can support static screen, 2 to 64 scan modes.

Compatible with many chips

Support normal chip, PWM chip.

Better effects

Adopt high refreshment technology, support high refreshment and high gray scale.

Support 256, 512、1024, 2048, 4096, 8192, 16384, 32768,65536.

Used for all kinds of situations, outdoor or indoor. Users can get a good effect by adjusting the refresh rate, display mode, etc.

Clock adjustment

Support adjustment from 10.42MHz to 31.25MHz. Satisfy cascade characteristics of different modules, has better effect. On the promise of refresh rate, will increase the width.

Blanking adjustment

Adjust the blanking, as to adjust the virtual light.

Maintenance

Receiving card supports read back function of configuration parameters; Support update online; It is convenient for customers to update and maintain.

Control Size

Better to control the sized smaller than 256*256, you will get a good effect.

The effect is depending on the width of the screen, as to be more clear, please check the below:

| scan mode | Suggest | Maximum | The lowest refresh rate |
|-----------|---------|---------|-------------------------|
| 1/32 | 64 | 128 | 960 |
| 1/16 | 128 | 192 | 960 |
| 1/8 | 64 | 128 | 1440 |
| 1/4 | 64 | 128 | 1920 |

Note:

- ◆ The upon scan modes are for straight lines. If your scan mode is 1/4, one data has 8 lines, you should choose the data of 1/8; If your scan mode is 1/4, one data has 16 lines, you should choose 1/16.
- ◆ If it is OK, you can use split mode as to improve the display effect.

Adjustment Guiding

Choose Parameters

➤ Display mode

Now, we have two modes, refreshment priority and brightness priority. Refreshment priority is for high refresh rate, and you will get good feedback by mobile phone or camera, but the brightness is lower. If you use brightness priority, you will get higher brightness but photo by mobile phone or camera may not so good. Usually, for indoor screen, brightness is not so important, so you can choose refreshment priority; But for outdoor screen, brightness is needed, in this situation, need to choose brightness priority.

➤ Brightness mode

For brightness mode, there are 3 modes: lower, normal or high brightness. If the display mode is fixed, then, the higher the brightness is, the lower the refreshment will be. Or, on the same refreshment, the control width will be smaller. So, when the brightness is enough, you can choose lower brightness mode, as to obtain a better refresh rate and shooting effect.

➤ Gray grade

On the same refresh rate, if the control size is the same, then, the gray grade is higher, the effect will be better. But if the gray grade is higher, the control size will be smaller. So, we usually suggest to use 4096 gray scale, do not over than 16384.

➤ Refresh rate

It is not correct that the refresh magnification is higher, the effect will be better. If the refresh rate is enough, the refresh magnification is lower, the shoot effect will be better.

➤ Replacement clock

Replacement clock is also an important parameters. The higher the replacement clock is, the control size will be larger(on the same refresh rate). But some kinds of modules are not so good with quality, cannot use higher replacement clock, usually, there will be some special flashing on the screen.

➤ Gray from the first grade


If users need better low gray effect, you can choose. But the effect will be not so good, it will be weird by your eyes. So, usually, we do not suggest.

Specification

| Screen index | |
|-----------------------|---|
| Parameters | Specification |
| Minimum size | 32 x 32 |
| Control size | 256*256 |
| Total pixels | 256*256 |
| Line offset range | 0-511 |
| Line offset height | Maximum 384 lines |
| Cascade quantity | Single LAN cable cascade receiving cards \leq 1024 |
| Gray grade | \leq 65536 |
| Refresh rate | Support 5000Hz, will be changed with the control width. |
| Screens | All kinds of full color LED screens |
| Chip | All main LED chip |
| Interface | 8nos T75 , 16 RGB data |
| Brightness adjustment | 256 grade |

| Details | |
|--------------------|--|
| Input power supply | 3V~6V; Please make sure the quality of power supply. |
| Power Dissipation | \leq 5W |
| Temperature | -40°C ~ 80°C |
| Size | 107.4mm × 91.7mm |


Interface Photo

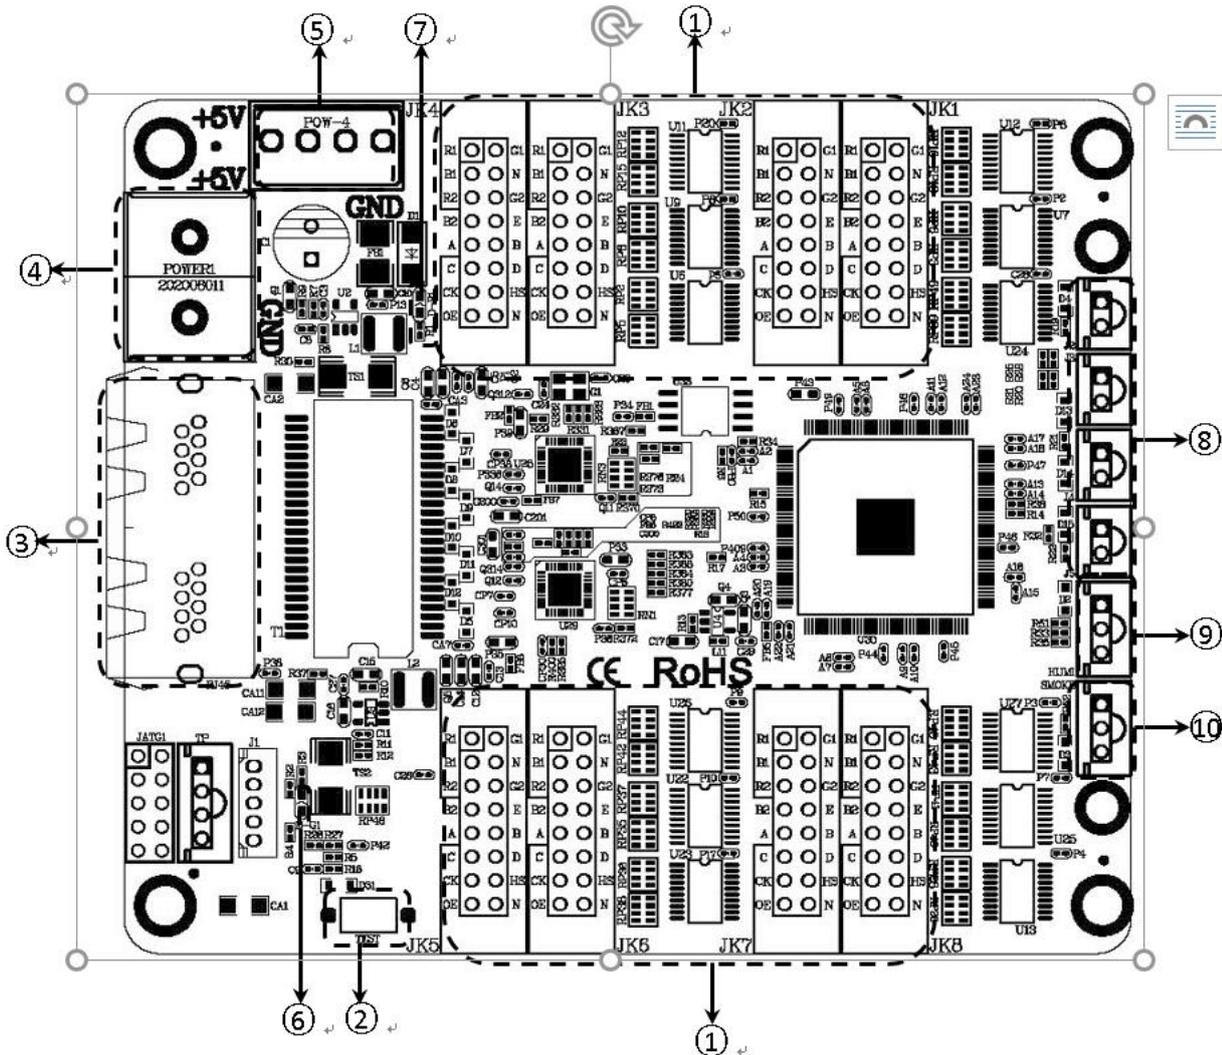

| Interface | | |
|-----------|----------------------|---|
| 1 | T75 port | T75 port (JK1, JK2, JK3, JK4, JK5, JK6, JK7, JK8) |
| 2 | TEST | Screen Text button |
| 3 | 1000M | Gigabit Ethernet, connect with sending card |
| 4 | Power supply | 5V power supply port, DC input, 5V, support 3V~6V |
| 5 | Power supply port | 5V power supply port, DC input, 5V, support 3V~6V |
| 6 | D-G1 | Status light, green light if it is OK |
| 7 | D-R1 | Power supply light, red light if it is OK |
| 8 | Power supply monitor | Power supply monitor port (optional) |
| 9 | HUMI | Temp&Humid sensor port (optional) |
| 10 | SMOKE | Smoke sensor port (optional) |

Interface Definition

| Function | Pin No | Pin No | Function |
|----------|--------|--------|----------|
| R1 | 1 | 2 | G1 |
| B1 | 3 | 4 | GND |
| R2 | 5 | 6 | G2 |
| B2 | 7 | 8 | E |
| A | 9 | 10 | B |
| C | 11 | 12 | D |
| CK | 13 | 14 | HS |
| OE | 15 | 16 | GND |

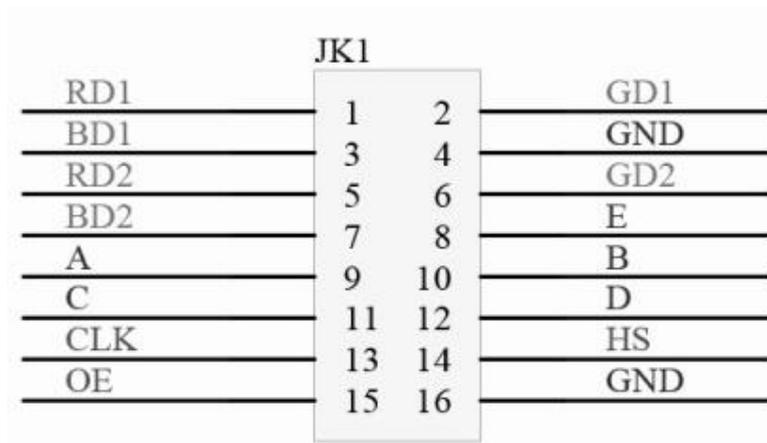

FAQ

- ◆ Gigabit or Sending card

If need better shoot effect, choose sending card mode.

- ◆ Is there any affect for shooting by environment?

Usually, the environment brightness is the biggest fact for shoot. Cause the time of the camera shutter is according the the environment brightness.

In indoor, the brightness is lower, so, the shutter will be slower, usually, 1/60 - 1/200 seconds. In this situation, if the refresh rate is about 1000, the shoot effect will be better.

But if in external, the brightness is higher, the shutter time will be faster, usually, faster than 1/800 seconds. In this situation, the refresh rate should be about 3000.

So, for same screen, the shoot effect in night is better then in day. And that is the reason why outdoor screen needs a higher refresh rate.

Contact Us

Shanghai ONBON Technology Co.,ltd (Headquarters)

Address: 7 Floor, Tower 88, 1199#, North Qinzhou Road, Xuhui District, Shanghai City, China

Tel Phone: 086-21-64955136

Fax: 086-21-64955136

Website: www.onbonbx.com

ONBON (Jiangsu) Optoelectronic Industrial Co.,LTD

Address: 1299#, Fuchun Jiang Road, Kunshan City, Jiangsu Province, China

Sales Contacts

Tel: 0086-15921814956 0086-15800379719

Email: onbon@onbonbx.com

Second Development

Tel: 0512-66589212

Email: dev@onbonbx.com

iLEDCloud

Website: <http://www.iledcloud.com/>



Public Wechat



ONBON APP