



FOG LIGHT MOUNT

2014 GMC® 1500

FOG LIGHT MOUNT KIT

**1 SET OF DUALLYS OR D2s
FOG LIGHT BRACKET
MOUNTING INSTRUCTIONS**

PARTS INCLUDED

- (8) Socket Button Head Screw #8-32 x 1/2" Stainless Steel
- (8) Nyloc Nut #8-32 Stainless Steel
- (8) Washer #8-32 Stainless Steel
- (4) Socket Button Head Screw M6X1 x 30mm Stainless Steel
- (4) Plastic Unthreaded Spacer (4) Nyloc Nut M6 Flange



Thank you for purchasing Rigid Industries' products for your GMC®. Installation is fairly simple with the right tools and good mechanical abilities. If you are not confident in your mechanical skills, please seek the help of a professional to perform the installation. Please read through all of these instructions and tips before proceeding with installation.

Always disconnect any power sources connected to your vehicle before servicing fuses or electrical systems.

STEP 1

We recommend starting your installation on the driver's side fog light first.

Unplug the fog light connector clip by pinching the connector and pulling the connector off.



STEP 2

There are 3 fog light retaining clips on the back of the fog light that need to be disconnected. We recommend using needle nose pliers to pinch the connectors and release them.

Once all 3 retaining clips have been released, you can now remove the original fog light by pushing it out.




STEP 3

Unclip the fog light shroud and remove.



STEP 4

Using a Dremel® tool, cut out sections from the factory fog light housing to remove material and make room for your new Rigid Industries D-Series Fog Lights.

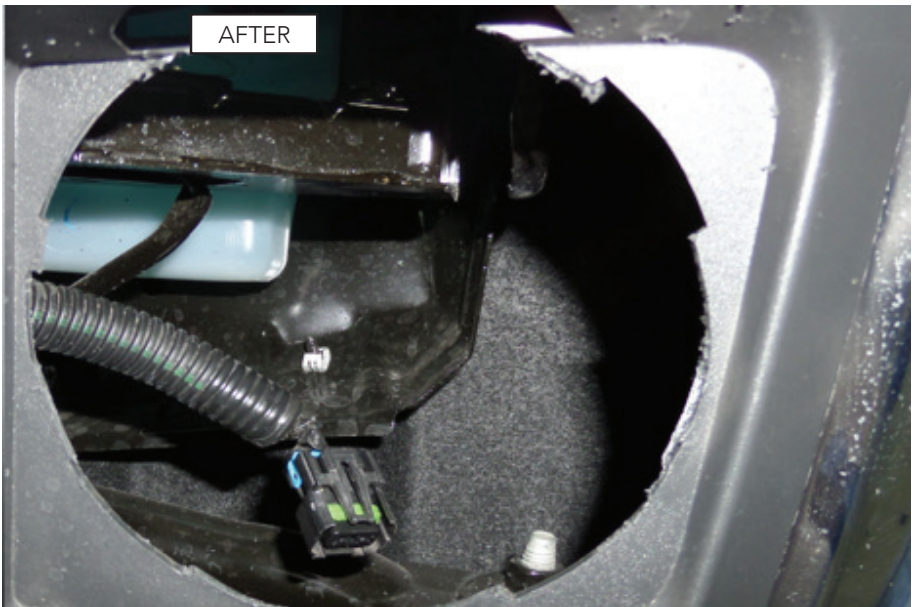

STEP 5

Using your new Rigid Industries Fog Light Bezel as a template, mark the four holes with a pencil that need to be drilled out in order to mount the bracket in the original OEM slot.

Drill size will be $11/64$ inch or a #18 drill bit.




STEP 6

Use the Plastic Unthreaded Spacer, Socket Button Head Screw M6x1 x 30mm, and Nyloc Nut M6 Flange to mount D-Series lights to the Fog Light Bracket.

The light will hold the Nyloc Nut and you will need a 5/32 Inch Allen wrench to tighten the bolt into place.

Unthreaded Spacer

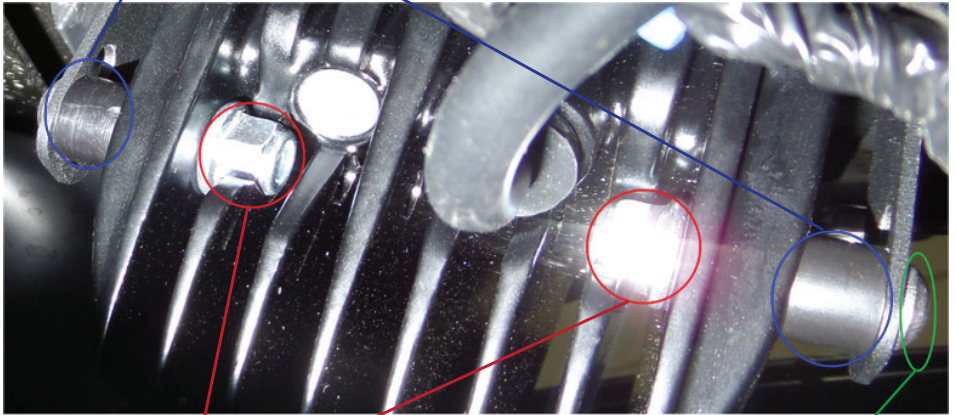

M6 Flange Nyloc Nuts


M6x1 x 30mm

STEP 7

Use 4 Socket Button Head Screws, 4 Washers, and 4 Nyloc Nuts to mount the new Bezel (with your D-Series light attached) into the original OEM fog light slot.

This will complete the driver's side fog light installation.

Socket Button #8-32 x 1/2

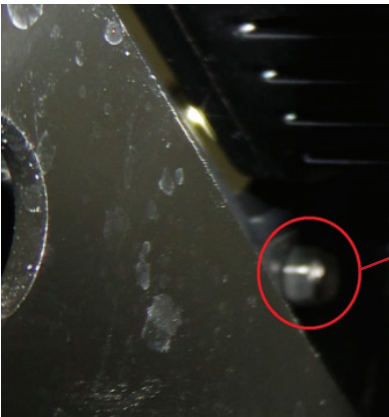


#8-32 Stainless Nyloc Nut

INSTALLING THE PASSENGER SIDE FOG LIGHT:

Repeat Steps 1-7. However, when it comes time to mounting together the Bezel with the D-Series light attached to the original OEM fog light slot, there will be a piece of plastic that interferes with the heat sink of the light.

Simply remove the piece of plastic with a Dremel® type tool to ensure there is nothing blocking proper installation.

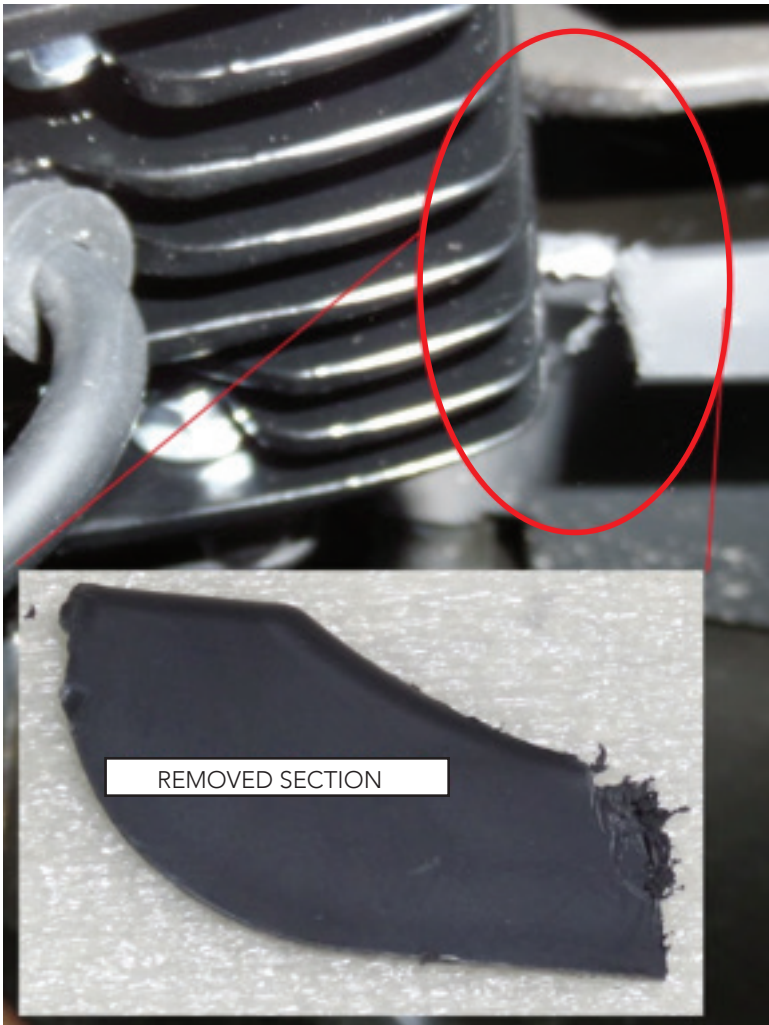

WIRING

Wire lights according to the instructions included with your lights.

Take care to avoid any heat sources and sharp or abrasive surfaces.



Your installation is now complete.

Welcome to the Rigid Nation!

ALSO AVAILABLE FOR YOUR GMC®



2014 GMC® 1500 LED GRILLE

PART #40573

WARRANTY INFORMATION

Rigid Industries warrants that this product will be free from defects in material and workmanship. If you believe your Rigid Industries product is defective, it must be returned to Rigid Industries for inspection by our warranty claims department. If, after inspection, Rigid Industries verifies that the defect was not caused by negligence, abuse, unauthorized repair or disassembly, Rigid Industries will determine whether the product will be repaired or replaced in accordance with Rigid Industries Limited Lifetime Warranty*.

Warranty Periods:

- All LED Lights – Limited Lifetime
- Flashlights – 1 year
- Accessories and Mounts – 2 years
- Batteries – 90 days

Warranty Coverage:

To begin your warranty claim, you must have a Return Merchandise Authorization (RMA) number. To get your RMA number, please contact our warranty department by phone at 480-655-0100 ext. 1008, or by filling out the Return Merchandise Authorization Form on our website.

All of the following will immediately void all warranties:

- Customer negligence – The customer has modified the light and/or is not using it for the recommend application.
- Customer abuse – Damage to the light beyond normal wear and tear.
- Repair work done by unauthorized personnel without Rigid Industries' approval.
- If the light has been opened or any screws have been removed.

All warranties are non-transferable. Warranty terms and policies are subject to change without notice.

*For all information regarding the Rigid Industries' Limited Lifetime Warranty please call 855-760-5337 ext. 1008, email warranty@RigidIndustries.com, or visit our warranty page online at RigidIndustries.com/about/warranty.

Follow us on facebook at
[Facebook.com/RigidIndustries](https://www.facebook.com/RigidIndustries)

779 N Colorado St, Gilbert, AZ 85233 • 855-760-5337 • www.rigidindustries.com

PKG-IS-060 REV2

Rigid Industries, Dually, D2 and D-Series are registered and/or unregistered trademarks of JST Performance, Inc. d/b/a Rigid Industries.