

LogiLink®

Universal Power Adapter 3–12 V

8 Changeable Tips Included


Art. No.: PA0198



Ideal as a replacement or secondary power adapter for electronics and small home appliance.

Features:

- » Provide different charger adapters for easily charging most of the digital devices
- » Reliable replacement or secondary power adapter in home or office
- » Extra USB port allows you to charge another 5 V device such as mobile phone at the same time
- » Built-in protection against overcurrent, overvoltage, over-temperature and short-circuit

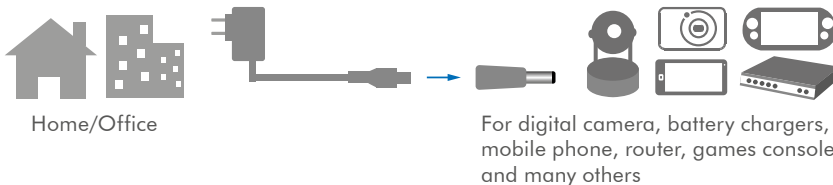

Specification:

Input Voltage	AC 100–240 V 50/60 Hz 1 A max.
Output Power	DC: 3 V/4.5 V/5 V/6 V/7.5 V/9 V/ 12 V 2 A (24 W max.) USB: 5 V/1 A (5 W max.)
Efficiency	>82%
Standby Power Loss	≤0.5 W
Operating Temperature	0–45°C
Operating Humidity	10–80% RH (no condensation)
Dimensions	8.5 x 5 x 4.1 cm (without cable)
Weight	0.135 kg
Cable Length	1.45 m
DC Plug	5.5 x 2.1 mm



C	5.5 x 2.5mm
E	5.5 x 2.1mm
H	3.5 x 1.35mm
G	4.0 x 1.7mm
L	3.0 x 1.1mm
H	2.5 x 0.7mm
S	Micro USB
LED Terminal	



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



PA0198



Made in China

Package Contents:

- » 1 x Universal Power Adapter
- » 8 x Changeable Tips
- » 1 x Key
- » 1 x User Manual

Package Information:

- » Packing Dimension: 176 x 127.5 x 42 mm
- » Packing Weight: 0.22 kg
- » Carton Dimension: 505 x 372 x 285 mm
- » Carton Q'ty: 40 pcs
- » Carton Weight: 10 kg



Warning

- *For use with Information Technology Equipment.
- *Compare the specifications of your device with the specifications of the adapter. The power current (A) of your device should be equal to or lower than the power current of the power supply.
- *Only to be used indoor.
- *Only to be used after powering on.
- *Only to be used within max load.
- *Remove the power adapter from its power source after use.



PA0198



4 052792 052893

Made in China



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.