

**INSTALLATION INSTRUCTIONS**  
**50154-1 FRONT MODULAR EUROGUARD**  
**50154-5 FRONT ONE PIECE EUROGUARD**  
**NISSAN FRONTIER 05-08**

<b>PARTS LIST:</b>	(1) <b>HARDWARE KIT 50154:</b>
<b>QTY:</b>	( 6 ) 1/2 x 1 1/4" Carriage head bolts
( 1 ) Front Guard Euroguard	(10) 1/2" Flat washers
( 2 ) Main mounting brackets ( Driver & Passenger)	( 6 ) 1/2" Lock nuts
( 2 ) Auxiliary mounting brackets (Driver & Passenger)	( 4 ) M12 x 40mm.Hex head bolt.
	( 2 ) 5/16 x 3/4" Hex head bolt.
	( 4 ) 5/16" Flat washers
	( 2 ) 5/16" Lock nuts

<b>TOOLS REQUIRED:</b>				<b>Modular Euroguard requieres extra:</b>
17mm Socket	3/4" Wrench	10mm Socket	Reel	Wrench allen 7/32"
3/4" Socket	Ratchet	Drill	Safety lenses	

**INSTRUCTIONS:** **Aproximated installation time: 30 min.**

1. Before beginning installation, read the instructions thoroughly and completely. If any of the items listed above are missing, please do not proceed with the installation. Call your distributor immediately to obtain the necessary items.
2. Locate and remove the lower plastic air dam to gain access. **Photo 1.**
3. Remove the factory tow hooks and replace with the main bracket assembly. Attach using the M12 x 40mm bolts provided.  
**NOTE: Factory tow hooks can not be re-installed. See Photo 2 and 3.**
4. The factory air dam may be discarded. If preferred, use a utility knife to notch the air dam where the mounting brackets attach to the frame and re-install. **Photo 4.**
5. Install your Euroguard over the main brackets and attach using the 1/2" x 1 1/4" carriage head bolts, flat washers and lock nuts. Leave loose. **See Photo 5.**
6. With the hood open, and using a flat screwdriver remove the plastic fasteners from the cover over the radiator. Place the auxiliary bracket as shown in **Photo 6** and attach using the 5/16" hex head bolts, flat and lock washers.  
**NOTE: In model 08', it will be necessary to make a small large drill in the plastic cover. In previous models 07' and the large drill can that is done; otherwise, drilling according to is indicated. Photo 7.**
7. Attach the auxiliary bracket to the Euroguard using the 3/8" bolt from the brushguard grill.
8. On the modular version (1) install the brushguards using the pre-installed brushguard bolts.
9. Make any final adjustments to the alignment of the Pull Pro and tighten all bolts. Make sure the Pull Pro does not interfere with opening and closing the hood.
10. Periodically check and re-tighten bolts as necessary over the term of use.
11. Fill out included warranty card and place in the vehicle.

**Assembly Diagram:**



PLASTIC AIR DAM

PHOTO 1



REMOVE THIS BOLTS

TOW HOOK

PHOTO 2

**Cleaning and care instructions:**

Protect the finish with a non-abrasive automotive wax, (e.g. Pure Carnauba) on a regular basis. The use of any soap, polish, or wax that contains an abrasive is detrimental to the finish, as the compounds scratch the finish and cause corrosion.

Revised 06/02/2008

G:\Usuarios\Diseño\Instructivos PDF\50s\50154-I.Pdf

**INSTALLATION INSTRUCTIONS  
50154-1 FRONT MODULAR EUROGUARD  
50154-5 FRONT ONE PIECE EUROGUARD  
NISSAN FRONTIER 05-08**

PHOTO 3



PHOTO 4



PHOTO 5

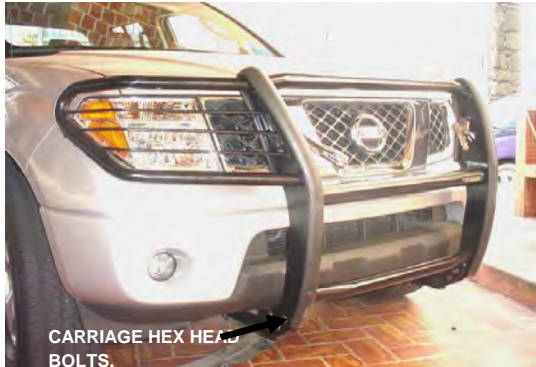


PHOTO 6



FOTO 7



DRILL OR CUT HERE, FOR AUXILIARY BRACKET INSTALLATION ( IN MODEL 08' )



**Cleaning and care instructions:**

Protect the finish with a non-abrasive automotive wax, (e.g. Pure Carnauba) on a regular basis. The use of any soap, polish, or wax that contains an abrasive is detrimental to the finish, as the compounds scratch the finish and cause corrosion.

Design:

Quality:

Revised 06/02/2008

G:\Usuarios\Diseño\Instructivos PDF\50s\50154-I.Pdf