


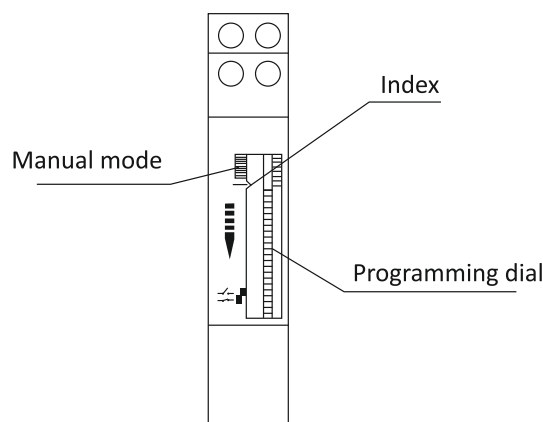

DESCRIPTION

UNO time switch controls any electrical installation by means of daily or weekly programs.

INSTALLATION

ATTENTION:Electrical devices must be installed and assembled by an authorized installer.They should be installed in switchboard cabinets made of 35 mm symmetric sections in accordance with EN 50 022.

VERY IMPORTANT:The switch is protected internally against interference by a safety device.However,particularly strong electromagnetic fields may alter its operation.

Such interference can be avoided by adhering to the following recommendations during installation:

- The device should not be installed near inductive loads (motors,transformers,contactors,etc.).
- Aseparate power line is recommended (equipped with a network filter if necessary).
- Inductive loads should be equipped with interference suppressors (varistor,RC filter).

If the timer switch is to be used in combination with other devices in an installation,it is necessary to verify that no parasitic disturbances will be caused by the group.

CONNECTION:connection scheme

PROGRAMMING

Take over all the pins to the right,Take over to the left the pins corresponding to the desired times of connection,in which the contact 1-2 will be closed.

HOUR UPDATING

Turn the dial till the index is on the current time.

MANUAL MOD

2 Positions:  =Automatic functioning
I =Permanent connection


TECHNICAL CHARACTERISTICS

Supply voltage:	Follow the indications
Switching capacity:	16(4)A/250V~
Power consumption:	0.5W
Operating accuracy:	+1 seg/day at 22°C
Power reserve(QRD,QRS):	100hours
Type of dial:	Weekly:96 pins
Minimum time of functioning:	Daily:15 minutes
Functioning temperature:	-10°C to +50°C
Protection category:	IP 20 as per EN 60529
Protection class:	II as per EN60335 under Correct assembling conditions


ATTENTION

This unit incorporates a battery which contents can be harmful to the enviroment.Please do not throw it away without removing the battery and putting it in the proper container for recycled batteries or to send the complete unit back to the factory.


DIMENSIONS

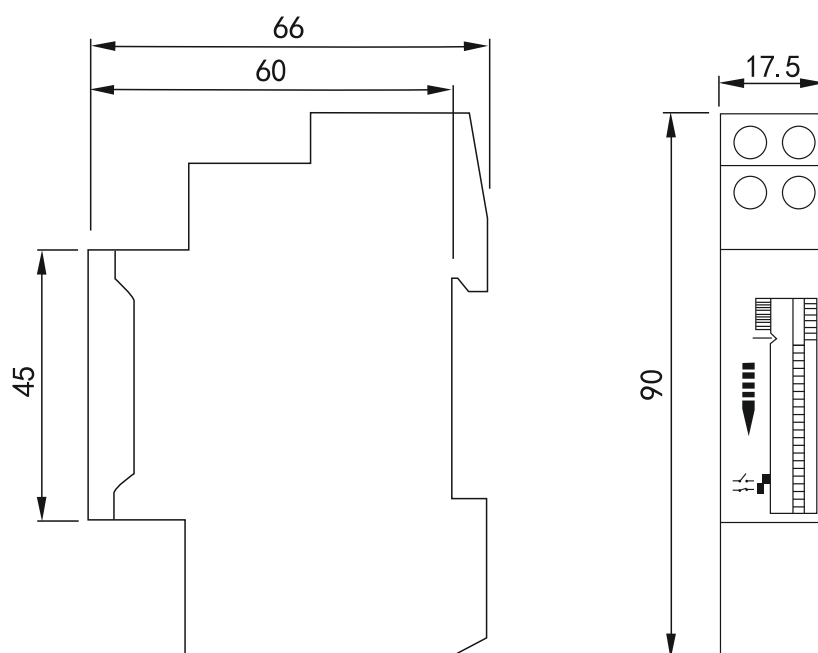

CONNECTION

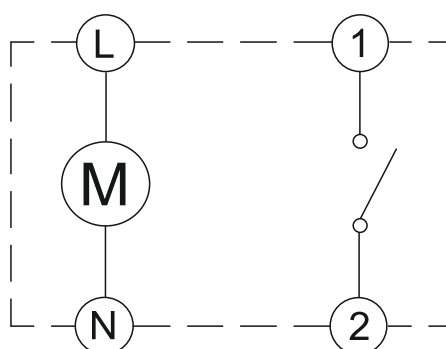

PROGRAMMING DIAL

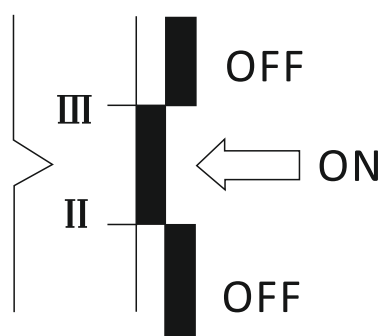


ECO LIGHT Sp. z o.o.

Działkowa 2a, 62-872 Borek, Polska

Made in P.R.C.

ecolight.pl



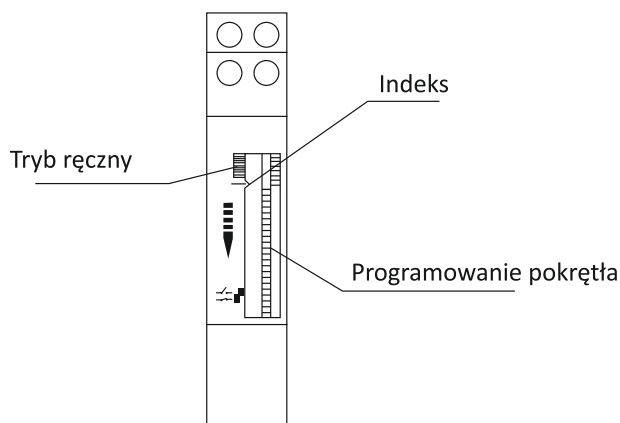

OPIS

Wyłącznik czasowy UNO steruje dowolną instalacją elektryczną za pomocą programów dziennych lub tygodniowych.

INSTALACJA

UWAGA: Urządzenia elektryczne muszą być instalowane i montowane przez autoryzowanego instalatora. powinny być instalowane w szafach rozdzielczych wykonanych z symetrycznych profili 35 mm zgodnie z normą EN 50 022.

BARDZO WAŻNE: Przełącznik jest wewnętrznie chroniony przed zakłóceniami przez urządzenie zabezpieczające. Jednak szczególnie silne pola elektromagnetyczne mogą zmienić jego działanie. Takich zakłóceń można uniknąć, stosując się do poniższych zaleceń podczas instalacji:

- Urządzenie nie powinno być instalowane w pobliżu obciążeń indukcyjnych (silniki, transformatory, styczniki itp.).
- Zaleca się stosowanie oddzielnej linii zasilania (w razie potrzeby wyposażonej w filtr sieciowy).
- Obciążenia indukcyjne powinny być wyposażone w filtry przeciwzakłóceń (warystor, filtr RC).

Jeśli wyłącznik czasowy ma być używany w połączeniu z innymi urządzeniami w instalacji, konieczne jest sprawdzenie że grupa ta nie będzie powodować żadnych zakłóceń pasożytniczych.

PODŁĄCZENIE: schemat połączeń

PROGRAMOWANIE

Przejmij wszystkie piny po prawej stronie, przejmij po lewej stronie piny odpowiadające żądanym czasom w których styk 1-2 zostanie zamknięty.

AKTUALIZACJA GODZINY

Obracaj pokrętkę, aż indeks znajdzie się na bieżącej godzinie.

TRYB RĘCZNY

2 Pozycje:  = funkcja automatyczna
I = Stałe połączenie


CHARAKTERYSTYKA TECHNICZNA

Napięcie zasilania:	Zgodnie ze wskazaniem
Zdolność przełączania:	16(4)A/250V~
Pobór mocy:	0.5W
Dokładność działania:	+1 seg/dzień przy 22°C
Rezerwa mocy (QRD, QRS):	100 godzin
Typ tarczy:	
	Tygodniowa: 96 pinów
Minimalny czas działania:	Dzienny: 15 minut
Temperatura działania:	-10°C do +50°C
Kategoria ochrony:	IP 20 zgodnie z normą EN 60529
Klasa ochrony:	II zgodnie z EN 60335 pod Prawidłowe warunki montażu


UWAGA

To urządzenie zawiera baterię, której zawartość może być szkodliwa dla środowiska. bez wyjęcia baterii i umieszczenia jej w odpowiednim pojemniku na baterie z recyklingu lub odesłania kompletnego urządzenia do fabryki kompletnego urządzenia z powrotem do fabryki.


WYMIARY

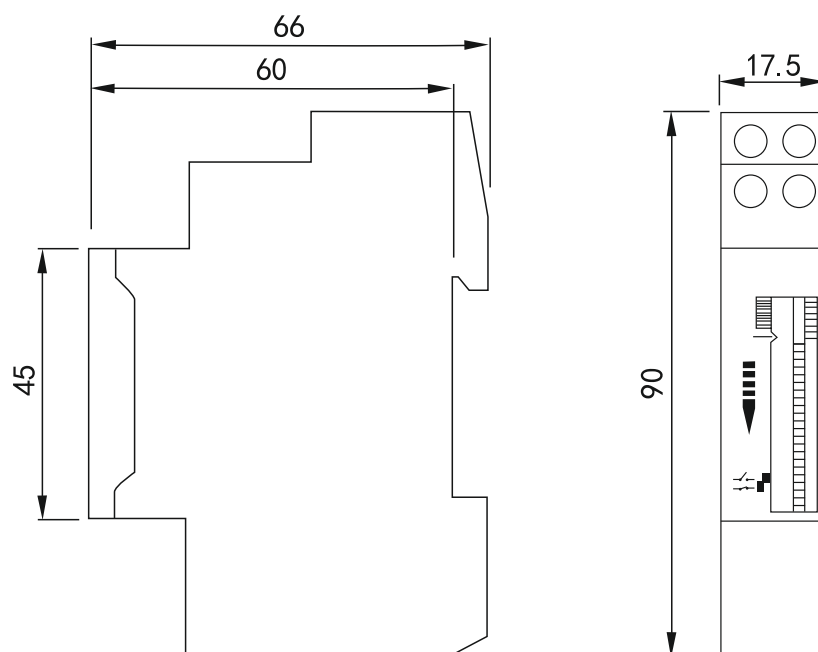

POŁĄCZENIE

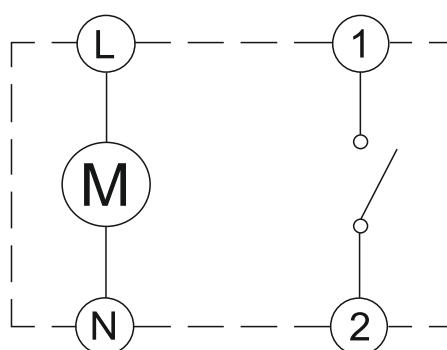

PROGRAMOWANIE

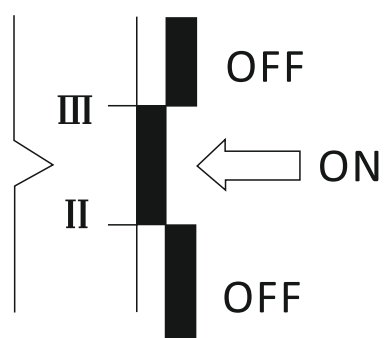

ECO LIGHT Sp. z o.o.

Działkowa 2a, 62-872 Borek, Polska

Made in P.R.C.

ecolight.pl

