



The **FIRST** Name
in Towing Products™

Scan for helpful
installation tips



INSTALLATION INSTRUCTIONS

51453 APPLICATIONS

Make	Model
Ram	1500
Ram	2500
Ram	3500

BRAKE CONTROL HARNESS




NOTICE

All steps must be followed to ensure the CURT brake control harness will function properly. Once installed, test for proper function by following the brake control unit instruction manual.

LOCATION GUIDE

Representative vehicle shown below

BH8- Under dash, to right of emergency brake pedal

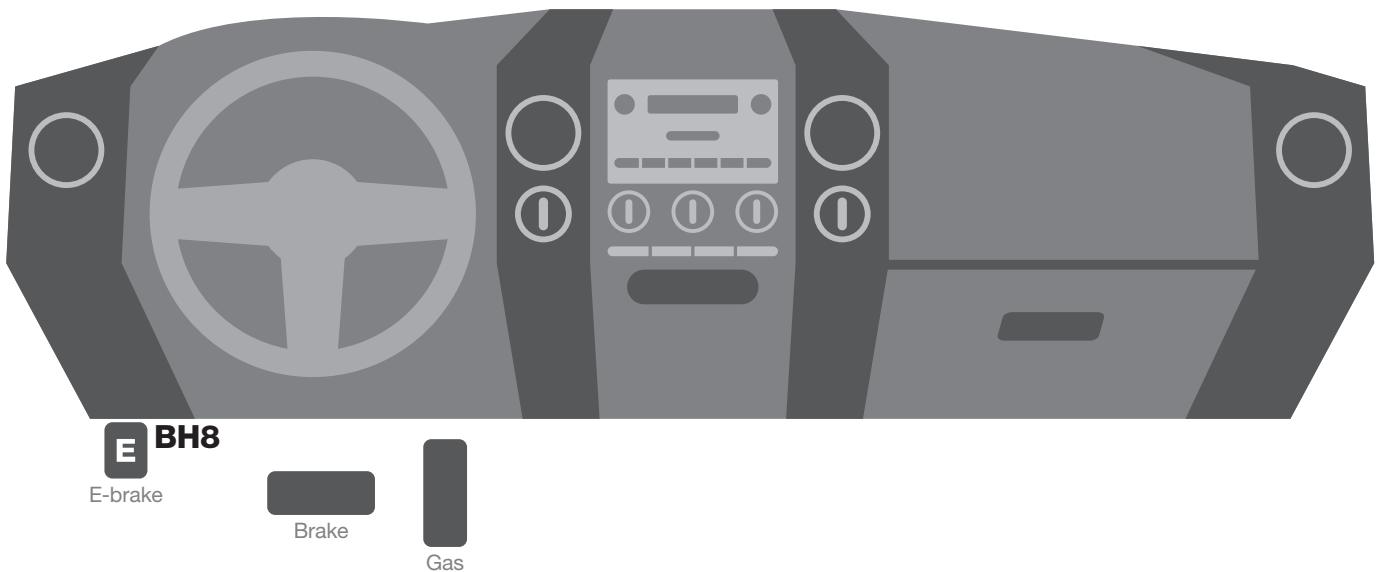

INSTALLATION / SAFETY INSTRUCTIONS

Step 1

Open the driver-side door and remove the two screws securing the lower dash panel (A). Remove the lower dash panel by pulling outwards.

Step 2

Locate the 2-pin and 4-pin vehicle brake control harness connectors under the dash, above the gas pedal. There will be two different size connectors wrapped in foam and taped to other wiring (B).

Step 3

Remove tape and protective cover from both connectors. Take care not to damage the locking tabs. The larger vehicle connector will be similar to that on the CURT brake control harness.

Step 4

Insert the 2-pin and 4-pin connectors on the CURT brake control harness into the vehicle connectors (C,D). Make sure the connector is fully inserted with locking tabs in place (E).

Step 5

Route the brake control harness along the back of the dash and out the bottom to the brake control unit. Insert the brake control harness's black connector into the brake control's quick plug connector. Secure the brake control harness with the provided cable ties, avoiding any pinch points.

Step 6

Complete the installation using the brake control instructions. Mount the unit as directed and perform test procedures as instructed in the brake control user manual.

