

User's Manual

www.PLANET.com.tw

Ultra PoE

POE-171 / POE-171S

Ultra Power over Ethernet Injector / Splitter



BUY ON

www.cablematic.com

Table of Contents

1. Package Contents	5
2. Product Features	6
3. Product Specifications	8
4. Product Outlook	12
5. Hardware Installation	14
5.1 Before Installation	14
5.2 The POE-171 Installation	14
5.3 The POE-171 and POE-171S Installation	16
5.4 The POE-171 and POE-E201 Installation	17
6. Customer Support	19

1. Package Contents

Thank you for purchasing PLANET Single-Port 10/100/1000Mbps POE-171 or POE-171S.

Model	LAN Port Speed	PoE Standard	PoE Budget
POE-171	10/100/1000Mbps	IEEE 802.3at/af	60 watts

Model	LAN Port Speed	PoE Standard	DC Out
POE-171S	10/100/1000Mbps	IEEE 802.3at/af	12V/19V/24V

Please unpack the box of the POE-171 or POE-171S carefully, and the box should contain the following items:

[POE-171]

- The Single-Port 10/100/1000Mbps ultra PoE injector x 1
- User's manual x 1
- 65W power adaptor x 1

[POE-171S]

- The Single-Port 10/100/1000Mbps ultra PoE splitter x 1
- User's manual x 1
- DC plug cable x 2
- 15cm RJ45 cable x 1

If any of these are missing or damaged, please contact your dealer immediately; if possible, retain the carton including the original packing material, and use them again to repack the product in case there is a need to return it to us for repair.

BUY ON

www.cablematic.com

2. Product Features

[POE-171]

■ Interface

- 2-Port RJ-45 interfaces
 - ◇ 1-Port **Data + Power** output
 - ◇ 1-Port **Data input**
- 1 DC 52~56V input power socket

■ Power over Ethernet

- Ultra Power over Ethernet End-Span / Mid-Span PSE
- IEEE 802.3at PoE compliant
- Backward compatible with IEEE 802.3af PD device
- Supports PoE Power up to 60 watts for PoE port
- Auto-detection of PoE IEEE 802.3at/af equipment and devices from being damaged by incorrect installation
- Remote power feeding up to 100m

[POE-171S]

■ Interface

- 2-Port RJ-45 Interfaces
 - ◇ 1-Port **Data + Power** Input
 - ◇ 1-Port **Data output**
- 1-Port DC output power socket
- 1 DC 12V/19V/24V DIP switch

■ Power over Ethernet

- Complies with ultra Power over Ethernet End-Span/Mid-Span PSE
- IEEE 802.3at PoE compliant

- Splits the 56V DC power over RJ-45 Ethernet cable into DC 12V/19V/24V output
- Distance up to 100 meters
- IEEE802.3af Injector devices compatible

■ Hardware

- Metal case
- LED Indicators for Power LED and PoE In-use LED

■ Standard Compliance

- IEEE 802.3 10Base-T
- IEEE 802.3u 100Base-TX
- IEEE 802.3ab 1000Base-T
- IEEE 802.3at High Power over Ethernet
- IEEE 802.3af Power over Ethernet
- FCC Part 15 Class A, CE



Note

PSE (Power Sourcing Equipment) is a device (switch, or hub for instance) that will provides power in a PoE setup. Maximum allowed continuous output power per such device in IEEE 802.3af is 15.4W, and in IEEE 802.3at is 30W.

PD (Powered Device) is a PoE-enabled terminal by PSE and thus consumes energy, such as PoE IP Phones, PoE IP cameras, PoE wireless access points, etc.

BUY ON

www.cablematic.com

3. Product Specifications

Product		POE-171
Hardware Specifications		
Interface	LAN Ethernet	1 x RJ-45 STP, "Data" Input Port
	Ethernet+DC (PoE)	1 x RJ-45 STP, Data + Power" Output Port
	Power	1 x DC 56V Input socket
Network Cable	Ultra PoE (60W)	4-Pair UTP Cat. 3, 4, 5, up to 100m (328ft)
	802.3af/at PoE (15W / 30W)	2-Pair UTP Cat. 3, 4, 5, up to 100m (328ft)
LED Indicator		System: Power x 1 (Green) PoE Port: PoE In-use x 2 (Green)
Data Rate		10/100/1000Mbps
Dimensions (W x D x H)		94 x 70.3 x 26.2 mm
Weight		237g
Unit Output Voltage		DC 56V, 1.16 A
Power Requirements		100-240V AC, 50/60Hz, 1.5A
Power Consumption		60 Watts max.
Number of devices can be powered		1
Operating Temperature		0 ~ 50 degrees C
Storage Temperature		-10 ~ 70 degrees C
Operating Humidity		5 ~ 90%, Relative Humidity, non-condensing

Storage Humidity	5 ~ 90%, Relative Humidity, non-condensing
Power over Ethernet	
PoE Standard	Ultra PoE over 4-pair UTP, IEEE 802.3at High Power over Ethernet End-Span / Mid-Span PSE
PoE Power Output Budget	DC 56V / 60 Watts
PoE Power Supply Type	End-Span + Mid-Span
Power Pin Assignment	Pair 1 End-Span: 1/2(-), 3/6(+) Pair 2 Mid-Span: 4/5(+), 7/8(-)
Standards Conformance	
Standards Compliance	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3at High Power over Ethernet IEEE 802.3af Power over Ethernet
Regulation Compliance	FCC Part 15 Class A, CE

BUY ON

www.cablematic.com

Product		POE-1715
Hardware Specifications		
Interface	Ethernet	1 x RJ-45 STP, Ethernet data output port
	PoE In	1 x RJ-45 STP, PoE power input port
	Power socket	1 x DC out power socket
Network Cable	Ultra PoE (60W)	4-Pair UTP Cat. 3, 4, 5, up to 100m (328ft)
	802.3af/at PoE (15W / 30W)	2-Pair UTP Cat. 3, 4, 5, up to 100m (328ft)
LED Indicator		System: Power x 1 (Green) PoE In-use x 2 (Green)
Data Rate		10/100/1000Mbps
Dimensions (W x D x H)		94 x 70.3 x 26.2 mm
Weight		300g
Unit Output Current (at 56V Input)		4.2A@12V DC 2.6A@19V DC 2.1A@24V DC
Power Consumption		54 watts max.
Number of devices can be powered		1
Operating Temperature		0 ~ 50 degrees C
Storage Temperature		-10 ~ 70 degrees C
Operating Humidity		5 ~ 90%, Relative Humidity, non-condensing

Storage Humidity	5 ~ 90%, Relative Humidity, non-condensing
Power over Ethernet	
PoE Standard	IEEE 802.3at High Power over Ethernet End-Span / Mid-Span PD
PoE Power Output Budget	DC 56V / 50 Watts
PoE Power Supply Type	End-Span / Mid-Span
Power Pin Assignment	1/2(-), 3/6(+) / 4/5(+), 7/8(-)
Standards Conformance	
Standards Compliance	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3at High Power over Ethernet IEEE 802.3af Power over Ethernet
Regulation Compliance	FCC Part 15 Class A, CE

BUY ON

www.cablematic.com

4. Product Outlook

Figure 1: shows overview of POE-171.



Figure 1: POE-171 Outlook

Figure 2: shows overview of POE-171S.



Figure 2: POE-171S Outlook

POE-171 LED Indicators

LED	Color	Function
PWR	Green	Lights to indicate the ultra PoE injector has power.
802.3at End-Span	Green	Lights to indicate the ultra PoE injector is working in End-Span mode and offers up to 30 watts of power.
802.3at Mid-Span	Green	Lights to indicate the ultra PoE injector is working in Mid-Span mode and offers up to 30 watts of power.

POE-171S LED Indicators

LED	Color	Function
PWR	Green	Lights to indicate the ultra PoE splitter has power.
End-Span PoE Input	Green	Lights to indicate the ultra PoE splitter is working in End-span mode
Mid-Span PoE Input	Green	Lights to indicate the ultra PoE splitter is working in Mid-span mode

BUY ON

www.cablematic.com

5. Hardware Installation

The following section describes the hardware features of PoE-171 and POE-171S. Before connecting any network device to them, please read this chapter carefully.

Please refer to following sections for detailed information about POE-171

5.1 Before Installation

Before your installation, it is recommended to check your network environment. If there is any IEEE 802.3at device that needs higher power to be powered on and works normally, the POE-171 provides you with a way out to supply power to this Ethernet device conveniently and easily. The POE-171 is equipped with a power adaptor which is 100-240V AC input and injects DC 56V power into the pin of the twisted pair cable (pair 1/2 [-], 3/6 [+] and pair 4/5[+], 7/8[-]).

If there is difficulty in finding a power socket for AC-DC adapter of your non-PoE IEEE 802.3at networked device, the POE-171 and POE-171S (Ultra PoE Splitter) provide you with a way out to supply DC power to this Ethernet device conveniently and easily.



Note

The POE-171 and POE-171S can be installed in a pair. However, the use of third-party device is allowed if the device complies with IEEE 802.3at Power over Ethernet.

5.2 The POE-171 Installation

1. Connect the AC power adaptor to "52-56V DC IN" of POE-171; the "PWR" LED will be steadily on.

2. Connect a standard Ethernet cable from an Ethernet switch or PC workstation to "Ethernet" port of POE-171.
3. Connect the long cable to "Ethernet+DC" port.
4. Connect with IEEE 802.3at/802.3af devices. Due to the capability of IEEE 802.3at/802.3af Power over Ethernet, the POE-171 can directly connect with any IEEE 802.3at/802.3af end-nodes, such as PTZ (Pan, Tilt & Zoom) network cameras, PTZ speed dome, color touch-screen, Voice over IP (VoIP) telephones and multi-channel wireless LAN access points which support IEEE 802.3at/802.3af In-line Power over Ethernet port. The screen in Figure 3 appears.

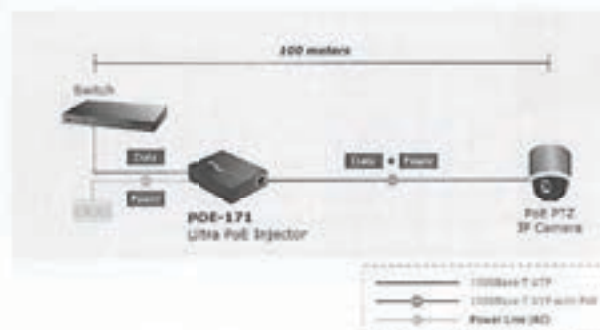


Figure 3: Connecting architecture with IEEE 802.3at/802.3af devices.

Once POE-171 detects the existence of an IEEE 802.3at/802.3af device, the PoE In-use LED indicator will be steadily on to show it is providing power.

BUY ON

www.cablematic.com



Note

1. Since the PoE port of POE-171 supports 52-56V DC PoE power output, please check and assure the powered device (PD) accepts DC power range of 52-56V DC. Otherwise, it will damage the powered device (PD).
2. If the connected device is not fully complied with IEEE 802.3at/802.3af Power over Ethernet or in-line power device, the LED indicator of POE-171 will not be steadily on.

5.3 The POE-171 and POE-171S Installation



Note

Please turn off POE-171S before you switch DC power output mode.

1. Adjust proper DC power output and connect DC plug from "DC OUT" of POE-171S to remote device.
2. Connect the power adaptor to "52-56V DC IN" of POE-171; the "PWR" LED will be steadily on.
3. Connect a standard Ethernet cable from "Ethernet+DC" port of POE-171 to "PoE In" port of POE-171S. The "802.3at End-Span" and "802.3at Mid-Span" LED of POE-171 and POE-171S will light up continuously.
4. Connect a standard Ethernet cable from an Ethernet switch or PC workstation to "Ethernet" port of POE-171.
5. Connect a standard Ethernet cable from "Ethernet" port of POE-171S to the remote Ethernet device.
6. Turn on the remote device and its power LED indicator will remain on.

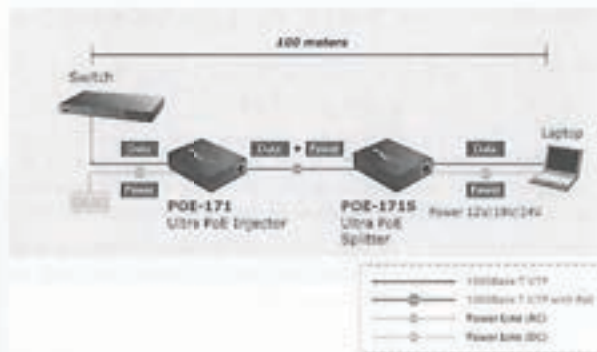


Figure 4: Connected architecture over POE-171 and POE-171S



Note

1. According to IEEE 802.3at/802.3af Power over Ethernet, the POE-171 will not inject power to the cable if not connected to IEEE 802.3at/802.3af device.
2. Please ensure the POE-171S output voltage is correct before applying power to remote device. The POE-171S provides DC12V/19V/24V power output.

5.4 The POE-171 and POE-E201 Installation

1. Connect the power adaptor to "52-56V DC IN" of POE-171; the "PWR" LED will be steadily on.
2. Connect a standard Ethernet cable from "Ethernet+DC" port of ultra PoE injector to the "IN" port of POE-E201.
3. The ultra PoE injector delivers both Ethernet Data and PoE power over UTP cable to the POE-E201, and the POE In-use

BUY ON

www.cablematic.com

LED of POE-171 and "PoE IN" LED of POE-E201 will light up continuously.

- 4 Connect the additional standard Ethernet cable that will be used for connecting to the remote powered device (PD) to the "OUT" port of POE-E201.
5. The "OUT" port is also the power injectors which transmit DC Voltage to the standard network cable and transfer data and power simultaneously between the POE-171 and PD.
- 6 Once POE-E201 detects the existence of an IEEE 802.3at/802.3af device, the "PoE OUT" LED Indicator will be steadily ON to show it is providing power.

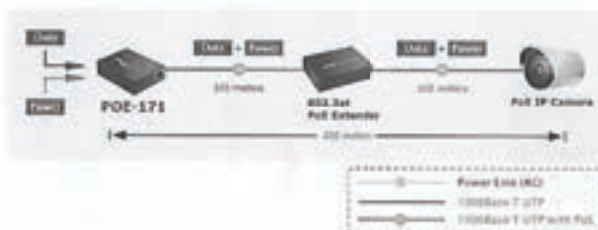


Figure 5: Connected architecture over POE-171 and POE-E201



Note

1. If the connected device is not fully complied with IEEE 802.3at/802.3af standard or in-line power device, the PoE OUT LED indicator of POE-E201 will not be steadily on.
2. According to IEEE 802.3at/802.3af standard, the POE-E201 will not inject power to the cable if not connected to a standard IEEE 802.3at/802.3af device.

6. Customer Support

Thank you for purchasing PLANET products. You can browse our online FAQ resource at the PLANET Web site first to check if it could solve your issue. If you need more support information, please contact PLANET switch support team.

PLANET online FAQ :

<http://www.planet.com.tw/en/support/faq.php?type=2>

Switch support team mail address :

support_switch@planet.com.tw

Copyright © PLANET Technology Corp. 2013.

Contents are subject to revision without prior notice.

PLANET is a registered trademark of PLANET Technology Corp. All other trademarks belong to their respective owners.

BUY ON

www.cablematic.com