

HPC002 User Manual

1、 HPC002 Main Features

1. Record checking and removing
2. Key Lock function
3. Battery saving mode
4. Counting function
5. Compatible with both battery and power adaptor
6. USB connection with PC

2、 HPC002 Key Advantages

Convenient operation with Light weight Automatic

Hourly Data updating Record Removing function

1.15 Inch Blue LCD screen makes it easy on the eyes Cache Memory Capacity up to 500pcs messages (Recorded Every hour) Counting distance spans from 0.8M to 4M Adjustable LCD background light turns on/off when only people access Lower battery indicator on LCD screen Two languages for operation (English/ Mandarin) Signal Indicator gives warning for weak signal Extended battery life with power supply Key Lock function eliminates improper operation Counting Data available on the LCD interface

3、 Operation Guide

1. Record checking and removing 1) Record

Query

Press

 , then press

 or  to select "Record Query", Press

 and enter in

"Record Query"

Press  or  to check counting number in certain day

Press

 , then press

 or

 to check counting number of certain period in

certain day

2) Record Removing



Press  , then press  or  to select "Record Query", press  or  to select

"Record Removing";

Remarks: Press <Exit> to come back to the main screen.




Press and removing record




2. Key Lock Function This is designed to eliminate improper operation by unauthorized person

Press  and then press , the key board is locked and screen shows “System locked”




Press , key board is unlocked, and screen resume to main interface




Remarks: Press <Exit> to come back to the main screen.




3. Clock 1) Set Up Time Press , then press , and select “time setting” then press  to enter in “time setting”;

Press  or  to select “Current time”, press  to enter in “current time”;

Press  or  set up “Year”, press  to confirm;

Press  or  set up “Month”,
press  to confirm;

Press  or  set up “Day”, press  to confirm;




Press  or  set up “Minute”, press  to confirm;




Press  or  set up “Second”, press  to confirm.




Remarks: Press <Exit> to come back to the main screen.

2) Auto On/Off

Set up clock to turn on/off counting device

Press , then press , and select “time setting”, press  to enter in “time setting”;

Press  or , and select “Timer setting”, Press  to confirm;


Press  or  to set “Power On Timer”, press  to confirm;

Press  or  to set “Power off Timer”, press  to confirm .

Remarks: Press <Exit> to come back to the main screen.

4. System Setting

1) Battery Saving Mode




Press , then press , select “system setting”, press  to confirm.

Press  or , select “battery saving mode”, press  to confirm.

Press  or , select “on/off”, press  to confirm.

Remarks: Press <Exit> to come back to the main screen.

2) Sensitivity Setting (Detection distance and accuracy)

Press , then press , select “system setting”, press  to confirm;

Press  or , select “Sensitivity Setting”, press  to confirm;

Press  or , select “high / medium / low”, press  to confirm.

Remarks:





Suggested to select high sensitivity for high volume to raise power sensitivity



Suggested to select low sensitivity for low volume to extend battery life




The red LED on receiver flashes, when transmitter is placed away from receiver far than accurate distance. It is suggested to move both part closer to solve this problem.

Language Setting

3) Language Setting

Press , then press  or , select "system setting", press  to confirm;

Press  or , select "language setting", press  to confirm;

Press  or , select "Chinese" or "English", Press  to confirm.

Remarks: Press <Exit> to come back to the main screen.

4、 Notice

(1) Optimal Detection Height: $0.5\text{m} \leq$ The position of transmitter and receiver $\leq 1.5\text{m}$, receiver and transmitter is placed at same height with opposite direction.

(2) Optimal Detection Distance: Max Distance is 4M, Min Distance $\geq 0.8\text{m}$ (Transmitter and receiver should be placed at same height with distance $\leq 3\text{mm}$)

(3) LED indicator flashes every second when voltage $\leq 2.3\text{V}$ or transmitter and receiver don't have connection signal. (4) In order to save battery, display screen uses low brightness with faster refresh frequency

5、 Installation of battery and power adaptor

1) Installation of Battery

1) Put two 1.5V SIZE AA batteries into each set of the people counter's back battery housing

2) The Red LED indicator flashes every 6 second when battery in normal status, and flashes every 1 second in low battery status

3) The clock setting is needed after replacing battery.

4) The clock setting will be saved after replacing battery when connecting with computer via USB Cable,

5) The Alkaline Battery is recommended. Rechargeable Battery might lead to installation difficulties due to the differences size and measurement.

2) Installation of Power Adaptor

Plug the cable head into transmitter hole and work (same for receiver)

Remarks: 1. Power Adaptor can be used together with battery

2. This people counter could equip with either Chinese Standard adaptor or Euro Standard adaptor or American Standard

adaptor according to customer requirement.

6、 PC Connection

1. PCTools installation Step 1, place installation CD in CD-ROM, and double click
“PEOPLE
COUNTER” folder



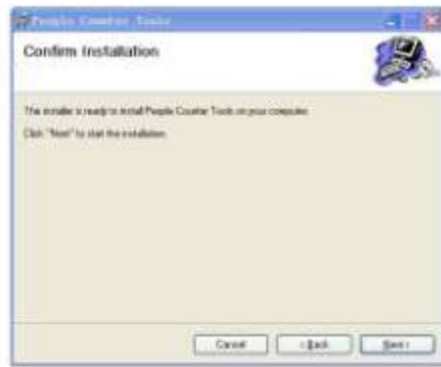
Step 2 Double Click“data output” file (As showed in left graph) 2. USB Connection
Setting Place installation CD in CD-ROM, and plug the bigger USB cable head into



Step 3
Click “Next Step” Button
(As showed in left graph)



Step 4
Click “Next Step” Button
(As showed in left graph)



Step 5
Click "Next Step" Button
(As showed in left graph)



Step 6
Click "Close" to finish installation
(As showed in left graph)

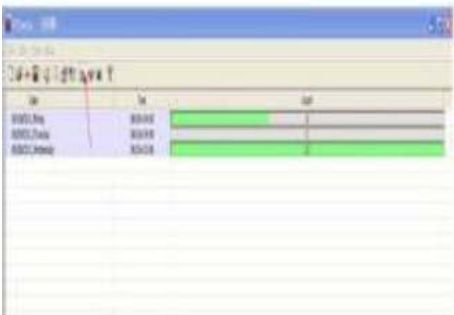
computer USB port and finish connection. "New hardware is available" will showed on screen. (As showed in bellow graphs)



Step 1,
Choose “Auto Run” to begin
installation, click “Next Step”.
(As showed in left graph)

Step 2,
Click “Close” to finish drive
installation
(As showed in left graph)

Step 3,
Double Click PCTools on the
desktop
(As showed in left graph)



Step 4,
Click "Activate" Button on the
tool bar
(As showed in left graph)

Step 5,
Click input program on the tool
bar
(As showed in left graph)

Step 6

Click “D” or “W”, or “M” to check records
in different period of day

“D” means the records in whole day “W” means the records in whole week; “M”
means the records in whole month

3. Download Data to Computer

1. Click “Menu” on the tool bar
2. Click “Save” as showed bellow



3. Input name in the folder bar, like “HPC002”, and click “save”

4. Double click the folder “HPC002” on the desktop

**Remarks: 1、 Data can be read only on
computer which can't be
removed on computer**

**2、 Data in certain period of
certain day can be read or**

removed directly on people counter

3、 Further system updating might not be listed in user manual.

7、 Package Contents

HPC002 Transmitter	(1)
HPC002 Receiver	(1)
USB Cable	(1)
CD-ROM	(1)
Power Adaptor	(2)
Fastening Adhesive Tape	(2)
Mounting Hooks(Concave)	(2)
Mounting Hooks(Convex)	(2)
M3X15 Screws	(4)