

INSTALLATION INSTRUCTION

Side Bar

98-03 Dodge Durango

| QTY | DESCRIPTION |
|-----|----------------------|
| 1 | Side Bar, left side |
| 1 | Side Bar, right side |
| 1 | Hardware Kit |

NOTE: Please read this information before installing. Check components received with components listed above. **NO DRILLING IS REQUIRED** for installation of these side bars. To obtain correct installation, we recommend you to follow these step by step installation instructions carefully.

Step One: Locate hardware kit. Check contents with the hardware listed below.

| QTY | DESCRIPTION |
|-----|----------------------------------|
| 2 | Front Mounting Bracket |
| 1 | Rear Mounting Bracket-left |
| 1 | Rear Mounting Bracket-right |
| 4 | 12mm x 50mm Hex Bolt-zinc plated |
| 4 | 12mm Lock washer-zinc plated |
| 4 | 12mm Flat washer-zinc plated |

Step Two: Remove the front and rear body mount bolts.

Step Three: Locate the two short mounting brackets and loosely install them to the front body mount locations with the factory bolts as per the Fig. 1

Step Four: Orient the rear mounting brackets as per Fig. 2 for the rear body mounts and attach with the factory bolts.

Step Five: Place the side bars into position. Using the 12mm x 50mm bolts, 3" plastic rings, and 12mm lock and flatwashers, loosely attach the side bars to the brackets. (NOTE: To determine which side bar is the left or right, Check the number on the welded insert at the end of the tube.)

Step Six: After checking to make sure the side bars are level and parallel with the sides of the vehicle completely tighten all hardware.

Step Seven: Periodically check and retighten the hardware as necessary.

IMPORTANT: Side bars have a 300 lb. weight capacity. To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish.

Cleaning Instructions

Hi-Gloss Black Powder Coat finish. Mild soap, window or glass cleaner may be used. Do not use any type of polish or wax that contains abrasives that could damage the finish.

Stainless Steel finish: Mild soap, window or glass cleaner may be used. Aluminum polish may be used to polish small scratches and scuffs on the finish.



FIG. 1

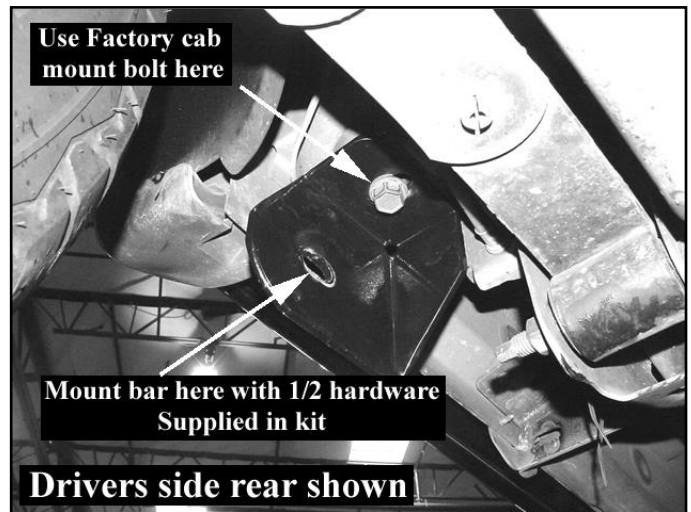


FIG. 2