


8 7 6 5 4 3 2 1


REVISION HISTORY		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE PER P3# 98080	1999-09-20
B	REVISED PER CR# 1057	2003-02-20

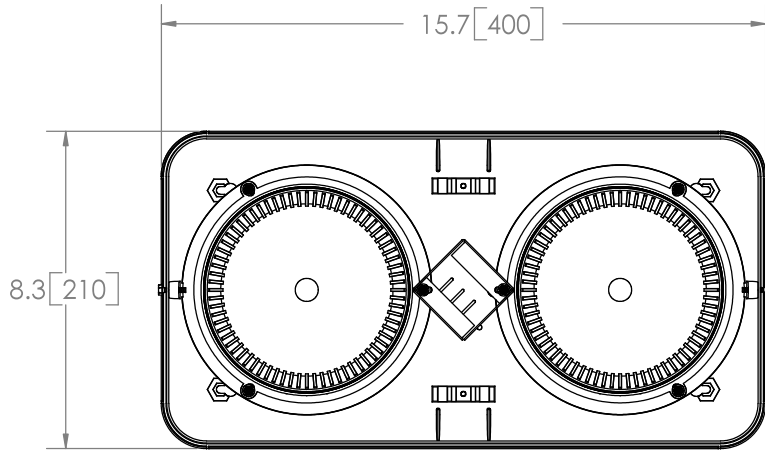

TOP VIEW

SPECIFICATIONS

- CERTIFICATIONS: **CE**, SAE J1318 (MAY 1998), CLASS 2, 5350CAA VERSION
- FLASH MODE: DBL: 80 FPM
QUAD: 65 FPM
- VOLTAGE (NOMINAL): 12 – 48 VDC
- VOLTAGE (EXTREME): 9.0 – 55.0 VDC
- CURRENT (NOMINAL): 3.0 A
- POWER (NOMINAL): 46 W
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: SEE WIRE NOTE
- MOUNTING: 4 BOLTS
- BASE MATERIAL: POLYCARBONATE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 5.0 LBS

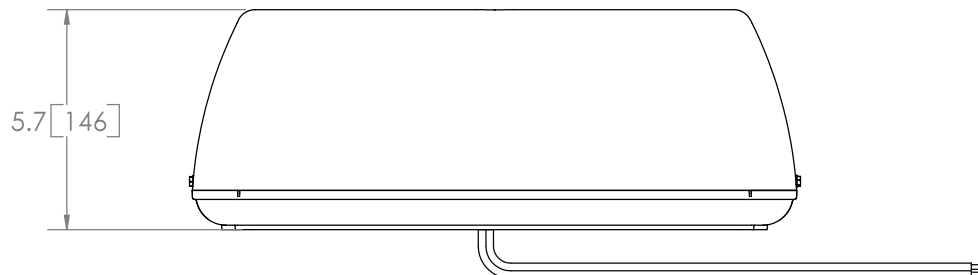

FRONT VIEW

WIRES: 16 AWG 144 [3658] ± .5 [13]
RED AND BLACK COILED

LENS CHART			
MODEL	OUTER LENS COLOR	FRESNEL LENS 1 COLOR	FRESNEL LENS 2 COLOR
5350AAA	AMBER	AMBER	AMBER
5350ACC	AMBER	CLEAR	CLEAR
5350CAA	CLEAR	AMBER	AMBER
5350CAB	CLEAR	AMBER	BLUE
5350CAC	CLEAR	AMBER	CLEAR
5350CAR	CLEAR	AMBER	RED
5350CBB	CLEAR	BLUE	BLUE
5350CBC	CLEAR	BLUE	CLEAR
5350CBR	CLEAR	BLUE	RED
5350CCC	CLEAR	CLEAR	CLEAR
5350CCR	CLEAR	CLEAR	RED
5350CGG	CLEAR	GREEN	GREEN
5350CRR	CLEAR	RED	RED


NOTES:
1. DIMENSIONS IN INCHES [MILLIMETERS]

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2002 ECCO

CAD GENERATED DRAWING
DO NOT MANUALLY UPDATE.
MODEL REFERENCED:04

THIRD ANGLE PROJECTION



APPROVALS		DATE
DRAWN BY	RKO	
CHECKED		
ELEC. ENG.		
MECH. ENG.		
TEST ENG.		
SALES		



Electronic Controls Co.
An Employee Owned Company
800-635-5900 P.O.BOX 7246,BOISE,ID 83707

STROBE BAR, 15", 12 - 48 VDC

Project:98080 Date Created:1999-09-29

SIZE DWG. NO. 5350XXX REV. B

SCALE 1:5 PREPARED PER ASME 14.100M-1998 / ASME Y14.1-1995 SHEET 1 OF 1

8 7 6 5 4 3 2 1