

**Evaluating the ADG1408L 4  $\Omega$   $R_{ON}$ , 8-Channel iCMOS Multiplexer with 1.2 V and 1.8 V JEDEC Logic Compliance****FEATURES**

- ▶ Single inline headers provide flexibility for the field programmable gate array (FPGA) or microcontroller 1.2 V or 1.8 V logic input signals
- ▶ Surface-mount device (SMD) pin resistor or capacitor sockets available for the addition of passive components
- ▶ SMB connector sockets provide flexibility for the input and output signals

**EVALUATION KIT CONTENTS**

- ▶ EVAL-ADG1408LEBZ evaluation board

**DOCUMENTS NEEDED**

- ▶ [ADG1408L](#) data sheet
- ▶ EVAL-ADG1408LEBZ user guide

**EQUIPMENT NEEDED**

- ▶ DC voltage source
  - ▶  $\pm 15$  V for dual supply
  - ▶ 12 V for single supply
  - ▶  $\pm 5$  V for dual supply
- ▶ Optional digital logic supply ( $V_L$ )
  - ▶ 1.1 V to 1.3 V for 1.2 V logic
  - ▶ 1.65 V to 1.95 V for 1.8 V logic
- ▶ Analog signal source
- ▶ Method to measure voltage, such as a digital multimeter (DMM)

**GENERAL DESCRIPTION**

The EVAL-ADG1408LEBZ is the evaluation board for the ADG1408L. The ADG1408L contains an eight channel multiplexer. The ADG1408L switches one of eight inputs to a common output, as determined by the 3-bit binary address lines, A0, A1, and A2. The enable pin (EN) is used to enable or disable the device. When disabled, all channels are switched off. When enabled, each channel conducts equally well in both directions and has an input signal range that extends to the supplies.

An external  $V_L$  supply pin provides logic control flexibility for lower logic controls. The ADG1408L is both 1.2 V and 1.8 V JEDEC standard compliant.

[Figure 1](#) shows the EVAL-ADG1408LEBZ in a typical evaluation setup. The EVAL-ADG1408LEBZ is located in the center of the evaluation board, and wire screw terminals are provided to connect each source and drain pin. Three screw terminals are used to power the device, and an external pin provides users with a defined digital logic supply voltage. Alternatively, the digital logic supply voltage can be supplied from a 5-pin header.

Full specifications on the ADG1408L are available in the ADG1408L data sheet available from Analog Devices, Inc., and must be consulted in conjunction with this user guide when using the EVAL-ADG1408LEBZ.

**TABLE OF CONTENTS**

Features.....	1	Power Supply.....	4
Evaluation Kit Contents.....	1	Link Headers.....	4
Documents Needed.....	1	SMB Connectors.....	4
Equipment Needed.....	1	Input Signals.....	4
General Description.....	1	Evaluation Board Schematic and Artwork.....	5
Evaluation Board Photograph.....	3	Ordering Information.....	9
Evaluation Board Hardware.....	4	Bill of Materials.....	9

**REVISION HISTORY****5/2023—Revision 0: Initial Version**

EVALUATION BOARD PHOTOGRAPH

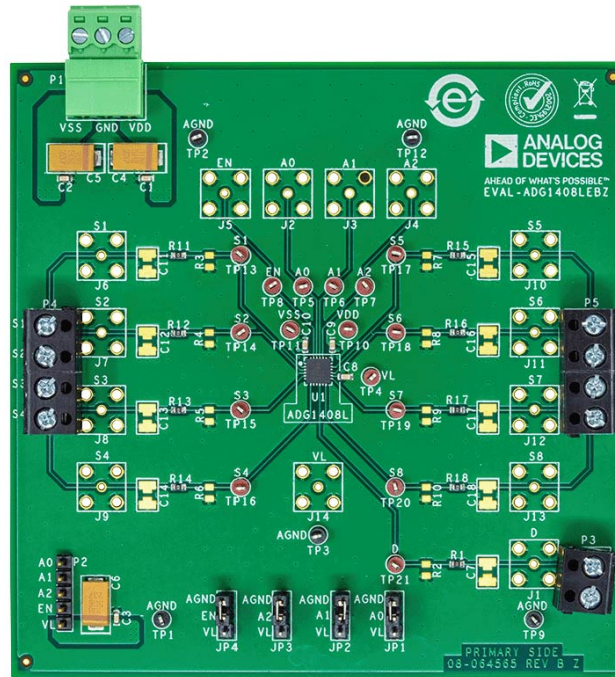


Figure 1. EVAL-ADG1408LEBZ Evaluation Board Photograph

## EVALUATION BOARD HARDWARE

### POWER SUPPLY

Connector P1 provides access to the supply pins on the [ADG1408L](#). VDD, AGND, and VSS on the P1 terminal block link to the appropriate pins on the ADG1408L. For dual-supply voltages, the EVAL-ADG1408LEBZ can be powered at  $\pm 15$  V or  $\pm 5$  V. For single-supply voltages, the GND and VSS terminals must be connected and power the EVAL-ADG1408LEBZ with 12 V. Additionally, 1.1 V to 1.95 V is supplied to the  $V_L$  pin of the ADG1408L.

### LINK HEADERS

The EVAL-ADG1408LEBZ provides several link options that must be set for the required operating conditions before using.

[Table 1](#) describes the positioning of the links necessary for controlling the EVAL-ADG1408LEBZ via the link headers. The functions of these link options are described in detail in [Table 2](#).

**Table 1. Link Header Descriptions**

Link	Position	Description
JP1 to JP4	A	VL
	B	AGND

**Table 2. Link Header Functions**

Link	Function
JP1 to JP4	This link selects the source of the $A_x$ voltage supplied to the ADG1408L. Position A selects VL from P2. Position B selects 0 V or AGND.

### SMB CONNECTORS

The parallel interface of the ADG1408L is controlled manually using the link headers of JP1 to JP4, or it can be accessed using the Subminiature Version B (SMB) connectors, J2 to J5. To use the SMB connectors, remove the link headers of JP1 to JP4.

### INPUT SIGNALS

Provided in the EVAL-ADG1408LEBZ are screw connectors, P3, P4, and P5 to connect to both the source and drain pins of the ADG1408L. Additional SMB connector pads are available if extra connections are required.

Each trace on the source and drain side includes two sets of 0603 pads, which can place a load on the signal path to ground. A  $0\ \Omega$  resistor is placed in the signal path and can be replaced with a user defined value. The resistor combined with the 0603 pads can create a simple RC filter.

EVALUATION BOARD SCHEMATIC AND ARTWORK

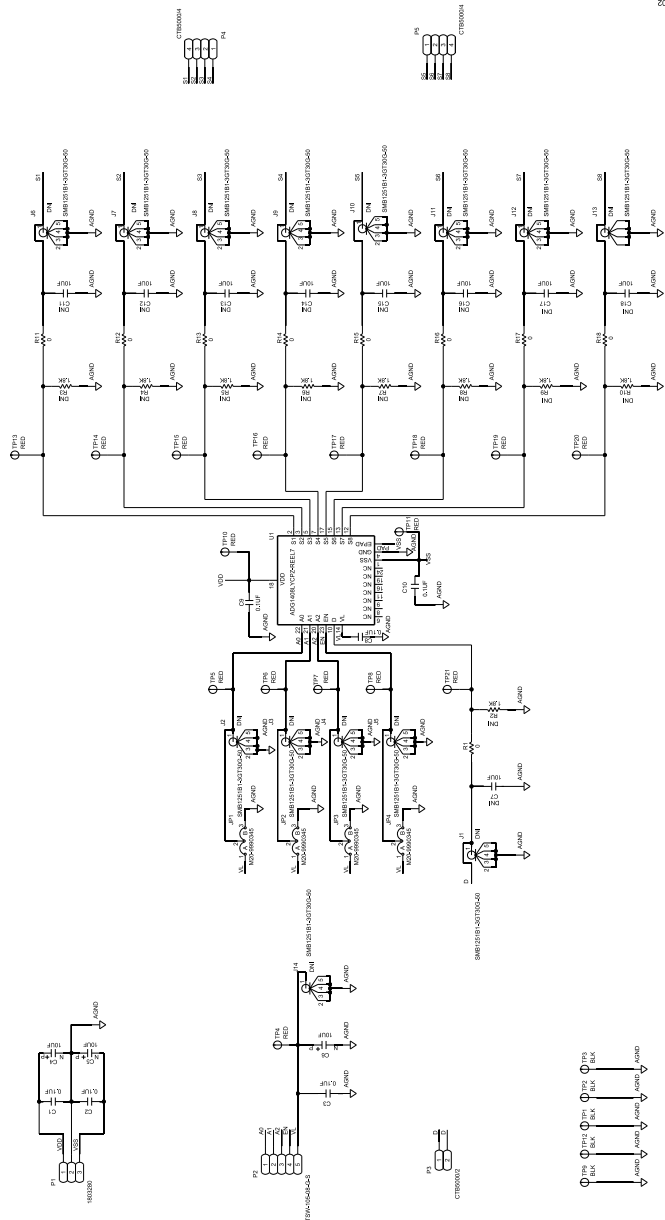


Figure 2. EVAL-ADG1408LEBZ Evaluation Board Schematic

EVALUATION BOARD SCHEMATIC AND ARTWORK

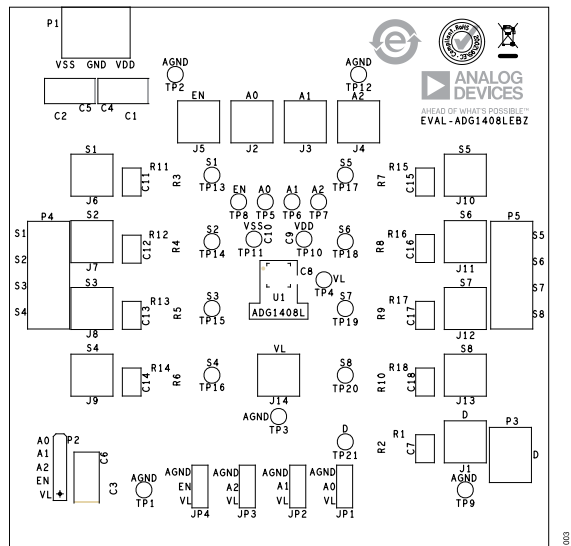


Figure 3. EVAL-ADG1408LEBZ Silkscreen

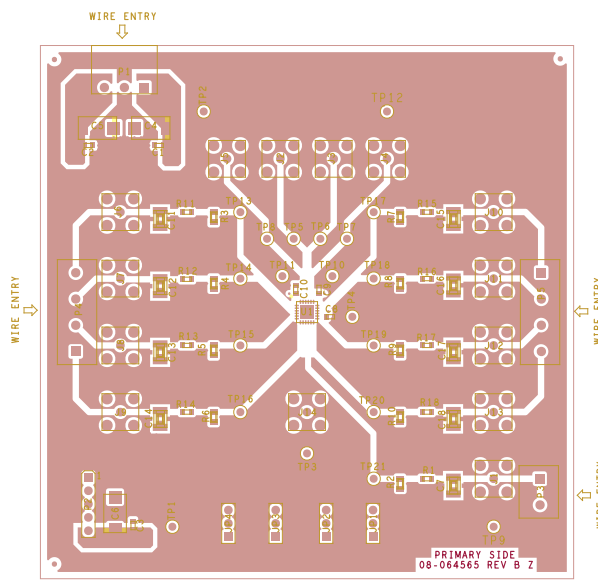


Figure 4. EVAL-ADG1408LEBZ Top Layer

EVALUATION BOARD SCHEMATIC AND ARTWORK

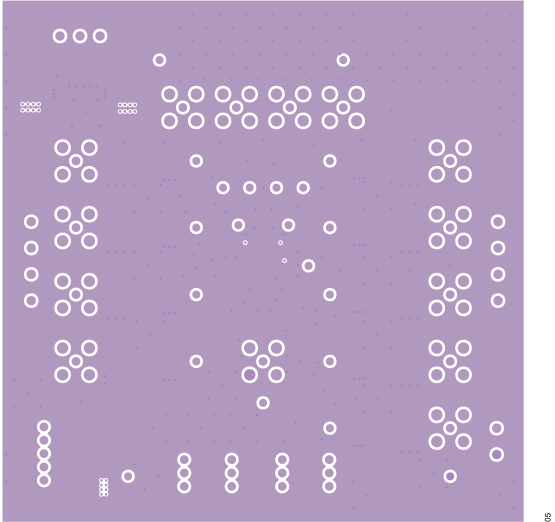


Figure 5. EVAL-ADG1408LEBZ Layer 2

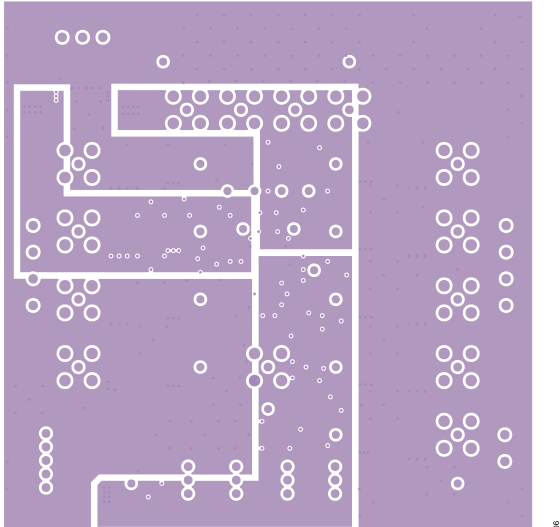


Figure 6. EVAL-ADG1408LEBZ Layer 3

EVALUATION BOARD SCHEMATIC AND ARTWORK

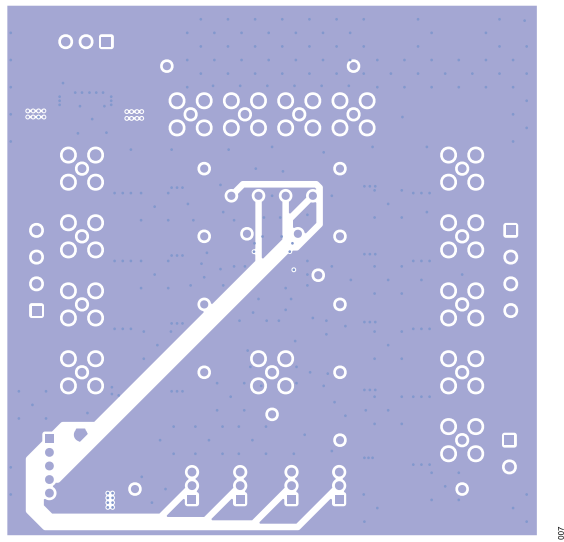


Figure 7. EVAL-ADG1408LEBZ Bottom Layer



## ORDERING INFORMATION

## BILL OF MATERIALS

Table 3. Bill of Materials

Reference Designator	Description	Manufacturer	Part Number
C4 to C6	50 V tantalum capacitors, 10 $\mu$ F, D size	Kemet	T491D106K050AT
C1 to C3, C8 to C10	50 V, X7R multilayer ceramic capacitors, 0.1 $\mu$ F, 0603	Vishay	VJ0603Y104KXAAC31X
C7, C11 to C18	Do not install (DNI)	Not applicable	Not applicable
R2 to R10	DNI	Not applicable	Not applicable
R1, R11 to R18	Resistors, 0 $\Omega$ , 0603, 1%	Panasonic	ERJ-3GEY0R00V
J1 to J14	50 $\Omega$ , SMB sockets, DNI	Amphenol	SMB1251B1-3GT30G-50
TP4 to TP8, TP10, TP11, TP13 to TP21	Red test points	Vero Technologies	20-313137
TP1, TP2, TP3, TP9, TP12	Black test points	Vero Technologies	20-2137
P1	3-pin terminal block, 5 mm with plug	Phoenix Contact	1803280
P2	Through hole header, 5-position	Samtec	TSW-105-08-G-S
P3	2-pin terminal block, 5 mm	Camdenboss, Ltd.	CTB5000/2
P4, P5	4-pin terminal blocks, 5 mm	Camdenboss, Ltd.	CTB5000/4
JP1 to JP4	3-pin single inline (SIL) header and shorting link	Harwin	M20-9990345
U1	4 $\Omega$ $R_{ON}$ , 8-channel iCMOS multiplexers with 1.2 V and 1.8 V JEDEC logic compliance	Analog Devices Inc.	ADG1408L

**ESD Caution**

**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

**Legal Terms and Conditions**

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

