



## Ministry of Housing and Infrastructure

Male', Republic of Maldives.

ދިވެހިސަރުކާރުގެ ގެޒެޓް ގައި ބަޔާންކުރި ގޮތުގައި  
މާލެ، ދިވެހިރާއްޖޭގެ ޖުމްހޫރިއްޔާ

Economic Prosperity – Social Harmony




## Information Sheet

### Technical Requirements:

- 1- Cut, Fill, and Shape the Subgrade and Compact to get the specified cross elevation and CBR of minimum 60% for the carriageways.
- 2- Construction of 150mm thick Cement Stabilized Base Course.
- 3- Application of Prime Coat (MC-30) at 1.0 liters/m<sup>2</sup>
- 4- Construction of 50mm thick Asphalt Wearing Course.

Typical Cross Sections:

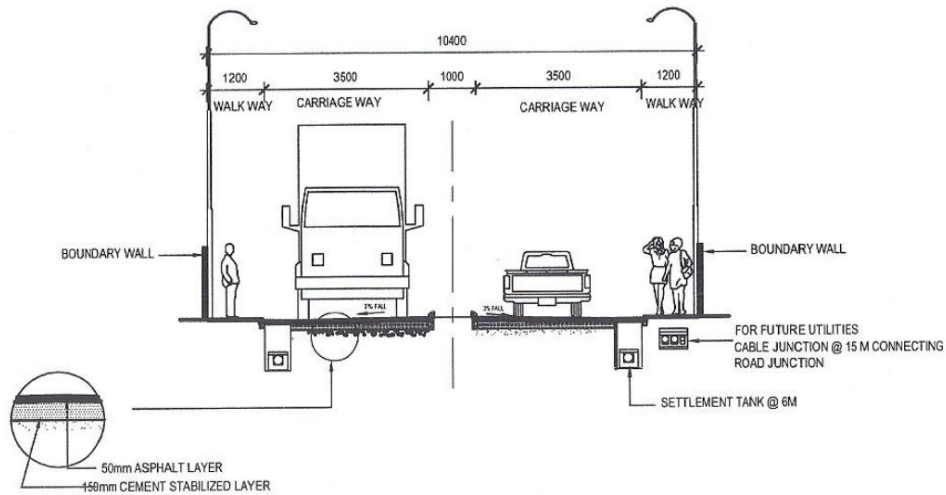

### Responsibilities of Client:

- 1- Site for installation of the Asphalt plant and storing all Machineries will be provided by the Client.
- 2- Electric Power for operating the Equipment and Machineries will be provided by the Client.
- 3- Providing all raw materials required for construction of Carriageway.



### **Responsibilities of Contractor:**

- 1- Contractor is required to provide all required equipment, machineries, and staffs for construction of the Carriageway.
- 2- Salaries including food and accommodation for the staffs have to be provided by the Contractor.
- 3- Mobilization and Demobilization cost have to be borne by the Contractor.
- 4- Fuel required for operating equipment and machineries have to be provided by the Contractor.

### **Documents that need to be submitted as a minimum:**

- 1- Company Registration Certificate.
- 2- GST Registration Certificate.
- 3- Details of Equipment and Machineries (specifying present location, registration certificates / import documentation).  
Minimum Equipment and Machineries Requirement:
  - Asphalt Plant, Asphalt Paver, Tandem Roller, Pneumatic Roller, Bitumen Sprayer, Dump Trucks, Loader/Excavator/Grader
- 4- Details of Manpower (CV).  
Minimum Manpower Requirement:
  - Road Engineer, Site Supervisors, Operators (Plant, Paver, Rollers, Sprayers, Trucks, Loader/Excavator/Grader), Rake man, Screed man, Laborers.
- 5- Experience records of similar works in past two years.
- 6- Bid Security of MVR 15,000.00 (Fifteen Thousand Rufiyaa) with validity of 20 days shall be submitted along with the bid.

### **Notes:**

- 1- All works have to be completed within 30 days of receiving Instruction to Mobilization. If works are not completed within 30 days, 0.25% of the total contract price shall be deducted per calendar day.
- 2- Price should be submitted in Maldivian Rufiyaa (MVR).



**Price Proposal:**

#	Description	Quantity	Unit	Unit Price	Total
1	Preliminaries Inclusive of Mobilization and Demobilization Cost, Staff Salaries, Food and Accommodation, etc.		L.S		
2	Preparation of Sub base (Leveling and Compaction)	72666.95	sqm		
3	Construction of Cement Stabilized Base Course and Compaction to a depth of 150mm	72666.95	sqm		
4	Application of Prime Coat	72666.95	sqm		
5	Laying 50mm Asphaltic Concrete Layer	72666.95	sqm		
				Subtotal	
				GST 6%	
				Total	

**Payment Terms:**

Advance Payment – 15% upon Submission of Payment Guarantee)

Remaining 80% – Weekly Progress Payments

Retention 5% – Completion of 1 year Retention Period

**Evaluation Criteria:**

Cost – 70%

Experience – 30%

(Minimum three experience letters have to be submitted, Each Letter will carry 10 points)