

Non-Isolated Board Mount DC / DC Converters

multicomp PRO

Wide input voltage Non-isolated and Regulated Single Output

**RoHS
Compliant**



Description

MP-K78_T-500R3 series are high efficiency switching regulators. The converters feature high efficiency, low loss and short circuit protection in a compact SMD package. These products are widely used in applications such as industrial control, instrumentation and electric power.

Features

- High efficiency up to 95%
- No-load input current as low as 0.2mA
- Operating ambient temperature range -40°C to +85°C
- Output short-circuit protection
- SMD package
- EN62368 Approval

Selection Guide					
Part Number	Input Voltage (VDC)*	Output		Full Load Efficiency (%) Typ. Vin Min./ Vin Nominal / Vin Max.	Capacitive Load (µF) Max.
	Nominal (Range)	Voltage (VDC)	Current (mA) Max.		
MP-K7803T-500R3	24 (4.75-36)	3.3	500	86/80	680
MP-K7803T-500R3(100)**					
MP-K7805T-500R3	24 (6.5-36)	5		90/84	
MP-K7805T-500R3(100)**					
MP-K78X6T-500R3	24 (8-36)	6.5		92/87	
MP-K78X6T-500R3(100)**					
MP-K7809T-500R3	24 (12-36)	9		93/90	
MP-K7809T-500R3(100)**					
MP-K7812T-500R3	24 (15-36)	12		94/91	
MP-K7812T-500R3(100)**					
MP-K7815T-500R3	24 (19-36)	15	95/93		
MP-K7815T-500R3(100)**					

Notes: * For input voltage exceeding 30 VDC, an input capacitor of 22µF/50V is required.
** Parts are packaged on Tape & Reel of 100 pcs

Non-Isolated Board Mount DC / DC Converters

multicomp PRO

Input Specifications					
Item	Operating Conditions	Min.	Typ.	Max.	Unit
No-load Input Current		--	0.2	1.5	mA
Reverse Polarity at Input		Avoid / Not protected			
Input Filter		Capacitance filter			
Ctrl*	Module on	Ctrl pin open or pulled high (TTL 3.5-5.5VDC)			
	Module off	Ctrl pin pulled low to GND (0-0.8VDC)			
	Input current when off	--	30	100	uA

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications						
Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy	Full load, input voltage range	3.3 VDC output	--	±2	±4	%
		Others	--		±3	
Linear Regulation	Full load, input voltage range	--	±0.2	±4		
Load Regulation	Nominal input voltage	3.3 VDC output	--	±0.6	--	
	10% -100% load	Others	--	±3	--	
Ripple & Noise*	20MHz bandwidth, nominal input voltage	3.3 VDC output, 20% -100% load	--	20	50	mVp-p
		Others, 10% -100% load	--			
Temperature Coefficient	Operating temperature -40°C to +85°C	--	--	±0.03	%/°C	
Transient Response Deviation	Nominal input voltage, 25% load step change	--	50	200	mV	
Transient Recovery Time		--	0.2	1	ms	
Short-circuit Protection	Nominal input voltage	Continuous, self-recovery				
V _{adj}	Input voltage range	--	±10	--	%Vo	

Note: *

- The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information;
- With light loads at or below 20%, Ripple & Noise for 3.3V output parts increases to 100mVp-p max. and a load below 10% for 5V/6.5V/9V/12V/15V output parts levels increase to 150mVp-p max.

Non-Isolated Board Mount DC / DC Converters

multicomp PRO

General Specifications					
Item	Operating Conditions	Min.	Typ.	Max.	Unit
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Reflow Soldering Temperature		Peak temperature $\leq 245^{\circ}\text{C}$, duration $\leq 60\text{s}$ max. over 217°C . Also refer to IPC/JEDEC J-STD-020D.1.			
Switching Frequency	Full load, nominal input voltage	--	1	--	MHz
MTBF	MIL-HDBK-217F@25°C	8552	--	--	K hours

Mechanical Specifications	
Case Material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
Dimensions	15.24mm x 11.4mm x 8.25mm
Weight	1.5g (Typ.)
Cooling Method	Free air convection

Non-Isolated Board Mount DC / DC Converters

multicomp PRO

Electromagnetic Compatibility (EMC)				
Emissions	CE	CISPR32/EN55032	CLASS B (see Fig. 4-2 for recommended circuit)	
	RE	CISPR32/EN55032	CLASS B (see Fig. 4-2 for recommended circuit)	
Immunity	ESD*	IEC/EN 61000-4-2	Contact $\pm 4\text{KV}$	perf. Criteria B
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	CS	IEC/EN 61000-4-4	$\pm 1\text{KV}$ (see Fig. 4-1 for recommended circuit)	perf. Criteria B
	EFT	IEC/EN 61000-4-5	line to line $\pm 1\text{KV}$ (see Fig. 4-1 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN 61000-4-6	3Vr.m.s	perf. Criteria A





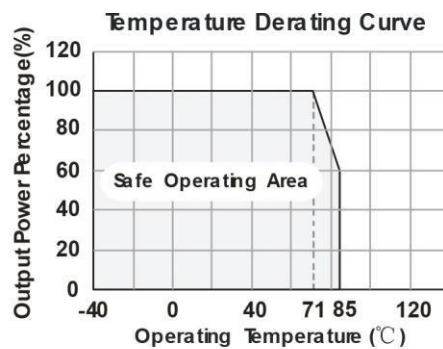


Fig. 1

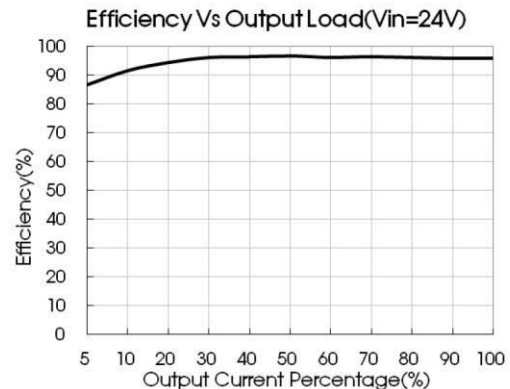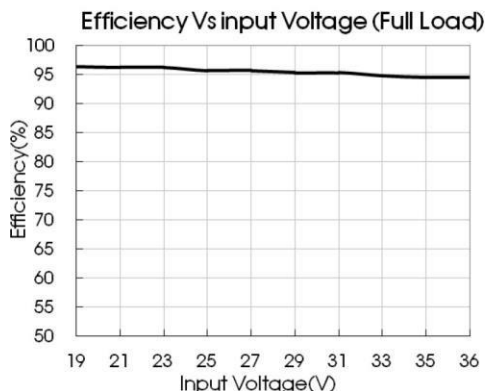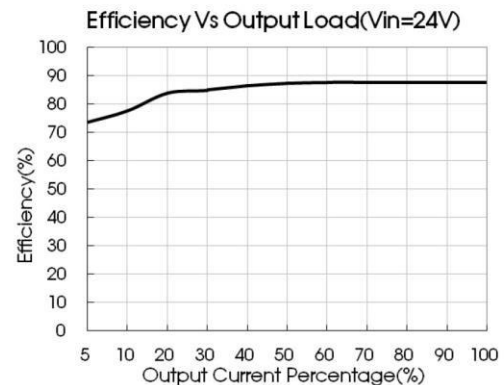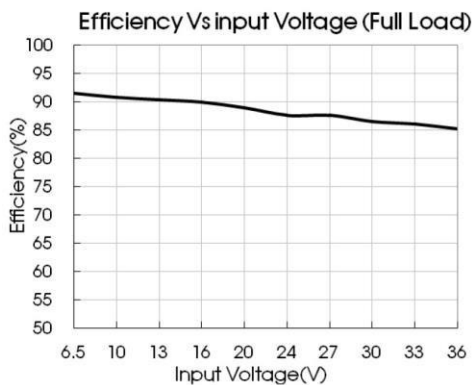

multicomp PRO

Non-Isolated Board Mount DC / DC Converters

Design Reference

1. Typical application

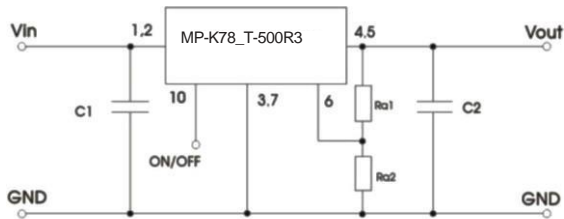


Fig. 2 Typical application circuit

Part Number	C1	C2	Ra1/Ra2 (Vadj) resistance
	(ceramic capacitor)	(ceramic capacitor)	
MP-K7803T-500R3	10µF/50V	22µF/10V	Refer to Vadj resistance calculation
MP-K7803T-500R3(100)**		22µF/10V	
MP-K7805T-500R3		22µF/16V	
MP-K7805T-500R3(100)**		22µF/16V	
MP-K78X6T-500R3		22µF/16V	
MP-K78X6T-500R3(100)**		22µF/16V	
MP-K7809T-500R3		22µF/25V	
MP-K7809T-500R3(100)**		22µF/25V	
MP-K7812T-500R3		22µF/25V	
MP-K7812T-500R3(100)**		22µF/25V	
MP-K7815T-500R3		22µF/25V	
MP-K7815T-500R3(100)**		22µF/25V	

Note: ** Parts are packaged on Tape & Reel of 100 pcs

table 1

Notes:

1. The required C1 and C2 capacitors must be connected as close as possible to the terminals of the module;
2. Refer to Table 1 for C1 and C2 capacitor values. For certain applications, increased values and/or tantalum or low ESR electrolytic capacitors may also be used instead;
3. Converter cannot be used for hot swap and with output in parallel;
4. To further reduce the output ripple and noise, we suggested the use of a "LC" filter at the output terminals, with an inductor value (L) of 10µH-47µH.

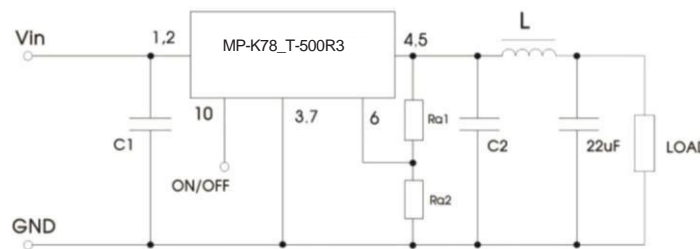


Fig. 3 External "LC" output filter circuit diagram

2. EMC compliance circuit


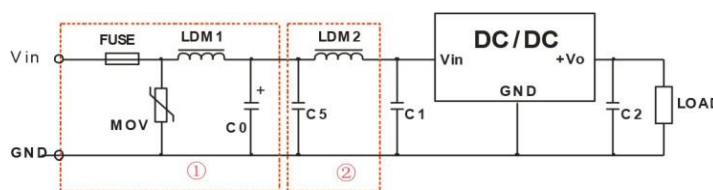


Fig. 4 Recommended compliance circuit

FUSE	MOV	LDM1	C0	C1/C2	C5	LDM2
Select fuse value according to actual input current	S20K30	82µH	680µF /50V	Refer to table 1	4.7µF /50V	12µH

Note: Part 1 in Fig. 4 shows Immunity compliance filter and part 2 filter for Emission compliance; depending on requirement both filters 1 and 2 can be used in series as shown.

3. Trim Function for Output Voltage Adjustment (open if unused)

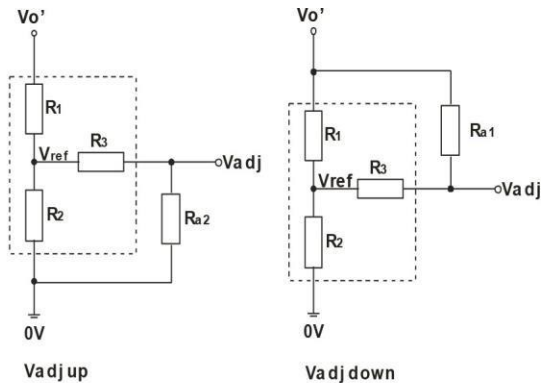

Calculating Trim resistor values:

$$\text{up: } R_{a2} = \frac{a R_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1$$

$$\text{down: } R_{a1} = \frac{a R_1}{R_1 - a} - R_3 \quad a = \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_2$$

Ra1, Ra2= Trim Resistor value;
 a= self-defined parameter;
 Vo'=desired output voltage.

Fig.5 Circuit diagram of Vadj up and down (dashed line shows internal part of module)


Vout(V)	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)
1.5	7.5	7.5	15	0.75
1.8	35.7	26.29	100	0.765
2.5	27	11.858	51	0.765
3.3	33	9.9	47	0.765
5	75	13.5	75	0.765
6.5	75	10	51	0.765
9	51	4.7	27	0.765
12	75	5.1	27	0.765
15	82	4.423	27	0.765

Note: The 1.5V model's output voltage can only be adjusted up (Vadj up) and cannot be adjusted to a lower voltage (Vadj down is not applicable)

Non-Isolated Board Mount DC / DC Converters



Dimensions and Recommended Layout

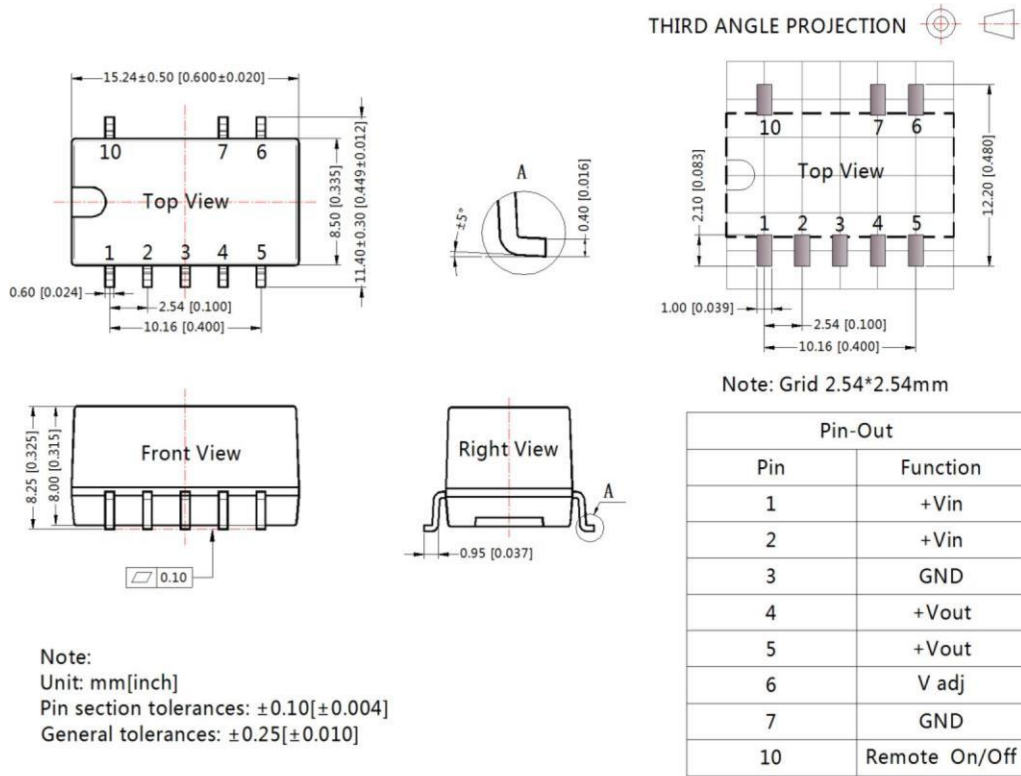

Note:
 Unit: mm[inch]
 Pin section tolerances: ±0.10[±0.004]
 General tolerances: ±0.25[±0.010]

NC: Pin to be isolated from circuitry

Notes:

1. The specified maximum capacitive load is tested under full load condition and over the input voltage range;
2. All parameters in this datasheet were measured under following conditions: Ta=25°C, relative humidity <75%RH, nominal input voltage and rated output load (unless otherwise specified);
3. All index testing methods in this data table are based on our Company's corporate standards;
4. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact with our technician for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

