



single trailing socket

# WORK



## POWER

ideal for power tools, DIY and workshop use

### FEATURES

- Heavy duty construction
- Rewireable
- Manufactured to BS1363-2
- Ideal for use with power tools, portable lighting and electrical appliances
- Single trailing socket made from industrial grade plastic




### PRODUCT IMAGES



ELS13B

ELS13W

### LINE DRAWING

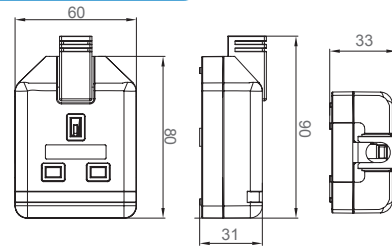

### PRODUCT INFORMATION

|                    |                                       |
|--------------------|---------------------------------------|
| Part Number        | ELS13x                                |
| Colour options (x) | Black (B), Orange (O), White (W)      |
| Product Dimensions | Height 31mm x Width 60mm x Depth 80mm |
| Sockets            | 1                                     |

### TECHNICAL SPECIFICATIONS

|   |   |
|---|---|
| Standard(s)                                 | This product is certified to applicable British safety standards<br>BS 1363-2 |
| Maximum Load (Wattage)                      | 13A: 3120 Watts, 240 Volts  |
| IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN |   |



### SAFETY WARNING

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

The total maximum load must not exceed 13A/3120 Watts. Ensure that the plug to be used in this unit is fitted with a fuse of the correct amperage as recommended by the appliance manufacturer. The total power consumed by the appliance plugged into this unit must not exceed 3120 Watts.

1. Use only 1.25mm<sup>2</sup> (13 amp) or 1.5mm<sup>2</sup> 3 core flexible cable. Use of smaller cable could result in overheating.
2. Prepare cable as shown in Figure 1
3. Remove cover and cord grip
4. It is important to connect the correct coloured wire to the appropriate terminal as shown in Figure 2 and ensure that all terminal screws are securely tightened.
5. Ensure that the cable sheath is securely clamped using the cord grip as shown in Figure 2.
6. Replace the cover and tighten securely. The other end of the cable must be fitted with a 13 amp plug fused at 13 amps (recommended Permaplug HDPT13). An unfused plug must not be used.

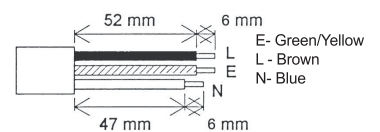


Fig 1.




Fig 2.

The long Earth wire is there for your protection. **DO NOT CUT THE EARTH WIRE SHORT**

### MOUNTING

1. Under no circumstances must this unit be hard wired or connected as a fixed installation. Mains connection must be by use of a flexible cable and 13 amp plug to BS 1363-2.
2. Do not use or mount as a trailing socket where it may be subject to the effects of dampness, excessive heat or moisture.

Masterplug Help Line

**03300 249 279**

Supplied by  
**Luceco PLC**

Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at

**www.masterplug.com**