

# RE22R1MYMR

multifunction relay, Harmony Timer Relays,  
8A, 1 CO, 0.05s...300h, symmetrical flashing,  
24...240V AC DC



## Main

|                           |                      |
|---------------------------|----------------------|
| Range of product          | Harmony Timer Relays |
| Product or component type | Multifunction relay  |
| Discrete output type      | Relay                |
| Device short name         | RE22                 |
| Nominal output current    | 8 A                  |

## Complementary

|                                |  |
|--------------------------------|--|
| Contacts type and composition  | 1 C/O timed contact, cadmium free  |
| Time delay type                | Power on-delay<br>Off-delay<br>On-delay and off-delay<br>Symmetrical flashing<br>Interval  |
| Time delay range               | 30...300 s<br>10...100 s<br>3...30 s<br>30...300 min<br>3...30 min<br>0.3...3 s<br>0.05...1 s<br>30...300 h<br>1...10 s<br>3...30 h  |
| Control type                   | Rotary knob<br>Diagnostic button<br>Potentiometer external   |
| [Us] rated supply voltage      | 24...240 V AC/DC 50/60 Hz  |
| Release input voltage          | $\leq 2.4$ V   |
| Voltage range                  | 0.85...1.1 Us  |
| Supply frequency               | 50...60 Hz +/- 5 %   |
| Connections - terminals        | Screw terminals, 1 x 0.5...1 x 3.3 mm <sup>2</sup> (AWG 20...AWG 12) solid without cable end<br>Screw terminals, 2 x 0.5...2 x 2.5 mm <sup>2</sup> (AWG 20...AWG 14) solid without cable end<br>Screw terminals, 1 x 0.2...1 x 2.5 mm <sup>2</sup> (AWG 24...AWG 14) flexible with cable end<br>Screw terminals, 2 x 0.2...2 x 1.5 mm <sup>2</sup> (AWG 24...AWG 16) flexible with cable end |
| Tightening torque              | 0.6...1 N.m conforming to IEC 60947-1  |
| Housing material               | Self-extinguishing   |
| Repeat accuracy                | +/- 0.5 % conforming to IEC 61812-1  |
| Temperature drift              | +/- 0.05 %/°C  |
| Voltage drift                  | +/- 0.2 %/V  |
| Setting accuracy of time delay | +/- 10 % of full scale at 25 °C conforming to IEC 61812-1  |
| Control signal pulse width     | 100 Ms with load in parallel<br>30 ms  |
| Insulation resistance          | 100 MOhm at 500 V DC conforming to IEC 60664-1   |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                                 |   |
|---------------------------------|---|
| Recovery time                   | 120 ms on de-energisation   |
| Immunity to microbreaks         | 10 ms   |
| Power consumption in VA         | 3 VA at 240 V AC  |
| Power consumption in W          | 1.5 W at 240 V DC   |
| Switching capacity in VA        | 2000 VA   |
| Minimum switching current       | 10 mA at 5 V DC   |
| Maximum switching current       | 8 A   |
| Maximum switching voltage       | 250 V AC  |
| Electrical durability           | 100000 Cycles, 8 A at 250 V, AC-1<br>100000 cycles, 2 A at 24 V, DC-1   |
| Mechanical durability           | 10000000 cycles   |
| Rated impulse withstand voltage | 5 kV for 1.2...50 µs conforming to IEC 60664-1  |
| Power on delay                  | 100 ms  |
| Creepage distance               | 4 kV/3 conforming to IEC 60664-1  |
| Overvoltage category            | III conforming to IEC 60664-1   |
| Safety reliability data         | MTTFd = 205.4 years<br>B10d = 190000  |
| Mounting position               | Any position  |
| Mounting support                | 35 mm DIN rail conforming to IEC 60715  |
| Status LED                      | LED backlight green (steady) for dial pointer indication<br>LED yellow (steady) for output relay energised<br>LED yellow (fast flashing) for timing in progress and output relay de-energised<br>LED yellow (slow flashing) for timing in progress and output relay energised   |
| Function available              | A- Power on-delay relay-1 C/O<br>Ac- On-delay and off-delay relay w/ control signal-1 C/O<br>At- Power on-delay relay w/ pause/summation (X1)-1 C/O<br>Aw- Power on-delay relay w/ retrigger/restart-1 C/O<br>Act- On-delay and off-delay relay w/ control signal and pause/summation-1 C/O<br>C- Off-delay relay w/ control signal-1 C/O<br>Ct- Off-delay relay w/ control signal and pause/summation-1 C/O<br>D- Symmetrical flashing relay (starting pulse-off)-1 C/O<br>Dt- Symmetrical flashing relay (starting pulse-off) w/ pause/summation (X1)-1 C/O<br>O<br>Dw- Symmetrical flashing relay (starting pulse-off) w/ retrigger/restart-1 C/O<br>Di- Symmetrical flashing relay (starting pulse-on)-1 C/O<br>Dit- Symmetrical flashing relay (starting pulse-on) w/ pause/summation (X1)-1 C/O<br>O<br>Diw- Symmetrical flashing relay (starting pulse-on) w/ retrigger/restart-1 C/O<br>H- Interval relay-1 C/O<br>Ht- Interval relay w/ pause/summation (X1)-1 C/O<br>Hw- Interval relay w/ retrigger/restart-1 C/O<br>W- Interval relay w/ control signal off-1 C/O<br>Wt- Interval relay w/ control signal off and pause/summation-1 C/O |
| Width                           | 22.5 mm   |
| Net weight                      | 0.1 kg  |
| Number of functions             | 18  |

## Environment

|                                       |  |
|---------------------------------------|--|
| Dielectric strength                   | 2.5 kV for 1 mA/1 minute at 50 Hz between relay output and power supply with basic insulation conforming to IEC 61812-1      |
| Standards                             | IEC 61812-1<br>UL 508  |
| Directives                            | 2004/108/EC - electromagnetic compatibility<br>2006/95/EC - low voltage directive  |
| Product certifications                | RCM[RETURN]GL[RETURN]EAC[RETURN]CE[RETURN]CSA[RETURN]CCC[RETURN]JUL  |
| Ambient air temperature for operation | -20...60 °C  |
| Ambient air temperature for storage   | -40...70 °C  |
| IP degree of protection               | IP40 housing: conforming to IEC 60529<br>IP50 front face: conforming to IEC 60529<br>IP20 terminals: conforming to IEC 60529 |
| Pollution degree                      | 3 conforming to IEC 60664-1  |
| Vibration resistance                  | 20 m/s <sup>2</sup> (f= 10...150 Hz) conforming to IEC 60068-2-6   |
| Shock resistance                      | 15 gn not operating for 11 ms conforming to IEC 60068-2-27<br>5 gn in operation for 11 ms conforming to IEC 60068-2-27       |

|                               |   |
|-------------------------------|---|
| Relative humidity             | 95 % at 25...55 °C  |
| Electromagnetic compatibility | <p>Fast transients immunity test - test level: 1 kV level 3 (capacitive connecting clip) conforming to IEC 61000-4-4</p> <p>Surge immunity test - test level: 1 kV level 3 (differential mode) conforming to IEC 61000-4-5</p> <p>Surge immunity test - test level: 2 kV level 3 (common mode) conforming to IEC 61000-4-5</p> <p>Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2</p> <p>Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2</p> <p>Radiated radio-frequency electromagnetic field immunity test - test level: 10 V/m level 3 (80 MHz...1 GHz) conforming to IEC 61000-4-3</p> <p>Conducted RF disturbances - test level: 10 V level 3 (0.15...80 MHz) conforming to IEC 61000-4-6</p> <p>Fast transient bursts - test level: 2 kV level 3 (direct contact) conforming to IEC 61000-4-4</p> <p>Immunity to microbreaks and voltage drops - test level: 30 % (500 ms) conforming to IEC 61000-4-11</p> <p>Immunity to microbreaks and voltage drops - test level: 100 % (20 ms) conforming to IEC 61000-4-11</p> |

### Packing Units

|                              |        |
|------------------------------|--------|
| Unit Type of Package 1       | PCE    |
| Number of Units in Package 1 | 1      |
| Package 1 Height             | 2.6 cm |
| Package 1 Width              | 8.2 cm |
| Package 1 Length             | 9.5 cm |
| Package 1 Weight             | 98 g   |


### Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product                                      |
| REACH Regulation           | <a href="#">REACH Declaration</a>                          |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) |
| Mercury free               | Yes  |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>                     |
| RoHS exemption information | <a href="#">Yes</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>              |
| Circularity Profile        | <a href="#">End Of Life Information</a>                    |

Dimensions



## Wiring Diagram




Function A: Power On-Delay


Description

On energisation of power supply, the timing period T starts. After timing, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output

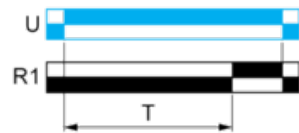

Function: 2 Outputs

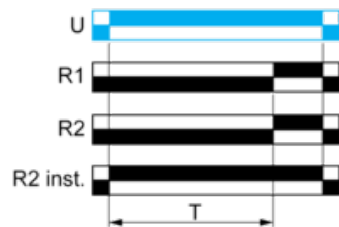

Function Ac: On-Delay & Off-Delay with Control Signal

Description

After energisation of power supply and energization of Y1 causes the timing period T to start.


At the end of this timing period, the output(s) R close(s).

When deenergization of Y1, the timing T starts.


At the end of this timing period T, the output(s) R revert(s) to its/their initial position.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs




Function Act: On-Delay & Off-Delay with Control Signal & With Pause / Summation Control

### Description

After energisation of power supply and energization of Y1 causes the timing period T to start and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R close(s). When deenergization of Y1, the timing T starts and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial position. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


### Function: 1 Output

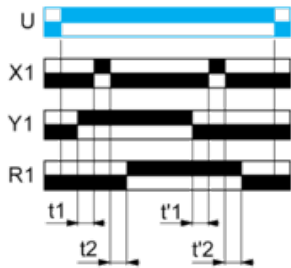

$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

### Function: 2 Outputs

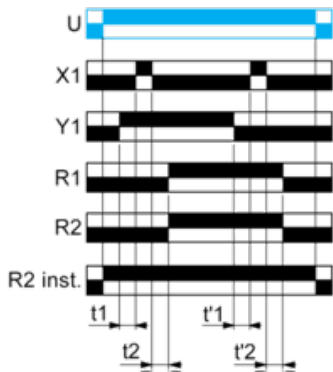

$$T = t_1 + t_2 + \dots$$


$$T = t'_1 + t'_2 + \dots$$

### Function At: Power On-Delay with Pause / Summation Control

### Description


On energisation of power supply, the timing period T starts. Timing can be interrupted / paused each time X1 energizes. Except for RE17\*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, timing can be interrupted / paused each time Y1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function: 1 Output with Pause / Summation Control

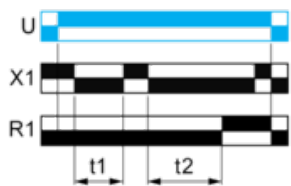


$$T = t_1 + t_2 + \dots$$

### Function: 2 Outputs with Pause / Summation Control




$T = t1 + t2 + \dots$

### Function: 1 Output with Retrigger / Restart Control



$T = t1 + t2 + \dots$

### Function: 2 Outputs with Retrigger / Restart Control



$T = t1 + t2 + \dots$


### Function Aw : Power On-Delay With Retrigger / Restart Control

---


#### Description

On energisation of power supply, the timing period T starts. At the end of the timing period T, the output(s) R close(s). Energization of Y1 makes the output(s) R open(s). Deenergization of Y1 restarts timing period T. At the end of timing period T, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST")

#### Function: 1 Output



#### Function: 2 Outputs



### Function C: Off-Delay Relay with Control Signal


---




## Description

After energisation of power supply and energization of Y1 causes output(s) R close(s). When Y1 deenergizes, timing T starts. At the end of this timing period T, the output(s) R revert(s) to its/their initial position. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function: 1 Output



### Function: 2 Outputs



## Function Ct: Off-Delay Relay with Control Signal & With Pause / Summation Control

## Description


After energisation of power supply and energization of Y1 cause output(s) R close(s). When Y1 deenergizes, timing starts and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function: 1 Output



$$T = t_1 + t_2 + \dots$$

### Function: 2 Outputs



$$T = t_1 + t_2 + \dots$$


## Function D: Symmetrical Flashing Relay (Starting Pulse Off)

## Description


On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T. This cycle is repeated indefinitely until power supply removal. Specially for RE17\*, RE22R2AMU, RE22R2MMW,

RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


**Function: 1 Output**




**Function: 2 Outputs**

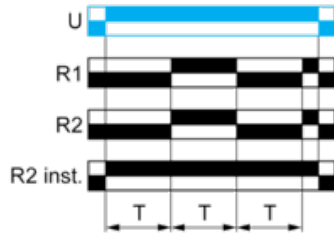

**Function: 1 Output with Retrigger / Restart Control**

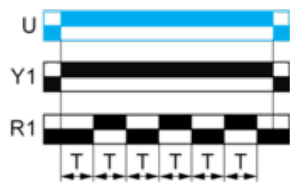

**Function: 2 Output with Retrigger / Restart Control**

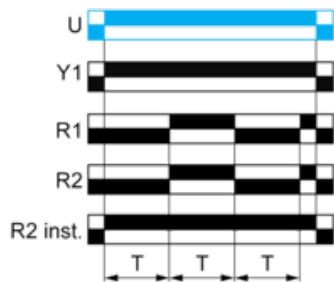


**Function Dt: Symmetrical Flashing Relay (Starting Pulse Off) & With Pause / Summation Control**

**Description**


On energisation of power supply, output(s) R starts at its/their initial state for timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, then changes to output(s) R close(s). The output(s) R close state will remain for the same timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output**

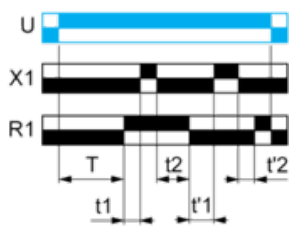

$T = t_1 + t_2 + \dots$   
 $T = t'1 + t'2 + \dots$

### Function: 2 Outputs



$T = t_1 + t_2 + \dots$   
 $T = t'_1 + t'_2 + \dots$

### Function DW: Symmetrical Flashing Relay (Starting Pulse Off) & With Retrigger / Restart Control

---


#### Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T. This cycle is repeated indefinitely until power supply removal. Specially for RE17\*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 1 Output



#### Function: 2 Outputs




### Function Di: Symmetrical Flashing Relay (Starting Pulse On)

---


#### Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T then revert(s) to its/their initial state for the same timing duration T. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 1 Output



### Function: 2 Outputs




### Function Dit: Symmetrical Flashing Relay (Starting Pulse On) & With Pause / Summation Control

#### Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, then revert(s) to its/their initial state. The output(s) R at initial state will remain for the same timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R change(s) to close state. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


### Function: 1 Output



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

### Function: 2 Outputs



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

### Function Diw: Symmetrical Flashing Relay (Starting Pulse On) & With Retrigger / Restart Control


#### Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T then revert(s) to its/their initial state for the same timing duration T. This cycle is repeated indefinitely until power supply removal. At any state of the output(s) R when Y1 energizes, the output(s) R will revert to its/their initial state and followed by Y1 deenergizes then restarts the same operation as described at the beginning. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function: 1 Output



### Function: 2 Outputs



### Function H: Interval Relay


#### Description

On energisation of power supply, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 1 Output



#### Function: 2 Outputs

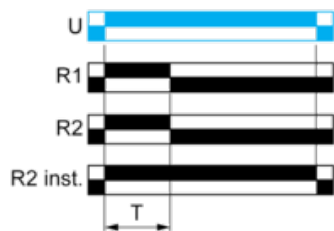

### Function Ht: Interval Relay & With Pause / Summation Control

#### Description

On energisation of power supply, output(s) R close(s) and timing period T starts.


The timing can be interrupted / paused each time X1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.

Except for RE17\*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 1 Output

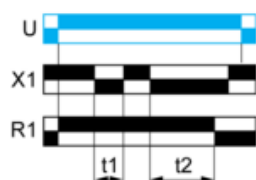


$$T = t1 + t2 + \dots$$

### Function: 2 Outputs




$$T = t1 + t2 + \dots$$

### Function: 1 Output with Retrigger / Restart Control



$$T = t1 + t2 + \dots$$

### Function: 2 Outputs with Retrigger / Restart Control




$$T = t1 + t2 + \dots$$

### Function Hw: Interval Relay & with Retrigger / Restart Control


#### Description

On energisation of power supply, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R revert(s) to its/their initial state. At any state of the output(s) R when Y1 energizes followed by deenergizes, the output(s) R close(s) then restarts the same operation as described at the beginning. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function: 1 Output



### Function: 2 Outputs




### Function W: Interval Relay with Control Signal Off


### Description

After energisation of power supply and on energization of Y1 following by deenergization of Y1, the output(s) R close(s) and starts the timing T. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function: 1 Output



### Function: 2 Outputs




### Function Wt: Interval Relay with Control Signal Off & with Pause / Summation Control

### Description


After energisation of power supply and on energization of Y1 following by deenergization of Y1, the output(s) R close(s) and starts the timing T. Timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

### Function: 1 Output



$$T = t1 + t2 + \dots$$

### Function: 2 Outputs



$$T = t1 + t2 + \dots$$

### Legend

Relay de-energised

Relay energised

Output open

Output closed

|            |  |
|------------|--|
| U -        | Supply   |
| R1/R2 -    | 2 timed outputs  |
| X1 -       | Pause / Summation control  |
| Y1 -       | Retrigger / Restart control  |
| R2 inst. - | The second output is instantaneous if the right position is selected |
| T -        | Timing period  |