

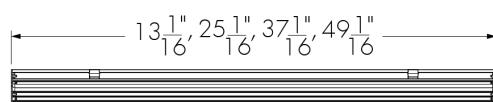


Project Name	Qty
Type	Catalog / Part Number



Front and side views

## Photometric Summary

	Delivered output (lm)	Intensity (peak cd)
1ft [305mm]	61	23
2ft [610mm]	122	46
3ft [914mm]	183	70
4ft [1219mm]	244	93

1. Based on RGB full output, DMX/RDM configuration.

2. Photometric performance is measured in compliance with IESNA LM-79-24.

## Optics



Direct view

## Color and Color Temperature



RGB

## Control



DMX/RDM

DALI  
T8

## Ratings

IP68

IK10

## Description

The Lumenfacade Inground Direct View Colour Changing is a high-performance linear LED luminaire designed for colourful asymmetric wall washing, grazing, and linear wayfinding. Featuring second generation LED technology, the Lumenfacade Inground Direct View Colour Changing is available in four different sizes (12 in, 24 in, 36 in or 48 in), with a wide number of options, including a choice of optics; RGB and colour mixing; controls; and Legacy or Custom output modes.

## Features

### Construction

Walk over compliant up to 500 kg in any type of ground, Walk over compliant up to 1000 kg in concrete

### Color and Color Temperature

RGB

### Length (Nominal)

12 in, 24 in, 36 in, 48 in

### Optics

Direct view

### Option

Anti-Slip Lens  
CE (certification covers European Economic Area)

### Power Consumption

6 W/ft, Typically 20% higher for 12 in fixture lengths

### Warranty

5-year limited warranty

## Performance

### Maximum Delivered Output

244 lm (48 in fixture, RGB full output, DMX/RDM)

### Maximum Delivered Intensity

93 cd at nadir (48 in fixture, RGB full output, DMX/RDM)

### Lumen Maintenance

L70 280,000 hrs  
L95 35,000 hrs

## Physical

### Optical Chamber Material

Aluminum

### Blockout Material

Polymer recycled PVC reinforced with a stainless steel frame

**Certifications**

<b>Trim Material</b>	Anodized aluminum
<b>Lens Material</b>	Frosted glass
<b>End Cap Material</b>	Die cast aluminum
<b>Hardware Material</b>	Stainless steel
<b>Weight</b>	12 in: 7.5 lbs 24 in: 15.3 lbs 36 in: 21.4 lbs 48 in: 27 lbs

**Electrical and Control**

<b>Voltage</b>	120 to 277 volts
<b>Fixture Cable</b>	Power and data in one cable
<b>Leader Cable Conductor</b>	5C #16-5
<b>Connectors</b>	IP68 push-lock
<b>Control</b>	Lumentalk, DMX/RDM Enabled, DALI 2 T8 Enabled Dimming 0.1%
<b>Resolution (DMX/RDM)</b>	Per foot or per fixture (configured with LumenID V3 software), 8-bit or 16-bit, 3 channels (RGB)

**Environmental**

<b>Storage Temperature</b>	-40 °F to 185 °F (device must reach start-up temperature value before operating)
<b>Start-up Temperature</b>	-13 °F to 122 °F
<b>Operating Temperature</b>	-40 °F to 122 °F
<b>Ingress Protection Rating</b>	IP68 rated for up to 1 ft, not suitable for permanent immersion applications
<b>Impact Resistance Rating</b>	IK10

**Accessories (Order Separately)**

<b>Cables</b>	Lumenfacade Inground Leader Cable, Lumenfacade Inground Jumper Cable
<b>Electrical Accessories</b>	Lumenfacade Inground Junction Box
<b>Control Boxes</b>	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
<b>Control Systems</b>	Pharos® Lighting Control Kit (PHAROS), Pharos® Expert Control Kit (EXPERT)
<b>Diagnostic and Addressing Tools</b>	LumenID (LID)

**Important****Virtual Patent Marking Notice**

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

## Cables (Order Separately)

### LOILC - Leader Cable For Lumenfacade Inground




#### LOILC-CERTIFICATION-LENGTH

Please specify:

**CERTIFICATION:** UL or CE; **LENGTH:** 10 ft, 25 ft or 50 ft

- Suitable for dimming/data and non-dimming applications.
- Consult Lumenfacade Inground leader cable specification sheet for details.

### LOIJC - Jumper Cable For Lumenfacade Inground




#### LOIJC-CERTIFICATION-LENGTH

Please specify:

**CERTIFICATION:** UL or CE; **LENGTH:** 2 ft, 4 ft or 10 ft

- Suitable for dimming/data and non-dimming applications.
- Consult Lumenfacade Inground jumper cable specification sheet for details.

### Jumper Cable Length Selection

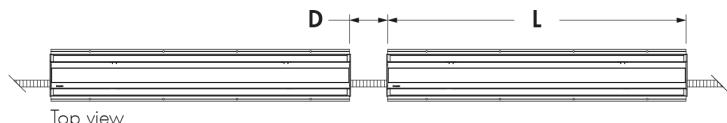

**D** - distance between two fixtures


**L** - length of fixture

Add the length of one fixture to the distance between two fixtures:  $L + D$ . Order the next longest jumper cable available: 2 ft, 4 ft or 10 ft.

Example: if the distance between two 4 ft fixtures is 0.5 ft,  $L + D = 4.5$  ft, therefore a 10 ft jumper cable is required.

## Electrical Accessories (Order Separately)


### LOI-JBOX - Lumenfacade Inground Junction Box



Lumenfacade Inground IP68 sealed junction box starter kit. Use for stand alone fixtures and/or first of run installations. The LOI-JBOX accessory does not fit in 12 in fixtures.


## Control Boxes (Order Separately)

### CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

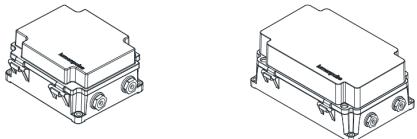

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.


### CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

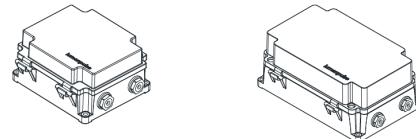

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


## Control Systems (Order Separately)

### PHAROS - Pharos® Designer Lighting Control Kit

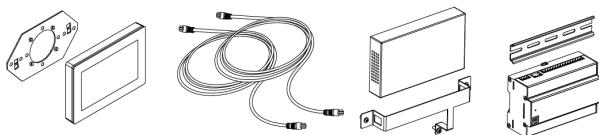

The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

### EXPERT - Pharos® Expert Control Kit

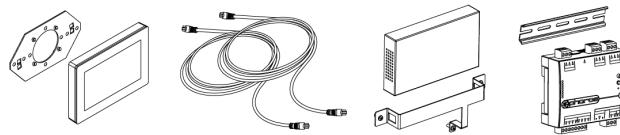

The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.

## Diagnostic And Addressing Tools (Order Separately)

### LID - LumenID



The updated LumenID (LID) is an all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Cable option may vary; please consult factory. For complete details, refer to the LID specification sheet.

## Resolution Details

**DMX/RDM Control, Resolution Per Foot: Each 12 in Section is Addressed Independently**

**DMX Addresses:**



RGB color mixing option

**DMX/RDM Control, Resolution Per Fixture: Each Fixture is Addressed Independently**

**DMX Addresses:**



RGB color mixing option


- 48 in fixtures shown.
- Applicable for DMX/RDM control option only. Fixture resolution can be configured on-site within the LumenID V3 software. A DMX/RDM enabled CBX is required.

## Typical Wiring Diagrams

### Wiring Color Code

UL Color Code	USE
Green	Ground
Black	Line
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -

### Typical Installation With Leader Cable

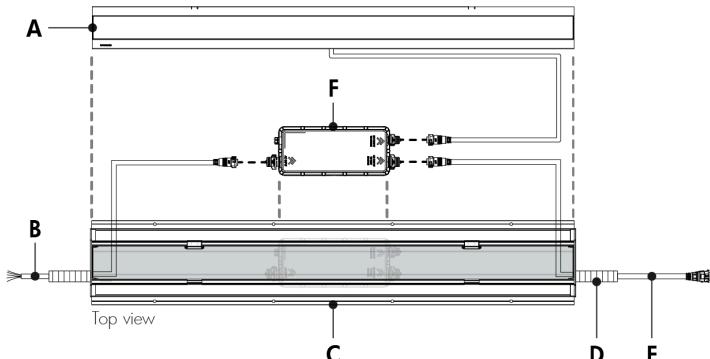

- A** - Optical chamber  
**B** - Leader cable (LOILC, order separately)  
**C** - Blockout  
**D** - Conduit (by others)  
**E** - Jumper cable to next fixture (LOIJC, order separately, for continuous run installations)  
**F** - PACBOX

### Typical Installation With IP68 LOI-JBOX Accessory



- A** - Optical chamber  
**B** - Power and data input cable (by others)  
**C** - Blockout  
**D** - Conduit (by others)  
**E** - Jumper cable to next fixture (LOIJC, order separately, for continuous run installations)  
**F** - PACBOX  
**G** - IP68 LOI-JBOX (order separately)


The IP68 LOI-JBOX accessory cannot be used with 12 in fixtures.

### Lumentalk (LT)



- A** - Power input (100-277V AC, wiring by others)  
**B** - DMX/RDM controller (order separately from Lumenpulse, or by others)  
**C** - Data wiring (by others)  
**D** - Lumentranslator 2 (LTL2-DMX)  
**E** - Power wiring (wiring by others)  
**F** - IP68 LOI-JBOX (optional)  
**G** - PACBOX  
**H** - Jumper cable (LOIJC)  
**I** - Lumenfacade Inground

- Consult the installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID. Consult factory for details.
- 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- 6 W/ft.

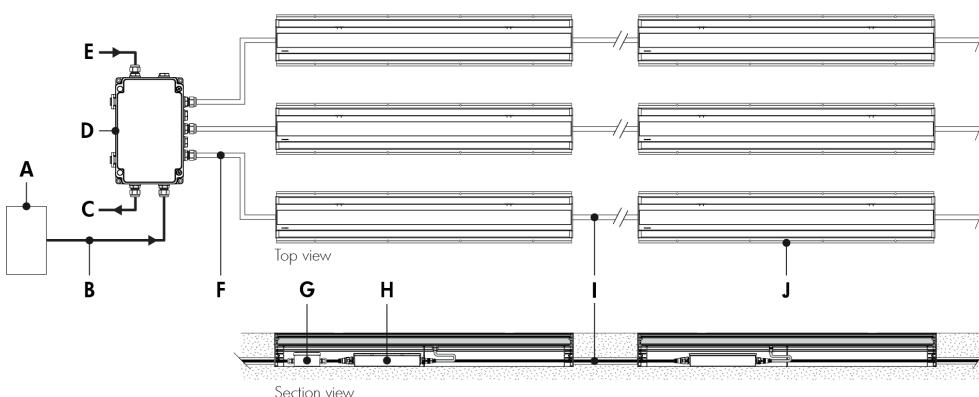**Star Layout (DMX/RDM)**


- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)  
**B** - Data input (Belden 9841 or equivalent, by others)  
**C** - Data output to next CBX (optional, not isolated/not boosted)  
**D** - CBX-ST  
**E** - Power input (120-277V, wiring by others)  
**F** - Leader cable (LOILC)  
**G** - IP68 LOI-JBOX (optional)  
**H** - PACBOX  
**I** - Jumper cable (LOIJC)  
**J** - Lumenfacade Inground

**Daisy Chain Layout (DMX/RDM)**

- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)  
**B** - Data input (Belden 9841 or equivalent, by others)  
**C** - Data output to next CBX (optional, not isolated/not boosted)  
**D** - CBX-DS  
**E** - Power input (120-277V, wiring by others)  
**F** - Leader cable (LOILC)  
**G** - IP68 LOI-JBOX (optional)  
**H** - PACBOX  
**I** - Jumper cable (LOIJC)  
**J** - Lumenfacade Inground



- Consult the installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST; maximum of 1 output per CBX-DS.
- RGB color mixture option requires 3 DMX addresses.
- 6 W/ft.

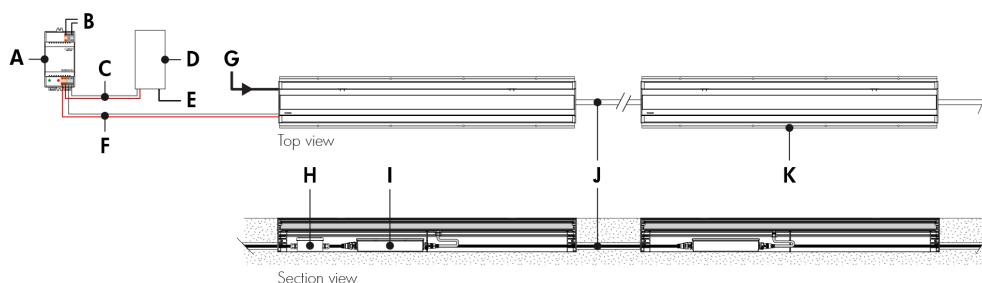**DALI 2 T8 (DALIT8)**

- A** - DALI bus power supply (by others)
- B** - Power input for DALI bus power supply (wiring by others)
- C** - Data output to DALI controller (wiring by others)
- D** - DALI controller (by others)
- E** - Power input for DALI controller (if required, wiring by others)
- F** - Data output to fixture (wiring by others)
- G** - Power input (120-277V, wiring by others)
- H** - IP68 LOI-JBOX (optional)
- I** - PACBOX
- J** - Jumper cable (LOIJC)
- K** - Lumenfacade Inground

- Consult the installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- 6 W/ft.
- The Lumenfacade Inground responds to RGBWAF controls.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.

## How to Order

Housing (1) (3) (4)	Voltage	Length	Color and Color Temperature	Control	Option
<b>LOID</b> Lumenfacade™ Inground Direct View, 6 W/ft <sup>(2)</sup>	<b>120/277</b> 120-277 Volts	<b>12</b> 13 1/16 in (7.5 lbs) <sup>(4)</sup> <b>24</b> 25 1/16 in (15.3 lbs) <b>36</b> 37 1/16 in (21.4 lbs) <b>48</b> 49 1/16 in (27 lbs)	<b>RGB</b> RGB	<b>LT</b> Lumentalk <b>DMX/RDM</b> DMX/RDM Enabled Dimming <sup>(5)</sup> <b>DALI/T8</b> DALI 2 T8 Enabled Dimming 0.1% <sup>(6)</sup>	<b>ASL</b> Anti-Slip Lens <b>CE</b> CE (European certification) <sup>(7)</sup>

## Notes:

1. A Lumenfacade Inground fixture includes one optical chamber (LOIC), one power and control box (PACBOX) and one recessed blockout (RBO). The LOIC, PACBOX and RBO are provided according to the output/color, length and control configuration.

2. Consult factory for products that are BAA-approved (Buy American Act).  
 3. Consult the installation instructions to plan all aspects of the fixture installation.

4. Power consumption is typically 20% higher for 12 in fixture lengths.

5. A control box (CBX) and LumenID (LID) must be specified.

6. DALI 2 T8 controller required, provided by others. DALI2 T8 control uses a single DALI short address.

7. Consult European specification sheet and installation instructions for CE wiring information.