

## Wireless Pet Immunity Detector User Manual


### ATLO-AC-AP96

#### Product Review:

This Wireless pet immunity PIR used the advanced intelligent signal analyzing and temperature auto compensating, built-in spring style high frequency antenna, which have the long range rejecting, electricity saving, security & reliable function. When the Intruder get into the detecting range, the detector will detect the bodily events automatically, and will send the wireless signal to the alarm host, This item can used for security Protecting of the residential area, flats, workshops, shopping mall, warehouse and office building etc...

#### Specification:

Power	9V 6F22 battery
Standby consumption	<15uA
Standby Consumption	<15uA
Alarm Current	<25mA
Anti white light intensity	12000Lux
Pet immunity	<15kgs
Detecting angle	110°
Detecting range	12M
Installing height	1.7~2.5M (2.2M Suggestion)
Transmitting Frequency	433MHZ (315/868/915MHZ optional)
Transmitting range	Around 100M (Open area)
Wireless Code	1527 / 330K
Install method	Wall or Corner mount
Working Temperature	-10°C~+50°C

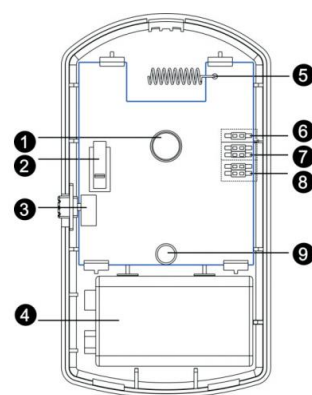

- ① Thermoluminescence infrared sensor
- ② anti-tamper button
- ③ power switch
- ④ battery
- ⑤ antenna
- ⑥ indicator switch
- ⑦ working mode setting
- ⑧ sensitive setting
- ⑨ indicator

#### Indicator:





Power ON: Flash 1 Second ; Detector alarming: LED on 3 seconds

Lower Power: detector flashing 3 seconds when alarming, please change the battery as soon as possible.

#### Anti-Tamper Function:

This product built-in anti-tamper button, then opening the detector, the button will be triggered, the indicator will be on for 3 seconds(low power will flash 3 seconds), and will send the message to the alarm host immediately, alarm host will alarm when get the message.

## Detection range Diagram:

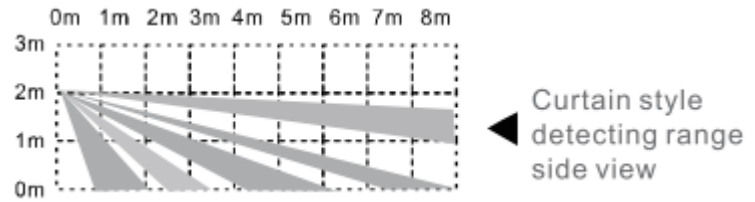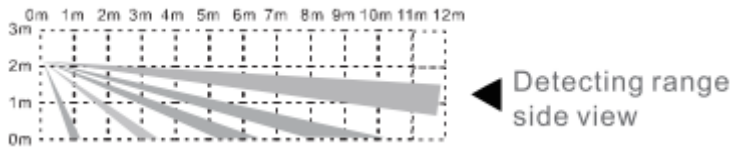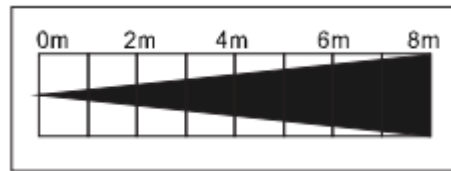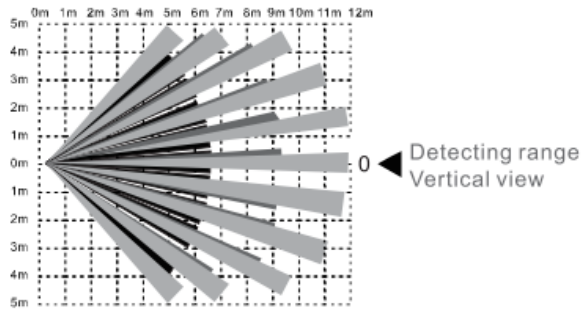

**Installation attention:** Don't install in the place of outdoor, air condition and sun exposure and related heat source...