











# **Specifications (Series luminaires)**

Voltage (V)	220-240V
Frecuency (Hz)	50-60Hz
Current (A)	350mA
Power factor (Cos fi)	0.9
LED number	12
Dimming	8N - DALI
Comm. Prot. for reprogr.	CMR
	Frecuency (Hz) Current (A) Power factor (Cos fi) LED number Dimming

${\longleftrightarrow}$	Measures	478x478x546mm
O /kg	Weight	8Kg
	Wind Resistance	0,188m2
fltc	Operating temperature	-40~+50°C
$\varphi_{_{\text{LUM}}}$	Flux (lm)	1.910lm
	Electrical isolation	CI
( <sup>170</sup>	Lifetime	L90 B10 >200.000h
¢∕W	Efficacy	144lm/W


L O O O	IP Tightness index	IP66
, L	IK Impact resistance	IK09
00	Body color	9007
14	Diffuser Material	VT-T
<u>[]</u>	Body	AL iap

K	Colour temperature	4.000K
Ø	CRI Colour rendering index	>70
<u>کې</u> ر	Optical	VAOOKOM

#### Prilux guarantees a ± 10% tolerance in light flux measurements.

 $\stackrel{}\longleftrightarrow$ 

# Dimensions





Reference	es								
	<b>W</b> LED	W		φ	$\varphi_{_{\text{LED}}}$	Φ <sub>LUM</sub>	ф <b>/</b> /V	-)	K
573375	12W	13,3W	350mA	2.399lm	2.301lm	1.910lm	144lm/W	12	4.000K






VA04D0P

VA05I0P

VA06I0P VA07L0P VA08L0M  $\bigotimes$ 

]\_\_\_

#### Photometry



### On request



K	ţ <u></u>	
PCAmbar	Available RAL colors (Consult)	VA00IOP
>70 2.700K		VA00L0M
>80 3.000K		VA01LOM
>80 4.000K		VA02L0M
>70 2.700K		VA03D0P






# Light packages

			P	CA	72	22	7	27	73	50	8	27	8	30	84	40
W	-)		Φ <sub>lum</sub>	¢∕W	φ <sub>lum</sub>	¢∕W	Φ <sub>LUM</sub>	¢∕W	Φ <sub>LUM</sub>	¢∕W	Φ <sub>LUM</sub>	ф <b>/</b> W	$\varphi_{\rm LUM}$	¢∕W	$\varphi_{_{\text{LUM}}}$	¢∕W
13,3W	12	350mA	1.022lm	77lm/W	1.475lm	1111m/W	1.710lm	1291m/W			1.571lm	118lm/W	1.571lm	118lm/W	1.655lm	124lm/W

# Mounting

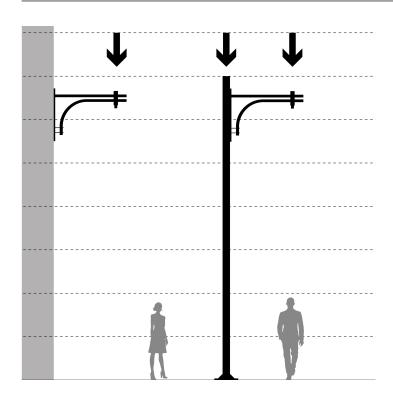

Ŷ

40 0 0





Accessories			$\bigcirc$
586573	581417	579827	501743
KIT ADAP. A POSTE Ø33MM ARISA TOP	KIT ADAP. A POSTE Ø42MM ARISA TOP	KIT ADAP. A POSTE Ø50MM ARISA TOP	KIT ADAP. A POSTE Ø76MM POLIVALENTE TECN. RAL9007T





Ø

**Technologies** 





### Overstorm

OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

### SystemShield

Ø

Ø

SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.



### CMR

CMR (CORA MANAGER READY) identifies the prilux luminaires compatible with the CORA MANAGER system that provides the luminaires with control, regulation and programming.





S

(i)

#### Solutions



### description

WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature, CCT. WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature



### description

SAFELIGHT allows the lighting of zebra crossings with road luminaires adapted with special optics for this application that illuminate with white light with a continuous level of 100%



## description

Ø

Ø

One of the key pieces to achieve the pathtowards smart cities is lighting. Lighting management systems are advancing by leapsand bounds, prioritizing primary objectives such as service quality, cost reduction and care for the environment. CORA Manager is the control system developedby Prilux that, together with our compatible luminaires that provides intelligent management of public lighting, maintaining harmony between sustainable development and quality of life forcitizens, while promoting safety and saving.

#### Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es