



MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades





















Historic buildings




Cultural spaces

Specifications (Series luminaires)






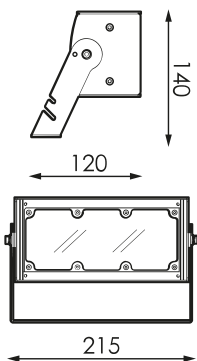


| | | | |
|--|----------|--|-----------------|
|  Voltage (V) | 220-240V |  Measures | 215x140x120mm |
| Hz Frecuency (Hz) | 50-60Hz |  Weight | 1.8Kg |
|  Current (A) | 1.400mA |  Wind Resistance | 0,018m2 |
| ϕ Power factor (Cos fi) | 0.97 |  Operating temperature | -40~+40°C |
|  LED number | 12 |  Surges protection | No |
|  Dimming | No |  Flux (lm) | 5.919lm |
|  IP Tightness index | IP67 |  Electrical isolation | CI |
|  IK Impact resistance | IK10 |  Lifetime | L90B10>200.000h |
|  Body color | 9007 | | |
|  Body | FE | | |
| K Colour temperature | 4.000K | | |
|  CRI Colour rendering index | >70 | | |
|  Optical | S146L0P | | |

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions



References

| | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| 628570 | 52 máx. | 1400mA | 6.892lm | 5.919lm | 12 | TAAQ-S146L0P | No |

On request



K

>70 3.000K

>70 5.000K

>80 3.000K

>80 4.000K

>80 4.000K

Accessories



480307

ACCESS. 3P TANEK
ARCH CONNECTOR



480291

ACCESS. 2P TANEK
ARCH CONNECTOR



480635

ACCES. SUPPORT
BOX TANEK ARQ
REMOTE



628716

CONNECTION KIT
TANEK ARQ NEO
REMOTE 5M

Accessories



628723

CONNECTION KIT
TANEK ARQ NEO
REMOTE 10M



628730

CONNECTION KIT
TANEK ARQ NEO
REMOTE 20M

Technologies



Overstorm

Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

Warning



The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in the luminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination adapted to your installation.