



Applications



Fairgrounds



Facades












Historic buildings








Cultural spaces

Specifications (Series luminaires)




	Voltage (V)	24 dcV
Hz	Frecuency (Hz)	50-60Hz
	LED number	18/18
	Dimming	DMX
	IP Tightness index	IP66
	IK Impact resistance	IK09
	Body color	9007
	Diffuser Material	VT
	Body	AL
K	Colour temperature	RGBW/RGBW
	CRI Colour rendering index	>80 (Blanco)

	Measures	1.000x76,5mm
	Surges protection	No
	Flux (lm)	1.016lm
	Electrical isolation	CIII
	Lifetime	L70>50.000h




Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions




References



	W_{LED}	ϕ_{LED}	ϕ_{LUM}		
490153	24W	1.471lm	1.016lm	18	Yes
581271	8W	490,3lm	1.016lm	18	Yes

Photometry

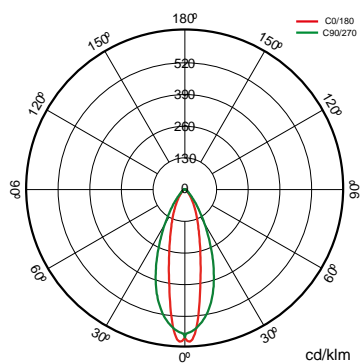

Accessories



516013

CONECTOR T DMX
LED PAD AVANT
RGBW



516020

EXTENSION 3M 5PIN
DMX LED PAD
AVANT RGBW



391535

EXTENSION FUENTE
DE ALIMENTACION
0,5 BL



588911

EXTENSION FUENTE
DE ALIMENTACION
0,5 NG



588928

EXTENSION FUENTE
DE ALIMENTACION
1M NG



529327

EXTENSION 0.5M
5PIN DMX LED PAD
AVANT RGBW



565325

TAPON FINAL
ALUMINIO LED PAD
AVANT RGBW



588942

POWER SUPPLY
EXTENSION 5M NG



Technologies



Overstorm

Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

Rules



Without remote control. RGB with memory effect.



Info



Do not connect more than 8 luminaires in series