

MADE IN SPAIN
Design by PRILUX




Applications



Monuments



Fairgrounds



Facades













Historic buildings











Cultural spaces

Specifications (Series luminaires)




	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	max.1400mA
Φ	Power factor (Cos fi)	Hasta 0,97
	LED number	12/12
	Dimming	No
	IP Tightness index	IP67
	IK Impact resistance	IK10
	Body color	9007
	Body	FE
K	Colour temperature	4.000K-4.000K
	CRI Colour rendering index	>70
	Optical	S093L0P

	Measures	215x140x120mm
	Weight	1.8Kg
	Wind Resistance	0,018m2
	Operating temperature	-40~+40°C
	Surges protection	No
	Flux (lm)	6.247lm
	Electrical isolation	CI
	Lifetime	L90B10>200.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.





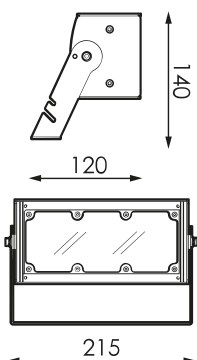
Dimensions





References



	W_{LED}		ϕ_{LED}	ϕ_{LUM}			
628518	52 máx.	1400mA	6.892lm	5.719lm	12	TAAQ-S027L0P	No
628525	52 máx.	1400mA	6.892lm	5.719lm	12	TAAQ-S027L0P	No
628532	52 máx.	1400mA	6.892lm	6.168lm	12	TAAQ-S060L0P	No
628549	52 máx.	1400mA	6.892lm	6.168lm	12	TAAQ-S060L0P	No
628556	52 máx.	1400mA	6.892lm	6.247lm	12	TAAQ-S093L0P	No
628563	52 máx.	1400mA	6.892lm	6.247lm	12	TAAQ-S093L0P	No
628570	52 máx.	1400mA	6.892lm	5.919lm	12	TAAQ-S146L0P	No
628587	52 máx.	1400mA	6.892lm	5.919lm	12	TAAQ-S146L0P	No

On request



K

>70 3.000K

>70 5.000K

>80 3.000K

>80 4.000K

>80 4.000K

Accessories



480307

ACCESS. 3P TANEK
ARCH CONNECTOR



480291

ACCESS. 2P TANEK
ARCH CONNECTOR



480635

ACCES. SUPPORT
BOX TANEK ARQ
REMOTE



628716

CONNECTION KIT
TANEK ARQ NEO
REMOTE 5M



628723

CONNECTION KIT
TANEK ARQ NEO
REMOTE 10M



628730

CONNECTION KIT
TANEK ARQ NEO
REMOTE 20M



Technologies



Overstorm

Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

Warning



The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in the luminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination adapted to your installation.