


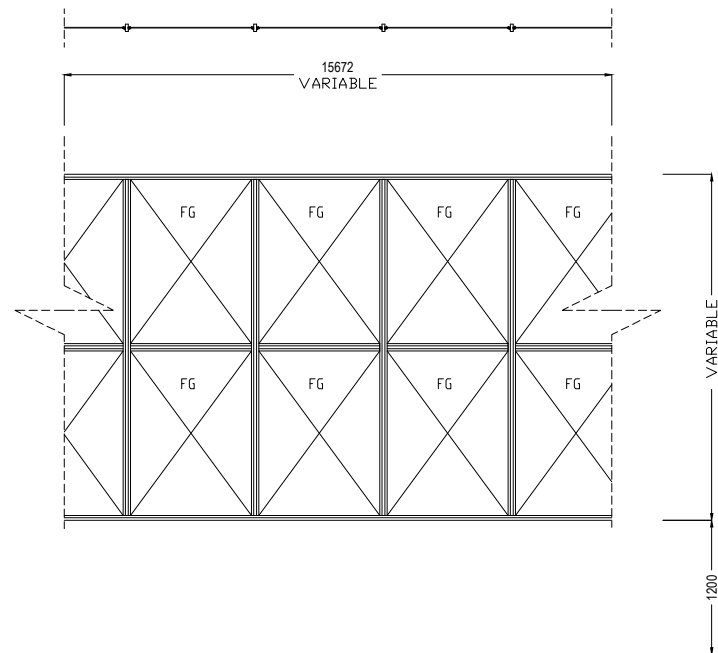

FG 3A, FG 3B & FG 3C

5TH FLOOR

43.098 sqm (Variable)


QUANTITY:- 15.672M (1 Nos)

GRAY POWER COATED ALUMINUM FRAME

Glass:- GOLD TINTED GLASS 6MM

LOCATION:- EXTERIOR WALL
SECURITY LEVEL:- NOT REQUIRED

COMMENTS:- TAKE MEASUREMENT ON SITE BEFORE FABRICATION

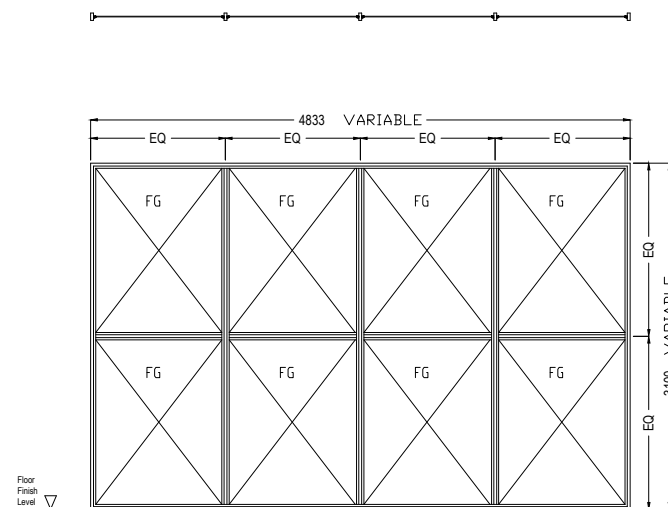

FG 1

5TH FLOOR


14.98 sqm (Variable)

QUANTITY:- 4.833M (1 Nos)

GRAY POWER COATED ALUMINUM FRAME

Glass:- GOLD TINTED GLASS 6MM

LOCATION:- EXTERIOR WALL
SECURITY LEVEL:- NOT REQUIRED

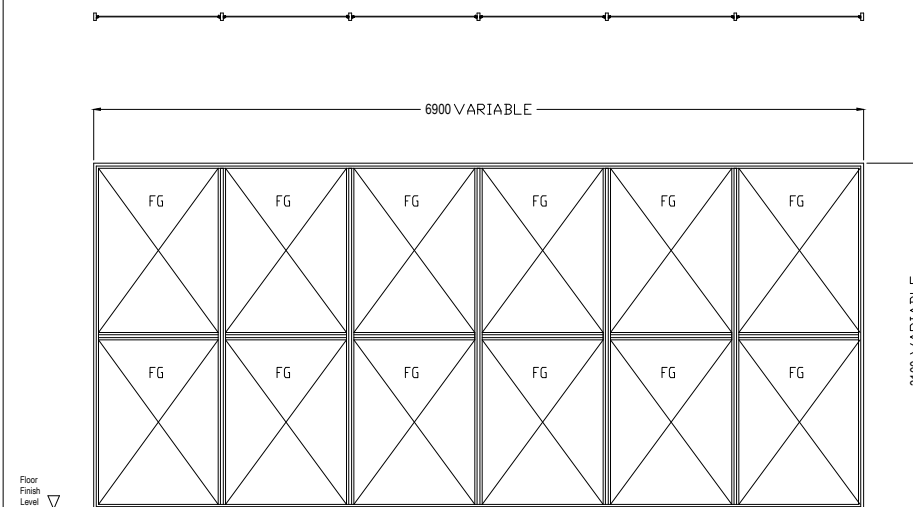

FG 2

5TH FLOOR

21.39 sqm (Variable)


QUANTITY:- 6.9M (1 Nos)

GRAY POWER COATED ALUMINUM FRAME


Glass:- GOLD TINTED GLASS 6MM

LOCATION:- EXTERIOR WALL
SECURITY LEVEL:- NOT REQUIRED


COMMENTS:- TAKE MEASUREMENT ON SITE BEFORE FABRICATION

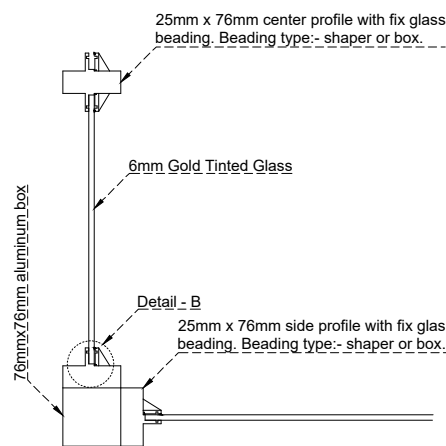

Detail - A

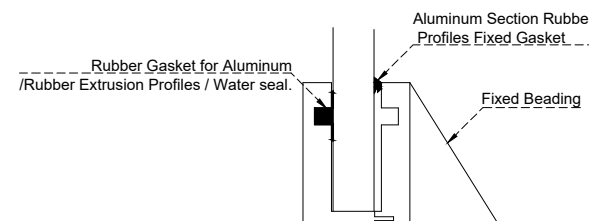

Detail - B

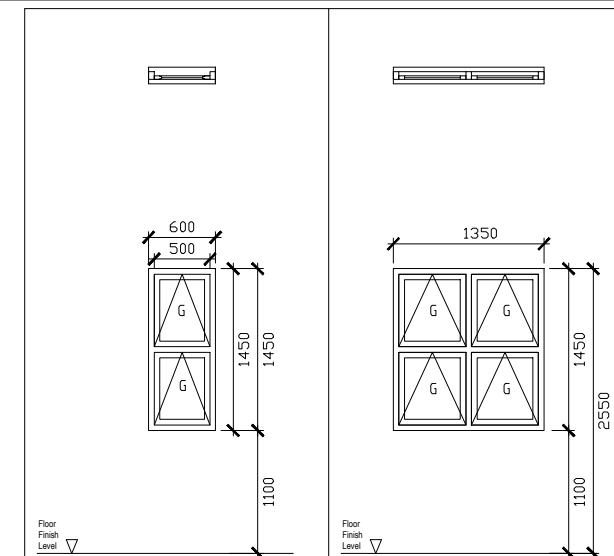

W2

W1

5TH FLOOR

0.87 sqm

QUANTITY:- 05 NOS

GRAY POWER COATED ALUMINUM FRAME

ALUMINIUM FRAMED TOP HUNG
WINDOWS WITH FIXED GLASS

Glass:- GOLD TINTED GLASS 6MM

LOCATION:- EXTERIOR WALL
SECURITY LEVEL:- NOT REQUIRED

5TH FLOOR

1.96 sqm

QUANTITY:- 23 NOS

GRAY POWER COATED ALUMINUM FRAME

ALUMINIUM FRAMED TOP HUNG
WINDOWS WITH FIXED GLASS

Glass:- GOLD TINTED GLASS 6MM

LOCATION:- EXTERIOR WALL
SECURITY LEVEL:- NOT REQUIRED

NOTE:- ALL MATERIALS SAMPLE MUST BE SUBMITTED ON HMH PROJECT TEAM AND GET APPROVED BEFORE FABRICATION. CLINT IS NOT RESPONSIBLE ANY PRICE VARIATION FOR THE DAMAGES OF SAMPLES WILL NOT BE APPROVED.

WINDOW SCHEDULE 3RD FLOOR

Revision notes:

Rev:	Date:	Notes:
1	18-04-2021	WINDOW SCHEDULE 3RD FLOOR
2	22-04-2021	WINDOW SCHEDULE AMENDED AS PER MINISTER COMMENT

Drawn by:

KALEEM
Hussain Sifaz

Client:

Hulhumale Hospital

Project:

6 story 5TH
OT

Drawing Title:

Construction

Date:

18-04-2021

Scale @ A3:

Revision:

