





**Krok 3** Mocowanie płytki VESA

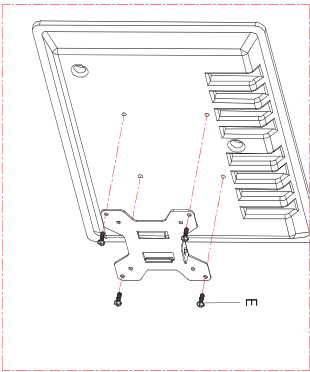


Monitory z płaską obudową w tylnej części

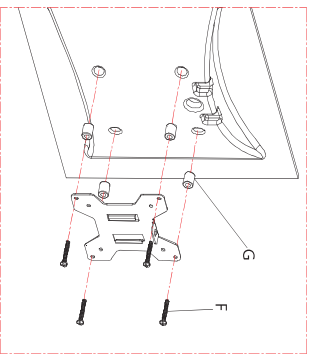


Monitory z zakrzywioną obudową w tylnej części

**Uwaga:** Do zestawu dołączone są śruby w różnych długościach. Upewnij się, czy śruby pasują do twojego monitora. Użycie zbyt długich śrub może uszkodzić monitor.

**Krok 4** Mocowanie monitora na ramieniu

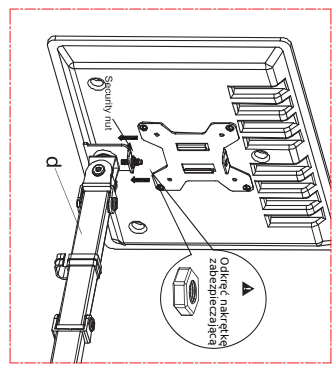


Wsuń uchwyt VESA na ramię (d)




Przykręć nakrętkę zabezpieczającą. Upewnij się, że jest dokręcona zanim zaczniesz obracać monitor

**Krok 5** Regulacja monitora





Wyreguluj kąt nachylenia i dokręć śrubę za pomocą dołączonego klucza imbusowego (D)

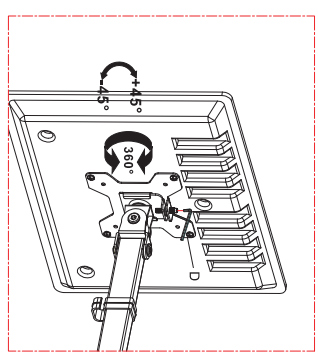

W celu zmiany wysokości położenia monitora, odkręć nakrętkę i obróć śrubę w kierunku przeciwnym do ruchu wskazówek zegara za pomocą dostarczonego klucza imbusowego. Po zakończeniu regulacji zamontuj nakrętkę zabezpieczającą.

**Uwaga:** Nigdy nie obracaj monitora zbyt mocno do przodu ani do tyłu, może dojść do przypadkowego upadku


**Krok 6** Zarządzanie przewodami i ustawienie ramion

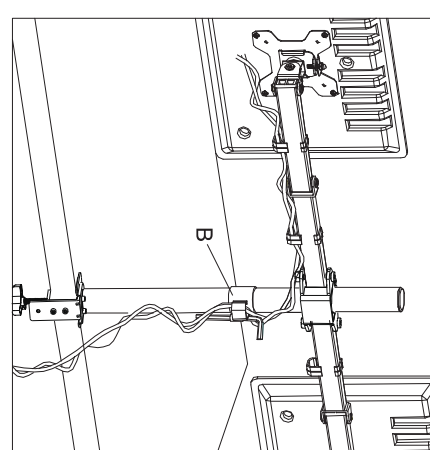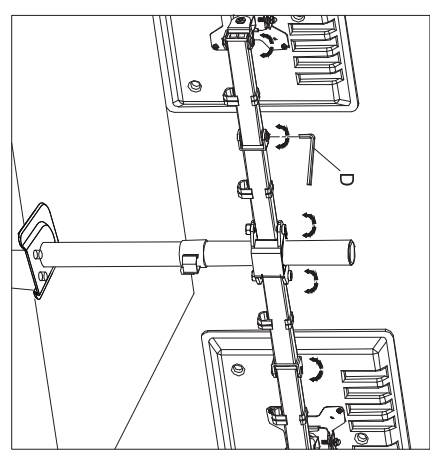

Użyj dołączonego długiego imbusowego aby poluznić śruby celem ustawienia pożądanego kąta na każdym z ramion, a następnie dokręć ponownie śruby.

Aby uporać przewody użyj dołączonych plastikowych klipsów

**Dziękujemy za wybór naszego produktu!**


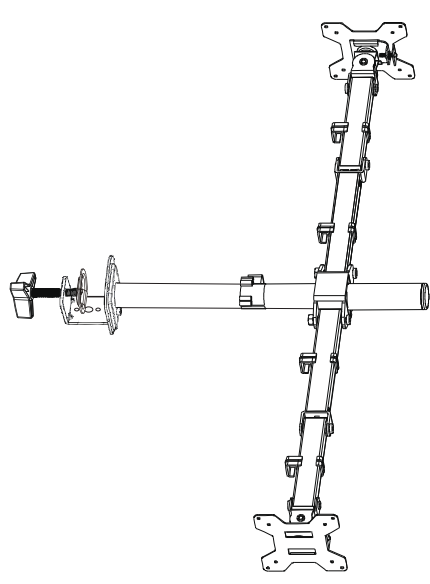


Przed rozpoczęciem montażu upewnij się, że w kątach znajdują się wszystkie elementy. W przypadku stwierdzenia uszkodzenia uszkodzenia którejkolwiek z elementów produktu zaniechaj jego używania i skontaktuj się ze sprzedawcą.

Instaluj i obsługuj to urządzenie ostrożnie. Należy przeczytać instrukcje i uważnie ich przestrzegać. Jeśli nie rozumiesz tych wskazówek lub masz wątpliwości co do bezpieczeństwa instalacji, skontaktuj się z wykwalifikowanym wykonawcą w celu uzyskania pomocy. Nie używaj tego produktu do żadnego celu ani w żadnej konfiguracji nieokreślonej wyraźnie w tej instrukcji. Niniejszym zrzekamy się wszelkiej odpowiedzialności za obrażenia lub szkody wynikające z nieprawidłowego montażu, nieprawidłowego montażu lub nieprawidłowego użytkowania tego produktu.

Produkt oraz elementy opakowania nie są zabawką. Produkt powinien być używany pod nadzorem odpowiedzialnej osoby dorosłej.

Supplied Parts List

|                                                                                     |                                                                                     |                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   |  |  |  |
| (1) Pole-a                                                                          | (1) Clamp-b                                                                         | (1) Clamp Brace-c                                                                   | (1) Swivel Arm-d                                                                     |
|  |  |  |   |
| (2) VESA Plate-e                                                                    | (2) M6X8 Bolt-A                                                                     | (1) Wire Clip-B                                                                     | (4) wire Clip-C                                                                      |
|   |    |    |     |
| (1) Allen Key -D                                                                    | (8) M4X12 Bolt -E                                                                   | (8) M4X30 Bolt -F                                                                   | (8) M8 Spacer-G                                                                      |

**WARNING**

This monitor/desktop mount must be securely attached to the horizontal desk. If the mount is not properly installed it may fall, resulting in possible injury and/or damage.

**CAUTION!**

Tools Required | Phillips Screwdriver


Step 1  
Install the Pole to the Desktop

Option A: Desk Clamp Install

OPTION A: Clamp Installation


1. Mount Clamp (b) to the bottom of Pole (a) by tightening bolts (A) with 5mm Allen Key (D).

2. Adjust the Clamp width to your desk. Secure stand to the desktop by tightening Clamp (b).

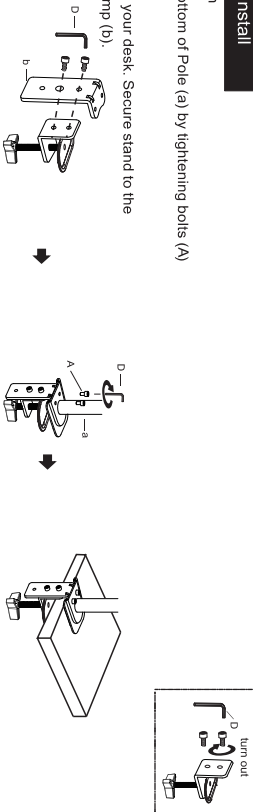

Option B: Grommet Base Install  
Existing Grommet Hole Installation

Position pole (a) on the mounting surface and then secure it by tightening the plastic knob after making Bolt through the Bracket , desk hole, and the bottom of Pole (a) sequentially.

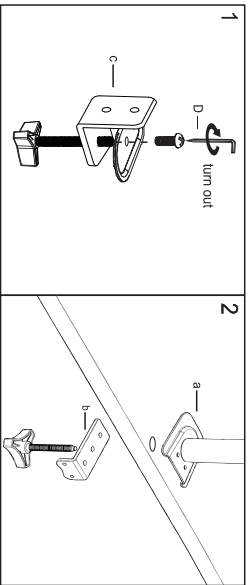


Step 1  
Install the Pole to the Desktop

Option B: Grommet Base Install

Self Drilled Grommet Hole Installation


Position the Pole(a) on the mounting surface and mark the center hole. Drill a 3/8" (10mm) diameter hole at the marked position through the mounting surface.

Position pole (a) on the mounting surface and then secure it by tightening the plastic knob after making Bolt through the Bracket, desk hole, and the bottom of Pole (a) sequentially.

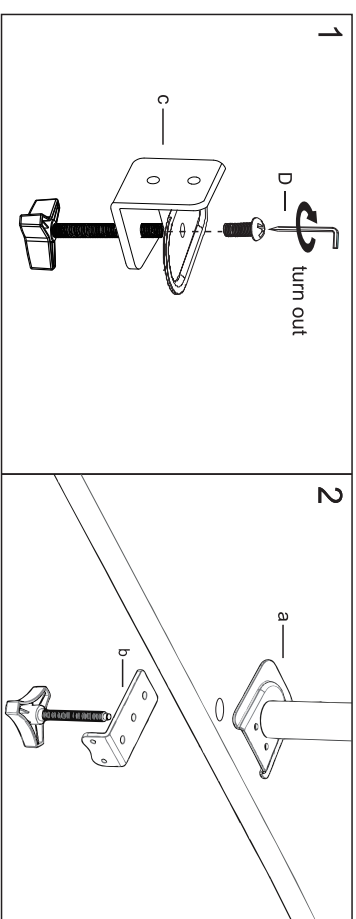


Step 2  
Install Arm to the Pole

Place the Swivel Arm(d) over the pole, and tighten with Allen Key (D)

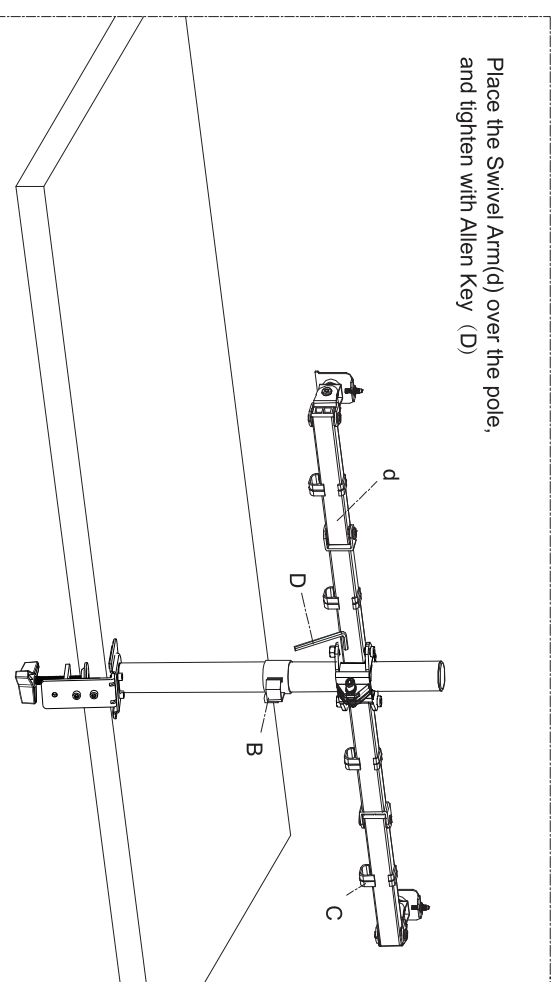


### Step 3

#### Attach the VESA Plate to the Monitor

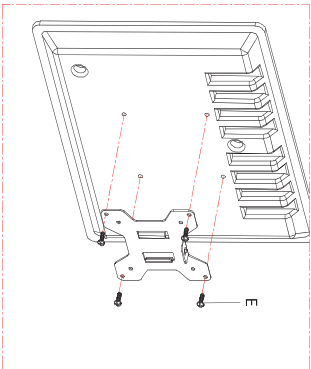


For Monitor with Flat Back




For Monitor with Curved or Recessed Back

### Step 4

#### Slide the Monitor to the Head of Swivel Arm

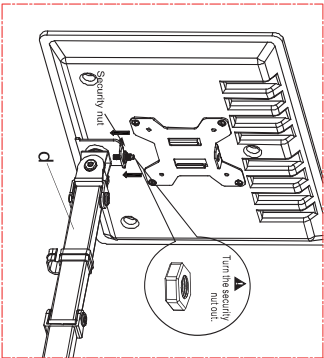


Slide the monitor onto the head of Swivel Arm(d) as the above diagram.




Install the security Nut . Make sure the security nut is installed before you rotate the monitor.

### Step 5

#### Make the Necessary Adjustments



Adjust and tighten the bolt with the supplied Allen Key (D) to fix the tilt angle




If one monitor is lower, remove the Nut and turn the bolt counter-clockwise with supplied Allen key( D) to raise the monitor. Install the Nut after the adjustment.


**Note:** Never swivel forward or backward too much, accidental falling might occur.

### Step 6

#### Manage the Wires and Store the Allen Keys on Wire Clip

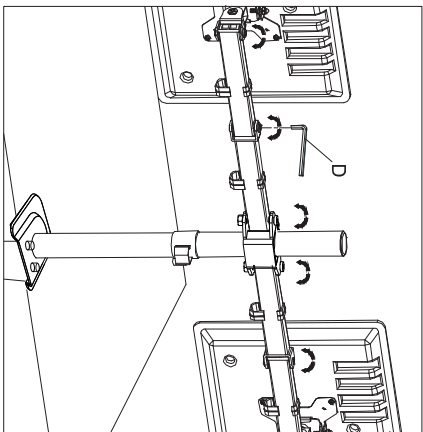

Use the provided Allen Key (D) to make the necessary adjustments to each arm

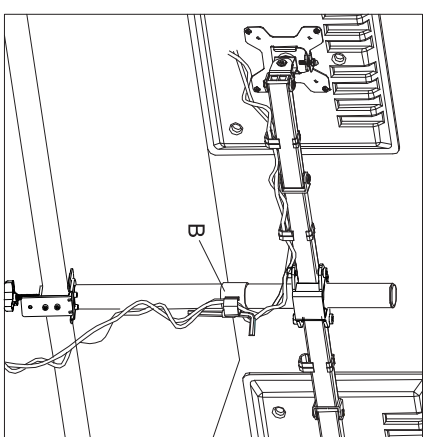

Hold wires in place with a cable clip (Wire Clip – B )

Thank you for choosing our products!


#### UNPACKING INSTRUCTIONS

- Carefully open the carton, remove contents and lay out on cardboard or other protective surface to avoid damage.
- Check package contents against the Supplied Parts List in the next page to assure that all components were received undamaged. Do not use damaged or defective parts.
- Carefully read all instructions before attempting installation.

#### IMPORTANT SAFETY INFORMATION

- Install and operate this device with care. Please read this instruction before installation, and carefully follow all instructions contained herein. Use proper safety equipment during installation.
- Please call a qualified installation contractor for help if you don't understand these directions or have any doubts about the safety of the installation.

Do not use this product for any purpose or in any configuration not explicitly specified in this instruction. We hereby disclaims any and all liability for injury or damage arising from incorrect assembly, incorrect mounting, or incorrect use of this product.

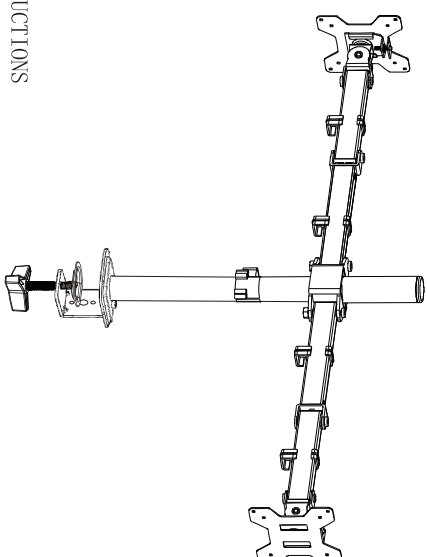

## PL

Przed rozpoczęciem montażu upewnij się, że w kartonie znajdują się wszystkie elementy

W przypadku stwierdzenia uszkodzenia któregokolwiek z elementów

produktu zaniechaj jego używania i skontaktuj się ze sprzedawcą.

Instaluj i obsługuj to urządzenie ostrożnie. Należy przeczytać instrukcje i uważnie

ich przestrzegać. Jeśli nie rozumiesz tych wskazówek lub masz wątpliwości co do

bezpieczeństwa instalacji, skontaktuj się z wykwalifikowanym wykonawcą

w celu uzyskania pomocy.

Nie używaj tego produktu do żadnego celu ani w żadnej konfiguracji

nieokreślonej wyraźnie w tej instrukcji. Niniejszym zrzekamy się wszelkiej

odpowiedzialności za obrażenia lub szkody wynikające z nieprawidłowego montażu,

nieprawidłowego montażu lub nieprawidłowego użytkowania tego produktu.

Produkt oraz elementy opakowania nie są zabawką.

Produkt powinien być używany pod nadzorem odpowiedzialnej osoby dorosłej.

## EN

Before starting assembly, make sure all components are in the box

If any element is damaged

discontinue use of the product and contact the seller.

Install and operate this device carefully. Please read the instructions carefully

follow them. If you don't understand these tips or have doubts about

installation safety, contact a qualified contractor

for help.

Do not use this product for any purpose or in any configuration

not expressly specified in this manual. We hereby waive any

liability for injuries or damage resulting from incorrect installation,

incorrect installation or incorrect use of this product.

The product and packaging elements are not a toy.

The product should be used under the supervision of a responsible adult.

Producent:

**WERKSTAR SPÓŁKA Z O. O.**

ul. Bydgoskich Przemysłowców 6a

85-665 Bydgoszcz

INFO@WERKSTAR.EU

Wyprodukowano w ChRL