

FULL RANGE FREQUENCY TRANSDUCER

KEY FEATURES

- 4" full-range compact ferrite loudspeaker
- 80 W program power
- Extended response and low distortion
- Paper cone and Santoprene[™] surround

- Pressed steel basket
- Ceramic magnet
- Ideal form beam-steering application (columns), portable array and compact applications





TECHNICAL SPECIFICATIONS

Nominal diameter	100 mm	4 in
Rated impedance		8 Ω
Minimum impedance		7,3 Ω
Power capacity ¹	4	0 W _{AES}
Program power ²		80 W
Sensitivity	87 dB 1W / 1r	n @ Z _N
Frequency range	100 - 20.000 Hz	
Voice coil diameter	20,3 mm	0,8 in
BI factor		4,2 N/A
Moving mass	0,0	0044 kg
Voice coil length		7,7 mm
Air gap height		5 mm

THIELE-SMALL PARAMETERS 3

Resonant frequency, f _s	92 Hz
D.C. Voice coil resistance, R _e	6,4 Ω
Mechanical Quality Factor, Q _{ms}	11,3
Electrical Quality Factor, Qes	0,96
Total Quality Factor, Qts	0,88
Equivalent Air Volume to C _{ms} , V _{as}	2,8 I
Mechanical Compliance, C _{ms}	668 μm / N
Mechanical Resistance, R _{ms}	0,23 kg / s
Efficiency, η ₀	0,22 %
Effective Surface Area, S _d	$0,0055 \text{ m}^2$
Maximum Displacement, X _{max} ⁴	3 mm
Displacement Volume, V _d	11 cm ³
Voice Coil Inductance, Le @ 1 kHz	0,2 mH

Notes

¹ The power capaticty is determined according to AES2-1984 (r2003) standard.

² Program power is defined as power capacity + 3 dB.

³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).


 $^{^4}$ The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.

⁵ Product designed by Acústica Beyma S.L.





FULL RANGE FREQUENCY TRANSDUCER

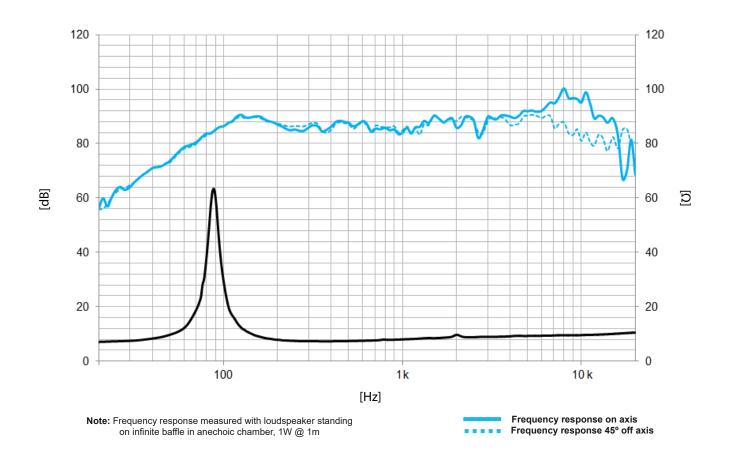

MOUNTING INFORMATION

118,2 mm	4,6 in
108,2 mm	4,3 in
92 mm	3,6 in
60 mm	2,4 in
0,55 kg	1,2 lb
0,75 kg	1,6 lb
	108,2 mm 92 mm 60 mm 0,55 kg

DIMENSION DRAWING

