

3-TERMINAL 0.5A POSITIVE VOLTAGE REGULATOR

The MC78MXXC series of three-terminal positive regulators is available TO-220 package with several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 0.5A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

FEATURES

- Output Current up to 0.5A
- Output Voltages of 5; 6; 8; 10; 12; 15; 18; 20; 24V
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor SOA Protection

BLOCK DIAGRAM


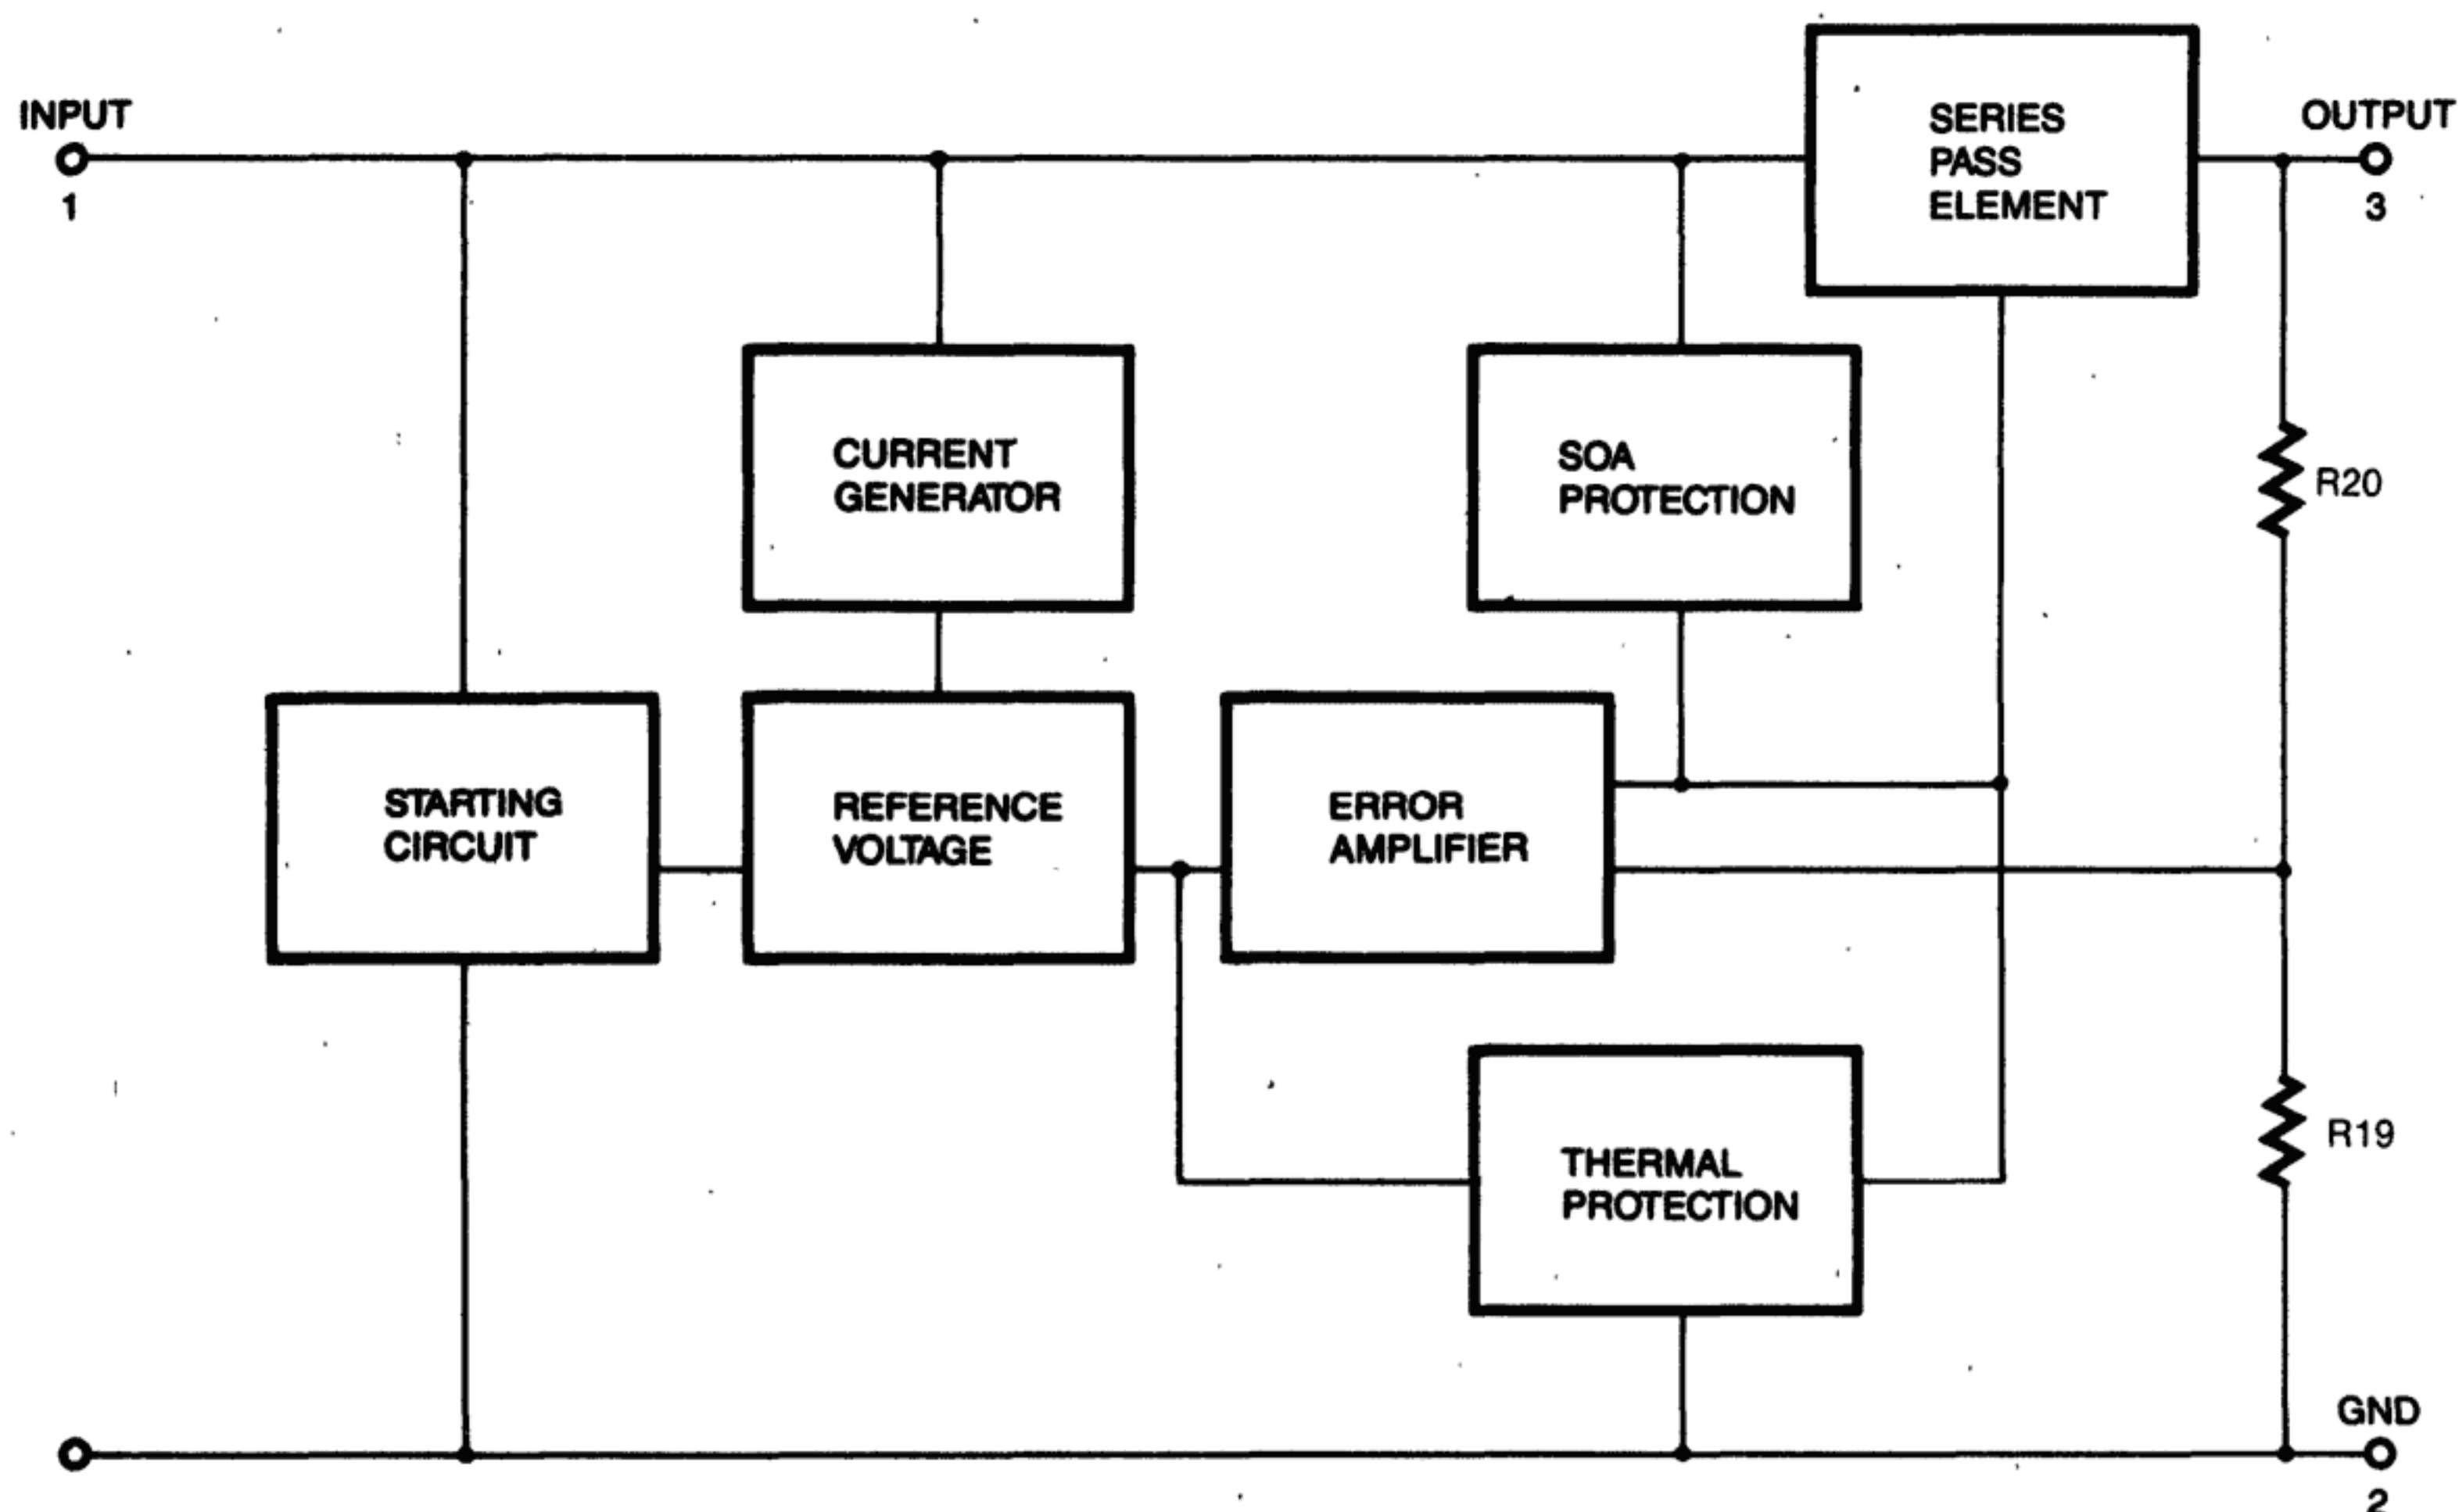


Fig. 1

TO-220

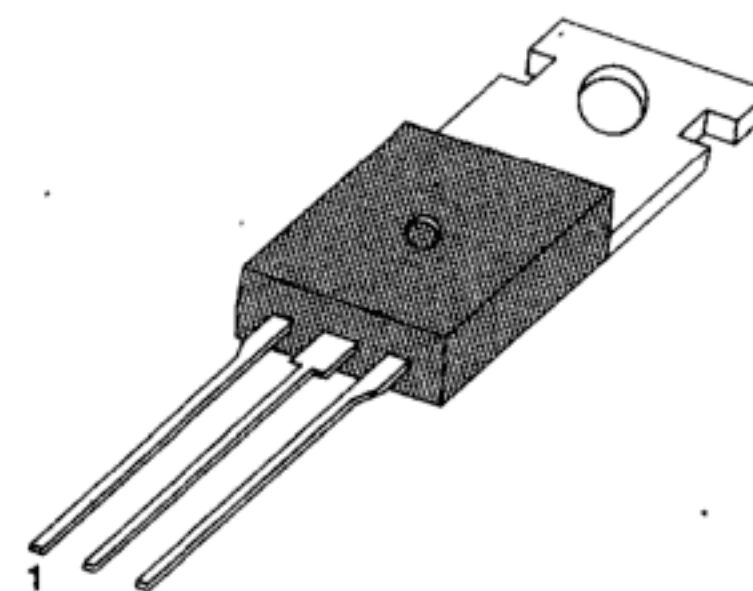

1: Input 2: GND 3: Output

ORDERING INFORMATION

Device	Package	Operating Temperature
MC78MXXIT	TO-220	-40 ~ +125°C
MC78MXXCT	TO-220	0°C ~ +125°C



SCHEMATIC DIAGRAM

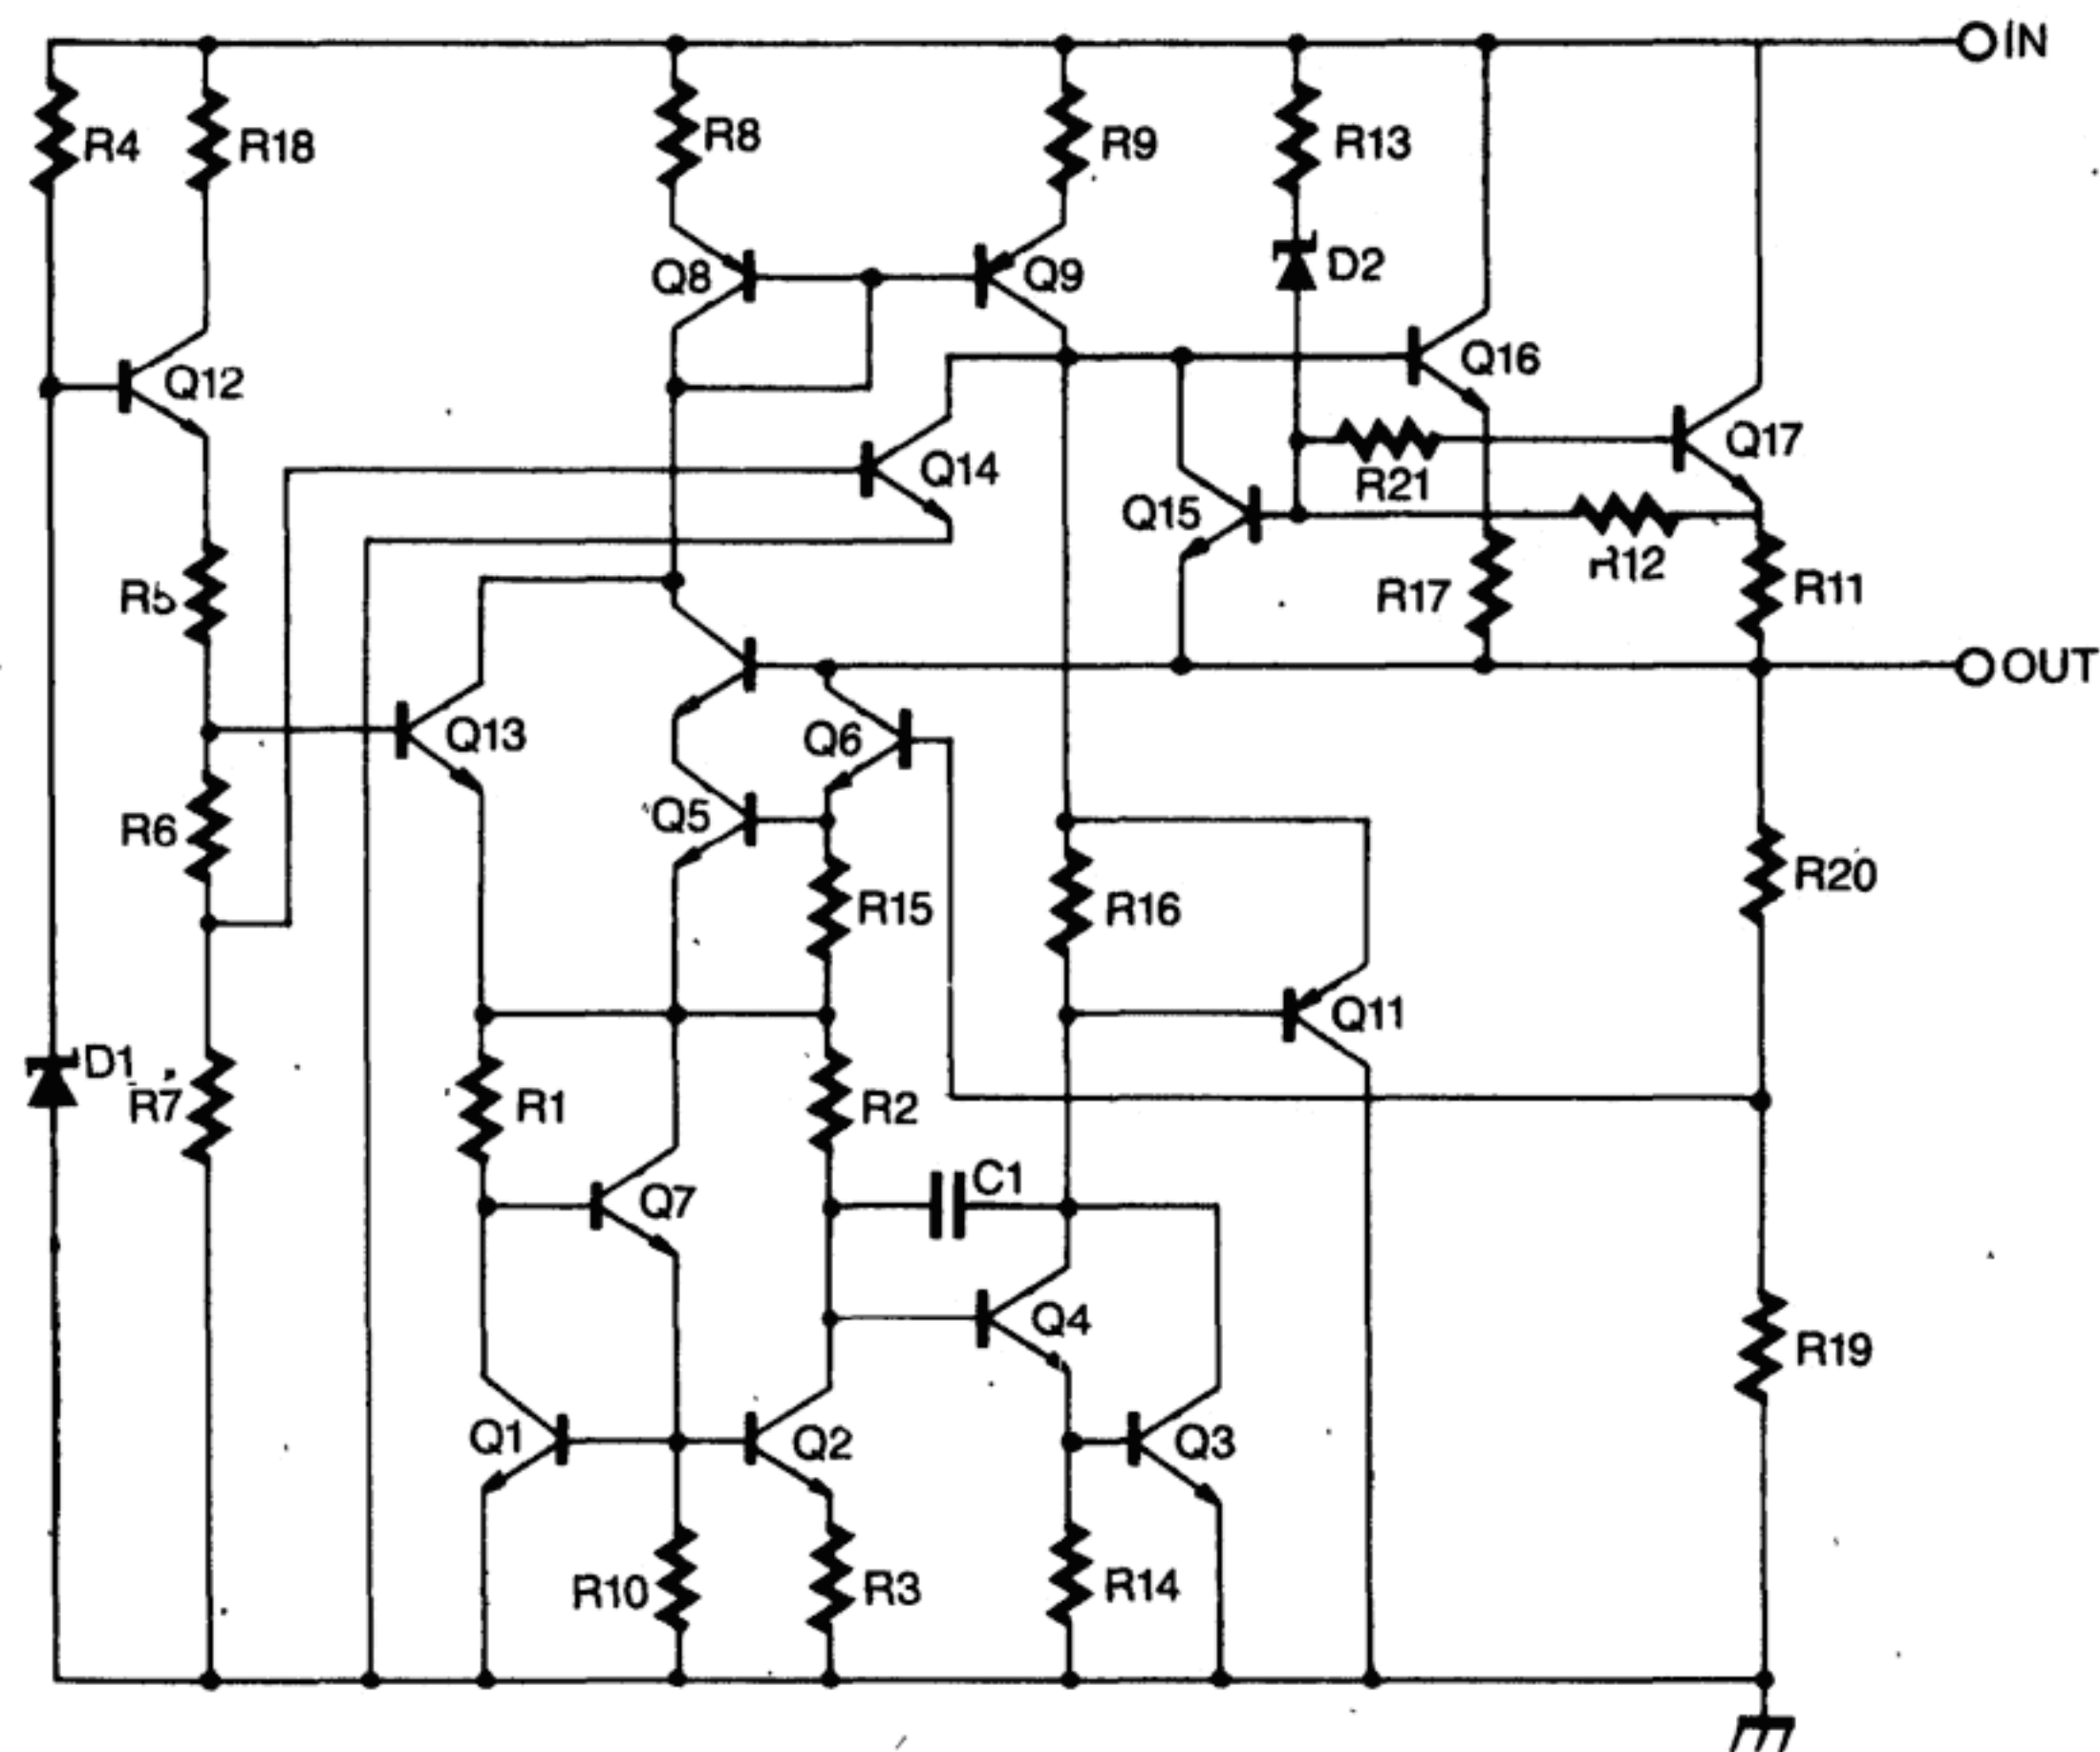


Fig. 2

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Value	Unit
Input Voltage (for $V_o = 5V$ to $18V$)	V_i	35	V
(for $V_o = 24V$)	V_i	40	V
Thermal Resistance Junction-Cases	θ_{JC}	5	$^{\circ}C/W$
Thermal Resistance Junction-Air	θ_{JA}	65	$^{\circ}C/W$
Operating Temperature Range MC78XXI	T_{opr}	$-40 \sim +125$	$^{\circ}C$
MC78XXC/AC		$0 \sim +125$	$^{\circ}C$
Storage Temperature Range	T_{stg}	$-65 \sim +150$	$^{\circ}C$

ELECTRICAL CHARACTERISTICS MC78M05C

(Refer to the test circuits, $T_{\min} \leq T_j \leq 125^{\circ}\text{C}$, $I_o = 350\text{mA}$, $V_i = 10\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_j = 25^{\circ}\text{C}$	4.8	5	5.2	V
		$I_o = 5 \text{ to } 350\text{mA}$ $V_i = 7 \text{ to } 20\text{V}$	4.75	5	5.25	
Line Regulation	ΔV_o	$I_o = 200\text{mA}$	$V_i = 7 \text{ to } 25\text{V}$		100	mV
			$V_i = 8 \text{ to } 25\text{V}$		50	
Load Regulation	ΔV_o	$I_o = 5\text{mA} \text{ to } 0.5\text{A}$			100	mV
		$I_o = 5\text{mA} \text{ to } 200\text{mA}$			50	
Quiescent Current	I_d				6	mA
Quiescent Current Change	ΔI_d	$I_o = 5\text{mA} \text{ to } 350\text{mA}$			0.5	mA
		$I_o = 200\text{mA}$ $V_i = 8 \text{ to } 25\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_o}{\Delta T}$	$I_o = 5\text{mA}$ $T_j = 0 \text{ to } 125^{\circ}\text{C}$		-0.5		mV/ $^{\circ}\text{C}$
Output Noise Voltage	V_N	$f = 10\text{Hz} \text{ to } 100\text{kHz}$		40		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $I_o = 300\text{mA}$ $V_i = 8 \text{ to } 18\text{V}$	62			dB
Dropout Voltage	V_D	$T_j = 25^{\circ}\text{C}$, $I_o = 500\text{mA}$		2		V
Short Circuit Current	I_{sc}	$T_j = 25^{\circ}\text{C}$, $V_i = 35\text{V}$		300		mA
Peak Current	I_{peak}	$T_j = 25^{\circ}\text{C}$		700		mA

* $T_{\min}$ MC78MXXI: $T_{\min} = -40^{\circ}\text{C}$ MC78MXXC: $T_{\min} = 0^{\circ}\text{C}$ www.datasheetcatalog.com

ELECTRICAL CHARACTERISTICS MC78M06C

(Refer to the test circuits, $T_{\min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 11\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	5.75	6	6.25	V
		$I_o = 5 \text{ to } 350\text{mA}$ $V_i = 8 \text{ to } 21\text{V}$	5.7	6	6.3	
Line Regulation	ΔV_o	$I_o = 200\text{mA}$	$V_i = 8 \text{ to } 25\text{V}$		100	mV
			$V_i = 9 \text{ to } 25\text{V}$		50	
Load Regulation	ΔV_o	$I_o = 5\text{mA} \text{ to } 0.5\text{A}$			120	mV
		$I_o = 5\text{mA} \text{ to } 200\text{mA}$			60	
Quiescent Current	I_d				6	mA
Quiescent Current Change	ΔI_d	$I_o = 5\text{mA} \text{ to } 350\text{mA}$			0.5	mA
		$I_o = 200\text{mA}$ $V_i = 9 \text{ to } 25\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_o}{\Delta T}$	$I_o = 5\text{mA}$ $T_j = 0 \text{ to } 125^\circ\text{C}$		-0.5		mV/ $^\circ\text{C}$
Output Noise Voltage	V_N	$f = 10\text{Hz} \text{ to } 100\text{kHz}$		45		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $I_o = 300\text{mA}$ $V_i = 9 \text{ to } 19\text{V}$	59			dB
Dropout Voltage	V_D	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$		2		V
Short Circuit Current	I_{sc}	$T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$		270		mA
Peak Current	I_{peak}	$T_j = 25^\circ\text{C}$		700		mA

* $T_{\min}$
 MC78MXXI: $T_{\min} = -40^\circ\text{C}$
 MC78MXXC: $T_{\min} = 0^\circ\text{C}$

www.datasheetcatalog.com



ELECTRICAL CHARACTERISTICS MC78M08C

(Refer to the test circuits, $T_{\min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 14\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	7.7	8	8.3	V
		$I_o = 5 \text{ to } 350\text{mA}$ $V_i = 10.5 \text{ to } 23\text{V}$	7.6	8	8.4	
Line Regulation	ΔV_o	$I_o = 200\text{mA}$	$V_i = 10.5 \text{ to } 25\text{V}$		100	mV
			$V_i = 11 \text{ to } 25\text{V}$		50	
Load Regulation	ΔV_o	$I_o = 5\text{mA} \text{ to } 0.5\text{A}$			160	mV
		$I_o = 5\text{mA} \text{ to } 200\text{mA}$			80	
Quiescent Current	I_d				6	mA
Quiescent Current Change	ΔI_d	$I_o = 5\text{mA} \text{ to } 350\text{mA}$			0.5	mA
		$I_o = 200\text{mA}$ $V_i = 10.5 \text{ to } 25\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_o}{\Delta T}$	$I_o = 5\text{mA}$ $T_j = 0 \text{ to } 125^\circ\text{C}$		-0.5		mV/ $^\circ\text{C}$
Output Noise Voltage	V_N	$f = 10\text{Hz} \text{ to } 100\text{kHz}$		52		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $I_o = 300\text{mA}$ $V_i = 11.5 \text{ to } 21.5\text{V}$	56			dB
Dropout Voltage	V_D	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$		2		V
Short Circuit Current	I_{sc}	$T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$		250		mA
Peak Current	I_{peak}	$T_j = 25^\circ\text{C}$		700		mA

* $T_{\min}$ MC78MXXI: $T_{\min} = -40^\circ\text{C}$ MC78MXXC: $T_{\min} = 0^\circ\text{C}$ www.datasheetcatalog.com

ELECTRICAL CHARACTERISTICS MC78M10C

(Refer to the test circuits, $T_{\min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 17\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Characteristic	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$		9.6	10	10.4	V
		$I_o = 5 \text{ to } 350\text{mA}$ $V_i = 12.5 \text{ to } 25\text{V}$		9.5	10	10.5	
Line Regulation	ΔV_o	$I_o = 200\text{mA}$	$V_i = 12.5 \text{ to } 25\text{V}$			100	mV
			$V_i = 13 \text{ to } 25\text{V}$			50	
Load Regulation	ΔV_o	$I_o = 5\text{mA} \text{ to } 0.5\text{A}$				200	mV
		$I_o = 5\text{mA} \text{ to } 200\text{mA}$				100	
Quiescent Current	I_d	$T_j = 25^\circ\text{C}$				6	mA
Quiescent Current Change	ΔI_d	$I_o = 5\text{mA} \text{ to } 350\text{mA}$				0.5	mA
		$I_o = 200\text{mA}$ $V_i = 12.5 \text{ to } 25\text{V}$				0.8	
Output Voltage Drift	$\frac{\Delta V_o}{\Delta T}$	$I_o = 5\text{mA}$ $T_j = 0 \text{ to } 125^\circ\text{C}$			-0.5		mV/ $^\circ\text{C}$
Output Noise Voltage	V_N	$f = 10\text{Hz} \text{ to } 100\text{kHz}$			65		μV
Ripple Rejection	RR	$f = 120\text{Hz}$, $I_o = 300\text{mA}$ $V_i = 13 \text{ to } 23\text{V}$		55			dB
Dropout Voltage	V_D	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$			2		V
Short Circuit Current	I_{sc}	$T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$			250		mA
Peak Current	I_{peak}	$T_j = 25^\circ\text{C}$			700		mA

* $T_{\min}$ MC78MXXI: $T_{\min} = -40^\circ\text{C}$ MC78MXXC: $T_{\min} = 0^\circ\text{C}$ www.datasheetcatalog.com

www.datasheetcatalog.com

ELECTRICAL CHARACTERISTICS MC78M12C

(Refer to the test circuits, $T_{\min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 19\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Characteristic	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$		11.5	12	12.5	V
		$I_o = 5 \text{ to } 350\text{mA}$ $V_i = 14.5 \text{ to } 27\text{V}$		11.4	12	12.6	
Line Regulation	ΔV_o	$I_o = 200\text{mA}$	$V_i = 14.5 \text{ to } 30\text{V}$			100	mV
			$V_i = 16 \text{ to } 30\text{V}$			50	
Load Regulation	ΔV_o	$I_o = 5\text{mA} \text{ to } 0.5\text{A}$				240	mV
		$I_o = 5\text{mA} \text{ to } 200\text{mA}$				120	
Quiescent Current	I_d	$T_j = 25^\circ\text{C}$				6	mA
Quiescent Current Change	ΔI_d	$I_o = 5\text{mA} \text{ to } 350\text{mA}$				0.5	mA
		$I_o = 200\text{mA}$ $V_i = 14.5 \text{ to } 30\text{V}$				0.8	
Output Voltage Drift	$\frac{\Delta V_o}{\Delta T}$	$I_o = 5\text{mA}$ $T_j = 0 \text{ to } 125^\circ\text{C}$			-0.5		mV/ $^\circ\text{C}$
Output Noise Voltage	V_N	$f = 10\text{Hz} \text{ to } 100\text{kHz}$			75		μV
Ripple Rejection	RR	$f = 120\text{Hz}$, $I_o = 300\text{mA}$ $V_i = 15 \text{ to } 25\text{V}$		55			dB
Dropout Voltage	V_D	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$			2		V
Short Circuit Current	I_{sc}	$T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$			240		mA
Peak Current	I_{peak}	$T_j = 25^\circ\text{C}$			700		mA

* $T_{\min}$

MC78MXXI: $T_{\min} = -40^\circ\text{C}$

MC78MXXC: $T_{\min} = 0^\circ\text{C}$

ELECTRICAL CHARACTERISTICS MC78M15C

(Refer to the test circuits, $T_{\min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 23\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	14.4	15	15.6	V
		$I_o = 5 \text{ to } 350\text{mA}$ $V_i = 17.5 \text{ to } 30\text{V}$	14.25	15	15.75	
Line Regulation	ΔV_o	$I_o = 200\text{mA}$	$V_i = 17.5 \text{ to } 30\text{V}$		100	mV
			$V_i = 20 \text{ to } 30\text{V}$		50	
Load Regulation	ΔV_o	$I_o = 5\text{mA} \text{ to } 0.5\text{A}$			300	mV
		$I_o = 5\text{mA} \text{ to } 200\text{mA}$			150	
Quiescent Current	I_d				6	mA
Quiescent Current Change	ΔI_d	$I_o = 5\text{mA} \text{ to } 350\text{mA}$			0.5	mA
		$I_o = 200\text{mA}$ $V_i = 17.5 \text{ to } 30\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_o}{\Delta T}$	$I_o = 5\text{mA}$ $T_j = 0 \text{ to } 125^\circ\text{C}$		-1		mV/ $^\circ\text{C}$
Output Noise Voltage	V_N	$f = 10\text{Hz} \text{ to } 100\text{KHz}$		90		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $I_o = 300\text{mA}$ $V_i = 18.5 \text{ to } 28.5\text{V}$	54			dB
Dropout Voltage	V_D	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$		2		V
Short Circuit Current	I_{sc}	$T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$		240		mA
Peak Current	I_{peak}	$T_j = 25^\circ\text{C}$		700		mA

* $T_{\min}$ MC78MXXI: $T_{\min} = -40^\circ\text{C}$ MC78MXXC: $T_{\min} = 0^\circ\text{C}$ www.datasheetcatalog.com

ELECTRICAL CHARACTERISTICS MC78M18C(Refer to the test circuits, $T_{\min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 26\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	17.3	18	18.7	V
		$I_o = 5$ to 350mA $V_i = 20.5$ to 33V	17.1	18	18.9	
Line Regulation	ΔV_o	$I_o = 200\text{mA}$	$V_i = 21$ to 33V		100	mV
			$V_i = 24$ to 33V		50	
Load Regulation	ΔV_o	$I_o = 5\text{mA}$ to 0.5A			360	mV
		$I_o = 5\text{mA}$ to 200mA			180	
Quiescent Current	I_d				6	mA
Quiescent Current Change	ΔI_d	$I_o = 5\text{mA}$ to 350mA			0.5	mA
		$I_o = 200\text{mA}$ $V_i = 21$ to 33V			0.8	
Output Voltage Drift	$\frac{\Delta V_o}{\Delta T}$	$I_o = 5\text{mA}$ $T_j = 0$ to 125°C		-1.1		mV/ $^\circ\text{C}$
Output Noise Voltage	V_N	$f = 10\text{Hz}$ to 100kHz		100		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $I_o = 300\text{mA}$ $V_i = 22$ to 32V	53			dB
Dropout Voltage	V_D	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$		2		V
Short Circuit Current	I_{sc}	$T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$		240		mA
Peak Current	I_{peak}	$T_j = 25^\circ\text{C}$		700		mA

* $T_{\min}$ MC78MXXI: $T_{\min} = -40^\circ\text{C}$ MC78MXXC: $T_{\min} = 0^\circ\text{C}$ 

ELECTRICAL CHARACTERISTICS MC78M20C(Refer to the test circuits, $T_{\min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 29\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	19.2	20	20.8	V
		$I_o = 5 \text{ to } 350\text{mA}$ $V_i = 23 \text{ to } 35\text{V}$	19	20	21	
Line Regulation	ΔV_o	$I_o = 200\text{mA}$	$V_i = 23 \text{ to } 35\text{V}$		100	mV
			$V_i = 24 \text{ to } 35\text{V}$		50	
Load Regulation	ΔV_o	$I_o = 5\text{mA} \text{ to } 0.5\text{A}$			400	mV
		$I_o = 5\text{mA} \text{ to } 200\text{mA}$			200	
Quiescent Current	I_d				6	mA
Quiescent Current Change	ΔI_d	$I_o = 5\text{mA} \text{ to } 350\text{mA}$			0.5	mA
		$I_o = 200\text{mA}$ $V_i = 23 \text{ to } 35\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_o}{\Delta T}$	$I_o = 5\text{mA}$ $T_j = 0 \text{ to } 125^\circ\text{C}$		-1.1		mV/ $^\circ\text{C}$
Output Noise Voltage	V_N	$f = 10\text{Hz} \text{ to } 100\text{kHz}$		110		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $I_o = 300\text{mA}$ $V_i = 24 \text{ to } 34\text{V}$	53			dB
Dropout Voltage	V_D	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$		2		V
Short Circuit Current	I_{sc}	$T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$		240		mA
Peak Current	I_{peak}	$T_j = 25^\circ\text{C}$		700		mA

* $T_{\min}$
 MC78MXXI: $T_{\min} = -40^\circ\text{C}$
 MC78MXXC: $T_{\min} = 0^\circ\text{C}$

www.datasheetcatalog.com

ELECTRICAL CHARACTERISTICS MC78M24C

(Refer to the test circuits, $T_{\min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 33\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	23	24	25	V
		$I_o = 5 \text{ to } 350\text{mA}$ $V_i = 27 \text{ to } 38\text{V}$	22.8	24	25.2	
Line Regulation	ΔV_o	$I_o = 200\text{mA}$	$V_i = 27 \text{ to } 38\text{V}$		100	mV
			$V_i = 28 \text{ to } 38\text{V}$		50	
Load Regulation	ΔV_o	$I_o = 5\text{mA} \text{ to } 0.5\text{A}$			480	mV
		$I_o = 5\text{mA} \text{ to } 200\text{mA}$			240	
Quiescent Current	I_d				6	mA
Quiescent Current Change	ΔI_d	$I_o = 5\text{mA} \text{ to } 350\text{mA}$			0.5	mA
		$I_o = 200\text{mA}$ $V_i = 27 \text{ to } 38\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_o}{\Delta T}$	$I_o = 5\text{mA}$ $T_j = 0 \text{ to } 125^\circ\text{C}$		-1.2		mV/ $^\circ\text{C}$
Output Noise Voltage	V_N	$f = 10\text{Hz} \text{ to } 100\text{kHz}$		170		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $I_o = 300\text{mA}$ $V_i = 28 \text{ to } 38\text{V}$	50			dB
Dropout Voltage	V_D	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$		2		V
Short Circuit Current	I_{sc}	$V_i = 35\text{V}$		240		mA
Peak Current	I_{peak}	$T_j = 25^\circ\text{C}$		700		mA

* $T_{\min}$ MC78MXXI: $T_{\min} = -40^\circ\text{C}$ MC78MXXC: $T_{\min} = 0^\circ\text{C}$ www.datasheetcatalog.com

APPLICATION CIRCUIT

www.datasheetcatalog.com

Fixed output regulator

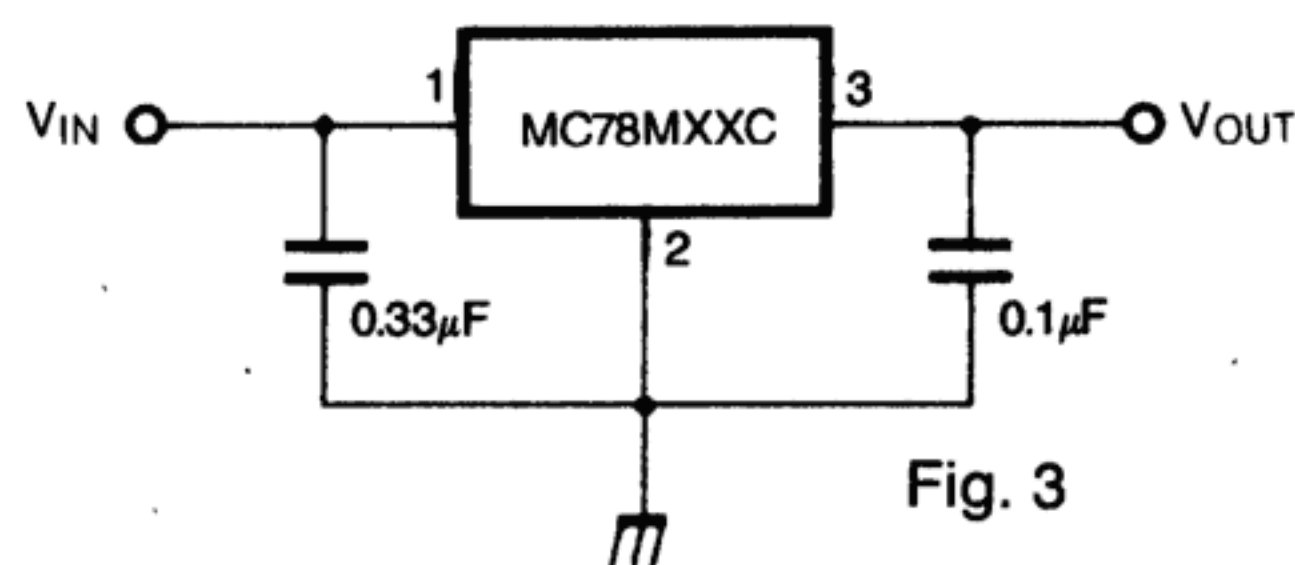


Fig. 3

Constant current regulator

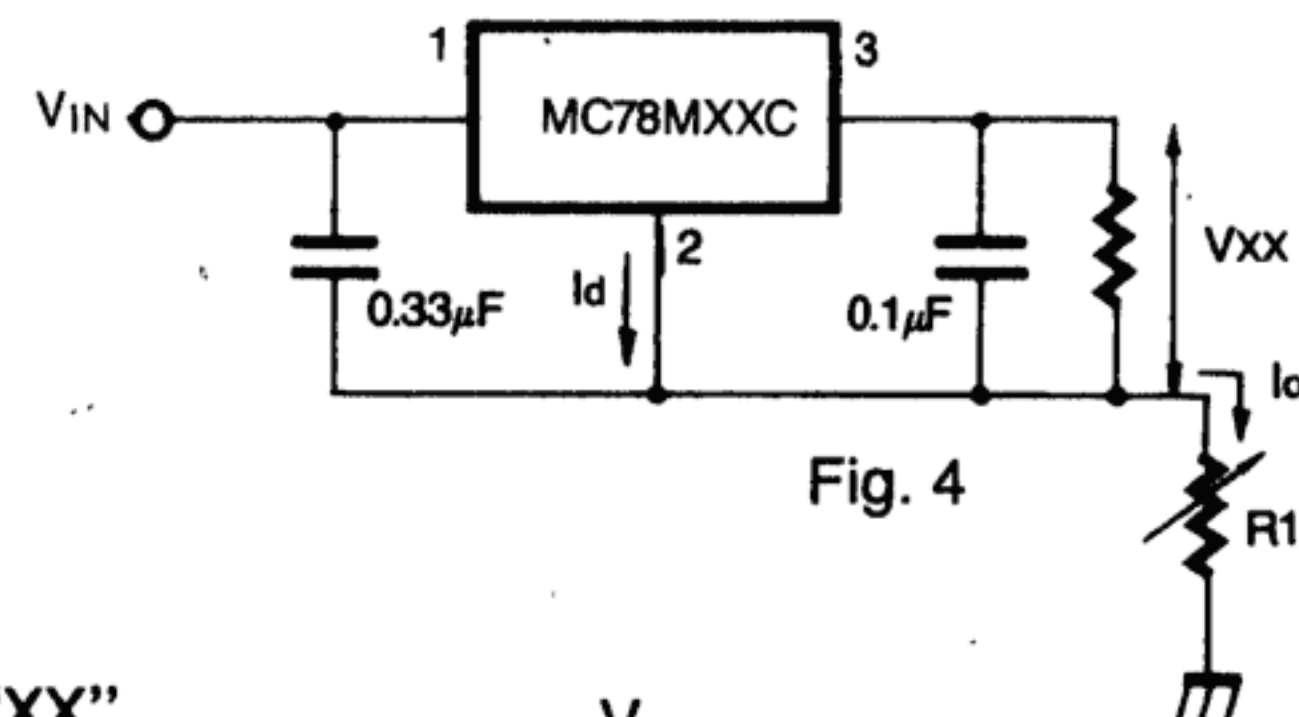


Fig. 4

$$I_o = \frac{V_{XX}}{R_1} + I_d$$

Notes:

- (1) To specify an output voltage, substitute voltage value for "XX".
- (2) Although no output capacitor is needed for stability, it does improve transient response.
- (3) Required if regulator is located an appreciable distance from power supply filter.

Adjustable output regulator (7 to 30V)

Circuit for increasing output voltage

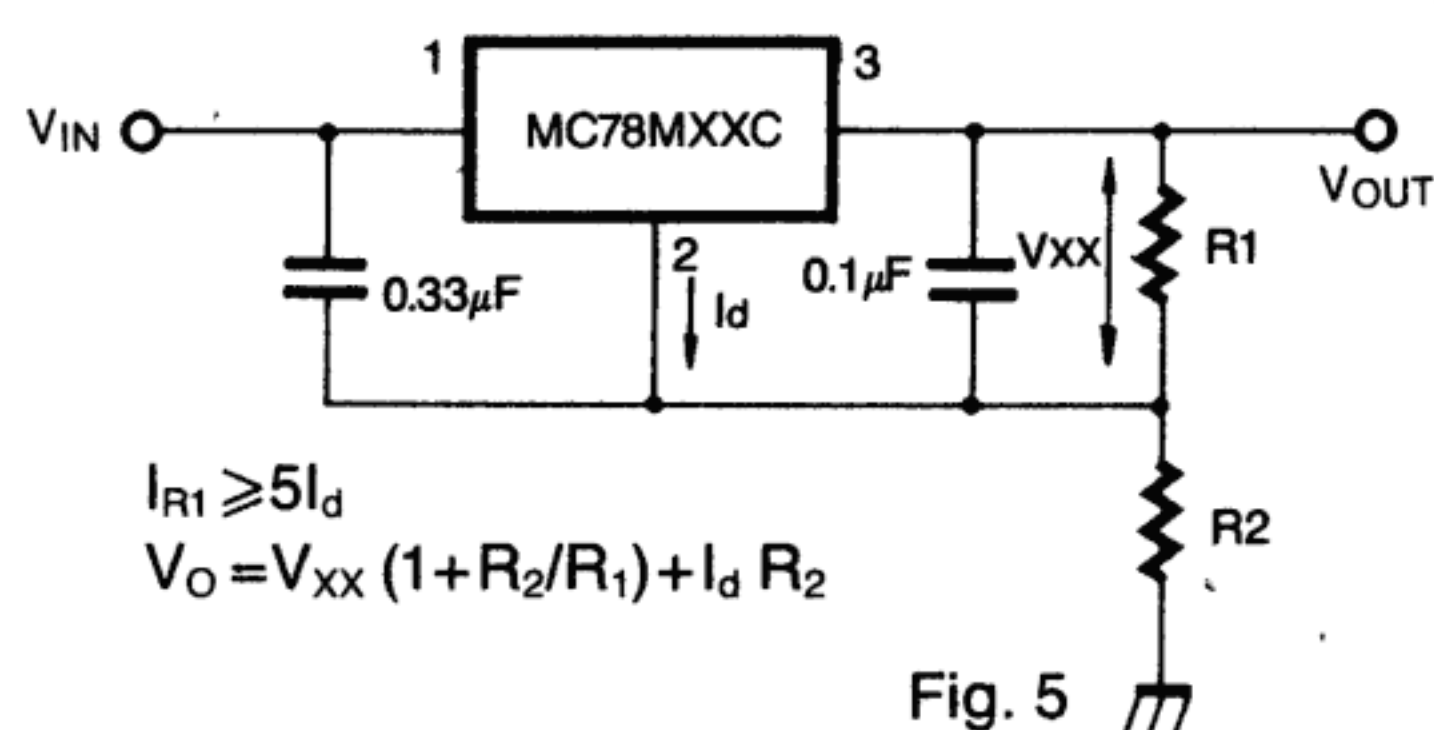


Fig. 5

$$I_{R1} \geq 5I_d$$

$$V_o = V_{XX} (1 + R_2/R_1) + I_d R_2$$

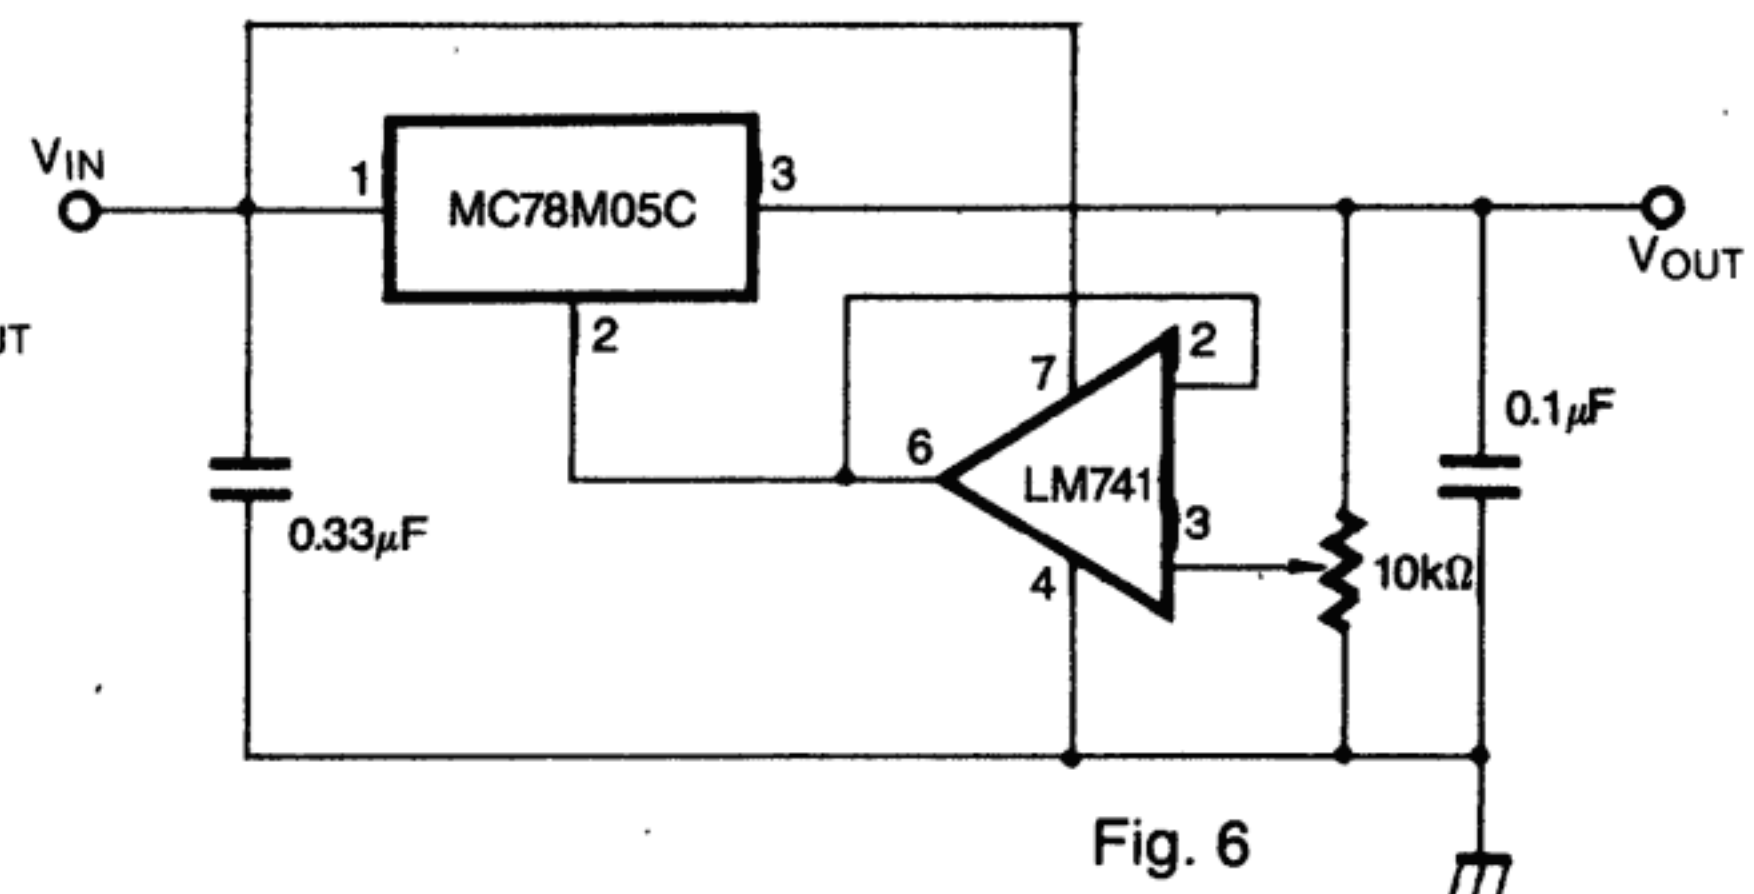


Fig. 6

0.5 to 10V regulator

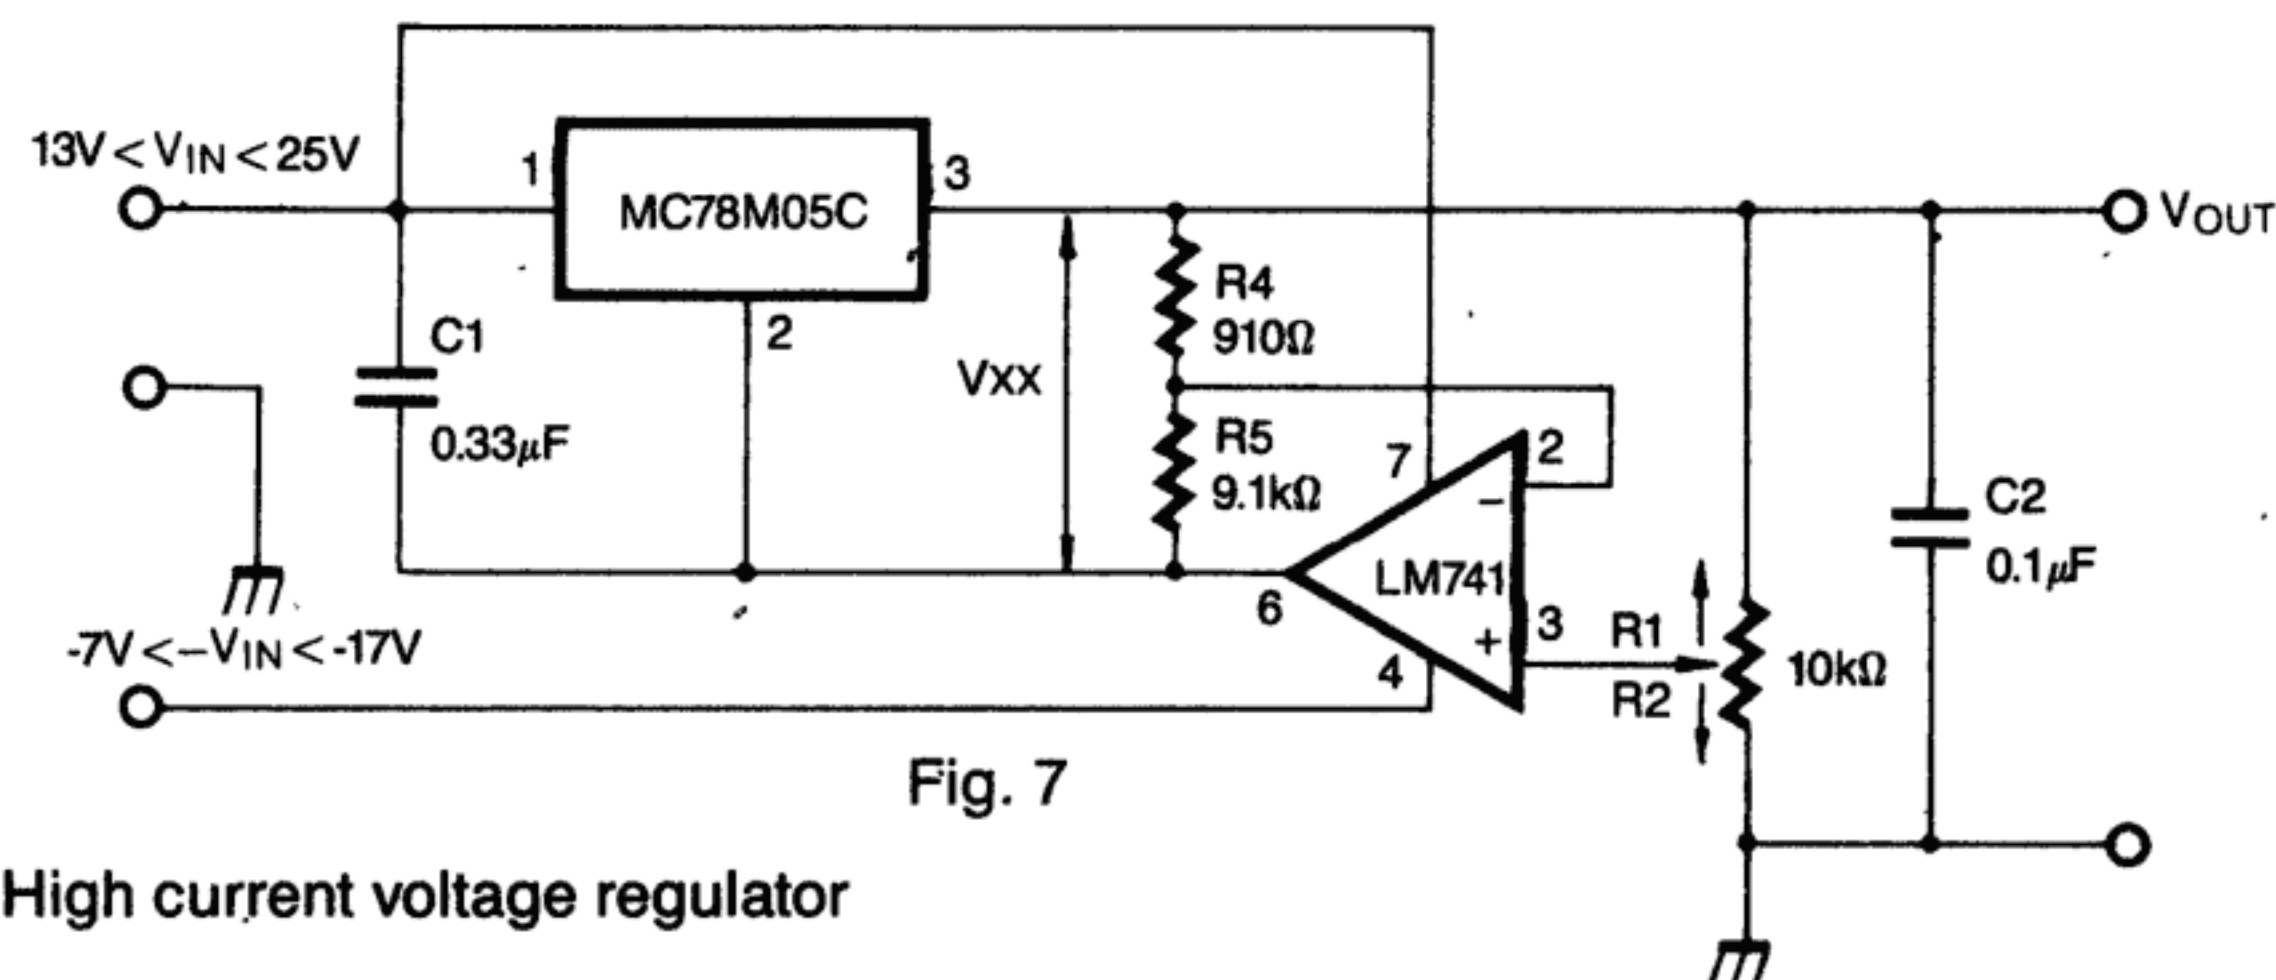


Fig. 7

$$V_o = V_{XX} \frac{R_4}{R_1}$$

High current voltage regulator

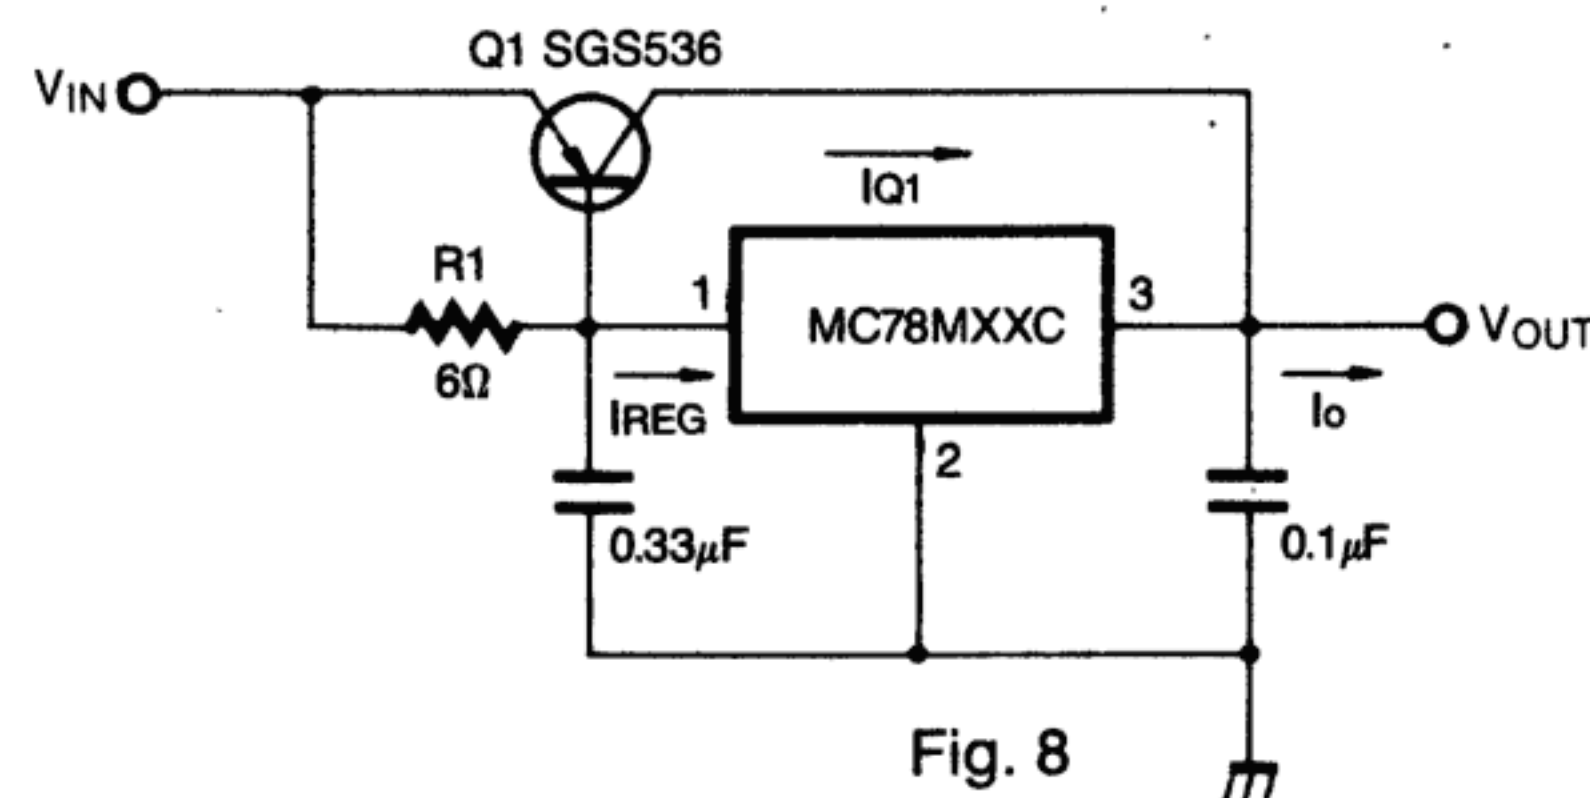


Fig. 8

$$R_1 = \frac{V_{BEQ1}}{I_{REG} - \frac{I_{Q1}}{\beta_{Q1}}}$$

$$I_o = I_{REG} + \beta_{Q1} (I_{REG} - \frac{V_{BEQ1}}{R_{R1}})$$

APPLICATION CIRCUIT (continued)

High output current with short circuit protection

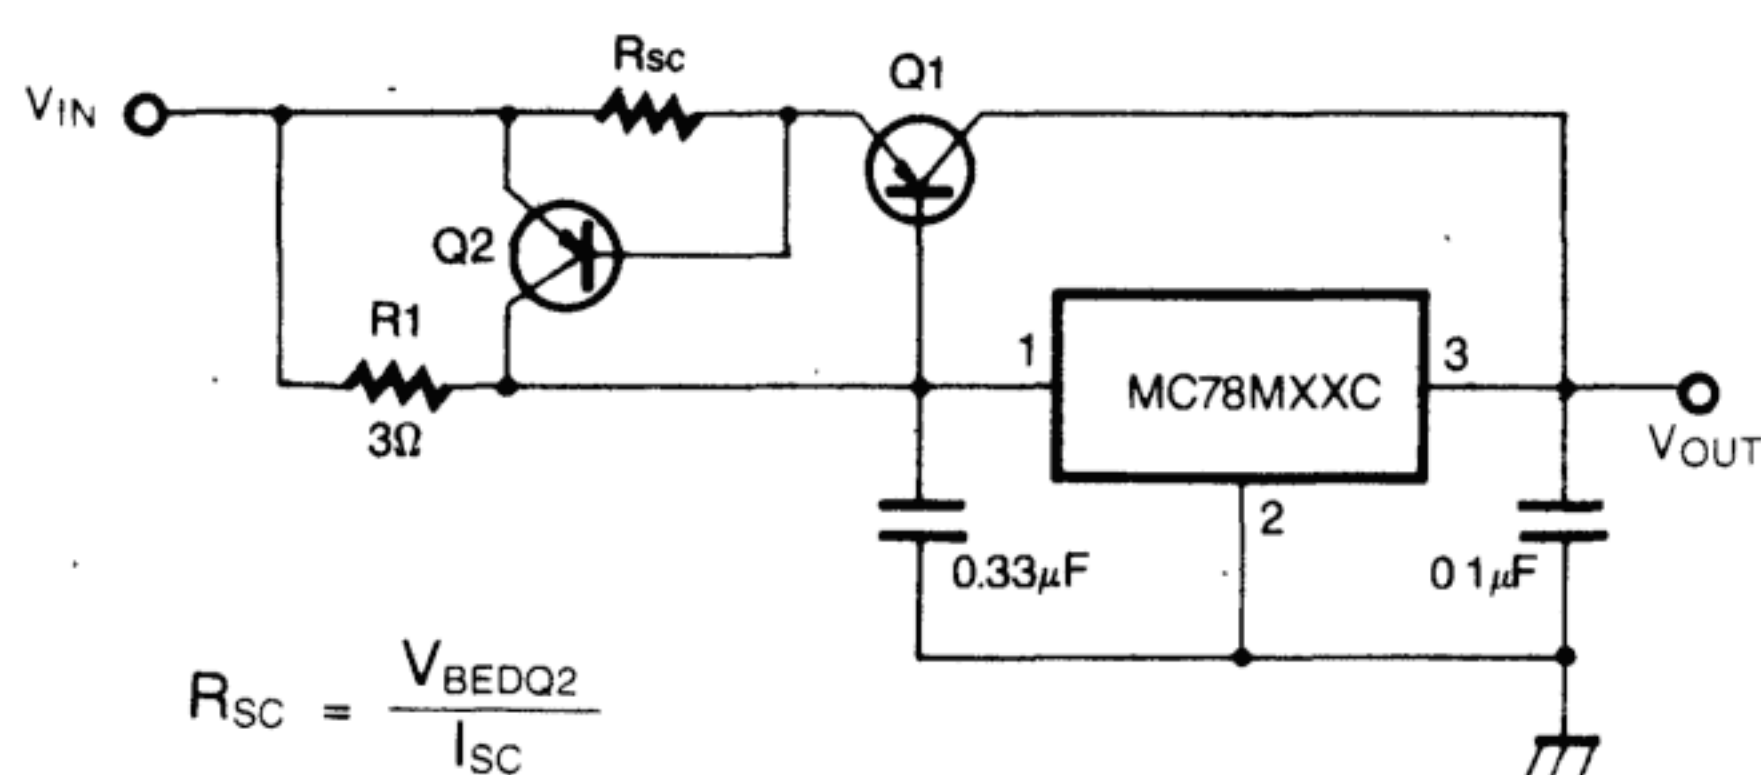


Fig. 9

Tracking voltage regulator

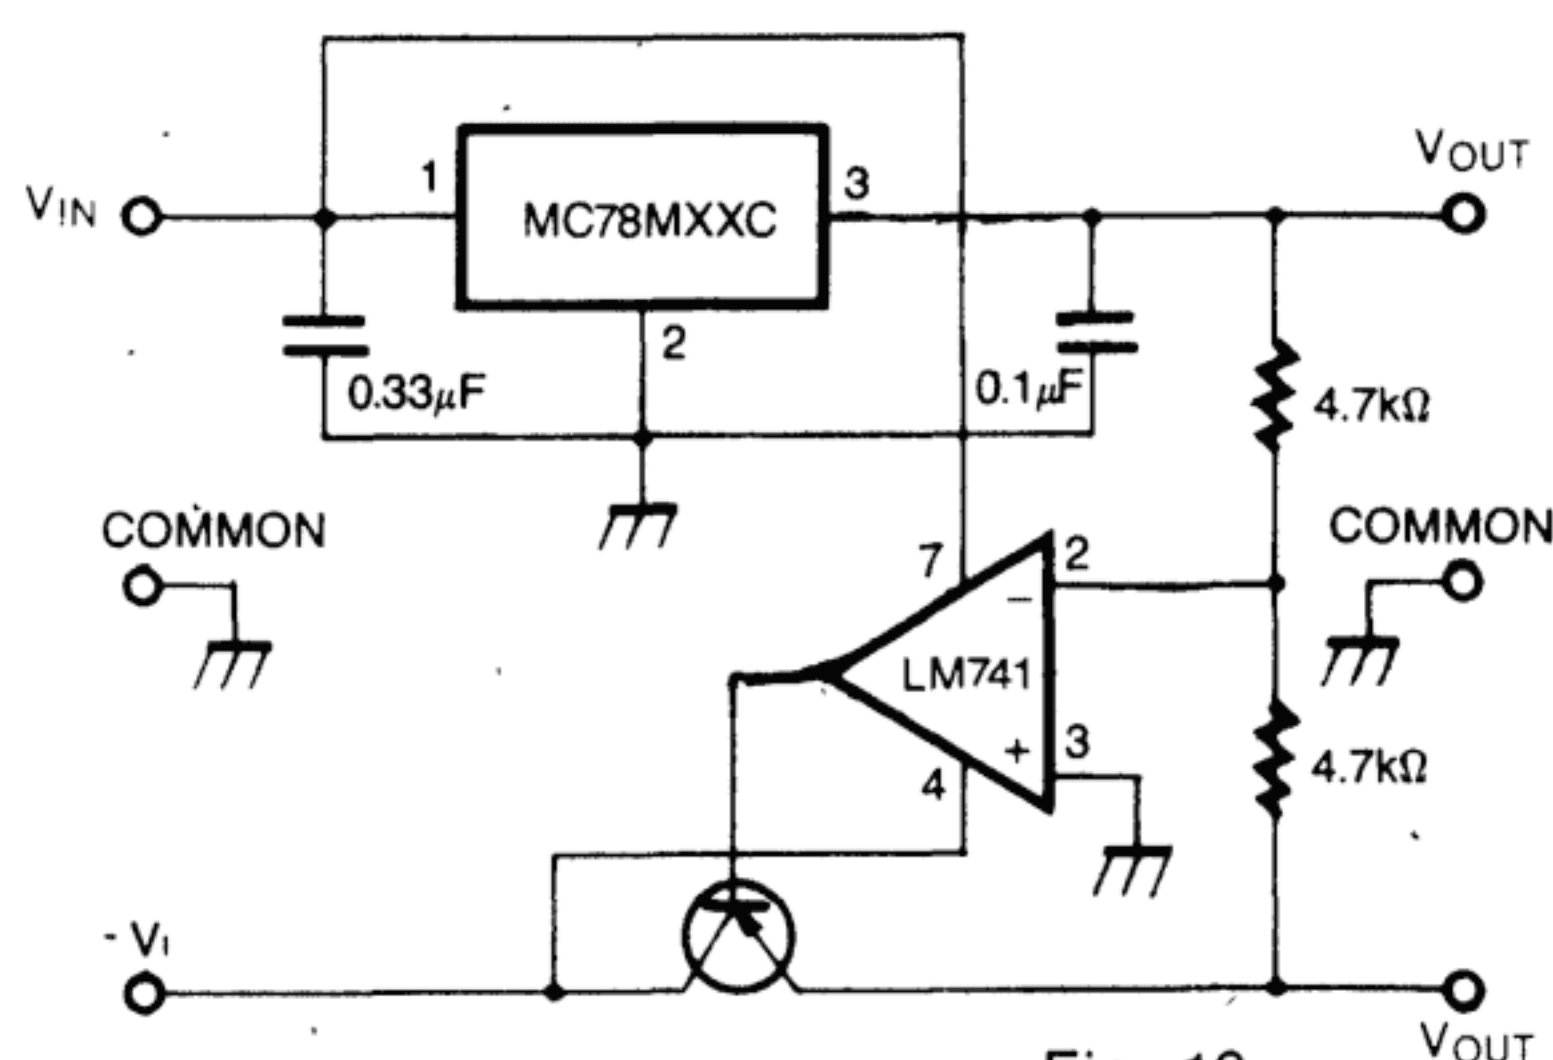


Fig. 10

High input voltage circuit

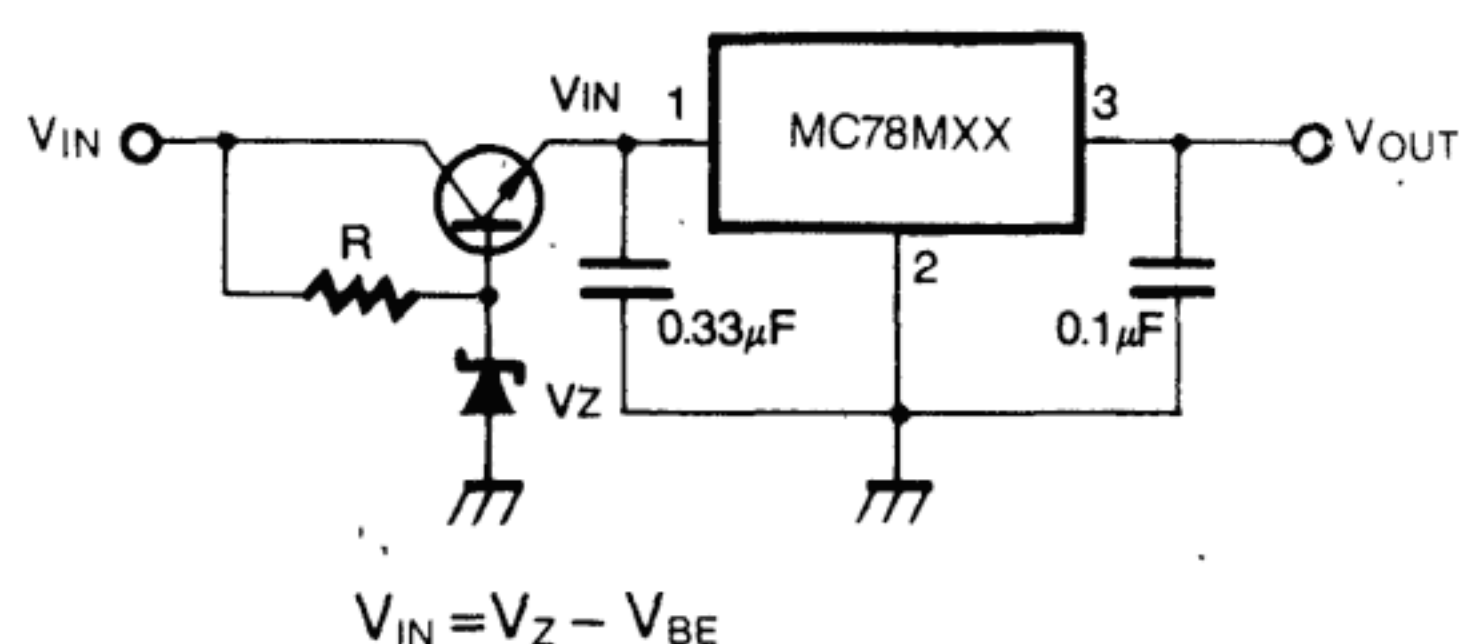


Fig. 11

Reducing power dissipation with dropping resistor


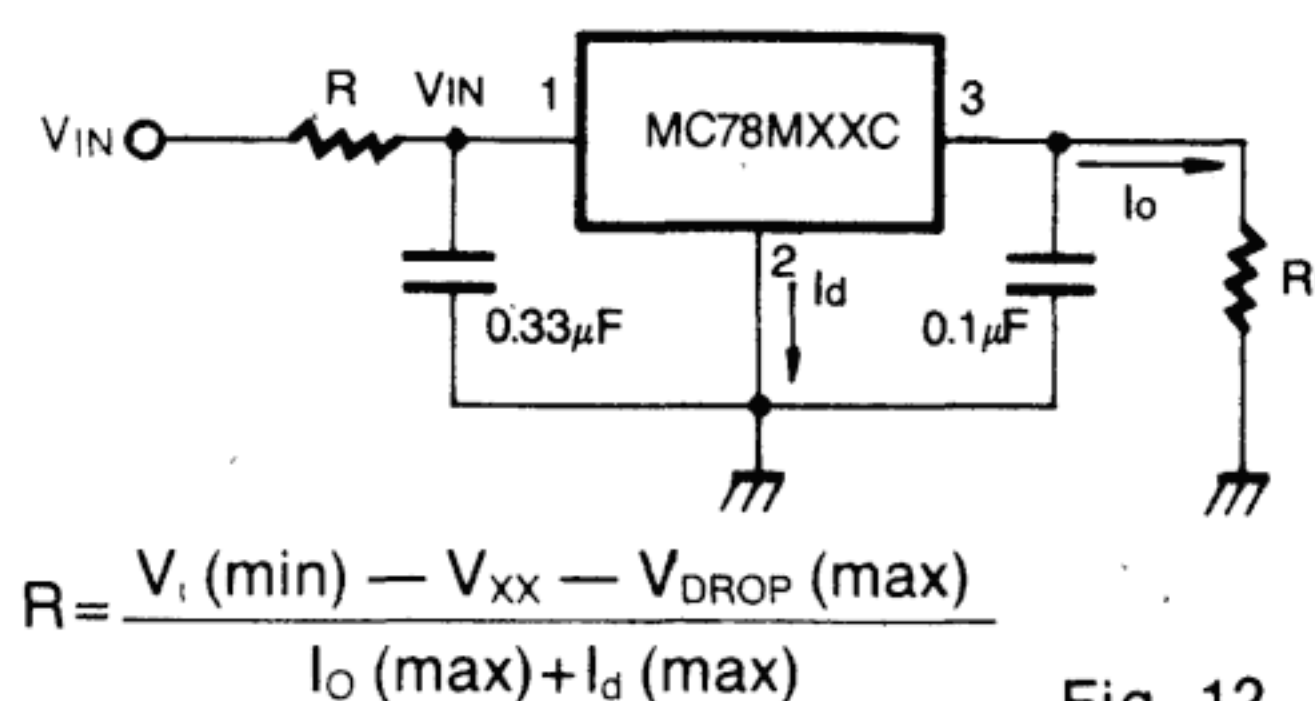


Fig. 12

Power AM modulator (unity voltage gain, $I_o \leq 0.5$)

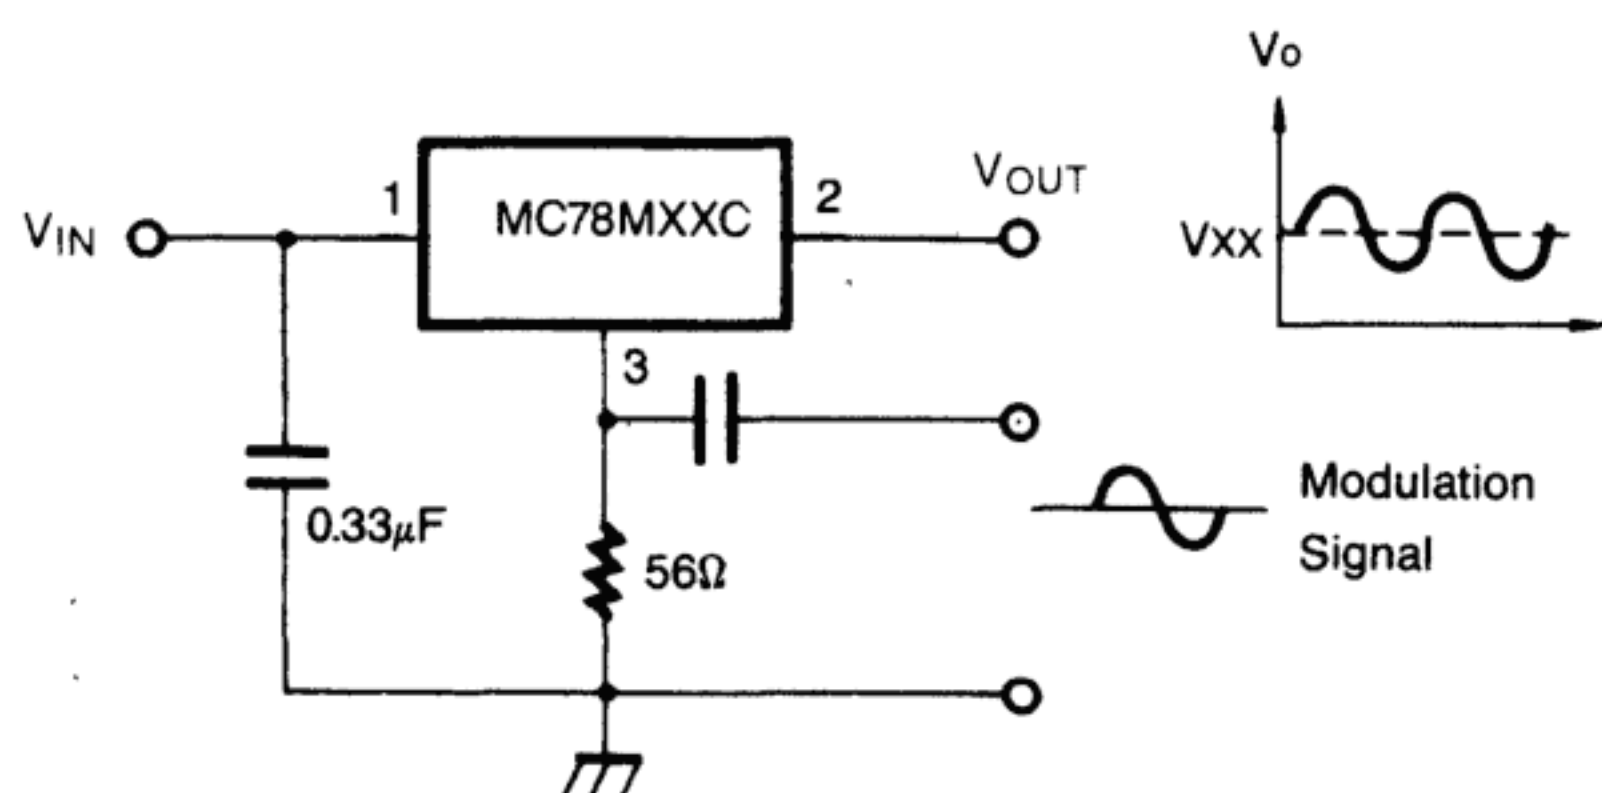

Note: The circuit performs well up to 100 KHz.

Fig. 13

Adjustable output voltage with temperature compensation

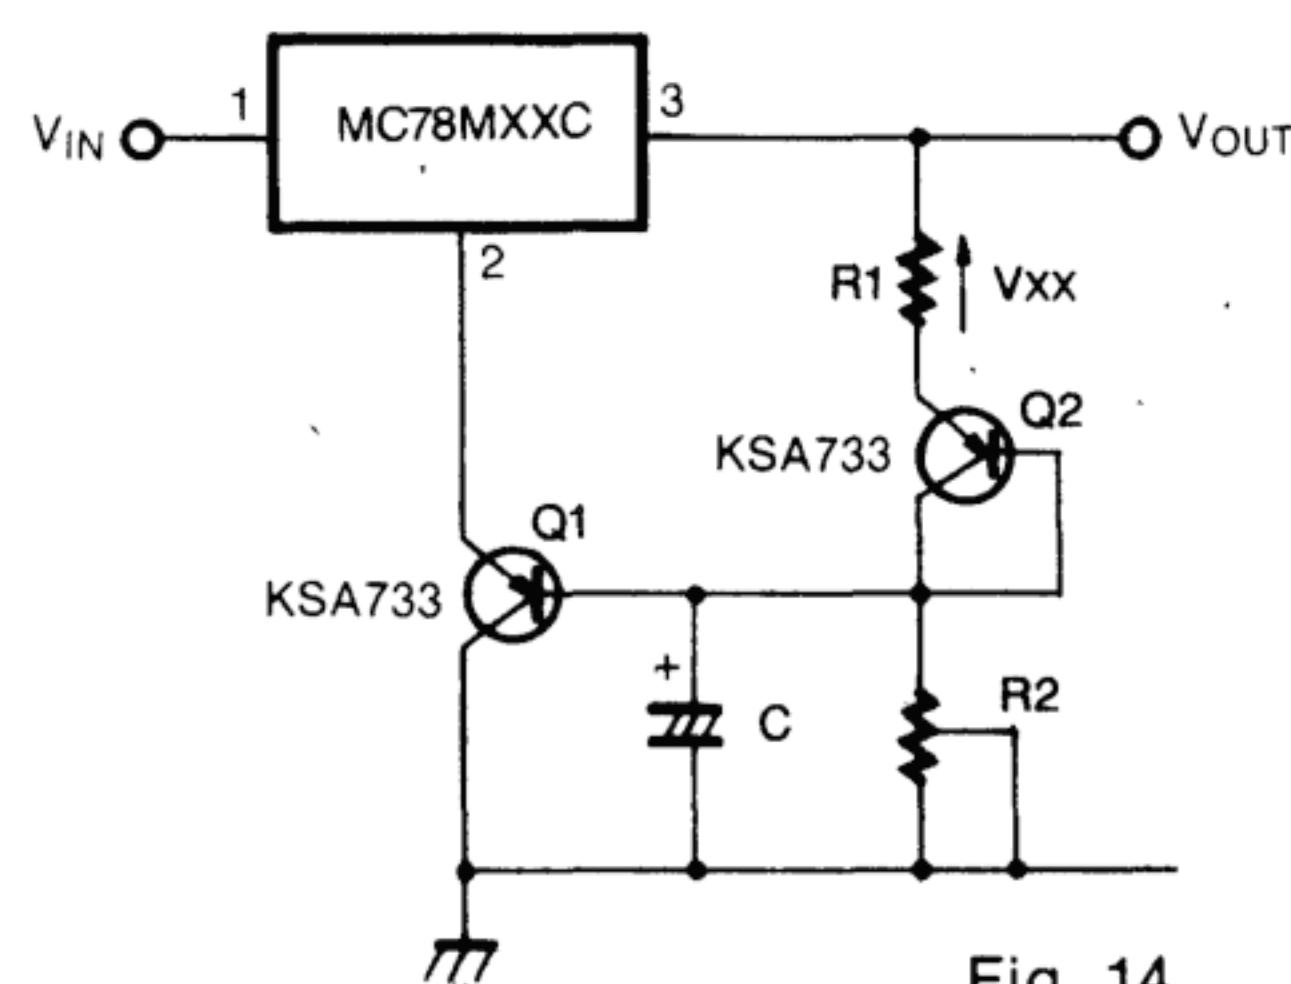


Fig. 14

Note: Q2 is connected as a diode in order to compensate the variation of the Q1 V_{BE} with the temperature. C allows a slow rise-time of the V_o

$$V_o = V_{XX} \left(1 + \frac{R_2}{R_1}\right) + V_{BE}$$