



M1 V5 VIA US 三模键盘用户手册

M1 V5 VIA US Tri-mode Mechanical Keyboard
User Manual


快速开始指南 ►

Quick Start Guide

感谢您购买及使用本产品

为了给您带来更好的使用体验，在使用产品前请仔细阅读本说明书，并请妥善保管，以便日后参观。

包装内容

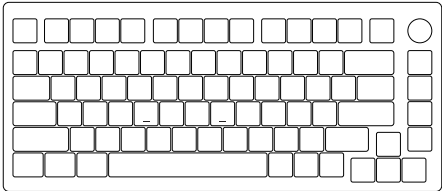

系统需求

Windows®XP / Vista / 7 / 8 / 10或更高版本


安装步骤

将键盘USB连接线插入电脑的USB接口即可开始使用。

独立指示灯

状态	指示灯位置	回连	配对	连接成功
BT1	按键E灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT2	按键R灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT3	按键T灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
2.4G	按键Y灯	绿灯慢闪	绿灯快闪	绿灯常亮2s熄灭
有线	按键U灯	无	无	白灯常亮2s熄灭
状态	指示灯位置	指示方式		
低电	独立LED指示灯 (Fn键)	红灯慢闪		
充电		红灯常亮		
充满		灯灭		
Caps	Caps按键灯位	白灯常亮		
锁Win	左Win键灯位	白灯常亮		

M1 V5 VIA US 组合键功能

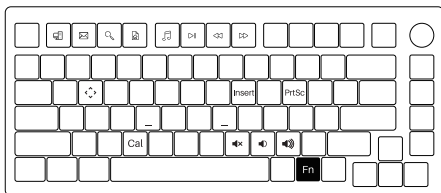


Fn+	F1	=	我的电脑
	F2	=	电子邮件
	F3	=	Windows搜索
	F4	=	浏览器主页
	F5	=	多媒体播放器

Fn+	F6	=	播放 / 暂停
	F7	=	上一首
	F8	=	下一首
	P	=	Prtsc
	C	=	计算器

Fn+	I	=	Insert
	M	=	静音
	<	=	音量减小
	>	=	音量增加
	W	=	将WASD与 ↑↓←→ 键对调

M1 V5 VIA US 系统功能（Windows）

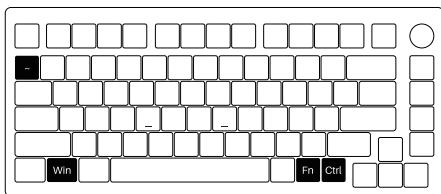


锁Win键
Fn + 左Win

恢复出厂设置
长按 Fn + ~ 5秒

切换成菜单键
长按 Fn + 右Ctrl 3秒

M1 V5 VIA US 系统功能 (Mac)

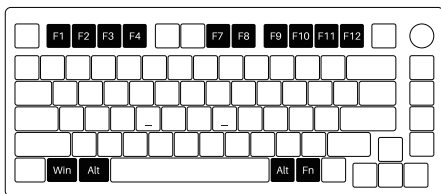

F1	降低显示屏亮度
F2	增加显示屏亮度
F3	开放任务控制
F4	呼出Siri
F7	上一曲


F8	播放/暂停
F9	下一曲
F10	静音
F11	调低音量
F12	调高音量

左Alt Command

右Alt Command

左Win Option


M1 V5 VIA US 灯光调节

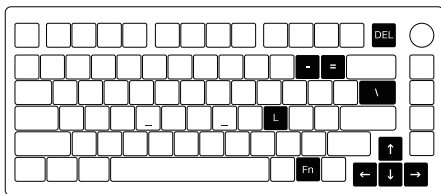

Fn+	-	灯光速度变慢
	=	灯光速度变快
	↑	灯光变亮
	↓	灯光变暗

Fn+	←	灯光饱和度-
	→	灯光饱和度+
	L	灯光关闭/开启
	DEL	切换16种背光灯效模式

M1 V5 VIA US 连接使用指南

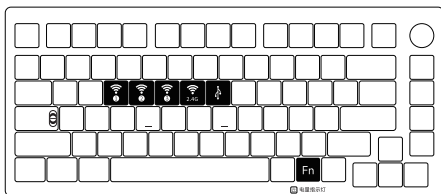

Fn+	E		蓝牙设备1
	R		蓝牙设备2
	T	=	蓝牙设备3
	Y		2.4G无线设备
	U		有线模式

 开关位于 CAPS按键右侧	上：MAC (内置电源开)
	中：Windows (内置电源关)
	下：Windows (内置电源开)

蓝牙配对

键盘开机后，按下FN+E/R/T进入蓝牙模式，长按FN+E/R/T组合键3S，键盘进入对码状态，蓝色指示灯快闪，连上后指示灯常亮2S，如果没有连上设备指示灯熄灭，键盘进入睡眠。

2.4G配对

键盘开机后，按下FN+Y进入2.4G模式，再按下FN+Y组合键3S进入配对模式后，插入接收器，绿色指示灯快闪，配对成功后退出对码，模式灯常亮2S，找不到配对设备30s后，退出对码模式灯熄灭，键盘进入睡眠。

电量查询

在无线模式下，按Fn+空格组合键可检查电池电量。如果电池电量低于30%，数字1-2键将显示红灯。如果电池电量低于100%，数字1-9键将显示绿灯，电池电量充满则数字1-0键显示绿灯。

1	2	3	4	5	6	7	8	9	0
低于30%		低于40%	低于50%	低于60%	低于70%	低于80%	低于90%	低于100%	充满

亮红灯

亮绿灯

按键/灯光自定义说明和调用说明

1. 键盘的按键以及灯光更深层次的自定义需配合网页版驱动实现
2. 网页版驱动地址: <https://Monsgeek.hsgaming.cn/>

MONGEEK保修和服务声明

1. MONGEEK为中国大陆的客户提供一年保修。对于其他地区，请联系您的卖家（MonsGeek分销商）以了解具体的保修政策。
2. 如果保修期到期，客户需要支付维修费用。如果用户喜欢自己修理键盘，MonsGeek也会提供说明。用户应对自行修复过程中发生的任何损失承担全部责任。
3. 在未经制造商/卖方指示的情况下拆开键盘将立即导致保修无效
4. 官方售后服务时间为每周一至周五上午10:00至下午18:00
节假日以国家法定节日休息为准。
5. 退货和保修政策在不同的平台上可能有所不同，并在购买时取决于具体的经销商。

公司：深圳银宸科技有限公司

地址：深圳市宝安区松岗街道碧头第一工业区朗碧路33号

电话：0755-23216420

网址：www.monsgeek.cn

产地：中国·深圳

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou First Industrial Zone, Bao'an District, Shenzhen, China



WARNING:
Water and Beverages can't be
poured into the Keyboard.




中国制造/Made in China

注意 事项

人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等，键盘为电子产品
请按照电子产品保护方式爱惜使用。

Packing List

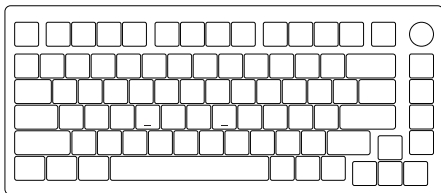

System Requirement

Windows®XP / Vista / 7 / 8 / 10 or higher version


Connectivity Method

Connect the keyboard to your computer by plugging in the USB cable into an available USB port to start using it.

LED Indicators

Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 3	LED for Key T	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
2.4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then turns off
Wired mode	LED for Key U	N/A	N/A	White light stays on for 2 seconds and then turns off
Status	Indicator	Indicating Mode		
Low Battery	LED for FN Key	Red light blinks slowly		
Charging		Steady red		
Fully Charged		LED off		
Caps	LED for Caps Key	Steady white		
Lock Win	LED for left Win Key	Steady white		

M1 V5 VIA US HotKeys

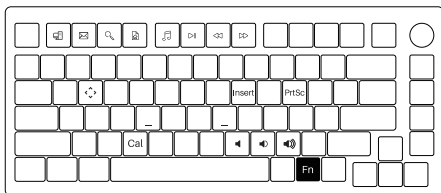


Fn+	F1	=	My Computer
	F2	=	E-mail
	F3	=	Windows Search
	F4	=	Browser Homepage
	F5	=	Multimedia Player

Fn+	F6	=	Play/Pause
	F7	=	Previous Song
	F8	=	Next Song
	P	=	Print SCR
	C	=	Calculator

Fn+	I	=	Insert
	M	=	Mute
	<	=	Decrease Volume
	>	=	Increase Volume
	W	=	Swap WASD with ↑ ↓ ← →

M1 V5 VIA US System Commands (Windows)

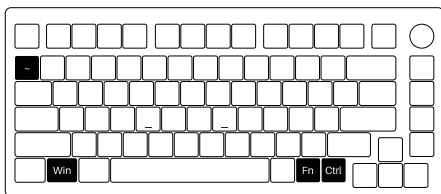

Lock Windows Key

Press Fn and
left Win Key


Restore Factory Settings

Hold down Fn and
press ~ Key for 5S

Revert Ctrl into Menu Key

Hold down Fn and
press right Ctrl for 3S

M1 V5 VIA US System Commands (Mac)

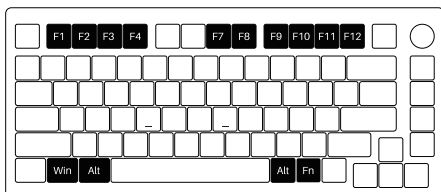

F1	Decrease display brightness
F2	Increase display brightness
F3	Open mission control
F4	Activate Siri
F7	Skip back (Audio)


F8	Pause/Play (Audio)
F9	Skip forward (Audio)
F10	Mute
F11	Volume down
F12	Volume up

Right Alt Command

Left Alt Command

Left Win Option


M1 V5 VIA US Backlight Settings

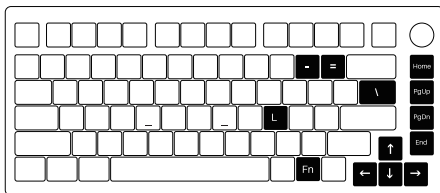


Fn+	-	Slower Animation
	=	Faster Animation
	↑	Bright
	↓	Dim

Fn+	←	Light Saturation -
	→	Light Saturation +
	L	Light Off/On
	DEL	Switch between 16 backlight effects

M1 V5 VIA US Wireless/Wired Connection Guide

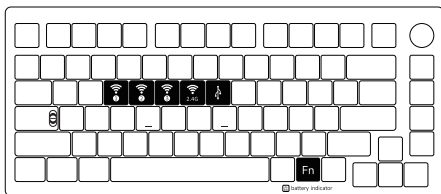

Fn+	E	=	Bluetooth Device 1
	R		Bluetooth Device 2
	T		Bluetooth Device 3
	Y		2.4G Wireless Device
	U		Wired Mode

 The switch is located under the CAPS key	Top: Mac (built-in power supply on)
	Middle: Default Windows (built-in power supply off)
	Bottom: Windows (built-in power supply on)

Bluetooth Pairing

After turning on the keyboard, press FN+E/R/T to enter Bluetooth mode. Press and hold the FN+E/R/T combination keys for 3 seconds to put the keyboard in pairing mode, with the blue indicator light flashing quickly. Once the connection is established, the indicator light will stay on for 2 seconds. If the device fails to connect, the indicator light will turn off and the keyboard will enter sleep mode.

2.4G Pairing

After turning on the keyboard, press FN+Y to enter 2.4G mode. Then press and hold the FN+Y combination key for 3 seconds to enter pairing mode. Then insert the receiver, and The green indicator light will flash quickly. Once the pairing is successful, the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

Battery Level Check

In wireless mode, please press FN+Spacebar combination keys to check the battery level. If the battery level is less than 30%, the 1-2 keys will light up red. If the battery level is less than 100%, the 1-9 keys will light up green, and if the battery level is full, the 1-0 keys will light up green.

1	2	3	4	5	6	7	8	9	0
Low 30%		Low 40%	Low 50%	Low 60%	Low 70%	Low 80%	Low 90%	Low 100%	Full
Red light					Green light				

*Note the LED indicator is located under the spacebar. To check the battery level, please make sure

① the keyboard is in wireless mode ② the RGB mode is turned on,

Key/Lighting Effects Customization Instruction

1. VIA is a widely recognized software that offers an intuitive interface for configuring and personalizing various keyboard settings. Users can utilize VIA to remap keys and adjust lighting on keyboards with VIA.

Web Version: <https://usevia.app/>

App: <https://github.com/the-via/releases/releases>

It enables you to remap keys, create custom macros, customize lighting effects, and more. If you encounter connection issues, please load the corresponding V3 JSON file specific to your keyboard model.

You can download JSON files from our dedicated Download page:
<https://www.monsgeek.com/download>

2. You can download keyboard source code (in compliance with GPL license) via:
<https://github.com/monsgeek>

MONGEEK Warranty and Service Statement

1. MONGEEK provides One-Year warranty for customers in mainland China. For other regions, please contact your seller (MonsGeek distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. MONGEEK will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Defects resulting from disassembly of our product, improper usage and incorrect installation are not covered by warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Company: Shenzhen Yinchon Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China

Tel: 0755-23216420

Website: www.monsgeek.com

Origin: Shenzhen, China



中国制造/Made in China

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

