

# The Right System for Any Commercial Job

## Wall Mounted Side to Side Systems



**CMK-SS2**  
2 Units, Side to Side



**CMK-SS3**  
3 Units, Side to Side



**CMK-SS4**  
4 Units, Side to Side



## Floor Standing Back to Back




**CMK-BB2**  
2 Units, Back to Back



**CMK-BB4**  
4 Units, Back to Back




## Configurable Up to 24 Units Floor Standing and Wall Hanging

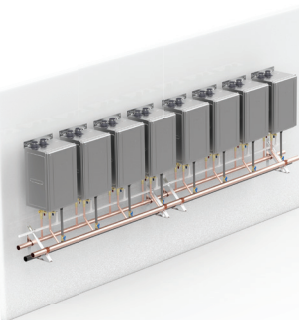

**8 Units, Side to Side  
Wall Hanging System**

Required Components:  
**2 x CMK-SS4**  
**8 x NCC199CDV Units**  
(Sold Separately)

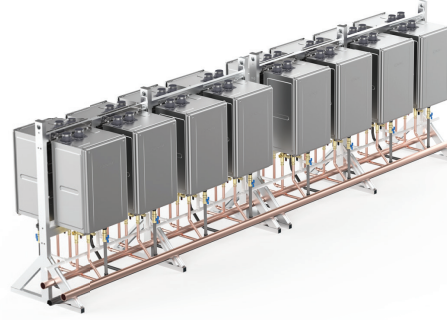

**16 Units, Back to Back  
Floor Standing System**

Required Components:  
**2 x CRK-BASE**  
**2 x CRK-ADDON**  
**4 x CMK-BB4**  
**16 x NCC199CDV Units**  
(Sold Separately)

Our rack kits can be customized to tackle any commercial demand. Assembly for these kits only require 12 bolts - almost 80% less than competitors - and can be installed in less than 2 hours, a major benefit that allows for minimal hot water disruption.




## Designed for Easier Setup and Transportation



**CMK-SS  
Wall Hanging  
Bundle Kits**

Includes manifold kit, wall mounting frame, and template for installation - everything needed to minimize downtime and get businesses up and running with faster hot water performance.

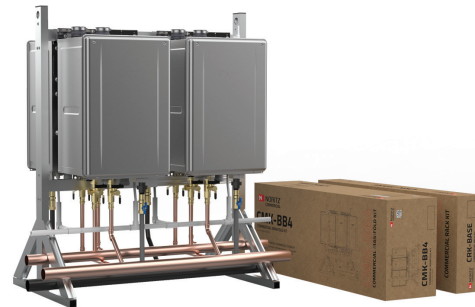

**CMK-BB  
Floor Standing  
Bundle Kits**

Each CMK-BB includes our manifold kit for 2 (BB2) or 4 (BB4) tankless units. Paired with CRK-BASE kit, the CMK-BB provides powerful performance with a faster setup.



**Designed for Use With Our  
Award-Winning CDV Tankless**

All our CMK/CRK bundles are engineered to work hand in hand with our award-winning NCC199CDV tankless (sold separately). Each unit comes with a 10 year warranty and is built to handle the most demanding hot water needs.

Scan to Watch  
Our CMK/CRK  
Explainer Video



**NORITZ**  
Noritz America | [www.noritz.com](http://www.noritz.com)  
11160 Grace Avenue  
Fountain Valley, CA 92708

02/2025 v1.0



## NORITZ® Quick Commercial Manifold & Rack Kits

'Rack in the Box' Commercial Water Heating Systems







# CMK and CRK Quick Commercial Manifold & Rack Kits

Engineered for a streamlined installation experience, our CMK (Commercial Manifold Kit) and CRK (Commercial Rack Kit) bundle all the components needed to build a custom floor or wall mounted commercial system\*.

\*NCC199CDV tankless units sold separately



## › Quickly Build a Commercial Rack FASTER & EASIER

Our commercial rack is designed for effortless installation. Each box kit includes all necessary components, enabling quick assembly on-site. This solution eliminates the need to maneuver large racks through mechanical room doors, offering a more convenient and efficient alternative.

## › To-Scale Installation Template Provided

Installation is made effortless with our to-scale wall template. Simply set it on the wall to see exactly where to drill pilot holes—eliminating the need for extensive pre-planning and measuring. This allows you to move quickly from setup to installation with confidence.



## › Fits Into One Box

Our predetermined box kits simplify commercial rack construction with all-in-one solutions. Choose from our set kits designed for standard configurations, making it easy to assemble the right setup for your needs without extra planning - just unbox and get straight to installation.



## › Only 12 Bolts Needed for Assembly

Our rack kit simplifies construction with just 12 bolts needed for the main manifold assembly. This streamlined design significantly reduces labor and effort compared to the competition with numerous pieces and screws.

## Floor Standing Option

CMK-BB Floor standing, back to back

### Step 1

Select number of NCC199CDV tankless units needed for your system



### Step 2

Choose your floor standing configuration

#### CMK-BB2

Floor Standing, 2 Unit Commercial System

Max BTU/h  
› 399,800 BTU/h

#### CMK-BB4

Floor Standing, 4 Unit Commercial System

Max BTU/h  
› 799,600 BTU/h



### Step 3

Select the base for your floor standing rack (CRK-BASE)



### Step 4

Select optional extension for systems over 4 units (CRK-ADDON)



## Wall Hanging Option

CMK-SS Wall mount, side by side

### Step 1

Select number of NCC199CDV tankless units needed for your system



### Step 2

Choose your wall hanging configuration



#### CMK-SS2

Wall mounted, 2 Unit Commercial System

Max BTU/h  
› 399,800 BTU/h



#### CMK-SS3

Wall mounted, 3 Unit Commercial System

Max BTU/h  
› 599,700 BTU/h



#### CMK-SS4

Wall Mounted, 4 Unit Commercial System

Max BTU/h  
› 799,600 BTU/h

Scan to Watch  
Our CMK-SS  
Installation Video



To learn more and to size your system with our Noritz experts, visit [Noritz.com/CMK-CRK](https://www.noritz.com/CMK-CRK)