

## Descriere articol

- Protected against mismatching and maintenance-free
- Push-in CAGE CLAMP® spring pressure connection technology allows solid conductors to be simply pushed into a unit
- Two-wire connection per pole for loops or bridges
- Additional variable coding is possible
- Components can be clearly printed on and color-coded to meet custom requirements

### Note:

All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug /socket).

### Note on mismatching protection:

All WINSTA® components are 100% protected against mismatching when:

- a.) plugging different numbers of poles
- b.) plugging while rotated 180
- c.) plugging while laterally staggered
- d.) plugging one pole

### Safety information 1:

Supus modificărilor.



Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.

## Date

### Electrical data

|                            |   |
|----------------------------|---|
| Note on Contact Resistance | approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/socket |
|----------------------------|---|

### Ratings per IEC/EN 60664-1

| Ratings per                 | IEC/EN 60664-1  |
|-----------------------------|---|
| Nominal voltage (III/3)     | 400 V   |
| Rated surge voltage (III/3) | 6 kV  |
| Rated current               | 25 A  |
| Legend (ratings)            | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

### Approvals per UL 1977

|                       |       |
|-----------------------|-------|
| Rated voltage UL 1977 | 600 V |
| Rated current UL 1977 | 23 A  |

### Connection data

|  |  |
|--|--|
| Connection technology                                      | Push-in CAGE CLAMP®                          |
| Actuation type   | Operating tool<br>Push-in                    |
| Nominal cross-section                                      | 4 mm <sup>2</sup>                            |
| Solid conductor  | 0,5 ... 4 mm <sup>2</sup> / 20 ... 12 AWG    |
| Solid conductor; push-in termination                       | 1,5 ... 4 mm <sup>2</sup> / 16 ... 12 AWG    |
| Stranded conductor   | 0,5 ... 2,5 mm <sup>2</sup> / 20 ... 14 AWG  |
| Fine-stranded conductor                                    | 0,5 ... 4 mm <sup>2</sup> / 20 ... 12 AWG    |
| Fine-stranded conductor; with insulated ferrule            | 0,25 ... 1,5 mm <sup>2</sup> / 20 ... 16 AWG |
| Fine-stranded conductor; with uninsulated ferrule          | 0,25 ... 2,5 mm <sup>2</sup> / 20 ... 14 AWG |
| Fine-stranded conductor; with ferrule; push-in termination | 1,5 mm <sup>2</sup> / 16 AWG                 |
| Strip length   | 9 mm / 0.35 inch                             |
| Note (strip length)  | see also packaging or instructions           |
| Pole No.   | 4  |
| Total number of connection points                          | 8  |
| Total number of potentials                                 | 4  |
| Conductor entry direction to mating direction              | 0°   |

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



## Geometrical Data

|             |                      |
|-------------|----------------------|
| Pin spacing | 10 mm / 0.394 inch   |
| Width       | 40 mm / 1.575 inch   |
| Height      | 12,9 mm / 0.508 inch |
| Depth       | 37,5 mm / 1.476 inch |

## Mechanical data

|   |  |
|---|--|
| Coding                                  | B  |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)   |
| Retention force of a plug-in connection | Locked: > 80 N   |
| Unmating force of a plug-in connection  | Unlocked: approx. 20 ... 70 N (depending on pole number)   |
| Number of mating cycles                 | 200, without resistive load<br>100, with resistive load $I_N = 25$ A, tested (4 mm <sup>2</sup> /AWG 12)                                   |
| Marking                                 | 2L 1L L  |
| Protection type                         | IP20   |
| Note on protection type                 | In mated condition with strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas.) |
| Potential marking                       | 2L 1L L  |

## Plug connection

|                                    |                     |
|------------------------------------|---------------------|
| Contact type (pluggable connector) | Male connector/plug |
| Connector (connection type)        | for conductor       |
| Mismating protection               | Yes                 |
| Locking of plug-in connection      | locking lever       |
| Locking lever                      | retrofitable        |

## Material Data

|                          |  |
|--------------------------|--|
| Color                    | gray                                     |
| Insulation material      | Polyamide 66 (PA 66)                     |
| Clamping spring material | Chrome nickel spring steel (CrNi)        |
| Contact material         | Copper or copper alloy (surface-treated) |
| Fire load                | 0,252 MJ                                 |

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
 /Representative Office Romania  
 Sos. Pipera-Tunari nr. 1/1  
 building 1, 2nd floor | 077190 Voluntari, Ilfov  
 Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
 Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|        |        |
|--------|--------|
| Weight | 13,4 g |
|--------|--------|

## Environmental Requirements


|  |  |
|--|--|
| Processing temperature                   | -5 ... +40 °C                              |
| Continuous operating temperature         | -35 ... +85 °C                             |
| Note on continuous operating temperature | Insulating parts for temperatures ≤ 105 °C |

## Commercial data

|                       |               |
|-----------------------|---------------|
| Packaging type        | BOX           |
| Country of origin     | DE            |
| GTIN                  | 4050821555551 |
| Customs tariff number | 85366990990   |

## Aprobări / certificate

### UL-Approvals

| Emblemă   | Aprobare                                | Text de aprobare suplimentar | Nume certificat  |
|---|---|------------------------------|------------------|
|  | cURus<br>Underwriters Laboratories Inc. | UL 1977                      | E45171<br>Sec. 9 |

## Counterpart



Nr. articol 770-244/064-000  
Socket; 4-pole; Cod. B; 4,00 mm<sup>2</sup>; gray

[www.wago.com/770-244/064-000](http://www.wago.com/770-244/064-000)



Nr. articol 770-744/064-000  
Snap-in socket; 4-pole; Cod. B; 4,00 mm<sup>2</sup>; gray

[www.wago.com/770-744/064-000](http://www.wago.com/770-744/064-000)



Nr. articol 770-844/011-000/064-000  
Socket for PCBs; angled; 4-pole; Cod. B; gray

[www.wago.com/770-844/011-000/064-000](http://www.wago.com/770-844/011-000/064-000)



Nr. articol 770-844/064-000  
Socket for PCBs; straight; 4-pole; Cod. B; gray

[www.wago.com/770-844/064-000](http://www.wago.com/770-844/064-000)

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

## Produse compatibile

### tools



**Nr. articol: 210-719**

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

[www.wago.com/210-719](http://www.wago.com/210-719)

### Marking accessories



**Nr. articol: 770-450**

Marker card; Plastic; white

[www.wago.com/770-450](http://www.wago.com/770-450)



**Nr. articol: 770-450/000-001**

Marker card; Plastic; white

[www.wago.com/770-450/000-001](http://www.wago.com/770-450/000-001)



**Nr. articol: 770-450/000-002**

Marker card; Plastic; white

[www.wago.com/770-450/000-002](http://www.wago.com/770-450/000-002)



**Nr. articol: 770-450/000-005**

Marker card; Plastic; white

[www.wago.com/770-450/000-005](http://www.wago.com/770-450/000-005)



**Nr. articol: 770-450/000-006**

Marker card; Plastic; white

[www.wago.com/770-450/000-006](http://www.wago.com/770-450/000-006)



**Nr. articol: 770-450/000-012**

Marker card; Plastic; white

[www.wago.com/770-450/000-012](http://www.wago.com/770-450/000-012)

### Strain relief plate



**Nr. articol: 770-504/023-000**

Strain relief housing; 4-pole; for 2 cables; 5.0 ... 9.0 mm; 55 mm; black

[www.wago.com/770-504/023-000](http://www.wago.com/770-504/023-000)



**Nr. articol: 770-514/023-000**

Strain relief housing; 4-pole; for 2 cables; 5.0 ... 9.0 mm; 55 mm; white

[www.wago.com/770-514/023-000](http://www.wago.com/770-514/023-000)

## Descărcări

### CAD/CAE-Data

#### CAD data

2D/3D Models 770-254/064-000

[URL](#)

[Descărcare](#)

Supus modificărilor.

CAE data


WSCAD Universe 770-254/064-000

[URL](#)

[Descărcare](#)

## Installation Notes


### Conductor termination

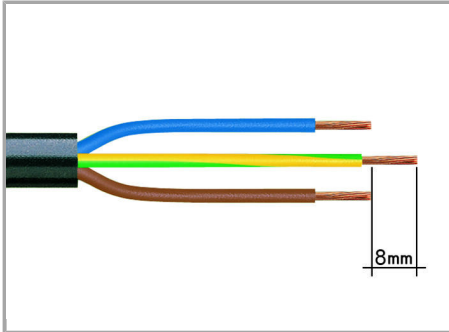


1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)

2. Strip length = 9 mm


3. Extended ground conductor = 8 mm

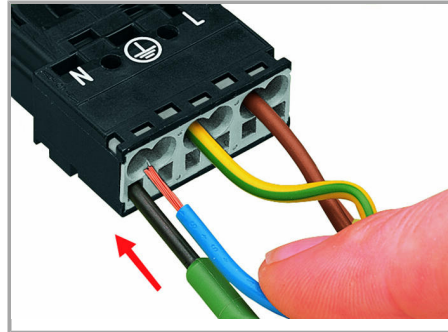

To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert stripped conductor until it hits backstop.

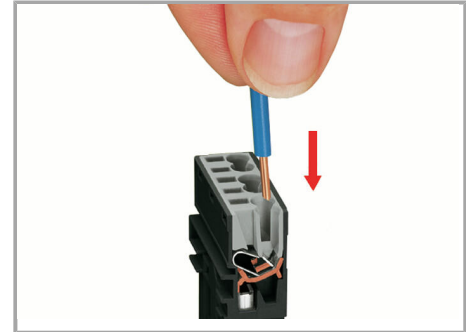


Insert stripped solid conductor until it hits backstop.

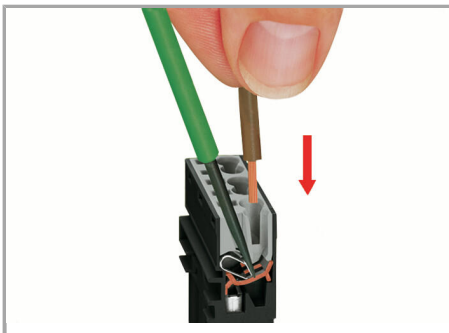

To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert stripped conductor until it hits backstop.


### Conductor removal

Supus modificărilor.

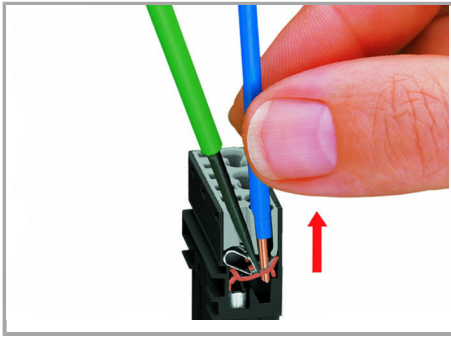


To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.


### Installation

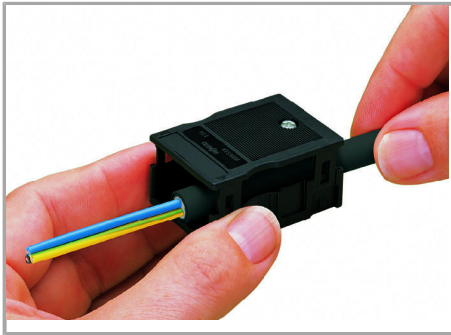

We recommend pulling the pre-latched strain relief housing over the cable prior to termination. However, the strain relief can be mounted at a later time as well.

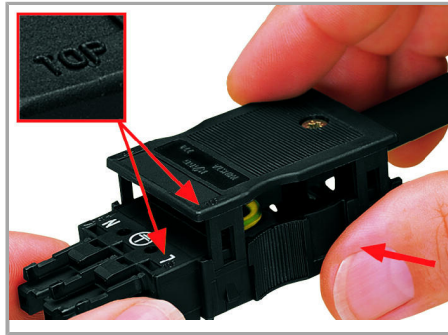

Latch the strain relief housing on the plug /socket. Note the "TOP" inscription.

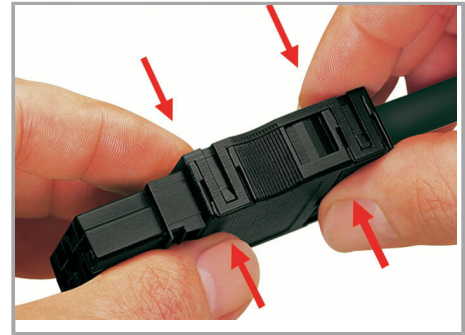

Prepare strain relief housing by snapping together upper and bottom part.




Tighten strain relief screw via screwdriver (2.5 mm blade width).

Supus modificărilor.

### Coding




Simply cut off the coding pin from the socket.

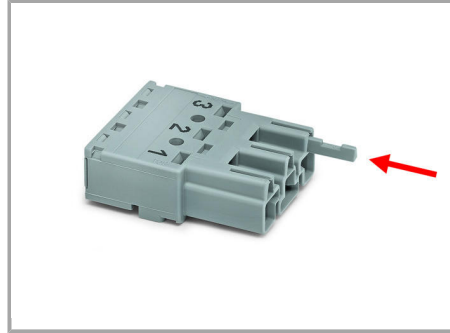


Insert coding pin into plug (break first) until it engages.


### Mismatching protection

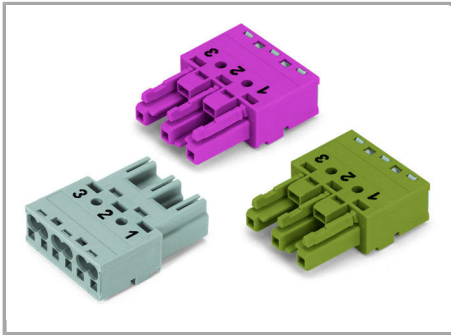

B-coded connectors with different colors can be plugged together.

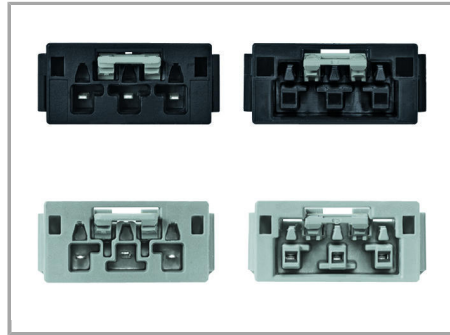

B-coded connectors (shown in gray) not only differ in color, but also in their design, making them incompatible with other coded connectors.

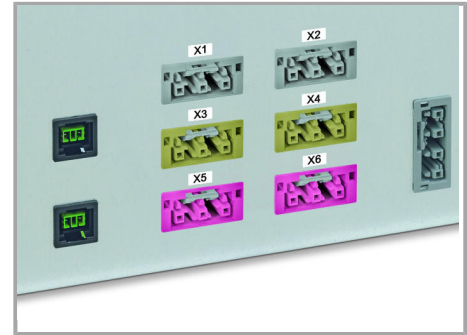

Easy circuit identification via different marking and colors

#### Important note:

Different colors and/or pole marking are used for circuit identification.

Only connectors of the same color and same pole marking must be plugged together.

### Familie de produse

**<i>WINSTA</i>® MIDI special**

Afișare globală produse din familie.

Supus modificărilor.