


# Belanko™


## Multistandard socket outlets

### USB Type-A - Type-C charger

Cat. No(s): 6 170 59 - 6 171 49  
 6 173 49/59 - 6 174 49/59



6 17X 59

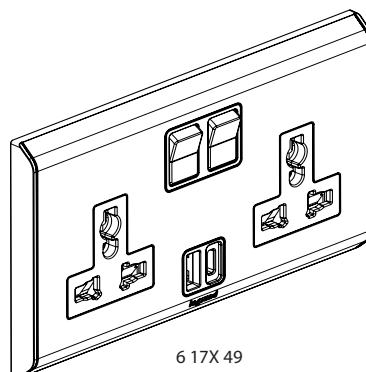

6 17X 49


#### 1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks. Delivered complete  
 Shuttered for child safety

#### 2. RANGE

Description	White	Dark Grey	Brown
<b>2P+E 1 gang switched + 1 USB Type-A</b> (1 output Type-A)	6 170 59	6 173 59	6 174 59
<b>2 x 2P+E 2 gang switched + 1 USB Type-A + 1 USB Type-C</b> (1 output Type-A - 1 output Type-C)	6 171 49	6 173 49	6 174 49

#### 3. DIMENSIONS (mm)

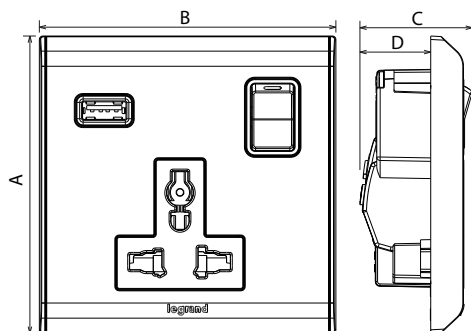

References	A	B	C	D
6 17X 59	86.2	86	32.6	20.5
6 17X 49	86.2	146	30.5	18.5

#### 4. CONNECTION

Type of terminals: with screws  
 Terminal capacity: 4 x 2.5 mm<sup>2</sup> - 3 x 4 mm<sup>2</sup> - 2 x 6 mm<sup>2</sup>  
 Stripping length: 12 mm

#### 5. TECHNICAL CHARACTERISTICS

##### ■ 5.1 Mechanical characteristics

Impact tests: IK 04  
 Penetration by solid bodies/liquid: IP 02

##### ■ 5.2 Material characteristics

Base: PP  
 Cover-plate: PC  
 Support frame: PC  
 Self-extinguishing:  
 + 850° C / 30 s for insulating parts holding live parts in place.  
 + 650° C / 30 s for other parts made of insulating materials.

##### ■ 5.3 Climatic characteristics

Storage temperature: - 20° C to + 70° C  
 Operating temperature: 0° C to + 45° C

##### ■ 5.4 Electrical characteristics

Voltage: 250 V~  
 Current: 2.5-5-6-10-13-16 A  
 Voltage: 127 V~  
 Current: 15 A  
 Frequency: 50/60 Hz

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Type	1 USB	2 USB
Nominal input voltage	100 - 250 V~	
Nominal input frequency	50-60 Hz	
Power consumption	12 W	15 W
Maximum input current	300 mA	
Maximum power consumption in standby	0.075 W	
Power average efficiency	80.3 %	
Nominal output voltage	5 V=	
Maximum output current	2.4 A	3 A*
No-load consumption and average energy efficiency: Level VI**		
Protection class	II - Low voltage	

\* Note : shared on A and C output

\*\*Note: European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies.

**Note :** To optimize the charging time of your device, ensure to turn it off during the charging phase.

## 6. CLEANING

Surface cleaning with a cloth.  
Do not use: acetone, tar remover, trichlorethylene.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

## 7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.  
Refer to e-catalogue.