


# AMP100

3 YEARS WARRANTY

RGB/RGBW AMPLIFIER  
AMPLIFICATOR RGB/RGBW  
AMPLIFICATORE RGB/RGBW



RGB

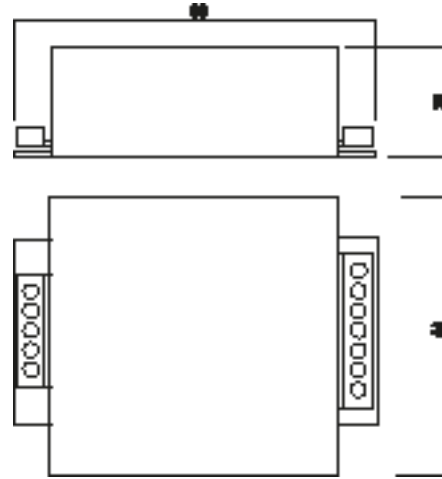

Code	Input voltage	Number of circuits	Output current / circuit	Output power / circuit	Number of channels / circuit	Output current / channel	Output power / channel	Operating ambient temperature	Weight
AMP100	12/24V DC	1	24A	288/576W	4	6A	72/144W	-20 ÷ +55°C	0,09 kg

**EN**

RGB/RGBW signals amplifier using the principle of PWM control (Pulse Width Modulation). This type of amplifier can be used for RGB/RGBW LEDs with common anode (+) mounting. Housing of aluminum. Screws terminal block, for 0,75 to 2,5 mm<sup>2</sup> diameter of wires.

**RO**

Amplificarea semnalelor RGB/RGBW pe baza principiului modulații în amplitudine (PWM, Pulse Width Modulation). Acest tip de amplificator de semnal poate fi utilizat pentru LEDurile RGB/RGBW, cu montaj anod (+) comun. Carcasă din aluminiu. Șir de conectori cu șurub, pentru diametre ale firelor de conexiune de la 0,75 la 2,5 mm<sup>2</sup>.

**IT**

Amplificatore di segnale RGB/RGBW. I segnali RGB/RGBW vengono amplificati in base alla modulazione della larghezza dell'impulso (PWM, Pulse Width Modulation). Questo tipo di amplificatore di segnale può essere utilizzato per LED RGB/RGBW, con montaggio anodo (+) comune. Carcasa in alluminio. Serie di connettori a vite, per diametri cavi di alimentazione 0,75-2,5 mm<sup>2</sup>.

