

## Silicon NPN Power Transistors

2SC3281

## DESCRIPTION


- With TO-3PL package
- Complement to type 2SA1302

## APPLICATIONS

- Power amplifier applications
- Recommended for 100W high fidelity audio frequency amplifier output stage

## PINNING

| PIN | DESCRIPTION                          |
|-----|--------------------------------------|
| 1   | Base                                 |
| 2   | Collector;connected to mounting base |
| 3   | Emitter                              |

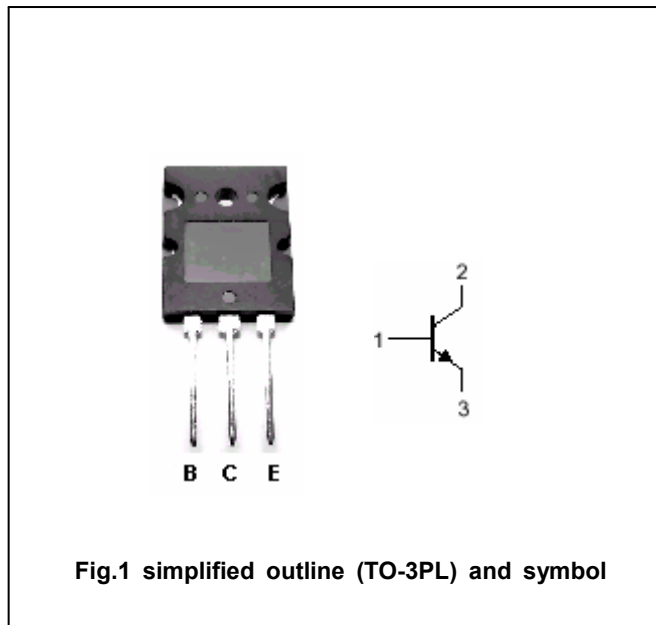Absolute maximum ratings( $T_a=25^\circ\text{C}$ )

| SYMBOL    | PARAMETER                   | CONDITIONS             | VALUE   | UNIT             |
|-----------|-----------------------------|------------------------|---------|------------------|
| $V_{CBO}$ | Collector-base voltage      | Open emitter           | 200     | V                |
| $V_{CEO}$ | Collector-emitter voltage   | Open base              | 200     | V                |
| $V_{EBO}$ | Emitter-base voltage        | Open collector         | 5       | V                |
| $I_C$     | Collector current           |                        | 15      | A                |
| $I_B$     | Base current                |                        | 1.5     | A                |
| $P_C$     | Collector power dissipation | $T_C=25^\circ\text{C}$ | 150     | W                |
| $T_j$     | Junction temperature        |                        | 150     | $^\circ\text{C}$ |
| $T_{stg}$ | Storage temperature         |                        | -55~150 | $^\circ\text{C}$ |

## Silicon NPN Power Transistors

## 2SC3281

## CHARACTERISTICS

T<sub>j</sub>=25 °C unless otherwise specified

| SYMBOL               | PARAMETER                            | CONDITIONS                                | MIN | TYP. | MAX | UNIT |
|----------------------|--------------------------------------|---|-----|------|-----|------|
| V <sub>(BR)CEO</sub> | Collector-emitter breakdown voltage  | I <sub>C</sub> =50mA ; I <sub>B</sub> =0  | 200 |      |     | V    |
| V <sub>CEsat</sub>   | Collector-emitter saturation voltage | I <sub>C</sub> =8A ; I <sub>B</sub> =0.8A |     |      | 2.5 | V    |
| V <sub>BE</sub>      | Base-emitter voltage                 | I <sub>C</sub> =8A ; V <sub>CE</sub> =5V  |     |      | 1.5 | V    |
| I <sub>CBO</sub>     | Collector cut-off current            | V <sub>CB</sub> =200V; I <sub>E</sub> =0  |     |      | 5   | μA   |
| I <sub>EBO</sub>     | Emitter cut-off current              | V <sub>EB</sub> =5V; I <sub>C</sub> =0    |     |      | 5   | μA   |
| h <sub>FE-1</sub>    | DC current gain                      | I <sub>C</sub> =1A ; V <sub>CE</sub> =5V  | 55  |      | 160 |      |
| h <sub>FE-2</sub>    | DC current gain                      | I <sub>C</sub> =8A ; V <sub>CE</sub> =5V  | 35  |      |     |      |
| f <sub>T</sub>       | Transition frequency                 | I <sub>C</sub> =1A ; V <sub>CE</sub> =5V  |     | 25   |     | MHz  |
| C <sub>OB</sub>      | Collector output capacitance         | f=1MHz; V <sub>CB</sub> =10V              |     | 270  |     | pF   |


◆ h<sub>FE-1</sub> classifications

| R      | O      |
|--------|--------|
| 55-110 | 80-160 |

Silicon NPN Power Transistors

2SC3281

PACKAGE OUTLINE

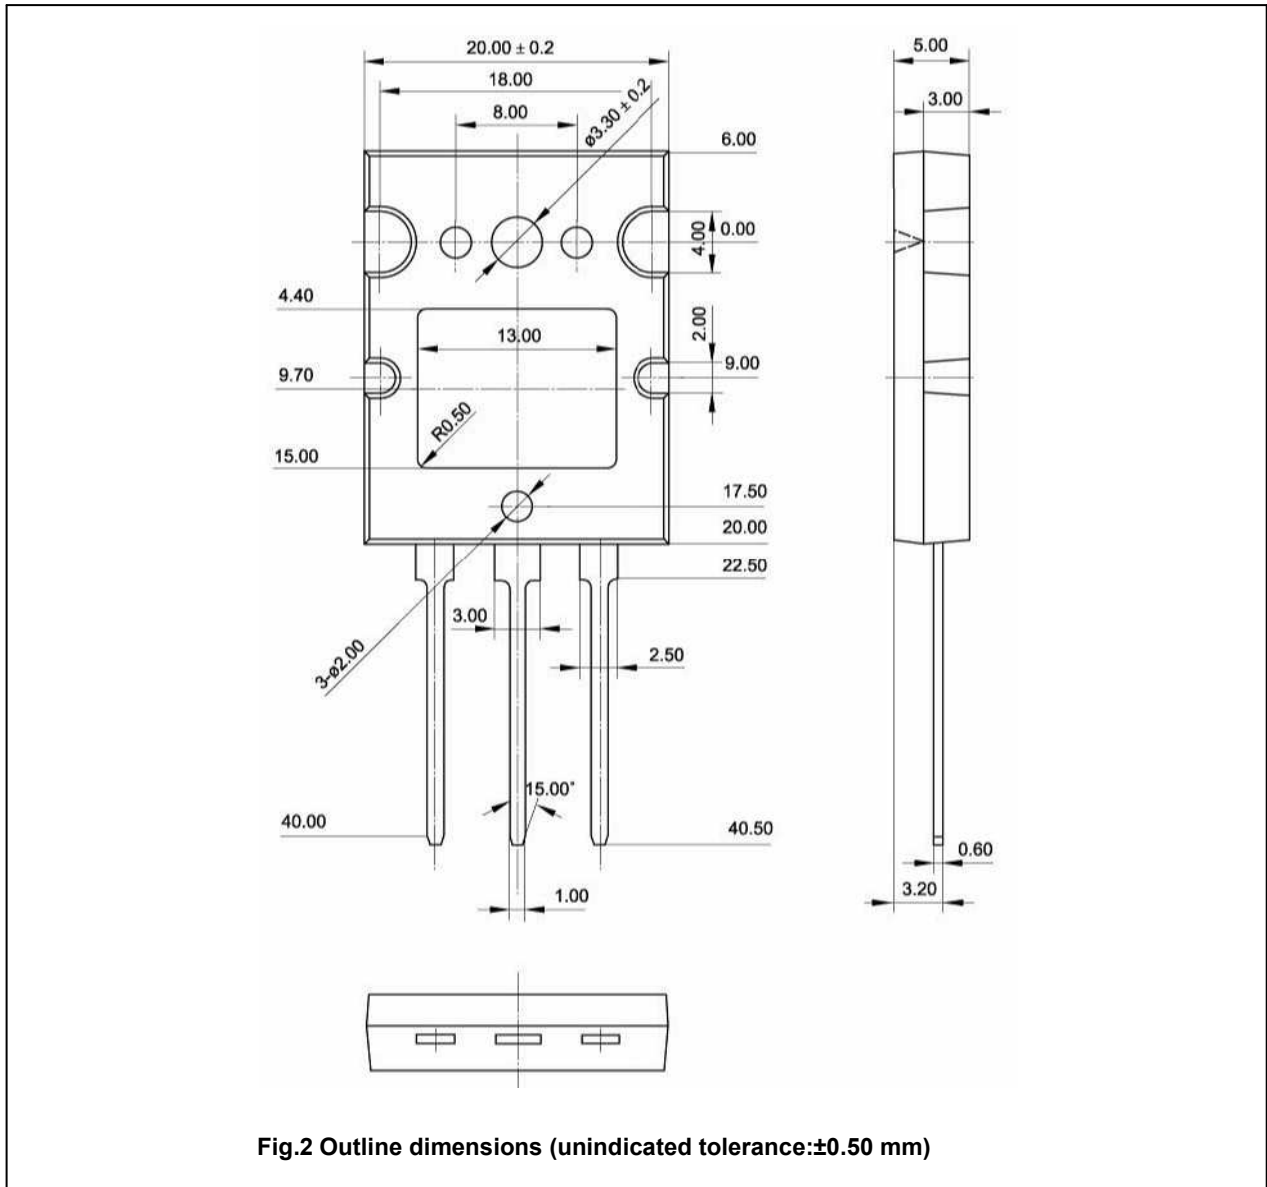

Silicon NPN Power Transistors

2SC3281

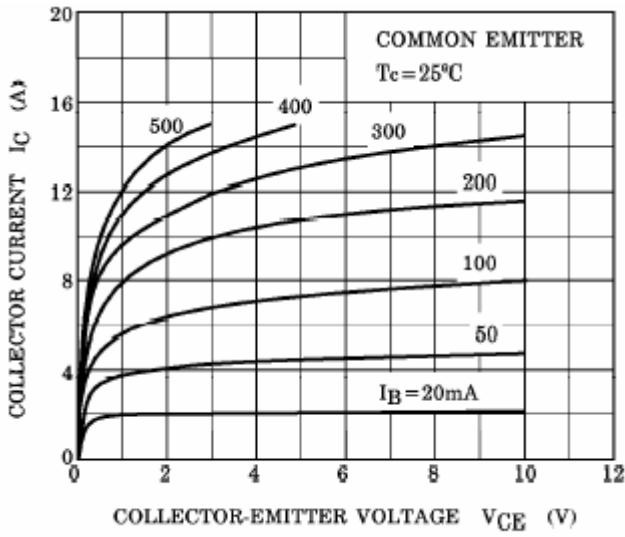


Fig.3 Static Characteristic

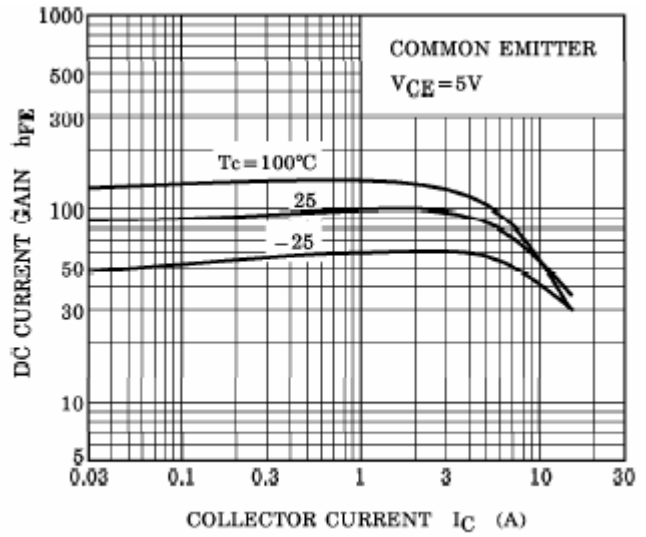


Fig.4 DC current Gain

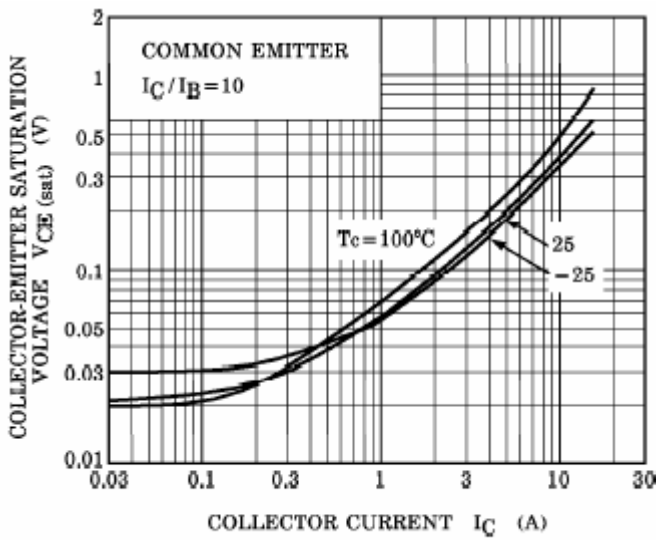


Fig.5 Collector-Emitter Saturation Voltage

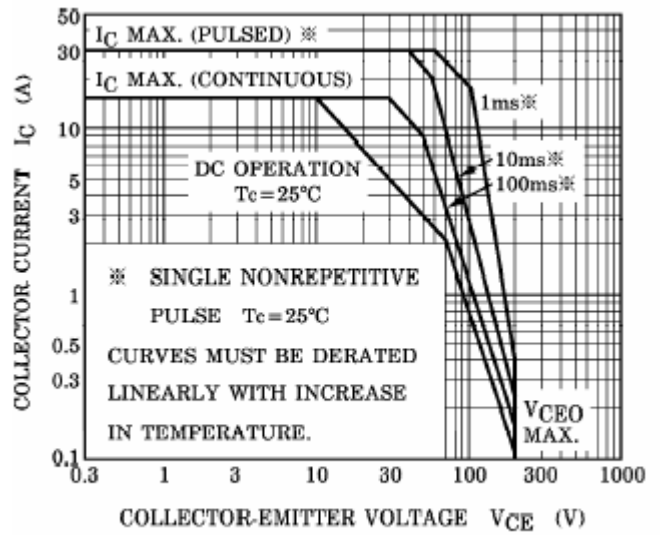


Fig.6 Safe Operating Area

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.