

## MUA22T/MUA21R

User can control hotkey via hotkey-control mode from RX . To control hotkey of TX, please use push button or extend switch button.

### HOTKEY OF RX TERMINAL

#### HOTKEY CONTROL of VEDIO

SWITCH TX PC 1、2 : SCRL+SCRL+T+X+NUMBER1、2

TX BUZZER ON/OFF : SCRL+SCRL+T+X+B +NUMBER1/0

SWITCH RX PC 1、2 : SCRL+SCRL+R+X+NUMBER1、2

RX BUZZER ON/OFF : SCRL+SCRL+R+X+B+ NUMBER 1/0

### AUDIO HOTKEY CONTROL

PRESET: TX Audio Control ON ; RX Audio Control OFF

( To setp up TX/RX AUDIO CONTROL- ON)

TX Audio Control ON : SCRL+SCRL+T+A+ A+ NUMBER 1

RX Audio Control ON : SCRL+SCRL+R+A+ A+ NUMBER 1

(TO USE AUDIO FUNCTOIN ONLY,AND DON'T WANT TO SWITCH AUDIO WITH KEYBOARD & MOUSE SYNRONIC ,JUST CHANGE AUDIO CONTROL TO "OFF" MODE)

TX Audio Control OFF : SCRL+SCRL+T+A+ A+ NUMBER 0

RX Audio Control OFF : SCRL+SCRL+R+A+ A+ NUMBER 0

SWITCH AUDIO TX PC 1、2 : SCRL+SCRL+T+A+NUMBER1、2

SWITCH AUDIO RX PC 1、2 : SCRL+SCRL+R+A+NUMBER1、2

(HOTKEY ADJUSTMENT WITH RGB RANGE)

(EX. User can select 64 levels by keeping press'→' OR '←' to select ,each key has up to 32 selections)

Press '→' OR '←' and synchronize the the R image ,then press ENTER to set up.

To select RGB level by'→' OR '←',user can press ESC to cancel the current setting. Then press ENTER to confirm the setting process.

RGB DEALY TIME R CONTROL Hotkey : SCRL + SCRL +R+ '→' OR '←' +ENTER

RGB DEALY TIME G CONTROL Hotkey : SCRL + SCRL +G+ '→' OR '←' +ENTER

RGB DEALY TIME B CONTROL Hotkey : SCRL + SCRL +B+ '→' OR '←' +ENTER









Add CTRL as backup function ( coexist with SCRL)



ADD CTRL ON/OFF: SCRL+SCRL +C+T+R+L+ NUMBER 1/0



**WARN**

Please use the qualified cable as the SPEC showed, otherwise we will not bear any duty for damage.

Connect	Twisted Pair	Line	Color
1	2	1	 Orang+White
2	2	2	 Orang
3	3	1	 Green+White
4	1	2	 Blue
5	1	1	 Blue+White
6	3	2	 Green
7	4	1	 Brown+White
8	4	2	 Brown

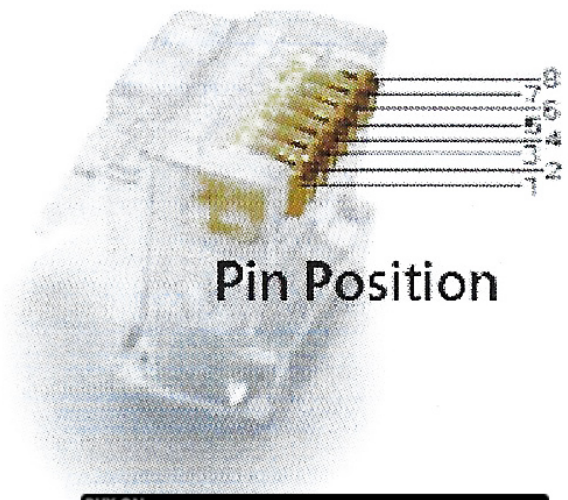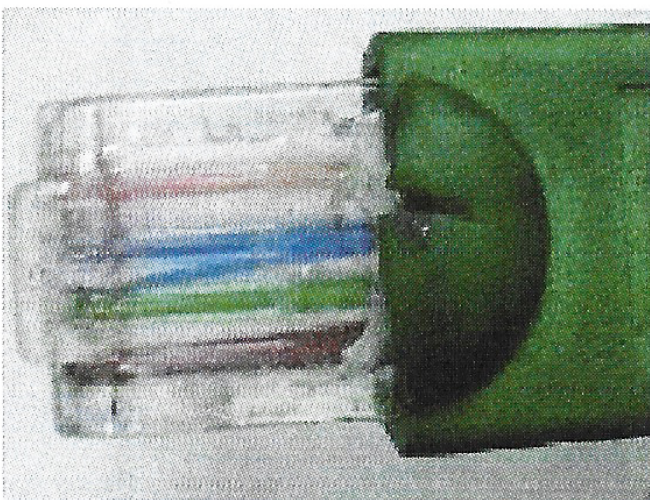

Pin Position

BUY ON  
[www.cablematic.com](http://www.cablematic.com)