



# Specification

## LED Panel Light 40W

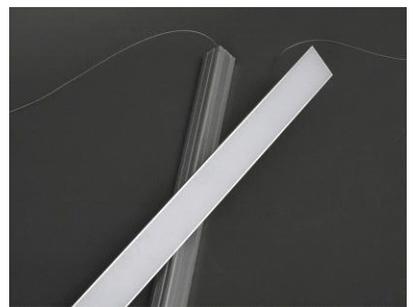


## LED Corner Panel Light

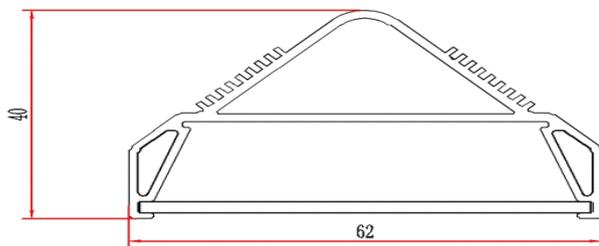

# Specification

Model	EL-GB08012		
Input Voltage	AC85V-277V 50/60Hz		
Size	L1000*W62*T40 (mm) (L500 or more Available)		
Lighting Source	SMD3014		
Power Consumption	45W		
Color Temperature	WW(2800~3300K)	NW(4000~4500K)	CW(6000~6500K)
Luminosity	≥3500lm	≥3580lm	≥3650lm
CRI (Ra)	>75		
Beam Angle	180°		
Work Temperature	-40℃ ~ 50℃		
Material	Die Cast +AL Reflector(45,60,90,120)		
GW	1.7kg		
NW	1.2kg		
IP Grade	IP44		
Lifespan (LED)	≥70,000hrs (75% Lumen Maintenance)		
Lumen Attenuation	<5% @ 5,000hrs		
Packing Dimension	L1020*W70*T50mm		


## Applications

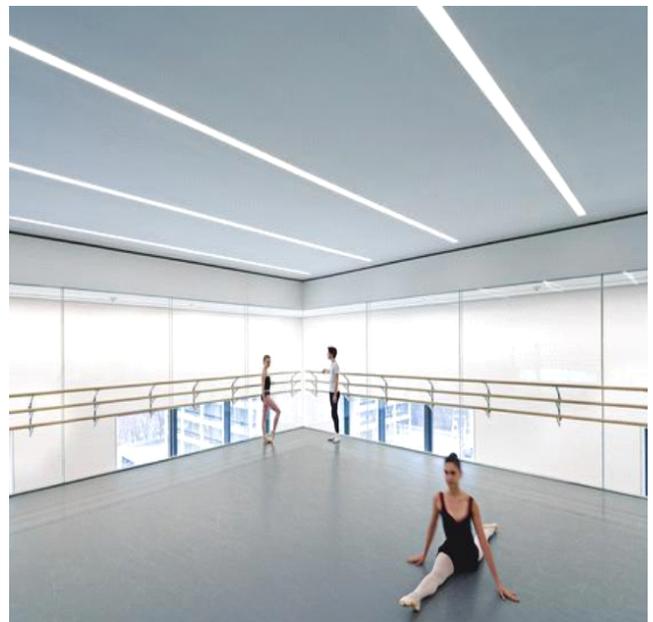

# Specification

## Installation Guide I

Chandelier: 1000x62x40mm

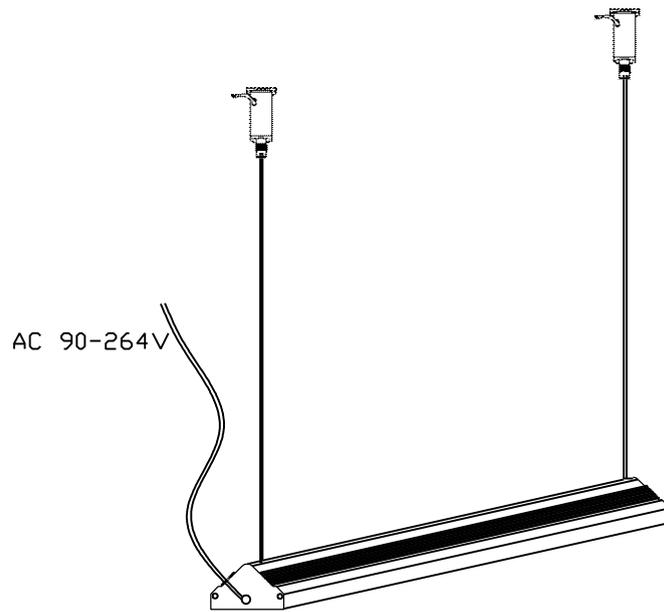


### 一. Installation

- 1, Input Voltage 90-264V, could be connected to room socket directly
- 2, Please disassemble or install under professional person's guide

# Specification


## 二.Product item and installation size

1000x62x40mm



2 installation holes

## 三.Standard accessories



Gecko




PA4x20mm screws

## 四.Installation guide:

- 1.Use hand drill to probe two holes on the ceiling according to marked size
- 2.Knock the Geckoes into the holes
- 3.Make sure the card line tackle and gecko hole on the same level
- 4.Set the screws into card line tackle and tighten into geckoes
- 5.Loosen the locking accessory to 3mm
- 6.Push up the locking accessory, pass through the card line tackle with handing wire(make sure the light height you need and excess handing wires are the same length)
- 7.Tighten the locking accessory
- 8.Connect the wire in the ceiling and power supply input wire by polarity, make sure well insulated.

# Specification


## 五. Installation Diagram

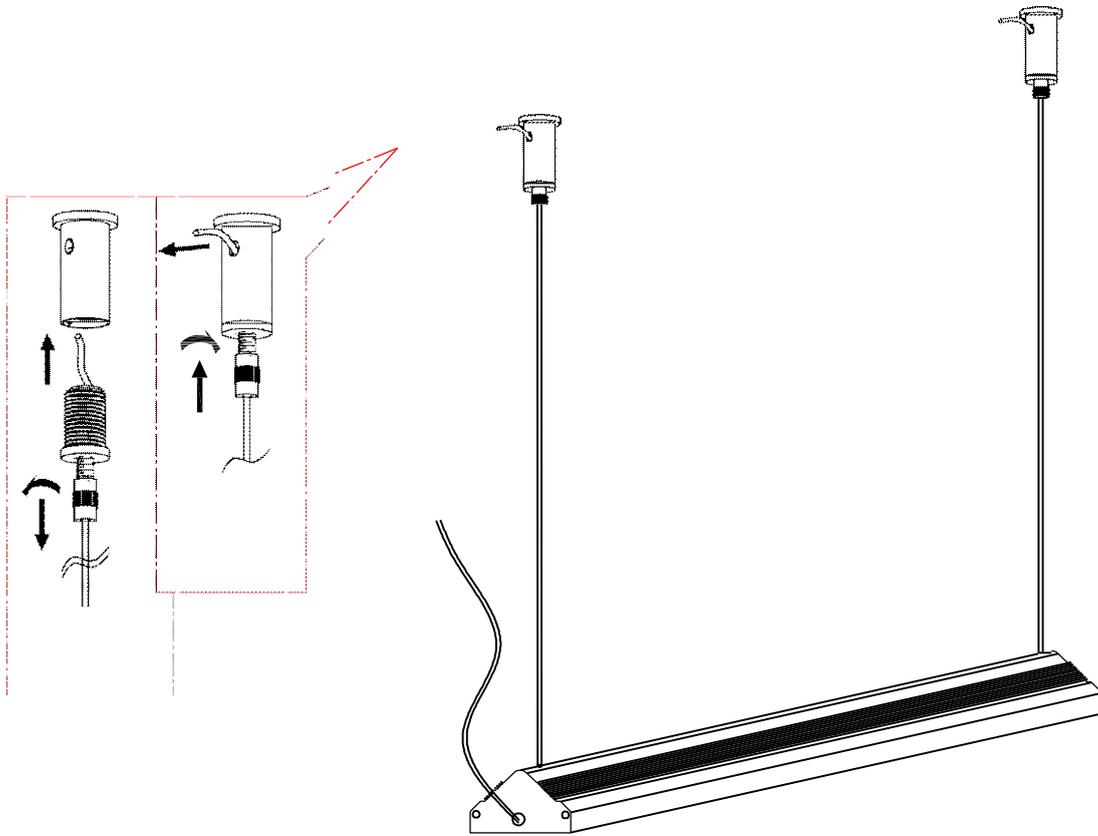

# Specification

## Installation Guide II

Chandelier: 1000x62x40mm

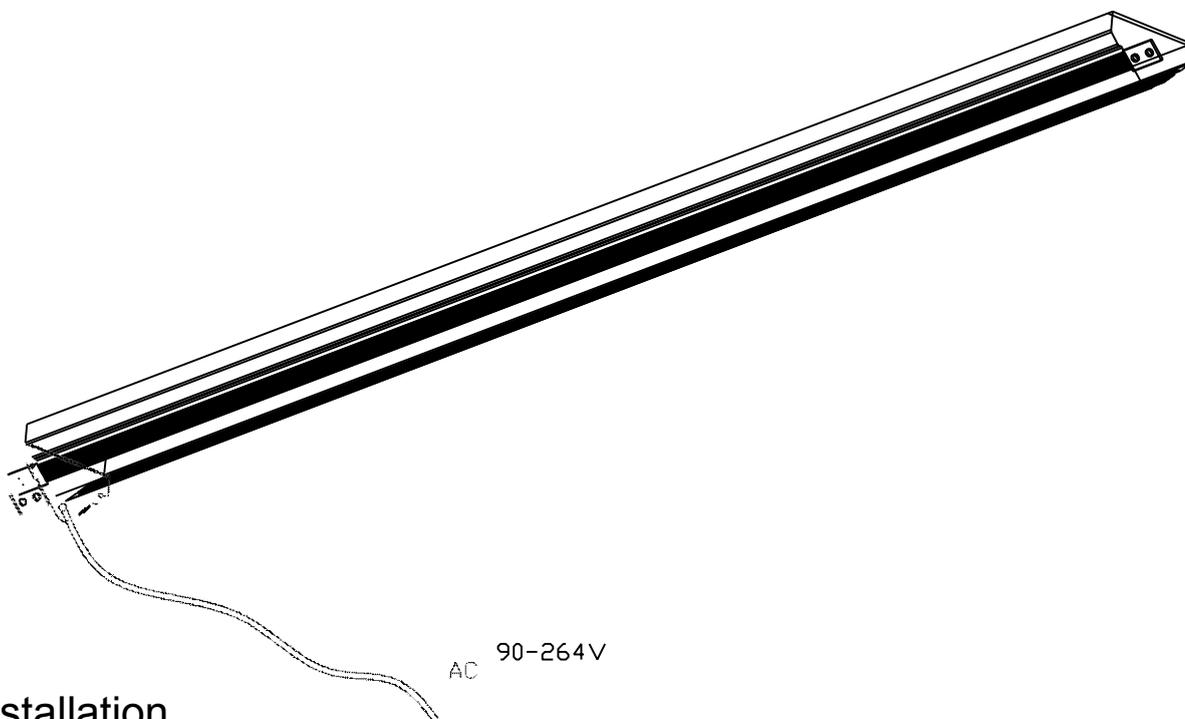


### — .Installation

- 1, Input Voltage AC 90-264V, could be connected to room socket directly
- 2, Please disassemble or install under professional person's guide

# Specification


## 二.Product item and installation size

1000x62x40mm




2 installation holes

## 三.Standard accessories



Gecko




PA4x20mm screws

## 四.Installation guide:

- 1, Please make 2 holes on the corner with electric hand drill accordingly to the marking size.
- 2, Hammer the Gecko screws which in the spare parts package in the holes.
- 3, Make sure the lamp cling to the wall and the holder point to the holes on the wall. Wind up the holder with self-tapping screw in the holes
- 4, Please connect the power input wire based the pole to the wires reserved in the ceiling. Make sure they are all insulative and the driver stay in the back of the lamp.
- 5, It is finished as if you connect the power output terminal to the lamp input terminal



# Specification

## 五. Installation Diagram

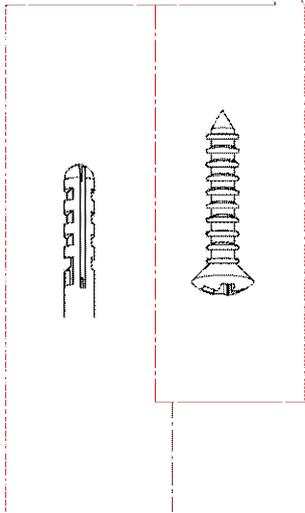

# Specification

## More Applications

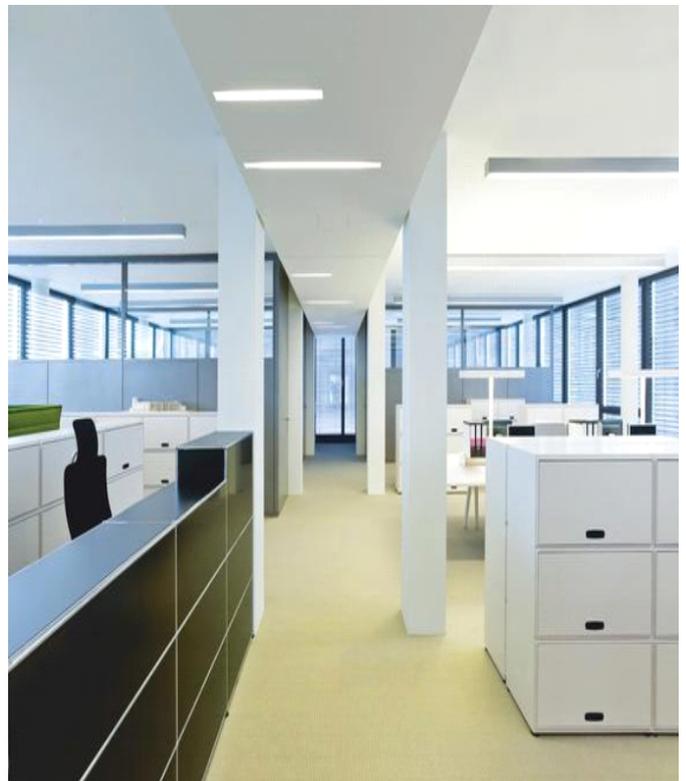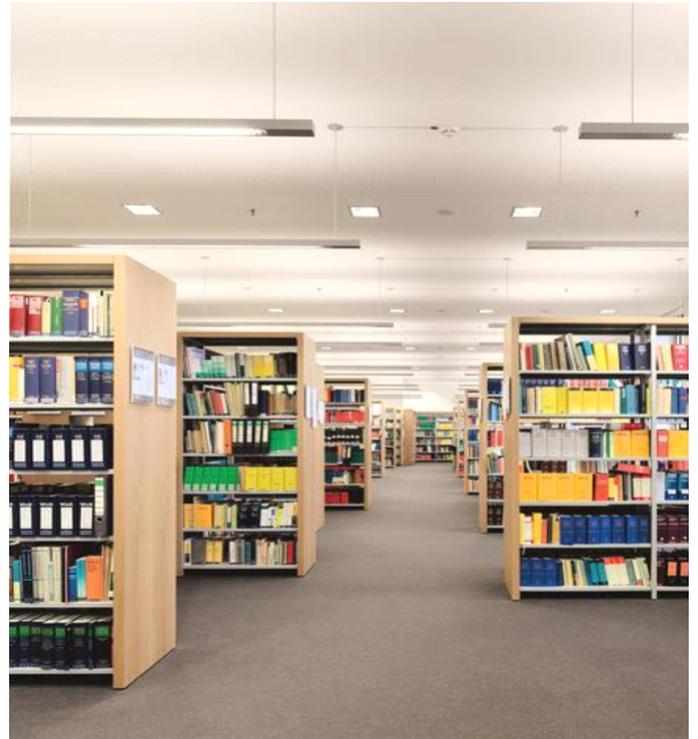

# Specification

## Warranty

WE warrant each LED lighting product to be free from defects in material and workmanship for a period that depends on application use: For up to 8 hours a day the warranty is three (3) years . The warranty period begins from the purchase date on the invoice for each respective product. If our lighting product fails to operate for the warranty period, we will repair or replace the Product, at its option.

This warranty does not cover cosmetic damage or damage due to acts of God, accident, misuse, abuse, negligence, commercial use, or modification of, or to any part of the Product. This warranty does not cover damage due to improper operation or maintenance, connection to improper voltage supply, or attempted repair by anyone than a facility authorized by us to service the Product.

Repair or replacement as provided under this warranty is the exclusive remedy of the customer. we shall not be liable for any incidental or consequential damages for breach of any express or implied warranty on this Product except to the extent prohibited by applicable law; any implied warranty of merchantability or fitness for a particular purpose on this Product is limited in duration to the duration of this limited warranty.

Some states do not allow the exclusion or limitation of incidental or consequential damages, or allow limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.



*Growing up together with you!*

