

TILT WALL MOUNT

FOR LCD, PLASMA, and LED DISPLAYS

INSTRUCTION MANUAL

SPECIFICATIONS

Display Size: 32" to 60"

Maximum Load: 75 kg(165 lbs)

Mounting Pattern: 600mm x 400mm

Tilt Range: 15°up/down

Profile: 3.5 cm (1.4")

BOX CONTENTS

- Upper Wall Plate (x1)
- Lower Wall Plate (x1)
- Left Plastic Side (x1)
- Right Plastic Side (x1)
- Mount Arm (x2)
- Instruction Manual (x1)
- Hardware Kit (x1)

WARNINGS

- 1 **Read these instructions before you begin.** If you are unsure of any part of the process, contact a professional contractor or installer for assistance. Improper installation can result in injury or damage.
- 2 The wall or mounting surface must be capable of supporting the combined weight of the mount and the display; if not, the structure must be reinforced.
- 3 Locate pipes, wires, or any other hazards in the wall where you wish to install the mount before drilling.
- 4 Safety gear and proper tools must be used. Failure to do so can result in injury or damage.
- 5 A minimum of two people are required for installation. Do not attempt to install this mount alone under any circumstances.
- 6 Follow all instructions and recommendations regarding adequate ventilation and suitable locations for mounting your display. Consult the owner's manual for your particular display for more information.

CAUTION: This wall mount is intended for use only with the maximum weight of 45 kg (100 lbs). Use with heavier than the maximum weights indicated may result in instability causing possible injury.

TOOLS REQUIRED

- Phillips Head Screw Driver or Screw Gun
- Electric or Portable Drill
- 3 mm (1/8") Drill Bit and Stud Finder for Drywall Installation
- 8 mm (5/16") Masonry Bit for Concrete Installation
- Level

HARDWARE KIT

(A) Drywall Screw (x4)



(F) M8x30 Screw(x4)



(B) Concrete Anchor (x4)



(G) Spacer (x4)



(C) 6x16x1 Spacer (x4)



(H) 6x16x1 Spacer (x4)



(D) M5x25 Screw(x4)



(I) 5x16x1 Spacer (x4)



(E) M6x30 Screw(x4)




(J) Bubble Level (x1)



ASSEMBLY

Assemble the mount by carefully snapping the right and left plastic sides onto the upper and lower wall plates, as shown in the illustration (see Fig. 1). Do not force any of the connections as it may result in breakage of the plastic parts.

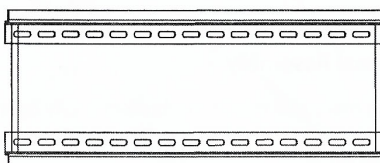

INSTALLATION


Part 1A – Mounting to the Wall (Drywall)

IMPORTANT! For safety reasons, this mount must be secured to at least two wood studs no less than 16" apart. The studs must be capable of supporting the combined weight of the mount and display.

- 1 Use a high quality stud finder to locate two adjacent studs where you wish to install your mount. Mark both edges of each stud to help identify the exact center.

NOTE: You must use the center of each stud to avoid cracking or splitting the wood during installation.

- 2 Place the assembled mount against the wall over the marked studs. Make sure it is level.
- 3 While another person holds the mount in position, mark four locations (two per stud) for securing the mount to the wall (see Fig. 2).
- 4 Set the mount aside and drill a 3 mm (1/8") pilot hole at each marked location.
- 5 Place the mount back against the wall and attach it using the M6.3 x 63 screws (A) and washers (B) provided (see Fig. 3). **Do not over-tighten these screws and do not release the mount until all screws are in place.** Ensure that the mount remains level after all screws are secured.

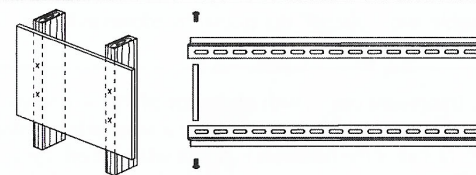

Part 1B – Mounting to the Wall (Concrete)

IMPORTANT! For safety reasons, the concrete wall must be capable of supporting the combined weight of the mount and the display. The manufacturer takes no responsibility for failure caused by walls of insufficient strength.

- 1 Place the assembled mount against the wall in the desired location. Make sure it is level.
- 2 While another person holds the mount in place, mark four locations on the wall for securing the mount (see Fig. 4).




Fig. 4

Part 1B – Mounting to the Wall (Concrete) (continued)

- 3 Set the mount aside and drill an 8 mm (5/16") hole at each marked location. Remove any excess dust from the holes.

- 4 Insert a concrete anchor (C) into each hole so that it is flush with the concrete surface (see Fig. 5). A hammer can be used to lightly tap the anchors into place if necessary.

NOTE: If the concrete wall is covered by a layer of plaster or drywall, the concrete anchor must pass completely through the layer to rest flush with the concrete surface.

- 5 Place the mount back against the wall and attach it using the M6.3 x 63 screws (A) and washers (B) provided (see Fig. 3). **Do not over-tighten these screws and do not release the mount until all screws are in place.** Ensure that the mount remains level after all screws are secured.

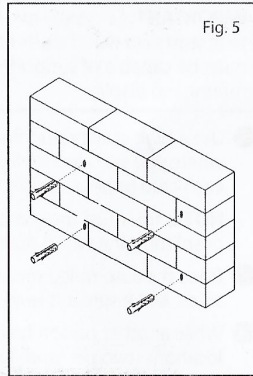


Fig. 5

Part 2 – Attaching the Mount Arms to the Display


IMPORTANT! Use extra care during this part of the installation. If possible, avoid placing your display facedown as it may damage the viewing surface.

NOTE: This mount comes with a selection of different screw diameters and lengths to accommodate a wide variety of display models. Not all of the hardware in the kit will be used. If you cannot find the appropriate screw size in the kit provided, consult the manufacturer of your display for more information.

- 1 Determine the correct length of screw to use by examining the back of your display:
 - A If the back of your display is flat and the mounting holes are flush with the surface, you will use the shorter screws (D, F or H) from the hardware kit.
 - B If the back of your display is curved, has a protrusion, or if the mounting holes are recessed, you will need to use the longer screws (E, G or I) and may also need to use the spacers (K).

Part 2 – Attaching the Mount Arms to the Display (continued)


- 2 Determine the correct diameter of screw to use by carefully trying one of each size (M4, M6 and M8) from the hardware kit. **Do not force any of the screws – if you feel resistance stop immediately and try a smaller diameter screw.**

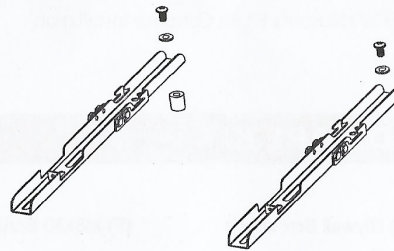

- 3 Attach the mount arms to the back of your display using the screws identified in steps 1 and 2 (see Fig. 6):

- A If you are using the M4 or M6 screws you will also need to use the M6 washers (J). M8 screws do not require washers.
- B If you are using the longer screws on a display with a curved or recessed back, you may also need to use the spacers (K). Use one spacer or two spacers stacked as needed. **Only use a spacer if necessary.**

NOTE: Make sure the mount arms are attached with the tilt mechanisms facing outward, exactly as shown in the illustration (see Fig. 7). Otherwise, the tilt function cannot be accessed.

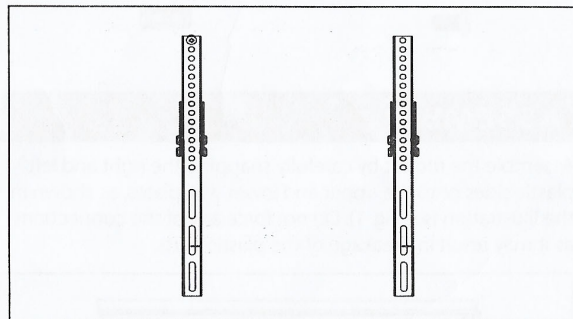

Part 3 – Final Assembly

- 1 Check to make sure the tilt mechanism is fully tightened. It can be tightened using the long Allen key (L) provided in the hardware kit.

Part 3 – Final Assembly (continued)

- 2 With the help of another person, carefully lift your display and place it on the mount. **Do not release the display until the mount arms have securely hooked onto the mount.**
- 3 Make sure the safety locks have successfully engaged by gently pushing up on the display. You should not be able to remove the display from the mount.
- 4 If the plastic tabs hang below the bottom of your display they can be trimmed with a knife or looped back and tucked into the rubber ring located on each tab.
- 5 If you need to remove the display from the mount, pull the plastic tabs located at the bottom of the mount arms down and then forward (away from the wall) to disengage the safety locks. With the help of another person, carefully lift the display from the mount. Return the tabs to their original position by pulling them down and pushing them backwards.

OPERATION AND ADJUSTMENT

- 1 To change the tilt angle of your display, hold the display firmly in place and loosen the tilt mechanisms using the long Allen key (L) from the hardware kit (see Fig. 8). Move your display to the desired position, and then re-tighten the tilt mechanisms. If your display is in the non-tilt position, you will need to push up gently on the display before you can move it. **Do not release the display until both tilt mechanisms are firmly tightened.**
- 2 Periodically clean your mount with a dry cloth. Inspect all screws and hardware at regular intervals to ensure that no connections have become loose over time. Re-tighten as needed.

