

AGENCY OF NATURAL RESOURCES
DEPARTMENT OF ENVIRONMENTAL CONSERVATION
WATERSHED MANAGEMENT DIVISION
ONE NATIONAL LIFE DRIVE, DAVIS BUILDING, 3rd FLOOR
MONTPELIER, VT

Permit Number: 3-1382

PIN: SJ95-0023

NPDES Number: VT0100951

Applicant Contact: Ryegate Fire District No. 2
PO Box 48
East Ryegate, VT 05042

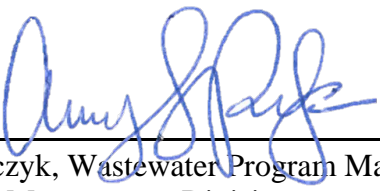
Facility Name: Ryegate Fire District No. 2
Facility Address: School Street East Ryegate, VT 05042
Facility Coordinates: Lat: 44.20243 Long: -72.06323

Expiration Date: March 31, 2026
Reapplication Date: September 30, 2025

In compliance with the provisions of the Vermont Water Pollution Control Act as amended (10 V.S.A., Chapter 47), the Vermont Water Pollution Control Permit Regulations as amended (Environmental Protection Rules, Chapter 13), the federal Clean Water Act as amended (33 U.S.C. § 1251 *et seq.*), and implementing federal regulations, Ryegate Fire District No. 2 (hereinafter referred to as the “Permittee”) is authorized by the Secretary of the Agency of Natural Resources (hereinafter referred to as the “Secretary”) to discharge from the Ryegate Fire District No. 2 Wastewater Treatment Facility (hereinafter referred to as the “WWTF”) to the Connecticut River in accordance with the following conditions.

This permit shall be effective on May 1, 2021

Peter Walke, Commissioner
Department of Environmental Conservation

By: 
Amy Polaczyk, Wastewater Program Manager
Watershed Management Division

Date: 4/13/2021

I. PERMIT SPECIAL CONDITIONS

A. EFFLUENT LIMITS AND MONITORING REQUIREMENTS

1. Discharge Point S/N 001, Lat. 44.20149, Long. -72.05928: During the term of this permit, the Permittee is authorized to discharge from outfall S/N 001 of the Ryegate Fire District No. 2 WWTF to the Connecticut River, an effluent for which the characteristics shall not exceed the values listed below:

Discharge Monitoring						
Constituent; Sampling Point and Sample Type	Season and Sampling Frequency	Limit 1	Limit 2	Limit 3	Limit 4	Limit 5
Flow; Effluent; Continuous	Year Round Daily	Monitor GPD Monthly Avg				
Flow; Annual Average; Calculated	12/01 - 12/31 Annual	10,300 GPD Annual Avg				
BOD, 5-Day; Effluent; 8 Hour Comp	Year Round Monthly	2.6 lbs/day Monthly Avg	3.9 lbs/day Weekly Avg	30 mg/l Monthly Avg	45 mg/l Weekly Avg	50 mg/l Daily Max
Chlorine, Total Residual; Effluent; Grab	Year Round Daily					1 mg/l Instant Max
E. Coli; Effluent; Grab	Year Round Monthly					77 #/100 ml Instant Max
Nitrite Plus Nitrate Total; Effluent; 8 Hour Comp	Year Round Monthly					Monitor mg/l Daily Max
Nitrogen, Kjeldahl Total; Effluent; 8 Hour Comp	Year Round Monthly					Monitor mg/l Daily Max
Nitrogen, Total; Effluent; Calculated	Year Round Monthly		Monitor lbs/day Daily Max			Monitor mg/l Daily Max
Nitrogen, Total; Annual Average; Calculated	12/01 - 12/31 Annual	1 lb/day Annual Avg				
pH; Effluent; Grab	Year Round Weekly			6.5 s.u. Min		8.5 s.u. Max
Phosphorus, Total; Effluent; 8 Hour Comp	Year Round Quarterly					Monitor mg/l Daily Max
Settleable Solids; Effluent; Grab	Year Round Daily					1 ml/l Instant Max
Suspended Solids, Total; Effluent; 8 Hour Comp	Year Round Monthly	2.6 lbs/day Monthly Avg	3.9 lbs/day Weekly Avg	30 mg/l Monthly Avg	45 mg/l Weekly Avg	50 mg/l Daily Max

2. Discharge Sampling Points

a. Influent sampling: The WWTF does not contain a headworks where representative samples can be collected; therefore, influent sampling is not required.

b. Effluent sampling: The Permittee shall collect samples past the v-notch weir post chlorination.

3. Discharge Special Conditions

- a.** The Permittee shall calculate monthly average flow by summing the daily effluent flow for each day in the given month and dividing the sum by the number of days of discharge in that month.
- b.** The Permittee shall operate the facility to meet the concentration limitations or pounds limitation, whichever is more restrictive.
- c.** Total nitrogen (TN) shall be reported as pounds TN and calculated as: $TN (mg/L) \times Total Daily Flow \times 8.34$; where, $TN (mg/L) = TKN (mg/L) + NOx (mg/L)$.
- d.** Composite samples for BOD₅, TSS, TP, TKN, and NO_x shall be taken during the hours of 6:00 AM to 6:00 PM, unless otherwise specified. Eight hours is the minimum period for the composite, 24 hours is the maximum for the composite.
- e.** The Permittee shall collect settleable solids samples between 10:00 AM and 2:00 PM or during the period of peak flow.
- f.** The Permittee shall collect the monthly E. coli sample at the same time and location as the daily Total Residual Chlorine sample. The Permittee shall collect samples between the hours of 6:00 AM and 6:00 PM.
- g.** If the effluent discharged for a period of 90 consecutive days exceeds 80 percent of the permitted flow limitation, the Permittee shall submit to the Secretary projected loadings and a program for maintaining satisfactory treatment levels.
- h.** The Permittee shall demonstrate the accuracy of the effluent flow measurement device weekly and report the results on the monthly report forms. The acceptable limit of error is $\pm 10\%$.
- i.** The effluent shall not cause visible discoloration of the receiving waters.
- j.** The discharge shall be free from substances in kind or quantity that settle to form harmful benthic deposits; float as foam, debris, scum or other visible substances; produce odor, color, taste or turbidity that is not naturally occurring and would render the surface water unsuitable for its designated uses; result in the dominance of nuisance species; or interfere with recreational activities; or which would cause a violation of the Vermont Water Quality Standards.
- k.** The discharge shall not result in toxic substances or chemical constituents in concentrations or combinations in the receiving water that injure or are inimical to plants, animals, humans or aquatic life; or persist in the environment or accumulate in aquatic organisms to levels that result in harmful concentrations in edible portions of fish, shellfish, other aquatic life, or wildlife that might consume aquatic life.
- l.** Any action on the part of the Secretary in reviewing, commenting upon or approving plans and specifications for the construction of WWTFs shall not relieve the Permittee from the responsibility to achieve effluent limitations set forth in this permit and shall not constitute a waiver of, or act of estoppel against any remedy available to the Secretary, the State of Vermont or the federal government for failure to meet any requirement set forth in this permit or imposed by state or federal law.

B. WASTE MANAGEMENT ZONE

In accordance with 10 V.S.A. § 1252, this permit hereby establishes a waste management zone that extends from the outfall of the WWTF in the Connecticut River downstream 135 feet.

C. EMERGENCY POWER FAILURE PLAN

The current Emergency Power Failure Plan for the facility was submitted on February 6, 2015.

1. The Permittee shall revise the Emergency Power Failure Plan and indicate in writing to the Secretary that in the event the primary source of electric power to the WWTF (including pump stations) fails, the Permittee shall either provide an alternative source of power for the operation of its WWTF, or demonstrate that the treatment facility has the capacity to store the wastewater volume that would be generated over the duration of the longest power failure that would have affected the facility in the last five years, excluding catastrophic events.

The alternative power supply, whether from a generating unit located at the WWTF or purchased from an independent source of electricity, must be separate from the existing power source used to operate the WWTF. If a separate unit located at the WWTF is to be used, the Permittee shall certify in writing to the Secretary when the unit is completed and prepared to generate power.

2. The determination of treatment system storage capacity shall be submitted to the Secretary upon completion.

3. The Permittee shall report according to the following table:

Due Date	Event Description
8/1/2021	The Permittee shall submit a revised Emergency Action Power Failure Plan.

D. ENGINEERING EVALUATION AND REPORT/ASSET MANAGEMENT PLAN

1. The Permittee shall conduct an in-depth engineering inspection/evaluation of the wastewater treatment facility and shall submit a written report of the results to the Secretary. The evaluation can be combined with or part of an Asset Management Plan provided the Plan includes an inspection of the treatment facility and collection system. The engineering inspection and report shall be conducted and prepared in accordance with the following conditions:

a. A professional engineer with experience in the design of municipal wastewater treatment facilities shall be hired to perform an in-depth inspection of the wastewater treatment facility, pump stations, collection system, and manholes. At the treatment facility, all components which are critical to the treatment process or which could adversely affect effluent quality in the event of their failure shall be evaluated. In the pump stations, all components critical to the proper conveyance of sewage, the prevention of sewage bypass, and the supporting appurtenances shall be evaluated.

b. The inspection is to be comprised of visual observation of equipment operability and condition as well as a review of maintenance records to determine recurring equipment problems and to estimate future life. Calibration checks shall be performed on all flow meters.

c. The resulting written inspection report shall document the components inspected, their condition, and include recommendations for all currently needed repairs and replacements and the need for on-site spare parts. The

projected date of replacement or major rehabilitation of each component and the anticipated cost shall be estimated. The Permittee shall determine how the future anticipated costs will be met and advise the Secretary in a letter transmitted with the written inspection report.

d. Should the Secretary determine that certain critical components are in need of repair or replacement due to the results of the inspection report, this permit may be reopened and amended to include an implementation schedule for repair or replacement of those components.

2. The Permittee shall report according to the following table:

Due Date	Event Description
12/31/2024	The Permittee shall submit an engineering evaluation prepared by a professional engineer.

E. OPERATION MANAGEMENT AND EMERGENCY RESPONSE PLAN (OMERP)

The current Operation Management and Emergency Response Plan (OMERP) for the treatment facility, sewage pumping stations, and sewer line stream crossings was submitted on September 9, 2009 and it was approved by the Secretary on September 10, 2009. The current OMERP for the sewage collection system was submitted on July 1, 2010 and was approved by the Secretary on August 6, 2010.

1. The Permittee shall prepare and submit to the Secretary for review and approval, an updated Operation Management and Emergency Response Plan for the treatment facility, sewage pumping stations, sewer line stream crossings, and sewage collection system. The Plan shall be immediately implemented upon approval by the Secretary. The Permittee shall revise these plans upon the Secretary's request or on its own motion to reflect equipment or operational changes. This plan shall comply with the provisions of 10 V.S.A. § 1278, which require:

a. Identification of those elements of the facility, including collection systems that are determined to be prone to failure based on installation, age, design, or other relevant factors.

b. Identification of those elements of the facility identified under subdivision (a) of this subsection which, if one or more failed, would result in a significant release of untreated or partially treated sewage to surface waters of the State.

c. The elements identified in subdivision (b) of this subsection shall be inspected in accordance with a schedule approved by the Secretary.

d. An emergency contingency plan to reduce the volume of a detected spill and to mitigate the effect of such a spill on public health and the environment.

2. The Permittee shall sample and report according to the following table:

Due Date	Event Description
6/1/2022	The Permittee shall submit a revised OMERP.

F. TOTAL NITROGEN

1. Optimization Plan

The Permittee shall continue to implement the Nitrogen Optimization Plan (NOP) approved by the Secretary on January 5, 2016. The Permittee shall implement the recommended operational changes to maintain the existing mass discharge loading of Total Nitrogen (TN). The baseline annual average daily TN load discharge from this facility is estimated to be **approximately 1 lb/day**.

2. Plan Evaluation

The Permittee shall continue to implement the Nitrogen Plan Evaluation submitted on January 24, 2020. The plan shall be revised at the Secretary's request. Actions to implement the approved nitrogen removal optimization practices, if any, shall be initiated within 90 days of the Secretary's approval.

3. Reporting

Annually, the Permittee shall submit a report to the Secretary as an attachment to the **December** Discharge Monitoring Report (DMR) form WR-43 that documents the annual average TN discharged (in pounds per day) from the facility, summarizes nitrogen removal optimization and efficiencies, and tracks trends relative to the previous year.

TN = Total Kjeldahl Nitrogen (TKN) + Nitrate/Nitrite (NO_x)

TN pounds per day, annual average, shall be calculated as follows:

1. Calculate the pounds of TN discharged on each sample date:

TN (lbs/day) = TN (mg/L) × volume discharged on day of sample (million gallons) × 8.34

2. Calculate the TN, pounds per day, annual average:

TN (lbs/day, annual average) = (Sum of all TN [lbs/day]) / (count of TN samples)

The Permittee shall sample and report according to the following table:

Due Date	Event Description
1/15/2022	The Permittee shall submit an annual TN report that documents TN trends and optimization techniques for the previous year.
1/15/2023	The Permittee shall submit an annual TN report that documents TN trends and optimization techniques for the previous year.
1/15/2024	The Permittee shall submit an annual TN report that documents TN trends and optimization techniques for the previous year.
1/15/2025	The Permittee shall submit an annual TN report that documents TN trends and optimization techniques for the previous year.
1/15/2026	The Permittee shall submit an annual TN report that documents TN trends and optimization techniques for the previous year.

G. QUALITY ASSURANCE REPORT/PROFICIENCY TESTING

1. In accordance with 10 V.S.A. § 1263.d.2, the Secretary may require a laboratory quality assurance sample program to ensure qualification of laboratory analysts. For purposes of demonstrating compliance with the requirements of this permit regarding adequate laboratory controls and appropriate quality assurance procedures, the Permittee shall conduct and pass an annual laboratory proficiency test, via an accredited laboratory, for the analysis of all pollutant parameters performed within their facility laboratory and reported as required by this permit. This can be carried out as part of an EPA DMR-QA study.
2. In the event this permit is administratively continued pursuant to 3 V.S.A. § 814, the Permittee shall continue to complete annual proficiency tests and report by December 31 each year.
3. The Permittee shall report on quality assurance according to the following table:

Due Date	Event Description
12/31/2022	The Permittee shall submit passing proficiency test results.
12/31/2023	The Permittee shall submit passing proficiency test results.
12/31/2024	The Permittee shall submit passing proficiency test results.
12/31/2025	The Permittee shall submit passing proficiency test results.

II. GENERAL CONDITIONS

A. GENERAL REQUIREMENTS

1. Authority

This permit is issued under authority of 10 V.S.A. §§ 1258 and 1259 of the Vermont Water Pollution Control Act, the Vermont Water Pollution Control Permit Regulation (Environmental Protection Rule, Chapter 13), and § 402 of the Clean Water Act, as amended.

2. Operating Fees

This discharge is subject to operating fees as required by 3 V.S.A. § 2822.

3. Duty to Comply

The Permittee shall comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application. Except as provided in Bypass (Condition II.B.5.) and “Emergency Pollution Permits” (Condition II.B.8.), nothing in this permit shall be construed to relieve the Permittee from civil or criminal penalties for noncompliance.

4. Civil and Criminal Liability

Civil and criminal penalties for non-compliance are provided for in 40 C.F.R. § 122.41(a)(2)-(3) and 10 V.S.A. Chapters 47, 201, and 211. As of the effective date of this permit, the Vermont statutory penalties, which are subject to change, are as follows:

a. Pursuant to 10 V.S.A. Chapter 47, a civil penalty not to exceed \$10,000.00 a day for each day of violation.

b. Pursuant to 10 V.S.A. Chapter 47, a fine not to exceed \$25,000.00 or imprisonment for not more than six months, or both.

c. Pursuant to 10 V.S.A. Chapter 47, any person who knowingly makes any false statement, representation or certification in any application, record, report, plan, or other document filed or required to be maintained by this permit, or who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained by this permit, shall upon conviction, be punished by a fine of not more than \$10,000.00 or by imprisonment for not more than six months, or by both.

d. Pursuant to 10 V.S.A. Chapter 201, a penalty of not more than \$42,500.00 for each determination of a separate violation. In addition, if the Secretary determines that a violation is continuing, the Secretary may assess a penalty of not more than \$17,000.00 for each day the violation continues. The maximum amount of penalty assessed under this provision shall not exceed \$170,000.00.

e. Pursuant to 10 V.S.A. Chapter 211, a civil penalty of not more than \$85,000.00 for each violation. In addition, in the case of a continuing violation, a penalty of not more than \$42,500.00 may be imposed for each day the violation continues.

5. Reopener Clause

In accordance with 40 C.F.R. § 122.44(c), this permit may be reopened and modified during the life of the permit to incorporate any applicable standard for sewage sludge use or disposal promulgated under section 405(d) of the Clean Water Act. The Secretary may promptly modify or revoke and reissue this permit if the

standard for sewage sludge use or disposal is more stringent than any requirements for sludge use or disposal in the permit, or controls a pollutant or practice not limited in the permit.

6. Permit Modification, Suspension, and Revocation

After notice and opportunity for a hearing, this permit may be modified, suspended, or revoked in whole or in part during its term for cause including the following:

- a.** Violation of any terms or conditions of this permit;
- b.** Obtaining this permit by misrepresentation or failure to disclose fully all relevant facts;
- c.** Reallocation of WLA under the LC TMDL;
- d.** Development of an integrated WWTF and stormwater runoff NPDES permit; or
- e.** A change in any condition that requires either a temporary or permanent reduction or elimination of the permitted discharge.
- f.** The filing of a request by the Permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance shall not stay any permit condition.

7. Toxic Effluent Standards

If a toxic effluent standard or prohibition (including any schedule of compliance specified in such effluent standard or prohibition) is established under § 307(a) of the Clean Water Act for a toxic pollutant which is present in the Permittee's discharge and such standard or prohibition is more stringent than any limitation upon such pollutant in this permit, then this permit shall be modified or revoked and reissued, pursuant to Condition II.A.6. of this permit, in accordance with the toxic effluent standard or prohibition and the Permittee so notified.

8. Other Materials

Other materials ordinarily produced or used in the operation of this facility, which have been specifically identified in the application, may be discharged at the maximum frequency and maximum level identified in the application, provided:

- a.** They are not:

- (i)** Designated as toxic or hazardous under provisions of Sections 307 and 311, respectively, of the Clean Water Act, or

- (ii)** Known to be hazardous or toxic by the Permittee, except that such materials indicated in (i) and (ii) above may be discharged in certain limited amounts with the written approval of, and under special conditions established by, the Secretary or their designated representative, if the substances will not pose any imminent hazard to the public health or safety;

- b.** The discharge of such materials will not violate the Vermont Water Quality Standards; and

- c.** The Permittee is not notified by the Secretary to eliminate or reduce the quantity of such materials entering the water.

9. Removed Substances

Collected screenings, sludges, and other solids removed in the course of treatment and control of wastewaters shall be stored, treated, and disposed of in accordance with 10 V.S.A. Chapter 159 and with the terms and conditions of any certification, interim or final, transitional operation authorization, or order issued pursuant to 10 V.S.A. Chapter 159 that is in effect on the effective date of this permit or is issued during the term of this permit.

10. Severability

The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit, shall not be affected thereby.

11. Duty to Provide Information

The Permittee shall provide to the Secretary, within a reasonable time, any information which the Secretary may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The Permittee shall also furnish to the Secretary upon request, copies of records required to be kept by this permit.

12. Other Information

If the Permittee becomes aware that it failed to submit any relevant facts in a permit application or submitted incorrect information in a permit application or in any report to the Secretary, it shall promptly submit such facts or information.

13. Oil and Hazardous Substance Liability

Nothing in this permit shall be construed to preclude the institution of legal action or relieve the Permittee from any responsibilities, liabilities, or penalties to which the Permittee is or may be subject under 10 V.S.A. § 1281.

14. Confidentiality

Pursuant to 10 V.S.A. § 1259(b):

Any records or information obtained under this permit program that constitutes trade secrets under 1 V.S.A. § 317(c)(9) shall be kept confidential, except that such records or information may be disclosed to authorized representatives of the State and the United States when relevant to any proceedings under 10 V.S.A. Chapter 47.

Claims for confidentiality for the following information will be denied:

- a. The name and address of any permit applicant or Permittee.
- b. Permit applications, permits, and effluent data.
- c. Information required by application forms, including information submitted on the forms themselves and any attachments used to supply information required by the forms.

15. Navigable Waters

This permit does not authorize or approve the construction of any onshore or offshore physical structures or facilities or the undertaking of any work in any navigable waters.

16. Property Rights

Issuance of this permit does not convey any property rights in either real or personal property, or any exclusive privileges, nor does it authorize any injury to private property or any invasion of personal rights, nor any infringement of federal, state, or local laws or regulations.

17. Duty to Reapply

If the Permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the Permittee must apply for and obtain a new permit. The Permittee shall submit a new application at least 180 days before the expiration date of the existing permit unless permission for a later date has been granted by the Director. The Director shall not grant permission for applications to be submitted later than the expiration date of the existing permit.

18. Other State Laws

Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the Permittee from any responsibilities, liabilities, or penalties established pursuant to any applicable state law or regulation under authority preserved by Section 510 of the Clean Water Act.

B. OPERATION AND MAINTENANCE OF POLLUTION CONTROLS

1. Proper Operation and Maintenance

All waste collection, control, treatment, and disposal facilities shall be operated in a manner consistent with the following:

- a.** The Permittee shall at all times properly operate and maintain in good working order all facilities and systems of treatment and control (and related appurtenances) installed or used by the Permittee to achieve compliance with the terms and conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems which are installed by the Permittee only when the operation is necessary to achieve compliance with the conditions of this permit.
- b.** The Permittee shall provide an adequate operating staff, consistent with the Operator Rule (Environmental Protection Rule, Chapter 4), which is duly qualified to carry out the operation, maintenance, and testing functions required to ensure compliance with the conditions of this permit; and
- c.** The operation and maintenance of the WWTF shall be performed only by a person or persons holding a valid license to engage in the practice of pollution abatement facility operation.

2. Need to Halt or Reduce Activity not a Defense

It shall not be a defense for the Permittee in an enforcement action that it would have been necessary to halt or reduce the activity in order to maintain compliance with the conditions of this permit.

3. Duty to Mitigate

The Permittee shall take all reasonable steps to minimize or prevent any discharge or sludge use or disposal in violation of this permit which has a reasonable likelihood of adversely affecting human health or the environment. The Permittee shall also take all reasonable steps to minimize or prevent any adverse impact to waters of the State, the environment, or human health resulting from non-compliance with any condition

specified in this permit, including accelerated or additional monitoring as necessary to determine the nature and impact of the non-complying discharge.

4. Dry Weather Flows

Dry weather flows of untreated municipal wastewater from any sanitary or combined sewers are not authorized by this permit and are specifically prohibited by state and federal laws and regulations. If for any reason there is a discharge to waters of the State of dry weather flows of untreated municipal wastewater from any sanitary or combined sewer, the operator of the WWTF or the operator's delegate shall comply with the notice requirements outlined in this permit.

5. Bypass

The bypass of facilities (including pump stations) is prohibited, except where authorized under the terms and conditions of an Emergency Pollution Permit issued pursuant to 10 V.S.A. § 1268.

In addition to § 1268 findings, such bypass must meet the following three conditions:

- a.** Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage;
- b.** There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance; and
- c.** The Permittee submitted notices as required under 40 C.F.R. § 122.41(m)(3):
 - (i)** Anticipated bypass. If the Permittee knows in advance of the need for a bypass, it shall submit prior notice, if possible, at least ten days before the date of the bypass.
 - (ii)** Unanticipated bypass. The Permittee shall submit notice of an unanticipated bypass as required in Condition II.D.3. (24-hour notice).

6. Upset

- a.** Effect of an upset. An upset constitutes an affirmative defense to an action brought for noncompliance with such technology-based permit effluent limitations if the requirements of Condition II.B.6.b. of this section are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review.
- b.** Conditions necessary for a demonstration of upset. A Permittee who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence that:
 - (i)** An upset occurred and that the Permittee can identify the cause(s) of the upset;
 - (ii)** The permitted facility was at the time being properly operated; and
 - (iii)** The Permittee submitted notice of the upset as required in Condition II.D.3. (24-hour notice).
 - (iv)** The Permittee complied with any remedial measures as required in Condition II.B.3.

c. Burden of proof. In any enforcement proceeding the Permittee seeking to establish the occurrence of an upset has the burden of proof.

7. Sewer Ordinance

The Permittee shall have in effect a sewer use ordinance acceptable to the Secretary which, at a minimum, shall:

a. prohibit the introduction by any person into the Permittee's sewerage system or WWTF of any pollutant which:

(i) Is a toxic pollutant in toxic amounts as defined in standards issued from time to time under § 307(a) of the Clean Water Act;

(ii) Creates a fire or explosion hazard in the Permittee's treatment works;

(iii) Causes corrosive structural damage to the Permittee's treatment works, including all wastes with a pH lower than 5.0;

(iv) Contains solid or viscous substances in amounts which would cause obstruction to the flow in sewers or other interference with proper operation of the Permittee's treatment works; or

(v) In the case of a major contributing industry, as defined in this permit, contains an incompatible pollutant, as defined in this permit, in an amount or concentration in excess of that allowed under standards or guidelines issued from time to time pursuant to Sections 304, 306, and/or 307 of the Clean Water Act.

b. Require 45 days prior notification to the Permittee by any person or persons of a:

(i) Proposed substantial change in volume or character of pollutants over that being discharged into the Permittee's treatment works at the time of issuance of this permit;

(ii) Proposed new discharge into the Permittee's treatment works of pollutants from any source which would be a new source as defined in § 306 of the Clean Water Act if such source were discharging pollutants; or

(iii) Proposed new discharge into the Permittee's treatment works of pollutants from any source which would be subject to § 301 of the Clean Water Act if it were discharging such pollutants.

c. Require any industry discharging into the Permittee's treatment works to perform such monitoring of its discharge as the Permittee may reasonably require, including the installation, use, and maintenance of monitoring equipment and monitoring methods, keeping records of the results of such monitoring, and reporting the results of such monitoring to the Permittee. Such records shall be made available by the Permittee to the Secretary upon request.

d. Authorize the Permittee's authorized representatives to enter into, upon, or through the premises of any industry discharging into the Permittee's treatment works to have access to and copy any records, to inspect any monitoring equipment or method required by this permit, and to sample any discharge into the Permittee's treatment works.

8. Emergency Pollution Permits

a. Maintenance activities, or emergencies resulting from equipment failure or malfunction, including power outages, which result in an effluent which exceeds the effluent limitations specified herein, shall be considered a violation of the conditions of this permit, unless the Permittee's discharge is covered under an emergency

pollution permit under the provisions of 10 V.S.A. § 1268. The Permittee shall notify the Secretary of the emergency situation by the next working day, unless notice is required sooner under Condition II.D.2.

10 V.S.A. § 1268 reads as follows:

When a discharge permit holder finds that pollution abatement facilities require repairs, replacement, or other corrective action in order for them to continue to meet standards specified in the permit, the holder may apply in the manner specified by the Secretary for an emergency pollution permit for a term sufficient to effect repairs, replacements or other corrective action. The Secretary shall proceed in accordance with Chapter 170 of this title. No emergency pollution permit shall be issued unless the applicant certifies and the Secretary finds that:

- (i) there is no present, reasonable alternative means of disposing of the waste other than by discharging it into the waters of the State during the limited period of time of the emergency;
- (ii) the denial of an emergency pollution permit would work an extreme hardship upon the applicant;
- (iii) the granting of an emergency pollution permit will result in some public benefit;
- (iv) the discharge will not be unreasonably harmful to the quality of the receiving waters; and
- (v) the cause or reason for the emergency is not due to willful or intended acts or omissions of the applicant.

b. Application shall be made to the Secretary at the following address: Agency of Natural Resources, Department of Environmental Conservation, One National Life Drive, Davis 3, Montpelier VT 05620-3522.

C. MONITORING REQUIREMENTS

1. Monitoring and Records

- a.** Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity.
- b.** Except for records of monitoring information required by this permit related to the Permittee's sewage sludge use and disposal activities, which shall be retained for a period of at least 5 years (or longer as required by 40 C.F.R. § 503), the Permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit, for a period of at least 3 years from the date of the sample, measurement, report or application. This period shall be extended during the course of unresolved litigation and may be extended by request of the Secretary at any time.
- c.** Records of monitoring information shall include:
 - (i) The date, exact place, and time of sampling or measurements;
 - (ii) The individual(s) who performed the sampling or measurements;
 - (iii) The date(s) analyses were performed;
 - (iv) The individual(s) who performed the analyses;
 - (v) The analytical techniques or methods used; and

- (vi) The results of such analyses.
 - (vii) The records of monitoring activities and results, including all instrumentation and calibration and maintenance records;
 - (viii) The original calculation and data bench sheets of the operator who performed analysis of the influent or effluent pursuant to requirements of this permit; and
 - (ix) For analyses performed by contract laboratories:
 - (a) The detection level reported by the laboratory for each sample; and
 - (b) The laboratory analytical report including documentation of the QA/QC and analytical procedures.
 - (x) When “non-detects” are recorded, the method detection limit shall be reported and used in calculating any time-period averaging for reporting on DMRs.
- d. Monitoring must be conducted according to test procedures approved under 40 C.F.R. § 136 unless another method is required under 40 C.F.R. Subchapters N or O.

2. Quality Control

- a. The Permittee shall calibrate and perform maintenance procedures on all monitoring and analytical instrumentation at regular intervals to ensure accuracy of measurements or shall ensure that both activities will be conducted.
- b. The Permittee shall keep records of these activities and shall provide such records upon request of the Secretary.

3. Right of Entry

The Permittee shall allow the Secretary, or an authorized representative (including an authorized contractor acting as a representative of the Administrator), upon presentation of credentials and other documents as may be required by law, to:

- a. To enter upon the Permittee’s premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;
- b. To have access to and copy, at reasonable times, any records required to be kept under the terms and conditions of this permit;
- c. To inspect, at reasonable times, any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
- d. To sample or monitor, at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the Clean Water Act, any substances or parameters at any location.

D. REPORTING REQUIREMENTS

1. Facility Modification / Change in Discharge

All discharges authorized herein shall be consistent with the terms and conditions of this permit. The discharge of any pollutant more frequently than, or at a level in excess of, that identified and authorized by this permit shall constitute a violation of the terms and conditions of this permit. Such a violation may result in the

imposition of civil and/or criminal penalties pursuant to 10 V.S.A. Chapters 47, 201, and/or 211. Any anticipated facility alterations or expansions or process modifications which will result in new, different, or increased discharges of any pollutants must be reported by submission of a new permit application or, if such changes will not violate the effluent limitations specified in this permit, by advance notice to the Secretary of such changes. This notification applies to pollutants which are subject neither to effluent limitations in this permit, nor to notification requirements for toxic pollutants under 40 C.F.R. § 122.42(a)(1). Following such notice, the permit may be modified, pursuant to Condition II.A.6. of this permit, to specify and limit any pollutants not previously limited.

2. Change in Introduction of Pollutants to WWTF

a. The Permittee, within 30 days of the date on which the Permittee is notified of such discharge, shall provide notice to the Secretary of the following:

- (i)** Any new introduction of pollutants into the treatment works from a source which would be a new source as defined in § 306 of the Clean Water Act if such source were discharging pollutants;
- (ii)** Except for such categories and classes of point sources or discharges specified by the Secretary, any new introduction of pollutants into the treatment works from a source which would be subject to § 301 of the Clean Water Act if such source were discharging pollutants; and
- (iii)** Any substantial change in volume or character of pollutants being introduced into the treatment works by a source introducing pollutants into such works at the time of issuance of the permit.

b. The notice shall include:

- (i)** The quality and quantity of the discharge to be introduced into the system, and
- (ii)** The anticipated impact of such change in the quality or quantity of the effluent to be discharged from the WWTF.

3. Noncompliance Notification

a. The Permittee shall give advance notice to the Secretary of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements.

b. In the event the Permittee is unable to comply with any of the conditions of this permit due, among other reasons, to:

- (i)** Breakdown or maintenance of waste treatment equipment (biological and physical-chemical systems including all pipes, transfer pumps, compressors, collection ponds or tanks for the segregation of treated or untreated wastes, ion exchange columns, or carbon absorption units);
- (ii)** Accidents caused by human error or negligence;
- (iii)** Any unanticipated bypass or upset which exceeds any effluent limitation in the permit;
- (iv)** Violation of a maximum day discharge limitation for any of the pollutants listed by the Secretary in this permit; or
- (v)** Other causes such as acts of nature,

the Permittee shall provide notice as specified in subdivisions c and d of this subsection.

c. Pursuant to 10 V.S.A. § 1295, notice for “untreated discharges,” as defined in section III.

(i) Public notice. For “untreated discharges” an operator of the WWTF or the operator’s delegate shall as soon as possible, but no longer than one hour from discovery of an untreated discharge from the WWTF, post on a publicly accessible electronic network, mobile application, or other electronic media designated by the Secretary an alert informing the public of the untreated discharge and its location, except that if the operator or his or her delegate does not have telephone or Internet service at the location where he or she is working to control or stop the untreated discharge, the operator or his or her delegate may delay posting the alert until the time that the untreated discharge is controlled or stopped, provided that the alert shall be posted no later than four hours from discovery of the untreated discharge.

(ii) Secretary notification. For “untreated discharges” an operator of the WWTF shall within 12 hours from discovery of an untreated discharge from the WWTF notify the Secretary and the local health officer of the municipality where the facility is located of the untreated discharge. The operator shall notify the Secretary through use of the Department of Environmental Conservation’s online event reporting system. If, for any reason, the online event reporting system is not operable, the operator shall notify the Secretary via telephone or e-mail. The notification shall include:

(a) The specific location of each untreated discharge, including the body of water affected. For combined sewer overflows, the specific location of each untreated discharge means each outfall that has discharges during the wet weather storm event.

(b) Except for discharges from the WWTF to a separate storm sewer system, the date and approximate time the untreated discharge began.

(c) The date and approximate time the untreated discharge ended. If the untreated discharge is still ongoing at the time of reporting, the entity reporting the untreated discharge shall amend the report with the date and approximate time the untreated discharge ended within three business days of the untreated discharge ending.

(d) Except for discharges from the WWTF to a separate storm sewer system, the approximate total volume of sewage and, if applicable, stormwater that was released. If the approximate total volume is unknown at the time of reporting, the entity reporting the untreated discharge shall amend the report with the approximate total volume within three business days.

(e) The cause of the untreated discharge and a brief description of the noncompliance, including the type of event and the type of sewer structure involved.

(f) The person reporting the untreated discharge.

d. For any non-compliance not covered under Condition II.D.3.c of this permit, an operator of the WWTF or the operator’s delegate shall notify the Secretary within 24 hours of becoming aware of such condition and shall provide the Secretary with the following information, in writing, within five days of becoming aware of such condition:

(i) Cause of non-compliance;

(ii) A description of the non-complying discharge including its impact upon the receiving water;

(iii) Anticipated time the condition of non-compliance is expected to continue or, if such condition has been corrected, the duration of the period of non-compliance;

(iv) Steps taken by the Permittee to reduce and eliminate the non-complying discharge; and

(v) Steps to be taken by the Permittee to prevent recurrence of the condition of non-compliance.

e. For noncompliance events related to combined sewer overflows, sanitary sewer overflows, or bypass events, these reports must include the data described above (with the exception of time of discovery) as well as the type of event (combined sewer overflows, sanitary sewer overflows, or bypass events), type of sewer overflow structure (e.g., manhole, combined sewer overflow outfall), discharge volumes untreated by the treatment works treating domestic sewage, types of human health and environmental impacts of the sewer overflow event, and whether the noncompliance was related to wet weather.

4. Planned Changes

a. The Permittee shall give notice to the Secretary as soon as possible of any planned physical alterations or additions to the permitted facility. Notice is required only when:

(i) The alteration or addition to a permitted facility may meet one of the criteria for determining whether a facility is a new source in 40 C.F.R. § 122.29(b); or

(ii) The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants which are subject neither to effluent limitations in the permit, nor to notification requirements at 40 C.F.R. § 122.42(a)(1).

(iii) The alteration or addition results in a significant change in the permittee's sludge use or disposal practices, and such alteration, addition, or change may justify the application of permit conditions that are different from or absent in the existing permit, including notification of additional use or disposal sites not reported during the permit application process or not reported pursuant to an approved land application plan.

5. Transfer of Ownership or Control

This permit is not transferable without prior written approval of the Secretary. All application and operating fees must be paid in full prior to transfer of this permit. In the event of any change in control or ownership of facilities from which the authorized discharges emanate, the Permittee shall provide a copy of this permit to the succeeding owner or controller and shall send written notification of the change in ownership or control to the Secretary **at least 30 days in advance of the proposed transfer date**. The notice to the Secretary shall include a written agreement between the existing and new Permittees containing a specific date for transfer of permit responsibility, coverage, and liability between them. The Permittee shall also inform the prospective owner or operator of their responsibility to make an application for transfer of this permit.

This request for transfer application must include as a minimum:

a. A properly completed application form provided by the Secretary and the applicable processing fee.

b. A written statement from the prospective owner or operator certifying:

(i) The conditions of the operation that contribute to, or affect, the discharge will not be materially different under the new ownership;

(ii) The prospective owner or operator has read and is familiar with the terms of the permit and agrees to comply with all terms and conditions of the permit; and

(iii) The prospective owner or operator has adequate funding to operate and maintain the treatment system and remain in compliance with the terms and conditions of the permit.

c. The date of the sale or transfer.

The Secretary may require additional information dependent upon the current status of the facility operation, maintenance, and permit compliance.

6. Monthly Reporting

- a.** The Permittee is required to submit monthly reports of monitoring results and operational parameters on Discharge Monitoring Report (DMR) form WR-43 or through an electronic reporting system made available by the Secretary. Reports are due on the 15th day of each month, beginning with the month following the effective date of this permit.
- b.** Unless waived by the Secretary, the Permittee shall electronically submit its DMRs via Vermont's online electronic reporting system. The Permittee shall electronically submit additional compliance monitoring data and reports specified by the Secretary. When the Permittee submits DMRs using an electronic system designated by the Secretary, which requires attachment of scanned DMRs in PDF format, it is not required to submit hard copies of DMRs. The electronic submittals are submitted through the State of Vermont Agency of Natural Resources' Online Services Portal, or its replacement.
- c.** If, in any reporting period, there has been no discharge, the Permittee must submit that information by the report due date.

7. Signature Requirements

- a.** All reports shall be signed:

- (i)** For a corporation. By a responsible corporate officer or a duly authorized representative of that person. For the purpose of this section, a responsible corporate officer means: (1) A president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy- or decision-making functions for the corporation, or (2) the manager of one or more manufacturing, production, or operating facilities, provided, the manager is authorized to make management decisions which govern the operation of the regulated facility including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures;

- (ii)** For a partnership or sole proprietorship. By a general partner or the proprietor, respectively; or

- (iii)** For a municipality, state, or other public agency. By either a principal executive officer or ranking elected official, or a duly authorized representative of that person.

- b.** For the purposes of subdivision (d) of this subsection, a person is a duly authorized representative only if:

- (i)** The authorization is made in writing by a person described in subdivision (d) of this subsection;

- (ii)** The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity, or an individual or position having overall responsibility for environmental matters for the company; and

- (iii)** The written authorization is submitted to the Secretary.

c. Changes to authorization. If an authorization under subdivision (e) of this subsection is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of subdivision (e) of this subsection must be submitted to the Secretary prior to or together with any reports, information, or applications to be signed by an authorized representative.

d. Certification. Any person signing a document under subdivisions (d) or (e) of this subsection shall make the following certification:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

8. Additional Monitoring

If the Permittee monitors any pollutant at the location(s) designated herein more frequently than required by this permit, using approved analytical methods as specified above, the results of such monitoring shall be included in the calculation and reporting of the values required in the DMR form WR-43. Such increased frequency shall also be indicated.

III. DEFINITIONS

For purposes of this permit, the following definitions shall apply.

Agency – means the Vermont Agency of Natural Resources.

Annual Average – means the highest allowable average of daily discharges calculated as the sum of all daily discharges (mg/L, lbs or gallons) measured during a calendar year divided by the number of daily discharges measured during that year.

Average – means the arithmetic means of values taken at the frequency required for each parameter over the specified period.

Bypass – means the intentional diversion of waste streams from any portion of the treatment facility.

The Clean Water Act – means the federal Clean Water Act, as amended (33 U.S.C. § 1251, et seq.).

Composite Sample – means a sample consisting of a minimum of one grab sample per hour collected during a 24-hour period (or lesser period as specified in the section on Monitoring and Reporting) and combined proportionally to flow over that same time period.

Daily Discharge – means the discharge of a pollutant measured during a calendar day or any 24-hour period that reasonably represents the calendar day for purposes of sampling.

For pollutants with limitations expressed in pounds the daily discharge is calculated as the total pounds of pollutants discharged over the day.

For pollutants with limitations expressed in mg/L the daily discharge is calculated as the average measurement of the pollutant over the day.

Discharge – means the placing, depositing, or emission of any wastes, directly or indirectly, into an injection well or into the waters of the State.

Grab Sample – means an individual sample collected in a period of less than 15 minutes.

Incompatible Substance – means any waste being discharged into the treatment works which interferes with, passes through without treatment, or is otherwise incompatible with said works or would have a substantial adverse effect on the works or on water quality. This includes all pollutants required to be regulated under the Clean Water Act.

Instantaneous Maximum – means a value not to be exceeded in any grab sample.

Major Contributing Industry – means one that: (1) has a flow of 50,000 gallons or more per average work day; (2) has a flow greater than five percent of the flow carried by the municipal system receiving the waste; (3) has in its wastes a toxic pollutant in toxic amounts as defined in standards issued under § 307(a) of the Clean Water Act; or (4) has a significant impact, either singly or in combination with other contributing industries, on a treatment works or on the quality of effluent from that treatment works.

Maximum Day or Maximum Daily Discharge Limitation – means the highest allowable “daily discharge” (mg/L, lbs or gallons).

Mean – means the arithmetic mean.

Monthly Average or Average Monthly Discharge Limitation – means the highest allowable average of daily discharges (mg/L, lbs or gallons) over a calendar month, calculated as the sum of all daily discharges (mg/L, lbs or gallons) measured during a calendar month divided by the number of daily discharges measured during that month.

NPDES – means the National Pollutant Discharge Elimination System.

Secretary – means the Secretary of the Agency of Natural Resources or the Secretary’s duly authorized representative.

Septage – means the liquid and solid material pumped from a septic tank, cesspool, or similar domestic sewage treatment system, or a holding tank when the system is cleaned or maintained.

Untreated Discharge – means (1) combined sewer overflows from a WWTF; (2) overflows from sanitary sewers and combined sewer systems that are part of a WWTF during dry weather flows, which result in a discharge to waters of the State; (3) upsets or bypasses around or within a WWTF during dry or wet weather conditions that are due to factors unrelated to a wet weather storm event and that result in a discharge of sewage that has not been fully treated to waters of the State; and (4) discharges from a WWTF to separate storm sewer systems.

Waste – means effluent, sewage or any substance or material, liquid, gaseous, solid, or radioactive, including heated liquids, whether or not harmful or deleterious to waters.

Waste Management Zone – means a specific reach of Class B waters designated by a permit to accept the discharge of properly treated wastes that prior to treatment contained organisms pathogenic to human beings. Throughout the receiving waters, water quality criteria must be achieved but increased health risks exist in a waste management zone due to the authorized discharge.

Waters – means all rivers, streams, creeks, brooks, reservoirs, ponds, lakes, springs, and all bodies of surface waters, artificial or natural, which are contained within, flow through, or border upon the State or any portion of it.

Weekly Average or Average Weekly Discharge Limitation – means the highest allowable average of daily discharges (mg/L, lbs or gallons) over a calendar week, calculated as the sum of all daily discharges (mg/L, lbs or gallons) measured during a calendar week divided by the number of daily discharges measured during that week.

Whole Effluent Toxicity (WET) – means the aggregate toxic effect of an effluent measured directly by a toxicity test.

Wastewater Treatment Facility (WWTF) – means a treatment plant, collection system, pump station, and attendant facilities permitted by the Secretary for the purpose of treating domestic, commercial, or industrial wastewater.

Attachment A.

Discharge ID	Discharge Activity	Discharge Status	Receiving Water	Latitude	Longitude
001	Sanitary Waste Outfall	A	Connecticut River	44.20149	-72.05928

AGENCY OF NATURAL RESOURCES
DEPARTMENT OF ENVIRONMENTAL CONSERVATION
WATERSHED MANAGEMENT DIVISION
ONE NATIONAL LIFE DRIVE, DAVIS BUILDING, 3rd FLOOR
MONTPELIER, VT 05620-3522

FACT SHEET FOR PERMIT
April 2021

**NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT TO
DISCHARGE TO WATERS OF THE STATE**

PERMIT NO: 3-1382
PIN: SJ95-0023
NPDES NO: VT0100951

NAME AND ADDRESS OF APPLICANT:

Ryegate Fire District No. 2
PO Box 48
East Ryegate, VT 05042

NAME AND ADDRESS OF FACILITY WHERE DISCHARGE OCCURS:

Ryegate Fire District No. 2 Wastewater Treatment Facility
School Street
East Ryegate, VT 05042

FACILITY COORDINATES: Lat: 44.20243 Long: -72.06323

RECEIVING WATER: Connecticut River

CLASSIFICATION: All uses Class B(2) with a waste management zone. Class B waters are suitable for swimming and other primary contact recreation; irrigation and agricultural uses; aquatic biota and aquatic habitat; good aesthetic value; boating, fishing, and other recreational uses; and suitable for public water source with filtration and disinfection or other required treatment. A waste management zone is a specific reach of Class B(1) or B(2) waters designated by a permit to accept the discharge of properly treated wastes that prior to treatment contained organisms pathogenic to human beings.

I. Proposed Action, Type of Facility, and Discharge Location

The Secretary of the Vermont Agency of Natural Resources (hereinafter referred to as “the Secretary”) received a renewal application for the permit to discharge into the designated receiving water from the above-named applicant on September 17, 2019. The facility’s previous permit was issued on January 6, 2015 and was amended on March 25, 2016. The previous permit

(hereinafter referred to as the "current permit") has been administratively continued, pursuant to 3 V.S.A. § 814, as the applicant filed a complete application for permit reissuance within the prescribed time period per the Vermont Water Pollution Control Permit Regulations Section 13.5(b). At this time, the Secretary has made a tentative decision to reissue the discharge permit.

The facility is engaged in the treatment of municipal wastewater and is classified as a Grade I Domestic Non-Major NPDES Wastewater Treatment Facility (WWTF).

A Reasonable Potential Determination Waiver Memo for the facility is provided in Attachment A.

II. Description of Discharge

The WWTF is engaged in the treatment of municipal wastewater with a majority of the waste stream consisting of residential wastewater and the remainder being comprised of minor commercial wastewaters. There are no pretreaters permitted under the NPDES program discharging to the collection system. The WWTF consists of two septic tanks in series for primary settling, a recirculating sand filter for secondary treatment, and a chlorination system for disinfection. The design flow of the WWTF is 10,300 gallons per day (GPD) and the estimated design Biochemical Oxygen Demand (BOD₅) loading is 310 mg/L. The average flow from the facility over the last 5 years is approximately 3,360 GPD.

The WWTF maintains a constant discharge to the Connecticut River.

III. Limitations and Conditions

The draft permit contains limitations for effluent flow, Biochemical Oxygen Demand (BOD₅), Total Suspended Solids (TSS), Total Nitrogen (TN), Settleable Solids, *Escherichia coli*, Total Residual Chlorine (TRC), and pH. It also contains monitoring requirements for Total Phosphorus (TP), Total Kjeldahl Nitrogen (TKN), and Nitrate/Nitrite (NO_x). The effluent limitations of the draft permit and the monitoring requirements may be found on the following pages of the draft permit:

Effluent Limitations: Page 2 of 23

Monitoring Requirements: Pages 2-3 of 23

IV. Statutory and Regulatory Authority

A. Clean Water Act and NPDES Background

Congress enacted the Clean Water Act (CWA or Act), "to restore and maintain the chemical, physical, and biological integrity of the Nation's waters." CWA § 101(a). To achieve this objective, the CWA makes it unlawful for any person to discharge any pollutant into the waters of the United States from any point source, except as authorized by specified permitting sections of the Act, one of which is § 402. CWA §§ 301(a), 402(a). Section 402 establishes one of the CWA's principal permitting programs, the National Pollutant Discharge Elimination System (NPDES). Under this section of the Act, the U.S. Environmental Protection Agency (EPA) may "issue a permit for the discharge of any pollutant, or combination of pollutants" in accordance with certain conditions. CWA § 402(a). The State of Vermont has been approved by the EPA to administer the

NPDES Program in Vermont. NPDES permits generally contain discharge limitations and establish related monitoring and reporting requirements. CWA § 402(a)(1) - (2).

Section 301 of the CWA provides for two types of effluent limitations to be included in NPDES permits: “technology-based” limitations and “water quality-based” limitations. CWA §§ 301, 303, 304(b); 40 C.F.R. Parts 122, 125, 131. Technology-based limitations, generally developed on an industry-by-industry basis, reflect a specified level of pollutant-reducing technology available and economically achievable for the type of facility being permitted. CWA § 301(b). As a class, WWTFs must meet performance-based requirements based on available wastewater treatment technology. CWA § 301(b)(1)(B). The performance level for WWTFs is referred to as “secondary treatment.” Secondary treatment is comprised of technology-based requirements expressed in terms of BOD₅, TSS, and pH; 40 C.F.R. Part 133.

Water quality-based effluent limits, on the other hand, are designed to ensure that state water quality standards are achieved, irrespective of the technological or economic considerations that inform technology-based limits. Under the CWA, states must develop water quality standards for all water bodies within the state. CWA § 303. These standards have three parts: (1) one or more “designated uses” for each water body or water body segment in the state; (2) water quality “criteria,” consisting of numerical concentration levels and/or narrative statements specifying the amounts of various pollutants that may be present in each water body without impairing the designated uses of that water body; and (3) an antidegradation provision, focused on protecting high quality waters and protecting and maintaining water quality necessary to protect existing uses. CWA § 303(c)(2)(A); 40 C.F.R. § 131.12. The applicable water quality standards for this permit are the 2017 Vermont Water Quality Standards (Environmental Protection Rule, Chapter 29a).

A permit must include limits for any pollutant or pollutant parameter (conventional, non-conventional, toxic, and whole effluent toxicity) that is or may be discharged at a level that causes or has “reasonable potential” to cause or contribute to an excursion above any water quality standard, including narrative water quality criteria. See 40 C.F.R. § 122.44(d)(1). An excursion occurs if the projected or actual in-stream concentration exceeds the applicable criterion. A NPDES permit must contain effluent limitations and conditions in order to ensure that the discharge does not cause or contribute to water quality standard violations.

Receiving stream requirements are established according to numerical and narrative standards adopted under state law for each stream classification. When using chemical-specific numeric criteria from the State's water quality standards to develop permit limits, both the acute and chronic aquatic life criteria are used and expressed in terms of maximum allowable instream pollutant concentrations. Acute aquatic life criteria are generally implemented through maximum daily limits and chronic aquatic life criteria are generally implemented through average monthly limits.

Where a state has not established a numeric water quality criterion for a specific chemical pollutant that is present in the effluent in a concentration that causes or has a reasonable potential to cause a violation of narrative water quality standards, the permitting authority must establish effluent limits in one of three ways: based on a “calculated numeric criterion for the pollutant which the permitting authority demonstrates will attain and maintain applicable narrative water quality criteria and fully protect the designated use”; on a “case-by-case basis” using CWA §

304(a) recommended water quality criteria, supplemented as necessary by other relevant information; or, in certain circumstances, based on an “indicator parameter.” 40 C.F.R. § 122.44(d)(1)(vi)(A-C).

The state rules governing Vermont’s NPDES permit program are found in the Vermont Water Pollution Control Permit Regulations (Environmental Protection Rule, Chapter 13).

1. Reasonable Potential Determination

In determining whether this permit has the reasonable potential to cause or contribute to an impairment, Vermont has considered:

- 1) Existing controls on point and non-point sources of pollution as evidenced by the Vermont surface water assessment database;
- 2) Pollutant concentration and variability in the effluent as determined from the permit application materials, monthly discharge monitoring reports (DMRs), or other facility reports;
- 3) Receiving water quality based on targeted water quality and biological assessments of receiving waters, as applicable, or other State or Federal water quality reports;
- 4) Toxicity testing results based on the Vermont Toxic Discharge Control Strategy, and compelled as a condition of prior permits;
- 5) Available dilution of the effluent in the receiving water, expressed as the instream waste concentration. In accordance with the applicable Vermont Water Quality Standards, available dilution for rivers and streams is based on a known or estimated value of the lowest average flow which occurs for seven (7) consecutive days with a recurrence interval of once in ten (10) years (7Q10) for aquatic life and human health criteria for non-carcinogens, or at all flows for human health (carcinogens only) in the receiving water. For nutrients, available dilution for stream and river discharges is assessed using the low median monthly flow computed as the median flow of the month containing the lowest annual flow. Available dilution for lakes is based on mixing zones of no more than 200 feet in diameter, in any direction, from the effluent discharge point, including as applicable the length of a diffuser apparatus; and
- 6) All effluent limitations, monitoring requirements, and other conditions of the draft permit.

A Reasonable Potential Determination Waiver Memo for the facility is provided in Attachment A.

B. Anti-Backsliding

Section 402(o) of the CWA provides that certain effluent limitations of a renewed, reissued, or modified permit must be at least as stringent as the comparable effluent limitations in the current permit. EPA has also promulgated anti-backsliding regulations which are found at 40 C.F.R. § 122.44(l). Unless applicable anti-backsliding exemptions are met, the limits and conditions in the

reissued permit must be at least as stringent as those in the current permit.

V. Description of Receiving Water

The receiving water for this discharge is the Connecticut River, a designated Cold-Water Fish Habitat. At the point of discharge, the river has a contributing drainage area of 2,224 square miles. The summer 7Q10 flow of the river is estimated to be 608 cubic feet per second (CFS) and the summer Low Median Monthly flow is estimated to be 1,665 CFS. The instream waste concentration at the summer 7Q10 flow is 0.00003 (0.003%) and the instream waste concentration at the summer Low Median Monthly flow is 0.00001 (0.001%).

VI. Waste Management and Mixing Zones

A **Waste Management Zone (WMZ)** is a specific reach of Class B waters designated by a permit to accept the discharge of properly treated wastes that contained organisms pathogenic to human beings prior to treatment. Throughout the receiving waters, water quality criteria must be achieved but increased health risks exist in a WMZ due to the authorized discharge.

10 V.S.A. § 1252 describes the process by which the Secretary may establish a WMZ as part of the issuance of a discharge permit. The model used to determine the WMZ is based upon three precepts of domestic wastewater treatment facility discharges: 1) the use of coliform bacteria as an indicator of pathogenic organisms, 2) despite proper operation and maintenance disinfection failures may occur, and 3) a reasonably sized waste management segment provides a "buffer zone" downstream of the wastewater discharge in which contact recreation is not recommended. If a disinfection failure should occur at the WWTF, the time of travel through this zone will provide time during which some pathogen die-off will occur and may also allow time for public notification. A WMZ is not a Mixing Zone.

The draft permit retains the existing waste management zone (WMZ) that extends downstream from the outfall for approximately one mile in the Winooski River.

Mixing Zone. A Mixing Zone is a length or area within Class B waters required for the dispersion and dilution of waste discharges adequately treated to meet federal and state treatment requirements and within which it is recognized that specific water uses or water quality criteria associated with the assigned classification for such waters may not be realized. A mixing zone shall not extend more than 200 feet from the point of discharge and must meet the terms of 10 V.S.A. § 29A-204. For a mixing zone to be applicable to a discharge it must be authorized within the discharge permit.

VII. Facility History and Background

The Ryegate Fire District No. 2 Wastewater Treatment Facility (WWTF) receives wastewater from approximately 140 users, which consists of domestic residences and a few commercial properties. The collection system consists of 1,800 feet of 3-inch PVC force main and 2,900 feet of 8-inch PVC gravity lines. Both the force main and gravity lines were installed in 1976.

The WWTF was constructed in 1994 and began operation in 1995 to replace a failed community leach field disposal system. The WWTF consists of two septic tanks in series for

primary settling. After the septic tanks, wastewater is pumped to a recirculating sand filter for secondary treatment. From the sand filter, treated wastewater enters a splitter box, where a portion of the flow is pumped back (recirculated) to the sand filter and the remaining portion flows to the chlorination system for disinfection with sodium hypochlorite prior to discharge to the receiving water. Sludge is removed from the septic tanks on an as-needed basis.

VIII. Permit Basis and Explanation of Effluent Limitation Derivation

A. Flow – The draft permit maintains the annual average flow limitation of 10,300 GPD. This facility maintains a constant discharge. Continuous flow monitoring is required.

B. Conventional Pollutants

- 1. Biochemical Oxygen Demand (BOD₅)** – The effluent limitations for BOD₅ remain unchanged from the current permit. The monthly average (30 mg/L) and weekly average (45 mg/L) reflect the minimum level of effluent quality specified for secondary treatment in 40 C.F.R. Part 133.102. In addition, the draft permit contains a 50 mg/L, maximum day, BOD₅ limitation. This is applied to all such discharges pursuant to 13.4 c. of the Vermont Water Pollution Control Permit Regulations. The Secretary implements the limit to supplement the federal technology-based limitations to prevent a gross one-day permit effluent violation to be offset by multiple weekly and monthly sampling events which would enable a discharger to comply with the weekly average and monthly average permit limitations. Mass limits (2.6 lbs/day, monthly average and 3.9 lbs/day, weekly average) are calculated using the concentration limits outlined above. The BOD₅ monthly monitoring requirement is unchanged from the current permit.
- 2. Total Suspended Solids (TSS)** – The facility has been achieving the secondary treatment standard TSS effluent limitations set forth under 40 C.F.R. § 133.102(b) for at least the past five years based upon the Discharge Monitoring Report (DMR) WR-43 forms submitted by the facility. The effluent limitations for TSS remain unchanged from the current permit. The monthly average (30 mg/L) and weekly average (45 mg/L) reflect a level of effluent quality attainable by facilities eligible for treatment equivalent to secondary treatment. In addition, the draft permit contains a 50 mg/L, maximum day, TSS limitation. This is applied to all such discharges pursuant to 13.4 c. of the Vermont Water Pollution Control Permit Regulations. The Secretary implements the limit to supplement the federal technology-based limitations to prevent a gross one-day permit effluent violation to be offset by multiple weekly and monthly average permit limitations. Mass limits (2.6 lbs/day, monthly average and 3.9 lbs/day, and weekly average) are calculated using the concentration limits outlined above and the permitted flow. The TSS monthly monitoring requirement is unchanged from the current permit.
- 3. *Escherichia coli*** – The *E. coli* limitation is 77 cfu/100ml, instantaneous maximum, based upon the limitation in the current permit and the anti-backsliding provisions of Section 402(o) of the CWA. As in the current permit, monthly monitoring is required.
- 4. pH** – The pH limitation remains at 6.5 - 8.5 Standard Units as specified in Section 29A-303(6) in the Vermont Water Quality Standards. Monitoring remains at weekly.

C. Non-Conventional and Toxics

1. Total Phosphorus (TP)

The quarterly “monitor only” requirement for TP remains unchanged from the current permit.

Per EPA, excess nitrogen (N) and phosphorus (P) are the leading cause of water quality degradation in the United States. Historically, nutrient management focused on limiting a single nutrient—phosphorus or nitrogen—based on assumptions that production is usually phosphorus limited in freshwater and nitrogen limited in marine waters. Scientific research demonstrates this is an overly simplistic model. The evidence clearly indicates management of both phosphorus and nitrogen is necessary to protect water quality. The literature shows that aquatic flora and fauna have differing nutrient needs, some are P dependent, others N dependent and others are co-dependent on these two nutrients.

Like N, P promotes noxious aquatic plant and algal growth. High concentrations of P and N together cause greater growth of algae than N alone. The relative abundance of these nutrients also influences the type of species within the community. Given the dynamic nature of all aquatic ecosystems, for the State to fully understand the degradation to water quality it is necessary to limit or monitor for P and N (including nitrate, ammonium, and certain dissolved organic nitrogen compounds).

For more information, see:

<https://www.epa.gov/sites/production/files/documents/nandpfactsheet.pdf>

2. Total Nitrogen (TN)

On November 10, 2011, a letter from the EPA (Region I) to the Agency indicated that Vermont must establish TN limitations in permits such that the TN load from all facilities in the Connecticut River watershed is consistent with the requirements of the Long Island Sound Total Maximum Daily Load (TMDL).

Condition I.F.1. of the draft permit requires the Permittee continue to implement the recommended operational changes to maintain the existing mass discharge loading of TN outlined in the Nitrogen Optimization Plan approved by the Secretary on January 5, 2016.

Condition I.F.2. of the draft permit requires the Permittee to continue to implement the Nitrogen Plan Evaluation submitted on January 24, 2020. The plan shall be revised at the Secretary’s request. Actions to implement the approved nitrogen removal optimization practices, if any, shall be initiated within 90 days of the Secretary’s approval.

Condition I.F.3 requires an annual report documenting the TN discharged, summarizing optimization efforts, and tracking trends relative to the previous year be submitted to the Secretary as an attachment to the **December** Discharge Monitoring Report (DMR) form WR-43.

The baseline annual average daily TN load of 1 lb/day is not a formal wasteload allocation. Condition II.A.6 reserves the right of the Secretary to reopen the permit to include additional monitoring requirements or a formal wasteload allocation for this facility if promulgated.

TN is a calculated value based on Total Kjeldahl Nitrogen (TKN) and Nitrate/Nitrite (NO_x) Nitrogen. The sum of TKN and NO_x shall be used to derive TN. As in the current permit, monthly monitoring is required.

For more information, see:

<https://www.epa.gov/sites/production/files/documents/nandpfactsheet.pdf>

3. **Total Kjeldahl Nitrogen (TKN)** – TKN is the sum of nitrogen in the forms of ammonia (un-ionized (NH₃) and ionized (NH₄⁺)), soluble organic nitrogen, and particulate organic nitrogen. The monthly “monitor only” requirement remains unchanged from the current permit.
4. **Nitrate/Nitrite (NO_x)** – Nitrite and nitrate are oxygenated forms of nitrogen. The monthly “monitor only” requirement remains unchanged from the current permit.
5. **Settleable Solids** – The limitation of 1.0 mL/L instantaneous maximum and daily monitoring remain unchanged from the current permit. This numeric limit was established in support of the narrative standard in Section 29A-303(2) of the Vermont Water Quality Standards.
6. **Total Residual Chlorine (TRC)** – The TRC limits of 1.0 mg/L instantaneous maximum is set in accordance with the Policy for the protection of aquatic biota. The limit ensures compliance with the Vermont Water Quality Standards. Monitoring remains at daily.

D. Special Conditions

1. **Laboratory Proficiency Testing** – To ensure there are adequate laboratory controls and appropriate quality assurance procedures, the Permittee shall conduct an annual laboratory proficiency test for the analysis of all pollutant parameters performed within their facility laboratory and reported as required by their NPDES permit. Proficiency test samples must be obtained from an accredited laboratory or as part of an EPA DMR-QA study. Results shall be submitted to the Secretary by December 31, annually beginning in 2022.
2. **Operation Management and Emergency Response Plan (OMERP)** – The current Operation Management and Emergency Response Plan (OMERP) for the treatment facility, sewage pumping stations, and sewer line stream crossings was submitted on September 9, 2009 and it was approved by the Secretary on September 10, 2009. The current OMERP for the sewage collection system was submitted on July 1, 2010 and was approved by the Secretary on August 6, 2010.

The Permittee shall prepare and submit to the Secretary for review and approval, an updated Operation Management and Emergency Response Plan for the treatment facility, sewage pumping stations, sewer line stream crossings, and sewage collection system. The Plan shall be immediately implemented upon approval by the Secretary. The Permittee shall revise these plans upon the Secretary’s request or on its own motion to reflect equipment or operational changes.

3. **Engineering Evaluation** – An engineering evaluation condition is included in this permit. This condition requires the Permittee to conduct an in-depth inspection and report of the treatment facility to identify and repair equipment, processes, and other possible deficiencies which may adversely affect effluent quality or proper operation. This type of evaluation is required once every 20 years and per DEC records has not been completed since the WWTF was upgraded in 1995.
4. **Emergency Power Failure Plan** – The current Emergency Power Failure Plan for the facility was submitted on February 6, 2015.

To ensure the facility can continue operations during the event of a power failure, Permittees are required to have Emergency Power Failure Plans on file. Within **90** days of the effective date of the permit. The Permittee must ensure this plan is up to date by submitting to the Secretary updated documentation addressing how the discharge will be handled in the event of an electric power outage.

5. **Electronic Reporting** - The EPA recently promulgated a final rule to modernize the Clean Water Act reporting for municipalities, industries, and other facilities by converting to an electronic data reporting system. The final rule requires the inclusion of electronic reporting requirements in NPDES permits that become effective after December 21, 2015. The rule requires that NPDES regulated entities that are required to submit discharge monitoring reports (DMRs), including majors and non-majors, individually permitted or covered by a general permit, must do so electronically after December 2016. The Secretary has created an electronic reporting system for DMRs and has recently trained facilities in its use. As of December 2020, these NPDES facilities will also be expected to submit additional information electronically as specified in Appendix A in 40 C.F.R. part 127.
6. **Noncompliance Notification** - As required by the passage of 10 V.S.A. § 1295, promulgated in the 2016 legislative session, Condition II.D.3. has been included in the draft permit. Section 1295 requires the Permittee to provide public notification of untreated discharges from wastewater facilities. The Permittee is required to post a public alert within one hour of discovery and submit to the Secretary specified information regarding the discharge within 12 hours of discovery.
7. **Reopener** - This draft permit includes a reopener whereby the Secretary reserves the right to reopen and amend the permit to implement an integrated plan to address multiple Clean Water Act obligations.

E. Reasonable Potential Analysis

The Agency has waived a reasonable potential analysis for the facility. The decision to waive the determination was based on the extremely small size of the effluent discharge from the Ryegate Fire District No. 2 WWTF and the large size of the receiving water (Connecticut River). The decision is attached to this Fact Sheet as Attachment A.

IX. Procedures for Formulation of Final Decision

The public comment period for receiving comments on this draft permit was from March 9, 2021 through April 9, 2021 during which time interested persons could submit their written views on the draft permit. No comments were received during the public comment period.

ATTACHMENT A.
REASONABLE POTENTIAL DETERMINATION

**Agency of Natural Resources
Department of Environmental Conservation**

**Watershed Management Division
1 National Life Drive Davis 3
802-828-1535**

MEMORANDUM

To: Katie Parrish, Wastewater Management Program

From: Amy Polaczyk, Manager, Wastewater Management Program

Cc: Pete LaFlamme, Director, Watershed
Management Division
Bethany Sargent, Monitoring and
Assessment Program

Date: March 1, 2021

Subject: Ryegate Fire District No. 2 Reasonable Potential Determination Decision

The Wastewater Management Program (WWP) has evaluated the available data for the Ryegate Fire District No. 2 Wastewater Treatment Facility. Due to the extremely small size of the RyegateFD #2 discharge and the very large size of the receiving water, the WWP has determined it is appropriate to waive a full Reasonable Potential Determination the facility.

The Ryegate FD#2 WWTF is permitted to discharge 10,300 GPD (0.0103 MGD or 0.016 cfs). At the point of discharge, the Connecticut River has a 7Q10 flow of 608 cfs. This results in an Instream Waste Concentration of 0.00003. Considering this amount of dilution, the WWP has determined this WWTF as currently operated and permitted, does not have the reasonable potential to exceed Vermont Water Quality Standards.

Facility:

Ryegate F.D. #2 Wastewater Treatment Facility
Permit No. 3-1382
NPDES No. VT0100951

Hydrology for Ryegate Fire District #2 used in this evaluation:

Design Flow: 0.010 MGD = 0.016 CFS
7Q10 = 608 CFS
LMM = 1665 CFS
IWC-7Q10 = 0.00003 (<1%)
IWC-LMM= 0.00001 (<1%)

Receiving Water:

Connecticut River, VT