

## Features

Voltage: AC110-230V 50/60Hz

Power: 20W


Light source: 2\*3W 3IN1 LEDs

4operation modes: Automatic running, DMX, Sound Active, Master/Slave

Sound controlled via built-in microphone

7 DMX channels

Advantages of LED-technology: extremely long life, low power consumption minimal heat emission

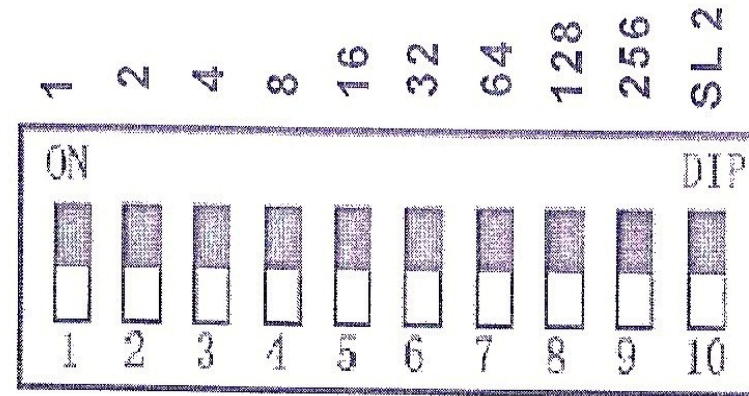

## DMX512 Controller instruction

ON	OFF	Function	
CH 1	0--255	All color dimmer	
CH 2	0--255	Red dimmer	
CH 3	0--255	Green dimmer	
CH 4	0--255	blue dimmer	
CH5	0--255	strobe	
CH6	0--255	Motor speed	
CH7	0--255	Control sound	0--127 off
			128--255 on

## DIP control instruction

Address code	Address code	Function instruction
ON	OFF	
1	2.3.4.5.6.7.8.9,10	Sound active(Master),auto run when no sound
1,2	3.4.5.6.7.8,9,10	Slow run(when no sound)
1,3	2.4.5.6.7.8,9,10	Quick run(when no sound)
9	1.2.3.4.5.6.7.8.10	All bright, motor auto run
	1.2.3.5.6.7.8.9,10	Slave 1(DMX)
10	1.2.3.4.5.6.7.8.9	Slave 2
1,2,3,4,5,6,7,8,9		DMX

BUY ON  
[www.cablematic.com](http://www.cablematic.com)