

Single Colour MR11 Downlight User Data

LU1-DL STEPLIGHT 1 WATT 1 CHANNEL

They say that all good things come in small packages, which can certainly be said about this MR11 sized downlight. With a variety of available colours and optics, these make for great feature lighting and marker LEDs.

The LU1 might be small, but it is powerful, with a high performance Luxeon LED thermally managed and housed in a precision engineered stainless steel & aluminium housing.



Specifications

Physical

- System Colours: Single
- Weight: 200g
- Lamp Depth: 65mm (max)
- Face Diameter: 70mm
- Cut Out Diameter: 63mm

Electrical

- Drive Current: 350-700mA Constant Current
- Power Consumption: 1W @350mA
- Connectivity: Two Core

Options

- 8° / 25° Optics / Frost
- LED Options: Red / Green / Blue / Amber / White
- Bespoke LED Population
- Bespoke Housing Colours

Operating Conditions

- Operating Ambient Temp Range: -10 °c / +40 °c
- Cooling System: Convection
- Environment: IP30 Dry

Construction

- Housing: Stainless Steel / Aluminium
- Two Core Cable

Compatible Drivers

- LUD48-D
- LUD48-4
- LUD192-D

Installation

- Two Core Connections

Mounting

- Recessed


Guarantee

- 2 Year Guarantee



Single Colour MR11 Downlight User Data

Wiring Connections

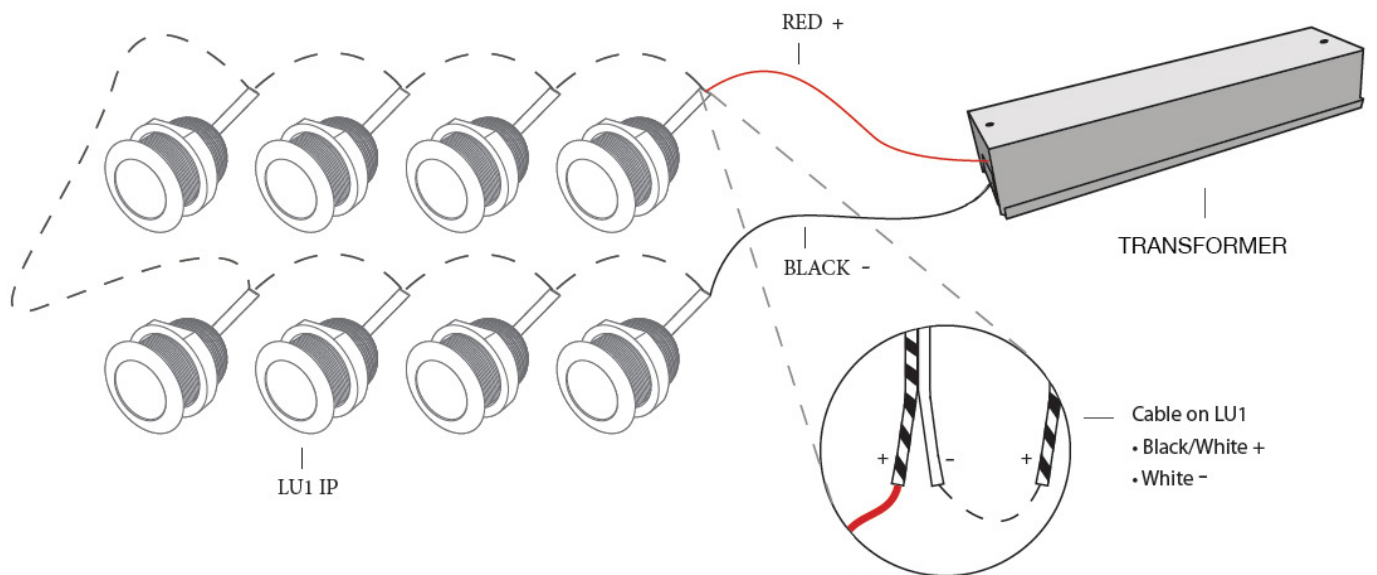

Single Colour MR11 Downlight User Data

Dimensions

