





ABOUT

Switch panel KNX with rotary push button

WIRING

KNX bus cable

POWER SUPPLY

30v dc, 5 mA

ASSEMBLY

In universal built-in-boxes with screws

ENGRAVING

Our plates are fully engravable according to your wishes, all kinds of fonts & symbols are possible.

CARE AND MAINTENANCE

Please do not clean our products with aggressive cleaning agents or alcohol-based products. These can damage the exclusive finish and materials used.

To maintain the quality and appearance, we recommend using only mild cleaning applications. Do not place any type of tape on the bronze finishes this can damage the varnish layer.

FINISH CODE

To complete your order code, add the code of your chosen finish to the product code. For example: CJC5601**V**



FEATURES

The KNX rotary button offers a versatile range of features for various functions: rotary push buttons: for varied lighting management, scene calling/memorization, scene dimming, circadian lighting management, on/off control, and volume control for an audio zone.

SWITCH FUNCTIONS

- ◆ On/Off Switch
- ◆ Dimming: On/Off 1 bit, 4-bit dimming
- ◆ Blind/Shutter Control: Up/Down, Stop
- ◆ KNX object transfer: 1 byte, 2 bytes
- ◆ Launching and memorization of lighting scenes

ROTARY BUTTON FUNCTIONS


- ◆ On/Off Switch on rotation
- ◆ Dimming: On/Off 1 bit, 4-bit dimming
- ◆ Blind/Shutter Control: Up/Down, Stop
- ◆ KNX object transfer: 1 byte, 2 bytes

BINARY INPUT/OUTPUT FUNCTIONS

- ◆ On/Off Switch
- ◆ LED Output 4V – 2, 5mA
- ◆ Dimming: On/Off 1 bit, 4-bit dimming
- ◆ Blind/Shutter Control: Up/Down, Stop
- ◆ Launching and memorization of lighting scenes

TECHNICAL SPECIFICATIONS

- ◆ KNX TP.256, S-Mode (ETS), 30V, 5mA
- ◆ Power Supply: KNX 30DC, 5mA



To ensure the order is complete, please include the KNX-Module with 4 Rotary Button Inputs + 4 Push Button Inputs / LED Outputs.


Add Product Code: CJCMOD



SWITCH PANEL KNX
WITH ROTARY PUSH-BUTTON

85 X 85 X 6


1 ROTARY PUSH BUTTON



CJC5601

155 X 85 X 6


2 ROTARY PUSH BUTTONS



CJC5602

226 X 85 X 6


3 ROTARY PUSH BUTTONS



CJC5603

SYMBOLS

CJC SYSTEMS

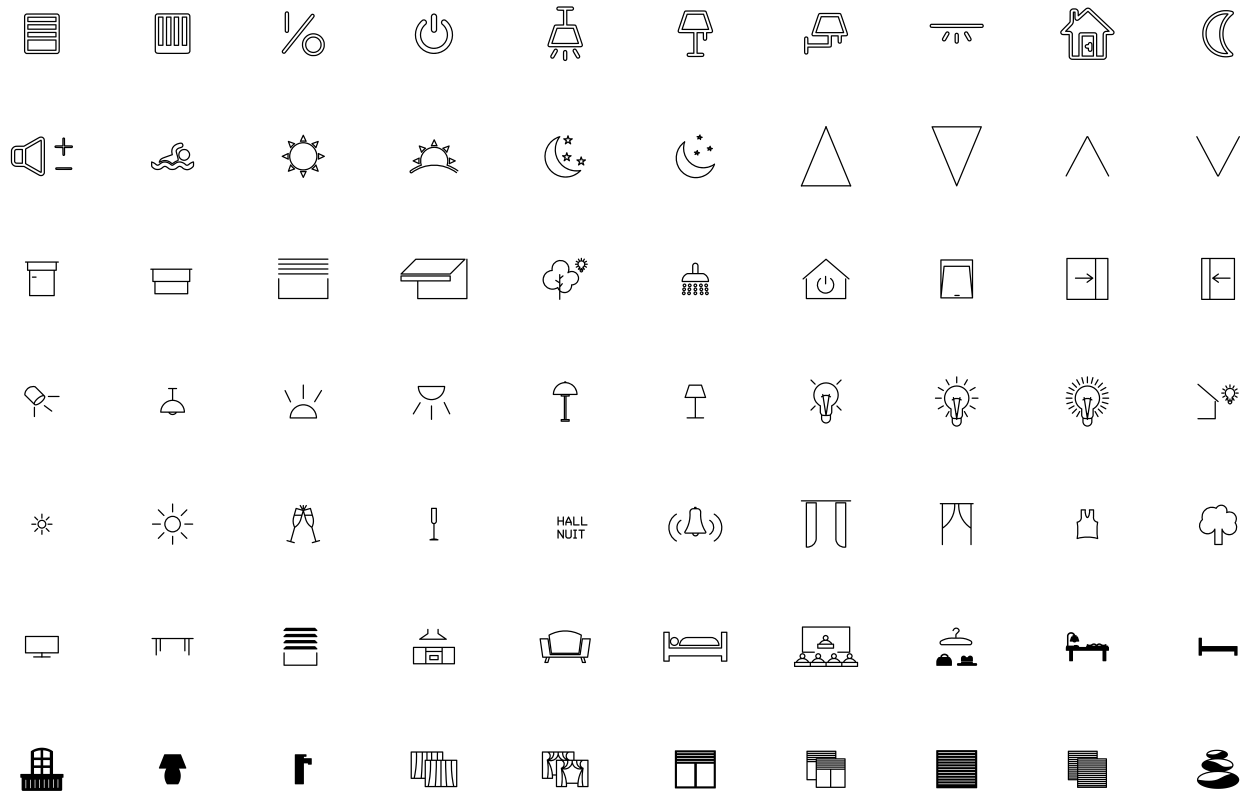

Away	Lights	Room Off	Living	Lamp	Room Off	All Off	Balcony	Room Off	Left Shutter
Bedroom	Shutter	Right Shutter	Here						

Note: All symbols and fonts can be fully customized to your specifications and should be indicated at the time of ordering.