


Road Specification for Town of Casey

Four Rod Town Right of Way

Adopted June 2026

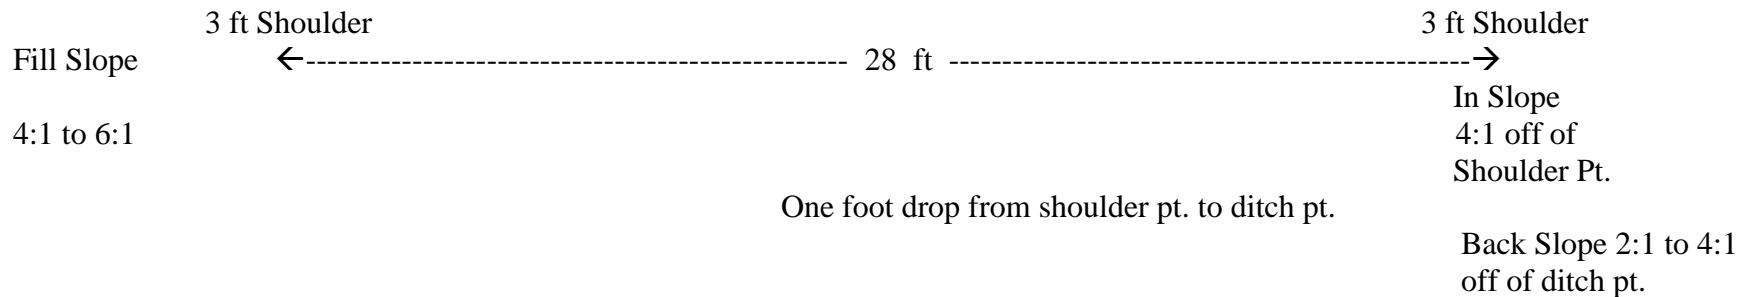

Contractor Requirements:

1. Staking and clearing of right of way including the supervision of removal of all telephone, power lines and personal property
2. Supervision of all tree removal from entire width of the right-of-way, with logs cut in lengths of a minimum of 100 inches then placed off of the right-of-way onto the property of owner.
3. On site burning and/or burial of tree stumpage.
4. Salvage of existing topsoil to spread prior to commencing with required seeding, fertilizing and mulching of ditches.
5. Installation of silt fencing, and culverts per town and/or WDNR specifications.
6. Culverts are only to be installed on slopes and to avoid pooling of water.
7. Adequate ditches to meet specification range and allow proper drainage.
8. Hay bales purchased and installed on slopes where needed.
9. Existing blacktop mat is to be scarified, pulverized to pieces < 4 inches in size, then recycled by mixing with gravel to form new road bed.
10. Road width must be a minimum of 28 ft. have a 2% crown and an eight inch gravel base.
11. Gravel specification: 5% or better binder to pass through 200 sieves.
12. Roadwork posting done to DOT specifications.
13. Right-of-way clearing, including phone and/or electrical wires relocation, must be completed prior to roadbed reconstruction.
14. All road signs (warning and informational) owned by the Town of Casey must be restored to pre-reconstruction location.
15. Road reconstruction must be completed prior to November 15th in year project contract was awarded.
16. Procedures for payment of work completed, procedure for acceptance by the Casey Town Board, and warranty by the contractor are accepted and adhered to as stated in Town of Casey Contractor Resolution II.

