

# Panel Mount Solid State Relay

## Three-phase Motor Reversing Module

**multicomp** PRO

**RoHS  
Compliant**



### Description

These are motor reversing module, specially developed for three-phase motor control. Control loop contains logic interlock delay circuit and the switching time exceeds 50ms. Internal automatic phase correction function and phase-loss protection function, widely used for motor control applications.

### Features

- SCR output for heavy industrial loads
- 10 ~ 32V DC input
- Dielectric strength  $\geq 4000\text{Vrms}$
- Internal RC protection circuit
- High EMC design
- Automatic phase correction function and phase loss protection function (Option)

### Technical Specification

Input Circuit		
Control Voltage Range	10 ~ 32VDC	
Minimum Turn-On Voltage	10V DC	
Minimum Turn-Off Voltage	4V DC	
Maximum Input Current	25mA	
Minimum Reversible Switching Time	50ms	
Output Circuit		
Load Voltage Range	24 ~ 530V AC	
Maximum Transient Over voltage	1200Vpk	
Minimum Load Current	100mA	
Maximum Turn-Off Time	20ms	
Maximum Surge Current [@10ms]	25A	250A
	60A	600A
Maximum I <sup>2</sup> t For Fusing [@10ms]	25A	312A <sup>2</sup> S
	60A	1800A <sup>2</sup> S
Maximum Off-State Leakage Current [ @ Rated Voltage]	5mA	
Maximum On-State Voltage Drop [ @ Rated Current]	1.7Vrms	
Minimum Off-State dv/dt [ @ Maximum Rated Voltage]	1000V/ $\mu$ s	
General Information		
Dielectric Strength[50/60Hz]	Input-Output	$\geq 4000\text{Vrms}$
	Input/Output/Base	$\geq 2500\text{Vrms}$

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

**multicomp** PRO

# Panel Mount Solid State Relay Three-phase Motor Reversing Module


**multicomp** PRO

Ambient Operating Temperature Range		-30°C ~ +80°C	
Ambient Storage Temperature Range		-30°C ~ +100°C	
Weight [typical]		338g	
Working Status Indication	LED1		Forward Indication
	LED2		Reverse Indication
	LED3	With function	Fault Indication
		Without function	None Indication

## Application

Motor control


## Installation Diagram

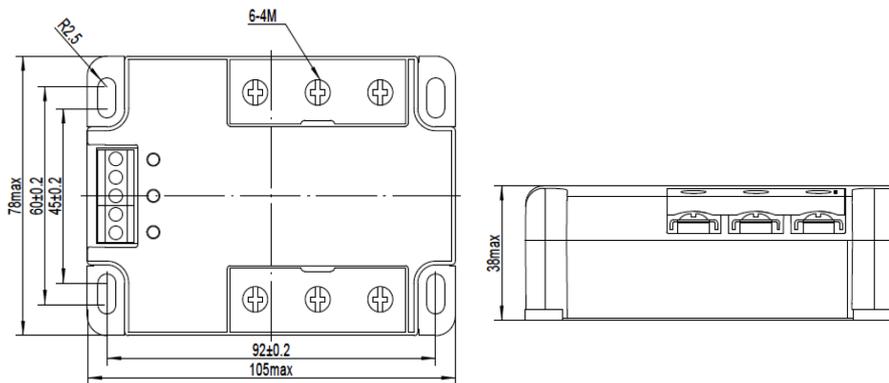

Dimensions : Millimetres

## Connection Diagram

### Common Anode

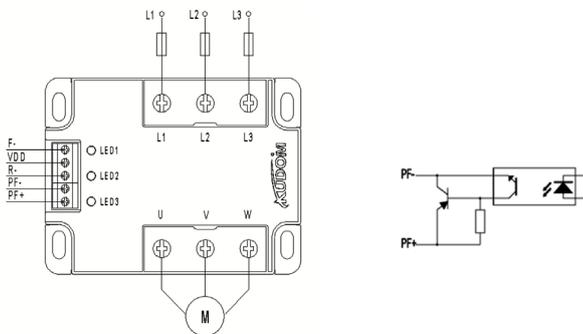

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro



**multicomp** PRO

# Panel Mount Solid State Relay

## Three-phase Motor Reversing Module



### Thermal Curve

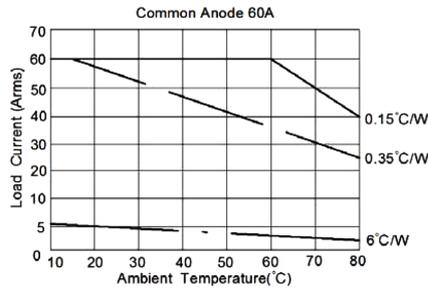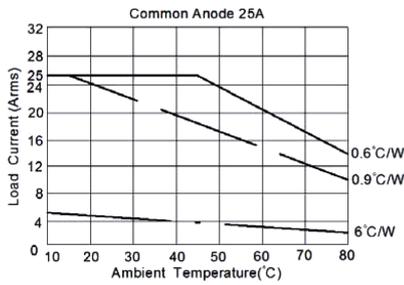

### Part Number Table

Description	Part Number
SSR, 25A, 480V AC, 10-32V DC, Common Anode, Zero Crossing, IP00, Thermal Pad	MC002294
SSR, 25A, 480V AC, 10-32V DC, Common Anode, Zero Crossing, IP00	MC002295
SSR, 60A, 480VAC, 10-32VDC, Common Anode, Zero Crossing, IP00, Thermal Pad	MC002296
SSR, 60A, 480VAC, 10-32VDC, Common Anode, Zero Crossing, IP00	MC002297

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro

