


Multiple Configurations

System Specifications

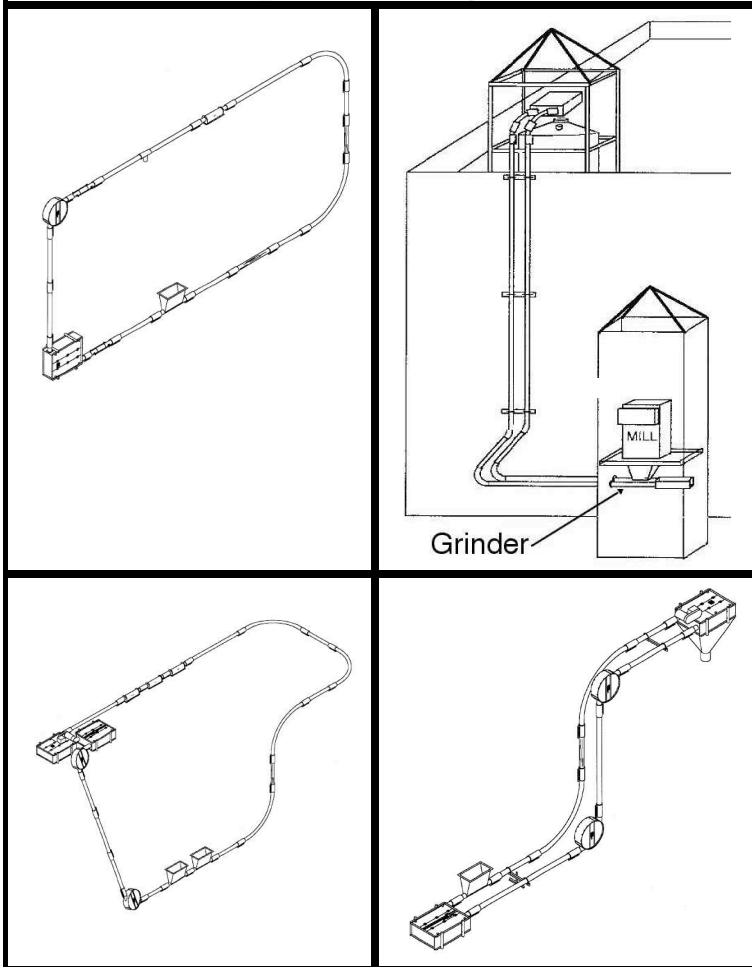

Convey Product Vertical

Multiple Inlets and Discharge Points

Material Density from 5 Lbs./Ft³ to 450 Lbs./Ft³

| System Size | Distance | Capacity |
|-------------|-----------------|---------------------------|
| 2" Diameter | 800 Ft. Circuit | 75 Ft ³ /Hour |
| 4" Diameter | 500 Ft. Circuit | 750 Ft ³ /Hour |

11 Gauge Stainless Steel Tube


Aircraft Grade Stainless Steel or Galvanized Cable

Unload from Dump Stations or Bulk Bags.

Corners available at various angles.

Adaptable to new or existing facilities.

Totally Enclosed System



Cable and Disc
Conveys Product Through
Stainless Steel Tube Without
Use of Air.

Clear Inspection Sections
Available For Product Viewing.

System Controls

VFD Variable Speed or
PLC Controlled

2" System Uses 1 Hp.
4" System Uses 3 Hp.

Safety Switch
Protected Against
Foreign Objects In
System.

- Low Maintenance
- Low Noise
- Low Product Degradation
- Low Initial Investment

- High Quality

➤ Move additives or fillers also



Intraco, Inc.
P.O. Box 148
Oskaloosa, Iowa 52577
Tel: (641) 673-8451 Fax: (641) 673-7419
E-mail: info@cablevey.com
Visit our Website @: www.cablevey.com

Conveying Products Since 1971.