


Dual Channel Digital Storage Oscilloscope **multicomp** PRO

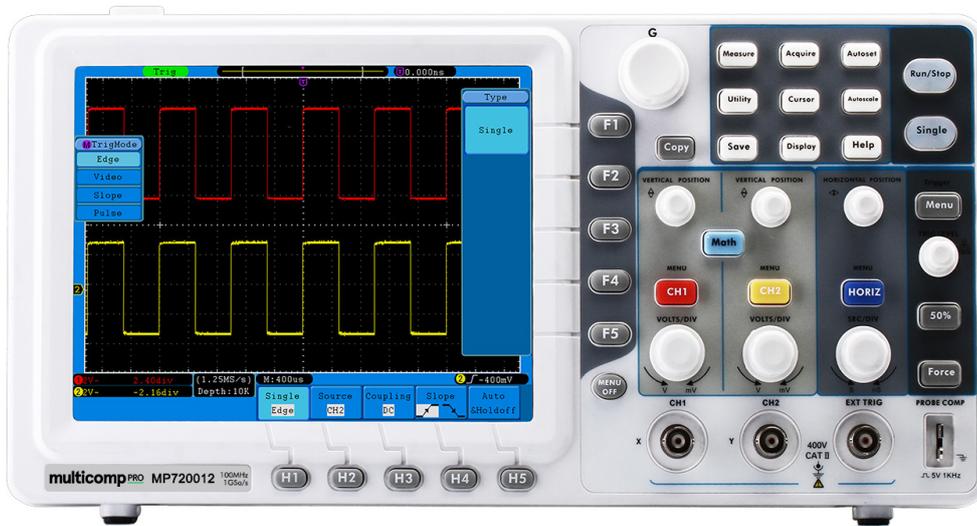

Features

- Bandwidth : 100MHz
- Sample rate : 1GS/s
- Ultra-thin body
- 8" high resolution LCD Display
- Pass / Fail function
- SCPI, and LabVIEW supported
- Newly added function - digital filtering, and current measurement

Oscilloscope Specifications

Bandwidth	100MHz
Sample Rate (real time)	1GS/s
Horizontal Scale (s/div)	2ns/div ~ 100s/div, step by 1~2~5
Rise Time (at input, typical)	≤3.5ns
Channel	2 + 1 (external)
Display	8" colour LCD, 800 × 600 pixels
Input Impedance	1MΩ ± 2%, in parallel with 15pF±3pF
Channel Isolation	50Hz : 100 : 1, 10MHz : 40 : 1
Max Input Voltage	400V (PK - PK) (DC+AC, PK - PK)
DC Gain Accuracy	±3%
Record Length	1M (optional 10M)
DC Accuracy (average)	Average≥16: ±(3% reading + 0.05 div) for ΔV
Probe Attenuation Factor	1X, 10X, 100X, 1000X
LF Respond (AC, -3dB)	≥10Hz (at input, AC coupling, -3dB)
Sample Rate / Relay Time Accuracy	±100ppm
Interpolation	sin (x) / x

Newark.com/exclusive-brands
 Farnell.com/exclusive-brands
 Element14.com/exclusive-brands

multicomp PRO

Dual Channel Digital Storage Oscilloscope **multicomp** PRO

Interval (ΔT) Accuracy (full bandwidth)	Single : $\pm(1 \text{ interval time} + 100\text{ppm} \times \text{reading} + 0.6\text{ns})$, Average >16 : $\pm(1 \text{ interval time} + 100\text{ppm} \times \text{reading} + 0.4\text{ns})$	
Input Coupling	DC, AC , and GND	
Vertical Resolution (A/D)	8 bits (2 Channels simultaneously)	
Vertical Sensitivity	2mV/div ~ 10V/div (at input)	
Digital Filtering	low-pass, high-pass, band-pass, and band-reject	
Trigger Type	Edge, Pulse, Video, Slope, and Alternate	
Trigger Mode	Auto, Normal, and Single	
Trigger Level	± 6 divisions from screen centre	
Line / Field Frequency (video)	NTSC, PAL, and SECAM standard	
Cursor Measurement	ΔV , and ΔT between cursors	
Automatic Measurement	Vpp, Vavg, RMS, Frequency, Period, Vmax, Vmin, Vtop, Vbase, Width, Over-shoot, Pre-shoot, Rise time, Fall time, +Width, -Width, +Duty, -Duty, Delay A→B ↕ , Delay A→B ↕	
Waveform Math	+, -, ×, ÷, invert, FFT	
Waveform Storage	15 waveforms	
Lissajous Figure	Bandwidth	Full bandwidth
	Phase Difference	± 3 degrees
Communication Interface	USB host, USB device, Pass / Fail, LAN, and VGA (optional)	
Cymometer	Available	
Power Consumption	<18W	
Fuse	2A, T class, 250V	
Battery	Not supported	
Dimension (W×H×D)	348mm × 170mm × 78mm	
Weight (without package)	1.5 kg	
Power Supply	100V AC to 240V AC, 50/60Hz, CAT II	
Power Cord Plug Type	UK / EU	
Standard Accessories Included	Power cord, USB cable, CD-Rom.Manual, Probes, Probe Adjust Tool	
Optional Accessories	Soft bag	
Warranty	12 months	

Part Number Table

Description	Part Number
Dual Channel Digital Storage Oscilloscope, 100MHz	MP720012 EU-UK

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
 Farnell.com/exclusive-brands
 Element14.com/exclusive-brands

multicomp PRO