

# D2EW-R

## Sealed Ultra Subminiature Basic Switch with Integrated Resistors

### Detection of four states by internal resistor Long stroke sealed switch

- The industry's smallest class \* (8.3 x 7.0 x 5.3 mm) D2GW equivalent size.
- Four states (switch ON/OFF, short circuit, open circuit) are output.
- Supports multi-angle operation without using a lever, increased flexibility in customer unit design.
- A sliding contact structure delivers high contact reliability and quiet operation.

\* Based on OMRON investigation in November 2024



Refer to the *Precautions* on page 5.

### Model Number Legend

D2EW -    -             -     
 (1) (2) (3) (4) (5) (6)

**(1)Circuit structure**

R1: Series circuit  
 R5: Parallel circuit

**(2)Mounting Structure**

B: Post

**(3)Actuator**

0: Pin plunger

**(4)Contact Form**

3: SPST-NO

**(5)Terminals**

L: Long press-fit terminals

**(6)Special Specification**

### List of Models

Model			Post
Actuator	Terminals	Circuit structure	
Pin plunger 	Long press-fit terminals	Series circuit	D2EW-R1-B03L
		Parallel circuit	D2EW-R5-B03L

If you have any desired model with a specification not in this model number legend, contact your OMRON sales representative. We will consider if a requested model can be manufactured by modifying existing models.



# D2EW-R

## Contact Specifications

Contact	Specification	Slide
	Material	Gold plated

Note: For more information on the minimum applicable load, refer to *Using Micro Loads of Precautions*.

## Electrical characteristic

		R1	R5
Rating voltage		5 to 18 VDC	
Resistance value *1	Resistor1	5,110 Ω	3,920 Ω
	Resistor2	1,620 Ω	511 Ω
Output resistance *2	FP-OP	6,730 Ω ± 4%	3,920 Ω ± 4%
	OP-TTP	1,620 Ω ± 4%	452 Ω ± 4%
Rated power of tip resistors *1		Environment temperature -40°C to 85°C: 0.33 W	Environment temperature -40°C to 57°C: 0.33 W Environment temperature 57°C to 70°C: 0.27 W Environment temperature 70°C to 85°C: 0.20 W
Circuit diagram *2			

\*1. The resistance value and power rating of resistors 1 and 2 can be changed.

Contact your OMRON sales representative for details.

\*2. Avoid use outside of the operating temperature range of -40°C to +85°C.

Temperature might cause output resistance to fluctuate which induces malfunction.

## Characteristics

Items		
Permissible operating speed		30 to 500 mm/s (pin plunger models)
Permissible operating frequency	Mechanical	30 operations/min Max.
	Electrical	30 operations/min Max.
Vibration resistance *1	Malfunction Destruction	Frequency: 10 to 55 Hz Amplitude: 1.5 mm Direction Time: X, Y and Z 10 minutes per axis
Shock resistance	Destruction	1,000 m/s <sup>2</sup> Max.
	Malfunction *1	300 m/s <sup>2</sup> Max.
Durability *2	Mechanical	300,000 operations Min. (at 30 operations/min)
	Electrical	300,000 operations Min. (at 30 operations/min)
Degree of protection		IEC IP67 (excluding the terminals)
Ambient operating temperature		-40 to +85°C (at 60%RH Max.) (with no icing or condensation)
Ambient operation humidity		95%RH Max. (for +5 to +35°C)
Heat resistance		85°C 500 hours
Cold resistance		-40°C 500 hours
Humidity resistance		85°C 85%RH 500 hours
Temperature cycle resistance		-40°C (0.5hours) ⇔ 85°C (0.5 hours) 500 cycles
Weight		Approx. 0.5 g

Note: The data given above are initial values.

\*1. For the pin plunger models, the above values apply for use at the free position, and total travel position.

Close or open circuit of the contact is 1 ms Max.

\*2. For testing conditions, consult your OMRON sales representative.





## Precautions

Please refer to "Safety Precautions for All Detection Switches" for correct use.

### Cautions

#### Degree of Protection

- Do not use this product underwater.  
Satisfy the test conditions for the standard given below, this test is to check the ingress of water into the switch enclosure after submerging the Switch in water for a given time. Satisfying this test condition does not mean that the Switch can be used underwater.  
JIS C0920:  
Degrees of protection provided by enclosures of electrical apparatus (IP Code)  
IEC 60529:  
Degrees of protection provided by enclosures (IP Code)  
Degree of protection: IP67  
(check water intrusion after immersion for 30 min. submerged 1m underwater)
- Do not operate the Switch when it is exposed to water spray, or when water drops adhere to the Switch surface, or during sudden temperature changes, otherwise water may intrude into the interior of the Switch due to a suction effect.
- Prevent the Switch from coming into contact with oil and chemicals. Otherwise, damage to or deterioration of Switch materials may result.
- Do not use the Switch in areas where it is exposed to silicon adhesives, oil, or grease. Otherwise faulty contact may result due to the generation of silicon oxide.


#### Horizontal and rotational operations

- Factors such as the operating speed, operating frequency, push-button indentation, and material and shape will affect the durability of the Switch. Confirm performance specifications under actual operating conditions before using the Switch in applications.

### Correct Use

#### Mounting

- Turn OFF the power supply before mounting or removing the Switch, wiring, or performing maintenance or inspection. Failure to do so may result in electric shock or burning.
- For models with posts, secure the posts by pressing into an attached device. Provide guides on the opposite ends of the posts to ensure that they do not fall out or rattle.
- When mounting a Press-fit terminals, press in A (body) and B (terminal) in the drawing below at the same time.  
If A (body) only is pressed in, the Press-fit terminals will be deformed and will not be properly inserted.  
Also, ensure that the Press-fit terminals is facing down when it is inserted. Mold the terminal part with urethane resin, etc., and use it in a state where the terminal part does not come into contact with outside air. Avoid connecting soldered or laser-welded terminals. Avoid mounting in conditions exposed to corrosive gases, high temperature and humidity, and dust.

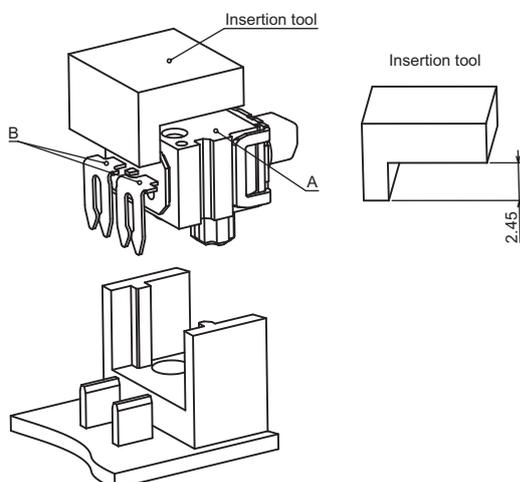

#### Operating Body


- Use an operating body with low frictional resistance and of a shape that will not interfere with the sealing rubber, otherwise the plunger may be damaged or the sealing may deteriorate.

#### ESD

- Static electricity adversely affects the chip resistor inside. For this reason, adopt sufficient electrostatic discharge measures when handling the Switch. Also, take sufficient consideration in the handling of the Switch and its packaging and transportation container.

#### Handling

- Do not handle the Switch in a way that may cause damage to the sealing rubber.
- When handling the Switch, ensure that pressure is not applied to the Pin plunger, Posts and Terminal in the directions shown in the following diagram. Otherwise, Switch may be damaged, or be reduced performance.

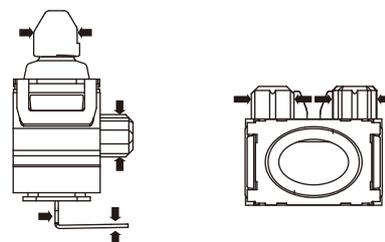

#### Using Micro Loads

- Even when using micro load models within the specification range, if inrush/surge current occurs, it may increase the contact wear and so decrease durability. Therefore, insert a contact protection circuit where necessary.

Please check each region's Terms & Conditions by region website.

---

## **OMRON Corporation**

**Device & Module Solutions Company**

### **Regional Contact**

#### **Americas**

<https://components.omron.com/us>

#### **Asia-Pacific**

<https://components.omron.com/ap>

#### **Korea**

<https://components.omron.com/kr>

#### **Europe**

<https://components.omron.com/eu>

#### **China**

<https://components.omron.com.cn>

#### **Japan**

<https://components.omron.com/jp>