

WWW.MSYSTEMS.CO.ZA

INFO@MSYSTEMS.CO.ZA





THE M-SECURE PRODUCT OFFERS THE MAXIMUM IN SECURITY AND COST EFFECTIVENESS WHILST BEING UNOBTRUSIVE. BEING HIGHLY


VERSATILE THIS SYSTEM CAN FOLLOW CONTOURS, ACHIEVE ANGLES AND SECURE MOST OBSTRUCTIONS LIKE PIPES AND DRAINS.



FABRICATED FROM 3 OR 4 MM WIRE WITH APERTURES OF 12.7 X 75 (H X W) MAKING IT EXTREMELY UNLIKELY TO BE BREACHED, PROVIDING MAXIMUM TIME DELAY FOR INTRUSION DETECTION AND REACTION.

3MM & 4MM WIRE PANELS

75MM X 12.7MM APERTURE

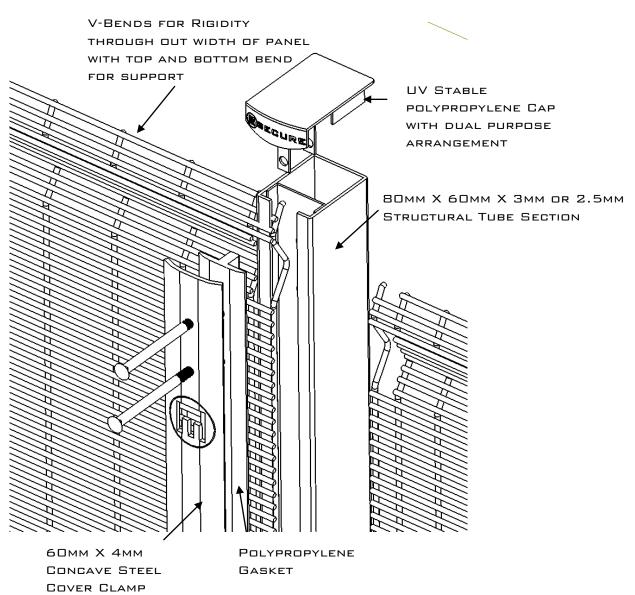


P.O.BOX 3032 KENMARE CHAMDOR 1745 1745 TEL: +27 11 769-1440 FAX: +27 11 769-1449




THE CLAMPING SYSTEM


CLAMPING OF ALL LINE WIRES AND ADDITIONAL 4MM VERTICAL WIRE FOR A SECURE CONNECTION SPREAD ACROSS THE ENTIRE HEIGHT OF THE PANEL AND POST. THE HDPE GASKET ENSURES MAXIMUM GRIP ON THE PANEL IS MAINTAINED.



THE CAP



THE CAP IS MADE FROM A UV STABILISED POLYPROPYLENE WITH INTERNAL FIXING FEATURES TO ENSURE ONCE INSTALLED IT CAN NOT BE REMOVED. THE CAP CAN BE SPLIT IN TWO SHOULD THE CLAMP SYSTEM BE EXTENDED FOR AN ELECTRIC FENCING SYSTEM OR ANTI SCALING OPTIONS. THE CAP CAN ALSO HOUSE A SOLAR PANEL FOR THE MARKETING CUT OUT ON THE COVER CLAMP. PLEASE SEE BELOW FOR MORE DETAILS.








THE COVER CLAMP

THE COVER CLAMP IS MANUFACTURED FROM A CONCAVE 60MM X 4MM FLAT SECTION FOR SUPERIOR CLAMPING PERFORMANCE. THE COVER CLAMP MAY BE ORDERED TO ANY SPECIFIC COLOUR WITH YOUR COMPANY NAME OR LOGO LASER CUT INTO IT FOR ACCESS AREAS. THE PLASTIC GASKET ALSO COMES IN A VARIETY OF COLOURS TO HIGHLIGHT THE BRANDED CUT OUT.



WE ALSO SUPPLY SOLAR POWERED ILLUMINATION OPTIONS OF HIGHLIGHTING THE CUT-OUT AT NIGHT



THE GASKET

THE POLYPROPYLENE GASKET HAS BEEN MOULDED TO ENHANCE THE CLAMPING EFFICACY OF THE CLAMPING SYSTEM. THE GASKET IS ACID RESISTANT, UV STABLE, HEAT RESISTANT DUE TO THE COMPOSITE METERIAL BEING USED, IT IS ALSO EXTREMLY HARD TO BREAK WITH HAMMERING OR CRUSHING ACTION.

THE GASKET IS AVAILABLE IN MULTIPLE COLOURS TO ENHANCE THE BRANDING OPTIONS ON THE COVER CLAMPS WITH THE LIGHTING ENHANCEMENTS.





P.O.BOX 3032 1 NICHOLLS STR. KENMARE CHAMDOR 1745 1745 TEL: +27 11 769-1440 FAX: +27 11 769-1449


0

C

WWW.MSYSTEMS.CO.ZA




<u>The Post</u>

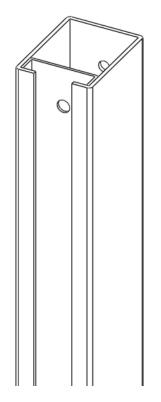

THE STRUCTURAL POST IS 80MM DEEP, 60MM WIDE AND AVAILABLE IN 2.5MM OR 3MM THICK MILD STEEL. BRACED

WITH AN OPTIONAL INTERNAL BRACE TO CREATE A STRONG AND STURDY UPRIGHT ELEMENT TO ENSURE MAXIMUM STRENGTH AND RIGIDITY. THIS FORMS A STOUT FRONT SECTION FOR THE PANEL TO BE PINNED IN AGAINST THE GASKET AND THE COVER CLAMP. ALL ELEMENTS OF THIS SYSTEM ARE PREDRILLED AS NOT TO BREACH ANY OF THE CORROSION PROTECTION APPLIED AFTER MANUFACTURING. THE POST ALSO HAS PREDRILLED HOLES FOR THE M-SECURE ELECTRIC FENCE BRACKET.



THE POST CONFIGURATION ALLOWS FOR MANY ANTI SCALING SYSTEMS. STANDARD OPTIONS INCLUDE WALL TOP ELECTRIC FENCING, FLAT WRAP OR COIL RAZOR PRODUCTS AND AN ESKOM SPECIFICATION WALL SPIKE.


THE PANEL NESTS SECURELY BEHIND THE GASKET AND STEEL COVER CLAMP TO FORM A UNIFORM CLAMPING SURFACE. THE PANEL HAS MULTIPLE V-BENDS WITH 2 STIFFENER BENDS AT THE TOP AND THE BOTTOM

THE FOLLOWING STANDARD SYSTEM HEIGHTS ARE AVAILABLE.

1200мм	1800мм		
2000мм	2400мм		
ЗОООММ			



BACK VIEW OF SYSTEM

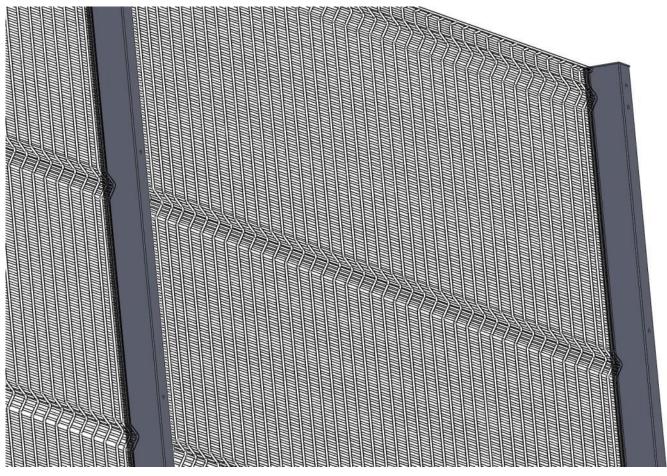

THE BOLTS AND NUTS

THE FIXING SYSTEM HAS BEEN OPTIMISED TO ENSURE NO RISK FROM THE OUT SIDE OF THE PERIMETER FENCING LINE WHILE KEEPING A MINIMALISTIC APPEARANCE FROM THE INSIDE









COATINGS

THE PANELS ARE AVAILABLE IN A GALVAN COATING WITH SELF HEALING PROPERTIES. HEAVY GALVANISED PANELS ARE AVAILABLE ON REQUEST.

THE POSTS ARE AVAILABLE - HOT DIPPED GALVANISED.

ALL BOLTS, NUTS AND WASHERS ARE HOT DIPPED GALVANISED.

ALL MATERIAL CAN BE POWDER OR THERMAL PLASTIC COATED TO MOST COLOUR REQUIREMENTS.
















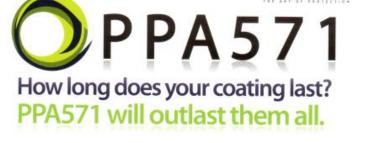

The Plascoat' PPA571 series is one of the most versatile coatings available on the market today, able to provide superior resistance to environmental exposure, wear and tear, damage, and malicious attack with no effect to its performance and low maintenance requirements.

- Extremely long life
- Corrosion resistance in hostile environments
- Aesthetic longevity
- Low toxicity
- Low Fume toxicity
- Warm to the touch
- Low fungal growth
- No primer required
- Graffiti resistant easily removed with no staining
- Water & food contact approvals

Advantages over Epoxy:

- Flexibility
- No curing required
- Significantly higher UV resistance

Advantages over Nylon coatings: Very low water absorption

- Cost effective
- No primer required

The Plascoat' PPA571 series is available in fluidised bed dlp, electrostatic spray, flock spray and extrusion grades.

Contact us for more information:



Plascoat Systems Ltd T: +44 (0)1252 733777 F: +44 (0)1252 733233 E: sales@plascoat.com

Plascoat Europe BV T: +31 (0)181 458888 F: +31 (0)181 458877 E: salespce@plascoat.nl www.plascoat.com **Plascoat** Corp T: +01 800 489 7236

P.O.Box 3032 1 NICHOLLS STR. Kenmare CHAMDOR 1745 1745 Tel: +27 11 769-1440 FAX: +27 11 769-1449

INFO@MSYSTEMS.CO.ZA



Extensive Plascoat lab tests & real world use indicate working life of over 70 years.

Plascoat

Swedish Corrosion Institute tests show underground life of PPA571 of over 200 years.

SGS

Global leader in inspection, , testing and certification. SGS certify that PPA571 will last: 10 years in normal

- conditions
- 5 years in heavy industrial & marine environments.

Advantages over PVC coatings: Very low toxicity

- No plasticizers, chlorine & halogens
- Low temperature performance to -70°C Does not shrink or become

brittle in hot weather Advantages over Polyester:

No curing required

Lasts longer in harsh environments







Stock Colours

Plascoat' PPA571 is available in these listed stock colours. A comprehensive colour matching service is available for larger orders. Please contact us for further details.

Our colour range is listed in Plascoat 3-digit codes, and RAL 4-digit identification.

Beige 222	RAL 1015	Red 233	RAL 3020
Yellow 344	RAL 1021	 Green 475	RAL 6005
Blue 536		 Blue 542	RAL 5015
Grey 613	RAL 7035	Grey 654	RAL 7001
Grey 695		Grey 640	RAL 7016
Brown 813	RAL 3009	Brown 838	
Black 700	RAL 9005	White 110	RAL 9016
		as accurate as po card should be u	rt is made to ensure the colours on this page are ssible, due to printing & on-screen limitations this sed as guidance only. Colours reflect coated finish nearest RAL value where appropriate. Samples are
Silver	RAL 9006		ed plates or powder.




ANTI SCALING TECHNOLOGIES

The M-Secure system is the only system on the market today that was designed to accept "after market" additional security technologies such as electric fencing, vibration detection systems, anti-scaling options like razor strips, Razor flat wrap and Razor Coil including Shark tooth type strips.

Extending our Cover plate with the HDPE Gasket creates a seamless transition to a wall top electric fencing system without the need to additionally fix any line brackets saving time and money


We offer a full length bracket should you wish to have a full length electric fence. This option is a pure bolt-on system and does not require.

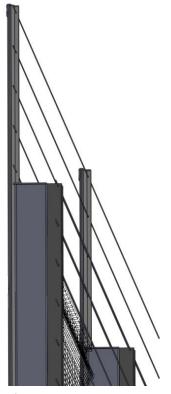

P.O.BOX 3032 1 NICHOLLS STR. KENMARE CHAMDOR 1745 1745 TEL: +27 11 769-1440 FAX: +27 11 769-1449 The Fencing system can accommodate the majority of vibrations detection system available on the market today.





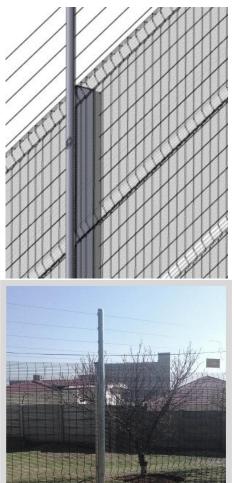







CONCEPT DRAWING PROPOSED TO CLIENT

ACTUAL FENCE



