


Thank you for choosing **Schneider Electric** Pieno Unit. To ensure proper application of our product, please read through the following information before installation and use.

This application guide applies to the following products :



Cat. No. : E82T25USB
Description : 13A Twin Gang Switched Socket with 2.1A USB



APPLICATION GUIDE
13A Socket with USB

CAT. NO.
 E82T25USB

SPECIFICATIONS

USB Input	: 220 -250V~, 50/60 Hz,0.45A
USB Output	: 5V---2.1A (2.1A Max for each port)
USB Compliance	: IEC 62368-1,BS EN 62368-1
USB protection	: Over heat, over current, over voltage
13A socket Voltage	: 250V~
13A socket Current	: 13A
13A socket Compliance	: BS1363-2,MS589-2,SS145-2
Mounting centre	: 120.6mm
Operation Temperature	: 0-40°C


MFR5937002 V00

Pieno

IMPORTANT NOTE

1. The products must be installed by qualified electricians
2. Please check your local wiring regulations before installation
3. Suggest to install product with 47mm depth wallbox
4. Suitable for mounting on concrete or other non-combustible surface only
5. Safekeeping the surround to prevent damage during product installation
6. Turn off the power supply when you clean the product. Use a piece of soft cloth or tissue paper to wipe off the dust and dirt on the surface. Avoid using corrosive chemicals
7. Kindly ensure your device's Battery Charging Specification suitable with this USB Charger before charging
8. Do not insert metal objects into USB Charger
9. User will feel some heat at the product surface when charging is in progress
10. Device's charging performance will be impacted by device's charging protocol, quality of charging cable used, and other relevant factors
11. Some charging cables with electronic design might functions as charging device.
12. This permanently connected equipment does not contain internal disconnected device, a readily accessible disconnected device should be provided externally
13. Not advisable to use with multi adaptors
14. Not allow reserve charging
15. Indoor use only

WIRING DIAGRAMS




Fixing :

MOUNTING INSTRUCTION

Please refer to the following diagram for proper installation : (Proper wire stripping length : 10-12mm)


Remarks :

For surround mounting, align the clip locks on the grid plate and press both side of the surround. Complete engagement of the clip locks is indicated by two clear clicks.

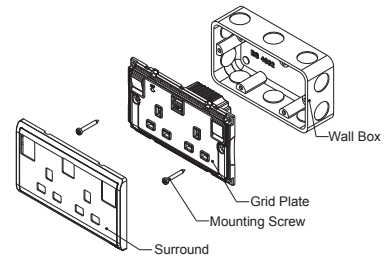

Remove :

Insert a screwdriver into the Release-Lock, and twist the screwdriver to remove the Surround

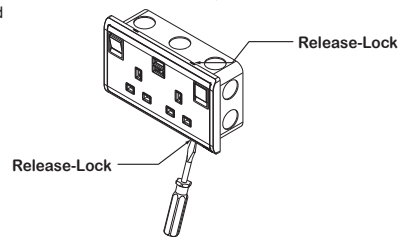

User Manual \ USB Socket \ Pieno EN, International Edition

> Note:

- 1/ 70g high quality uncoated Book-Paper (white).
- 2/ Double side printing.




DIE-CUT



PANTONE Black C

ECN201906386	Initial Release, 2019/01/025	ZXZ	00
DECN/ECN/TCAN	DESCRIPTION	DRN	REV
NUMBER :	MFR5937002	Revision:	Sheet:
		00	1/1

> Folding / Appearance & Size :



> ARTWORK :
 File Size = A4



Released for Manufacturing
 Printed on 2019/09/09