INTALITE UK

SLV
EXPERIENCE LIGHT



BIG WHITE 2020

DEAR CUSTOMER,

We would like to take this opportunity to thank you for choosing INTALITE UK.
Our 2020 range has more new & innovative designs than ever before. With this new edition of our annual lighting catalogue we are offering you enhanced product information and more detailed imagery. Be inspired by our location examples. If you have any questions please contact our team for further assistance. We are always happy to help.

Pricing:
The catalogue is fully priced at the RRP excluding VAT.

Deliveries:
All items held here in the UK are available on a next day service for orders received by 2pm. Items held in our central European warehouse are available on a 3 - 4 working day delivery service. If your order is urgent we are able to offer an express next day service from Europe subject to a freight cost based on the weight of the order. All orders placed after 12pm will be treated as being received on the next working day. Delivery times are approximate and we accept no liability for late deliveries caused by events beyond our control. This also includes express deliveries.

Minimum order value:
Our carriage paid order is £150 nett excl vat, orders below £150 will be subject to a small order charge of £12.

Chargeable Samples:
We are happy to supply chargeable sale or return samples. carriage is applicable and refundable on placement of full order. If not required, then goods must be returned in A1 resealable conditions & returned at your own cost within 30 days.

Cancellation of orders:
Once an order is placed with us it is then placed with SLV in Germany almost immediately to ensure the quickest delivery time possible. This process only allows us a 30 minute window in which to cancel / amend an order. Beyond this time it is not possible to amend or cancel.

Returns:
Returned goods will not be accepted without prior notification. A returns authorisation document is available upon request. Any goods returned without this authorisation document will be refused. Returns of unwanted items are accepted within three months after purchase, are subject to a 25% handling charge and need to be returned in A1 condition.

Faults:
If a product appears to be faulty we will offer to collect the product for inspection. If the fault is repairable, this option will be offered. If the product is not repairable we will send it away for testing, which can take up to 6 weeks. If a replacement is required in the meantime, this will be supplied as a chargeable replacement. A credit will be issued once it has been confirmed that the product has a genuine fault and it has not been caused by poor installation.

Non required / cancelled items:
All products ordered in error or not required will be subject to a 25% handling charge with the cost of return carriage to be incurred by the customer.

Guarantee:
Products carry a 5 year electrical guarantee. All lamps have their own average life span and some paint finishes for exterior fittings are excluded. We recommend all products are installed by NICEIC+ registered electrical contractors. Failure to do so will result in any guarantee becoming void, Subject to SLV warranty conditions.

Made to order / emergency conversions:
All made to order products including emergency conversions are non returnable.

Account facilities:
Accounts facilities can be applied for by returning our account application form (available upon request). We are contractually obliged to forward details to our insurers. Any account that is more than 60 days overdue this may result in credit facilities being removed and credit ratings being effected.

Payment terms (Account customers):
We require payment in full by the last day of the month following the invoice date for this we offer a 2.5%settlement discount.

Retention of title:
All goods remain the property of INTALITE UK until such time that full payment is received for goods supplied. We are a supply company only, we offer replacement / repairs for faulty goods. We do not offer any form of compensation relating to installation / un-installation.

Additional information:
- Photometric data for our products can be found at www.relux.biz under the manufacturer's name SLV. Individual ldt files are also available on request.
- The inverted black triangle found next to some products indicates that this is a running out model. If ordered, these items are non returnable.
- External products are not all suitable for marine environments unless specified.

Full Terms & Conditions:
For our full terms and conditions please visit our website - intalite.co.uk/terms

Contact Details
148-154 Merton High Street
Wimbledon
London
SW19 1AZ

Opening Hours
Monday-Thursday:
8.00 – 17.30

Friday:
8.00 – 17.00

Phone:
0208 542 1471

Sales Fax:
0870 421 1763

Sales Email:
sales@intalite.co.uk

INTALITE.CO.UK

SLV VALETO®



© bernardbodo, Adobe Stock


COMPATIBLE WITH OTHERS.
CONNECTED WITH YOU.

The SLV VALETO® SMART LIGHT SYSTEM makes your life easier. You can connect the system to Philips Hue, OSRAM SMART+ and other ZigBee® 3.0-compatible systems from other manufacturers and control them using voice commands with the aid of Amazon Alexa.

All of the options and benefits from page 816 onwards.

LET'S GO DIGITAL
SO THAT YOU CAN WORK MORE EFFICIENTLY


"AND WHAT EXACTLY CAN THE NEW WORKSHOP DO NOW?" A GREAT DEAL!

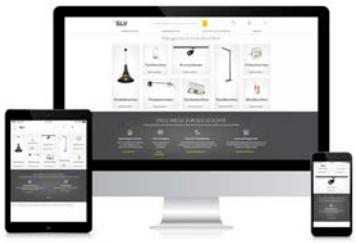

During the reorientation, it was not just about making the web site look good. Performance was also an issue. Not only has the display of our products been improved, but also the search results. A faster page set-up and more intuitive operation were other requests that we have incorporated. Of course, all of this has not just been optimised for desktops but also for Smartphones and tablets.

SEARCH & FIND

A product search is essential in a web shop. For this reason we have paid special attention to this area. Meaningful filters and a multitude of internal and external suggestions have been interwoven with the technical possibilities of clever search algorithms here. The results are therefore not only displayed more quickly but also in a better way – in a nutshell: the search is more efficient!

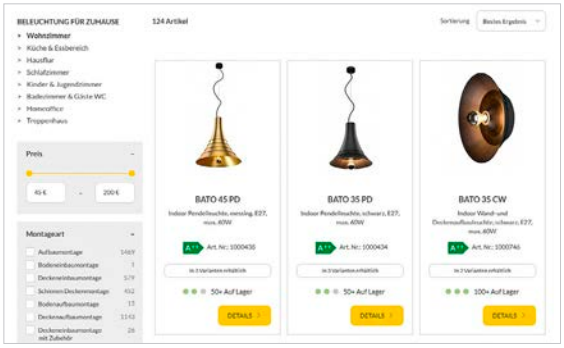

YOUR VISION – OUR LUMINAIRES



Light is equally as diverse as the people that deal with it. This is also reflected in different projects. In order for these to become reality, we provide you with all of the tools and information that you need. Regardless of whether you prefer certain software or need a certain energy label: We would be pleased to provide the necessary information.

VIEW ONLINE

You have probably already got to know our 300 page catalogue. If not, we would like to take the opportunity to show you the advantages again. You will find a short video guide under the QR code. Just take a look!











INDOOR 006 - 527

Table lamps and floor stands ..... 006 - 031
Pendants ..... 032 - 131
Wall lights ..... 132 - 229
Ceiling lights ..... 230 - 277
Wall and ceiling lights ..... 278 - 329

240V track, 3-circuit ..... 330 - 373
240V track, D-track ..... 374 - 381
240V track, 1-circuit ..... 382 - 405
240V track Easytec® II ..... 406 - 415
Low-voltage cable system and glass cabinet track ..... 416 - 433

Recessed fittings ..... 434 - 527

OUTDOOR 528 - 735

Mobile luminaires and floor stands ..... 528 - 583
Spots ..... 584 - 609
Wall lights ..... 614 - 671
Ceiling lights ..... 672 - 679
Wall and ceiling lights ..... 680 - 681

Recessed wall lights ..... 696 - 701
Recessed ceiling lights ..... 702 - 711
Inground fittings ..... 712 - 735

SAFETY SOLUTIONS 736 - 745

Safety solutions ..... 736 - 745

PROFILE SOLUTIONS 746 - 777

LED STRIPS AND LIGHT BARS 778 - 815

LED strips ..... 782 - 812
Light bars ..... 813 - 815

SLV VALETO® SMART LIGHT SYSTEM | SLV LIGHT CONTROLLERS 816 - 841

SLV VALETO® SMART LIGHT SYSTEM ..... 816 - 825
SLV LIGHT CONTROLLERS Overview ..... 826 - 827
SLV COLOR CONTROL ..... 828 - 831
SLV KELVIN CONTROL ..... 832 - 834
SLV BLUETOOTH® CONTROL 835
SLV CONTROL BY TRUST ..... 836 - 841

ACCESSORIES 842 - 865

Accessories ..... 842 - 865

LAMPS 866 - 881


Lamps ..... 866 - 881

LUMINAIRE FAMILIES AND INDEX 882 - 918

The SLV luminaire families ..... 882 - 899
Numerical ..... 900 - 911
Alphabetical ..... 912 - 917

Other luminaires and variants can be found online at www.slv.com

All prices specified are recommended retail prices (RRP) excluding VAT.

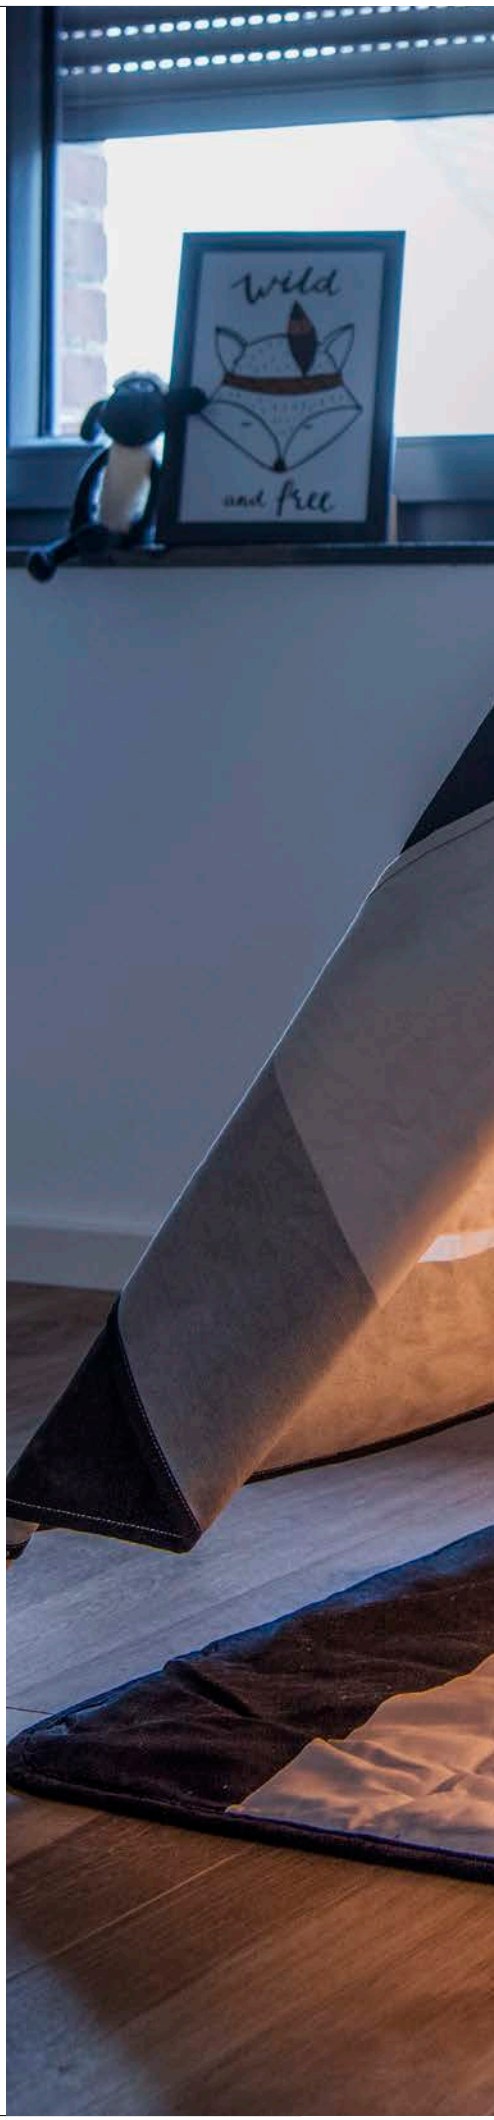

TIMELESS CLASSIC

SUITABLE TABLE LAMPS AND FLOOR STANDS FOR ANY ROOM.

The classic among the luminaires: our table lamps and floor stands blend into any interior thanks to their simple, slim design and therefore always make a good impression in offices, living areas and stores.


1002582 11
1002583 11


1002146 29

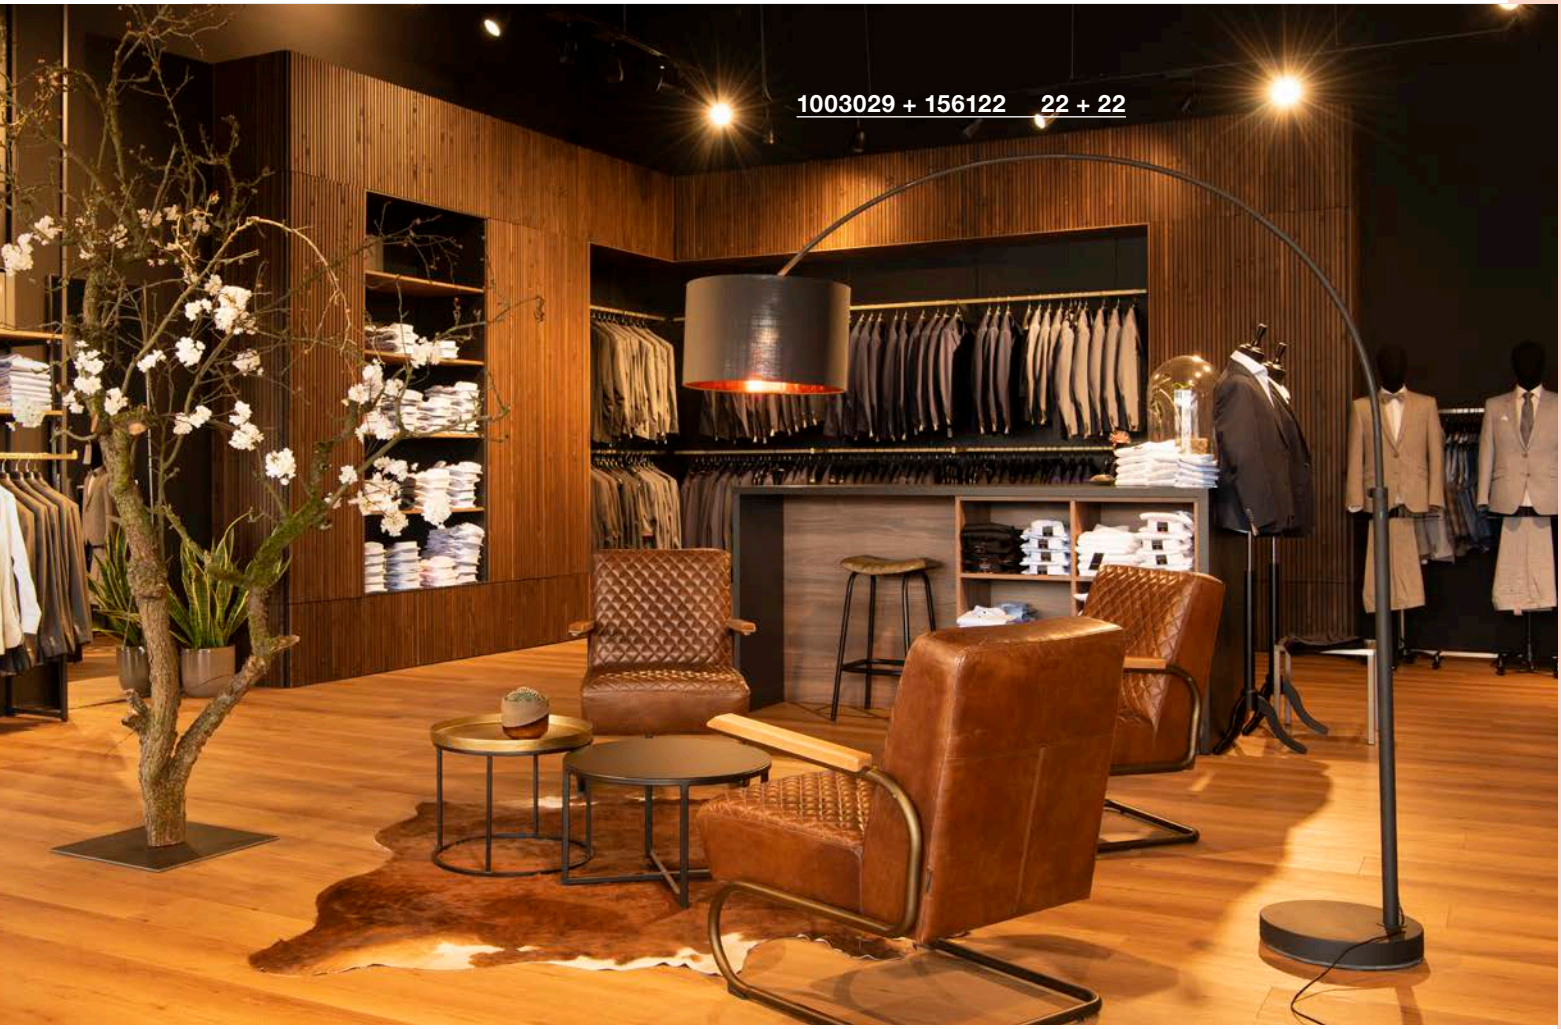


TABLE LAMPS AND FLOOR STANDS



Other luminaires and variants can be found online at www.slv.com

KALU
FL, single, QPAR111

889

E-A++ Spectrum A++–E








- Luminaire unit, can be rotated by 350° and swivelled by 90°
- Foot switch on connection lead

Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note
Shock-proof 2-pin plug and switch

Recommended lamp

LED GU10 6.5W 30°
2700K 400lm EEI=A+
7kWh/1000h
Item no. 1000684 | 40,50 GBP

LED GU10 15.5W 30°
2700K 680lm EEI=A
6kWh/1000h
Item no. 570672 | 63,00 GBP

Lamp details
max. 20W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
■ black	**1000722**	**99,00**
GU10 | QPAR111		
□ white	**1000723**	**99,00**
GU10 | QPAR111		
▨ matt aluminium	**1000724**	**101,70**

FITU
TL, E27

887

E-A++ Spectrum A++–E

NEW








- Switch on connection lead

Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note
2-pin plug and switch


Recommended lamp


E27 8W
2000-2900K 500lm EEI=A
8kWh/1000h
Item no. 560741 | 25,20 GBP


LED E27 8W 350°
2200K 250lm EEI=B
8kWh/1000h
Item no. 1001357 | 29,70 GBP

Lamp details
max. 10W


Variant	Item no.	GBP
E27		
■ black	**1001676**	**49,50**
E27		
□ white	**1001677**	**49,50**
E27		
▨ aluminium	**1001678**	**52,20**

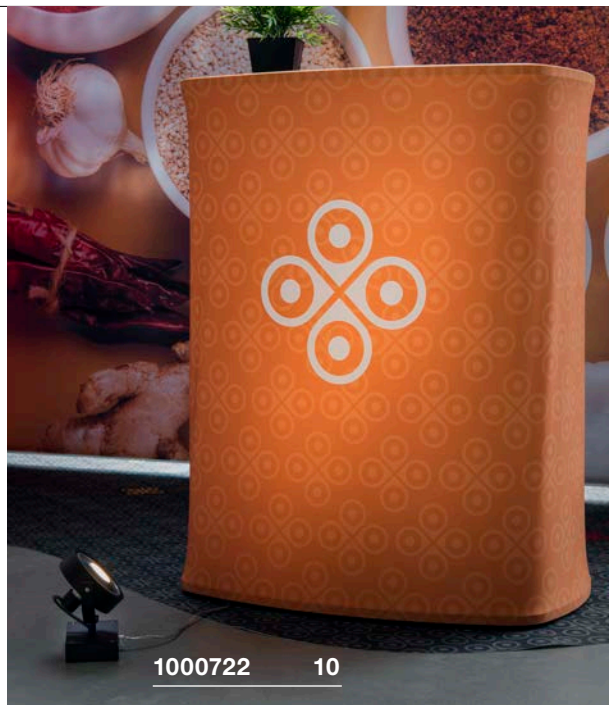

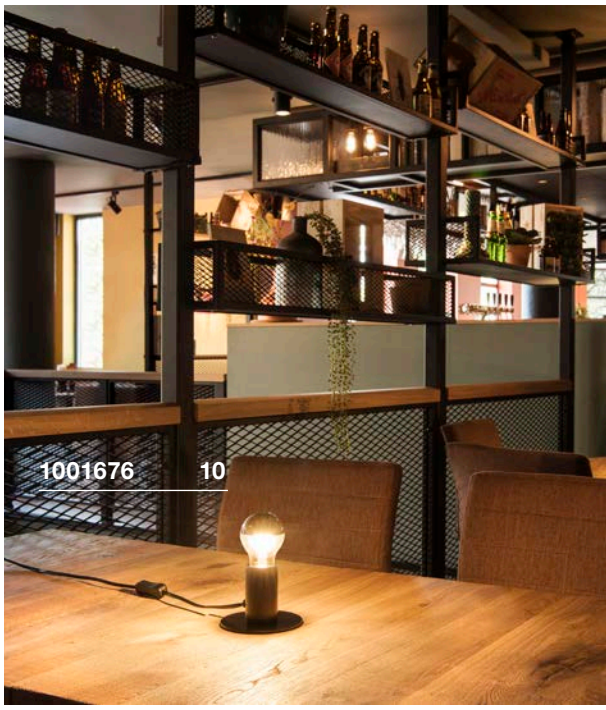

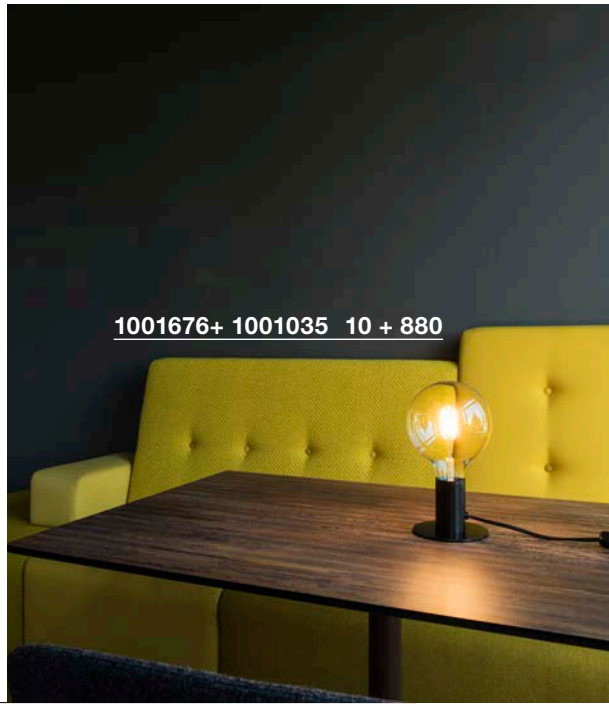



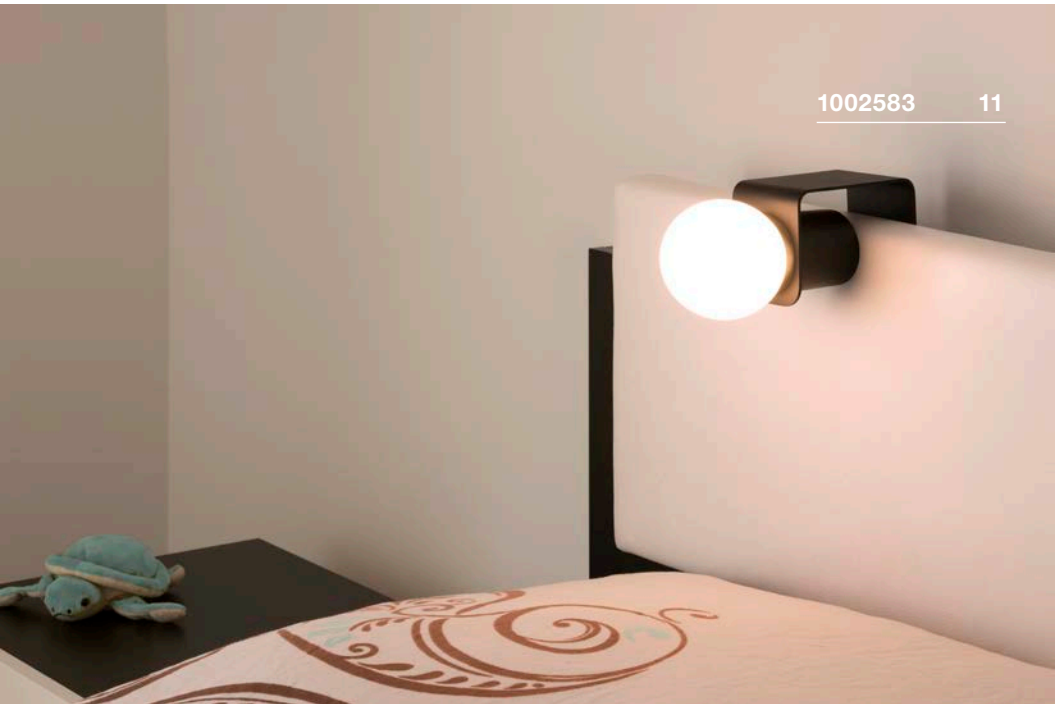



TONILA
TL

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW








- Mobile, wireless luminaire
- Dimmable in 3 stages using the button
- Convenient charging via USB

Product details

Battery operated
Total consumption: 1.6W
Material: Aluminium / Plastic
Dimmable: Switch



Dimensioned drawing



Note

Power supply excl. USB charger 5V DC/1-2A required.

Variant	Item no.	GBP
90lm | 2700K | CRI>80 white / aluminium	1002582	85,50
90lm | 2700K | CRI>80 black / brass	1002583	85,50

MAGANDA
TL

890

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Illuminated outer edge
- Switch on lamp base
- 3-times optical magnification

Product details

100-240V ~50/60Hz | 12V DC
Total consumption: 4.2W
Material: Steel / Glass

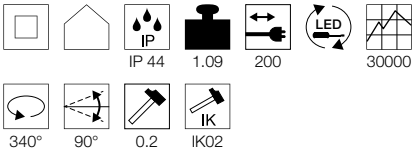

Dimensioned drawing



Note

IP 2-pin mains plug

Variant	Item no.	GBP
70lm | 3000K | CRI>80 chrome / white	**1001502**	**126,00**

VINCELLI D
TL

898

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Slim design
- Lamp unit made from real bamboo

Product details

220-240V ~50Hz | 500mA
Total consumption: 12W
Material: Bamboo / Steel

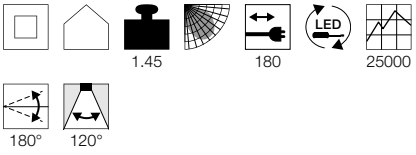


Dimensioned drawing




Note

Power supply

Variant	Item no.	GBP
500lm | 2700K | CRI>80 anthracite / brown	**1002068**	**171,00**

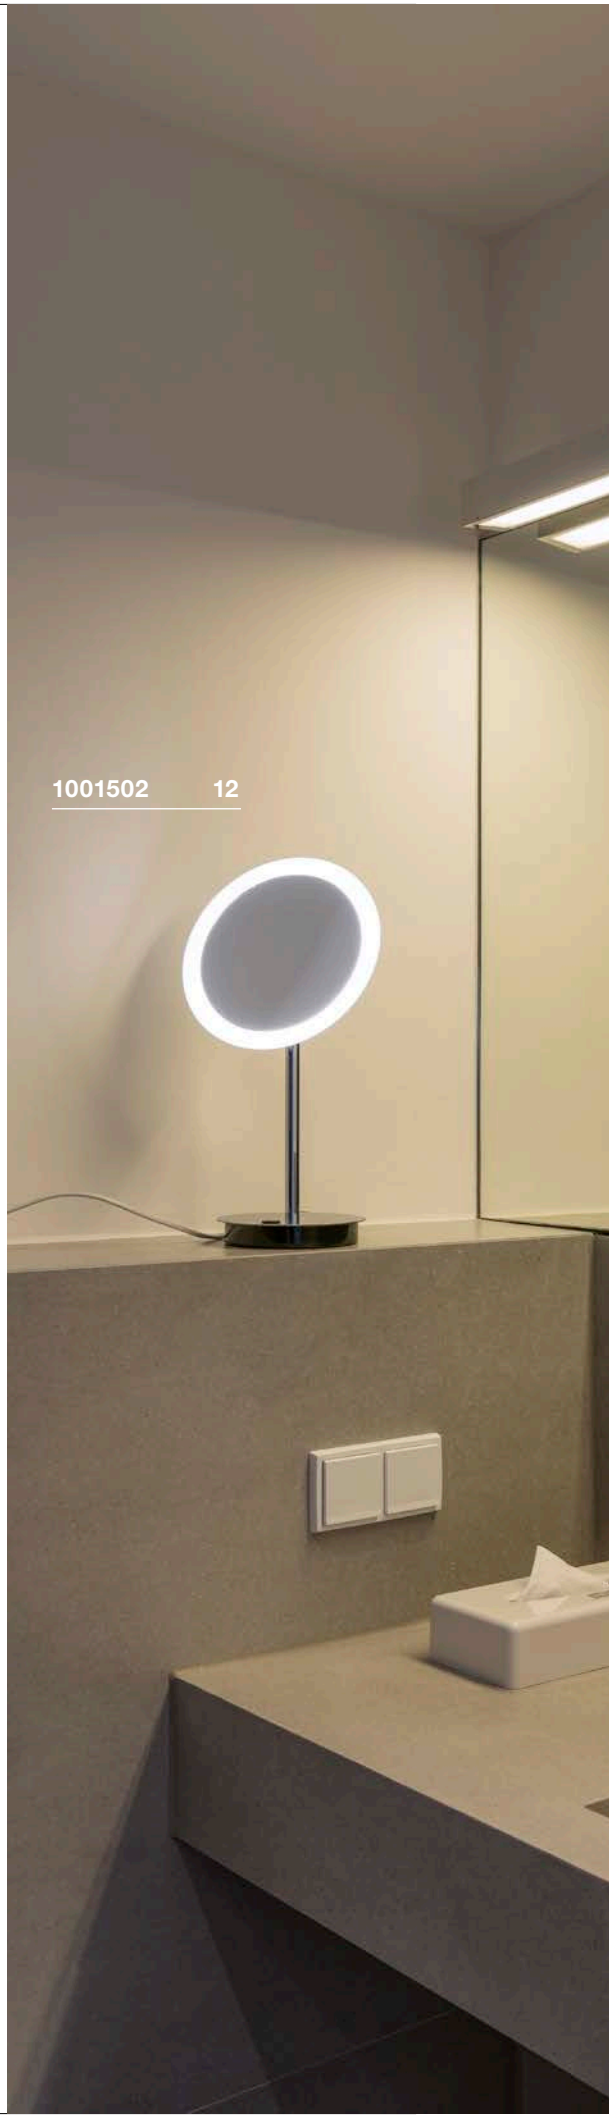

1001502 **12**

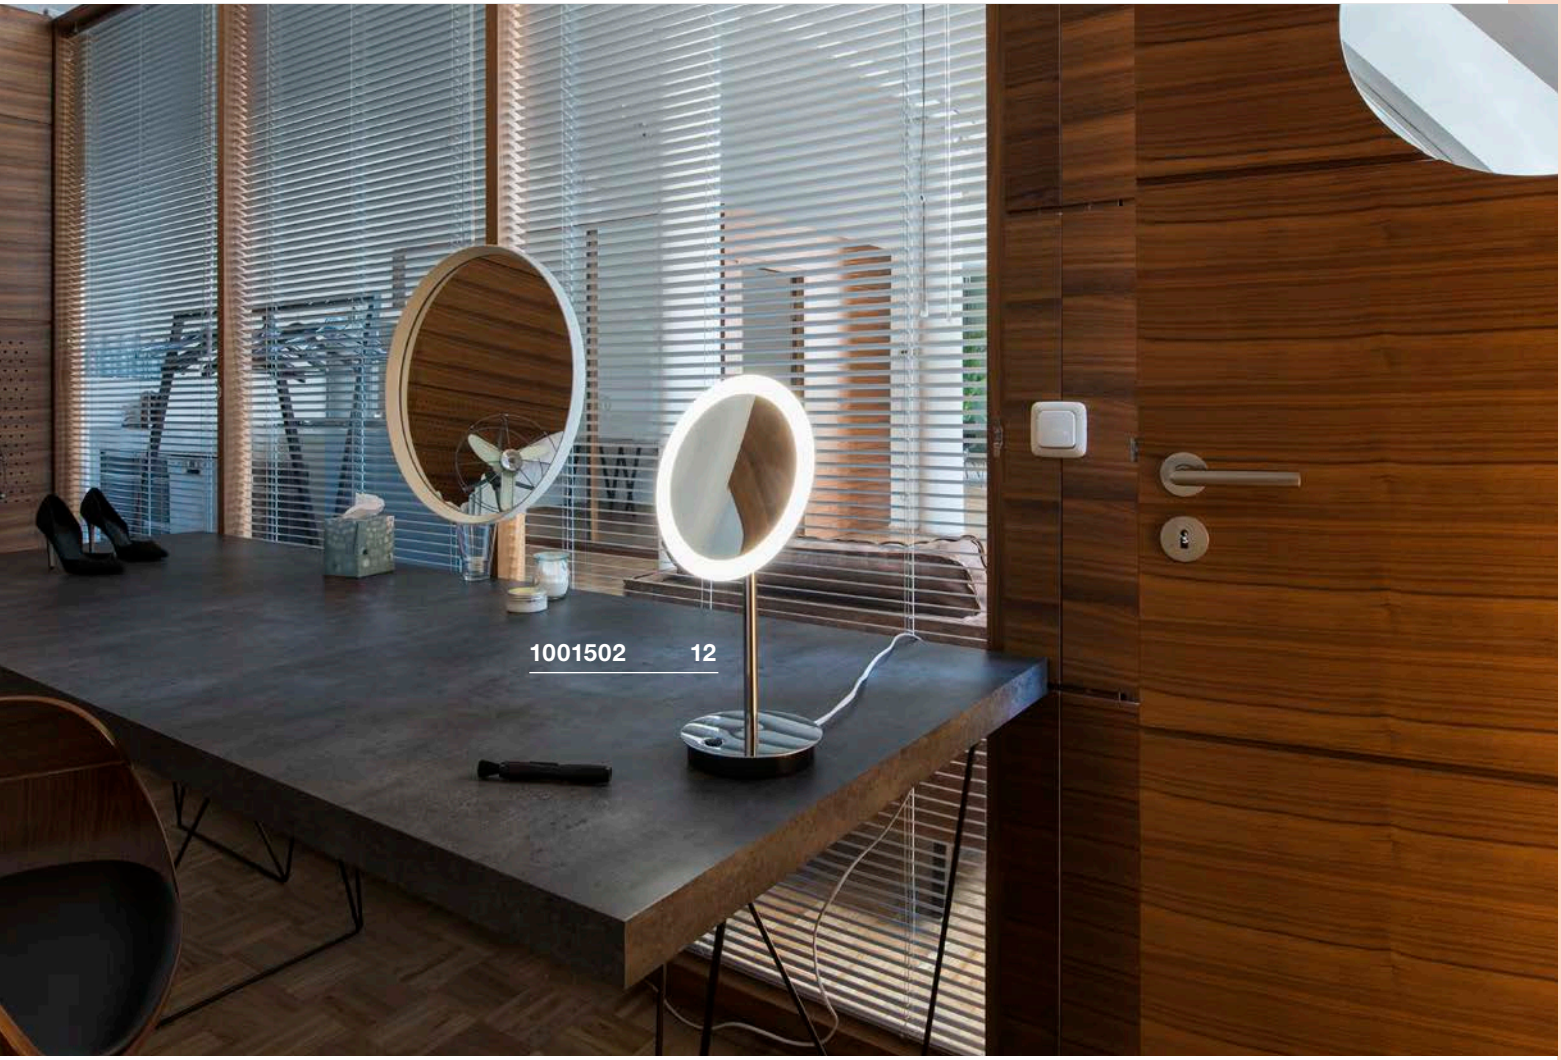

1001502 12


1002068 12

reddot award 2018
winner



DESIGNED BY
Johannes Tomm

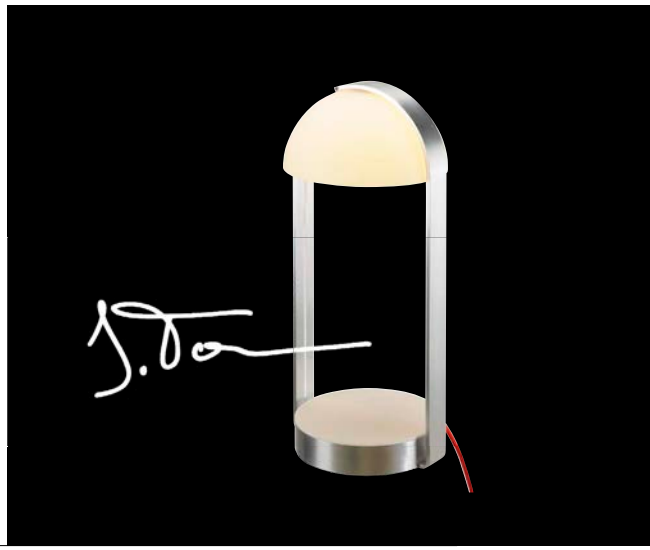

BRENDA
TL, wireless charging

885


A-A++ Spectrum A⁺⁺–E


LED INSIDE

FR





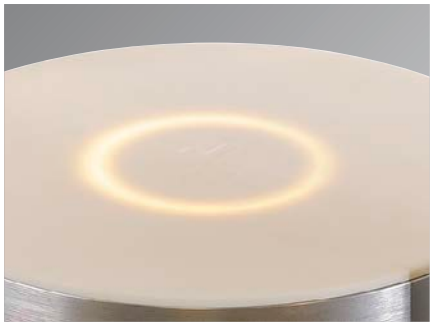

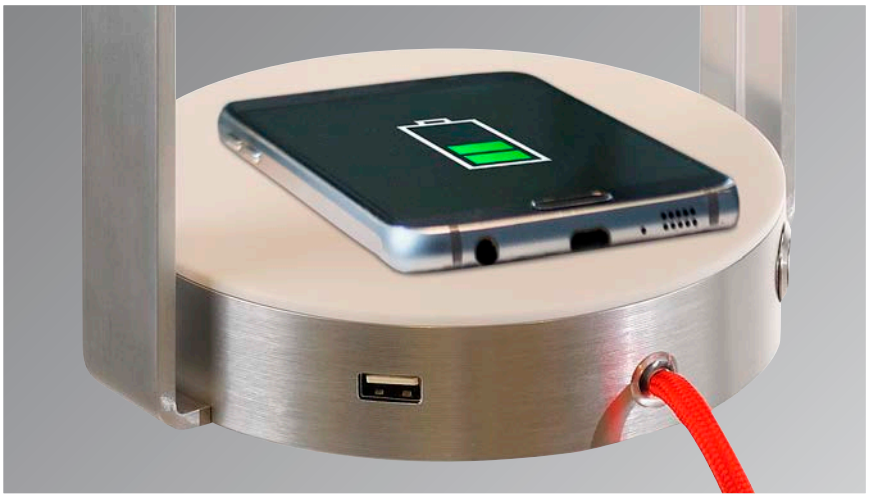

- Dimmable in 3 stages
- Charging surface for wireless Smartphone charging
- Premium LED and USB connection

Product details

220-240V ~50/60Hz | 12V DC
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Switch




1.58 200



50000

Dimensioned drawing



Note


Night light can be switched separately
2-pin plug

MODERN TABLE LAMP WITH INDUCTIVE CHARGING FUNCTION

Red Dot Award winner combines modern design and functionality.


Frosted glass and brushed aluminium – combining to create a great aesthetic, complimented by a red power cable.
The BRENDA table lamp can be dimmed to three levels, adapting to the required mood and surroundings by touch. The Brenda does not just impress as a high-quality table lamp; it also provides a night light function (50 lm) and a double Smartphone charging function (inductive charging station and USB connection). Increasing the scope of functionality to a new level, ushering in a new connectivity era (Qi compatible Smartphone required).

The integrated Premium LED module with a service life of 50,000 hours in white, sets new standards with a high degree of economy (EEK A++ at 11 Watts).
The Brenda forms part of a product family which was designed by well-known designer Johannes Tomm. Complimentary wall lamps and pendant lamps are also available.

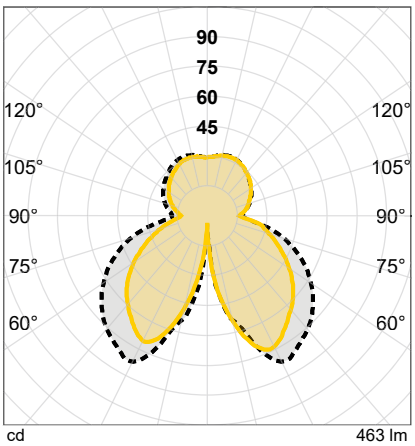


Variant	Item no.	GBP
Indirect: 460lm | 3000K | CRI>80 Night light: 50lm | 3000K | CRI>80		
white / matt grey	146111	296,10

SLV FENDA. MIX & MATCH.

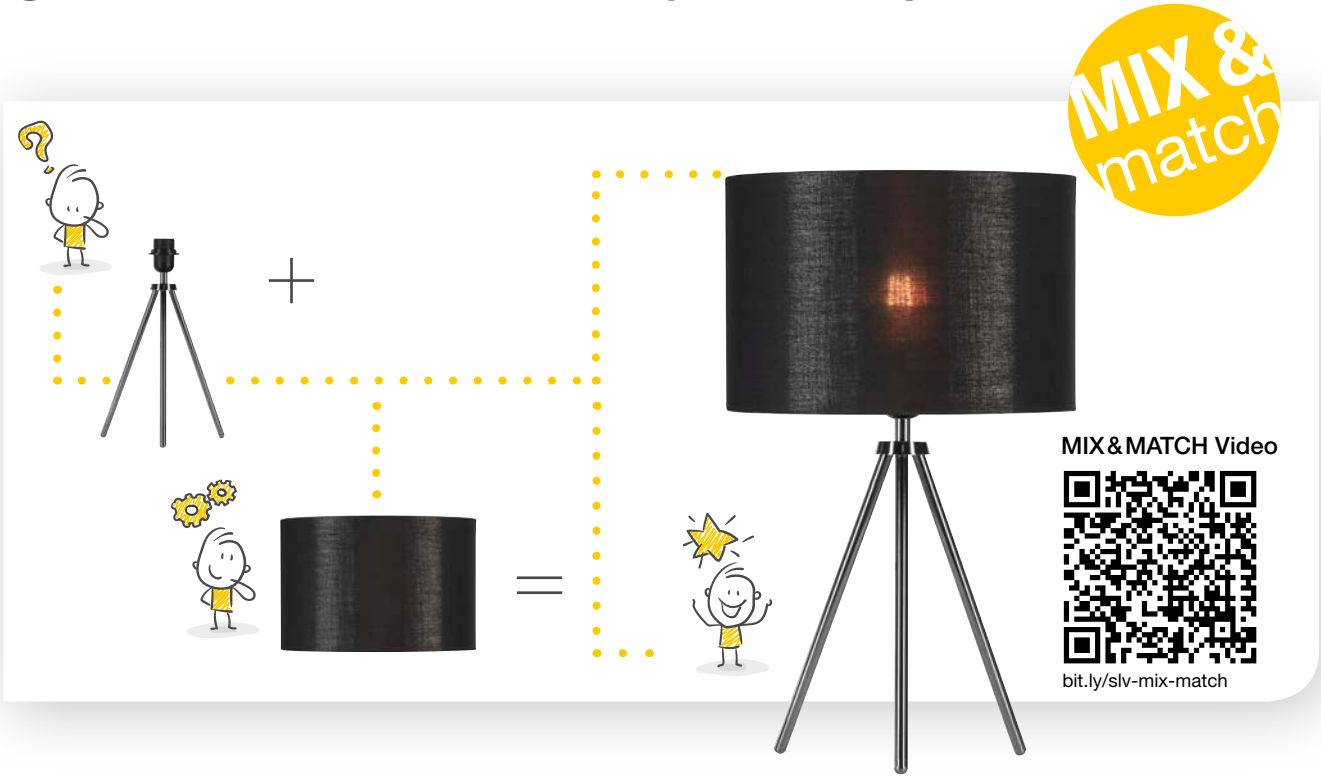



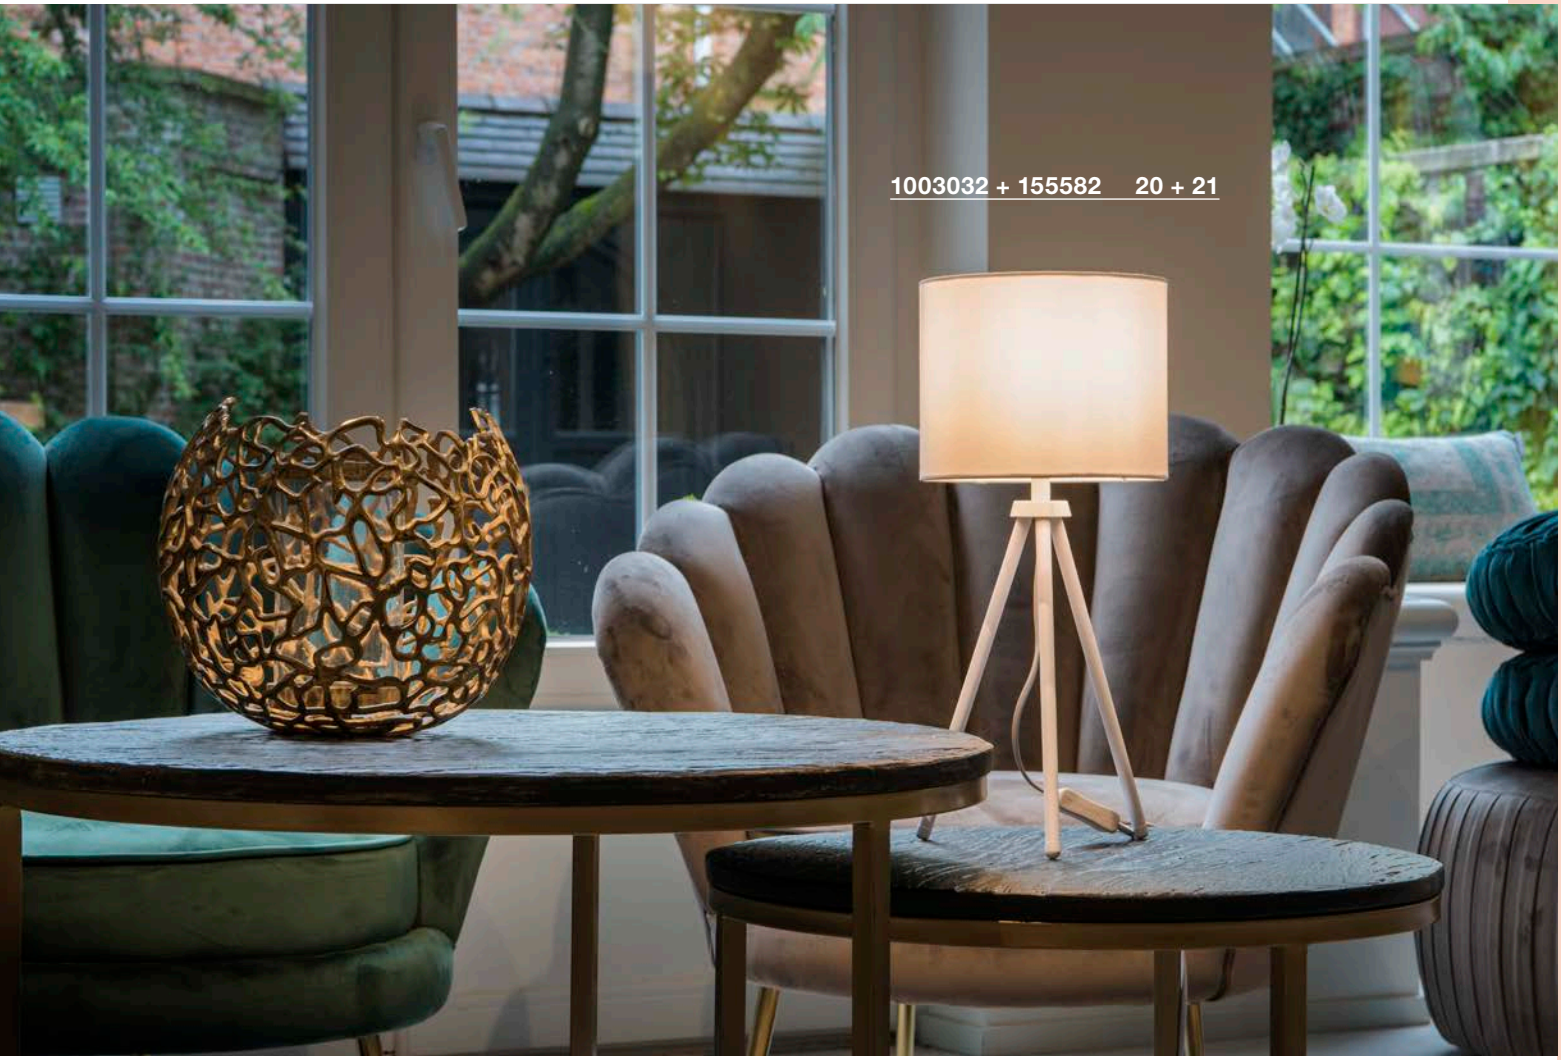

1003032 + 155582 20 + 21



1003029 + 156122 22



1003030 + 155582 18 + 21

FENDA
TL, E27

886

E-A++ Spectrum A⁺⁺–E








- Individually configurable by selecting the lamp shades
- Switch on connection lead

Product details
220-240V ~50/60Hz
Material: Steel



Dimensioned drawing



Note
2-pin plug and switch

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560752 | 18,00 GBP

LED E27 7W
2700K 810lm EEI=A++
7kWh/1000h
Item no. 1001038 | 20,70 GBP

Lamp details
max. 60W

Variant	Item no.	GBP
E27		
matt white	1003030	58,50
E27		
matt black	155780	58,50
E27		
brushed nickel	155785	67,50

FENDA
FL, E27

886

E-A++ Spectrum A⁺⁺–E








- Individually configurable by selecting the lamp shades
- Foot switch on connection lead

Product details
220-240V ~50/60Hz
Material: Steel



Dimensioned drawing



Note
2-pin plug and switch

Recommended lamp

LED E27 11.5W 240°
2700K 1060lm EEI=A+
12kWh/1000h | **3 Step-Dim**
Item no. 560432 | 22,50 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details
max. 60W

Variant	Item no.	GBP
E27		
matt white	1003031	108,00
E27		
matt black	155790	108,00
E27		
brushed nickel	155795	117,00

FENDA
Ø 15 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details
Material: Textile / Steel



Dimensioned drawing



Note
max. 40W







Variant	Item no.	GBP
white	156141	34,60
beige	156143	34,60
black / copper	156152	40,50

FENDA
Ø 30 cm, round

886






- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel



Dimensioned drawing



Note

max. 60W







Variant	Item no.	GBP
white	155582	40,50
beige	155583	40,50
black / copper	155592	54,00

FENDA
Ø 45 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel



Dimensioned drawing




Note

max. 60W








Variant	Item no.	GBP
white	156111	63,00
beige	156113	63,00
black / copper	156122	67,50

FENDA
Ø 70 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel





Dimensioned drawing



Note

max. 60W





Variant	Item no.	GBP
white	1000579	85,50
black / copper	1000580	99,00

FENDA
TL, E27

886

E-A++ Spectrum A++–E








- Individually configurable by selecting the lamp shades
- Switch on connection lead

Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note
2-pin plug

Recommended lamp
LED E27 9.5W 240°
2200-6700K 806lm EEI=A+
10kWh/1000h
Item no. 560161 | 20,70 GBP

Lamp details
max. 40W

Variant	Item no.	GBP
E27		
matt white	1003032	58,50
E27		
matt black	155540	58,50


FENDA
FL, E27

886

E-A++ Spectrum A++–E








- Individually configurable by selecting the lamp shades
- Switch on the lamp head

Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note
2-pin plug

Recommended lamp
LED E27 8.5W
2700K 806lm EEI=A+
10kWh/1000h
Item no. 560161 | 20,70 GBP

Lamp details
max. 40W

Variant	Item no.	GBP
E27		
matt white / shiny black	1003033	99,00
E27		
matt black	155490	99,00
E27		
chrome	155492	108,00

FENDA
Ø 15 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details
Material: Textile / Steel



Dimensioned drawing



Note
max. 40W







Variant	Item no.	GBP
white	156141	34,60
beige	156143	34,60
black / copper	156152	40,50

FENDA
Ø 30 cm, round

886






- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel



Dimensioned drawing



Note

max. 60W







Variant	Item no.	GBP
white	155582	40,50
beige	155583	40,50
black / copper	155592	54,00

FENDA
Ø 45 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel



Dimensioned drawing




Note

max. 60W








Variant	Item no.	GBP
white	156111	63,00
beige	156113	63,00
black / copper	156122	67,50

FENDA
Ø 70 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel





Dimensioned drawing



Note

max. 60W





Variant	Item no.	GBP
white	1000579	85,50
black / copper	1000580	99,00

FENDA BOW BASIC
FL, E27

886

E-A++ Spectrum A++–E








- Individually configurable by selecting the lamp shades
- Foot switch on connection lead

Product details
220-240V ~50/60Hz
Material: Steel



Dimensioned drawing



Note
Max. permitted shade weight 900 g
2-pin plug and switch

Recommended lamp

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1002127 | 11,70 GBP

LED E27 7W
2700K 810lm EEI=A++
7kWh/1000h
Item no. 1001038 | 20,70 GBP

Lamp details
max. 25W
L: 17.5 cm max.

Variant	Item no.	GBP
E27		
matt white	1003028	188,10
E27		
matt black	1003029	188,10
E27		
chrome	1000763	197,10

FENDA
Ø 40 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details
Material: Polymethylacrylate (PMMA)



Dimensioned drawing



Note
max. 60W

Variant	Item no.	GBP
white	1000764	76,50

FENDA
Ø 45 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details
Material: Textile / Steel




Dimensioned drawing



Note
max. 60W








Recommended accessories
Acrylic glass cover
Item no. 156100 | 34,20 GBP

Variant	Item no.	GBP
white	156111	63,00
beige	156113	63,00
black / copper	156122	67,50

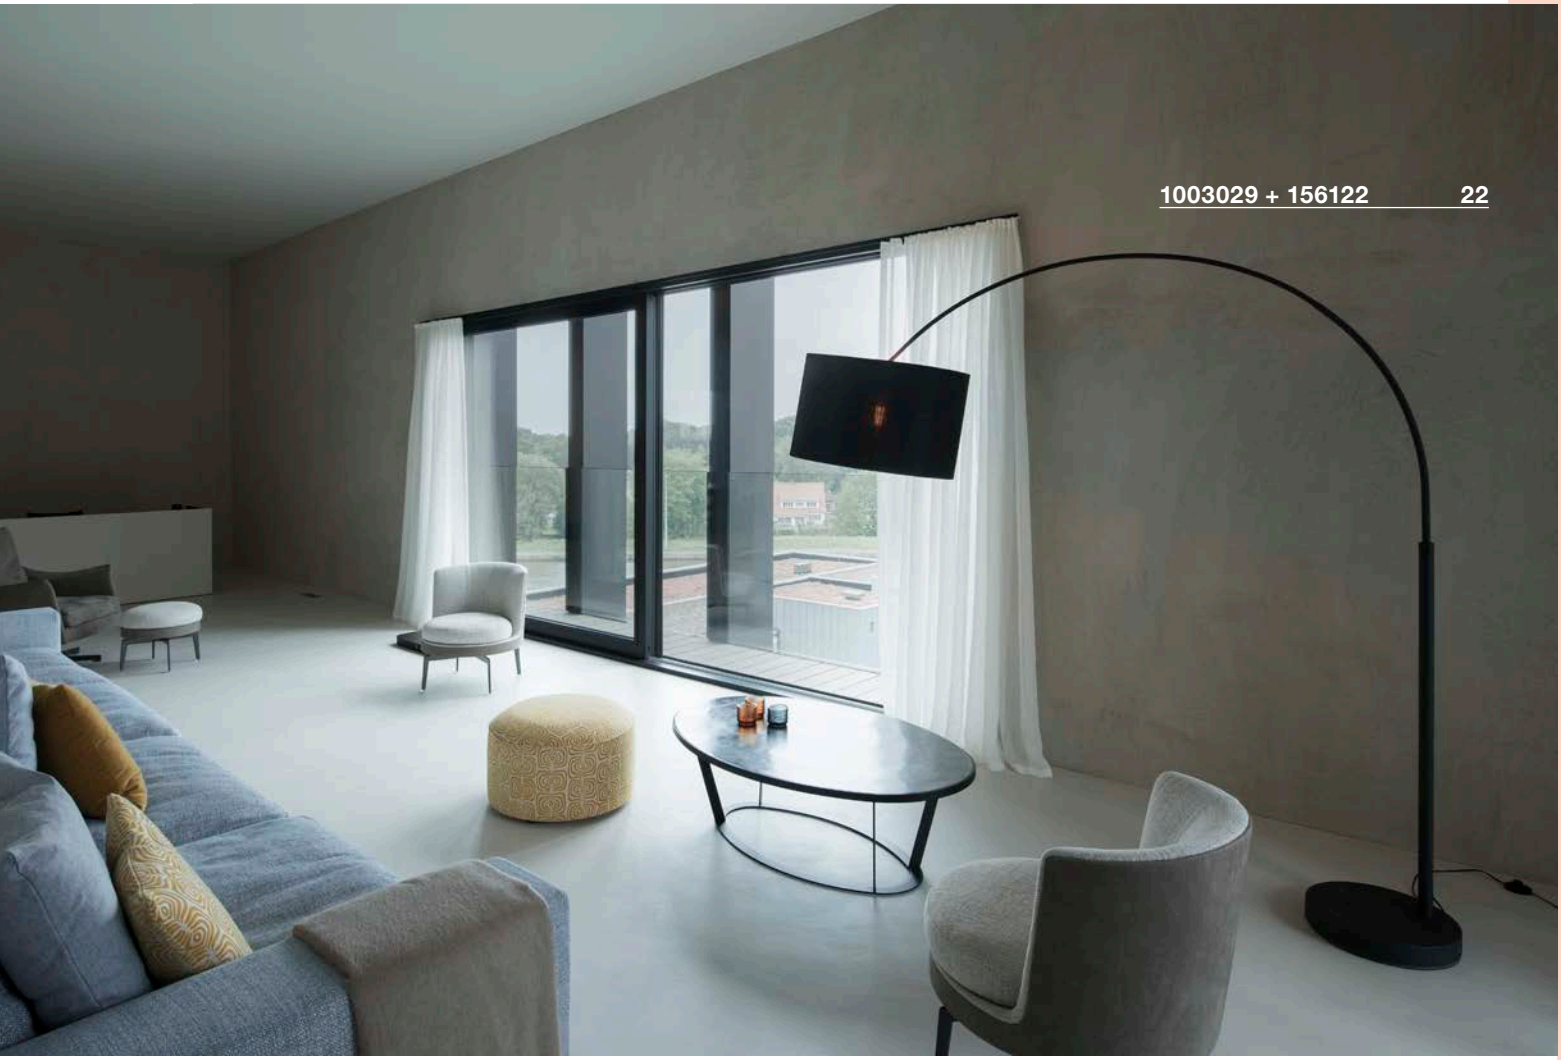

1003029 + 156122 22



1000763 + 1000764 22

BISHADE
TL, E27

885

E-A++ Spectrum A⁺⁺–E








- Double conical lamp shade
- Switch on connection lead

Product details

230V ~50Hz
Material: Artificial leather / Textile



Dimensioned drawing



Note

2-pin plug and switch

Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 11.5W 240°
2700K 1060lm EEI=A+
12kWh/1000h | **3 Step-Dim**
Item no. 560432 | 22,50 GBP

Lamp details

max. 25W
L: 15 cm max.

Variant	Item no.	GBP
E27		
transparent / white	**155651**	**153,00**

BISHADE
FL, E27

885

E-A++ Spectrum A⁺⁺–E




- Double conical lamp shade
- Foot switch on connection lead

Product details

230V ~50Hz
Material: Artificial leather / Textile



Dimensioned drawing



Note

2-pin plug and switch

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP


Lamp details

max. 40W
L: 22 cm max.

Variant	Item no.	GBP
E27		
transparent / white	**155652**	**287,10**





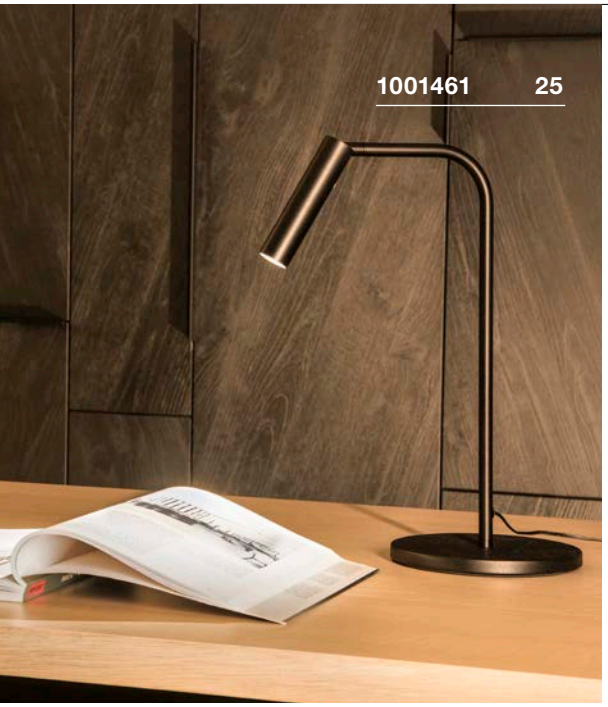





KARPO TL

889

A-A++ Spectrum A++–E

LED INSIDE







- Premium LED with CRI>90
- Switch on lamp head
- Dimmable in 3 stages using the button

Product details

100-240V ~50/60Hz | 500mA
Total consumption: 6.5W
Material: Aluminium
Dimmable: Switch

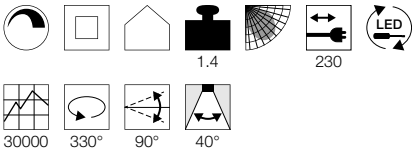

Dimensioned drawing




Variant	Item no.	GBP
400lm | 3000K | CRI>90		
white	1001460	144,00
330lm | 3000K | CRI>90		
black	1001461	144,00

KARPO FL

889

A-A++ Spectrum A++–E


LED INSIDE

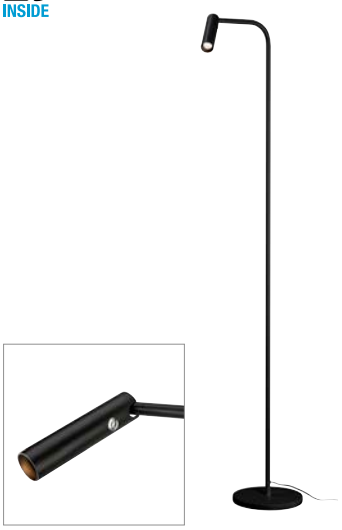


- Premium LED with CRI>90
- Switch on lamp head
- Dimmable in 3 stages using the button

Product details

100-240V ~50/60Hz | 500mA
Total consumption: 6.5W
Material: Aluminium
Dimmable: Switch

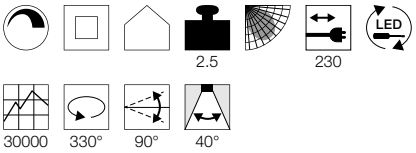

Dimensioned drawing



Variant	Item no.	GBP
400lm | 3000K | CRI>90		
white	1001462	188,10
330lm | 3000K | CRI>90		
black	1001463	188,10

PHELIA
TL, QPAR51

893

E-A++ Spectrum A⁺⁺–E









- Switch on the lamp head
- Head can be tilted 90°
- Lamp shade lacquered in white on the inside

Product details

230V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note

Shock-proof 2-pin plug and switch

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



Lamp details

max. 35W QPAR51
Ø: 5 cm max. L: 10.5 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**146000**	**148,50**
GU10 | QPAR51		
□ white	**146001**	**148,50**

PHELIA
FL, E27

893

E-A++ Spectrum A⁺⁺–E









- Switch on the lamp head
- Head can be tilted 90°
- Lamp shade lacquered in white on the inside

Product details

230V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note

Shock-proof 2-pin plug and switch

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP



LED E27 11.5W 240°
2700K 1060lm EEI=A+
12kWh/1000h | **3 Step-Dim**
Item no. 560432 | 22,50 GBP



Lamp details


max. 23W
Ø: 5.3 cm max. L: 18 cm max.

Variant	Item no.	GBP
E27		
■ black	**146010**	**193,50**
E27		
□ white	**146011**	**193,50**








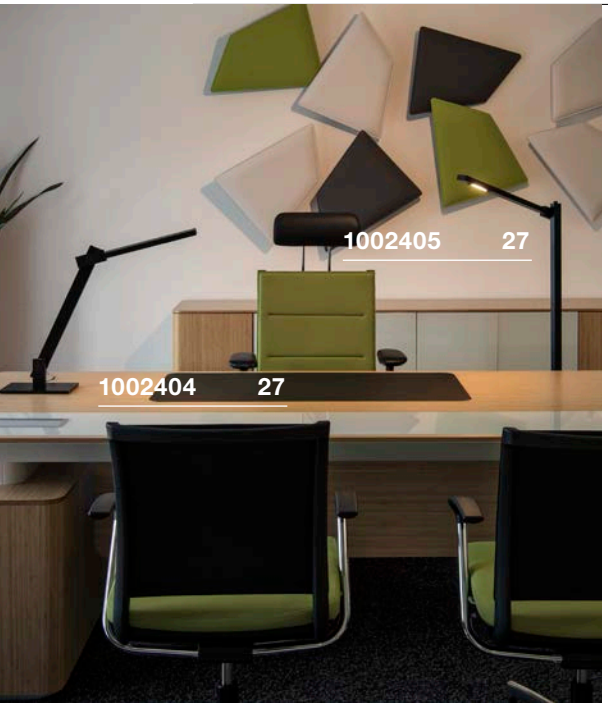



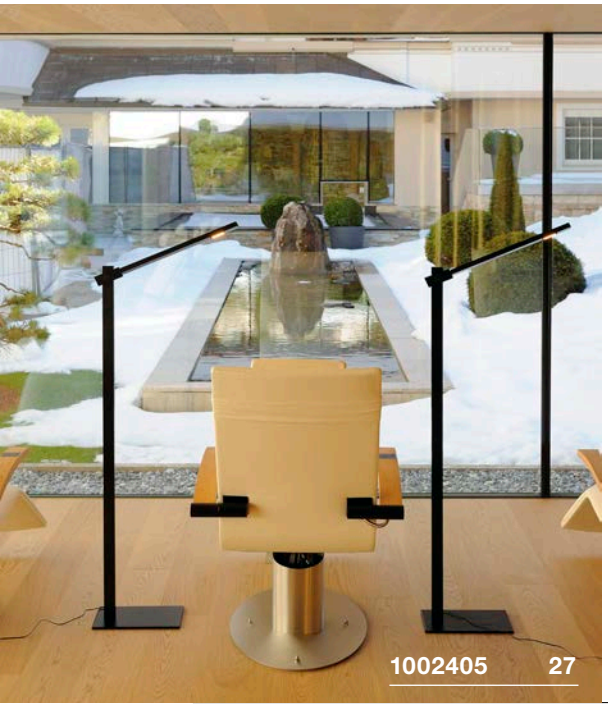

MECANICA PLUS
TL

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









• Dimming function and colour tuning

Product details

100-240V ~50/60Hz | 12V DC
Total consumption: 7W
Material: Aluminium
Dimmable: Switch

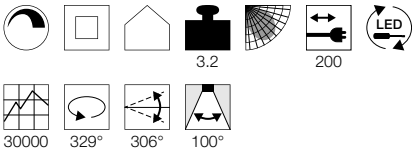

Dimensioned drawing



Note

Power supply

Variant	Item no.	GBP
450lm | 2700-6500K | CRI>80		
■ black	1002404	153,00

MECANICA PLUS
FL

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









• Dimming function and colour tuning

Product details

100-240V ~50/60Hz | 12V DC
Total consumption: 7W
Material: Aluminium
Dimmable: Switch

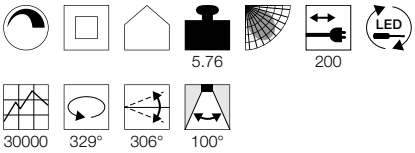

Dimensioned drawing



Note

Power supply

Variant	Item no.	GBP
450lm | 2700-6500K | CRI>80		
■ black	1002405	233,10

LIGHT PIPE 60/90/140
Pole, TRIAC

890


A-A++ Spectrum A⁺⁺–E

LED INSIDE





• Suitable for indoor and outdoor use

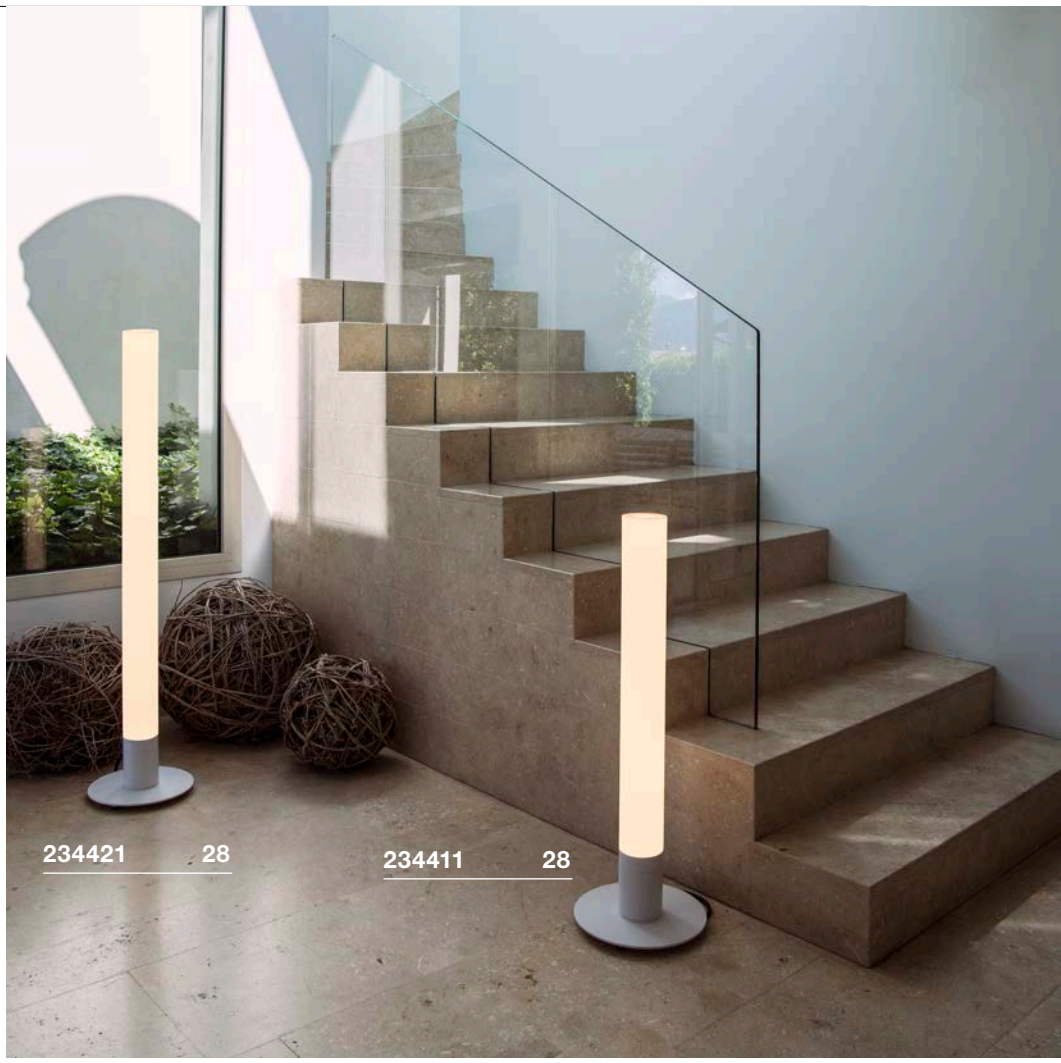

Product details

220-240V ~50/60Hz
Total consumption: 11W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C, Triac L




IP 55

20000



0.2

Dimensioned drawing



Note

Luminaire supplied without a mounting plate.
Indoor installation plate with foot switch on the connection lead.
Outdoor installation plate without foot switch, with IP44 shock-proof mains plug.

Recommended accessories

Earth spike
Item no. 234430 | 38,70 GBP




Outdoor Installation plate
Item no. 234431 | 43,20 GBP




Indoor installation plate
Item no. 234441 | 43,20 GBP

Variant	Item no.	GBP
630lm | 2700K | CRI>80 | H: 60 cm | 1.5 kg		
white	**234401**	**161,10**
630lm | 2700K | CRI>80 | H: 90 cm | 1.71 kg		
white	**234411**	**188,10**
630lm | 2700K | CRI>80 | H: 140 cm | 2.06 kg		
white	**234421**	**242,10**



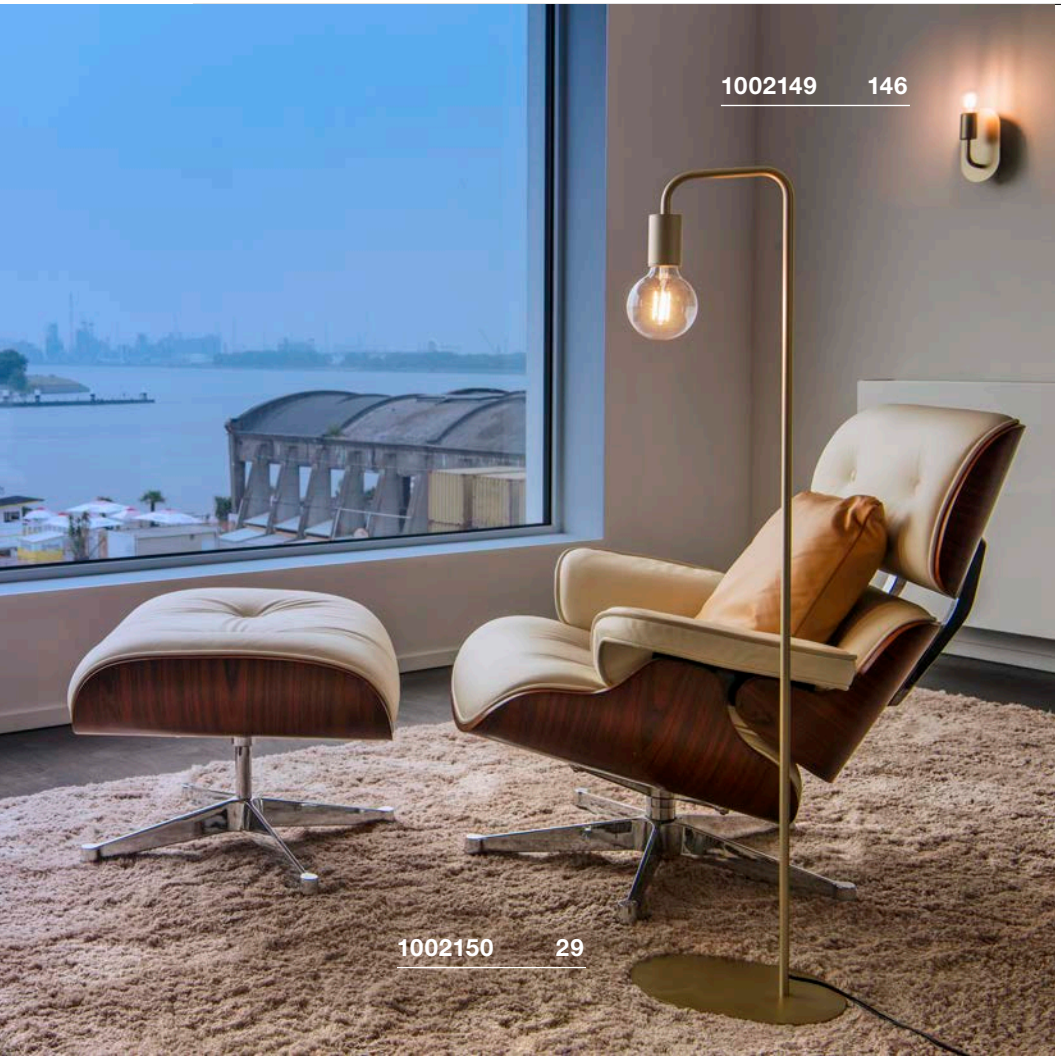

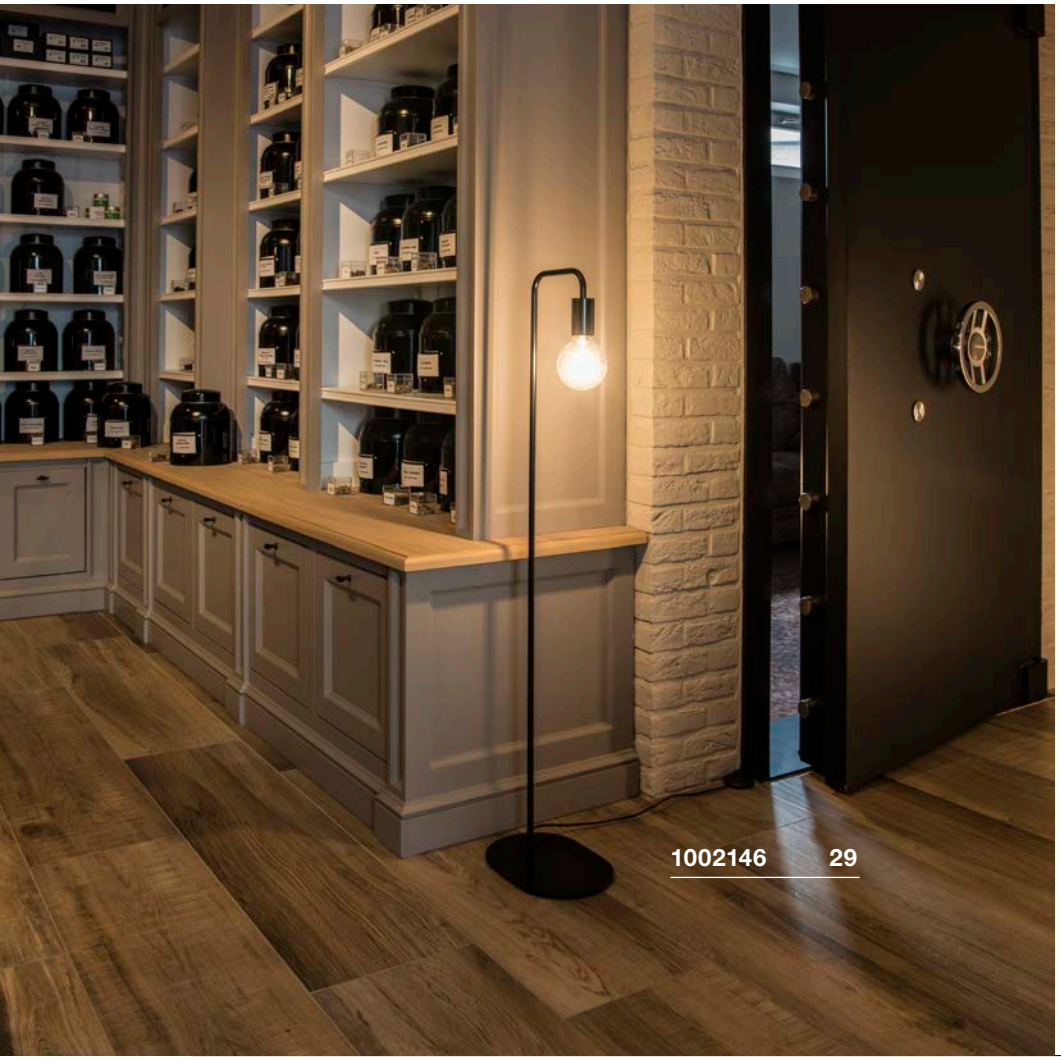

FITU
FL, E27

887

E-A++ Spectrum A⁺⁺–E








• Foot switch on connection lead

Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note

2-pin plug and switch

Recommended lamp

E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP



LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001038 | 20,70 GBP



Lamp details

max. 24W

Variant	Item no.	GBP
E27 white	1002145	184,50
E27 black	1002146	184,50
E27 gold	1002150	197,10

WORKLIGHT
FL

898

A-A++ Spectrum A++–E

LED INSIDE









- Switch on the lamp body
- Direct and indirect light

Product details

220-240V ~50/60Hz | 226mA
Total consumption: 35W
Material: Aluminium / Acrylic




Dimensioned drawing



Note

Shock-proof 2-pin plug



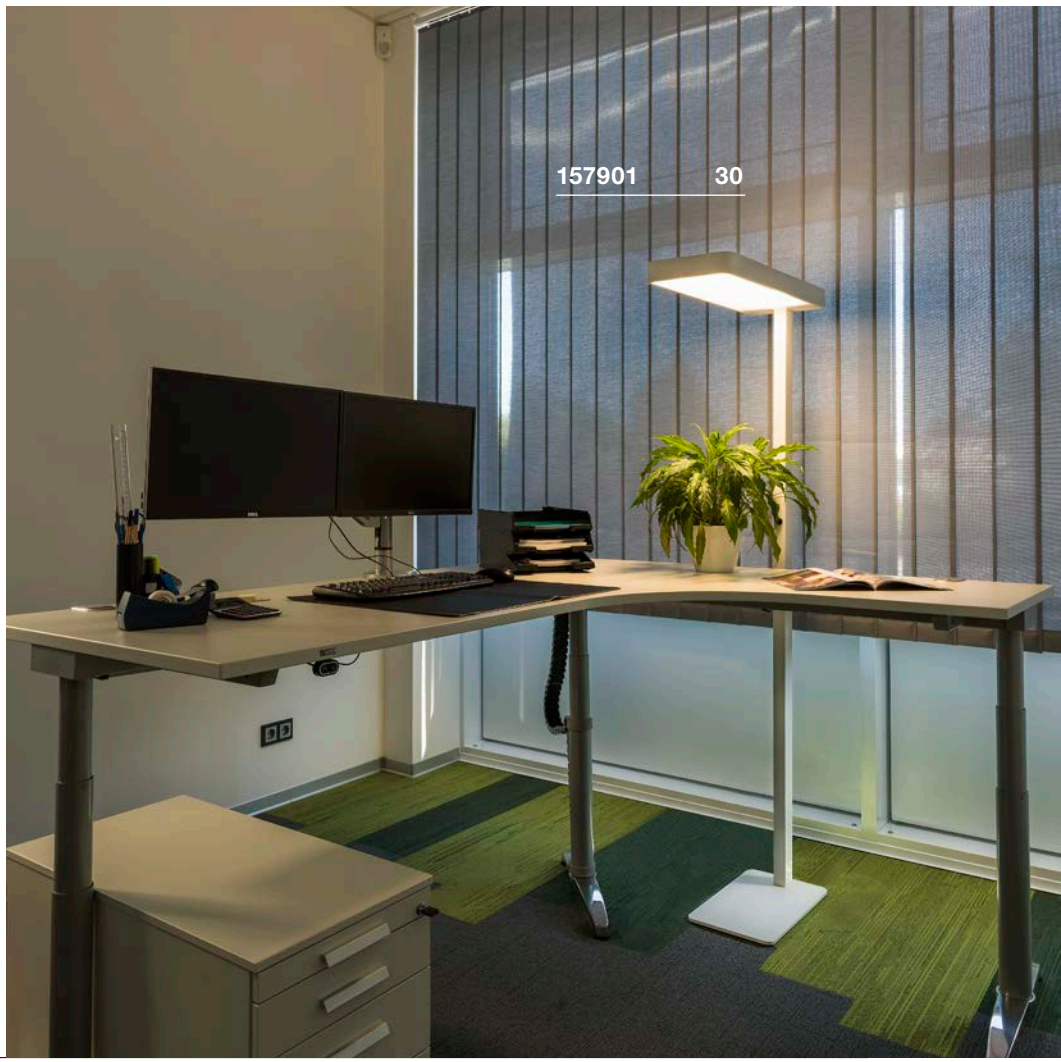

Variant	Item no.	GBP
Direct: 1850lm | 3000K | CRI>80 Indirect: 1850lm | 3000K | CRI>80		
white	157901	809,10
Direct: 1850lm | 3000K | CRI>80 Indirect: 1850lm | 3000K | CRI>80		
anthracite	157905	809,10

WORKLIGHT PLUS
FL, DALI

898

A-A++ Spectrum A⁺⁺–E

LED INSIDE


NEW VARIANT



- Intelligent presence control and brightness sensor
- Suitable for screen workplaces in accordance with EN 12464-1
- Direct and indirect light





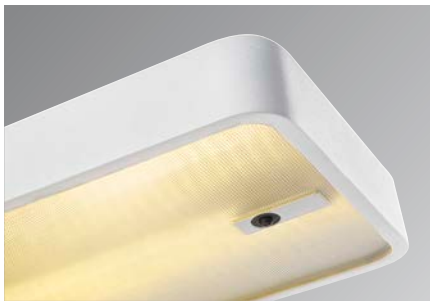



MOBILE AND INTELLIGENT WORKPLACE LIGHT FOR THE MODERN OFFICE


Energy efficient and long-lasting

As a consistent further development of our WORKLIGHT series, we introduce a mobile workplace light for **workstations (UGR ≤19)** with the DALI SENSOR version**,** equipped with state-of-the-art technology and **powerful LEDs with a service life of 50,000 hours** from Philips. The energy saving potential is optimized due to being equipped with intelligent light control. **Thanks to the integrated presence control, the light switches on and off automatically depending on movement,** and the lumen output is controlled by the daylight sensor. This ensures that there is a consistent light level at the workplace.


The combination of **direct and indirect light output** provides widespread illumination.
The WORKLIGHT is also available as a pendant.

Product details

220-240V ~50/60Hz | 226mA
Total consumption: 48W
Material: Aluminium / Acrylic
Dimmable: Dali

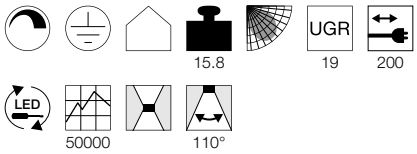



Dimensioned drawing



Note

Switch on the luminaire shaft
Shock-proof 2-pin plug

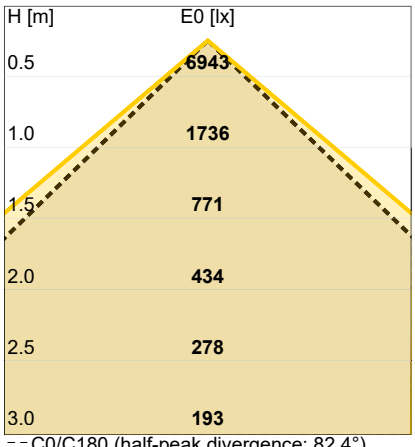

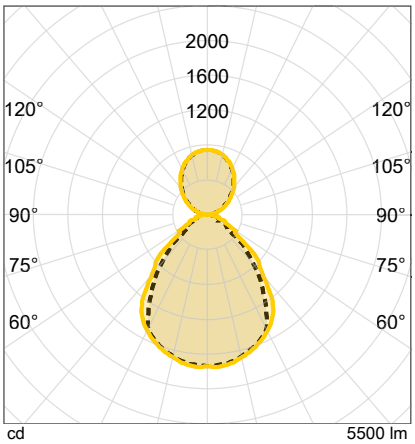

Variant	Item no.	GBP
Direct: 3600lm | 3000K | CRI>80 Indirect: 1800lm | 3000K | CRI>80		
white	1002847	1.161,00
Direct: 3600lm | 3000K | CRI>80 Indirect: 1800lm | 3000K | CRI>80		
anthracite	1002848	1.161,00



HANGING AROUND.

PENDANTS CREATE EMPHASIS.

Give each room an individual feel: with pendants you immerse selected areas in atmospheric light and set visual highlights thanks to a wide range of style directions. Perfect for rest in restaurants, cafés, bars or at home – the luminaires create cosy locations and make a tasteful statement.


143430 57



PENDANTS


036


036


037

038

039


044


044


044


046

047


047


047

048


049



049


050


050


053


053


053


055


055


056


057


057


057


058


058


058


059


061


061


062


062


062


065


065


066


066

066



Other luminaires and variants can be found online at www.slv.com

FITU
PD, E27

887

E-A++ Spectrum A⁺⁺–E








- Lamp unit made from real bamboo
- Can be combined with Fitu ceiling plates and accessories

Product details

220-240V ~50/60Hz
Material: Bamboo / Steel



Dimensioned drawing



Note

Textile cable
Open cable end

Recommended lamp

LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP



LED E27 7W 180°
2700K 630lm EEI=A+
8kWh/1000h
Item no. 1001357 | 29,70 GBP



Lamp details

max. 60W

Variant	Item no.	GBP
E27		
anthracite / brown	**1000581**	**40,50**

FITU
PD, E27

887

E-A++ Spectrum A⁺⁺–E









- 2.5 m long cable
- Can be combined with Fitu ceiling plates and accessories

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Textile cable
Open cable end

Recommended lamp


E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP



Lamp details

max. 60W

Variant	Item no.	GBP
E27		
black	**132650**	**40,50**
E27		
white	**132651**	**40,50**
E27		
gold	**1002167**	**49,50**

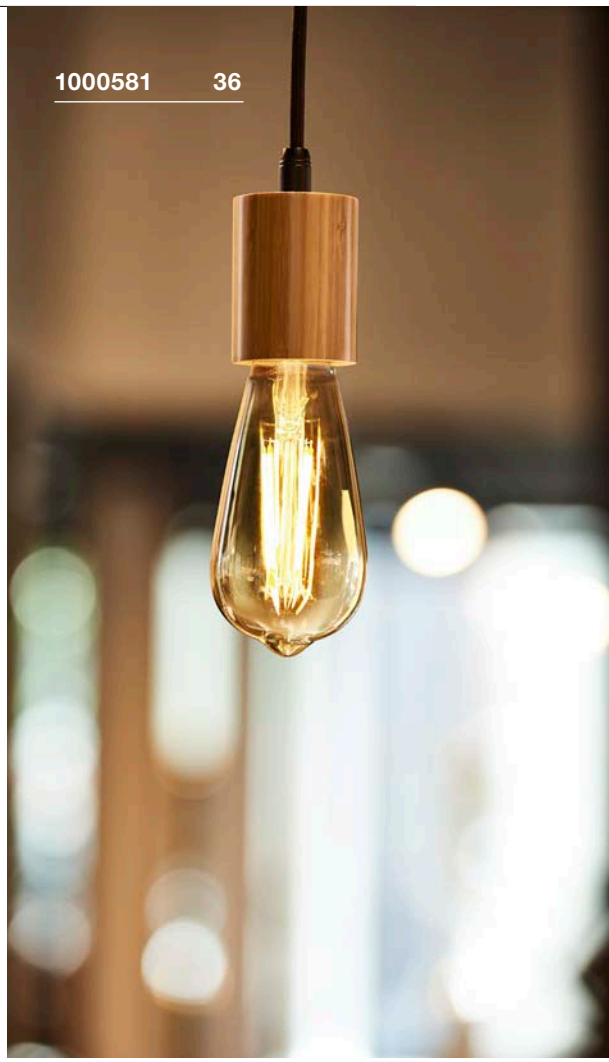





FITU
PD, E27

887

E-A++ Spectrum A⁺⁺–E








- 5 m long cable
- Can be combined with Fitu ceiling plates and accessories

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Textile cable
Open cable end

Recommended lamp

LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001035 | 15,30 GBP



LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP



Lamp details

max. 60W

Variant	Item no.	GBP
E27 ■ black	**132690**	**45,00**
E27 □ white	**132691**	**45,00**
E27 ▮ gold	**1002168**	**58,50**

FITU
PD, E27

887

E-A++ Spectrum A⁺⁺–E








- 2.5 m long cable
- Can be combined with Fitu ceiling plates and accessories
- Extra-long lamp body

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Textile cable
Open cable end

Recommended lamp

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP



LED E27 7W 180°
2700K 630lm EEI=A+
8kWh/1000h
Item no. 1001357 | 29,70 GBP




Lamp details

max. 60W

Variant	Item no.	GBP
E27 black	1002159	85,50
E27 white	1002160	85,50
E27 brushed aluminium	1002161	94,50
E27 gold	1002162	94,50



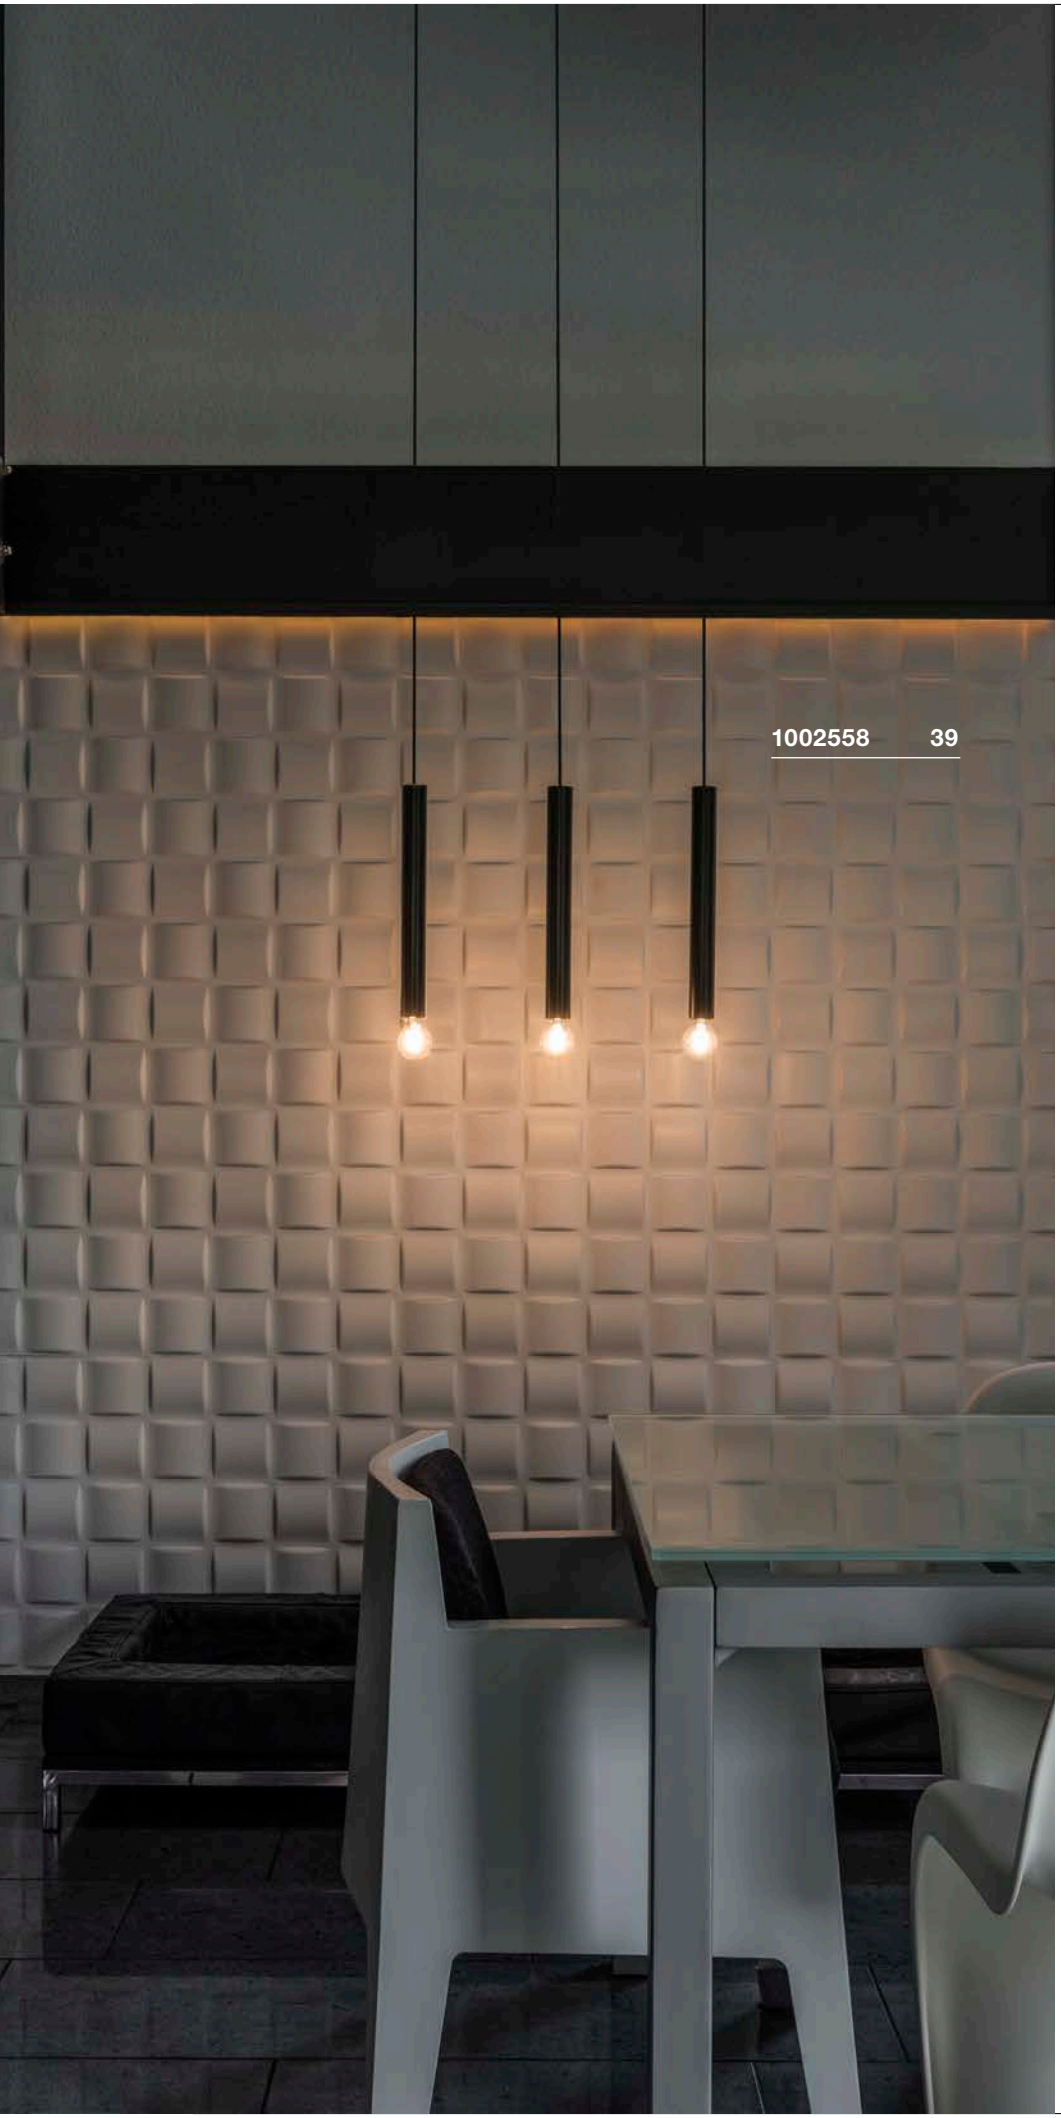

FITU
PD, E27

887

E-A++ Spectrum A⁺⁺–E

NEW VARIANT








- 5 m long cable
- Can be combined with Fitu ceiling plates and accessories

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Textile cable
Open cable end

Recommended lamp

LED E27 8W
2000-2900K 500lm EEI=A
8kWh/1000h
Item no. 1002124 | 9,90 GBP



LED E27 8W 350°
2200K 250lm EEI=B
8kWh/1000h
Item no. 1001357 | 29,70 GBP



Lamp details

max. 60W

Variant	Item no.	GBP
E27 black	1002558	94,50
E27 white	1002562	94,50
E27 brushed aluminium	1002563	103,50
E27 gold	1002564	103,50

FITU MIX&MATCH ACCESSORIES

Fitu single ceiling plate

16A max.
Steel
Ø: 8.5 cm H: 3.9 cm
0.14 kg
1 pc.



Variant	Item no.	GBP
black	132600	20,70
white	132601	20,70
chrome	132605	22,50
gold	1002163	22,50

Fitu triple ceiling plate

Steel
1.08 kg
L: 60 cm W: 8.5 cm H: 5 cm
Fastening materials, incl.



Variant	Item no.	GBP
black	1001818	76,50
white	1001819	76,50
gold	1002264	90,00

1-phase lamp adapter

230V ~50Hz, 6A max.
Plastic PC
L: 8.2 cm W: 3.5 cm H: 4.2 cm
0.04 kg
Maximum mechanical load: 3 kg
1 pc.



Variant	Item no.	GBP
black	143120	9,90
white	143121	9,90
silver-grey	143124	9,90

Fitu triple ceiling plate

16A max.
Steel
Ø: 22 cm H: 5.4 cm
0.5 kg
1 pc.



Variant	Item no.	GBP
black	132610	49,50
white	132611	49,50
chrome	132615	54,00
gold	1002164	54,00

Fitu quintuple ceiling plate

Steel
2.06 kg
L: 120 cm W: 8.5 cm H: 5 cm
Fastening materials, incl.

Variant	Item no.	GBP
black	1001820	99,00
white	1001821	99,00
gold	1002265	108,00

3-phase lamp adapter

230V ~50Hz, 10A max.
Plastic
0.07 kg
Maximum mechanical load: 5 kg
1 pc.



Variant	Item no.	GBP
black	145990	14,90
white	1001542	14,90
silver-grey	145994	14,90

Fitu quintuple ceiling plate

16A max.
Steel
Ø: 33 cm H: 6 cm
1.25 kg
1 pc.



Variant	Item no.	GBP
black	132620	67,50
white	132621	67,50
chrome	132625	72,00
gold	1002165	72,00

Ceiling hook

16A max.
Steel
L: 60 cm W: 8.5 cm H: 5 cm
Weight: 1.08 kg
1 pc.





Variant	Item no.	GBP
black	132670	15,30
white	132671	15,30

Cable clamp

16A max.
Steel
L: 60 cm W: 8.5 cm H: 5 cm
Weight: 1.08 kg
1 pc.

Variant	Item no.	GBP
black	132680	9,90
white	132681	9,90

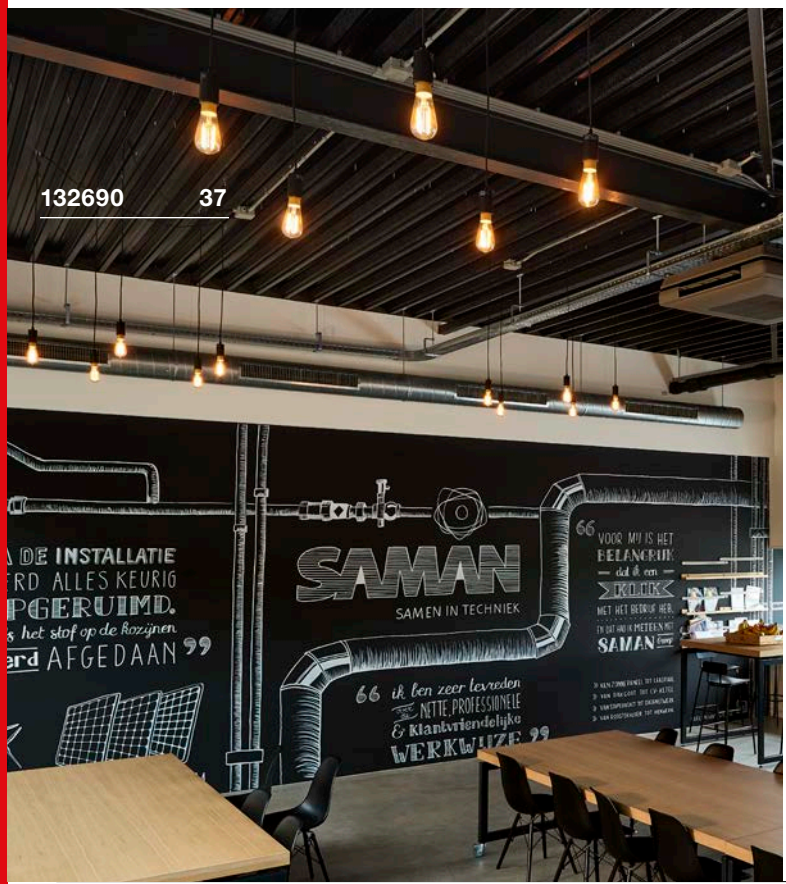

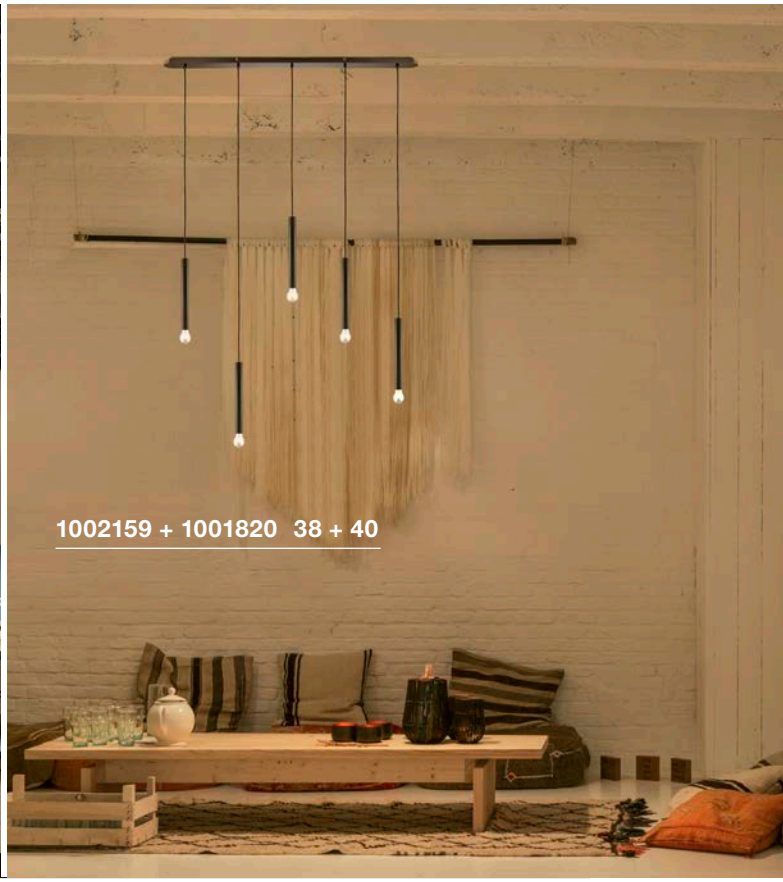

1002162 + 1002165 38 + 40





SLV FENDA. MIX & MATCH.






132660 + 1000580 44 + 46

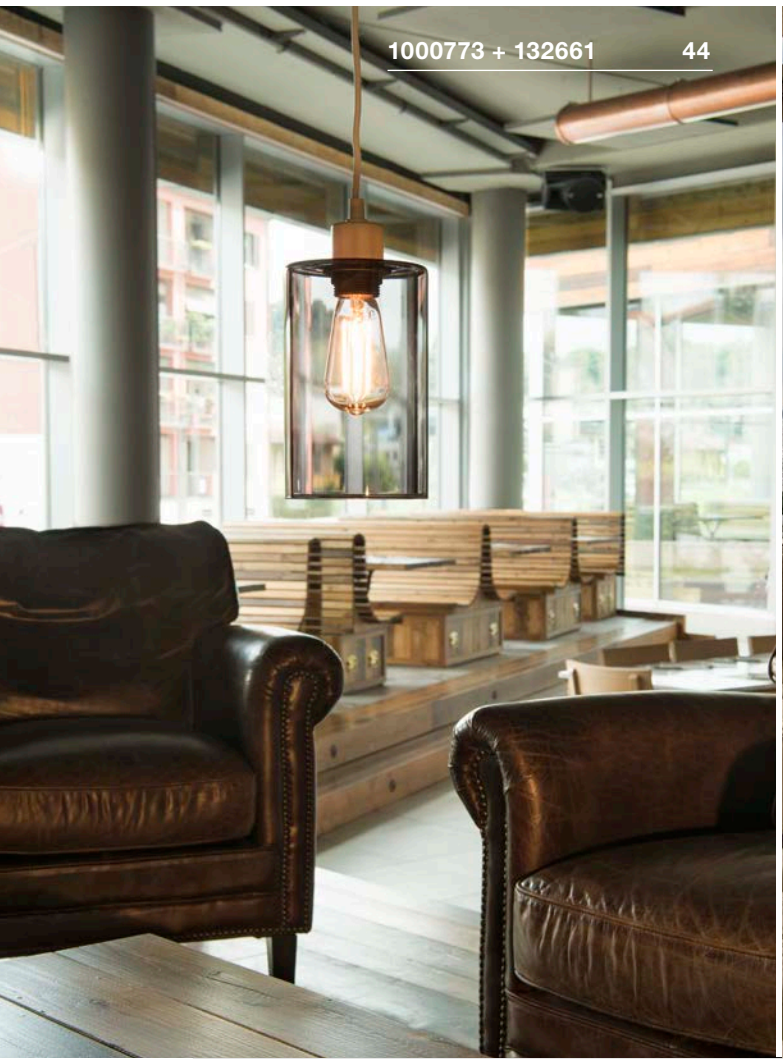
1000773 + 132661 44

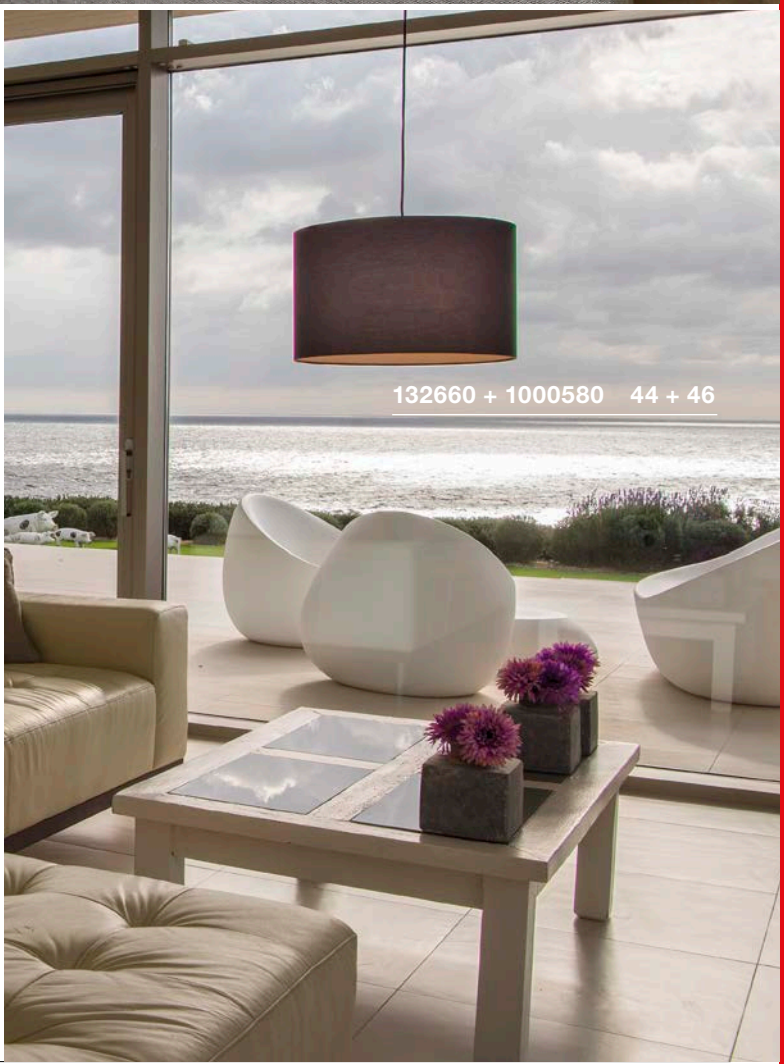
132660 + 1000580 44 + 46

FENDA
PD, E27

886

E-A++ Spectrum A⁺⁺–E








- Individually configurable by selecting the lamp shade

Product details
230V ~50Hz
Material: Steel / Plastic



Dimensioned drawing



Note
Open cable end

Recommended accessories
1-circuit lamp adapter
Item no. 143120 | 9,90 GBP



3-circuit lamp adapter
Item no. 145990 | 14,90 GBP



Recommended lamp
LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP



LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP



Lamp details
max. 60W

Variant	Item no.	GBP
E27		
black	**132660**	**22,50**
E27		
white	**132661**	**22,50**
E27		
chrome	**132662**	**25,20**

FENDA
Glass shade

886








- Individually configurable by selecting a suitable lamp base

Product details
Material: Glass



Dimensioned drawing



Note
max. 40W
Can be combined with the Fitu Mix & Match accessory on page 40

Variant	Item no.	GBP
transparent brown	**1000773**	**49,50**
white	**1002217**	**24,80**

FENDA
Ø 40 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details
Material: Polymethylacrylate (PMMA)




Dimensioned drawing




Note
max. 60W

Variant	Item no.	GBP
white	**1000764**	**76,50**

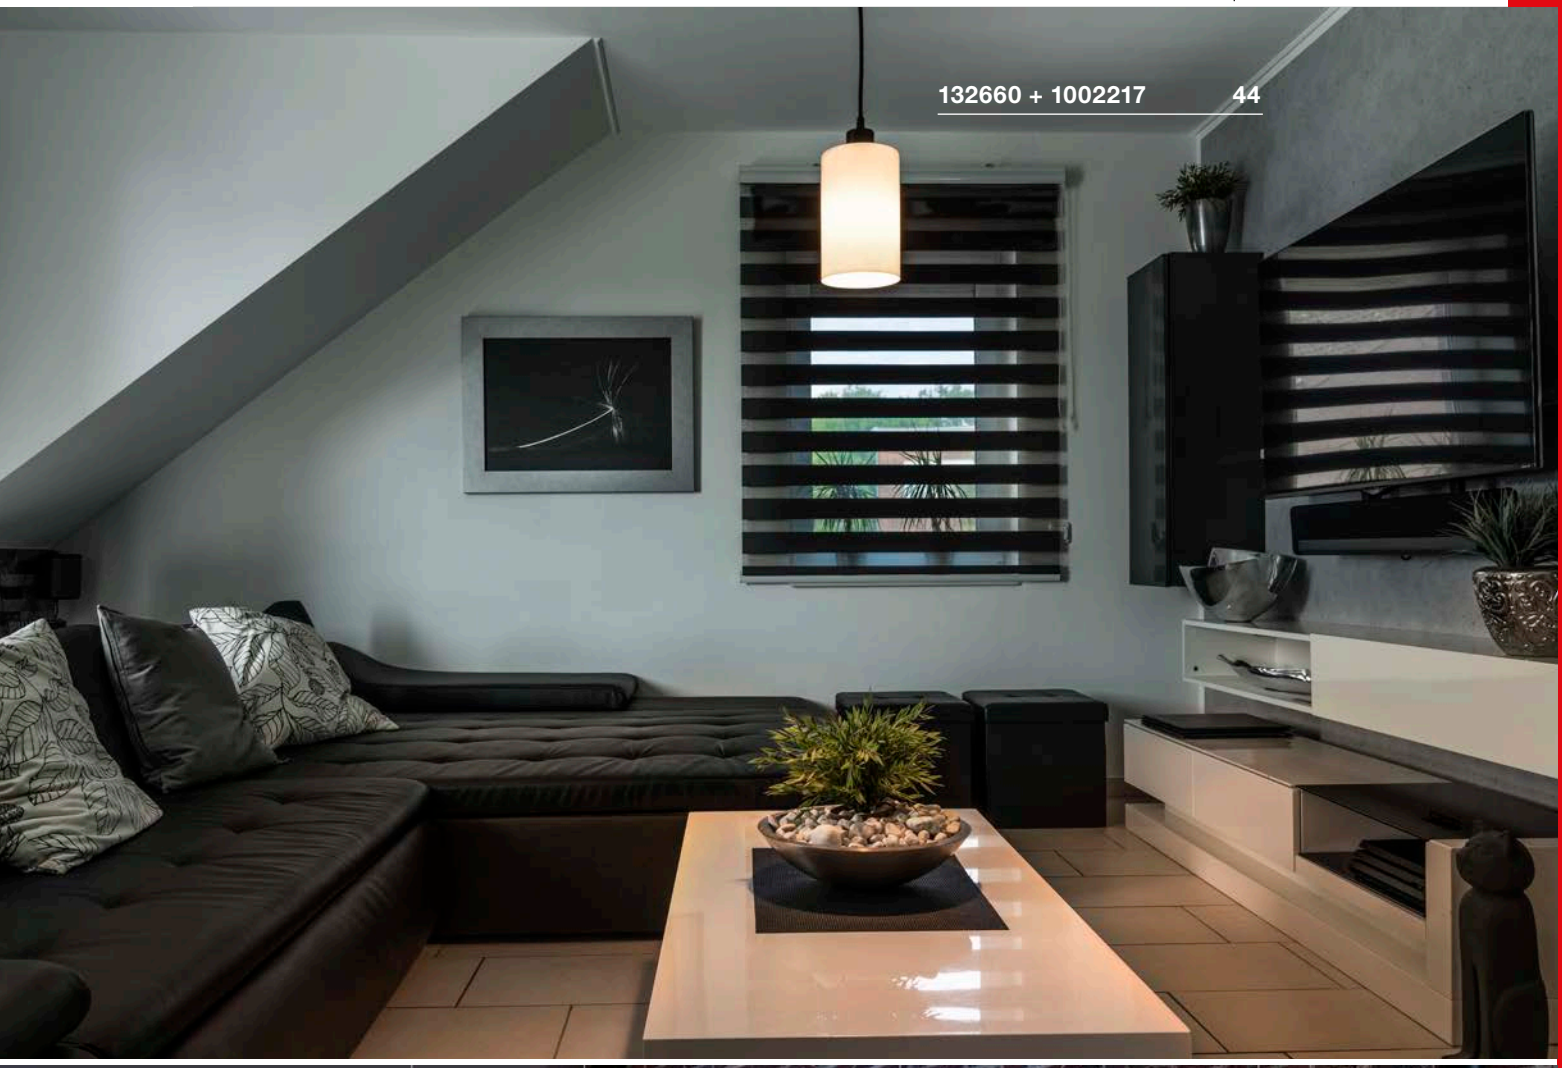

132660 + 1002217 44

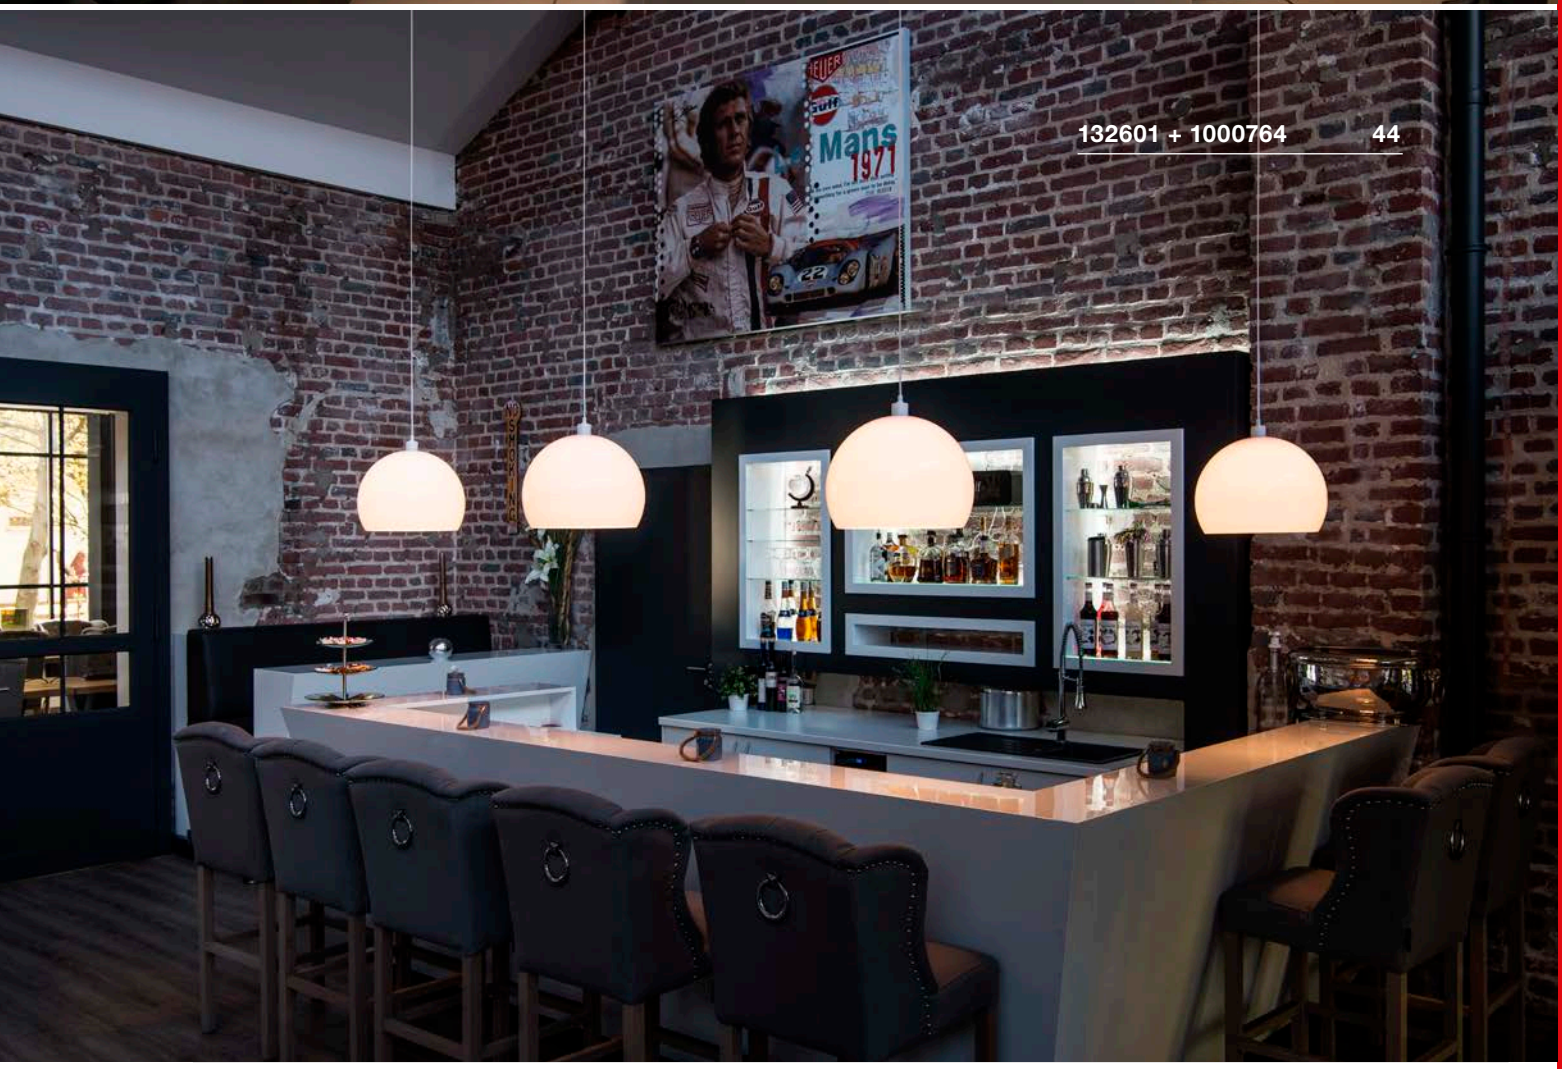

132601 + 1000764 44

FENDA
Ø 15 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel



Dimensioned drawing



Note


max. 40W








Variant	Item no.	GBP
white	156141	34,60
beige	156143	34,60
black / copper	156152	40,50

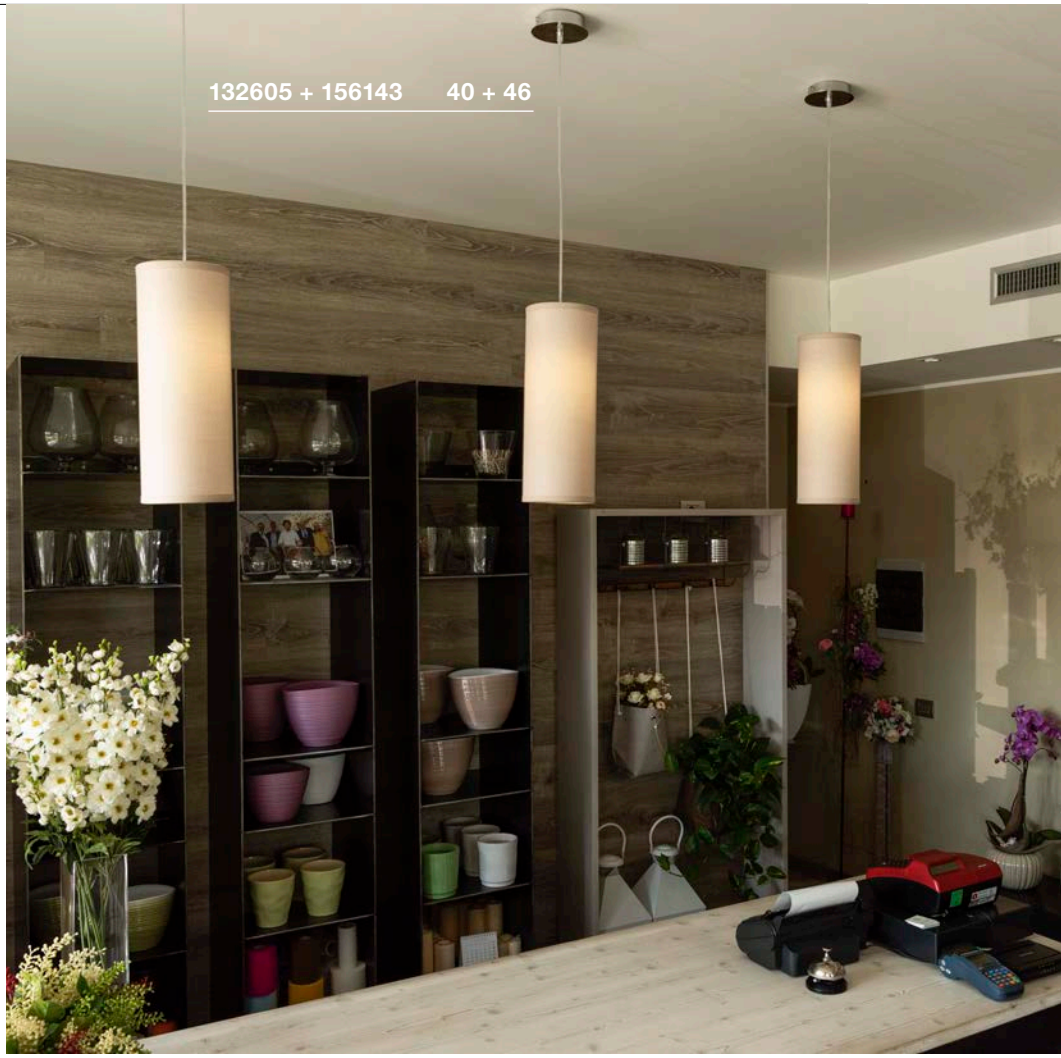

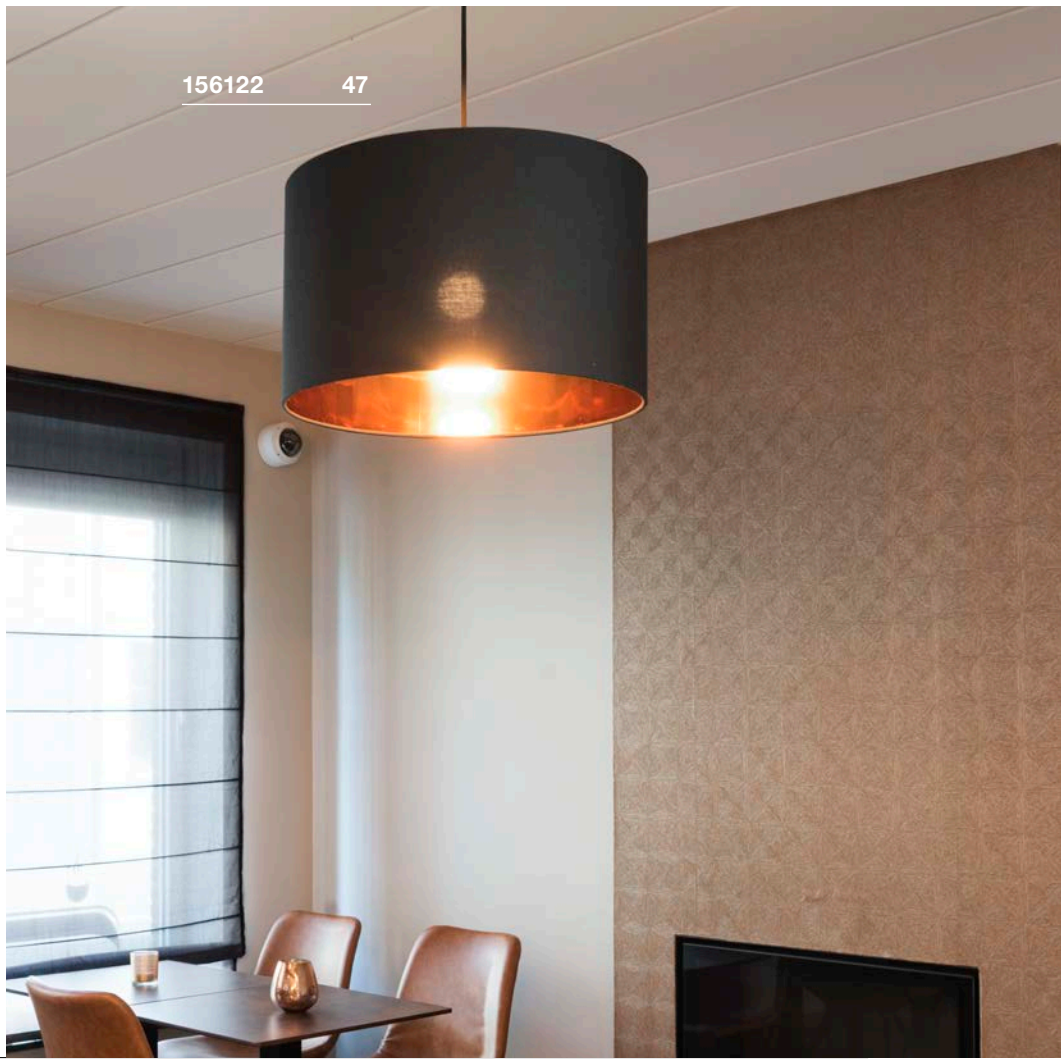

FENDA
Ø 30 cm, round

886






- Individually configurable by selecting a suitable lamp base

Product details
Material: Textile / Steel



Dimensioned drawing



Note
max. 60W
Acrylic cover (155570) available as an accessory for covering the shade at one side







Recommended accessories
Acrylic cover
Item no. 155570 | 22,50 GBP

Variant	Item no.	GBP
white	155582	40,50
beige	155583	40,50
black / copper	155592	54,00

FENDA
Ø 45 cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details
Material: Textile / Steel




Dimensioned drawing



Note
max. 60W
Acrylic cover (156100) available as an accessory for covering the shade at one side








Recommended accessories
Acrylic cover
Item no. 156100 | 34,20 GBP

Variant	Item no.	GBP
white	156111	63,00
beige	156113	63,00
black / copper	156122	67,50

FENDA
Ø 70 cm, round

886








- Individually configurable by selecting a suitable lamp base


Product details
Material: Textile / Steel




Dimensioned drawing



Note
max. 60W
Acrylic cover (1000957) available as an accessory for covering the shade at one side





Recommended accessories
Acrylic cover
Item no. 1000957 | 72,00 GBP

Variant	Item no.	GBP
white	1000579	85,50
black / copper	1000580	99,00

PLASTRA 25
PD, cone, TCR-TSE

893

B-A++ Spectrum A++–E







- Can be individually designed with colours, stickers and more

Product details

230V ~50Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

GX53 7.5W 120°
3000K 620lm EEI=A+
8kWh/1000h
Item no. 1001220 | 29,70 GBP




LED GX53 4.2W 35°
3000K 200lm EEI=A
5kWh/1000h
Item no. 550092 | 40,50 GBP



Lamp details

max. 11W TCR-TSE

Variant	Item no.	GBP
GX53 | TCR-TSE white	**1000782**	**108,00**

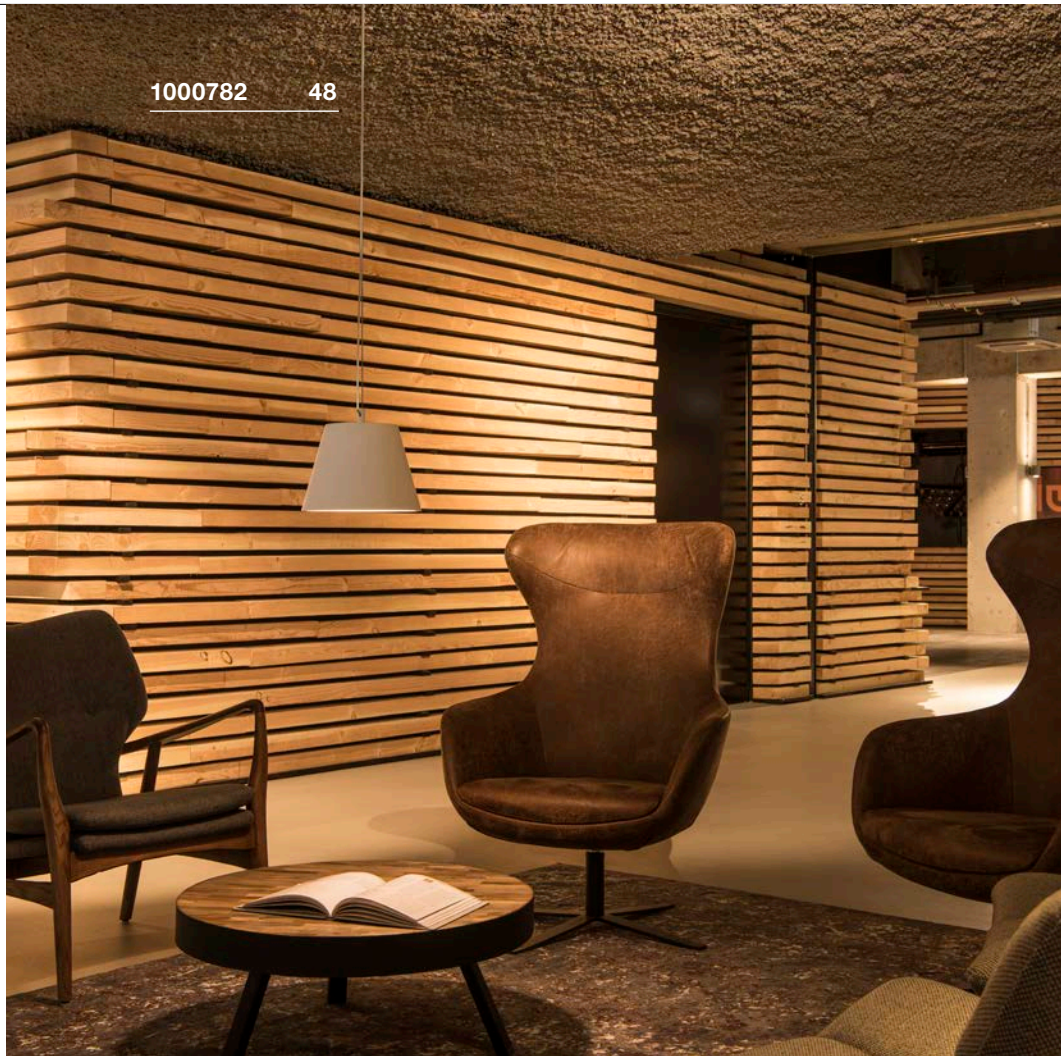







PLASTRA 25
PD, TCR-TSE

893

B-A++ Spectrum A++–E









- Can be individually designed with colours, stickers and more

Product details

230V ~50Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

GX53 7.5W 120°
4000K 620lm EEI=A+
8kWh/1000h
Item no. 1001221 | 29,70 GBP



LED GX53 7.5W 25°
3000K 450lm EEI=A
8kWh/1000h
Item no. 550082 | 49,50 GBP



Lamp details

max. 11W TCR-TSE

Variant	Item no.	GBP
GX53 | TCR-TSE white	**148040**	**90,00**

PLASTRA 25
PD, round, TCR-TSE

893

B-A++ Spectrum A++–E









- Can be individually designed with colours, stickers and more

Product details

230V ~50Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

GX53 7.5W 120°
4000K 620lm EEI=A+
8kWh/1000h
Item no. 1001221 | 29,70 GBP



LED GX53 7.5W 25°
3000K 450lm EEI=A
8kWh/1000h
Item no. 550082 | 49,50 GBP



Lamp details

max. 11W TCR-TSE

Variant	Item no.	GBP
GX53 | TCR-TSE white	**1002047**	**99,00**


LIGHT EYE® 90
PD, GU10

890

E-A++ Spectrum A⁺⁺–E









- The optimal deco ring for the lamp in the appropriate colour reduces the distance between housing and lamp

Product details
220-240V ~50/60Hz
Material: Steel



Dimensioned drawing



Note
Textile cable

Recommended accessories

Lamp deco ring diam. 5.7cm
Item no. 151040 | 4,00 GBP



Lamp deco ring diam. 5.7cm
Item no. 151041 | 4,00 GBP



Lamp deco ring diam. 5.7cm
Item no. 151049 | 5,90 GBP



Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



Lamp details
max. 6W LED GU10 51mm

Variant	Item no.	GBP
GU10 | LED GU10 51mm black / chrome	133490	63,00
GU10 | LED GU10 51mm white / chrome	133491	63,00
GU10 | LED GU10 51mm gold	133493	67,50
GU10 | LED GU10 51mm copper	133499	72,00

LIGHT EYE® 150
PD, QPAR111

890


E-A++ Spectrum A⁺⁺–E








Product details
220-240V ~50/60Hz
Material: Steel



Dimensioned drawing



Note
Textile cable


Recommended lamp

GU10 15.5W 30°
2700K 680lm EEI=A
6kWh/1000h
Item no. 570672 | 63,00 GBP




Lamp details
max. 75W QPAR111


Variant	Item no.	GBP
GU10 | QPAR111 white / chrome	133481	90,00
GU10 | QPAR111 chrome	133482	94,50
GU10 | QPAR111 gold	133483	99,00
GU10 | QPAR111 copper	133489	117,00

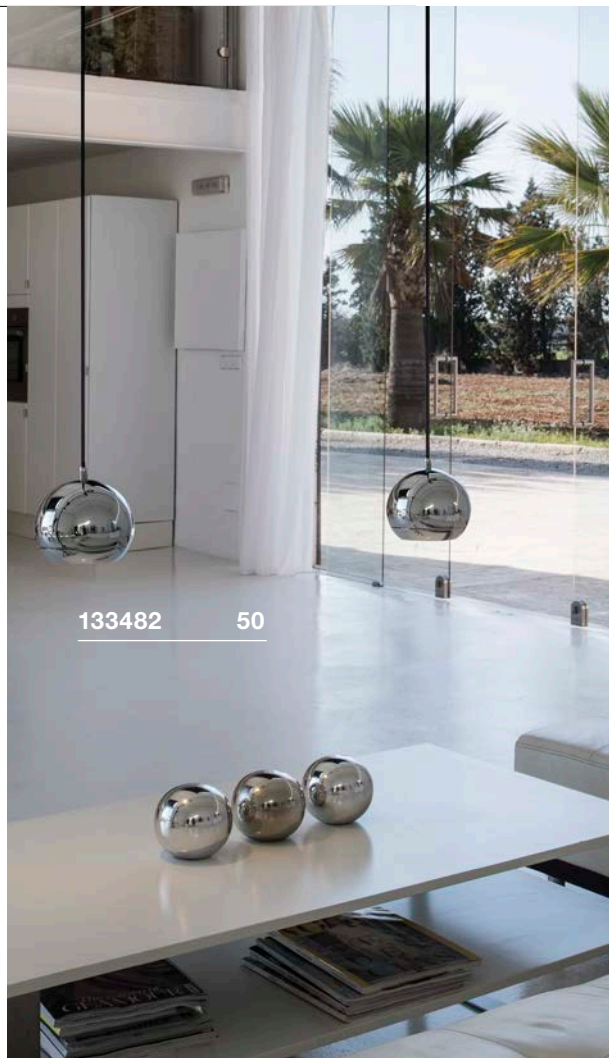




133481 50

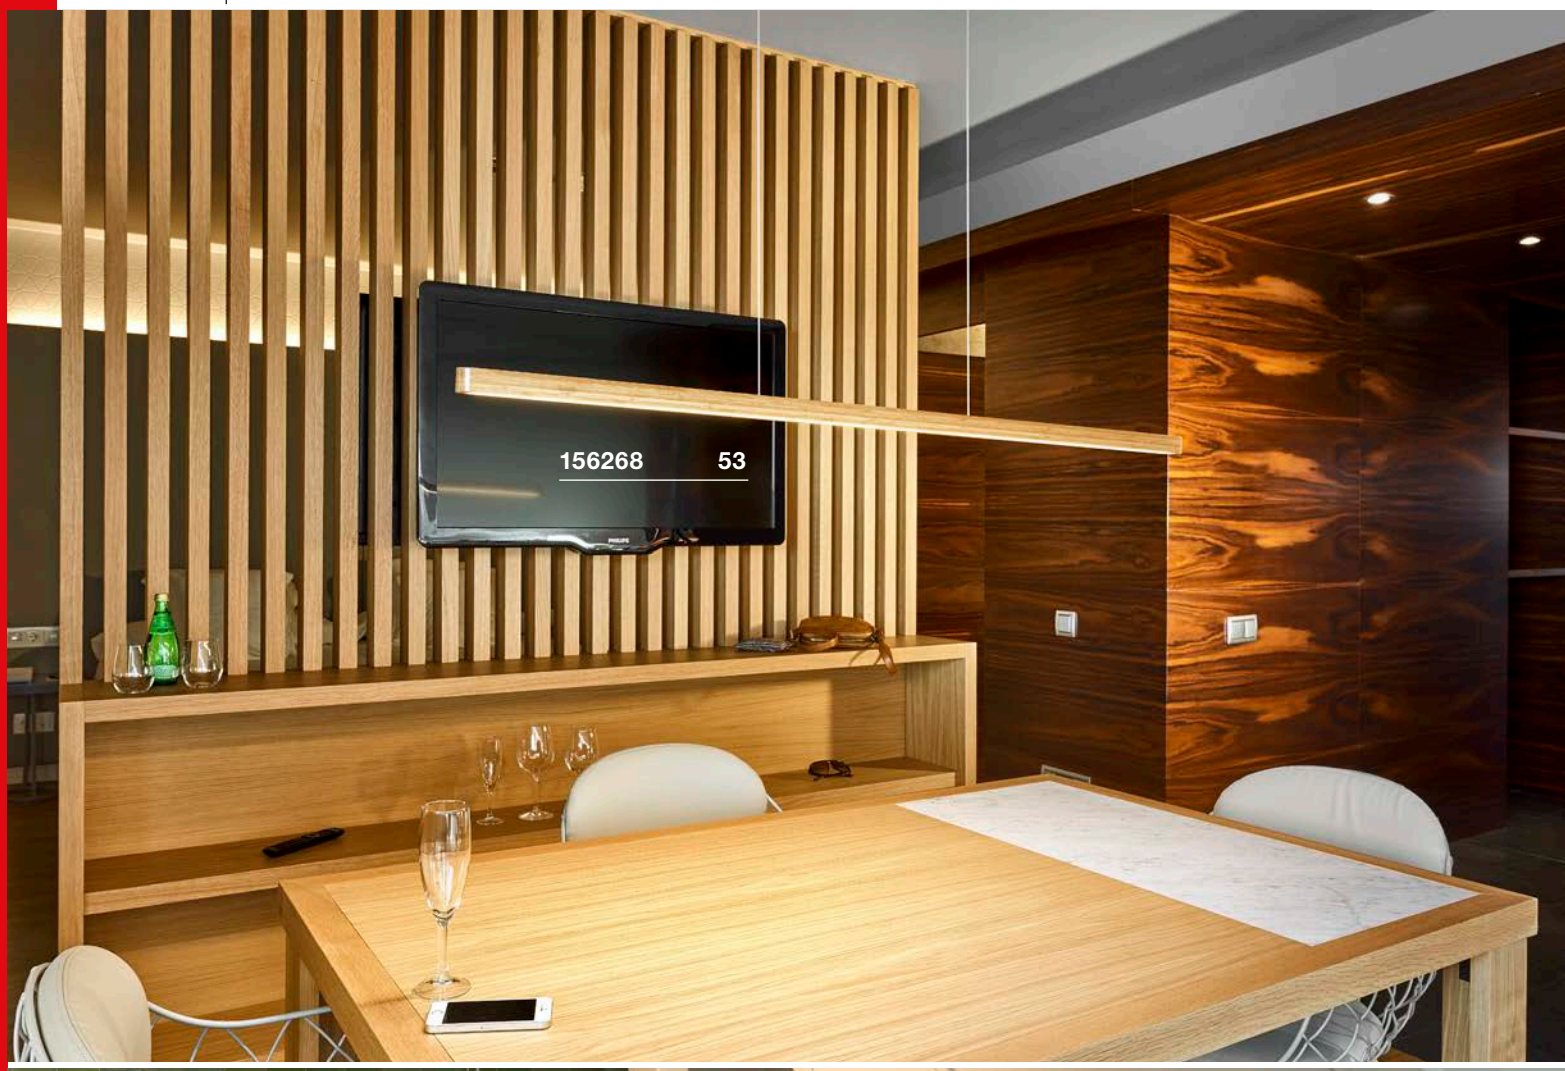
156268 53

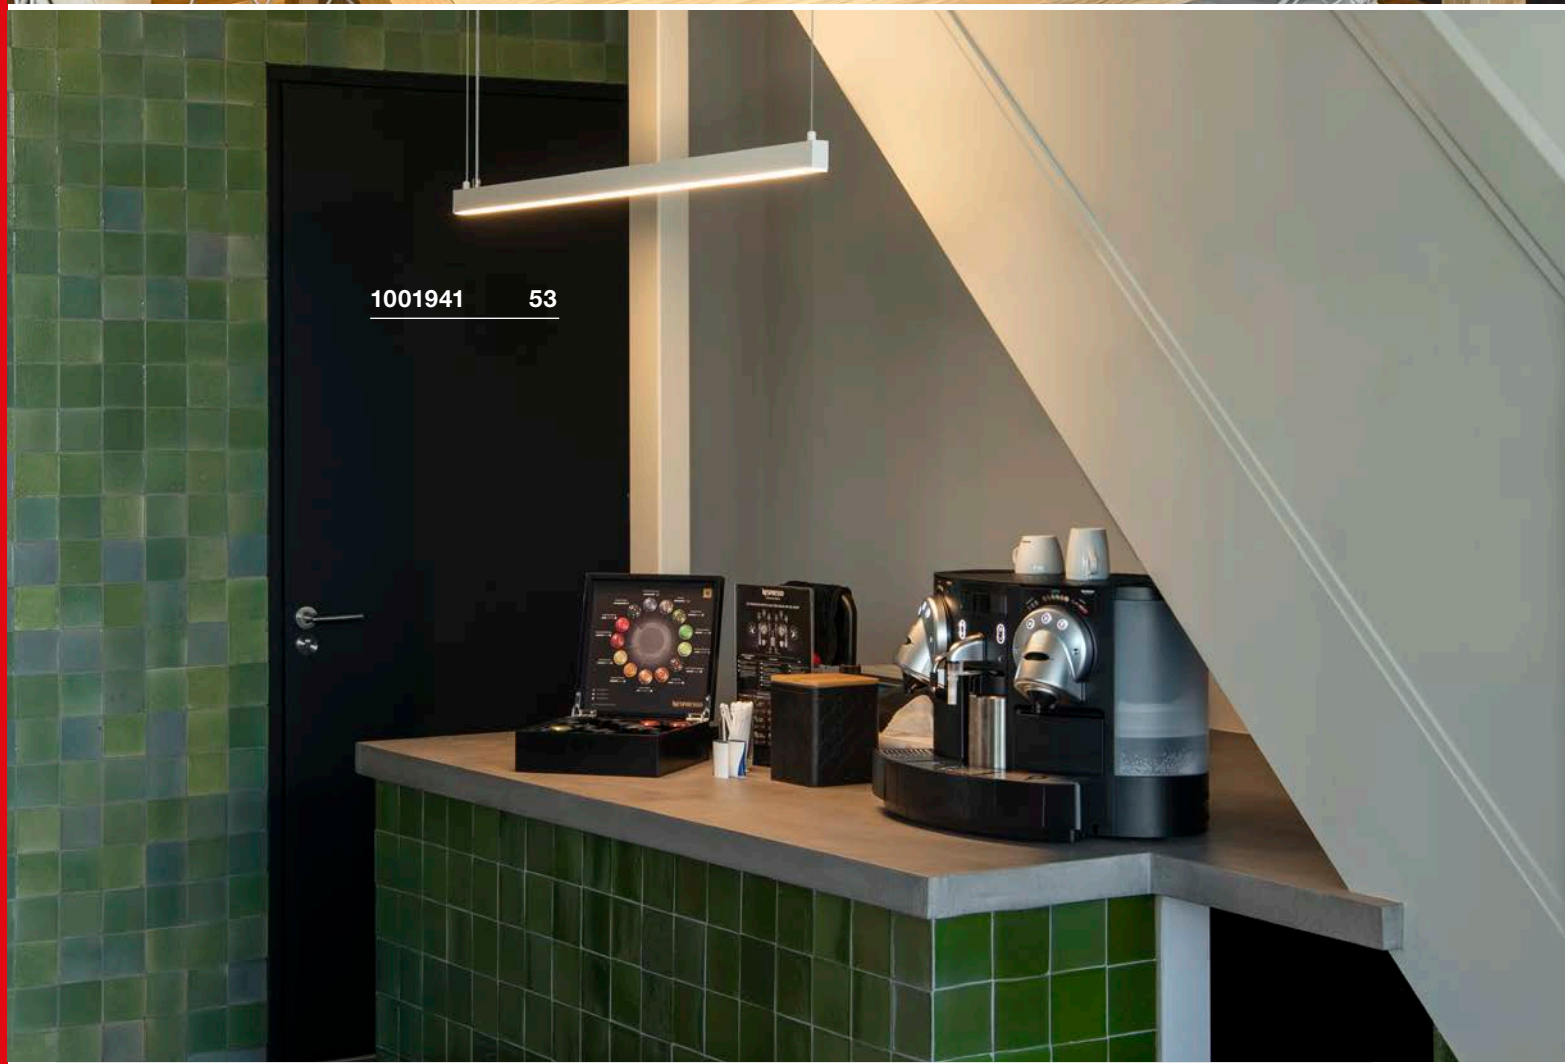
1001941 53

VINCELLI D
PD, TRIAC

898

A-A++ Spectrum A++–E


LED INSIDE




- Slim design
- Lamp body made from real bamboo

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Bamboo / Steel
Dimmable: Triac C, Triac L

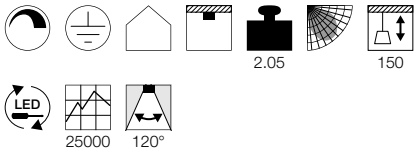

Dimensioned drawing



Variant	Item no.	GBP
1400lm | 2700K | CRI>80		
bamboo / black	**156268**	**359,10**

AROSA
PD, 1.25m, TRIAC

A-A++ Spectrum A++–E


LED INSIDE




- Straight-lined design
- Direct and indirect light

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 32W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C

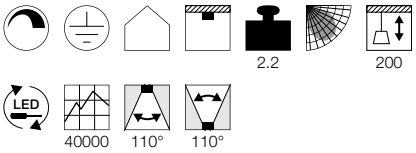

Dimensioned drawing




Variant	Item no.	GBP
Up: 750lm | 3000K | CRI>80 Down: 950lm | 3000K | CRI>80		
black	**1001940**	**476,10**
Up: 750lm | 3000K | CRI>80 Down: 950lm | 3000K | CRI>80		
matt white	**1001941**	**476,10**
Up: 750lm | 3000K | CRI>80 Down: 950lm | 3000K | CRI>80		
aluminium	**1001942**	**485,10**

AROSA
PD, 2m, TRIAC

A-A++ Spectrum A++–E


LED INSIDE

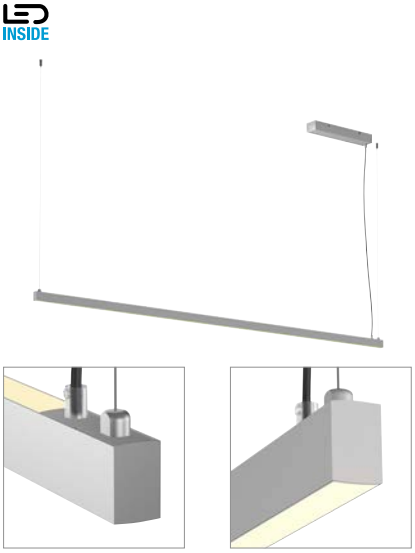


- Straight-lined design
- Direct and indirect light

Product details


220-240V ~50/60Hz | 600mA
Total consumption: 65W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C

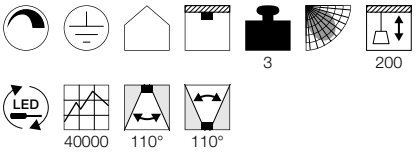



Dimensioned drawing



Variant	Item no.	GBP
Up: 1800lm | 3000K | CRI>80 Down: 1800lm | 3000K | CRI>80		
black	**1001943**	**494,10**
Up: 1800lm | 3000K | CRI>80 Down: 1800lm | 3000K | CRI>80		
matt white	**1001944**	**494,10**
Up: 1800lm | 3000K | CRI>80 Down: 1800lm | 3000K | CRI>80		
aluminium	**1001945**	**503,10**

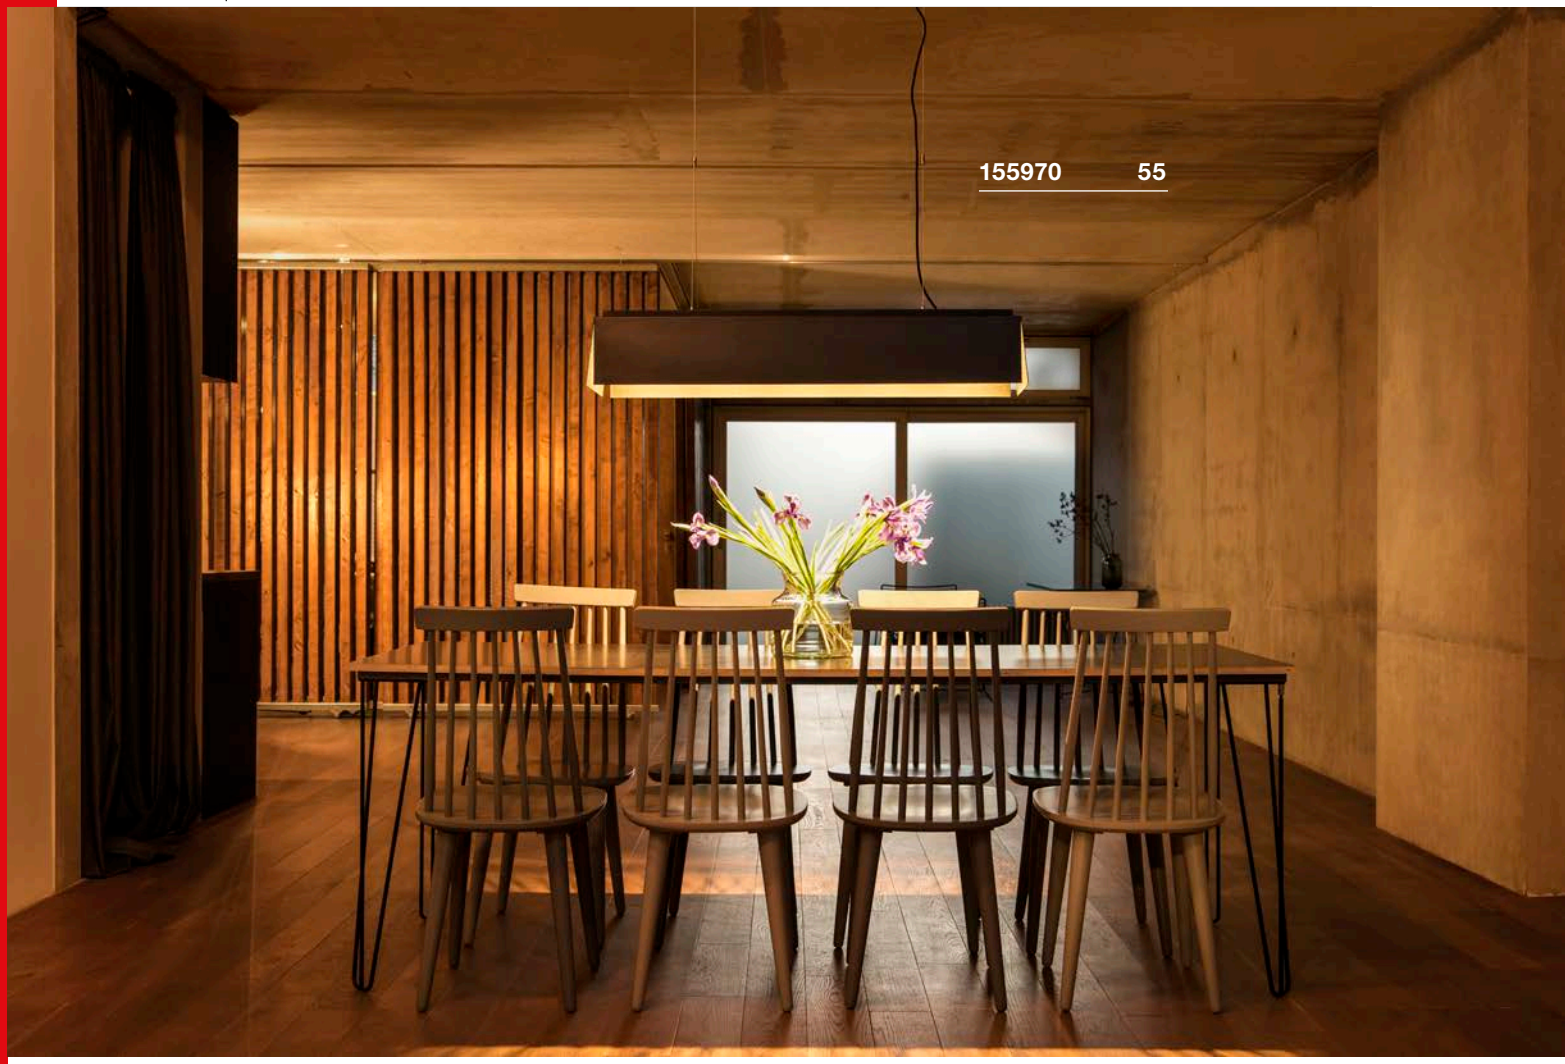
155970 55

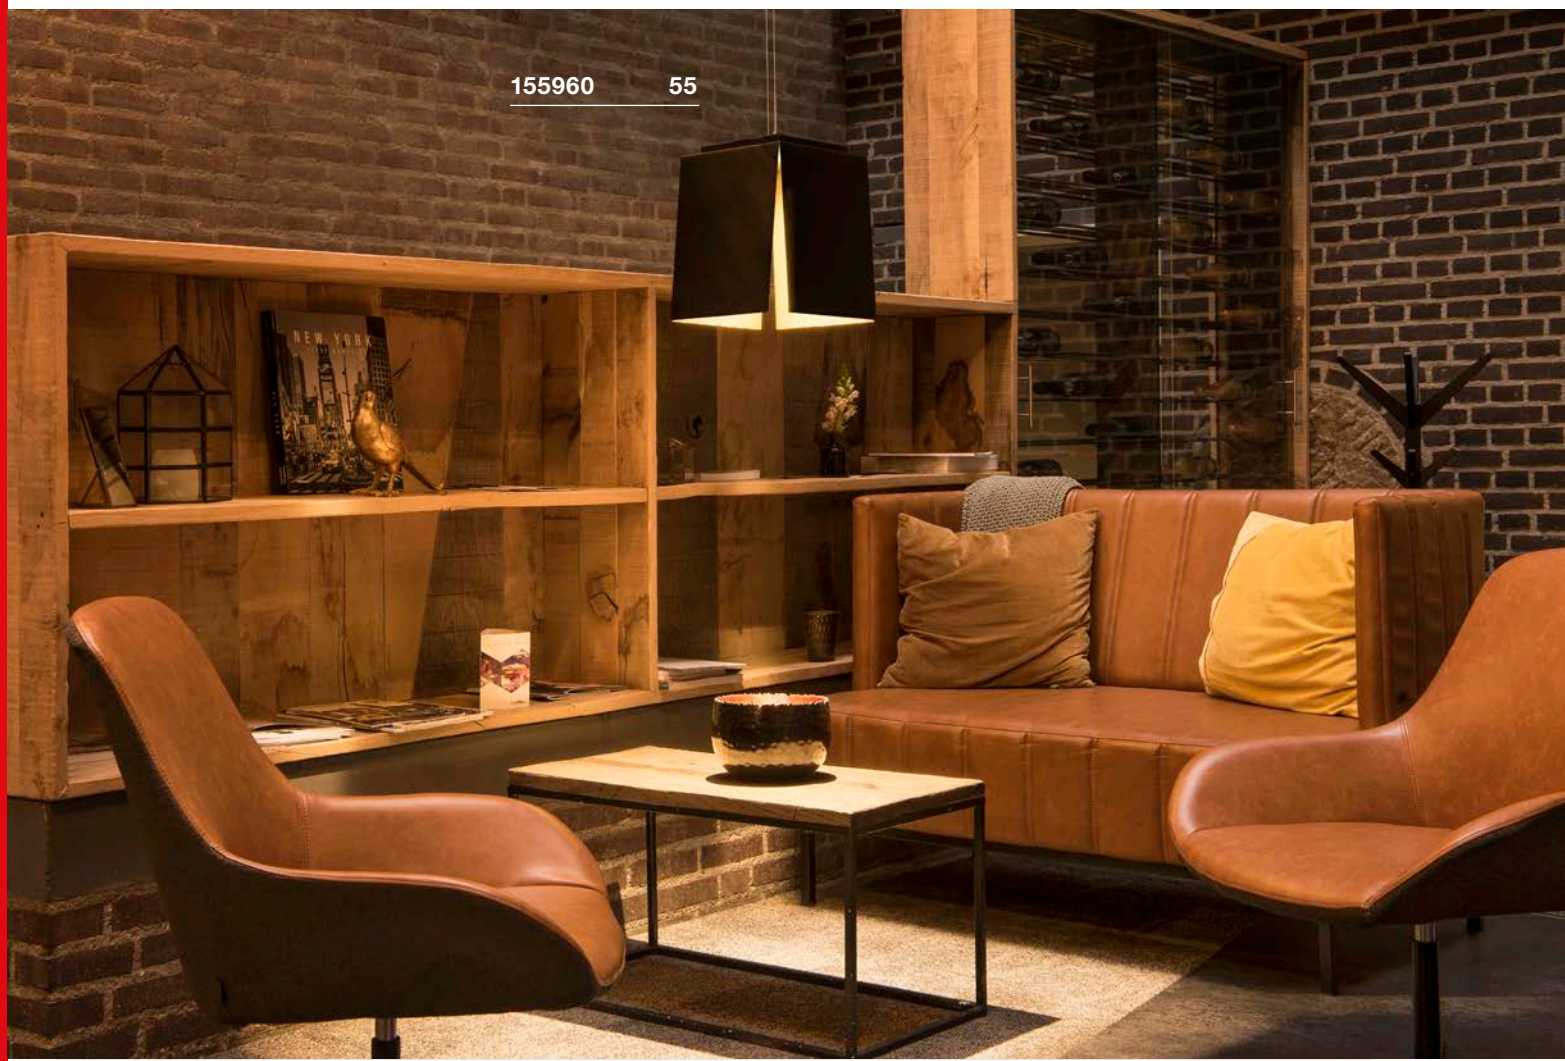
155960 55
NEW YORK

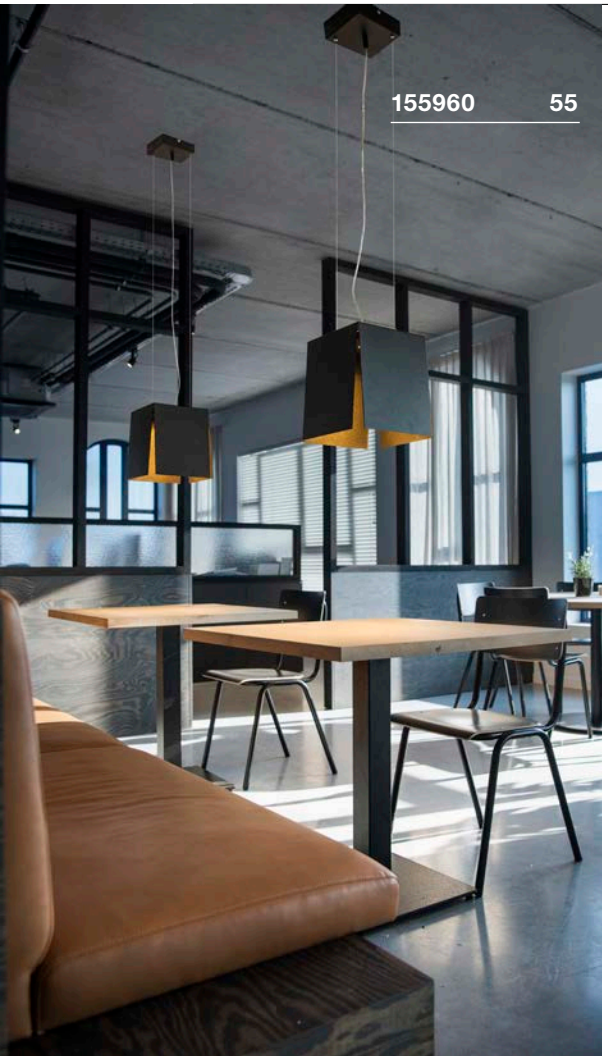



AVENTO 30
PD

A-A++ Spectrum A++–E

LED INSIDE









- Structured inner coating in gold colour

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium
Dimmable: Triac C

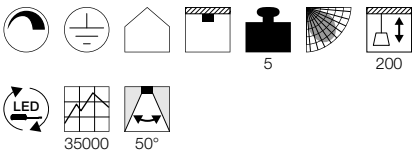

Dimensioned drawing



Note

Textile cable


Variant	Item no.	GBP
660lm | 3000K | CRI>80 black / gold	**155960**	**287,10**

AVENTO 110
PD

A-A++ Spectrum A++–E

LED INSIDE









- Structured inner coating in gold colour

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Aluminium
Dimmable: Triac C

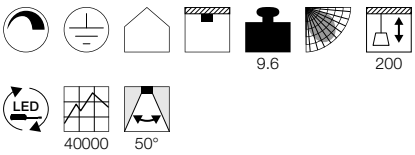

Dimensioned drawing



Note

Textile cable

Variant	Item no.	GBP
2500lm | 3000K | CRI>80 black / gold	**155970**	**557,10**

PHELIA
PD, E27

893

A-A++ Spectrum A++–E








- Individual lamp head design
- Can be combined into a “lighting group” by means of individual configuration

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Textile cable

Recommended lamp


LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 1002126 | 17,10 GBP


LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

Lamp details

max. 23W

Variant	Item no.	GBP
E27 black / gold	1002948	112,50
E27 black / white	133300	108,00
E27 white	1002136	108,00

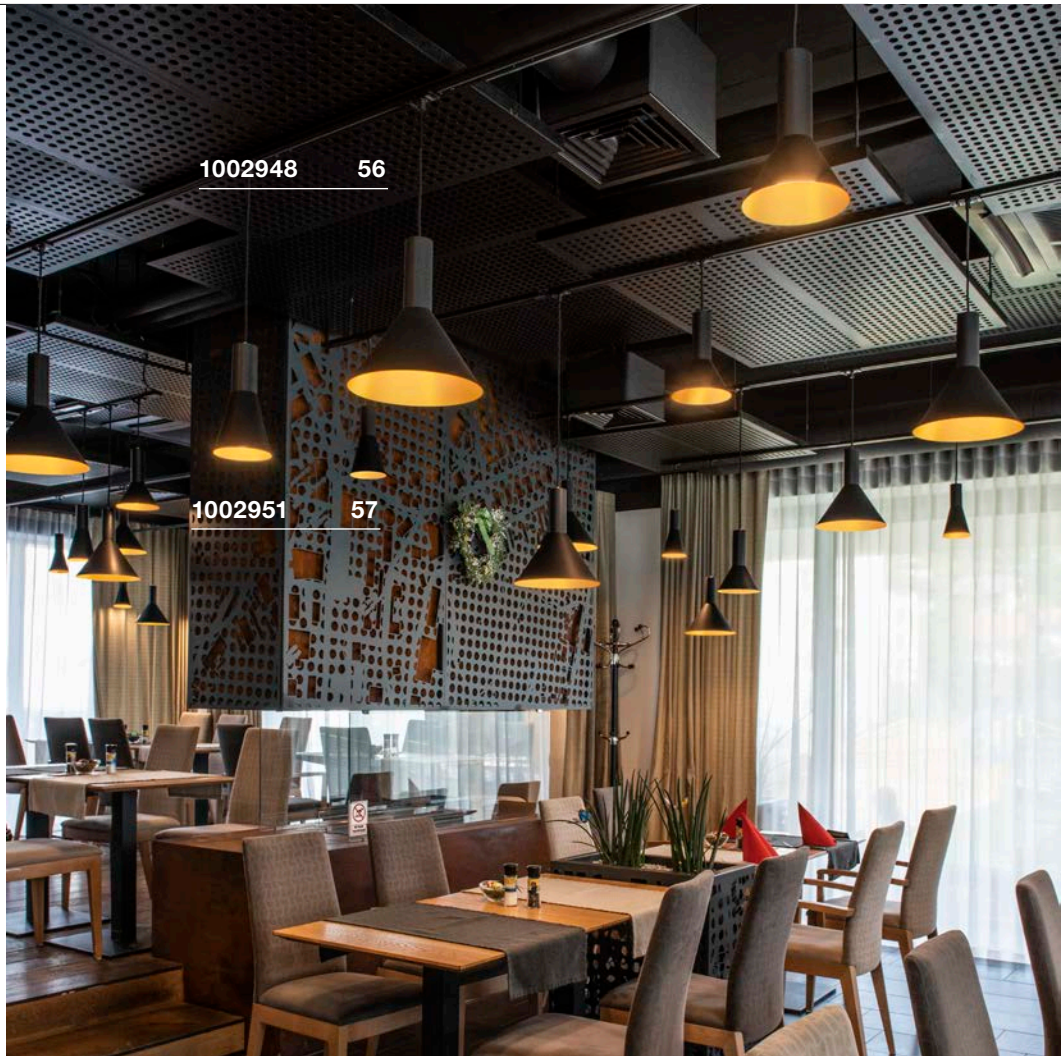

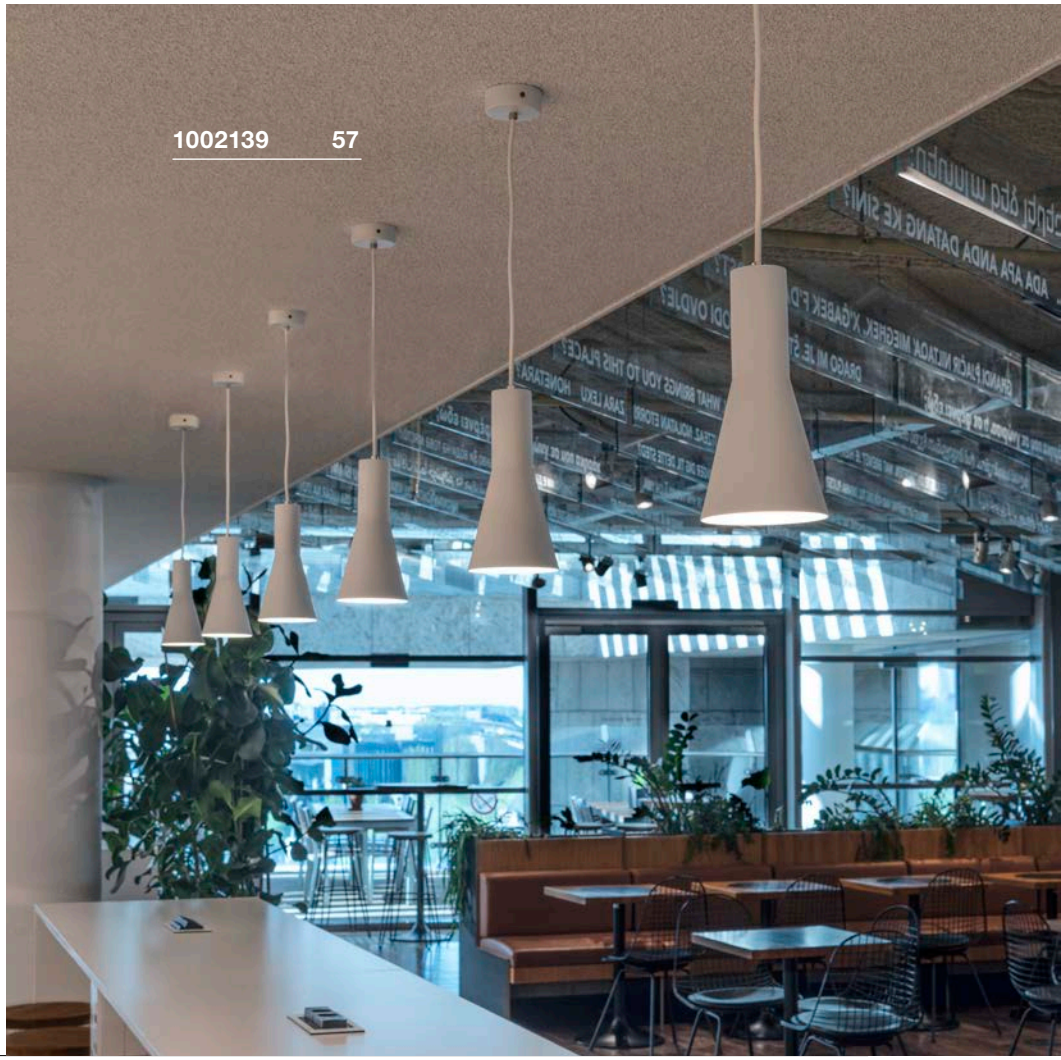

PHELIA
PD, E27

893

A-A++ Spectrum A⁺⁺–E









- Individual lamp head design
- Can be combined into a “lighting group” by means of individual configuration

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Textile cable

Recommended lamp

LED E27 4W 180°
2000-2900K 200lm EEI=A
4kWh/1000h
Item no. 1002126 | 17,10 GBP



LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP



Lamp details

max. 23W

Variant	Item no.	GBP
E27		
black / gold	**1002949**	**126,00**
E27		
black / white	**133310**	**117,00**
E27		
white	**1002137**	**117,00**

PHELIA
PD, E27

893

A-A++ Spectrum A⁺⁺–E









- Individual lamp head design
- Can be combined into a “lighting group” by means of individual configuration

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Textile cable

Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1002126 | 17,10 GBP



LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP



Lamp details

max. 23W

Variant	Item no.	GBP
E27		
black / gold	**1002950**	**148,50**
E27		
black / white	**133320**	**148,50**
E27		
white	**1002138**	**148,50**

PHELIA
PD, E27

893

A-A++ Spectrum A⁺⁺–E









- Individual lamp head design
- Can be combined into a “lighting group” by means of individual configuration

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Textile cable

Recommended lamp

LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP



LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP



Lamp details

max. 23W

Variant	Item no.	GBP
E27		
black / gold	**1002951**	**103,50**
E27		
black / white	**133330**	**108,00**
E27		
white	**1002139**	**108,00**

BATO 35
PD, TRIAC

884

A-A++ Spectrum A++–E

LED INSIDE









- Can be combined into a “lighting group” by means of individual configuration

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 21W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C

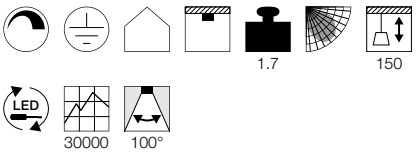

Dimensioned drawing



Note

Textile cable


BATO 35
PD, E27

884

E-A++ Spectrum A++–E









- Can be combined into a “lighting group” by means of individual configuration

Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note

Textile cable

Recommended lamp

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP



LED E27 7W 180°
2700K 630lm EEI=A+
8kWh/1000h
Item no. 1001357 | 29,70 GBP



Lamp details

max. 60W

Variant	Item no.	GBP
1300lm | 2700K | CRI>80		
black / matt brass	**1001351**	**269,10**
1300lm | 2700K | CRI>80		
black	**1000436**	**260,10**
1500lm | 2500K | CRI>80		
matt brass	**1000441**	**269,10**

Variant	Item no.	GBP
E27		
black / matt brass	**1001266**	**224,10**
E27		
black	**1000434**	**206,10**
E27		
matt brass	**1000439**	**224,10**

BATO 45
PD, TRIAC

884

A-A++ Spectrum A++–E

LED INSIDE









- Can be combined into a “lighting group” by means of individual configuration

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C

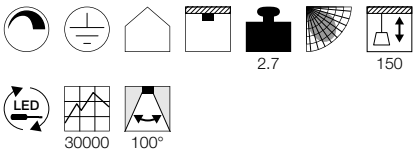

Dimensioned drawing



Note

Textile cable

Variant	Item no.	GBP
1450lm | 2700K | CRI>80		
black / matt brass	**1001350**	**341,10**
1450lm | 2700K | CRI>80		
black	**1000435**	**323,10**
1900lm | 2500K | CRI>80		
matt brass	**1000440**	**341,10**

BATO 45
PD, E27

884

E-A++ Spectrum A⁺⁺–E








- Can be combined into a “lighting group” by means of individual configuration

Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note

Textile cable

Recommended lamp


LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP

LED E27 7W 180°
2700K 630lm EEI=A+
8kWh/1000h
Item no. 1001357 | 29,70 GBP

Lamp details

max. 60W

Variant	Item no.	GBP
E27		
black / matt brass	**1001265**	**287,10**
E27		
black	**1000433**	**269,10**
E27		
matt brass	**1000438**	**287,10**

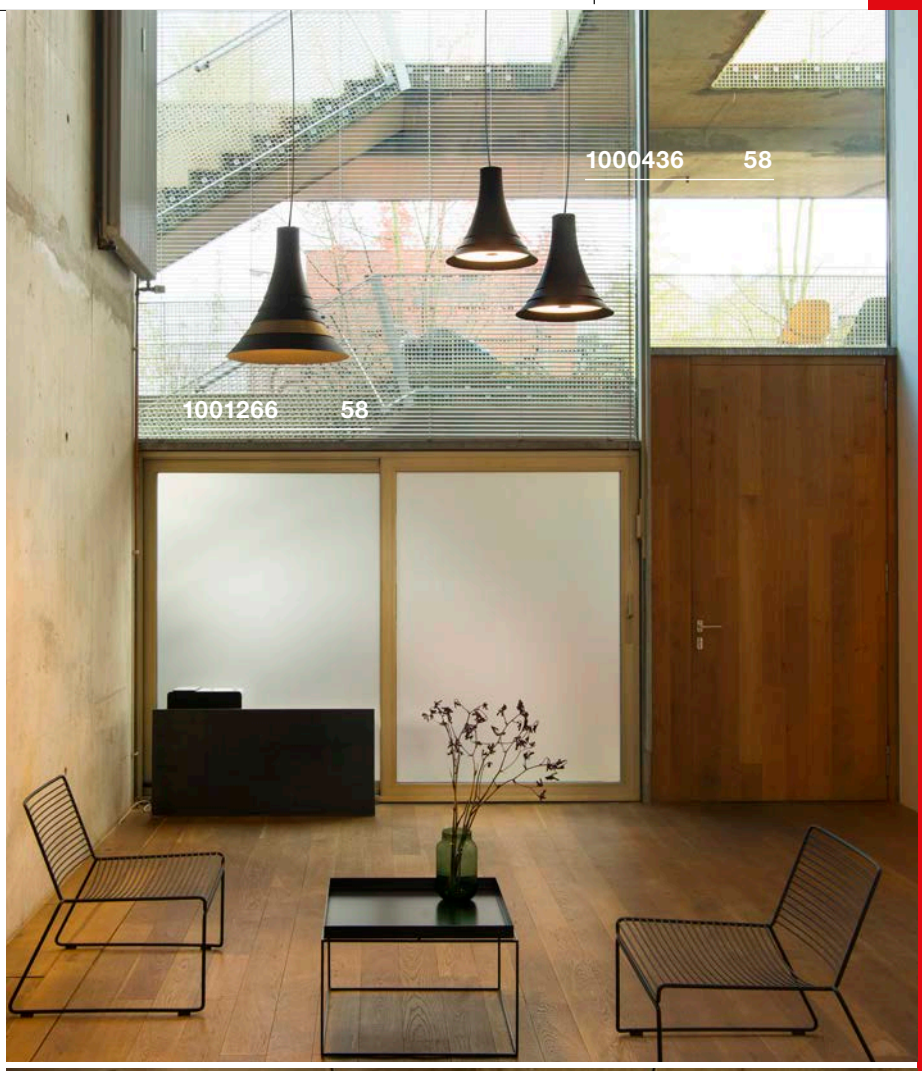




133897 61





BELA 40
PD

A-A++ Spectrum A++–E

LED INSIDE








- Reduced glare due to diffused illumination surface


Product details

220-240V ~50/60Hz | 700mA
Total consumption: 24W
Material: Aluminium / Polymethylacrylate (PMMA)





Dimensioned drawing



Note

Textile cable

BELA 60
PD

A-A++ Spectrum A++–E

LED INSIDE








- Reduced glare due to diffused illumination surface


Product details

220-240V ~50/60Hz | 700mA
Total consumption: 31W
Material: Aluminium / Polymethylacrylate (PMMA)





Dimensioned drawing



Note

Textile cable

Variant	Item no.	GBP
1350lm | 3000K | CRI>80 white	**133881**	**283,50**
1350lm | 3000K | CRI>80 black / white	**133886**	**296,10**
1350lm | 3000K | CRI>80 black / gold	**133887**	**305,10**

Variant	Item no.	GBP
1850lm | 3000K | CRI>80 white	**133891**	**404,10**
1850lm | 3000K | CRI>80 black / white	**133896**	**404,10**
1850lm | 3000K | CRI>80 black / gold	**133897**	**413,10**

FORCHINI 40
PD, E27

887

E-A++ Spectrum A++–E








- Every luminaire interior pattern is unique
- Textile cable in housing colour

Product details
230V ~50Hz
Material: GRP

1.4 150

Dimensioned drawing


Recommended lamp
LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001035 |15,30 GBP

Lamp details
max. 40W
L: 14 cm max.

Variant	Item no.	GBP
E27		
black / grey	**155500**	**117,00**
E27		
black / gold	**155510**	**119,70**
E27		
white/gold	**155511**	**119,70**

FORCHINI 50
PD, E27

887

E-A++ Spectrum A++–E








- Every luminaire interior pattern is unique
- Textile cable in housing colour

Product details
230V ~50Hz
Material: GRP

2.6 150

Dimensioned drawing


Recommended lamp
LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001035 |15,30 GBP

LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 |17,10 GBP

Lamp details
max. 40W
L: 20 cm max.

Variant	Item no.	GBP
E27		
black / grey	**155520**	**171,00**
E27		
black / gold	**155530**	**175,50**
E27		
white/gold	**155531**	**175,50**

FORCHINI 70
PD, E27

887

E-A++ Spectrum A++–E

NEW VARIANT








- Every luminaire interior pattern is unique
- Textile cable in housing colour

Product details
220-240V ~50/60Hz
Material: GRP

4.75 150


Dimensioned drawing


Recommended lamp
LED E27 8W 180°
2000-2900K 400lm EEI=A
8kWh/1000h
Item no. 1001035 |15,30 GBP

LED E27 8W
2000-2900K 500lm EEI=A
8kWh/1000h
Item no. 1001038 |20,70 GBP


Lamp details
max. 40W
L: 20 cm max.

Variant	Item no.	GBP
E27		
black / gold	**1001701**	**314,10**

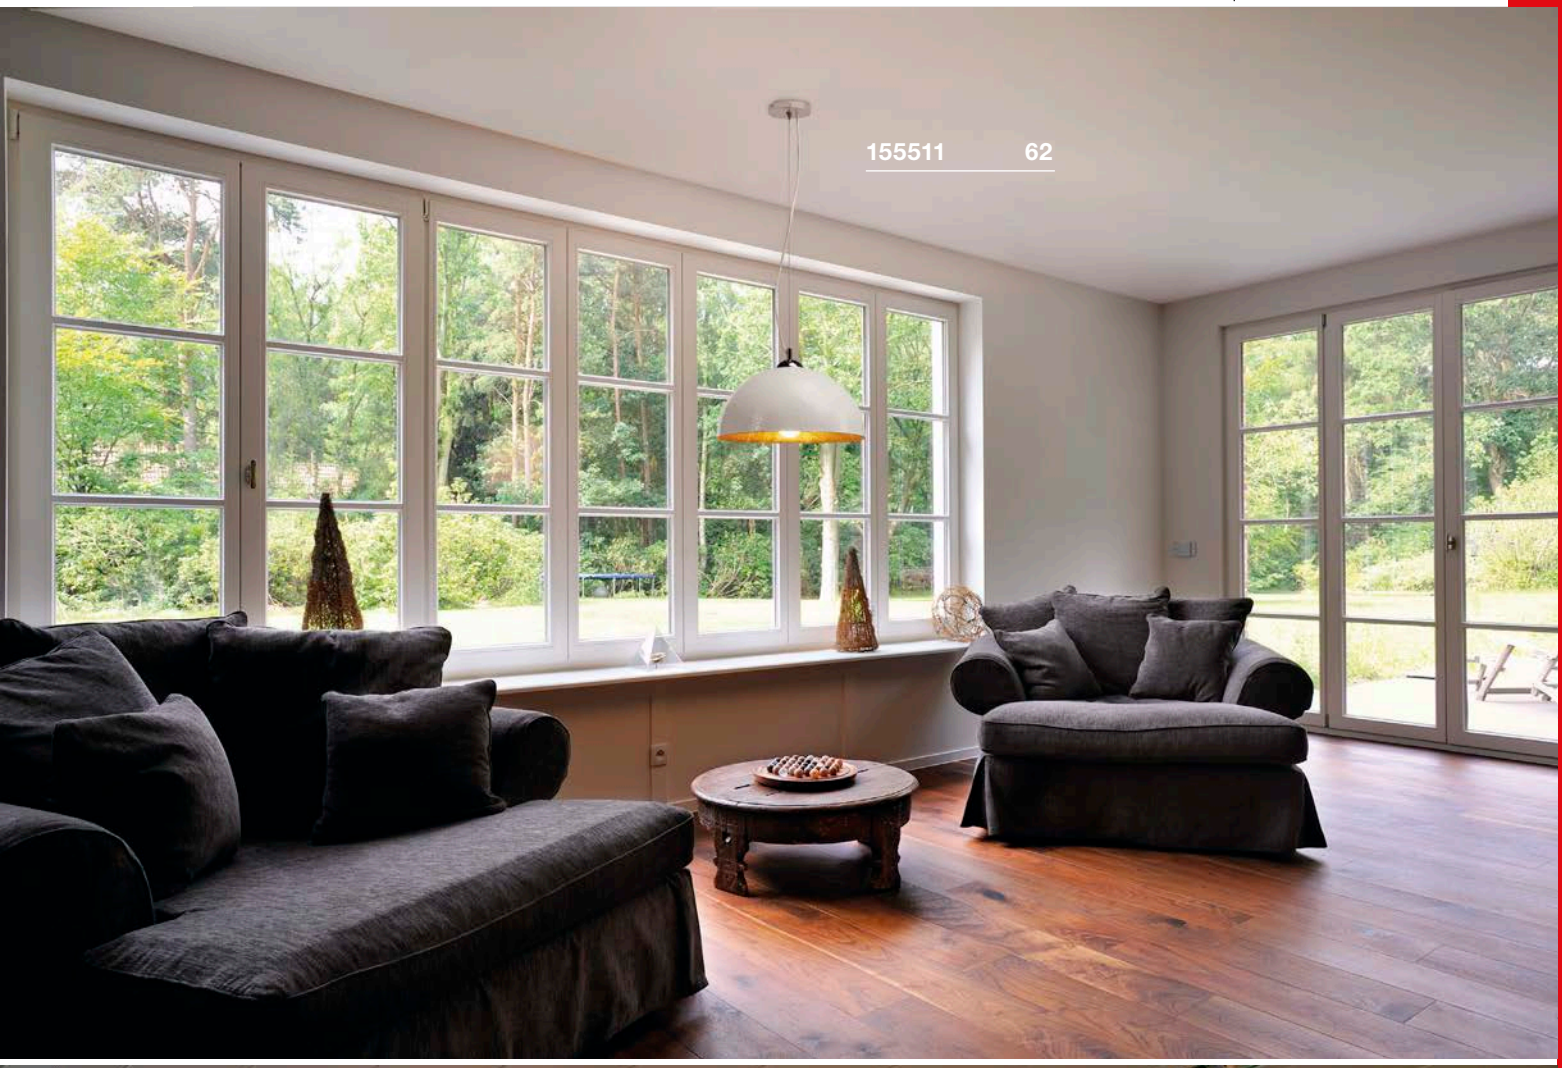
155511 62


155531 62


1555930 65

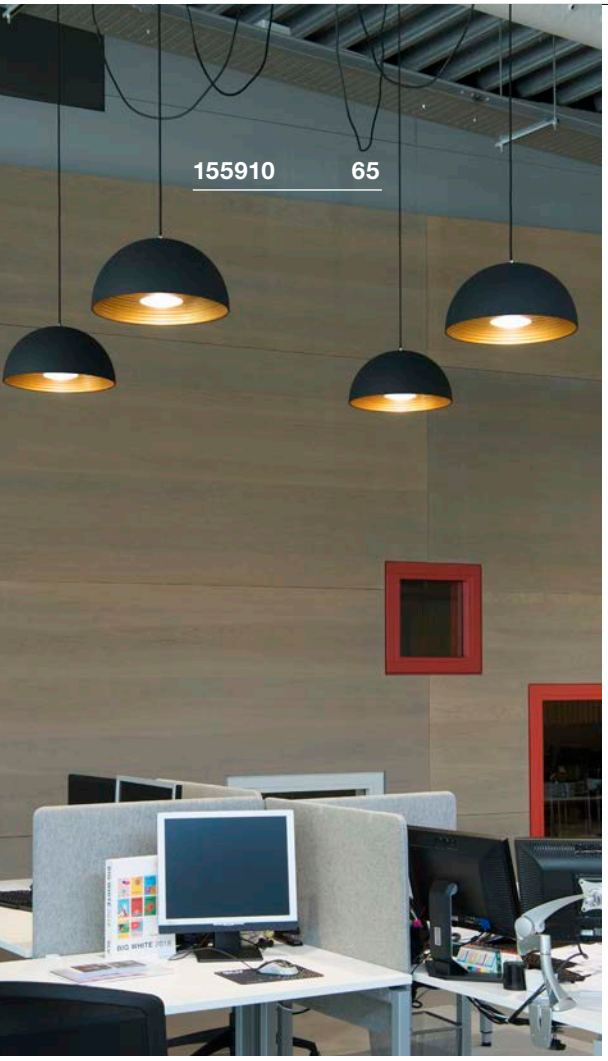



FORCHINI M 40
PD, E27

887

E-A++ Spectrum A++–E









- Textured interior design with internal reflector
- Textile cable in housing colour

Product details

230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001035 | 15,30 GBP

LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP

Lamp details

max. 40W
L: 15.2 cm max.

Variant	Item no.	GBP
E27 black / grey	**155900**	**171,00**
E27 white / grey	**155901**	**171,00**
E27 black / gold	**155910**	**175,50**
E27 white/gold	**155911**	**175,50**

FORCHINI M 50
PD, E27

887

E-A++ Spectrum A++–E









- Textured interior design with internal reflector
- Textile cable in housing colour

Product details

230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001038 | 20,70 GBP

LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP

Lamp details

max. 40W
L: 18 cm max.

Variant	Item no.	GBP
E27 black / grey	**155920**	**188,10**
E27 white / grey	**155921**	**188,10**
E27 black / gold	**155930**	**193,50**
E27 white/gold	**155931**	**193,50**

PARA CONE 20
PD, E27

893

E-A++ Spectrum A++–E




- Can be combined into a “lighting group” by means of individual configuration
- Wide range of colours and sizes

Product details
220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note
Textile cable
black / gold version with gold reflector

Recommended lamp
LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP



Lamp details
max. 60W

Variant	Item no.	GBP
E27		
white	133001	85,50
E27		
matt aluminium	133005	90,00
E27		
copper	133009	126,00
E27		
black / gold	133050	90,00

PARA CONE 30
PD, E27


893

E-A++ Spectrum A++–E




- Can be combined into a “lighting group” by means of individual configuration
- Wide range of colours and sizes

Product details
220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note
Textile cable
black / gold version with gold reflector

Recommended lamp
LED E27 4.8W 330°
2700K 470lm EEI=A++
5kWh/1000h
Item no. 560752 | 18,00 GBP



LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details
max. 60W

Variant	Item no.	GBP
E27		
white	133011	139,50
E27		
matt aluminium	133015	153,00
E27		
copper	133019	171,00
E27		
black / gold	133060	153,00

PARA CONE 40
PD, E27

893

E-A++ Spectrum A++–E




- Can be combined into a “lighting group” by means of individual configuration
- Wide range of colours and sizes

Product details
220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note
Textile cable
black / gold version with gold reflector

Recommended lamp
LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001038 | 20,70 GBP



LED E27 7W 180°
2700K 630lm EEI=A+
8kWh/1000h
Item no. 1001357 | 29,70 GBP



Lamp details
max. 60W

Variant	Item no.	GBP
E27		
white	155471	180,00
E27		
matt aluminium	155475	188,10
E27		
copper	155479	206,10
E27		
black / gold	133070	188,10

MALANG
CW, SLV VALETO®

A-A++ Spectrum A⁺⁺–E

NEW












- Can be integrated in the SLV VALETO® system and other ZigBee® systems
- Panel can be controlled separately from warm white to cool white and dimmed
- The ring can be controlled separately in RGBW colours and dimmed


The decorative **RING** can be controlled separately. Create an atmospheric ambience by setting different light colours and dimming the light.

The **PANEL** can be controlled separately. You can set the colour temperature to 2700-6500K and dim the light.

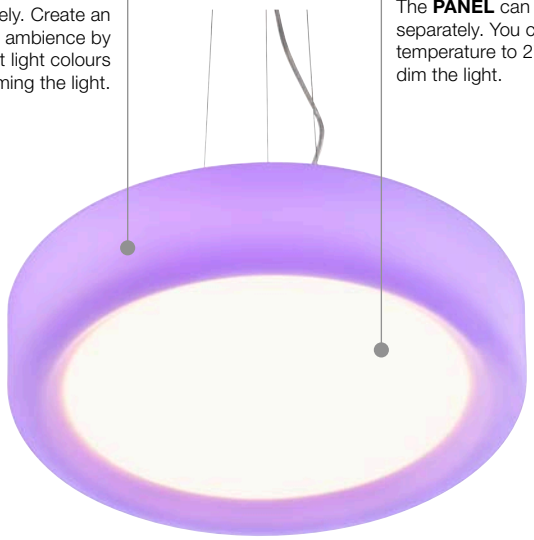


Product details

100-240V ~50/60Hz | 24V DC
Total consumption: 39W
Material: Aluminium / Polycarbonate (PC)

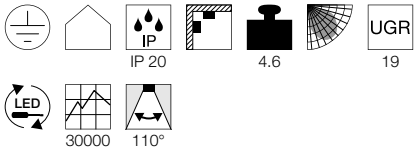

Dimensioned drawing



Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

With our SLV VALETO® SMART LIGHT SYSTEM the choice is yours: Control your light at home with our SLV VALETO® remote control (1002994), or an app on your Smartphone via our SLV VALETO® Gateway (1002411).

Thanks to the latest ZigBee standard (ZigBee® 3.0) there are no limits to your smart light control.



Remote control
Item no. 1002994




Gateway
Item no. 1002411


SLV VALETO®
App

Recommended accessories

- Suspension set 1.5m
  Item no. 135250 | 34,20 GBP
- Suspension set 1.5m
  Item no. 135251 | 34,20 GBP
- Suspension set 1.5m
  Item no. 135254 | 34,20 GBP
- Suspension set 5m
  Item no. 1001950 | 76,50 GBP
- Suspension set 5m
  Item no. 1001951 | 76,50 GBP
- Suspension set 5m
  Item no. 1001952 | 76,50 GBP
- Remote control CCT/RGBW
  Item no. 1002994 | 43,20 GBP

Variant	Item no.	GBP
Ring: 350lm | RGB+W (3000K) | CRI>80 Panel: 2100-2400lm | 2700-6500K | CRI>80		
white	1002858	629,10

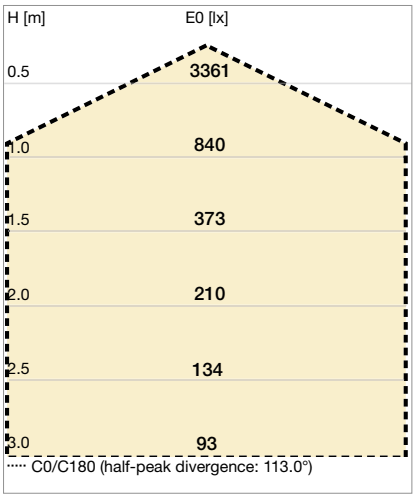

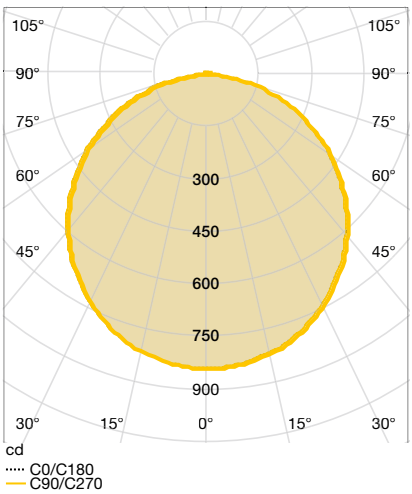

SPHERA 45
PD, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- Sleek lamp body
- High-gloss lacquered finish

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 13W
Material: Aluminium / Acrylic
Dimmable: Triac C

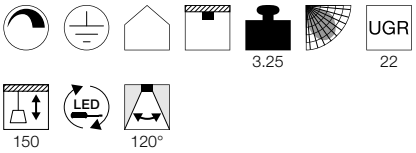

Dimensioned drawing



Variant	Item no.	GBP
800lm | 2700K | CRI>80		
white	**133341**	**269,10**

SPHERA 75
PD, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- Sleek lamp body
- High-gloss lacquered finish

Product details


220-240V ~50/60Hz | 500mA
Total consumption: 15W
Material: Aluminium / Acrylic
Dimmable: Triac C

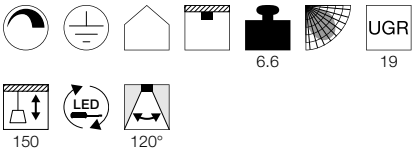


Dimensioned drawing




Variant	Item no.	GBP
1200lm | 2700K | CRI>80		
white	**133351**	**332,10**

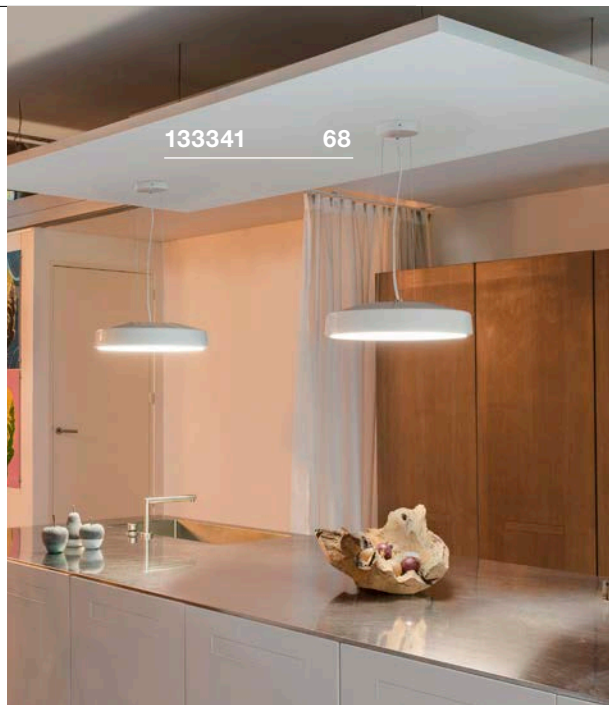



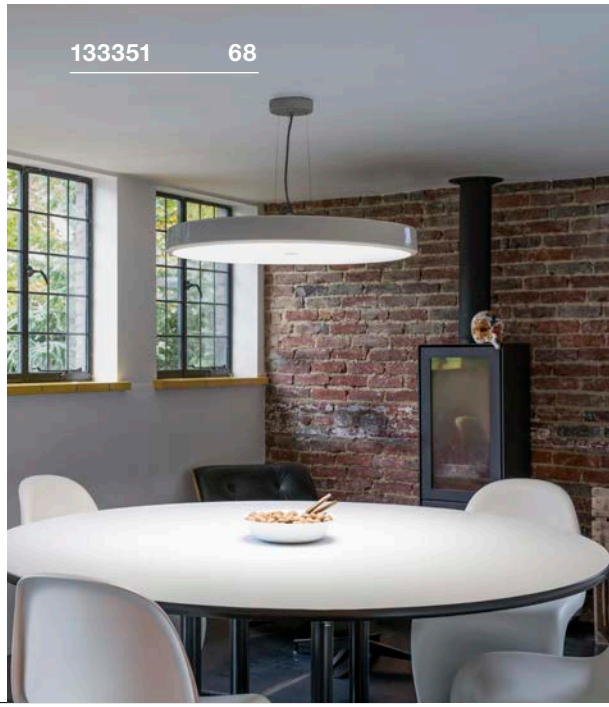

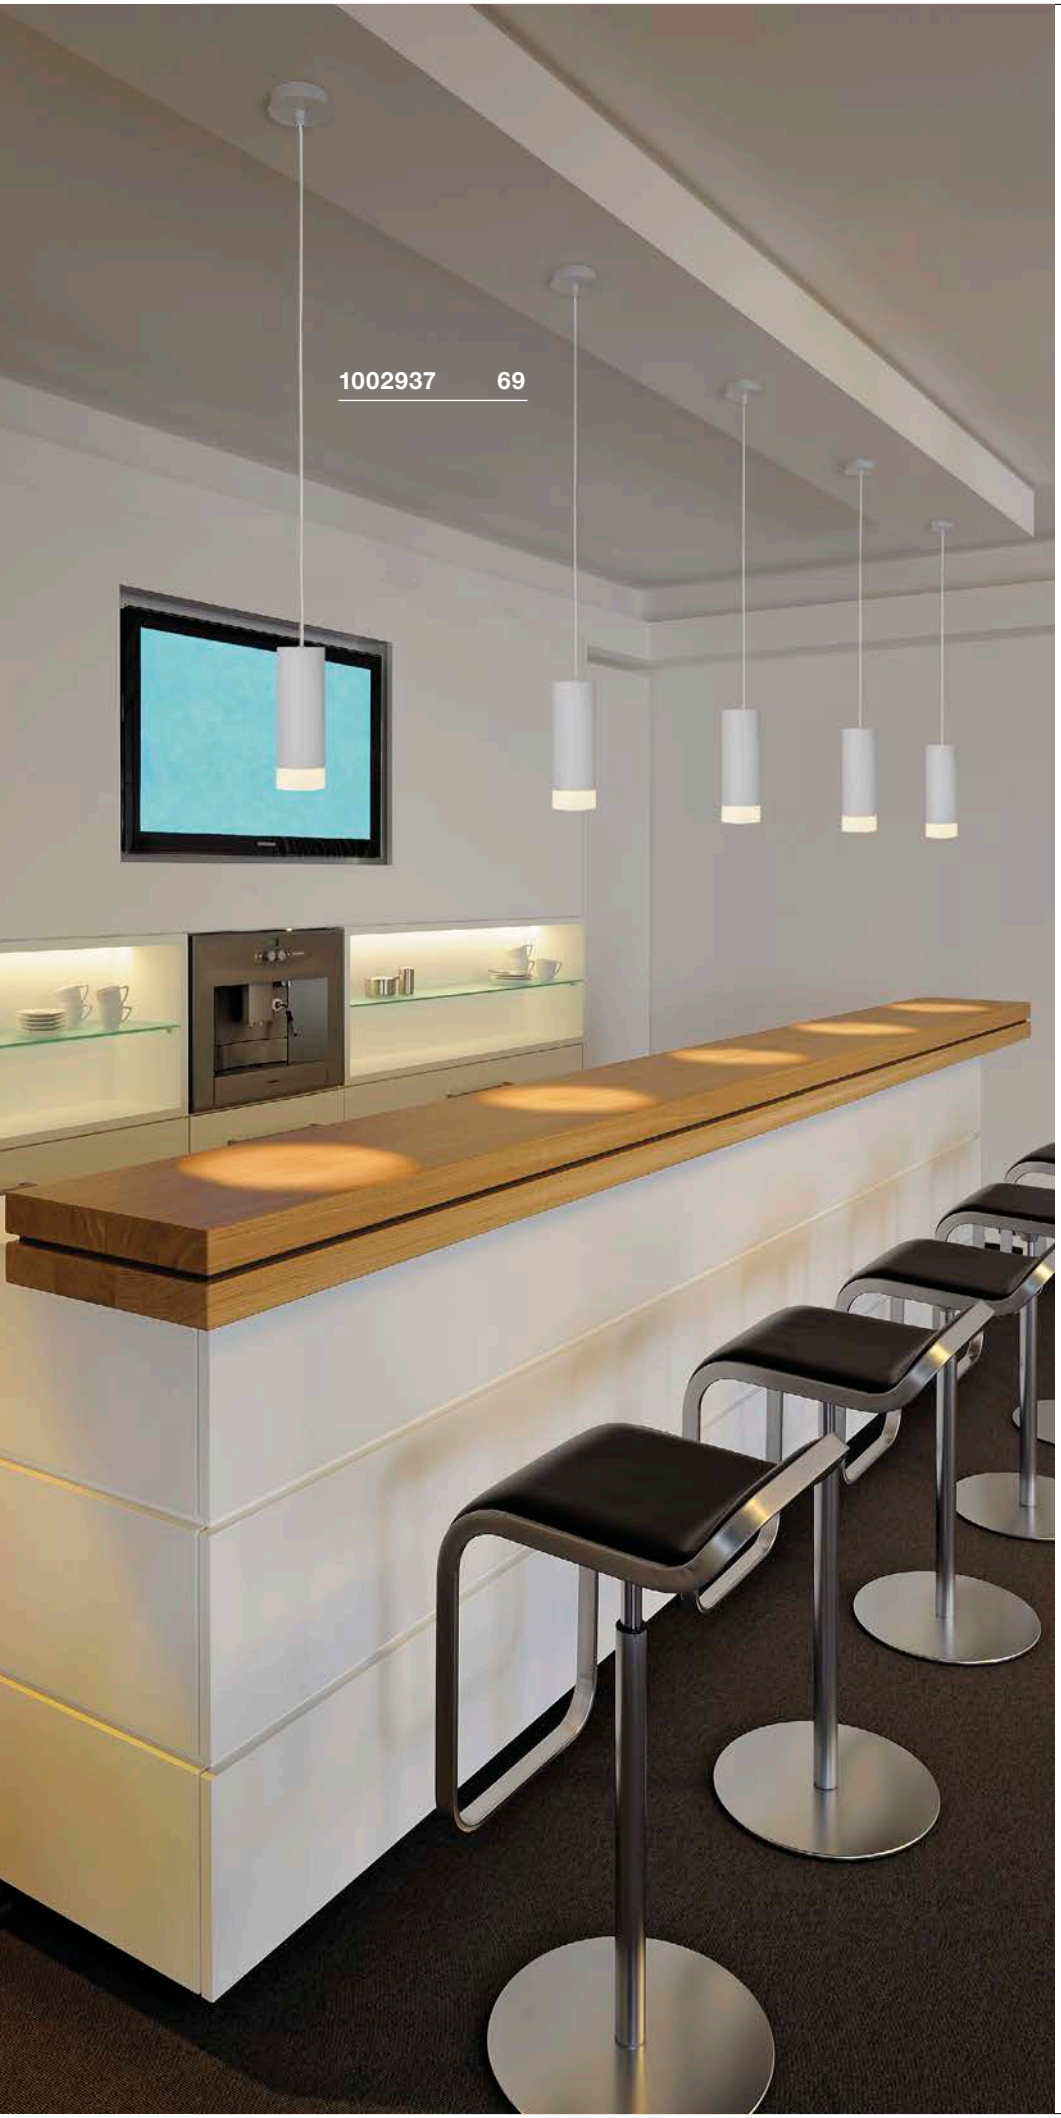

ASTINA
PD, QPAR51

884

A-A++ Spectrum A⁺⁺–E

NEW







- High-quality, frosted glass
- 2.5 m long cable

Product details

220-240V ~50/60Hz
Material: Aluminium
Product dimensions: Ø: 7 cm L: 20 cm



Note

Open cable end
Can be combined with the Fitu Mix & Match accessory on page 40

Lamp details

GU10 QPAR51 max. 10W

Variant	Item no.	GBP
GU10 | QPAR51 matt white	1002937	90,00
GU10 | QPAR51 matt grey	1002938	90,00
GU10 | QPAR51 matt black	1002939	90,00

PLASTRA
PD, QPAR51

893

A-A++ Spectrum A++–E









- Can be individually designed with colours, stickers and more

Product details

230V ~50Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP



Lamp details

max. 7W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	148042	67,50

ENOLA B
PD, QPAR51

885

E-A++ Spectrum A++–E









Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP





Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 black	151850	99,00
GU10 | QPAR51 white	151851	99,00
GU10 | QPAR51 gold	151853	103,50
GU10 | QPAR51 grey / black	151854	99,00



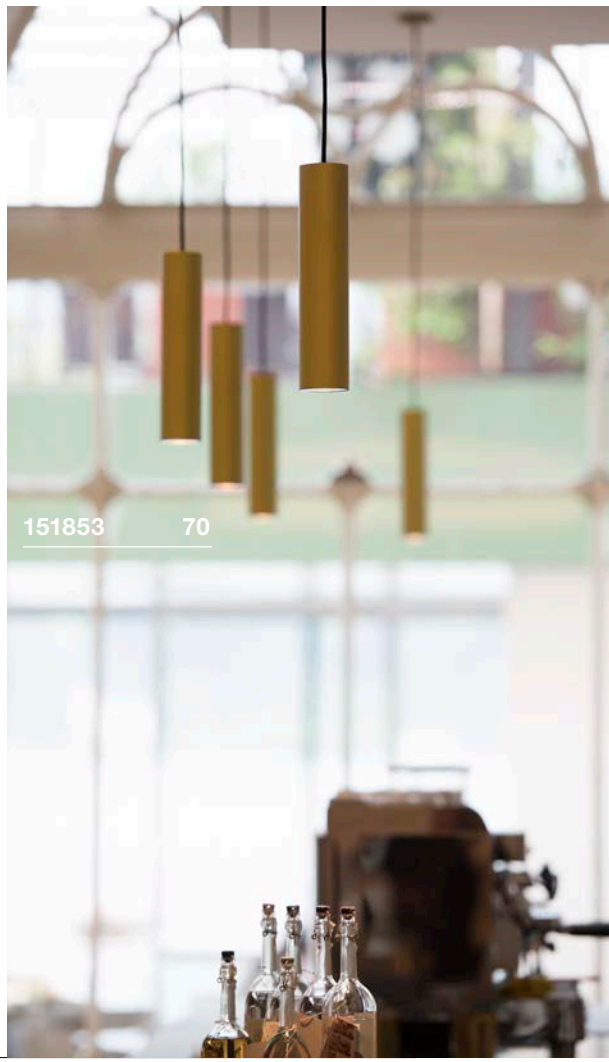

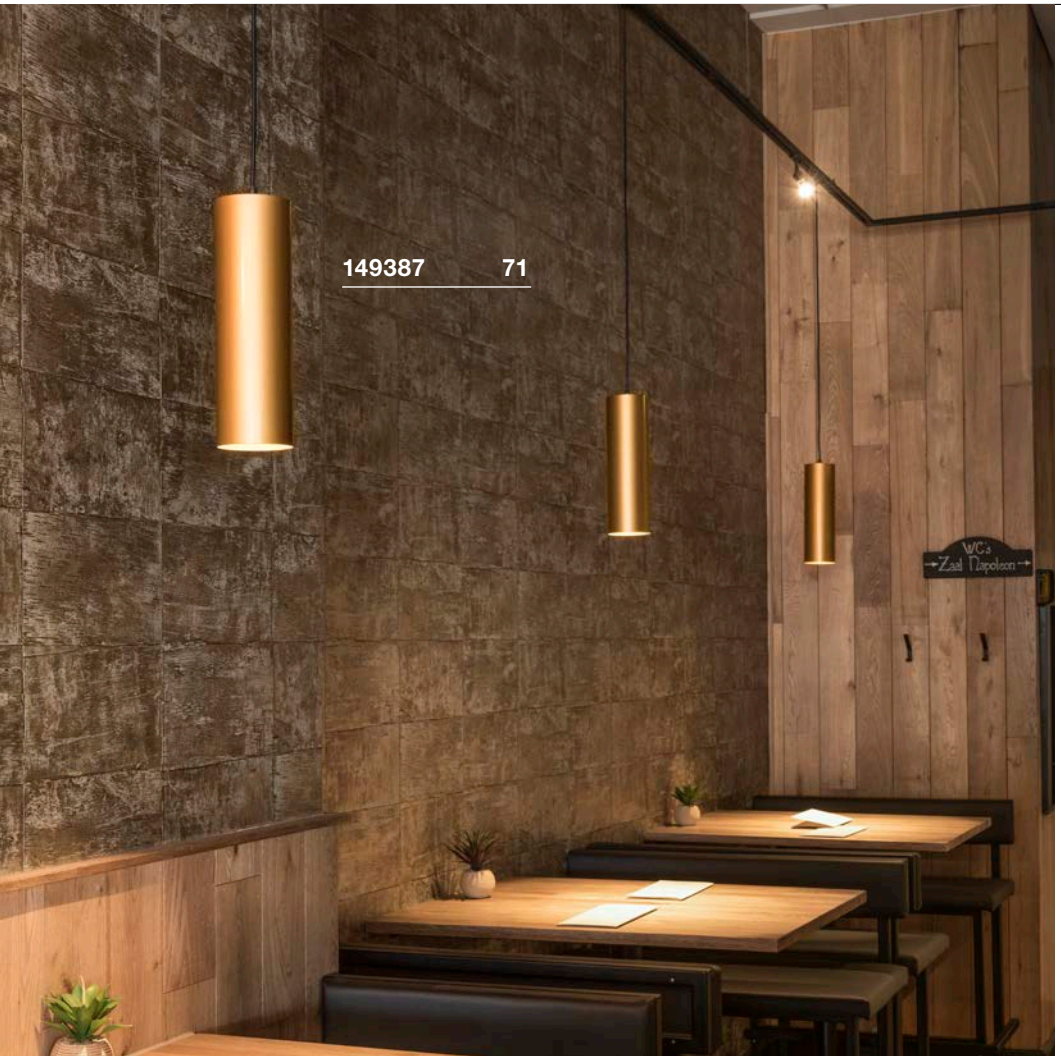



ENOLA
PD, E27

885

E-A++ Spectrum A++–E









Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP



LED E27 7W 280°
2700K 790lm EEl=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP



Lamp details

max. 60W
Ø: 9 cm max. L: 18 cm max.


Variant	Item no.	GBP
E27 matt black	**149388**	**67,50**
E27 white	**149381**	**67,50**
E27 matt aluminium	**149385**	**81,00**
E27 gold	**149387**	**81,00**

HELIA 30 PD

888

A-A++ Spectrum A⁺⁺–E


LED INSIDE

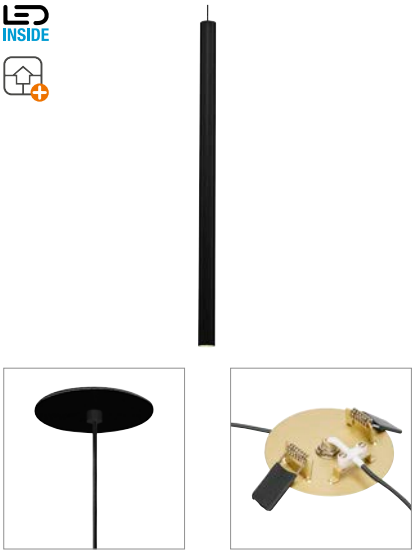


• Premium LED with CRI>90
• Slim, extra-long lamp body
• Canopy for ceiling installation

Product details

500mA
Total consumption: 7.5W
Material: Aluminium
Installation dimensions:
Installation Ø: 6.8 cm D: 3 cm



Dimensioned drawing



Note

LED driver excl.
Material thickness, mounting surface:
max. 12 mm

Recommended accessories

LED driver 500mA | 9W
Item no. 464091 | 20,70 GBP



LED driver 500mA | 15W dimmable
Item no. 464144 | 29,70 GBP




Variant	Item no.	GBP
500lm | 3000K | CRI>90		
■ black	**158400**	**153,00**
550lm | 3000K | CRI>90		
□ white	**158401**	**153,00**
550lm | 3000K | CRI>90		
■ gold	**1002170**	**157,50**

HELIA 40 PD

888

A-A++ Spectrum A⁺⁺–E

LED INSIDE




• Premium LED with CRI>90
• Long lamp body
• Canopy for ceiling installation

Product details

500mA
Total consumption: 9W
Material: Aluminium
Installation dimensions:
Installation Ø: 6.8 cm D: 3 cm



Dimensioned drawing



Note

LED driver excl.
Material thickness, mounting surface:
max. 12 mm

Recommended accessories

LED driver 500mA | 9W
Item no. 464091 | 20,70 GBP




LED driver 500mA | 15W dimmable
Item no. 464144 | 29,70 GBP



Variant	Item no.	GBP
700lm | 3000K | CRI>90		
■ black	**158410**	**171,00**
720lm | 3000K | CRI>90		
□ white	**158411**	**171,00**
720lm | 3000K | CRI>90		
■ gold	**1002169**	**175,50**





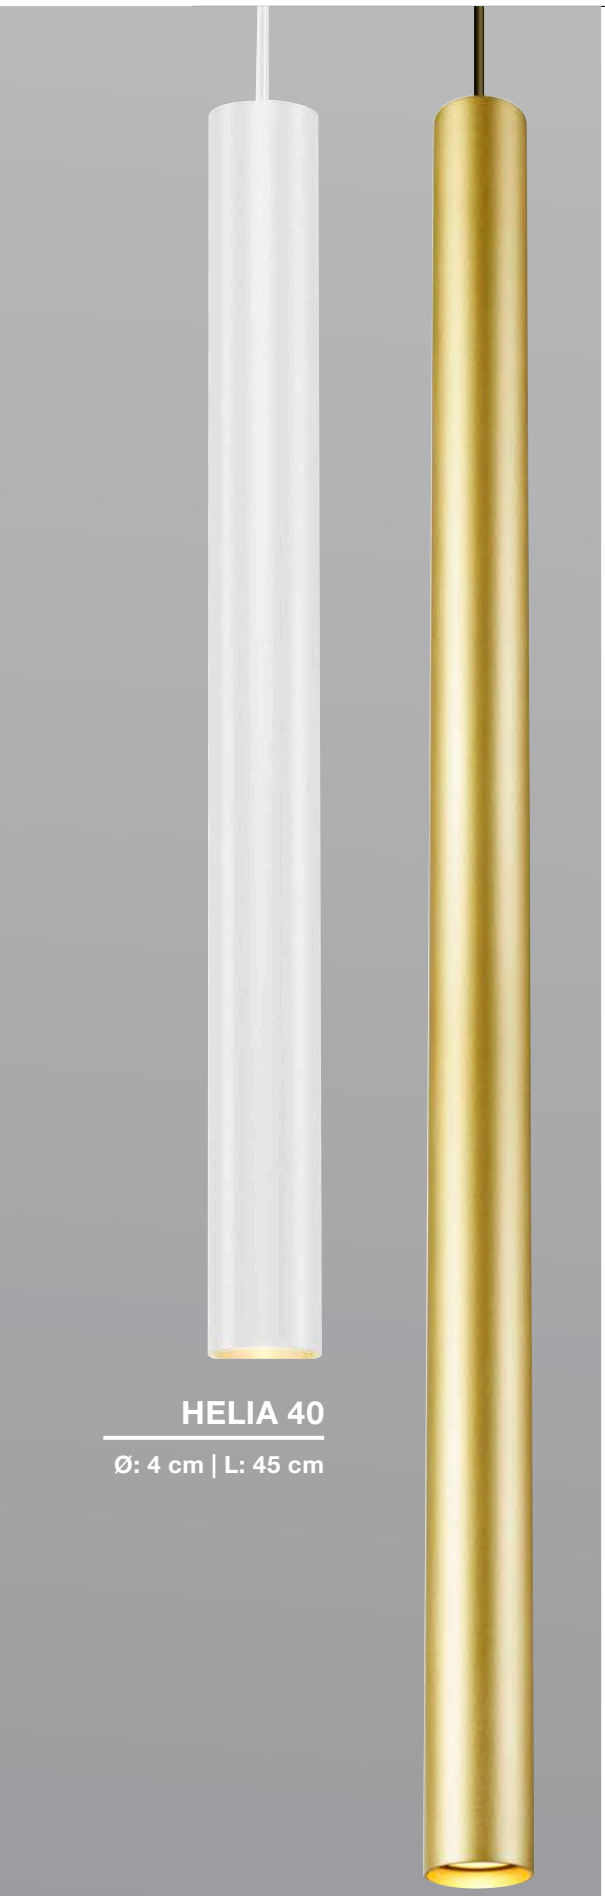

HELIA 40

Ø: 4 cm | L: 45 cm

HELIA 30

Ø: 3 cm | L: 60 cm

HELIA 30
PD, TRIAC

888

A-A++ Spectrum A⁺⁺–E

LED INSIDE









• Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 10W
Material: Aluminium
Dimmable: Triac C, Triac L

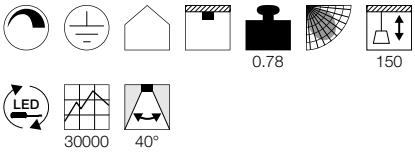

Dimensioned drawing



Variant	Item no.	GBP
500lm | 3000K | CRI>90		
■ black	**152360**	**188,10**
550lm | 3000K | CRI>90		
□ white	**152361**	**188,10**
550lm | 3000K | CRI>90		
■ gold	**1002172**	**193,50**

HELIA 40
PD, TRIAC

888

A-A++ Spectrum A⁺⁺–E

LED INSIDE







• Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium
Dimmable: Triac C, Triac L

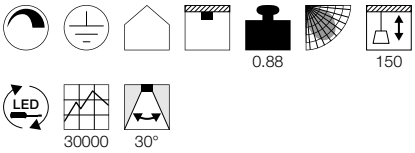

Dimensioned drawing



Variant	Item no.	GBP
700lm | 3000K | CRI>90		
■ black	**152370**	**206,10**
720lm | 3000K | CRI>90		
□ white	**152371**	**206,10**
720lm | 3000K | CRI>90		
■ gold	**1002171**	**224,10**

ANELA
PD, TRIAC

883

A-A++ Spectrum A++–E

LED INSIDE








- Premium LED with CRI>90
- Glare-reducing
- Coloured reflectors available as accessories


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium
Dimmable: Triac C





Dimensioned drawing



Note

Reflector excl.
Lumen output with reflector 1000809 = 500lm
Lumen output with reflector 1000810 = 620lm
Lumen output with reflector 1000811 = 200lm
Lumen output with reflector 1000812 = 600lm

Recommended accessories

Reflector 28°
Item no. 1000809 |14,40 GBP

Reflector 28°
Item no. 1000810 |14,40 GBP

Reflector 28°
Item no. 1000811 |14,40 GBP

Reflector 28°
Item no. 1000812 |14,40 GBP


Variant	Item no.	GBP
200-620lm | 3000K | CRI>90		
black	1000813	162,00
200-620lm | 3000K | CRI>90		
white	1000814	162,00







Reflector 28° – the reflector of this luminaire can be replaced, giving you a completely new lighting effect due to the different colours (gold, grey, black and white).

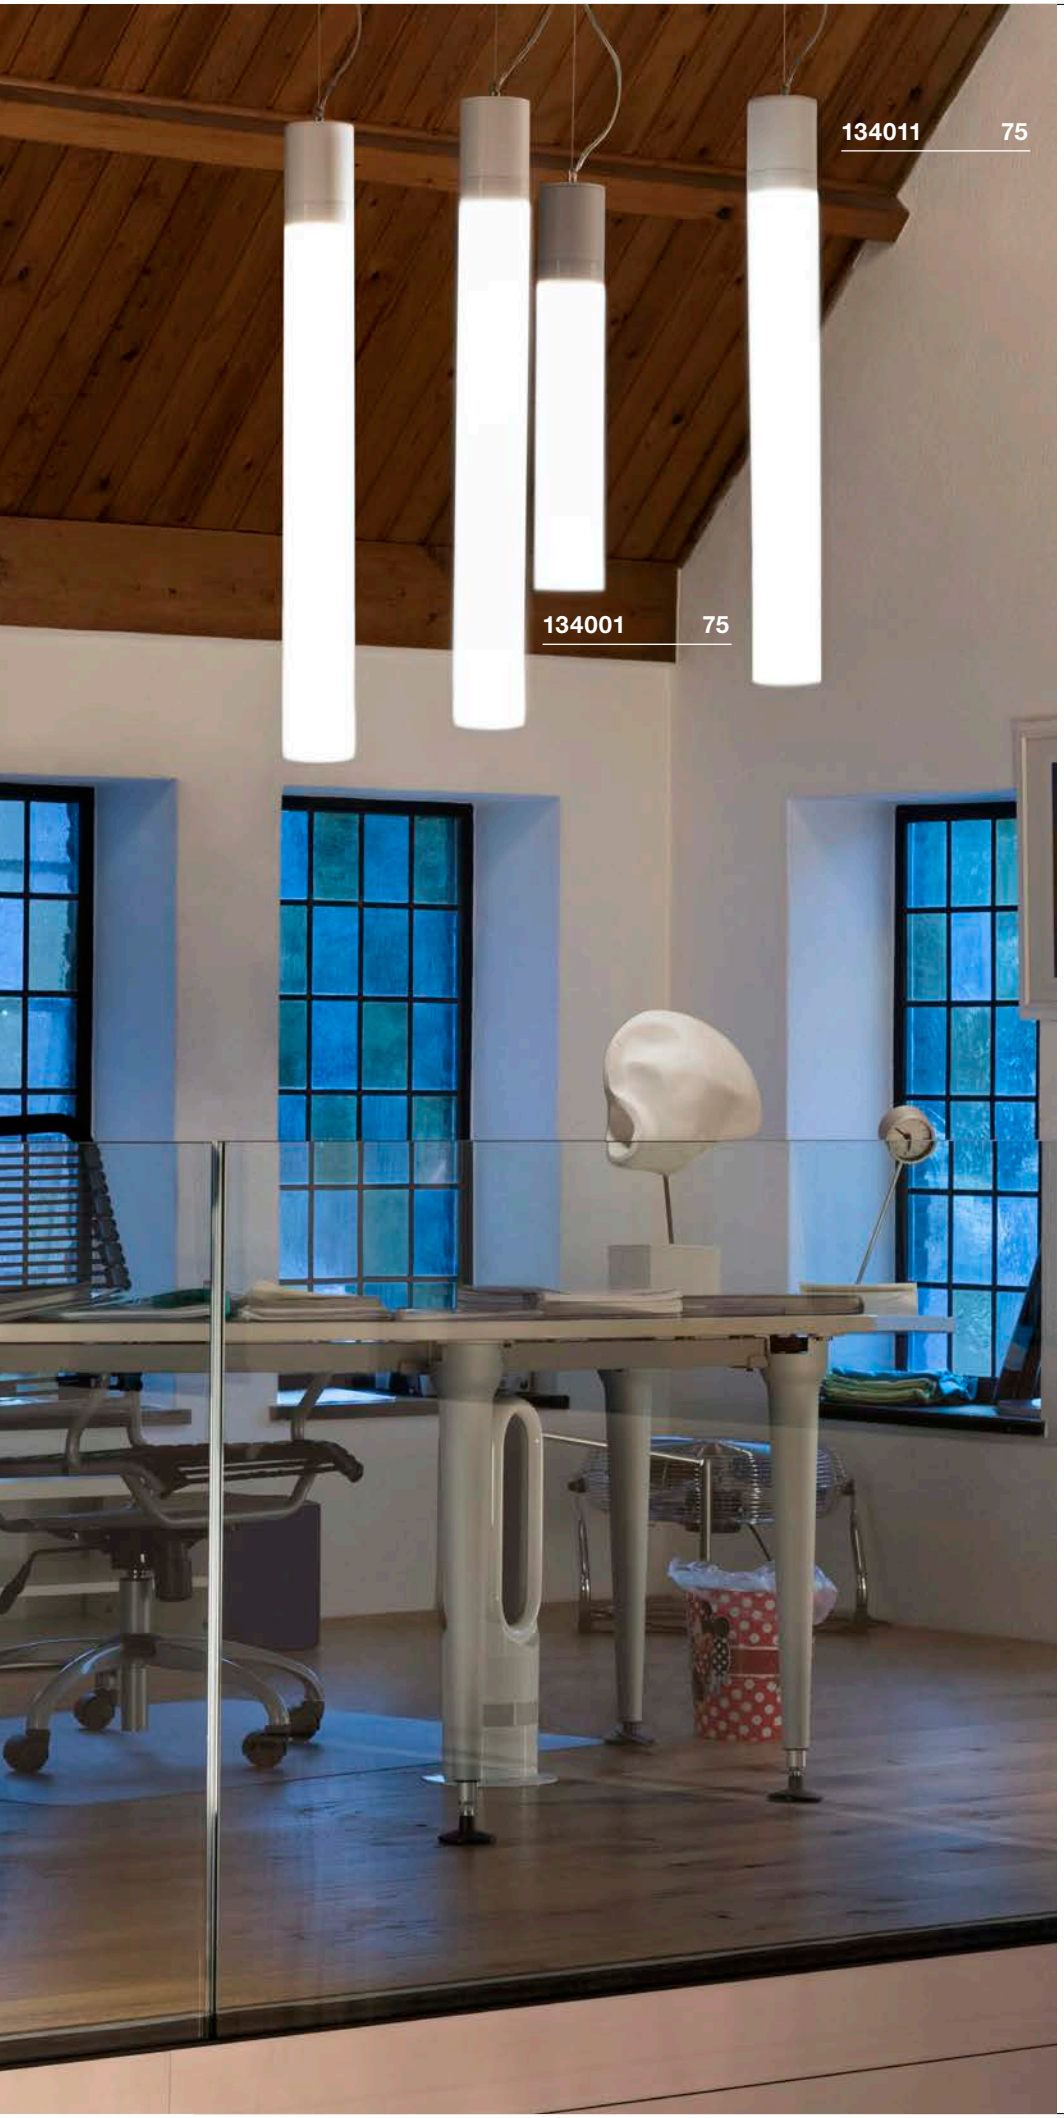

LIGHT PIPE 60/90
PD, TRIAC

890

A-A++ Spectrum A⁺⁺–E

LED INSIDE





• Height adjustable


Product details

220-240V ~50/60Hz
Total consumption: 11W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
630lm | 2700K | CRI>80 | H: 60 cm | 1.88 kg		
white	**134001**	**157,50**
630lm | 2700K | CRI>80 | H: 90 cm | 2.1 kg		
white	**134011**	**188,10**

LISENNE
PD, E27

890

E-A++ Spectrum A++–E








- Basalt and smoked glass
- Height adjustable

Product details

220-240V ~50/60Hz
Material: Basalt / Glass



Dimensioned drawing







Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP



Lamp details

max. 23W
Ø: 5.9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
grey / brown	**155714**	**188,10**

COMMO
PD, TCR-TSE


B-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Steel / Glass



Dimensioned drawing



Recommended lamp

GX53 7.5W 120°
3000K 620lm EEI=A+
8kWh/1000h
Item no. 1001220 | 29,70 GBP



LED GX53 7.5W 25°
3000K 450lm EEI=A
8kWh/1000h
Item no. 550082 | 49,50 GBP



Lamp details
max. 13W TCR-TSE


Variant	Item no.	GBP
GX53 | TCR-TSE		
chrome	**149380**	**76,50**

TONGA®
PD, E14

897


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

E14 3.4W 260°
3000K 250lm EEI=A+
4kWh/1000h
Item no. 560362 | 5,90 GBP

LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP



Lamp details
max. 60W C35
Ø: 5 cm max. L: 13 cm max.

Variant	Item no.	GBP
E14 | C35		
grey / shiny opaque	**133444**	**99,00**

BIBA
PD, E14

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing




Recommended lamp


LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP



Lamp details
max. 60W C35
Ø: 5 cm max. L: 13 cm max.

Variant	Item no.	GBP
E14 | C35		
aluminium / white	**133464**	**99,00**

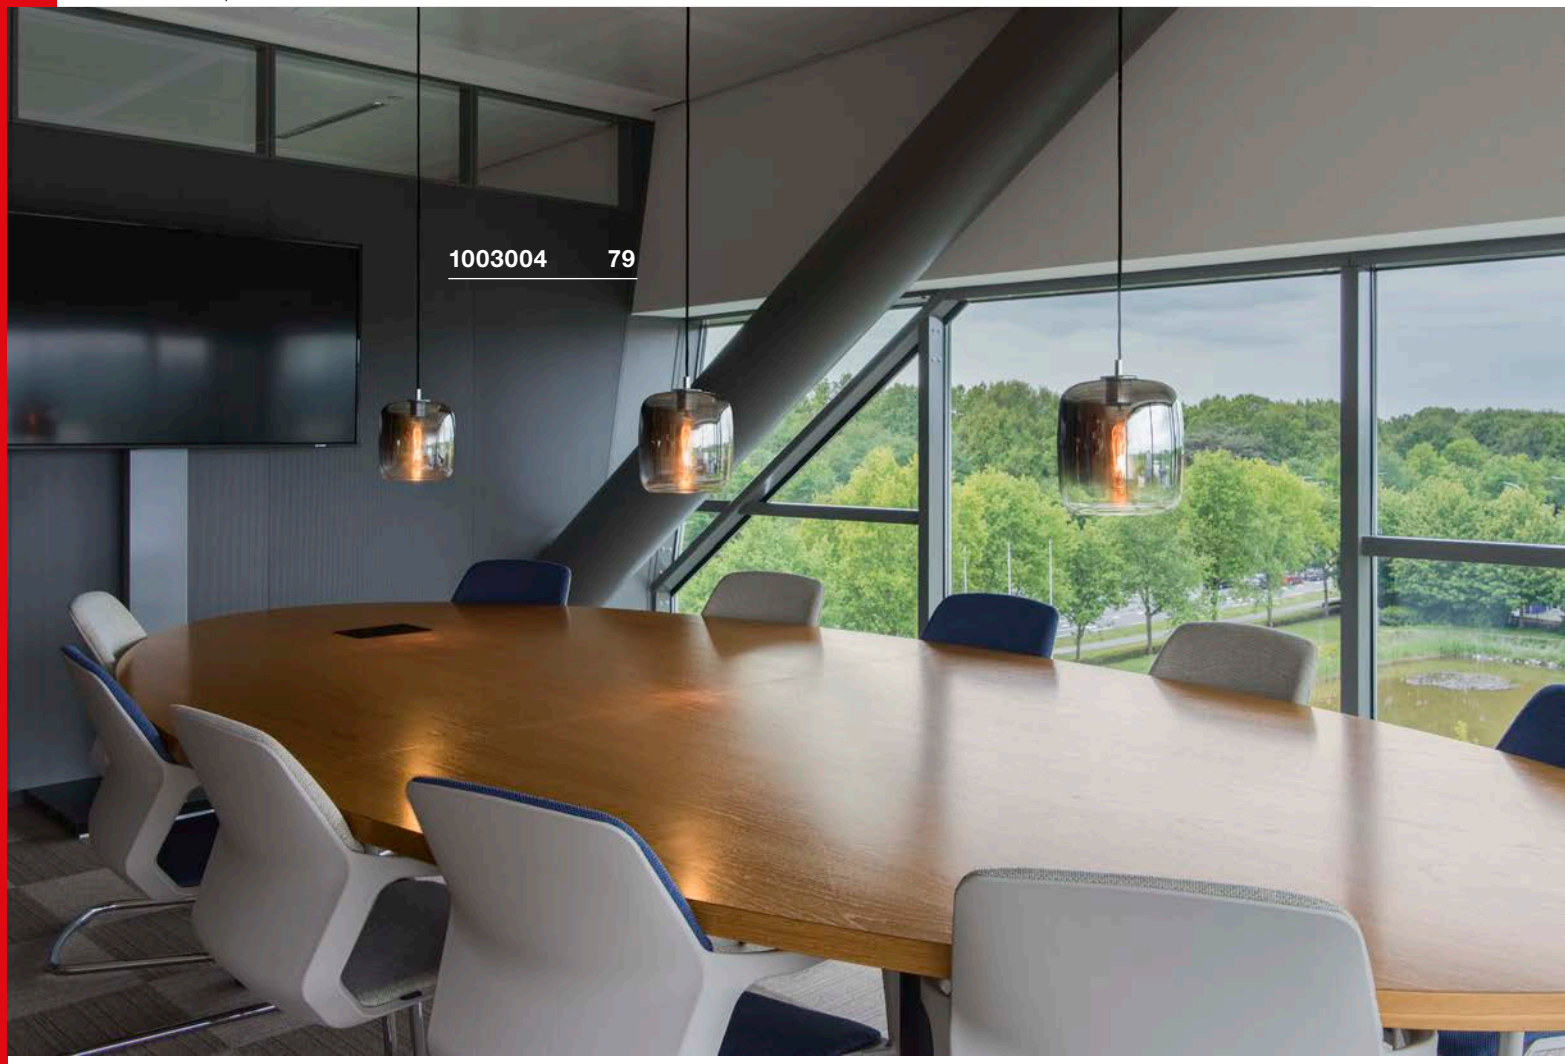
1003004 79

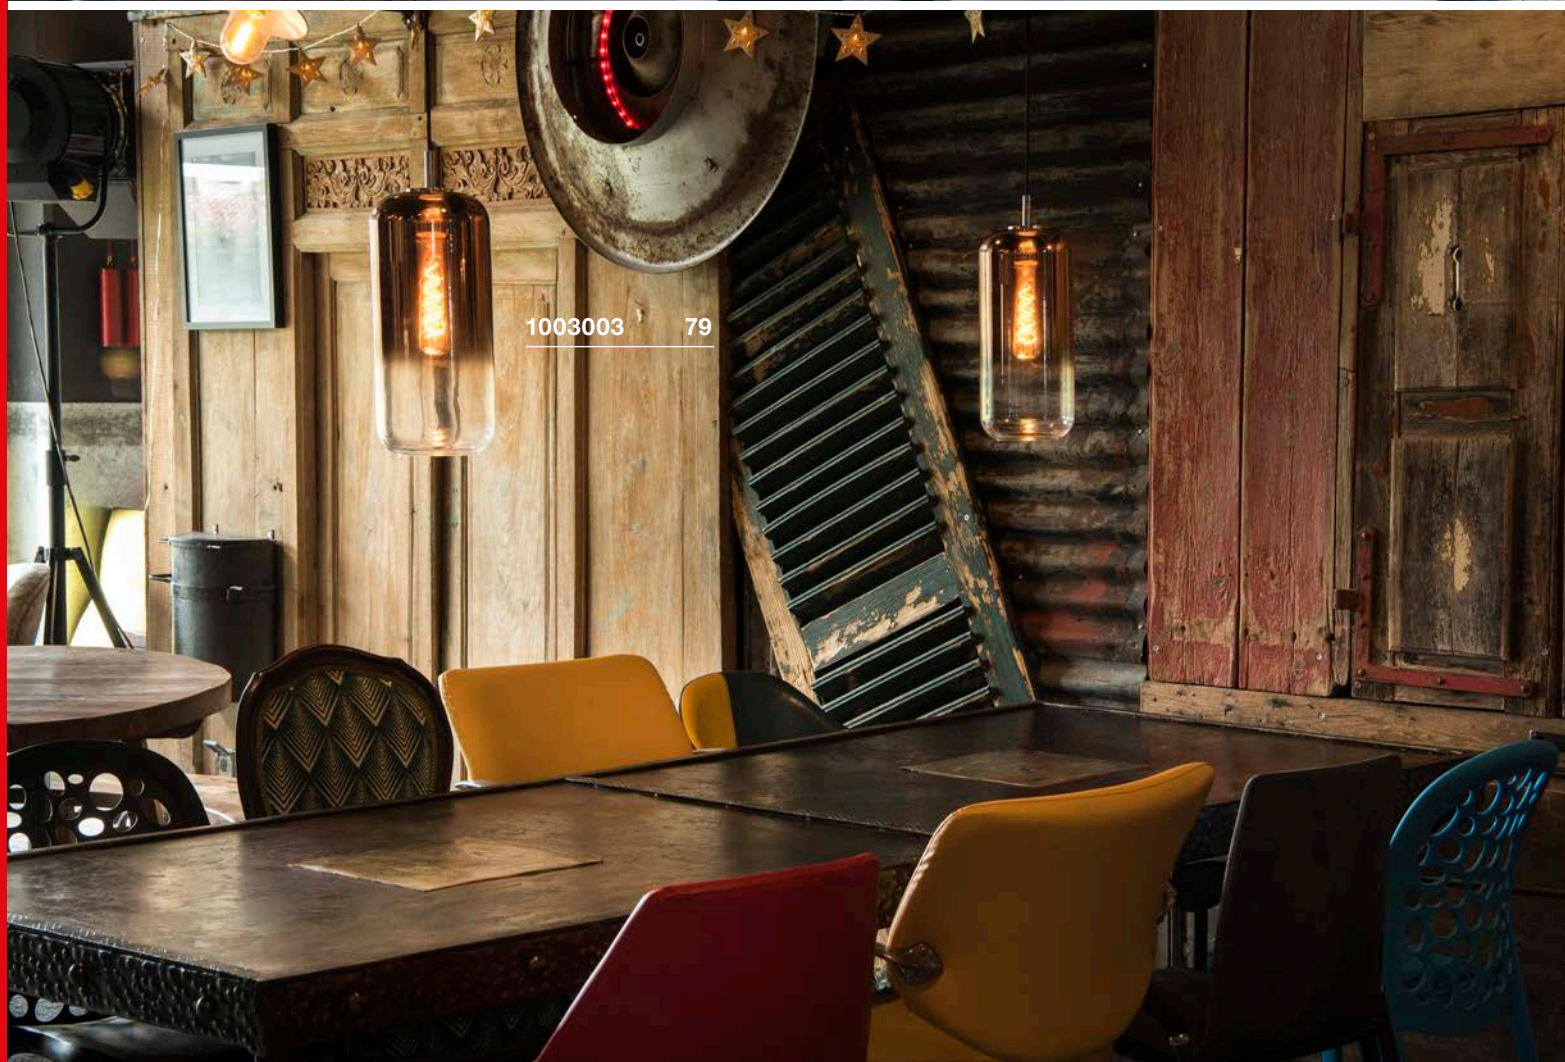
1003003 79

PANTILO 20
PD, E27

A-A++ Spectrum A++–E

NEW



- Chrome plated, high-quality glass shade
- Can be combined into a “lighting group” by means of individual configuration

Product details

200-240V ~50/60Hz
Material: Glass
Product dimensions: Ø: 20 cm H: 21.3 cm



Note

Can be combined with the Fitu Mix & Match accessory on page 40

Lamp details

max. 15W

Variant	Item no.	GBP
E27		
chrome	1003004	135,00
E27		
copper	1003005	171,00

PANTILO 28
PD, E27

A-A++ Spectrum A++–E

NEW







- Chrome plated, high-quality glass shade
- Can be combined into a “lighting group” by means of individual configuration

Product details

200-240V ~50/60Hz
Material: Glass
Product dimensions: Ø: 28 cm H: 17.2 cm



Note

Can be combined with the Fitu Mix & Match accessory on page 40

Lamp details

max. 15W

Variant	Item no.	GBP
E27		
chrome	1003006	157,50
E27		
copper	1003007	157,50

PANTILO 16
PD, E27

A-A++ Spectrum A++–E

NEW







- Chrome plated, high-quality glass shade
- Can be combined into a “lighting group” by means of individual configuration

Product details

200-240V ~50/60Hz
Material: Glass
Product dimensions: Ø: 16 cm H: 35 cm



Note

Can be combined with the Fitu Mix & Match accessory on page 40

Lamp details

max. 15W

Variant	Item no.	GBP
E27		
chrome	1003002	162,00
E27		
copper	1003003	157,50

SUN / BIG SUN
PD, E27



BRENDA
PD, TRIAC


885






• Height adjustable

Product details
220-240V ~50/60Hz | 500mA
Total consumption: 21W
Material: Aluminium / Glass
Dimmable: Triac C

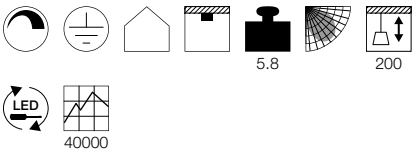

Dimensioned drawing



Variant	Item no.	GBP
2000lm | 3000K | CRI>80		
white / matt grey	157701	386,10

ROTOBALL 25/40/50
PD, E27


895






• Height adjustable

Product details
230V ~50Hz
Material: Steel / Polyethylene (PE)



Dimensioned drawing

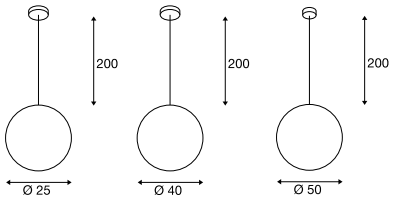

Recommended lamp


LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 9.5W 240°
2200-6700K 806lm EEI=A+
10kWh/1000h
Item no. 1001917 | 49,50 GBP


Lamp details
max. 24W
Ø: Item no. 165390 7 cm max.
Ø: Item no. 165410 9.5 cm max.
Ø: Item no. 165400 9.5 cm max.

Variant	Item no.	GBP
E27 | Ø: 25 cm | 1.25 kg		
white / grey	165390	126,00
E27 | Ø: 40 cm | 2.4 kg		
white / grey	165410	144,00
E27 | Ø: 50 cm | 3.6 kg		
white / grey	165400	171,00

Product details
230V ~50Hz
Material: Steel / Glass



Dimensioned drawing



Note
Open cable end
Can be combined with the Fitu Mix & Match accessory on page 40

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP


LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP

Lamp details
max. 60W
Ø: 7 cm max. L: 17 cm max.

Variant	Item no.	GBP
E27 | Ø: 19.5 cm | 0.73 kg		
white / chrome	1002045	67,50
E27 | Ø: 30 cm | 1.83 kg		
white / chrome	1002046	126,00



165400 80

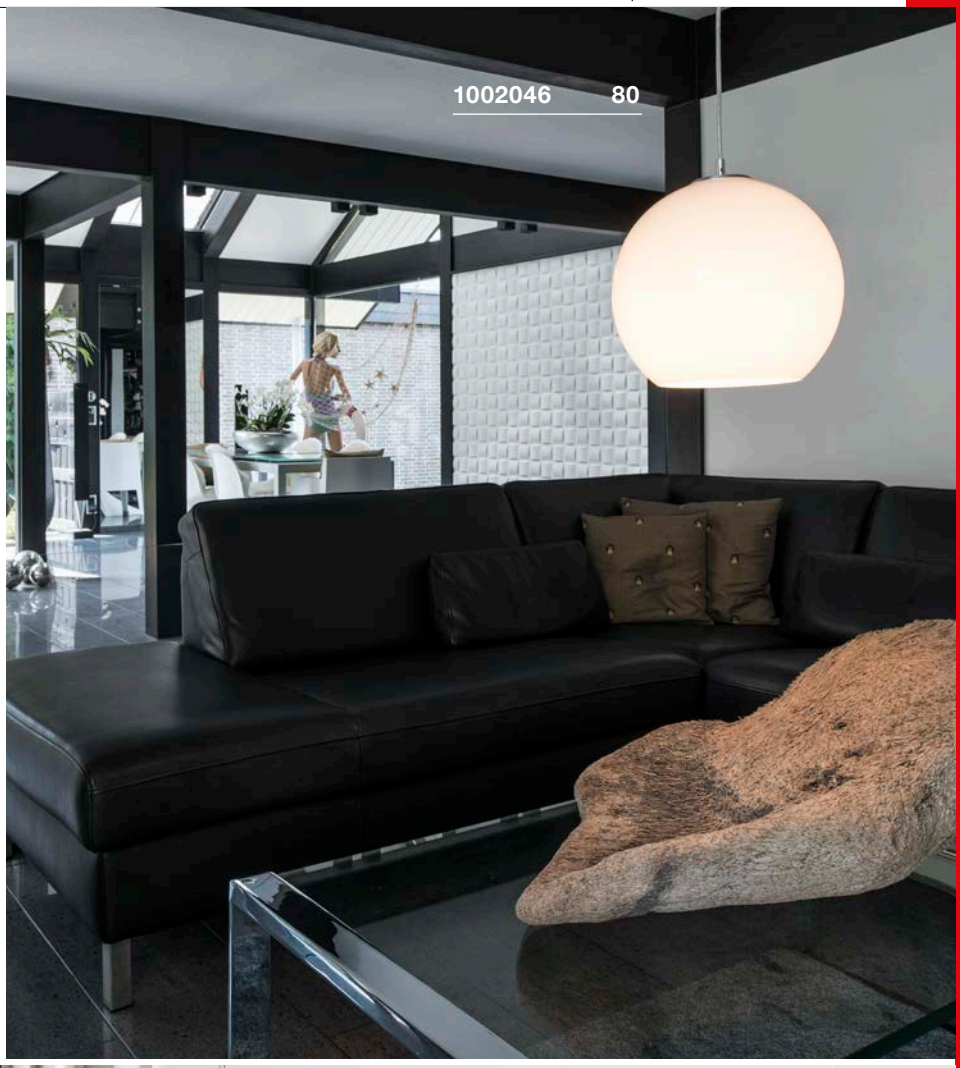

1002046 80



165410 80

SOPRANA
PD, E27

896

E-A++ Spectrum A++–E









- Height adjustable
- Acrylic cover on underside of shade

Product details

230V ~50Hz
Material: Textile / Acrylic



Dimensioned drawing



Recommended lamp

LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP

Lamp details

3x max. 60W
L: 16.5 cm max.

Variant	Item no.	GBP
E27		
white	**155462**	**175,50**
E27		
beige	**155463**	**175,50**

BISHADE
PD, E27

885

A-A++ Spectrum A++–E









- Double conical lamp shade
- Height adjustable

Product details

230V ~50Hz
Material: Textile / Steel



Dimensioned drawing



Recommended lamp


LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP


LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP

Lamp details

3x max. 23W
L: 17 cm max.

Variant	Item no.	GBP
E27		
black / transparent	**155650**	**242,10**

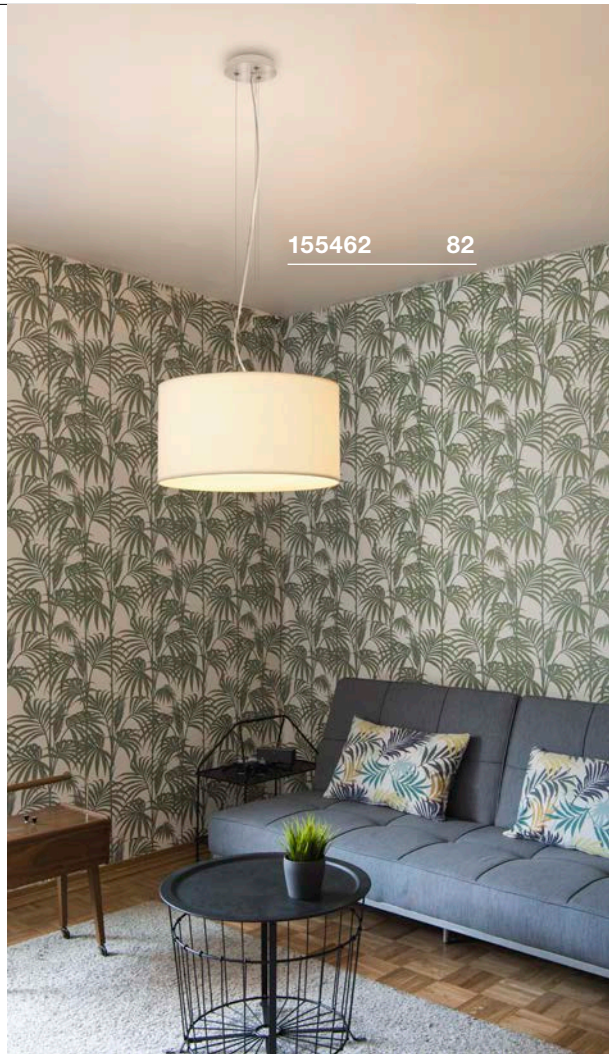

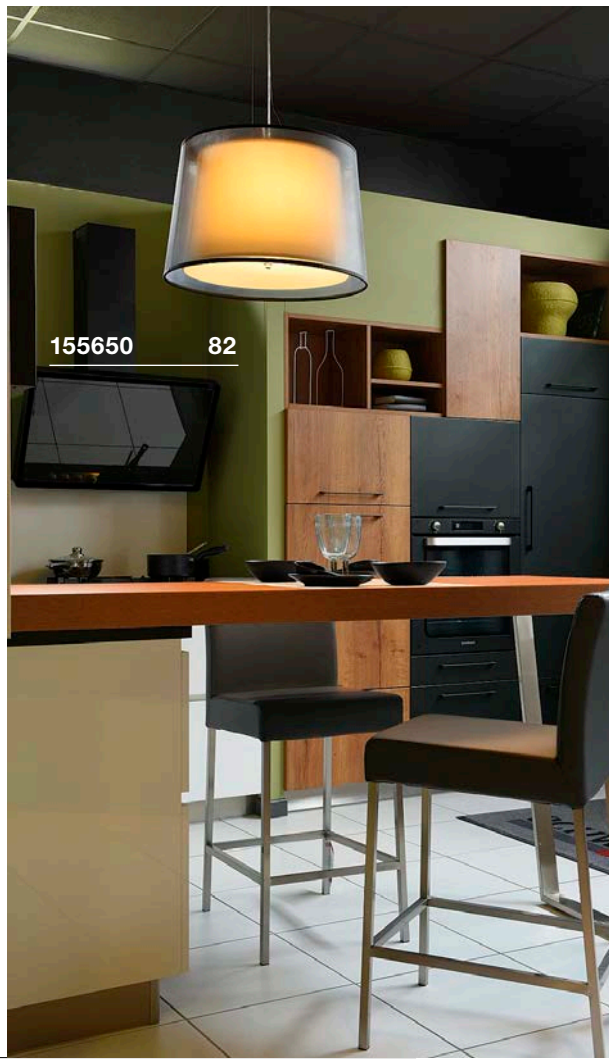





ACCANTO
PD, E27

882

E-A++ Spectrum A++–E

NEW








- Acrylic cover on underside of shade
- Height adjustable

Product details

220-240V ~50/60Hz
Material: Steel / Textile
Product dimensions:
L: 80 cm W: 30 cm H: 20 cm



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

3x max. 40W
L: 13 cm max.

Variant	Item no.	GBP
E27		
black / chrome	**1002946** NEW	**224,10**
E27		
white / chrome	**1002947** NEW	**224,10**

TRIADEM
PD, E27

E-A++ Spectrum A++–E









- Height adjustable

Product details

230V ~50Hz
Material: Textile / Steel



Dimensioned drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

3x max. 60W
L: 14 cm max.

Variant	Item no.	GBP
E27		
black / chrome	**155870**	**350,10**
E27		
white / chrome	**155871**	**350,10**

LASSON 10
PD, E27

889

E-A++ Spectrum A++–E









Product details

230V ~50Hz
Material: Steel / Textile



Dimensioned drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 |15,30 GBP

LED E27 4.5W 280°
2200-2700K 500lm EEI=A++
5kWh/1000h
Item no. 1002125 |13,50 GBP

Lamp details

max. 40W

Variant	Item no.	GBP
E27		
■ black	**155380**	**99,00**


LASSON 45
PD, E27

889

E-A++ Spectrum A++–E









- Acrylic glass cover on underside of shade
- Height adjustable

Product details

230V ~50Hz
Material: Textile / Acrylic



Dimensioned drawing



Recommended lamp

LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 |15,30 GBP


LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 |17,10 GBP


Lamp details

3x max. 60W
L: 13 cm max.

Variant	Item no.	GBP
E27		
■ black	**155300**	**197,10**



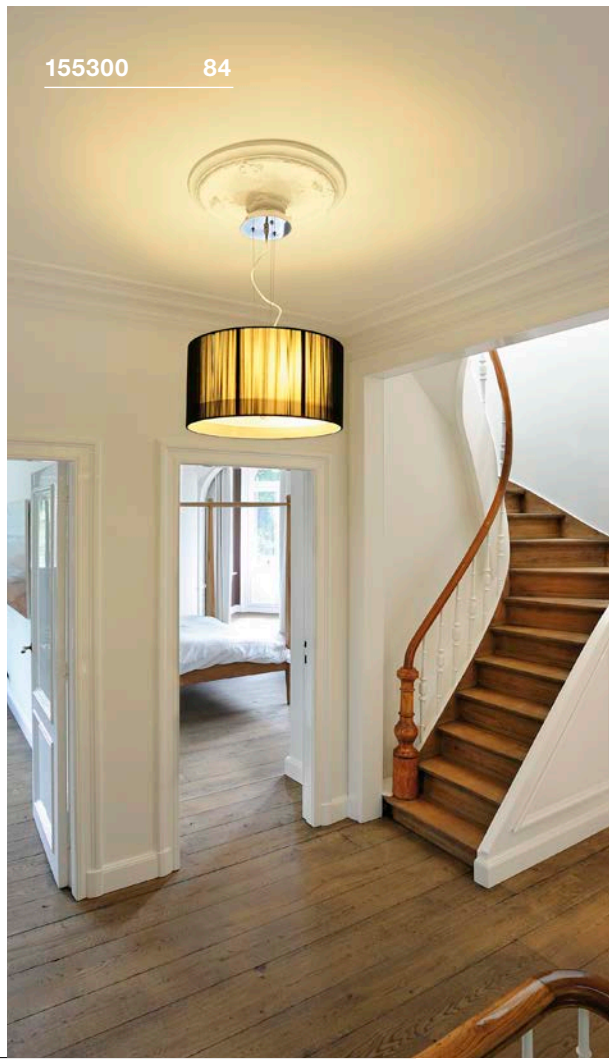

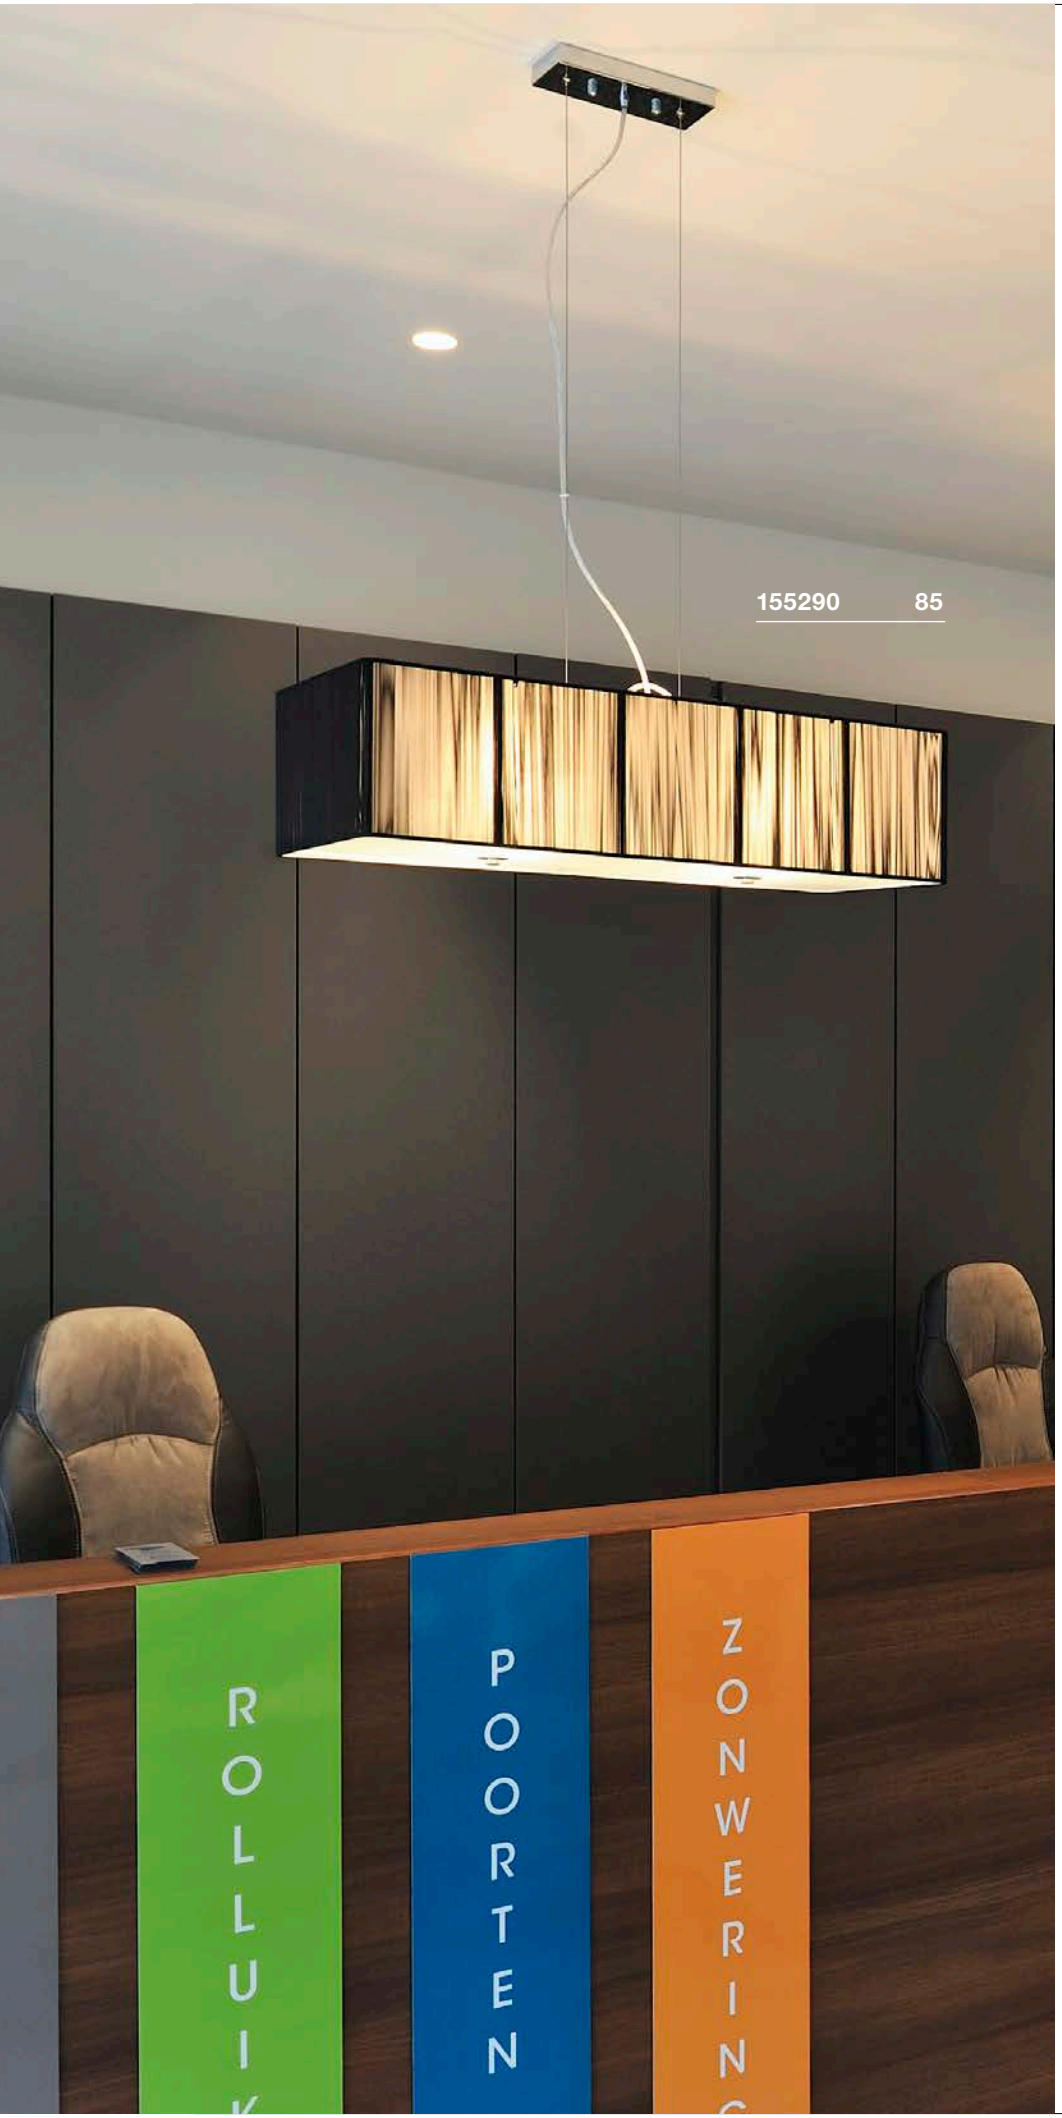

LASSON 80
PD, E27

889

E-A++ Spectrum A⁺⁺–E









- Glass cover on bottom of shade
- Height adjustable

Product details

230V ~50Hz
Material: Textile / Glass



Dimensioned drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

4x max. 60W
Ø: 8 cm max. L: 18 cm max.


Variant	Item no.	GBP
E27		
■ black	**155290**	**251,10**

MEDO LIGHT SERIES.
PENDANT OR CEILING LIGHT

	MEDO 30 CL, 1-10V	MEDO 40 CL, 1-10V	MEDO 60 CL, 1-10V	MEDO 90 CL, 1-10V
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Ø: 30 cm	Ø: 40 cm	Ø: 60 cm	Ø: 90 cm
Luminous intensity	1000lm	2000lm	3500lm	11000lm
UGR	25	25	22	25
Dimmable	1-10V	1-10V	1-10V	1-10V
Suspension set (excl.)	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 CL, TRIAC	MEDO 40 CL, TRIAC	
Example			
Lamp	LED INSIDE	LED INSIDE	
Size Ø	Ø: 30 cm	Ø: 40 cm	
Luminous intensity	1200lm	2125lm	
UGR	25	25	
Dimmable	Triac C, Triac L	Triac C, Triac L	
Suspension set (excl.)	1.5 m | 5 m	1.5 m | 5 m	**This MEDO variant** is dimmed using TRIAC dimmers!

	MEDO 60 CL, square, 1-10V	MEDO 60 CL, square, DALI
Example		
Lamp	LED INSIDE	LED INSIDE
Size	W | L: 60 cm	W | L: 60 cm
Luminous intensity	3300 lm	3300 lm
UGR	22	22
Dimmable	1-10V	Dali
Suspension set (excl.)	1.5 m | 5 m	1.5 m | 5 m

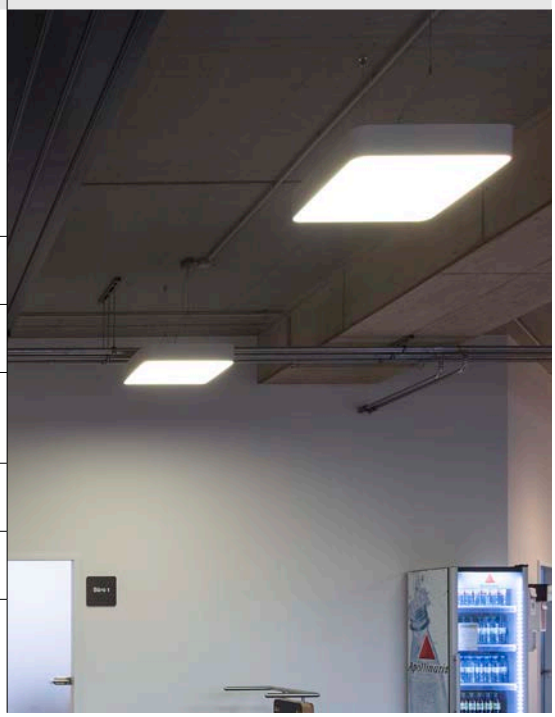

	MEDO RING 60 PD, 1-10V	MEDO RING 90 PD, 1-10V	MEDO RING 60 PD, DALI
Example			
Lamp	LED INSIDE	LED INSIDE	LED INSIDE
Size	Ø: 60 cm	Ø: 90 cm	Ø: 60 cm
Luminous intensity	2000lm	3945lm	2000lm
UGR	–	–	22
Dimmable	1-10V	1-10V	Dali
Suspension set	Not required, (incl.) – Pendant only	Not required, (incl.) – Pendant only	Not required, (incl.) – Pendant only

MEDO LIGHT SERIES.
PENDANT OR CEILING LIGHT

	MEDO 30 CORONA CW, TRIAC	MEDO 40 CORONA CW, TRIAC	MEDO 60 CORONA CW, TRIAC	MEDO 90 CORONA CW, TRIAC
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Ø: 30 cm	Ø: 40 cm	Ø: 60 cm	Ø: 90 cm
Luminous intensity	Down: 1230/1280lm Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	Triac C	Triac C	Triac C	Triac C
Suspension set (excl.)	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 CORONA CW, DALI	MEDO 40 CORONA CW, DALI	MEDO 60 CORONA CW, DALI	MEDO 90 CORONA CW, DALI
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Ø: 30 cm	Ø: 40 cm	Ø: 60 cm	Ø: 90 cm
Luminous intensity	Down: 1230/1280lm Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	DALI	DALI	DALI	DALI
Suspension set (excl.)	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m







Corona e›ect – these MEDO variants have homogeneous indirect upwards-directed light emission.

Colour temperature – with this MEDO variant you can select the colour temperature yourself. You can choose between 3000K and 4000K using the switch on the back.

MEDO 30
CL, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE








- Can be converted into a pendant using the additionally available accessories




Product details

220-240V ~50/60Hz | 350mA
Total consumption: 16W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C, Triac L





Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 |34,20 GBP

Suspension set 1.5m
Item no. 135251 |34,20 GBP


Suspension set 1.5m
Item no. 135254 |34,20 GBP

Suspension set 5m
Item no. 1001950 |76,50 GBP

Suspension set 5m
Item no. 1001951 |76,50 GBP

Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
1200lm | 3000K | CRI>80 black	135020	206,10
1200lm | 3000K | CRI>80 white	135021	206,10
1200lm | 3000K | CRI>80 grey	135024	206,10
1200lm | 3000K | CRI>80 red	135026	206,10

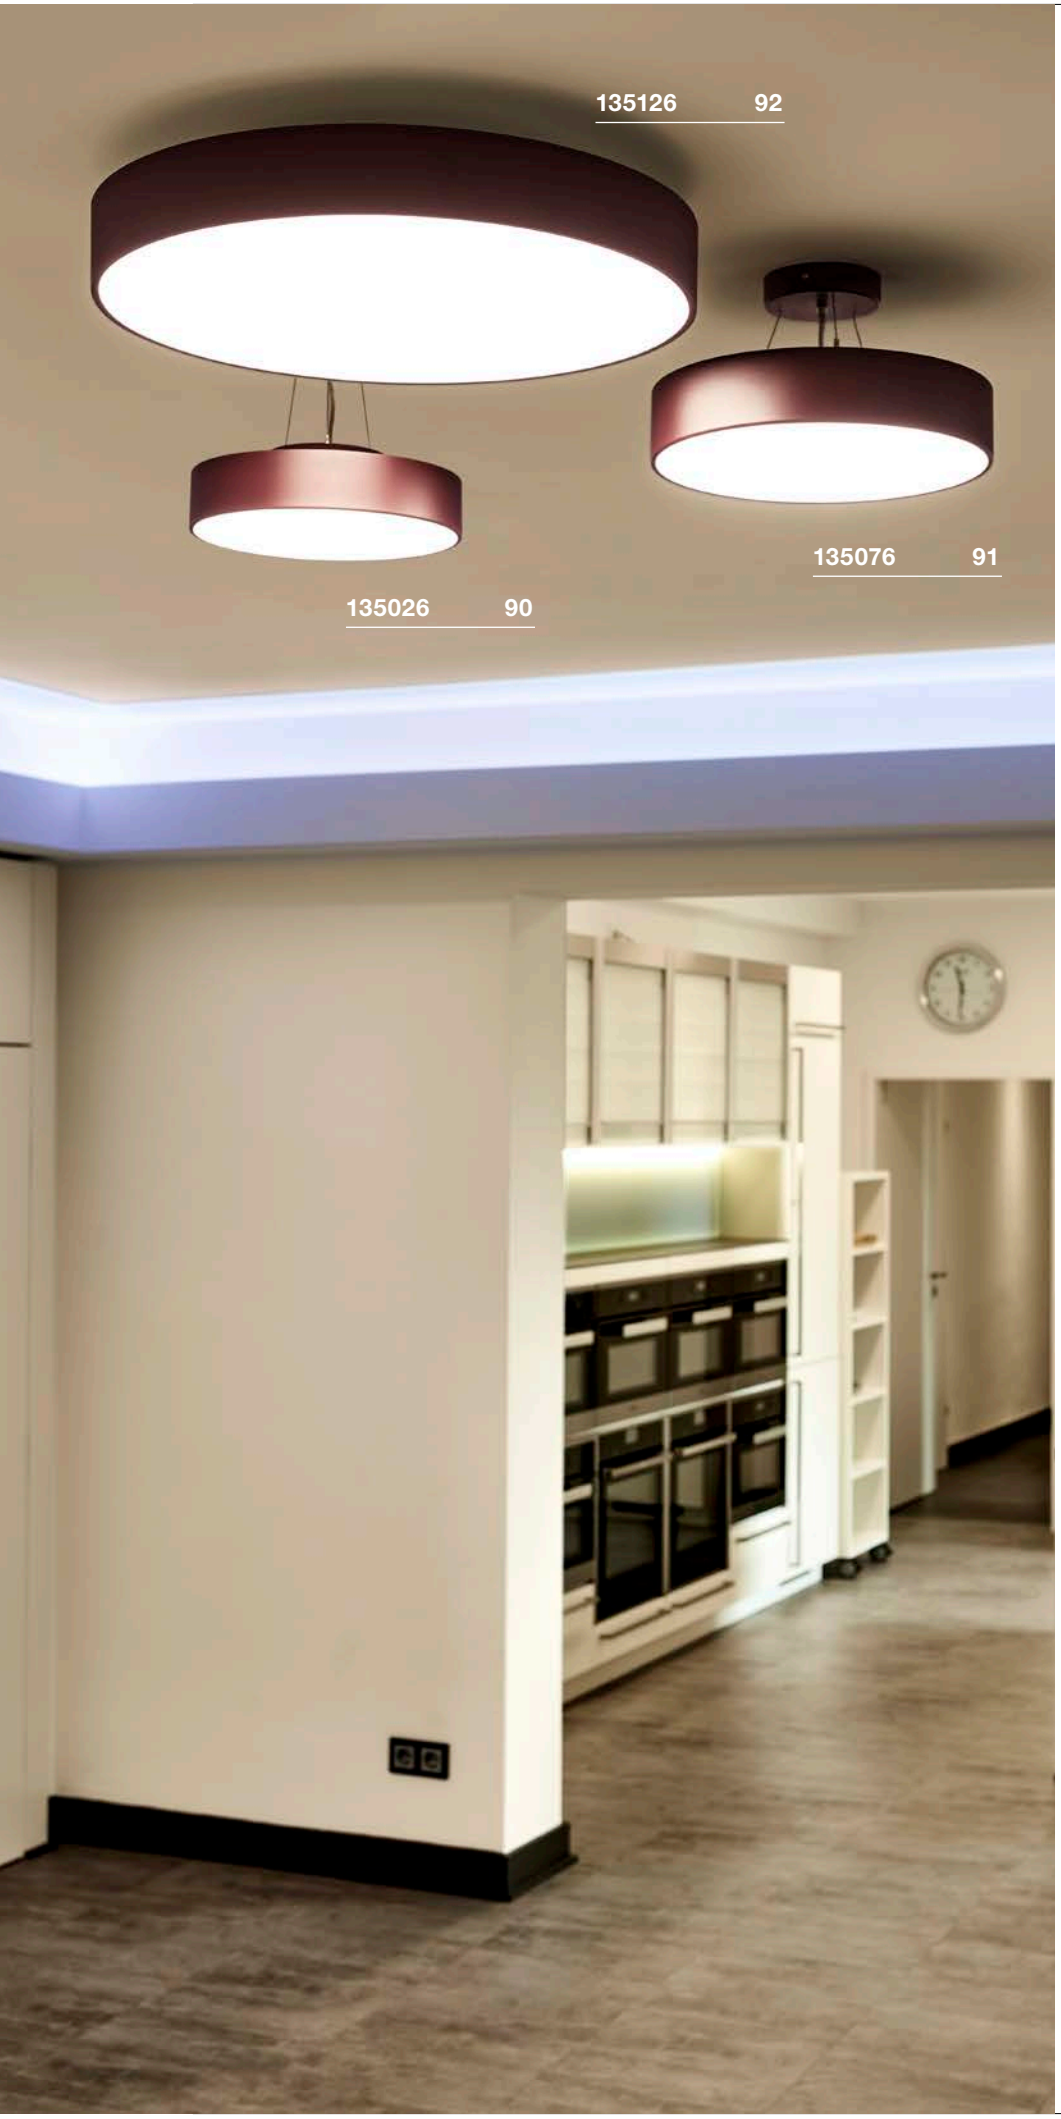

MEDO 40
CL, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE









- Can be converted into a pendant using the additionally available accessories

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 31W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C, Triac L

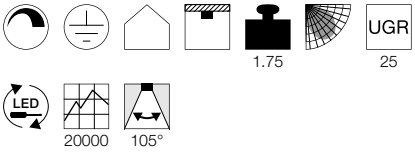

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 | 34,20 GBP

Suspension set 1.5m
Item no. 135251 | 34,20 GBP

Suspension set 1.5m
Item no. 135254 | 34,20 GBP

Suspension set 5m
Item no. 1001950 | 76,50 GBP

Suspension set 5m
Item no. 1001951 | 76,50 GBP

Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
2125lm | 3000K | CRI>80 black	135070	242,10
2125lm | 3000K | CRI>80 white	135071	242,10
2125lm | 3000K | CRI>80 grey	135074	242,10
2125lm | 3000K | CRI>80 red	135076	242,10

MEDO 30
CL, 1-10V

891

A-A++ Spectrum A++–E

LED INSIDE









- Can be converted into a pendant using the additional available accessories

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

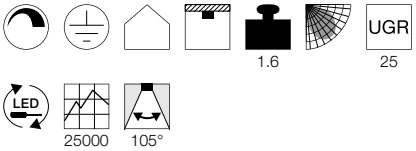

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

- Suspension set 1.5m
  Item no. 135250 |34,20 GBP
- Suspension set 1.5m
  Item no. 135251 |34,20 GBP
- Suspension set 1.5m
  Item no. 135254 |34,20 GBP
- Suspension set 5m
  Item no. 1001950 |76,50 GBP
- Suspension set 5m
  Item no. 1001951 |76,50 GBP
- Suspension set 5m
  Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
1000lm | 3000K | CRI>80		
black	**1000855**	**206,10**
1000lm | 3000K | CRI>80		
white	**1000856**	**206,10**
1000lm | 3000K | CRI>80		
grey	**1000857**	**206,10**

MEDO 40
CL, 1-10V

891

A-A++ Spectrum A++–E

LED INSIDE









- Can be converted into a pendant using the additional available accessories

Product details

120-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

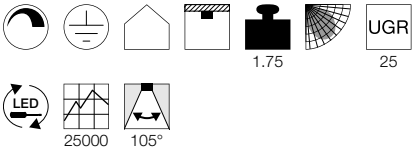

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

- Suspension set 1.5m
  Item no. 135250 |34,20 GBP
- Suspension set 1.5m
  Item no. 135251 |34,20 GBP
- Suspension set 1.5m
  Item no. 135254 |34,20 GBP
- Suspension set 5m
  Item no. 1001950 |76,50 GBP
- Suspension set 5m
  Item no. 1001951 |76,50 GBP
- Suspension set 5m
  Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
2000lm | 3000K | CRI>80		
black	**1000864**	**242,10**
2000lm | 3000K | CRI>80		
white	**1000865**	**242,10**
2000lm | 3000K | CRI>80		
grey	**1000866**	**242,10**

MEDO 60
CL, 1-10V

891

A-A++ Spectrum A++–E

LED INSIDE









- Can be converted into a pendant using the additional available accessories

Product details

100-240V ~50/60Hz | 1000mA
Total consumption: 40W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

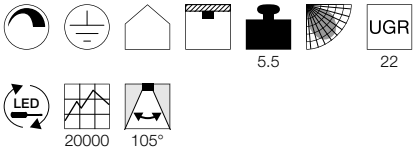

Dimensioned drawing




Note

Suspension set excl.

Recommended accessories

- Suspension set 1.5m
  Item no. 135250 |34,20 GBP
- Suspension set 1.5m
  Item no. 135251 |34,20 GBP
- Suspension set 1.5m
  Item no. 135254 |34,20 GBP
- 1-10V dimming
  Item no. 470505 |9,90 GBP
- Suspension set 5m
  Item no. 1001950 |76,50 GBP
- Suspension set 5m
  Item no. 1001951 |76,50 GBP
- Suspension set 5m
  Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
3500lm | 3000K | CRI>80		
black	**135120**	**431,10**
3500lm | 3000K | CRI>80		
white	**135121**	**431,10**
3500lm | 3000K | CRI>80		
grey	**135124**	**431,10**
3500lm | 3000K | CRI>80		
red	**135126**	**431,10**

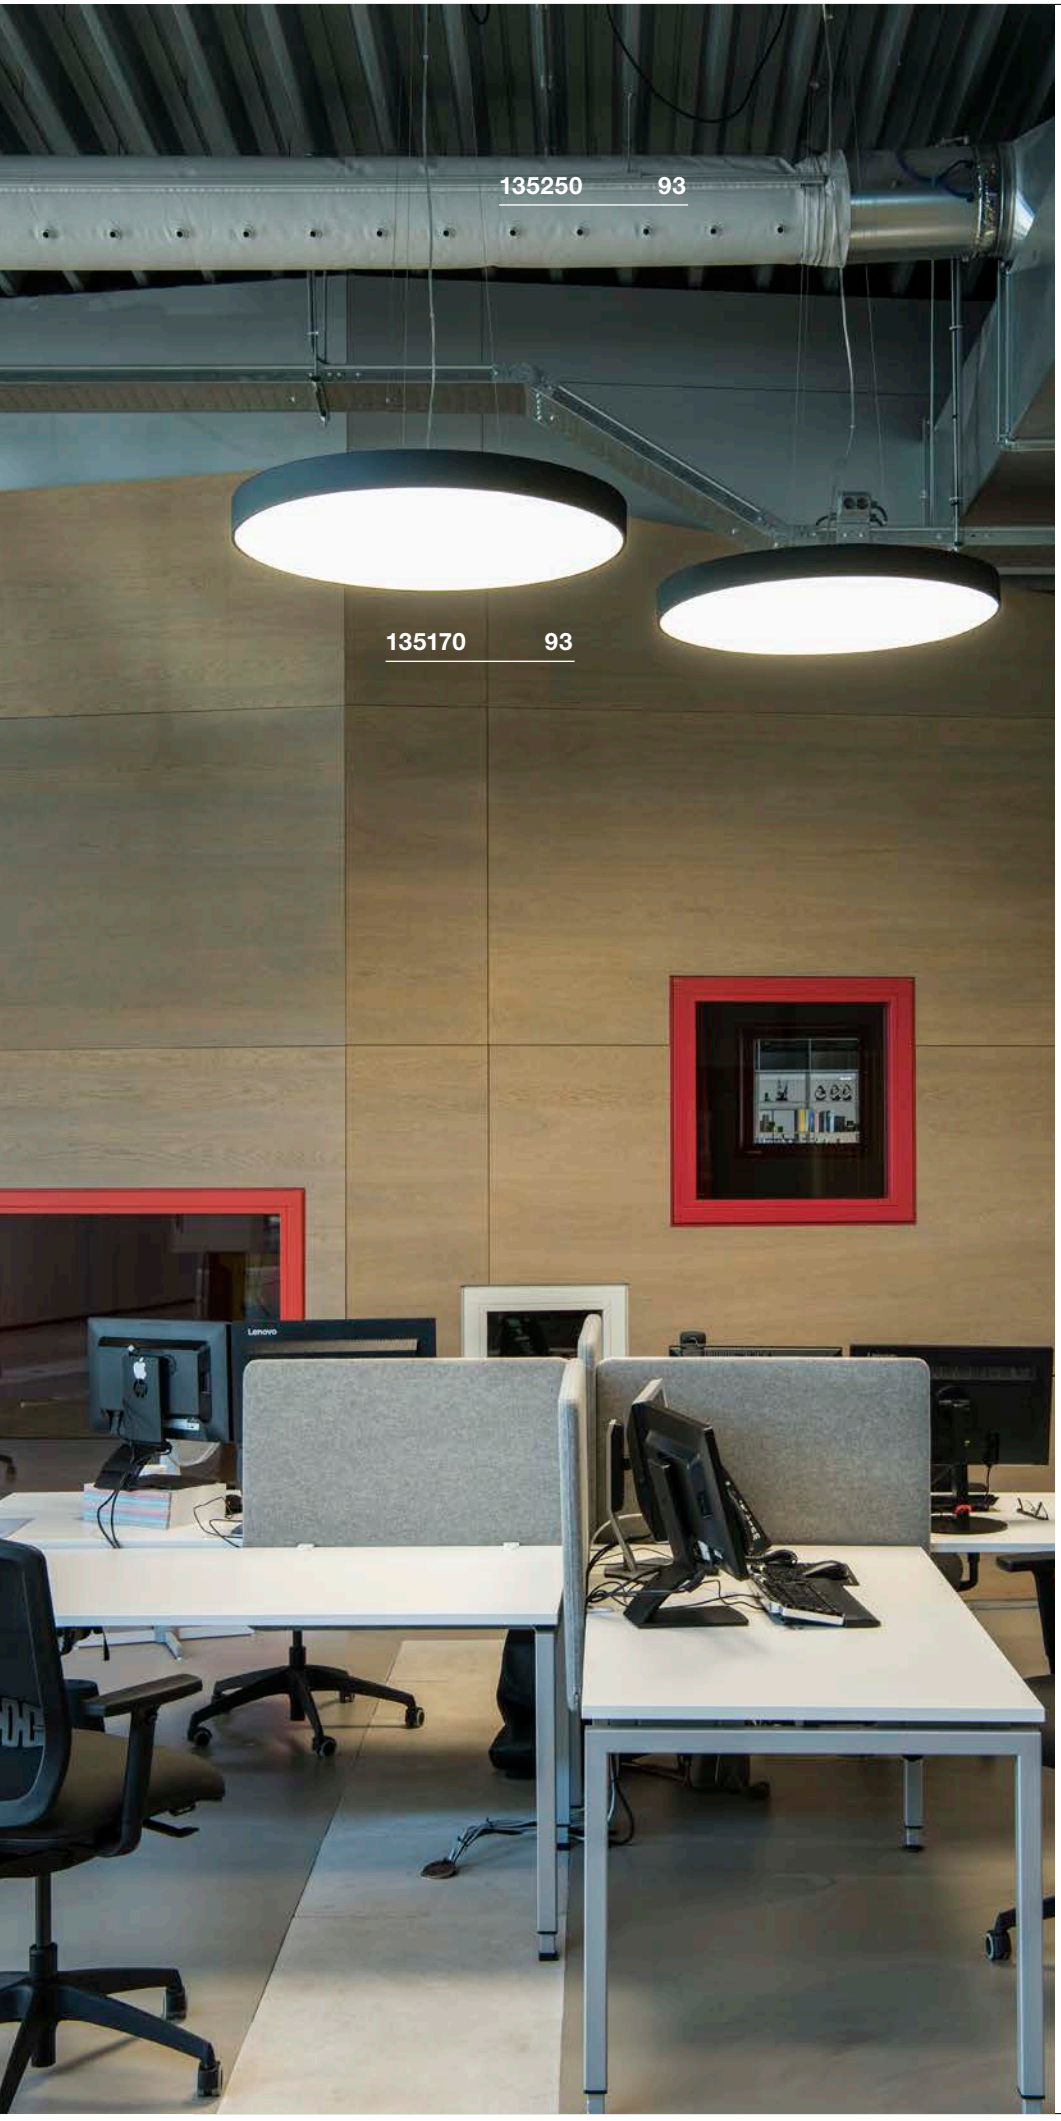

MEDO 90
CL, 1-10V

891

A-A++ Spectrum A++–E

LED INSIDE









- Can be converted into a pendant using the additionally available accessories

Product details

220-240V ~50/60Hz | 2900mA
Total consumption: 119W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

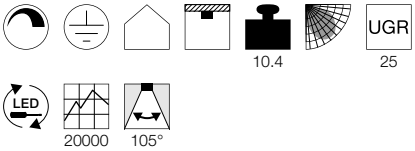

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 | 34,20 GBP

Suspension set 1.5m
Item no. 135251 | 34,20 GBP

Suspension set 1.5m
Item no. 135254 | 34,20 GBP

1-10V dimming
Item no. 470505 | 9,90 GBP

Suspension set 5m
Item no. 1001950 | 76,50 GBP

Suspension set 5m
Item no. 1001951 | 76,50 GBP

Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
11000lm | 3000K | CRI>80 black	135170	899,10
11000lm | 3000K | CRI>80 white	135171	899,10
11000lm | 3000K | CRI>80 grey	135174	899,10
11000lm | 3000K | CRI>80 red	135176	899,10

MEDO 30 CORONA
CW, TRIAC

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE








- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C





Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 | 34,20 GBP

□ Suspension set 1.5m
Item no. 135251 | 34,20 GBP


■ Suspension set 1.5m
Item no. 135254 | 34,20 GBP

□ Suspension set 5m
Item no. 1001950 | 76,50 GBP

■ Suspension set 5m
Item no. 1001951 | 76,50 GBP

■ Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 ■ black	**1001877**	**224,10**
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 □ white	**1001881**	**224,10**
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 ■ grey	**1001882**	**224,10**

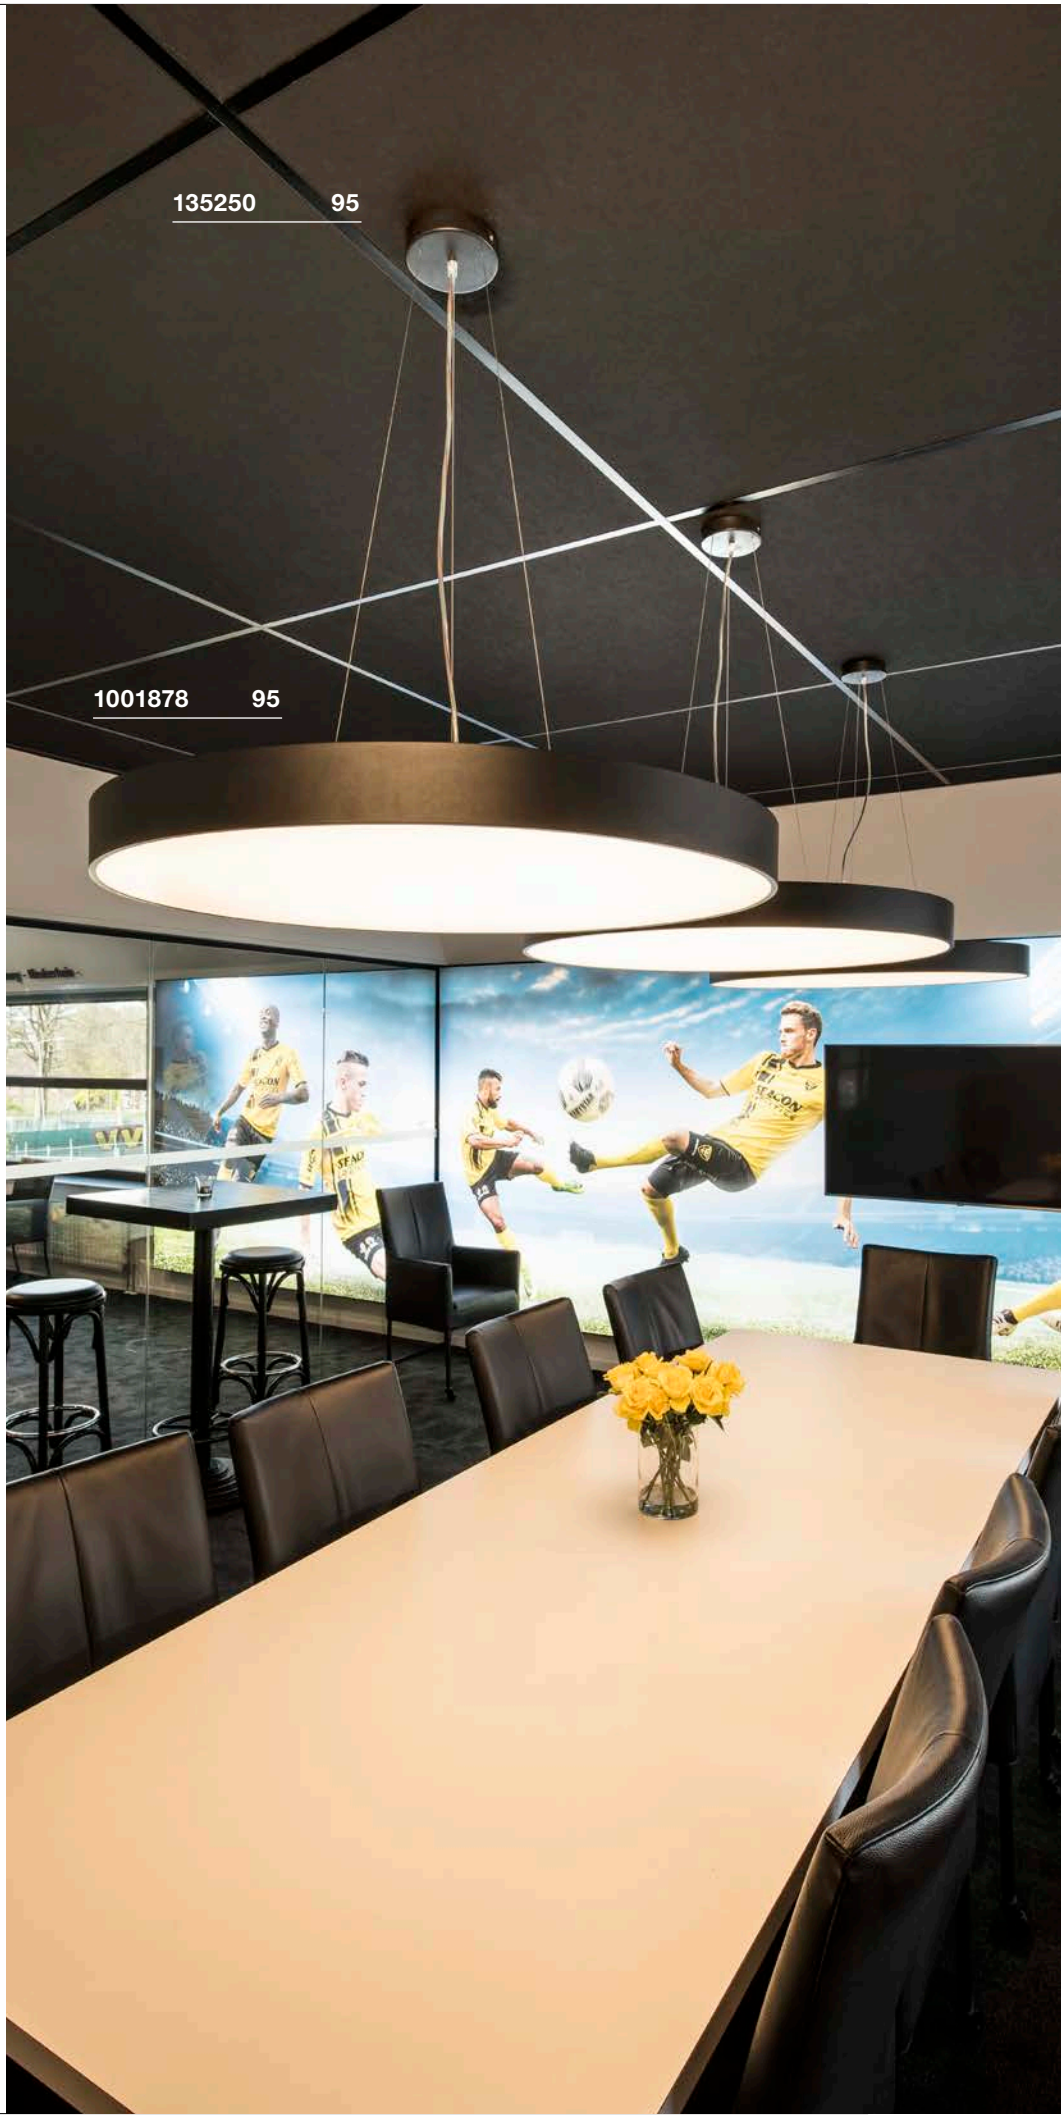

MEDO 40 CORONA
CW, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

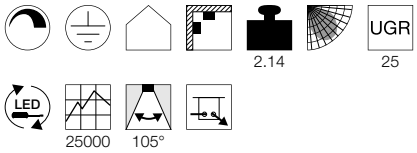

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

- Suspension set 1.5m **Item no. 135250 | 34,20 GBP**
- Suspension set 1.5m **Item no. 135251 | 34,20 GBP**
- Suspension set 1.5m **Item no. 135254 | 34,20 GBP**
- Suspension set 5m **Item no. 1001950 | 76,50 GBP**
- Suspension set 5m **Item no. 1001951 | 76,50 GBP**
- Suspension set 5m **Item no. 1001952 | 76,50 GBP**

Variant	Item no.	GBP
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
black	**1001883**	**251,10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
white	**1001884**	**251,10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
grey	**1001885**	**251,10**

MEDO 60 CORONA
CW, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories

Product details

220-240V ~50/60Hz | 1050mA
Total consumption: 40W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

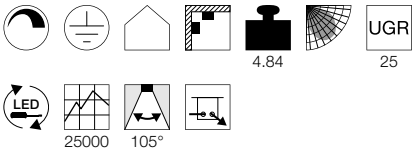

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

- Suspension set 1.5m **Item no. 135250 | 34,20 GBP**
- Suspension set 1.5m **Item no. 135251 | 34,20 GBP**
- Suspension set 1.5m **Item no. 135254 | 34,20 GBP**
- Suspension set 5m **Item no. 1001950 | 76,50 GBP**
- Suspension set 5m **Item no. 1001951 | 76,50 GBP**
- Suspension set 5m **Item no. 1001952 | 76,50 GBP**

Variant	Item no.	GBP
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
black	**1001886**	**476,10**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
white	**1001887**	**476,10**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
grey	**1001888**	**476,10**

MEDO 90 CORONA
CL, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories

Product details

220-240V ~50/60Hz | 1050mA
Total consumption: 78W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

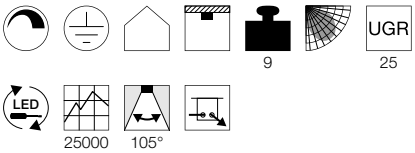

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

- Suspension set 1.5m **Item no. 135250 | 34,20 GBP**
- Suspension set 1.5m **Item no. 135251 | 34,20 GBP**
- Suspension set 1.5m **Item no. 135254 | 34,20 GBP**
- Suspension set 5m **Item no. 1001950 | 76,50 GBP**
- Suspension set 5m **Item no. 1001951 | 76,50 GBP**
- Suspension set 5m **Item no. 1001952 | 76,50 GBP**

Variant	Item no.	GBP
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80		
black	**1001878**	**944,10**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80		
white	**1001879**	**944,10**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80		
grey	**1001880**	**944,10**

MEDO 30 CORONA
CW, DALI

891

A-A++ Spectrum A++–E


LED INSIDE




- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali





Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80		
■ black	**1001889**	**251,10**
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80		
□ white	**1001893**	**251,10**
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80		
■ grey	**1001894**	**251,10**

MEDO 40 CORONA
CW, DALI

891

A-A++ Spectrum A++–E


LED INSIDE




- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories


Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali





Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
■ black	**1001895**	**332,10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
□ white	**1001896**	**332,10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
■ grey	**1001897**	**332,10**

MEDO 60 CORONA
CW, DALI

891

A-A++ Spectrum A++–E


LED INSIDE




- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories


Product details

220-240V ~50/60Hz | 1000mA
Total consumption: 40W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali





Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
■ black	**1001898**	**512,10**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
□ white	**1001900**	**512,10**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
■ grey	**1001899**	**512,10**



MEDO 90 CORONA
CL, DALI


891

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW VARIANT









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories

Product details

220-240V ~50/60Hz | 1000mA
Total consumption: 78W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali

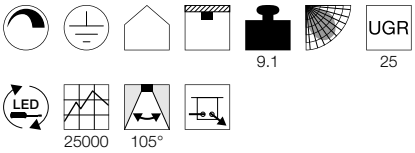

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 | 34,20 GBP

□ Suspension set 1.5m
Item no. 135251 | 34,20 GBP

■ Suspension set 1.5m
Item no. 135254 | 34,20 GBP

□ Suspension set 5m
Item no. 1001950 | 76,50 GBP

■ Suspension set 5m
Item no. 1001951 | 76,50 GBP

■ Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 ■ black	1001890	1.161,00
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 □ white	1001891	1.161,00
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 ■ grey	1001892	1.161,00

MEDO 60
CL, square, 1-10V

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Can be converted into a pendant using the additionally available accessories

Product details

100-240V ~50/60Hz | 1000mA
Total consumption: 39W
Material: Aluminium / Acrylic
Dimmable: 1-10V

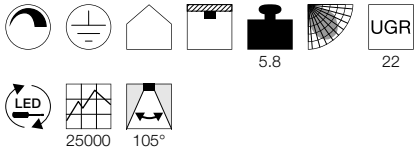

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 |34,20 GBP

Suspension set 1.5m
Item no. 135251 |34,20 GBP

Suspension set 1.5m
Item no. 135254 |34,20 GBP


1-10V dimming
Item no. 470505 |9,90 GBP


Suspension set 5m
Item no. 1001950 |76,50 GBP

Suspension set 5m
Item no. 1001951 |76,50 GBP

Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
3300lm | 3000K | CRI>80 black	**1000725**	**431,10**
3300lm | 3000K | CRI>80 white	**1000726**	**431,10**
3300lm | 3000K | CRI>80 grey	**1000727**	**431,10**

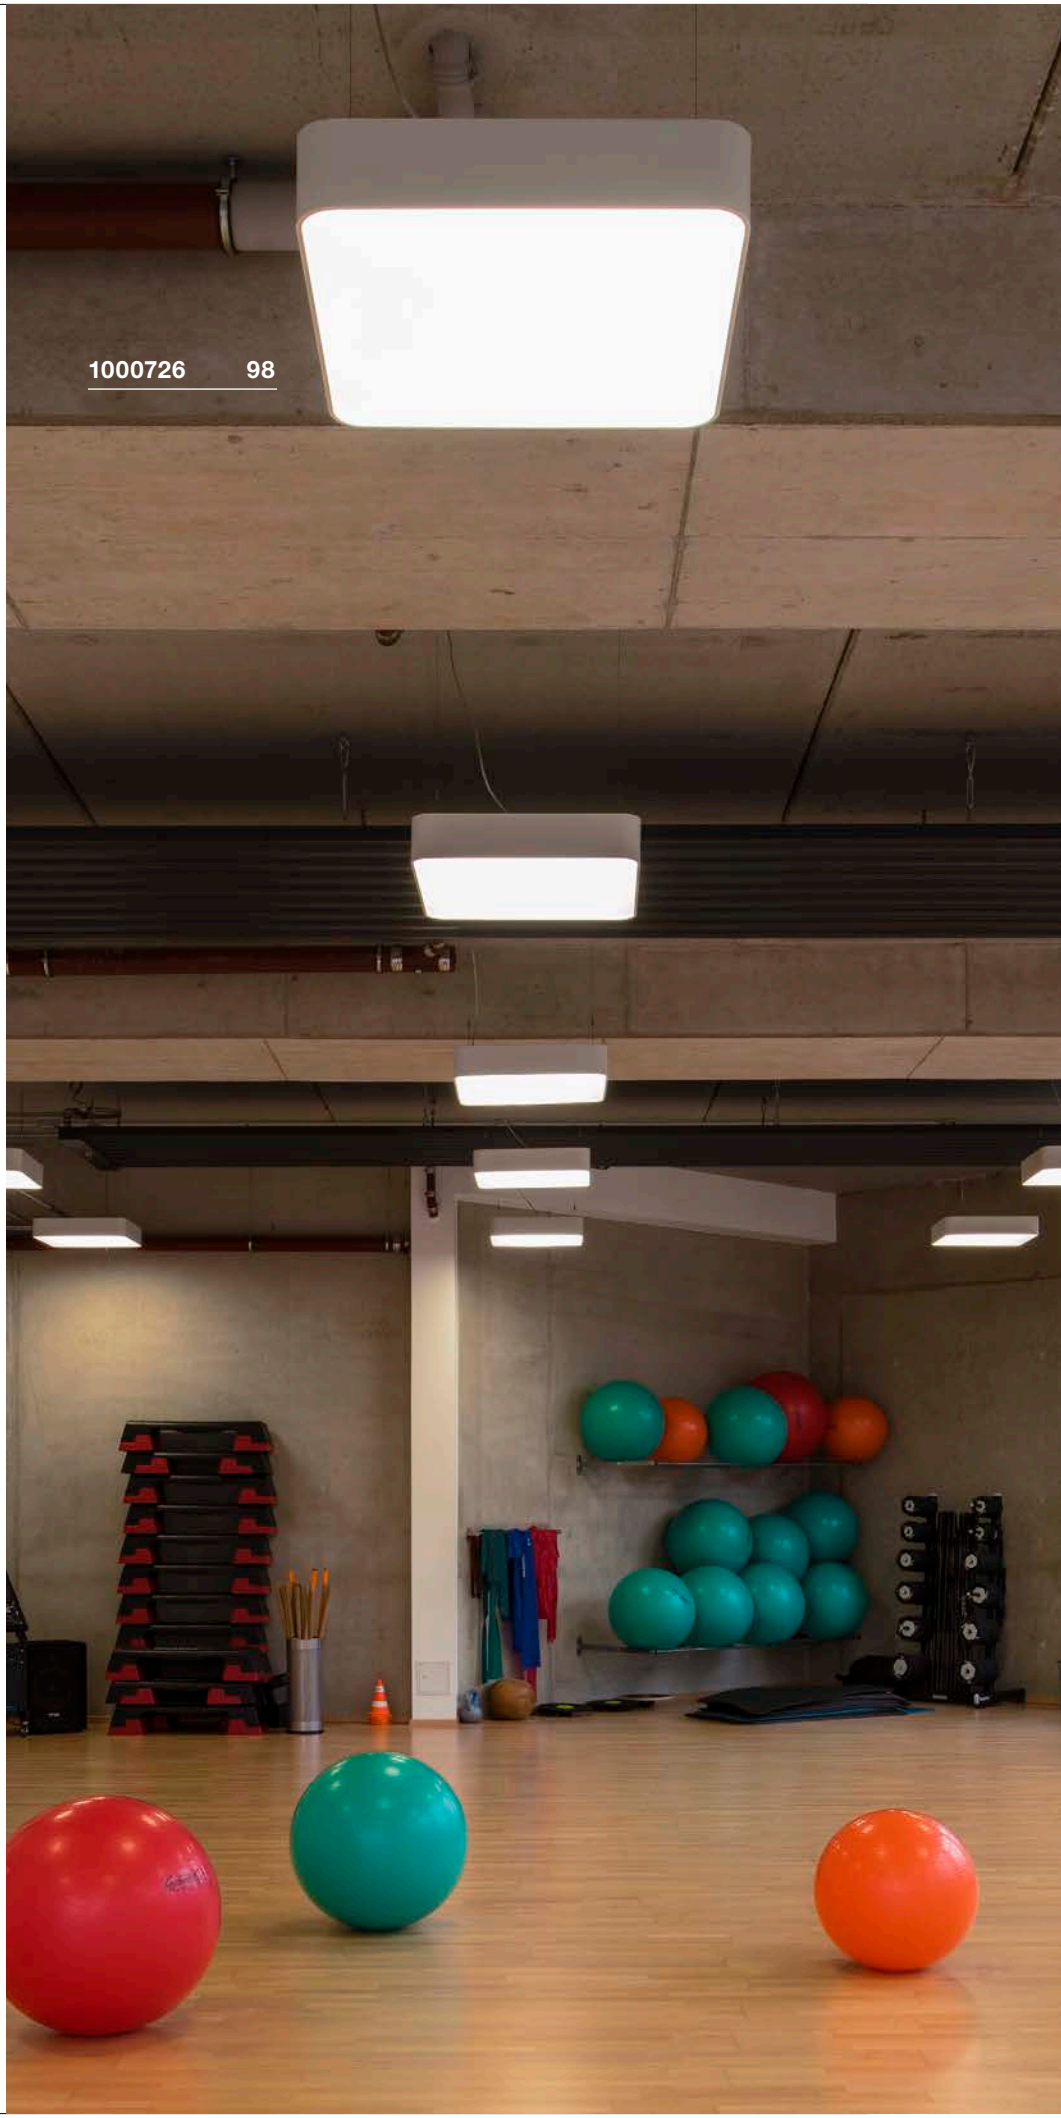

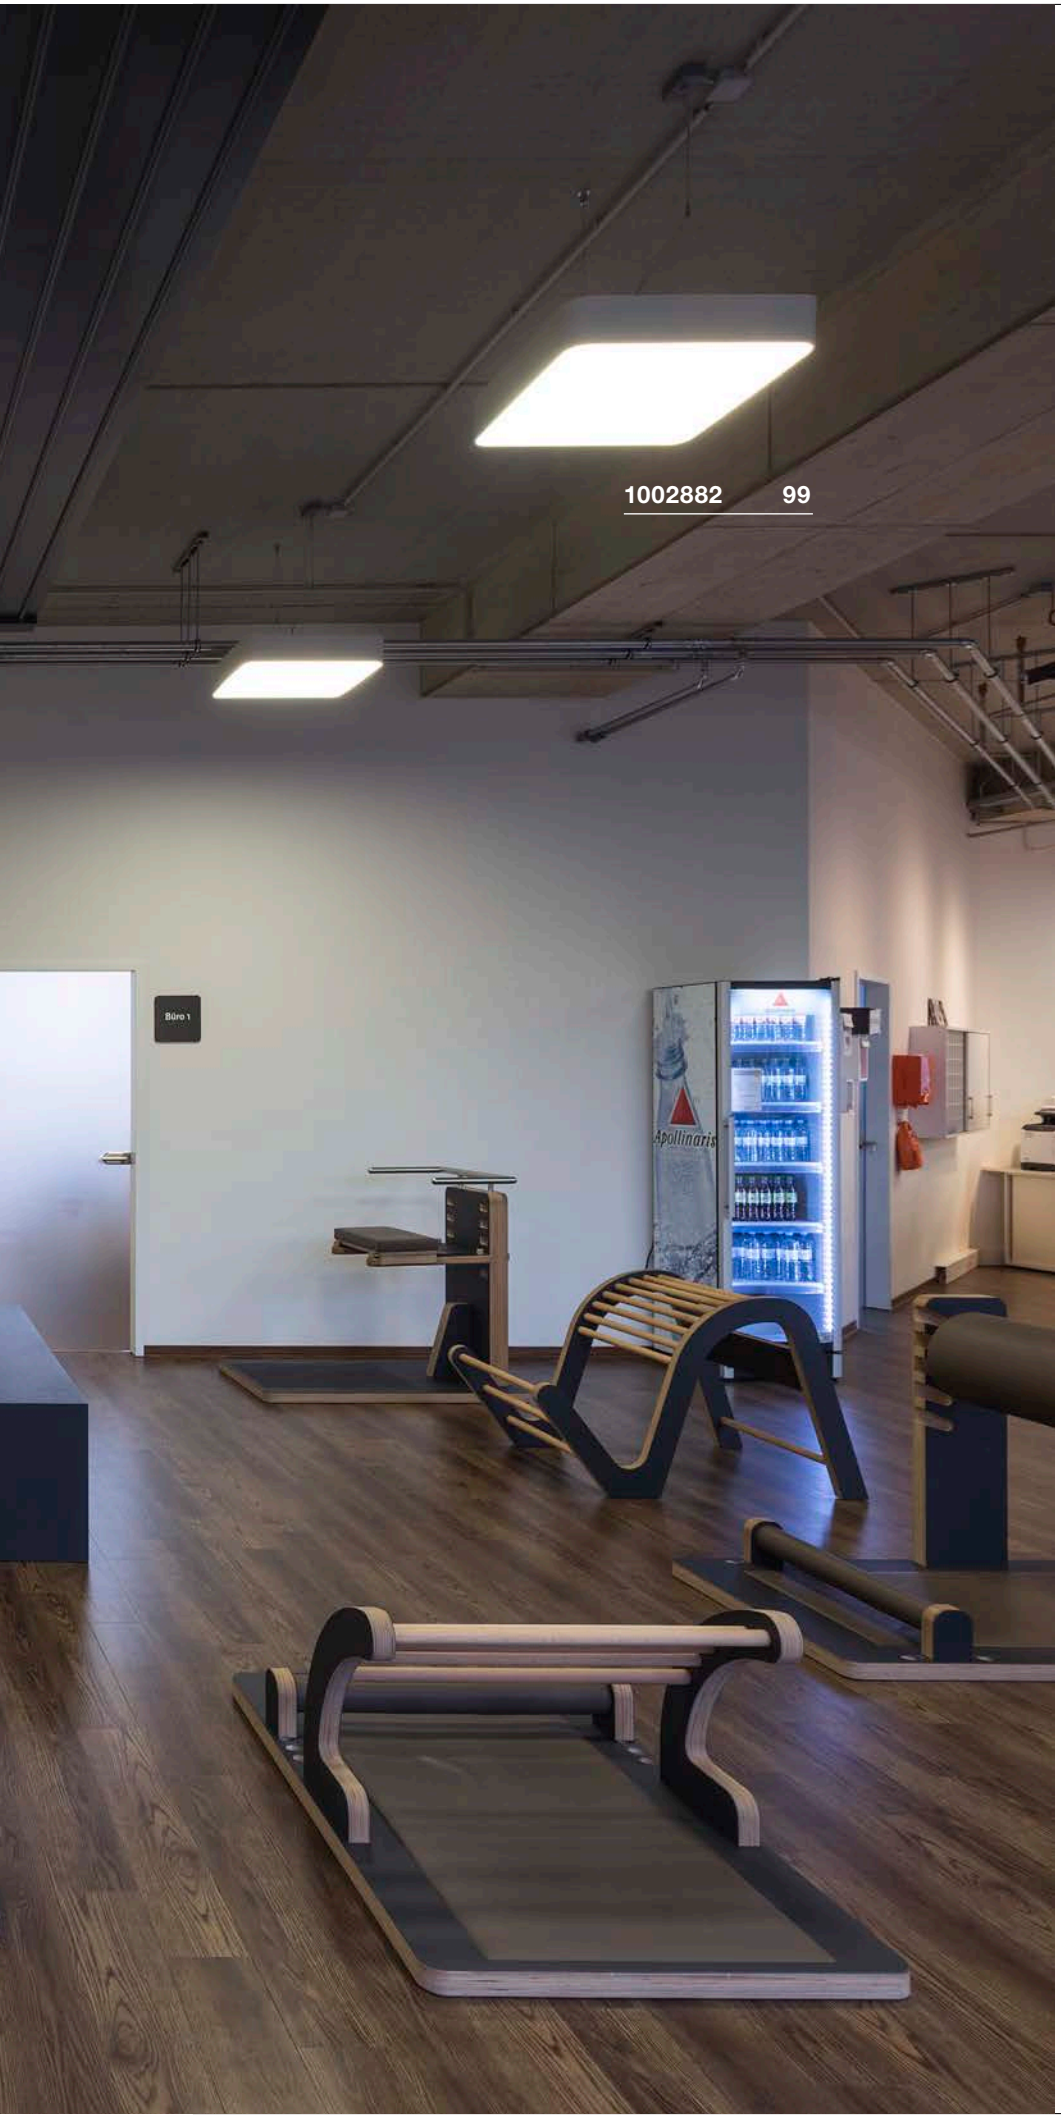

MEDO 60
CL, square, DALI

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW VARIANT









- Can be converted into a pendant using the additionally available accessories

Product details

100-277V ~50/60Hz | 1000mA
Total consumption: 39W
Material: Aluminium / Acrylic
Dimmable: Dali

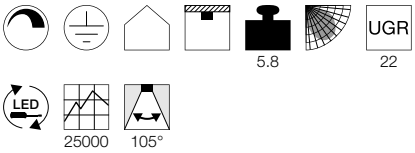

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 | 34,20 GBP

Suspension set 1.5m
Item no. 135251 | 34,20 GBP

Suspension set 1.5m
Item no. 135254 | 34,20 GBP

Suspension set 5m
Item no. 1001950 | 76,50 GBP

Suspension set 5m
Item no. 1001951 | 76,50 GBP

Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
3300lm | 3000K | CRI>80		
white	**1002882**	**458,10**

MEDO RING 60
PD,1-10V

891

A-A++ Spectrum A++–E


LED INSIDE




• Height adjustable

Product details

120-240V ~50/60Hz | 700mA
Total consumption: 35W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

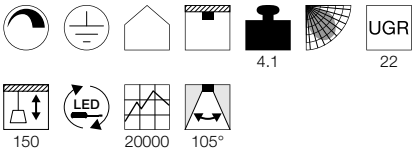

Dimensioned drawing



Recommended accessories

1-10V dimming
Item no. 470505 |9,90 GBP



Variant	Item no.	GBP
2000lm | 3000K | CRI>80		
■ black	**133840**	**539,10**
2095lm | 3000K | CRI>80		
□ white	**133841**	**539,10**

MEDO RING 90
PD,1-10V

891

A-A++ Spectrum A++–E


LED INSIDE




• Height adjustable

Product details

100-240V ~50/60Hz | 1200mA
Total consumption: 58W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

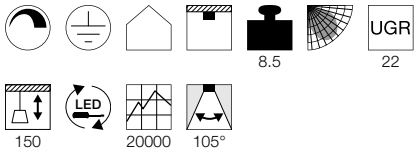

Dimensioned drawing



Recommended accessories

1-10V dimming
Item no. 470505 |9,90 GBP




Variant	Item no.	GBP
3945lm | 3000K | CRI>80		
■ black	**133850**	**674,10**
4185lm | 3000K | CRI>80		
□ white	**133851**	**674,10**







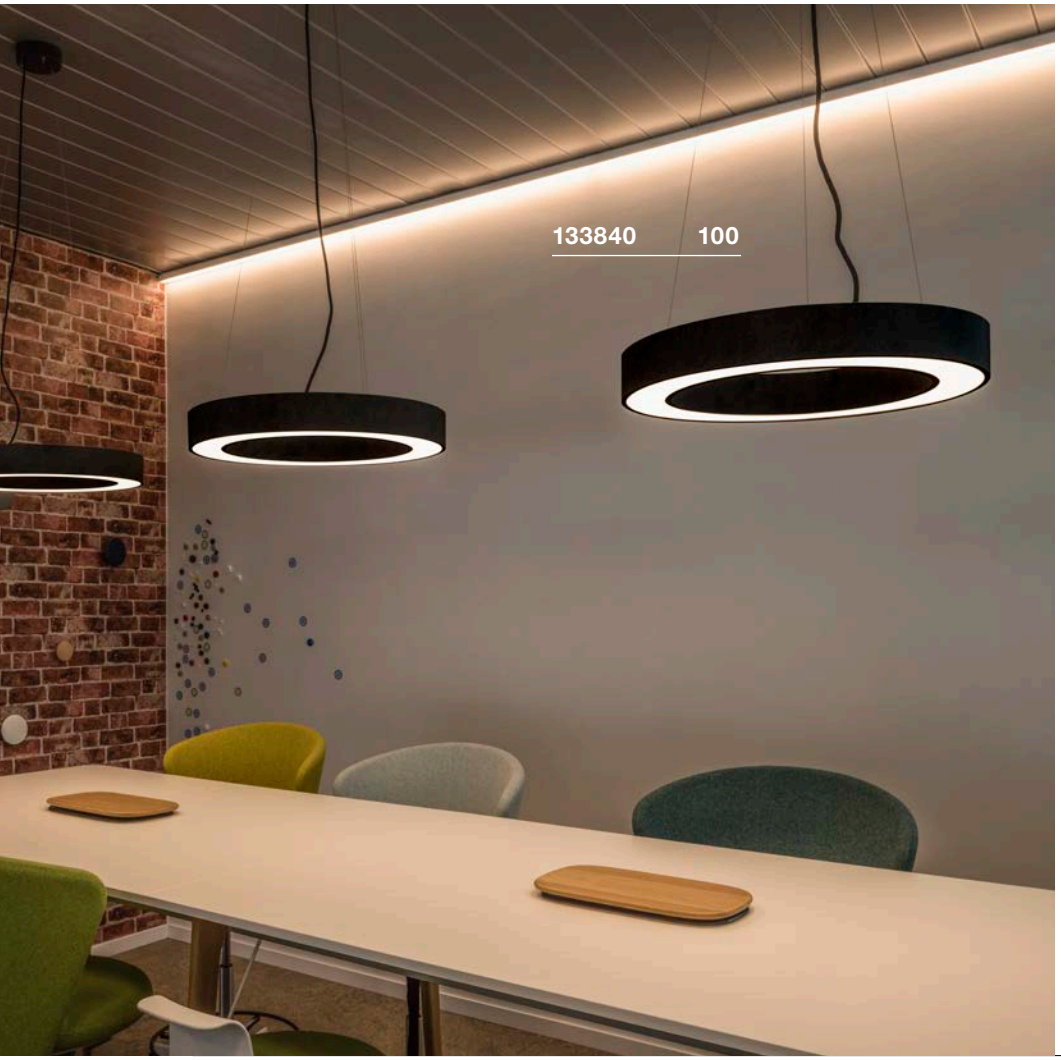

MEDO RING 60
PD, DALI

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW VARIANT









- Height adjustable

Product details


220-240V ~50/60Hz | 700mA
Total consumption: 34W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Dali

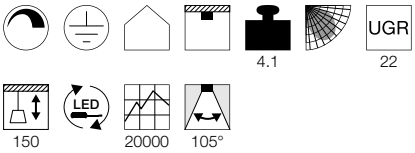


Dimensioned drawing



Variant	Item no.	GBP
2000lm | 3000K | CRI>80		
■ black	1002890	566,10
2095lm | 3000K | CRI>80		
□ white	1002891	566,10

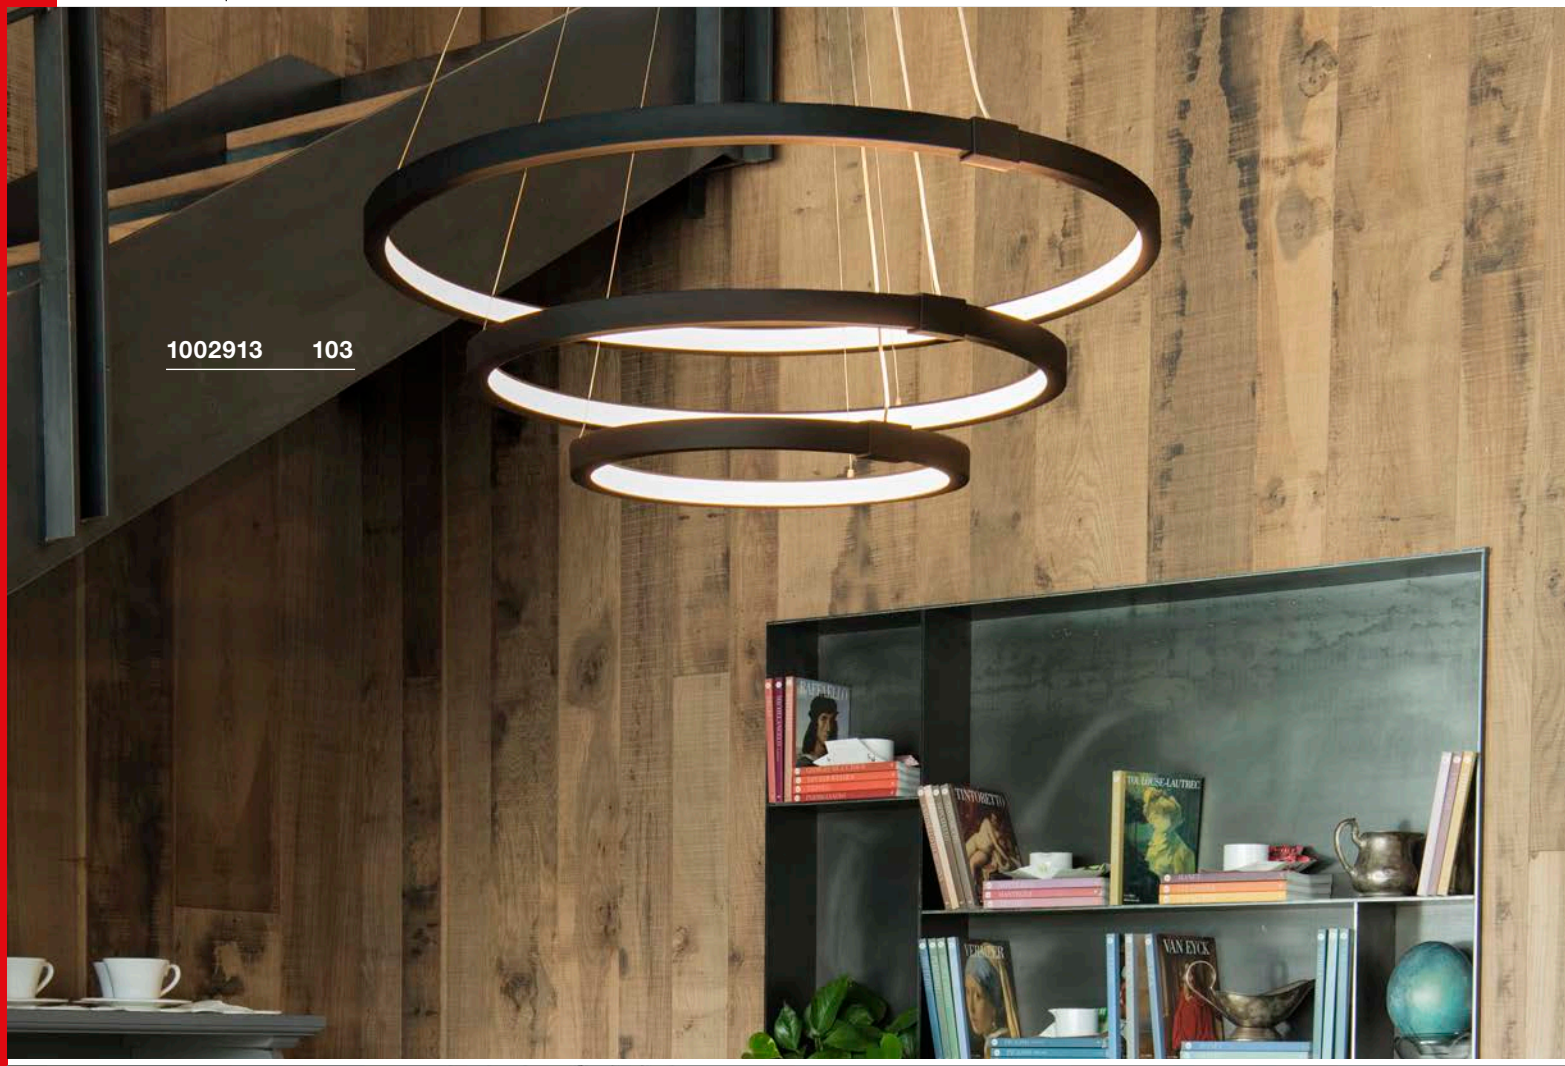
1002913 103

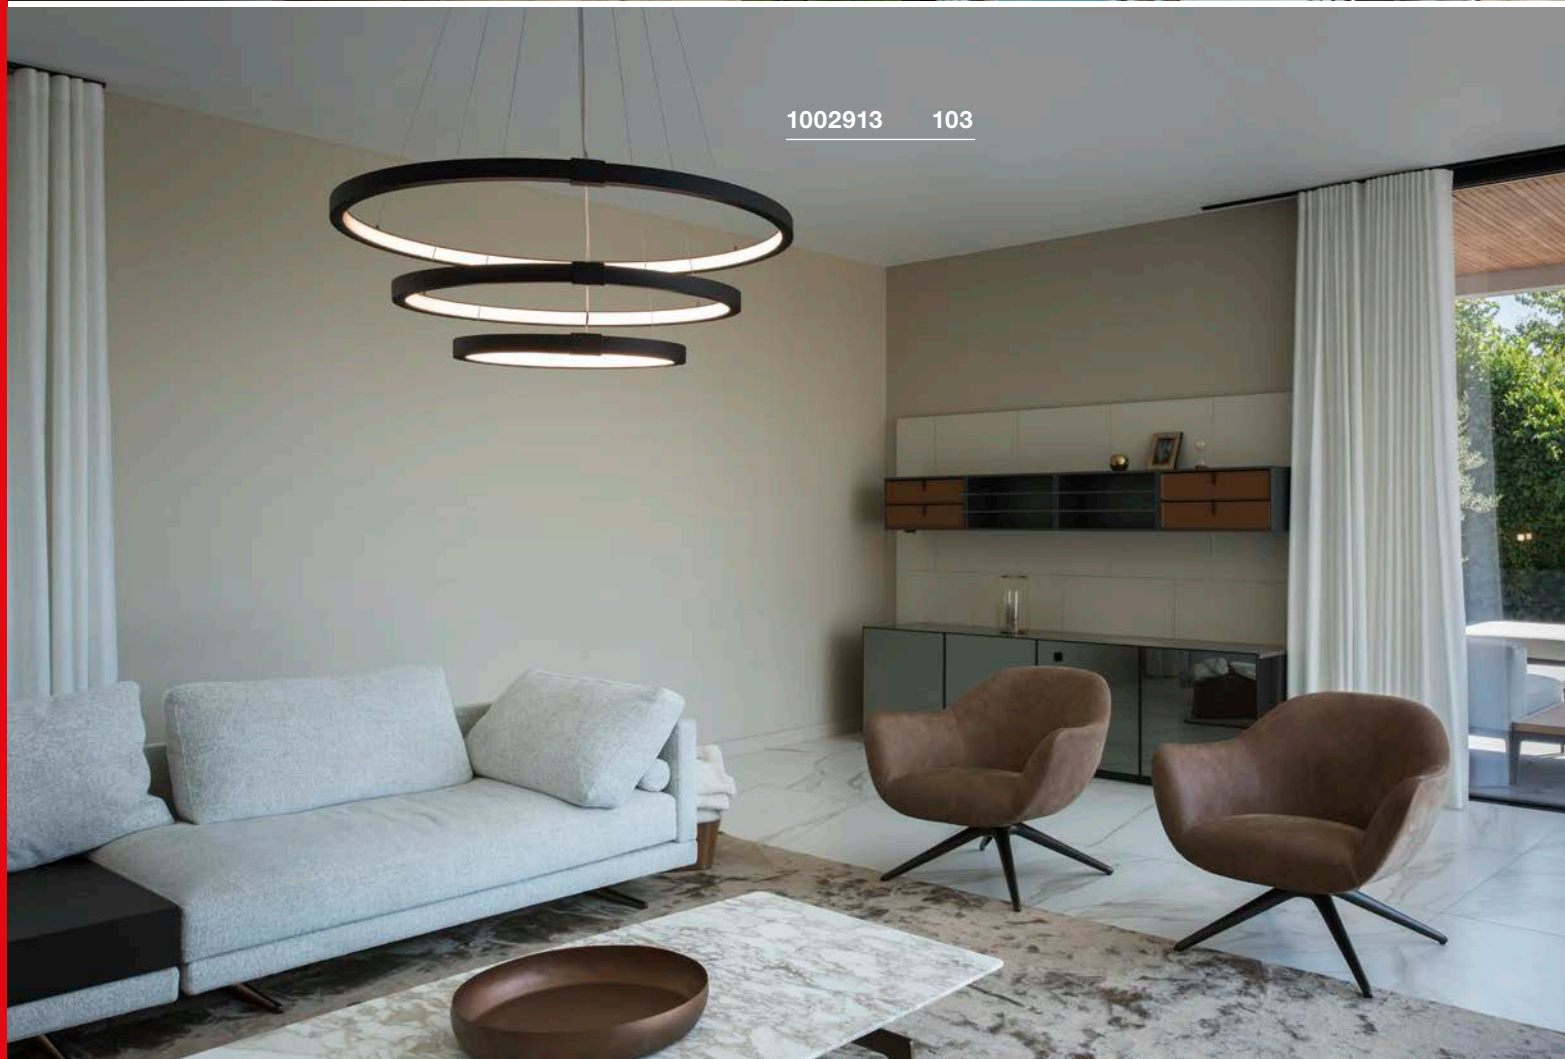
1002913 103

ONE TRIPLE
PD, DALI

892

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW








- Height adjustable
- Switchable light colour

Product details

220-240V 0/~50/60Hz | 1700mA
Total consumption: 65W
Material: Aluminium / Steel
Dimmable: Dali
Product dimensions: Ø: 80 cm L: 150 cm

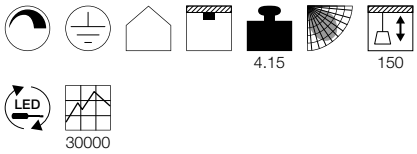

Variant	Item no.	GBP
3900/4200lm | 3000/4000K | CRI>80		
■ matt black	1002913	944,10
3900/4200lm | 3000/4000K | CRI>80		
□ matt white	1002914	944,10

ONE 60
PD, DALI

892

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW








- Height adjustable
- Switchable light colour

Product details

220-240V ~50/60Hz | 600mA
Total consumption: 25W
Material: Aluminium / Steel
Dimmable: Dali
Product dimensions: Ø: 60 cm L: 150 cm

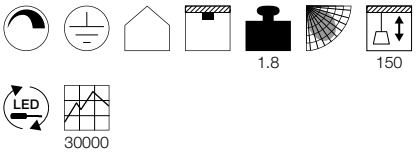

Variant	Item no.	GBP
1400/1500lm | 3000/4000K | CRI>80		
■ matt black	1002909	323,10
1400/1500lm | 3000/4000K | CRI>80		
□ matt white	1002910	323,10

ONE 80
PD, DALI

892

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW








- Height adjustable
- Switchable light colour

Product details

220-240V ~50/60Hz | 800mA
Total consumption: 35W
Material: Aluminium / Steel
Dimmable: Dali
Product dimensions: Ø: 80 cm L: 150 cm

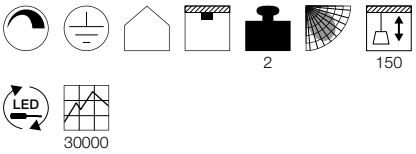

Variant	Item no.	GBP
2000/2200lm | 3000/4000K | CRI>80		
■ matt black	1002911	368,10
2000/2200lm | 3000/4000K | CRI>80		
□ matt white	1002912	368,10

PANEL 60
PD, 1-10V

A-A++ Spectrum A++–E

LED INSIDE









• Height adjustable

Product details

100-240V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

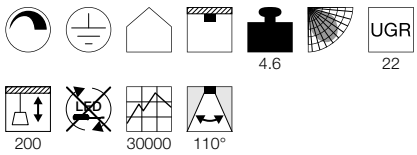

Dimensioned drawing




Recommended accessories

1-10V dimming
Item no. 470505 | 9,90 GBP



Variant	Item no.	GBP
2850lm | 2700K | CRI>80 white	**1001343**	**251,10**
3150lm | 3000K | CRI>80 white	**1001344**	**251,10**
3350lm | 4000K | CRI>80 white	**1001345**	**251,10**
2850lm | 2700K | CRI>80 grey	**1001346**	**251,10**
3150lm | 3000K | CRI>80 grey	**1001347**	**251,10**
3350lm | 4000K | CRI>80 grey	**1001348**	**251,10**



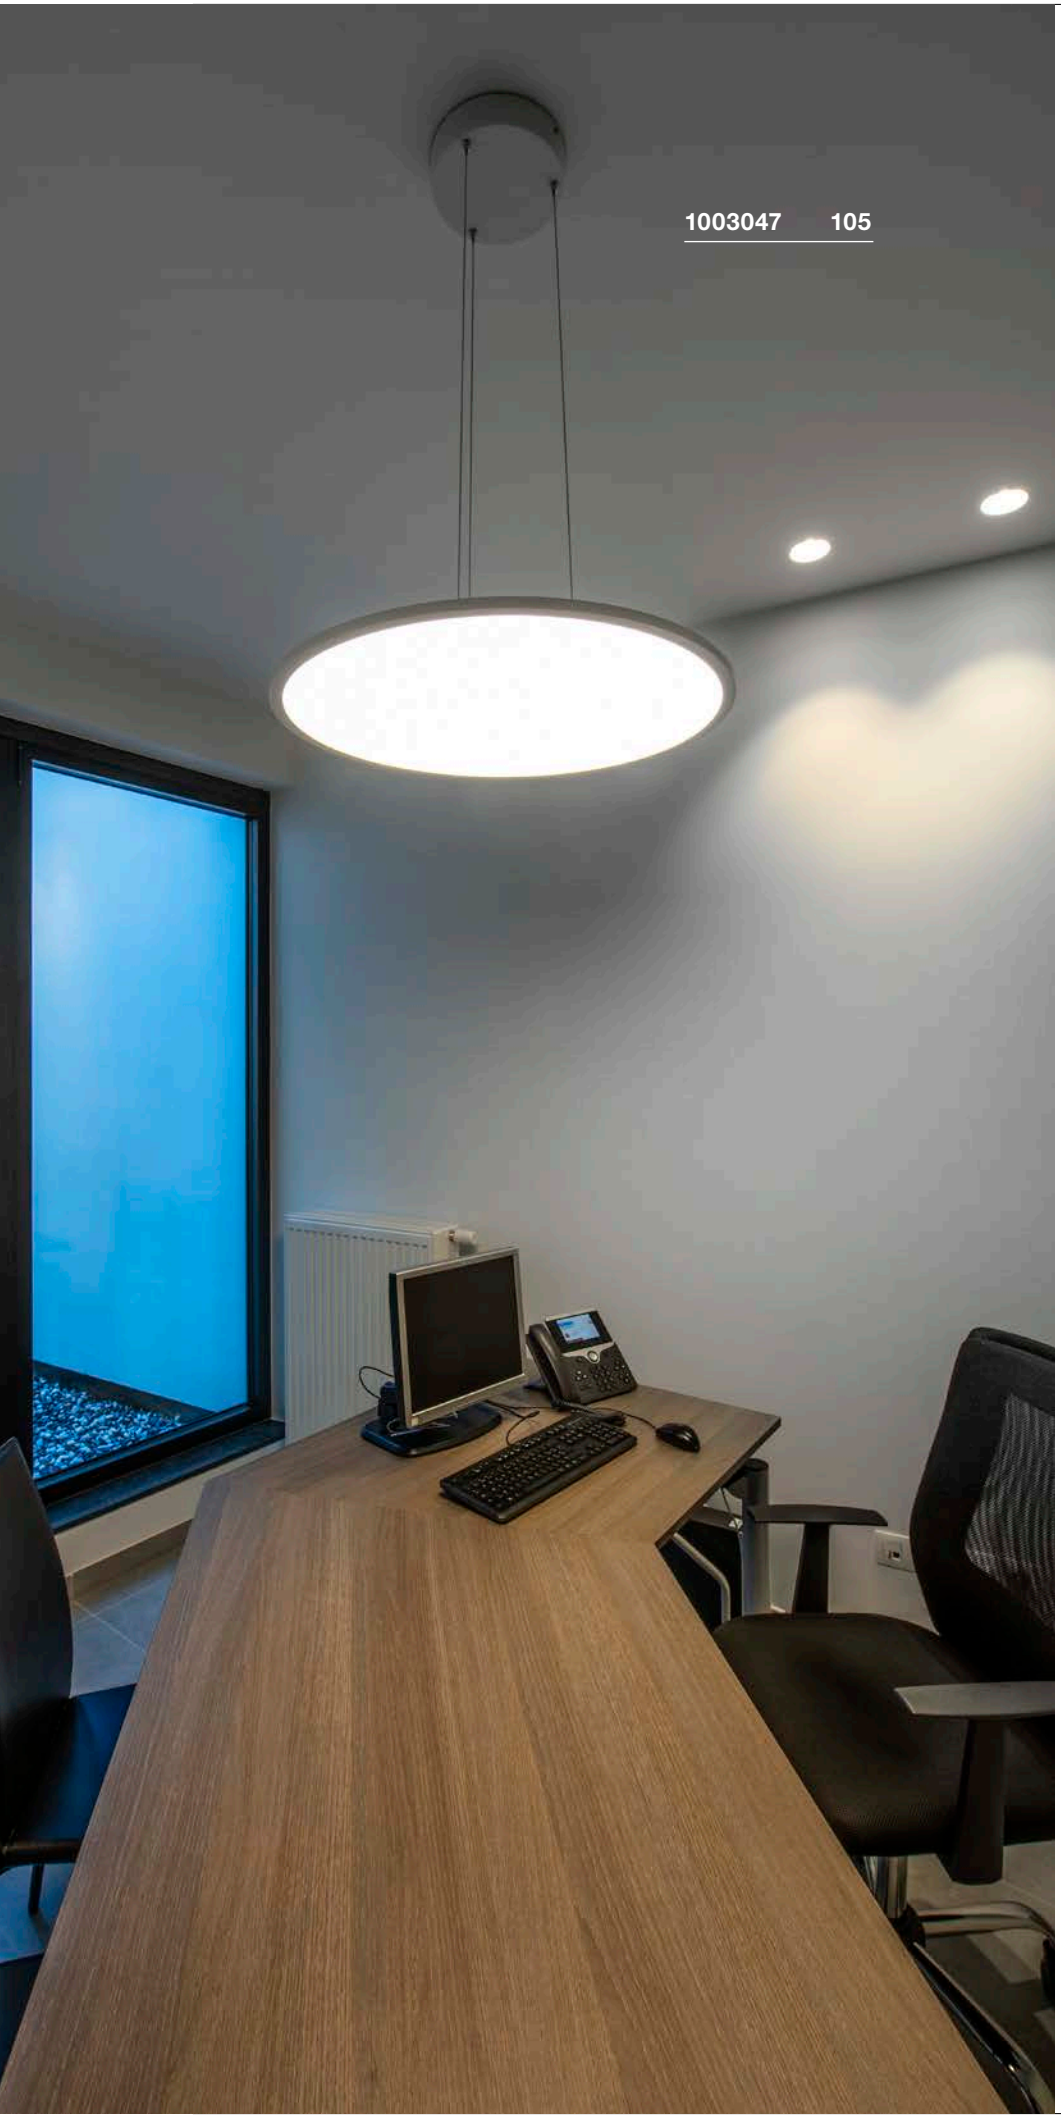

PANEL 60
PD, round, DALI

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









- Height adjustable

Product details


100-277V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Dali

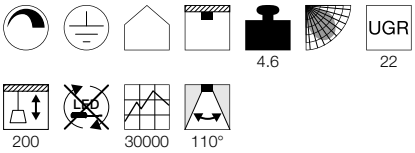

Dimensioned drawing



Variant	Item no.	GBP
3150lm | 3000K | CRI>80		
white	1003044	260,10
3350lm | 4000K | CRI>80		
white	1003045	260,10
3150lm | 3000K | CRI>80		
grey	1003046	260,10
3350lm | 4000K | CRI>80		
grey	1003047	260,10

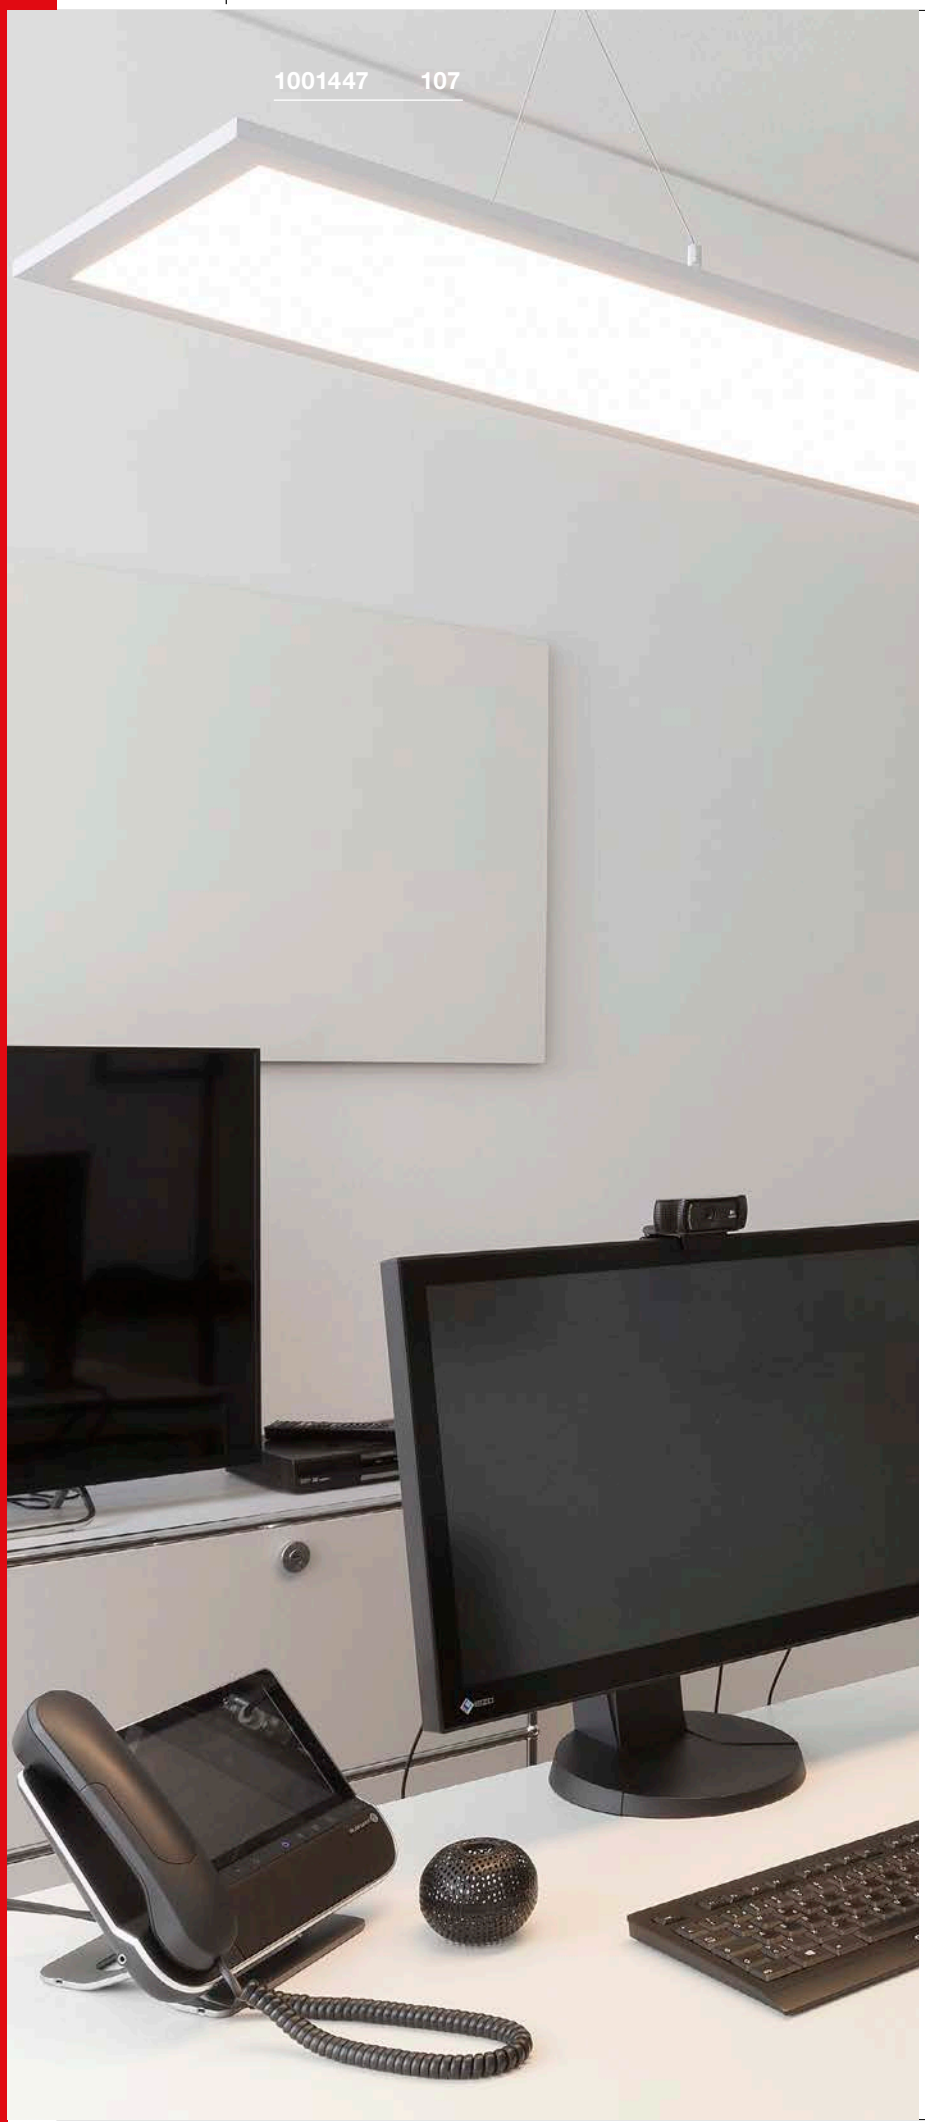


I-PENDANT PRO

PD, 1195x295mm,
UGR<22, 1-10V

A-A++ Spectrum A++–E

LED INSIDE

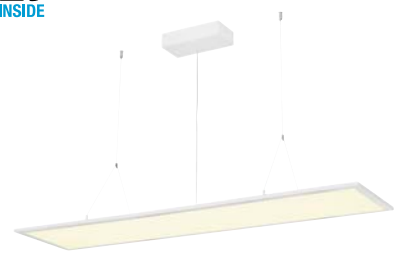





- UGR <22
- Height adjustable

Product details

100-240V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Acrylic
Dimmable: 1-10V

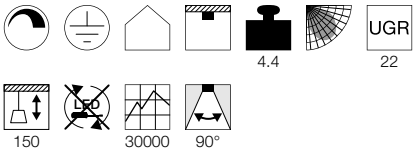


Dimensioned drawing



Recommended accessories

1-10V dimming
Item no. 470505 | 9,90 GBP




Variant	Item no.	GBP
3300lm | 3000K | CRI>80		
white	**158853**	**179,10**
3600lm | 4000K | CRI>80		
white	**158854**	**179,10**

I-PENDANT PRO
PD, 1195x295mm, 1-10V

A-A++ Spectrum A++–E

LED INSIDE

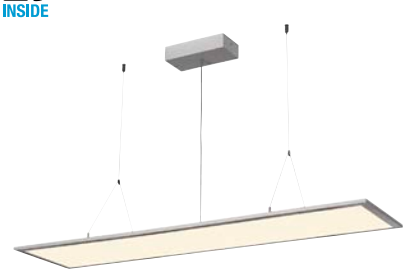





- Height adjustable

Product details

100-240V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Acrylic
Dimmable: 1-10V

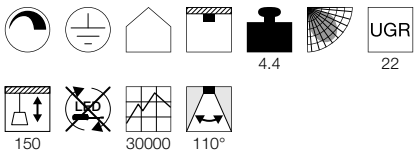


Dimensioned drawing



Recommended accessories

1-10V dimming
Item no. 470505 | 9,90 GBP




Variant	Item no.	GBP
3100lm | 3000K | CRI>80		
matt white	**158723**	**179,10**
3550lm | 4000K | CRI>80		
matt white	**158724**	**179,10**
3100lm | 3000K | CRI>80		
grey	**158733**	**179,10**
3550lm | 4000K | CRI>80		
grey	**158734**	**179,10**

I-PENDANT PRO
PD, 1195x295mm, UGR<19, 1-10V

A-A++ Spectrum A++–E

LED INSIDE

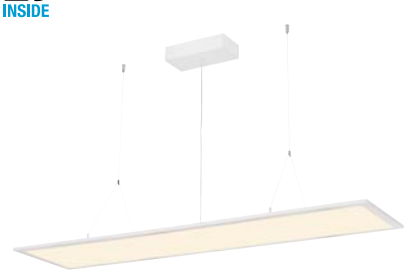





- Height adjustable
- Reduced glare due to UGR <19
- Workstation-compatible

Product details

100-240V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

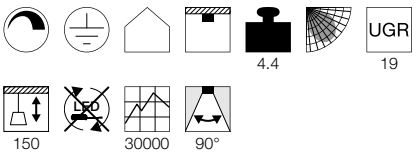


Dimensioned drawing



Recommended accessories

1-10V dimming
Item no. 470505 | 9,90 GBP




Variant	Item no.	GBP
3750lm | 3000K | CRI>80		
white	**1001447**	**269,10**
3800lm | 4000K | CRI>80		
white	**1001448**	**269,10**
3750lm | 3000K | CRI>80		
grey	**1001647**	**269,10**
3800lm | 4000K | CRI>80		
grey	**1001648**	**269,10**

I-PENDANT PRO
PD, 1195x295mm, DALI

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT

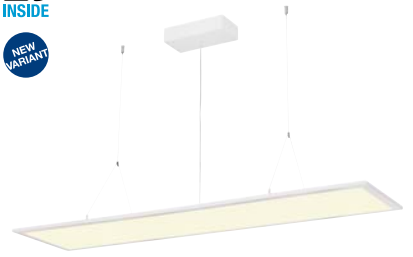







- Height adjustable
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

100-277V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Dali

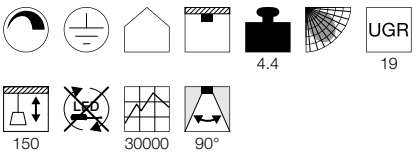

Dimensioned drawing



Variant	Item no.	GBP
3750lm | 3000K | CRI>80		
white	**1003048**	**296,10**
3800lm | 4000K | CRI>80		
white	**1003049**	**296,10**
3750lm | 3000K | CRI>80		
grey	**1003050**	**296,10**
3800lm | 4000K | CRI>80		
grey	**1003051**	**296,10**

HANG UP 120
PD, TRIAC

A-A++ Spectrum A++–E


LED INSIDE








• Height adjustable

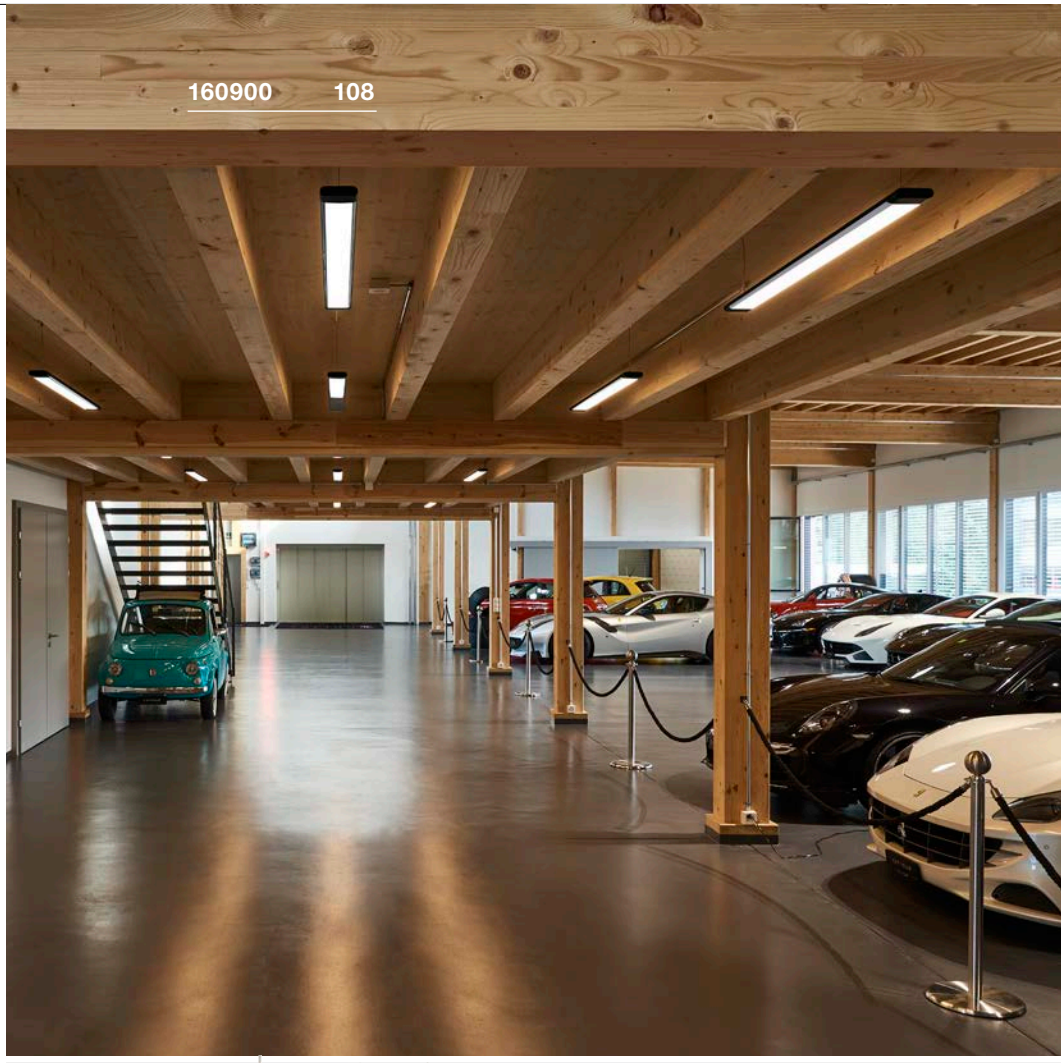




Product details

220-240V ~50/60Hz | 250mA
Total consumption: 41W
Material: Aluminium / Plastic
Dimmable: Triac C

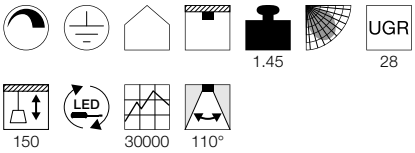

Dimensioned drawing



Note

Canopy excl.
Open cable end

Recommended accessories

■ Ceiling plate
Item no. 210060 | 25,20 GBP


□ Ceiling plate
Item no. 210061 | 25,20 GBP


■ Ceiling plate
Item no. 210064 | 25,20 GBP

Variant	Item no.	GBP
4000lm | 3000K | CRI>80 ■ black	**160900**	**162,00**
4000lm | 3000K | CRI>80 □ white	**160901**	**162,00**
4000lm | 3000K | CRI>80 ■ grey	**160904**	**162,00**


160904 108

LUMINAIRE HIGHLIGHTS
OUR PERFECT LIGHT FOR YOUR WORKPLACE

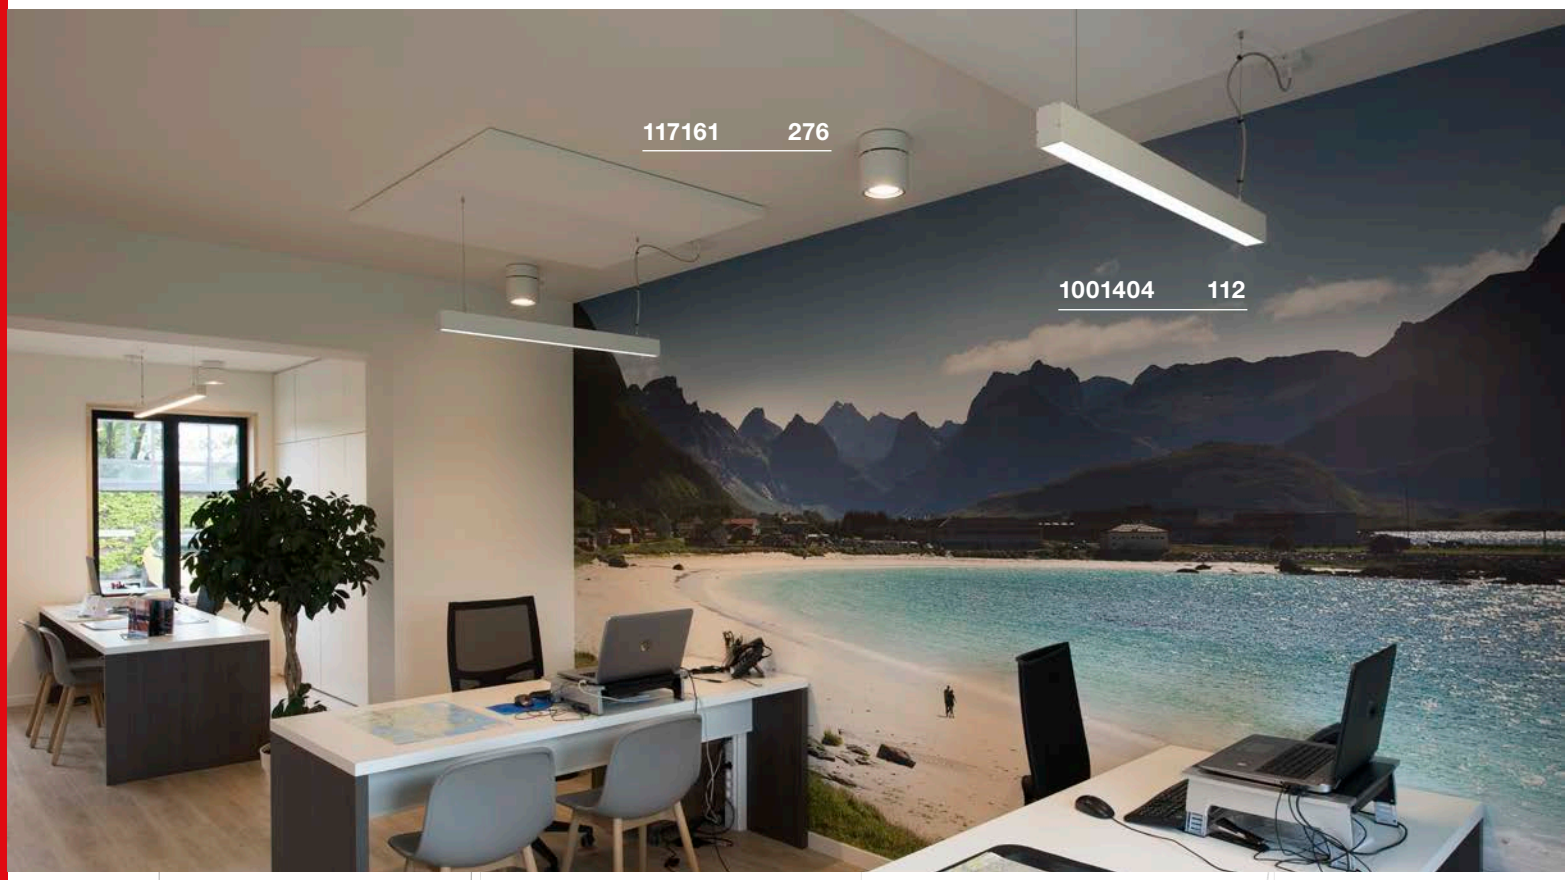

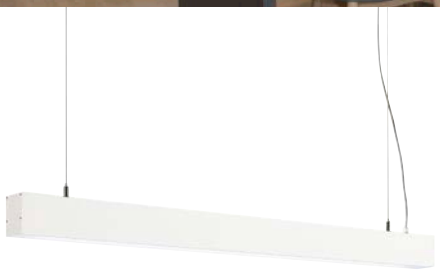


GLENOS® 1m | 2m | 112



Q-LINE® PD, single | 113



Q-LINE® PD, DALI single | 113

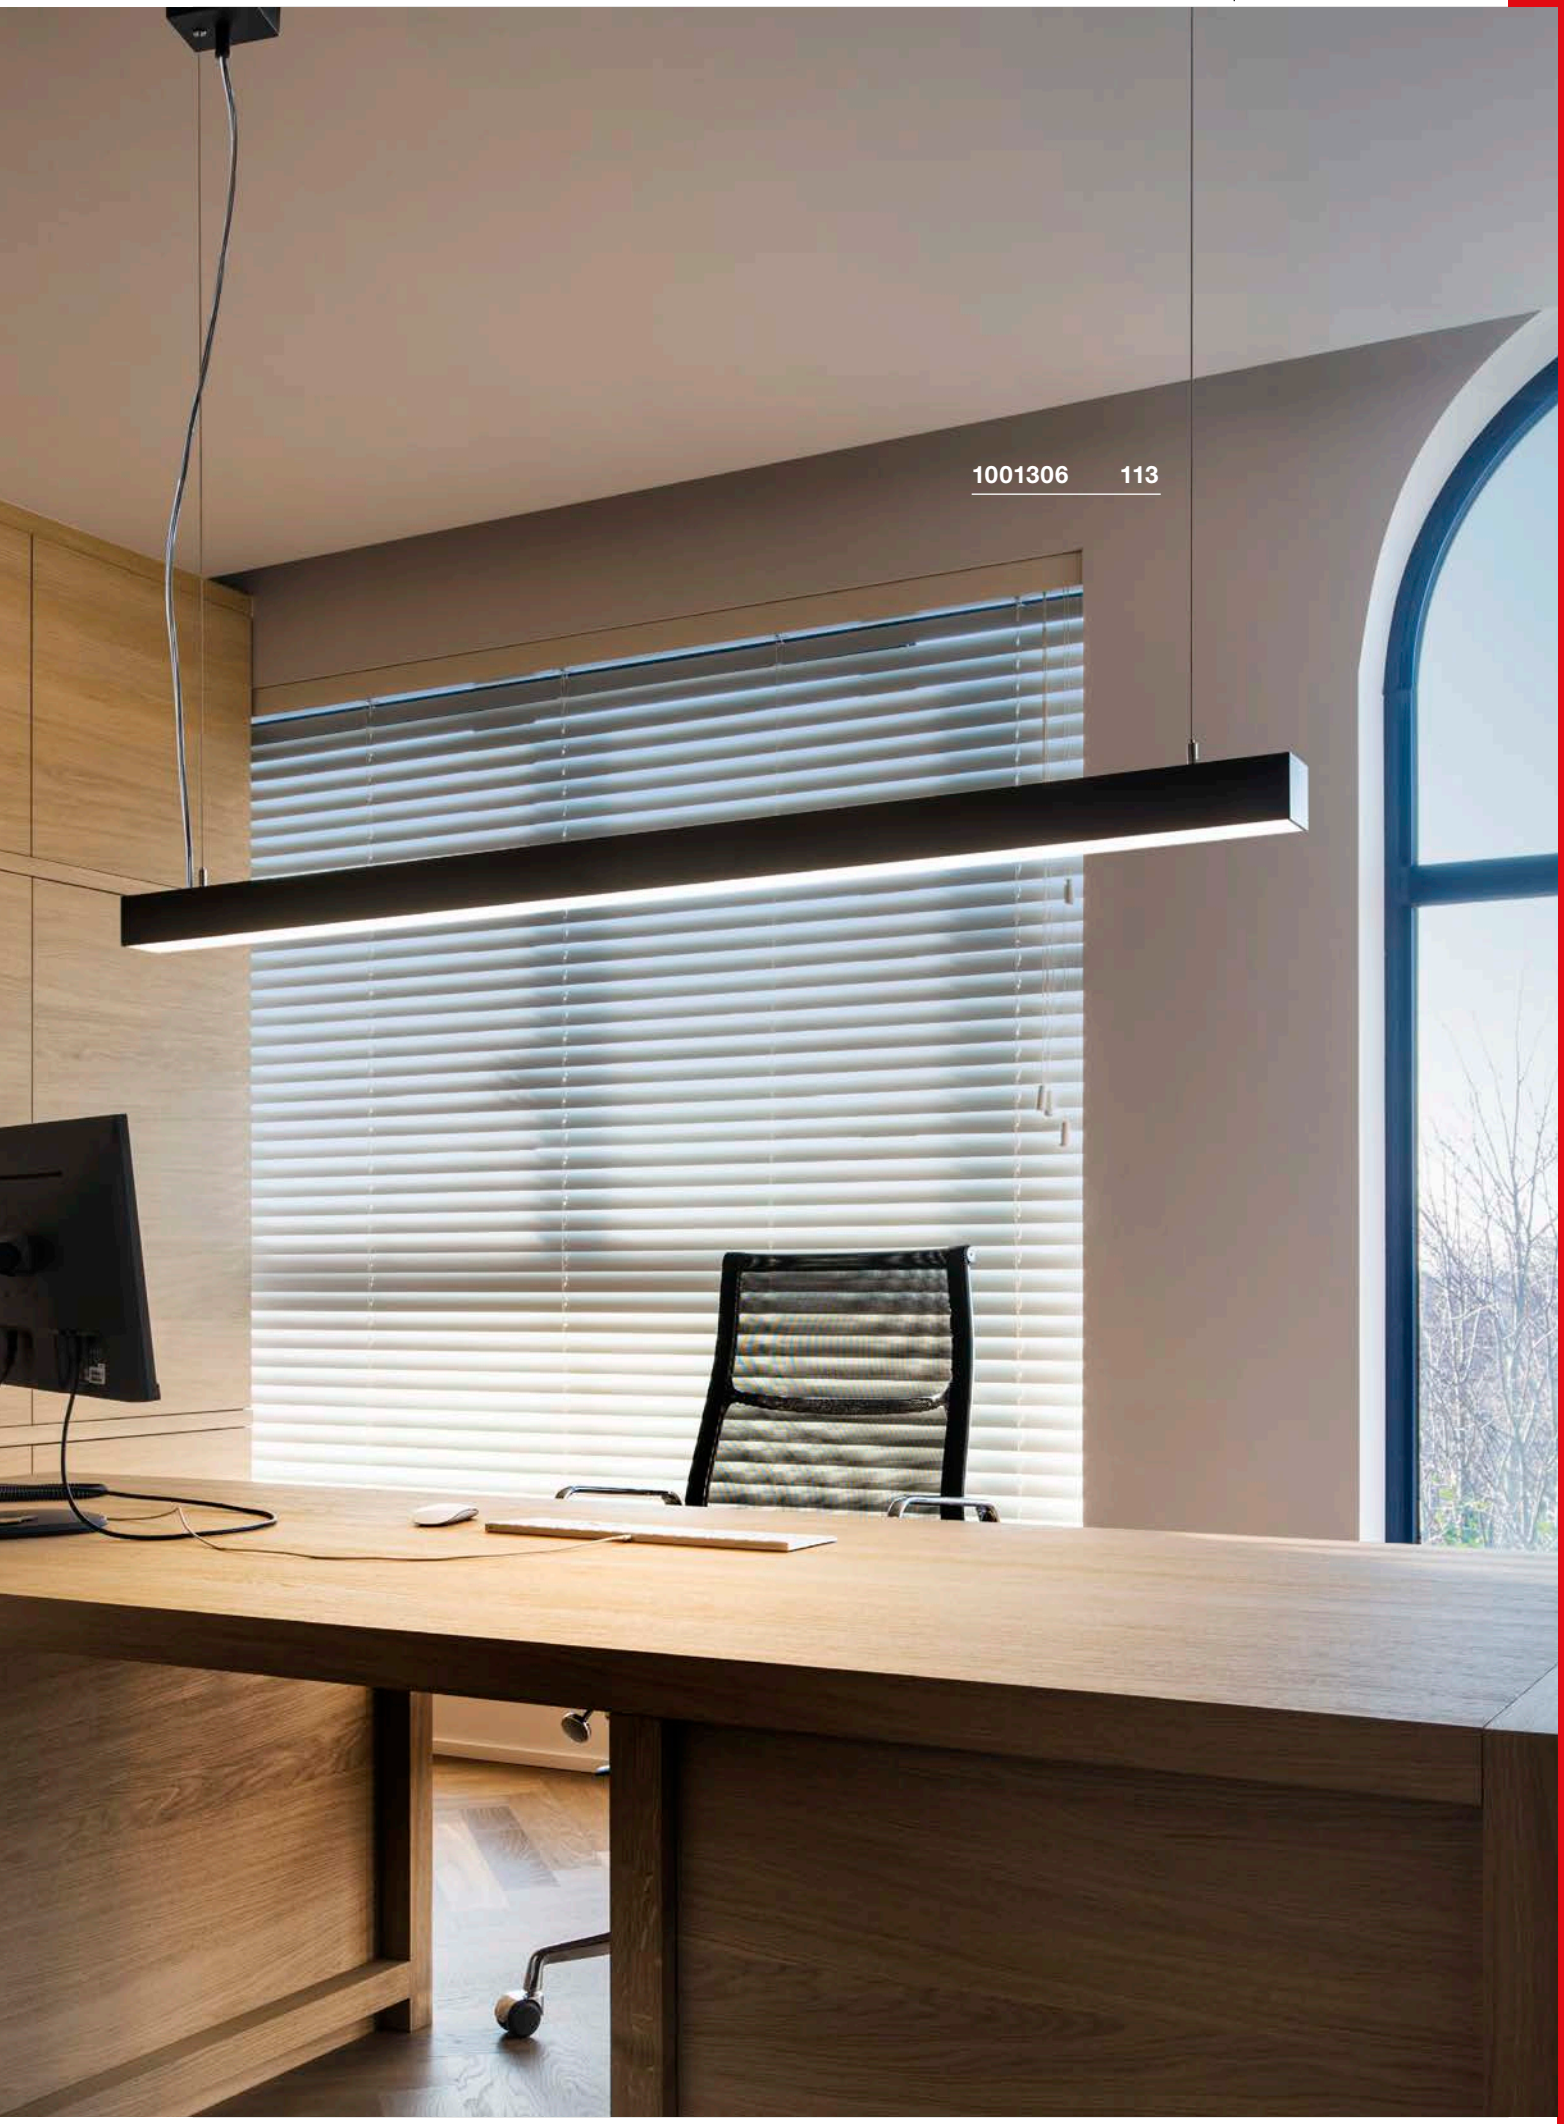
1001306 113

GLENOS
PD, 1m, 1-10V

A-A++ Spectrum A++–E

LED INSIDE

FOLLOWER









Product details

220-240V ~50/60Hz | 1000mA
Total consumption: 43W
Material: Aluminium / Plastic
Dimmable: 1-10V

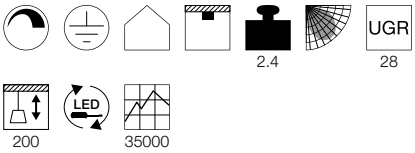

Dimensioned drawing



Variant	Item no.	GBP
2850lm | 3000K | CRI>80		
matt black	1001400	314,10
2850lm | 3000K | CRI>80		
matt white	1001401	314,10
2850lm | 3000K | CRI>80		
silver	1001402	332,10
3300lm | 4000K | CRI>80		
matt black	1001403	314,10
3300lm | 4000K | CRI>80		
matt white	1001404	314,10
3300lm | 4000K | CRI>80		
silver	1001405	332,10

GLENOS
PD, 2m, 1-10V

A-A++ Spectrum A++–E

LED INSIDE

FOLLOWER









Product details


220-240V ~50/60Hz | 1000mA
Total consumption: 85W
Material: Aluminium / Plastic
Dimmable: 1-10V

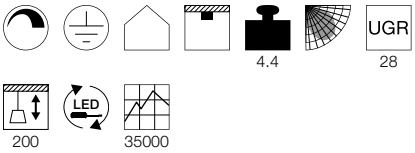



Dimensioned drawing



Variant	Item no.	GBP
5700lm | 3000K | CRI>80		
matt black	1001406	431,10
5700lm | 3000K | CRI>80		
matt white	1001407	431,10
5700lm | 3000K | CRI>80		
silver	1001408	449,10
6600lm | 4000K | CRI>80		
matt black	1001409	431,10
6600lm | 4000K | CRI>80		
matt white	1001410	431,10
6600lm | 4000K | CRI>80		
silver	1001411	449,10

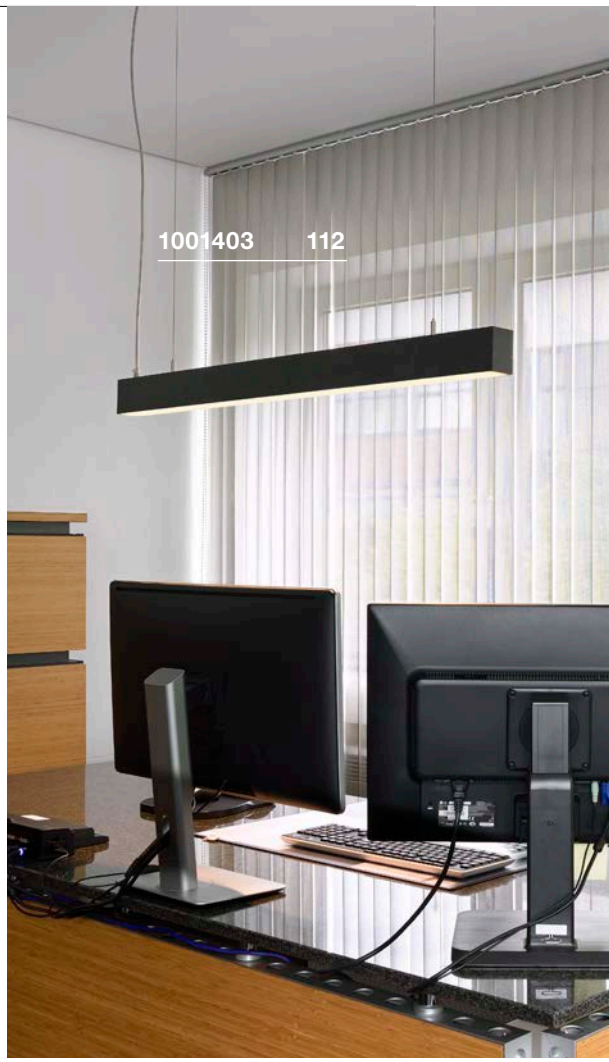

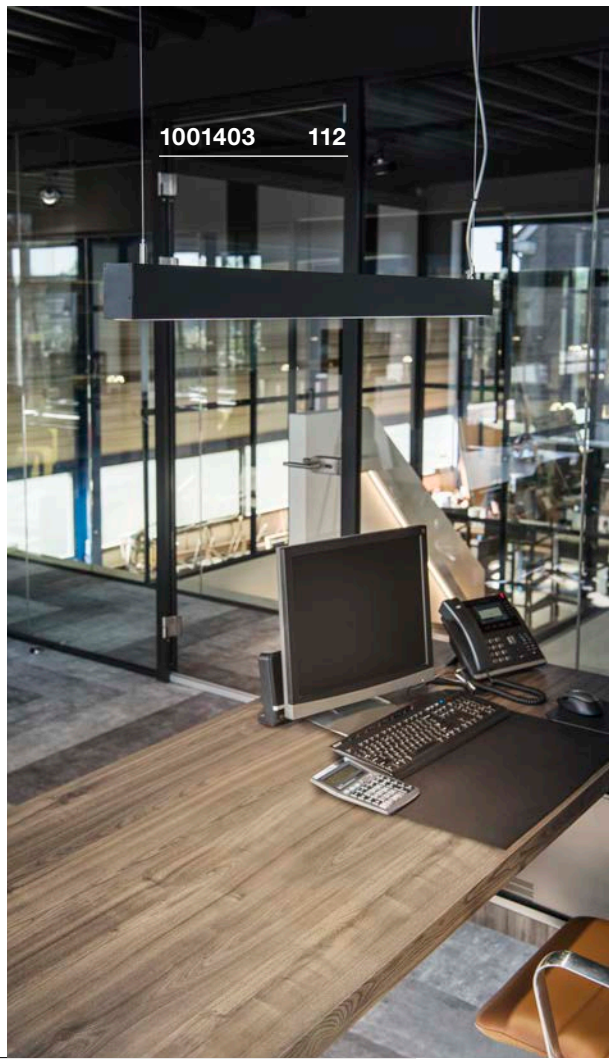

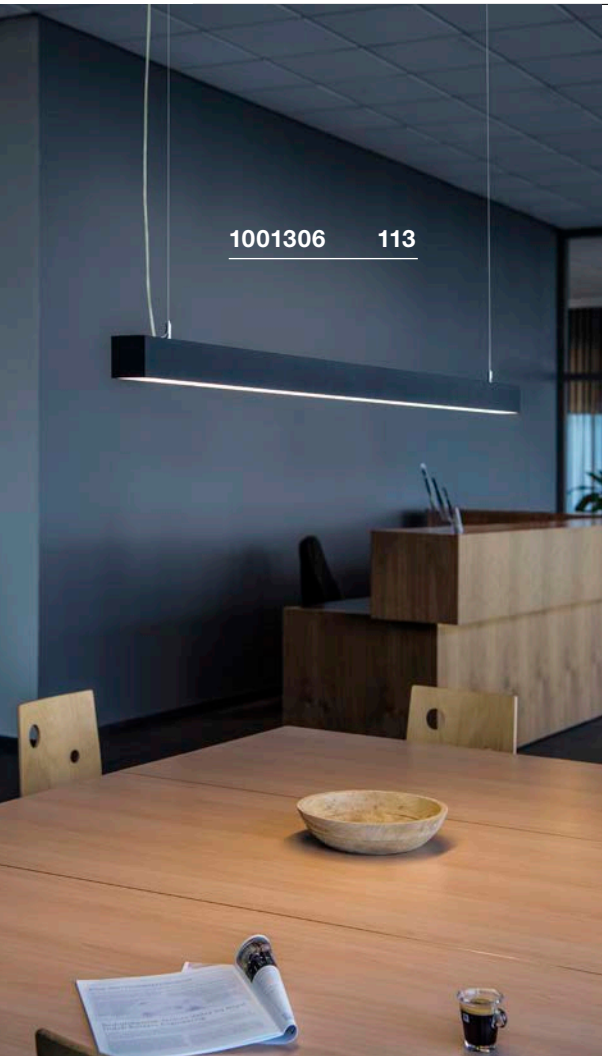




Q-LINE®
PD, single

894

A-A++ Spectrum A⁺⁺–E



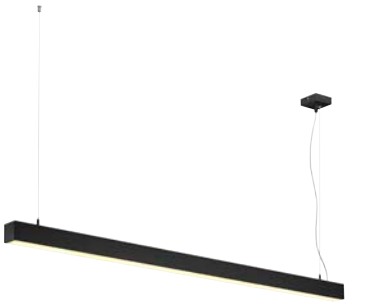







- Height adjustable

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 45.8W
Material: Aluminium / Acrylic

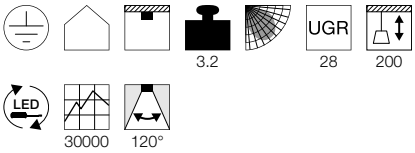

Dimensioned drawing



Variant	Item no.	GBP
3700lm | 3000K | CRI>80 ■ black	**1001306**	**377,10**
3700lm | 3000K | CRI>80 □ white	**1001307**	**377,10**
3700lm | 3000K | CRI>80 ■ grey	**1001308**	**377,10**


Q-LINE®
PD, DALI, single

894

A-A++ Spectrum A⁺⁺–E



LED INSIDE

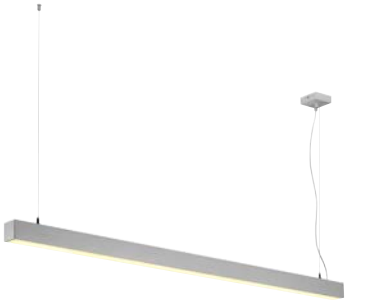







- Height adjustable

Product details

220-240V ~50/60Hz | 350mA-1050mA
Total consumption: 47W
Material: Aluminium / Acrylic
Dimmable: Dali, switch

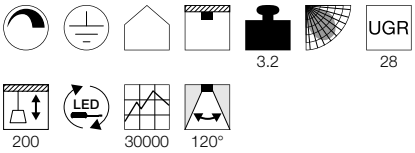

Dimensioned drawing



Variant	Item no.	GBP
3700lm | 3000K | CRI>80 ■ black	**1001309**	**449,10**
3700lm | 3000K | CRI>80 □ white	**1001310**	**449,10**
3700lm | 3000K | CRI>80 ■ grey	**1001312**	**449,10**

Q-LINE®
PD, 1m, BAP, TRIAC

894

A-A++ Spectrum A++–E


LED INSIDE




- Premium LED with CRI>90
- Height adjustable

Product details

220-240V ~50/60Hz | 900mA
Total consumption: 45W
Material: Aluminium / Plastic
Dimmable: Triac L

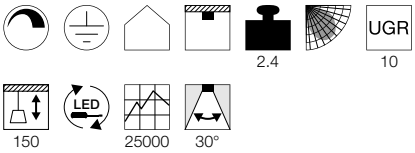

Dimensioned drawing



Variant	Item no.	GBP
2100lm | 3000K | CRI>90 white	1000926	377,10
2100lm | 3000K | CRI>90 black	1000927	377,10
2100lm | 3000K | CRI>90 grey	1000928	377,10
2300lm | 4000K | CRI>90 white	1000932	377,10
2300lm | 4000K | CRI>90 black	1000933	377,10
2300lm | 4000K | CRI>90 grey	1000934	377,10

Q-LINE®
PD, 2m, BAP, TRIAC

894

A-A++ Spectrum A++–E


LED INSIDE




- Premium LED with CRI>90
- Height adjustable

Product details

220-240V ~50/60Hz | 900mA
Total consumption: 85W
Material: Aluminium / Plastic
Dimmable: Triac L

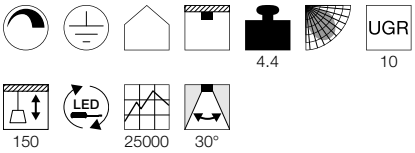


Dimensioned drawing




Variant	Item no.	GBP
4200lm | 3000K | CRI>90 white	1000929	566,10
4200lm | 3000K | CRI>90 black	1000930	566,10
4200lm | 3000K | CRI>90 grey	1000931	566,10
4600lm | 4000K | CRI>90 white	1000935	566,10
4600lm | 4000K | CRI>90 black	1000936	566,10
4600lm | 4000K | CRI>90 grey	1000937	566,10



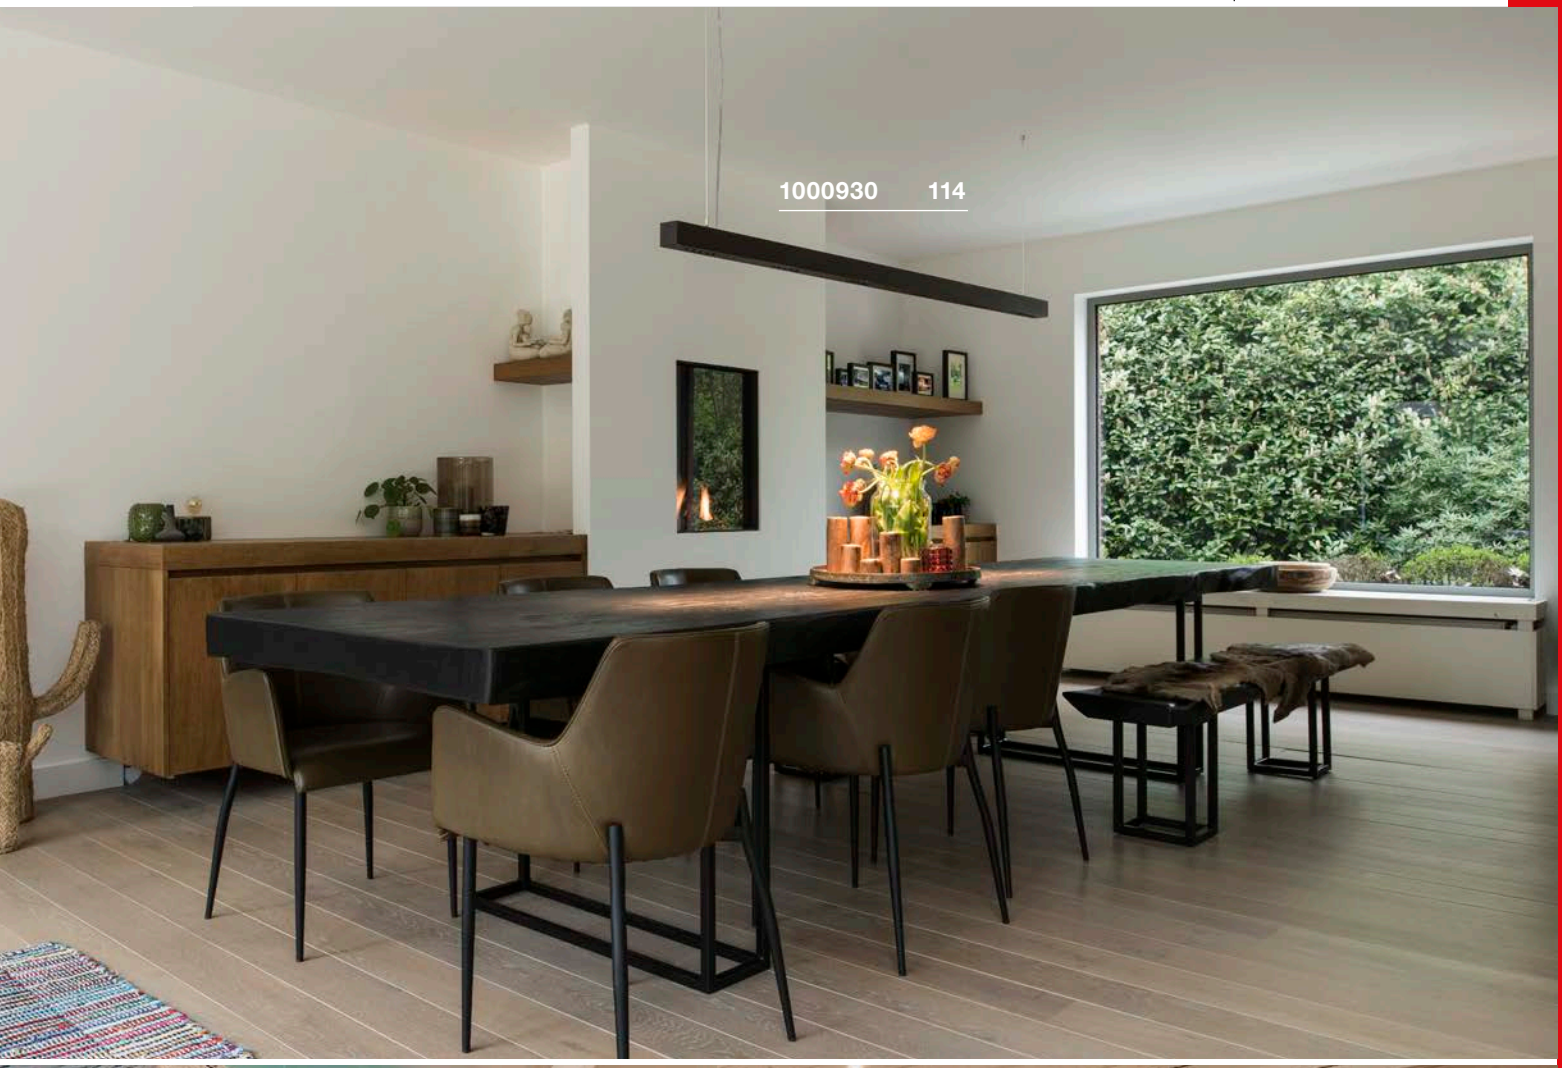


1000930 114

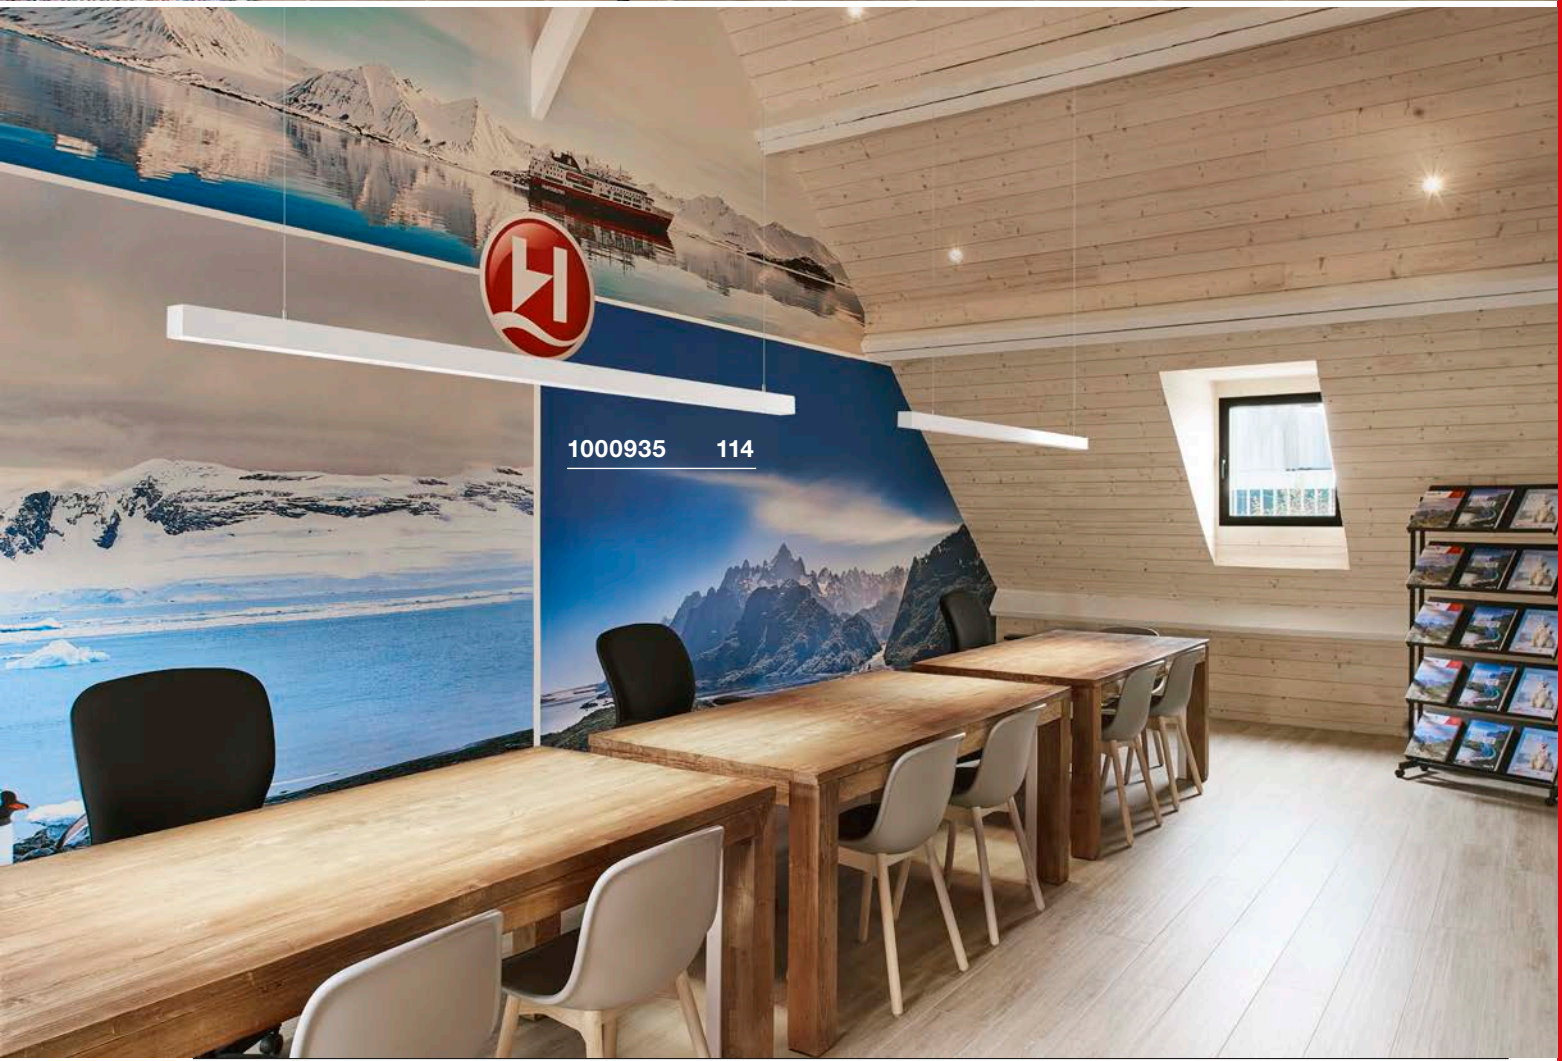
1000935 114

OPEN GRILL
PD, Single Twist

892

A-A++ Spectrum A⁺⁺–E









- Height adjustable

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 38W
Material: Aluminium / Acrylic

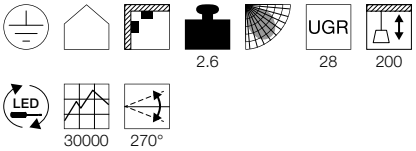

Dimensioned drawing



Variant	Item no.	GBP
3160lm | 3000K | CRI>80		
■ black	**1001297**	**323,10**
2500lm | 3000K | CRI>80		
□ white	**157671**	**323,10**

OPEN GRILL
PD, Double Twist

892

A-A++ Spectrum A⁺⁺–E









- Height adjustable

Product details


220-240V ~50/60Hz | 1050mA
Total consumption: 54W
Material: Aluminium / Acrylic

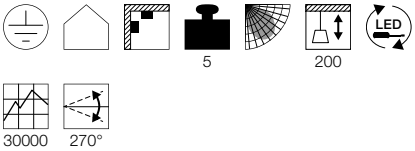


Dimensioned drawing



Variant	Item no.	GBP
4500lm | 3000K | CRI>80		
■ black	**1001295**	**431,10**
4500lm | 3000K | CRI>80		
□ white	**1001296**	**431,10**

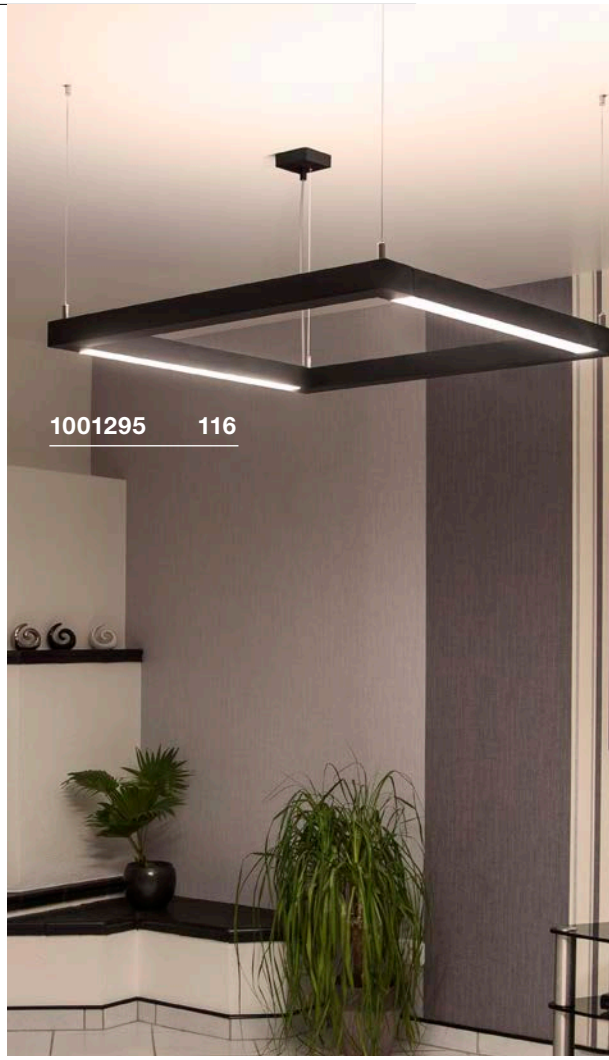

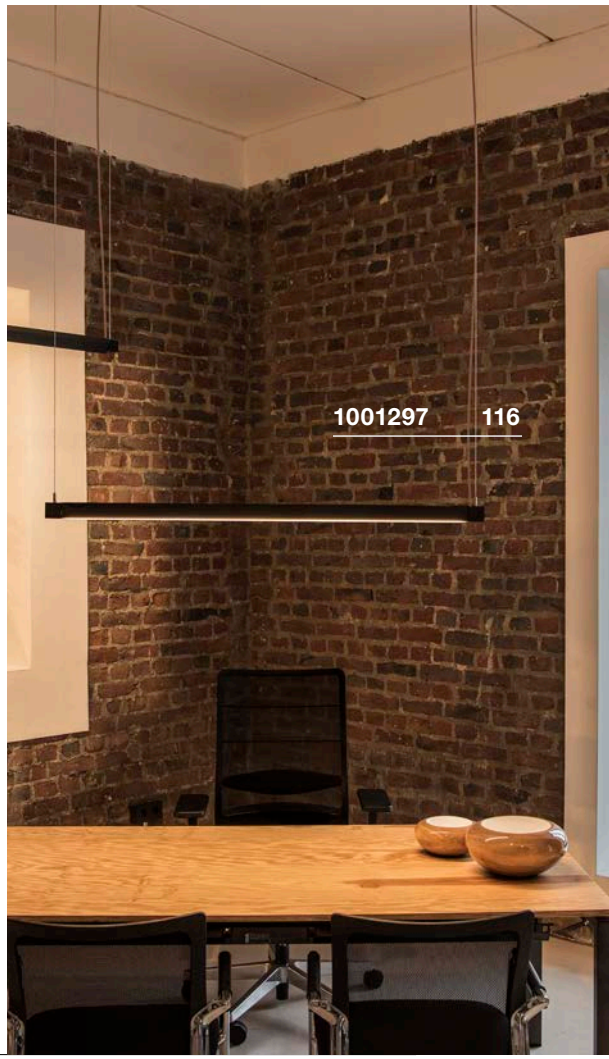



AIXLIGHT® 150
PD, R2 Office, TRIAC

883

E-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 700mA
Total consumption: 35W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L

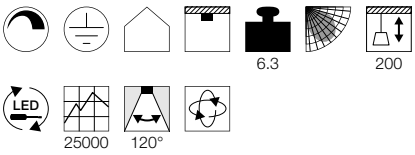

Dimensioned drawing



Recommended lamp

GU10 7.9W 40°
4000K 760lm EEI=A+
8kWh/1000h
Item no. 560734 | 20,70 GBP

LED GU10 13W 140°
4000K 1100lm EEI=A+
13kWh/1000h
Item no. 1001245 | 76,50 GBP



Lamp details

2x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 4100lm | 4000K | CRI>80 ■ black	159140	476,10
GU10 | QPAR111 4100lm | 4000K | CRI>80 □ white	159141	476,10
GU10 | QPAR111 4100lm | 4000K | CRI>80 ◪ grey / matt transparent	159144	476,10

AIXLIGHT®
PD, R2, double, QPAR111

883

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 17.5W 140°
2700K 750lm EEI=A
18kWh/1000h
Item no. 570532 | 90,00 GBP



LED GU10 13W 30°
4000K 1300lm EEI=A+
13kWh/1000h
Item no. 1001243 | 76,50 GBP



Lamp details
2x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
black	**159210**	**206,10**
GU10 | QPAR111		
white	**159211**	**206,10**
GU10 | QPAR111		
grey	**159214**	**206,10**

AIXLIGHT®
PD, R2, quad, QPAR111

883

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

GU10 6.5W 38°
2700K 390lm EEI=A+
7kWh/1000h
Item no. 551882 | 40,50 GBP



LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP



Lamp details
4x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
black	**159230**	**341,10**
GU10 | QPAR111		
white	**159231**	**341,10**
GU10 | QPAR111		
grey	**159234**	**341,10**


AIXLIGHT®
PD, R2, quad, QPAR111

883

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

GU10 7W 40°
3000K 560lm EEI=A+
8kWh/1000h
Item no. 1001572 | 20,70 GBP



LED GU10 9W 40°
2700-6500K 765lm EEI=A+
9kWh/1000h
Item no. 1001921 | 49,50 GBP



Lamp details
4x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
black	**159220**	**341,10**
GU10 | QPAR111		
white	**159221**	**341,10**
GU10 | QPAR111		
grey	**159224**	**341,10**





LYNAH
PD, quad

890

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Luminaire can be rotated in multiple directions. Swivels by 180°.

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 56W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

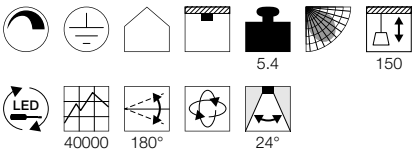

Dimensioned drawing




Variant	Item no.	GBP
3800lm | 3000K | CRI>80		
■ black	**1000412**	**467,10**
3800lm | 3000K | CRI>80		
□ white	**1000413**	**467,10**


WORKLIGHT
PD, DALI

898

A-A++ Spectrum A++–E

NEW VARIANT

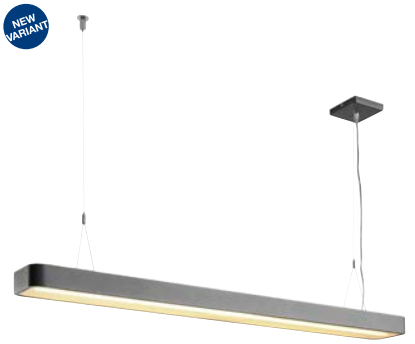







- Height adjustable
- Direct and indirect light

Product details


220-240V ~50/60Hz | 226mA
Total consumption: 49W
Material: Aluminium / Acrylic
Dimmable: Dali

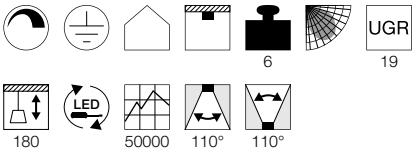


Dimensioned drawing



Variant	Item no.	GBP
Direct: 3600lm | 3000K | CRI>80 Indirect: 1800lm | 3000K | CRI>80 white	1002838	629,10
Direct: 3600lm | 3000K | CRI>80 Indirect: 1800lm | 3000K | CRI>80 anthracite	1002839	629,10

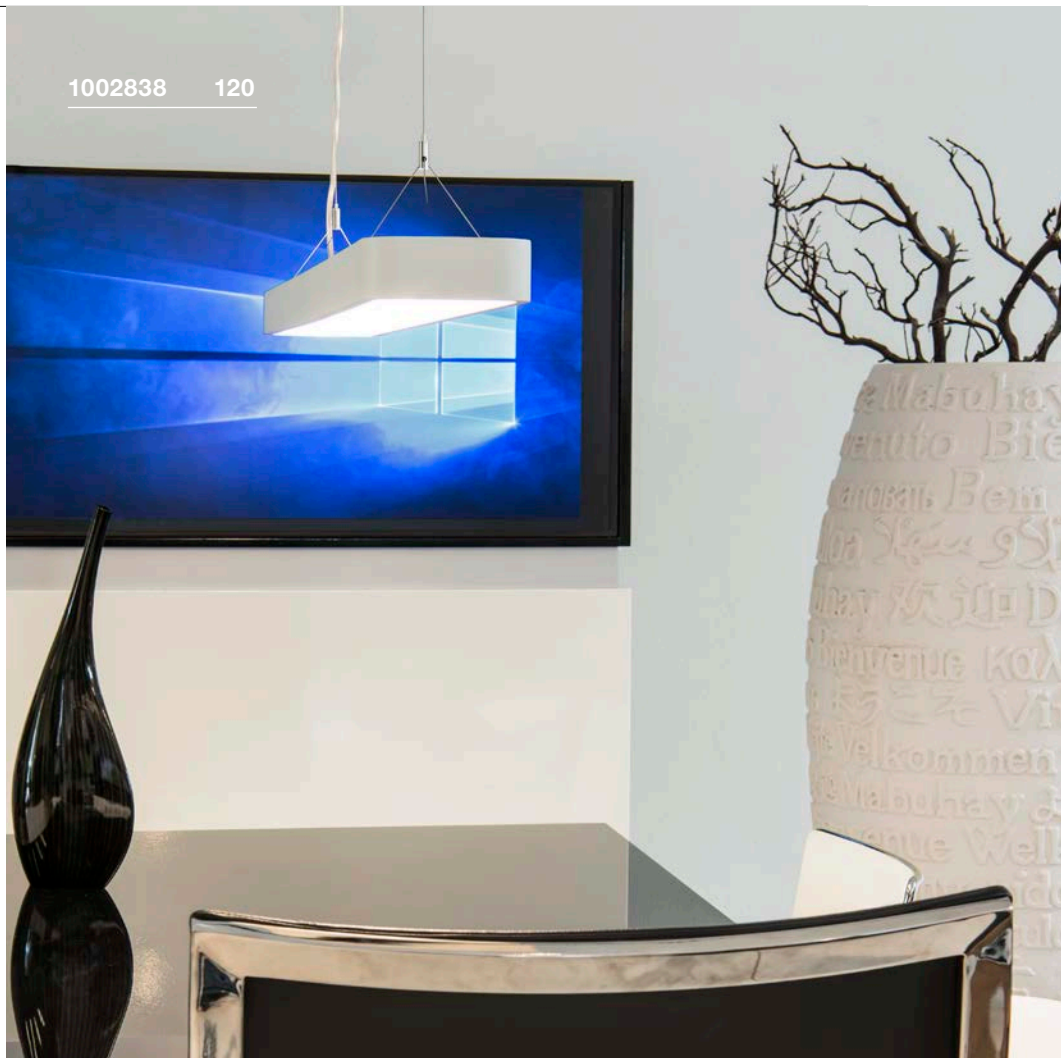

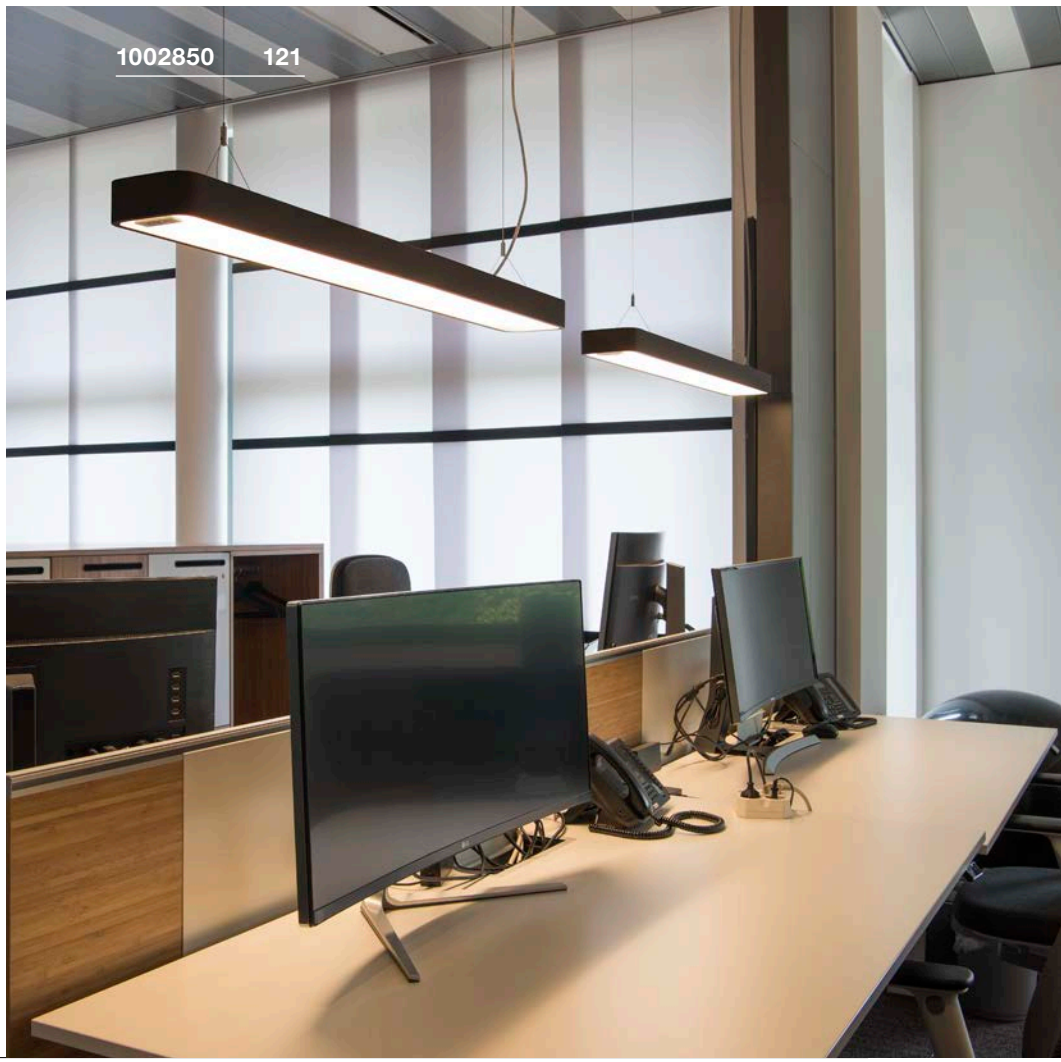


WORKLIGHT PLUS
PD, DALI

898

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW VARIANT

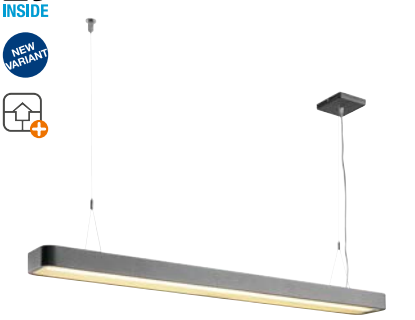





- Intelligent presence control and brightness sensor
- Direct and indirect light









Product details

220-240V ~50/60Hz | 226mA
Total consumption: 48W
Material: Aluminium / Acrylic
Dimmable: Dali

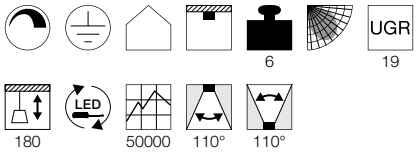

Dimensioned drawing




INTELLIGENT WORKPLACE LIGHT FOR THE MODERN OFFICE


Energy efficient and long-lasting

Our WORKLIGHT PLUS PD, DALI pendant for workstations (UGR ≤19) impresses with its clear design, state-of-the-art technology and powerful LEDs with a service life of 50,000 from Philips.
The energy saving potential is optimized due being equipped with intelligent light control. Thanks to the integrated presence control, the light switches on and off automatically depending on movement, and the lumen output is controlled by the daylight sensor. This ensures that there is a consistent light level at the workplace.
Another highlight is the capability of setting the background level (10%-70% lumen output), which also increases comfort. The combination of direct and indirect light output provides widespread and homogeneous illumination.

Luminaire grouping and individual settings for open plan offices are also possible with the programmable infrared remote control (up to 50 luminaires).
Simple retrofitting with the WORKLIGHT PLUS PD, DALI pendant after office renovation – not a problem. Thanks to the possibility of wireless control and programming (wireless DALI), the mobile workplace light can easily be integrated into the building without the need for expensive cabling.
The pendant is already equipped with pendant suspension and a ceiling plate. The WORKLIGHT family is a product family and is also available as a floor stand.

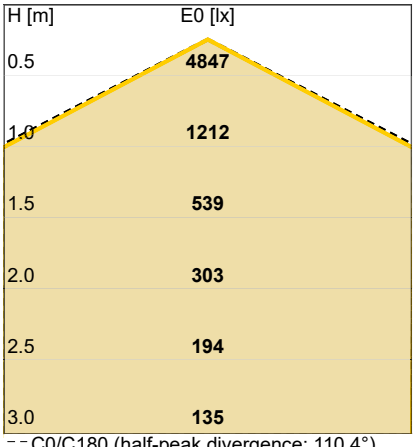


– – C0/C180 (half-peak divergence: 110.4°)
— C90/C270 (half-peak divergence: 109.6°)

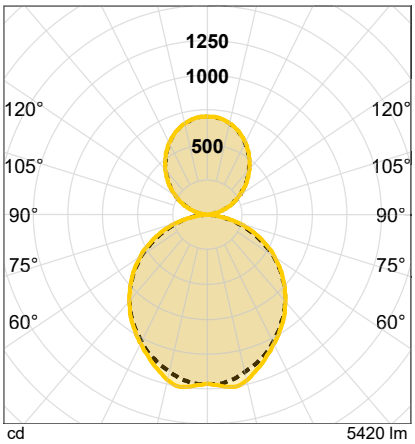

– – C0/C180
— C90/C270

Variant	Item no.	GBP
Direct: 3600lm | 3000K | CRI>80 Indirect: 1920lm | 3000K | CRI>80 white	1002849	899,10
Direct: 3600lm | 3000K | CRI>80 Indirect: 1920lm | 3000K | CRI>80 anthracite	1002850	899,10


1002196 123
1002193 123

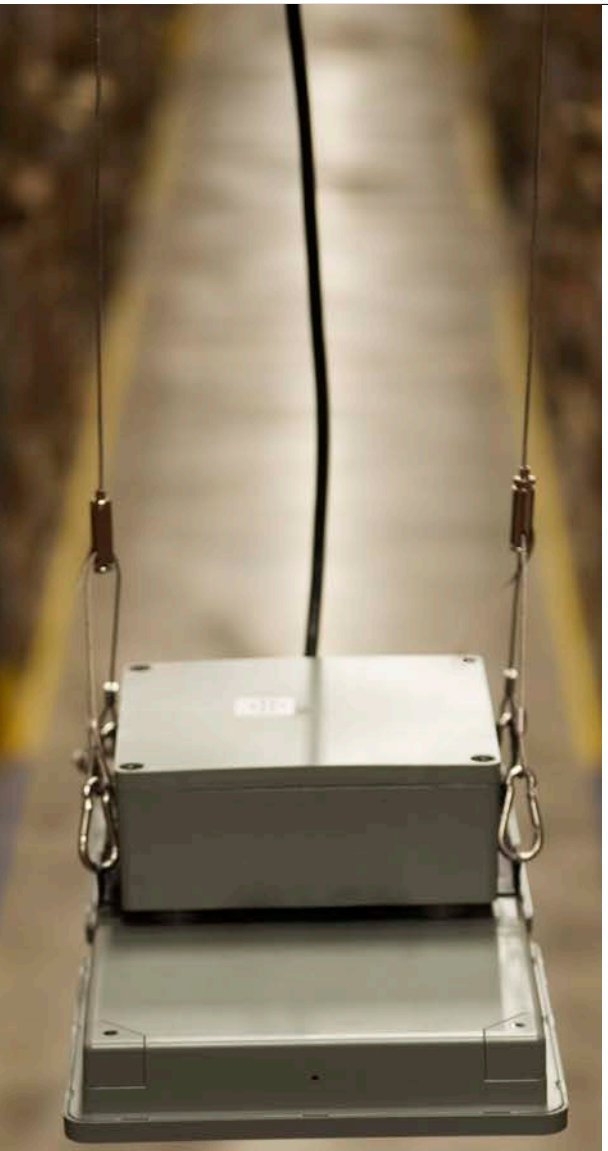

1002193 **123**

ALMINO
PD, double, UGR<19

883

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Suitable for industrial areas, warehouse and logistical areas
- Efficient basic lighting with limited direct glare, UGR<19
- Extremely hard-wearing housing

Product details

220-240V ~50/60Hz | 600mA
Total consumption: 95W
Material: Steel / Polycarbonate (PC)

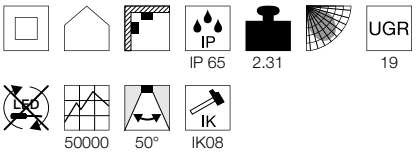

Dimensioned drawing



Note

Tilt range (when used with 1002197): 0-180°

Recommended accessories

Suspension set 3m
Item no. 1002196 |40,50 GBP



Installation bracket
Item no. 1002197 |14,90 GBP

Variant	Item no.	GBP
12000lm | 4000K | CRI>80 grey / white	**1002193**	**305,10**

ALMINO
PD, quad, UGR<19

883

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Suitable for industrial areas, warehouse and logistical areas
- Efficient basic lighting with limited direct glare, UGR<19
- Extremely hard-wearing housing

Product details

220-240V ~50/60Hz | 1200mA
Total consumption: 190W
Material: Steel / Polycarbonate (PC)

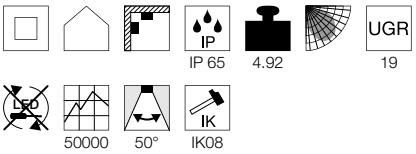

Dimensioned drawing



Recommended accessories

Suspension set 3m
Item no. 1002196 |40,50 GBP



Installation bracket
Item no. 1002197 |14,90 GBP

Variant	Item no.	GBP
24000lm | 4000K | CRI>80 grey / white	**1002194**	**503,10**

SUPROS 78 PD

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE











Product details

220-240V ~50/60Hz | 250mA
Total consumption: 12W
Material: Aluminium
Dimmable: Triac C, Triac L

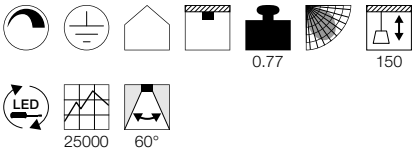

Dimensioned drawing




Recommended accessories

Lens, 20°
Item no. 116302 |3,00 GBP

Lens, 40°
Item no. 116304 |3,00 GBP

Variant	Item no.	GBP
700lm | 3000K | CRI>80 ■ black	**133120**	**135,00**
700lm | 3000K | CRI>80 □ white	**133121**	**135,00**

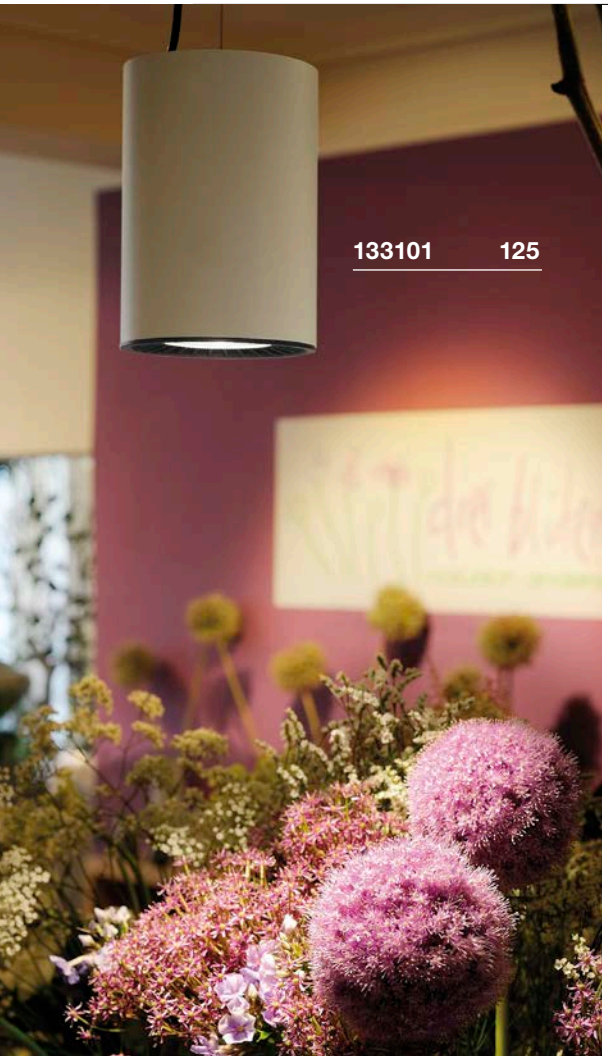



SUPROS PD

897

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 750mA
Total consumption: 31W
Material: Aluminium





Dimensioned drawing



Recommended accessories

Reflector 20°
Item no. 114102 | 9,50 GBP



Reflector 40°
Item no. 114104 | 9,50 GBP



Variant	Item no.	GBP
2600lm | 3000K | CRI>80		
■ black	**133100**	**224,10**
2600lm | 3000K | CRI>80		
□ white	**133101**	**224,10**
2850lm | 4000K | CRI>80		
■ black	**133110**	**224,10**
2850lm | 4000K | CRI>80		
□ white	**133111**	**224,10**

SUPROS PD

897

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 950mA
Total consumption: 36W
Material: Aluminium





Dimensioned drawing



Recommended accessories

Reflector 20°
Item no. 114102 | 9,50 GBP




Reflector 40°
Item no. 114104 | 9,50 GBP



Variant	Item no.	GBP
3100lm | 3000K | CRI>80		
■ black	**133140**	**229,50**
3100lm | 3000K | CRI>80		
□ white	**133141**	**229,50**
3300lm | 4000K | CRI>80		
■ black	**133150**	**229,50**
3300lm | 4000K | CRI>80		
□ white	**133151**	**229,50**


1000259 127

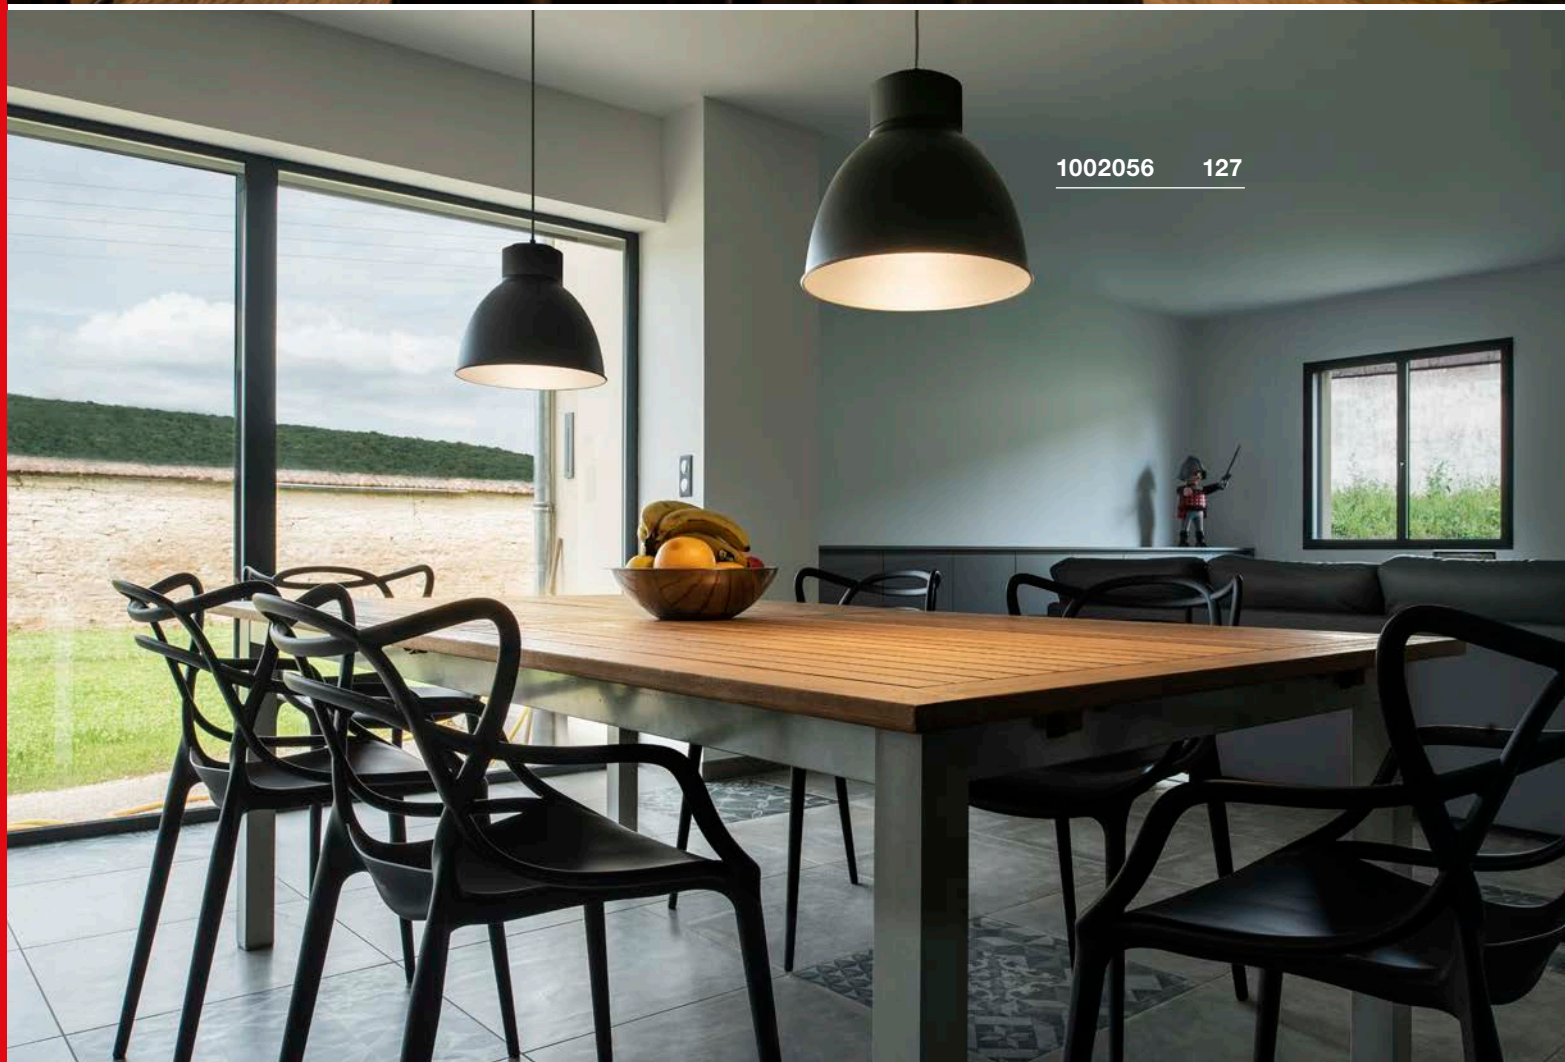
1002056 127

PARA DOME
PD, E27

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note

Open cable end

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP



LED E27 17W 45°
3000K 1430lm EEI=A+
17kWh/1000h
Item no. 560473 | 60,30 GBP



Lamp details

max. 150W

Variant	Item no.	GBP
E27		
black	**1002053**	**60,30**
E27		
white	**1002054**	**60,30**
E27		
grey	**1002055**	**60,30**

PARA DOME
E27







Product details

Material: Aluminium
Product dimensions: Ø: 30.8 cm H: 20.6 cm



Variant	Item no.	GBP
black	**1002056**	**76,50**
white	**1002057**	**76,50**
grey	**1002058**	**76,50**

PARA DOME
E27







Product details

Material: Polycarbonate (PC)
Product dimensions: Ø: 31.5 cm H: 20.5 cm



Variant	Item no.	GBP
transparent	**1002059**	**76,50**

PARA 380
PD, E27

E-A++ Spectrum A++–E










Product details

230V ~50Hz
Material: Aluminium

1.1 150

Dimensioned drawing





Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP


LED E27 18.5W 38°
4000K 1280lm EEI=A+
19kWh/1000h
Item no. 551944 | 43,20 GBP

Lamp details

160W HME-SB

Variant	Item no.	GBP
E27 | HME-SB grey	165350	126,00
E27 | HME-SB red	165356	126,00
E27 | HME-SB aluminium	165358	128,70
E27 | HME-SB black	165359	126,00



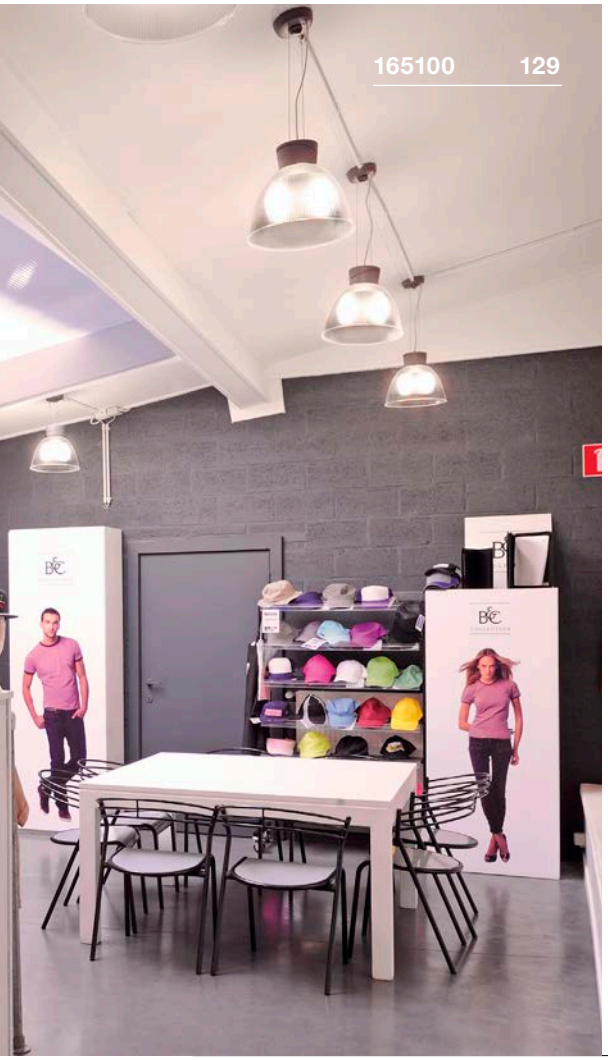


PARA DOME
PD, E27

E-A++ Spectrum A++–E









• Wide-open lamp shade

Product details
230V ~50Hz
Material: Aluminium / Polycarbonate (PC)



Dimensioned drawing



Recommended accessories
Reflector cover
Item no. 165160 | 47,70 GBP



Recommended lamp
LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP



LED E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 | 25,20 GBP

Lamp details
max. 150W

Variant	Item no.	GBP
E27		
anthracite	**165100**	**144,00**

PARA MULTI
PD, DLMI

A-A++ Spectrum A++–E


LED INSIDE








Product details
220-240V ~50/60Hz
Total consumption: 18W
Material: Steel / Acrylic

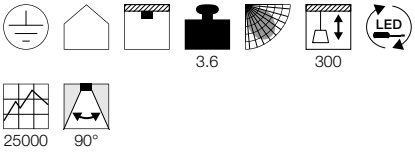

Dimensioned drawing



Variant	Item no.	GBP
2040lm | 4000K | CRI>80		
grey / matt transparent	**165221**	**314,10**
1940lm | 3000K | CRI>80		
grey / matt transparent	**165222**	**314,10**

PARA FLAC
PD/CL

A-A++ Spectrum A++–E

LED INSIDE









• High light output: >100lm/W

Product details

220-240V ~50/60Hz | 2400mA
Material: Aluminium / Polycarbonate (PC)

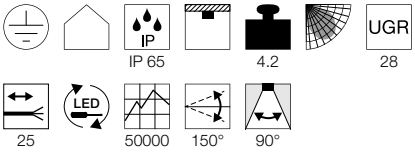

Dimensioned drawing



Note

Product supplied without chain and can be suspended using normal commercial chains.
Open cable end.

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



◪ Reflector
Item no. 1000918 | 38,70 GBP



□ Refractor
Item no. 1001691 | 49,50 GBP




□ Refractor cover
Item no. 1001692 | 24,80 GBP



Variant	Item no.	GBP
12800lm | 4000K | CRI>80 | 104W		
■ black	**1000827**	**332,10**
19200lm | 4000K | CRI>80 | 150W		
■ black	**1000828**	**431,10**



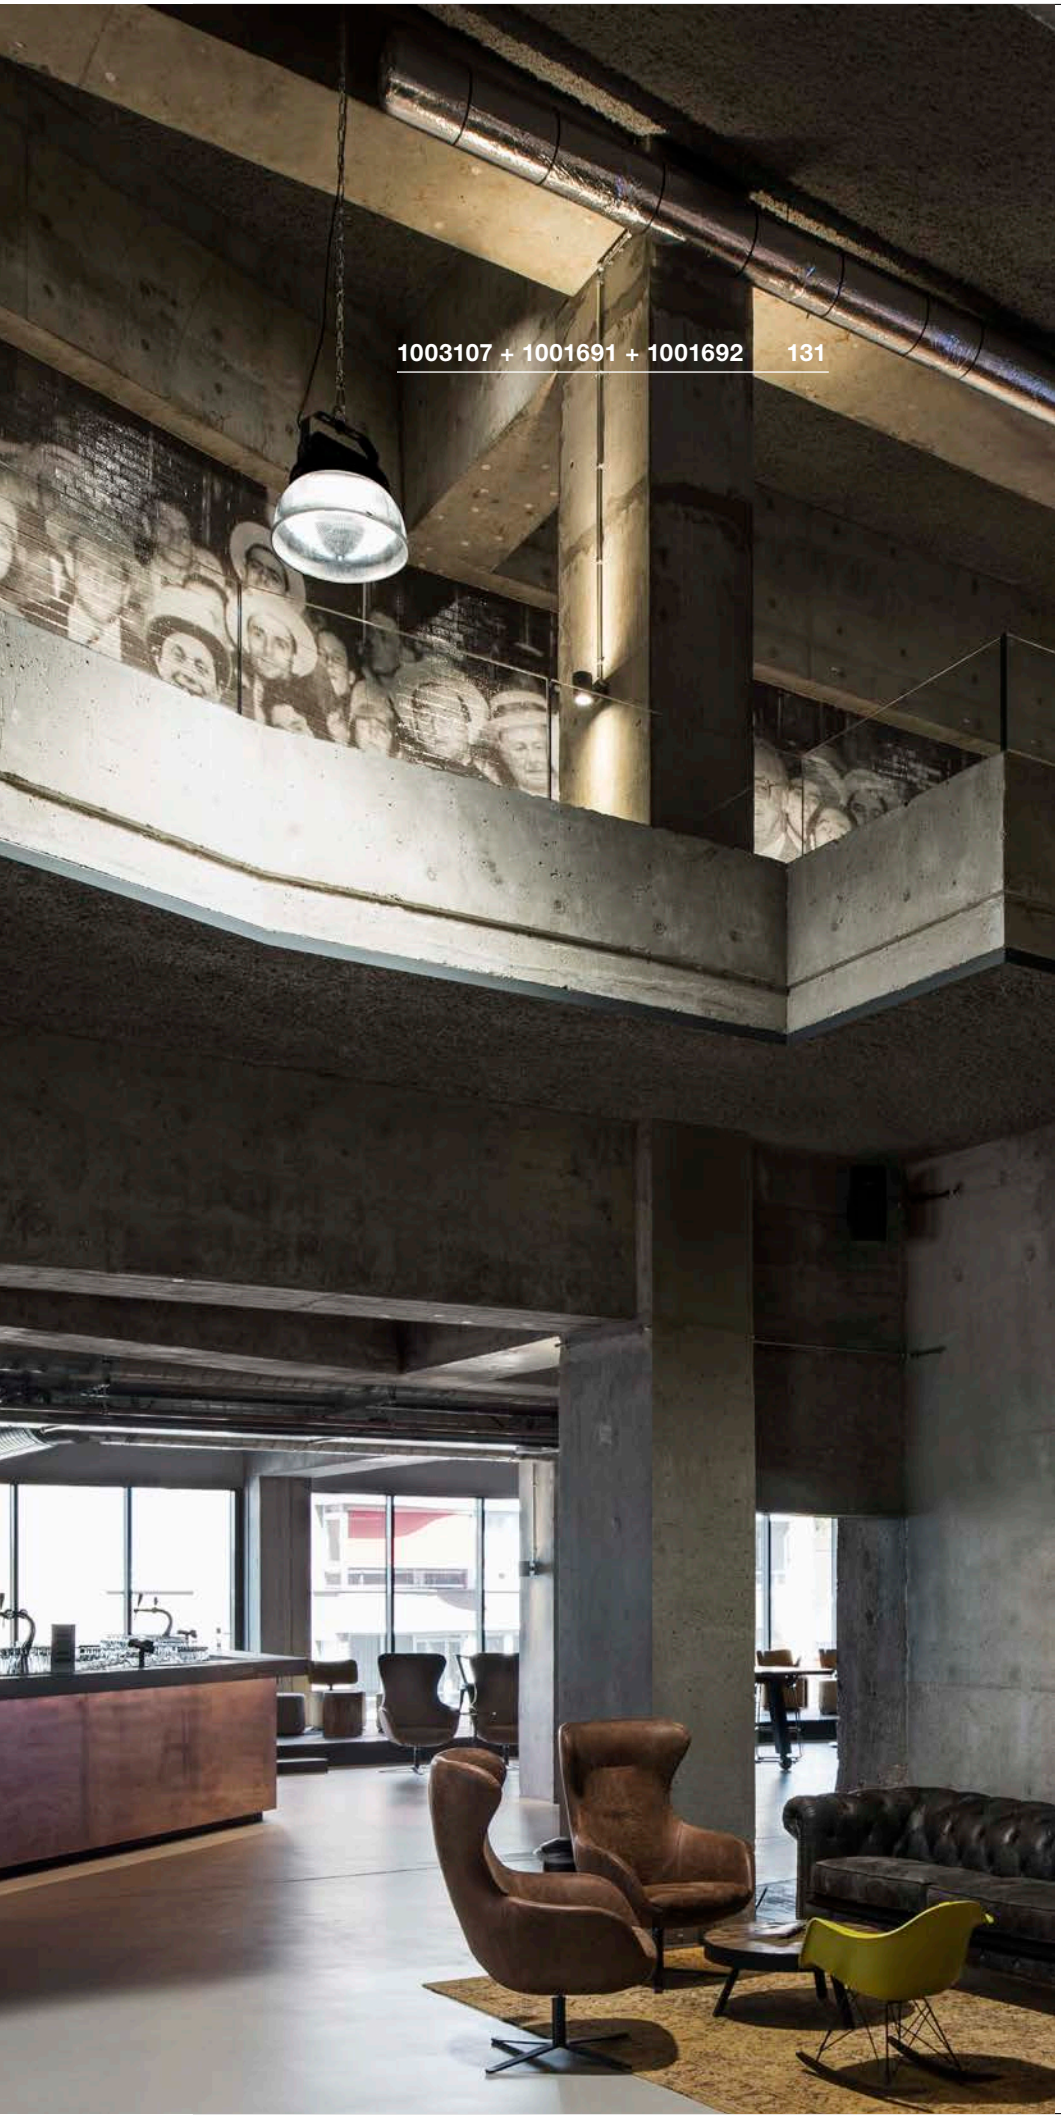

PARA FLAC
PD/CL, DALI

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









Product details

220-240V ~50/60Hz | 1600mA
Total consumption: 104W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali

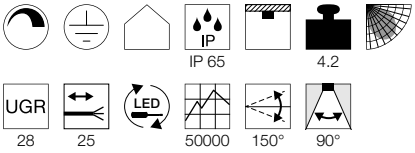

Dimensioned drawing



Note

Product supplied without chain and can be suspended using normal commercial chains. Open cable end.

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



◪ Reflector
Item no. 1000918 | 38,70 GBP



□ Refractor
Item no. 1001691 | 49,50 GBP



□ Refractor cover
Item no. 1001692 | 24,80 GBP



Variant	Item no.	GBP
12800lm | 4000K | CRI>80		
■ black	**1003107**	**359,10**


SURPRISINGLY VERSATILE.

WALL LIGHTS PRODUCE INDIVIDUAL SPOTS OF LIGHT.

An eye-catcher for the wall – a real highlight for the room: Wall lights are an ideal way of setting light spots in a space-saving way. With the wide range of designs and colours, there is something for every taste.




1002928 157

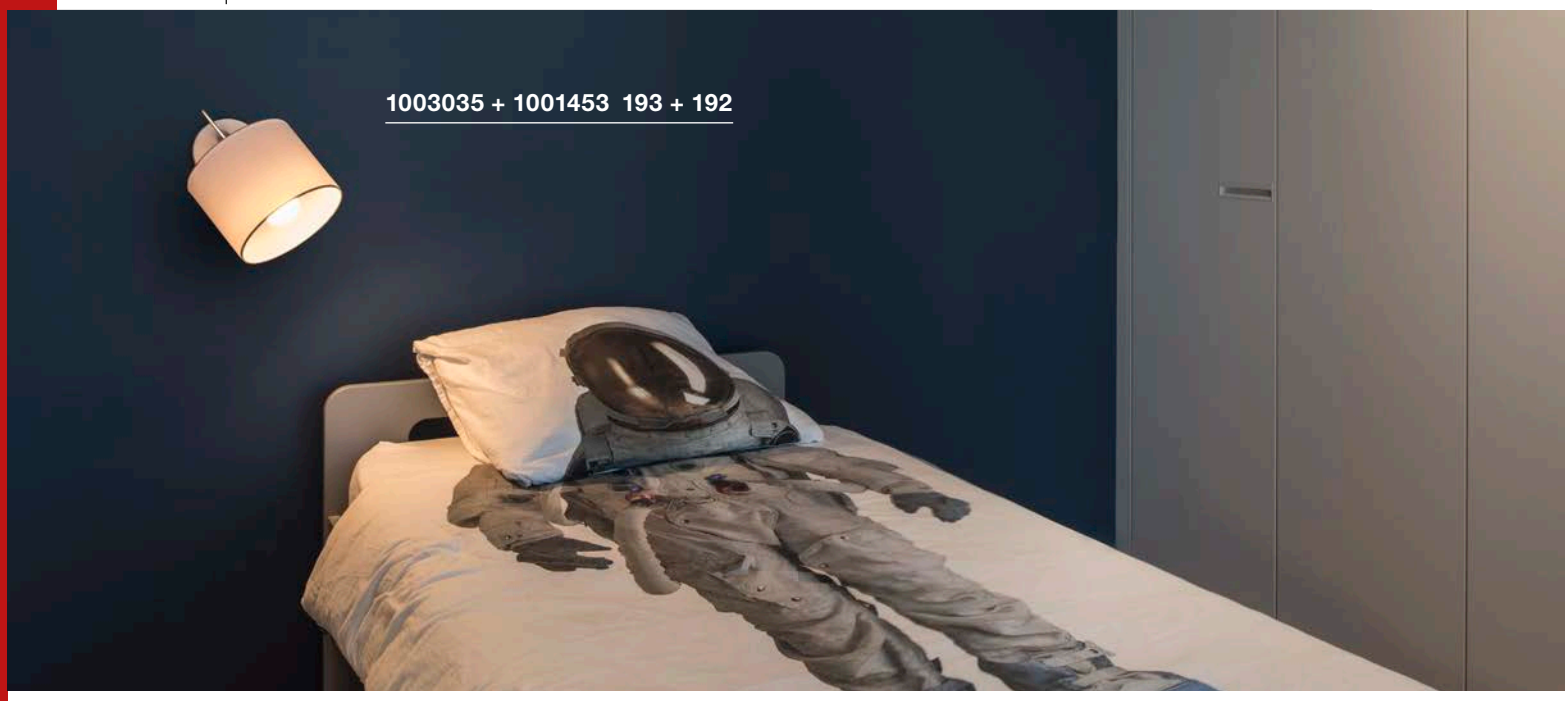

WALL LIGHTS


137

137

139

139

140

140

142

143

144

145

145

145

146

147

148

148

149

149

150

151

151

152

153

153

153

154


155

155

156

156

157

157

158

158

159

159

161

162

162

163

163

164

164

164

166

167

167

167

168

168

169

169

170

171

171

171



172 172 173 173 174 174 175 175
176 176 178 178 179 180 180 180
183 183 183 184 184 185 186 186
188 189 190 191 192 192 193 194
194 194 195 196 197 198 199 199
199 200 200 202 202 202 204 204
205 206 206 208 208 210 210 211
211 212 212 213 213 214 215 215
216 216 219 220 220 221 223 223
223 224 224 225 225 227 227 228
228 229

Other luminaires and variants can be found online at www.slv.com



148091 137



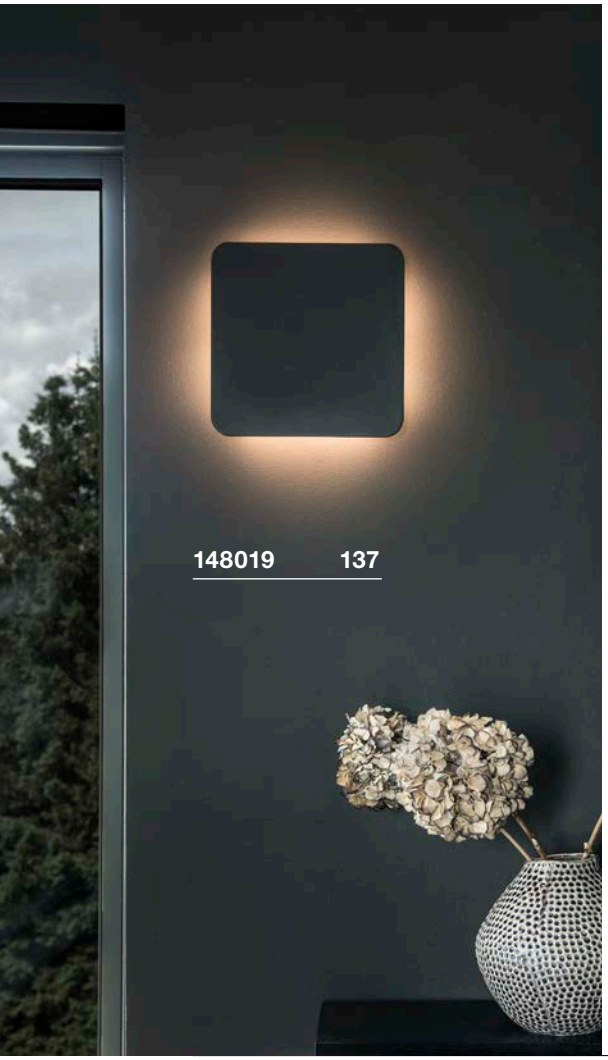

PLASTRA
WL

893

A-A++ Spectrum A++–E

LED INSIDE






- Can be individually designed with colours, stickers and more

Product details

100-240V ~50/60Hz | 12V DC
Total consumption: 7.4W
Material: Plaster / Steel



Dimensioned drawing



Variant	Item no.	GBP
400lm | 3000K | CRI>80 white	**148091**	**126,00**


PLASTRA
WL, Square

893

A-A++ Spectrum A++–E

LED INSIDE








- Can be individually designed with colours, stickers and more

Product details


100-240V ~50/60Hz | 12V DC
Total consumption: 11W
Material: Plaster / Steel



Dimensioned drawing




Variant	Item no.	GBP
400lm | 3000K | CRI>80 white	**148019**	**162,00**

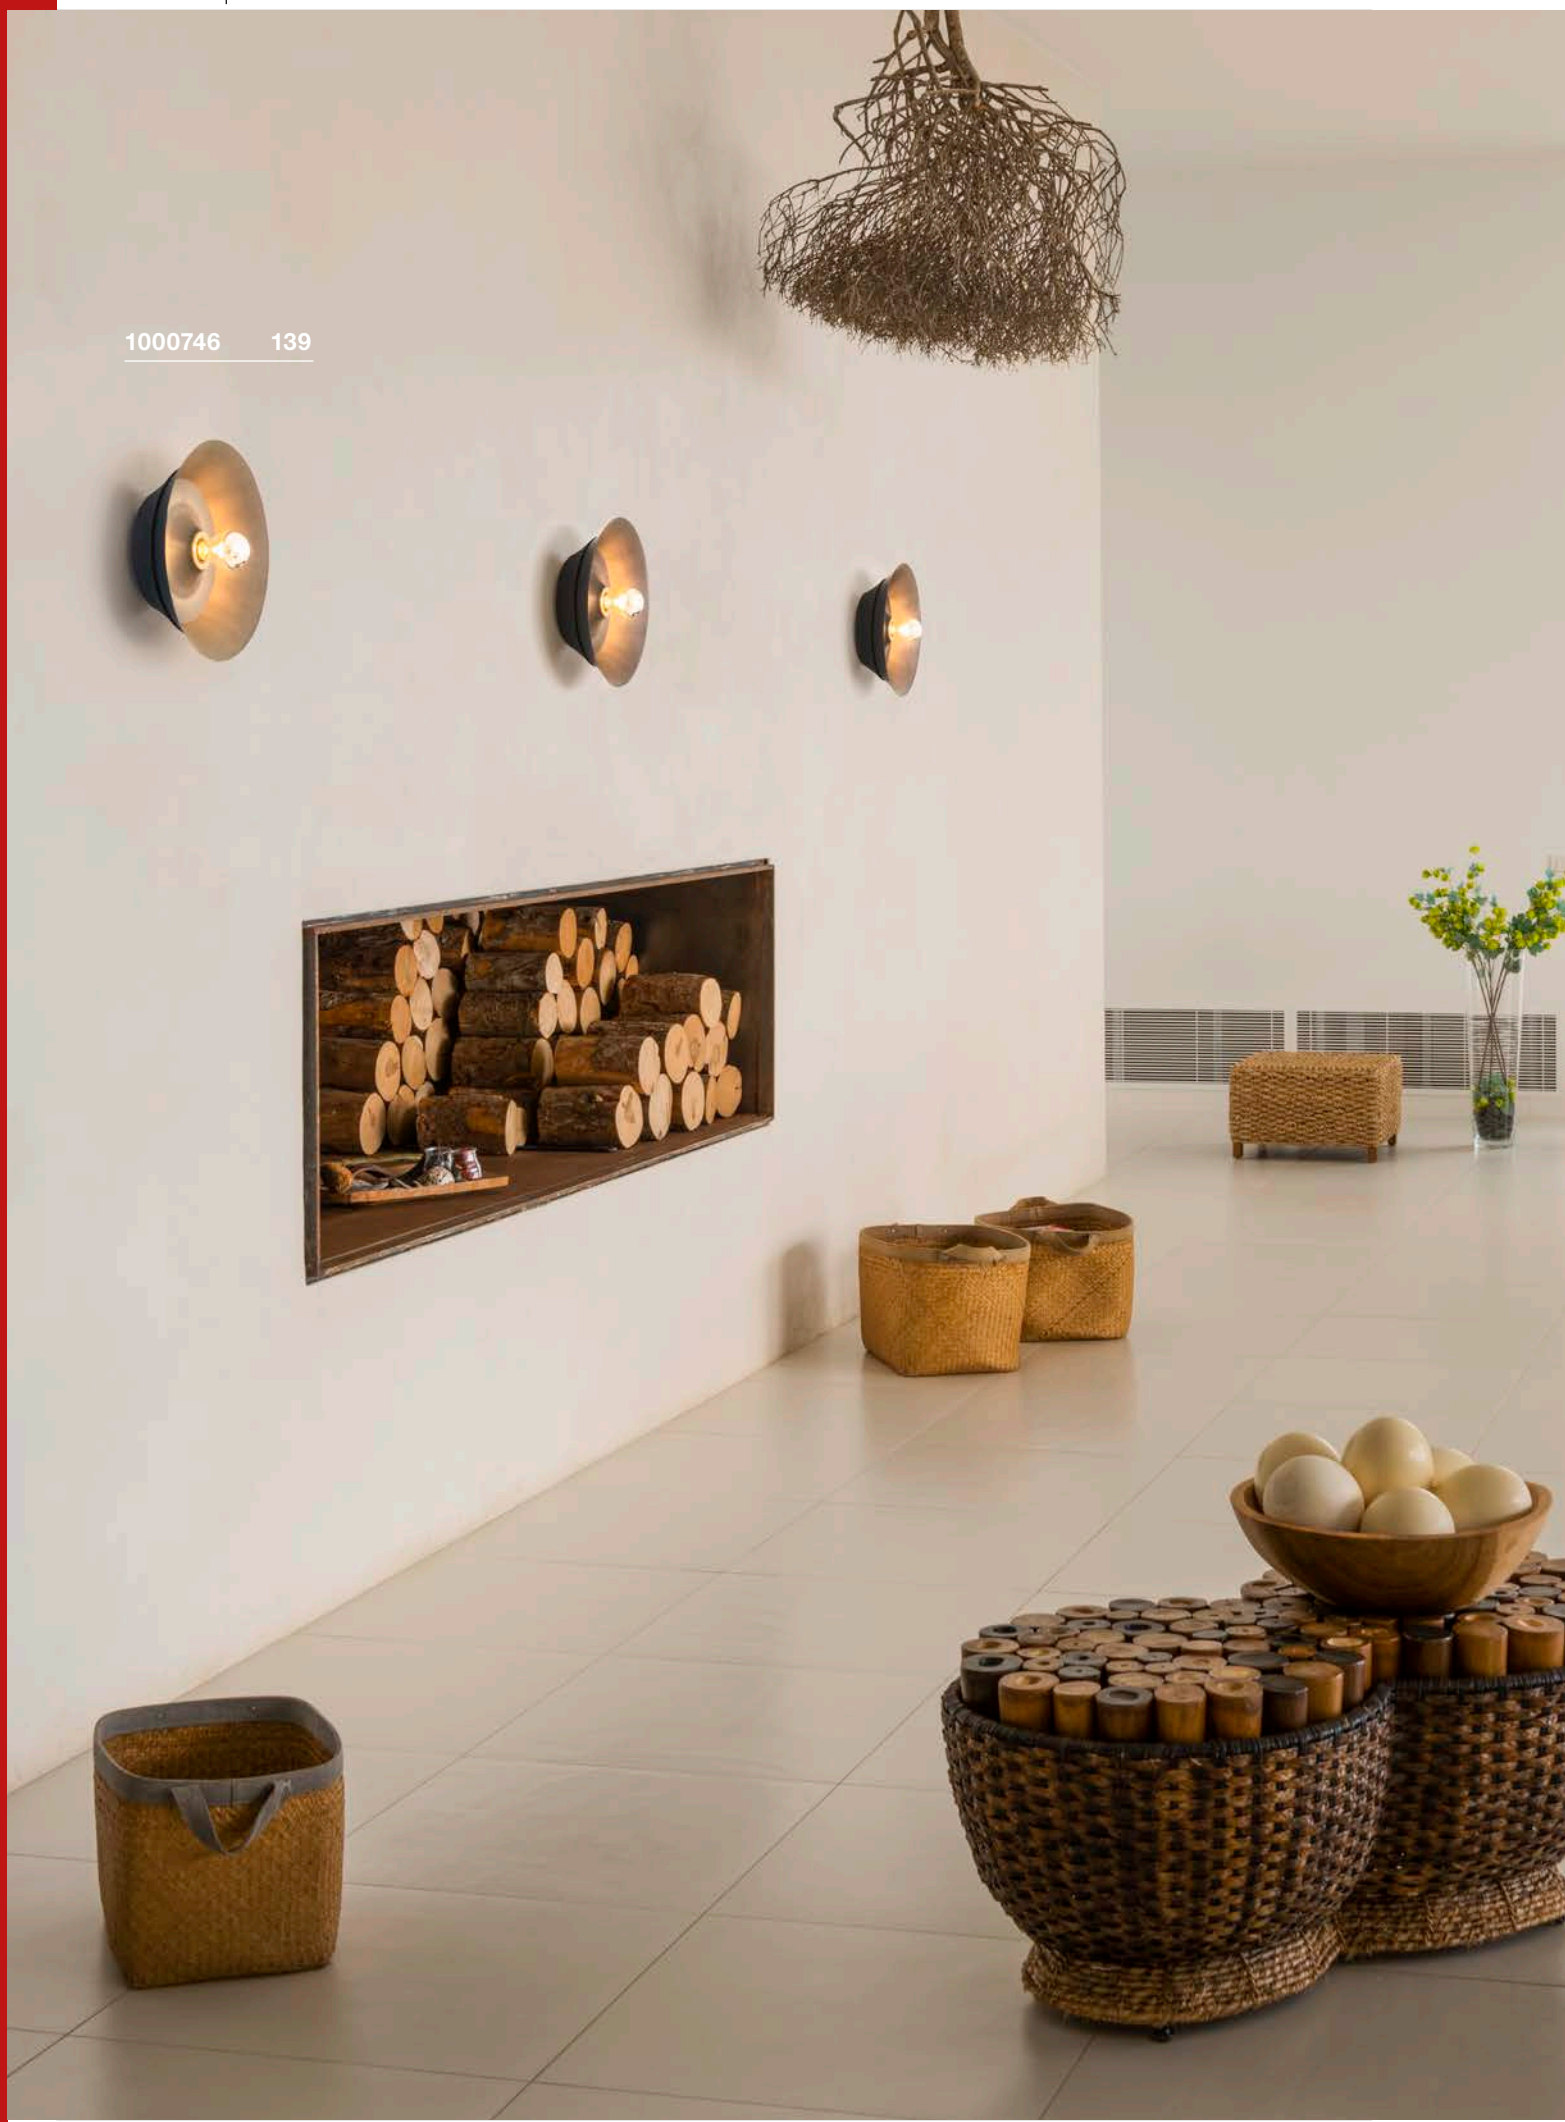

1000746 139



1000745 139

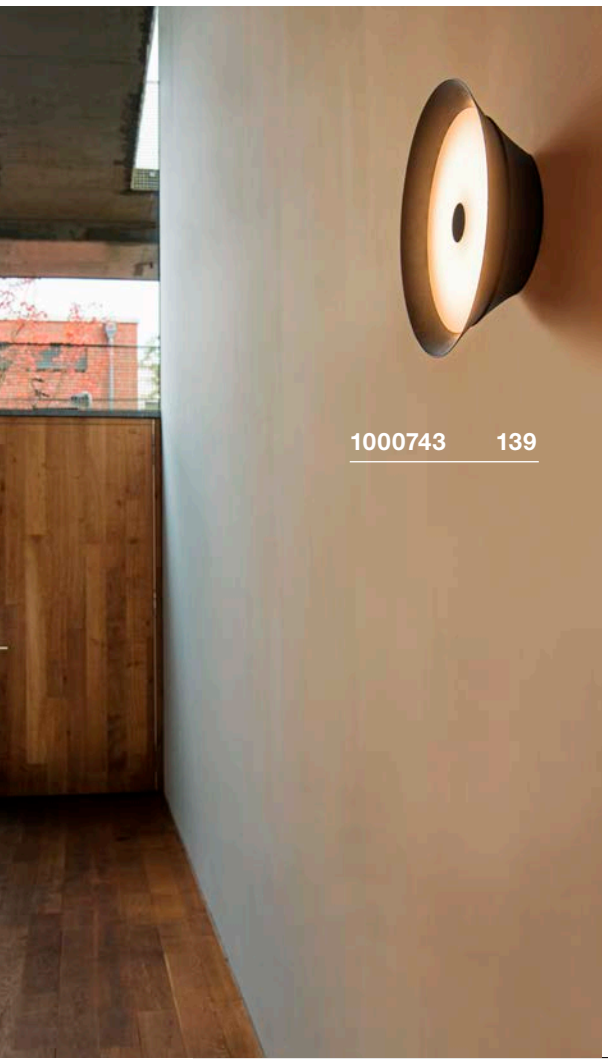

1000743 139

BATO 35
CW, TRIAC


884

A-A++ Spectrum A++–E

LED INSIDE










Product details

220-240V ~50/60Hz | 700mA
Total consumption: 15W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C





Dimensioned drawing




Variant	Item no.	GBP
850lm | 2700K | CRI>80		
■ black	1000743	180,00
1050lm | 2500K | CRI>80		
■ matt brass	1000745	188,10


BATO 35
CW, E27

884

E-A++ Spectrum A++–E









Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP



LED E27 7W 180°
2700K 630lm EEI=A+
8kWh/1000h
Item no. 1001357 | 29,70 GBP



Lamp details

max. 60W

Variant	Item no.	GBP
E27		
■ black	1000746	135,00
E27		
■ brass	1000748	144,00


ONE 40
WL, DALI

892

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW








- Switchable light colour

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 14W
Material: Aluminium / Steel
Dimmable: Dali
Product dimensions: Ø: 40 cm D: 7.5 cm



30000

Variant	Item no.	GBP
720/770lm | 3000/4000K | CRI>80		
■ matt black / black	1002915	278,10
720/770lm | 3000/4000K | CRI>80		
□ matt white / white	1002917	278,10

ONE 60
WL, DALI

892

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW








- Switchable light colour

Product details

220-240V ~50/60H | 600mA
Total consumption: 25W
Material: Aluminium / Steel
Dimmable: Dali
Product dimensions: Ø: 60 cm D: 8 cm




30000

Variant	Item no.	GBP
1400/1500lm | 3000/4000K | CRI>80		
■ matt black / black	1002918	323,10
1400/1500lm | 3000/4000K | CRI>80		
□ matt white / white	1002919	323,10







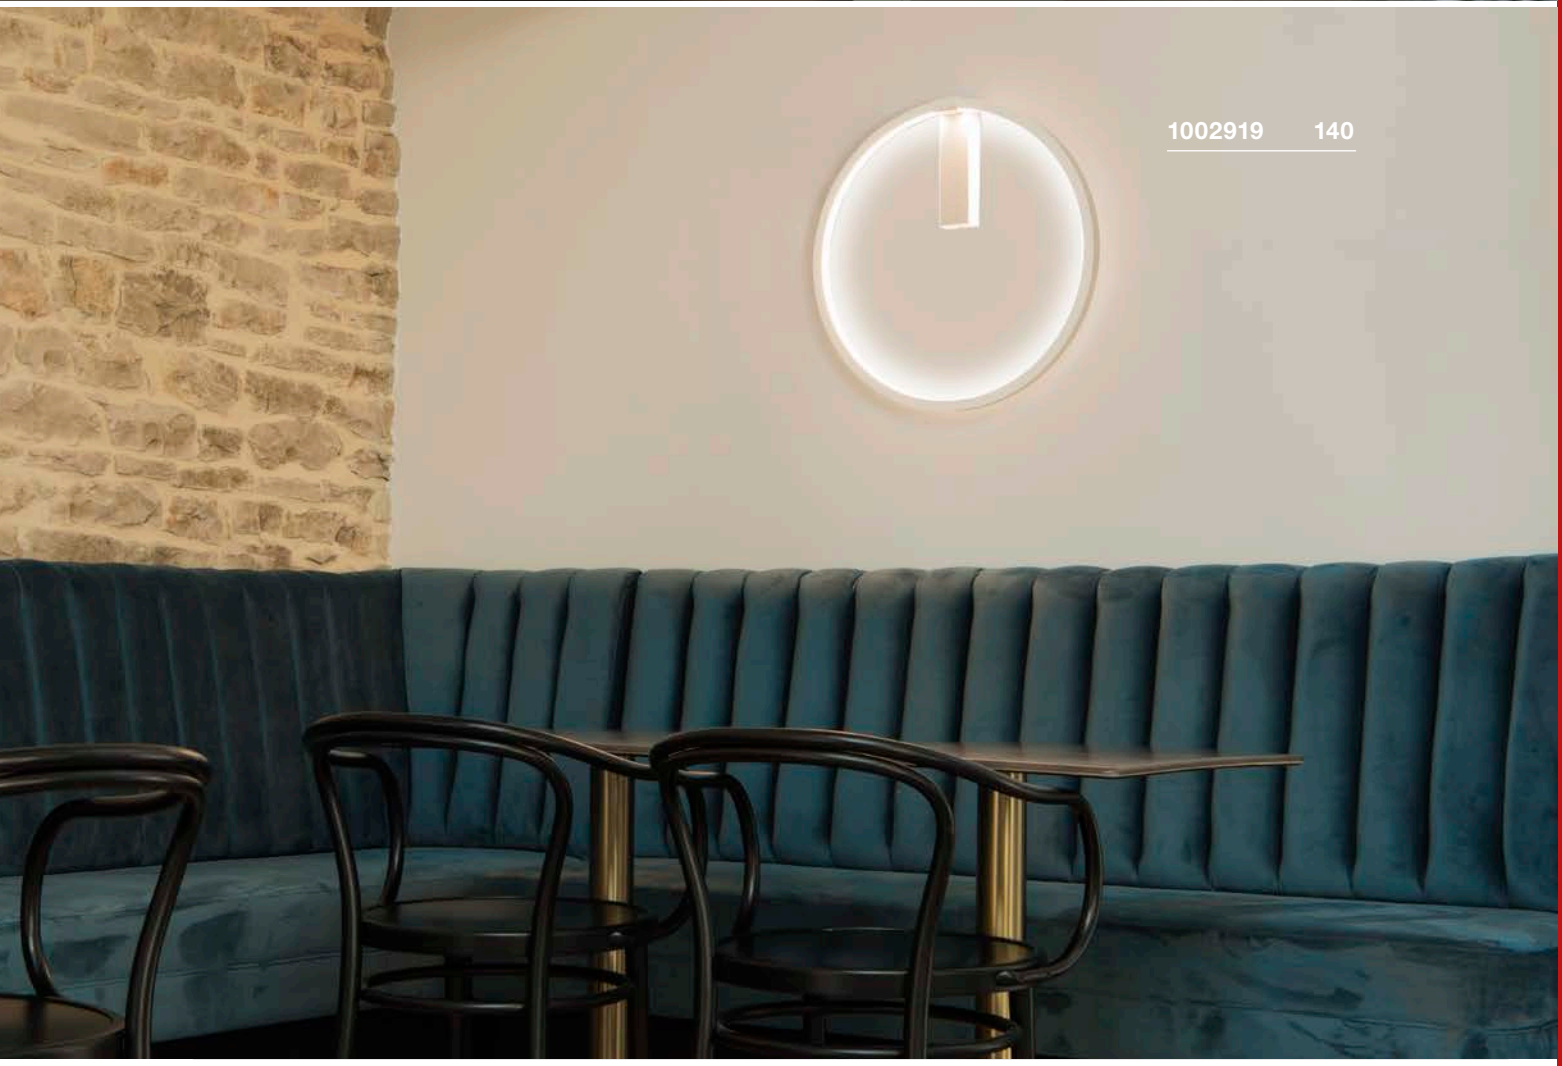

1002919 **140**

BRENDA
WL

885


A-A++ Spectrum A⁺⁺–E

LED INSIDE

reddot award 2018 winner









- Adjustable spot
- Light sources switchable together or separately
- Luminaire can also be switched externally


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 14W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L





Dimensioned drawing





Variant	Item no.	GBP
Indirect: 880lm | 3000K | CRI>80 Spot: 80lm | 3000K | CRI>80		
white / matt grey	149431	220,50



155752 143



155752 143

LISENNE
WL, E27

890

E-A++ Spectrum A⁺⁺–E









- Basalt and smoked glass

Product details

220-240V ~50/60Hz
Material: Basalt / Glass



Dimensioned drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP

Lamp details

max. 23W
Ø: 5.9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
grey / brown	**155752**	**188,10**

ANDREAS
WL, QT-DE12


D-A+ Spectrum A++–E

NEW







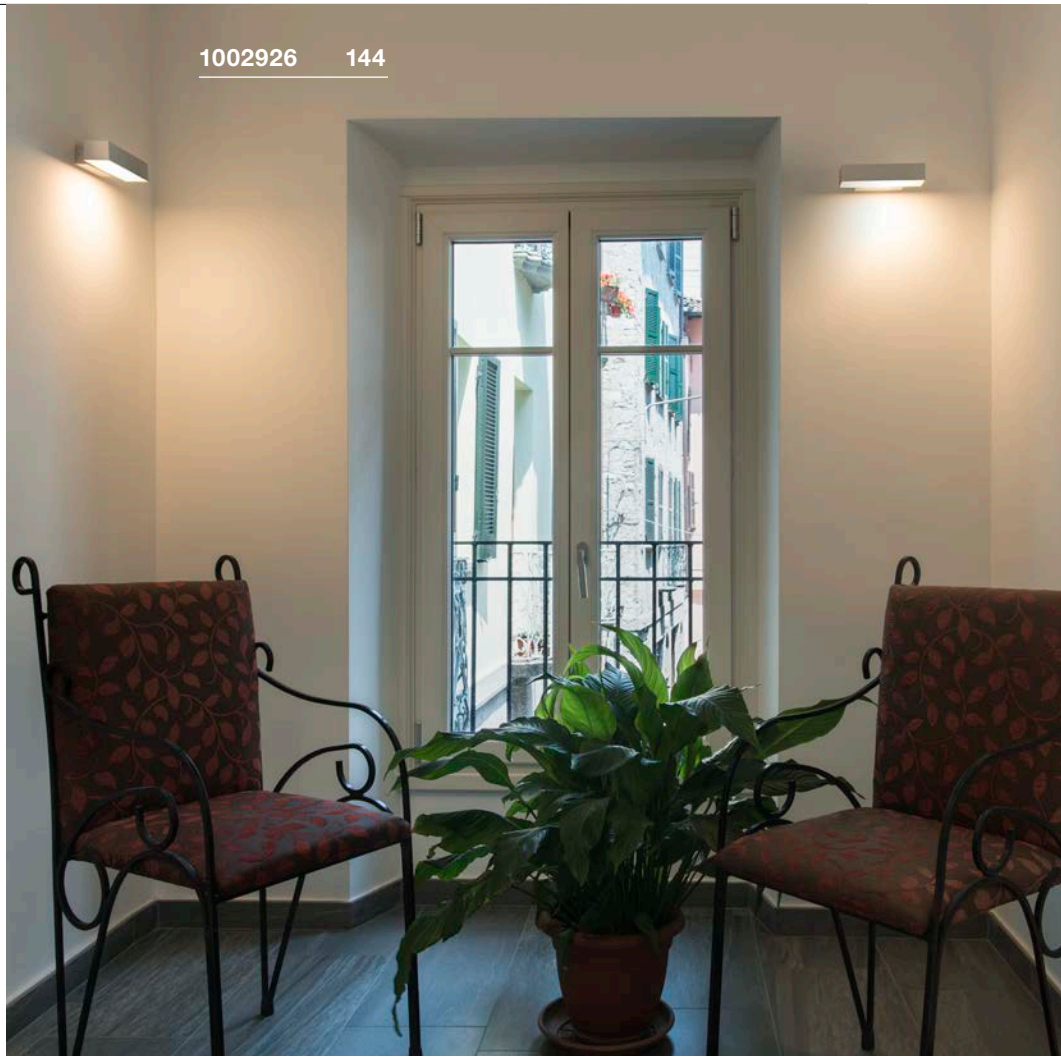



Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Maßzeichnung



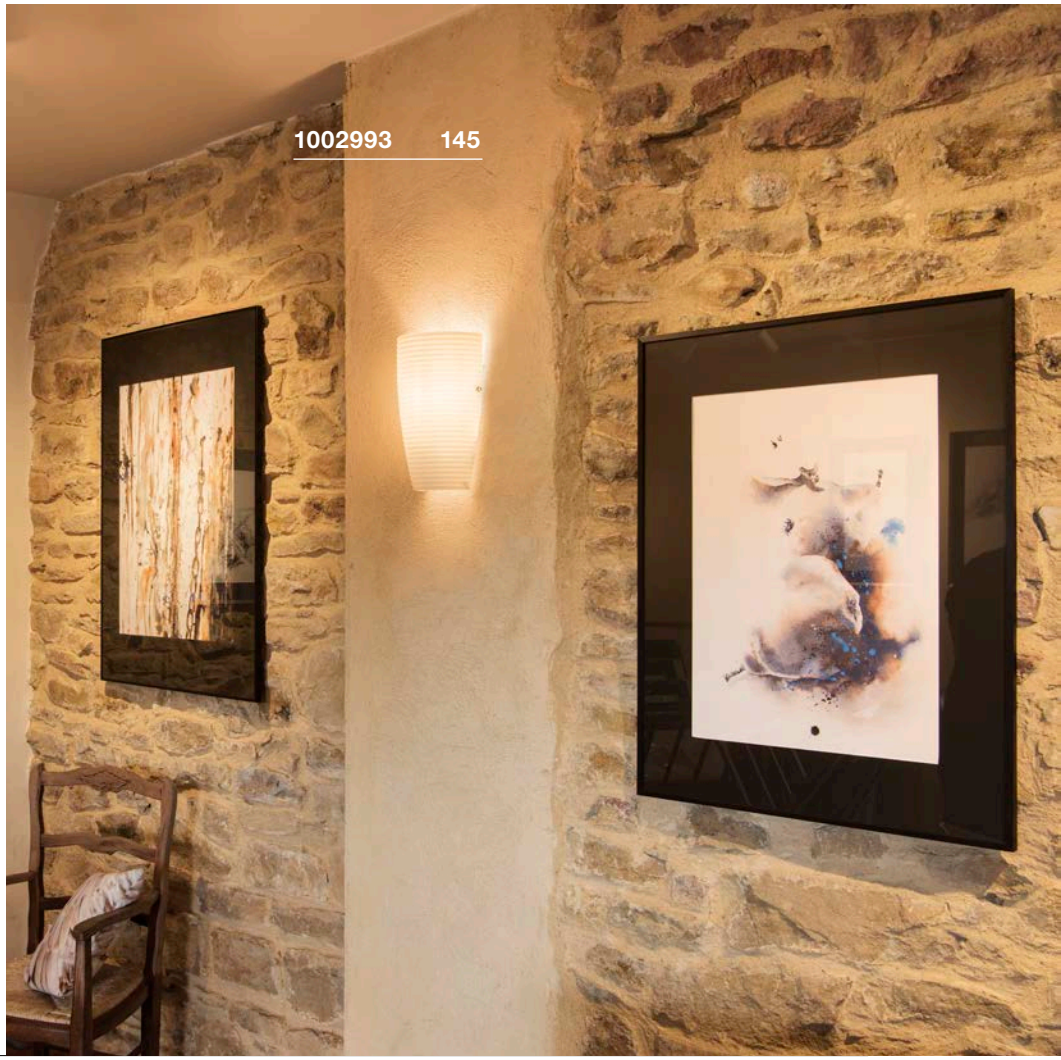

Recommended lamp

R7s 118mm 10.5W 330°
3000K 1050lm EEI=A+
11kWh/1000h
Item no. 560352 | 22,50 GBP


LED R7s 118mm 14W
3000K 2000lm EEI=A++
14kWh/1000h
Item no. 1002135 | 60,30 GBP

Lamp details

max. 80W

Variant	Item no.	GBP
R7s 118mm matt white / white	1002925	85,50
R7s 118mm matt grey / grey	1002926	85,50
R7s 118mm matt black / black	1002927	85,50


DENA 30
WL, E14





Product details
230V ~50Hz
Material: Aluminium / Glass

0.73

Dimensioned drawing


Recommended lamp
E14 4W
2700K 250lm EEI=A+
4kWh/1000h
Item no. 560222 |12,60 GBP

Lamp details
2x max. 40W C35
Ø: 5 cm max. L: 9.6 cm max.


Variant	Item no.	GBP
E14 | C35		
matt aluminium	**147529**	**76,50**

PURISA
WL, E27

NEW








• High-quality, frosted glass

Product details
220-240V ~50/60Hz
Material: Steel / Glass

0.98

Dimensioned drawing


Recommended lamp
LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 |15,30 GBP

LED E27 9.5W 240°
2200-6700K 806lm EEI=A+
10kWh/1000h
Item no. 1001917 |49,50 GBP

Lamp details
max. 40W
Ø: 8 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
shiny white / opaque	**1002993**	**85,50**


BASKET
WL, E27





Product details
230V ~50Hz
Material: Aluminium / Glass

1.14

Dimensioned drawing


Recommended lamp
LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 |15,30 GBP

LED E27 9.5W 240°
2200-6700K 806lm EEI=A+
10kWh/1000h
Item no. 1001917 |49,50 GBP

Lamp details
max. 60W
Ø: 5.2 cm max. L: 15.2 cm max.

Variant	Item no.	GBP
E27		
white	**151591**	**67,50**

FITU
WL, E27


887

E-A++ Spectrum A⁺⁺–E








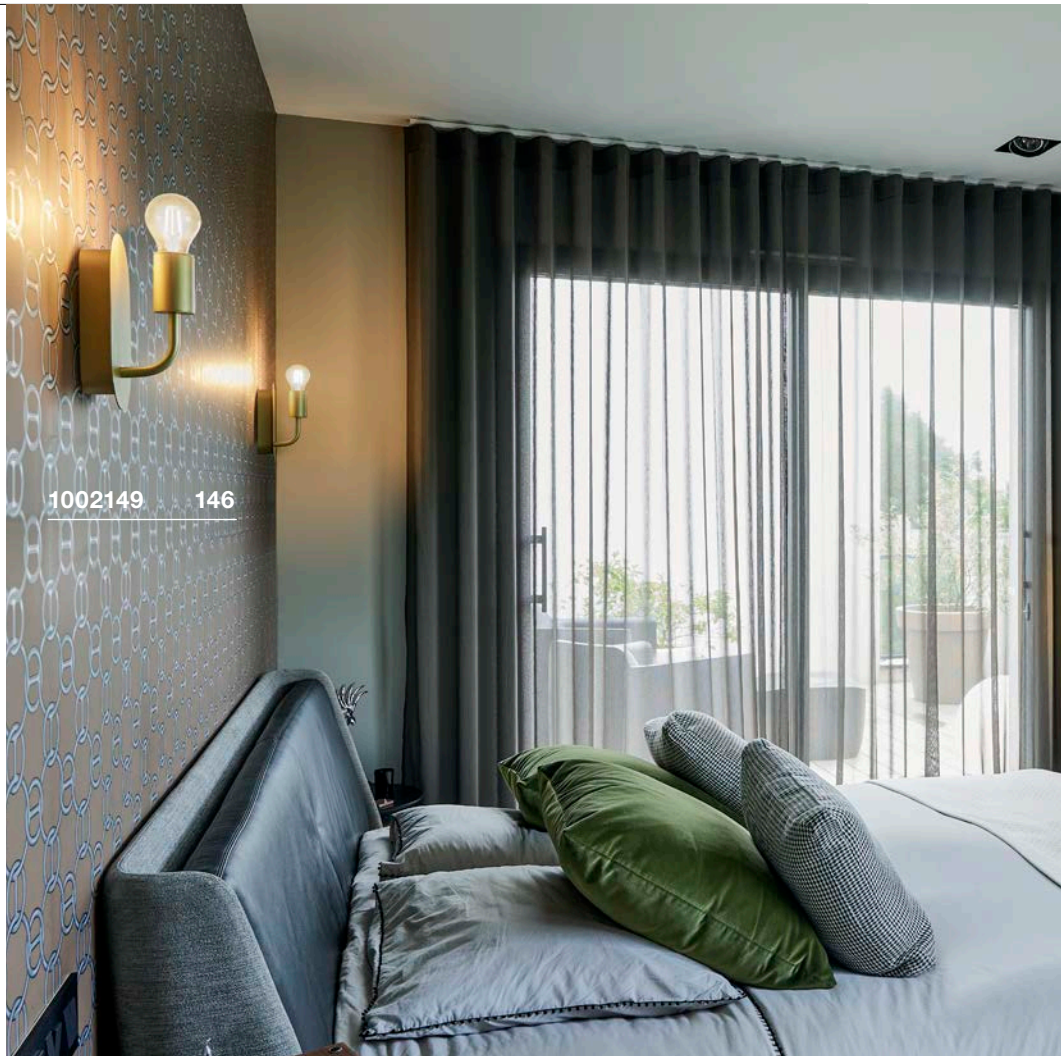



Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



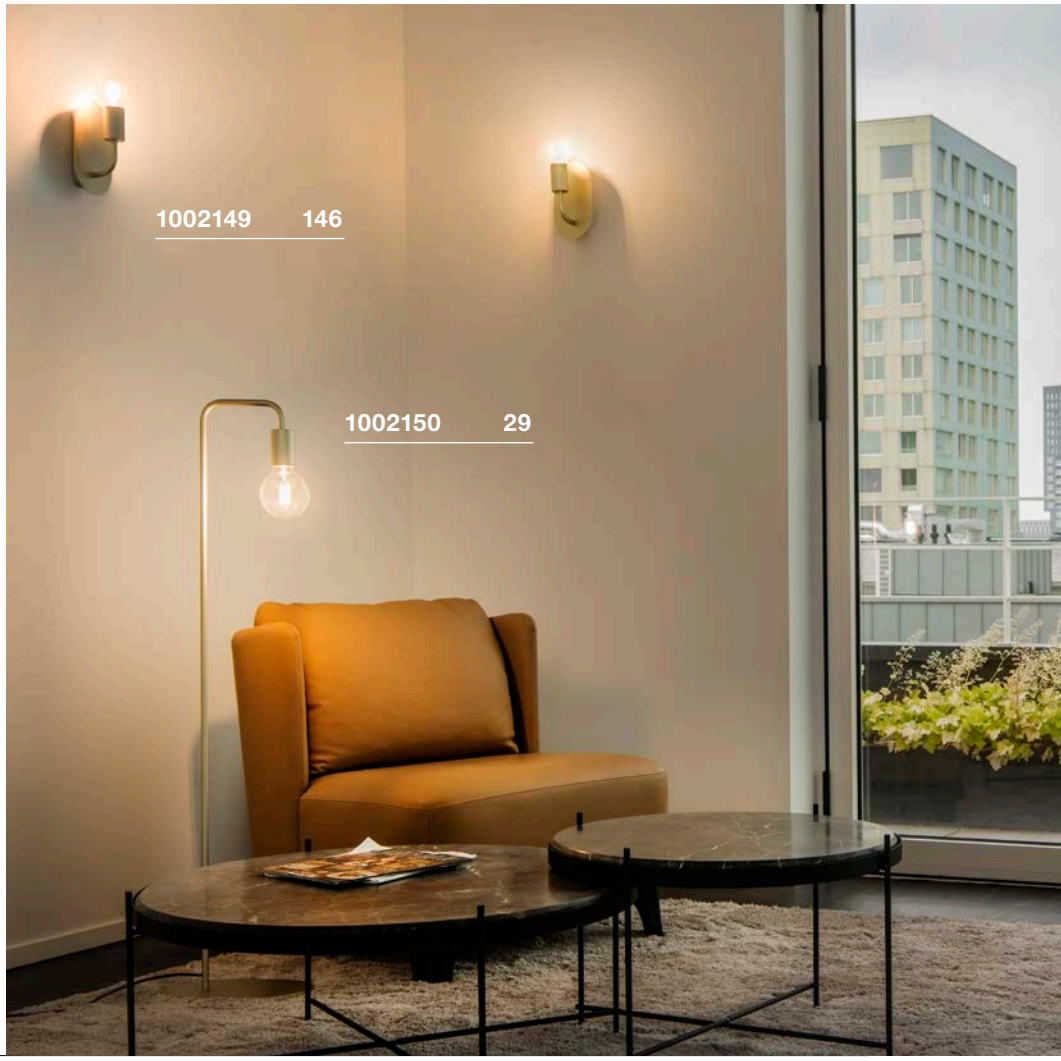

Recommended lamp

E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP



LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001038 | 20,70 GBP





Lamp details

max. 24W

Variant	Item no.	GBP
E27 white	1002147	76,50
E27 black	1002148	76,50
E27 gold	1002149	81,00



SOPRANA OVAL
WL, E27

896

E-A++ Spectrum A++–E









Product details

230V ~50Hz
Material: Steel / Textile



Dimensioned drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP



LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

max. 60W
L: 13 cm max.

Variant	Item no.	GBP
E27		
white	**155861**	**103,50**

FENDA
WL, basic, E27

886

E-A++ Spectrum A⁺⁺–E









Product details

230V ~50/60Hz
Material: Steel / Plastic



Dimensioned drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

max. 40W
Ø: 5 cm max. L: 20 cm max.

Variant	Item no.	GBP
E27		
white	1001272	38,70

FENDA
Half-shade

886








- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel



Dimensioned drawing




Note

max. 40W

Variant	Item no.	GBP
black	1001273	29,70
black / copper	1001274	34,60
white	1001275	29,70
beige	1001276	29,70



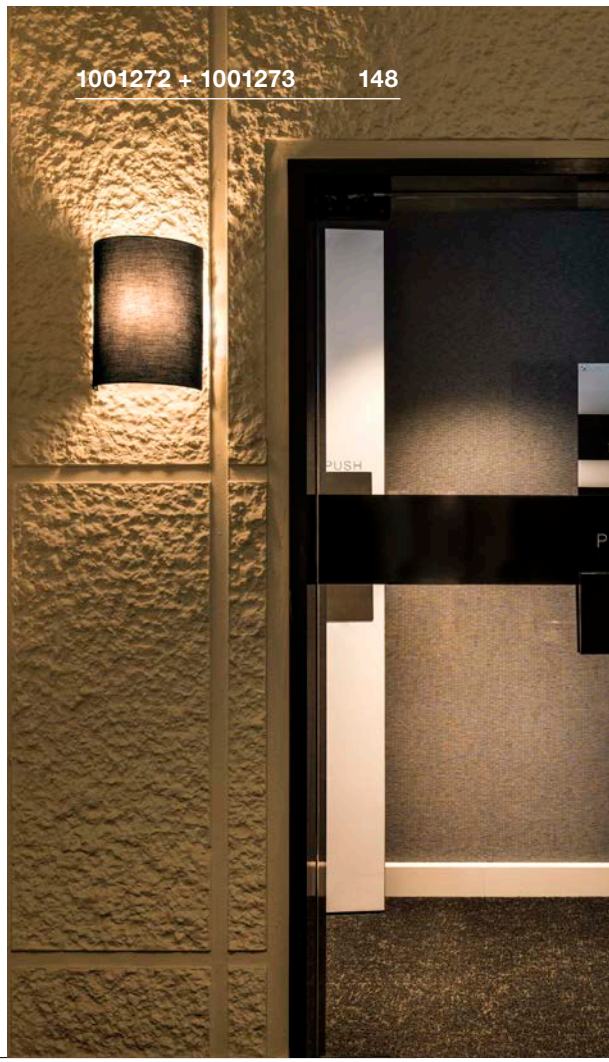





LASSON
WL, E27

889

E-A++ Spectrum A++–E









Product details

230V ~50Hz
Material: Textile / Steel



Dimensioned drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP



LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP



Lamp details

max. 40W
Ø: 5 cm max. L: 20 cm max.

Variant	Item no.	GBP
E27		
■ black	**155340**	**108,00**

SOPRANA
WL, E27

896

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Textile / Steel



Dimensioned drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP



LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

max. 40W
Ø: 6.6 cm max. L: 17.3 cm max.

Variant	Item no.	GBP
E27		
■ beige	**155643**	**103,50**

MANA
WL, basic, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM









- Premium LED with CRI>90
- Dim to Warm


Product details


220-240V ~50/60Hz | 350mA
Total consumption: 8W
Material: Aluminium / Steel
Dimmable: Triac C



Dimensioned drawing



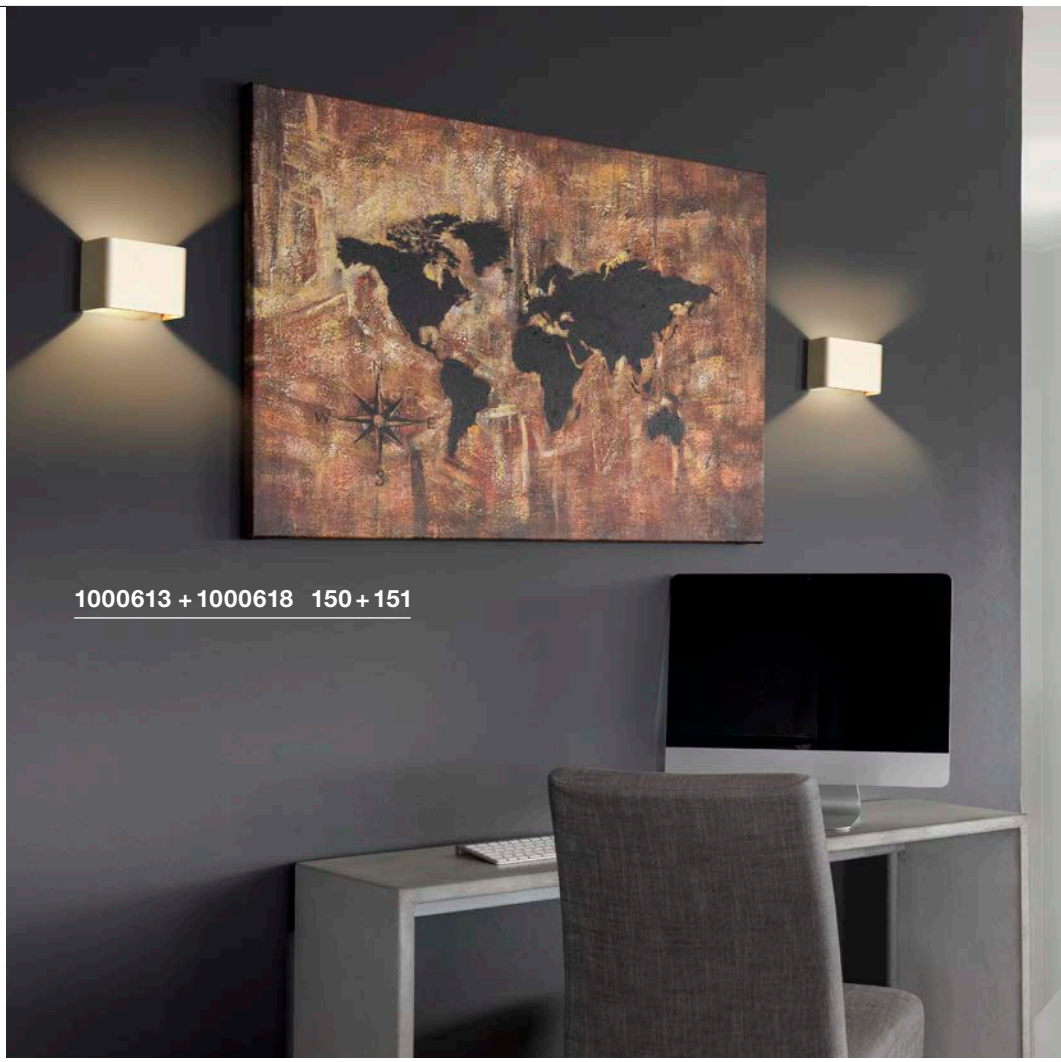

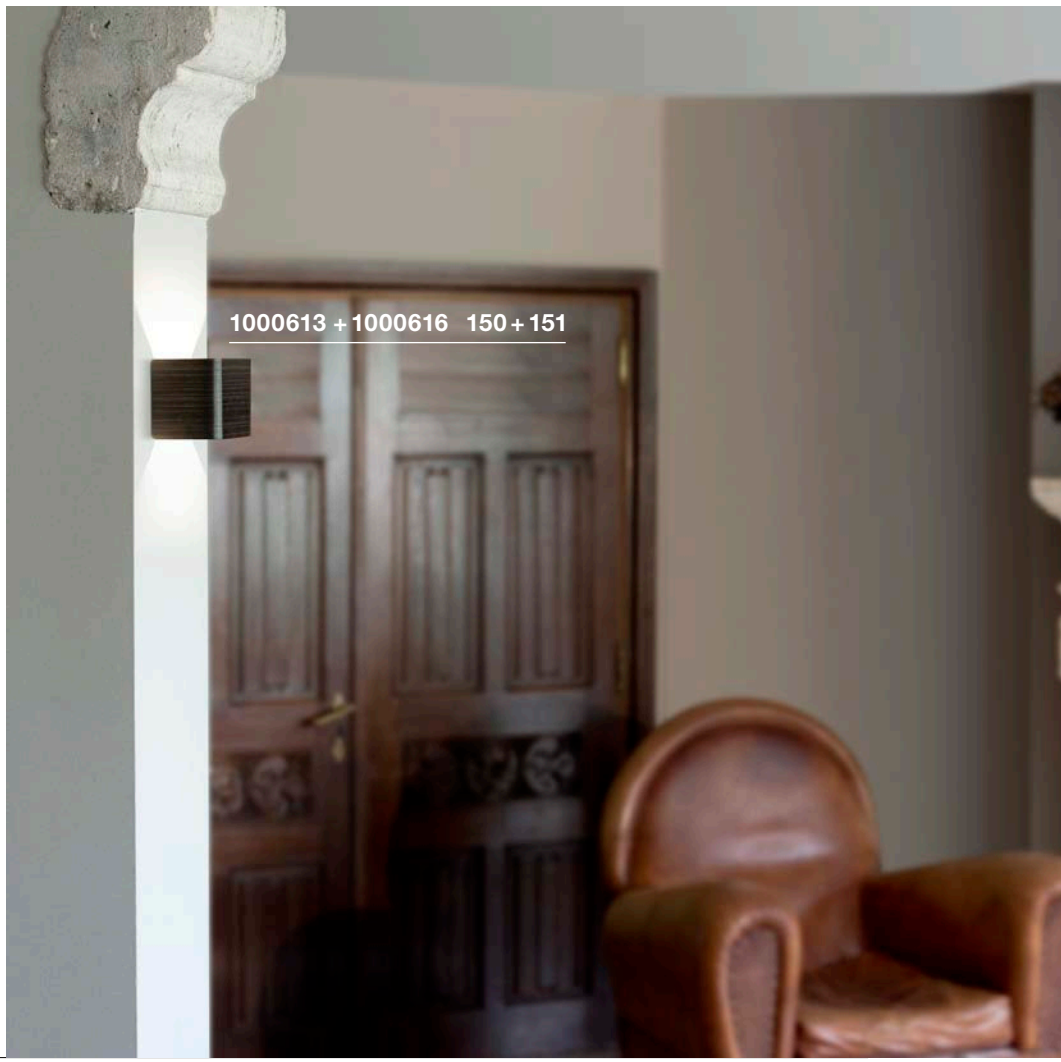

Variant	Item no.	GBP
320lm | 2000-3000K | CRI>90		
white	1000613	108,00





MANA
Shade

891







MANA
Shade

891







- Can be individually designed with colours, stickers and more


Product details

Material: Plaster / Steel






Dimensioned drawing



Dimensioned drawing



Note

Only suitable for 1000613

Note

Only suitable for 1000613

Variant	Item no.	GBP
Wood | 0.11 kg		
grey / brown	**1000616**	**37,80**
Aluminium | 0.29 kg		
white	**1000618**	**37,80**
Aluminium | 0.29 kg		
aluminium	**1000619**	**45,00**

Variant	Item no.	GBP
white	**1000824**	**27,00**


MANA
WL, basic, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM









- Premium LED with CRI>90
- Dim to Warm


Product details


220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Steel
Dimmable: Triac C



Dimensioned drawing



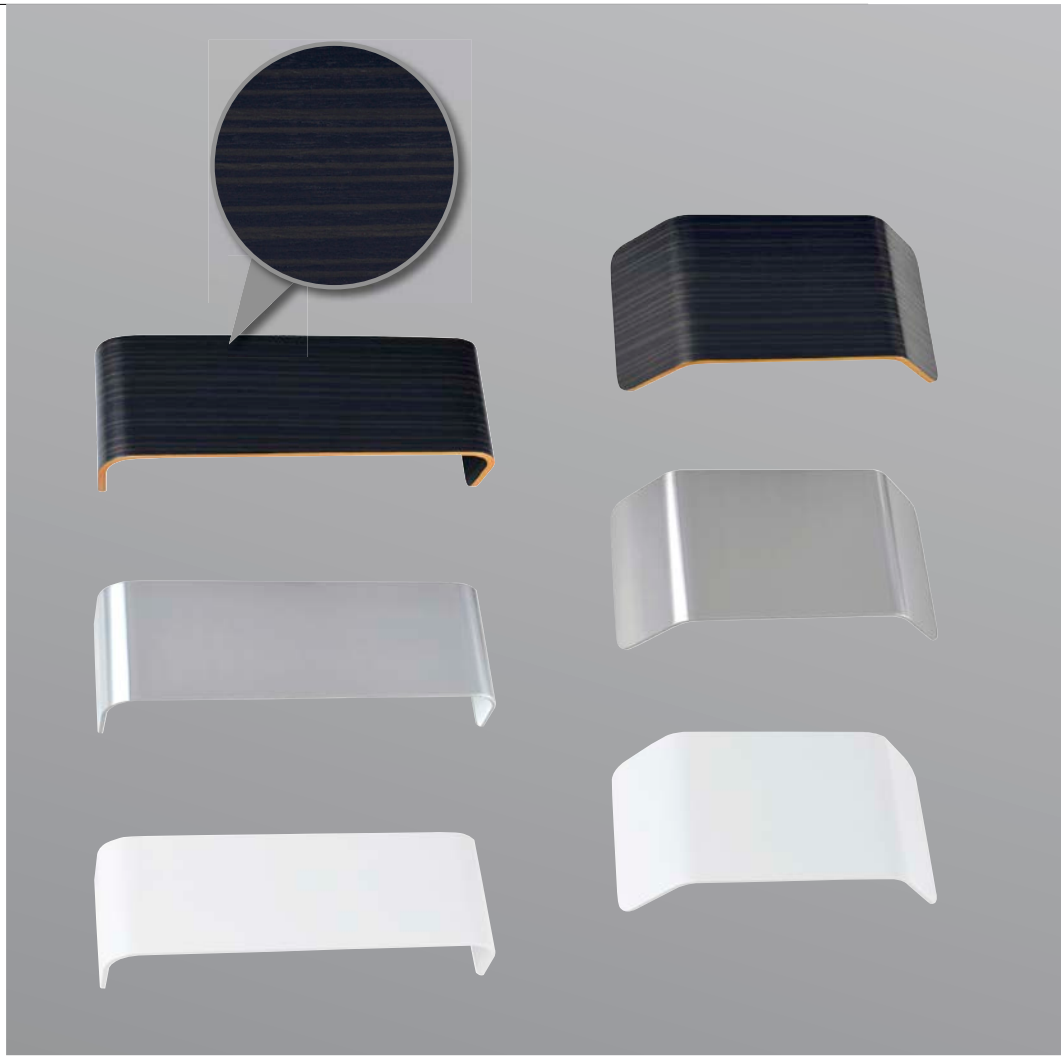

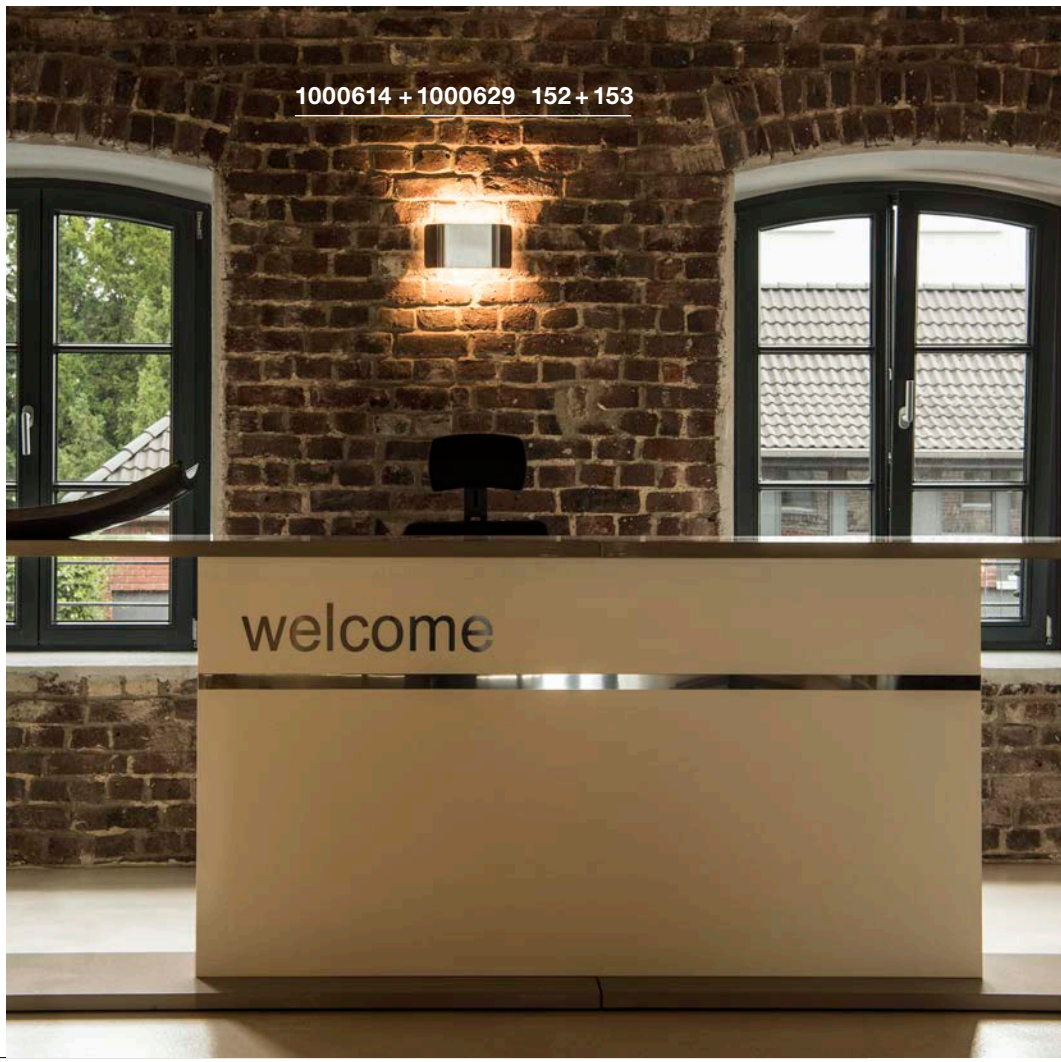

Variant	Item no.	GBP
700lm | 2000-3000K | CRI>90		
white	**1000614**	**126,00**

MANA
Shade

891








MANA
Shade

891







MANA
Shade

891






- Can be individually designed with colours, stickers and more

Product details


Material: Plaster / Steel

0.93


Dimensioned drawing



Dimensioned drawing



Dimensioned drawing



Note

Only suitable for 1000614/1000615

Note

Only suitable for 1000614/1000615

Note

Only suitable for 1000614/1000615

Variant	Item no.	GBP
Wood | 0.16 kg		
grey / brown	**1000621**	**45,00**
Aluminium | 0.39 kg		
white	**1000623**	**45,00**
Aluminium | 0.39 kg		
aluminium	**1000624**	**54,00**

Variant	Item no.	GBP
Wood | 0.2 kg		
grey / brown	**1000626**	**45,00**
Aluminium | 0.47 kg		
white	**1000628**	**45,00**
Aluminium | 0.47 kg		
aluminium	**1000629**	**54,00**

Variant	Item no.	GBP
white	**1000825**	**25,20**

PLASTRA
WL, rectangular, QT-DE12

893

D-A+ Spectrum A++–E


NEW









- Can be individually designed with colours, stickers and more

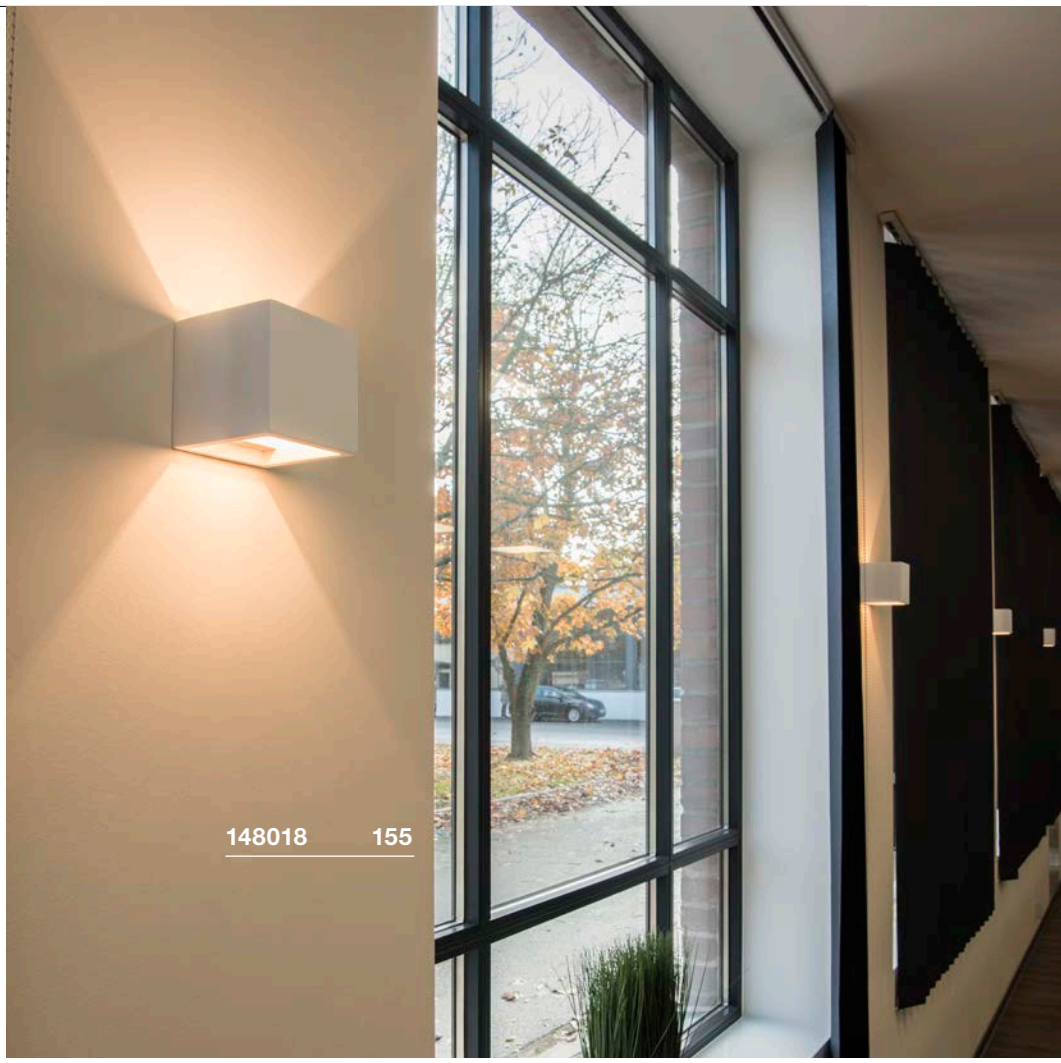

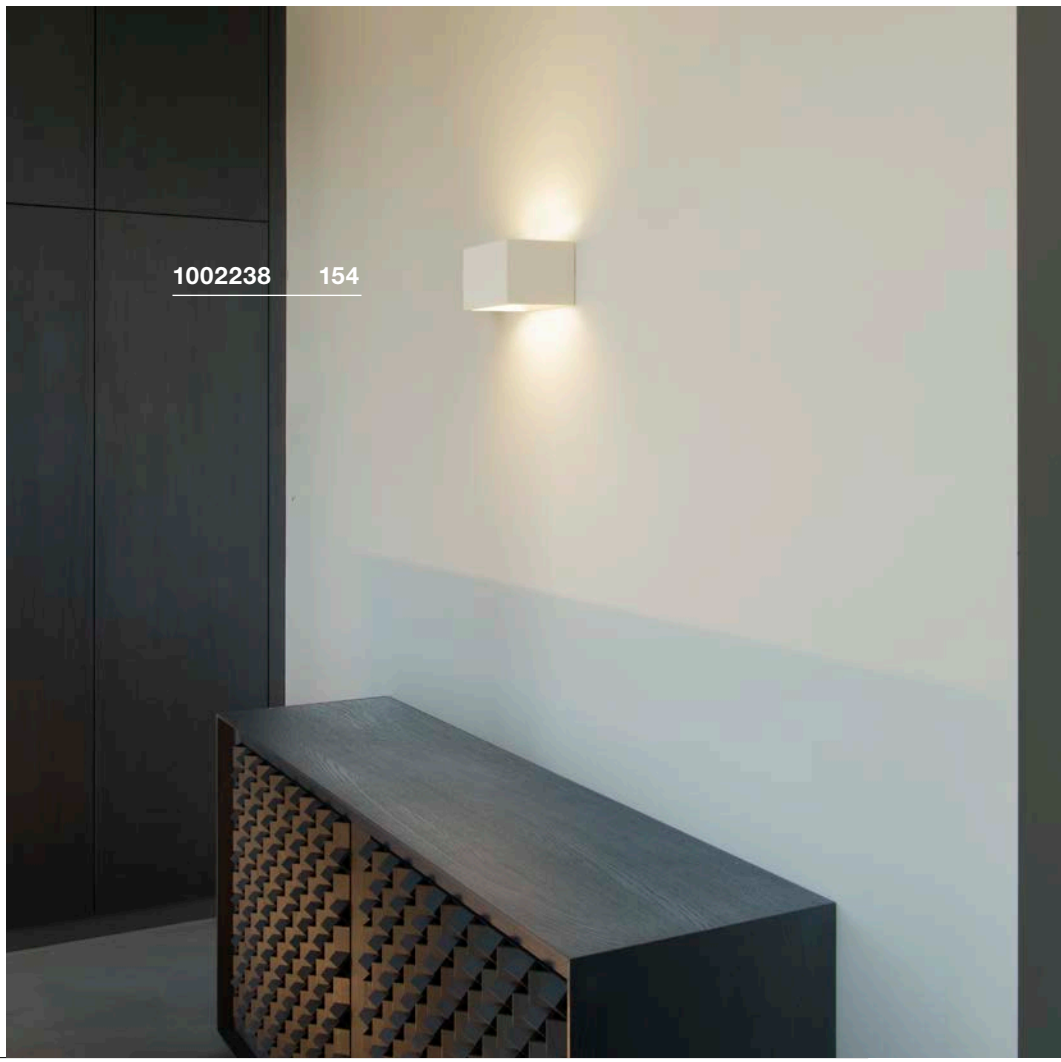


Product details

220-240V ~50/60Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp


R7s 118mm 10.5W 330°
3000K 1050lm EEI=A+
11kWh/1000h
Item no. 560352 | 22,50 GBP


LED R7s 118mm 14W
3000K 2000lm EEI=A++
14kWh/1000h
Item no. 1002135 | 60,30 GBP

Lamp details

max. 20W

Variant	Item no.	GBP
R7s 118mm		
white	**1002238** NEW	**58,50**

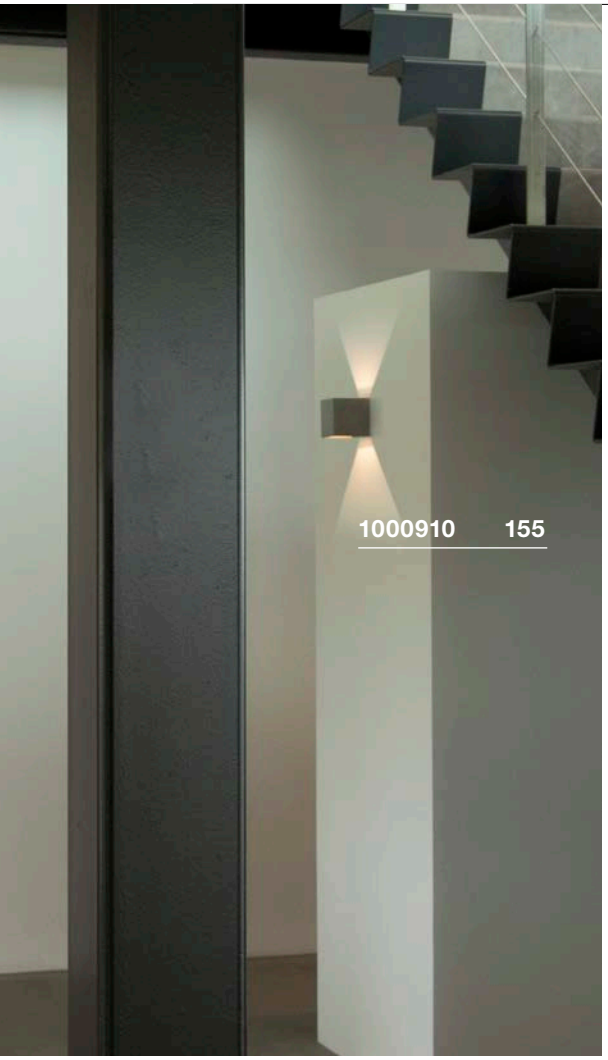

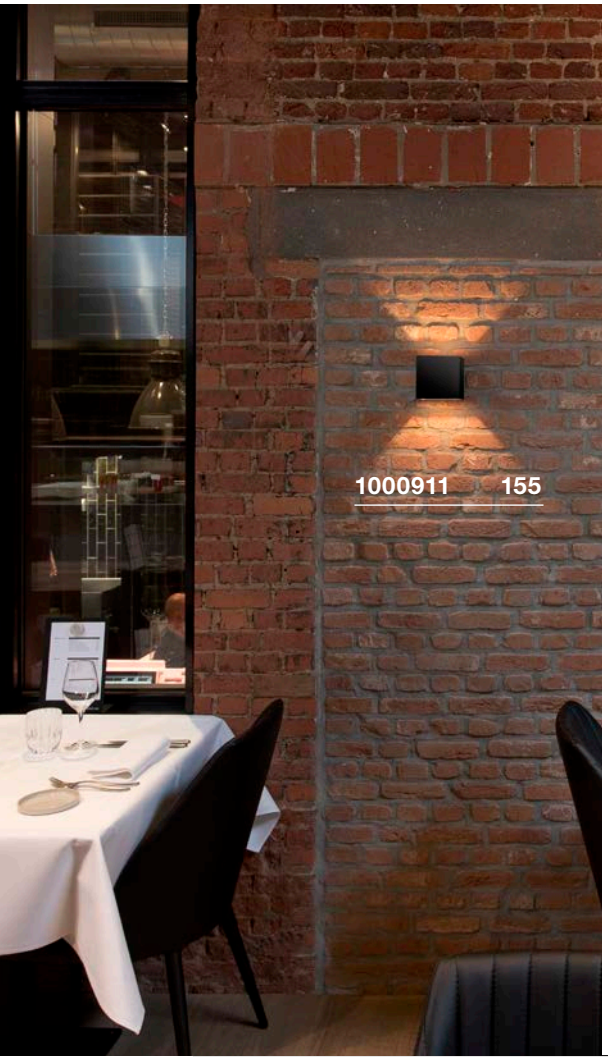

SOLID CUBE
WL, QT14

D-A+ Spectrum A++–E








Product details

230V ~50Hz
Material: Concrete

1.1

Dimensioned drawing



Recommended lamp

G9 2.5W
2700K 180lm EEI=A+
3kWh/1000h
Item no. 560302 | 10,80 GBP

Lamp details

max. 25W QT14

Variant	Item no.	GBP
G9 | QT14		
grey	**1000910**	**67,50**
G9 | QT14		
black	**1000911**	**67,50**


PLASTRA
WL, Cube, QT14

893

D-A+ Spectrum A++–E








- Can be individually designed with colours, stickers and more

Product details

230V ~50Hz
Material: Plaster / Steel

1

Dimensioned drawing



Recommended lamp

LED G9 3.5W
2800K 300lm EEI=A+
4kWh/1000h
Item no. 1002131 | 17,10 GBP

Lamp details

max. 42W QT14

Variant	Item no.	GBP
G9 | QT14		
white	**148018**	**40,50**

LOGS IN WL

890

A-A++ Spectrum A⁺⁺–E

LED INSIDE

DIM TO WARM








- Premium LED with CRI>90
- Dim to Warm


Product details

220-240V ~50/60Hz | 250mA
Total consumption: 12W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
290lm | 2000-3000K | CRI>90		
black / gold	1000638	144,00
490lm | 2000-3000K | CRI>90		
white	1000639	139,50
490lm | 2000-3000K | CRI>90		
aluminium / white	1000640	144,00


LOGS IN WL

890

A-A++ Spectrum A⁺⁺–E

LED INSIDE








Product details

100-240V ~50/60Hz | 500mA
Total consumption: 6.9W
Material: Aluminium




Dimensioned drawing



Variant	Item no.	GBP
390lm | 3000K | CRI>90		
black / gold	151320	108,00
440lm | 3000K | CRI>90		
white	151321	99,00
440lm | 3000K | CRI>90		
aluminium / white	151325	108,00



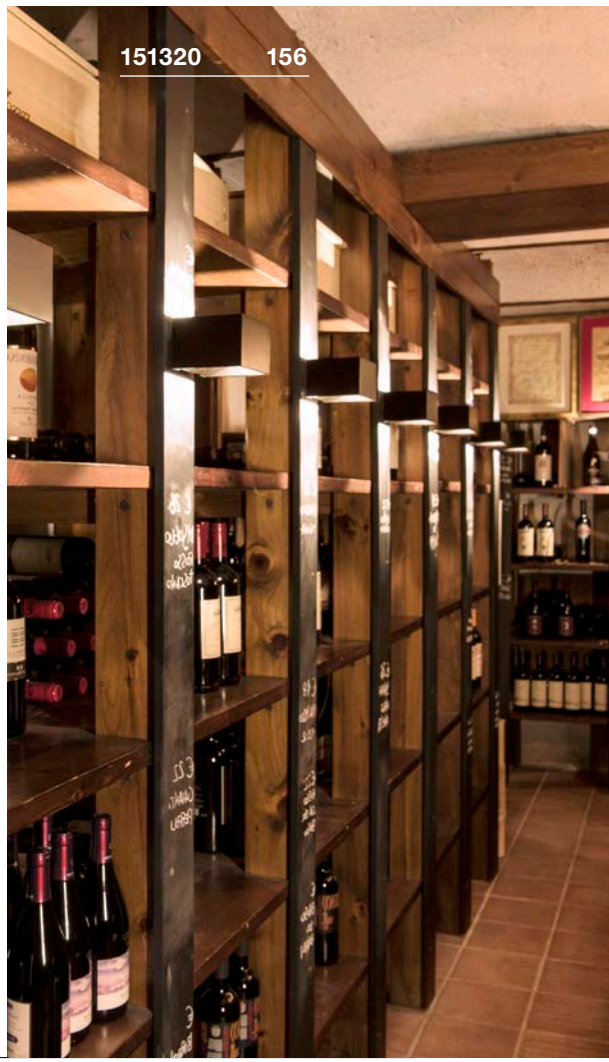



LOGS IN L
WL

890


A-A++ Spectrum A++–E

LED INSIDE

NEW

DIM TO WARM







- Premium LED with CRI>90
- Dim to Warm


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 19W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
1500lm | 2000-3000K | CRI>90		
black / gold	1002930	242,10
1500lm | 2000-3000K | CRI>90		
white	1002929	233,10
1100lm | 2000-3000K | CRI>90		
aluminium / white	1002928	242,10

LOGS IN L
WL, TRIAC

890

A-A++ Spectrum A++–E

LED INSIDE

NEW








- Premium LED with CRI>90


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 17W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
1100lm | 3000K | CRI>90		
black / gold	1002842	188,10
1400lm | 3000K | CRI>90		
white	1002844	180,00
1400lm | 3000K | CRI>90		
aluminium / white	1002843	188,10



QUAD UP/DOWN 12
WL

894

A-A++ Spectrum A++–E

LED INSIDE









Product details

200-240V ~50/60Hz | 700mA
Total consumption: 6.8W
Material: Aluminium / Glass

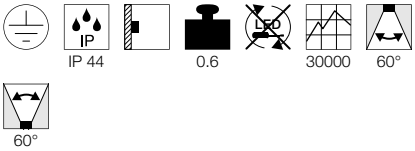

Dimensioned drawing



Variant	Item no.	GBP
175lm | 3000K | CRI>80		
white	232471	99,00
140lm | 3000K | CRI>80		
anthracite	232475	99,00

QUAD UP/DOWN 15
WL

894

A-A++ Spectrum A++–E

LED INSIDE









Product details


100-277V ~50/60Hz | 350mA
Total consumption: 8.6W
Material: Aluminium / Glass

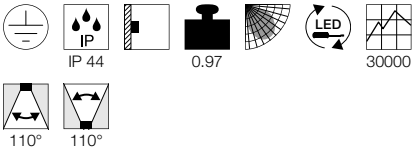


Dimensioned drawing




Variant	Item no.	GBP
Up: 290lm | 3000K | CRI>80 Down: 290lm | 3000K | CRI>80		
white	232441	117,00
Up: 260lm | 3000K | CRI>80 Down: 260lm | 3000K | CRI>80		
anthracite	232445	117,00

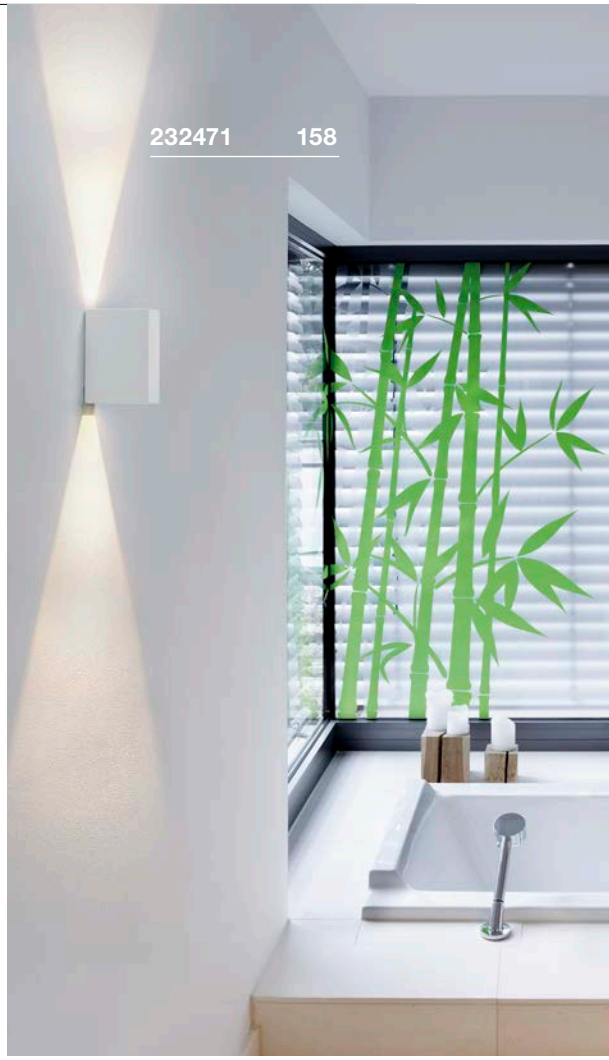

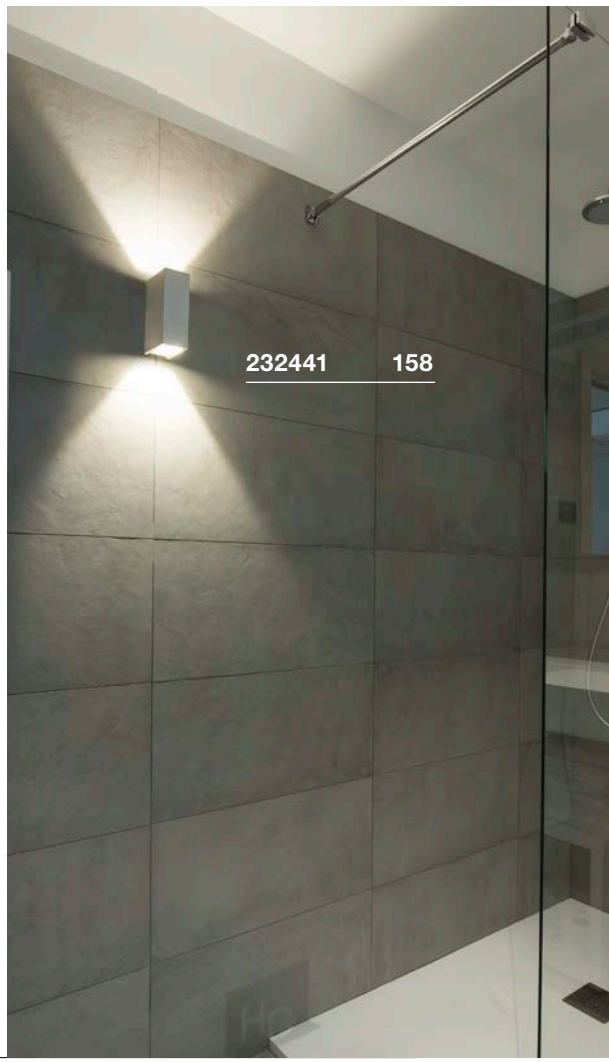



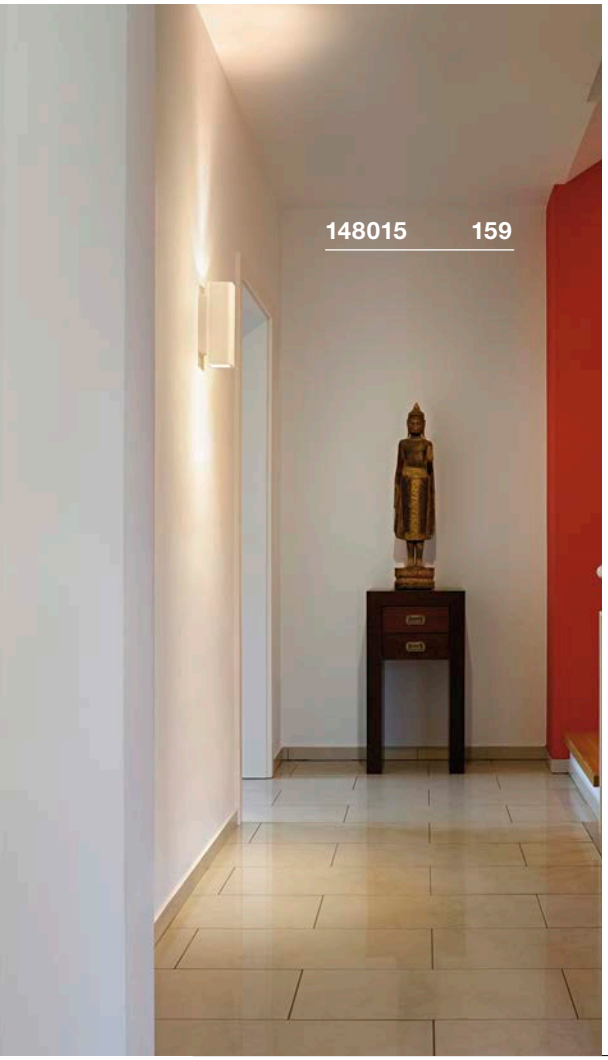

PLASTRA
WL, slot, E14

893

E-A++ Spectrum A++–E








- Can be individually designed with colours, stickers and more

Product details

230V ~50Hz
Material: Plaster / Steel

0.81

Dimensioned drawing



Recommended lamp

LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP

Lamp details

max. 40W C35

Variant	Item no.	GBP
E14 | C35 white	**148010**	**38,70**

PLASTRA
WL, QPAR51

893

E-A++ Spectrum A++–E








- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz
Material: Plaster / Steel

1.49

Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP


LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP

Lamp details

2x max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**148015**	**60,30**


1000327 161

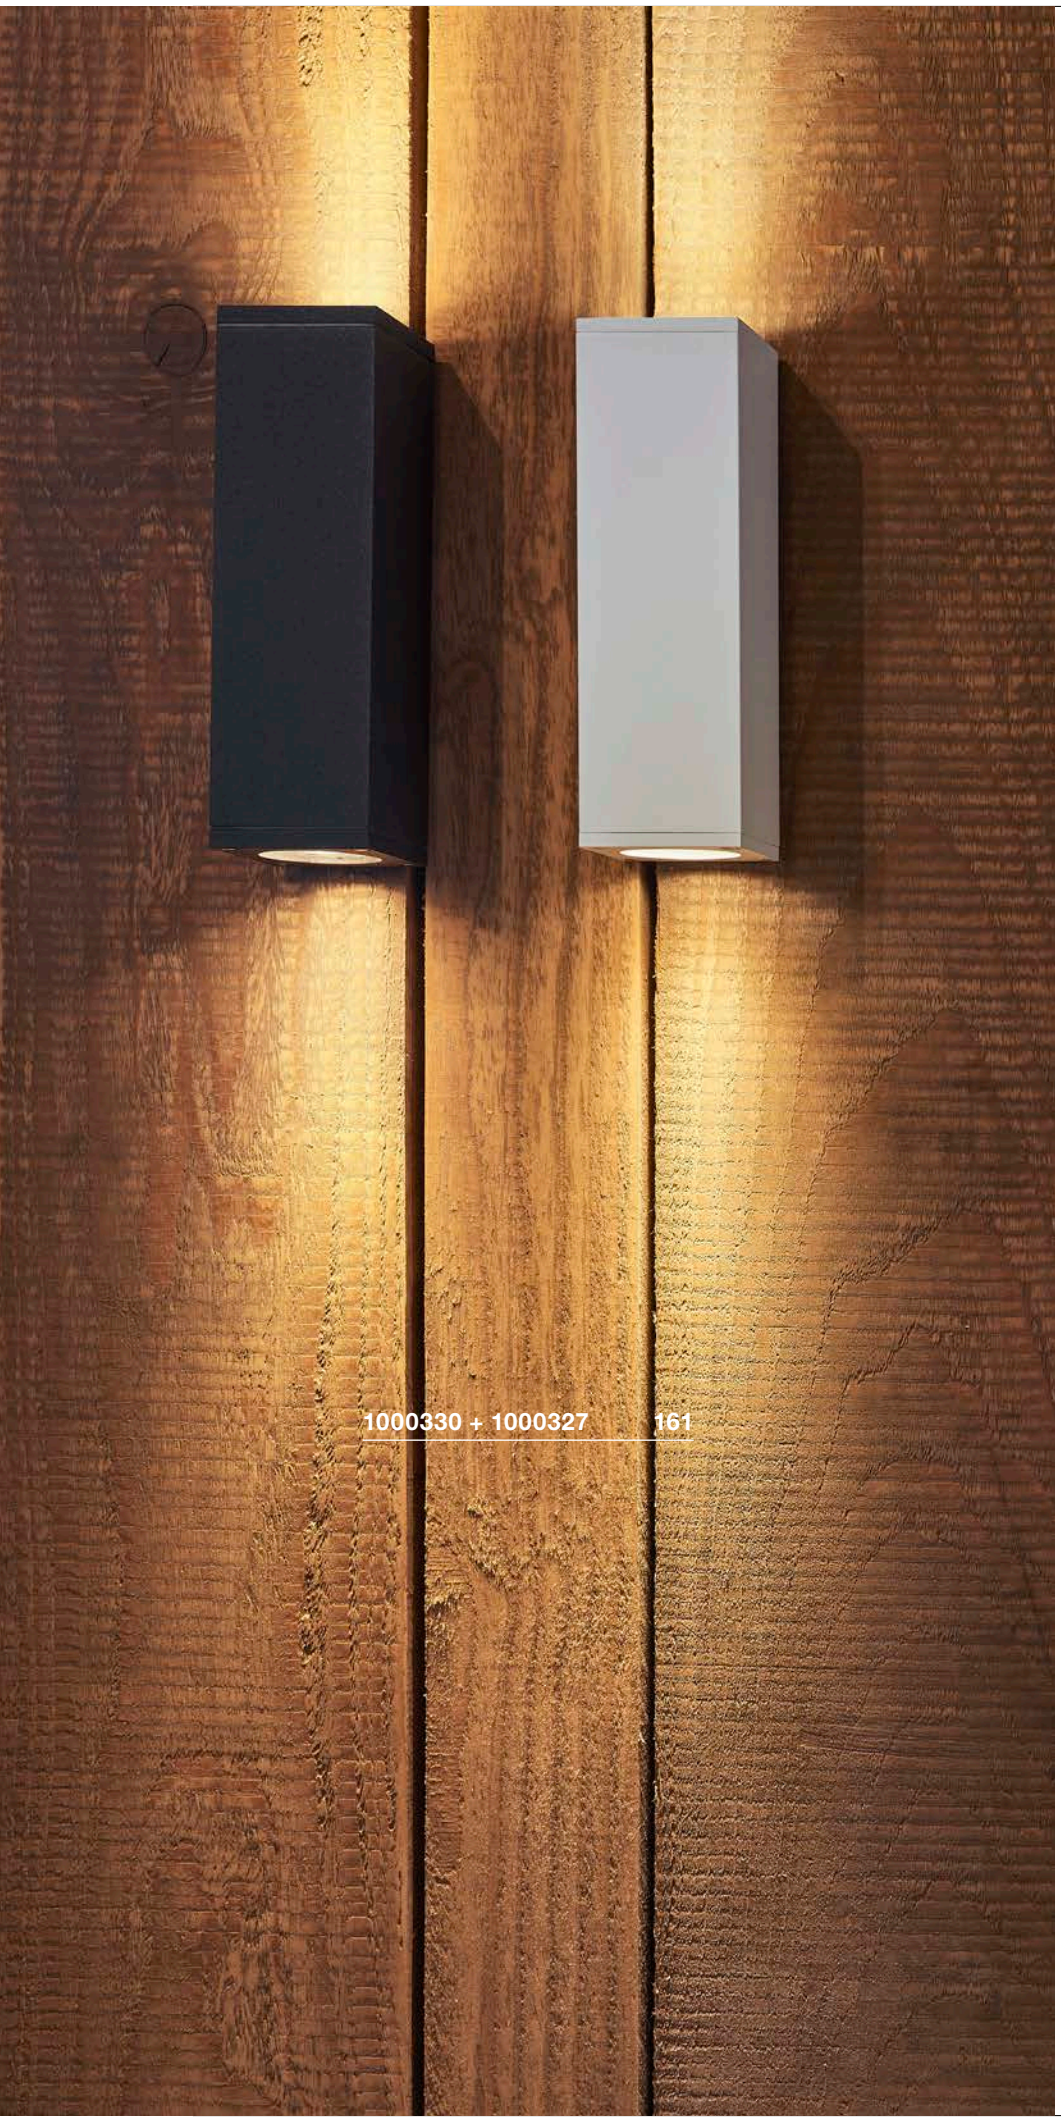

1000330 + 1000327 **161**

THEO UP/DOWN
WL, QPAR51

897

E-A++ Spectrum A⁺⁺–E









Product details

230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001566 | 9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details

2x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**1000327**	**90,00**
GU10 | QPAR51 grey	**1000328**	**90,00**
GU10 | QPAR51 matt aluminium	**1000329**	**94,50**
GU10 | QPAR51 anthracite	**1000330**	**90,00**

CHROMBO
WL

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz
Total consumption: 9.7W
Material: Steel / Glass
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
480lm | 3000K | CRI>80		
white	155221	126,00
480lm | 3000K | CRI>80		
matt grey	155228	126,00

TANI
WL, QT-DE12

D-A+ Spectrum A++–E









Product details

230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

R7s 118mm 10.5W 330°
3000K 1050lm EEI=A+
11kWh/1000h
Item no. 560352 | 22,50 GBP


LED R7s 118mm 14W
3000K 2000lm EEI=A++
14kWh/1000h
Item no. 1002135 | 60,30 GBP


Lamp details

max. 200W QT-DE12

Variant	Item no.	GBP
R7s 118mm | QT-DE12		
matt aluminium	147566	72,00



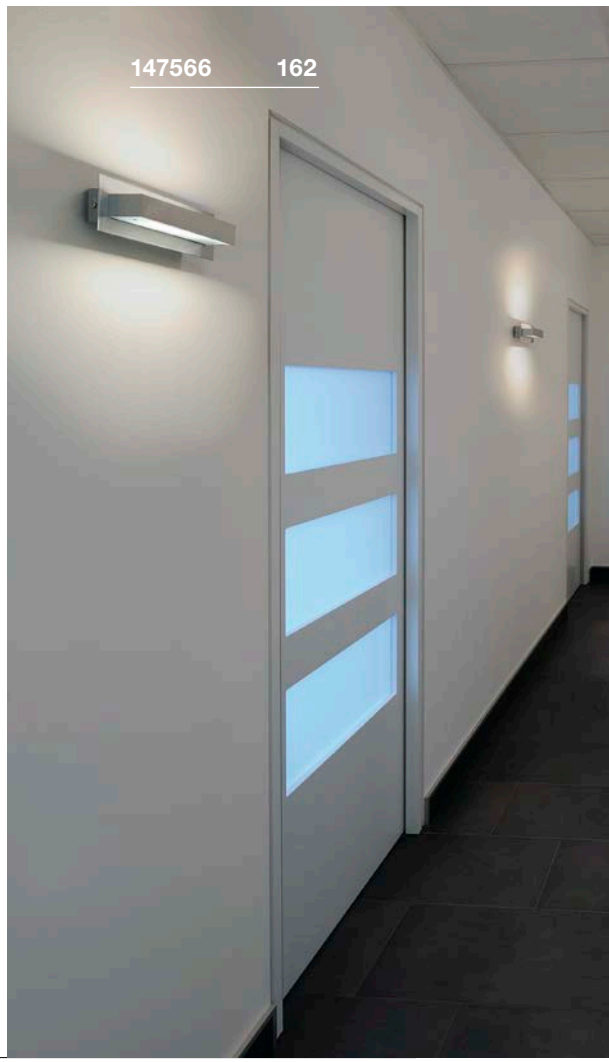

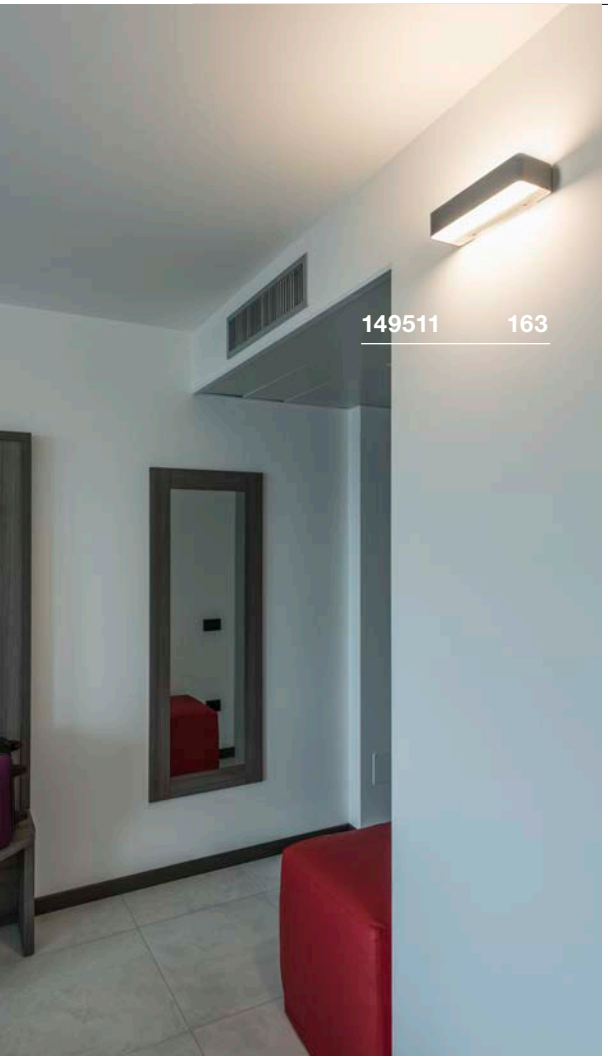



WL 149
WL, QT-DE12

D-A+ Spectrum A++–E









Product details

230V ~50Hz
Material: Steel / Glass



Dimensioned drawing



Recommended lamp

R7s 78mm 5.5W 330°
3000K 530lm EEI=A+
6kWh/1000h
Item no. 560332 | 9,90 GBP

Lamp details

max. 60W QT-DE12

Variant	Item no.	GBP
R7s 78mm | QT-DE12		
matt white	**149471**	**58,50**
R7s 78mm | QT-DE12		
chrome	**149472**	**67,50**

WL 149
WL

A-A++ Spectrum A++–E

LED INSIDE






Product details

220-240V ~50/60Hz | 500mA
Total consumption: 16W
Material: Steel / Glass



Dimensioned drawing



Variant	Item no.	GBP
1060lm | 3000K | CRI>80		
white	**149511**	**117,00**
1060lm | 3000K | CRI>80		
chrome	**149512**	**126,00**

SEDO 7
WL

A-A++ Spectrum A++–E

LED INSIDE

NEW








Product details

220-240V ~50/60Hz | 350mA
Total consumption: 11.5W
Material: Aluminium / Glass

IP 20 | 0.77 | 30000

Dimensioned drawing




Variant	Item no.	GBP
1020lm | 3000K | CRI>80		
white	1002962	139,50
1020lm | 3000K | CRI>80		
matt aluminium	1002964	157,50

SEDO 14
WL

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 500mA
Total consumption: 16W
Material: Aluminium / Glass

IP 20 | 1.6 | 30000

Dimensioned drawing



Variant	Item no.	GBP
1300lm | 3000K | CRI>80		
white	151781	188,10
1300lm | 3000K | CRI>80		
matt aluminium	151786	197,10

SEDO 21
WL

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Glass


IP 20 | 2.4 | 30000

Dimensioned drawing



Variant	Item no.	GBP
2500lm | 3000K | CRI>80		
white	151791	233,10
2500lm | 3000K | CRI>80		
matt aluminium	151796	242,10


151781 164

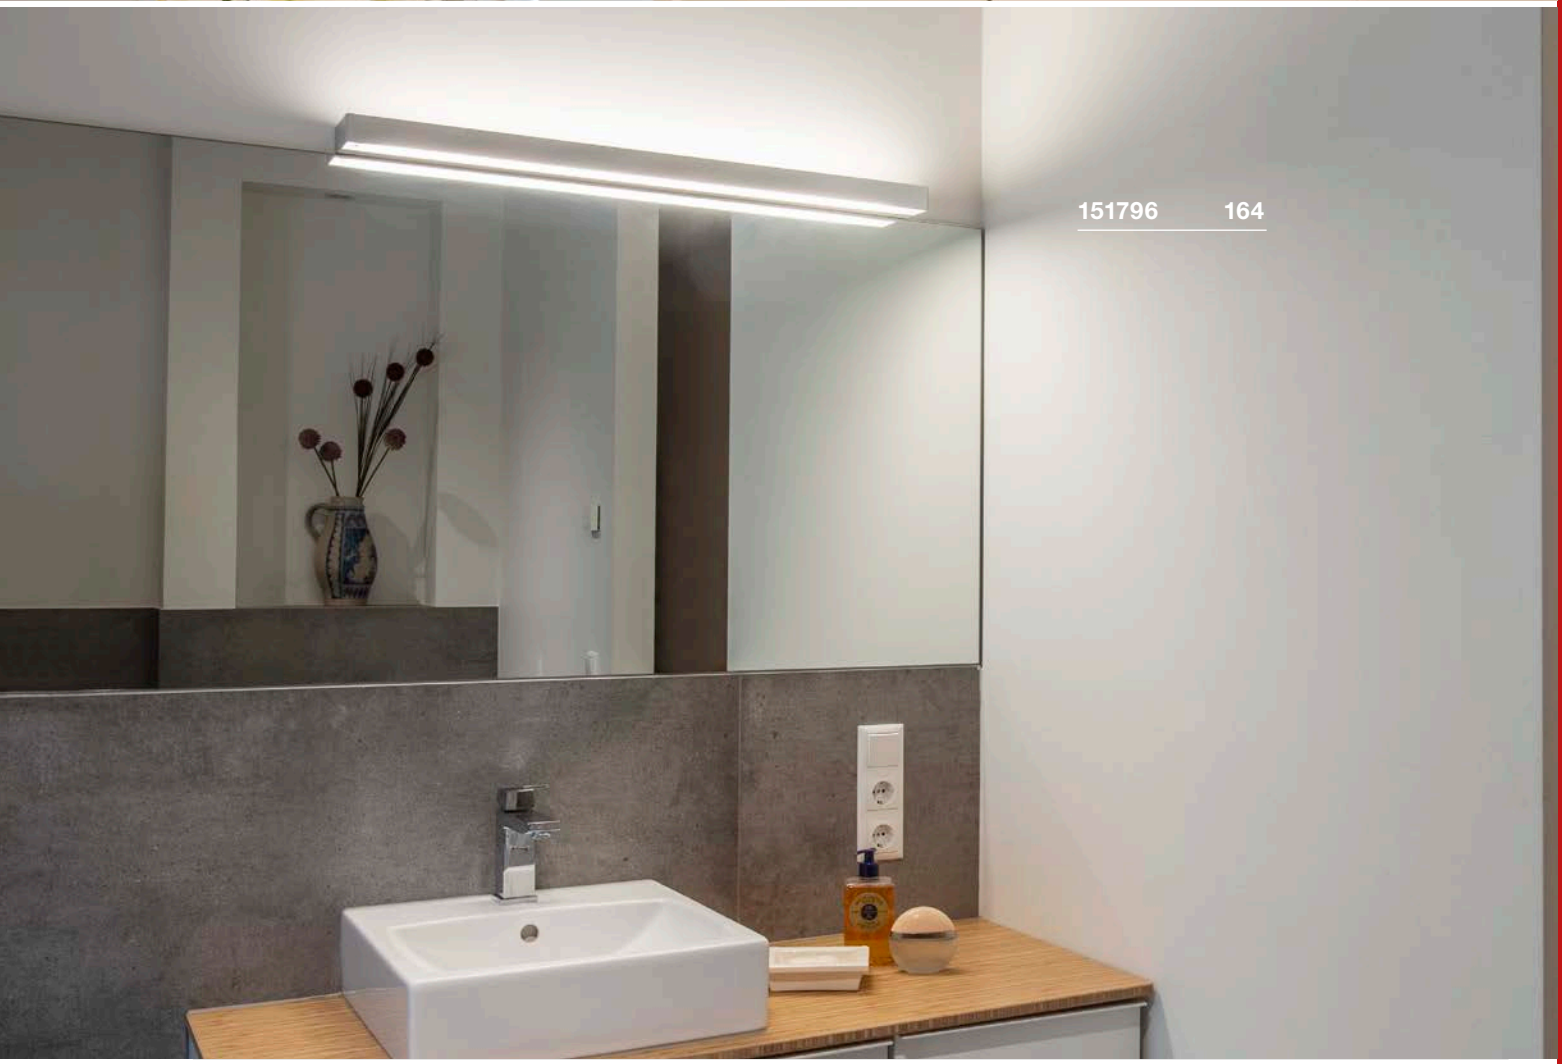
151796 164

ASSO 70
WL

A-A++ Spectrum A++–E

LED INSIDE








Product details


100-240V ~50/60Hz | 500mA
Total consumption: 7.6W
Material: Aluminium / Steel



Dimensioned drawing





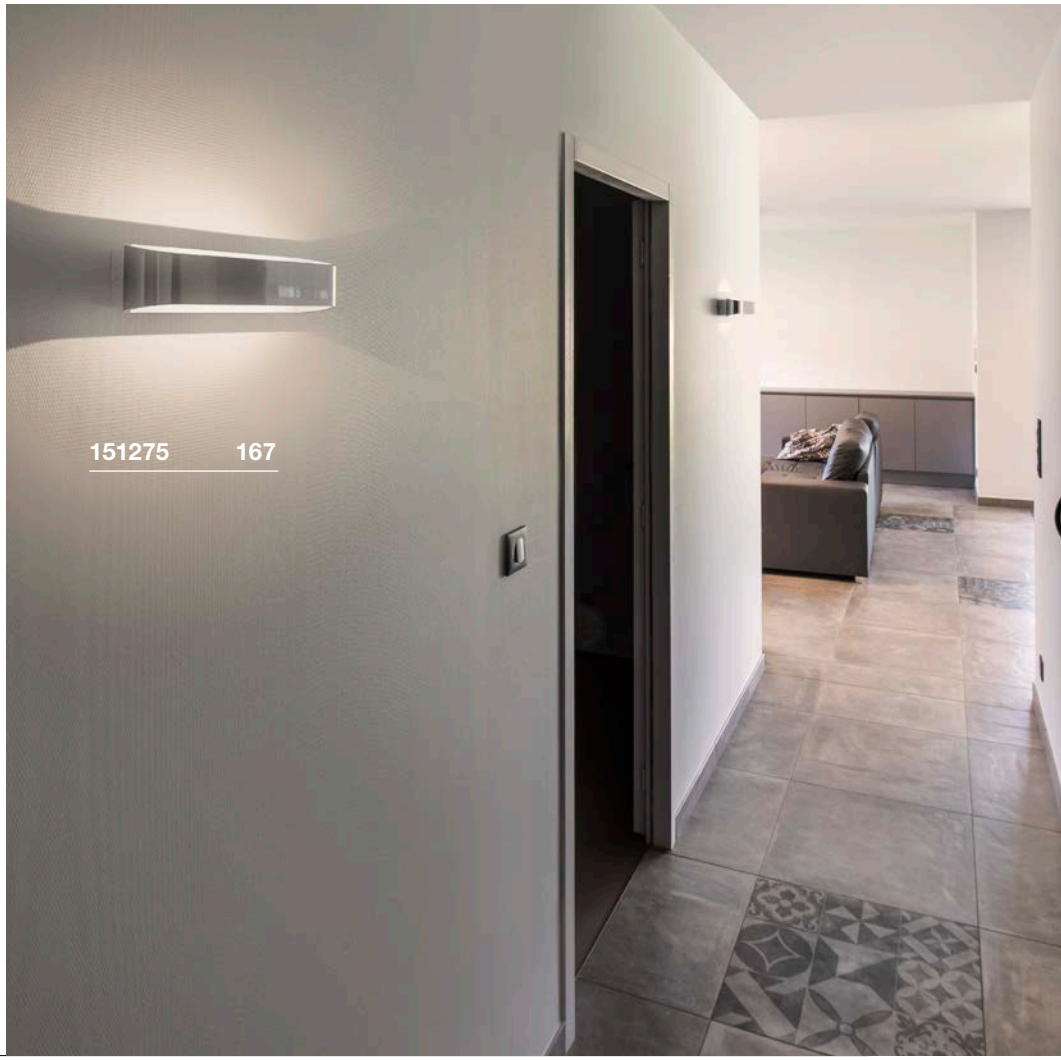

Variant	Item no.	GBP
350lm | 3000K | CRI>80 white	151311	128,70
350lm | 3000K | CRI>80 matt aluminium / white	151315	137,70

ASSO 300
WL







ASSO 300
WL







- Premium LED with CRI>90
- Dim to Warm
- Light colour changes when dimming

ASSO
WL







- Premium LED with CRI>90
- Dim to Warm
- Light colour changes when dimming


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium / Steel




Product details

220-240V ~50/60Hz | 500mA
Total consumption: 22W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L

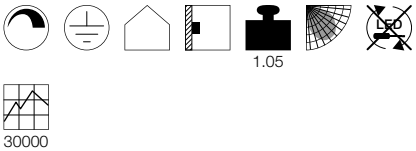


Product details


220-240V ~50/60Hz | 250mA
Total consumption: 12W
Material: Aluminium / Steel
Dimmable: Triac C




Dimensioned drawing



Dimensioned drawing



Dimensioned drawing



Variant	Item no.	GBP
700lm | 3000K | CRI>80		
white	**151271**	**165,60**
700lm | 3000K | CRI>80		
matt aluminium / white	**151275**	**174,60**

Variant	Item no.	GBP
1040lm | 2000-3000K | CRI>90		
white	**1000634**	**192,60**
1040lm | 2000-3000K | CRI>90		
matt aluminium / white	**1000635**	**201,60**

Variant	Item no.	GBP
530lm | 2000-3000K | CRI>90		
white	**1000636**	**165,60**
530lm | 2000-3000K | CRI>90		
matt aluminium / white	**1000637**	**174,60**


OSSA 180
WL, QT-DE12

D-A+ Spectrum A++–E







Product details
230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp
R7s 78mm 5.5W 330°
3000K 530lm EEI=A+
6kWh/1000h
Item no. 560332 | 9,90 GBP

Lamp details
max. 100W QT-DE12

Variant	Item no.	GBP
R7s 78mm | QT-DE12 ■ black	**151450**	**72,00**
R7s 78mm | QT-DE12 □ white	**151451**	**72,00**
R7s 78mm | QT-DE12 ▨ matt aluminium	**151456**	**76,50**

OSSA 300
WL, QT-DE12

D-A+ Spectrum A++–E







Product details
230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing




Recommended lamp
R7s 118mm 10.5W 330°
3000K 1050lm EEI=A+
11kWh/1000h
Item no. 560352 | 22,50 GBP

LED R7s 118mm 14W
3000K 2000lm EEI=A++
14kWh/1000h
Item no. 1002135 | 60,30 GBP

Lamp details
max. 120W QT-DE12

Variant	Item no.	GBP
R7s 118mm | QT-DE12 ■ black	**151410**	**90,00**
R7s 118mm | QT-DE12 □ white	**151411**	**90,00**
R7s 118mm | QT-DE12 ▨ matt aluminium / white	**151416**	**99,00**



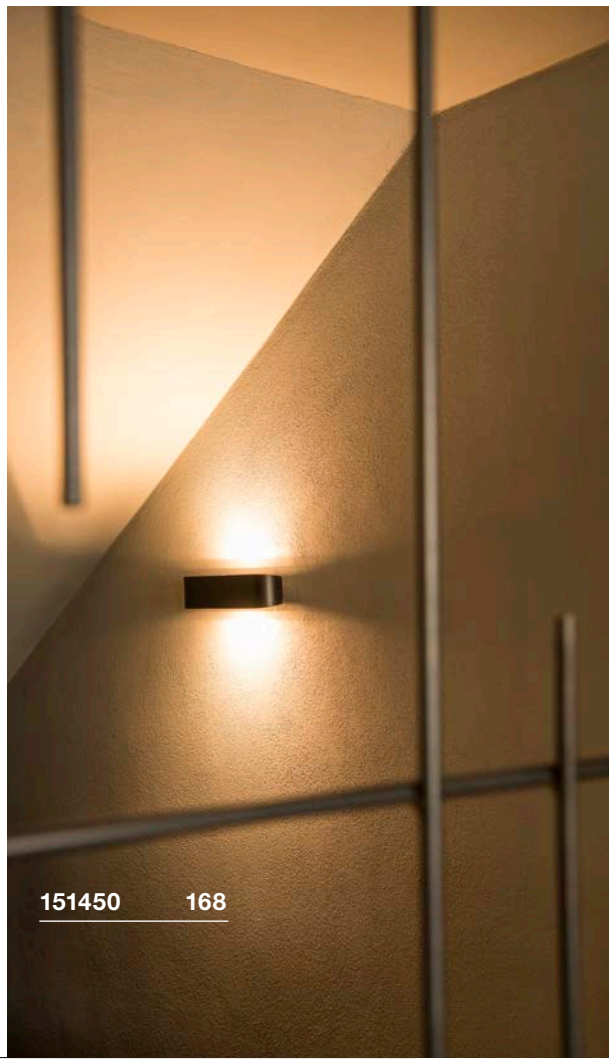





ARLINA 60/130
WL

A-A++ Spectrum A++–E

LED INSIDE

NEW







Product details

220-240V ~50/60Hz | 500mA
Material: Aluminium / Glass
Product dimensions: W: 6.8 cm H: 6 cm



IP 20 30000

Variant	Item no.	GBP
1400lm | 3000K | CRI>80 | 20W | L: 67 cm | 2.2 kg		
aluminium	**1002239** NEW	**188,10**
2400lm | 3000K | CRI>80 | 28W | L: 128 cm | 3.9 kg		
aluminium	**1002240** NEW	**242,10**

ARLINA 60/130
WL, T16

A-A+ Spectrum A++–E









Product details

220-240V ~50/60Hz
Total consumption: 31.5W
Material: Aluminium



IP 20

Dimensioned drawing



Recommended lamp

LED G5 28W
3000K 2600lm EEI=A+
44kWh/1000h
Item no. 548028 | 10,80 GBP

Lamp details

28W T16

Variant	Item no.	GBP
G5 | T16 | L: 67 cm | 2.2 kg		
aluminium	**155206**	**171,00**
G5 | T16 | L: 128 cm | 3.8 kg		
aluminium	**155216**	**224,10**

PLASTRA
WL, curve

893

A-A++ Spectrum A++–E

LED INSIDE








• 240V LED


Product details


230V ~50Hz
Total consumption: 19W
Material: Plaster / Glass
Dimmable: Triac C, Triac L





Dimensioned drawing



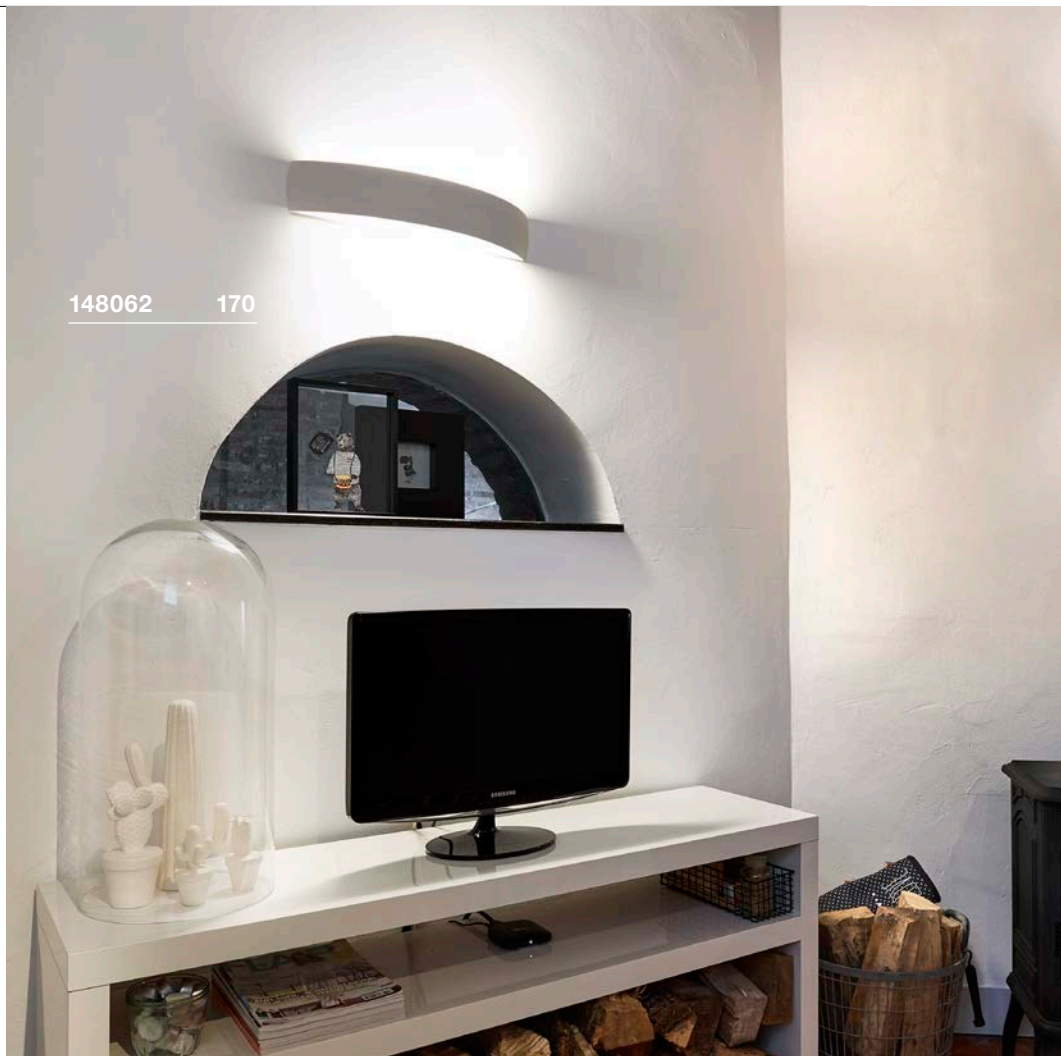




Variant	Item no.	GBP
Up: 520lm | 3000K | CRI>80 Down: 520lm | 3000K | CRI>80 white/matt transparent	148062	180,00

WAVE 25
WL

898

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11.5W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing




Variant	Item no.	GBP
830lm | 3000K | CRI>80		
white	**147821**	**144,00**
700lm | 3000K | CRI>80		
gold	**147823**	**162,00**
830lm | 3000K | CRI>80		
matt aluminium	**147826**	**162,00**

WAVE 45
WL

898

A-A++ Spectrum A++–E

LED INSIDE







- Premium LED with CRI>90


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 21W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
1400lm | 3000K | CRI>90		
white	**147841**	**188,10**
1300lm | 3000K | CRI>90		
gold	**147843**	**215,10**
1400lm | 3000K | CRI>90		
matt aluminium	**147846**	**215,10**

WAVE 45
WL

898

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM








- Premium LED with CRI>90
- Dim to Warm
- Light colour changes when dimming


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 22W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
1050lm | 2000-3000K | CRI>90		
white	**1000650**	**233,10**
900lm | 2000-3000K | CRI>90		
gold	**1000651**	**251,10**
1050lm | 2000-3000K | CRI>90		
aluminium / white	**1000652**	**251,10**

CARISO
WL

A-A++ Spectrum A⁺⁺–E

LED INSIDE





- The different lamp interior colours produce different light colours


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L

0.66

30000

Dimensioned drawing



Variant	Item no.	GBP
200lm | 2700K | CRI>80		
black / gold	**151710**	**148,50**
390lm | 3000K | CRI>80		
white	**151711**	**144,00**

CARISO
WL

A-A++ Spectrum A⁺⁺–E

LED INSIDE







- Premium LED with CRI>90
- The different lamp interior colours produce different light colours


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 22W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L

1.06


30000


Dimensioned drawing



Variant	Item no.	GBP
500lm | 1700-2700K | CRI>90		
black / gold	**151740**	**247,50**
900lm | 2000-3000K | CRI>90		
white	**151741**	**242,10**



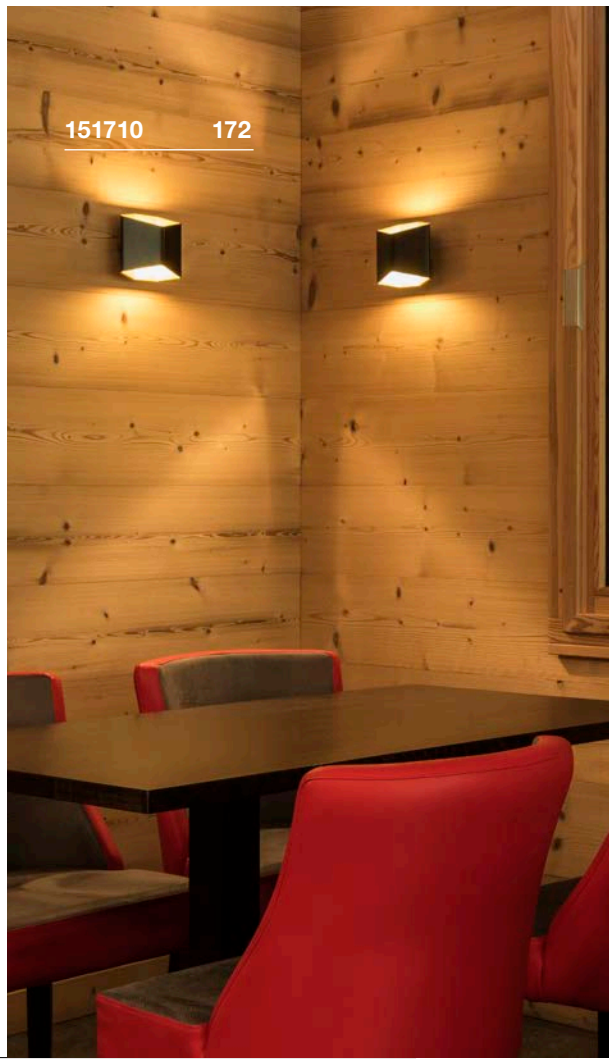

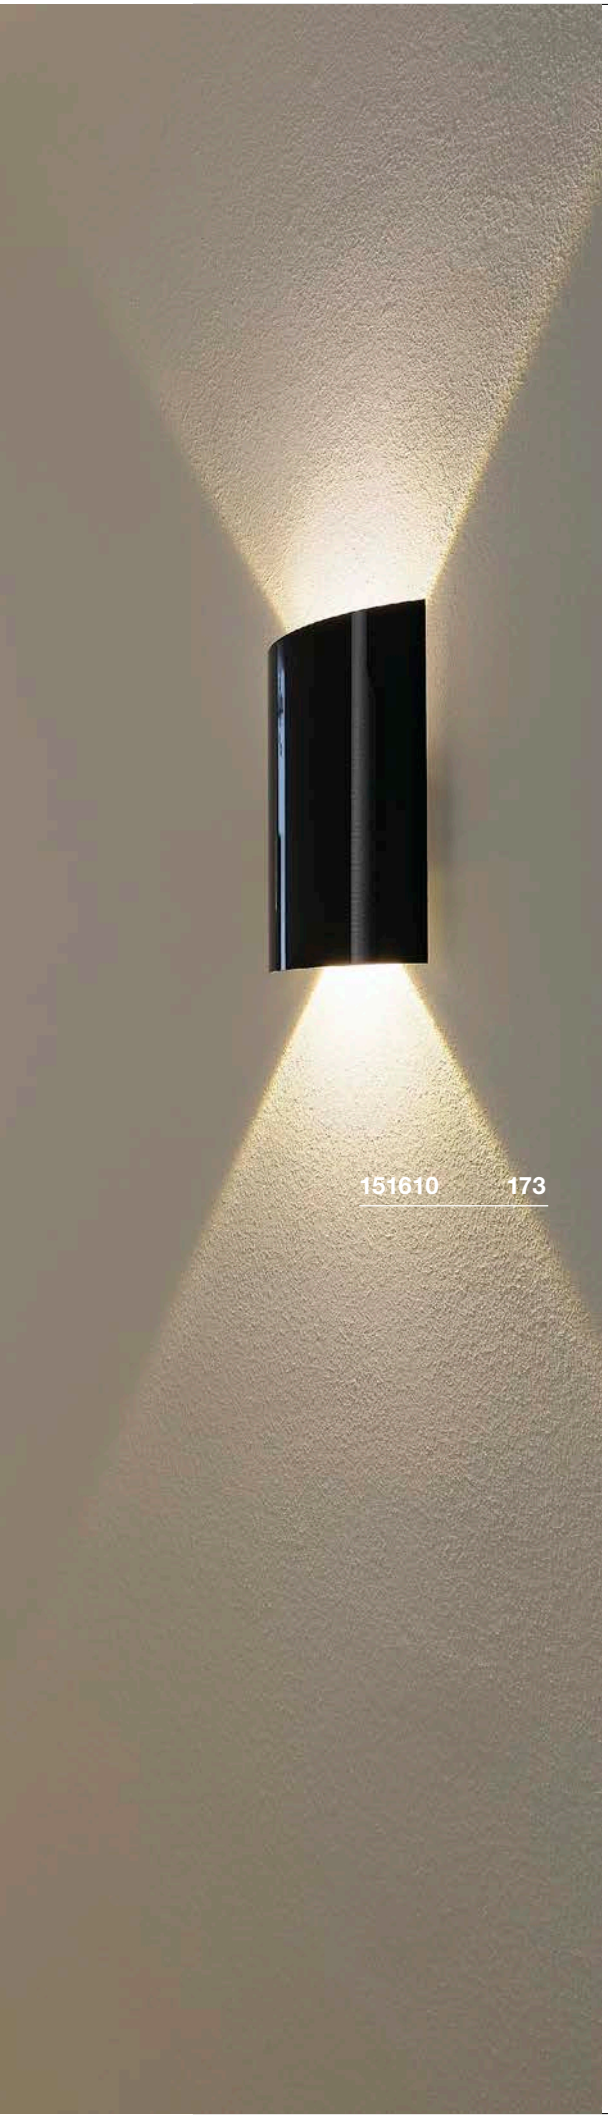

LED SAIL
WL

889

A-A++ Spectrum A++–E

LED INSIDE








Product details

100-240V ~50/60Hz | 700mA
Total consumption: 3.5W
Material: Aluminium / Steel





Dimensioned drawing



Variant	Item no.	GBP
110lm | 3000K | CRI>80		
■ black	**151600**	**126,00**
140lm | 3000K | CRI>80		
□ white	**151601**	**126,00**

LED SAIL
WL

889

A-A++ Spectrum A++–E

LED INSIDE









Product details

100-240V ~50/60Hz | 700mA
Total consumption: 6W
Material: Aluminium / Steel





Dimensioned drawing



Variant	Item no.	GBP
Up: 85lm | 3000K | CRI>80		
Down: 85lm | 3000K | CRI>80		
■ black	**151610**	**153,00**
Up: 120lm | 3000K | CRI>80		
Down: 120lm | 3000K | CRI>80		
□ white	**151611**	**153,00**

PLASTRA UP/DOWN
WL, curve

893

A-A++ Spectrum A++–E

LED INSIDE









- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 6.6W
Material: Plaster / Steel
Dimmable: Triac C, Triac L

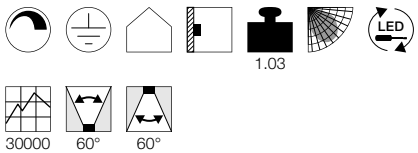

Dimensioned drawing



Variant	Item no.	GBP
Up: 125lm | 3000K | CRI>80 Down: 125lm | 3000K | CRI>80 white	**1001271**	**126,00**

PLASTRA 104
WL, QT14

893

D-A+ Spectrum A++–E







- Can be individually designed with colours, stickers and more

Product details

230V ~50Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

G9 2.5W
2700K 180lm EEI=A+
3kWh/1000h
Item no. 560302 | 10,80 GBP



LED G9 3.5W
2800K 300lm EEI=A+
4kWh/1000h
Item no. 1002131 | 17,10 GBP








Lamp details

max. 42W QT14

Variant	Item no.	GBP
G9 | QT14 white	**148016**	**40,50**

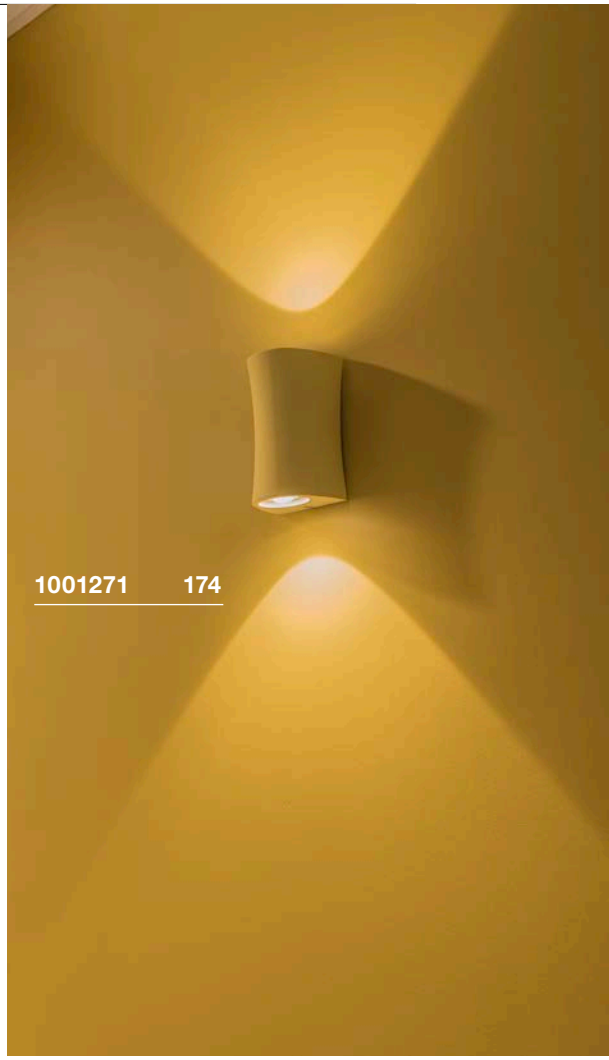

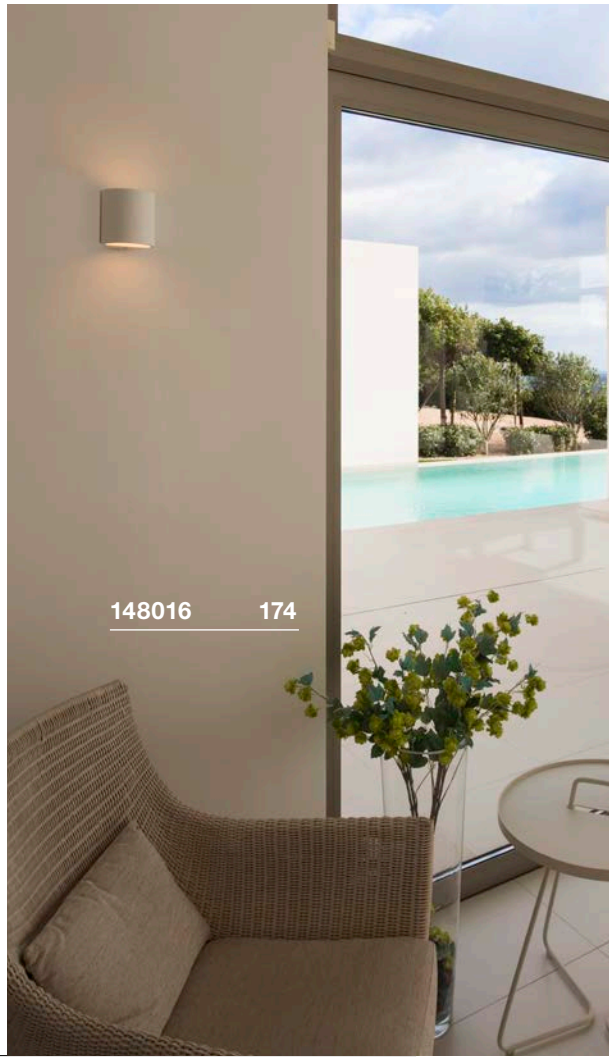

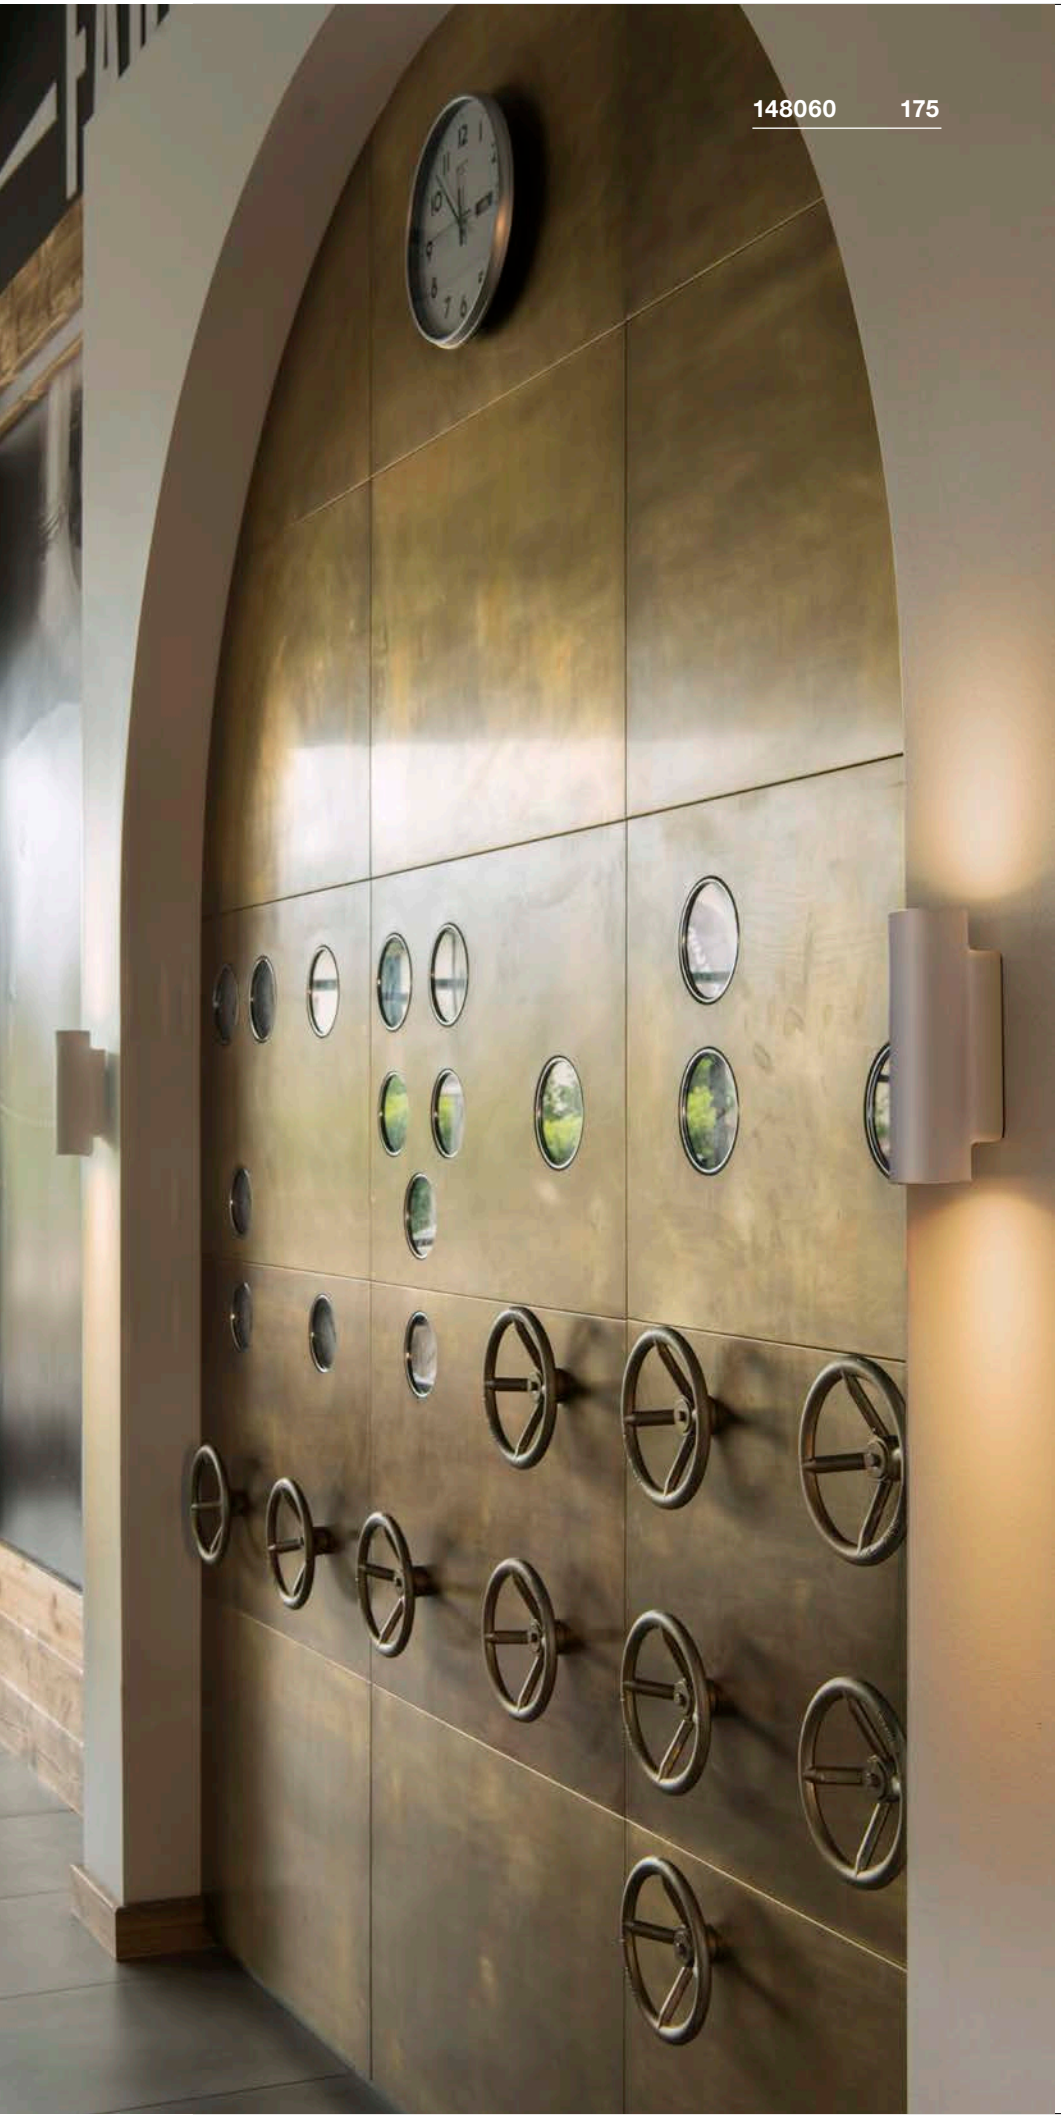

PLASTRA
WL, QPAR51

893

E-A++ Spectrum A⁺⁺–E









- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP




LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001561 | 9,90 GBP





Lamp details

2x max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**148060**	**49,50**

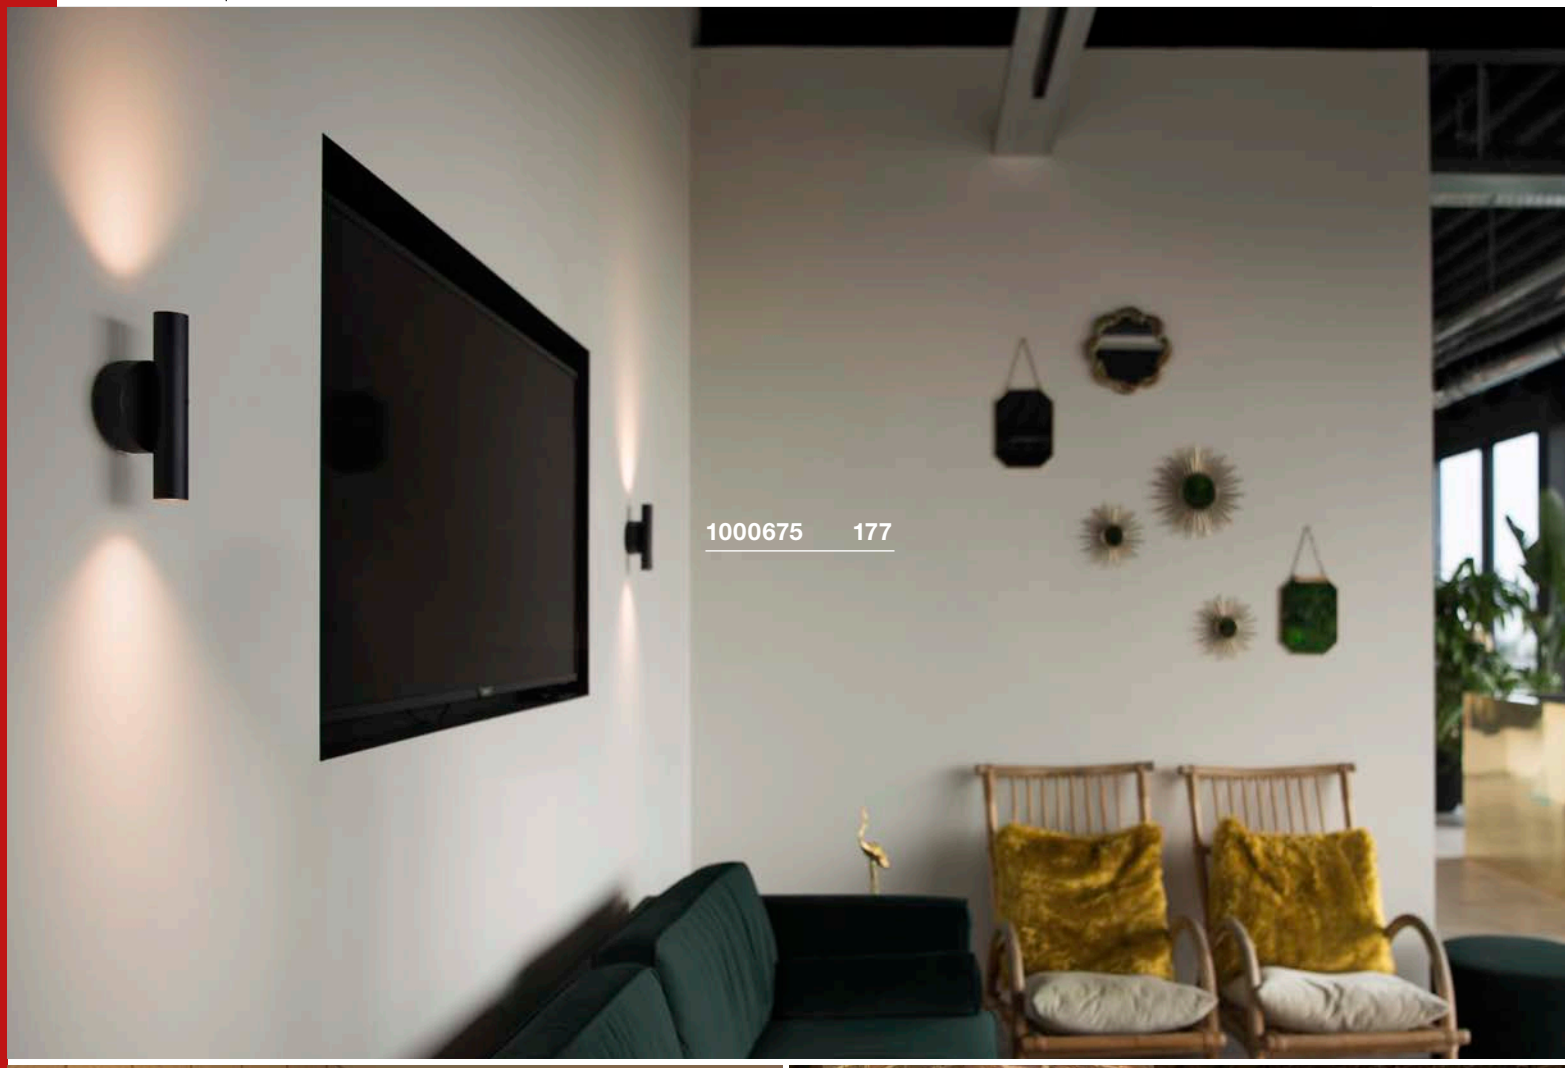
1000675 177

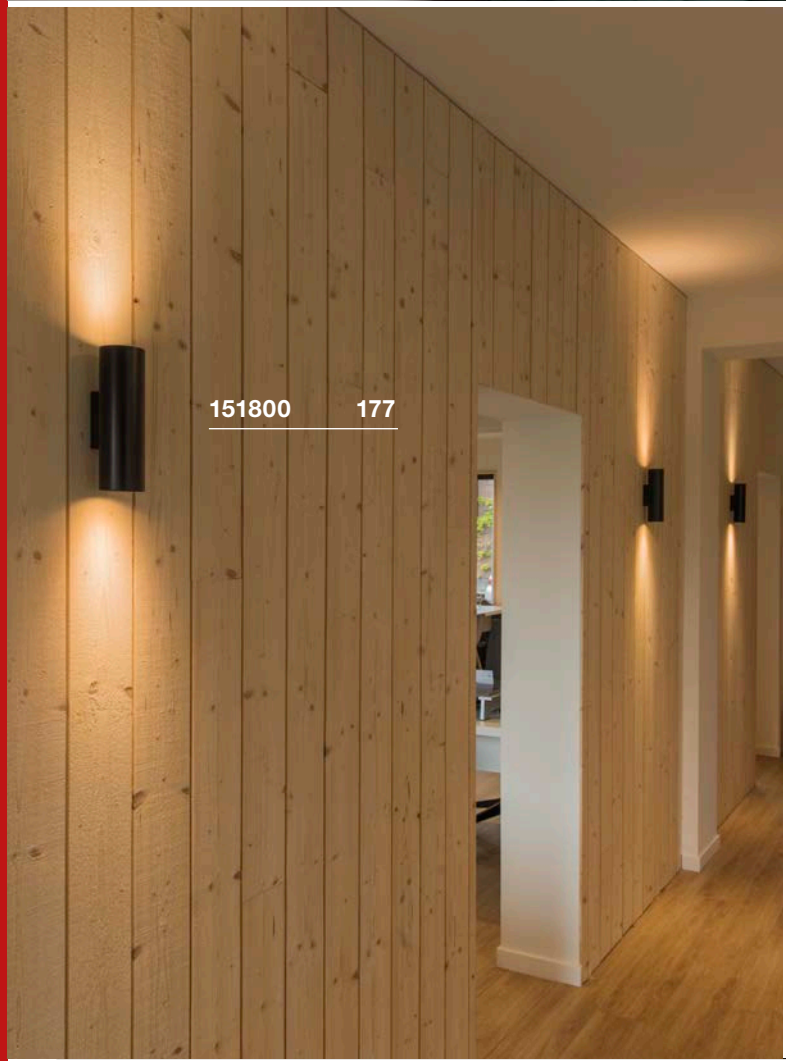
151800 177

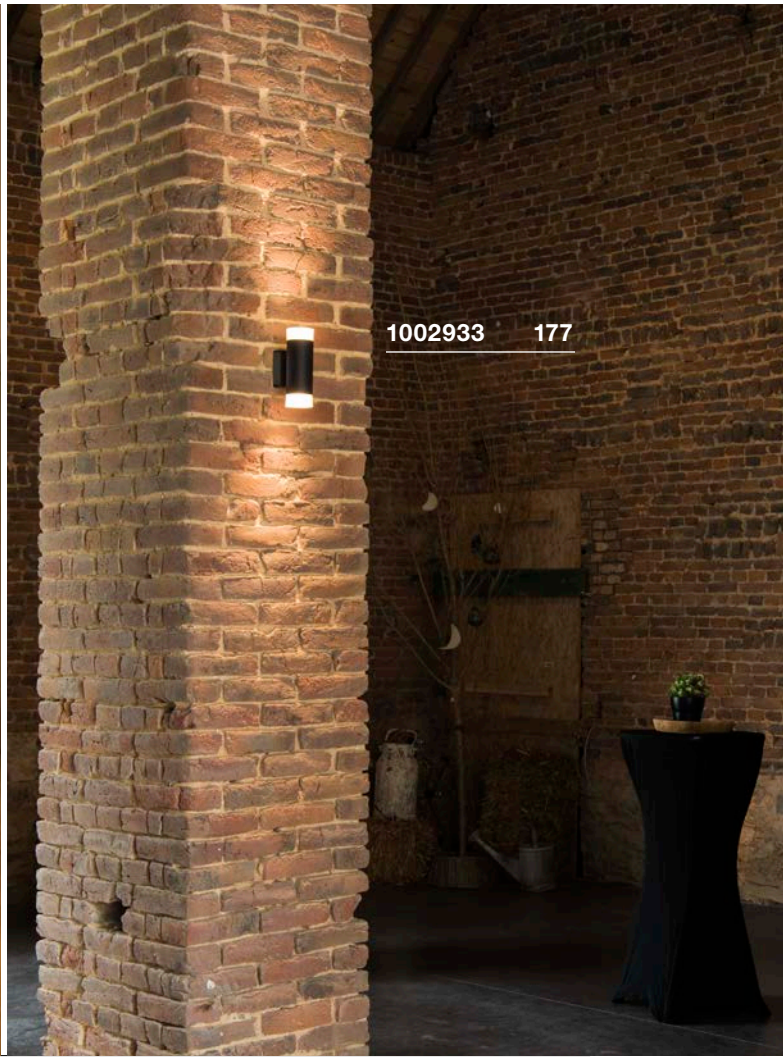
1002933 177

KARPO UP/DOWN
WL

889

A-A++ Spectrum A++–E

LED INSIDE







• Premium LED with CRI>90


Product details

100-240V ~50/60Hz | 450mA
Total consumption: 10W
Material: Aluminium





Dimensioned drawing



Variant	Item no.	GBP
Up: 320lm | 3000K | CRI>90 Down: 320lm | 3000K | CRI>90 ■ black	1000675	126,00
Up: 370lm | 3000K | CRI>90 Down: 370lm | 3000K | CRI>90 □ white	1000676	126,00
Up: 340lm | 3000K | CRI>90 Down: 340lm | 3000K | CRI>90 ■ gold	1002174	135,00

ENOLA B
WL, QPAR51

885

E-A++ Spectrum A++–E









Product details

230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended accessories

■ Deco ring
Item no. 151840 | 6,80 GBP



Recommended lamp

LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP



LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001561 | 9,90 GBP



Lamp details

2x max. 50W QPAR51
L: 8.5 cm max.

Variant	Item no.	GBP
GU10 | QPAR51 ■ black	151800	81,00
GU10 | QPAR51 □ white	151801	81,00
GU10 | QPAR51 ■ gold	151803	90,00
GU10 | QPAR51 ■ grey / black	151804	81,00

ASTINA UP/DOWN
WL, QPAR51

884

A-A++ Spectrum A++–E

NEW









• High-quality, frosted glass

Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Lamp details

2x max. 10W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 □ matt white / matt white	1002931	85,50
GU10 | QPAR51 ■ matt grey / matt grey	1002932	85,50
GU10 | QPAR51 ■ matt black / matt black	1002933	85,50

ROX
WL, QPAR111

895

E-A++ Spectrum A⁺⁺–E






- High-quality brushed finish

Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 0.9

Dimensioned drawing



Recommended lamp

LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP

LED GU10 13W 30°
4000K 1300lm EEI=A+
13kWh/1000h
Item no. 1001243 | 76,50 GBP

Lamp details

max. 50W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
brushed aluminium	**1000333**	**117,00**

ROX UP/DOWN
WL, QPAR111

895

E-A++ Spectrum A⁺⁺–E






- High-quality brushed finish

Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 1.2

Dimensioned drawing



Recommended lamp

LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP


LED GU10 13W 30°
4000K 1300lm EEI=A+
13kWh/1000h
Item no. 1001243 | 76,50 GBP

Lamp details

2x max. 50W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
brushed aluminium	**1000334**	**144,00**



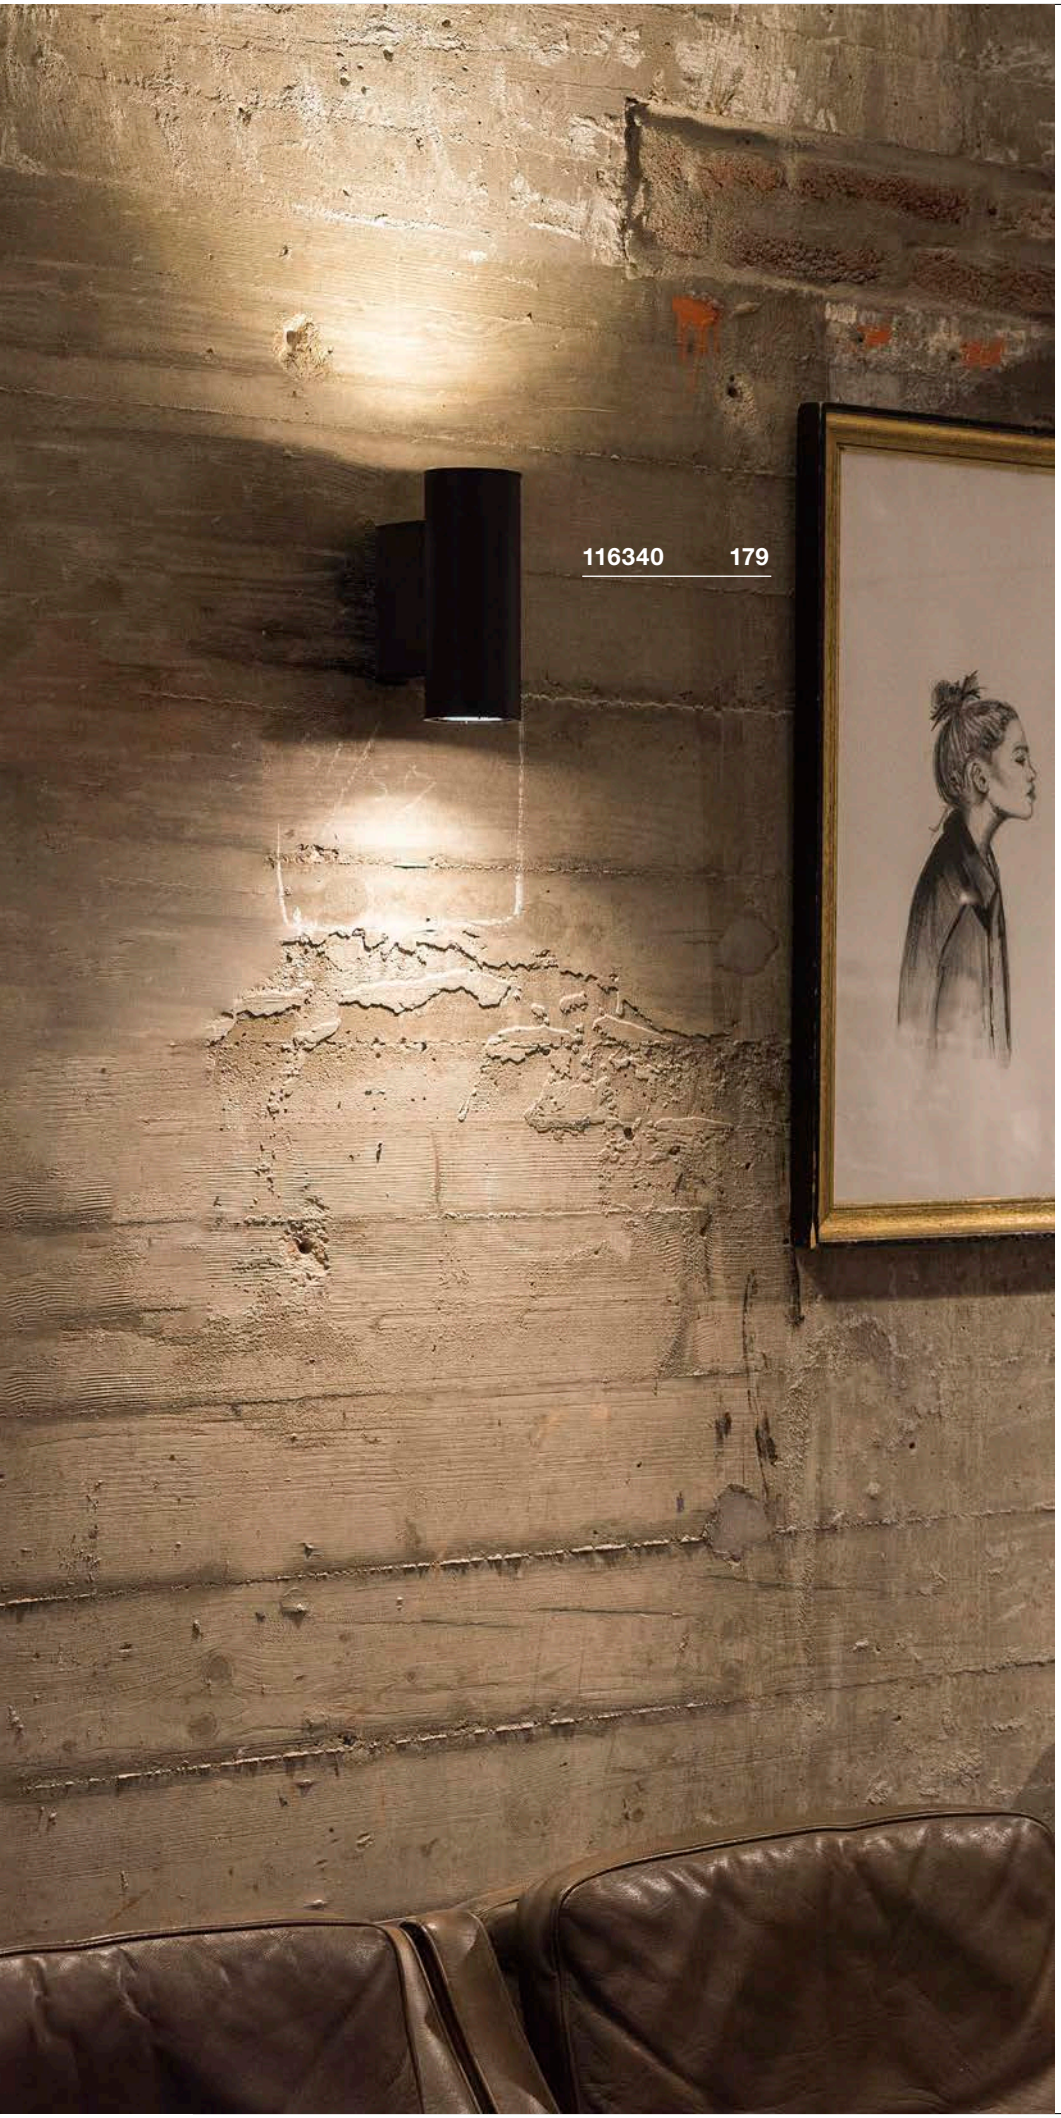

SUPROS 78 UP/DOWN WL

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

220-240V ~50/60Hz | 250mA
Total consumption: 24W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing



Recommended accessories

Lens, 20°
Item no. 116302 | 3,00 GBP


Lens, 40°
Item no. 116304 | 3,00 GBP

Variant	Item no.	GBP
Up: 700lm | 3000K | CRI>80 Down: 700lm | 3000K | CRI>80 ■ black	116340	180,00
Up: 700lm | 3000K | CRI>80 Down: 700lm | 3000K | CRI>80 □ white	116341	180,00

PLASTRA 101
WL, E14

893

E-A++ Spectrum A++–E

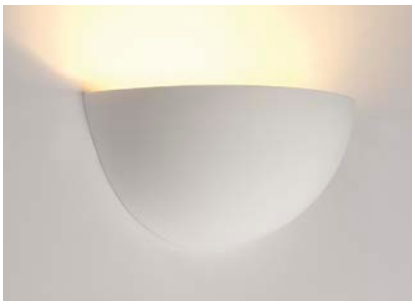







- Can be individually designed with colours, stickers and more

Product details
230V ~50Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP



LED E14 4W
2700K 250lm EEI=A+
4kWh/1000h
Item no. 560222 | 12,60 GBP



Lamp details
max. 40W C35
Ø: 4.5 cm max. L: 11 cm max.

Variant	Item no.	GBP
E14 | C35		
white	**148013**	**40,50**

PLASTRA
WL, curve, QT-DE12

893

D-A+ Spectrum A++–E









- Can be individually designed with colours, stickers and more

Product details
230V ~50Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

R7s 78mm 5.5W 330°
3000K 530lm EEI=A+
6kWh/1000h
Item no. 560332 | 9,90 GBP

Lamp details
max. 100W QT-DE12

Variant	Item no.	GBP
R7s 78mm | QT-DE12		
white	**148012**	**54,00**

PLASTRA
WL, cone, TCR-TSE

893


B-A++ Spectrum A++–E






- Can be individually designed with colours, stickers and more

Product details
230V ~50Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

GX53 4.2W 35°
3000K 200lm EEI=A
5kWh/1000h
Item no. 550092 | 40,50 GBP



LED GX53 7.5W 120°
4000K 620lm EEI=A+
8kWh/1000h
Item no. 1001221 | 29,70 GBP



Lamp details
max. 11W TCR-TSE


Variant	Item no.	GBP
GX53 | TCR-TSE		
white	**148061**	**49,50**




148061 180




148013 180

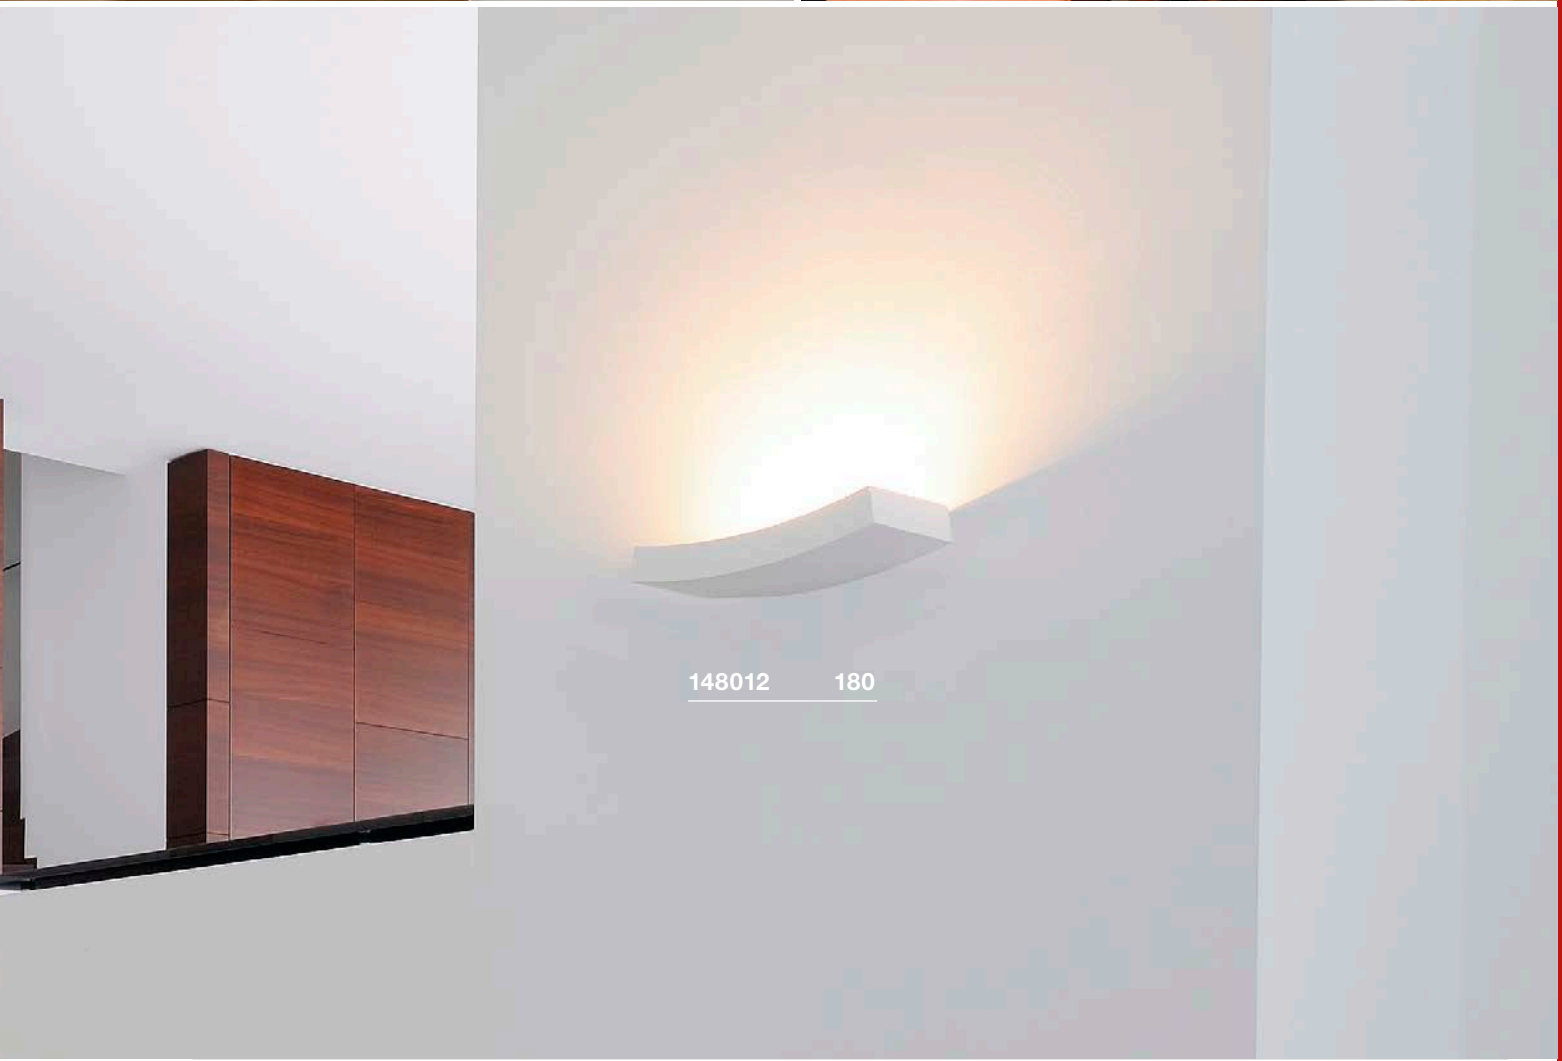

148012 180

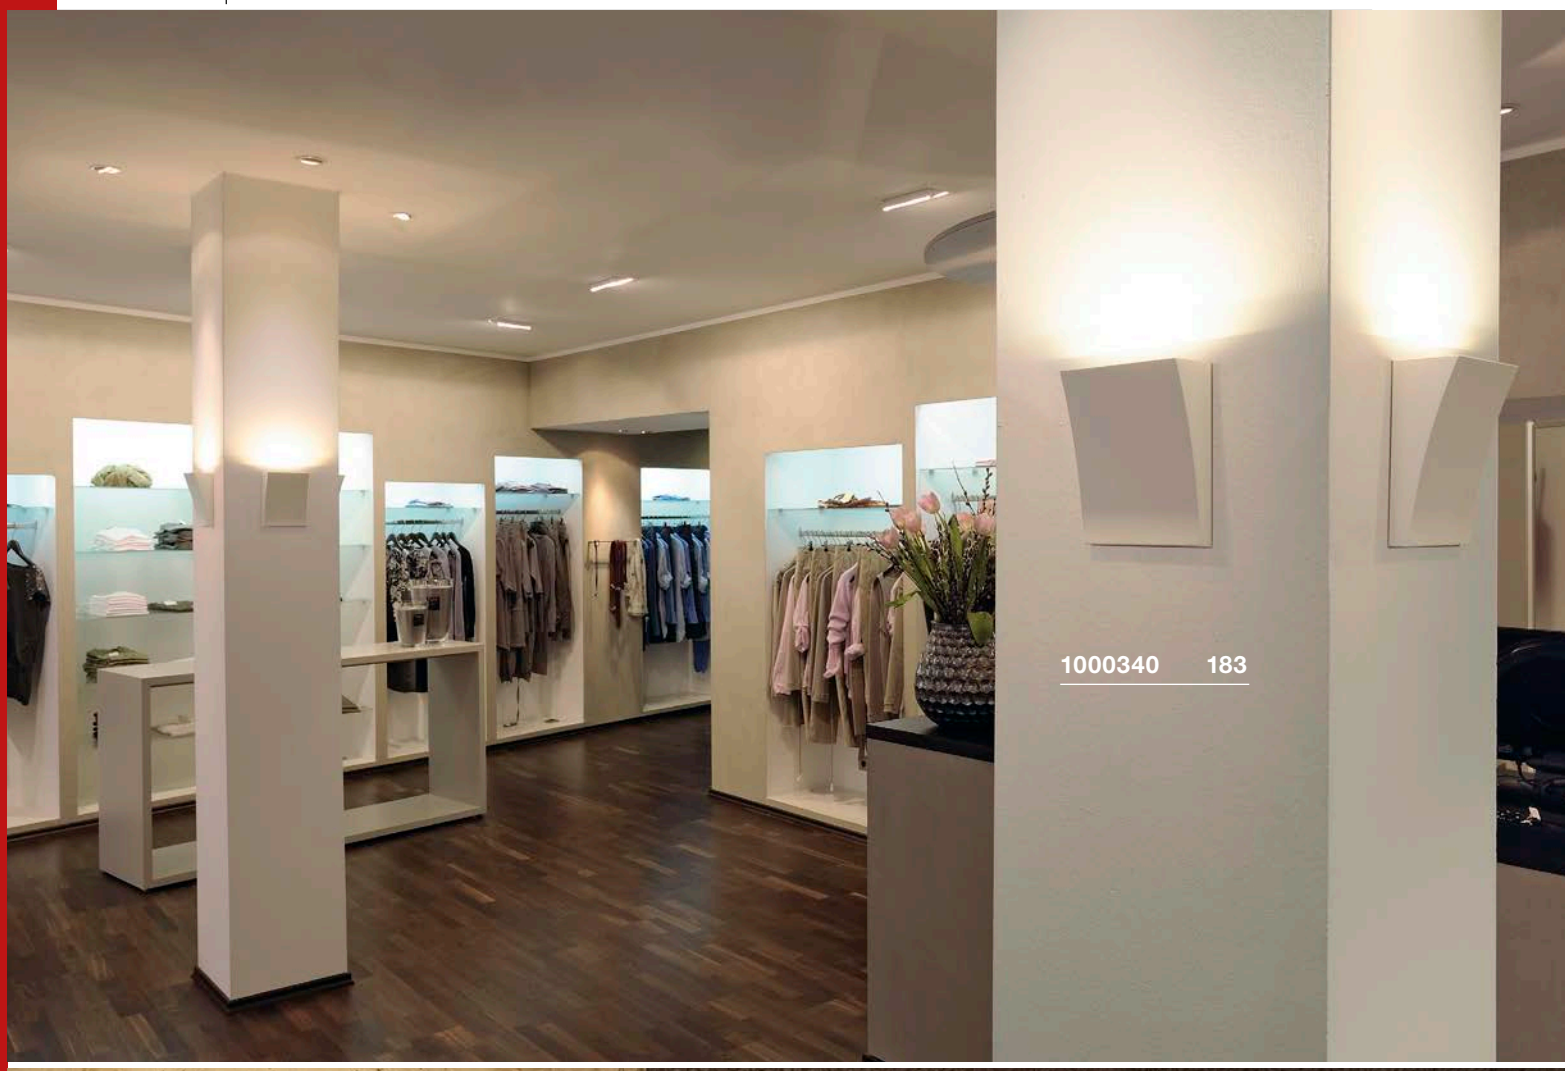
1000340 183

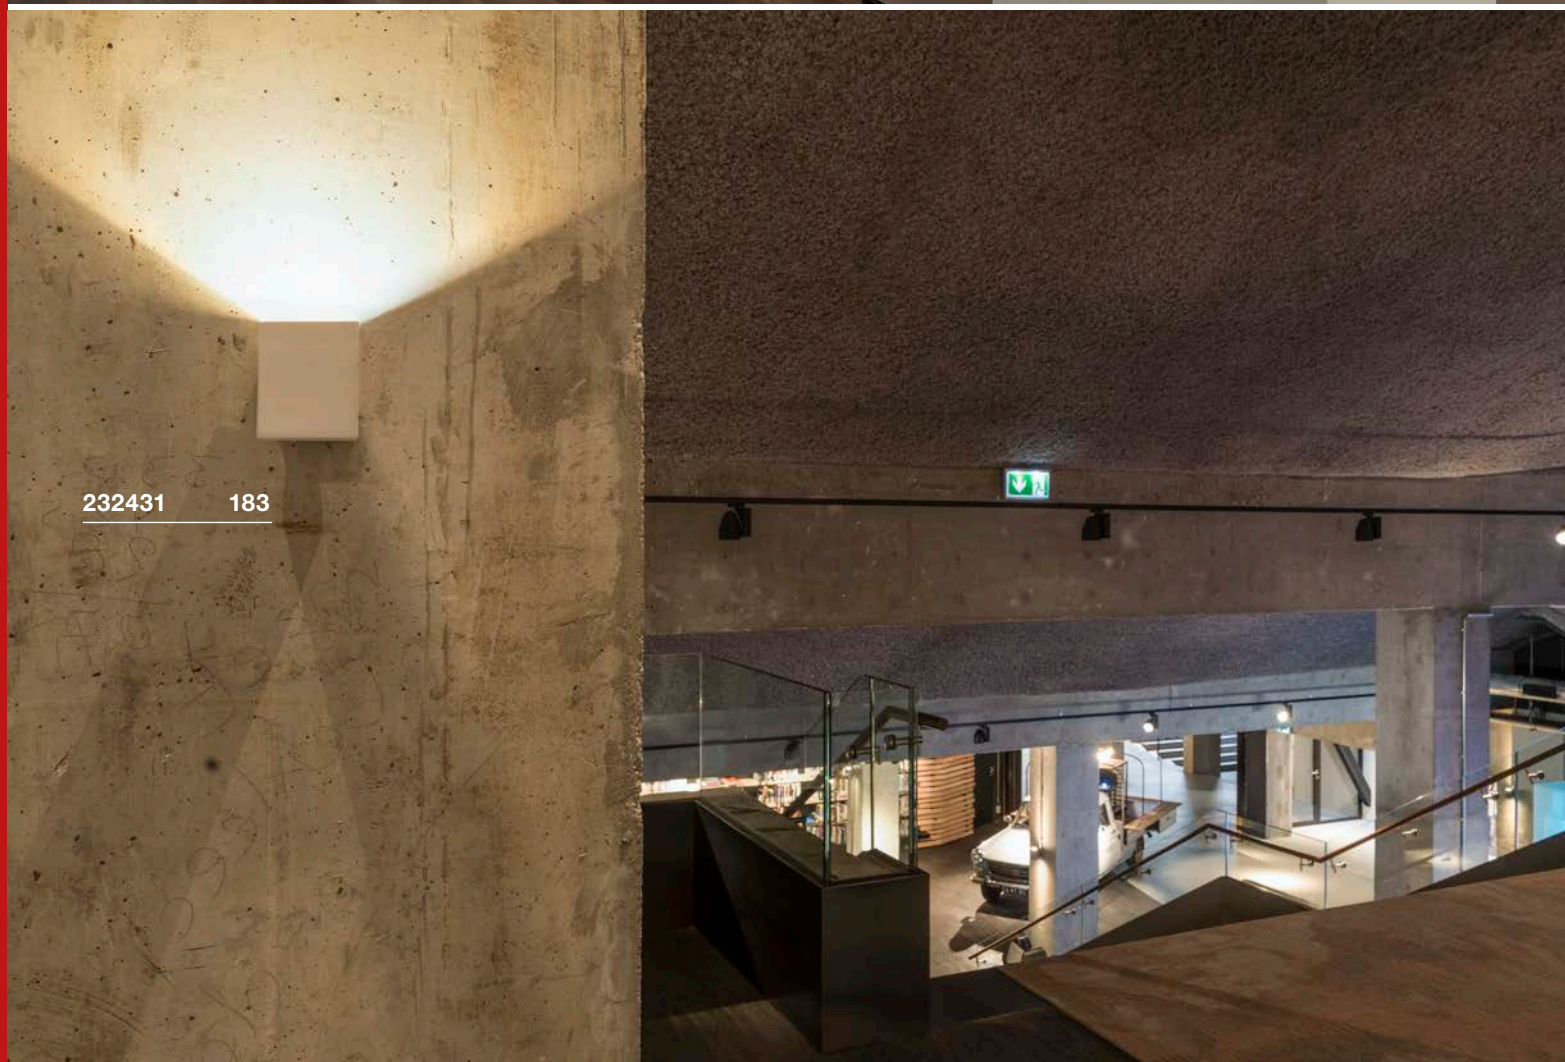
232431 183


DELWA
WL

A-A++ Spectrum A++–E

LED INSIDE









Product details

100-240V ~50/60Hz | 700mA
Total consumption: 10W
Material: Aluminium / Glass

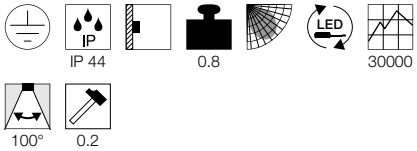

Dimensioned drawing



Variant	Item no.	GBP
910lm | 3000K | CRI>80		
white	**1000340**	**162,00**
910lm | 3000K | CRI>80		
grey	**1000341**	**162,00**
910lm | 3000K | CRI>80		
anthracite	**1000342**	**162,00**

QUAD
WL

894

A-A++ Spectrum A++–E

LED INSIDE








Product details

200-240V ~50/60Hz | 700mA
Total consumption: 4.6W
Material: Aluminium / Glass



Dimensioned drawing



Variant	Item no.	GBP
100lm | 3000K | CRI>80		
white	**232461**	**72,00**
80lm | 3000K | CRI>80		
anthracite	**232465**	**72,00**

BIG QUAD
WL

A-A++ Spectrum A++–E

LED INSIDE









Product details

100-277V ~50/60Hz | 350mA
Total consumption: 4.5W
Material: Aluminium / Glass

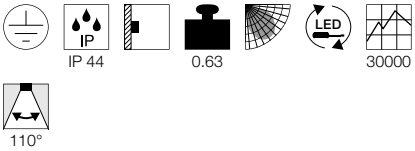

Dimensioned drawing



Variant	Item no.	GBP
290lm | 3000K | CRI>80		
white	**232431**	**103,50**
260lm | 3000K | CRI>80		
anthracite	**232435**	**103,50**

PEMA®
WL

A-A++ Spectrum A++–E

LED INSIDE








Product details

230V ~50Hz
Total consumption: 4.7W
Material: Aluminium / Glass



IP 44 | 0.3 | 30000

Dimensioned drawing



Note

Protection class IP44 only when mounted with the light emission opening pointing downwards.

Variant	Item no.	GBP
125lm | 3000K | CRI>80		
white	231010	90,00
125lm | 3000K | CRI>80		
grey	231012	90,00
125lm | 3000K | CRI>80		
anthracite	231015	90,00

LYNAH
WL

890

A-A++ Spectrum A++–E

LED INSIDE









- Luminaire can be rotated in multiple directions. Swivels by 180°.

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 14W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C




1.4




40000 | 180° | 24°


Dimensioned drawing




Variant	Item no.	GBP
950lm | 3000K | CRI>80		
black	1000414	180,00
950lm | 3000K | CRI>80		
white	1000415	180,00



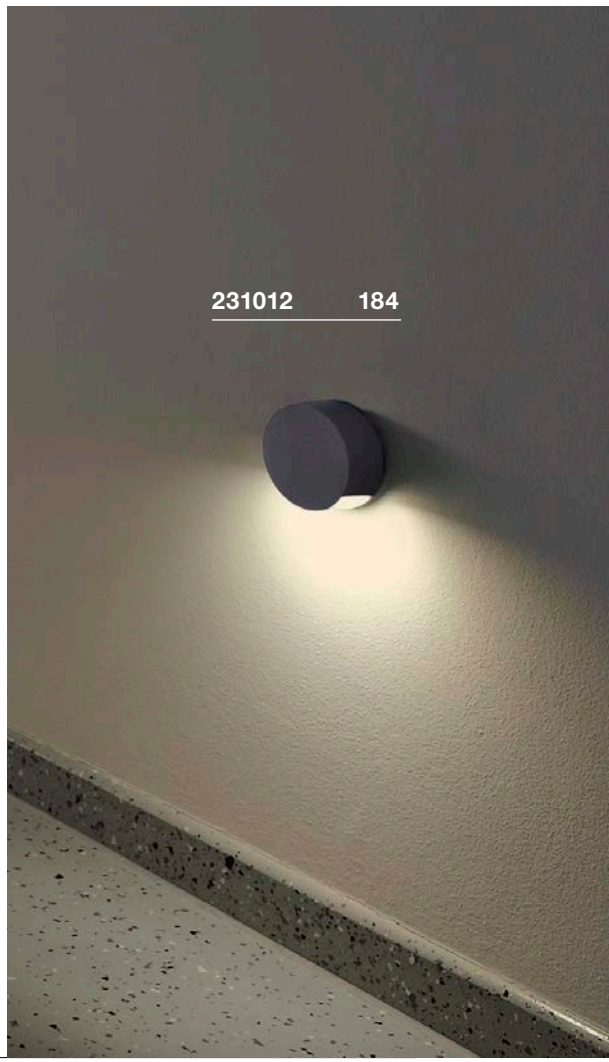

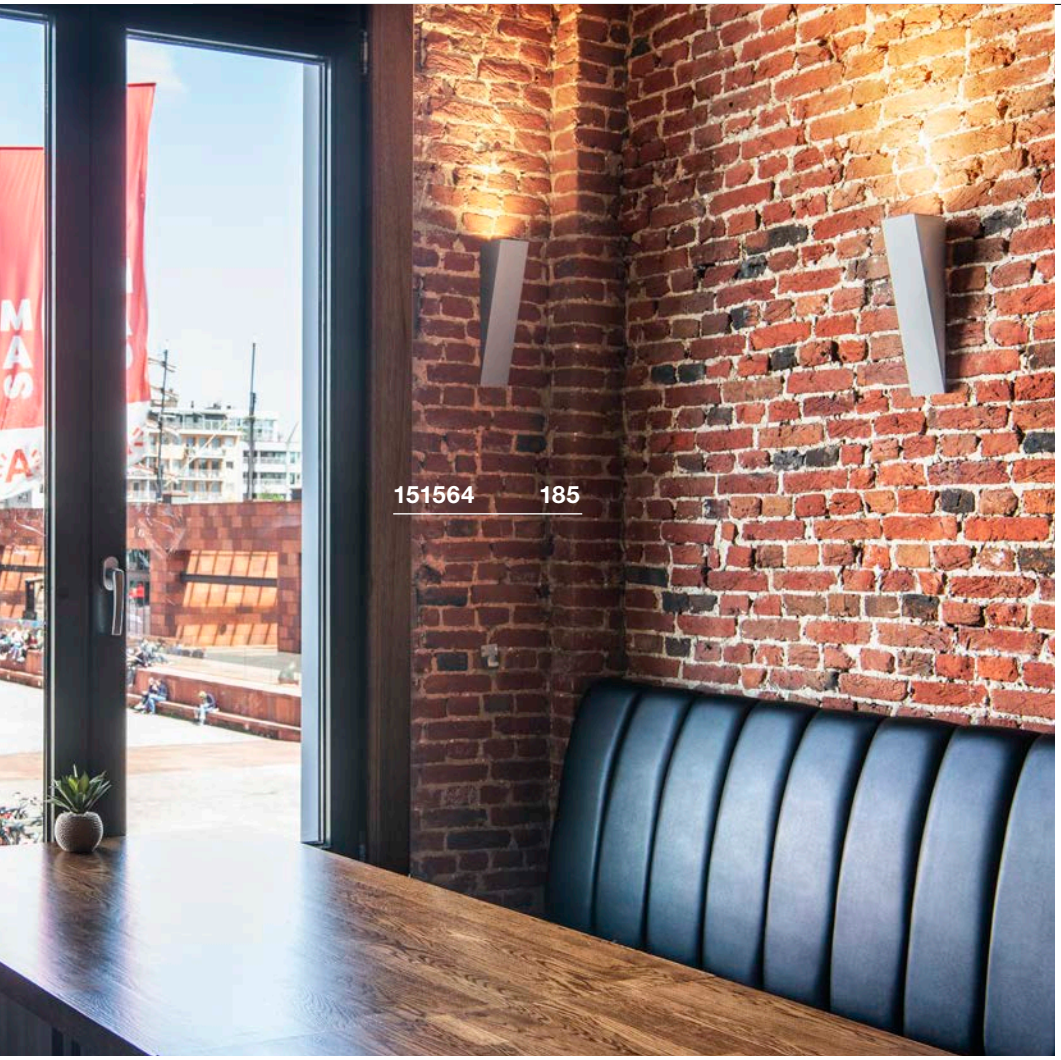

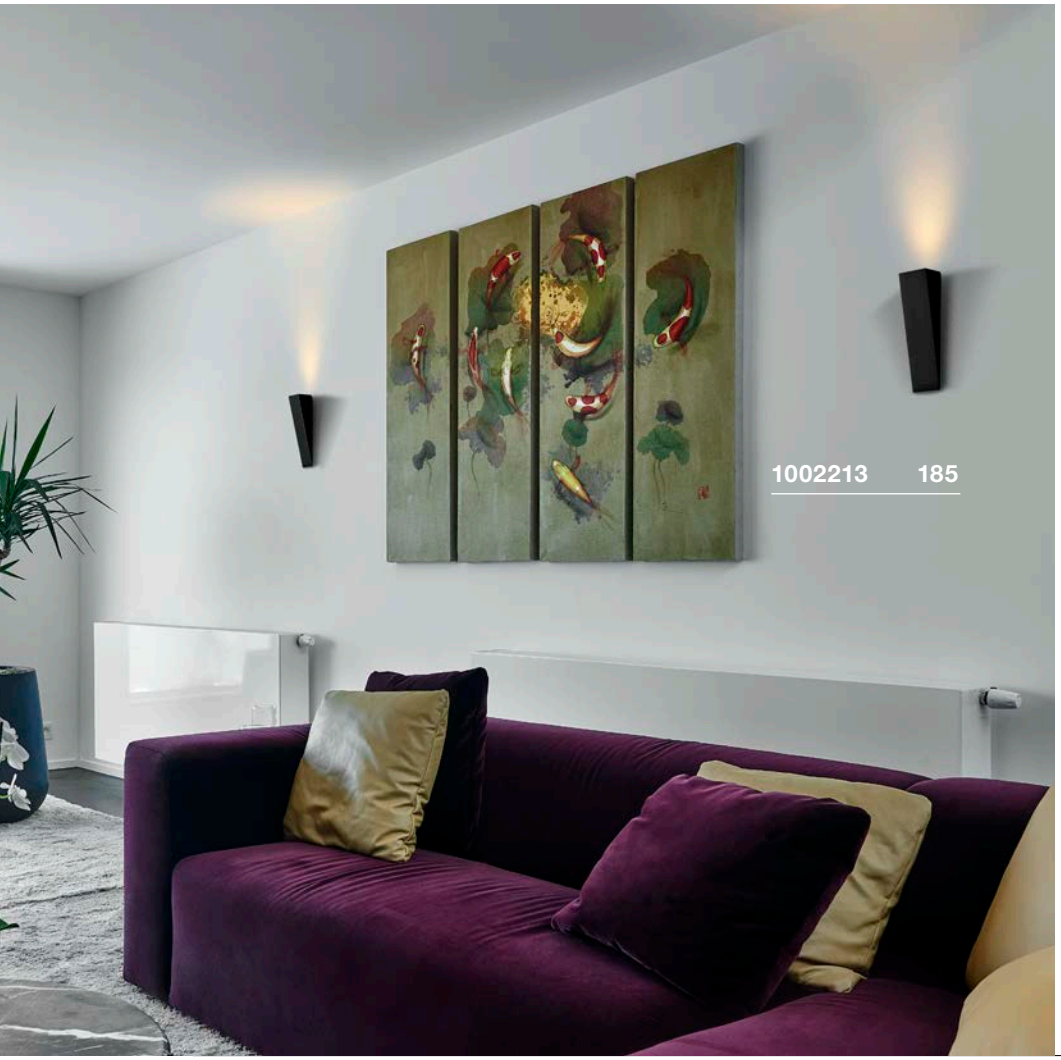

ALTRA DICE
WL, QPAR51

883

E-A++ Spectrum A⁺⁺–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Steel

0.55

Dimensioned drawing



Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**151561**	**90,00**
GU10 | QPAR51 grey	**151564**	**90,00**
GU10 | QPAR51 black	**1002213**	**90,00**

SHELL 15
WL, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- Indirect lighting


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Acrylic
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
1400lm | 3000K | CRI>80		
white	**1000422**	**197,10**

SHELL 30
WL, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- Indirect lighting


Product details

220-240V ~50/60Hz | 700mA
Total consumption: 54W
Material: Aluminium / Acrylic
Dimmable: Triac C







Dimensioned drawing




Variant	Item no.	GBP
5600lm | 3000K | CRI>80		
white	**1000423**	**296,10**

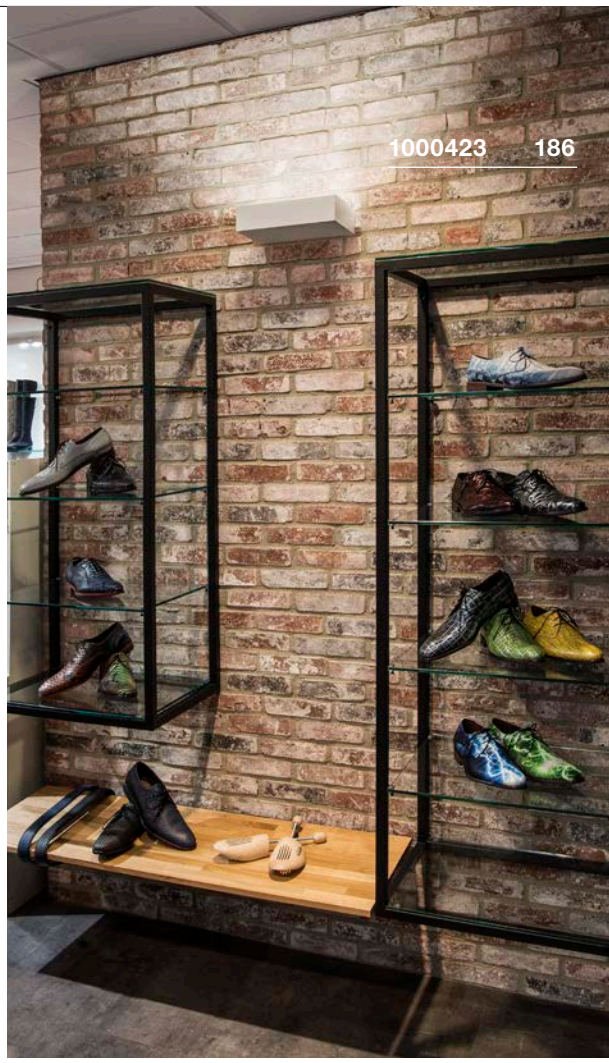

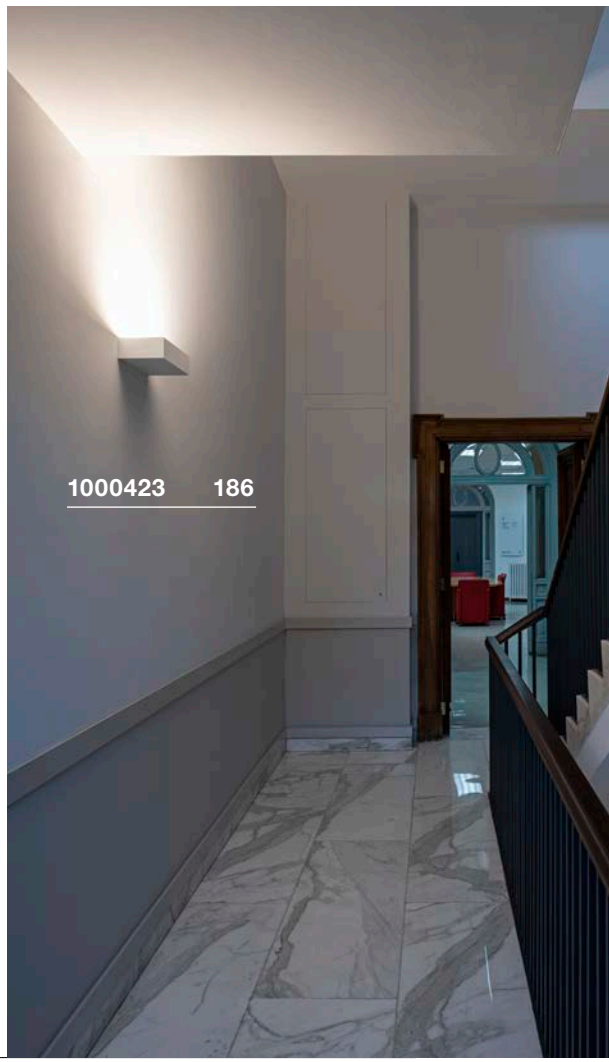



1000422 186

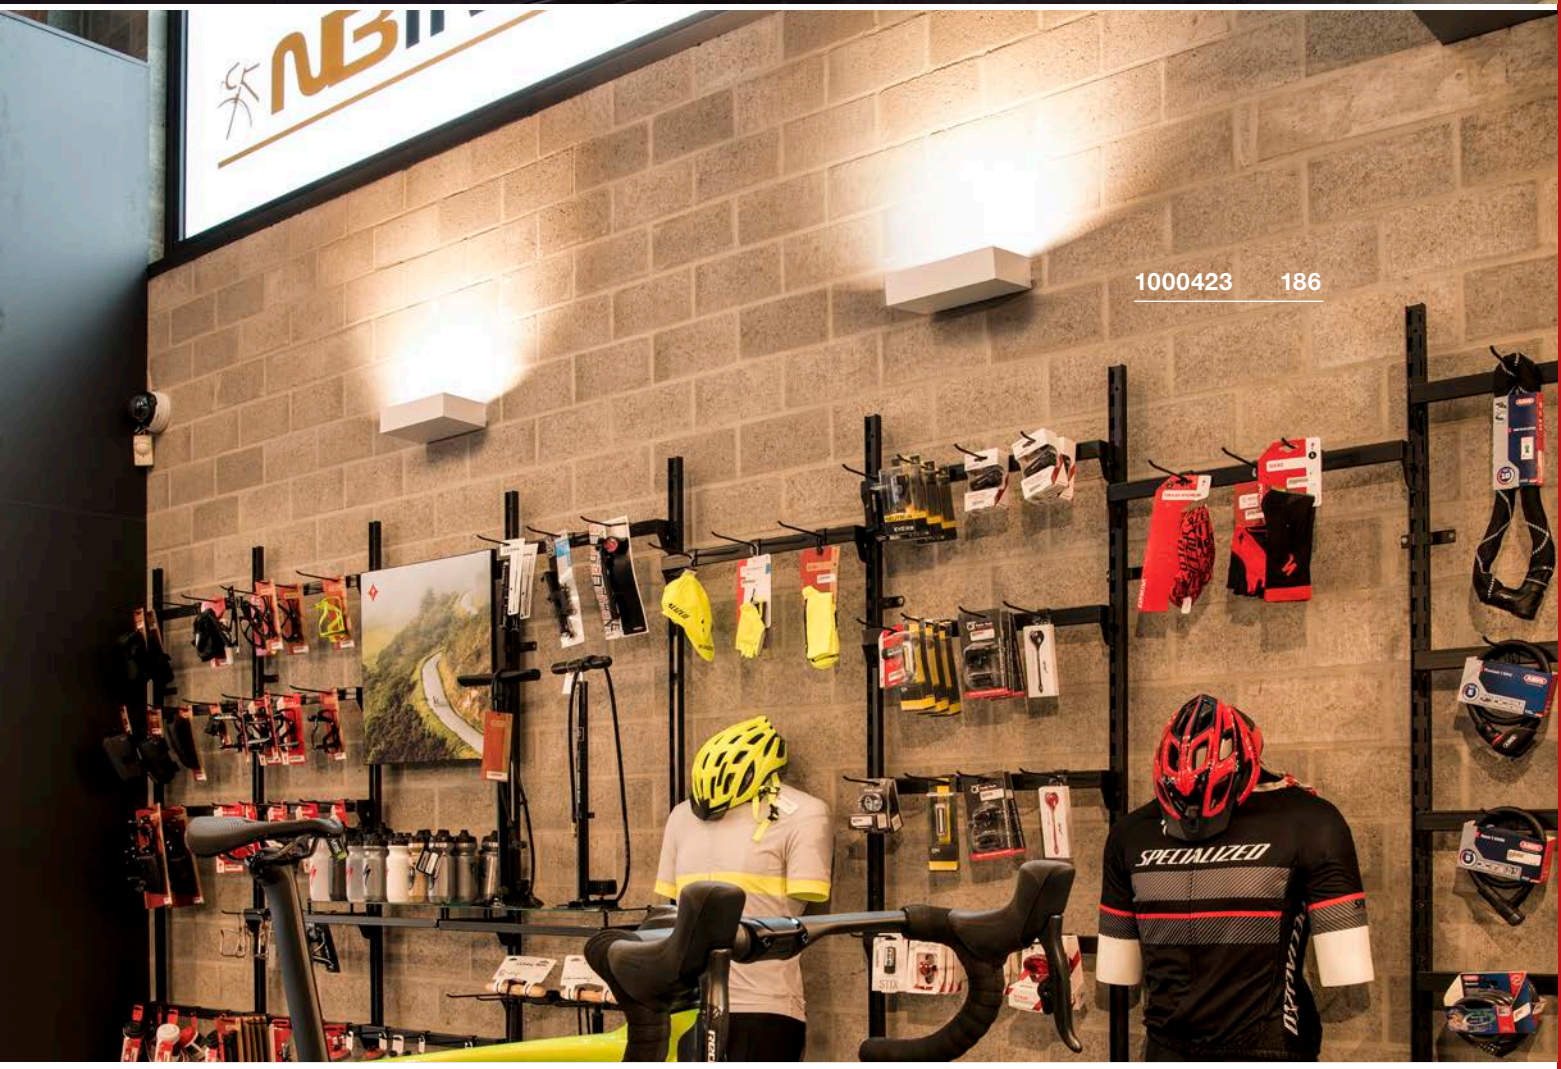

1000423 186

LENITO
WL

889

A-A++ Spectrum A++–E

LED INSIDE

NEW











Product details

220-240V ~50/60Hz | 160mA
Total consumption: 24W
Material: Aluminium / Polycarbonate (PC)





Dimensioned drawing



Variant	Item no.	GBP
2450lm | 3000K | CRI>80		
■ black	1002920	135,00
2540lm | 3000K | CRI>80		
□ white	1002921	135,00



MERADO FLOOD
WL

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Asymmetric light distribution

Product details

220-240V ~50/60Hz | 1000mA
Total consumption: 40W
Material: Aluminium
Dimmable: Triac C, Triac L

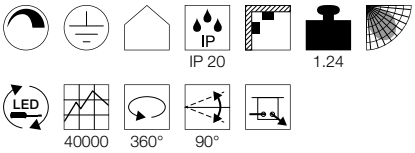

Dimensioned drawing



Variant	Item no.	GBP
3000lm | 3000K | CRI>80 ■ black	**1001469**	**180,00**
3000lm | 3000K | CRI>80 □ white	**1001468**	**180,00**
3200lm | 4000K | CRI>80 ■ black	**1001473**	**180,00**
3200lm | 4000K | CRI>80 □ white	**1001472**	**180,00**

ALMINO
WL, UGR<19

883

A-A++ Spectrum A++–E

LED INSIDE







- Suitable for industrial areas, warehouse and logistical areas
- Efficient basic lighting with limited direct glare, UGR<19
- Extremely hard-wearing housing

Product details


220-240V ~50/60Hz | 300mA
Total consumption: 45W
Material: Steel / Polycarbonate (PC)

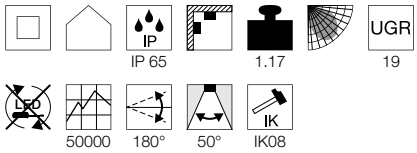



Dimensioned drawing




Variant	Item no.	GBP
6200lm | 4000K | CRI>80 grey / white	1002195	188,10

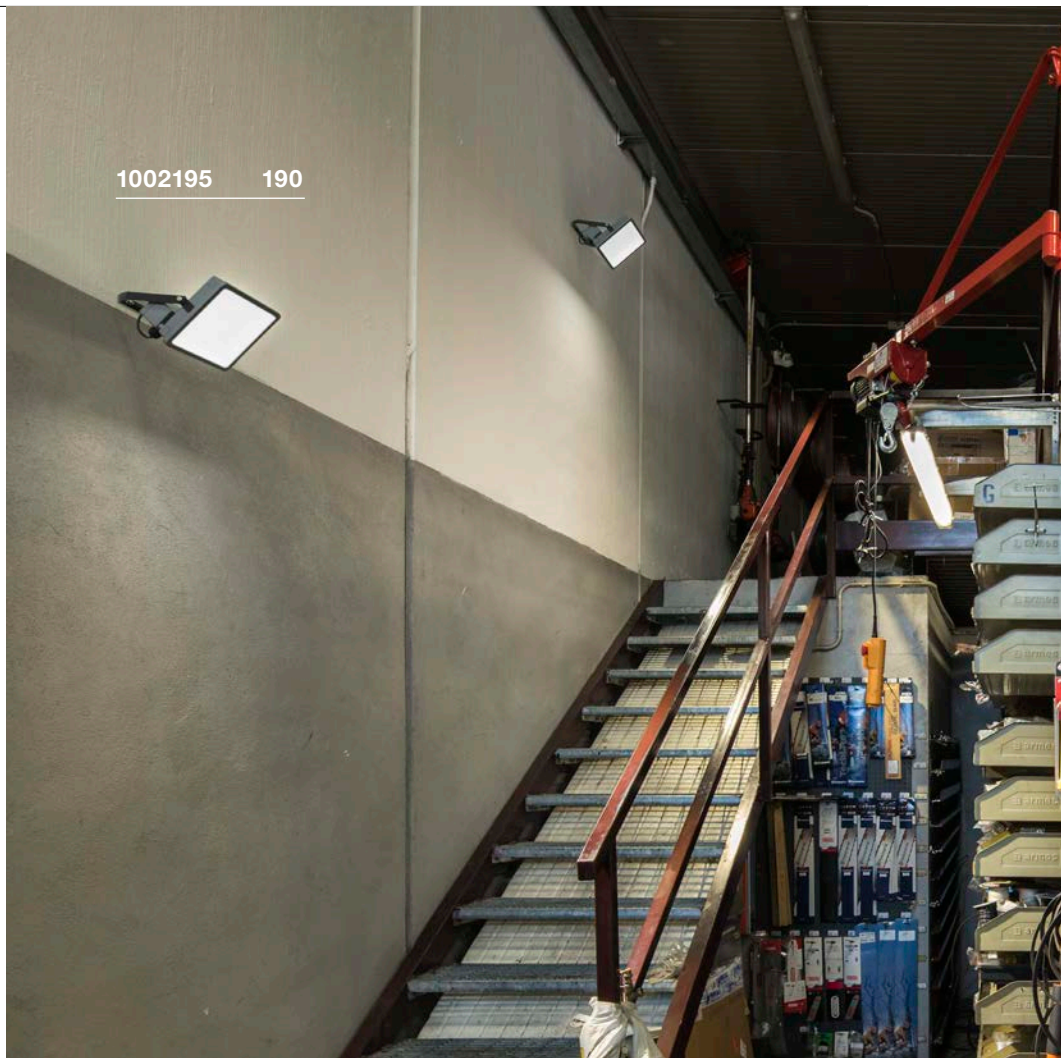

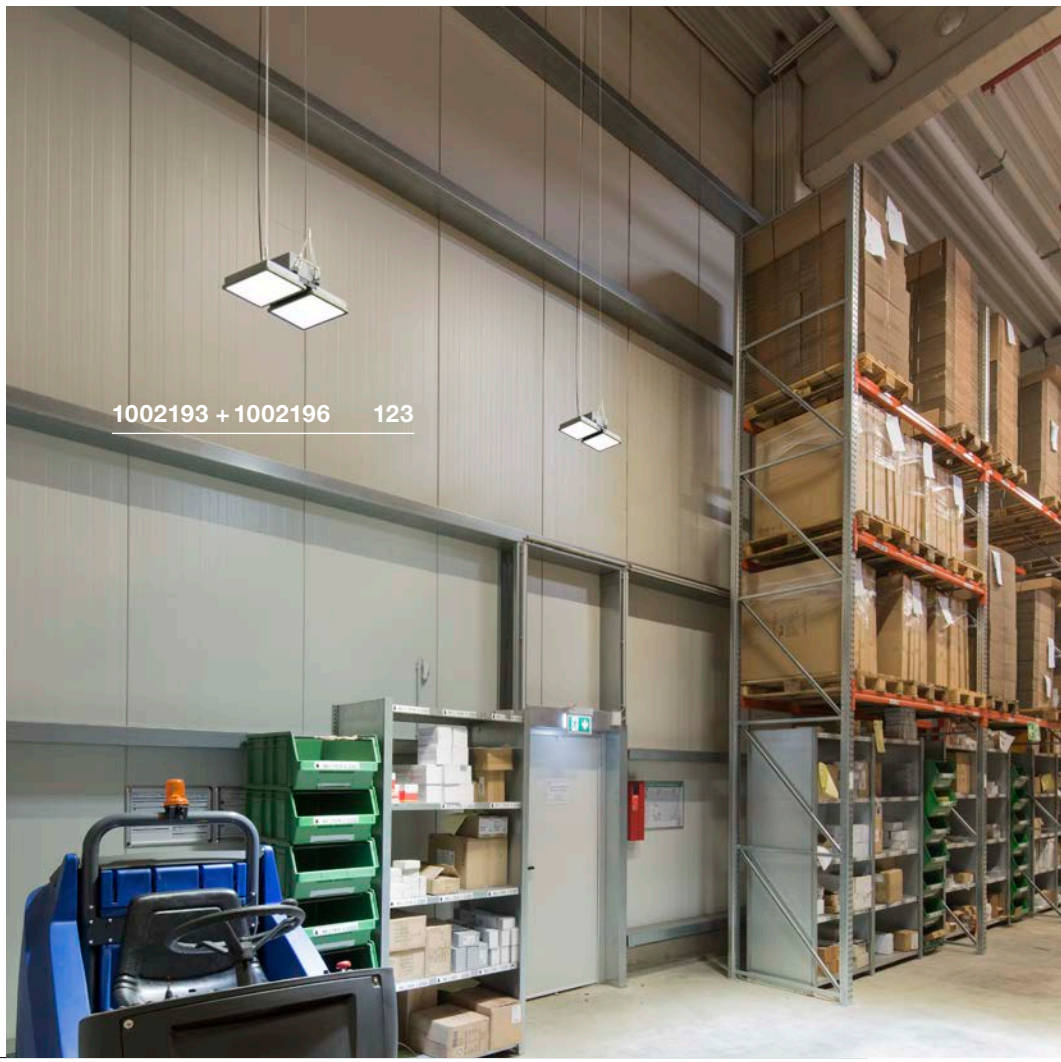

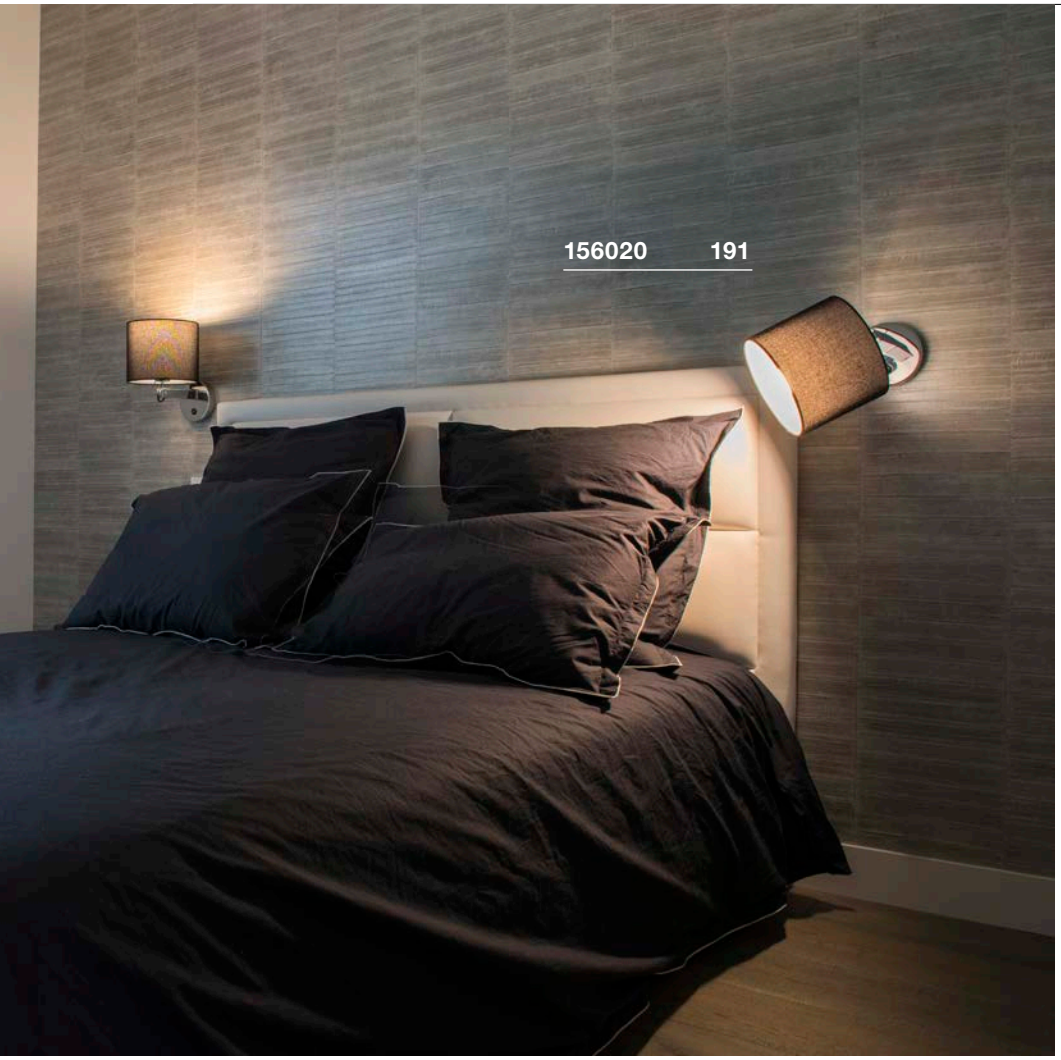


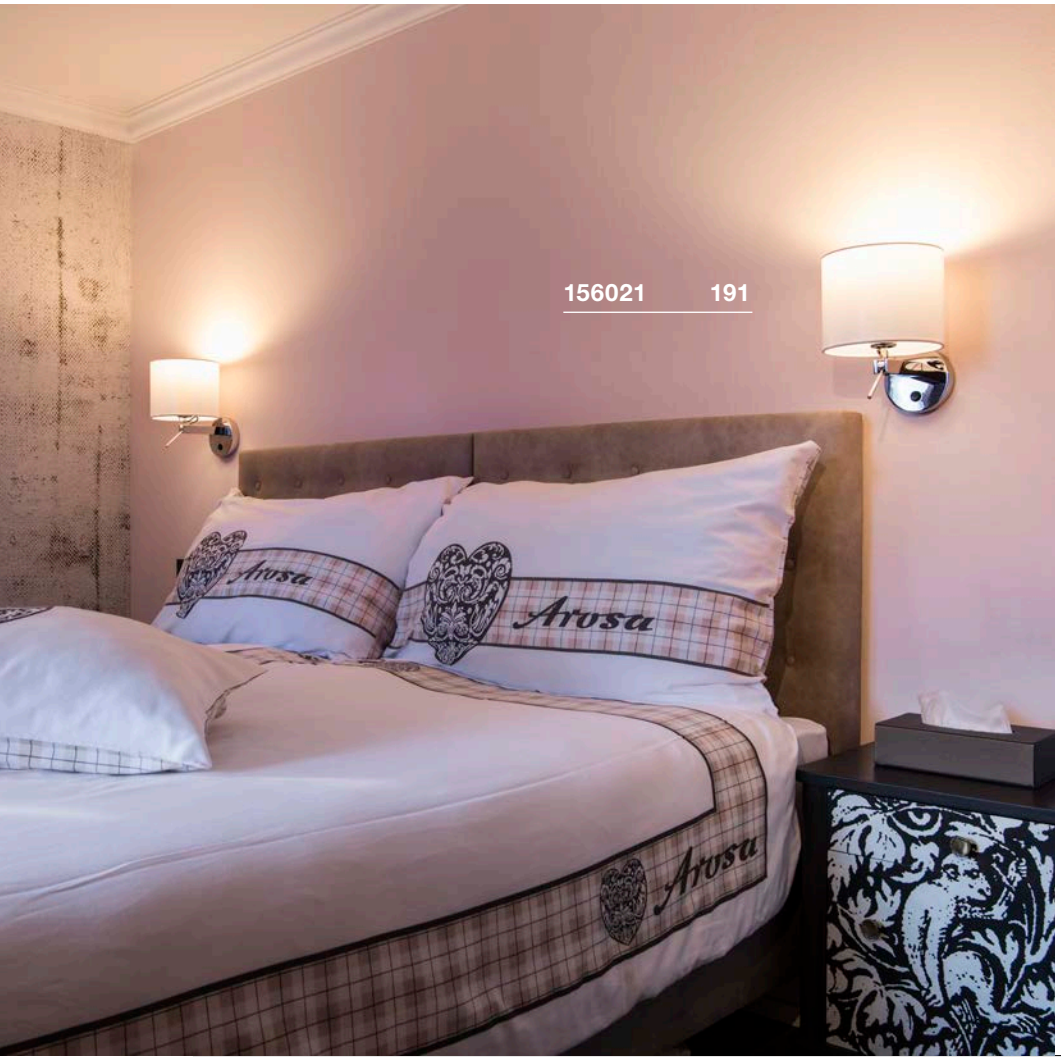

TENORA
WL, E27

897

E-A++ Spectrum A++–E








- Rotating and swivelling wall light
- Switch at canopy

Product details

220-240V ~50/60Hz
Material: Aluminium / Textile



Dimensioned drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP



Lamp details

max. 60W

Variant	Item no.	GBP
E27		
black / chrome	**156020**	**117,00**
E27		
white	**156021**	**117,00**

FENDA
WL, basic, E27

886

E-A++ Spectrum A⁺⁺–E









- Individually configurable by selecting the lamp shades

Product details
230V ~50Hz
Material: Steel



Dimensioned drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details
max. 40W
L: 12 cm max.

Variant	Item no.	GBP
E27		
chrome	1001449	67,50
E27		
black	1001450	63,00

FENDA
Ø 20cm, round

886








- Individually configurable by selecting a suitable lamp base

Product details
Material: Textile / Steel




Dimensioned drawing



Note
max. 60W

Variant	Item no.	GBP
black	1001451	29,70
black / copper	1001452	34,60
white	1001453	29,70
beige	1001454	29,70

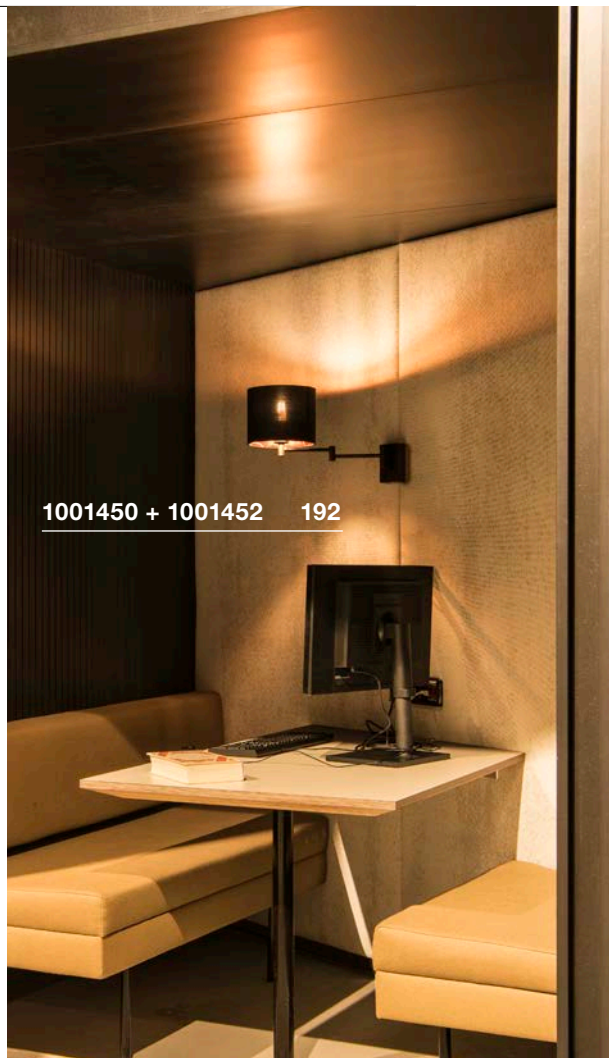







FENDA
WL, E27


886

E-A++ Spectrum A++–E

NEW









- Individually configurable by selecting the lamp shades
- Rotating and swivelling wall light
- Switch at canopy

Product details

220-240V ~50/60Hz
Material: Steel / Aluminium



Dimensioned drawing



Lamp details

max. 40W

Variant	Item no.	GBP
E27		
matt black	1003034	76,50
E27		
matt white	1003035	76,50

KENKUA SPOT
WL, E27

E-A++ Spectrum A++–E

LED INSIDE

NEW








- High-quality, frosted glass
- Adjustable reading light
- Light sources can be switched separately at the canopy

Product details

100-277V ~50/60Hz | 700mA
Material: Steel / Glass
Product dimensions:
W: 21.5 cm H: 25 cm D: 15.5





Lamp details

max. 40W


Variant	Item no.	GBP
E27		
Spot: 200lm | 3000K | CRI>80		
shiny chrome / opaque	1002855 NEW	144,00

KENKUA
WL, E27

E-A++ Spectrum A++–E

NEW








- High-quality, frosted glass

Product details

220-240V ~50/60Hz
Material: Steel / Glass
Product dimensions:
W: 21.5 cm H: 20.5 cm D: 15.5



Lamp details

max. 40W

Variant	Item no.	GBP
E27		
shiny chrome / opaque	1002856 NEW	99,00

ACCANTO SPOT SQUARE
WL, E27

882

A-A++ Spectrum A++–E

LED INSIDE








Product details

230V ~50Hz
Material: Steel / Textile





Dimensioned drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP




Lamp details

max. 24W
L: 17.3 cm max.

Variant	Item no.	GBP
E27		
Spot: 100lm | 3000K | CRI>80		
black	155670	144,00
E27		
Spot: 100lm | 3000K | CRI>80		
white	155673	144,00



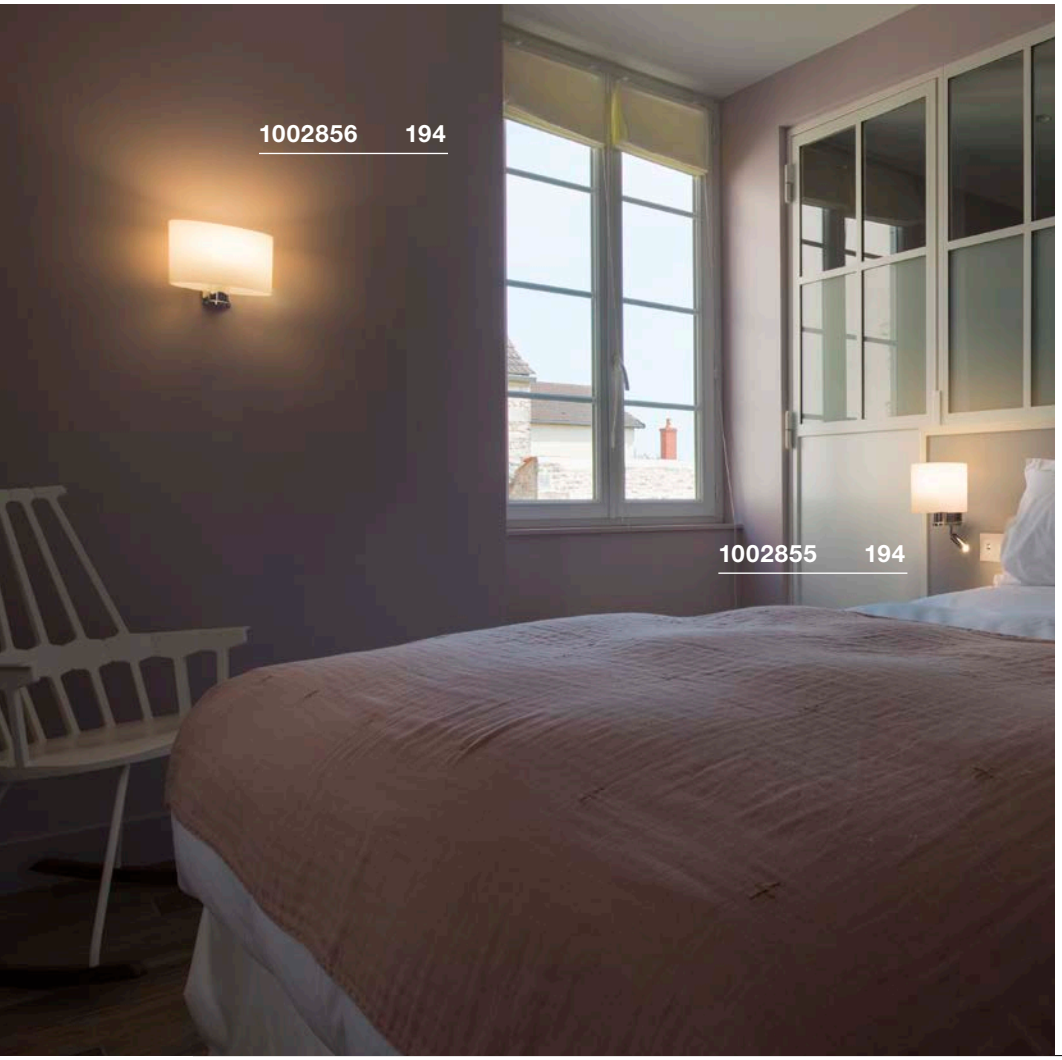

ACCANTO
WL, E27

882

E-A++ Spectrum A++–E

NEW








Product details

220-240V ~50/60Hz
Material: Steel / Textile

0.68

Dimensioned drawing



Lamp details

max. 40W

Variant	Item no.	GBP
E27		
■ black	1002942	67,50
E27		
□ white	1002943	67,50

COUPA FLEX
WL

D-A++ Spectrum A++–E

LED INSIDE







- Light sources can be switched separately
- Switch at canopy


Product details

230V ~50Hz
Total consumption: 4.8W
Material: Steel / Glass





Dimensioned drawing



Recommended lamp

G9 2.7W
2600K 250lm EEI=A+
3kWh/1000h
Item no. 560302 | 10,80 GBP



LED G9 2.5W
2700K 180lm EEI=A+
3kWh/1000h
Item no. 1002131 | 17,10 GBP






Lamp details


max. 40W QT14
L: 9 cm max.

Variant	Item no.	GBP
G9 | QT14 Spot: 125lm | 3000K | CRI>80		
chrome / white	**149452**	**180,00**



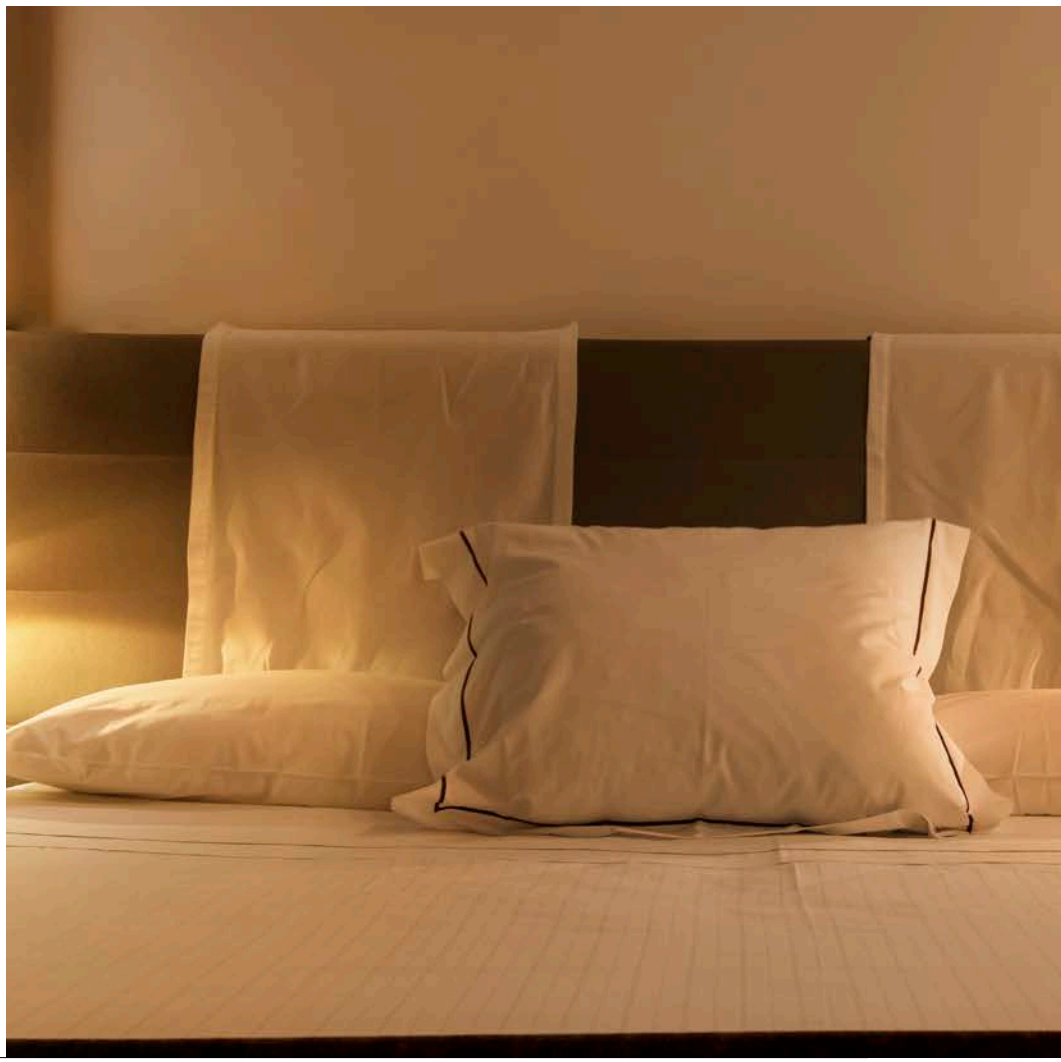



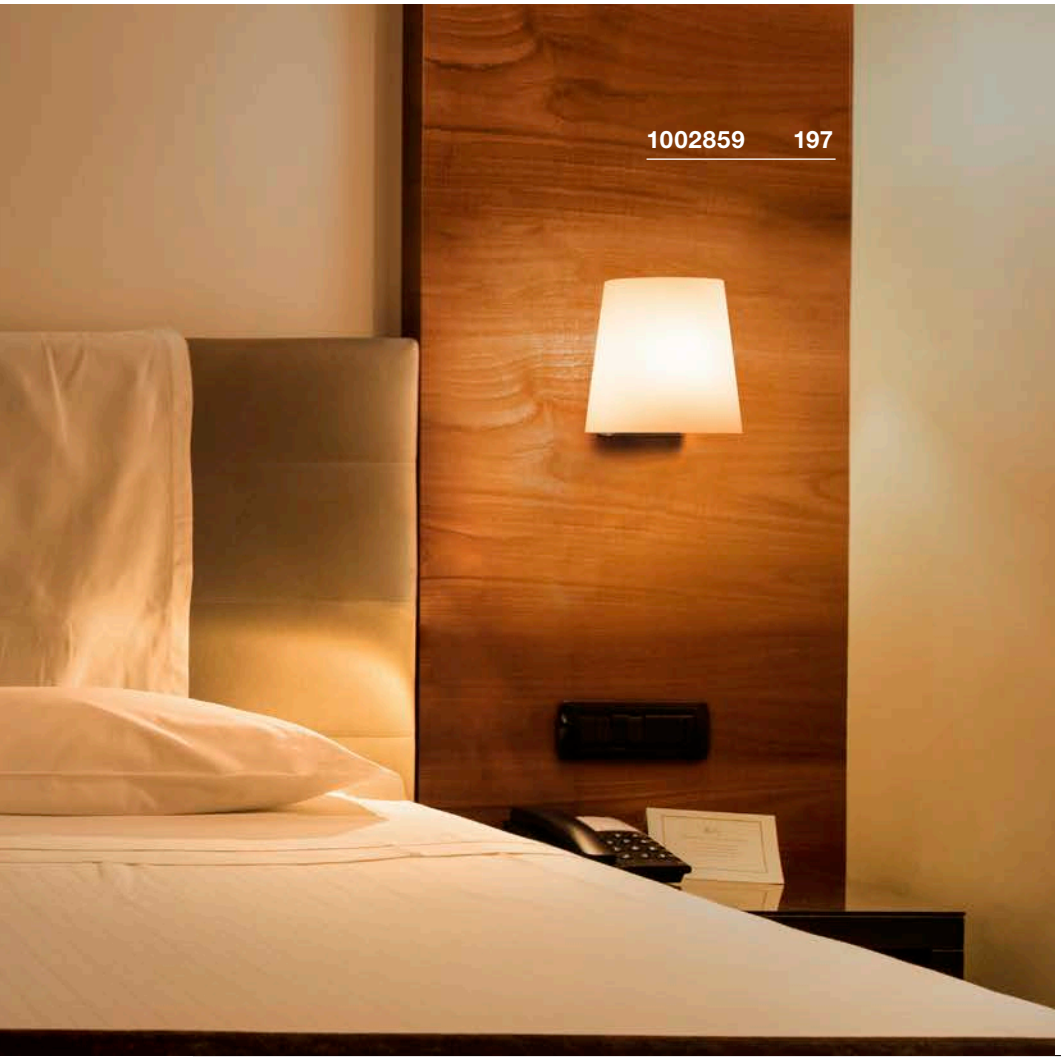


COUPA
WL, QT14

D-A+ Spectrum A⁺⁺–E

NEW








- High-quality, frosted glass

Product details

220-240V ~50/60Hz
Material: Steel / Glass



Dimensioned drawing



Recommended lamp

G9 2.7W
2600K 250lm EEI=A+
3kWh/1000h
Item no. 560302 | 10,80 GBP



LED G9 2.5W
2700K 180lm EEI=A+
3kWh/1000h
Item no. 1002131 | 17,10 GBP



Lamp details

max. 42W QT14
L: 9 cm max.

Variant	Item no.	GBP
G9 | QT14		
chrome / white	**1002859**	**94,50**

MANA
WL, basic

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE






- Premium LED with CRI>90
- With adjustable reading light, light sources can be switched separately

Product details

100-240V ~50/60Hz | 320mA/500mA
Total consumption: 11W
Material: Aluminium / Steel




Dimensioned drawing



Variant	Item no.	GBP
Flood: 490lm | 3000K | CRI>90 Spot: 80lm | 3000K | CRI>90		
white / chrome	**1000615**	**162,00**

1000615 + 1000629 198 + 199

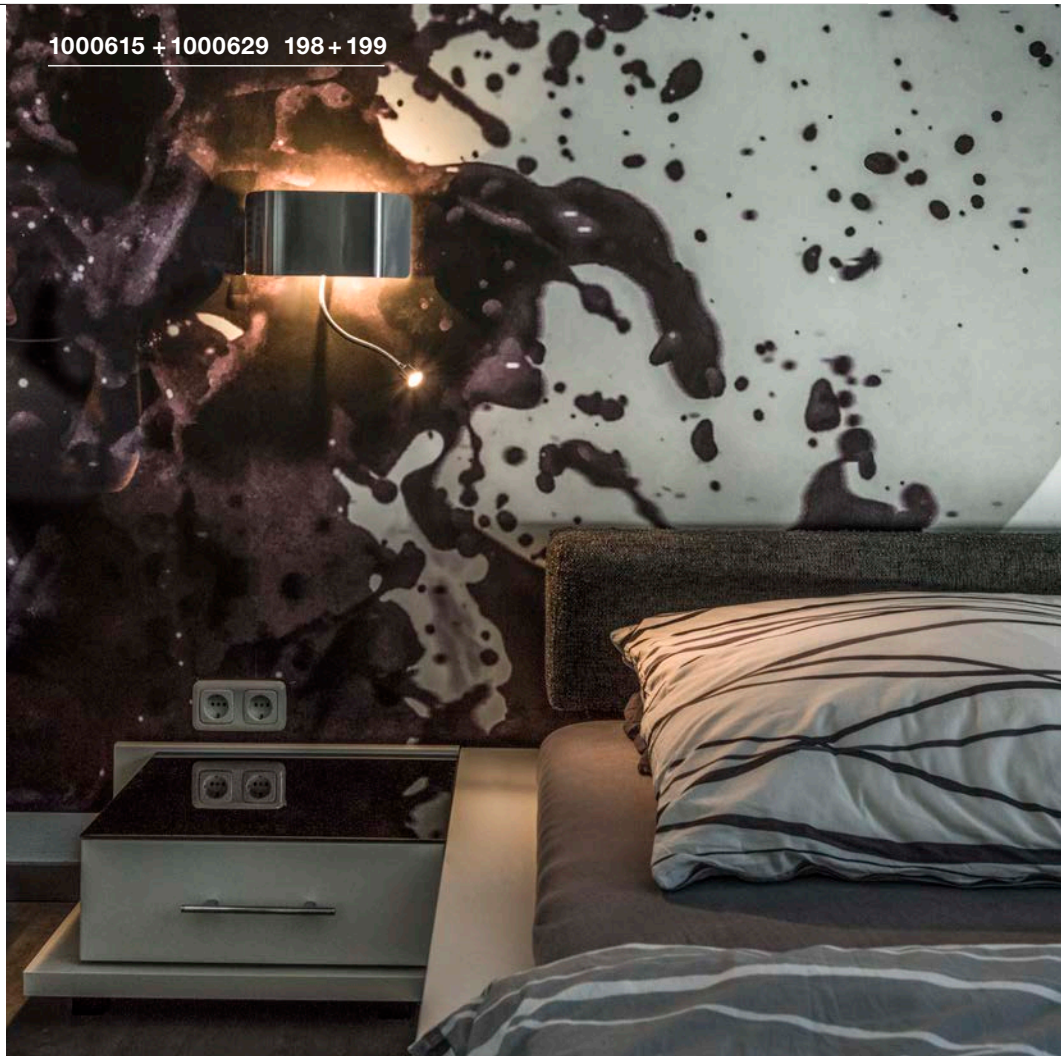



MANA
Shade

891








MANA
Shade

891







MANA
Shade

891






- Can be individually designed with colours, stickers and more

Product details


Material: Plaster / Steel

0.93


Dimensioned drawing



Dimensioned drawing



Dimensioned drawing



Note

Only suitable for 1000614/1000615

Note

Only suitable for 1000614/1000615

Note

Only suitable for 1000614/1000615

Variant	Item no.	GBP
Wood | 0.16 kg		
grey / brown	**1000621**	**45,00**
Aluminium | 0.39 kg		
white	**1000623**	**45,00**
Aluminium | 0.39 kg		
aluminium	**1000624**	**54,00**

Variant	Item no.	GBP
Wood | 0.2 kg		
grey / brown	**1000626**	**45,00**
Aluminium | 0.47 kg		
white	**1000628**	**45,00**
Aluminium | 0.47 kg		
aluminium	**1000629**	**54,00**

Variant	Item no.	GBP
white	**1000825**	**25,20**

NAPIA
WL

A-A++ Spectrum A++–E

LED INSIDE









- Direct and indirect lighting
- Light sources can be switched separately

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 3.8W
Material: Aluminium

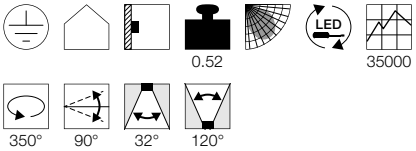

Dimensioned drawing



Variant	Item no.	GBP
Direct: 95lm | 3000K | CRI>80 Indirect: 62lm | 3000K | CRI>80 black	155100	162,00
Direct: 95lm | 3000K | CRI>80 Indirect: 62lm | 3000K | CRI>80 white	155101	162,00
Direct: 95lm | 3000K | CRI>80 Indirect: 62lm | 3000K | CRI>80 matt aluminium	155104	166,50

NAPIA TWIN
WL

A-A++ Spectrum A++–E

LED INSIDE









- Direct and indirect lighting
- Light sources can be switched separately

Product details


220-240V ~50/60Hz
Total consumption: 21W
Material: Aluminium

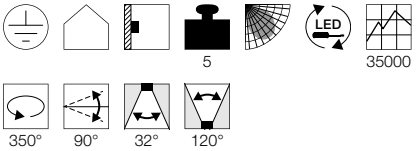


Dimensioned drawing




Variant	Item no.	GBP
Direct: 95lm | 3000K | CRI>80 Indirect: 470lm | 3000K | CRI>80 white	1001822	440,10
Direct: 95lm | 3000K | CRI>80 Indirect: 470lm | 3000K | CRI>80 matt aluminium	155114	485,10

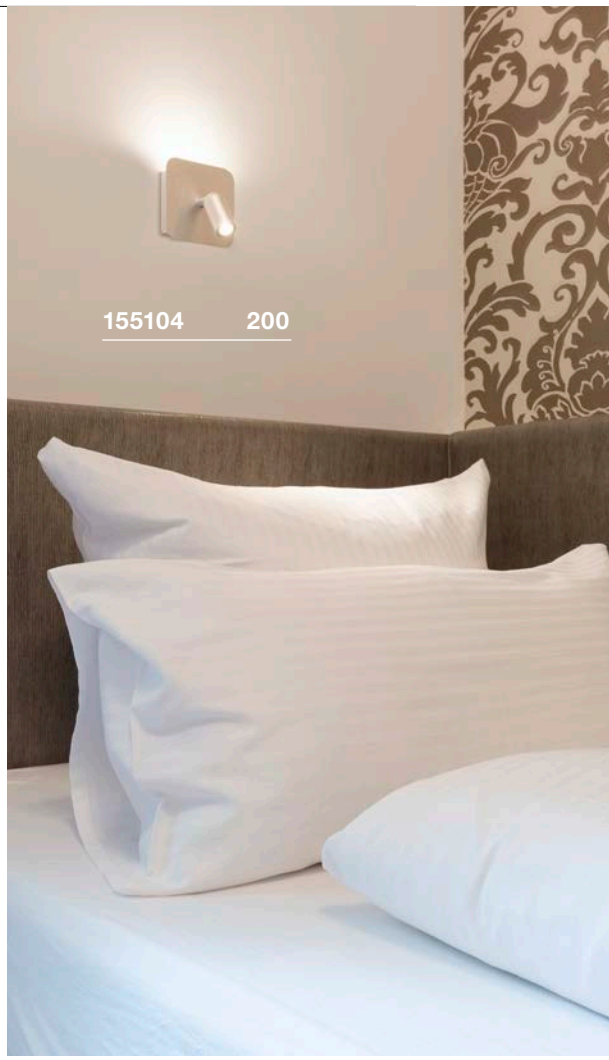


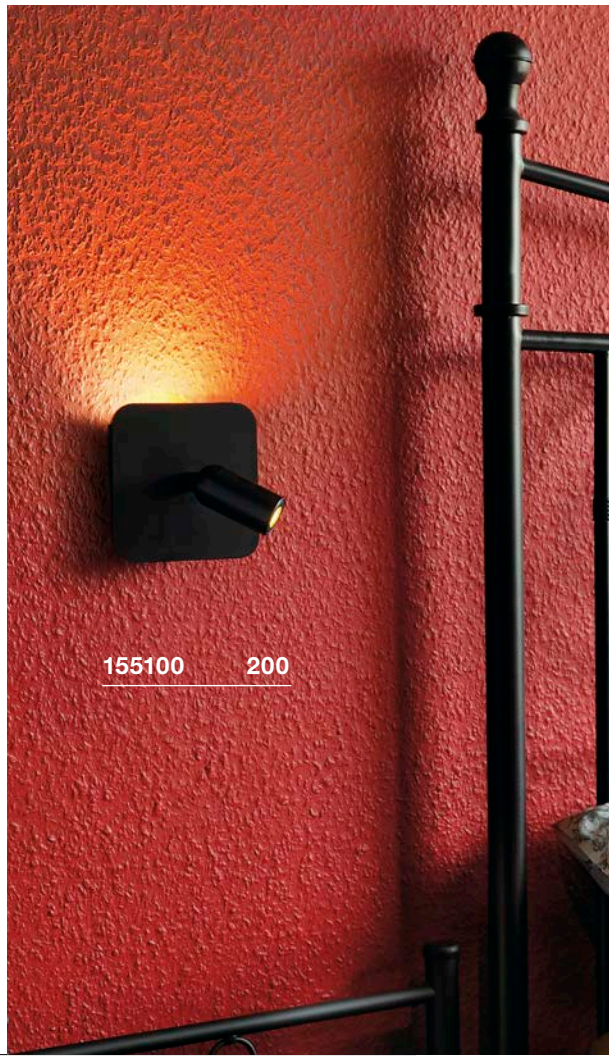


155100 200


155114 200

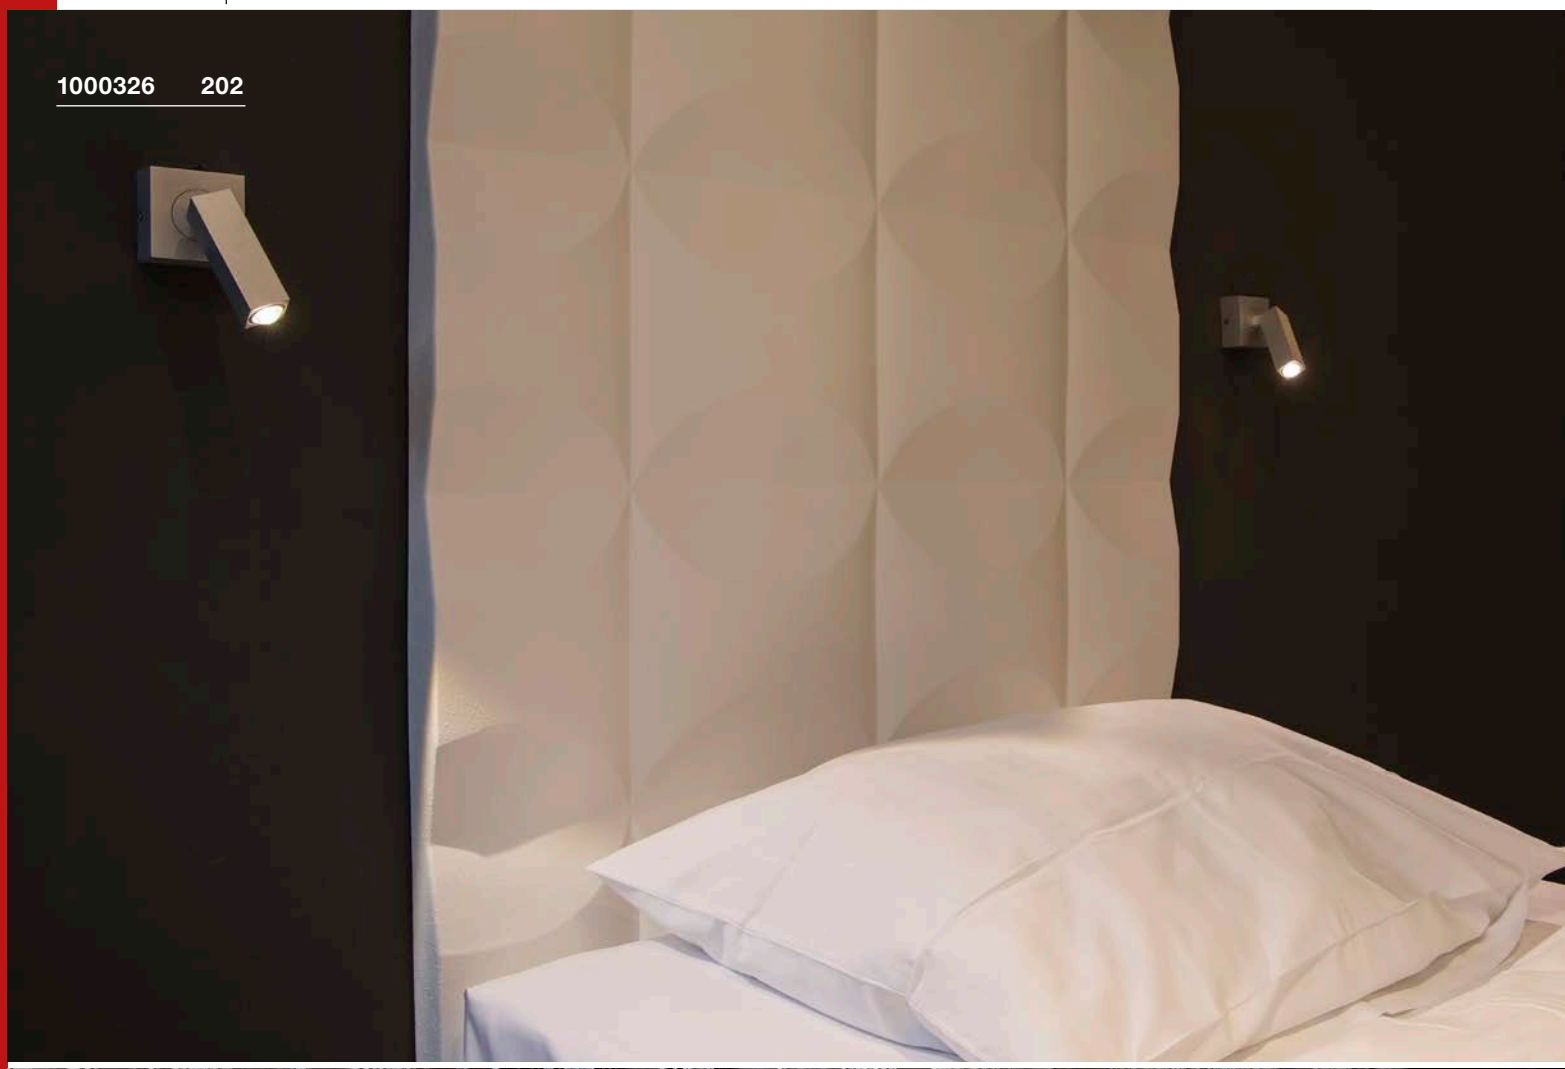
1000326 202

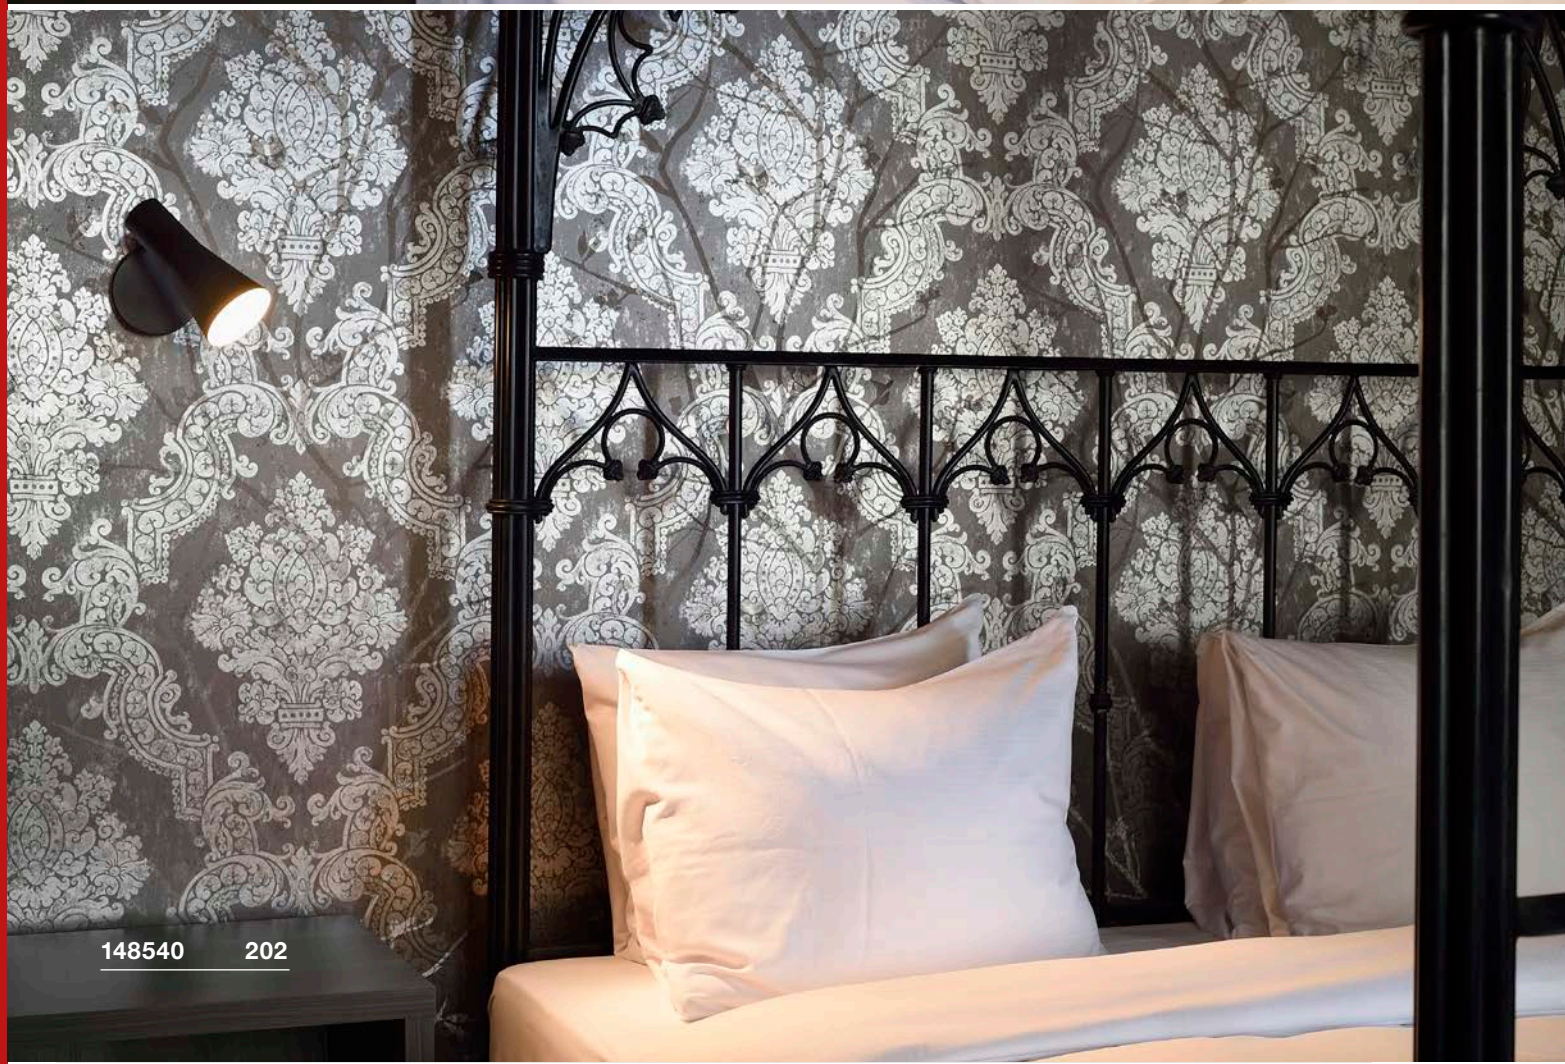
148540 202

STIX
WL

A-A++ Spectrum A++–E

LED INSIDE









- Rotating and swivelling lamp head
- Switch at canopy

Product details

100-240V ~50/60Hz | 700mA
Total consumption: 4.5W
Material: Aluminium

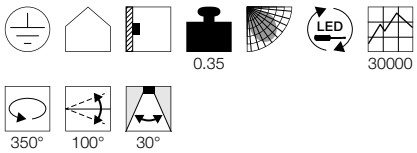

Dimensioned drawing



Variant	Item no.	GBP
185lm | 3000K | CRI80		
black	**1000324**	**103,50**
185lm | 3000K | CRI80		
white	**1000325**	**103,50**
185lm | 3000K | CRI80		
grey	**1000326**	**103,50**

PHELIA
WL, QPAR51

893

E-A++ Spectrum A++–E






- Switch on the lamp head
- Lampshade interior lacquered in white

Product details

230V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP



Lamp details

max. 35W QPAR51
Ø: 5 cm max. L: 10.5 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
black	**148540**	**103,50**

PHELIA
WL, QPAR51

893

E-A++ Spectrum A++–E






- Lampshade interior lacquered in white

Product details

230V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP



Lamp details

max. 35W QPAR51
Ø: 5 cm max. L: 10.5 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
white	**1002122**	**103,50**


ENOLA B
WL, QPAR51

885

E-A++ Spectrum A++–E









• Switch at canopy

Product details

230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended accessories

■ Deco ring
Item no. 151840 | 6,80 GBP



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 5.1W 48°
2700-6500K 350lm EEI=A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP




Lamp details

max. 50W QPAR51
L: 6 cm max.

Variant	Item no.	GBP
GU10 | QPAR51 ■ black	1000729	67,50
GU10 | QPAR51 □ white	1000730	67,50
GU10 | QPAR51 ■ gold	1000731	72,00
GU10 | QPAR51 ■ grey	1000732	67,50





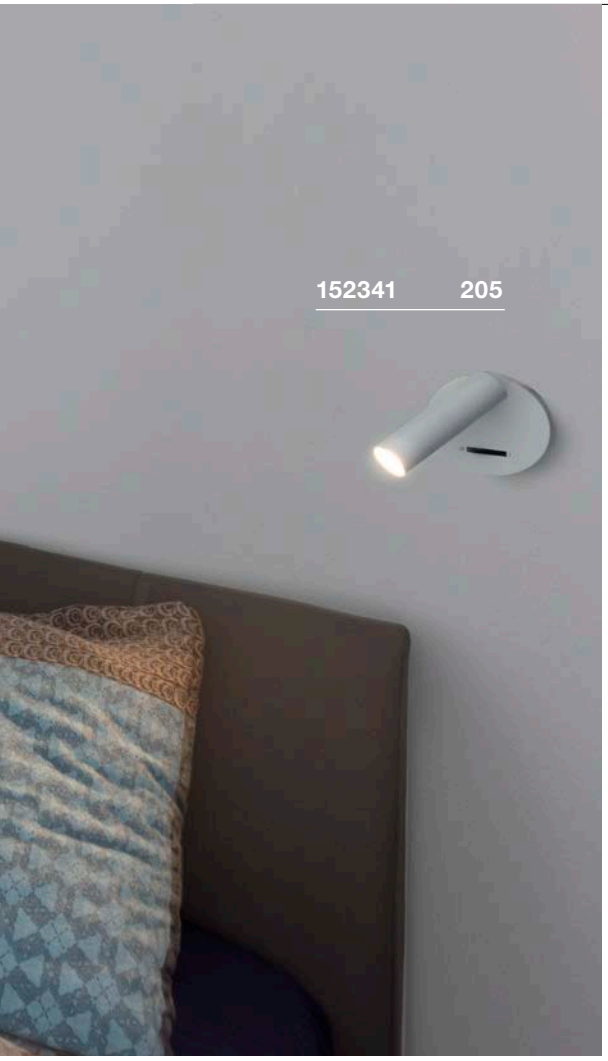

152341 205



1002140 205

KARPO 30
CW, single

889

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90
- Switch at canopy

Product details

100-240V ~50/60Hz | 500mA
Total consumption: 6W
Material: Aluminium / Steel

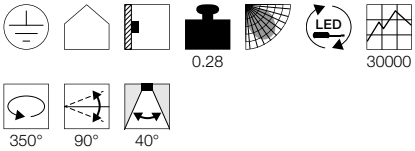

Dimensioned drawing



Variant	Item no.	GBP
330lm | 3000K | CRI>90		
black	152340	99,00
380lm | 3000K | CRI>90		
white	152341	99,00
360lm | 3000K | CRI>90		
gold	1002173	108,00

KARPO
WL

889

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90
- 3 step dimming
- 2 USB connections (max. load 1.5A)

Product details


220-240V ~50/60Hz | 500mA
Total consumption: 6.6W
Dimmable: Switch

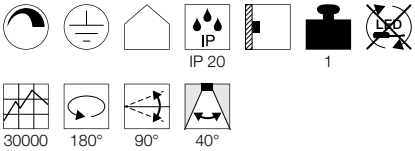

Dimensioned drawing



Variant	Item no.	GBP
390lm | 3000K | CRI>90		
white	1002140	188,10

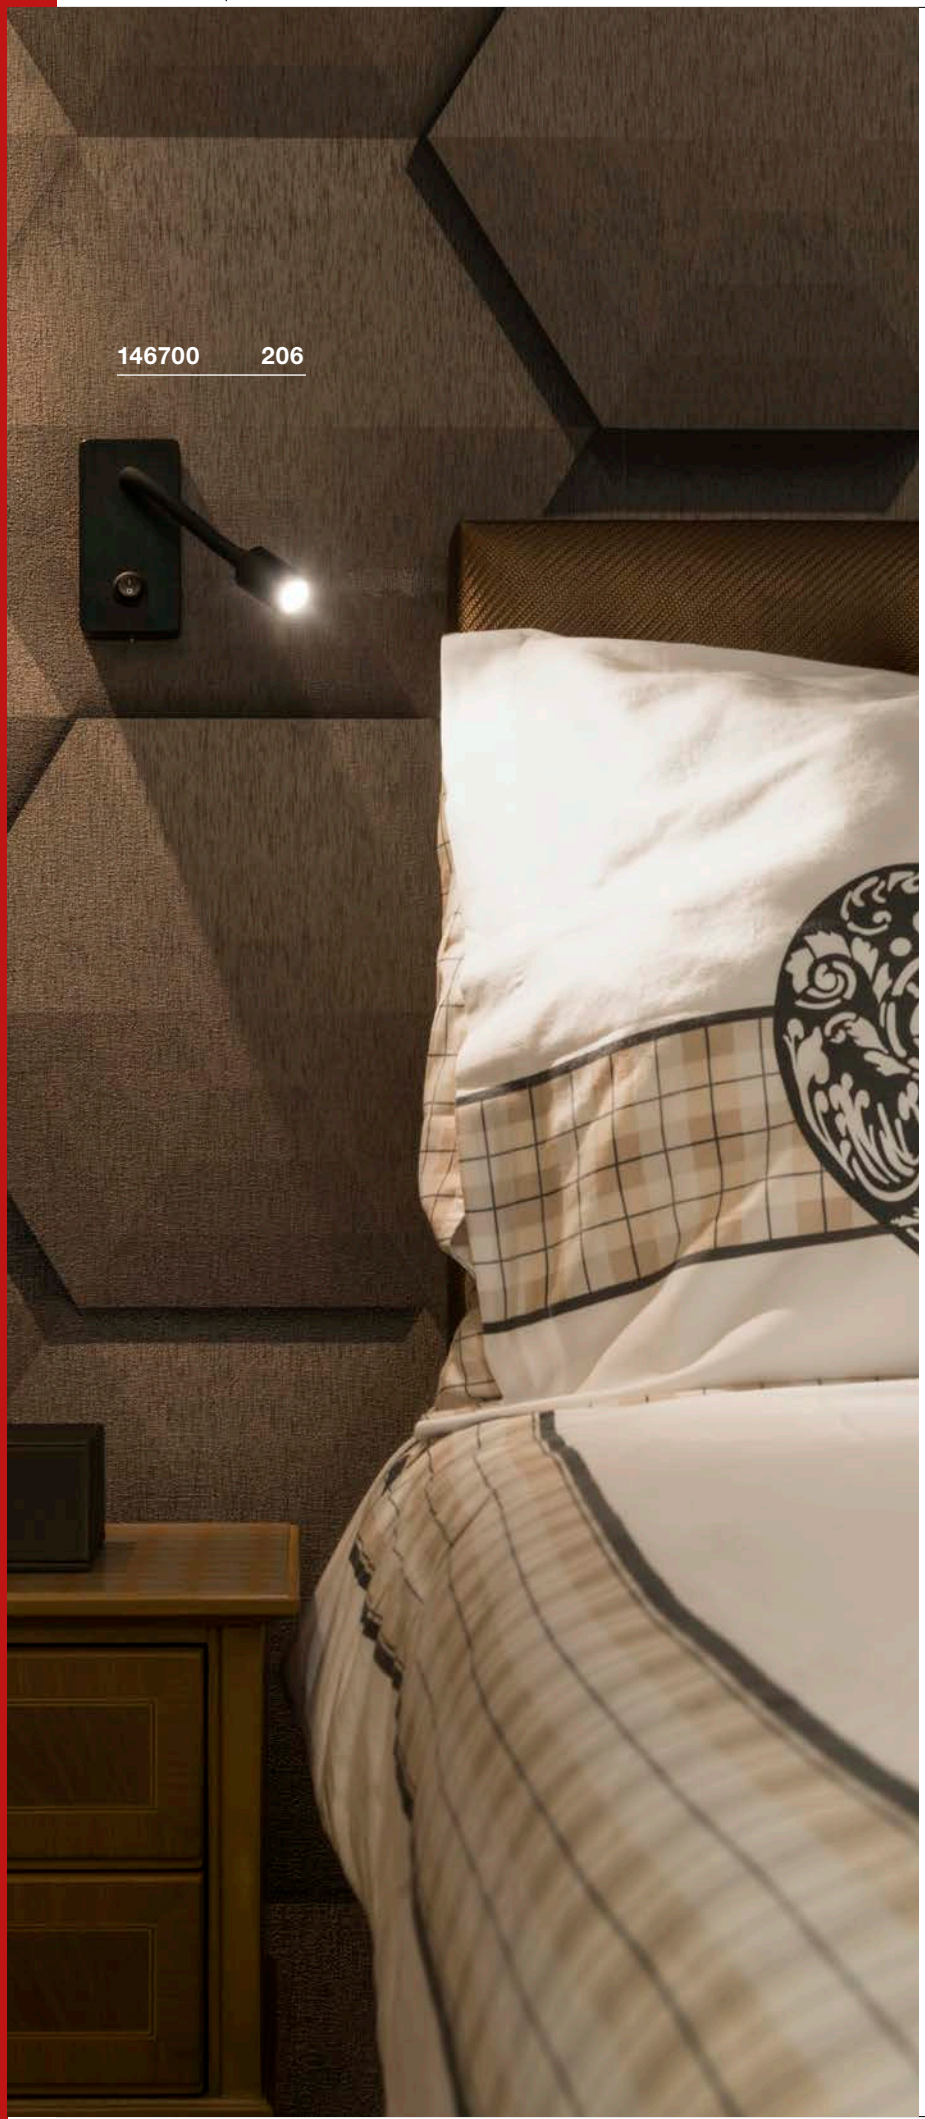

PIPOFLEX
WL

A-A++ Spectrum A++–E

LED INSIDE







- Switch at canopy


Product details

220-240V ~50/60Hz | 266mA
Total consumption: 4.6W
Material: Aluminium







Dimensioned drawing



Variant	Item no.	GBP
200lm | 3000K | CRI>80 ■ black	**146700**	**67,50**
200lm | 3000K | CRI>80 □ white	**146701**	**67,50**
200lm | 3000K | CRI>80 ■ grey	**146704**	**67,50**

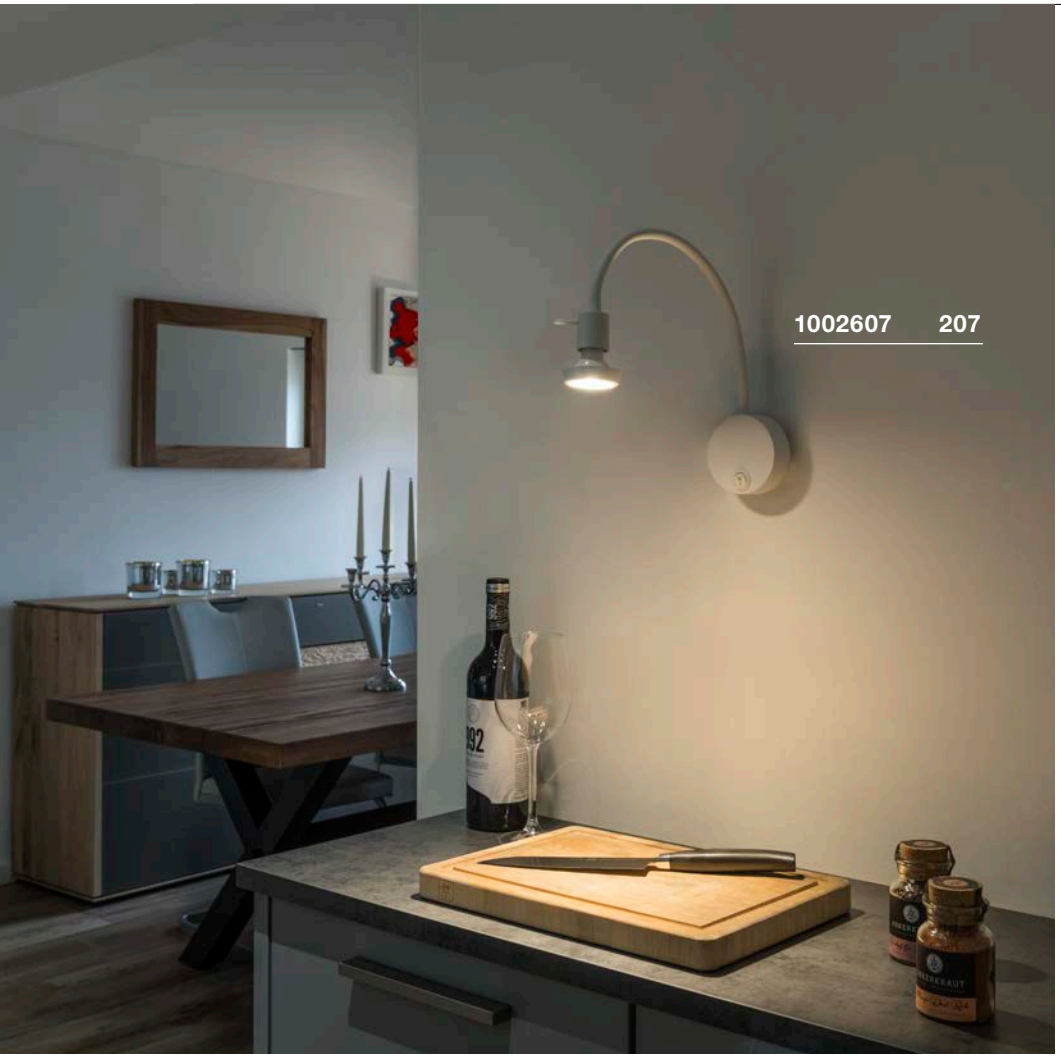

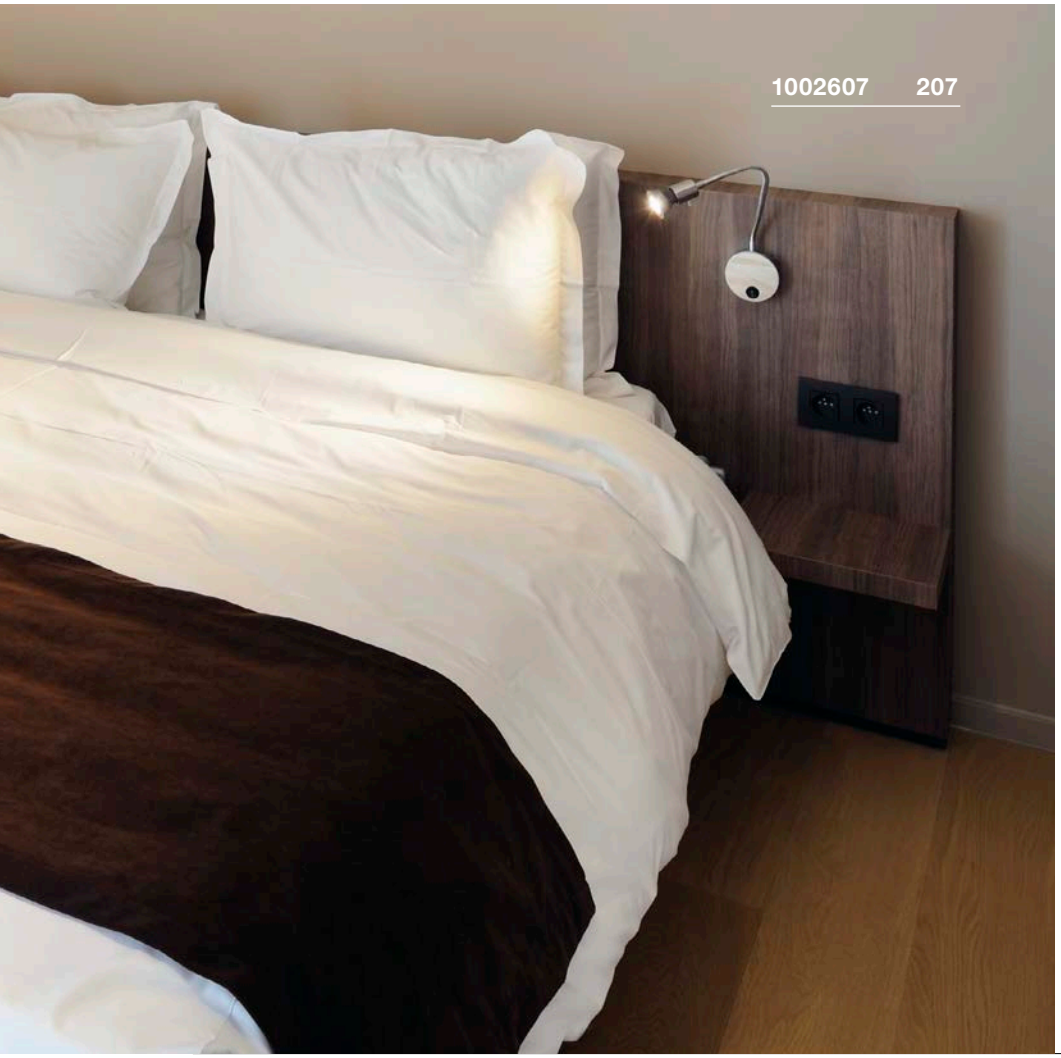

DIO FLEX PLATE
WL QPAR51

E-A++ Spectrum A++–E

NEW COLOR









• Switch at canopy

Product details

230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended accessories

■ Lamp deco ring diam. 5.7cm
Item no. 151040 | 4,00 GBP



Recommended lamp

LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP



LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP



Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**1002607**	**43,20**
GU10 | QPAR51		
■ black	**1002608**	**43,20**
GU10 | QPAR51		
chrome	**146692**	**49,50**

DIO FLEX PLATE
WL

A-A++ Spectrum A++–E

LED INSIDE








• Switch at canopy


Product details

100-240V ~50/60Hz | 320mA
Total consumption: 1.9W
Material: Aluminium





Dimensioned drawing







Variant	Item no.	GBP
82lm | 2700K | CRI>80 white	1002117	76,50
82lm | 2700K | CRI>80 chrome	1002116	81,00
82lm | 2700K | CRI>80 black	1002430	76,50
82lm | 3000K | CRI>80 white	1002118	76,50
82lm | 3000K | CRI>80 chrome	146682	81,00
82lm | 3000K | CRI>80 black	1002431	76,50
82lm | 4000K | CRI>80 white	1002119	76,50
82lm | 4000K | CRI>80 chrome	146680	81,00
82lm | 4000K | CRI>80 black	1002432	76,50



IVED GOOSE
WL, canopy

A-A++ Spectrum A++–E

LED INSIDE






Product details

100-240V ~50/60Hz | 350mA
Total consumption: 2.2W
Material: Aluminium



Dimensioned drawing



Variant	Item no.	GBP
80lm | 3000K | CRI>80		
grey	146512	99,00

MAGANDA
WL

890

A-A++ Spectrum A++–E

LED INSIDE








- Illuminated outer edge
- Switch at canopy
- 3-times optical magnification

Product details

100-240V ~50/60Hz | 12V DC
Total consumption: 4.2W
Material: Steel / Glass




IP 44 | 0.9 | 30000



0.2

Dimensioned drawing



Variant	Item no.	GBP
70lm | 3000K | CRI>80 chrome / transparent	**1001503**	**144,00**

VISSARDO
WL

A-A++ Spectrum A++–E

LED INSIDE








- Switch at canopy
- 3-times optical magnification

Product details

100-240V ~50/60Hz
Total consumption: 5.8W
Material: Steel / Glass




IP 21 | 1.5 | 30000




0.2

Dimensioned drawing



Variant	Item no.	GBP
130lm | 3000K | CRI>80 chrome	**149782**	**171,00**

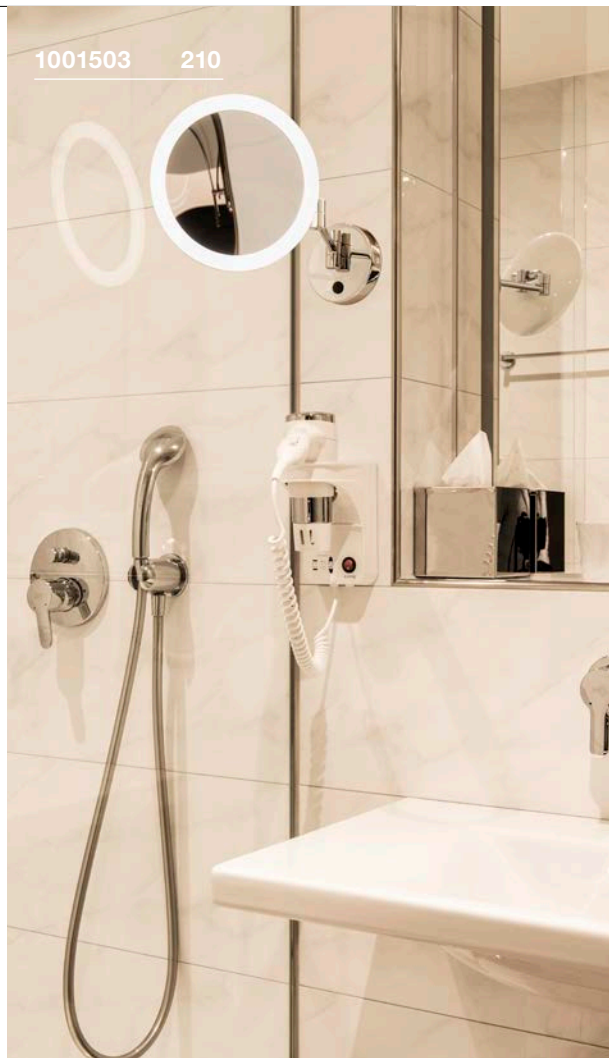







TRUKKO
WL

A-A++ Spectrum A++–E

LED INSIDE








Product details

100-240V ~50/60Hz | 700mA
Total consumption: 9W

IP 44 | 9 | 30000

Dimensioned drawing



Variant	Item no.	GBP
250lm | 3000K | CRI>80		
transparent	**149752**	**283,50**

TRUKKO 60/90
WL

A-A++ Spectrum A++–E

LED INSIDE








Product details

100-240V ~50/60Hz | 500mA
Material: Steel / Plastic

IP 44 | 15000

Dimensioned drawing



Variant	Item no.	GBP
450lm | 8.8W | 3000K | CRI>80		
H: 60 cm | 0.75 kg		
chrome/white	**149762**	**126,00**
710lm | 11.4W | 3000K | CRI>80		
H: 90 cm | 0.8 kg		
chrome/white	**149772**	**148,50**


MARYLIN
WL

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 600mA
Material: Aluminium / Polycarbonate (PC)




IP 44 35000



120°

Dimensioned drawing



Variant	Item no.	GBP
800lm | 10W | 3000K | CRI>80		
L: 40 cm | 0.85 kg		
chrome / white	**1002190**	**171,00**
1200lm | 15W | 3000K | CRI>80		
L: 60 cm | 1.12 kg		
chrome / white	**1002191**	**215,10**
1700lm | 21W | 3000K | CRI>80		
L: 90 cm | 1.64 kg		
chrome / white	**1002192**	**260,10**

DEVIN
WL, double

A-A++ Spectrum A++–E

LED INSIDE







- Elegant aluminium and glass combination

Product details

220-240V ~50/60Hz
Total consumption: 16W
Material: Steel / Glass
Dimmable: Triac C, Triac L




IP 44 1.02





35000

Dimensioned drawing



Variant	Item no.	GBP
890lm | 3000K | CRI>80		
chrome / white	**151553**	**197,10**

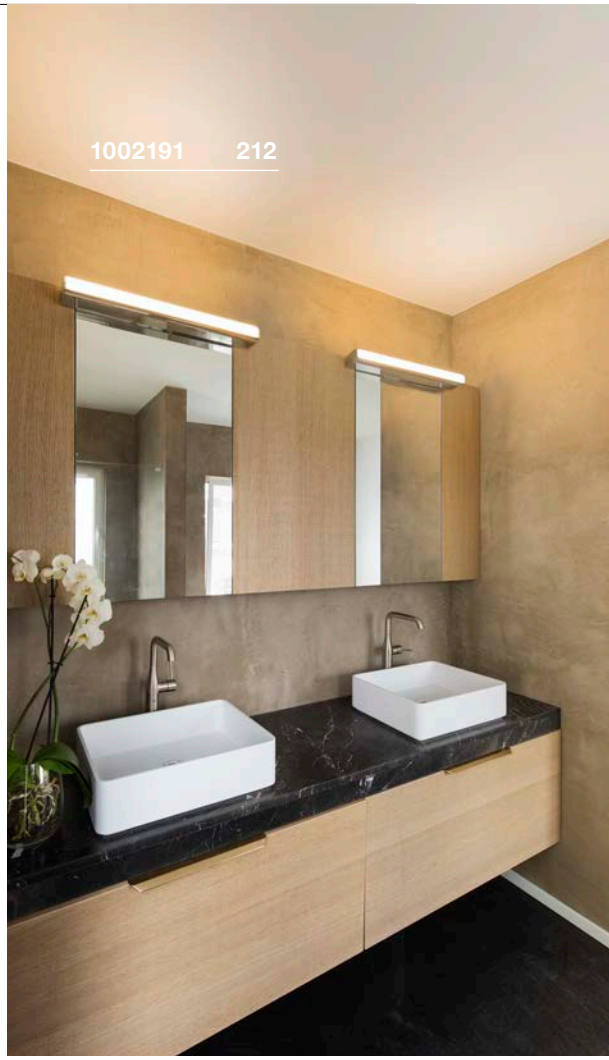

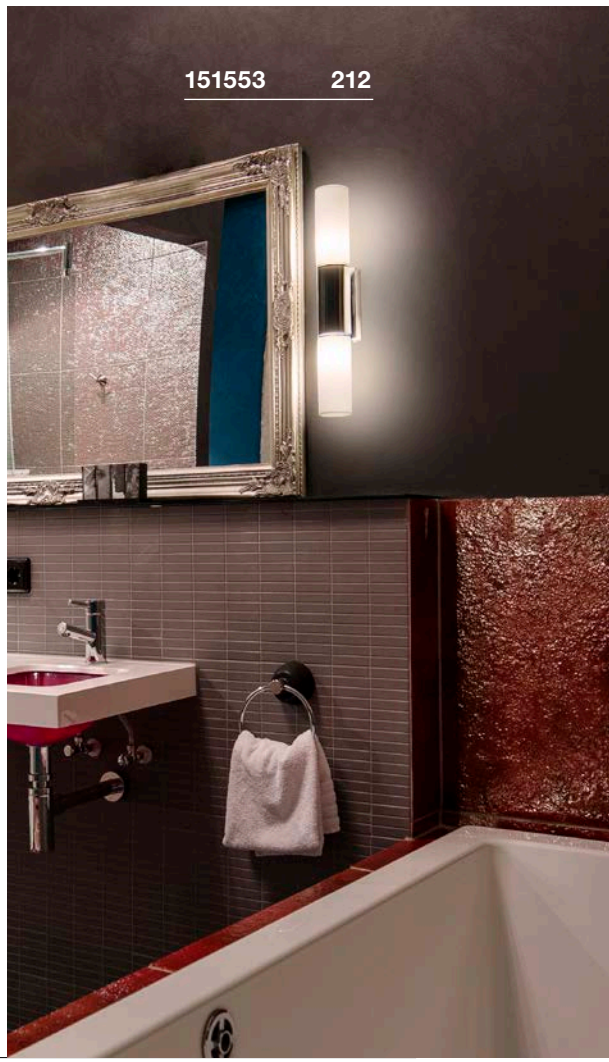

WL 106
E14






Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 44 0.66

Dimensioned drawing



Recommended lamp

LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP

LED E14 4W
2700K 250lm EEI=A+
4kWh/1000h
Item no. 560222 | 12,60 GBP

Lamp details

max. 40W
Ø: 3.6 cm max. L: 11 cm max.

Variant	Item no.	GBP
E14		
chrome	**1002228**	**72,00**

WL 106
E14






Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 44 1.12

Dimensioned drawing



Recommended lamp


E14 4W
2700K 250lm EEI=A+
4kWh/1000h
Item no. 560222 | 12,60 GBP

Lamp details

2x max. 40W
Ø: 3.6 cm max. L: 11 cm max.


Variant	Item no.	GBP
E14		
chrome	**1002229**	**135,00**



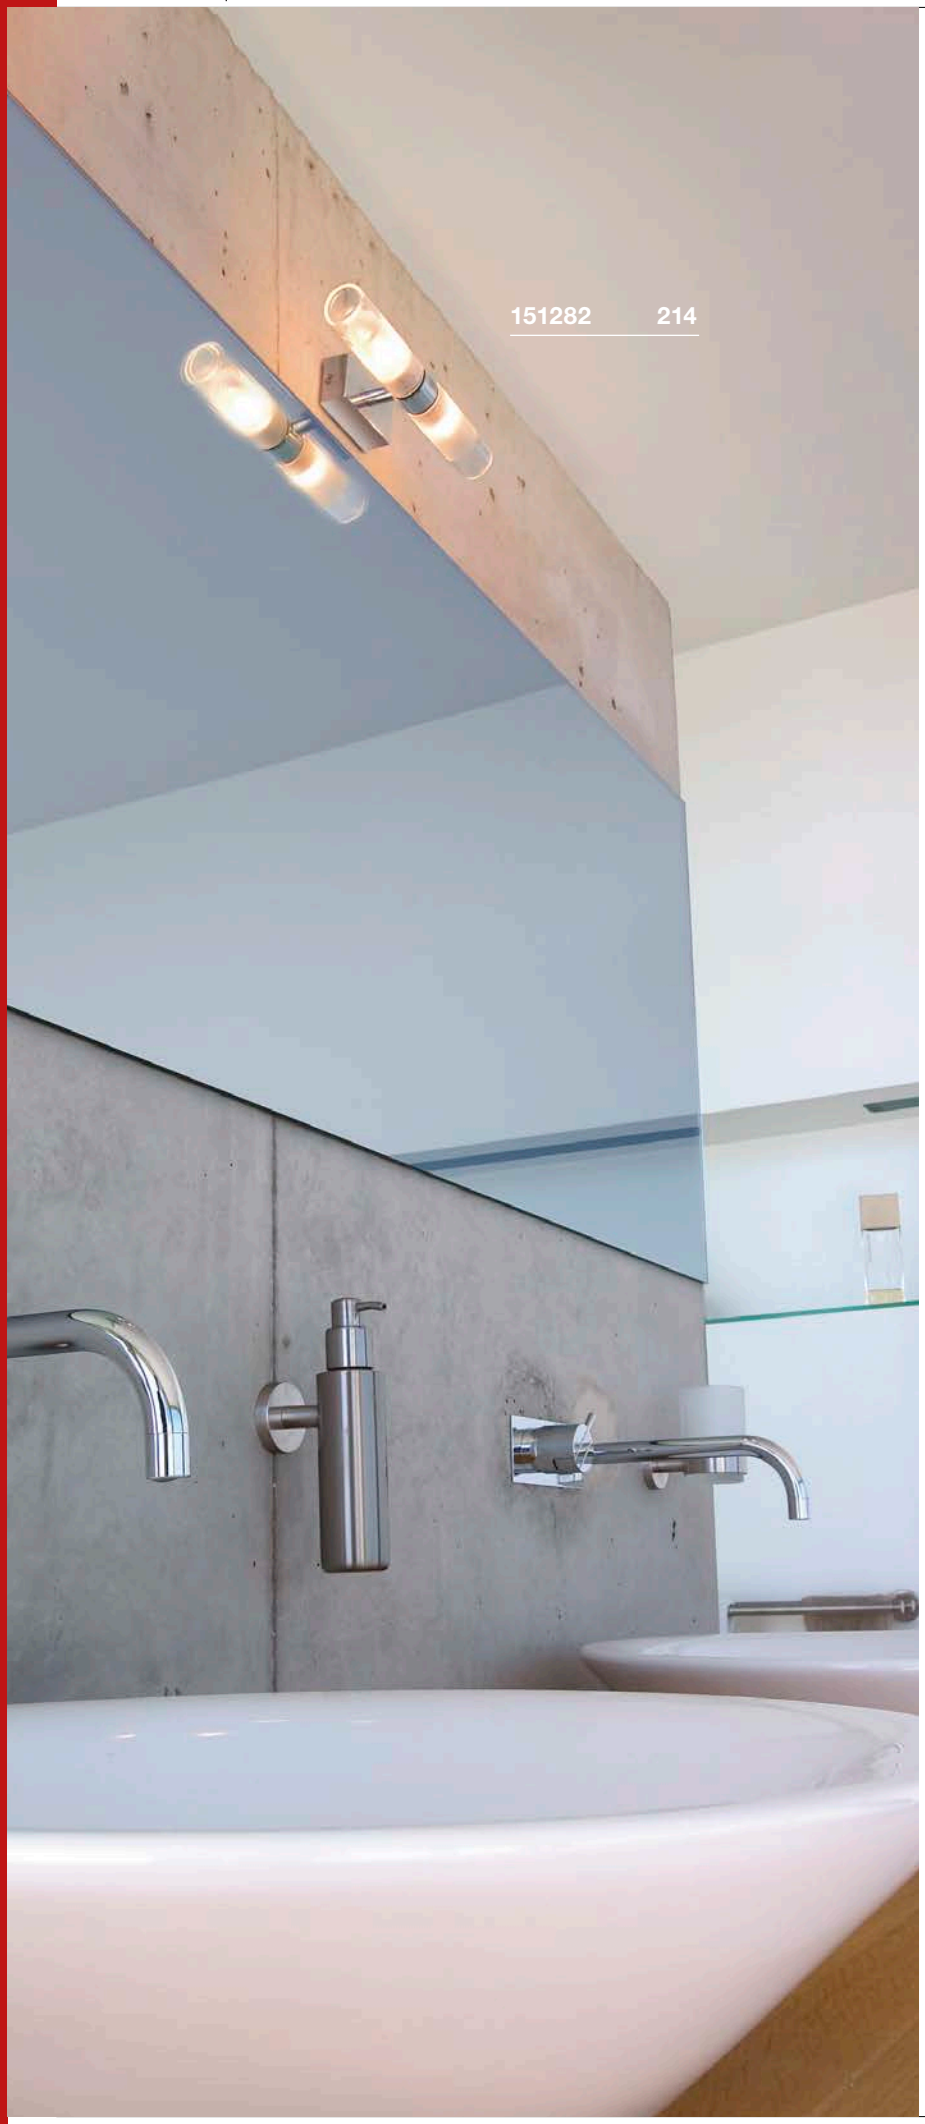


MIBO UP/DOWN
WL, QT14

D-A+ Spectrum A++–E









Product details

220-240V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

G9 2.5W
2700K 180lm EEI=A+
3kWh/1000h
Item no. 560302 |10,80 GBP



LED G9 3.5W
2800K 300lm EEI=A+
4kWh/1000h
Item no. 1002131 |17,10 GBP





Lamp details

2x max. 25W QT14

Variant	Item no.	GBP
G9 | QT14		
chrome	**151282**	**72,00**

DORISA 30

A-A++ Spectrum A++–E

LED INSIDE









• Convertible by removing the vanity light bracket

Product details

220-240V ~50/60Hz | 340mA
Total consumption: 5.2W
Material: Aluminium / Plastic

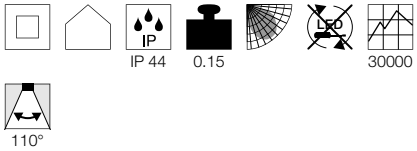

Dimensioned drawing



Note

Clamping range: 0-6 mm

Variant	Item no.	GBP
280lm | 4000K | CRI>80 chrome	**1000777**	**83,70**
280lm | 4000K | CRI>80 matt grey	**1000778**	**81,00**

DORISA 50

A-A++ Spectrum A++–E

LED INSIDE









• Convertible by removing the vanity light bracket

Product details

220-240V ~50/60Hz | 340mA
Total consumption: 6.6W
Material: Aluminium / Plastic

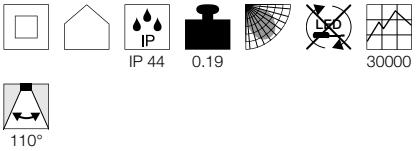


Dimensioned drawing




Note

Clamping range: 0-6 mm

Variant	Item no.	GBP
370lm | 4000K | CRI>80 chrome	**1000780**	**92,70**
370lm | 4000K | CRI>80 matt grey	**1000781**	**90,00**

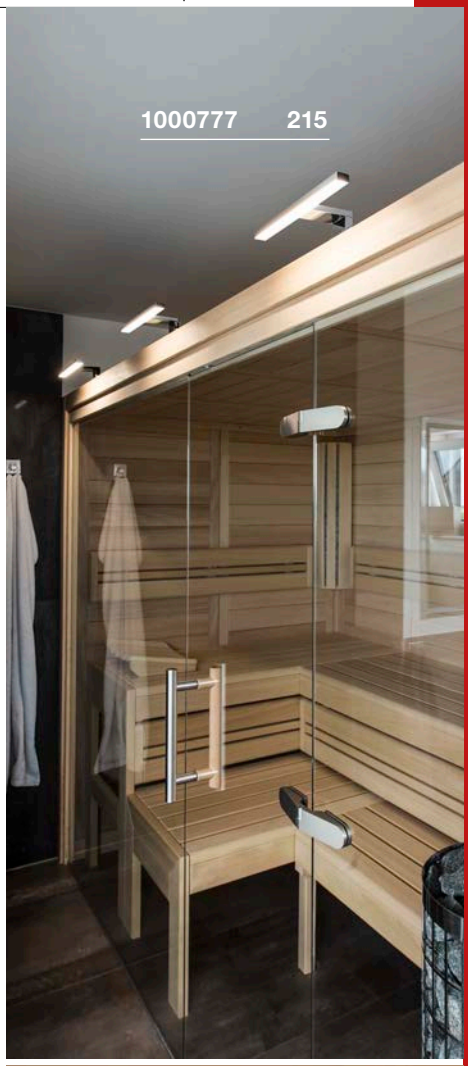

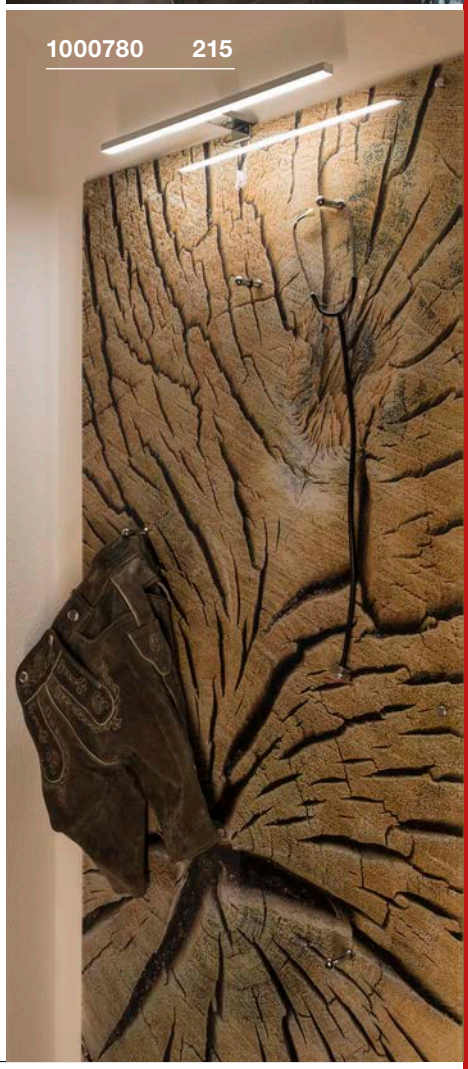

DORISA 20
square

A-A++ Spectrum A++–E

LED INSIDE









- Convertible by removing the vanity light bracket

Product details

220-240V ~50/60Hz | 340mA
Total consumption: 5.5W
Material: Aluminium / Plastic

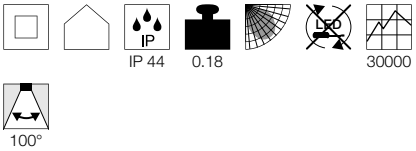

Dimensioned drawing



Note

Clamping range: 0-6 mm

Variant	Item no.	GBP
230lm | 4000K | CRI>80 chrome	**1000816**	**54,00**

DORISA 40
rectangular

A-A++ Spectrum A++–E









- Convertible by removing the vanity light bracket

Product details

220-240V ~50/60Hz | 340mA
Total consumption: 6.6W
Material: Aluminium / Plastic

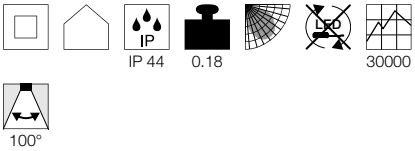

Dimensioned drawing




Note

Clamping range: 0-6 mm

Variant	Item no.	GBP
310lm | 4000K | CRI>80 chrome	**1000818**	**63,00**



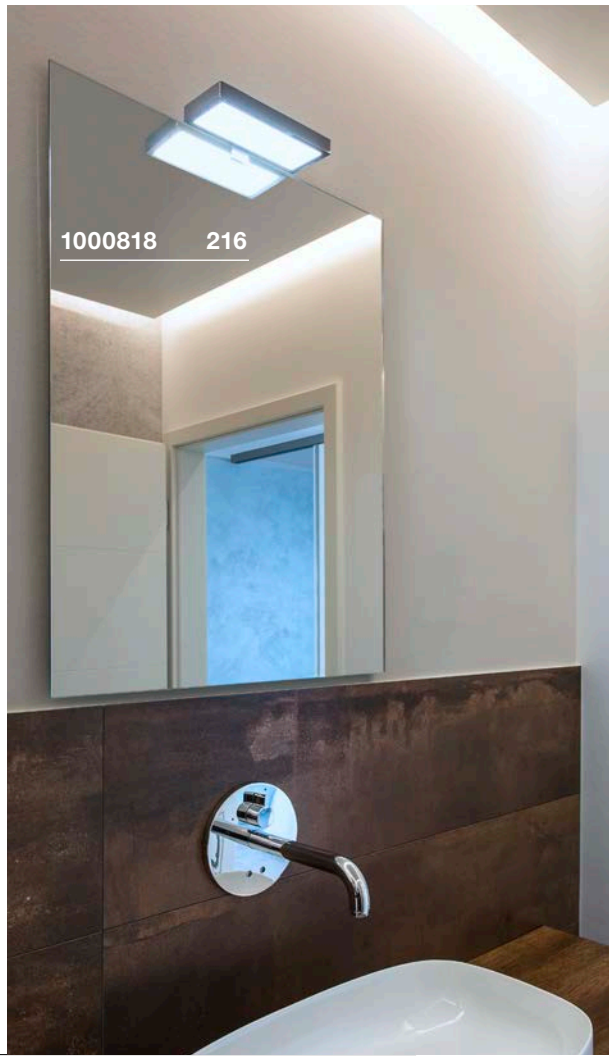



1000816 216

BATHROOM LIGHT HIGHLIGHTS.
OUR PERFECT LIGHT IN THE BATHROOM.





GLENOS® 60 | 219

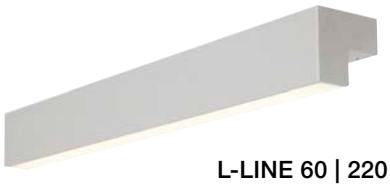


L-LINE 60 | 220



L-LINE 120 | 220



Q-LINE® | 221

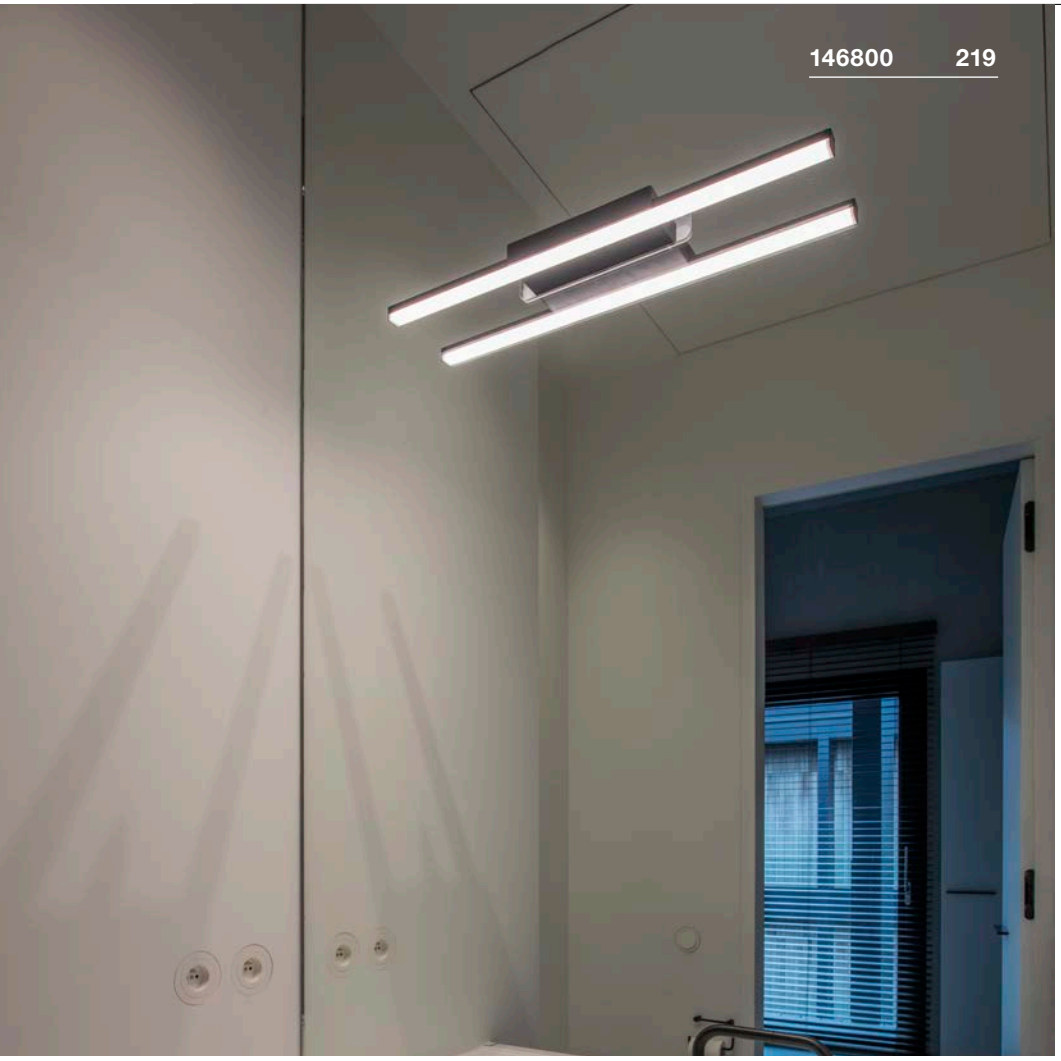



GLENOS® 60

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

100-240V ~50/60Hz | 24V DC
Total consumption: 17W
Material: Aluminium / Acrylic

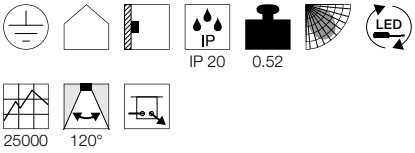

Dimensioned drawing



Variant	Item no.	GBP
1000lm | 3000K | CRI>80 ■ black	**146800**	**144,00**
1000lm | 3000K | CRI>80 □ white	**146801**	**144,00**
1000lm | 3000K | CRI>80 ■ grey	**146804**	**144,00**

L-LINE 60

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total consumption: 10W
Material: Aluminium / Polycarbonate (PC)




IP 44 1.21



30000 120°

Dimensioned drawing



Variant	Item no.	GBP
820lm | 3000K | CRI>80 white	**1001299**	**188,10**
820lm | 3000K | CRI>80 matt silver	**1001300**	**202,50**
820lm | 3000K | CRI>80 grey	**1001301**	**188,10**

L-LINE 120

A-A++ Spectrum A++–E


LED INSIDE






Product details

220-240V ~50/60Hz | 350mA
Total consumption: 18.5W
Material: Aluminium / Polycarbonate (PC)




IP 44 2.14




30000 120°

Dimensioned drawing



Variant	Item no.	GBP
1650lm | 3000K | CRI>80 white	**1001303**	**260,10**
1650lm | 3000K | CRI>80 matt silver	**1001304**	**274,50**
1650lm | 3000K | CRI>80 grey	**1001305**	**260,10**

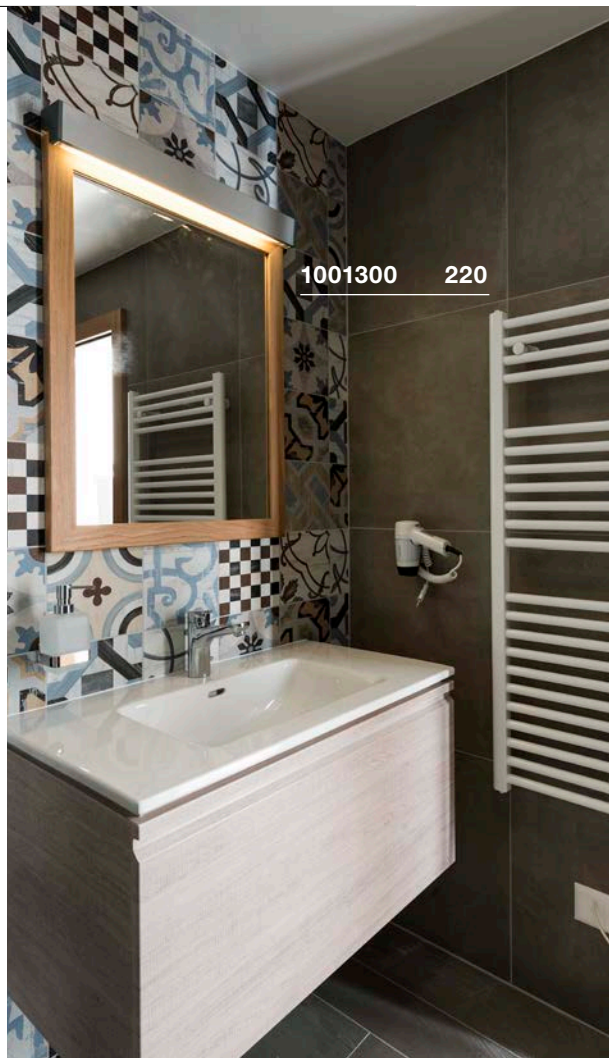







Q-LINE®
WL

894

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details


220-240V ~50/60Hz | 700mA
Total consumption: 45W
Material: Aluminium / Acrylic

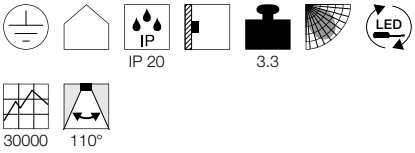

Dimensioned drawing



Variant	Item no.	GBP
3800lm | 3000K | CRI>80 white	**1000668**	**359,10**
3800lm | 3000K | CRI>80 black	**1000669**	**359,10**
3800lm | 3000K | CRI>80 grey	**1000670**	**359,10**

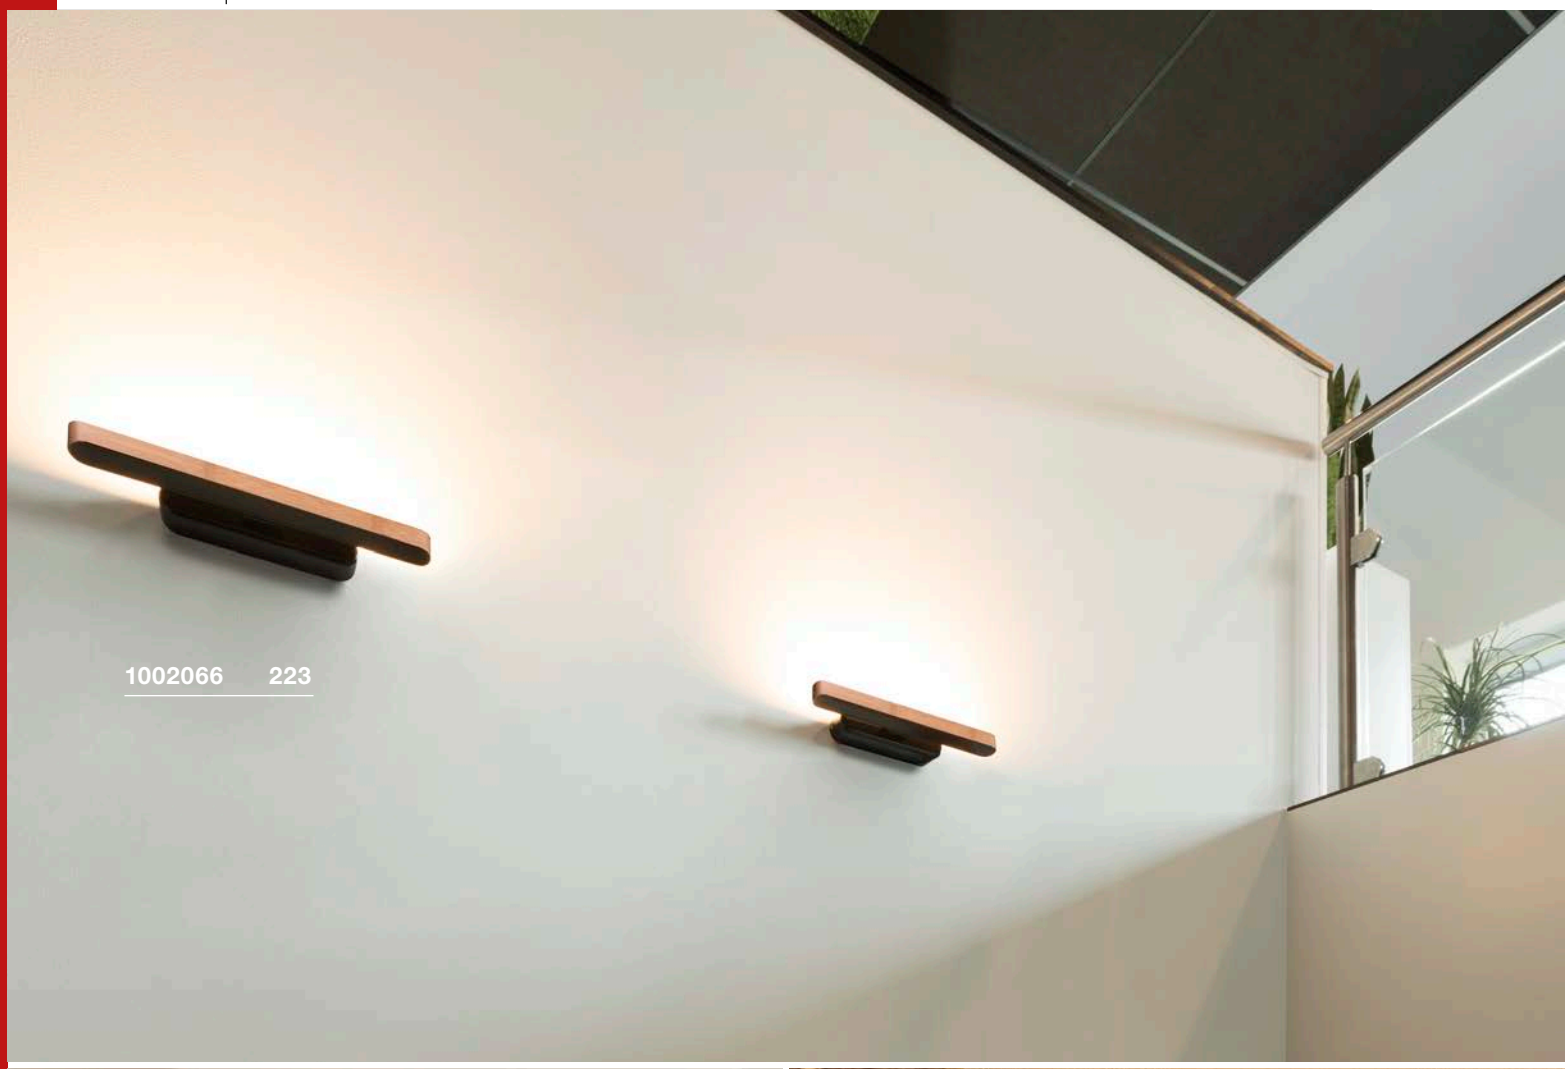
1002066 223


1002067 223


1002960 223

VINCELLI D
WL

898

A-A++ Spectrum A++–E

LED INSIDE









- Slim design
- Lamp unit made from real bamboo

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 11W
Material: Bamboo / Steel
Dimmable: Triac C, Triac L

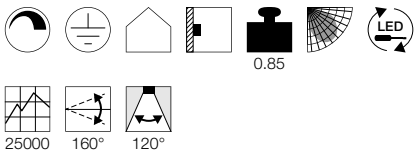

Dimensioned drawing



Variant	Item no.	GBP
500lm | 2700K | CRI>80		
anthracite / brown	1002066	162,00

VINCELLI D
WL

898

A-A++ Spectrum A++–E

LED INSIDE









- Slim design
- Lamp unit made from real bamboo

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 11W
Material: Bamboo / Steel
Dimmable: Triac C, Triac L

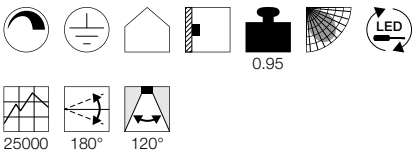

Dimensioned drawing



Variant	Item no.	GBP
500lm | 2700K | CRI>80		
anthracite / brown	1002067	171,00

RETRATO
WL

A-A++ Spectrum A++–E

LED INSIDE

NEW









- Rotating and swivelling lamp head

Product details

220-240V ~50/60Hz
Total consumption: 12W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L

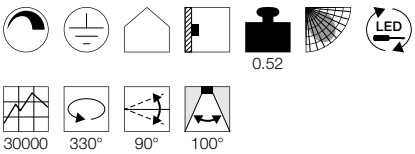

Dimensioned drawing



Variant	Item no.	GBP
730lm | 3000K | CRI>90		
matt white / chrome	1002960	188,10
730lm | 3000K | CRI>90		
matt chrome	1002961	215,10


FILI, CANOPY
WL, QPAR51






- Rotating and swivelling lamp head

Product details
220-240V ~50/60Hz
Material: Aluminium / Brass



Dimensioned drawing



Note
Deco ring 51 mm incl.

Recommended lamp
LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001561 | 9,90 GBP



LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001564 | 9,90 GBP



Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
grey	146482	72,00

FILI, TERMINAL
WL, QPAR51








- Rotating and swivelling lamp head

Product details
230V ~50Hz
Material: Aluminium / Brass



Dimensioned drawing



Note
Clamping range max. 8 cm

Recommended lamp
LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP




LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP




Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
grey	146452	72,00

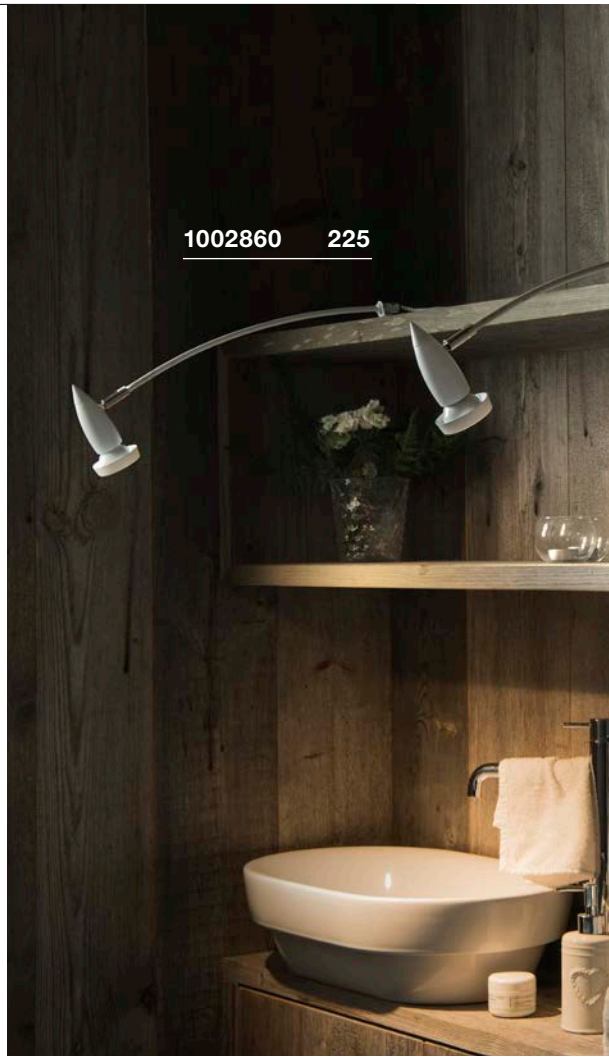





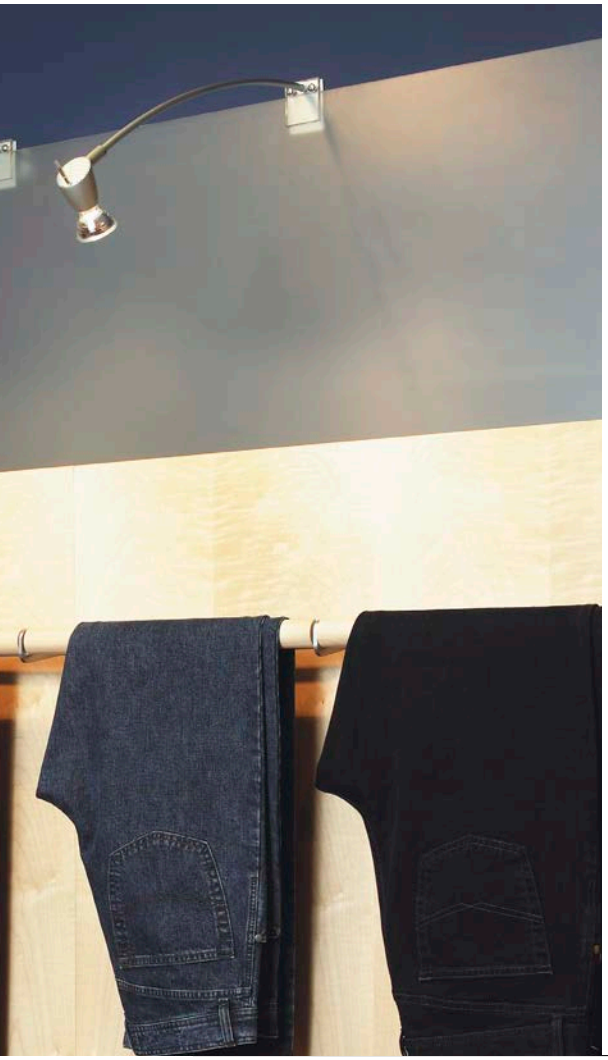

DISPLAY ADL 50
QPAR51

E-A++ Spectrum A⁺⁺–E

NEW COLOR








- Rotating and swivelling lamp head

Product details

220-240V ~50/60Hz
Material: Aluminium / Brass



Dimensioned drawing



Recommended accessories

Lamp deco ring diam. 5.7cm
Item no. 151041 |4,00 GBP

Lamp deco ring diam. 5.7cm
Item no. 151049 |5,90 GBP



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 |9,90 GBP



LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001566 |9,90 GBP



Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**1002860**	**34,20**
GU10 | QPAR51		
chrome	**146332**	**41,40**

SPOT DISPLAY
E27

896

A-A++ Spectrum A⁺⁺–E

NEW








- Switch at connection lead

Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note


Shock-proof mains plug
Clamping range: 10-60 mm


Lamp details

max. 18.5W

Variant	Item no.	GBP
E27		
matt black	**1002985**	**58,50**
E27		
matt white	**1002986**	**58,50**
E27		
matt grey	**1002987**	**58,50**


1000734 227
1000746 + 1000748 139

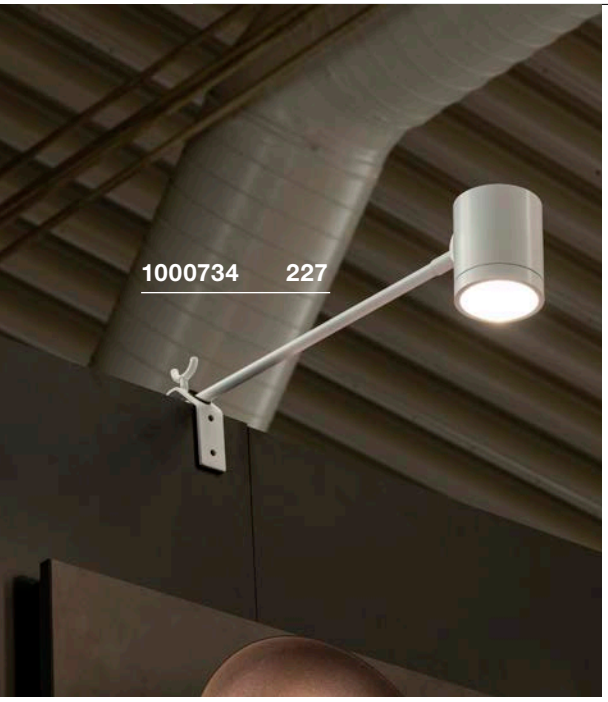

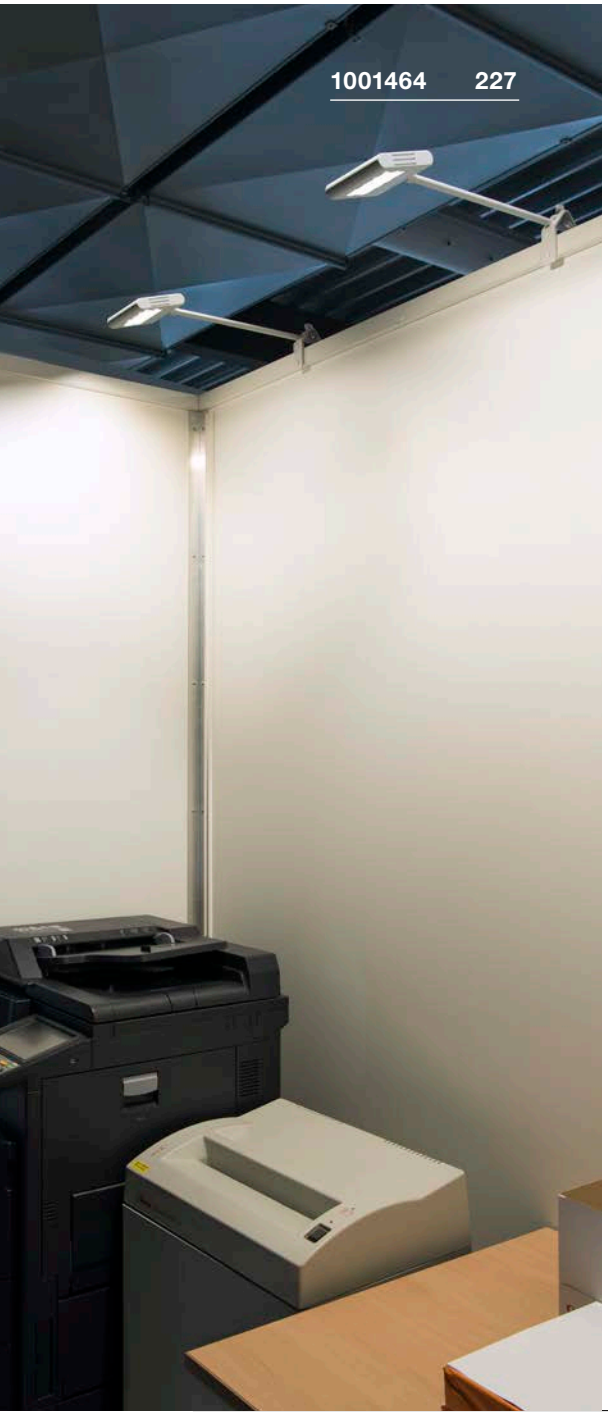

ANELA
Display

883

A-A++ Spectrum A++–E

LED INSIDE









- Switch at connection lead

Product details

220-240V ~50/60Hz
Total consumption: 10W
Material: Aluminium
Dimmable: Triac C, Triac L

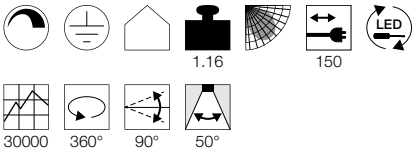

Dimensioned drawing



Note

2-pin plug
Clamping range: 7-50 mm

Recommended accessories

■ Nepro Display tube kit
Item no. 146479 |6,30 GBP



Variant	Item no.	GBP
750lm | 3000K | CRI>80		
■ black	**1000733**	**126,00**
750lm | 3000K | CRI>80		
□ white	**1000734**	**126,00**
750lm | 4000K | CRI>80		
■ black	**1001009**	**126,00**
750lm | 4000K | CRI>80		
□ white	**1001010**	**126,00**

LENITO
WL

889

A-A++ Spectrum A++–E

LED INSIDE









- Easy installation due to screw terminal with wing nut

Product details

220-240V ~50/60Hz | 160mA
Total consumption: 23W
Material: Aluminium / Polycarbonate (PC)

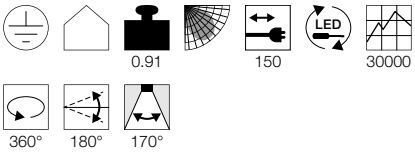

Dimensioned drawing



Note

Shock-proof 2-pin plug and switch
Clamping range: 10-45 mm

Variant	Item no.	GBP
2500lm | 3000K | CRI>80		
□ white	**1001464**	**135,00**
2350lm | 3000K | CRI>80		
■ black	**1001465**	**135,00**

MALO DISPLAY
WL

A-A++ Spectrum A++–E

LED INSIDE









- Easy installation due to screw terminal with wing nut

Product details

230V ~50Hz
Total consumption: 23W
Material: Aluminium



Dimensioned drawing



Note

2-pin plug and switch
Clamping range: 15-55 mm

Variant	Item no.	GBP
1600lm | 4000K | CRI>80		
grey	**1001857**	**153,00**
1600lm | 4000K | CRI>80		
white / chrome	**1001858**	**155,70**

NEPRO DISPLAY
QT-DE12

D-A+ Spectrum A++–E








- Rotating and swivelling head
- Easy installation due to screw terminal with wing nut

Product details

230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note

Shock-proof 2-pin plug and switch
Clamping range: 15-55 mm

Recommended accessories

Nepro Display tube kit
Item no. 146479 | 6,30 GBP

Recommended lamp

R7s 118mm 6.5W
3000K 806lm EEI=A++
7kWh/1000h
Item no. 551893 | 38,70 GBP

LED R7s 118mm 14W
3000K 2000lm EEI=A++
14kWh/1000h
Item no. 1002135 | 60,30 GBP

Lamp details

max. 300W QT-DE12

Variant	Item no.	GBP
R7s 118mm | QT-DE12		
grey / chrome	**146472**	**99,00**









DISPLAY

A-A++ Spectrum A++–E

LED INSIDE









- Rotating and swivelling lamp head
- Easy installation using screw clamp

Product details

230V ~50Hz | 24V DC
Total consumption: 16W
Material: Aluminium / Plastic

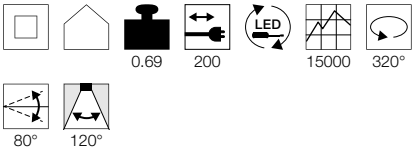

Dimensioned drawing



Note

Clamping range: 5-55 mm
2-pin plug

Variant	Item no.	GBP
1100lm | 4000K | CRI>80		
grey	170401	117,00
1060lm | 3000K | CRI>80		
grey	170402	117,00

THE BEST THINGS COME FROM ABOVE.


CEILING LIGHTS FOR FLEXIBLE LIGHTING.

Ceiling lights are the centrepiece of any room. They bring a warm ambience into each space with their radiant power. Adapted to the room concept, you can align the luminaires in an optimum way and set impressive emphasis of light from above.





156050 **237**

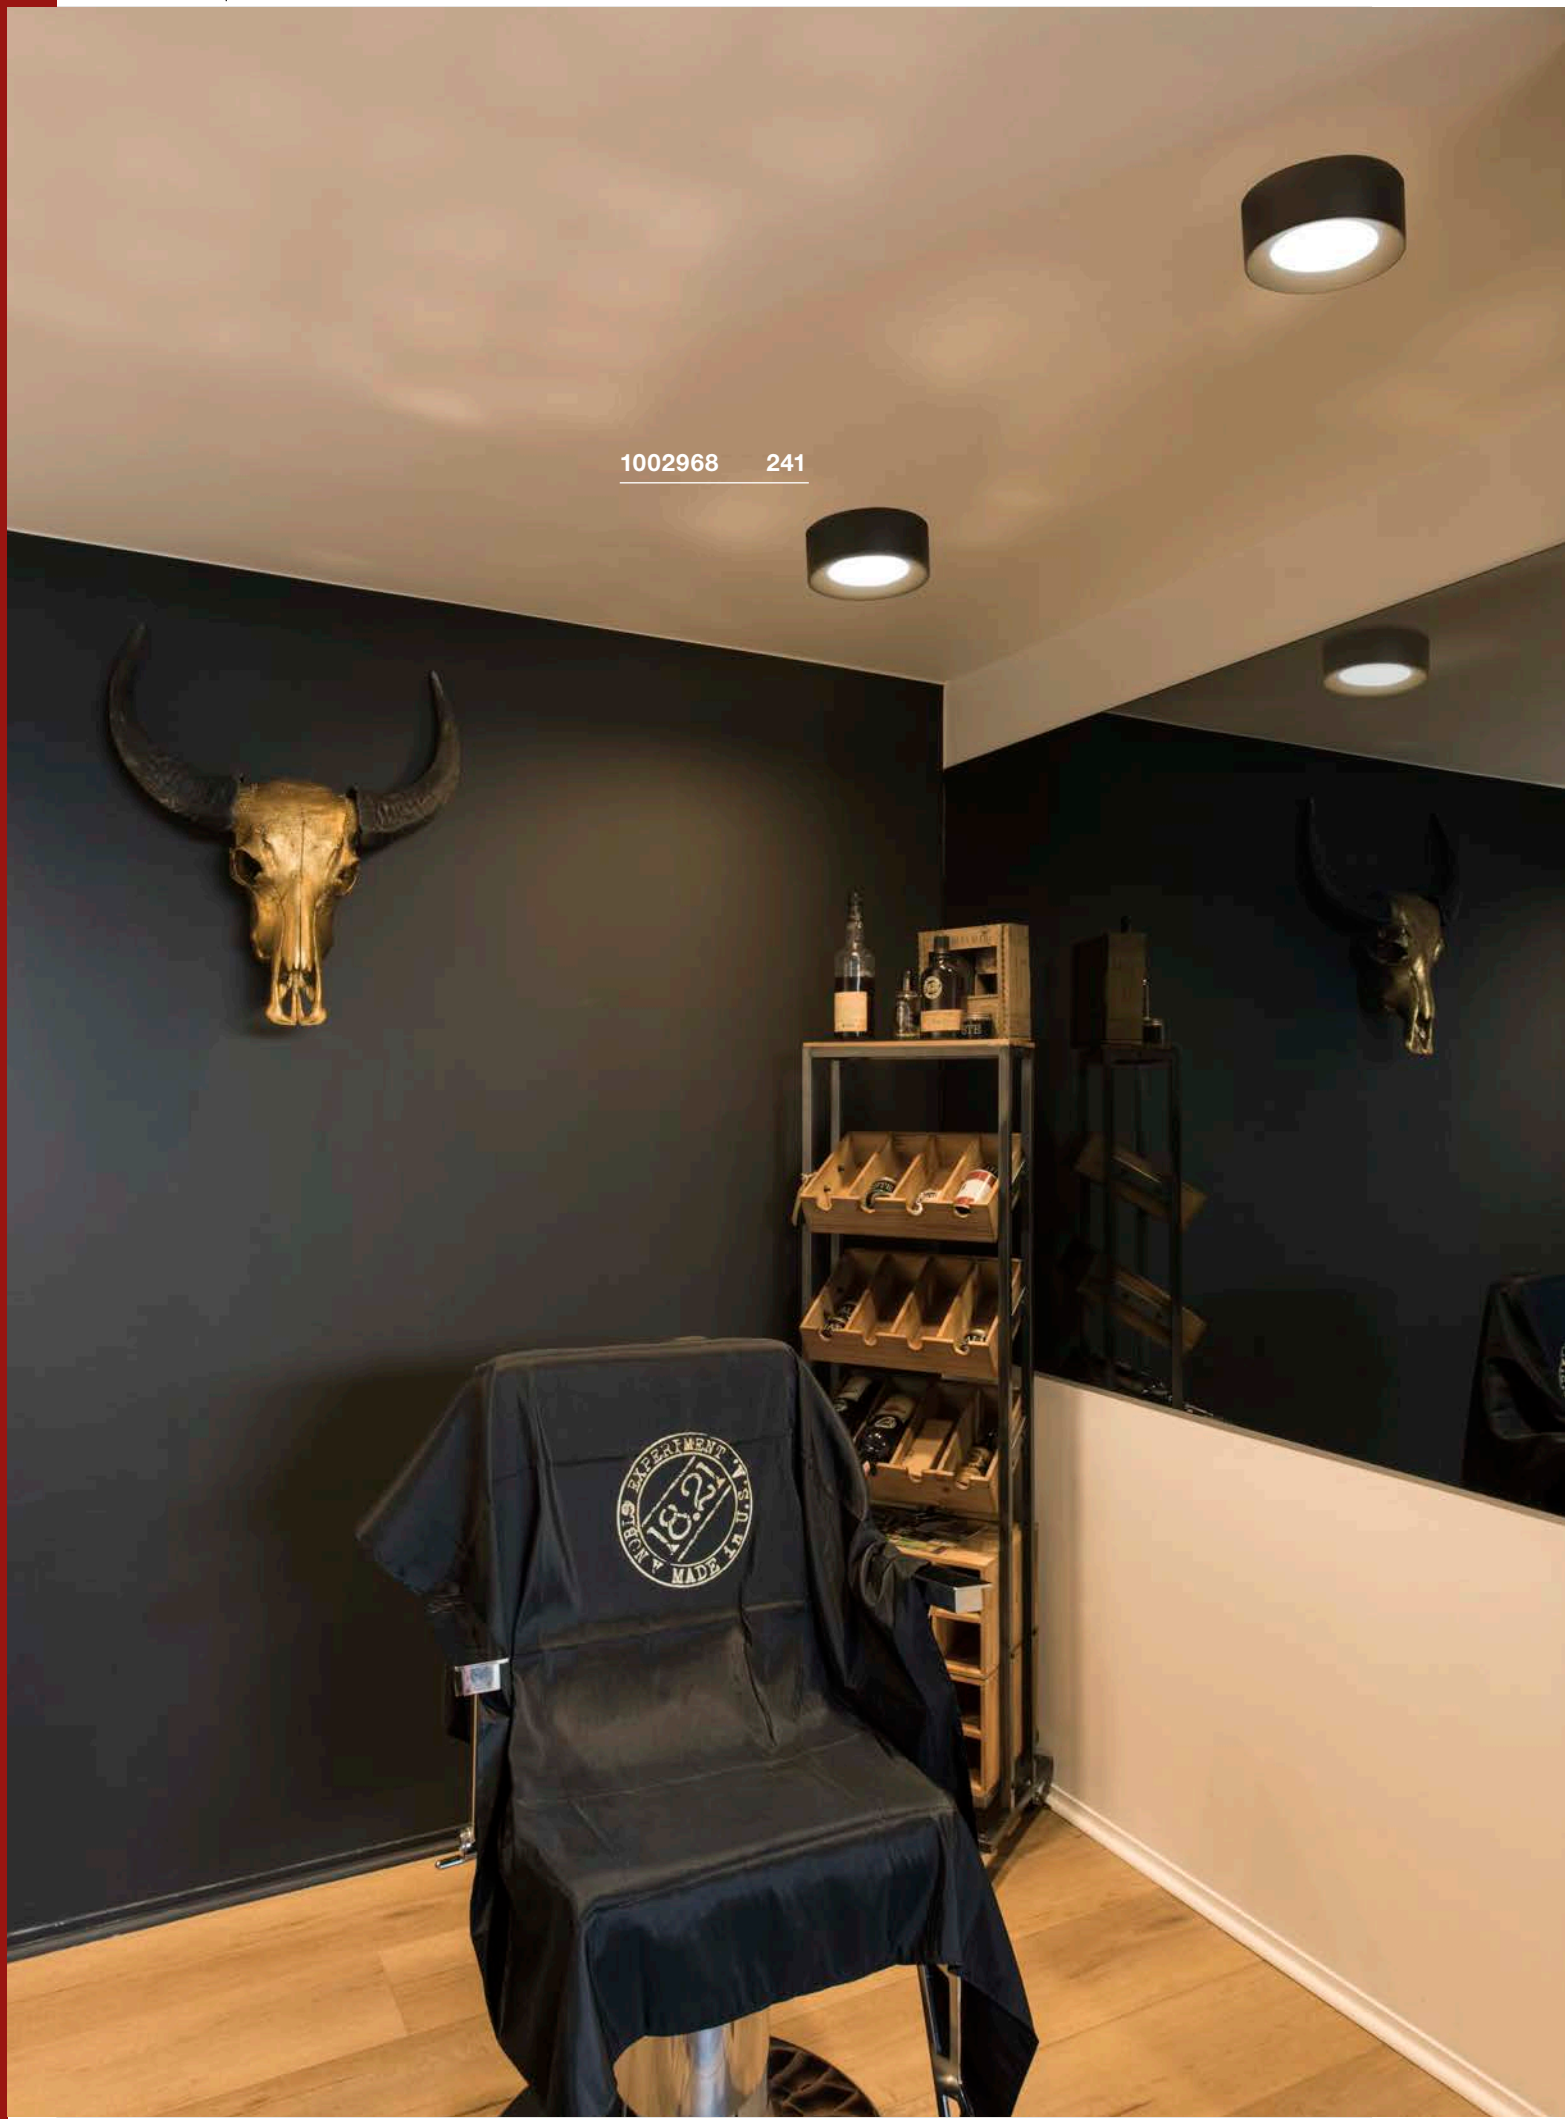
1002968 241

CEILING LIGHTS


234


235


235


235


236

237


237


238


238


240


240

240

241


241


246


247


248


248


248

249


250


251


251


251


252


252

252


253


254

255

256


257


257

257


258


258


259


259

260

260

260

262

263

263

263

264

264

265

265

266

266

266

267

267

268

268

269

269

270

271

271

271

272

272

273

273

274

274

275

275

276

276


277

277

277

Other luminaires and variants can be found online at www.slv.com

SLV FENDA.
MIX & MATCH.

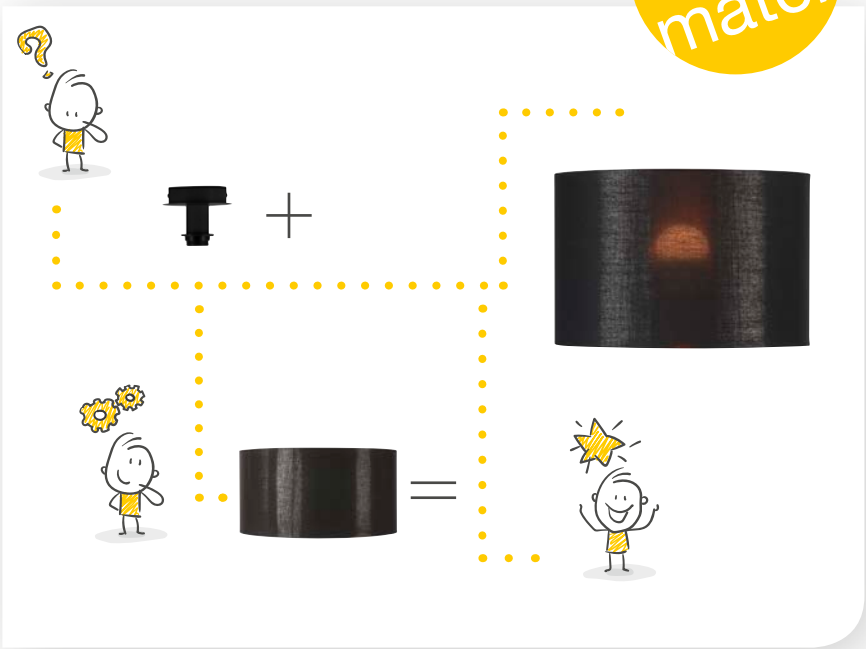



FENDA
Ceiling plate, E27

886

E-A++ Spectrum A++–E








- Individually configurable by selecting the lamp shades

Product details

230V ~50Hz
Material: Steel

0.3

Dimensioned drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001038 | 20,70 GBP

Lamp details


max. 60W

Variant	Item no.	GBP
E27		
black	**155550**	**36,00**
E27		
white	**155551**	**36,00**
E27		
chrome	**155552**	**40,50**

FENDA
Ø 30 cm, round

886



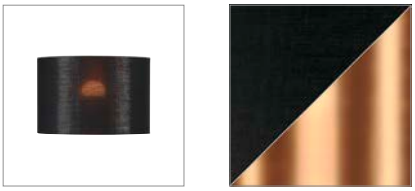


- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel




Dimensioned drawing



Note

max. 60W
Acrylic glass cover (155570) available as an accessory for closing the shade at one side

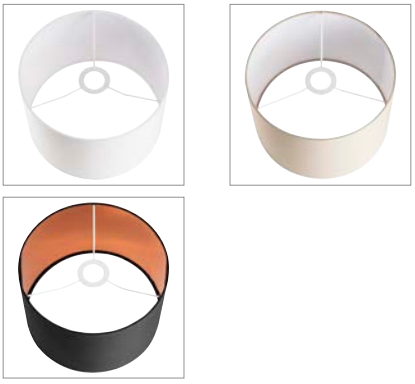

Recommended accessories

Acrylic glass cover
Item no. 155570 | 22,50 GBP

Variant	Item no.	GBP
white	155582	40,50
beige	155583	40,50
black / copper	155592	54,00

FENDA
Ø 45 cm, round

886






- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel



Dimensioned drawing



Note

max. 60W
Acrylic glass cover (156100) available as an accessory for closing the shade at one side



Recommended accessories


Acrylic glass cover
Item no. 156100 | 34,20 GBP

Variant	Item no.	GBP
white	156111	63,00
beige	156113	63,00
black / copper	156122	67,50

FENDA
Ø 70 cm, round

886



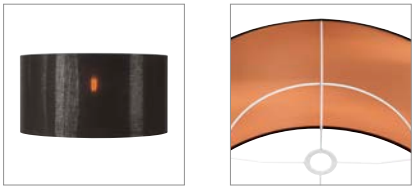


- Individually configurable by selecting a suitable lamp base

Product details

Material: Textile / Steel




Dimensioned drawing



Note

max. 60W
Acrylic glass cover (1000957) available as an accessory for closing the shade at one side

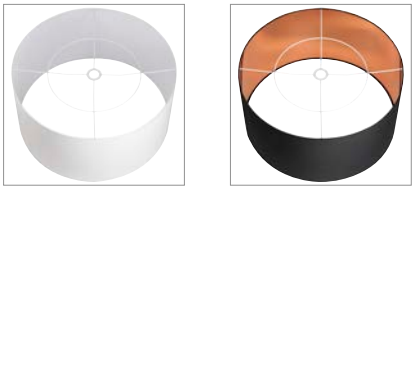

Recommended accessories

Acrylic glass cover
Item no. 1000957 | 72,00 GBP

Variant	Item no.	GBP
white	1000579	85,50
black / copper	1000580	99,00

ACCANTO
CL, E27

882

E-A++ Spectrum A⁺⁺–E

NEW








• Acrylic cover on underside of shade

Product details

220-240V ~50/60Hz
Material: Steel / Textile




Dimensioned drawing



Lamp details

2x max. 40W

Variant	Item no.	GBP
E27		
white / black	1002944	117,00
E27		
white / white	1002945	117,00

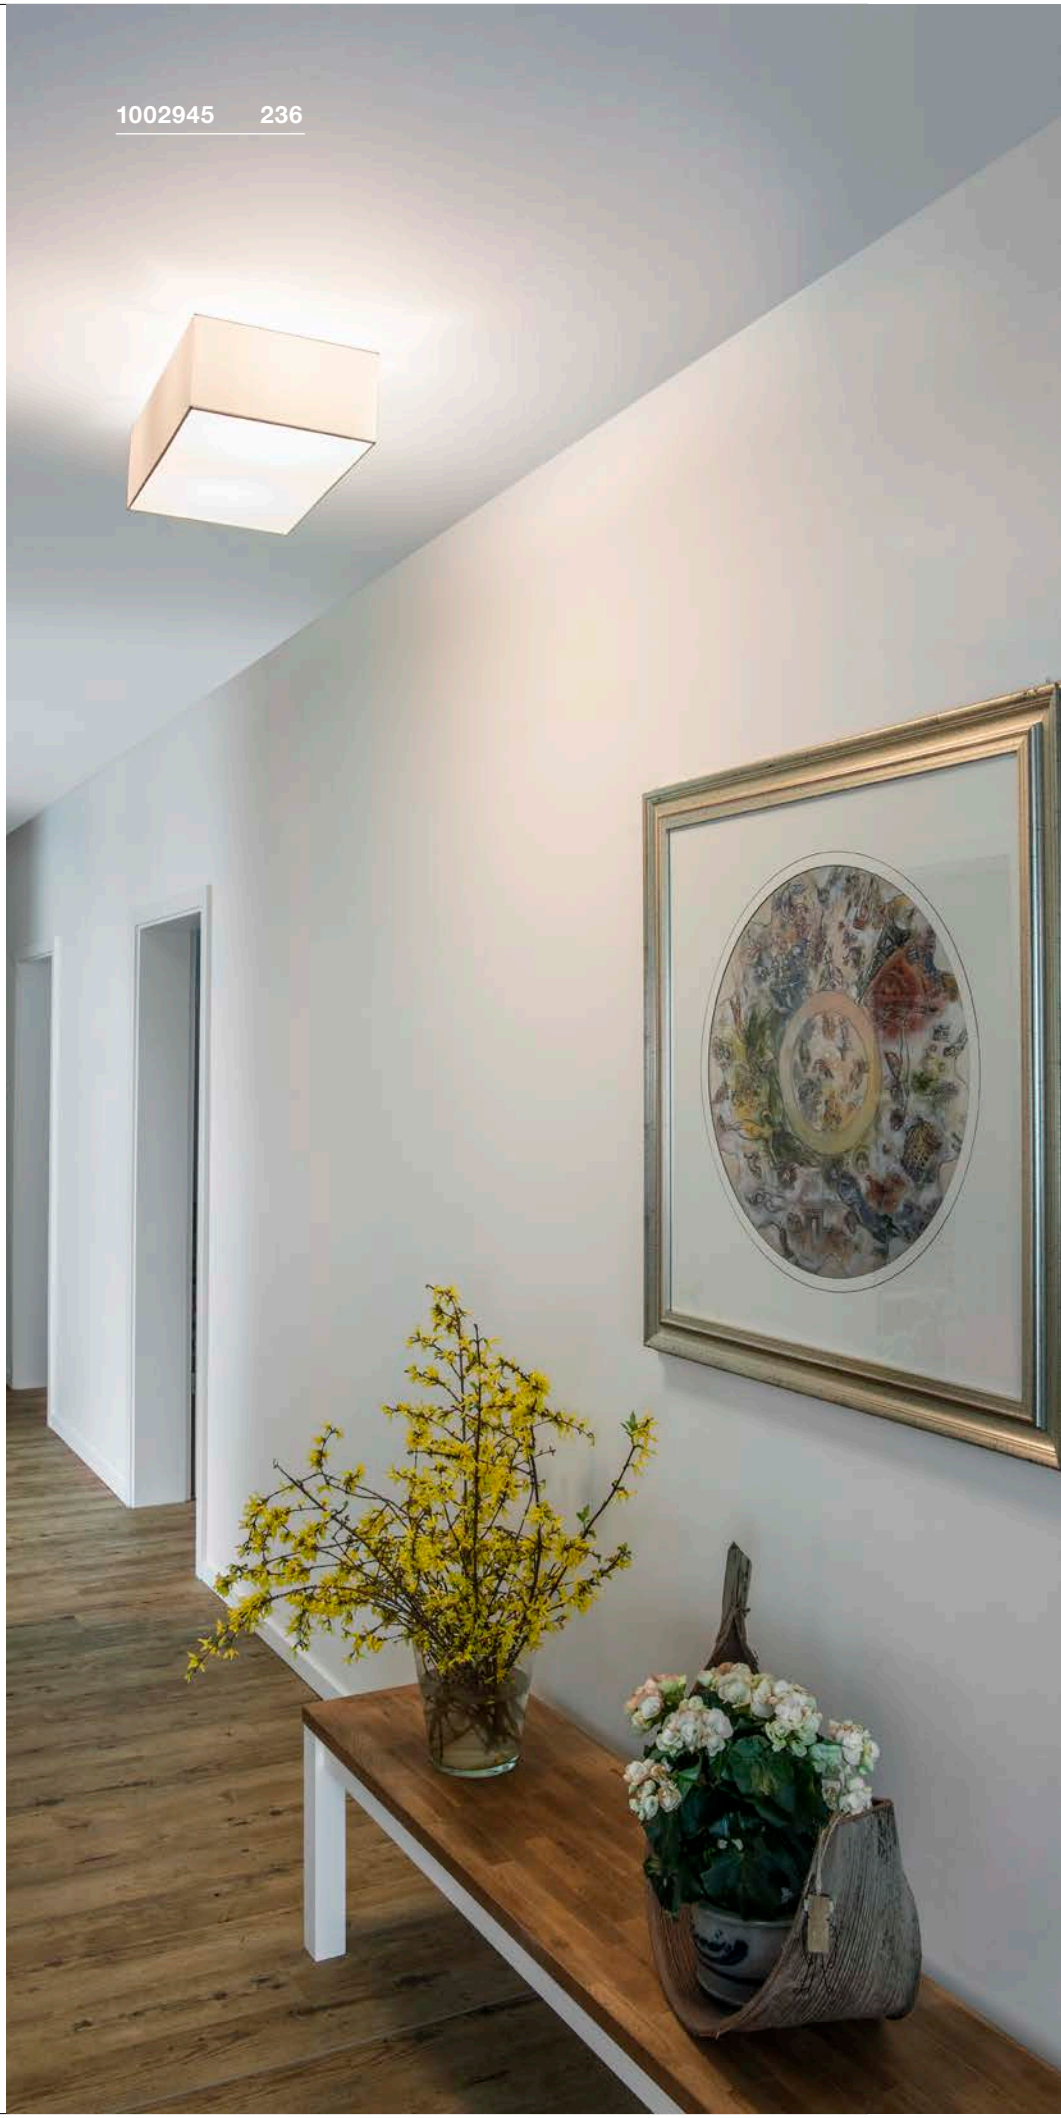






TENORA
CL, E27

897

A-A++ Spectrum A++–E




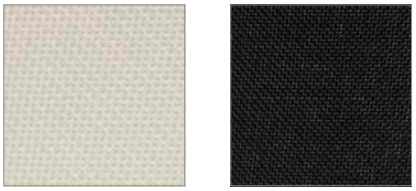

Product details
230V ~50Hz
Material: Steel / Textile

1.4

Dimensioned drawing



Note
Canopy: Ø 12 cm

Recommended lamp

LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP

Lamp details
3x max. 23W
L: 14.8 cm max.

Variant	Item no.	GBP
E27		
■ black	**156050**	**144,00**
E27		
□ white	**156051**	**144,00**

SOPRANA
CL, E27

896

E-A++ Spectrum A++–E






Product details
230V ~50Hz
Material: Steel / Textile

2.5

Dimensioned drawing



Note
Canopy: Ø 15 cm

Recommended lamp

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP

LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP

Lamp details
3x max. 60W
L: 20 cm max.

Variant	Item no.	GBP
E27		
□ white	**155372**	**153,00**
E27		
■ beige	**155373**	**153,00**

BATO 45
CW, E27

884

E-A++ Spectrum A⁺⁺–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Steel

1.65

Dimensioned drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP



LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP



Lamp details

max. 60W

Variant	Item no.	GBP
E27		
■ black	**1000443**	**144,00**
E27		
■ matt brass	**1000445**	**162,00**

BATO 45
CW

884

A-A++ Spectrum A⁺⁺–E

LED INSIDE








Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C

1.8


30000 100°

Dimensioned drawing



Variant	Item no.	GBP
1450lm | 2700K | CRI>80		
■ black	**1000437**	**188,10**
1900lm | 2500K | CRI>80		
■ matt brass	**1000442**	**206,10**



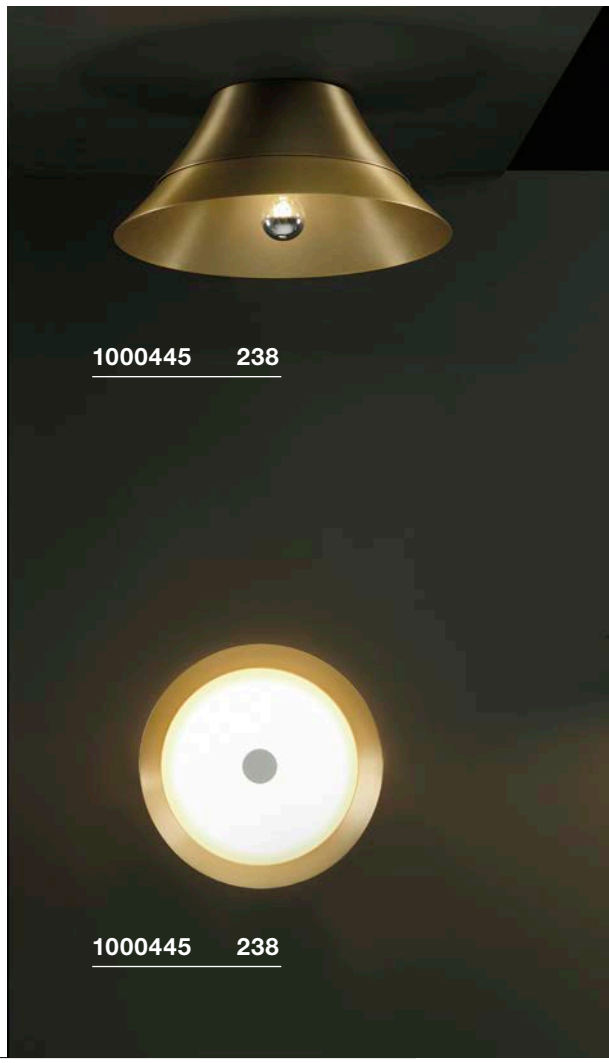


1000442 238

PLASTRA
CL

893

A-A++ Spectrum A++–E

LED INSIDE








- Can be individually designed with colours, stickers and more


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Plaster / Steel
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
990lm | 3000K | CRI>80		
white	148005	99,00

PLASTRA 105
CL, E27

893

E-A++ Spectrum A++–E








- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz
Material: Plaster / Glass



Dimensioned drawing



Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

LED E27 12W 240°
3000K 1055lm EEI=A+
12kWh/1000h
Item no. 1001032 | 20,70 GBP

Lamp details

2x max. 25W
Ø: 5 cm max. L: 14 cm max.

Variant	Item no.	GBP
E27		
white / matt transparent	148001	67,50

PLASTRA 104
CL, E27

893

E-A++ Spectrum A++–E







- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz
Material: Plaster / Glass



Dimensioned drawing



Recommended lamp

E27 11W
3000K 600lm EEI=A
11kWh/1000h
Item no. 508211 | 10,80 GBP



LED E27 12W 240°
3000K 1055lm EEI=A+
12kWh/1000h
Item no. 1001032 | 20,70 GBP

Lamp details

2x max. 25W
Ø: 5 cm max. L: 14 cm max.

Variant	Item no.	GBP
E27		
white / matt transparent	148002	63,00



FERA 25
CL, DALI

A-A++ Spectrum A++–E

LED INSIDE

NEW







- Switchable light colour

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 19.5W
Material:
Polycarbonate (PC) / Polymethylacrylate (PMMA)
Dimmable: Dali



Dimensioned drawing



Variant	Item no.	GBP
1580/1650lm | 3000/4000K | CRI>80		
matt white / frosted	**1002967** NEW	**224,10**
1580/1650lm | 3000/4000K | CRI>80		
matt black / frosted	**1002968** NEW	**224,10**

FERA 25
CL

A-A++ Spectrum A++–E

LED INSIDE









Product details


100-240V ~50/60Hz | 550mA
Total consumption: 21W
Material:
Aluminium / Polystyrene (PS)



Dimensioned drawing



Variant	Item no.	GBP
2000lm | 3000K | CRI>80		
white	**161461**	**153,00**
2000lm | 3000K | CRI>80		
grey	**161464**	**153,00**
2000lm | 3000K | CRI>80		
black	**1001939**	**153,00**

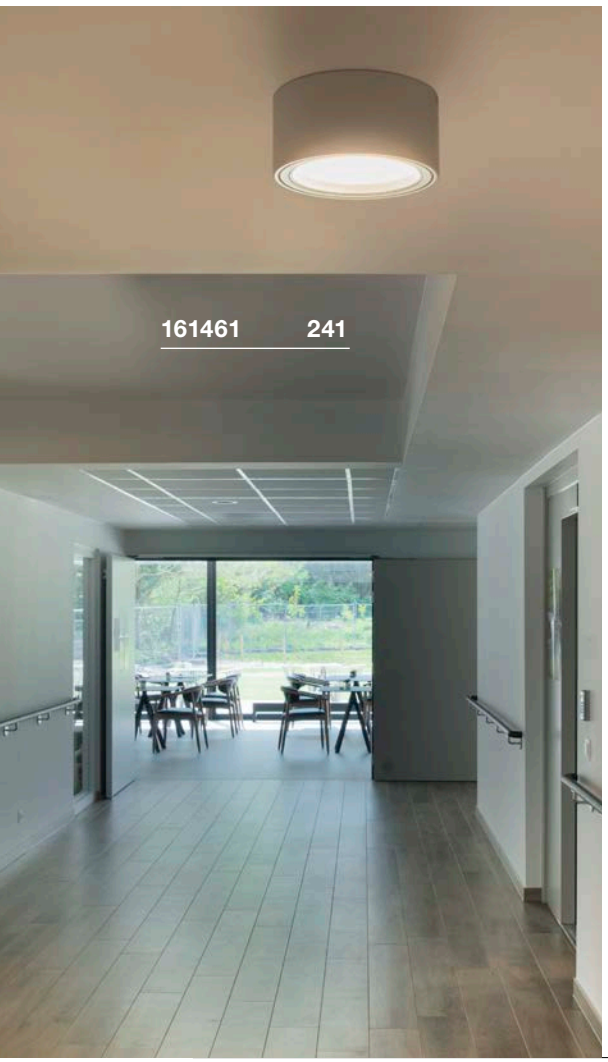

MEDO LIGHT SERIES.
CEILING LIGHT OR PENDANT.

	MEDO 30 CL, 1-10V	MEDO 40 CL, 1-10V	MEDO 60 CL, 1-10V	MEDO 90 CL, 1-10V
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Ø: 30 cm	Ø: 40 cm	Ø: 60 cm	Ø: 90 cm
Luminous intensity	1000lm	2000lm	3500lm	11000lm
UGR	25	25	22	25
Dimmable	1-10V	1-10V	1-10V	1-10V
Suspension set	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 CL, TRIAC	MEDO 40 CL, TRIAC
Example		
Lamp	LED INSIDE	LED INSIDE
Size Ø	Ø: 30 cm	Ø: 40 cm
Luminous intensity	1200lm	2125lm
UGR	25	25
Dimmable	Triac C, Triac L	Triac C, Triac L
Suspension set (excl.)	1.5 m | 5 m	1.5 m | 5 m



This MEDO variant is dimmed using TRIAC dimmers!


	MEDO 60 CL, square, 1-10V	MEDO 60 CL, square, DALI
Example		
Lamp	LED INSIDE	LED INSIDE
Size	W | L: 60 cm	W | L: 60 cm
Luminous intensity	3300 lm	3300 lm
UGR	22	22
Dimmable	1-10V	Dali
Suspension set	1.5 m | 5 m	1.5 m | 5 m



MEDO LIGHT SERIES.
CEILING LIGHT OR PENDANT.

	MEDO 30 CORONA CW, TRIAC	MEDO 40 CORONA CW, TRIAC	MEDO 60 CORONA CW, TRIAC	MEDO 90 CORONA CL, TRIAC
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Ø: 30 cm	Ø: 40 cm	Ø: 60 cm	Ø: 90 cm
Luminous intensity	Down: 1230/1280lm Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	Triac C	Triac C	Triac C	Triac C
Suspension set	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 CORONA CW, DALI	MEDO 40 CORONA CW, DALI	MEDO 60 CORONA CW, DALI	MEDO 90 CORONA CL, DALI
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Ø: 30 cm	Ø: 40 cm	Ø: 60 cm	Ø: 90 cm
Luminous intensity	Down: 1230/1280lm Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	DALI	DALI	DALI	DALI
Suspension set	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

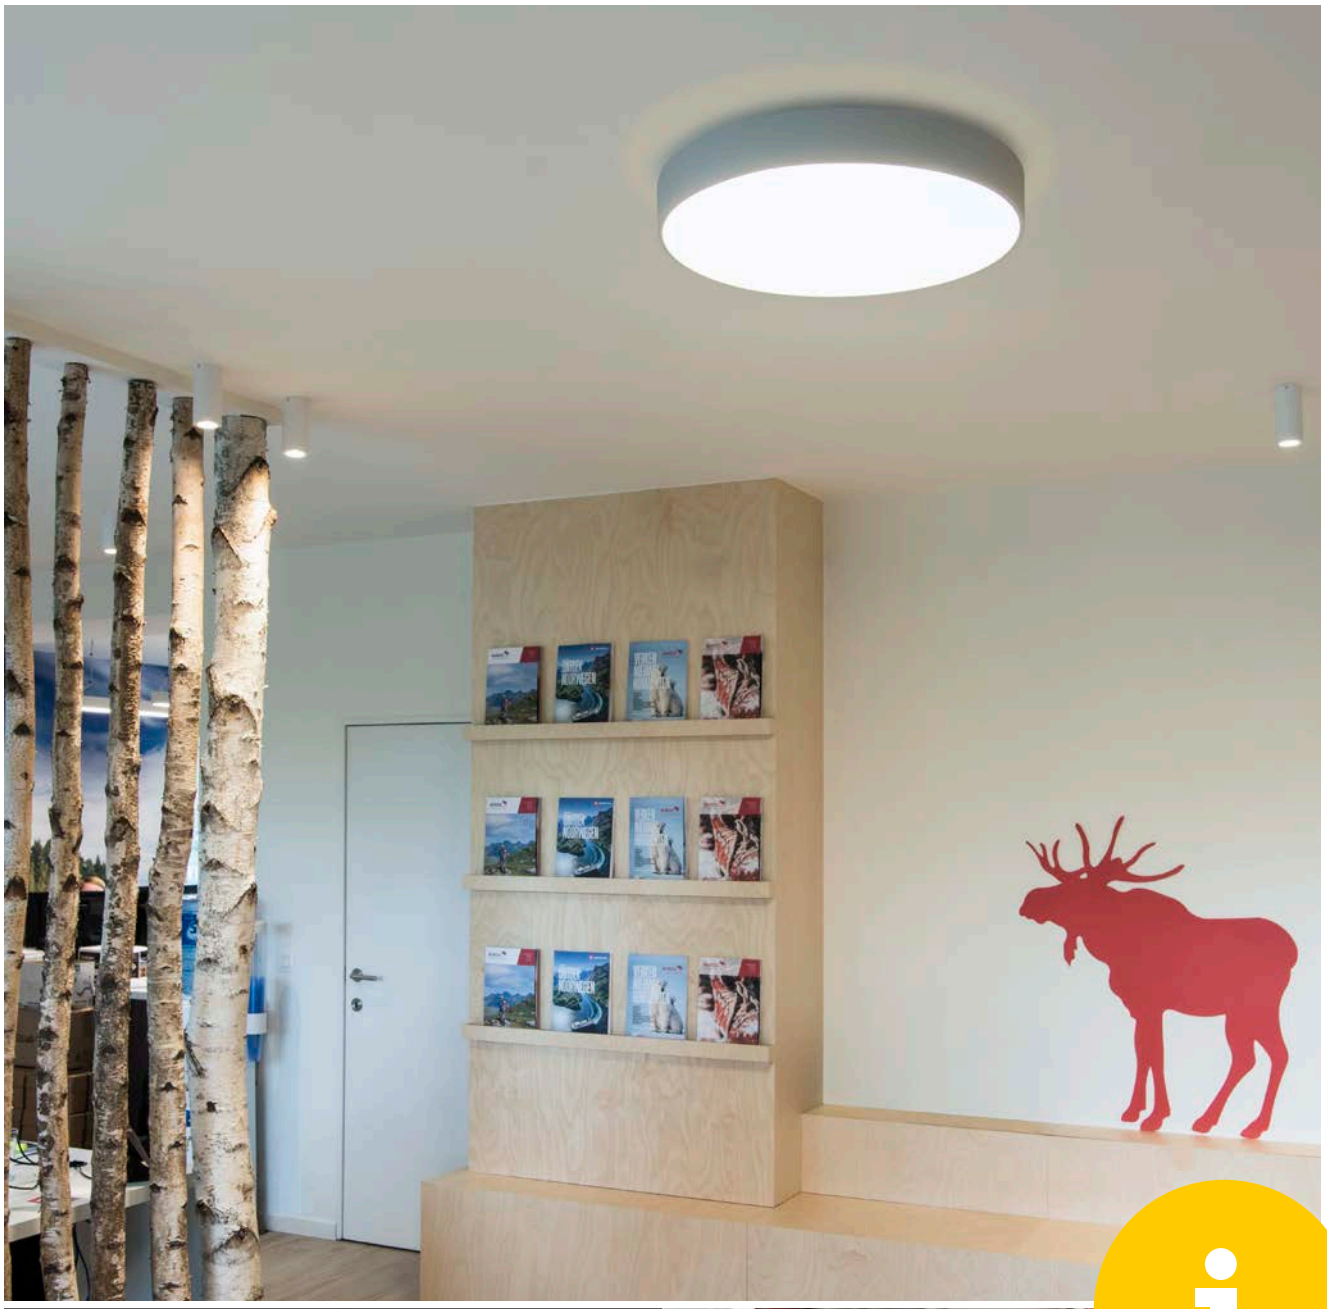





Corona e›ect – these MEDO variants have homogeneous indirect upwards-directed light emission.

Colour temperature – with this MEDO variant you can select the colour temperature yourself. You can choose between 3000K and 4000K using the switch on the back.

MEDO 30
CL, TRIAC

891


A-A++ Spectrum A++–E

LED INSIDE








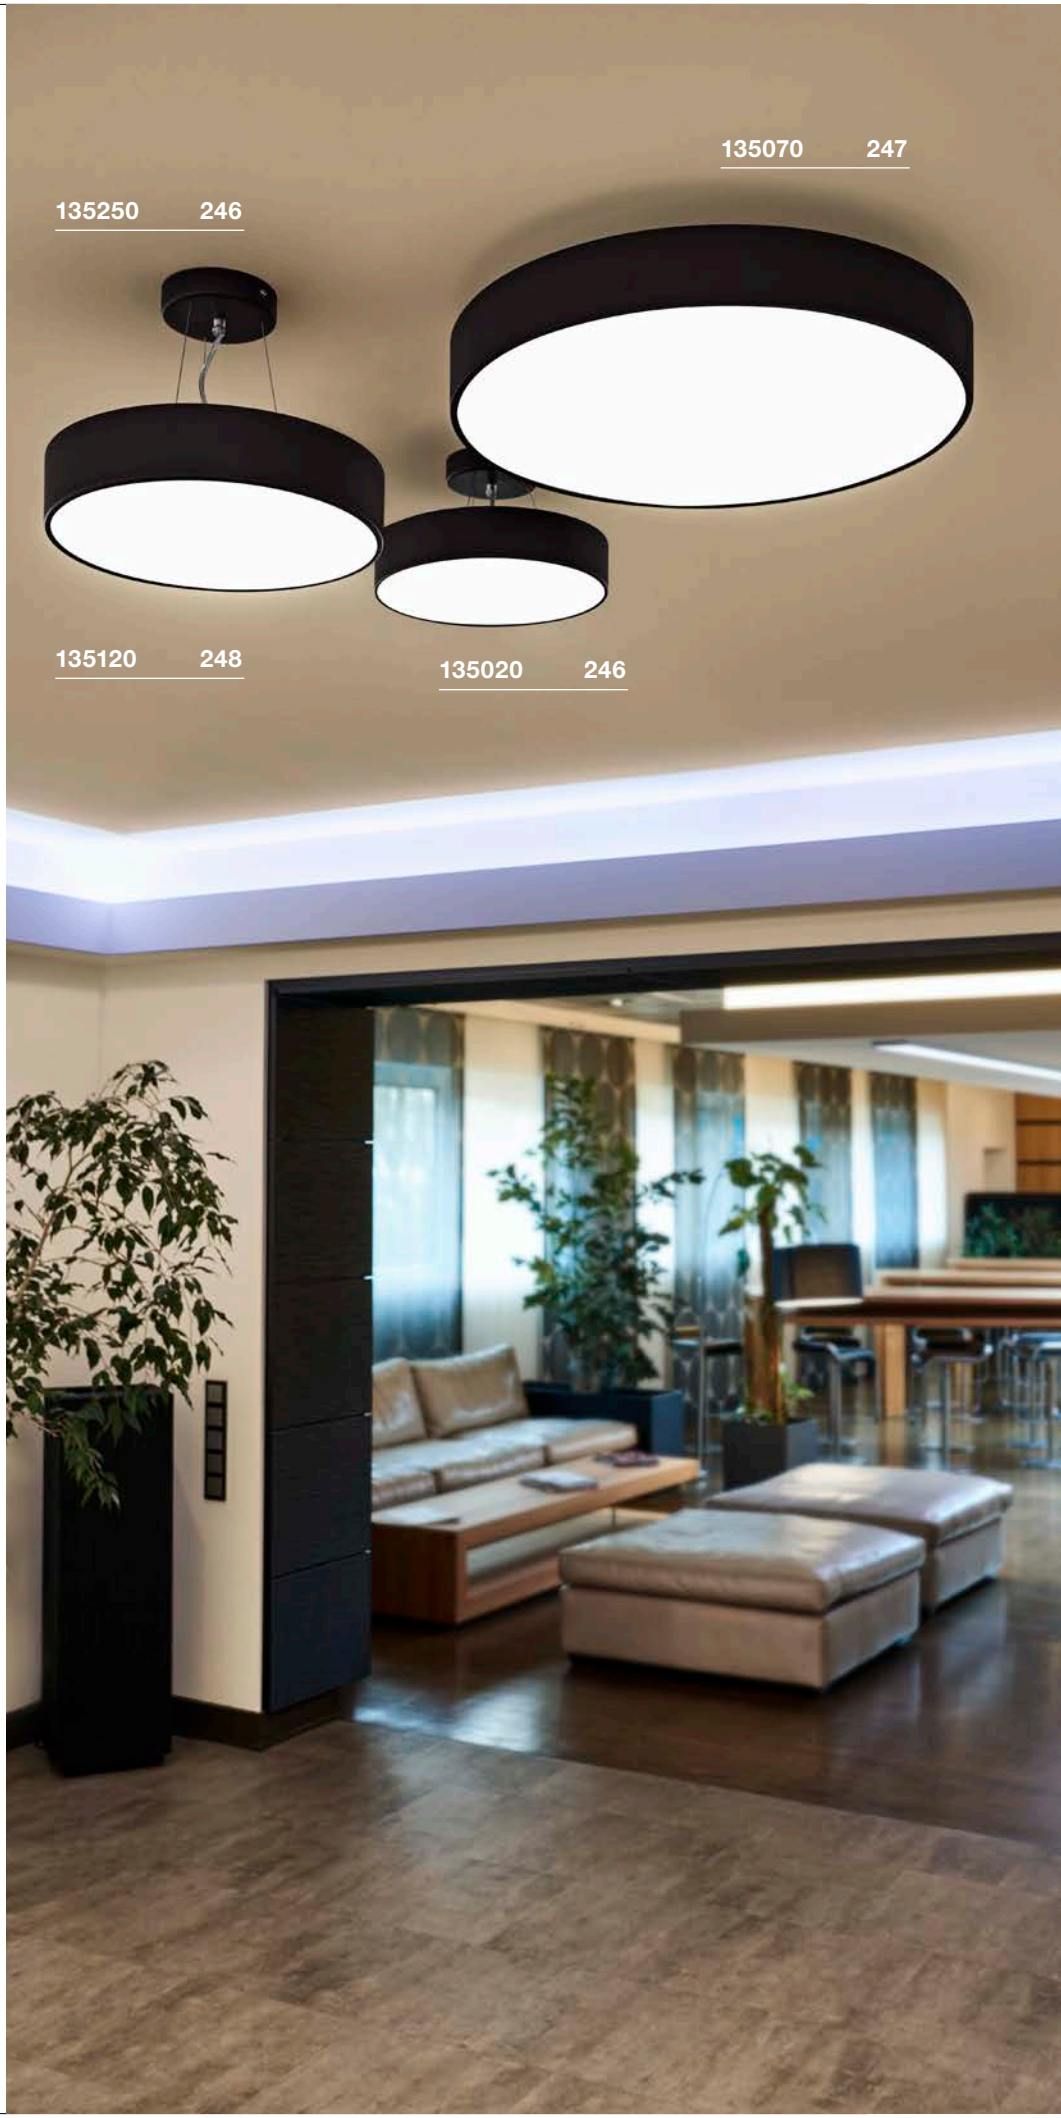


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 16W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C, Triac L

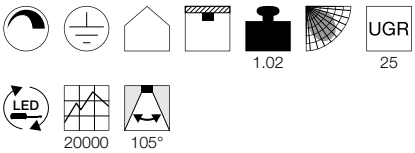

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 |34,20 GBP

Suspension set 1.5m
Item no. 135251 |34,20 GBP

Suspension set 1.5m
Item no. 135254 |34,20 GBP

Suspension set 5m
Item no. 1001950 |76,50 GBP

Suspension set 5m
Item no. 1001951 |76,50 GBP

Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
1200lm | 3000K | CRI>80 black	135020	206,10
1200lm | 3000K | CRI>80 white	135021	206,10
1200lm | 3000K | CRI>80 grey	135024	206,10
1200lm | 3000K | CRI>80 red	135026	206,10



MEDO 40
CL, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 700mA
Total consumption: 31W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C, Triac L

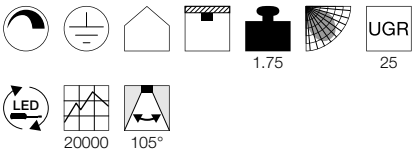

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 | 34,20 GBP

Suspension set 1.5m
Item no. 135251 | 34,20 GBP

Suspension set 1.5m
Item no. 135254 | 34,20 GBP

Suspension set 5m
Item no. 1001950 | 76,50 GBP

Suspension set 5m
Item no. 1001951 | 76,50 GBP

Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
2125lm | 3000K | CRI>80 black	**135070**	**242,10**
2125lm | 3000K | CRI>80 white	**135071**	**242,10**
2125lm | 3000K | CRI>80 grey	**135074**	**242,10**
2125lm | 3000K | CRI>80 red	**135076**	**242,10**

MEDO 30
CL, 1-10V

891

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V



Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
1000lm | 3000K | CRI>80		
■ black	**1000855**	**206,10**
1000lm | 3000K | CRI>80		
□ white	**1000856**	**206,10**
1000lm | 3000K | CRI>80		
■ grey	**1000857**	**206,10**

MEDO 40
CL, 1-10V

891

A-A++ Spectrum A++–E

LED INSIDE









Product details

120-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

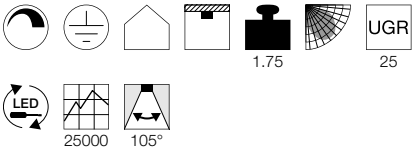

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
2000lm | 3000K | CRI>80		
■ black	**1000864**	**242,10**
2000lm | 3000K | CRI>80		
□ white	**1000865**	**242,10**
2000lm | 3000K | CRI>80		
■ grey	**1000866**	**242,10**

MEDO 60
CL, 1-10V

891

A-A++ Spectrum A++–E

LED INSIDE









Product details

100-240V ~50/60Hz | 1000mA
Total consumption: 40W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V



Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP


□ 1-10V dimming
Item no. 470505 |9,90 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
3500lm | 3000K | CRI>80		
■ black	**135120**	**431,10**
3500lm | 3000K | CRI>80		
□ white	**135121**	**431,10**
3500lm | 3000K | CRI>80		
■ grey	**135124**	**431,10**
3500lm | 3000K | CRI>80		
■ red	**135126**	**431,10**

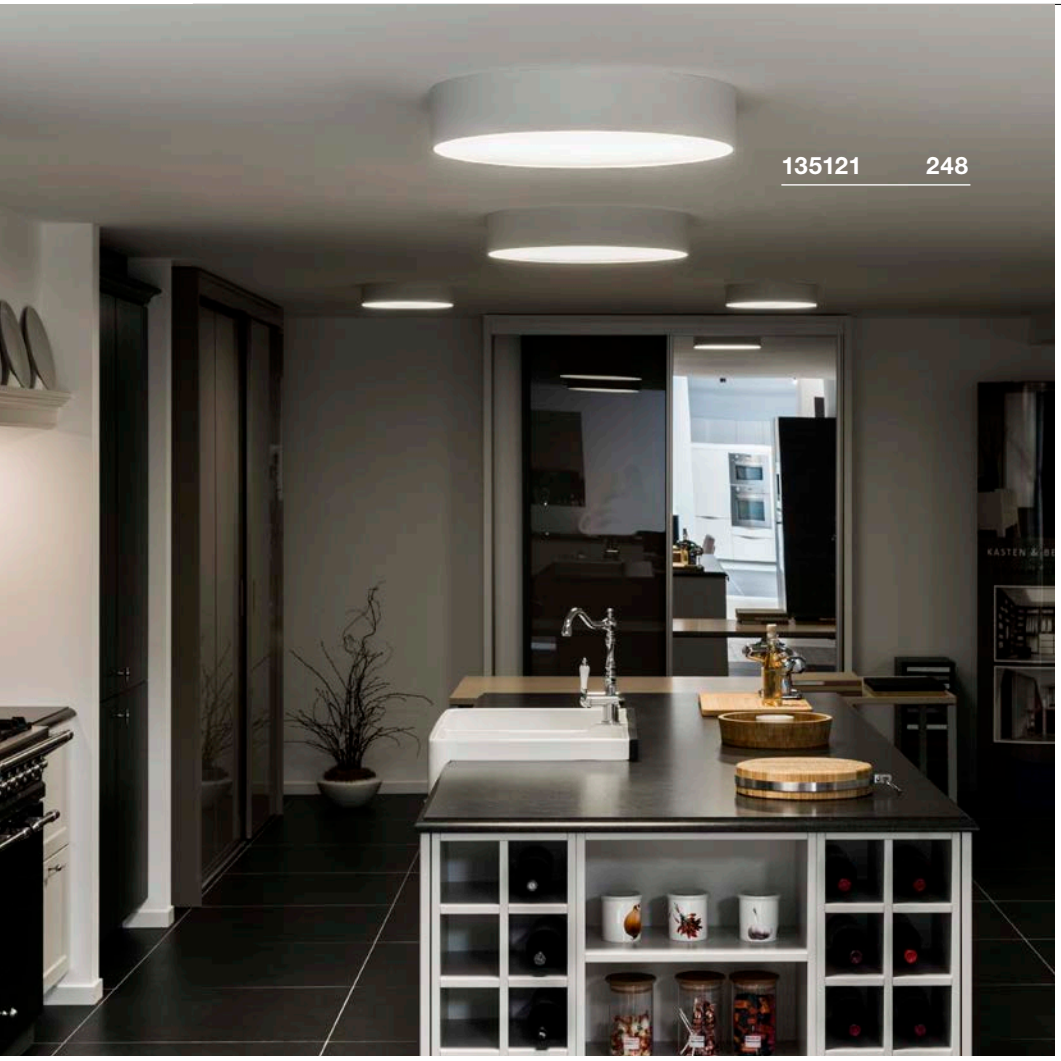



MEDO 90
CL, 1-10V

891

A-A++ Spectrum A++–E


LED INSIDE






Product details

220-240V ~50/60Hz | 2900mA
Total consumption: 119W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: 1-10V

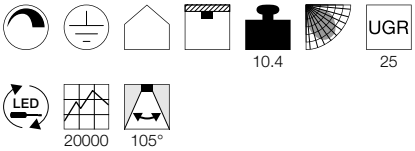

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 | 34,20 GBP

Suspension set 1.5m
Item no. 135251 | 34,20 GBP

Suspension set 1.5m
Item no. 135254 | 34,20 GBP

1-10V dimming
Item no. 470505 | 9,90 GBP

Suspension set 5m
Item no. 1001950 | 76,50 GBP

Suspension set 5m
Item no. 1001951 | 76,50 GBP

Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
11000lm | 3000K | CRI>80 black	135170	899,10
11000lm | 3000K | CRI>80 white	135171	899,10
11000lm | 3000K | CRI>80 grey	135174	899,10
11000lm | 3000K | CRI>80 red	135176	899,10

MEDO 30 CORONA
CW, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

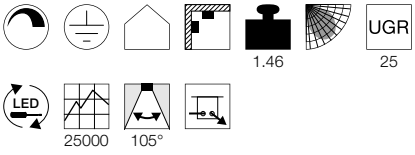

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 | 34,20 GBP

Suspension set 1.5m
Item no. 135251 | 34,20 GBP

Suspension set 1.5m
Item no. 135254 | 34,20 GBP

Suspension set 5m
Item no. 1001950 | 76,50 GBP

Suspension set 5m
Item no. 1001951 | 76,50 GBP

Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 black	1001877	224,10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 white	1001881	224,10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 grey	1001882	224,10




MEDO 40 CORONA
CW, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

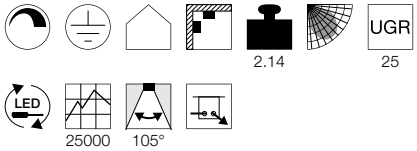

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 | 34,20 GBP

□ Suspension set 1.5m
Item no. 135251 | 34,20 GBP

■ Suspension set 1.5m
Item no. 135254 | 34,20 GBP

□ Suspension set 5m
Item no. 1001950 | 76,50 GBP

■ Suspension set 5m
Item no. 1001951 | 76,50 GBP

■ Suspension set 5m
Item no. 1001952 | 76,50 GBP


Variant	Item no.	GBP
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
■ black	**1001883**	**251,10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
□ white	**1001884**	**251,10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
■ grey	**1001885**	**251,10**


MEDO 60 CORONA
CW, TRIAC


891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch

Product details

220-240V ~50/60Hz | 1050mA
Total consumption: 40W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

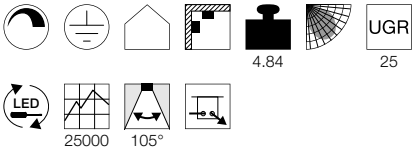

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 | 34,20 GBP

□ Suspension set 1.5m
Item no. 135251 | 34,20 GBP

■ Suspension set 1.5m
Item no. 135254 | 34,20 GBP

□ Suspension set 5m
Item no. 1001950 | 76,50 GBP

■ Suspension set 5m
Item no. 1001951 | 76,50 GBP

■ Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
■ black	**1001886**	**476,10**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
□ white	**1001887**	**476,10**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
■ grey	**1001888**	**476,10**


MEDO 90 CORONA
CL, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT

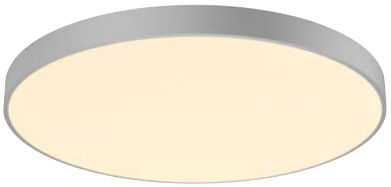







- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch

Product details

220-240V ~50/60Hz | 1050mA
Total consumption: 78W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

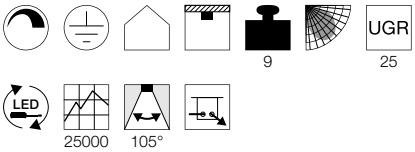

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 | 34,20 GBP

□ Suspension set 1.5m
Item no. 135251 | 34,20 GBP

■ Suspension set 1.5m
Item no. 135254 | 34,20 GBP

□ Suspension set 5m
Item no. 1001950 | 76,50 GBP

■ Suspension set 5m
Item no. 1001951 | 76,50 GBP

■ Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80		
■ black	**1001878**	**944,10**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80		
□ white	**1001879**	**944,10**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80		
■ grey	**1001880**	**944,10**

MEDO 30 CORONA
CW, DALI

891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali



Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 |34,20 GBP

Suspension set 1.5m
Item no. 135251 |34,20 GBP

Suspension set 1.5m
Item no. 135254 |34,20 GBP

Suspension set 5m
Item no. 1001950 |76,50 GBP

Suspension set 5m
Item no. 1001951 |76,50 GBP

Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 black	1001889	251,10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 white	1001893	251,10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 grey	1001894	251,10

MEDO 40 CORONA
CW, DALI


891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali

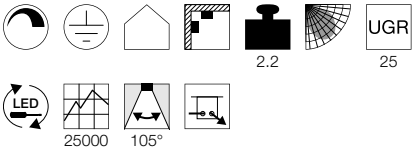

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 |34,20 GBP

Suspension set 1.5m
Item no. 135251 |34,20 GBP

Suspension set 1.5m
Item no. 135254 |34,20 GBP

Suspension set 5m
Item no. 1001950 |76,50 GBP

Suspension set 5m
Item no. 1001951 |76,50 GBP

Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 black	1001895	332,10
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 white	1001896	332,10
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 grey	1001897	332,10

MEDO 60 CORONA
CW, DALI


891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch

Product details

220-240V ~50/60Hz | 1000mA
Total consumption: 40W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali

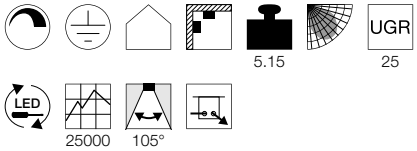

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 |34,20 GBP

Suspension set 1.5m
Item no. 135251 |34,20 GBP


Suspension set 1.5m
Item no. 135254 |34,20 GBP


Suspension set 5m
Item no. 1001950 |76,50 GBP

Suspension set 5m
Item no. 1001951 |76,50 GBP

Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 black	1001898	512,10
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 white	1001900	512,10
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 grey	1001899	512,10

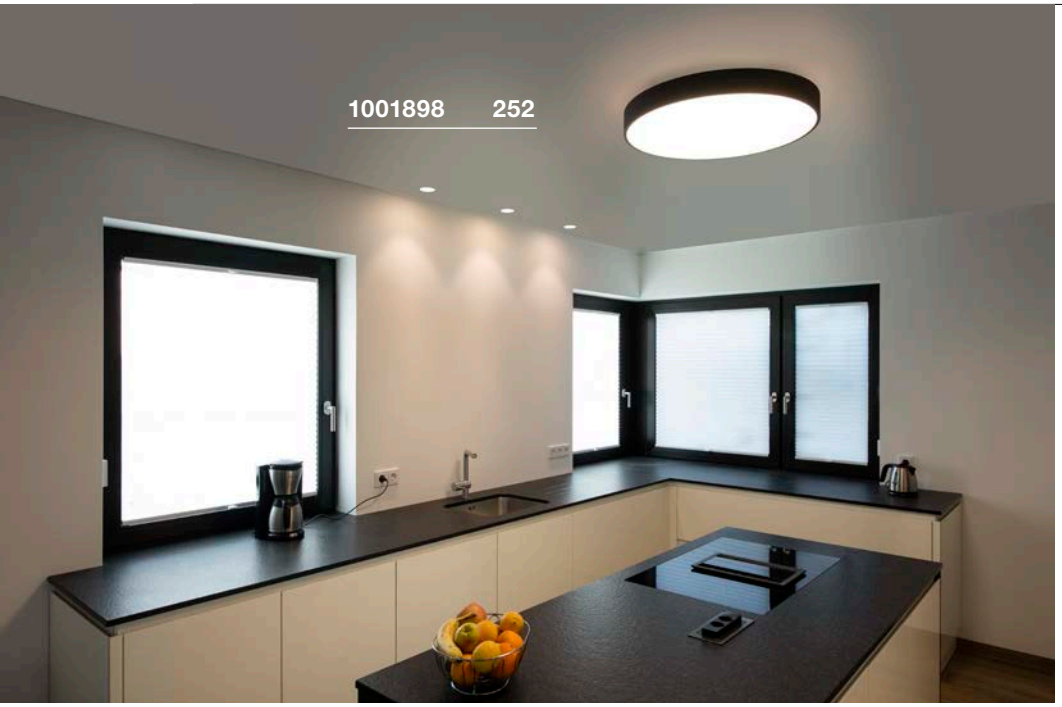

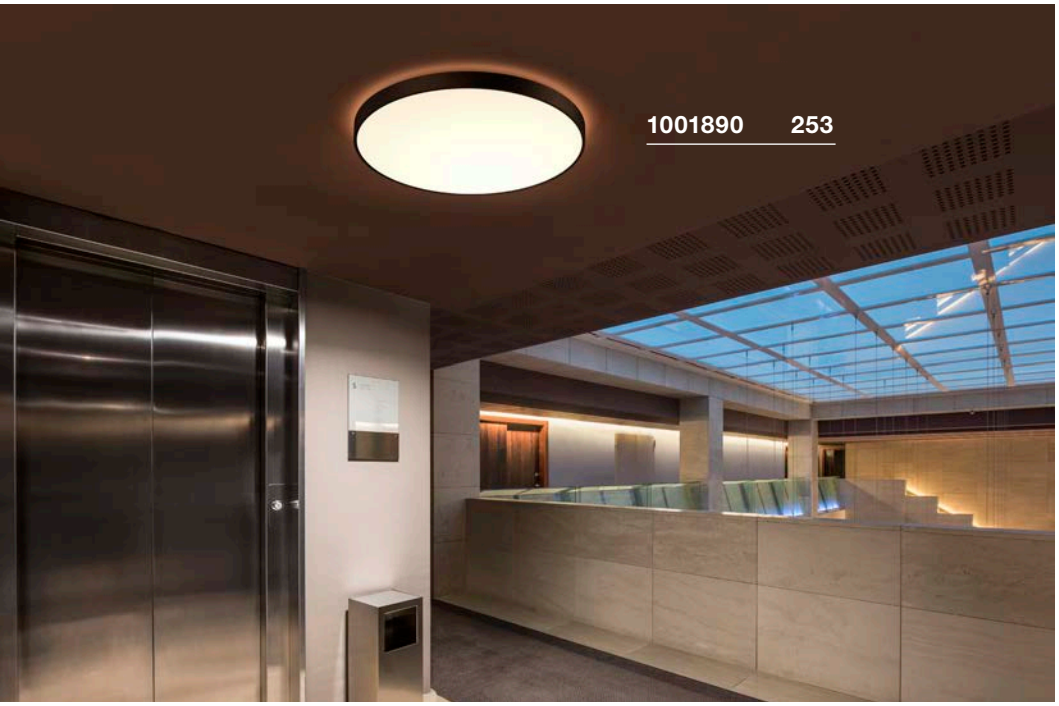




MEDO 90 CORONA
CL, DALI

891

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT

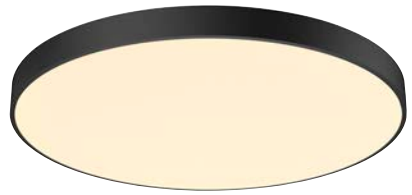







- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch

Product details

220-240V ~50/60Hz | 1000mA
Total consumption: 78W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali

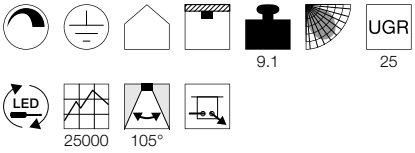

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

Suspension set 1.5m
Item no. 135250 | 34,20 GBP

Suspension set 1.5m
Item no. 135251 | 34,20 GBP

Suspension set 1.5m
Item no. 135254 | 34,20 GBP

Suspension set 5m
Item no. 1001950 | 76,50 GBP

Suspension set 5m
Item no. 1001951 | 76,50 GBP

Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 black	1001890	1.161,00
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 white	1001891	1.161,00
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 grey	1001892	1.161,00

MEDO 60
CL, square

891

A-A++ Spectrum A++–E

LED INSIDE







1000725 254




Product details

100-240V ~50/60Hz | 1000mA
Total consumption: 39W
Material: Aluminium / Acrylic
Dimmable: 1-10V



Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP


□ 1-10V dimming
Item no. 470505 |9,90 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
3300lm | 3000K | CRI>80 ■ black	**1000725**	**431,10**
3300lm | 3000K | CRI>80 □ white	**1000726**	**431,10**
3300lm | 3000K | CRI>80 ■ grey	**1000727**	**431,10**

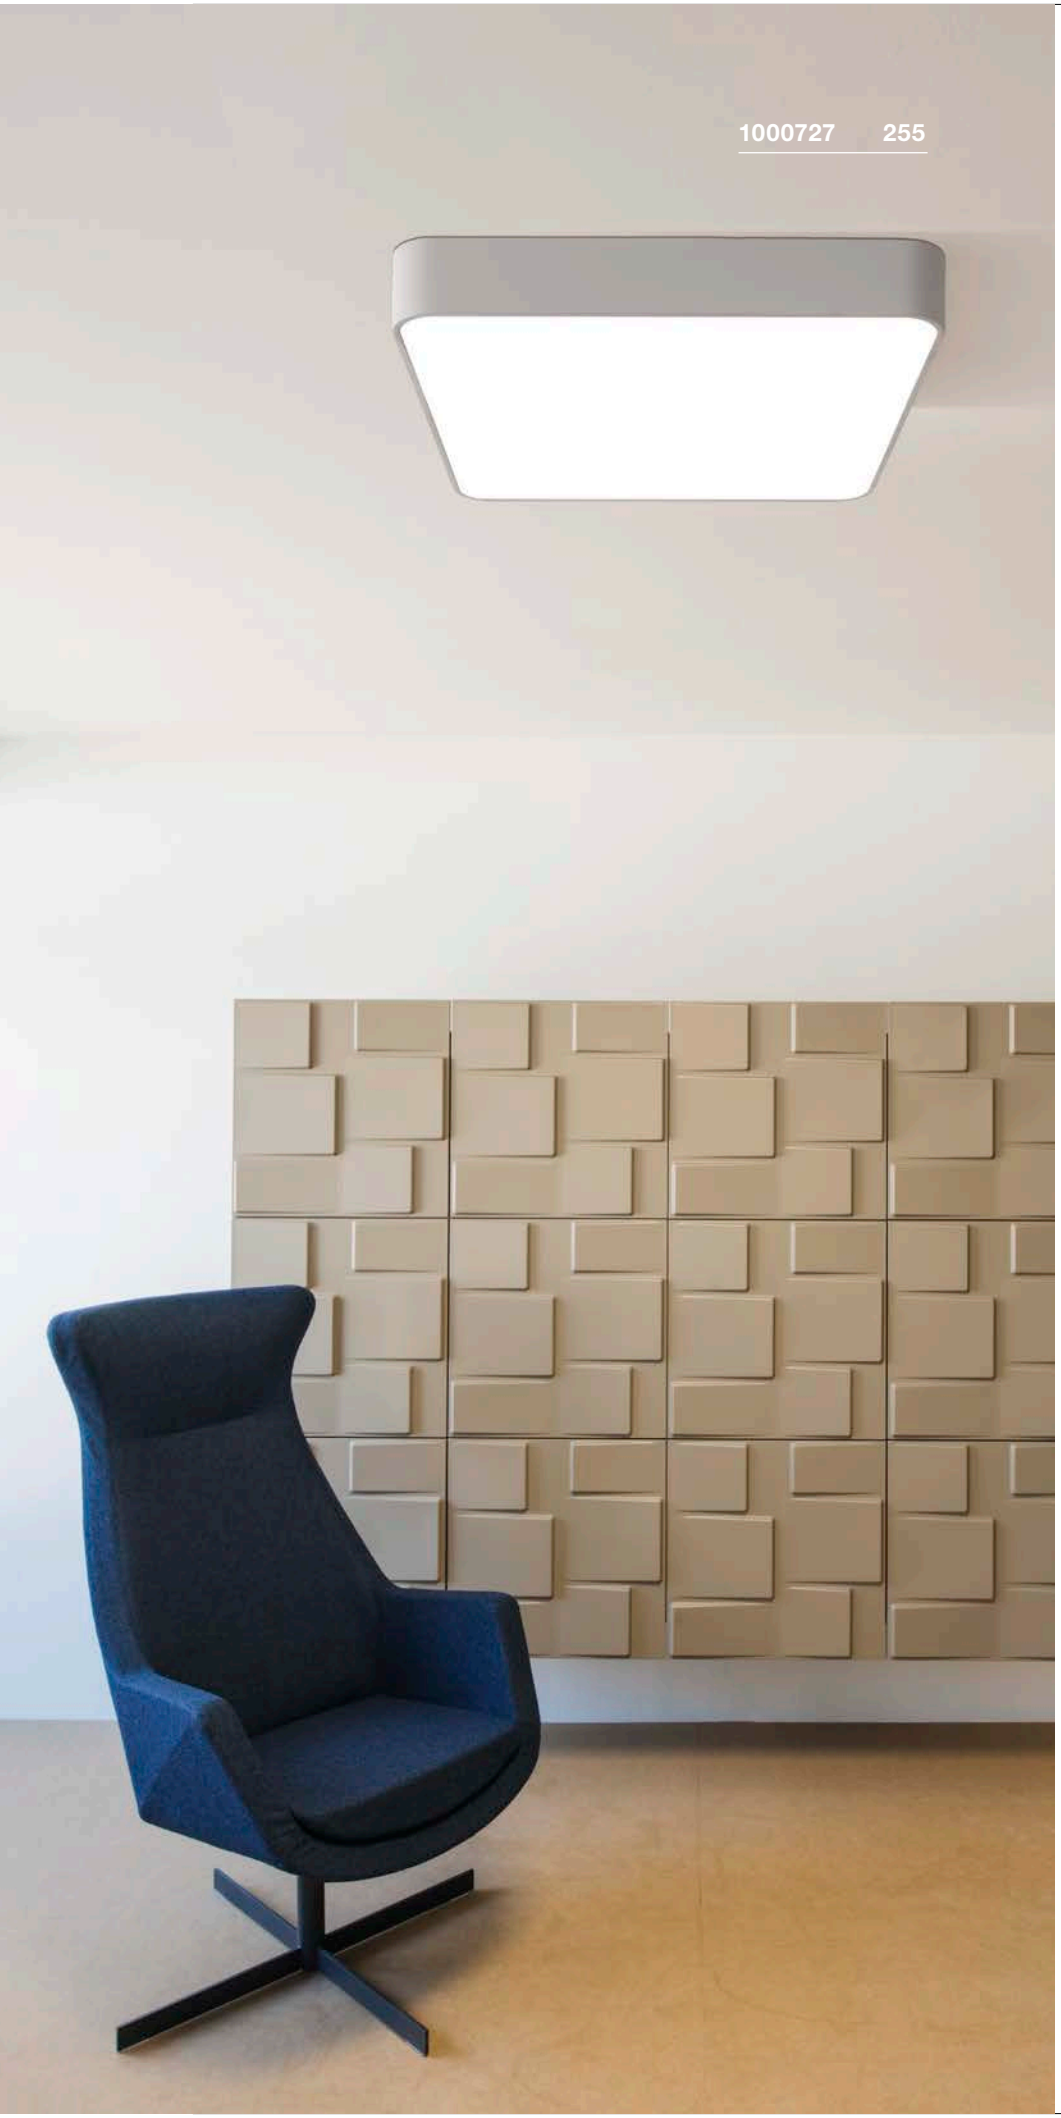

1000727 255

MEDO 60
CL, square, DALI

891

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT




Product details

100-277V ~50/60Hz | 1000mA
Total consumption: 39W
Material: Aluminium / Acrylic
Dimmable: Dali





Dimensioned drawing



Recommended accessories

Suspension set 1.5m
Item no. 135250 | 34,20 GBP

Suspension set 1.5m
Item no. 135251 | 34,20 GBP

Suspension set 1.5m
Item no. 135254 | 34,20 GBP

Suspension set 5m
Item no. 1001950 | 76,50 GBP

Suspension set 5m
Item no. 1001951 | 76,50 GBP

Suspension set 5m
Item no. 1001952 | 76,50 GBP

Variant	Item no.	GBP
3300lm | 3000K | CRI>80		
white	1002882	458,10

PANEL 60
CL, round, TRIAC

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Panel can be surface mounted or partially recessed

Product details


220-240V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions:
Installation Ø: 20 cm D: 7 cm
Dimmable: Triac C




Dimensioned drawing



Variant	Item no.	GBP
3150lm | 3000K | CRI>80 white	1000783	224,10
3350lm | 4000K | CRI>80 white	1000784	224,10
3150lm | 3000K | CRI>80 grey	1000785	224,10
3350lm | 4000K | CRI>80 grey	1000786	224,10

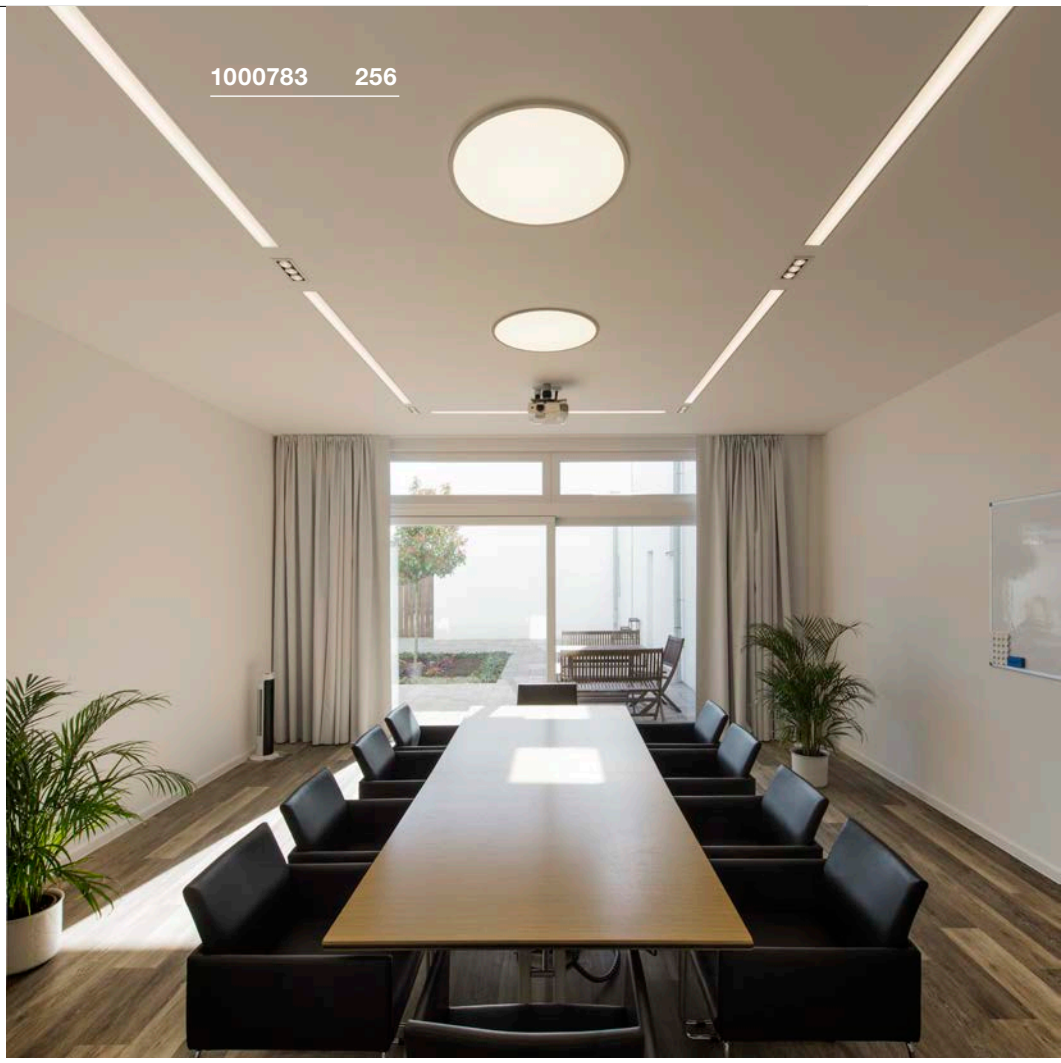

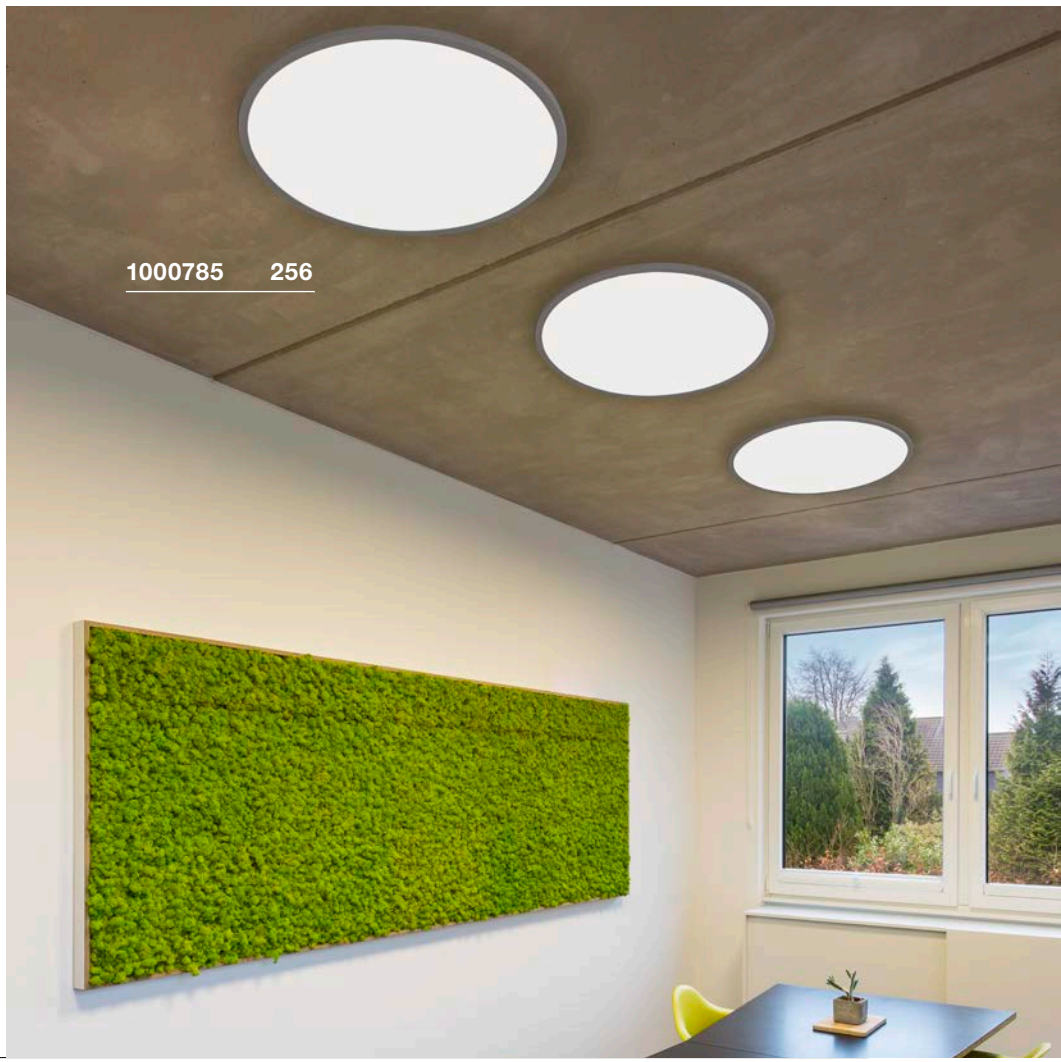

PANEL 60
CL, round, DALI

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









- Panel can be surface mounted or partially recessed

Product details

100-277V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions:
Installation Ø: 20 cm D: 7 cm
Dimmable: Dali

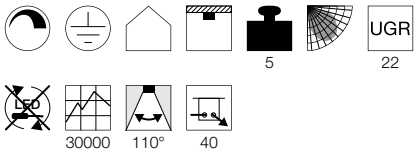

Dimensioned drawing



Variant	Item no.	GBP
3150lm | 3000K | CRI>80		
white	1003040	233,10
3350lm | 4000K | CRI>80		
white	1003041	233,10
3150lm | 3000K | CRI>80		
grey	1003042	233,10
3350lm | 4000K | CRI>80		
grey	1003043	233,10

PANEL
CL, 1200x300mm, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- UGR<19
- Suitable for screen workplaces in accordance with EN 12464-1

Product details

220-240V ~50/60Hz | 1000mA
Total consumption: 45W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C

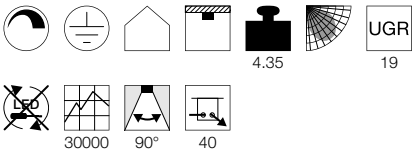

Dimensioned drawing



Variant	Item no.	GBP
3100lm | 3000K | CRI>80		
white	1001505	224,10
3400lm | 4000K | CRI>80		
white	1001506	224,10
3100lm | 3000K | CRI>80		
grey	1001508	224,10
3400lm | 4000K | CRI>80		
grey	1001509	224,10

PANEL
CL, 1200x300mm, DALI

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT







- UGR<19
- Suitable for screen workplaces in accordance with EN 12464-1

Product details

100-277V ~50/60Hz | 1000mA
Total consumption: 45W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Dali

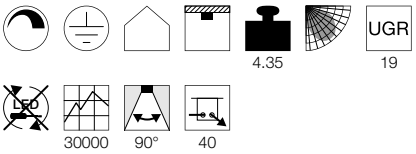

Dimensioned drawing



Variant	Item no.	GBP
3100lm | 3000K | CRI>80		
white	1003052	233,10
3400lm | 4000K | CRI>80		
white	1003053	233,10
3100lm | 3000K | CRI>80		
grey	1003054	233,10
3400lm | 4000K | CRI>80		
grey	1003055	233,10


RASTO 120/150
CL, double

A-A++ Spectrum A⁺⁺–E

LED INSIDE








Product details
220-240V ~50/60Hz | 775mA
Material: Aluminium / Steel





Dimensioned drawing



Note
Optional suspension set available as accessory.

Recommended accessories
Suspension set 1.5m
Item no. 158969 |38,70 GBP

Variant	Item no.	GBP
3900lm | 3000K | CRI>80 | 36W L: 120.4 cm | 4.7 kg white	**158941**	**287,10**
6400lm | 3000K | CRI>80 | 60W L: 150.4 cm | 5.5 kg white	**158951**	**332,10**

RASTO 125/155
CL, double

A-A++ Spectrum A⁺⁺–E

LED INSIDE








- UGR<19
- Suitable for screen workplaces in accordance with EN 12464-1

Product details
220-240V ~50/60Hz | 300mA
Material: Aluminium / Steel





Dimensioned drawing




Note
Optional suspension set available as accessory.

Recommended accessories
Suspension set 1.5m
Item no. 158969 |38,70 GBP

Variant	Item no.	GBP
4100lm | 3000K | CRI>80 | 36W L: 124.5 cm | 2.8 kg white	**158961**	**314,10**
4900lm | 3000K | CRI>80 | 44W L: 154.5 cm | 3.4 kg white	**158971**	**404,10**





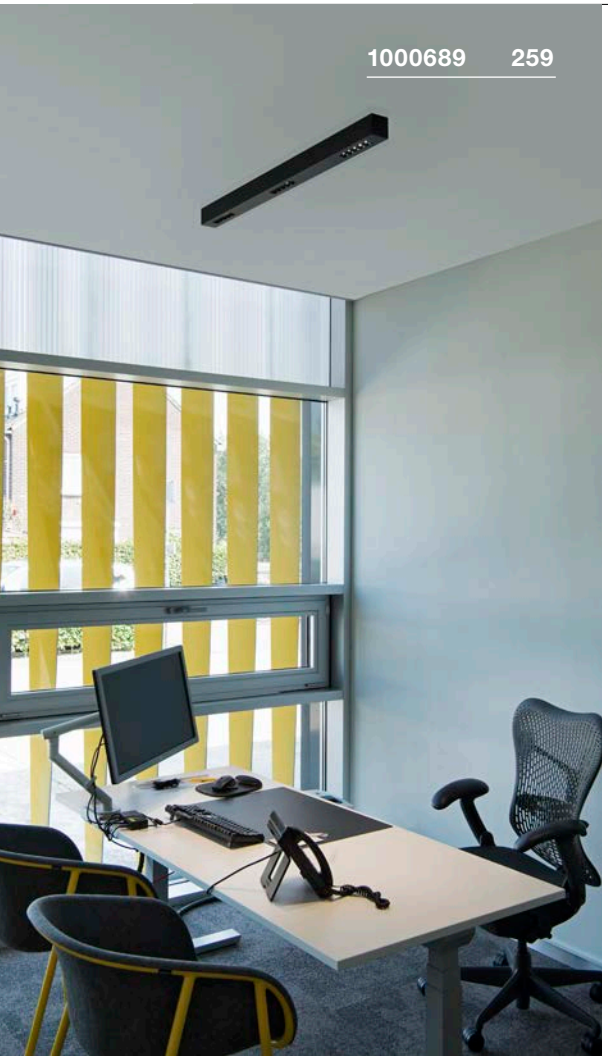

1000689 259

Q-LINE®
CL, 1m, BAP

894

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 900mA
Total consumption: 45W
Material: Aluminium / Plastic
Dimmable: Triac L

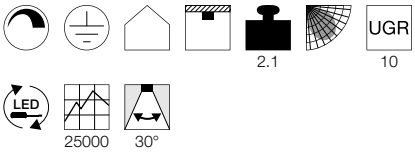

Dimensioned drawing



Variant	Item no.	GBP
2100lm | 3000K | CRI>90 white	1000685	359,10
2100lm | 3000K | CRI>90 black	1000686	359,10
2100lm | 3000K | CRI>90 grey	1000687	359,10
2300lm | 4000K | CRI>90 white	1000688	359,10
2300lm | 4000K | CRI>90 black	1000689	359,10
2300lm | 4000K | CRI>90 grey	1000690	359,10



1000692 259

Q-LINE®
CL, 2m, BAP

894

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 900mA
Total consumption: 85W
Material: Aluminium / Plastic
Dimmable: Triac L

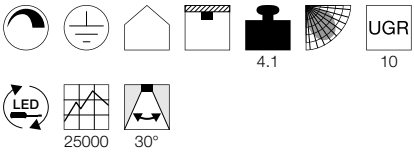

Dimensioned drawing




Variant	Item no.	GBP
4200lm | 3000K | CRI>90 white	1000691	539,10
4200lm | 3000K | CRI>90 black	1000692	539,10
4200lm | 3000K | CRI>90 grey	1000693	539,10
4600lm | 4000K | CRI>90 white	1000694	539,10
4600lm | 4000K | CRI>90 black	1000695	539,10
4600lm | 4000K | CRI>90 grey	1000696	539,10

ROTOBALL 25
CL, E27


895

A-A++ Spectrum A++–E






Product details
230V ~50Hz
Material: Steel / Polyethylene (PE)



Dimensioned drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP


Lamp details
max. 24W
Ø: 9.5 cm max.

Variant	Item no.	GBP
E27		
white	**1002051**	**99,00**


ROTOBALL 40
CL, E27

895


A-A++ Spectrum A++–E



Product details
230V ~50Hz
Material: Steel / Polyethylene (PE)



Dimensioned drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP


LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP


Lamp details
max. 24W
Ø: 9.5 cm max.

Variant	Item no.	GBP
E27		
white	**1002052**	**126,00**

MALANG
CL, E27

E-A++ Spectrum A++–E






Product details
230V ~50Hz
Material: Steel / Glass



Dimensioned drawing




Recommended lamp

LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 9.5W 240°
2200-6700K 806lm EEI=A+
10kWh/1000h
Item no. 1001917 | 49,50 GBP


Lamp details
2x max. 60W
Ø: 5.5 cm max. L: 13.5 cm max.

Variant	Item no.	GBP
E27		
white / chrome	**146942**	**144,00**

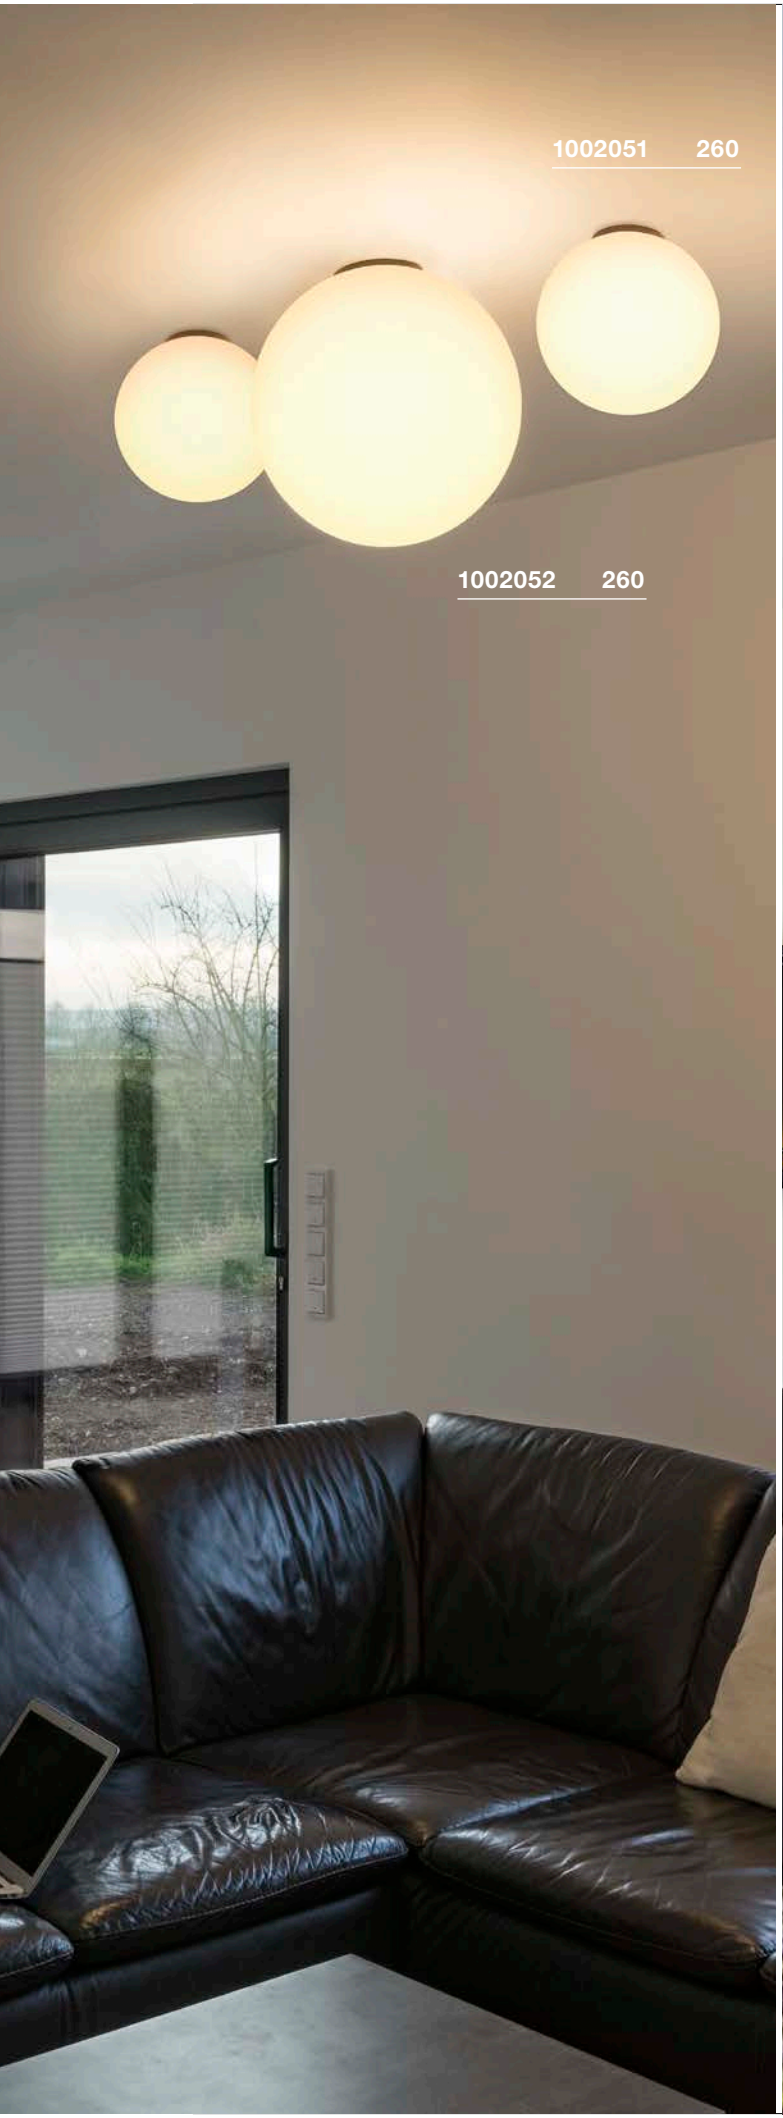

1002051 260

1002052 260

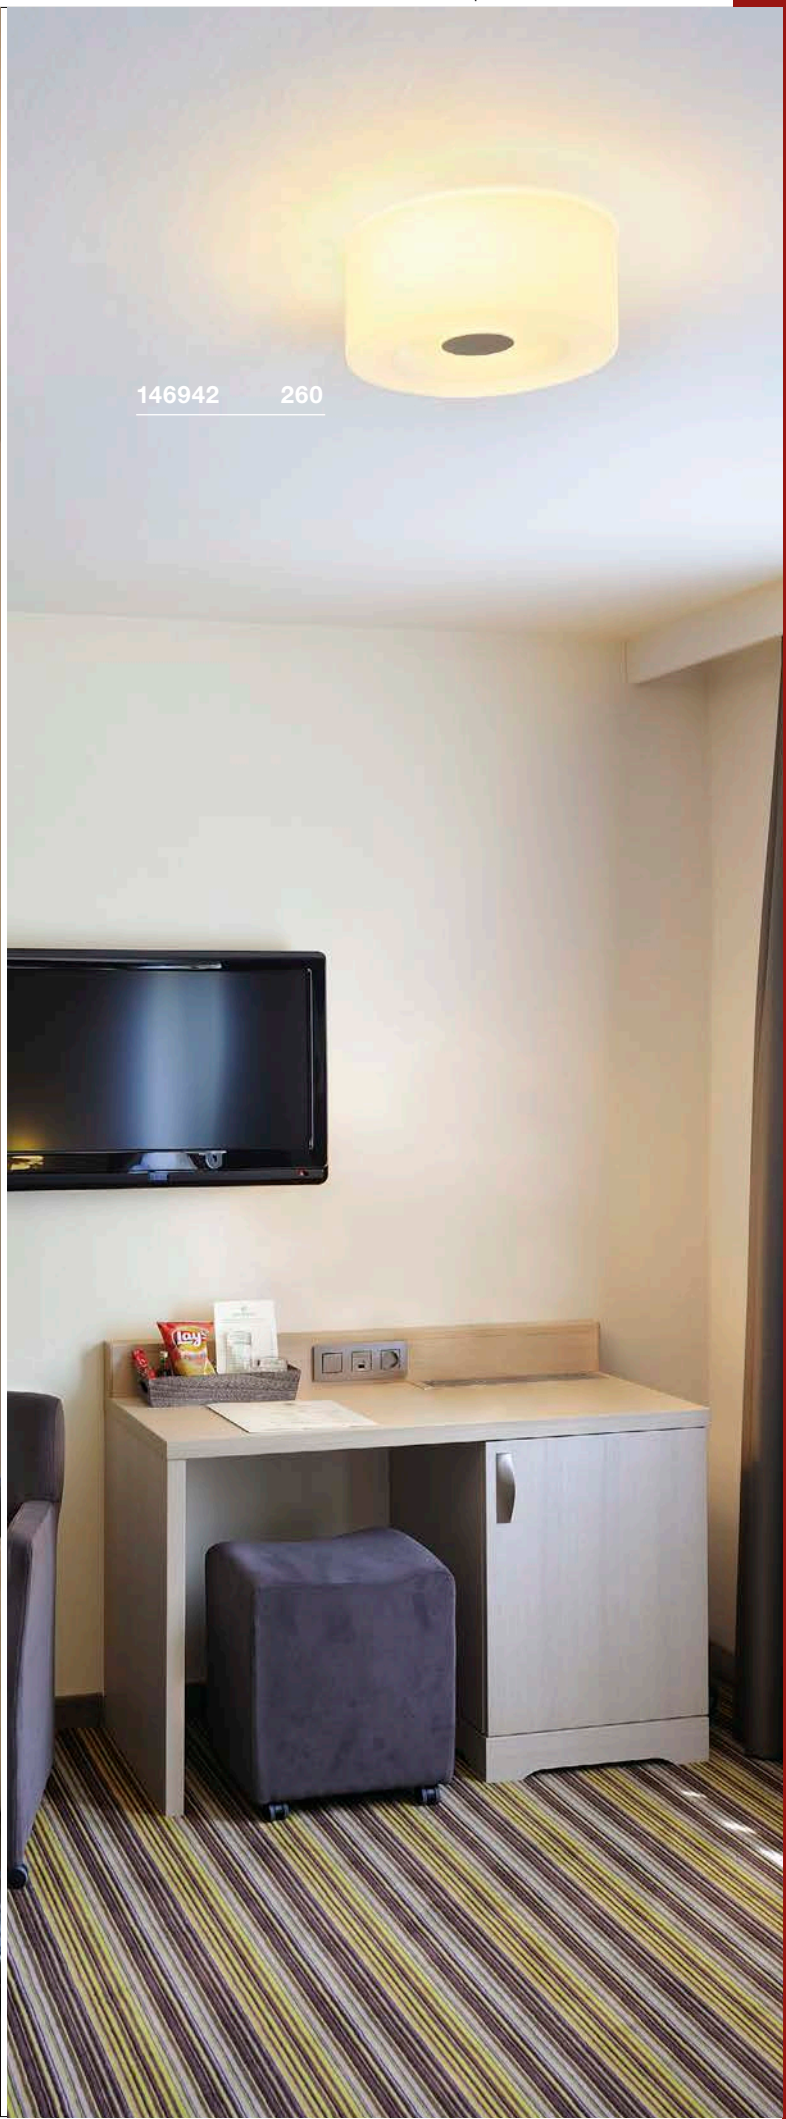

146942 260



OCCULDAS 13
DL, indirect, TRIAC

892

A-A++ Spectrum A++–E

LED INSIDE






- Glare-free, indirect light


Product details


220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium
Dimmable: Triac C





Dimensioned drawing



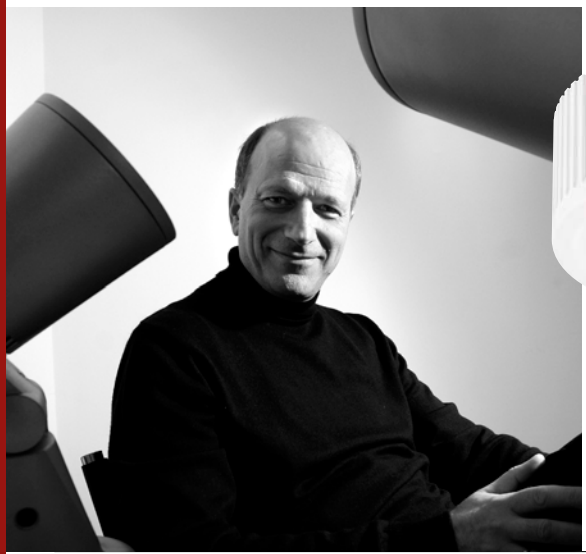



"Excellent light quality from innovative, distinctive and attractive luminaire designs."

Variant	Item no.	GBP
810lm | 3000K | CRI>80		
white	117351	153,00

OCCULDAS 23
DL, indirect, TRIAC

892

A-A++ Spectrum A++–E

LED INSIDE







- Glare-free, indirect light


Product details

200-240V ~50/60Hz | 700mA
Total consumption: 26W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L, Uni





Dimensioned drawing



OCCULDAS 13
DL, TRIAC

892

A-A++ Spectrum A++–E


LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total consumption: 16W
Material: Aluminium
Dimmable: Triac C





Dimensioned drawing



OCCULDAS 13 MOVE
DL, TRIAC

892

A-A++ Spectrum A++–E

LED INSIDE









- Adjustable spot


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.8W
Material: Aluminium / Steel
Dimmable: Triac C





Dimensioned drawing



Variant	Item no.	GBP
1500lm | 3000K | CRI>80		
white	**117321**	**260,10**

Variant	Item no.	GBP
1200lm | 3000K | CRI>80		
white	**117381**	**171,00**

Variant	Item no.	GBP
700lm | 3000K | CRI>80		
white	**117361**	**188,10**

ASTINA
CL

884

A-A++ Spectrum A⁺⁺–E

NEW








- High-quality, frosted glass

Product details

220-240V ~50/60Hz
Material: Aluminium

0.39

Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

Lamp details

max. 10W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 matt white	1002934	67,50
GU10 | QPAR51 matt grey	1002935	67,50
GU10 | QPAR51 matt black	1002936	67,50

NAGY 75
CL, QPAR51

A-A++ Spectrum A⁺⁺–E

NEW



- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz
Material: Plaster
Product dimensions: Ø: 7.5 cm H: 14 cm

0.7 0.2

Recommended lamp


LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP


LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP


Lamp details

max. 10W QPAR51


Variant	Item no.	GBP
GU10 | QPAR51 matt white	1002965	38,70

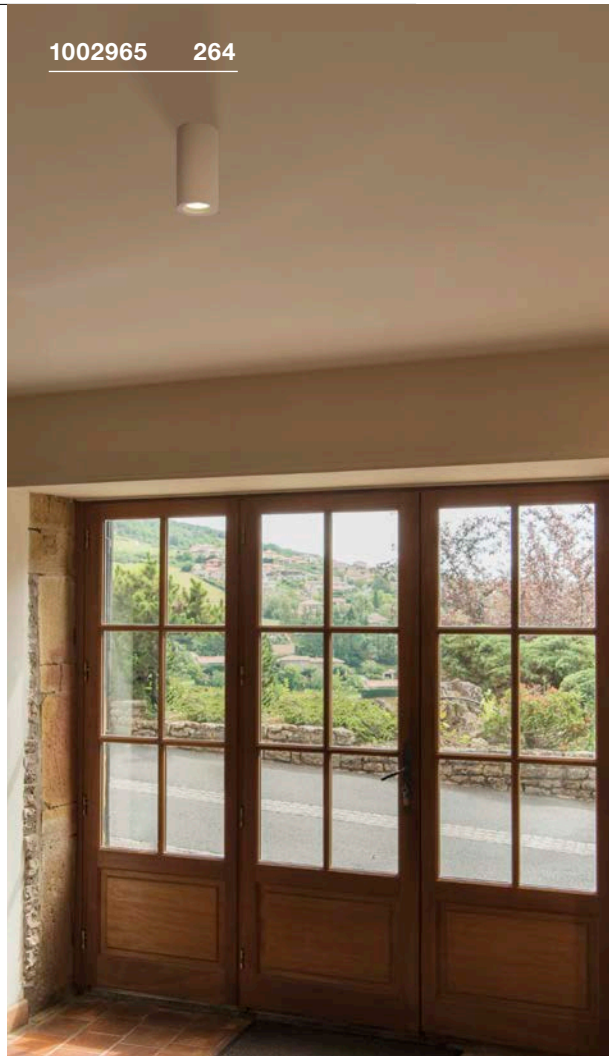

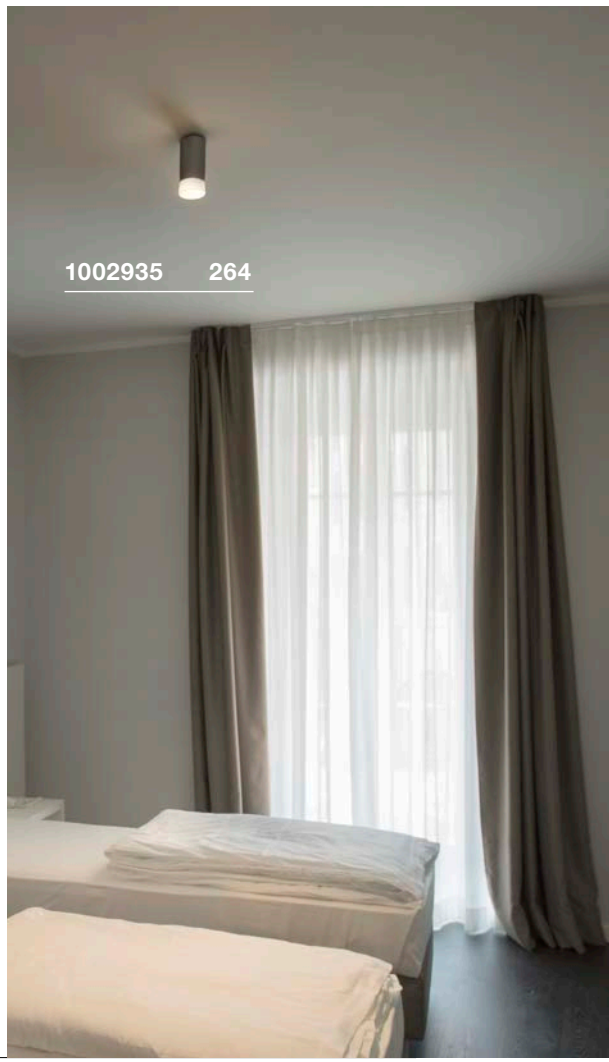

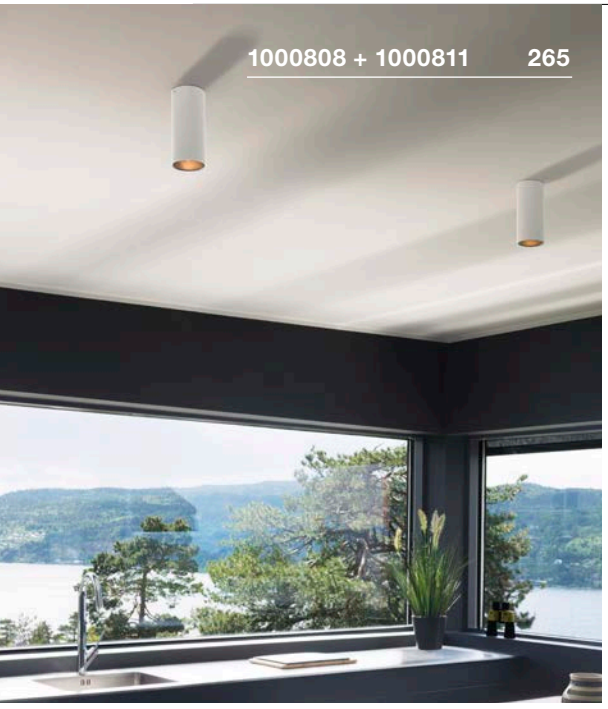

1000808 + 1000811 265

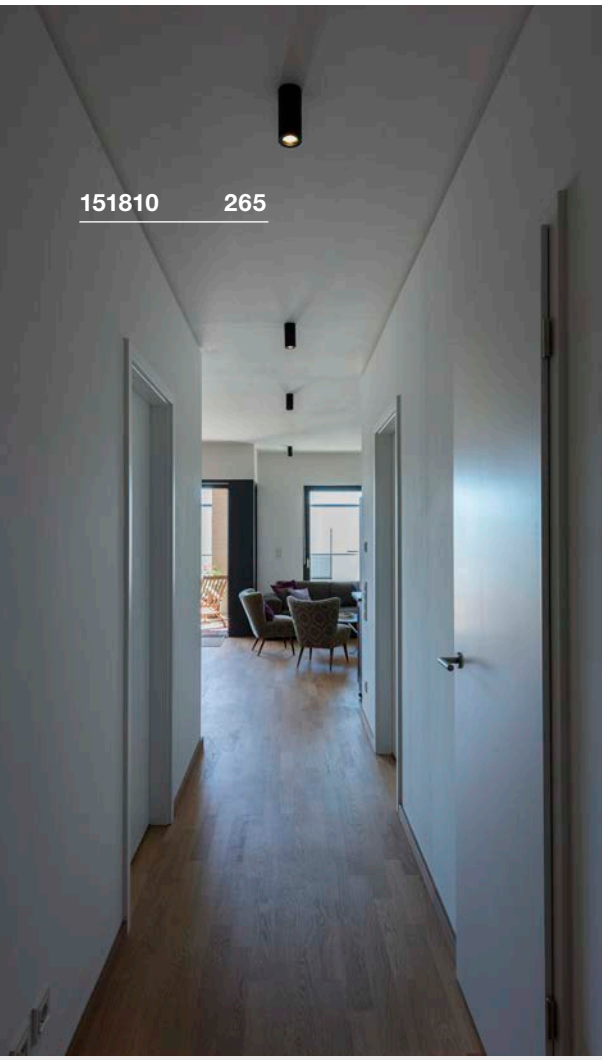

151810 265



Reflector 28° – the reflector of this luminaire can be replaced, giving you a different lighting effect because of the different colours (gold, grey, black and white).

ENOLA B
CL, QPAR51

885

E-A++ Spectrum A++–E









Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended accessories

■ Deco ring
Item no. 151840 | 6,80 GBP



Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



Lamp details

max. 35W QPAR51
L: 8.5 cm max.

Variant	Item no.	GBP
GU10 | QPAR51 ■ black	151810	49,50
GU10 | QPAR51 □ white	151811	49,50
GU10 | QPAR51 ■ gold	151813	58,50
GU10 | QPAR51 ◪ grey / black	151814	49,50

ANELA
CL

883

A-A++ Spectrum A++–E

LED INSIDE








- Premium LED with CRI>90
- Reduced glare
- Coloured reflectors available as accessories


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium
Dimmable: Triac C





Dimensioned drawing



Note

Lumen output with reflector 1000809 = 500lm
Lumen output with reflector 1000810 = 620lm
Lumen output with reflector 1000811 = 200lm
Lumen output with reflector 1000812 = 600lm

Recommended accessories

■ Reflector 28°
Item no. 1000809 | 14,40 GBP



■ Reflector 28°
Item no. 1000810 | 14,40 GBP



■ Reflector 28°
Item no. 1000811 | 14,40 GBP



□ Reflector 28°
Item no. 1000812 | 14,40 GBP




Variant	Item no.	GBP
200-620lm | 3000K | CRI>90 ■ black	1000807	135,00
200-620lm | 3000K | CRI>90 □ white	1000808	135,00

ROX
CL, QPAR111

895

E-A++ Spectrum A++–E






- High-quality brushed finish

Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 0.8

Dimensioned drawing



Recommended lamp



GU10 7.9W 25°
2700K 730lm EEI=A+
8kWh/1000h
Item no. 560702 | 20,70 GBP



LED GU10 9W 25°
2700-6500K 765lm EEI=A+
9kWh/1000h
Item no. 1001920 | 49,50 GBP

Lamp details

max. 50W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
brushed aluminium	**1000332**	**99,00**

ENOLA C
CL

886

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM








- Premium LED with CRI>90
- Dim to warm
- Light colour changes when dimming

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Glass
Dimmable: Triac C

0.63 | 30000 | 35°

Dimensioned drawing



Variant	Item no.	GBP
900lm | 2000-3000K | CRI>90		
white	**1000631**	**188,10**

ENOLA C
CL

886

A-A++ Spectrum A++–E

LED INSIDE






Product details


100-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium / Glass

0.5 | 40000 | 35°

Dimensioned drawing



Variant	Item no.	GBP
850lm | 3000K | CRI>80		
white	**152101**	**171,00**

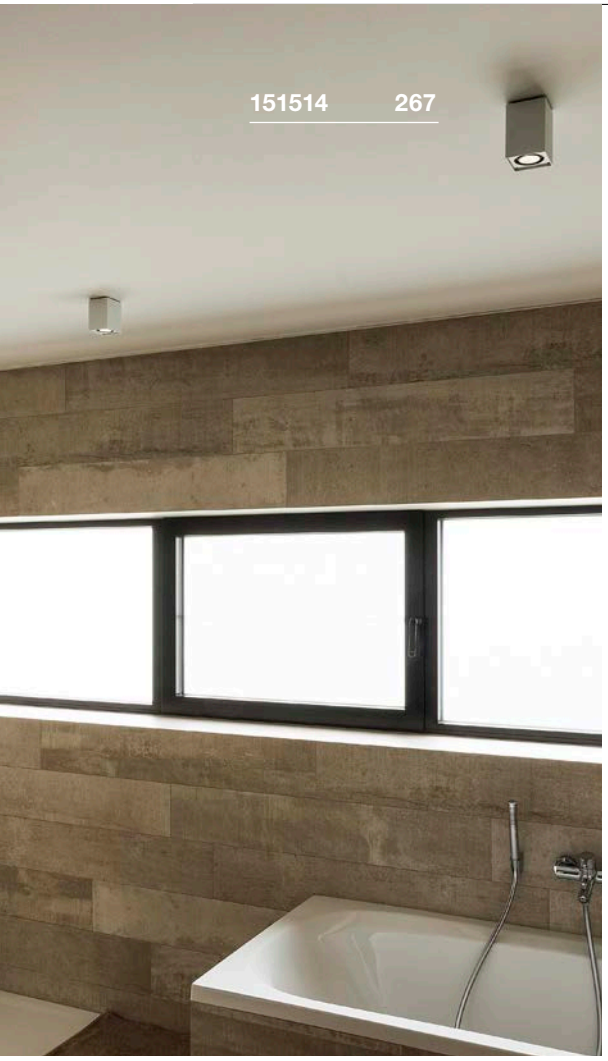



ALTRA DICE
CL, QPAR51

883

E-A++ Spectrum A++–E







ALTRA DICE
CW, double, QPAR51

883

E-A++ Spectrum A++–E








• Entire lamp can be rotated


Product details

220-240V ~50/60Hz
Material: Aluminium / Steel




Product details


220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

LED GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP

Recommended lamp

LED GU10 4.3W 40°
3000K 375lm EEI=A++
5kWh/1000h
Item no. 560143 | 31,50 GBP

LED GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP

Lamp details

max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**151511**	**54,00**
GU10 | QPAR51		
grey / black	**151514**	**54,00**
GU10 | QPAR51		
black	**1002216**	**54,00**

Lamp details

2x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**151531**	**99,00**
GU10 | QPAR51		
grey / black	**151534**	**99,00**
GU10 | QPAR51		
black	**1002215**	**99,00**

TEC KALU
CL, double, TRIAC

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Can be converted into a pendant using the optional suspension set
- Spots rotatable by 360° and tiltable by 120°
- Entire luminaire rotatable by 360°

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 31W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

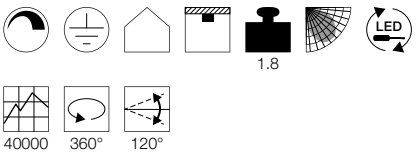

Dimensioned drawing



Recommended accessories

■ Suspension set 1.5m
Item no. 1001435 |49,50 GBP

□ Suspension set 1.5m
Item no. 1001436 |49,50 GBP

Variant	Item no.	GBP
1900lm | 3000K | CRI>80 | 24°		
■ black	**1001431**	**224,10**
1900lm | 3000K | CRI>80 | 24°		
◪ white / black	**1001432**	**224,10**
1900lm | 3000K | CRI>80 | 60°		
■ black	**1001423**	**224,10**
1900lm | 3000K | CRI>80 | 60°		
◪ white / black	**1001424**	**224,10**

TEC KALU
CL, quad, TRIAC

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Can be converted into a pendant using the optional suspension set
- Spots rotatable by 360° and tiltable by 120°
- Entire luminaire rotatable by 360°

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 60W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

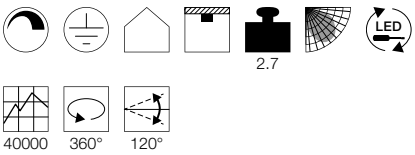

Dimensioned drawing



Recommended accessories

■ Suspension set 1.5m
Item no. 1001435 |49,50 GBP

□ Suspension set 1.5m
Item no. 1001436 |49,50 GBP

Variant	Item no.	GBP
3800lm | 3000K | CRI>80 | 24°		
■ black	**1001433**	**359,10**
3800lm | 3000K | CRI>80 | 24°		
◪ white / black	**1001434**	**359,10**
3800lm | 3000K | CRI>80 | 60°		
■ black	**1001425**	**359,10**
3800lm | 3000K | CRI>80 | 60°		
◪ white / black	**1001426**	**359,10**









TRILEDO
CL, single, round, QPAR51


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560552 | 9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP




Lamp details
max. 10W LED GU10 51mm
Ø: 5 cm max. L: 5.5 cm max.

Variant	Item no.	GBP
GU10 | LED GU10 51mm white	1002011	67,50
GU10 | LED GU10 51mm brushed aluminium	1002012	72,00
GU10 | LED GU10 51mm black	1002010	67,50

TRILEDO
CL, single, square, QPAR51


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001566 | 9,90 GBP



LED GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



Lamp details
max. 10W LED GU10 51mm
Ø: 5 cm max. L: 5.5 cm max.

Variant	Item no.	GBP
GU10 | LED GU10 51mm white	1002015	67,50
GU10 | LED GU10 51mm brushed aluminium	1002004	72,00
GU10 | LED GU10 51mm black	1002013	67,50

TRILEDO
CL, double, square, QPAR51

E-A++ Spectrum A++–E









Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001566 | 9,90 GBP




LED GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP




Lamp details

2x max. 10W LED GU10 51mm
Ø: 5 cm max. L: 5.5 cm max.

Variant	Item no.	GBP
GU10 | LED GU10 51mm white	1002006	99,00
GU10 | LED GU10 51mm black	1002005	99,00

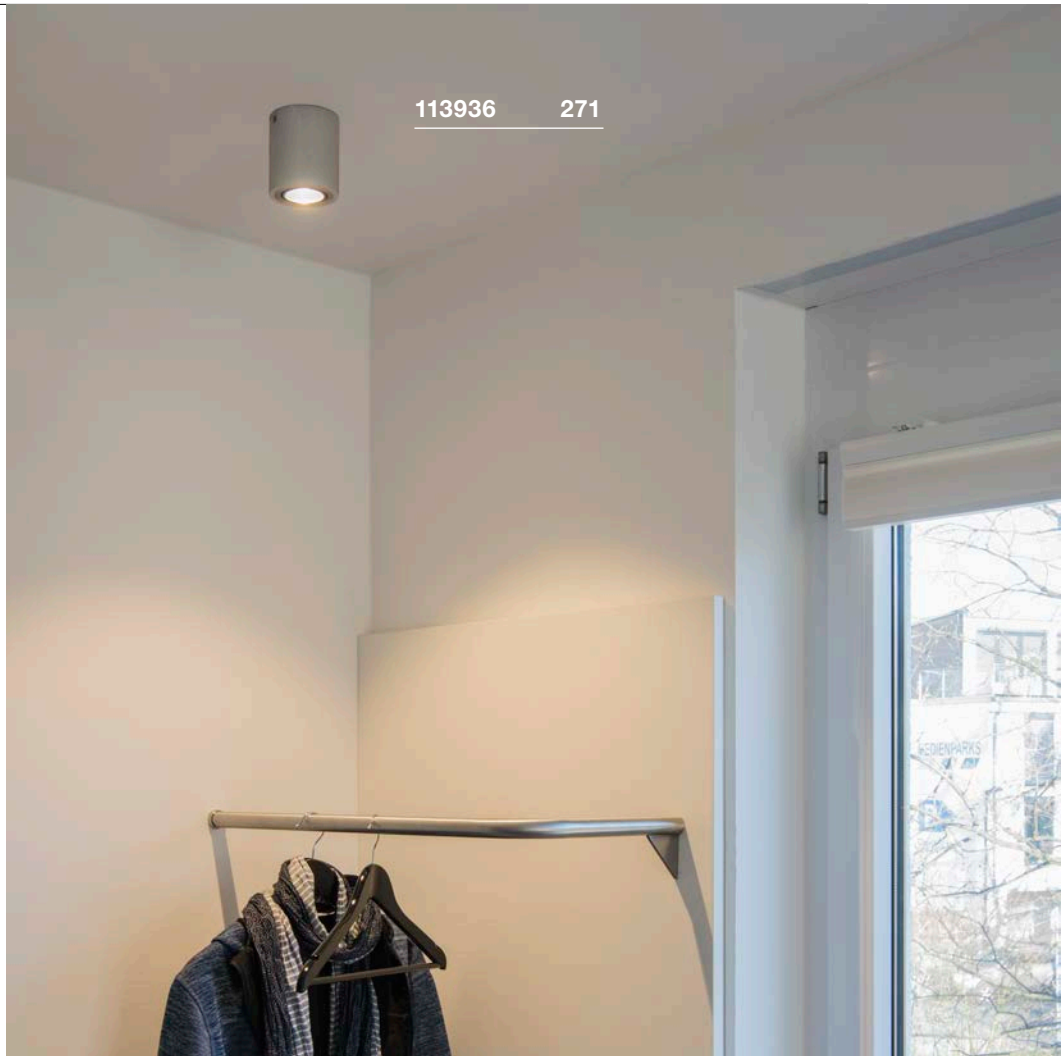

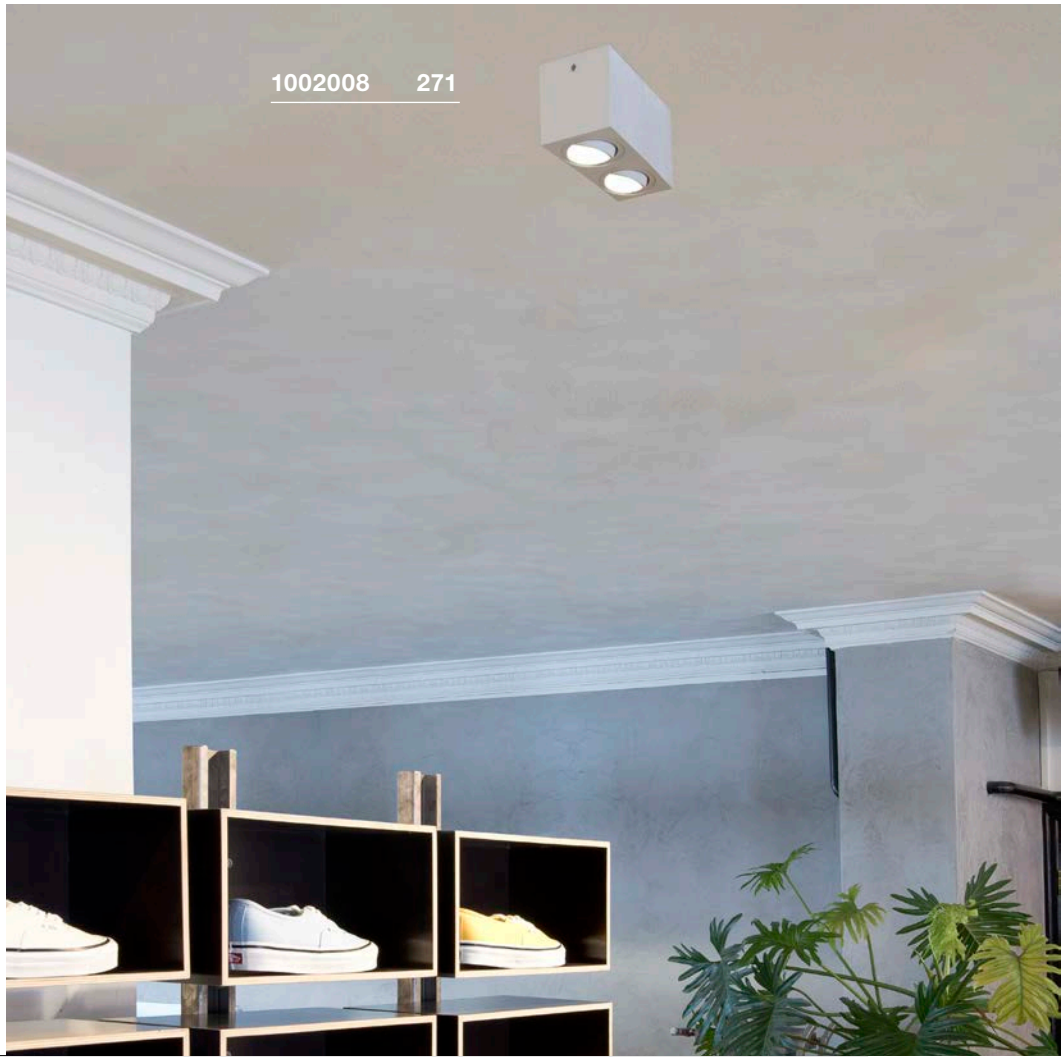

TRILEDO
CL, single, round

E-A++ Spectrum A++–E

LED INSIDE









Product details

100-240V ~50/60Hz | 350mA
Total consumption: 8.1W
Material: Aluminium

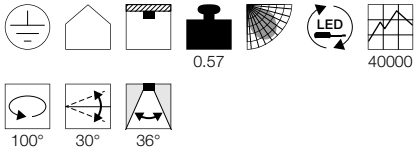

Dimensioned drawing



Variant	Item no.	GBP
670lm | 3000K | CRI>80		
white	**113931**	**90,00**
670lm | 3000K | CRI>80		
matt aluminium	**113936**	**99,00**
670lm | 3000K | CRI>80		
matt black	**113930**	**90,00**

TRILEDO
CL, single, square

E-A++ Spectrum A++–E

LED INSIDE









Product details

100-240V ~50/60Hz | 350mA
Total consumption: 8.1W
Material: Aluminium

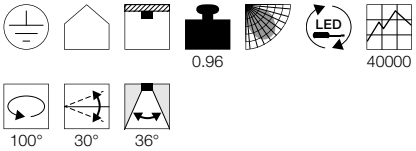

Dimensioned drawing



Variant	Item no.	GBP
670lm | 3000K | CRI>80		
white	**113941**	**90,00**
670lm | 3000K | CRI>80		
matt aluminium	**113946**	**99,00**
670lm | 3000K | CRI>80		
matt black	**113940**	**90,00**

TRILEDO
CL, double, square

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total consumption: 14W
Material: Aluminium

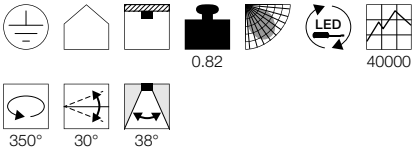

Dimensioned drawing



Variant	Item no.	GBP
1100lm | 3000K | CRI>80		
white	**1002008**	**126,00**
1100lm | 3000K | CRI>80		
black	**1002003**	**126,00**

PLASTRA
CL, QPAR51

893

E-A++ Spectrum A++–E









- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560552 | 9,90 GBP



Lamp details

max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**148004**	**49,50**

PLASTRA 15
CL, single, QPAR51

893

E-A++ Spectrum A++–E








- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP





Lamp details


max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**148051**	**81,00**



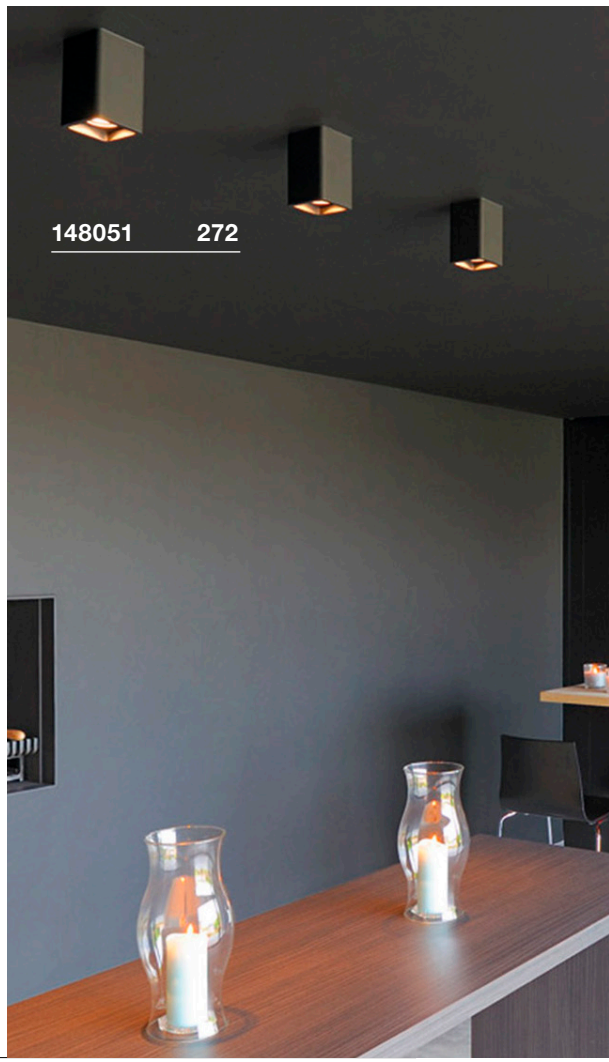

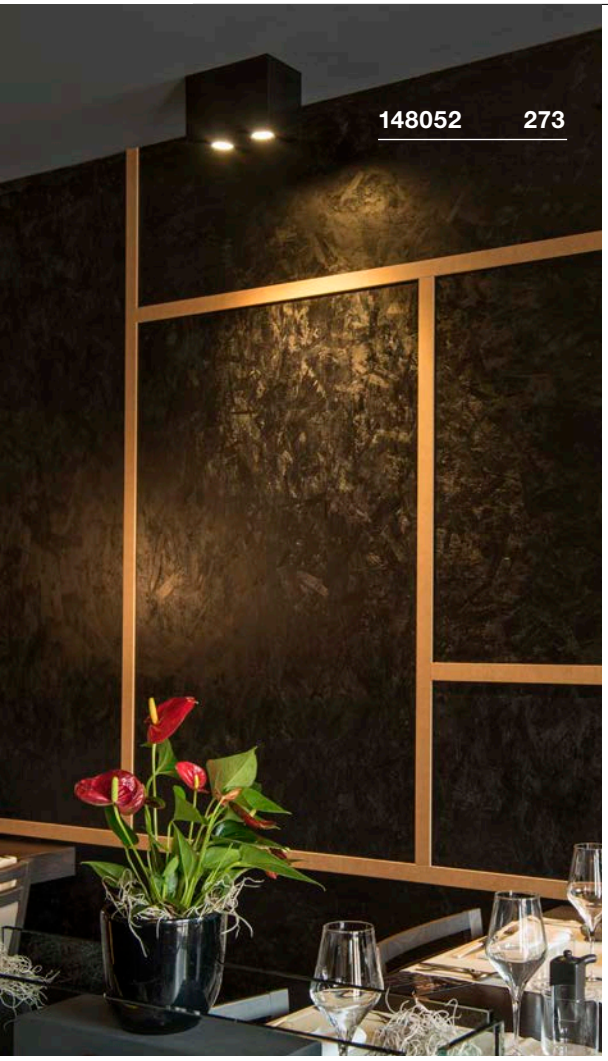

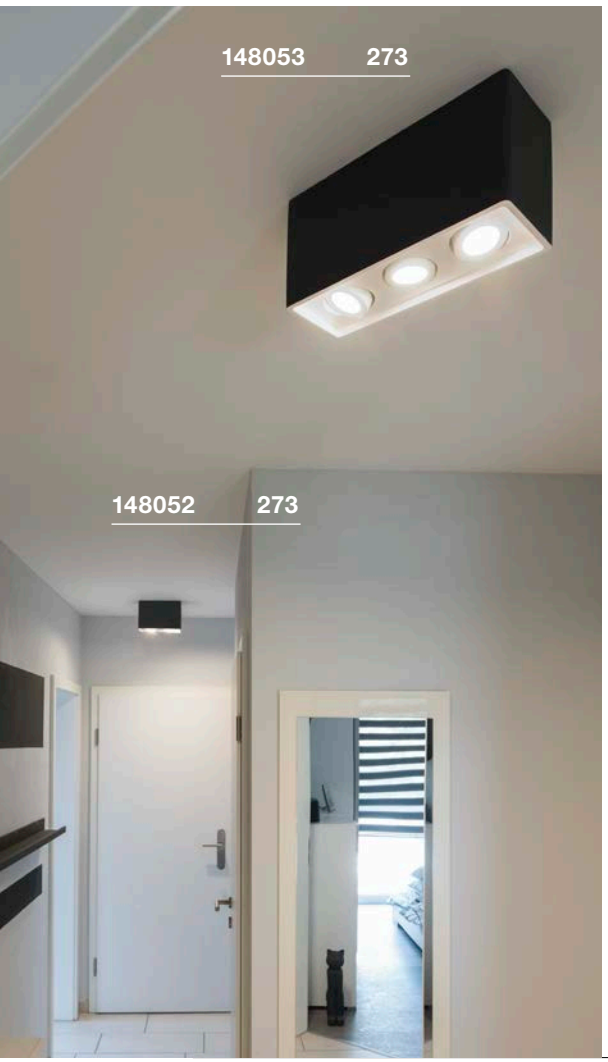

PLASTRA 25
CL, double, QPAR51

893

E-A++ Spectrum A++–E









- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560552 | 9,90 GBP



Lamp details

2x max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**148052**	**99,00**

PLASTRA 35
CL, triple, QPAR51

893

E-A++ Spectrum A++–E








- Can be individually designed with colours, stickers and more

Product details

220-240V ~50/60Hz
Material: Plaster / Steel



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001564 | 9,90 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP



Lamp details

3x max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**148053**	**135,00**

KARDAMOD
CL, square, single, QPAR111

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Steel

1.58

Dimensioned drawing



Recommended lamp

GU10 6.5W 38°
2700K 390lm EEI=A+
7kWh/1000h
Item no. 551882 | 40,50 GBP

LED GU10 6.5W 30°
3000K 420lm EEI=A+
7kWh/1000h
Item no. 551912 | 40,50 GBP

Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
■ matt black	**117100**	**108,00**
GU10 | QPAR111		
□ white	**117101**	**108,00**

KARDAMOD
CL, square, double, QPAR111

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Steel

2.88

Dimensioned drawing



Recommended lamp


LED GU10 13W 30°
4000K 1300lm EEI=A+
13kWh/1000h
Item no. 1001243 | 76,50 GBP


LED GU10 13W 140°
4000K 1100lm EEI=A+
13kWh/1000h
Item no. 1001245 | 76,50 GBP


Lamp details
2x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
■ matt black	**117110**	**197,10**
GU10 | QPAR111		
□ white	**117111**	**197,10**



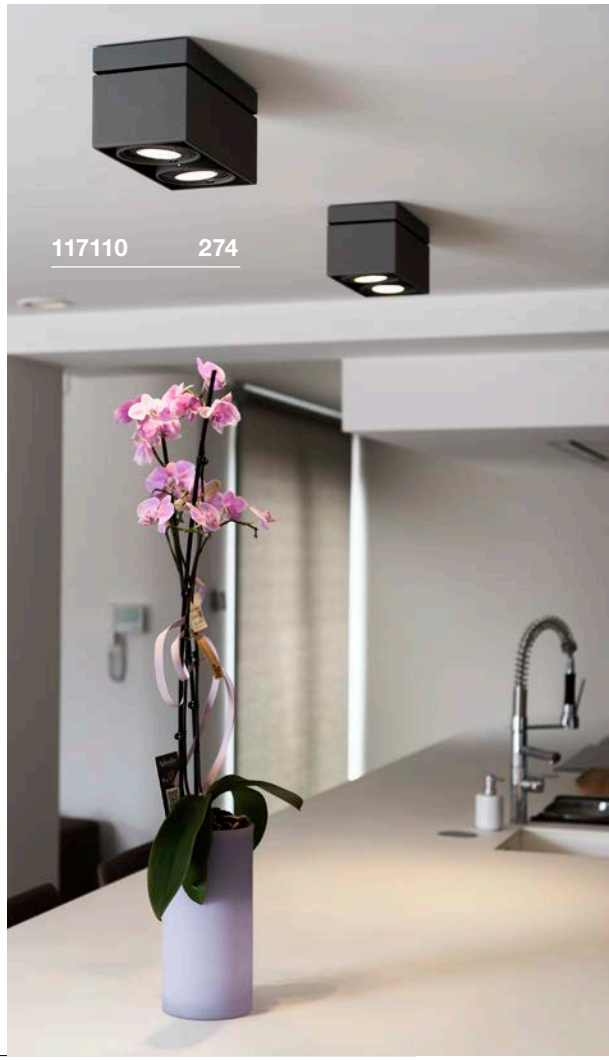

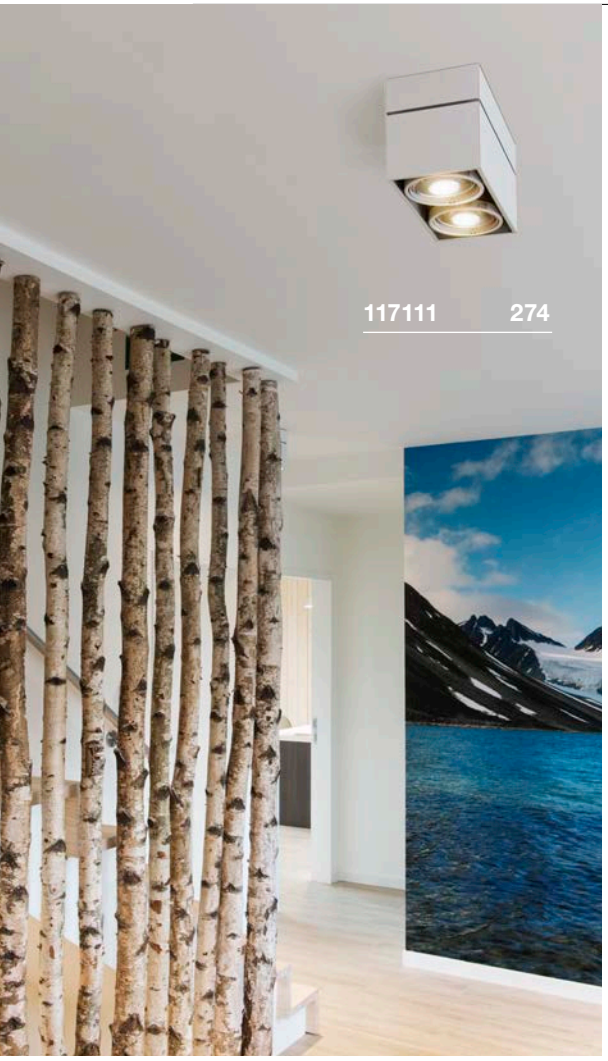

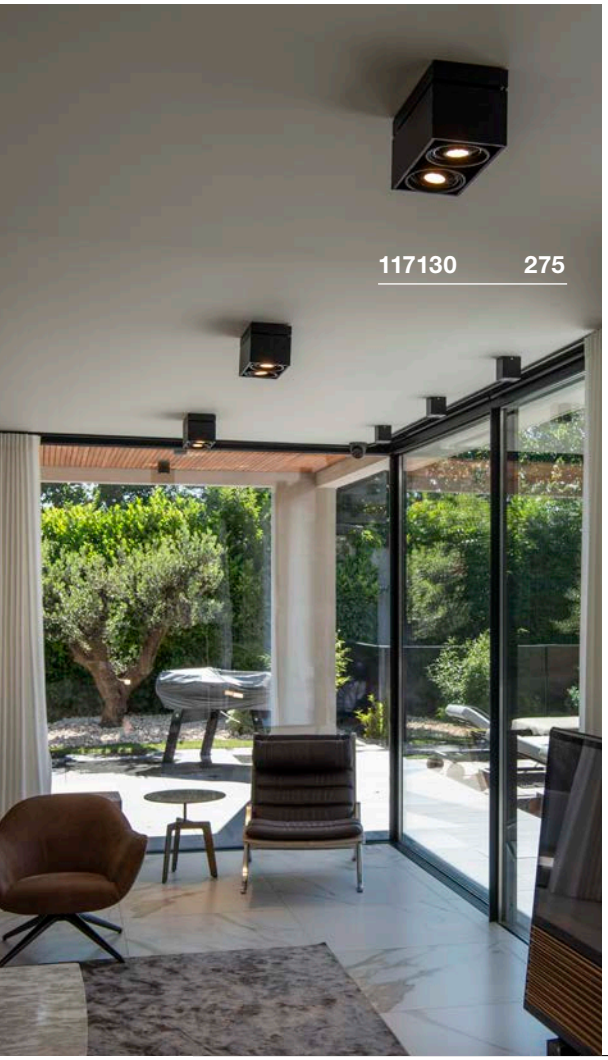

KARDAMOD
CL, square, single, QR111

D-A+ Spectrum A++–E








Product details
230V ~50Hz | 12V AC
Material: Steel
Dimmable: C

1.82

Dimensioned drawing



Recommended lamp
LED G53 15W 24°
2700K 760lm EEI=A
17kWh/1000h
Item no. 560231 | 90,00 GBP

LED G53 15W 40°
2700K 750lm EEI=A
17kWh/1000h
Item no. 560232 | 90,00 GBP

Lamp details
max. 75W QR111

Variant	Item no.	GBP
G53 | QR111		
■ matt black	**117120**	**180,00**
G53 | QR111		
□ white	**117121**	**180,00**

KARDAMOD
CL, square, double, QR111

E-A++ Spectrum A++–E








Product details
230V ~50Hz | 12V AC
Material: Steel
Dimmable: C

2.98

Dimensioned drawing



Recommended lamp
LED G53 15W 24°
2700K 760lm EEI=A
17kWh/1000h
Item no. 560231 | 90,00 GBP

LED G53 15W 40°
2700K 750lm EEI=A
17kWh/1000h
Item no. 560232 | 90,00 GBP

Lamp details
2x max. 50W QR111

Variant	Item no.	GBP
G53 | QR111		
■ matt black	**117130**	**260,10**
G53 | QR111		
□ white	**117131**	**260,10**

KARDAMOD
CL, round, single, QPAR111

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Steel

1.5

Dimensioned drawing



Recommended lamp

GU10 6.5W 38°
2700K 390lm EEI=A+
7kWh/1000h
Item no. 551882 | 40,50 GBP



LED GU10 6.5W 30°
3000K 420lm EEI=A+
7kWh/1000h
Item no. 551912 | 40,50 GBP





Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
■ matt black	**117160**	**108,00**
GU10 | QPAR111		
□ white	**117161**	**108,00**

KARDAMOD
CL, round, double, QPAR111

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Steel

2.6

Dimensioned drawing



Recommended lamp

LED GU10 13W 30°
4000K 1300lm EEI=A+
13kWh/1000h
Item no. 1001243 | 76,50 GBP




LED GU10 13W 140°
4000K 1100lm EEI=A+
13kWh/1000h
Item no. 1001245 | 76,50 GBP



Lamp details
2x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
■ matt black	**117180**	**215,10**
GU10 | QPAR111		
□ white	**117181**	**215,10**

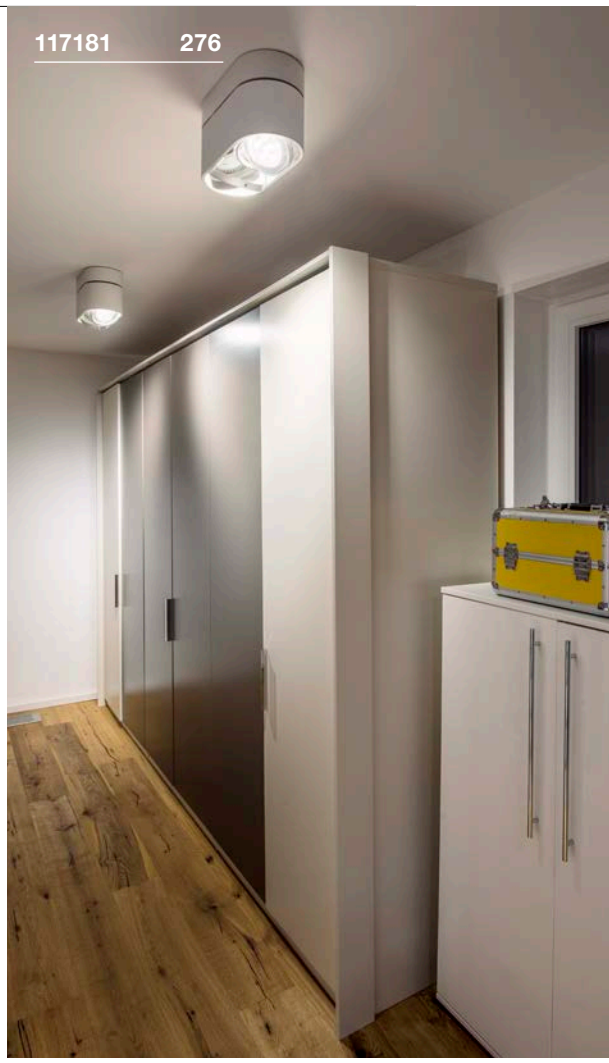



SUPROS CL

897

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 950mA
Total consumption: 36W
Material: Aluminium / Glass

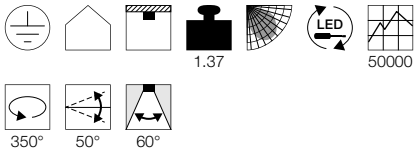

Dimensioned drawing



Recommended accessories

Reflector 20°
Item no. 114102 |9,50 GBP



Reflector 40°
Item no. 114104 |9,50 GBP



Variant	Item no.	GBP
3100lm | 3000K | CRI>80		
■ black	**118130**	**224,10**
3100lm | 3000K | CRI>80		
□ white / transparent	**118131**	**224,10**
3300lm | 4000K | CRI>80		
■ black	**118180**	**224,10**
3300lm | 4000K | CRI>80		
□ white / transparent	**118181**	**224,10**

SUPROS 78 CL, TRIAC

897

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 250mA
Total consumption: 12W
Material: Aluminium
Dimmable: Triac C, Triac L

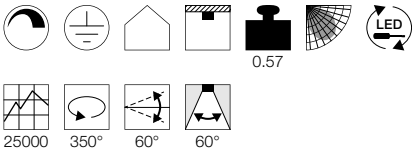

Dimensioned drawing



Recommended accessories

Lens, 20°
Item no. 116302 |3,00 GBP



Lens, 40°
Item no. 116304 |3,00 GBP



Variant	Item no.	GBP
700lm | 3000K | CRI>80		
■ black	**116330**	**135,00**
700lm | 3000K | CRI>80		
□ white	**116331**	**135,00**

SUPROS CL, Move

897

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 750mA
Total consumption: 31W
Material: Aluminium / Glass

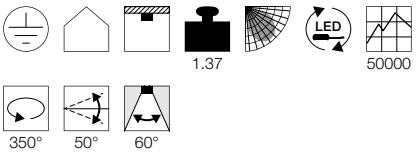

Dimensioned drawing



Recommended accessories

Reflector 20°
Item no. 114102 |9,50 GBP



Reflector 40°
Item no. 114104 |9,50 GBP




Variant	Item no.	GBP
2850lm | 4000K | CRI>80		
■ black	**114180**	**206,10**
2850lm | 4000K | CRI>80		
□ white / transparent	**114181**	**206,10**
2600lm | 3000K | CRI>80		
■ black	**114130**	**206,10**
2600lm | 3000K | CRI>80		
□ white / transparent	**114131**	**206,10**

FOR THAT RADIANT LOOK.

COMBINATION OF WALL AND CEILING LIGHTS.

Whereas ceiling lights call the tune with regard to general lighting, wall luminaires create individual impressions. A combination of the two is therefore ideal for an integrated light solution – providing many varying options; there are no limits to your creativity.

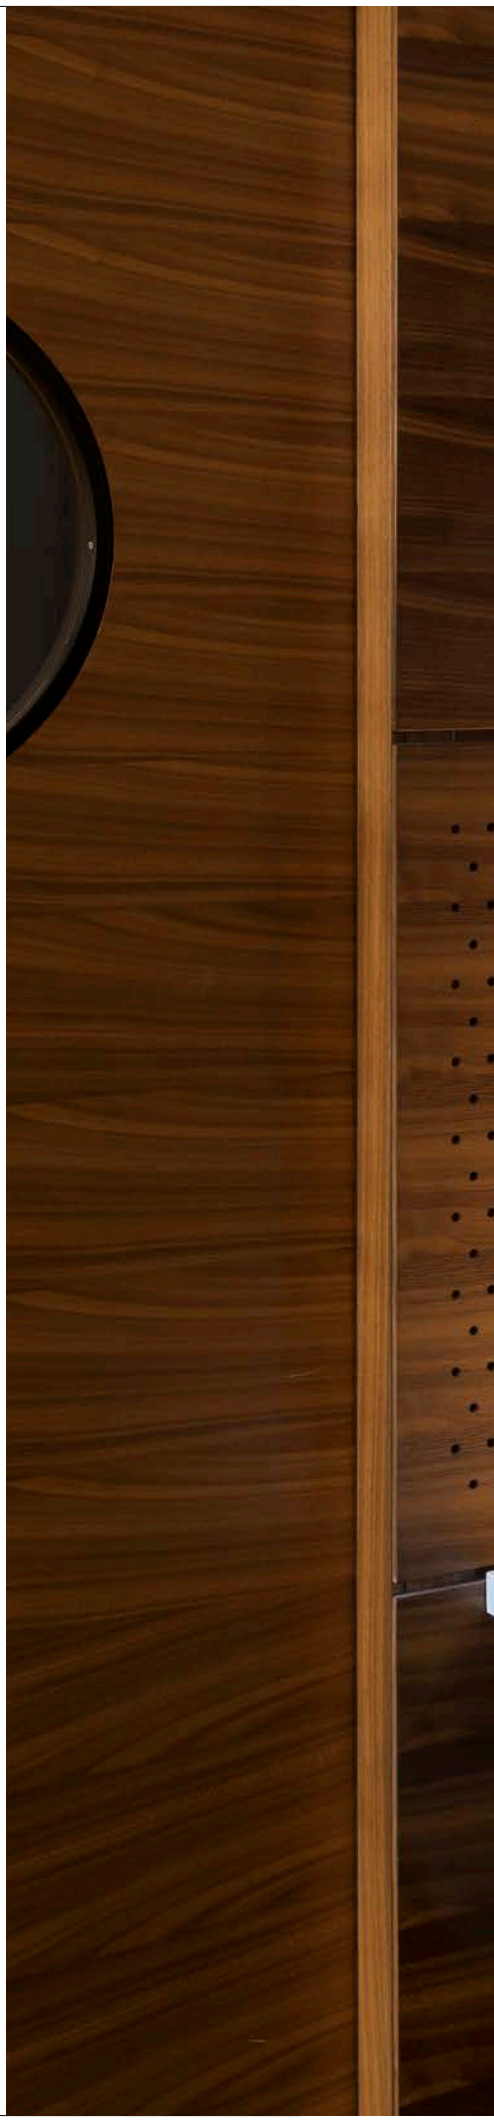


1000887 299


1002974 297

WALL AND CEILING LIGHTS


282


283


283


284


285


286


286


287


288


289


289


290


290


291


291


292


292


295


295


295


297


297


297


299


299


299


299


301


301


301


301


303


303


303


303


304


304


304


304


306

306

306

307

307

307

310

310

310

311

311

311

312

312

312

313

313

314

315

315

315

316

317

317

318

319

319

319

321

321

321

322

324

324

324

325

325

325

327

327

328

328

329

329

Other luminaires and variants can be found online at www.slv.com

SPOT
CW, E27

896

D-A+ Spectrum A++–E










Product details

230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED E27 11.5W 38°
3000K 760lm EEI=A+
12kWh/1000h
Item no. 551933 | 34,20 GBP




LED E27 17W 45°
3000K 1430lm EEI=A+
17kWh/1000h
Item no. 560473 | 60,30 GBP



Lamp details

max. 75W QPAR20
optional: QPAR30

Variant	Item no.	GBP
E27 | QPAR20 ■ black	1002072	40,50
E27 | QPAR20 □ white	1002073	40,50
E27 | QPAR20 ■ grey	1002074	40,50

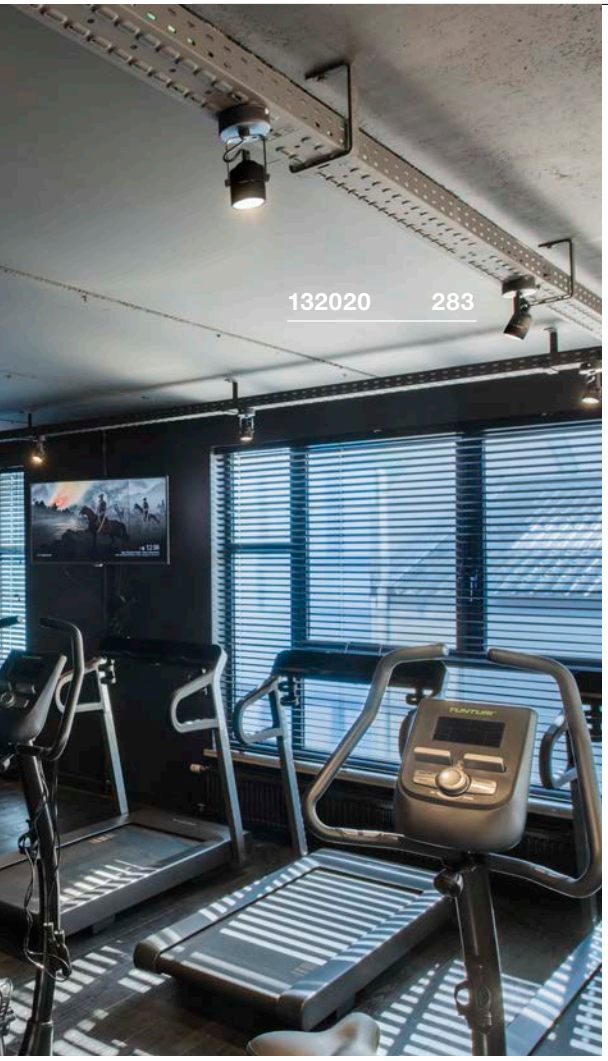



SPOT 79
CW, QPAR51


E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560552 | 9,90 GBP



Lamp details
max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**132020**	**26,10**
GU10 | QPAR51		
□ white	**132021**	**26,10**
GU10 | QPAR51		
■ grey	**132024**	**26,10**

INDA
CW, QPAR51


E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP



Lamp details
max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**147550**	**58,50**
GU10 | QPAR51		
□ matt white	**147551**	**58,50**
GU10 | QPAR51		
□ matt aluminium	**147559**	**63,00**

ALTRA DICE
CW, double, QPAR51

883

E-A++ Spectrum A⁺⁺–E









• Entire lamp can be rotated

Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

LED GU10 4.3W 40°
3000K 375lm EEI=A++
5kWh/1000h
Item no. 560143 | 31,50 GBP



LED GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



Lamp details


2x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**151531**	**99,00**
GU10 | QPAR51 grey / black	**151534**	**99,00**
GU10 | QPAR51 black	**1002215**	**99,00**

1002215 284





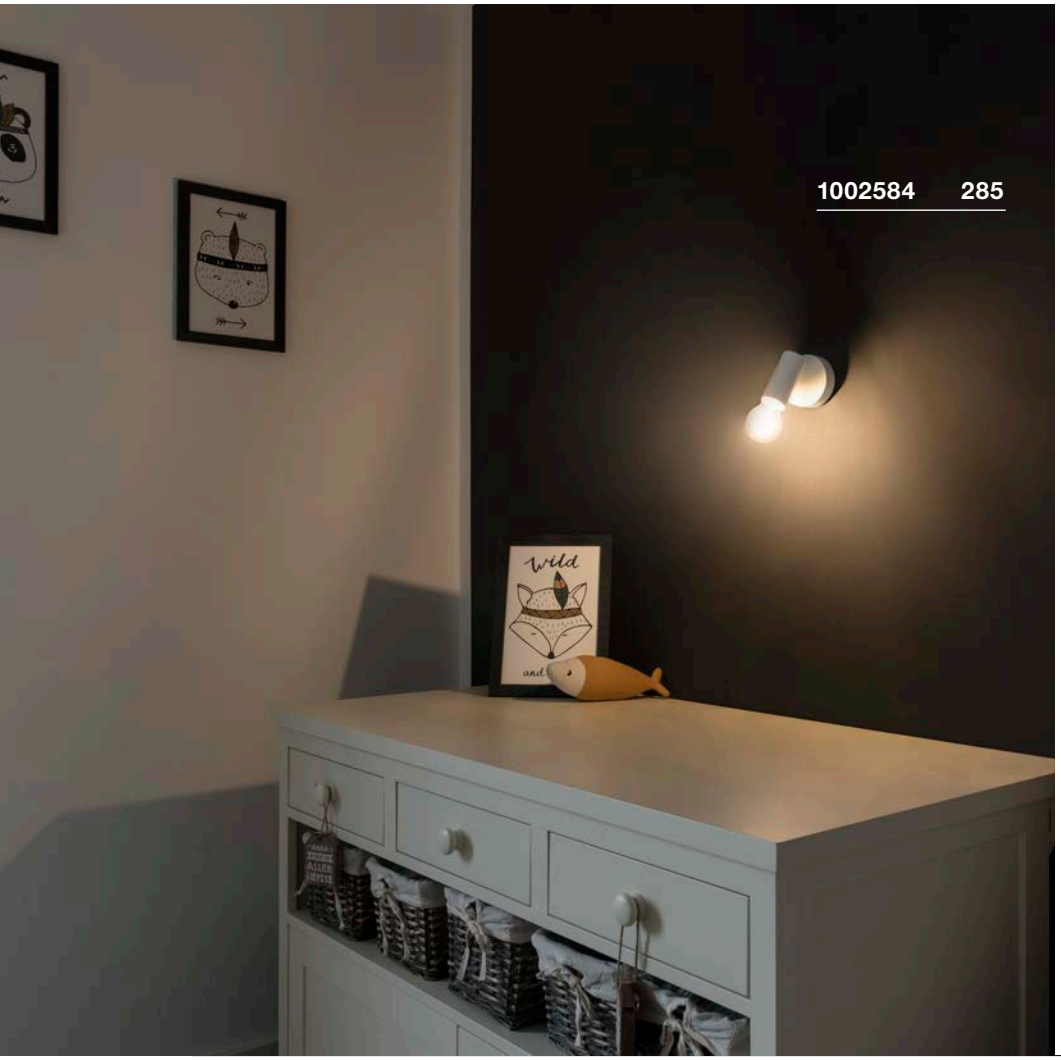

FITU
CW, E27

887

E-A++ Spectrum A++–E

NEW VARIANT









Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

LED E27 8W 350°
2200K 250lm EEI=B
8kWh/1000h
Item no. 1002123 | 6,80 GBP



LED E27 10.5W 360°
2700K 1000lm EEI=A+
10.5kWh/1000h
Item no. 1001756 | 20,70 GBP



Lamp details

max. 60W

Variant	Item no.	GBP
E27 white	1002584	58,50
E27 black	1002585	58,50

KARPO 30
CW, single

889

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90

Product details

100-240V ~50/60Hz | 500mA
Total consumption: 9.5W
Material: Aluminium / Steel

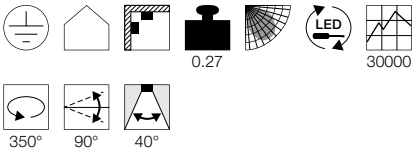

Dimensioned drawing



Variant	Item no.	GBP
480lm | 3000K | CRI>90		
■ black	**152330**	**99,00**
530lm | 3000K | CRI>90		
□ white	**152331**	**99,00**
530lm | 3000K | CRI>90		
■ gold	**1002175**	**117,00**

KARPO 30
CW, single, TRIAC

889

A-A++ Spectrum A++–E


LED INSIDE




- Premium LED with CRI>90
- Dimmable

Product details


220-240V ~50/60Hz | 500mA
Total consumption: 9W
Material: Aluminium / Steel
Dimmable: Triac C

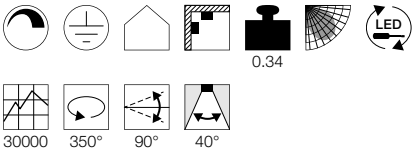


Dimensioned drawing



Variant	Item no.	GBP
580lm | 3000K | CRI>90		
■ black	**1001495**	**117,00**
600lm | 3000K | CRI>90		
□ white	**1001496**	**117,00**

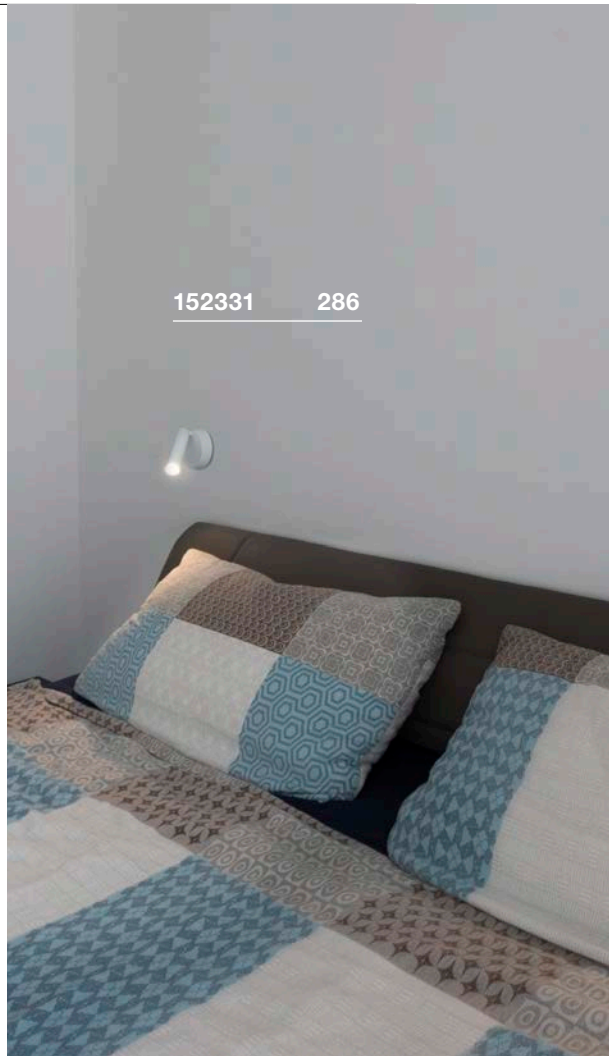

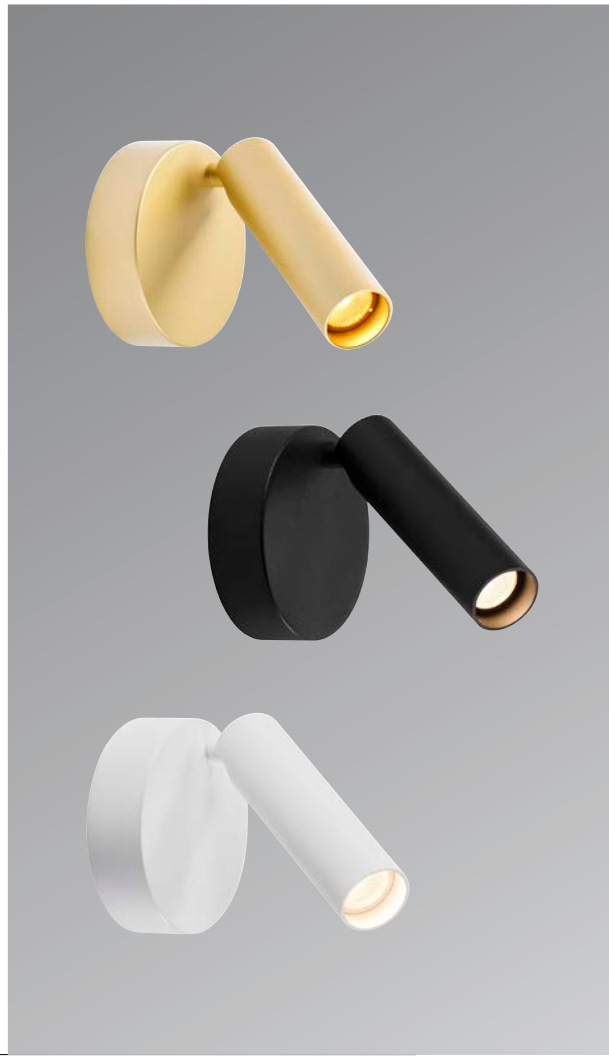



TOTHEE
CW, TRIAC

897

A-A++ Spectrum A++–E

LED INSIDE










Product details

220-240V ~50/60Hz | 350mA
Total consumption: 17W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
1250lm | 3000K | CRI>80 ■ black	**1000424**	**197,10**
1250lm | 3000K | CRI>80 ◪ white / black	**1000425**	**197,10**
1250lm | 3000K | CRI>80 ■ black	**1000426**	**197,10**
1250lm | 3000K | CRI>80 ◪ white / black	**1000427**	**197,10**

BILAS
CW, single, TRIAC


885

A-A++ Spectrum A++–E

LED INSIDE









• 240V LED

Product details


230V ~50/60Hz
Total consumption: 16W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

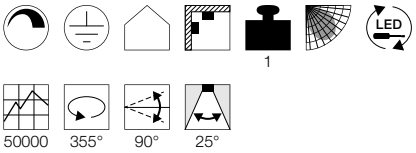



Dimensioned drawing



Variant	Item no.	GBP
1000lm | 2700K | CRI>80		
■ matt black	156420	224,10
1000lm | 2700K | CRI>80		
□ matt white	156421	224,10

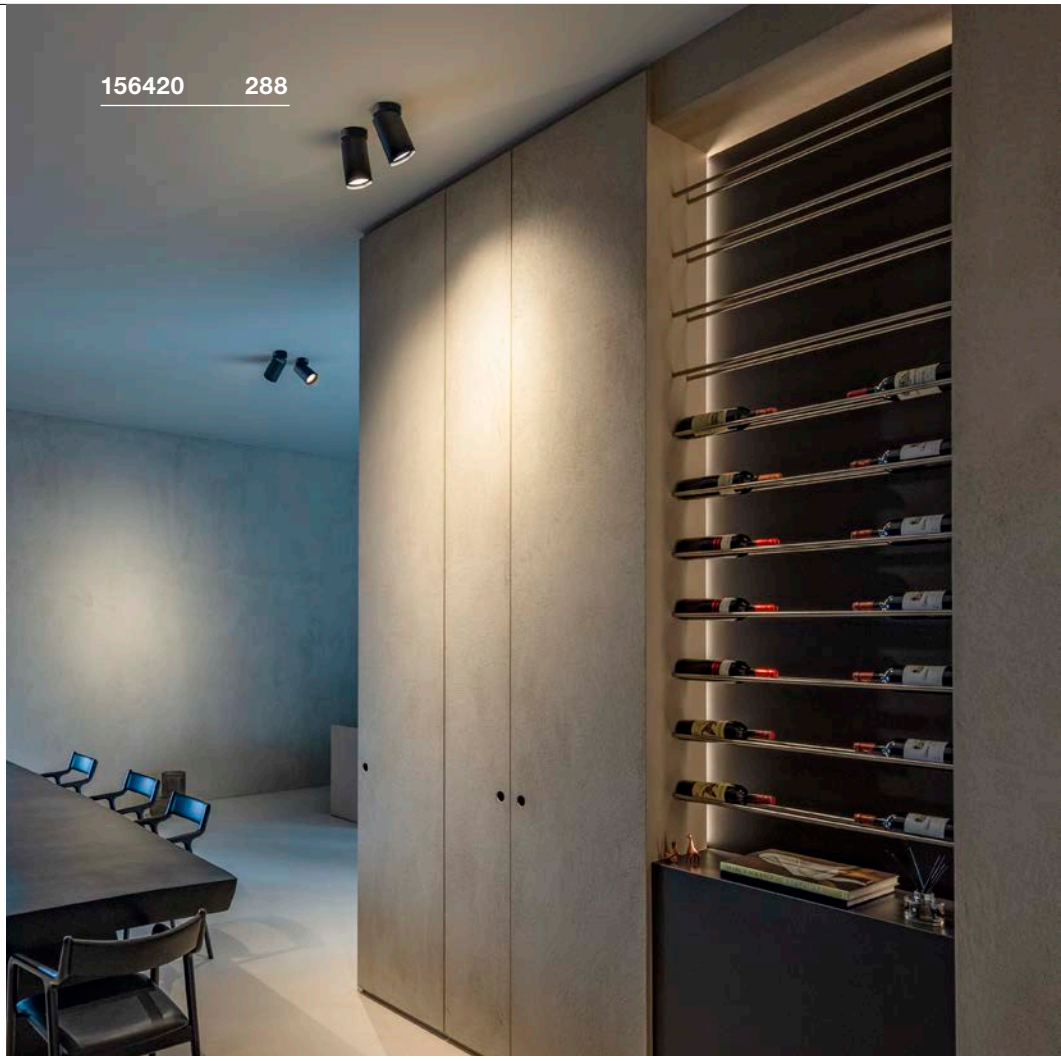

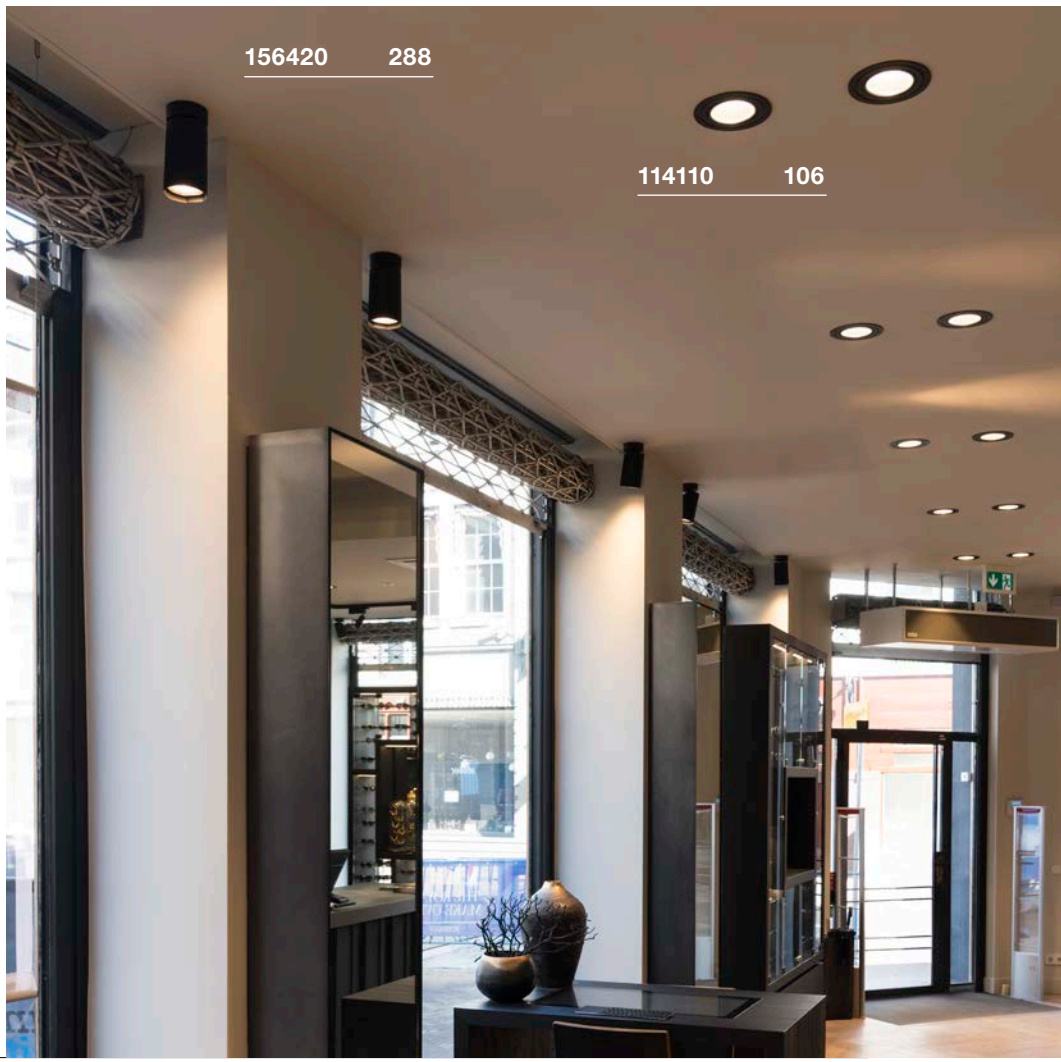

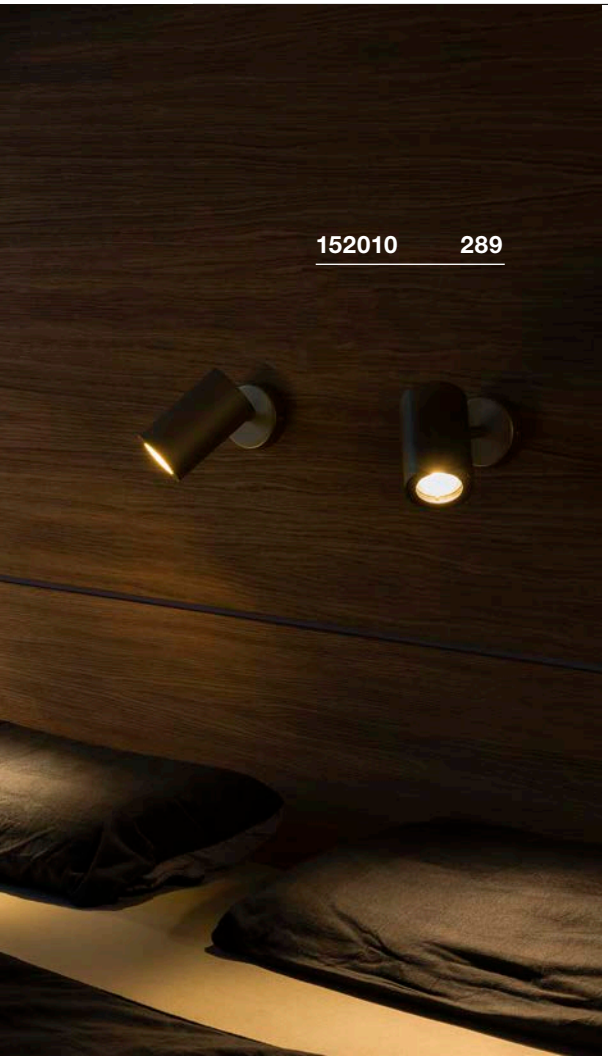



ENOLA B
CW, single, QPAR51

885


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note
Deco ring in lamp colour incl.
Optional black deco ring available as accessory.

Recommended accessories
■ Deco ring
Item no. 151840 | 6,80 GBP



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP



Lamp details
max. 50W QPAR51
L: 6.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**152010**	**63,00**
GU10 | QPAR51		
□ white	**152011**	**63,00**
GU10 | QPAR51		
■ gold	**152013**	**67,50**

ENOLA B
CW, double, QPAR51

885


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note
Deco ring in lamp colour incl.
Optional black deco ring available as accessory.

Recommended accessories
■ Deco ring
Item no. 151840 | 6,80 GBP



Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details
2x max. 50W QPAR51
L: 6.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**152020**	**108,00**
GU10 | QPAR51		
□ white	**152021**	**108,00**
GU10 | QPAR51		
■ gold	**152023**	**117,00**

ENOLA B
CW, single, QPAR51

885


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note
Deco ring in lamp colour incl.
Optional black deco ring available as accessory.

Recommended accessories
■ Deco ring
Item no. 151840 |6,80 GBP



Recommended lamp
GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 |15,30 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 |15,30 GBP



Lamp details
max. 50W QPAR51
L: 8 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**151820**	**81,00**
GU10 | QPAR51		
□ white	**151821**	**81,00**

ENOLA B
CW, double, QPAR51

885


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note
Deco ring in lamp colour incl.
Optional black deco ring available as accessory.

Recommended accessories
■ Deco ring
Item no. 151840 |6,80 GBP



Recommended lamp
LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 |15,30 GBP



LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 |9,90 GBP




Lamp details
2x max. 50W QPAR51
L: 8 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**151830**	**135,00**
GU10 | QPAR51		
□ white	**151831**	**135,00**







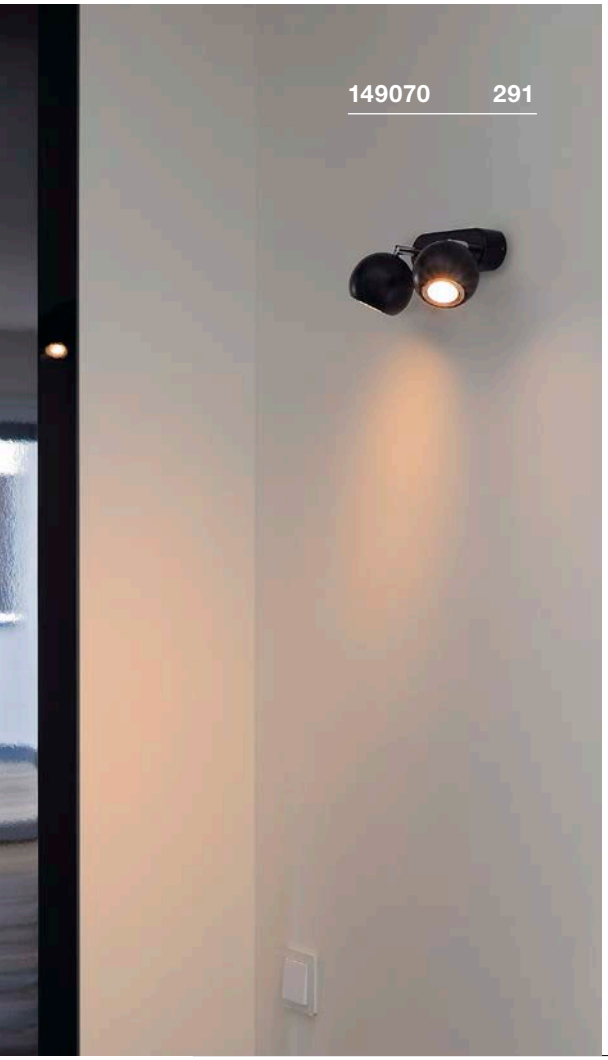

LIGHT EYE® 90
CW, single, QPAR51

890

E-A++ Spectrum A⁺⁺–E









- The optional deco ring for the lamp in the appropriate colour reduces the distance between the housing and the lamp

Product details

220-240V ~50/60Hz
Material: Steel



Dimensioned drawing



Recommended accessories

■ Lamp deco ring diam. 5.7cm
Item no. 151040 | 4,00 GBP

□ Lamp deco ring diam. 5.7cm
Item no. 151041 | 4,00 GBP

■ Lamp deco ring diam. 5.7cm
Item no. 151049 | 5,90 GBP

Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP

LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP

Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 ■ black / chrome	**149060**	**54,00**
GU10 | QPAR51 □ white / chrome	**149061**	**54,00**

LIGHT EYE® 90
CW, double, QPAR51

890

E-A++ Spectrum A⁺⁺–E









- The optional deco ring for the lamp in the appropriate colour reduces the distance between the housing and the lamp

Product details

220-240V ~50/60Hz
Material: Steel



Dimensioned drawing



Recommended accessories

■ Lamp deco ring diam. 5.7cm
Item no. 151040 | 4,00 GBP

□ Lamp deco ring diam. 5.7cm
Item no. 151041 | 4,00 GBP

■ Lamp deco ring diam. 5.7cm
Item no. 151049 | 5,90 GBP

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

Lamp details

2x max. 50W LED GU10 51mm

Variant	Item no.	GBP
GU10 | LED GU10 51mm ■ black / chrome	**149070**	**99,00**
GU10 | LED GU10 51mm □ white / chrome	**149071**	**99,00**

HELIA
CW, single, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium
Dimmable: Triac C

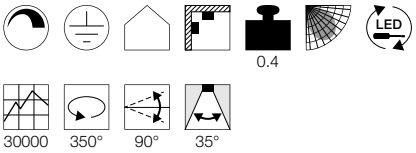

Dimensioned drawing



Variant	Item no.	GBP
620lm | 3000K | CRI>90		
■ black	**156500**	**108,00**
620lm | 3000K | CRI>90		
□ white	**156501**	**108,00**

HELIA
CW, double, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE







- Premium LED with CRI>90

Product details


220-240V ~50/60Hz | 500mA
Total consumption: 18W
Material: Aluminium
Dimmable: Triac C, Triac L

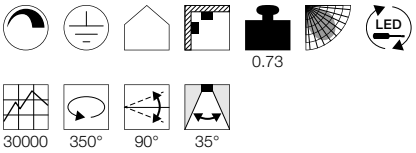


Dimensioned drawing



Variant	Item no.	GBP
1200lm | 3000K | CRI>90		
■ black	**156510**	**153,00**
1200lm | 3000K | CRI>90		
□ white	**156511**	**153,00**

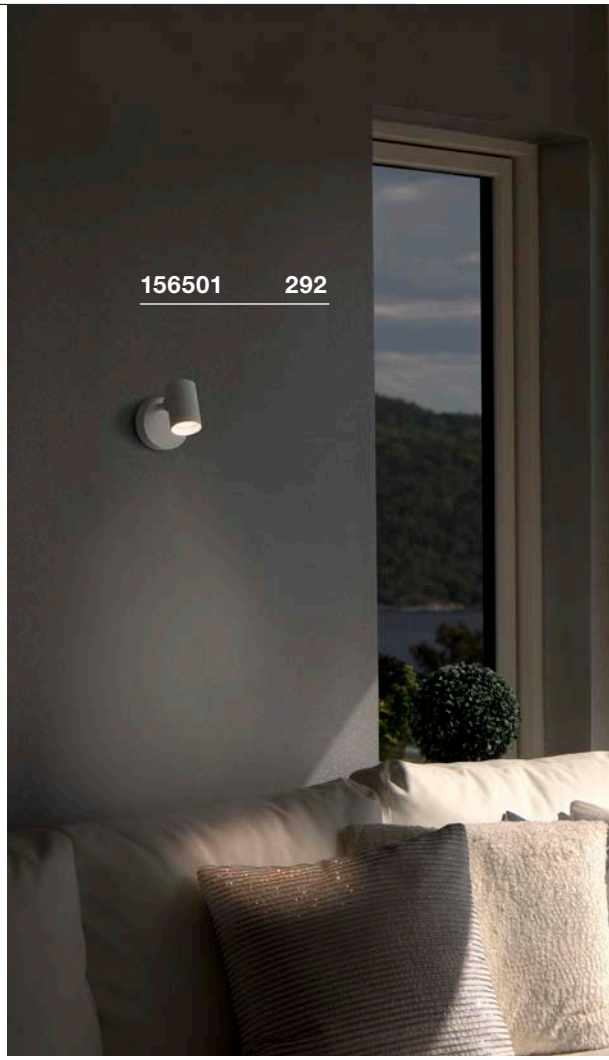

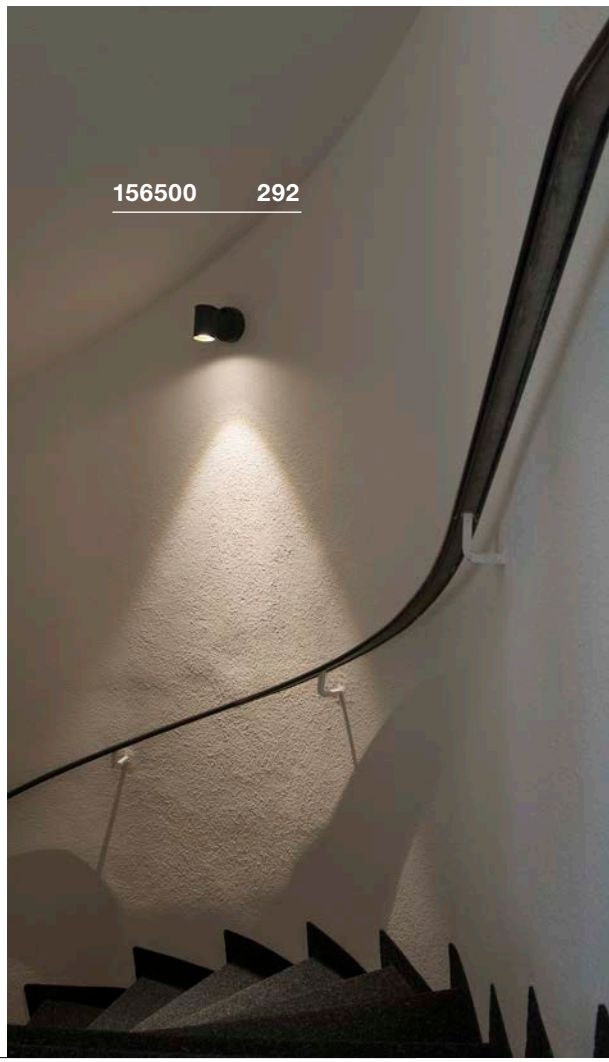


156510 292


147412 294

ASTO TUBE
CW, QPAR51

E-A++ Spectrum A++–E


- Use of long LED lamps possible





Product details

230V ~50Hz
Total consumption: 50W
Material: Aluminium



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP




LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP



ASTO TUBE
CW, single, QPAR51



Dimensioned drawing




Lamp details


max. 50W QPAR51
Ø: 6.4 cm max. L: 8.1 cm max.

Variant	Item no.	GBP
GU10 | QPAR51 | 0.34 kg		
white	**147411**	**49,50**

ASTO TUBE
CW, double, QPAR51



Dimensioned drawing



Lamp details


2x max. 50W QPAR51
Ø: 6.4 cm max. L: 8.1 cm max.

Variant	Item no.	GBP
GU10 | QPAR51 | 0.7 kg		
white	**147412**	**108,00**

ASTO TUBE
CW, triple, QPAR51



Dimensioned drawing



Lamp details

3x max. 50W QPAR51
Ø: 6.4 cm max. L: 8.1 cm max.

Variant	Item no.	GBP
GU10 | QPAR51 | 1.15 kg		
white	**147414**	**153,00**


1002976 297

NOBLO
CW, TRIAC


892

A-A++ Spectrum A⁺⁺–E

- Rotating and swivelling lamp head

Product details

220-240V ~50/60Hz | 350mA
Material: Aluminium
Dimmable: Triac C, Triac L







NOBLO
CW, single, TRIAC

LED INSIDE

NEW VARIANT



Variant	Item no.	GBP
600lm | 2700K | CRI>80 | 8W L: 9 cm | W: 10.5 cm | H: 12.7 cm | 0.31 kg matt black	1002969	90,00
600lm | 2700K | CRI>80 | 8W L: 9 cm | W: 10.5 cm | H: 12.7 cm | 0.31 kg matt white	1002970	90,00
600lm | 2700K | CRI>80 | 8W L: 9 cm | W: 10.5 cm | H: 12.7 cm | 0.31 kg matt silver	1002971	90,00

NOBLO
CW, double, TRIAC

LED INSIDE

NEW VARIANT



Variant	Item no.	GBP
1200lm | 2700K | CRI>80 | 16W L: 24 cm | W: 10.5 cm | H: 12.7 cm | 0.67 kg matt black	1002973	144,00
1200lm | 2700K | CRI>80 | 16W L: 24 cm | W: 10.5 cm | H: 12.7 cm | 0.67 kg matt white	1002974	144,00
1200lm | 2700K | CRI>80 | 16W L: 24 cm | W: 10.5 cm | H: 12.7 cm | 0.67 kg matt silver	1002975	144,00


NOBLO
CW, triple, TRIAC


LED INSIDE

NEW VARIANT



Variant	Item no.	GBP
1800lm | 2700K | CRI>80 | 24W L: 40 cm | W: 10.5 cm | H: 12.7 cm | 1 kg matt black	1002976	215,10
1800lm | 2700K | CRI>80 | 24W L: 40 cm | W: 10.5 cm | H: 12.7 cm | 1 kg matt white	1002977	215,10
1800lm | 2700K | CRI>80 | 24W L: 40 cm | W: 10.5 cm | H: 12.7 cm | 1 kg matt silver	1002978	215,10

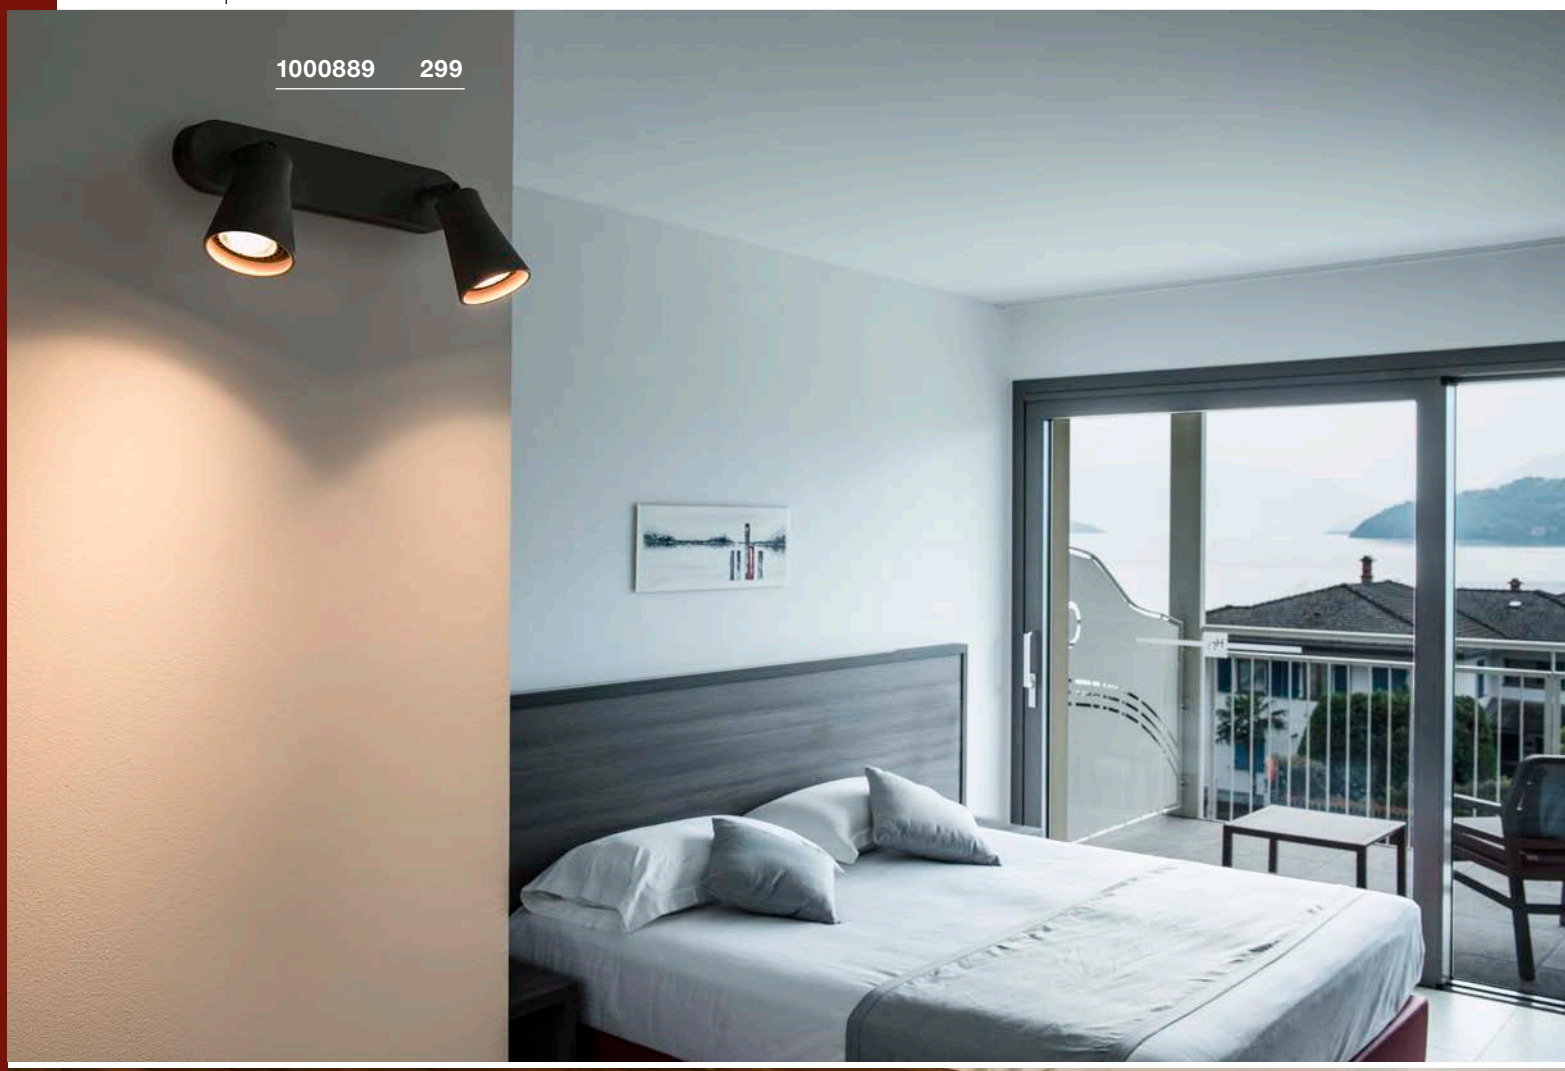
1000889 299

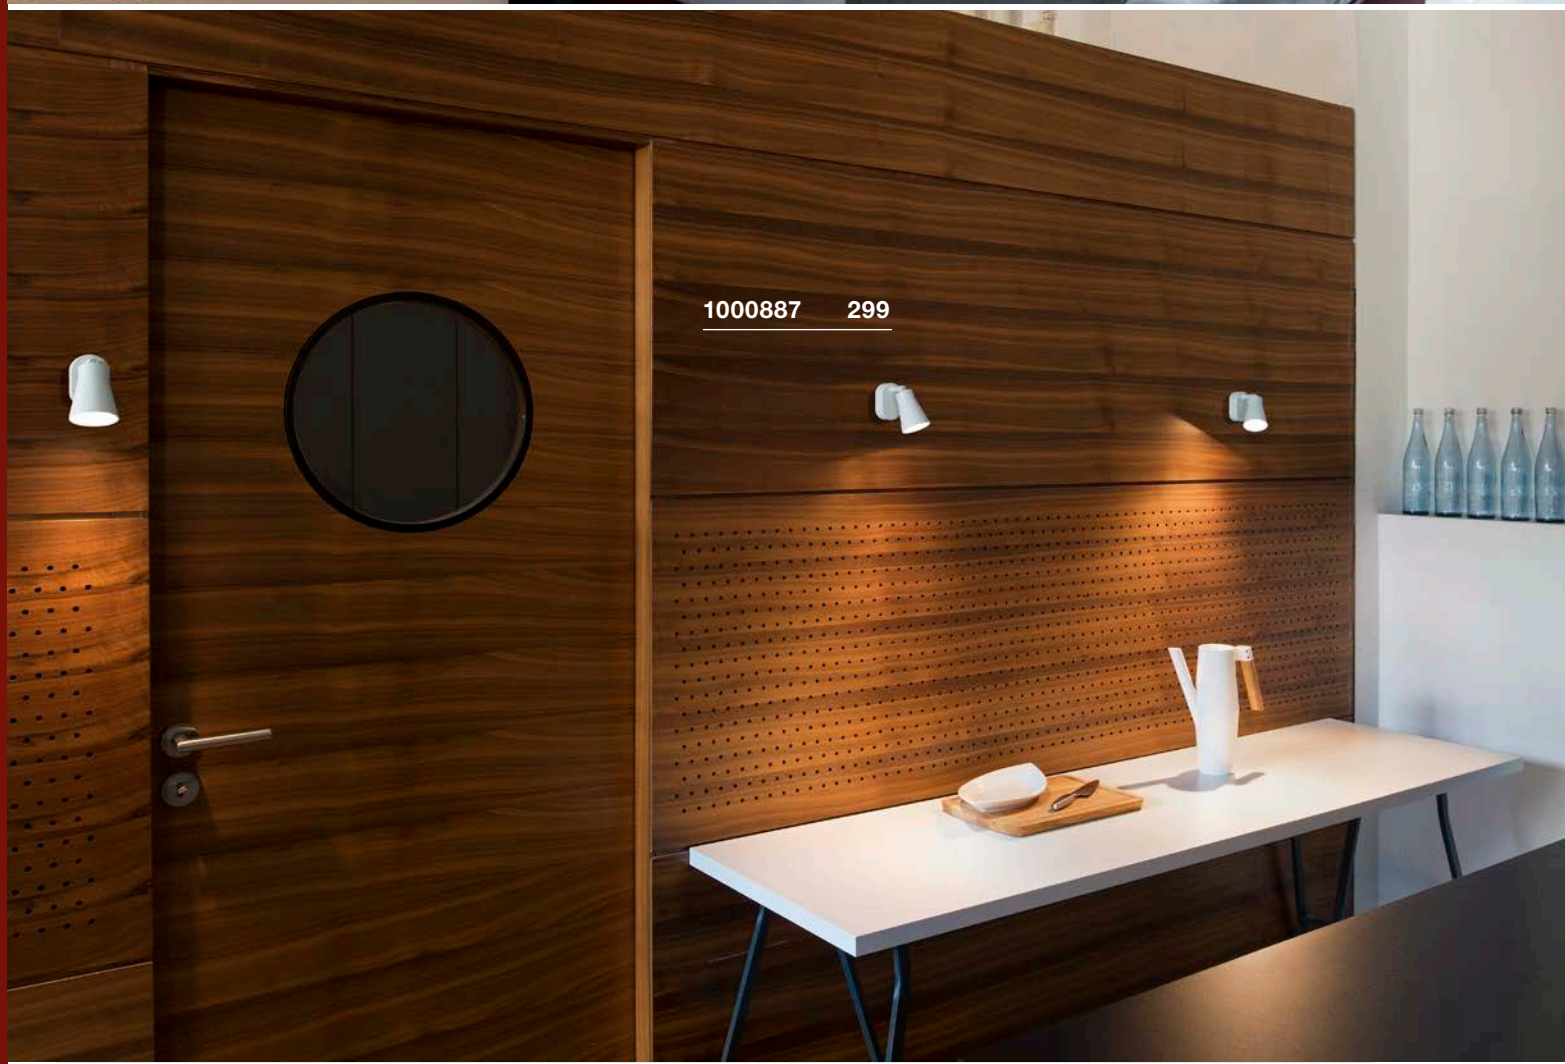
1000887 299

AVO
CW, QPAR51

884

E-A++ Spectrum A⁺⁺–E

Product details

230V ~50Hz
Material: Steel


320° 90°

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP


LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP

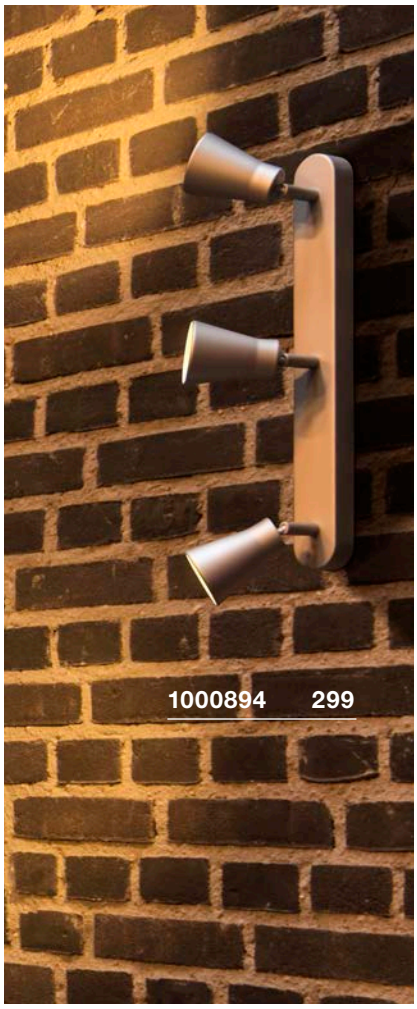

AVO
CW, single, QPAR51



Dimensioned drawing



Lamp details


max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 0.22 kg		
■ black	**1000886**	**35,10**
GU10 | QPAR51 | 0.22 kg		
□ white	**1000887**	**35,10**
GU10 | QPAR51 | 0.22 kg		
■ grey	**1000888**	**35,10**

AVO
CW, double, QPAR51



Dimensioned drawing



Lamp details


2x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 0.47 kg		
■ black	**1000889**	**72,00**
GU10 | QPAR51 | 0.47 kg		
□ white	**1000890**	**72,00**
GU10 | QPAR51 | 0.47 kg		
■ grey	**1000891**	**72,00**

AVO
CW, triple, QPAR51



Dimensioned drawing



Lamp details


3x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 0.71 kg		
■ black	**1000892**	**90,00**
GU10 | QPAR51 | 0.71 kg		
□ white	**1000893**	**90,00**
GU10 | QPAR51 | 0.71 kg		
■ grey	**1000894**	**90,00**

AVO
CW, quad, QPAR51



Dimensioned drawing



Lamp details

4x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 1 kg		
■ black	**1000895**	**108,00**
GU10 | QPAR51 | 1 kg		
□ white	**1000896**	**108,00**
GU10 | QPAR51 | 1 kg		
■ grey	**1000897**	**108,00**


147443 301
147316 304

ASTO
QPAR51

E-A++ Spectrum A++–E

Product details

230V ~50Hz
Material: Aluminium

310° 85°


Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

ASTO
CW, single, QPAR51



Dimensioned drawing



Lamp details


max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 0.25 kg matt aluminium	**147441**	**27,00**

ASTO
CW, double, QPAR51



Dimensioned drawing



Lamp details

max. 75W QPAR51


Variant	Item no.	GBP
GU10 | QPAR51 | 0.35 kg matt aluminium	**147442**	**54,00**



ASTO
CW, triple, QPAR51



Dimensioned drawing



Lamp details


max. 75W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 0.55 kg matt aluminium	**147443**	**72,00**

ASTO
CW, quad, QPAR51



Dimensioned drawing



Lamp details

max. 75W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 0.8 kg matt aluminium	**147444**	**90,00**


147380 303

PURI
CW, QPAR51

894

E-A++ Spectrum A⁺⁺–E

Product details

230V ~50Hz
Material: Aluminium / Steel

350° 80°

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 |15,30 GBP

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 |9,90 GBP


GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 |15,30 GBP



PURI
CW, single, QPAR51



Dimensioned drawing



Lamp details


max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 0.27 kg ■ matt black	**147360**	**31,50**
GU10 | QPAR51 | 0.27 kg □ matt white	**147361**	**31,50**

PURI
CW, double, QPAR51



Dimensioned drawing



Lamp details


2x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 0.62 kg ■ matt black	**147370**	**63,00**
GU10 | QPAR51 | 0.62 kg □ matt white	**147371**	**63,00**

PURI
CW, triple, QPAR51



Dimensioned drawing



Lamp details


3x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 0.98 kg ■ matt black	**147380**	**85,50**
GU10 | QPAR51 0.98 kg □ matt white	**147381**	**85,50**

PURI
CW, quad, QPAR51



Dimensioned drawing



Lamp details

4x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 | 1.25 kg ■ black	**1002029**	**126,00**
GU10 | QPAR51 | 1.25 kg □ matt white	**1002030**	**126,00**

KALU
CW, QPAR111

889

E-A++ Spectrum A++–E

Product details

220-240V ~50/60Hz
Material: Aluminium

IP 20 350° 90°

Recommended lamp

LED GU10 13W 30°
2700K 1100lm EEI=A+
13kWh/1000h
Item no. 1001242 | 76,50 GBP

LED GU10 9W 25°
2700-6500K 765lm EEI=A+
9kWh/1000h
Item no. 1001920 | 49,50 GBP


LED GU10 10W 38°
2700K 540lm EEI=A+
10kWh/1000h
Item no. 1001028 | 45,00 GBP

LED GU10 13W 140°
2700K 1000lm EEI=A+
13kWh/1000h
Item no. 1001244 | 76,50 GBP

KALU
CW, single, QPAR111



Dimensioned drawing



Lamp details


max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 | 0.44 kg ■ black	**1000702**	**81,00**
GU10 | QPAR111 | 0.44 kg □ matt white	**147301**	**81,00**
GU10 | QPAR111 | 0.44 kg ▫ matt aluminium	**147306**	**85,50**

KALU
CW, double, QPAR111



Dimensioned drawing



Lamp details


2x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 | 0.8 kg ■ black	**1000703**	**135,00**
GU10 | QPAR111 | 0.8 kg □ matt white	**147311**	**135,00**
GU10 | QPAR111 | 0.8 kg ▫ matt aluminium	**147316**	**144,00**

KALU
CW, triple, QPAR111



Dimensioned drawing



Lamp details


3x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 | 1.23 kg ■ black	**1000704**	**180,00**
GU10 | QPAR111 | 1.23 kg □ matt white	**147321**	**180,00**
GU10 | QPAR111 | 1.23 kg ▫ matt aluminium	**147326**	**189,00**

KALU
CW, quad, QPAR111




Dimensioned drawing



Lamp details

4x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 | 1.7 kg ■ black	**1002023**	**242,10**
GU10 | QPAR111 | 1.7 kg □ white	**1002024**	**242,10**
GU10 | QPAR111 | 1.7 kg ▫ matt aluminium	**1002025**	**251,10**

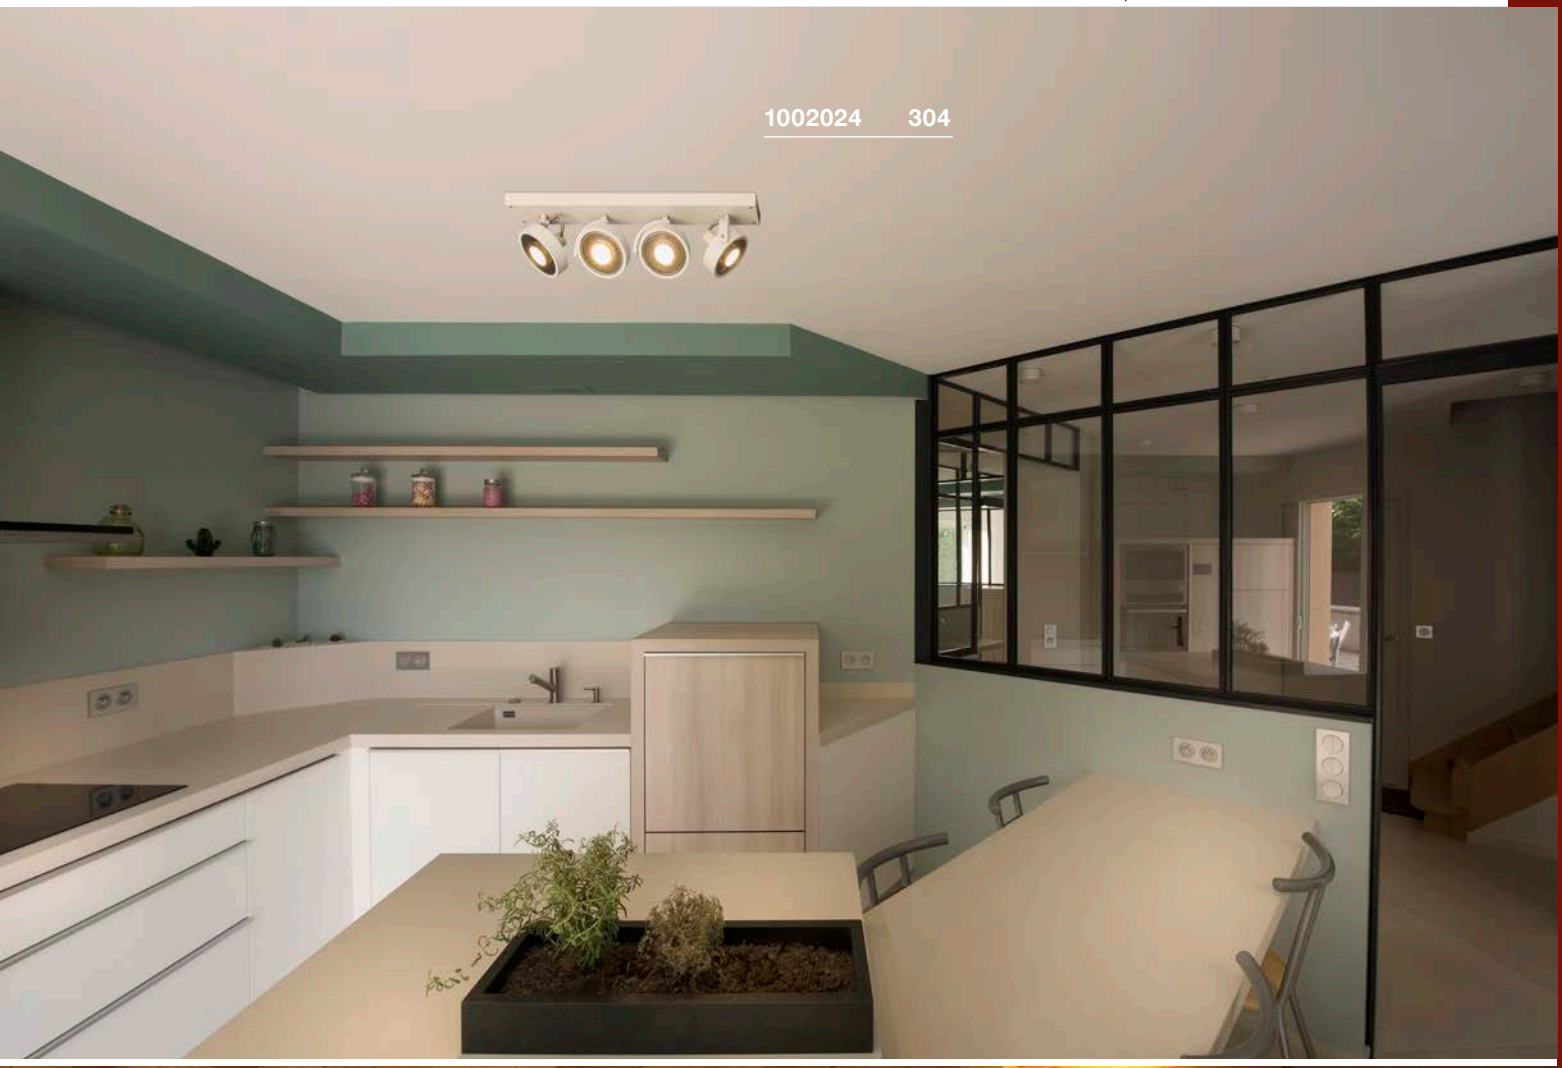
1002024 304


1000702 304

KALU
CW, TRIAC

888

A-A++ Spectrum A++–E

- Luminaire unit, can be rotated by 340° and swivelled by 120°

Product details

220-240V ~50/60Hz | 350mA
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

LED

40000

340° 120° 60°




KALU
CW, single, TRIAC

LED INSIDE



Dimensioned drawing




Variant	Item no.	GBP
1000lm | 3000K | CRI>80 | 17W | 0.77 kg		
■ black	**1000127**	**135,00**
1000lm | 3000K | CRI>80 | 17W | 0.77 kg		
◪ white / black	**1000128**	**135,00**

KALU
CW, double, TRIAC

LED INSIDE



Dimensioned drawing




Variant	Item no.	GBP
2000lm | 3000K | CRI>80 | 31W | 1.6 kg		
■ black	**1000129**	**224,10**
2000lm | 3000K | CRI>80 | 31W | 1.6 kg		
◪ white / black	**1000130**	**224,10**

KALU
CW, triple, TRIAC

LED INSIDE



Dimensioned drawing



Variant	Item no.	GBP
3000lm | 3000K | CRI>80 | 47W | 2.2 kg		
■ black	**1000131**	**341,10**
3000lm | 3000K | CRI>80 | 47W | 2.2 kg		
◪ white / black	**1000132**	**341,10**



KALU
CW, quad, TRIAC


888

A-A++ Spectrum A⁺⁺–E

- Luminaire unit, rotates by 340° and swivels by 120°
- Premium LED

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 60W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

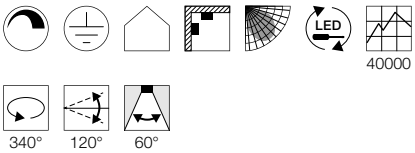


KALU
CW, quad, long, TRIAC

LED INSIDE



Dimensioned drawing




Variant	Item no.	GBP
4000lm | 3000K | CRI>80 | 2.9 kg		
■ black	**1000133**	**431,10**
4000lm | 3000K | CRI>80 | 2.9 kg		
◪ white / black	**1000134**	**431,10**

KALU
CW, quad, square, TRIAC

LED INSIDE



Dimensioned drawing




Variant	Item no.	GBP
4000lm | 3000K | CRI>80 | 3.75 kg		
■ black	**1000135**	**431,10**
4000lm | 3000K | CRI>80 | 3.75 kg		
◪ white / black	**1000136**	**431,10**

KALU
CW, quad, wide, TRIAC

LED INSIDE




Dimensioned drawing




Variant	Item no.	GBP
4000lm | 3000K | CRI>80 | 3.65 kg		
■ black	**1000137**	**476,10**
4000lm | 3000K | CRI>80 | 3.65 kg		
◪ white / black	**1000138**	**476,10**


LIPSY® LIGHT SERIES.
THE COLOUR OF YOUR CHOICE.

	LIPSY® 30 VALETO®	LIPSY® 40 VALETO®	LIPSY® 50 VALETO®
Example			
Lamp	LED INSIDE	LED INSIDE	LED INSIDE
Sensor	–	–	–
Size	Ø: 28 cm	Ø: 39 cm	Ø: 49.6 cm
Colour temperature	3000K	3000K	3000K
Light colour	1400lm	1700lm	2800lm
Control | dimmable	Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]	Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]	Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

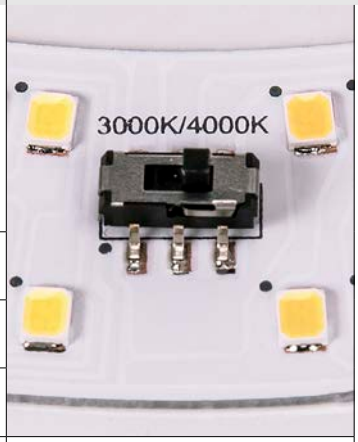	LIPSY® 30 Dome	LIPSY® 40 Dome	LIPSY® 50 Dome	
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	
Sensor	–	–	–	
Size	Ø: 30 cm	Ø: 35 cm	Ø: 40 cm	
Colour temperature	3000K | 4000K	3000K | 4000K	3000K | 4000K	
Light colour	1400/1600lm	1800/2000lm	2200/2400lm	
Control | dimmable	–	–	–	

With this LIPSY® variant you can select/switch the colour temperature!

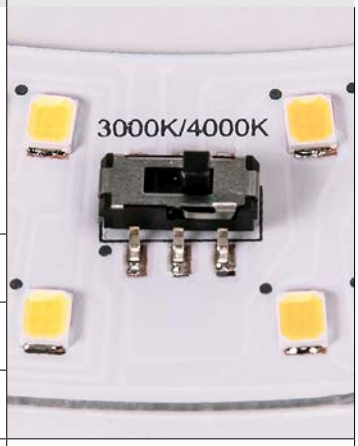	LIPSY® 30 Drum	LIPSY® 40 Drum	LIPSY® 50 Drum	
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	
Sensor	–	–	–	
Size	Ø: 30 cm	Ø: 35 cm	Ø: 40 cm	
Colour temperature	3000K | 4000K	3000K | 4000K	3000K | 4000K	
Light colour	1400/1600lm	1800/2000lm	2200/2400lm	
Control | dimmable	–	–	–	**With this LIPSY® variant** you can select/switch the colour temperature!

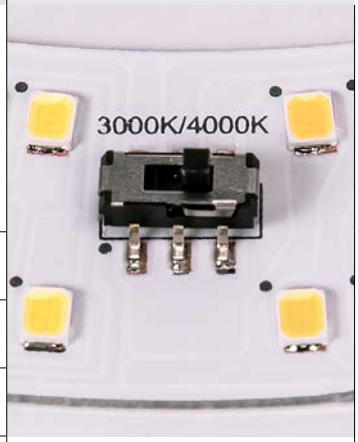	LIPSY® 40 CW, Drum	LIPSY® 50 CW, Drum	
Example			
Lamp	LED INSIDE	LED INSIDE	
Sensor	–	–	
Size	Ø: 35 cm	Ø: 40 cm	
Colour temperature	3000K | 4000K	3000K | 4000K	
Light colour	1800/2000lm	2200/2400lm	
Control | dimmable	–	–	**With this LIPSY® variant** you can select the colour temperature!

LIPSY®
CW, VALETO®

- Can be integrated into the VALETO® system

Product details

230V ~50/60Hz
Total consumption: 14,5W/17W/31,5W
Material: Polymethylacrylate (PMMA) / Steel

IP 20 50000 120°

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]






LIPSY® 30
CW, VALETO®

LED INSIDE

Dimensioned drawing




Variant	Item no.	GBP
1400lm | 3000K | CRI>80 | 0.4 kg		
white	1002132	94,50

LIPSY® 40
CW, VALETO®

LED INSIDE

Dimensioned drawing




Variant	Item no.	GBP
1700lm | 3000K | CRI>80 | 0.77 kg		
white	1002133	121,50

LIPSY® 50
CW, VALETO®

LED INSIDE

Dimensioned drawing





Variant	Item no.	GBP
2800lm | 3000K | CRI>80 | 1.36 kg		
white	1002134	157,50


LIPSY®
CW, Dome

A-A++ Spectrum A⁺⁺–E

- Colour temperature (3000K/4000K) selectable using a switch

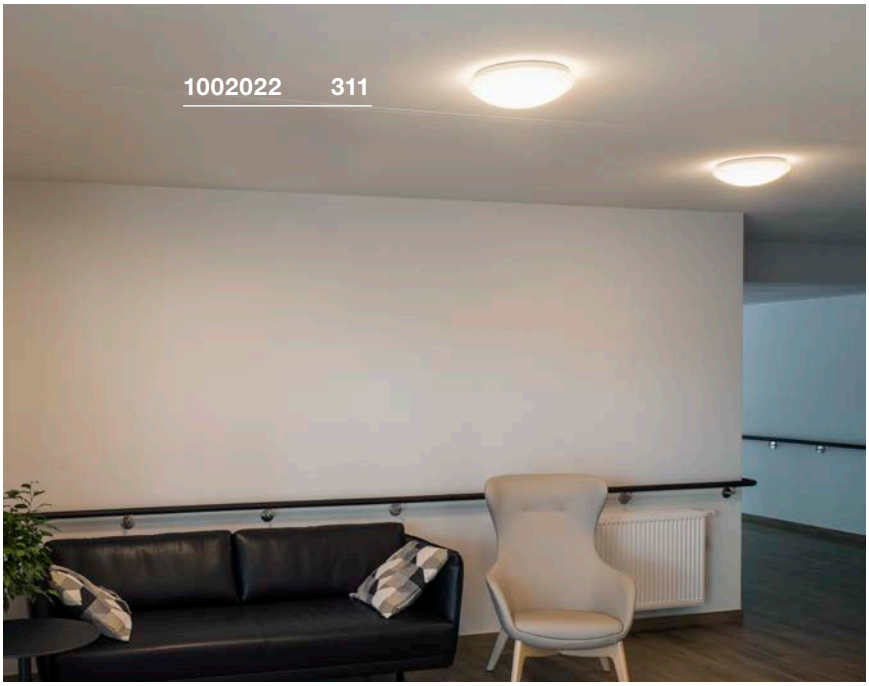

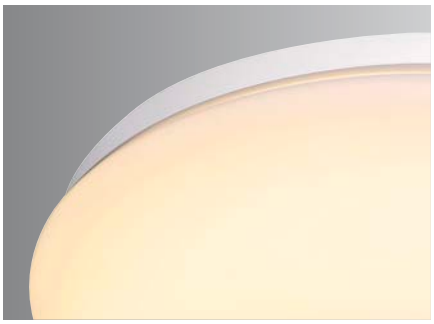

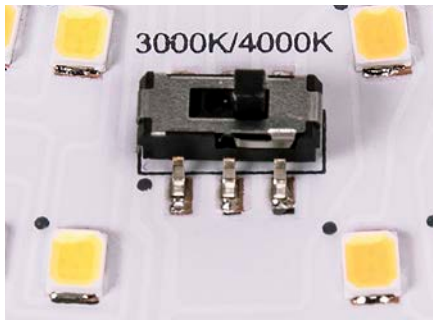

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 15W/18W/21W
Material: Aluminium / Polycarbonate (PC)


IP 44 | 30000 | 110°

LIPSY® 30
CW, Dome

LED INSIDE



Dimensioned drawing




Variant	Item no.	GBP
1400/1600lm | 3000/4000K | CRI>80| 0.6 kg		
white	**1002020**	**67,50**

LIPSY® 40
CW, Dome

LED INSIDE

Dimensioned drawing




Variant	Item no.	GBP
1800/2000lm | 3000/4000K | CRI>80 | 0.77 kg		
white	**1002021**	**85,50**

LIPSY® 50
CW, Dome

LED INSIDE

Dimensioned drawing



Variant	Item no.	GBP
2200/2400lm | 3000/4000K | CRI>80 | 0.96 kg		
white	**1002022**	**94,50**

LIPSY®
CW, Drum


A-A++ Spectrum A++–E


- Colour temperature (3000K/4000K) selectable using a switch

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 15W/18W/21W
Material: Aluminium / Polycarbonate (PC)

IP 44 | LED | 30000 | 120°

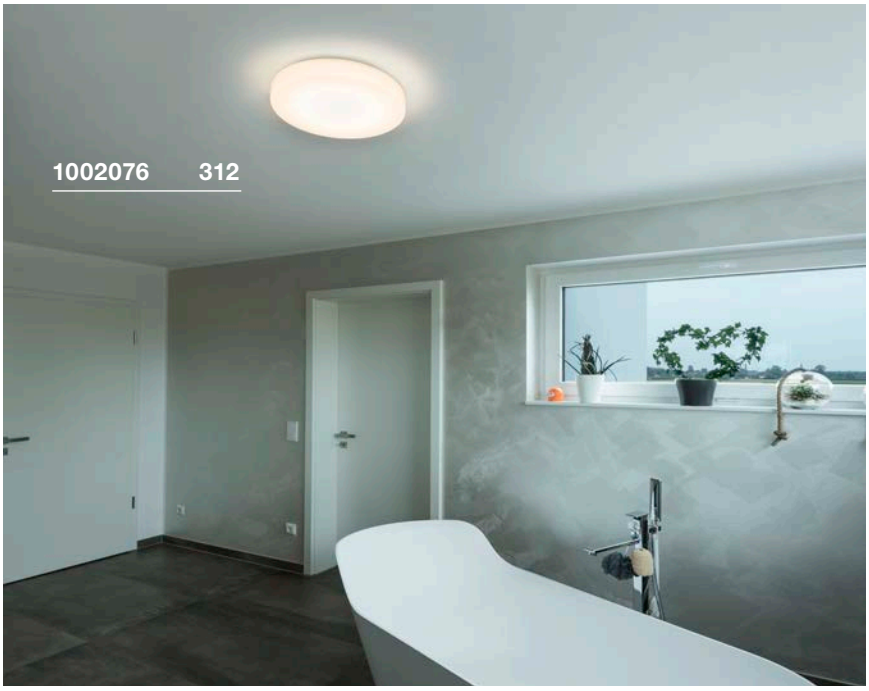

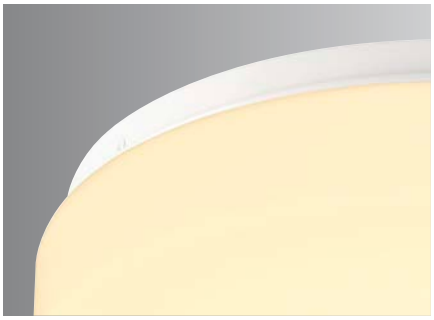




LIPSY® 30
CW, Drum

LED INSIDE

Dimensioned drawing




Variant	Item no.	GBP
1400/1600lm | 3000/4000K | CRI>80 | 0.6 kg		
white	1002075	76,50

LIPSY® 40
CW, Drum

LED INSIDE

Dimensioned drawing




Variant	Item no.	GBP
1800/2000lm | 3000/4000K | CRI>80 | 0.77 kg		
white	1002076	85,50

LIPSY® 50
CW, Drum

LED INSIDE

Dimensioned drawing



Variant	Item no.	GBP
2200/2400lm | 3000/4000K | CRI>80 | 0.96 kg		
white	1002077	94,50

LIPSY®
CW, Drum, DALI

A-A++ Spectrum A++–E


- Switchable light colour


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 18W/21W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Dali

IP 44

30000 120°

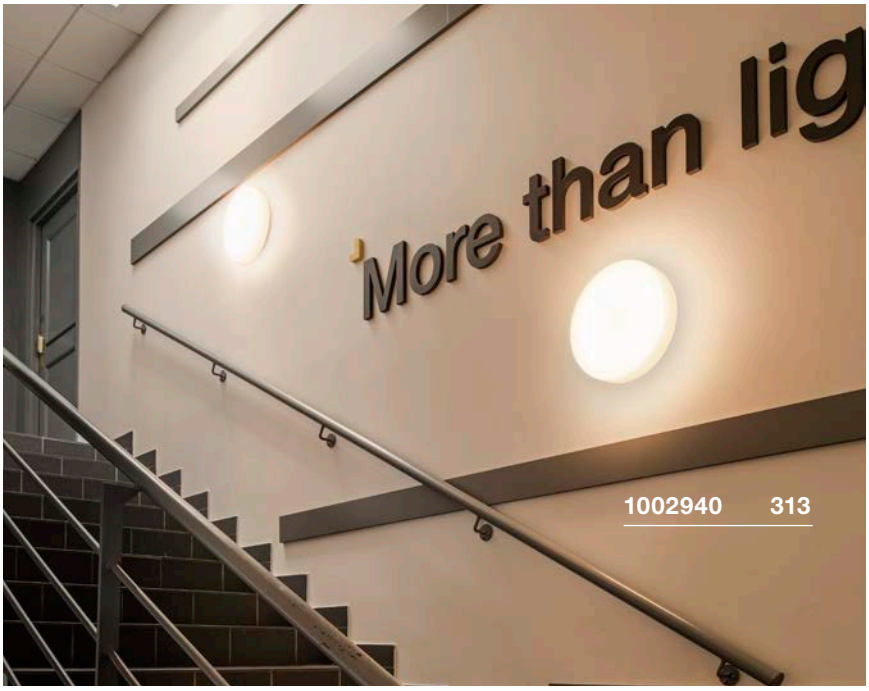

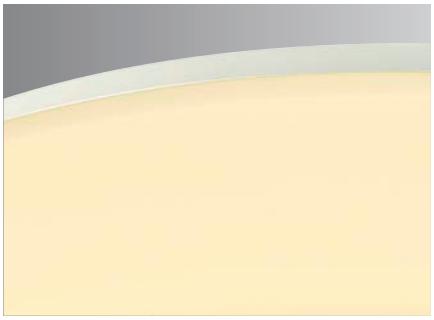






LIPSY® 40
CW, Drum, DALI

LED INSIDE

NEW VARIANT

Dimensioned drawing




Variant	Item no.	GBP
1800/2000lm | 3000/4000K | CRI>80 | 0.77 kg		
white	1002940	157,50

LIPSY® 50
CW, Drum, DALI

LED INSIDE

NEW VARIANT

Dimensioned drawing



Variant	Item no.	GBP
2200/2400lm | 3000/4000K | CRI>80 | 0.96 kg		
white	1002941	166,50

MARONA
CW, TRIAC

A-A++ Spectrum A++–E

LED INSIDE






Product details

200-240V ~50/60Hz | 430mA
Total consumption: 15W
Material: Polymethylacrylate (PMMA) / Steel
Dimmable: Triac C, Triac L




0.63



30000 120°

Dimensioned drawing






Variant	Item no.	GBP
1200lm | 3000K | CRI>80 chrome	155152	121,50
1200lm | 3000K | CRI>80 matt grey	155156	117,00

MOLDI 32
CW

A-A++ Spectrum A⁺⁺–E

LED INSIDE






- Premium LED

Product details

100-240V ~50/60Hz | 450mA
Total consumption: 22W
Material: Aluminium / Plastic PC



Dimensioned drawing




Variant	Item no.	GBP
1150lm | 3000K | CRI>80 matt aluminium	**134323**	**135,00**

MOLDI 46
CW

A-A++ Spectrum A⁺⁺–E

LED INSIDE






- Premium LED

Product details

100-240V ~50/60Hz | 700mA
Total consumption: 34W
Material: Aluminium / Plastic PC



Dimensioned drawing



Variant	Item no.	GBP
2010lm | 3000K | CRI>80 matt aluminium	**134333**	**180,00**


MOLDI 46
CW, Sensor

A-A++ Spectrum A⁺⁺–E

LED INSIDE

MR






- Premium LED
- With integrated MR (microwave sensor)

Product details

100-240V ~50/60Hz | 700mA
Total consumption: 34W
Material: Aluminium / Plastic PC



Dimensioned drawing



Variant	Item no.	GBP
2010lm | 3000K | CRI>80 matt aluminium	**134343**	**215,10**

MELAN
CW, E27

E-A++ Spectrum A++–E






Product details

230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP



LED E27 9,1W 240°
2700K 760lm EEK=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP



Lamp details

max. 60W
Ø: 7 cm max. L: 16 cm max.

Variant	Item no.	GBP
E27		
matt aluminium	**155236**	**76,50**








GLASSA
CW, square, E27

E-A++ Spectrum A++–E






Product details
230V ~50Hz
Material: Frosted glass / Steel



Dimensioned drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP



LED E27 8.5W
2700K 806lm EEI=A+
10kWh/1000h
Item no. 560161 | 20,70 GBP



Lamp details
2x max. 60W
Ø: 4.8 cm max. L: 14.8 cm max.


Variant	Item no.	GBP
E27		
matt transparent / chrome	**155180**	**99,00**

GLASSA
CW, round, E27


E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Steel / Glass



Dimensioned drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP



LED E27 8.5W
2700K 806lm EEI=A+
10kWh/1000h
Item no. 560161 | 20,70 GBP



Lamp details
2x max. 60W
Ø: 4.8 cm max. L: 13.6 cm max.

Variant	Item no.	GBP
E27		
matt transparent / chrome	**155185**	**99,00**

SIMA
CW, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE







- Flat, robust design
- With spacer for cable on-wall mounting


Product details


220-240V ~50/60Hz | 350mA
Total consumption: 25W
Material: Polycarbonate (PC)
Dimmable: Triac C, Triac L






Dimensioned drawing



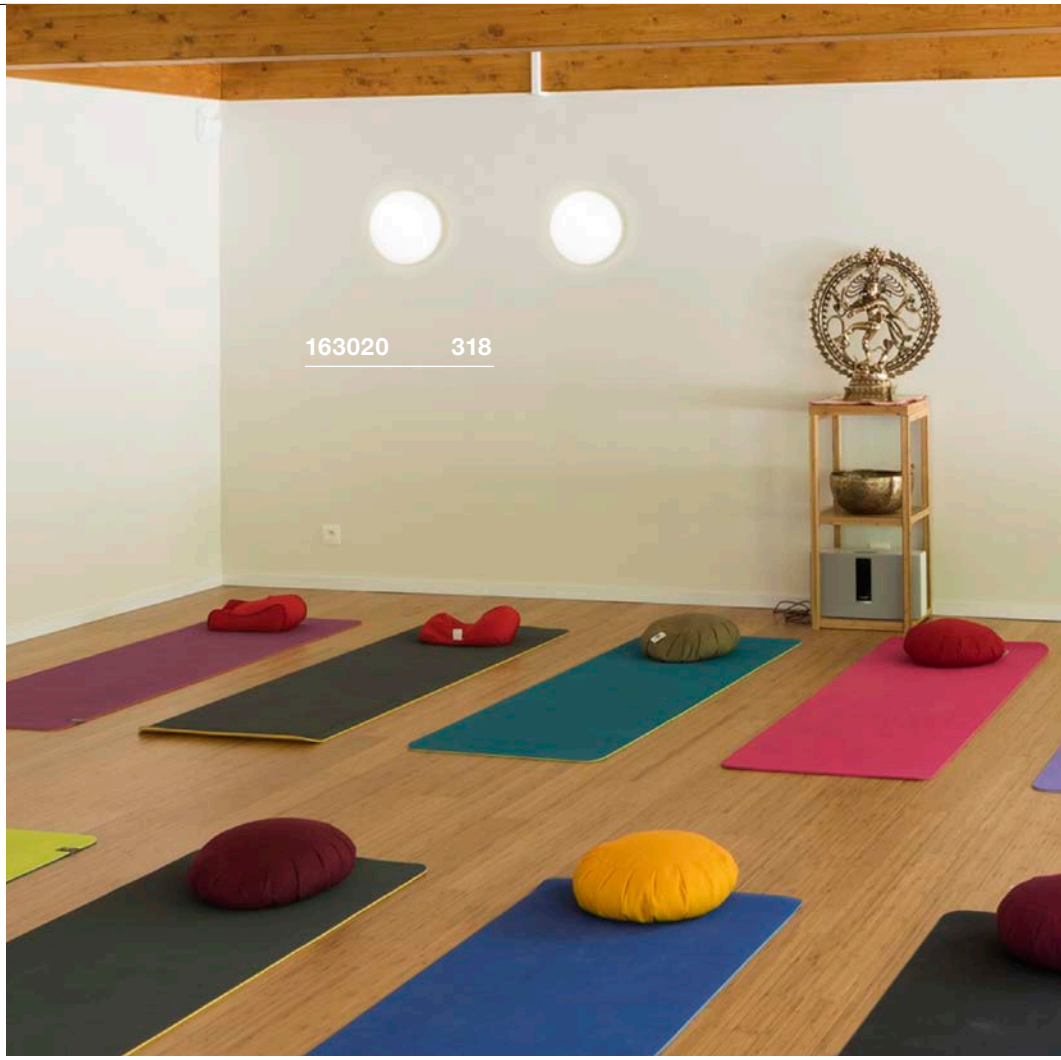

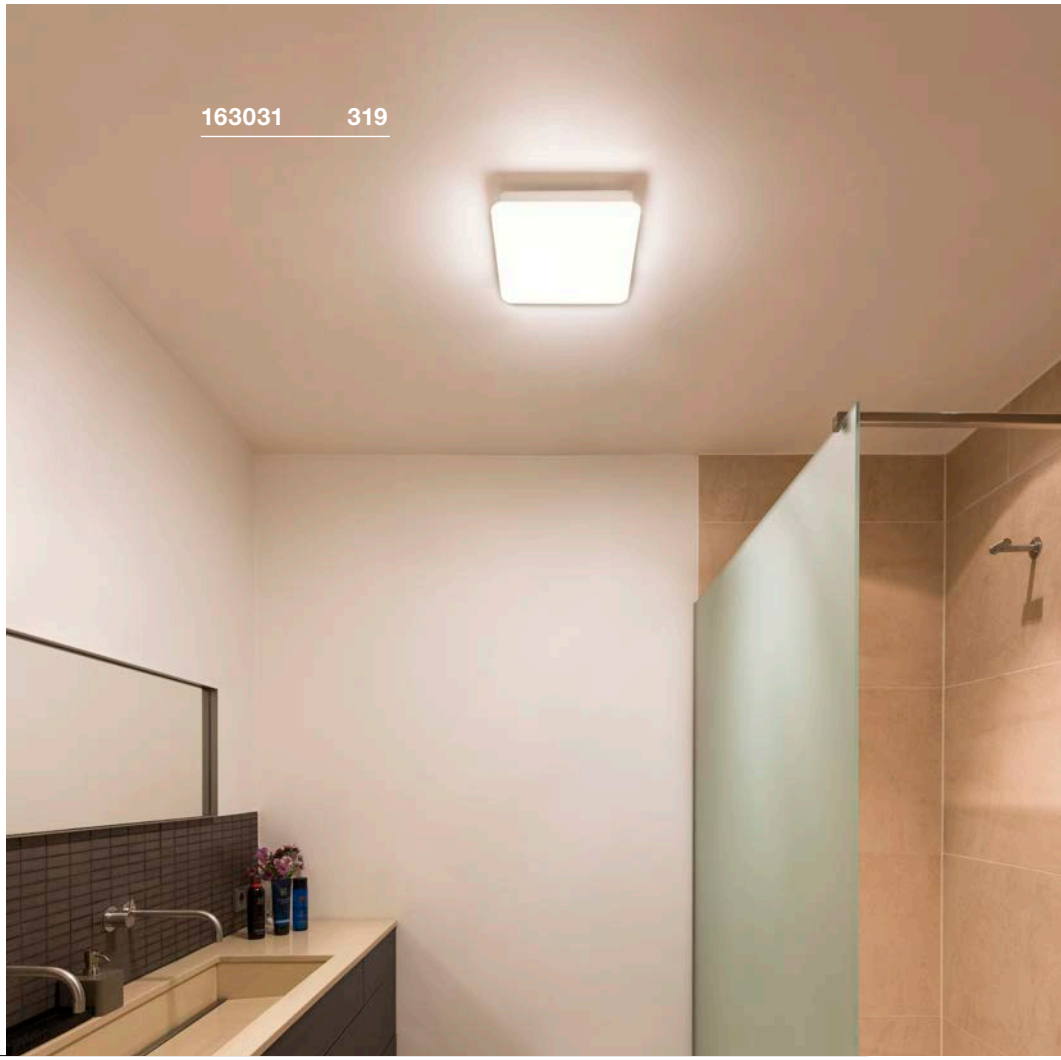

Variant	Item no.	GBP
2300lm | 3000K | CRI>80		
white	**163020**	**117,00**

SIMA
CW, round, Sensor

A-A++ Spectrum A++–E

LED INSIDE

MR









- Flat, robust design
- With spacer for cable on-wall mounting
- Motion sensor with MR (micro-wave) technology integrated in the luminaire housing

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 27W
Material: Polycarbonate (PC)

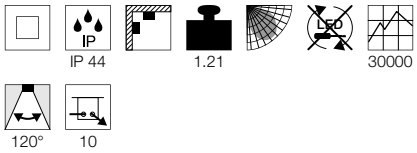

Dimensioned drawing



Variant	Item no.	GBP
2300lm | 3000K | CRI>80		
white	**163021**	**135,00**

SIMA
CW, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE







- Flat, robust design
- With spacer for cable on-wall mounting

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 25W
Material: Polycarbonate (PC)
Dimmable: Triac C, Triac L

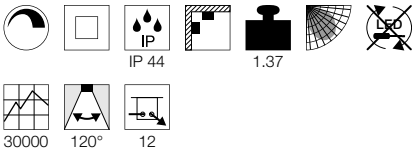

Dimensioned drawing



Variant	Item no.	GBP
2300lm | 3000K | CRI>80		
white	**163030**	**117,00**

SIMA
CW, square, Sensor

A-A++ Spectrum A++–E

LED INSIDE

MR







- Flat, robust design
- With spacer for cable on-wall mounting
- Motion sensor with MR (micro-wave) technology integrated in the luminaire housing

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 27W
Material: Polycarbonate (PC)

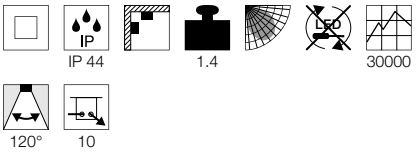

Dimensioned drawing



Variant	Item no.	GBP
2300lm | 3000K | CRI>80		
white	**163031**	**135,00**


1001884 321

MEDO 30 CORONA
CW, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C





Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80		
■ black	**1001877**	**224,10**
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80		
□ white	**1001881**	**224,10**
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80		
■ grey	**1001882**	**224,10**

MEDO 40 CORONA
CW, TRIAC

891

A-A++ Spectrum A++–E

LED INSIDE









- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch


Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C





Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP


Variant	Item no.	GBP
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
■ black	**1001883**	**251,10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
□ white	**1001884**	**251,10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80		
■ grey	**1001885**	**251,10**


MEDO 60 CORONA
CW, TRIAC


891

A-A++ Spectrum A++–E

LED INSIDE

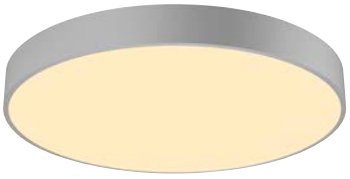







- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch


Product details

220-240V ~50/60Hz | 1050mA
Total consumption: 40W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C





Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

■ Suspension set 1.5m
Item no. 135250 |34,20 GBP

□ Suspension set 1.5m
Item no. 135251 |34,20 GBP

■ Suspension set 1.5m
Item no. 135254 |34,20 GBP

□ Suspension set 5m
Item no. 1001950 |76,50 GBP

■ Suspension set 5m
Item no. 1001951 |76,50 GBP

■ Suspension set 5m
Item no. 1001952 |76,50 GBP

Variant	Item no.	GBP
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
■ black	**1001886**	**476,10**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
□ white	**1001887**	**476,10**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80		
■ grey	**1001888**	**476,10**


1002858 323

MALANG
CW, SLV VALETO®


A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW












- Can be integrated in the SLV VALETO® system and other ZigBee® systems
- Panel can be controlled separately from warm white to cool white and dimmed
- The ring can be controlled separately in RGBW colours and dimmed

Product details

100-240V ~50/60Hz | 24V DC
Total consumption: 39W
Material: Aluminium / Polycarbonate (PC)




IP 20 | 4.6 | 19



30000 | 110°

Dimensioned drawing



Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Recommended accessories



■ Suspension set 1.5m
Item no. 135250 | 34,20 GBP

□ Suspension set 1.5m
Item no. 135251 | 34,20 GBP

■ Suspension set 1.5m
Item no. 135254 | 34,20 GBP

□ Suspension set 5m
Item no. 1001950 | 76,50 GBP

■ Suspension set 5m
Item no. 1001951 | 76,50 GBP

■ Suspension set 5m
Item no. 1001952 | 76,50 GBP

□ Remote control CCT/RGBW
Item no. 1002994 | 43,20 GBP

Variant	Item no.	GBP
Ring: 350lm | RGB+W (3000K) | CRI>80 Panel: 2100-2400lm | 2700-6500K | CRI>80		
□ white	1002858	629,10

The decorative **RING** can be controlled separately. Create an atmospheric ambience by setting different light colours and dimming the light.

The **PANEL** can be controlled separately. You can set the colour temperature to 2700-6500K and dim the light.



With our SLV VALETO® SMART LIGHT SYSTEM the choice is yours: Control your light at home with our SLV VALETO® remote control (1002994), or an app on your Smartphone via our SLV VALETO® Gateway (1002411).

Thanks to the latest ZigBee standard (ZigBee® 3.0) there are no limits to your smart light control.




Remote control
Item no. 1002994




Gateway
Item no. 1002411



SLV VALETO®
App

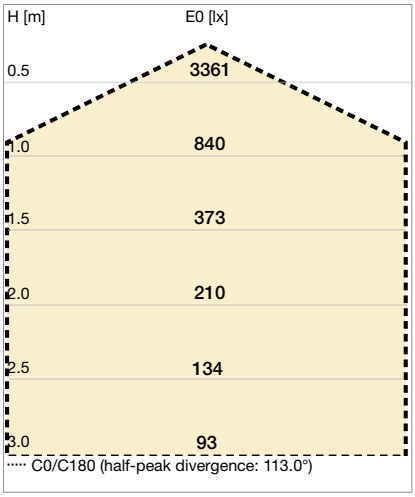

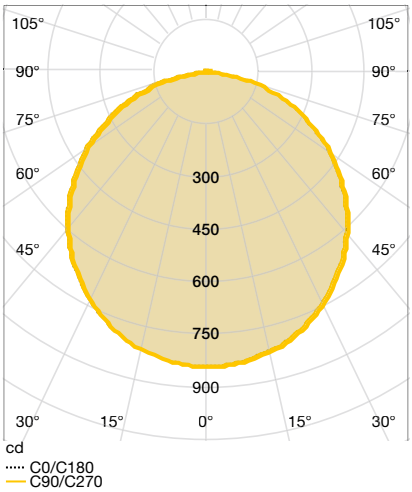

SENSER
CW, square, TRIAC

895

A-A++ Spectrum A++–E



Product details

220-240V ~50/60Hz
Material: Aluminium
Dimmable: Triac C

IP 20


48000 0.2 IK02

SENSER 12
CW, square, TRIAC

LED INSIDE

FOLLOWER

Dimensioned drawing



Variant	Item no.	GBP
480lm | 3000K | CRI>80 | 8.2W | 0.27 kg		
matt white	1003017	63,00


SENSER 18
CW, square, TRIAC

LED INSIDE

FOLLOWER



Dimensioned drawing



Variant	Item no.	GBP
880lm | 3000K | CRI>80 | 12W | 0.39 kg		
matt white	1003018	67,50


SENSER 24
CW, square, TRIAC

LED INSIDE

FOLLOWER



Dimensioned drawing



Variant	Item no.	GBP
1200lm | 3000K | CRI>80 | 15W | 0.5 kg		
matt white	1003019	72,00

SENSER
CW, round, TRIAC

895

A-A++ Spectrum A⁺⁺–E



Product details

220-240V ~50/60Hz
Material: Aluminium
Dimmable: Triac C

IP 20


48000 0.2 IK02

SENSER 12
CW, round, TRIAC

LED INSIDE

FOLLOWER

Dimensioned drawing



Variant	Item no.	GBP
480lm | 3000K | CRI>80 | 8.2W | 0.23 kg		
matt white	1003014	63,00


SENSER 18
CW, round, TRIAC

LED INSIDE

FOLLOWER



Dimensioned drawing



Variant	Item no.	GBP
880lm | 3000K | CRI>80 | 12W | 0.34 kg		
matt white	1003015	67,50


SENSER 24
CW, round, TRIAC

LED INSIDE


FOLLOWER



Dimensioned drawing



Variant	Item no.	GBP
1200lm | 3000K | CRI>80 | 15W | 0.47 kg		
matt white	1003016	72,00

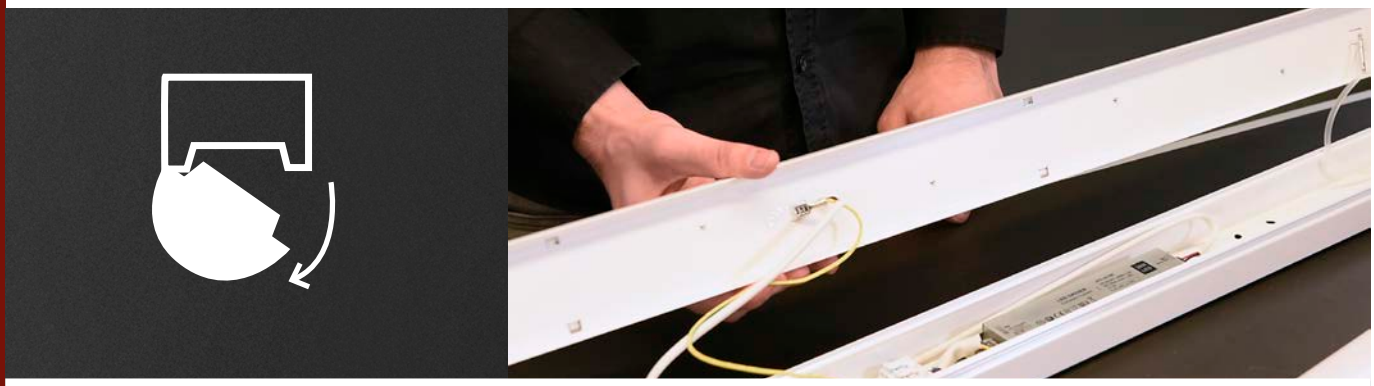








BENA Video

bit.ly/slv-bena

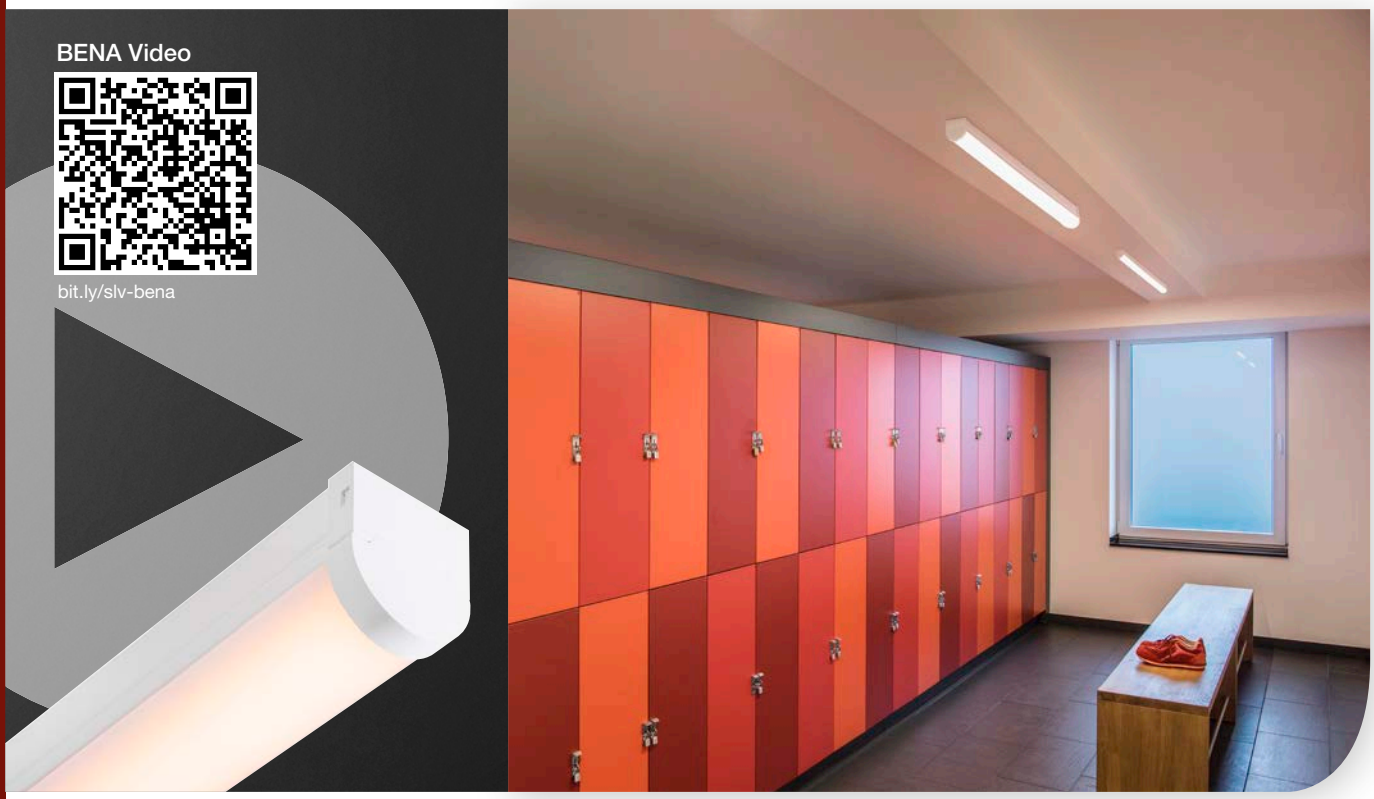

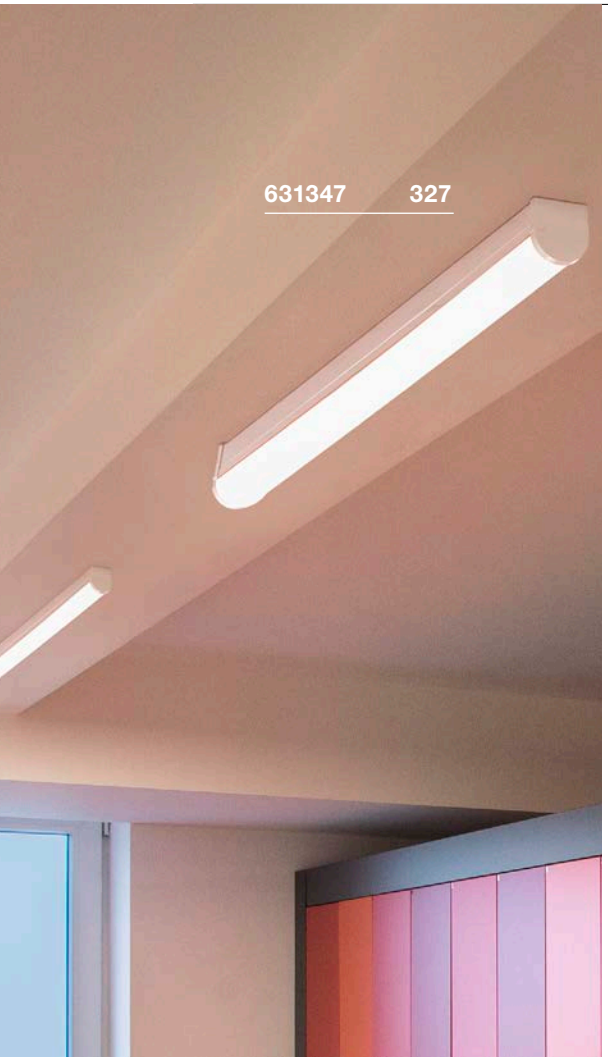


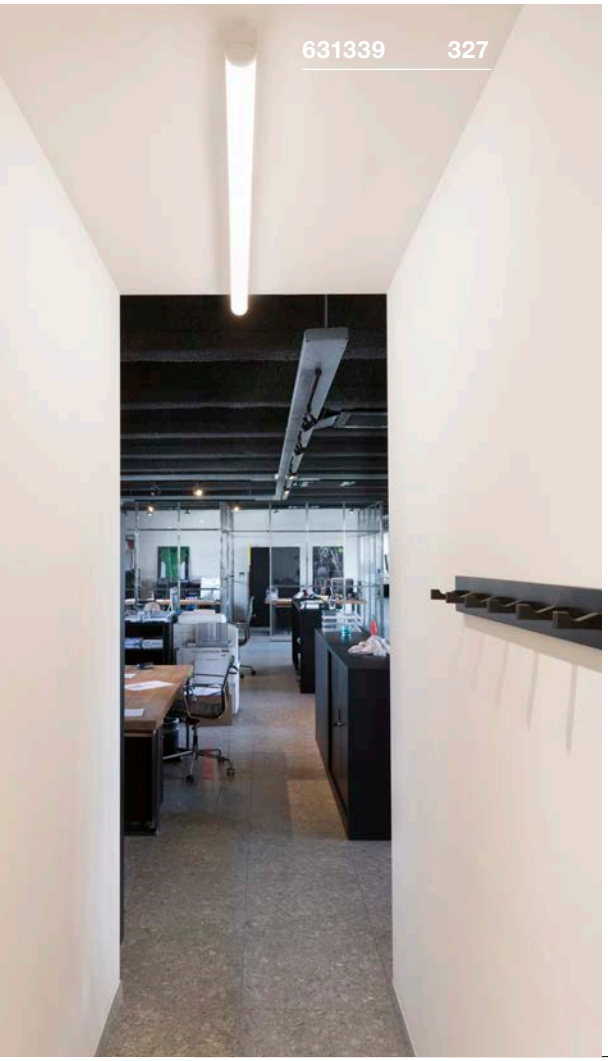

BENA 120
CW

A-A++ Spectrum A++–E

LED INSIDE





- Simple installation


Product details

220-240V ~50/60Hz | 700mA
Total consumption: 28W
Material: Polymethylacrylate (PMMA) / Steel





Dimensioned drawing




Variant	Item no.	GBP
3200lm | 3000K | CRI>80		
white	**631337**	**126,00**
3400lm | 4000K | CRI>80		
white	**631347**	**126,00**

BENA 150
CW

A-A++ Spectrum A++–E

LED INSIDE





- Simple installation


Product details

220-240V ~50/60Hz | 700mA
Total consumption: 38W
Material: Polymethylacrylate (PMMA) / Steel





Dimensioned drawing



Variant	Item no.	GBP
4400lm | 3000K | CRI>80		
white	**631339**	**153,00**
4600lm | 4000K | CRI>80		
white	**631349**	**153,00**


SIGHT 60
CW

895

A-A++ Spectrum A++–E

LED INSIDE






• Switch on lamp housing


Product details

220-240V ~50/60Hz | 700mA
Total consumption: 20W
Material: Aluminium / Acrylic





Dimensioned drawing



Variant	Item no.	GBP
1490lm | 3000K | CRI>80 black	1001283	180,00
1490lm | 3000K | CRI>80 white	1001284	180,00
1490lm | 3000K | CRI>80 grey	1001285	180,00


SIGHT 115
CW

895

A-A++ Spectrum A++–E

LED INSIDE






Product details

220-240V ~50/60Hz | 700mA
Total consumption: 37.3W
Material: Aluminium / Acrylic





Dimensioned drawing



Variant	Item no.	GBP
3100lm | 3000K | CRI>80 black	1001286	251,10
3100lm | 3000K | CRI>80 white	1001287	251,10
3100lm | 3000K | CRI>80 grey	1001288	251,10








LONG GRILL
CW

A-A++ Spectrum A++–E

LED INSIDE









- Lamp unit, swivels by 270°

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 20W
Material: Aluminium / Acrylic

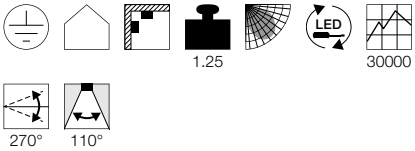

Dimensioned drawing



Variant	Item no.	GBP
1600lm | 3000K | CRI>80		
■ black	**1001020**	**242,10**
1600lm | 3000K | CRI>80		
□ white	**1001019**	**242,10**

OPEN GRILL
CW

892

A-A++ Spectrum A++–E

LED INSIDE









- Lamp unit, swivels by 270°

Product details

220-240V ~50/60Hz | 1050mA
Total consumption: 54W
Material: Aluminium / Acrylic

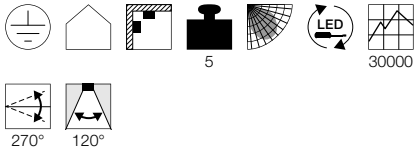

Dimensioned drawing




Variant	Item no.	GBP
4500lm | 3000K | CRI>80		
■ black	**1001293**	**422,10**
4500lm | 3000K | CRI>80		
□ white	**1001294**	**422,10**

PROFESSIONAL IMPRESSION.

3-CIRCUIT HIGH-VOLTAGE TRACKS FOR NEW LIGHT EMPHASIS.

Well thought-out lighting is essential, particularly in locations where there is a lot to see. 3-circuit high-voltage tracks are ideal for shops and trade fair stands. They provide perfect lighting and put products and exhibits in the right light.

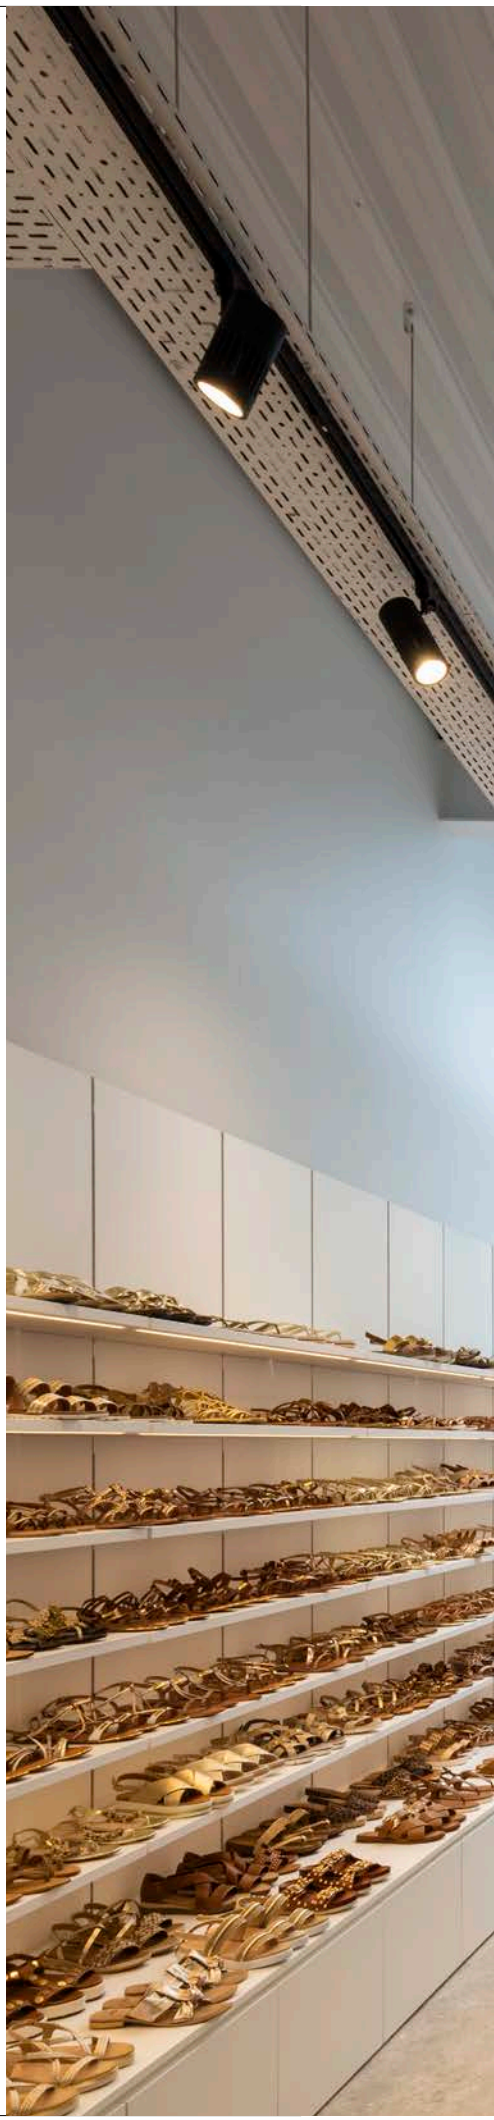


1003026 336
SCARPETTA


176081 356
PARA MI



240V TRACK, 3-CIRCUIT


334

334

335

336

337

342

343

343

344

344

345

345

346

346

346

348

349

349

350

351

351

351

352

352

353

353

354

355

355

356

356

356

357

358

358

359

359

360

360

361

361

361

362

363

363

363

Suitable recessed and surface mounted track systems as well as accessories can be found on pages 339-341, 365-373

Other luminaires and variants can be found online at www.slv.com

EURO SPOT TRACK
3-circuit, DALI, 235mm

886

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT








• Premium LED with CRI>90


Product details

220-240V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium
Dimmable: Dali





Dimensioned drawing



Variant	Item no.	GBP
2900lm | 3000K | CRI | 15°		
■ black	1002809	287,10
2900lm | 3000K | CRI | 15°		
□ white	1002810	287,10
3200lm | 4000K | CRI | 15°		
■ black	1002811	287,10
3200lm | 4000K | CRI | 15°		
□ white	1002812	287,10
2900lm | 3000K | CRI | 38°		
■ black	1002813	287,10
2900lm | 3000K | CRI | 38°		
□ white	1002814	287,10
3200lm | 4000K | CRI | 38°		
■ black	1002815	287,10
3200lm | 4000K | CRI | 38°		
□ white	1002816	287,10
2850lm | 3000K | CRI | 60°		
■ black	1002817	287,10
2850lm | 3000K | CRI | 60°		
□ white	1002818	287,10
3150lm | 4000K | CRI | 60°		
■ black	1002819	287,10
3150lm | 4000K | CRI | 60°		
□ white	1002820	287,10

EURO SPOT TRACK
3-circuit, DALI, 255mm

886

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT








• Premium LED with CRI>90


Product details

220-240V ~50/60Hz | 1200mA
Total consumption: 47W
Material: Aluminium
Dimmable: Dali





Dimensioned drawing



Variant	Item no.	GBP
4800lm | 3000K | CRI>90 | 40°		
■ black	1002663	341,10
4800lm | 3000K | CRI>90 | 40°		
□ white	1002664	341,10
4800lm | 4000K | CRI>90 | 40°		
■ black	1002665	341,10
4800lm | 4000K | CRI>90 | 40°		
□ white	1002666	341,10







EURO SPOT TRACK
3-circuit, DALI, 173mm

886

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW VARIANT









- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 20W
Material: Aluminium
Dimmable: Dali

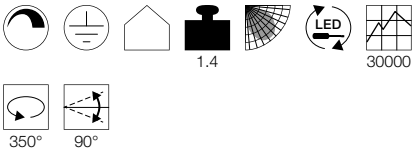

Dimensioned drawing



Variant	Item no.	GBP
1900lm | 3000K | CRI>90 | 15°		
■ black	1002667	188,10
1900lm | 3000K | CRI>90 | 15°		
□ white	1002668	188,10
1900lm | 3000K | CRI>90 | 38°		
■ black	1002669	188,10
1900lm | 3000K | CRI>90 | 38°		
□ white	1002670	188,10
1900lm | 3000K | CRI>90 | 60°		
■ black	1002671	188,10
1900lm | 3000K | CRI>90 | 60°		
□ white	1002672	188,10
2000lm | 4000K | CRI>90 | 15°		
■ black	1002673	188,10
2000lm | 4000K | CRI>90 | 15°		
□ white	1002674	188,10
2000lm | 4000K | CRI>90 | 38°		
■ black	1002675	188,10
2000lm | 4000K | CRI>90 | 38°		
□ white	1002676	188,10
2000lm | 4000K | CRI>90 | 60°		
■ black	1002677	188,10
2000lm | 4000K | CRI>90 | 60°		
□ white	1002678	188,10

STRUCTEC
3-circuit, DALI

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW VARIANT









- Premium LED with CRI>90


Product details

200-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Aluminium
Dimmable: Dali

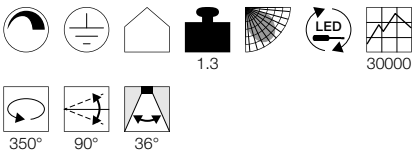


Dimensioned drawing



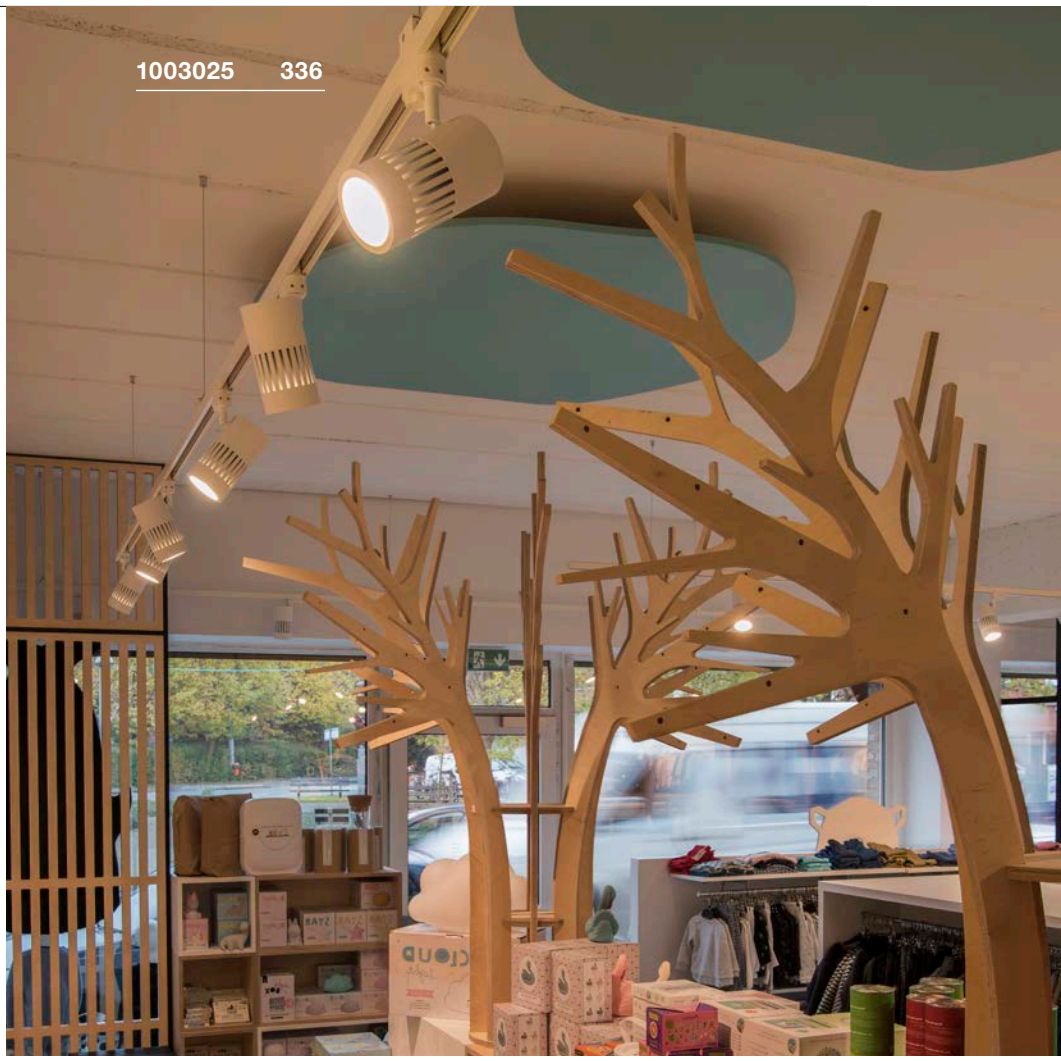



Variant	Item no.	GBP
2500lm | 3000K | CRI97		
■ matt black	1003024	269,10
2500lm | 3000K | CRI97		
□ matt white	1003025	269,10
2600lm | 4000K | CRI97		
■ matt black	1003026	269,10
2600lm | 4000K | CRI97		
□ matt white	1003027	269,10

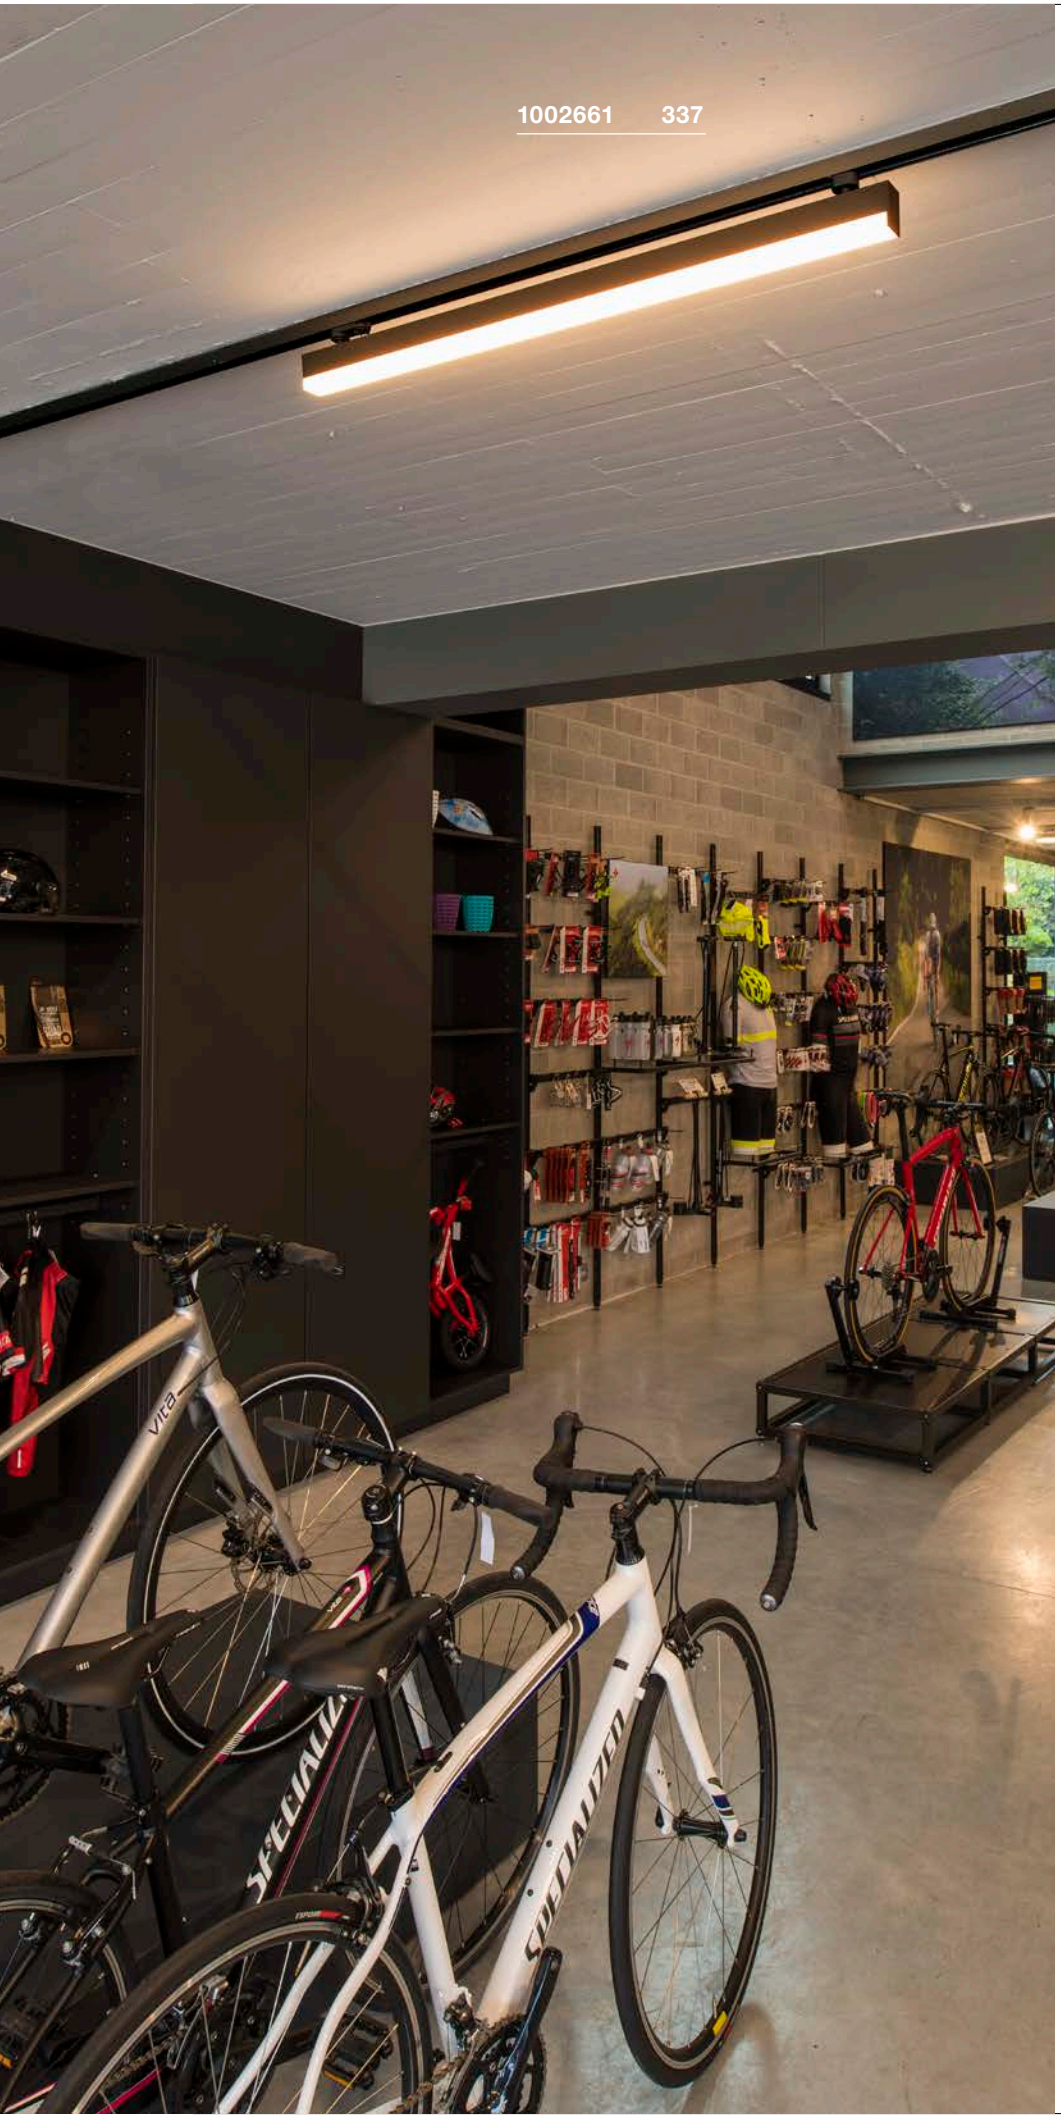

SIGHT TRACK
3-circuit, DALI

895

A-A++ Spectrum A⁺⁺–E

NEW VARIANT






Product details

220-240V 0/~50/60Hz | 700mA
Total consumption: 40W
Material: Aluminium / Acrylic
Dimmable: Dali






Dimensioned drawing





Variant	Item no.	GBP
3100lm | 3000K | CRI>80 ■ black	1002661	332,10
3100lm | 3000K | CRI>80 □ white	1002662	332,10



1002667 335


S-TRACK 3-CIRCUIT SURFACE-MOUNTED TRACK DALI

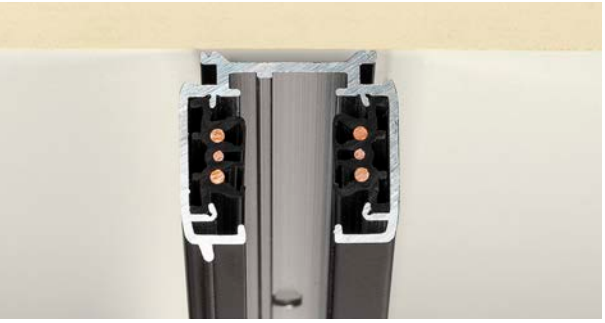

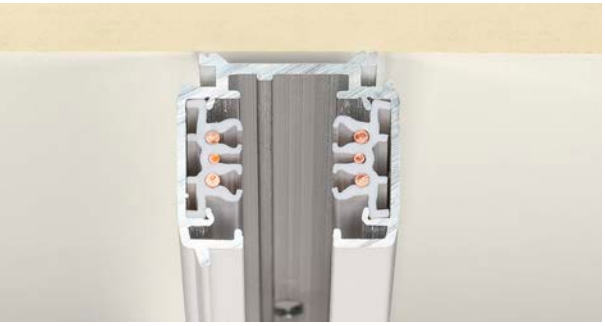

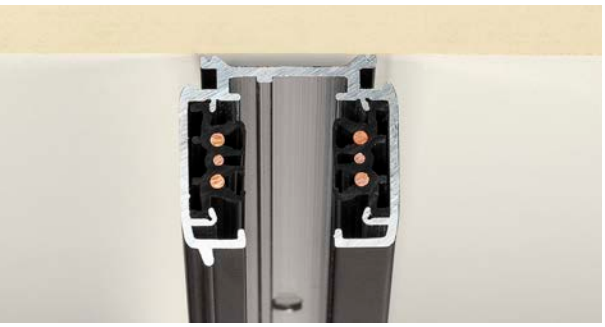


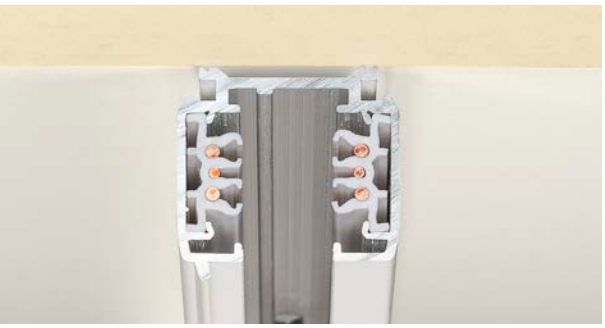





	S-TRACK 3-circuit surface mounted track, DALI, 2m	S-TRACK 3-circuit surface mounted track, DALI, 2m
Rated voltage	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. perm. current	16A	16A
Mech. max. load	300N	300N
Mech. max. load	30 kg	30 kg
Feed-in capability	no	no
Material	Aluminium	Aluminium
Colour	black	white
Length	200 cm	200 cm
Width	3.6 cm	3.6 cm
Height	3.6 cm	3.6 cm
Weight	1.84 kg	1.84 kg
Item no.	**1002631**	**1002632**
GBP	**72,00**	**72,00**





	S-TRACK 3-circuit surface mounted track, DALI, 3m	S-TRACK 3-circuit surface mounted track, DALI, 3m
Rated voltage	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. perm. current	16A	16A
Mech. max. load	300N	300N
Mech. max. load	30 kg	30 kg
Feed-in capability	no	no
Material	Aluminium	Aluminium
Colour	black	white
Length	300 cm	300 cm
Width	3.6 cm	3.6 cm
Height	3.6 cm	3.6 cm
Weight	2.76 kg	2.76 kg
Item no.	**1002633**	**1002634**
GBP	**112,50**	**112,50**


1001002 356

ACCESSORIES S-TRACK 3-CIRCUIT SURFACE-MOUNTED TRACK DALI

Feed-in, DALI, earth on left side

16A max.
Polycarbonate (PC)
L: 13.9 cm W: 3.5 cm H: 3.3 cm
Weight: 0.06 kg
1 pc.



Variant	Item no.	GBP
black	1002638	14,40
white	1002640	14,40

LT-connector, DALI, earth on outside

16A max.
Polycarbonate (PC)
L: 11.9 cm W: 11.9 cm H: 3.3 cm
Weight: 0.13 kg
1 pc.



Variant	Item no.	GBP
black	1002648	25,20
white	1002650	25,20

Ceiling suspension

Stainless Steel / Brass
L: 500 cm
Weight: 0.2 kg
Max. 10 kg
2 pcs.



Variant	Item no.	GBP
nickel	1002845	31,50

Feed-in, DALI, earth on right side

10A max.
Polycarbonate (PC)
L: 13.9 cm W: 3.5 cm H: 3.3 cm
Weight: 0.06 kg
1 pc.



Variant	Item no.	GBP
black	1002637	14,40
white	1002639	14,40

T-connector, DALI, earth on right side

16A max.
Polycarbonate (PC)
L: 20.3 cm W: 11.9 cm H: 3.3 cm
Weight: 0.2 kg
1 pc.



Variant	Item no.	GBP
black	1002651	29,70
white	1002653	29,70

3-circuit adapter with hooks

Plastic / Steel
Ø: 2.6 cm H: 5.2 cm
Weight: 0.01 kg
Max. 10 kg
1 pc.



Variant	Item no.	GBP
black	175190	2,00
white	1001393	2,00

Mini connector, DALI

16A max.
Polycarbonate (PC)
L: 10.6 cm W: 2.5 cm H: 2.8 cm
Weight: 0.04 kg
1 pc.



Variant	Item no.	GBP
black	1002641	7,70
white	1002642	7,70

T-connector, DALI, earth on left side

16A max.
Polycarbonate (PC)
L: 20.3 cm W: 11.9 cm H: 3.3 cm
Weight: 0.2 kg
1 pc.



Variant	Item no.	GBP
black	1002652	29,70
white	1002654	29,70

Steel wire suspension kit with bar

Aluminium / Plastic
L: 100 cm W: 6 cm H: 4 cm
Weight: 0.2 kg
Max. 10 kg
1 pc.

Variant	Item no.	GBP
black	175160	24,80
white	1001390	24,80

Long connector, DALI

10A max.
Polycarbonate (PC)
L: 20.3 cm W: 3.5 cm H: 3.3 cm
Weight: 0.13 kg
1 pc.



Variant	Item no.	GBP
black	1002643	25,20
white	1002644	25,20

X-connector, DALI

16A max.
Polycarbonate (PC)
L: 20.3 cm W: 20.3 cm H: 3.3 cm
Weight: 0.27 kg
1 pc.



Variant	Item no.	GBP
black	1002655	47,70
white	1002656	47,70

End cap

Plastic
L: 3.5 cm W: 3.3 cm H: 3.2 cm
Weight: 0.01 kg
1 pc.



Variant	Item no.	GBP
black	175060	1,50
white	1001380	1,50

Flexible connector, DALI

16A max.
Polycarbonate (PC)
L: 28.5 cm W: 3.5 cm H: 3.3 cm
Weight: 0.18 kg
1 pc.



Variant	Item no.	GBP
black	1002645	40,50
white	1002646	40,50

Mounting clip, DALI

Steel
L: 4 cm W: 3.4 cm H: 1.25 cm
Weight: 0.02 kg
1 pc.



Variant	Item no.	GBP
black	1002657	5,90
white	1002658	5,90

L-connector, DALI, earth on inside

16A max.
Polycarbonate (PC)
L: 11.9 cm W: 11.9 cm H: 3.3 cm
Weight: 0.13 kg
1 pc.



Variant	Item no.	GBP
black	1002647	25,20
white	1002649	25,20

Adapter, DALI

10A max.
Polycarbonate (PC)
L: 11.3 cm W: 5.5 cm H: 3.3 cm
Weight: 0.062 kg
Max. 5 kg
1 pc.



Variant	Item no.	GBP
black	1002660	14,00
white	1002659	14,00

SPOT TRACK
3-circuit, E27

896

D-A+ Spectrum A⁺⁺–E









- Stable joint

Product details

230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED E27 11.5W 38°
3000K 760lm EEI=A+
12kWh/1000h
Item no. 551933 | 34,20 GBP




LED E27 17W 45°
3000K 1430lm EEI=A+
17kWh/1000h
Item no. 560473 | 60,30 GBP



Lamp details

max. 75W QPAR20
optional: QPAR30

Variant	Item no.	GBP
E27 | QPAR20 ■ black	**152200**	**40,50**
E27 | QPAR20 □ white	**152201**	**40,50**
E27 | QPAR20 ■ grey	**152204**	**40,50**

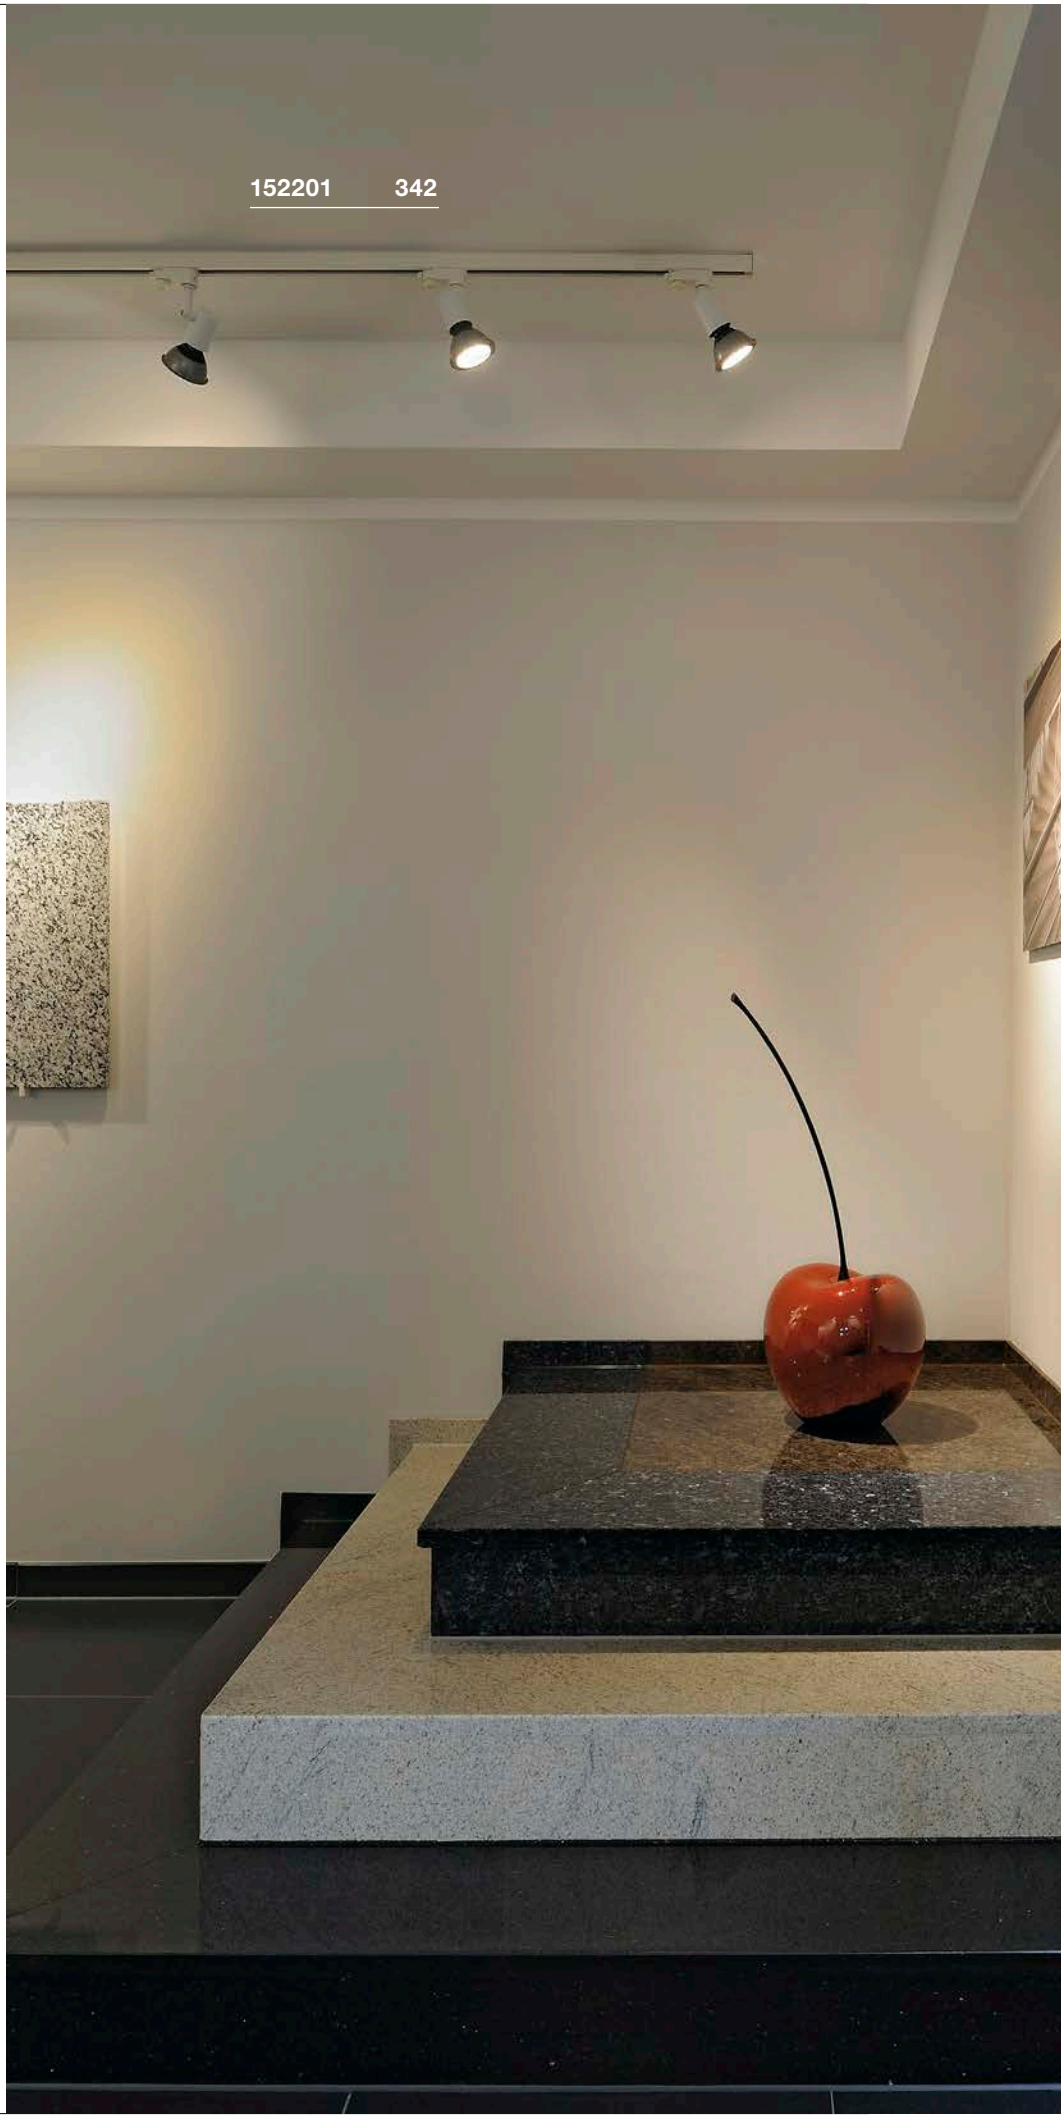





AVO TRACK
3-circuit, QPAR51

884

E-A++ Spectrum A++–E









Product details

230V ~50/60Hz
Material: Steel



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details

max. 50W QPAR51
Ø: 5 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**152640**	**34,20**
GU10 | QPAR51		
□ white	**152641**	**34,20**
GU10 | QPAR51		
■ grey	**152644**	**34,20**

ALTRA DICE TRACK
3-circuit, QPAR51

883

E-A++ Spectrum A++–E









Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details

max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**152320**	**81,00**
GU10 | QPAR51		
□ white	**152321**	**81,00**
GU10 | QPAR51		
■ grey	**152324**	**81,00**

LIGHT EYE® 150 TRACK
3-circuit, QPAR51

890

E-A++ Spectrum A⁺⁺–E









- Luminaire unit, rotates by 350° and swivels by 90°

Product details
230V ~50Hz
Material: Steel



Dimensioned drawing



Recommended lamp

GU10 7W 25°
3000K 620lm EEI=A+
8kWh/1000h
Item no. 1001570 | 20,70 GBP



LED GU10 7.9W 40°
4000K 760lm EEI=A+
8kWh/1000h
Item no. 560724 | 20,70 GBP



Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 ■ black	1000707	99,00
GU10 | QPAR111 white / chrome	1000708	99,00
GU10 | QPAR111 chrome	153102	108,00

PARA CONE 14
3-circuit, QPAR51

893

E-A++ Spectrum A⁺⁺–E

NEW VARIANT








Product details
220-240V ~50/60Hz
Material: Steel
Product dimensions: Ø: 13.5 cm H: 22.50 cm




Dimensioned drawing




Lamp details
max. 25W QPAR51

Variant	Item no.	GBP
GU10 ■ shiny black	1002876	67,50
GU10 shiny white	1002877	65,70
GU10 copper	1002878	67,50



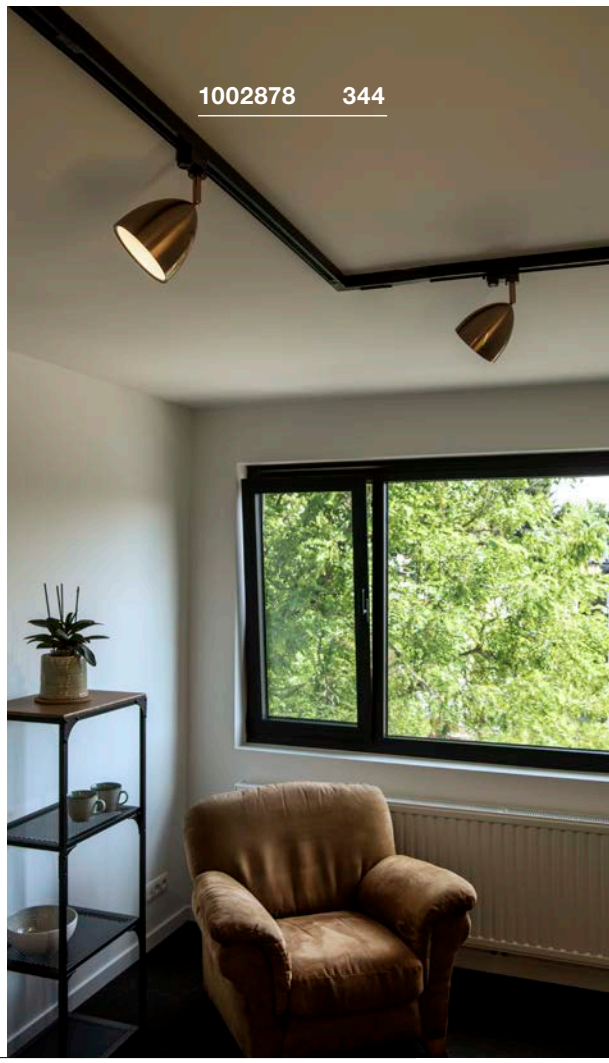



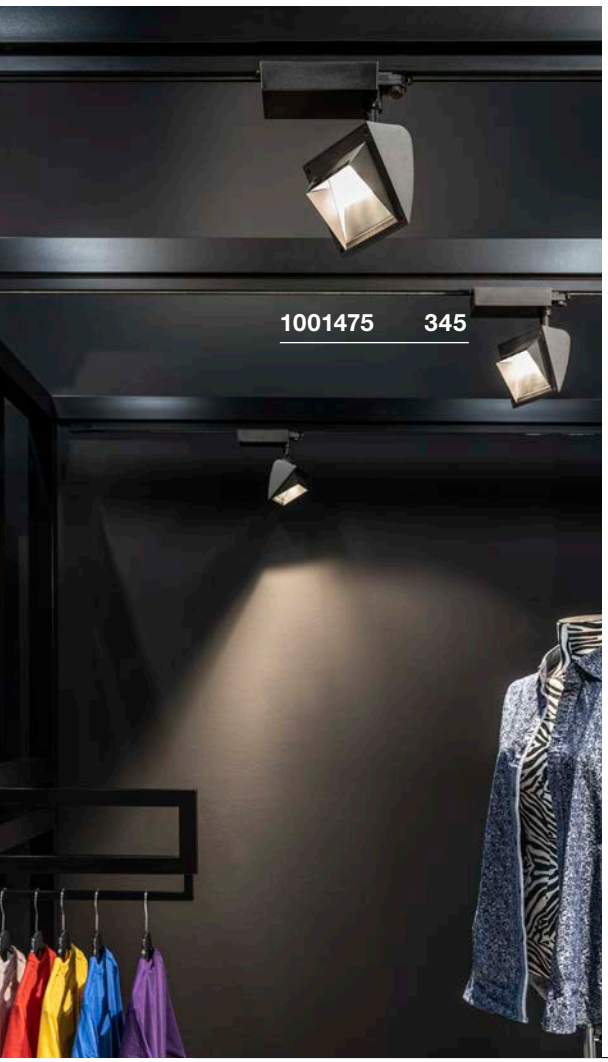

LENITO TRACK
3-circuit

889

A-A++ Spectrum A⁺⁺–E









- High efficiency
- Wide, homogeneous lighting

Product details

220-240V ~50/60Hz | 160mA
Total consumption: 23W
Material: Aluminium / Polycarbonate (PC)

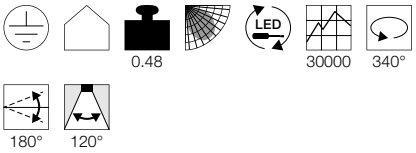

Dimensioned drawing



Variant	Item no.	GBP
2500lm | 3000K | CRI>80		
white	**1001466**	**153,00**
2450lm | 3000K | CRI>80		
black	**1001467**	**153,00**

MERADO FLOOD TRACK
3-circuit, TRIAC

891

A-A++ Spectrum A⁺⁺–E









- Asymmetric light distribution
- For uniform lighting

Product details

220-240V ~50/60Hz | 1000mA
Total consumption: 40W
Material: Aluminium / Plastic
Dimmable: Triac C, Triac L

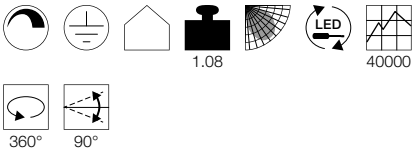

Dimensioned drawing



Variant	Item no.	GBP
3000lm | 3000K | CRI>80		
white	**1001470**	**180,00**
3000lm | 3000K | CRI>80		
black	**1001471**	**180,00**
3200lm | 4000K | CRI>80		
white	**1001474**	**180,00**
3200lm | 4000K | CRI>80		
black	**1001475**	**180,00**

HELIA 50 TRACK
3-circuit

888

A-A++ Spectrum A++–E

LED INSIDE



NOBLO SPOT
3-circuit

892

A-A++ Spectrum A++–E

LED INSIDE







ENOLA C TRACK
3-circuit

886

A-A++ Spectrum A++–E

LED INSIDE









• Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium

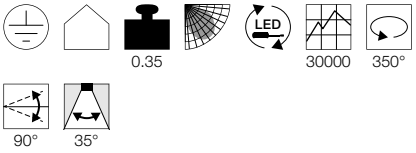


Dimensioned drawing




Variant	Item no.	GBP
750lm | 3000K | CRI>90		
■ black	**152960**	**99,00**
750lm | 3000K | CRI>90		
□ white	**152961**	**99,00**

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.5W
Material: Aluminium

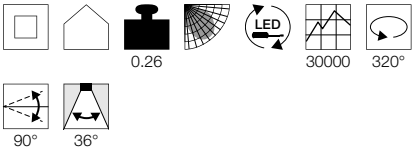


Dimensioned drawing




Variant	Item no.	GBP
620lm | 2700K | CRI>80		
■ black	**1001865**	**50,40**
620lm | 2700K | CRI>80		
□ white	**1001866**	**50,40**
620lm | 2700K | CRI>80		
■ grey	**1001867**	**50,40**

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium

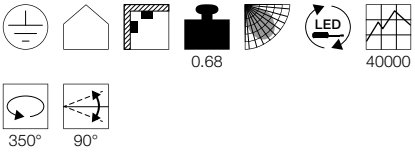


Dimensioned drawing



Variant	Item no.	GBP
900lm | 3000K | CRI>80 | 35°		
■ black	**152420**	**153,00**
900lm | 3000K | CRI>80 | 35°		
□ white	**152421**	**153,00**
900lm | 3000K | CRI>80 | 55°		
■ black	**152430**	**153,00**
900lm | 3000K | CRI>80 | 55°		
□ white	**152431**	**153,00**


152960 346
1001431 268

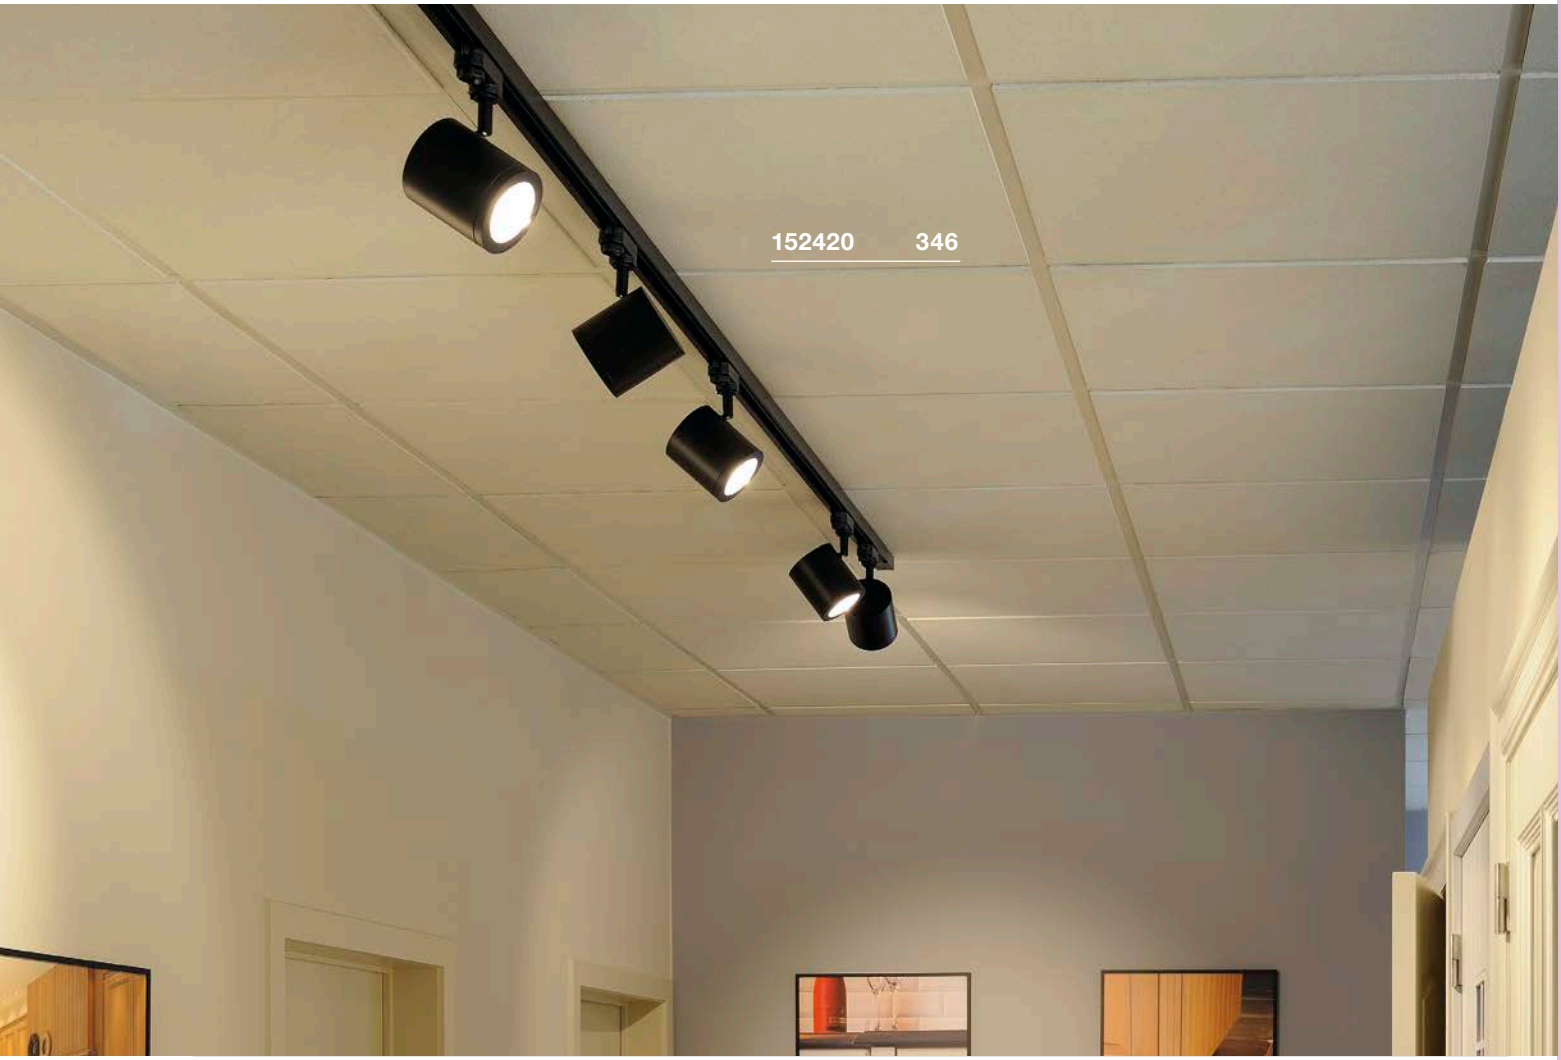
152420 346

SPOT T
3-circuit

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz
Total consumption: 39W
Material: Aluminium / Plastic

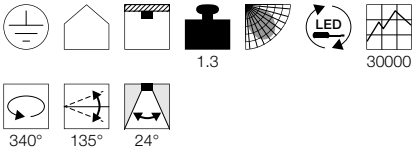


Dimensioned drawing



Variant	Item no.	GBP
3100lm | 3000K | CRI>80		
■ black	**1001269**	**171,00**
3100lm | 3000K | CRI>80		
□ white	**1001270**	**171,00**



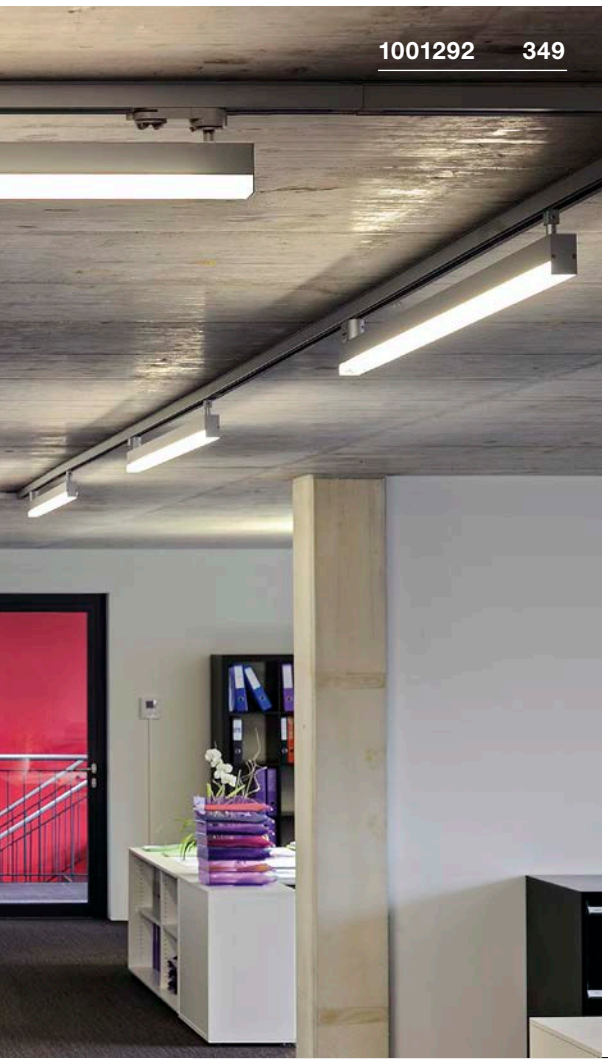

BILAS TRACK
3-circuit, TRIAC

885

A-A++ Spectrum A⁺⁺–E

LED INSIDE







• 240V LED

Product details

230V ~50/60Hz
Total consumption: 16W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

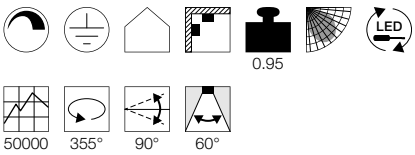

Dimensioned drawing



Variant	Item no.	GBP
1000lm | 2700K | CRI>80		
■ matt black	**152980**	**224,10**
1000lm | 2700K | CRI>80		
□ matt white	**152981**	**224,10**

SIGHT TRACK
3-circuit

895

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

220-240V ~50/60Hz | 700mA
Total consumption: 37W
Material: Aluminium / Acrylic

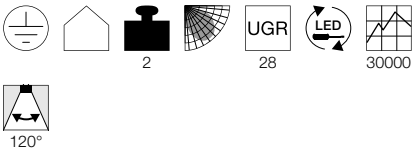

Dimensioned drawing



Variant	Item no.	GBP
3100lm | 3000K | CRI>80		
■ black	**1001289**	**278,10**
3100lm | 3000K | CRI>80		
□ white	**1001290**	**278,10**
3100lm | 3000K | CRI>80		
■ grey	**1001292**	**278,10**

PURI TRACK
3-circuit, QPAR51


894


E-A++ Spectrum A++–E








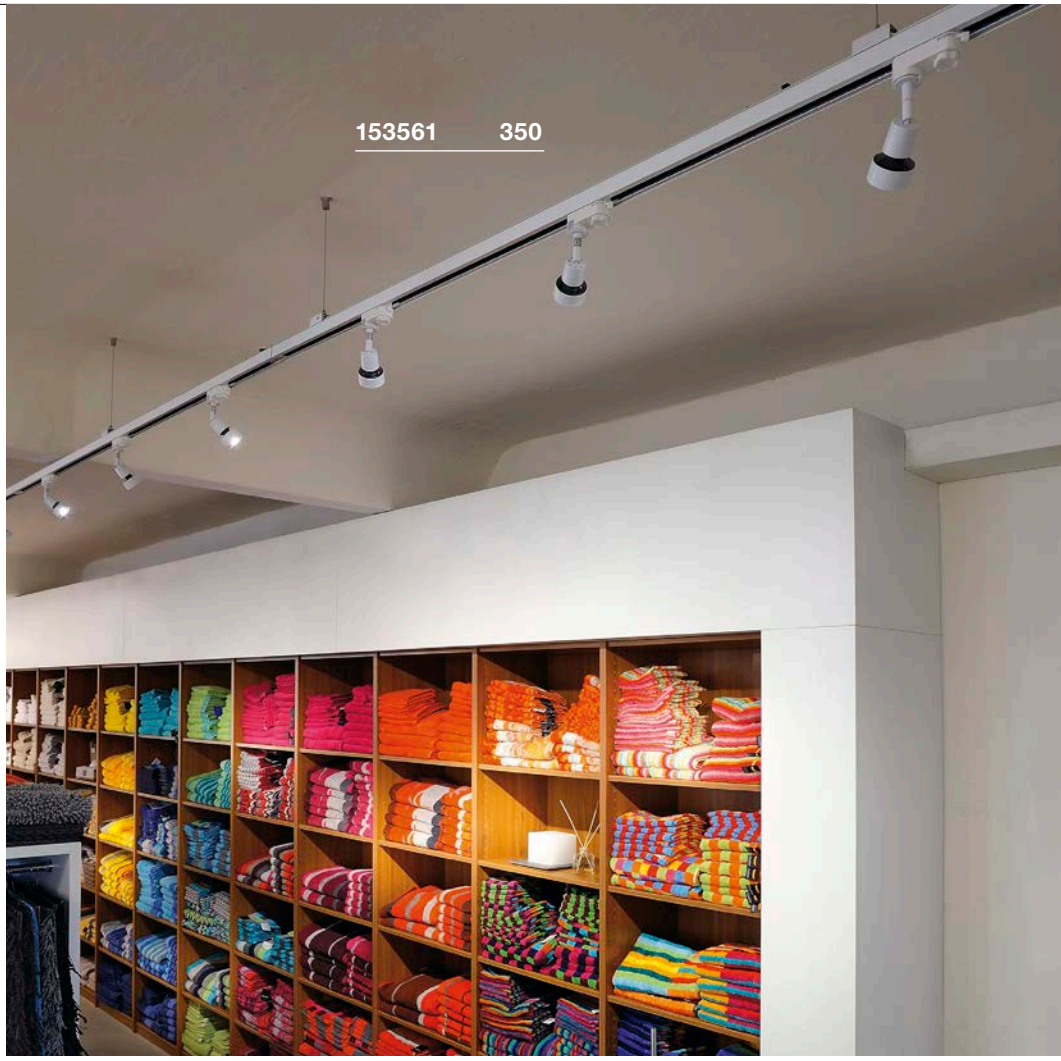

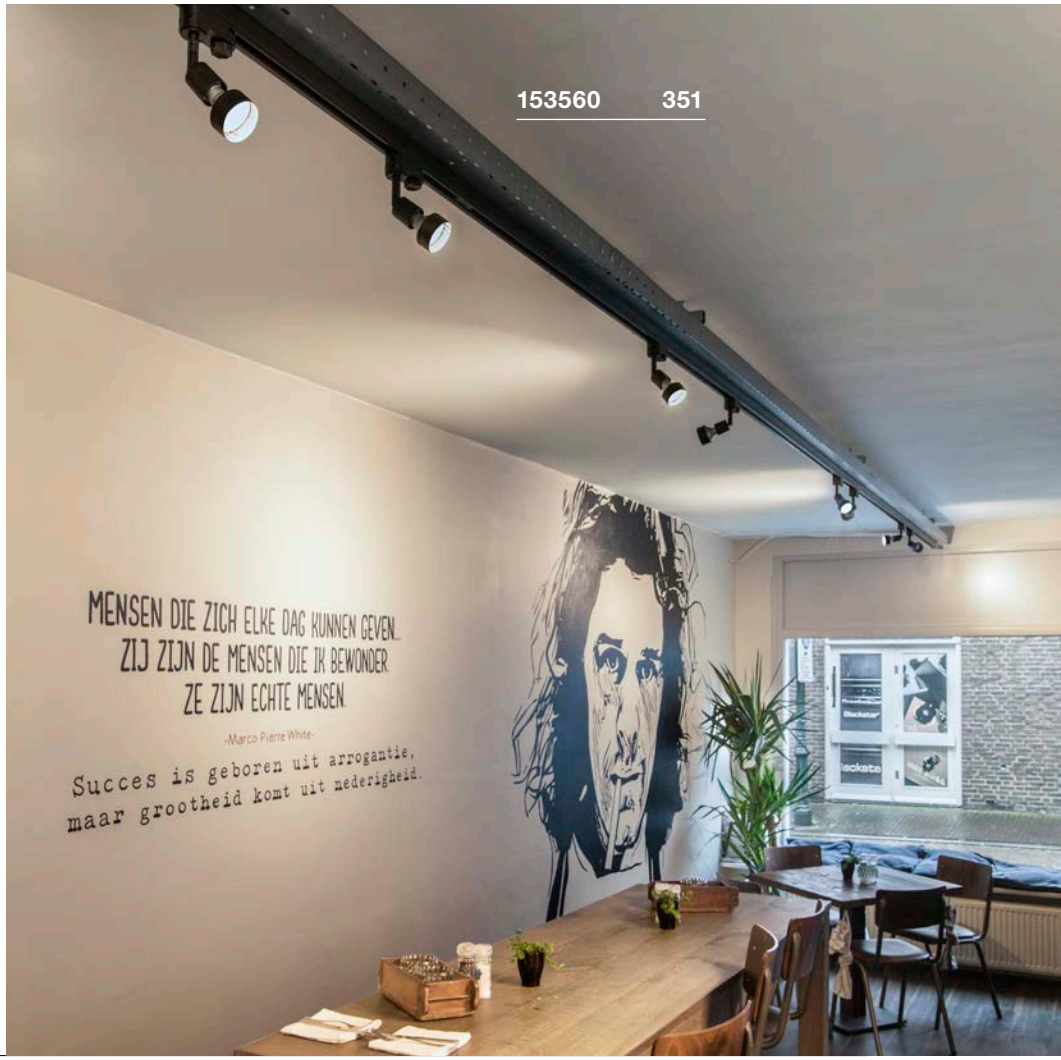


Product details

220-240V ~50/60Hz
Material: Aluminium / Polycarbonate (PC)



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP



Lamp details

max. 50W QPAR51
Ø: 11 cm max. L: 7.8 cm max.
optional: QPAR111

Variant	Item no.	GBP
GU10 | QPAR51 ■ matt black	153560	29,70
GU10 | QPAR51 □ white	153561	29,70
GU10 | QPAR51 ■ grey	153564	29,70

PURI TRACK
3-circuit, QPAR51

894

E-A++ Spectrum A++–E







BIMA
3-circuit, single, QPAR51

885

E-A++ Spectrum A++–E







BIMA
3-circuit, double, QPAR51

885

E-A++ Spectrum A++–E








- The lamp heads can be swivelled in opposite directions

Product details

230V ~50Hz
Material: Aluminium / Plastic



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP




Lamp details

max. 10W QPAR51


Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**1001871**	**34,20**
GU10 | QPAR51		
□ white	**1001872**	**34,20**
GU10 | QPAR51		
■ grey	**1001873**	**34,20**

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP




Lamp details

max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.


Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**152240**	**49,50**
GU10 | QPAR51		
□ matt white	**152241**	**49,50**
GU10 | QPAR51		
■ grey	**152242**	**49,50**

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP



Lamp details

2x max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**152230**	**72,00**
GU10 | QPAR51		
□ matt white	**152231**	**72,00**
GU10 | QPAR51		
■ grey	**152232**	**72,00**

TEC KALU TRACK
3-circuit, double, TRIAC

897

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 700mA
Total consumption: 31W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C





Dimensioned drawing



Variant	Item no.	GBP
1900lm | 3000K | CRI>80 | 24°		
■ black	**1001427**	**224,10**
1900lm | 3000K | CRI>80 | 24°		
◪ white / black	**1001428**	**224,10**
1900lm | 3000K | CRI>80 | 60°		
■ black	**1001419**	**224,10**
1900lm | 3000K | CRI>80 | 60°		
◪ white / black	**1001420**	**224,10**

TEC KALU TRACK
3-circuit, quad, TRIAC

897

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 700mA
Total consumption: 60W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C





Dimensioned drawing



Variant	Item no.	GBP
3800lm | 3000K | CRI>80 | 24°		
■ black	**1001429**	**359,10**
3800lm | 3000K | CRI>80 | 24°		
◪ white / black	**1001430**	**359,10**
3800lm | 3000K | CRI>80 | 60°		
■ black	**1001421**	**359,10**
3800lm | 3000K | CRI>80 | 60°		
◪ white / black	**1001422**	**359,10**









EURO CUBE
3-circuit

A-A++ Spectrum A++–E

LED INSIDE









• Premium LED with CRI>90

Product details

220-240V ~50/60Hz
Total consumption: 28.5W
Material: Aluminium

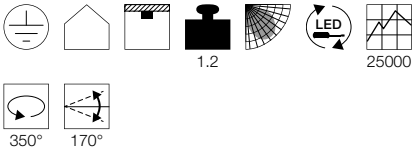

Dimensioned drawing



Variant	Item no.	GBP
2100lm | 3000K | CRI>90 | 60°		
■ black	**152750**	**224,10**
2100lm | 3000K | CRI>90 | 60°		
□ white	**152751**	**224,10**
2100lm | 3000K | CRI>90 | 60°		
■ grey	**152754**	**224,10**
1950lm | 3000K | CRI>90 | 90°		
■ black	**152760**	**224,10**
1950lm | 3000K | CRI>90 | 90°		
□ white	**152761**	**224,10**
1950lm | 3000K | CRI>90 | 90°		
■ grey	**152764**	**224,10**

EURO CUBE
3-circuit

A-A++ Spectrum A++–E

LED INSIDE









• Premium LED with CRI>90

Product details

220-240V ~50/60Hz
Total consumption: 28.5W
Material: Aluminium

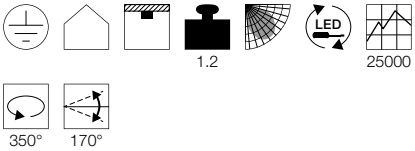

Dimensioned drawing



Variant	Item no.	GBP
2150lm | 4000K | CRI>90 | 60°		
■ black	**152780**	**224,10**
2150lm | 4000K | CRI>90 | 60°		
□ white	**152781**	**224,10**
2150lm | 4000K | CRI>90 | 60°		
■ grey	**152784**	**224,10**
2050lm | 4000K | CRI>90 | 90°		
■ black	**152790**	**224,10**
2050lm | 4000K | CRI>90 | 90°		
□ white	**152791**	**224,10**
2050lm | 4000K | CRI>90 | 90°		
■ grey	**152794**	**224,10**

SUPROS 78 TRACK
3-circuit, TRIAC

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE











Product details

220-240V ~50/60Hz | 250mA
Total consumption: 12W
Material: Aluminium
Dimmable: Triac C, Triac L

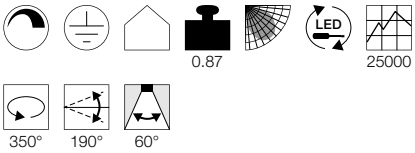

Dimensioned drawing



Recommended accessories

Lens, 20°
Item no. 116302 |3,00 GBP



Lens, 40°
Item no. 116304 |3,00 GBP




■ Lamp shield
Item no. 1000677 |19,80 GBP



□ Lamp shield
Item no. 1000678 |19,80 GBP



Variant	Item no.	GBP
700lm | 3000K | CRI>80 ■ black	**152660**	**112,50**
700lm | 3000K | CRI>80 □ white	**152661**	**112,50**

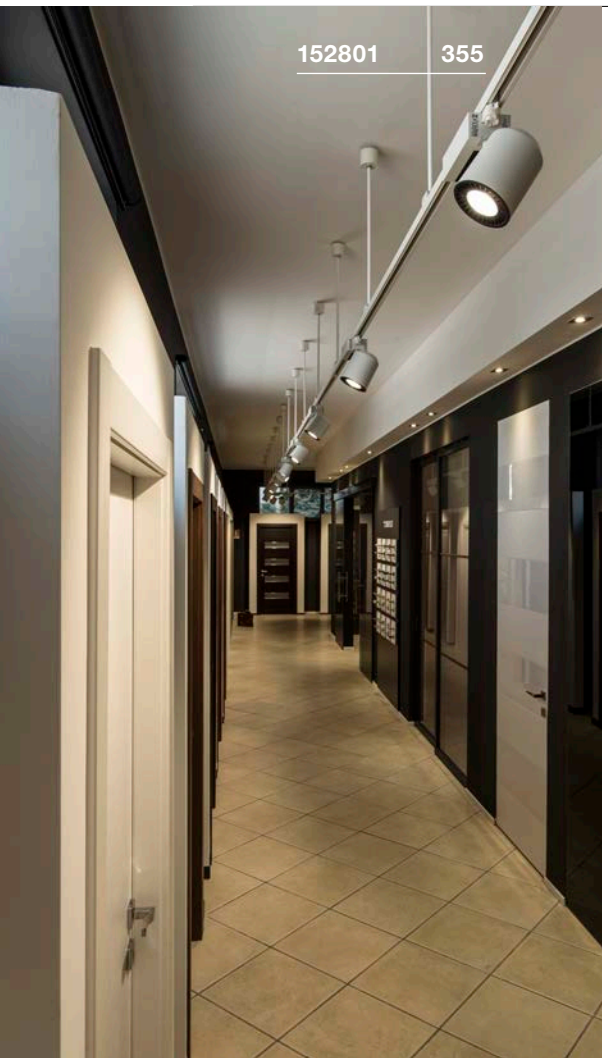



SUPROS TRACK
3-circuit

897

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 750mA
Total consumption: 31W
Material: Aluminium

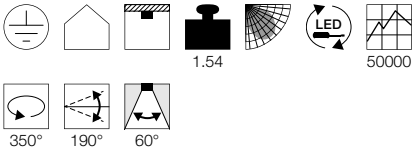

Dimensioned drawing



Note

Other colour temperatures available on request

Recommended accessories

Lens, 20°
Item no. 116302 |3,00 GBP



Lens, 40°
Item no. 116304 |3,00 GBP



■ Lamp shield
Item no. 1000677 |19,80 GBP



□ Lamp shield
Item no. 1000678 |19,80 GBP



Variant	Item no.	GBP
2600lm | 3000K | CRI>80 ■ black	**152620**	**206,10**
2600lm | 3000K | CRI>80 □ white	**152621**	**206,10**
2850lm | 4000K | CRI>80 ■ black	**152680**	**206,10**
2850lm | 4000K | CRI>80 □ white	**152681**	**206,10**

SUPROS TRACK
3-circuit

897

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 950mA
Total consumption: 36W
Material: Aluminium / Glass

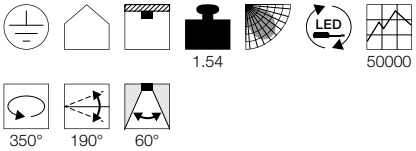

Dimensioned drawing



Recommended accessories

Lens, 20°
Item no. 116302 |3,00 GBP



Lens, 40°
Item no. 116304 |3,00 GBP



■ Lamp shield
Item no. 1000677 |19,80 GBP



□ Lamp shield
Item no. 1000678 |19,80 GBP



Variant	Item no.	GBP
3100lm | 3000K | CRI>80 ■ black	**152800**	**224,10**
3100lm | 3000K | CRI>80 □ white	**152801**	**224,10**
3300lm | 4000K | CRI>80 ■ black	**152810**	**224,10**
3300lm | 4000K | CRI>80 □ white	**152811**	**224,10**

STRUCTEC
3-circuit

897

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90

Product details

220-240V ~50/60Hz
Total consumption: 28W
Material: Aluminium

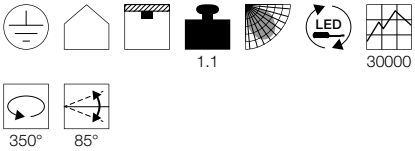

Dimensioned drawing



Variant	Item no.	GBP
2700lm | 3000K | CRI>90 | 36°		
■ black	1000980	171,00
2700lm | 3000K | CRI>90 | 36°		
□ white	1000981	171,00
2700lm | 3000K | CRI>90 | 36°		
■ grey	1000982	171,00
2650lm | 3000K | CRI>90 | 60°		
■ black	1000983	171,00
2650lm | 3000K | CRI>90 | 60°		
□ white	1000984	171,00
2650lm | 3000K | CRI>90 | 60°		
■ grey	1000985	171,00
2800lm | 4000K | CRI>90 | 36°		
■ black	1000986	171,00
2800lm | 4000K | CRI>90 | 36°		
□ white	1000987	171,00
2800lm | 4000K | CRI>90 | 36°		
■ grey	1000988	171,00
2750lm | 4000K | CRI>90 | 60°		
■ black	1000989	171,00
2750lm | 4000K | CRI>90 | 60°		
□ white	1000990	171,00
2750lm | 4000K | CRI>90 | 60°		
■ grey	1000991	171,00

STRUCTEC
3-circuit

897

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90

Product details

220-240V ~50/60Hz
Total consumption: 35W
Material: Aluminium

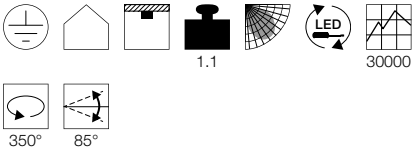

Dimensioned drawing



Variant	Item no.	GBP
3200lm | 3000K | CRI>90 | 36°		
■ black	1000992	215,10
3200lm | 3000K | CRI>90 | 36°		
□ white	1000993	215,10
3200lm | 3000K | CRI>90 | 36°		
■ grey	1000994	215,10
3150lm | 3000K | CRI>90 | 60°		
■ black	1000995	215,10
3150lm | 3000K | CRI>90 | 60°		
□ white	1000996	215,10
3150lm | 3000K | CRI>90 | 60°		
■ grey	1000997	215,10
3450lm | 4000K | CRI>90 | 36°		
■ black	1000998	215,10
3450lm | 4000K | CRI>90 | 36°		
□ white	1000999	215,10
3450lm | 4000K | CRI>90 | 36°		
■ grey	1001000	215,10
3400lm | 4000K | CRI>90 | 60°		
■ black	1001001	215,10
3400lm | 4000K | CRI>90 | 60°		
□ white	1001002	215,10
3400lm | 4000K | CRI>90 | 60°		
■ grey	1001003	215,10

STRUCTEC
3-circuit, R9

897

A-A++ Spectrum A++–E









- Premium LED
- High colour rendering characteristic R9/CRI>95
- Narrow design, versatile integration

Product details


220-240V ~50/60Hz | 900mA
Total consumption: 35W
Material: Aluminium

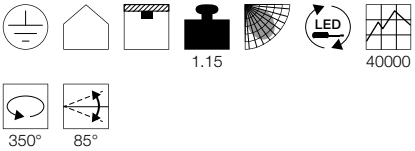


Dimensioned drawing



Variant	Item no.	GBP
2460lm | 3000K | CRI>95 | 36°		
■ black	176080	215,10
2460lm | 3000K | CRI>95 | 36°		
□ white	176081	215,10
2250lm | 3000K | CRI>95 | 60°		
■ black	176090	215,10
2250lm | 3000K | CRI>95 | 60°		
□ white	176091	215,10

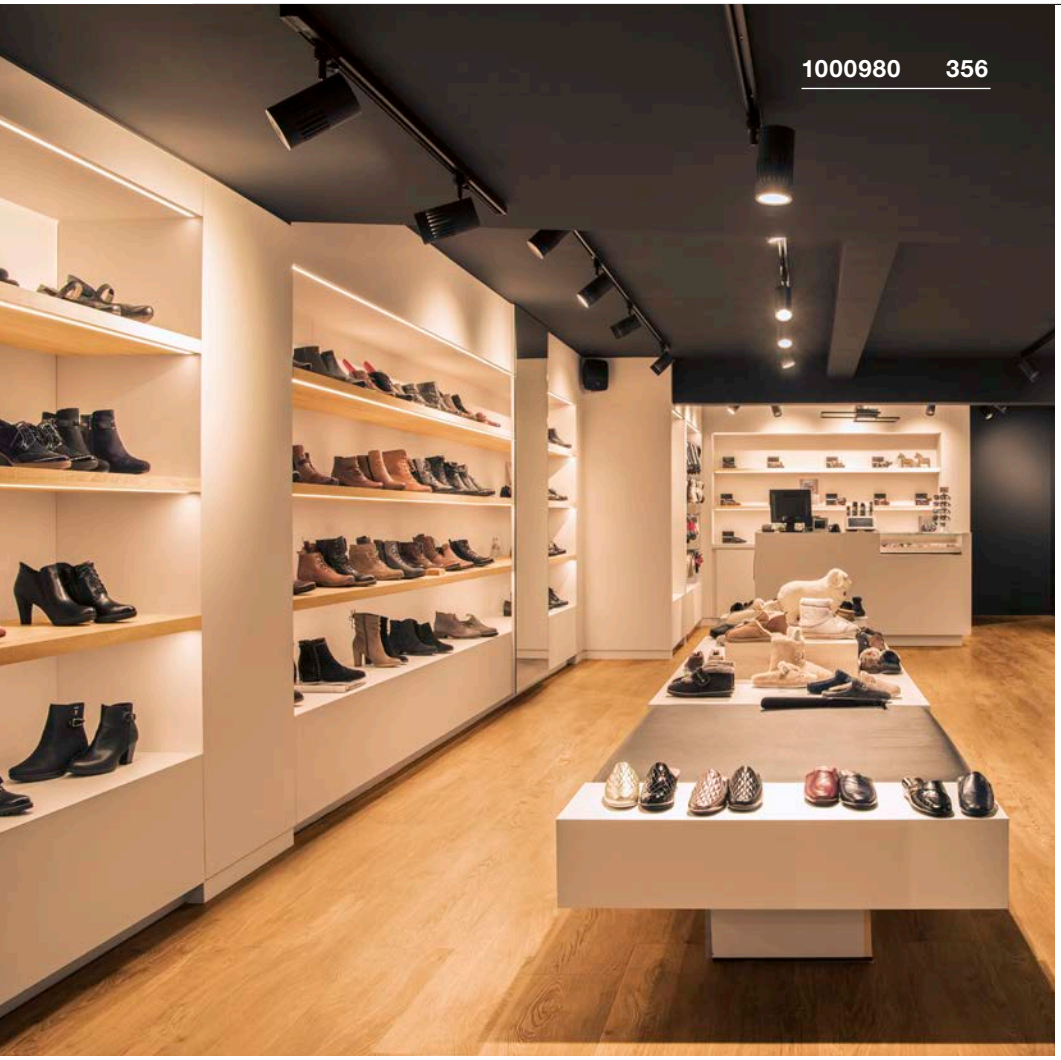



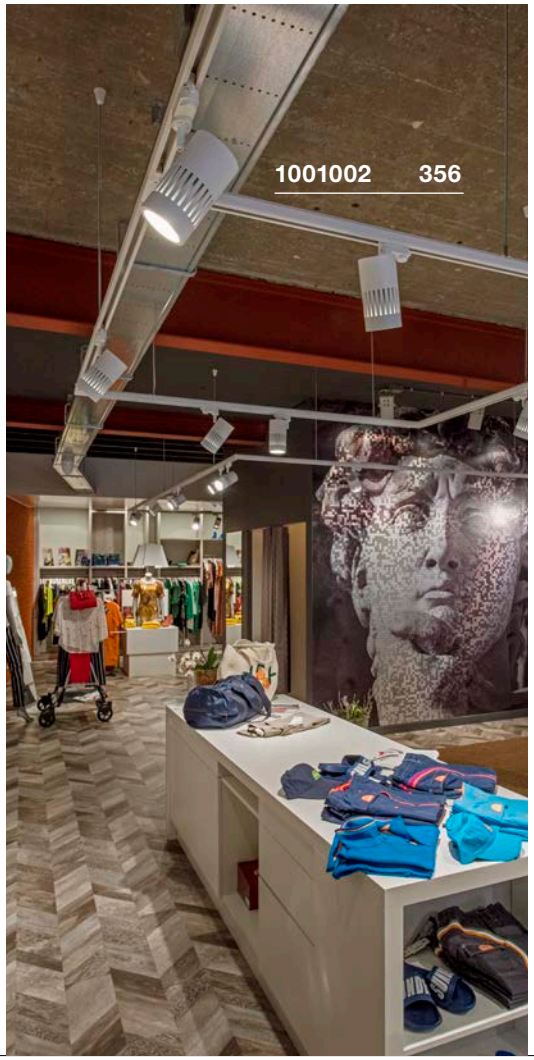

STRUCTEC ZOOM
3-circuit

896

A-A++ Spectrum A⁺⁺–E

LED INSIDE








- Premium LED with CRI>90
- Adjustable from 25° to 60°


Product details

220-240V ~50/60Hz
Total consumption: 35W
Material: Aluminium





Dimensioned drawing



Variant	Item no.	GBP
3000lm | 3000K | CRI>90 ■ black	1000656	224,10
3000lm | 3000K | CRI>90 □ white	1000657	224,10
3000lm | 3000K | CRI>90 ■ grey	1000658	224,10

KALU TRACK
3-circuit, QPAR111

889

E-A++ Spectrum A++–E









Product details

230V ~50Hz |
Material: Aluminium / Plastic



Dimensioned drawing



Recommended lamp

GU10 7.9W 40°
2700K 730lm EEI=A+
8kWh/1000h
Item no. 560732 | 20,70 GBP

LED GU10 13W 140°
4000K 1100lm EEI=A+
13kWh/1000h
Item no. 1001245 | 76,50 GBP



Lamp details

max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
■ black	**152610**	**85,50**
GU10 | QPAR111		
□ white	**152611**	**85,50**
GU10 | QPAR111		
■ grey	**152614**	**85,50**

KALU TRACK
3-circuit, QR111

889

D-A+ Spectrum A++–E








Product details

230V ~50Hz | 12V AC
Material: Aluminium / Plastic



Dimensioned drawing



Recommended lamp

G53 15W 140°
2700K 680lm EEI=A
6kWh/1000h
Item no. 551612 | 49,50 GBP




LED G53 15W 40°
3000K 760lm EEI=A
17kWh/1000h
Item no. 560234 | 90,00 GBP



Lamp details

max. 50W QR111

Variant	Item no.	GBP
G53 | QR111		
■ black	**153580**	**117,00**
G53 | QR111		
□ white	**153581**	**117,00**
G53 | QR111		
■ grey	**153584**	**117,00**

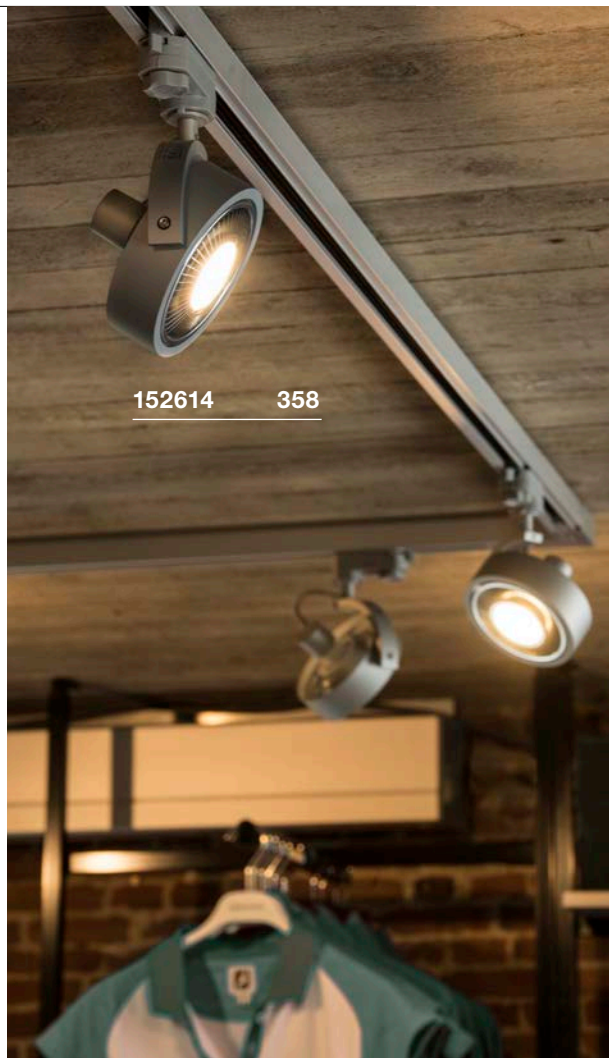







KALU TRACK
3-circuit, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE










Product details

220-240V ~50/60Hz
Total consumption: 13W
Material: Aluminium
Dimmable: Triac C





Dimensioned drawing



Variant	Item no.	GBP
860lm | 3000K | CRI>80		
■ black	**152600**	**197,10**
860lm | 3000K | CRI>80		
□ white	**152601**	**197,10**

KALU TRACK
3-circuit, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE









- Luminaire unit, can be rotated by 340° and swivelled by 120°


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 17W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C





Dimensioned drawing



Variant	Item no.	GBP
1000lm | 3000K | CRI>80 | 24°		
■ black	**153600**	**188,10**
1000lm | 3000K | CRI>80 | 60°		
■ black	**1000769**	**188,10**

EURO SPOT TRACK
3-circuit, QPAR51

886

E-A++ Spectrum A++–E









Product details

230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP



Lamp details

max. 25W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 ■ black	**153850**	**63,00**
GU10 | QPAR51 □ white	**153851**	**63,00**
GU10 | QPAR51 ■ grey	**153854**	**63,00**

EURO SPOT TRACK
3-circuit, QPAR111

886

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP



LED GU10 7W 13°
3000K 660lm EEI=A+
8kWh/1000h
Item no. 1001568 | 20,70 GBP



Lamp details

max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 ■ black	**153420**	**81,00**
GU10 | QPAR111 □ white	**153421**	**81,00**
GU10 | QPAR111 ■ grey	**153424**	**81,00**





EURO SPOT TRACK
3-circuit

886


A-A++ Spectrum A⁺⁺–E

LED INSIDE




Product details

220-240V ~50/60Hz
Total consumption: 11W
Material: Aluminium

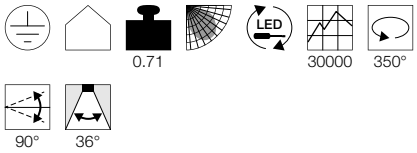

Dimensioned drawing



Variant	Item no.	GBP
650lm | 3000K | CRI>80		
■ black	**1001367**	**126,00**
650lm | 3000K | CRI>80		
□ white	**1001368**	**126,00**
650lm | 3000K | CRI>80		
■ grey	**1001369**	**126,00**

EURO SPOT TRACK
3-circuit, TRIAC

886


A-A++ Spectrum A⁺⁺–E

LED INSIDE




Product details

220-240V ~50/60Hz
Total consumption: 21W
Material: Aluminium
Dimmable: Triac C, Triac L

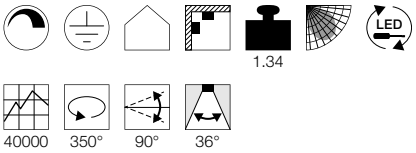

Dimensioned drawing



Variant	Item no.	GBP
1350lm | 3000K | CRI>80		
■ black	**153810**	**153,00**
1350lm | 3000K | CRI>80		
□ white	**153811**	**153,00**
1350lm | 3000K | CRI>80		
■ grey	**153814**	**153,00**

EURO SPOT TRACK
3-circuit

886


A-A++ Spectrum A⁺⁺–E

LED INSIDE




Product details

220-240V ~50/60Hz | 1500mA
Total consumption: 61W
Material: Aluminium / Glass

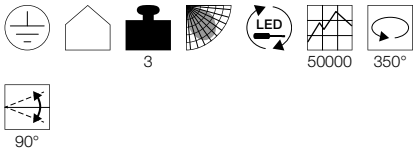

Dimensioned drawing



Variant	Item no.	GBP
5500lm | 3000K | CRI>80 | 12°		
■ black	**1001476**	**296,10**
5500lm | 3000K | CRI>80 | 12°		
□ white	**1001477**	**296,10**
5500lm | 3000K | CRI>80 | 12°		
◪ grey / transparent	**1001478**	**296,10**
5500lm | 3000K | CRI>80 | 38°		
■ black	**1001484**	**296,10**
5500lm | 3000K | CRI>80 | 38°		
□ white	**1001480**	**296,10**
5500lm | 3000K | CRI>80 | 38°		
◪ grey / transparent	**1001479**	**296,10**
5500lm | 3000K | CRI>80 | 60°		
■ black	**1001481**	**296,10**
5500lm | 3000K | CRI>80 | 60°		
□ white	**1001482**	**296,10**
5500lm | 3000K | CRI>80 | 60°		
◪ grey / transparent	**1001483**	**296,10**

SIGHT TRACK
3-circuit, PD

895

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 700mA
Total consumption: 40W
Material: Aluminium / Acrylic


2 200


30000 120°

Dimensioned drawing



Variant	Item no.	GBP
3100lm | 3000K | CRI>80 ■ black	1002048	278,10
3100lm | 3000K | CRI>80 □ white	1002049	278,10
3100lm | 3000K | CRI>80 ■ grey	1002050	278,10

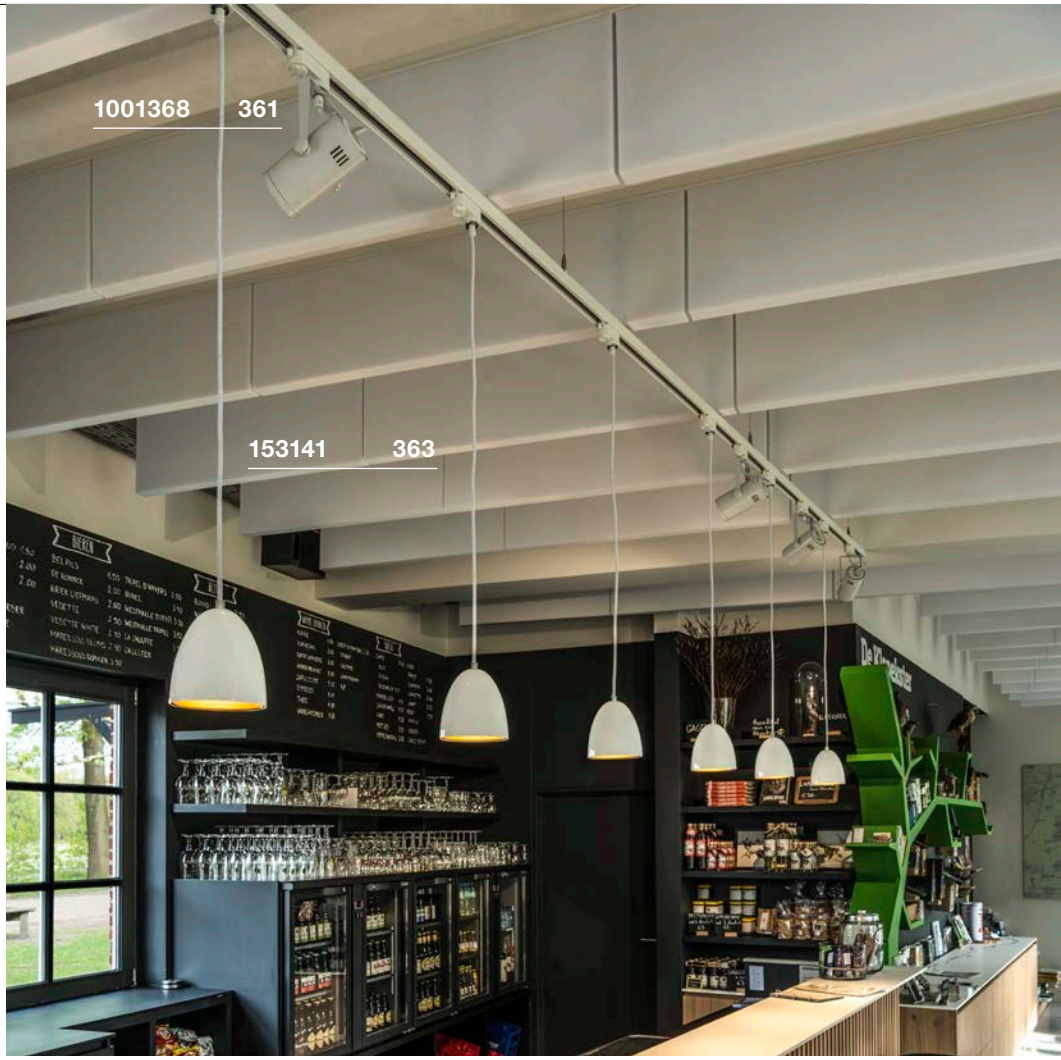

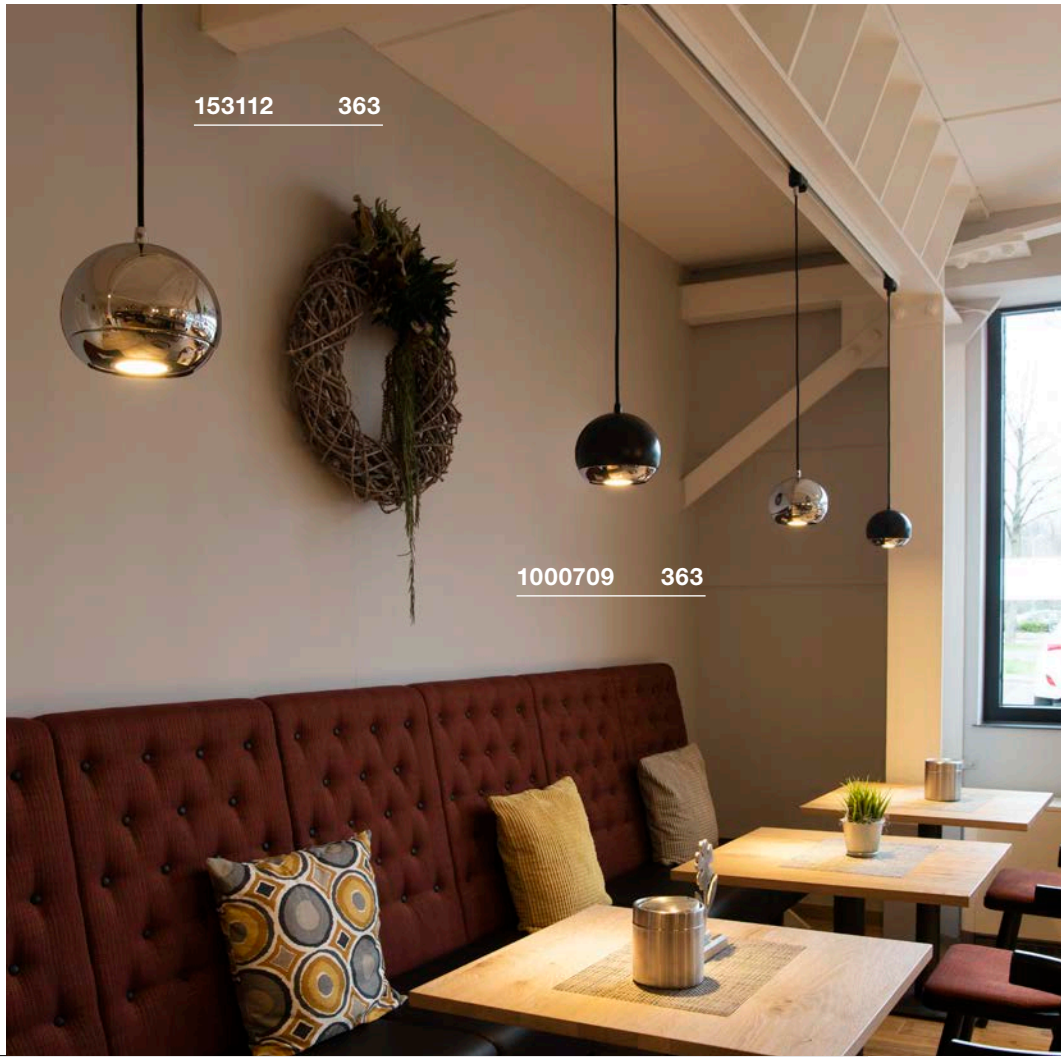


LIGHT EYE® 150
3-circuit, PD, QPAR111

890


E-A++ Spectrum A++–E



Product details
230V ~50Hz
Material: Steel



Dimensioned drawing



Recommended lamp

LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP



LED GU10 9.5W 25°
2200-6700K 750lm
Item no. 1001922 | 49,50 GBP



Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 black / chrome	1000709	99,00
GU10 | QPAR111 white / chrome	1000710	99,00
GU10 | QPAR111 chrome	153112	108,00

PARA CONE 14
3-circuit, PD, QPAR51


893

E-A++ Spectrum A++–E


NEW COLOR



Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Lamp details
max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 copper	1002686	94,50
GU10 | QPAR51 shiny black	153140	90,00
GU10 | QPAR51 white	153141	90,00

FORCHINI M 40 TRACK
3-circuit, PD, E27


887

E-A++ Spectrum A++–E




- Double-walled design with internal reflector
- Textile cable in housing colour

Product details
230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing



Recommended lamp

LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001035 | 15,30 GBP




LED E27 7W 280°
2200-2700K 830lm EEI=A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP





Lamp details
max. 40W
Ø: 6.8 cm max. L: 15.2 cm max.


Variant	Item no.	GBP
E27 black / gold	153130	180,00
E27 white/gold	153131	180,00

PLANNING AID FOR S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK

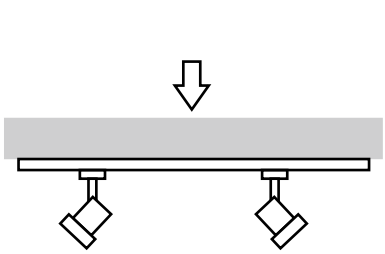

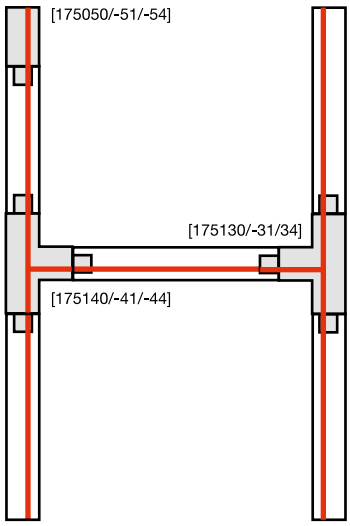

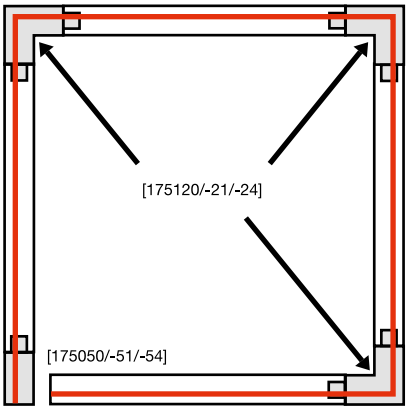

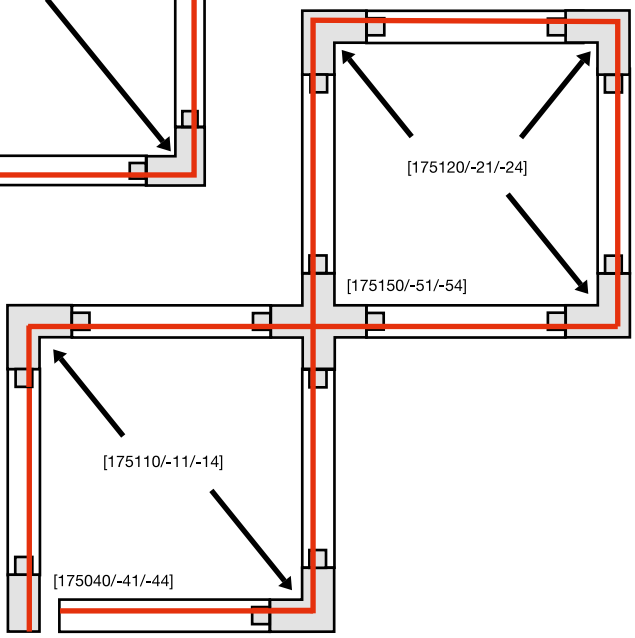





S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK



	 S-TRACK 3-circuit surface mounted track, 1m	 S-TRACK 3-circuit surface mounted track, 1m	 S-TRACK 3-circuit surface mounted track, 1m
Rated voltage	220-250V ~50Hz	220-250V ~50Hz	220-250V ~50Hz
Max. perm. current	16A	16A	16A
Feed-in capability	no	no	no
Material	Aluminium / Plastic	Aluminium / Plastic	–
Colour	black	white	–
Length	99.5 cm	99.5 cm	99.5 cm
Width	3.6 cm	3.6 cm	3.6 cm
Height	3.6 cm	3.6 cm	3.6 cm
Weight	0.9 kg	0.9 kg	0.9 kg
Item no.	**175010**	**1001375**	**175014**
GBP	**29,70**	**29,70**	**29,70**



	 S-TRACK 3-circuit surface mounted track, 2m	 S-TRACK 3-circuit surface mounted track, 2m	 S-TRACK 3-circuit surface mounted track, 2m
Rated voltage	220-250V ~50Hz	220-250V ~50Hz	220-250V ~50Hz
Max. perm. current	16A	16A	16A
Feed-in capability	no	no	no
Material	Aluminium / Plastic	Aluminium / Plastic	–
Colour	black	white	–
Length	199.5 cm	199.5 cm	199.5 cm
Width	3.6 cm	3.6 cm	3.6 cm
Height	3.6 cm	3.6 cm	3.6 cm
Weight	1.8 kg	1.8 kg	1.8 kg
Item no.	**175020**	**1001376**	**175024**
GBP	**63,00**	**63,00**	**63,00**



	 S-TRACK 3-circuit surface mounted track, 3m	 S-TRACK 3-circuit surface mounted track, 3m	 S-TRACK 3-circuit surface mounted track, 3m
Rated voltage	220-250V ~50Hz	220-250V ~50Hz	220-250V ~50Hz
Max. perm. current	16A	16A	16A
Feed-in capability	no	no	no
Material	Aluminium / Plastic	Aluminium / Plastic	–
Colour	black	white	–
Length	299.5 cm	299.5 cm	299.5 cm
Width	3.6 cm	3.6 cm	3.6 cm
Height	3.6 cm	3.6 cm	3.6 cm
Weight	2.7 kg	2.7 kg	2.7 kg
Item no.	**175030**	**1001377**	**175034**
GBP	**90,00**	**90,00**	**90,00**


152960 346
175100 367

ACCESSORIES FOR S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK

3-circuit adapter with hooks

Plastic / Steel
Ø: 2.6 cm H: 5.2 cm
Weight: 0.01 kg
Max. 10 kg
1 pc.



Variant	Item no.	GBP
black	175190	2,00
white	1001393	2,00
grey	175194	2,00

Mini connector

16A max.
Aluminium / Plastic
L: 6.8 cm W: 2.5 cm H: 2.6 cm
Weight: 0.03 kg
1 pc.



Variant	Item no.	GBP
black	175070	6,80
white	1001381	6,80
grey	175074	6,80

Mini connector, mechanical

Plastic
L: 6.8 cm W: 3.1 cm H: 2.6 cm
Weight: 0.02 kg
1 pc.



Variant	Item no.	GBP
black	175080	5,90
white	1001382	5,90
grey	175084	5,90

Lamp adapter

16A max.
Aluminium / Plastic
L: 8.4 cm W: 5.5 cm H: 3.3 cm
Weight: 0.08 kg
Incl. strain relief
Max. 10 kg
1 pc.



Variant	Item no.	GBP
black	175200	11,70
white	1001394	11,70
grey	175204	11,70

L-connector, earth on inside

16A max.
Aluminium / Plastic
L: 6.7 cm W: 6.7 cm H: 3.3 cm
Weight: 0.11 kg
Earth electrode interior, with feed-in capability. 1 pc.



Variant	Item no.	GBP
black	175110	24,80
white	1001385	24,80
grey	175114	24,80

Flexible connector

16A max.
Aluminium / Plastic
L: 16.2 cm W: 3.5 cm H: 3.3 cm
Weight: 0.14 kg
1 pc.



Variant	Item no.	GBP
black	175100	31,50
white	1001384	31,50
grey	175104	31,50

Light adapter, mechanical

Aluminium / Plastic
L: 6.6 cm W: 6.6 cm H: 3.1 cm
Weight: 0.14 kg
Max. 10 kg
1 pc.



Variant	Item no.	GBP
black	175210	11,70
white	1001395	11,70
grey	175214	11,70

L-connector, earth on outside

16A max.
Aluminium / Plastic
L: 6.7 cm W: 6.7 cm H: 3.3 cm
Weight: 0.11 kg
Earth electrode exterior with feed-in capability. 1 pc.



Variant	Item no.	GBP
black	175120	24,80
white	1001386	24,80
grey	175124	24,80

Coupling joint connector

Aluminium
L: 18.2 cm W: 3.3 cm H: 2.1 cm
Weight: 0.08 kg
1 pc.



Variant	Item no.	GBP
black	175180	8,90
white	1001392	8,90
grey	175184	8,90

Feed-in, earth on right side

16A max.
Aluminium / Plastic
L: 6.5 cm W: 3.5 cm H: 3.3 cm
Weight: 0.06 kg
Earth electrode, right-hand side.
1 pc.



Variant	Item no.	GBP
black	175040	11,70
white	1001378	11,70
grey	175044	11,70

X-connector

16A max.
Aluminium / Plastic
L: 10 cm W: 10 cm H: 3.3 cm
Weight: 0.23 kg
2 power circuits.
1 pc.



Variant	Item no.	GBP
black	175150	34,20
white	1001389	34,20
grey	175154	34,20

Ceiling suspension

Stainless Steel / Brass
L: 500 cm
Weight: 0.2 kg
Max. 10 kg
2 pcs.



Variant	Item no.	GBP
nickel	1002845	31,50

Feed-in, earth on left side

16A max.
Aluminium / Plastic
L: 6.5 cm W: 3.5 cm H: 3.3 cm
Weight: 0.06 kg
Earth electrode, left-hand side.
1 pc.



Variant	Item no.	GBP
black	175050	11,70
white	1001379	11,70
grey	175054	11,70

T-connector, earth on left side

16A max.
Aluminium / Plastic
L: 10 cm W: 6.7 cm H: 3.3 cm
Weight: 0.17 kg
Earth electrode, left-hand side, with feed-in capability. 1 pc.



Variant	Item no.	GBP
black	175130	29,70
white	1001387	29,70
grey	175134	29,70

Steel wire suspension kit with bar

Aluminium / Plastic
L: 100 cm W: 6 cm H: 4 cm
Weight: 0.2 kg
Max. 10 kg
1 pc.

Variant	Item no.	GBP
black	175160	24,80
white	1001390	24,80
grey	175164	24,80

Long connector with feed-in capability

16A max.
Aluminium / Plastic
L: 9.9 cm W: 3.5 cm H: 3.3 cm
Weight: 0.11 kg
With feed-in capability.
1 pc.



Variant	Item no.	GBP
black	175090	24,80
white	1001383	24,80
grey	175094	24,80

T-connector, earth on right

16A max.
Aluminium / Plastic
L: 10 cm W: 6.7 cm H: 3.3 cm
Weight: 0.17 kg
Earth electrode, right-hand side, with feed-in capability. 1 pc.



Variant	Item no.	GBP
black	175140	29,70
white	1001388	29,70
grey	175144	29,70


End cap


Plastic
L: 3.5 cm W: 3.3 cm H: 3.2 cm
Weight: 0.01 kg
1 pc.





Variant	Item no.	GBP
black	175060	1,50
white	1001380	1,50
grey	175064	1,50

PLANNING AID FOR EUTRAC® 3-CIRCUIT SURFACE MOUNTED TRACK

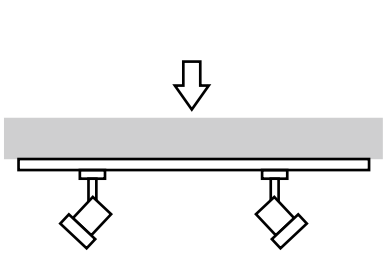

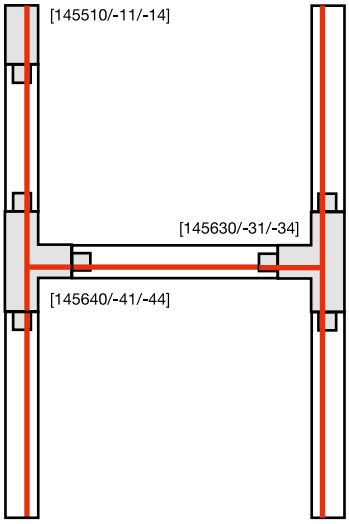

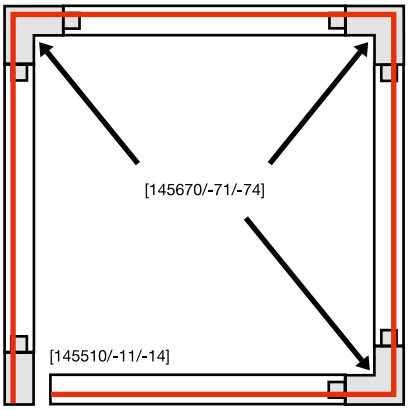


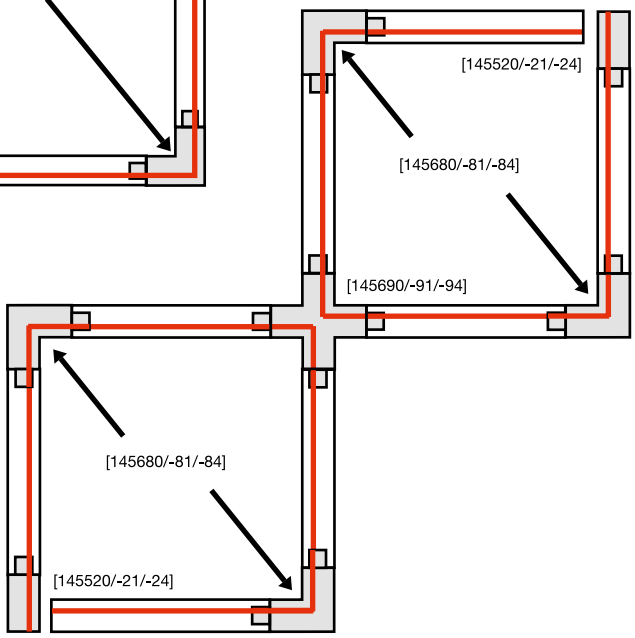





EUTRAC® 3-CIRCUIT SURFACE MOUNTED TRACK





EUTRAC® 3-circuit surface mounted track, 1m




EUTRAC® 3-circuit surface mounted track, 1m



EUTRAC® 3-circuit surface mounted track, 1m

Rated voltage	230V ~50Hz	230V ~50Hz	230V ~50Hz
Max. perm. current	16A	16A	16A
Feed-in capability	no	no	no
Material	Aluminium / Plastic	Aluminium / Plastic	Aluminium / Plastic
Colour	black	white	grey
Length	100 cm	100 cm	100 cm
Width	3.6 cm	3.6 cm	3.6 cm
Height	3.2 cm	3.2 cm	3.2 cm
Weight	1 kg	1 kg	1 kg
Item no.	**145100**	**1001510**	**145102**
GBP	**36,00**	**36,00**	**36,00**





EUTRAC® 3-circuit surface mounted track, 2m




EUTRAC® 3-circuit surface mounted track, 2m



EUTRAC® 3-circuit surface mounted track, 2m

Rated voltage	230V ~50Hz	230V ~50Hz	230V ~50Hz
Max. perm. current	16A	16A	16A
Feed-in capability	no	no	no
Material	Aluminium / Plastic	Aluminium / Plastic	Aluminium / Plastic
Colour	black	white	grey
Length	200 cm	200 cm	200 cm
Width	3.6 cm	3.6 cm	3.6 cm
Height	3.2 cm	3.2 cm	3.2 cm
Weight	2 kg	2 kg	2 kg
Item no.	**145200**	**1001511**	**145202**
GBP	**72,00**	**72,00**	**72,00**





EUTRAC® 3-circuit surface mounted track, 3m




EUTRAC® 3-circuit surface mounted track, 3m



EUTRAC® 3-circuit surface mounted track, 3m

Rated voltage	230V ~50Hz	230V ~50Hz	230V ~50Hz
Max. perm. current	16A	16A	16A
Feed-in capability	no	no	no
Material	Aluminium / Plastic	Aluminium / Plastic	Aluminium / Plastic
Colour	black	white	grey
Length	300 cm	300 cm	300 cm
Width	3.6 cm	3.6 cm	3.6 cm
Height	3.2 cm	3.2 cm	3.2 cm
Weight	3 kg	3 kg	3 kg
Item no.	**145300**	**1001512**	**145302**
GBP	**117,00**	**117,00**	**117,00**

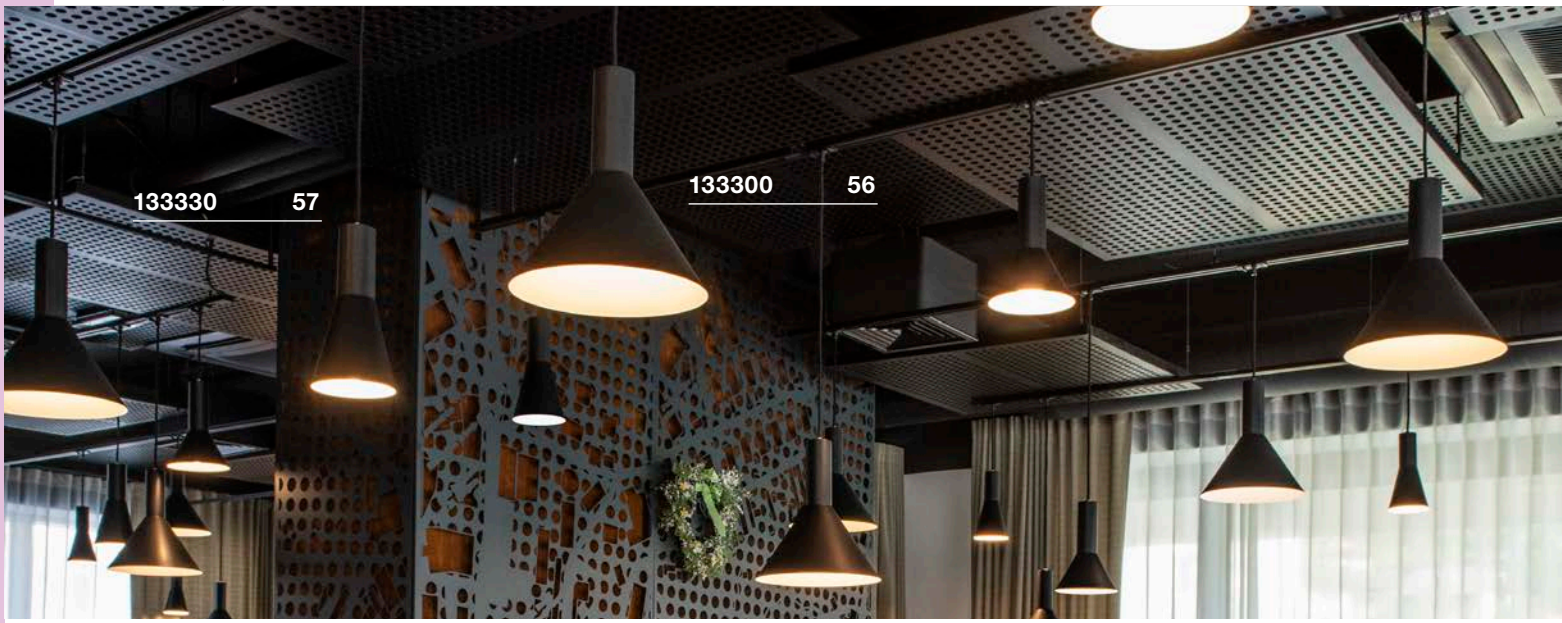

ACCESSORIES FOR EUTRAC® 3-CIRCUIT SURFACE MOUNTED TRACK

Feed-in, left

16A max.
Plastic
L: 11.2 cm W: 3.6 cm H: 3.2 cm
Weight: 0.08 kg
Earth electrode, on left-hand side.
1 pc.



Variant	Item no.	GBP
black	145510	14,90
white	1001513	14,90
grey	145514	14,90

Feed-in, right

16A max.
Plastic
L: 11.2 cm W: 3.6 cm H: 3.2 cm
Weight: 0.08 kg
Earth electrode, right-hand side
1 pc.



Variant	Item no.	GBP
black	145520	14,90
white	1001514	14,90
grey	145524	14,90

Centre feed-in

16A max.
Plastic
L: 13 cm W: 3.6 cm H: 3.6 cm
Weight: 0.08 kg
1 pc.



Variant	Item no.	GBP
black	145530	34,20
white	1001515	34,60
grey	145534	34,20

Long connector

16A max.
Plastic
L: 5.8 cm W: 1.5 cm H: 2.6 cm
Weight: 0.03 kg
1 pc.



Variant	Item no.	GBP
black	145560	14,90
white	1001516	14,90
grey	145564	14,90

Long connector with feed-in capability

16A max.
Plastic / Steel
L: 26 cm W: 3.6 cm H: 3.2 cm
Weight: 0.15 kg
1 pc.



Variant	Item no.	GBP
black	145660	58,50
white	1001517	58,50
grey	145664	58,50

T-connector, earth electrode on left

16A max.
Plastic / Steel
L: 26 cm W: 18.5 cm H: 3.2 cm
Weight: 0.35 kg
1 pc.



Variant	Item no.	GBP
black	145630	67,50
white	1001518	67,50
grey	145634	67,50

T-connector, earth electrode on right

16A max.
Plastic / Steel
L: 26 cm W: 18.5 cm H: 3.2 cm
Weight: 0.35 kg
1 pc.




Variant	Item no.	GBP
black	145640	67,50
white	1001519	67,50
grey	145644	67,50

L-connector, earth electrode exterior

16A max.
Plastic / Steel
L: 15 cm W: 15 cm H: 3.2 cm
Weight: 0.24 kg
1 pc.



Variant	Item no.	GBP
black	145670	49,50
white	1001520	49,50
grey	145674	49,50

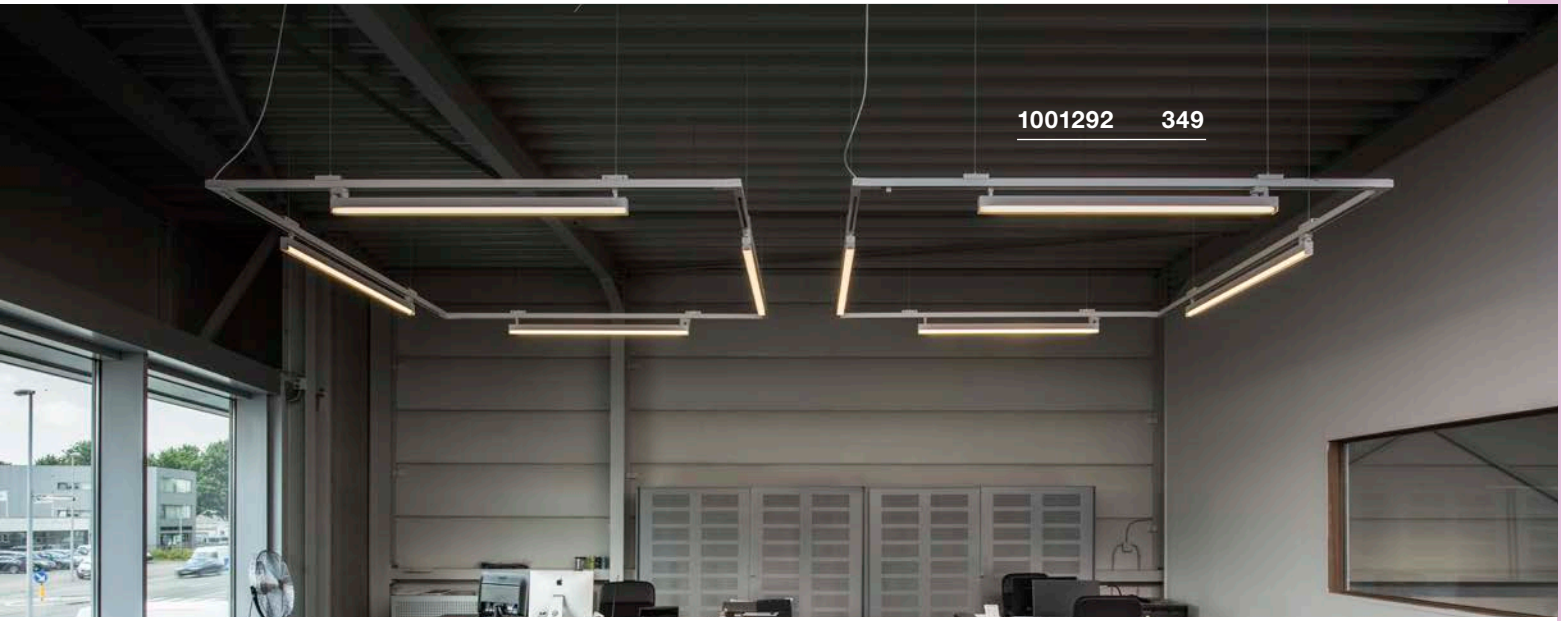

ACCESSORIES FOR EUTRAC® 3-CIRCUIT SURFACE MOUNTED TRACK

L-connector, earth electrode interior

16A max.
Plastic / Steel
L: 15 cm W: 15 cm H: 3.2 cm
Weight: 0.24 kg
1 pc.



Variant	Item no.	GBP
black	145680	49,50
white	1001521	49,50
grey	145684	49,50

Socket

6.3A max.
Plastic
L: 9.6 cm W: 6.5 cm H: 9 cm
Weight: 0.17 kg
1 pc.



Variant	Item no.	GBP
black	145700	72,00
white	1001525	72,00

Pendant suspension, rigid

Plastic / Steel
Ø: 7 cm L: 120 cm H: 122 cm
Weight: 0.49 kg
1 pc.

Variant	Item no.	GBP
black	145710	34,20
white	1001528	34,20
grey	145714	34,20

X-connector

16A max.
Plastic / Steel
L: 26 cm W: 26 cm H: 3.2 cm
Weight: 0.27 kg
1 pc.



Variant	Item no.	GBP
black	145690	99,00
white	1001522	99,00
grey	145694	99,00

Universal point outlet

16A max.
Plastic
Ø: 11.9 cm H: 3.1 cm
1 pc.



Variant	Item no.	GBP
white	1001526	79,20
grey	145834	79,20
black	145830	79,20

Pendant suspension, rigid

Plastic / Steel
Ø: 7 cm L: 60 cm H: 63.5 cm
Weight: 0.28 kg
1 pc.

Variant	Item no.	GBP
black	145720	29,70
white	1001529	29,70
grey	145724	29,70

Coupling joint connector

Plastic
L: 10 cm W: 3.6 cm H: 1.9 cm
Weight: 0.06 kg
1 pc.



Variant	Item no.	GBP
black	145600	16,70
white	1001523	16,70
grey	145604	16,70

End cap

Plastic
L: 3.6 cm W: 1.7 cm H: 3.2 cm
Weight: 0.01 kg
2 pcs.



Variant	Item no.	GBP
black	145590	3,00
white	1001527	3,00
grey	145594	3,00

Swinging clip

Aluminium
L: 5 cm W: 3.6 cm H: 1.9 cm
Weight: 0.04 kg
1 pc.



Variant	Item no.	GBP
black	145730	8,60
white	1001530	8,60
grey	145734	8,60

Flexible connector

16A max.
Plastic / Steel
L: 22 cm W: 3.6 cm H: 3.2 cm
Weight: 0.23 kg
1 pc.



Variant	Item no.	GBP
black	145580	67,50
white	1001524	67,50
grey	145584	67,50

Ceiling suspension

Stainless Steel / Brass
L: 500 cm
Weight: 0.2 kg
2 pcs.




Variant	Item no.	GBP
nickel	1002845	31,50

3-circuit pendant luminaire adapter


10A max.
Plastic
1 pc.



Variant	Item no.	GBP
black	145990	14,90
white	1001542	14,90
silver-grey	145994	14,90

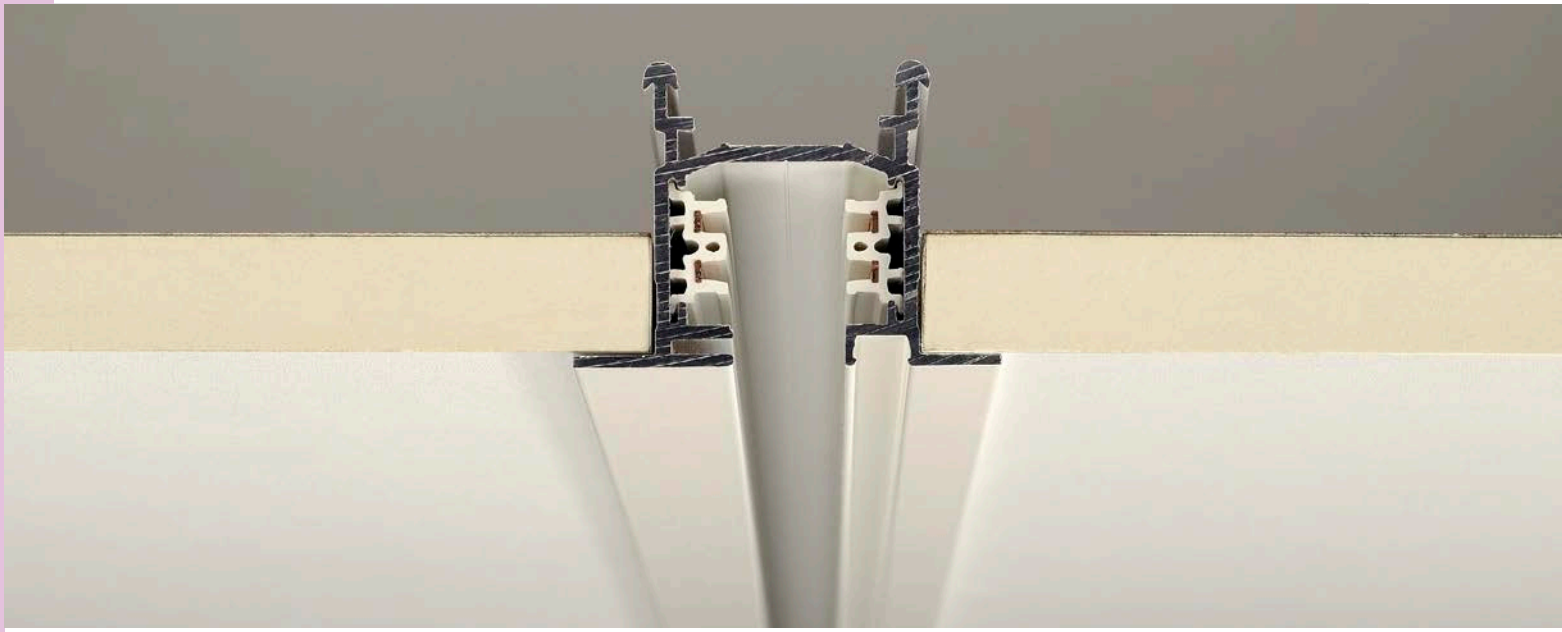

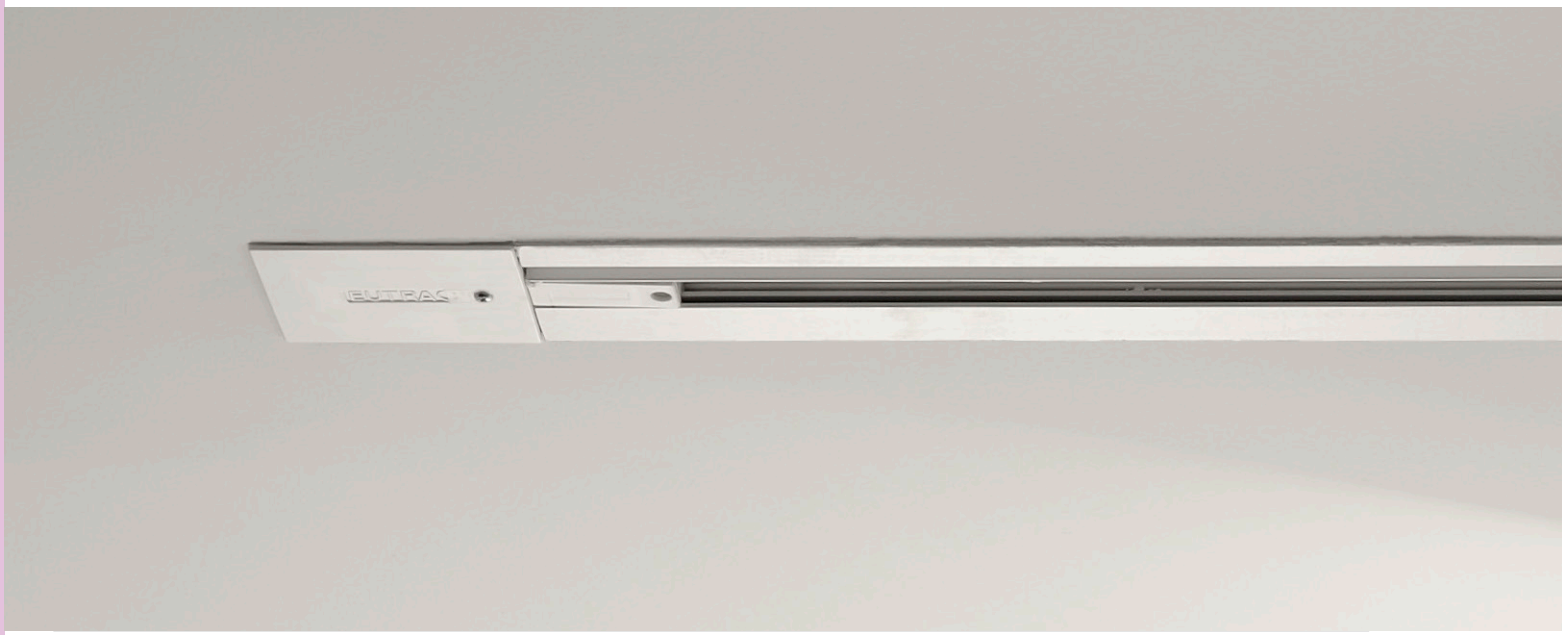


EUTRAC

3-CIRCUIT RECESSED TRACK

Recessed track




EUTRAC®
3-circuit recessed track, 2 m



EUTRAC®
3-circuit recessed track, 3 m

Rated voltage	230V ~50Hz	230V ~50Hz
Max. perm. current	16A	16A
Material	Aluminium / Plastic	Aluminium / Plastic
Colour	white	white
Length	200 cm	300 cm
Width	5.9 cm	5.9 cm
Height	4.1 cm	4.1 cm
Inst. Width	4 cm	4 cm
Weight	2.6 kg	3.9 kg
Item no.	**1001531**	**1001532**
GBP	**90,00**	**162,00**

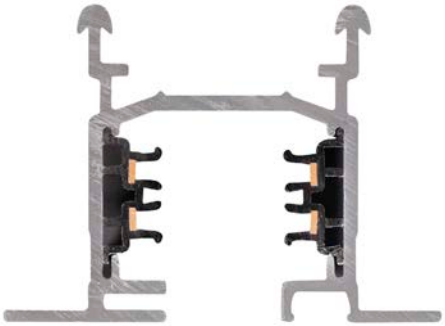

ACCESSORIES FOR 3-CIRCUIT RECESSED TRACK

Feed-in left

16A max.
Plastic / Steel
L: 12.2 cm W: 6 cm H: 3.4 cm
Weight: 0.1 kg
1 pc.



Variant	Item no.	GBP
white	**1001533**	**24,80**

End cap

Plastic
L: 2.7 cm W: 6 cm H: 3.2 cm
Weight: 0.02 kg
1 pc.



Variant	Item no.	GBP
white	**1001538**	**5,90**

Spring clip installation

Steel
L: 2 cm W: 1 cm H: 2.5 cm
Weight: 0.03 kg
6 pc.



Variant	Item no.	GBP
grey	**145551**	**9,90**

Feed-in right

16A max.
Plastic / Steel
L: 12.2 cm W: 6 cm H: 3.4 cm
Weight: 0.1 kg
1 pc.



Variant	Item no.	GBP
white	**1001534**	**24,80**

L-connector

16A max.
Plastic / Steel
L: 16 cm W: 16 cm H: 3.2 cm
Weight: 0.24 kg
Earth electrode inside
with feed-in capability
1 pc.



Variant	Item no.	GBP
white	**1001537**	**58,50**

Pendant adapter

10A max.
Plastic
Weight: 0.07 kg
1 pc.



Variant	Item no.	GBP
black	**145990**	**14,90**
white	**1001542**	**14,90**
grey	**145994**	**14,90**

L-connector

16A max.
Plastic / Steel
L: 16 cm W: 16 cm H: 3.2 cm
Weight: 0.24 kg
Earth electrode exterior
with feed-in capability
1 pc.




Variant	Item no.	GBP
white	**1001536**	**58,50**

Long connector

16A max.
Plastic / Steel
L: 6.2 cm W: 2.5 cm H: 2.7 cm
Weight: 0.09 kg
1 pc.




Variant	Item no.	GBP
white	**1001539**	**20,70**

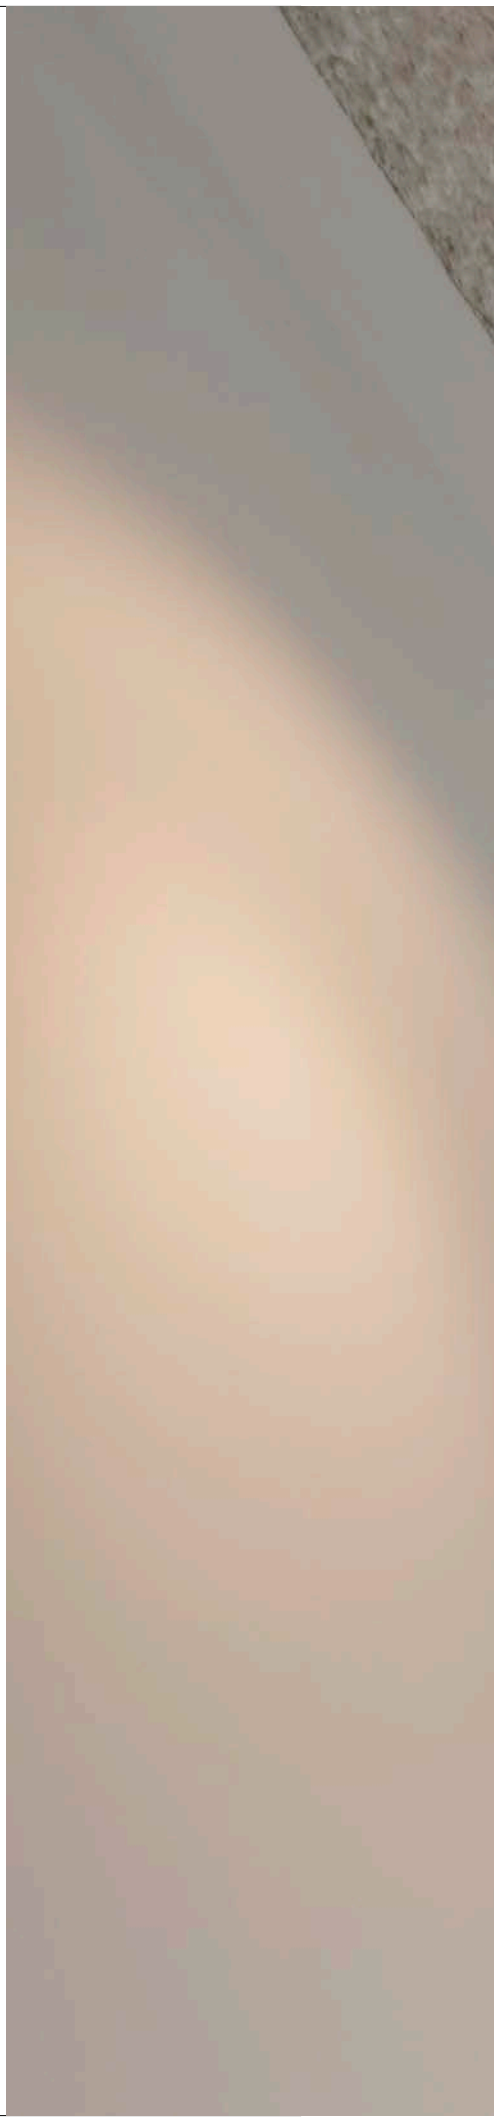

KEEPING YOUR PROMISE.

2-CIRCUIT DESIGNER TRACK FOR SOPHISTICATED LIVING AMBIENCE.

When comfort and functionality converge, considerable demands are made of having the right product. The D-TRACK® 2-circuit designer track is therefore the perfect solution for anyone who would like to set visual highlights and make use of all of the light design possibilities.

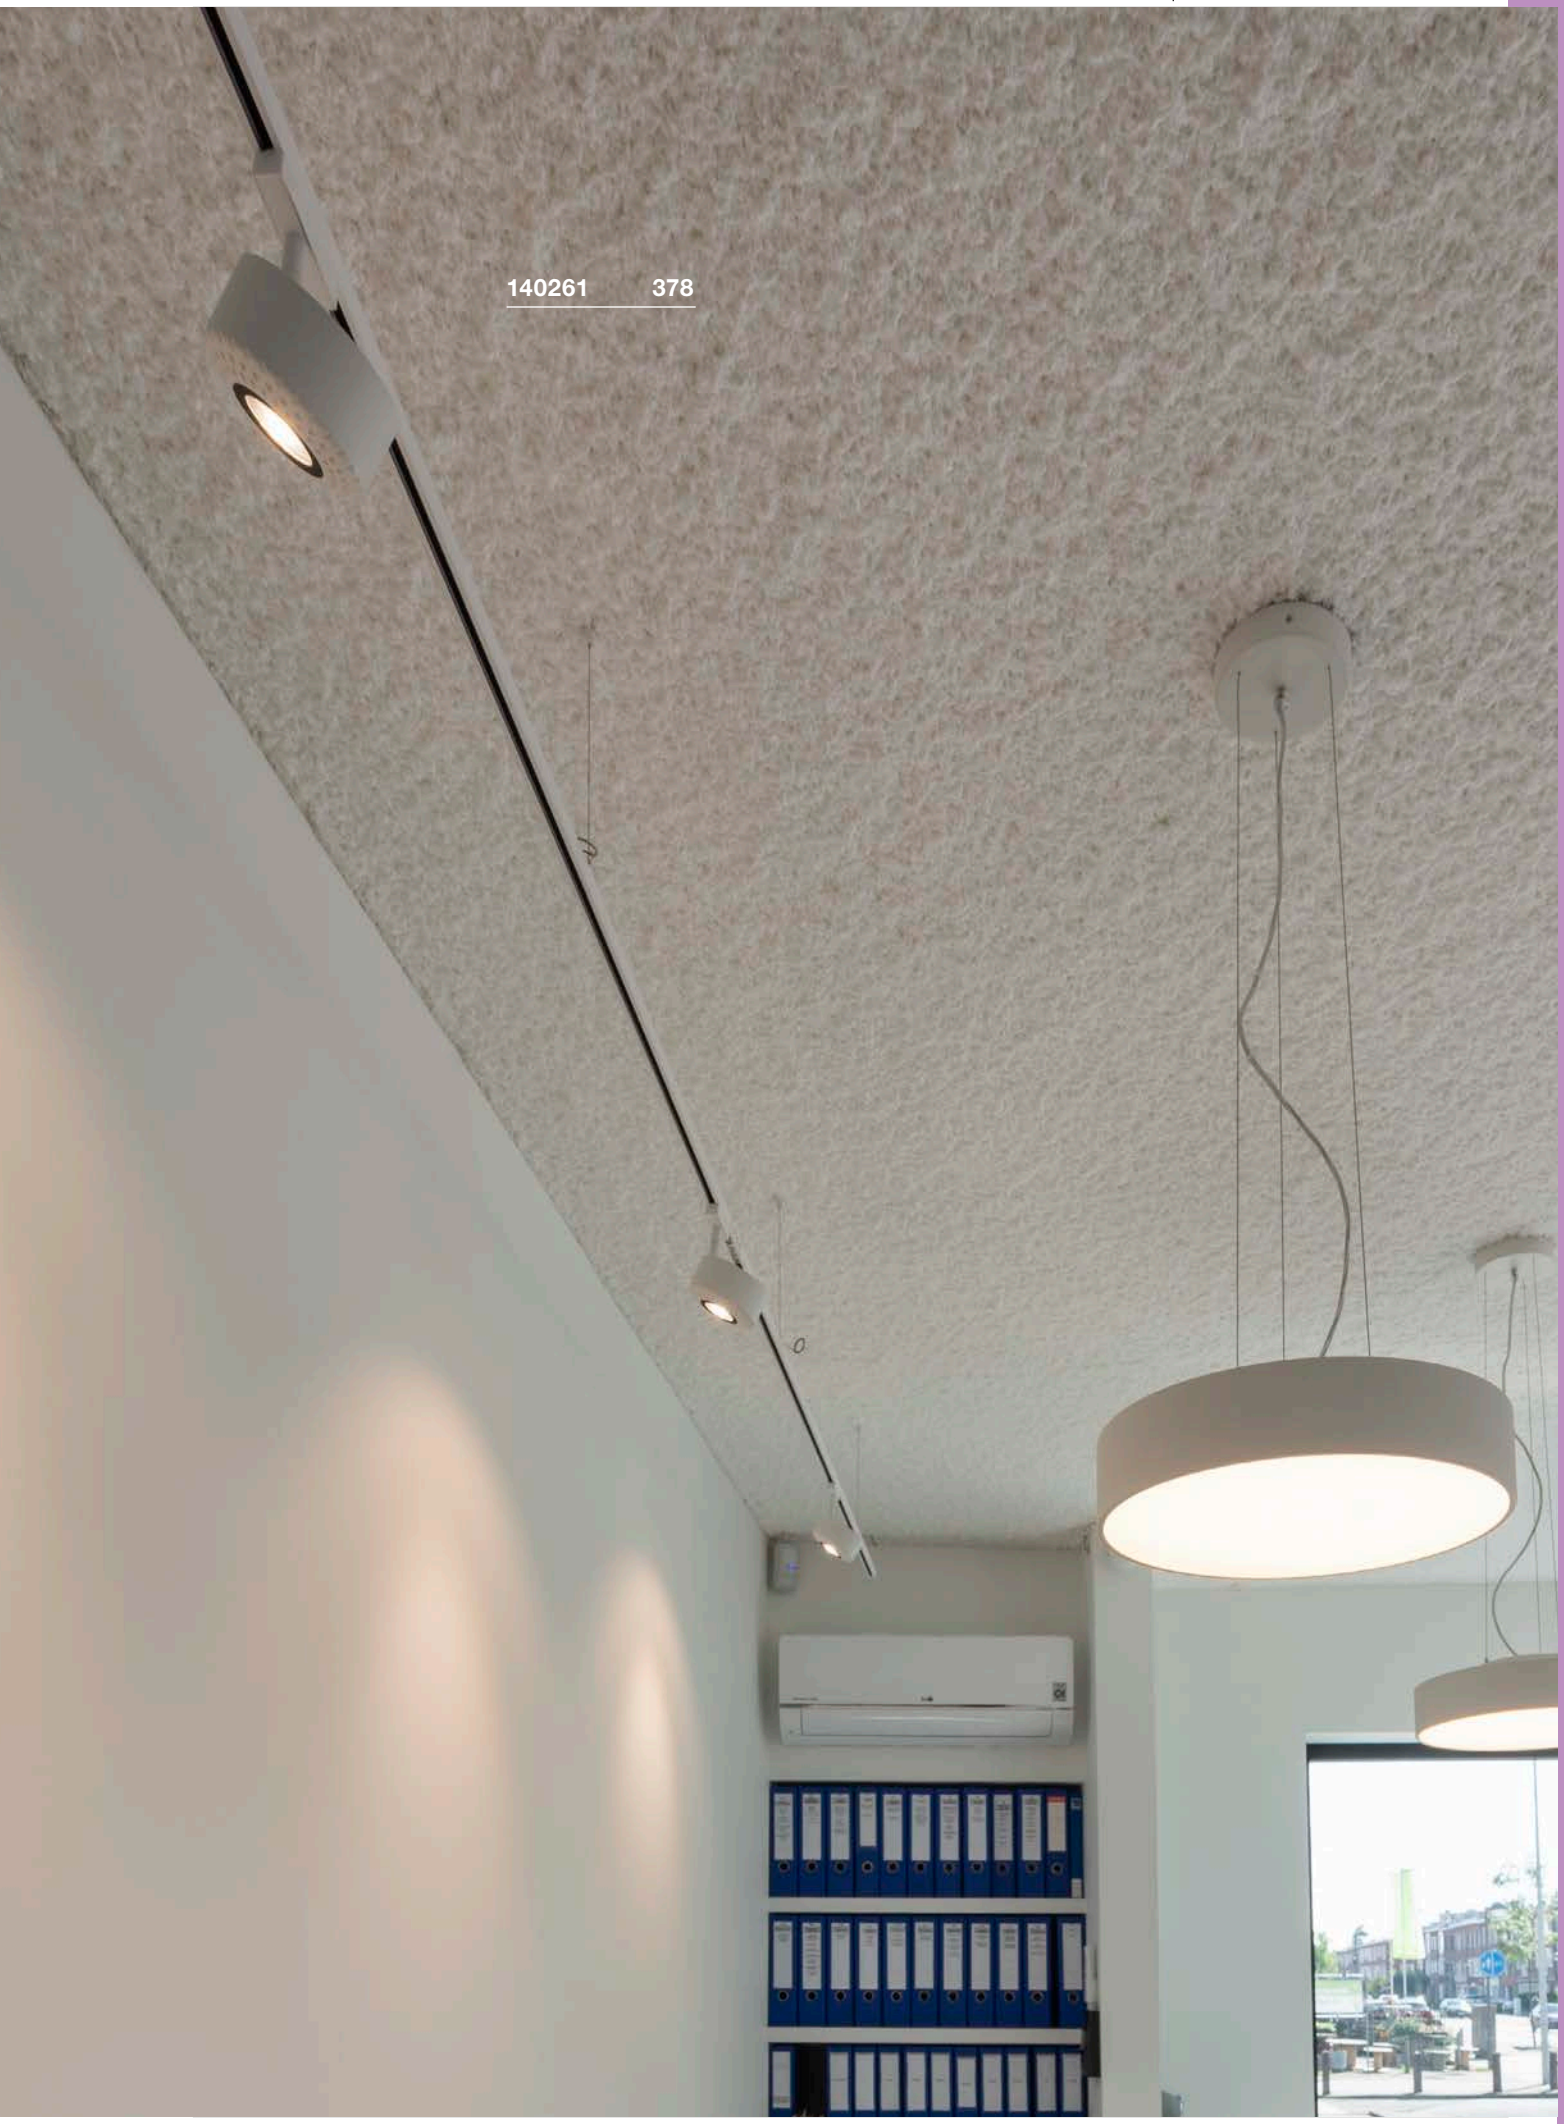
140261 378



1001354 378



240V TRACK D-TRACK®


378


378


378


Suitable track systems and accessories can be found on pages 380-381

Other luminaires and variants can be found online at www.slv.com

REVILO TRACK
D-TRACK®


A-A++ Spectrum A++–E

LED INSIDE

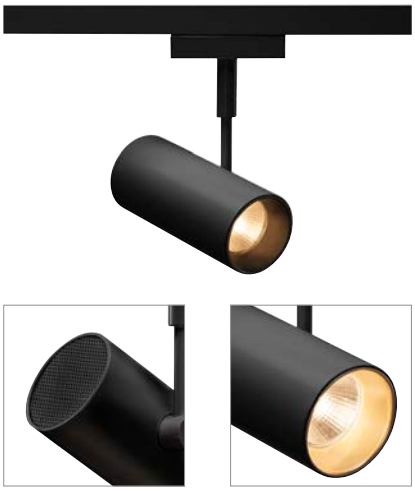


Product details

220-240V ~50/60Hz
Total consumption: 9.5W
Material: Aluminium / Steel

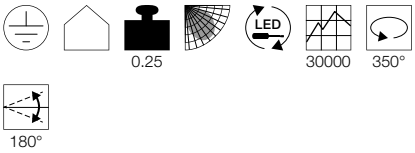

Dimensioned drawing



Recommended accessories

■ Deco ring
Item no. 140240 |5,00 GBP

□ Deco ring
Item no. 140241 |5,00 GBP

■ Deco ring
Item no. 140243 |5,00 GBP

Variant	Item no.	GBP
620lm | 2700K | CRI>80 | 15°		
■ black	**140200**	**108,00**
620lm | 2700K | CRI>80 | 15°		
□ white	**140201**	**108,00**
620lm | 2700K | CRI>80 | 36°		
■ black	**140210**	**108,00**
620lm | 2700K | CRI>80 | 36°		
□ white	**140211**	**108,00**

REVILO
D-TRACK®


A-A++ Spectrum A++–E

LED INSIDE




Product details

220-240V ~50/60Hz
Total consumption: 9.5W
Material: Aluminium / Steel

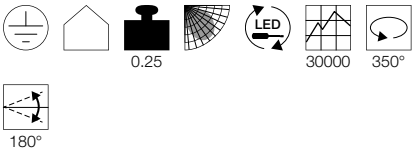

Dimensioned drawing



Recommended accessories

■ Deco ring
Item no. 140240 |5,00 GBP

□ Deco ring
Item no. 140241 |5,00 GBP

■ Deco ring
Item no. 140243 |5,00 GBP

Variant	Item no.	GBP
670lm | 3000K | CRI>80 | 15°		
■ black	**1001352**	**108,00**
550lm | 3000K | CRI>80 | 15°		
□ white	**140221**	**108,00**
670lm | 3000K | CRI>80 | 36°		
■ black	**1001354**	**108,00**
670lm | 3000K | CRI>80 | 36°		
□ white	**1001355**	**108,00**

TOTHEE
D-TRACK®, TRIAC

897


A-A++ Spectrum A++–E

LED INSIDE




Product details


220-240V ~50/60Hz | 350mA
Total consumption: 17W
Material: Aluminium
Dimmable: Triac C, Triac L

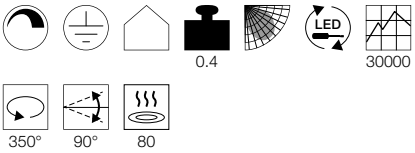


Dimensioned drawing



Variant	Item no.	GBP
1250lm | 3000K | CRI>80 | 25°		
■ black	**140250**	**197,10**
1250lm | 3000K | CRI>80 | 25°		
□ white	**140251**	**197,10**
1250lm | 3000K | CRI>80 | 50°		
■ black	**140260**	**197,10**
1250lm | 3000K | CRI>80 | 50°		
□ white	**140261**	**197,10**

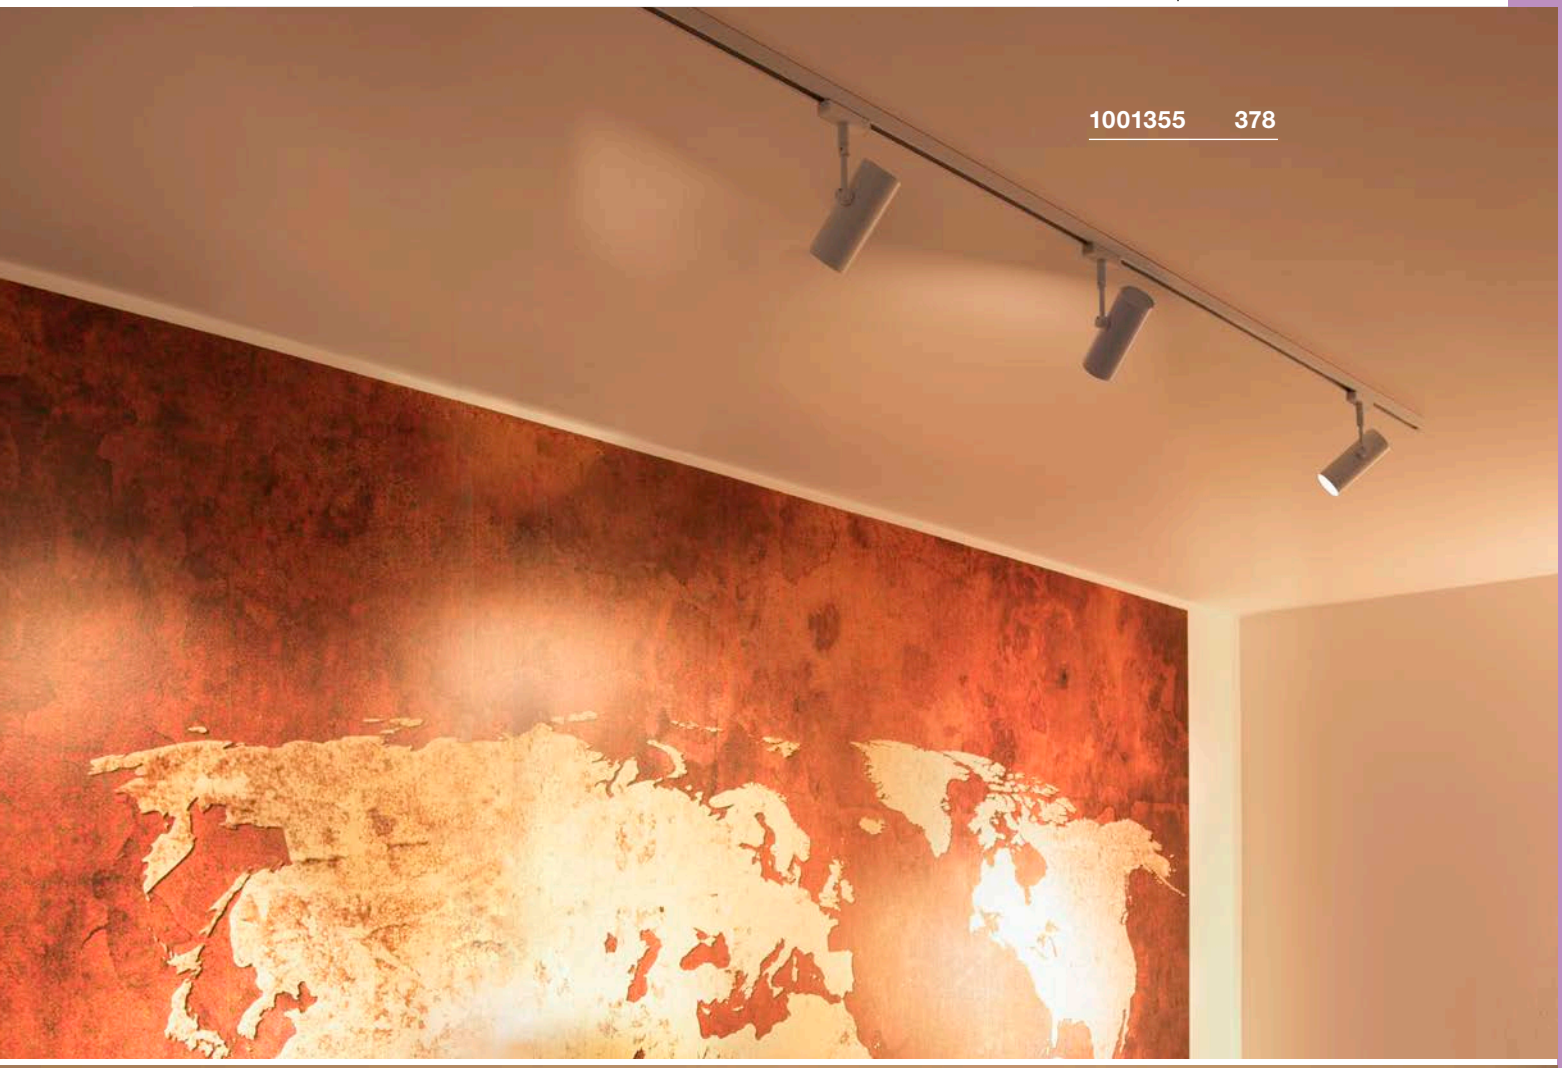
1001355 378

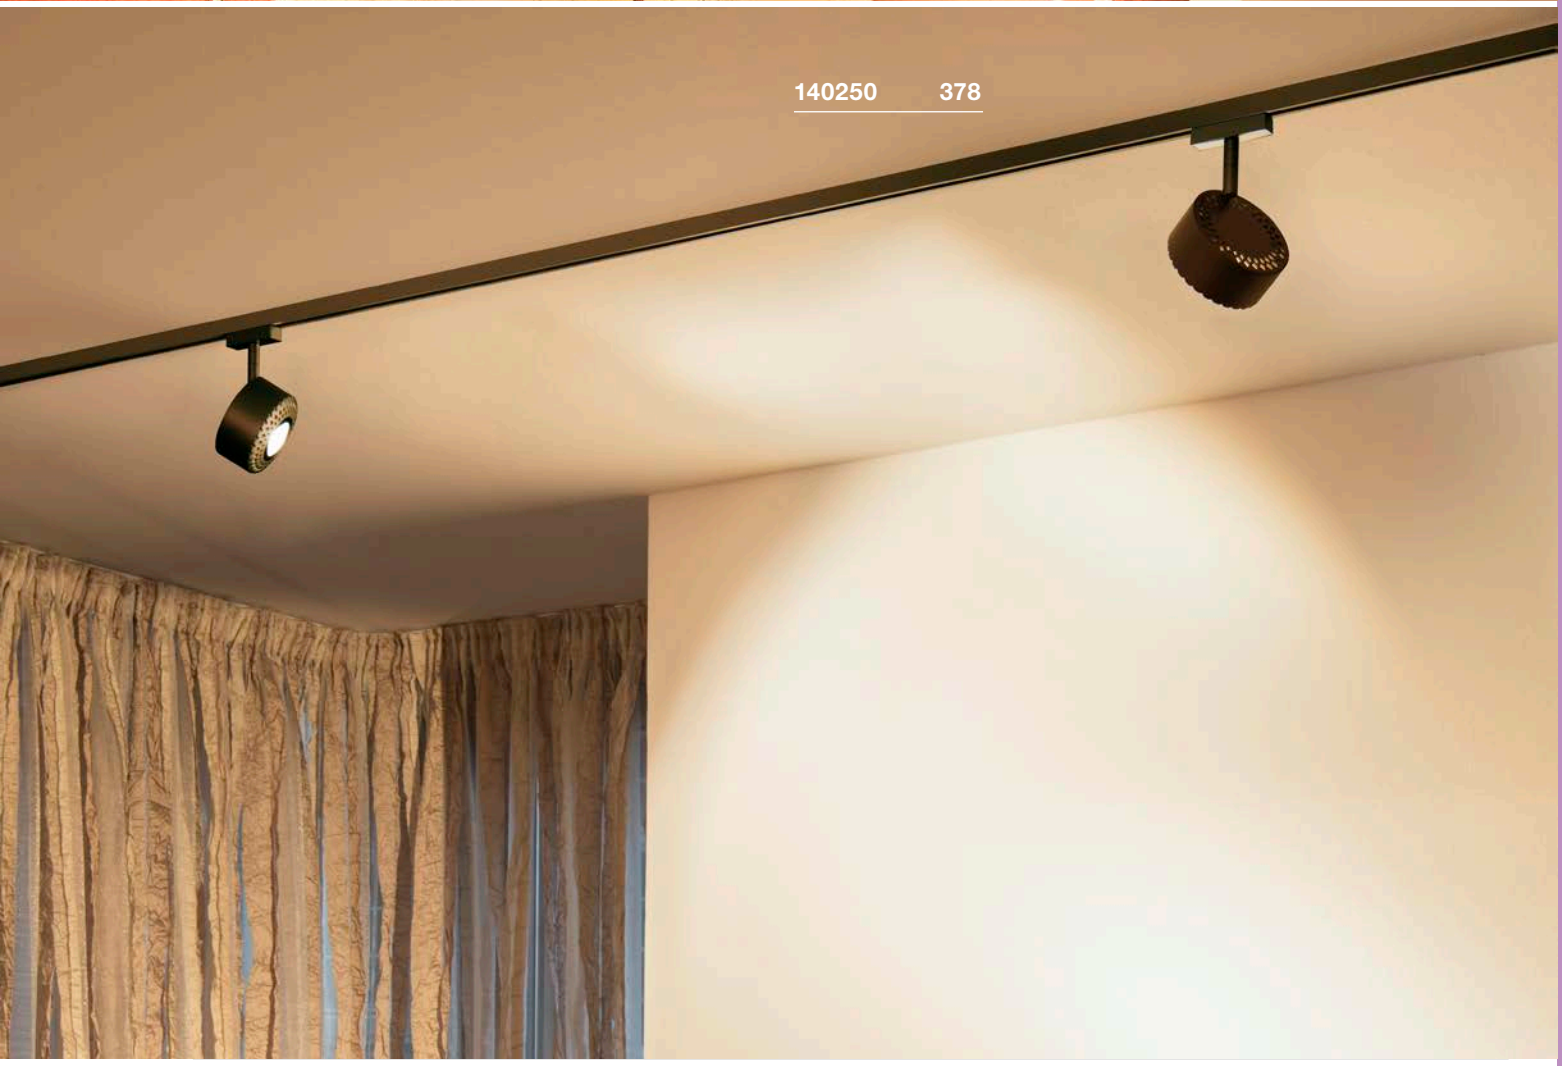
140250 378

D-TRACK®



Track, 1m



D-TRACK® 1m, 2-circuit surface-mounted track



D-TRACK® 1m, 2-circuit surface-mounted track

Rated voltage	230V, 50Hz, 60Hz	230V, 50Hz, 60Hz
Max. perm. current	10A	10A
Mech. max. load	100N	100N
Mech. max. load	10 kg	10 kg
Material	Aluminium / Plastic	Aluminium / Plastic
Colour	black	white
Length	100 cm	100 cm
Width	1.8 cm	1.8 cm
Height	1.8 cm	1.8 cm
Weight	0.4 kg	0.4 kg
Item no.	**172010**	**172011**
GBP	**58,50**	**58,50**
Note	Max. 10A per phase.	Max. 10A per phase.



Track, 2m



D-TRACK® 2m, 2-circuit surface-mounted track



D-TRACK® 2m, 2-circuit surface-mounted track

Rated voltage	230V, 50Hz, 60Hz	230V, 50Hz, 60Hz
Max. perm. current	10A	10A
Mech. max. load	200N	200N
Mech. max. load	20 kg	20 kg
Material	Aluminium / Plastic	Aluminium / Plastic
Colour	black	white
Length	200 cm	200 cm
Width	1.8 cm	1.8 cm
Height	1.8 cm	1.8 cm
Weight	0.8 kg	0.8 kg
Item no.	**172020**	**172021**
GBP	**108,00**	**108,00**
Note	Max. 10A per phase.	Max. 10A per phase.



Track, 3m




D-TRACK® 3m, 2-circuit surface-mounted track





D-TRACK® 3m, 2-circuit surface-mounted track


Rated voltage	230V, 50Hz, 60Hz	230V, 50Hz, 60Hz
max. power load	10A	10A
Mech. max. load	300N	300N
Mech. max. load	30 kg	30 kg
Material	Aluminium / Plastic	Aluminium / Plastic
Colour	black	white
Length	295 cm	295 cm
Width	1.8 cm	1.8 cm
Height	1.8 cm	1.8 cm
Weight	1.2 kg	1.2 kg
Item no.	**172030**	**172031**
GBP	**162,00**	**162,00**
Note	Max. 10A per phase.	Max. 10A per phase.

D-TRACK® PLANNING AID

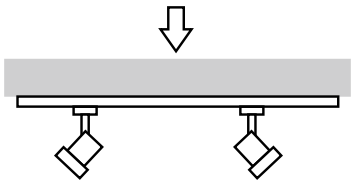

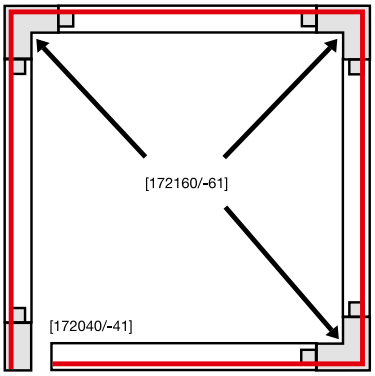

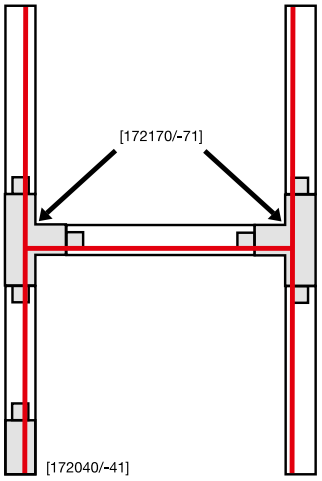

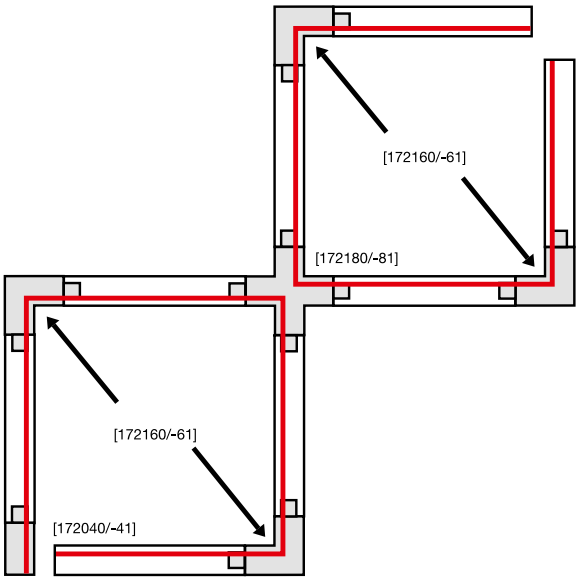

D-TRACK® ACCESSORIES

End infeed

10A max.
Aluminium / Steel
L: 22 cm W: 1.8 cm H: 1.8 cm
Weight: 0.09 kg
1 pc.

Variant	Item no.	GBP
black	172040	144,00
white	172041	144,00

End infeed

10A max.
Aluminium / Plastic
L: 9.4 cm W: 1.8 cm H: 1.8 cm
Weight: 0.42 kg
1 pc.



Variant	Item no.	GBP
black	172090	188,10
white	172091	188,10

Insulating connector

Steel / Plastic
L: 7 cm W: 1.5 cm H: 1.5 cm
Weight: 0.03 kg
1 pc.



Variant	Item no.	GBP
transparent	172145	37,80

Centre feed-in

10A max.
Aluminium / Steel
L: 37.5 cm W: 1.8 cm H: 1.8 cm
Weight: 0.26 kg
1 pc.



Variant	Item no.	GBP
black	172050	215,10
white	172051	215,10

Centre feed-in

10A max.
Aluminium / Plastic
L: 15.7 cm W: 1.8 cm H: 1.8 cm
Weight: 0.39 kg
1 pc.



Variant	Item no.	GBP
black	172100	188,10
white	172101	188,10

Flexible connector

10A max.
Aluminium / Plastic
L: 29 cm W: 1.8 cm H: 1.8 cm
Weight: 0.12 kg
13.5 cm cable length.
1 pc.



Variant	Item no.	GBP
black	172190	162,00
white	172191	162,00

End infeed

10A max.
Aluminium / Steel
L: 11.7 cm W: 8 cm H: 4 cm
Weight: 0.38 kg
1 pc.



Variant	Item no.	GBP
black	172060	144,00
white	172061	144,00

End cap

Plastic
L: 1.1 cm W: 1.8 cm H: 1.8 cm
Weight: 0.01 kg
1 pc.



Variant	Item no.	GBP
black	172110	6,90
white	172111	6,90

Steel wire holders

Aluminium / Steel
L: 100 cm
Weight: 0.02 kg
1 pc.



Variant	Item no.	GBP
black	172200	49,50
white	172201	49,50

Centre feed-in

10A max.
Aluminium / Steel
L: 15.5 cm W: 8 cm H: 4 cm
Weight: 0.26 kg
1 pc.



Variant	Item no.	GBP
black	172070	144,00
white	172071	144,00

Aluminium cover

Aluminium / Plastic
L: 100 cm W: 1.8 cm H: 0.2 cm
Weight: 0.06 kg
Incl. 10 fastening clips.
1 pc.

Variant	Item no.	GBP
black	172120	85,50
white	172121	85,50

Adapter

2A max.
Aluminium / Plastic
L: 7 cm W: 1.9 cm H: 3.2 cm
Weight: 0.05 kg
Incl. strain relief for pendants.
Suitable for products with M10 thread.
1 pc.



Variant	Item no.	GBP
black	172220	20,70
white	172221	20,70

End infeed

10A max.
Aluminium / Plastic
L: 9.4 cm W: 1.8 cm H: 1.8 cm
Weight: 0.25 kg
Incl. connection box with strain relief
1 pc.



Variant	Item no.	GBP
black	172080	171,00
white	172081	171,00

Linear connector

10A max.
Steel / Plastic
L: 7 cm W: 1.5 cm H: 1.5 cm
Weight: 0.03 kg
1 pc.




Variant	Item no.	GBP
grey	172134	40,50

STAYING ON TRACK.

SIMPLY WELL ILLUMINATED WITH 1-PHASE 240VTRACKS.

Thanks to the holes in the profile, the flat aluminium track can be attached to the wall or ceiling in a quick and uncomplicated way. When doing this you have the choice between a recessed version and a surface-mounted version, available in several colours.

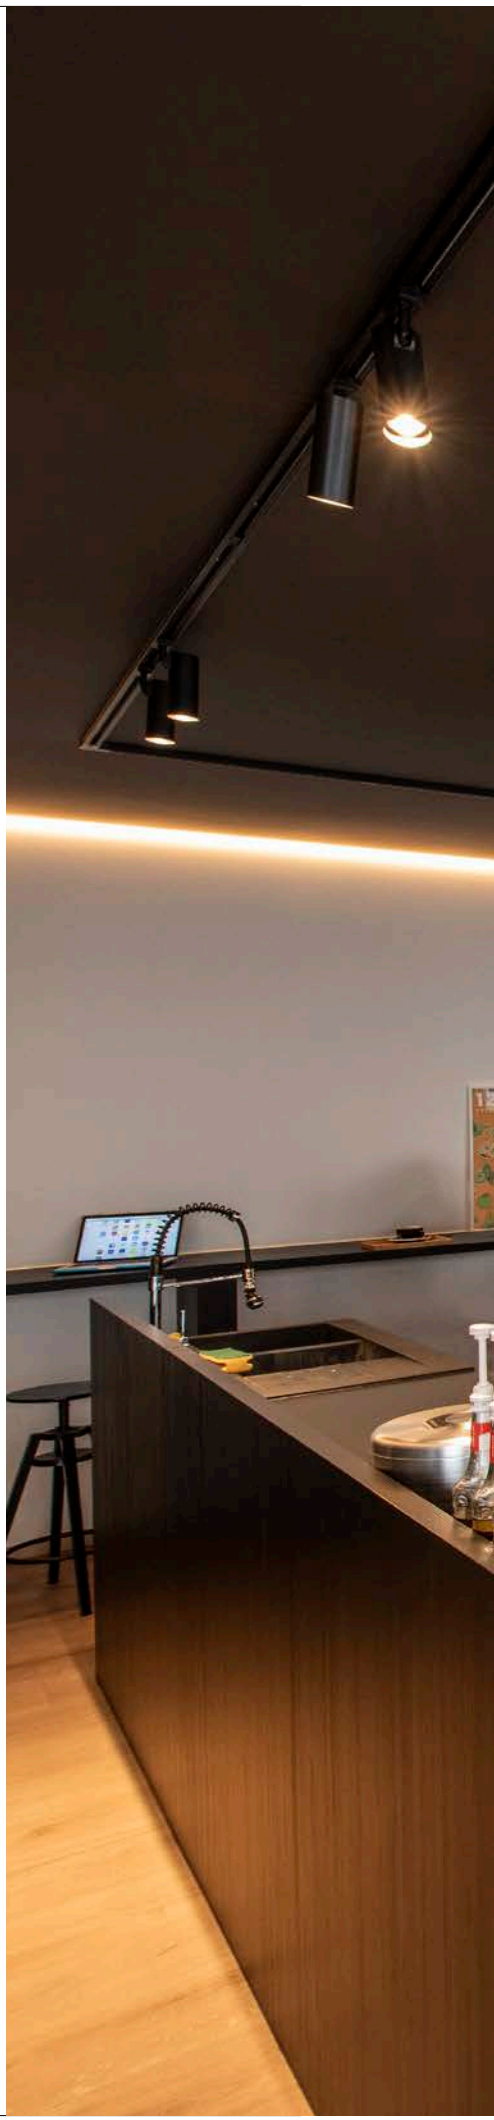


143580 397
HOT COFFEE
ICE COFFEE
izy
COFFEE
SPECIALTY COFFEE
Spoon
Milk
Spoon
Dark
LA MARZOCCO
izy
THE
BELT
ASIA/PACIFIC


1001862 396



240V TRACK, 1-CIRCUIT


386


386


387


387


387


388


388


388


389


390


391


391


392


392


393


395


395


395


396


397


397


398


398


399


399


400

400


401

Suitable recessed and surface mounted track systems as well as accessories can be found on pages 402-405

Other luminaires and variants can be found online at www.slv.com

NOBLO SPOT
1 circuit, Triple Track Set


892

A-A++ Spectrum A++–E

NEW VARIANT


LED INSIDE



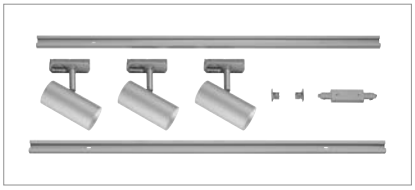

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 22.5W
Material: Aluminium

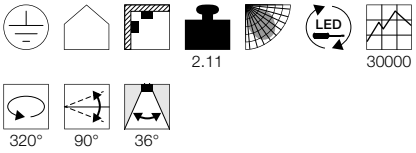

Note

The set consists of:
2x 1m 240V tracks [143010/-1/-2]
1x feed-in cable/longitudinal connector [143100/-1/-2]
1x 2 end caps [143130/-1/-2]
3x lamp heads NOBLO [1001862/-3/-4]


Variant	Item no.	GBP
1860lm | 2700K | CRI>80		
black	1002610	188,10
1860lm | 2700K | CRI>80		
white	1002611	188,10
1860lm | 2700K | CRI>80		
grey	1002612	188,10

PURI TRACK
1 circuit, Triple Track Set

894


E-A++ Spectrum A++–E



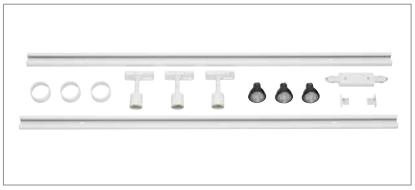

Product details

230V ~50Hz
Total consumption: 12.9W
Material: Aluminium



Note


The set consists of:
2x 1m 240V tracks
1x long connector
1x 2 end caps
3x lamp heads PURI
3x LED GU10 lamps
3x deco rings for GU10


Lamp details

3x 4.3W LEDs GU10 51mm

Variant	Item no.	GBP
GU10 | LED GU10 51mm		
black	143190	162,00
GU10 | LED GU10 51mm		
white	143191	162,00
GU10 | LED GU10 51mm		
grey	143194	162,00



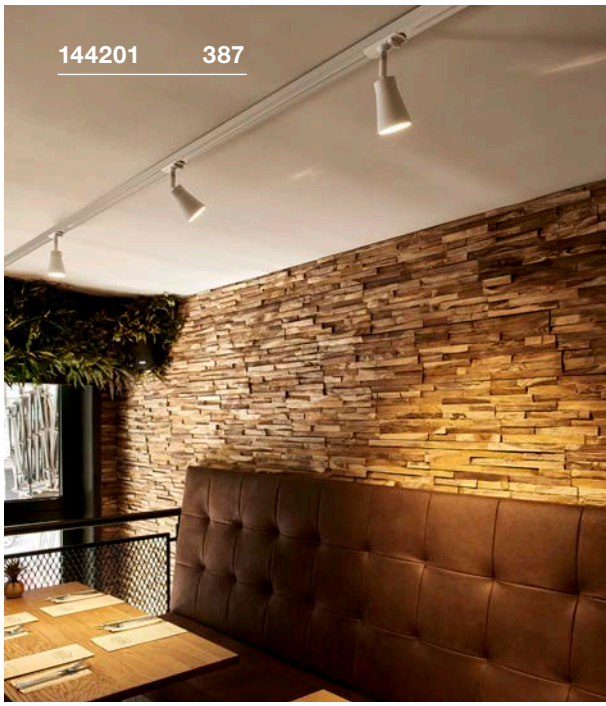

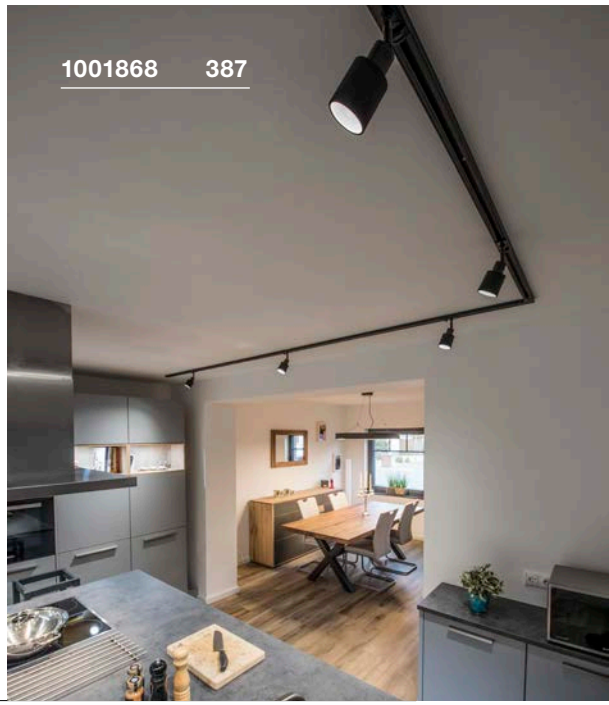

PURIA TRACK
1-circuit, QPAR51

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
3000K 440lm EEI=A+
6kWh/1000h
Item no. 551902 |13,50 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 |22,50 GBP



Lamp details
max. 10W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**143450**	**31,50**
GU10 | QPAR51		
□ white/matt transparent	**143451**	**31,50**
GU10 | QPAR51		
■ grey	**143454**	**31,50**

AVO TRACK
1-circuit, QPAR51

884

E-A++ Spectrum A++–E








Product details
230V ~50/60Hz
Material: Steel



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 |9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 |15,30 GBP



Lamp details
max. 50W QPAR51
Ø: 5 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**144200**	**29,70**
GU10 | QPAR51		
□ white	**144201**	**29,70**
GU10 | QPAR51		
■ grey	**144204**	**29,70**

PURI TRACK
1-circuit, QPAR51

894


E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Plastic



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 |15,30 GBP



LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 |9,90 GBP



Lamp details
max. 10W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**1001868**	**34,20**
GU10 | QPAR51		
□ white	**1001869**	**34,20**
GU10 | QPAR51		
■ grey	**1001870**	**34,20**

PURI TRACK
1-circuit, QPAR51

894

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Polycarbonate (PC)



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP

LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP

Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
matt black	143390	27,00
GU10 | QPAR51		
white	143391	27,00
GU10 | QPAR51		
grey	143392	27,00

SPOT TRACK
1-circuit, E27

896

D-A+ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED E27 11.5W 38°
3000K 760lm EEI=A+
12kWh/1000h
Item no. 551933 | 34,20 GBP

LED E27 17W 45°
3000K 1430lm EEI=A+
17kWh/1000h
Item no. 560473 | 60,30 GBP

Lamp details
max. 75W QPAR20
optional: QPAR30

Variant	Item no.	GBP
E27 | QPAR20		
black	1001874	31,50
E27 | QPAR20		
white	1001875	31,50
E27 | QPAR20		
grey	1001876	31,50

LIGHT EYE® 90
1-circuit, QPAR51

890

E-A++ Spectrum A++–E









- The optional deco ring for the lamp in the appropriate colour reduces the distance between the housing and the lamp

Product details
230V ~50/60Hz
Material: Steel



Dimensioned drawing



Recommended accessories

Lamp deco ring diam. 5.7cm
Item no. 151040 | 4,00 GBP

Lamp deco ring diam. 5.7cm
Item no. 151041 | 4,00 GBP

Lamp deco ring diam. 5.7cm
Item no. 151049 | 5,90 GBP


Recommended lamp


LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP

Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white / chrome	144011	63,00
GU10 | QPAR51		
gold	144013	72,00
GU10 | QPAR51		
copper	144019	72,00
GU10 | QPAR51		
black / chrome	144010	63,00

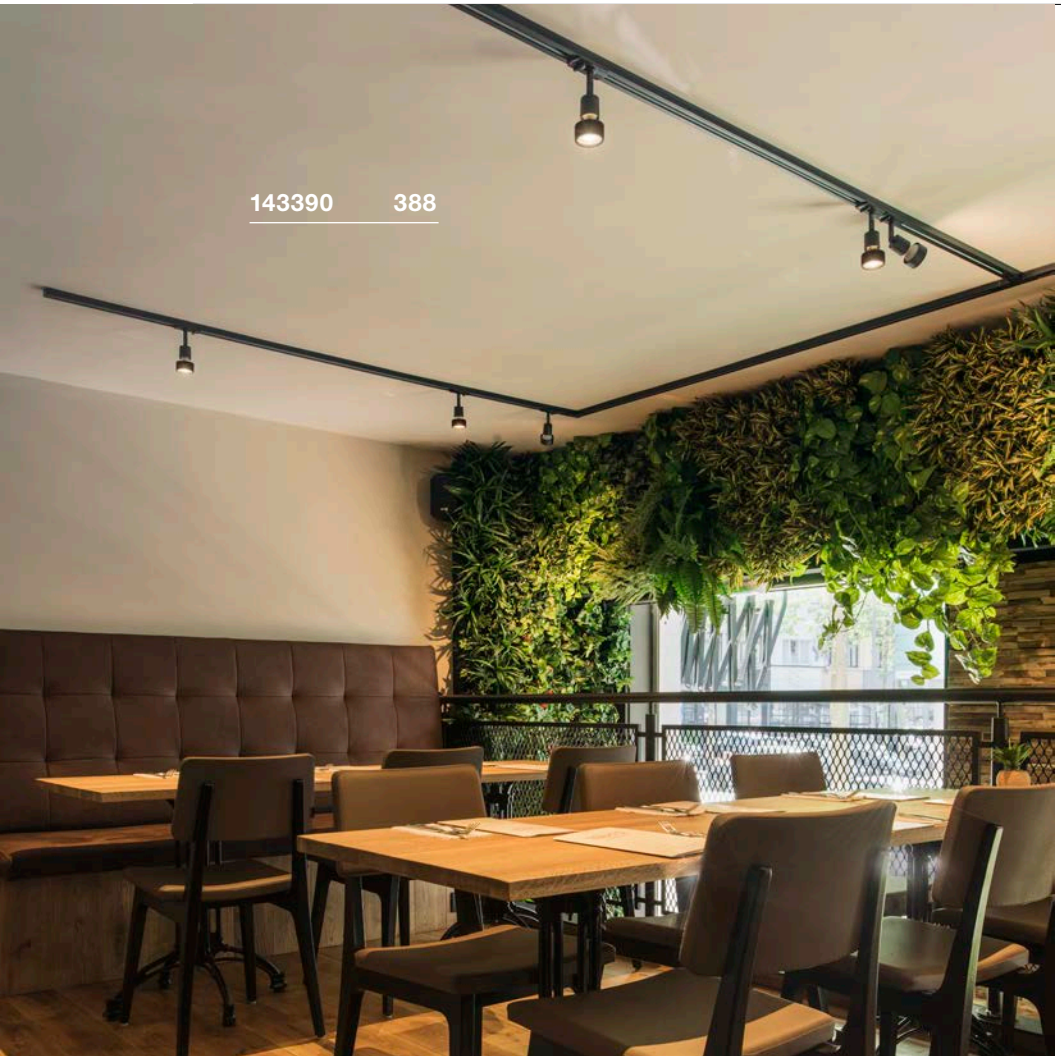

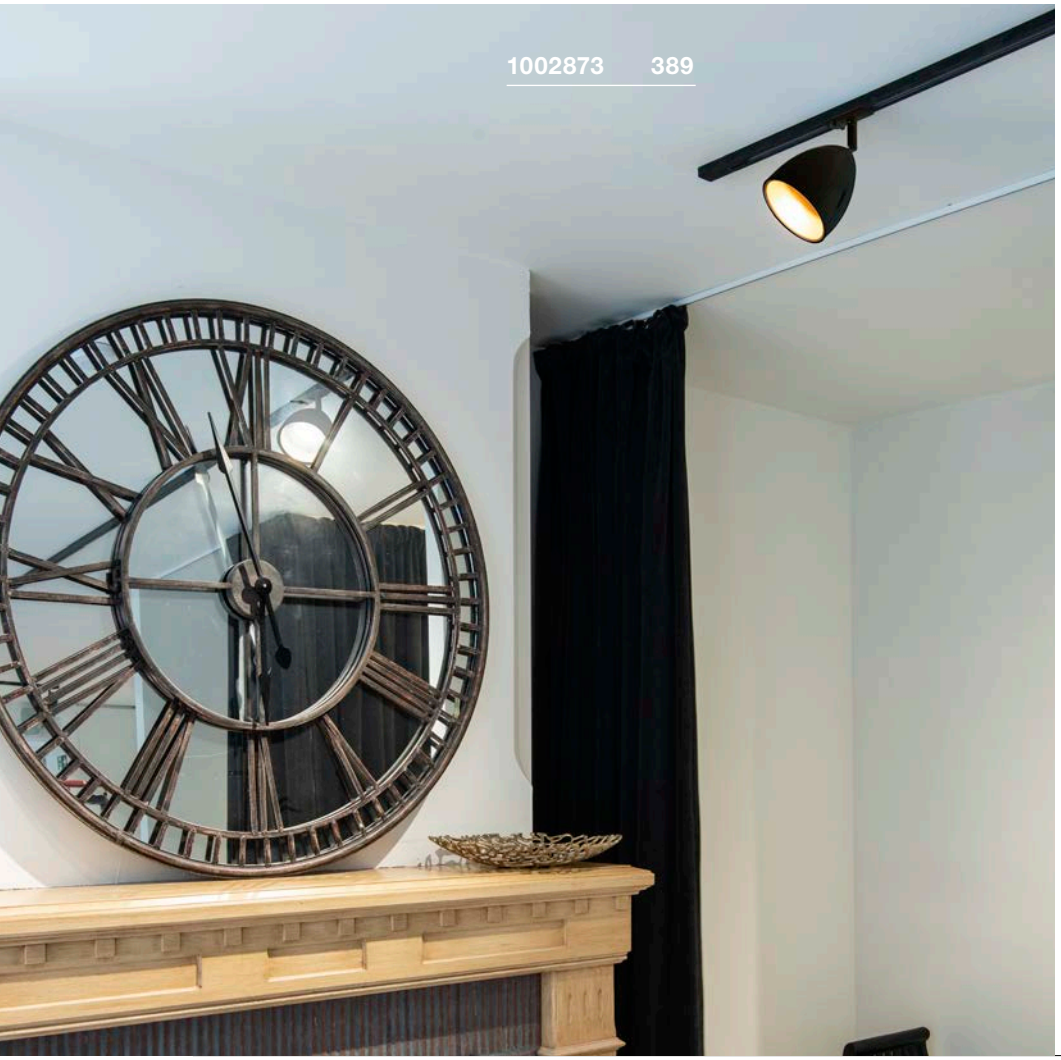

PARA CONE 14

1-circuit, QPAR51

893

E-A++ Spectrum A⁺⁺–E

NEW VARIANT









Product details

220-240V ~50/60Hz
Material: Steel



Dimensioned drawing



Lamp details

max. 25W QPAR51

Variant	Item no.	GBP
GU10 ■ shiny black	1002873	65,70
GU10 □ shiny white	1002874	65,70
GU10 ■ copper	1002875	67,50

ENOLA B TRACK
1-circuit, QPAR51

885

E-A++ Spectrum A++–E










Product details

230V ~50/60Hz
Material: Aluminium / Steel

IP 20 | 0.35 | 350° | 90°

Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP


LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP

Lamp details

max. 50W QPAR51
Ø: 5 cm max. L: 6.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51 ■ black	1002110	60,30
GU10 | QPAR51 □ white	1002111	60,30
GU10 | QPAR51 ■ grey	1002113	60,30



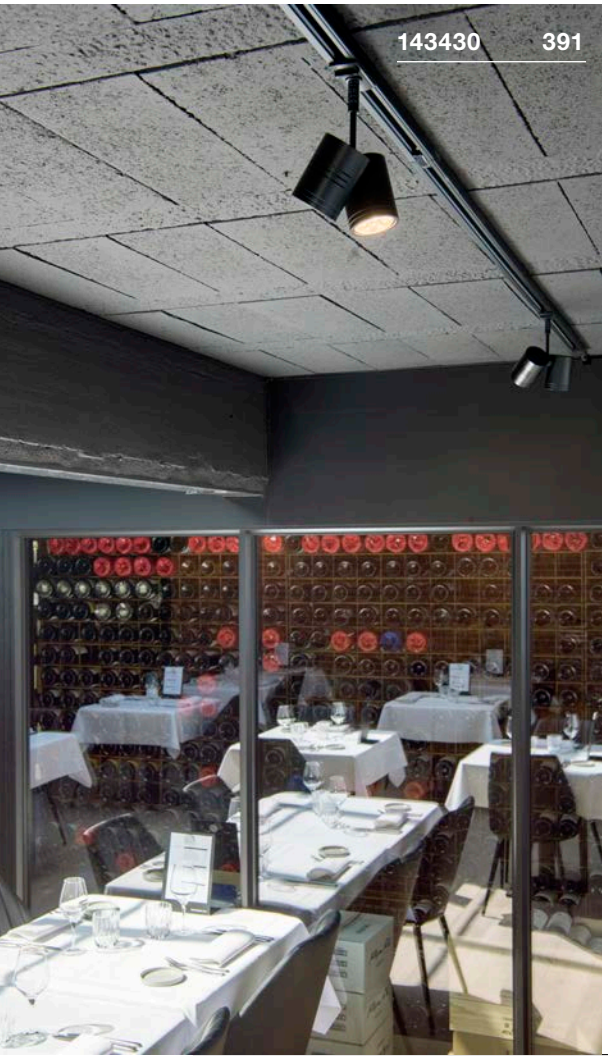

BIMA
1-circuit, single, QPAR51

885

E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium

0.31 350° 200°

Dimensioned drawing



Recommended lamp
LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

Lamp details
max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
matt black	**143440**	**40,50**
GU10 | QPAR51		
matt white	**143441**	**40,50**
GU10 | QPAR51		
grey	**143442**	**40,50**

BIMA
1-circuit, double, QPAR51

885

E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium

0.51 350° 200°

Dimensioned drawing



Recommended lamp
LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001566 | 9,90 GBP

Lamp details
2x max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
matt black	**143430**	**60,30**
GU10 | QPAR51		
matt white	**143431**	**60,30**
GU10 | QPAR51		
grey	**143432**	**60,30**

EURO SPOT TRACK
1-circuit QPAR51

886

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP



Lamp details

max. 25W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**1001861**	**58,50**
GU10 | QPAR51		
□ white / transparent	**143811**	**58,50**
GU10 | QPAR51		
■ grey	**143814**	**58,50**

EURO SPOT TRACK
1-circuit

886

A-A++ Spectrum A++–E

LED INSIDE









Product details


230V ~50Hz
Total consumption: 11W
Material: Aluminium

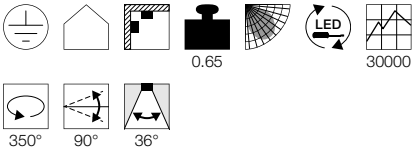



Dimensioned drawing



Variant	Item no.	GBP
650lm | 3000K | CRI>80		
■ black	**1001485**	**99,00**
650lm | 3000K | CRI>80		
□ white	**1001486**	**99,00**
650lm | 3000K | CRI>80		
■ grey	**1001487**	**99,00**

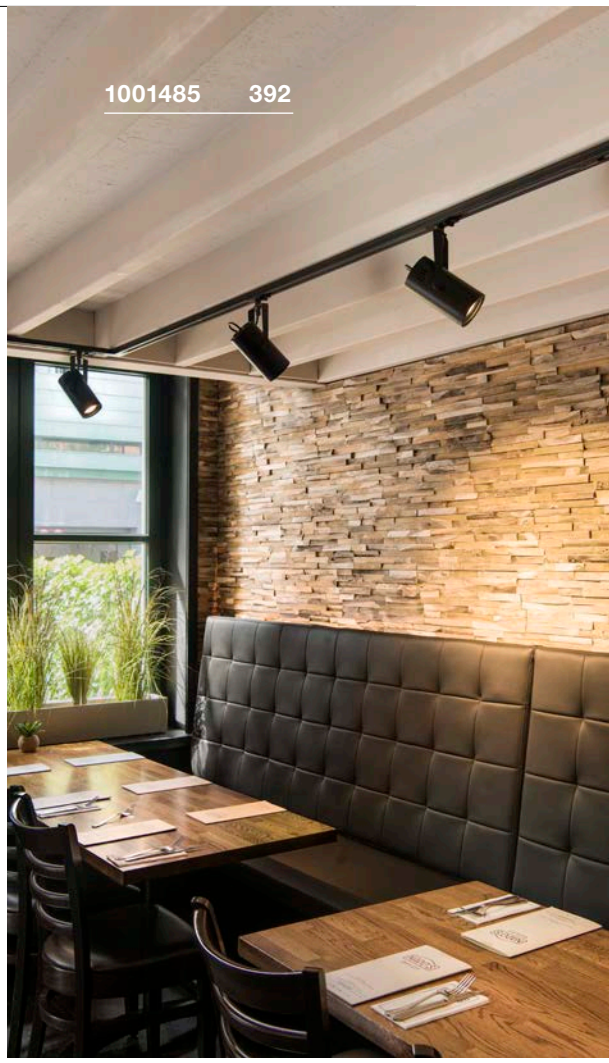

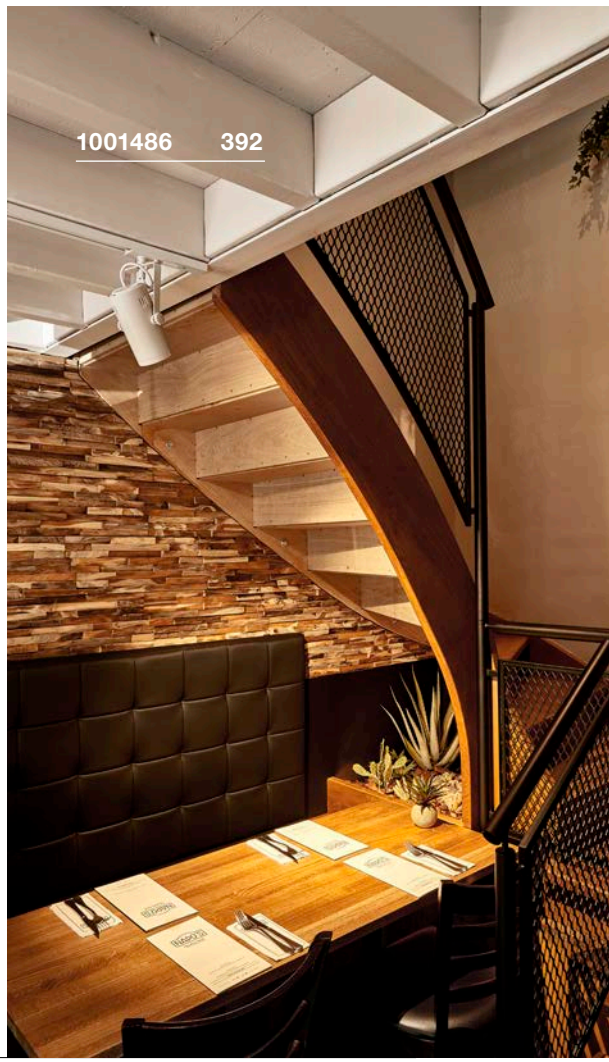

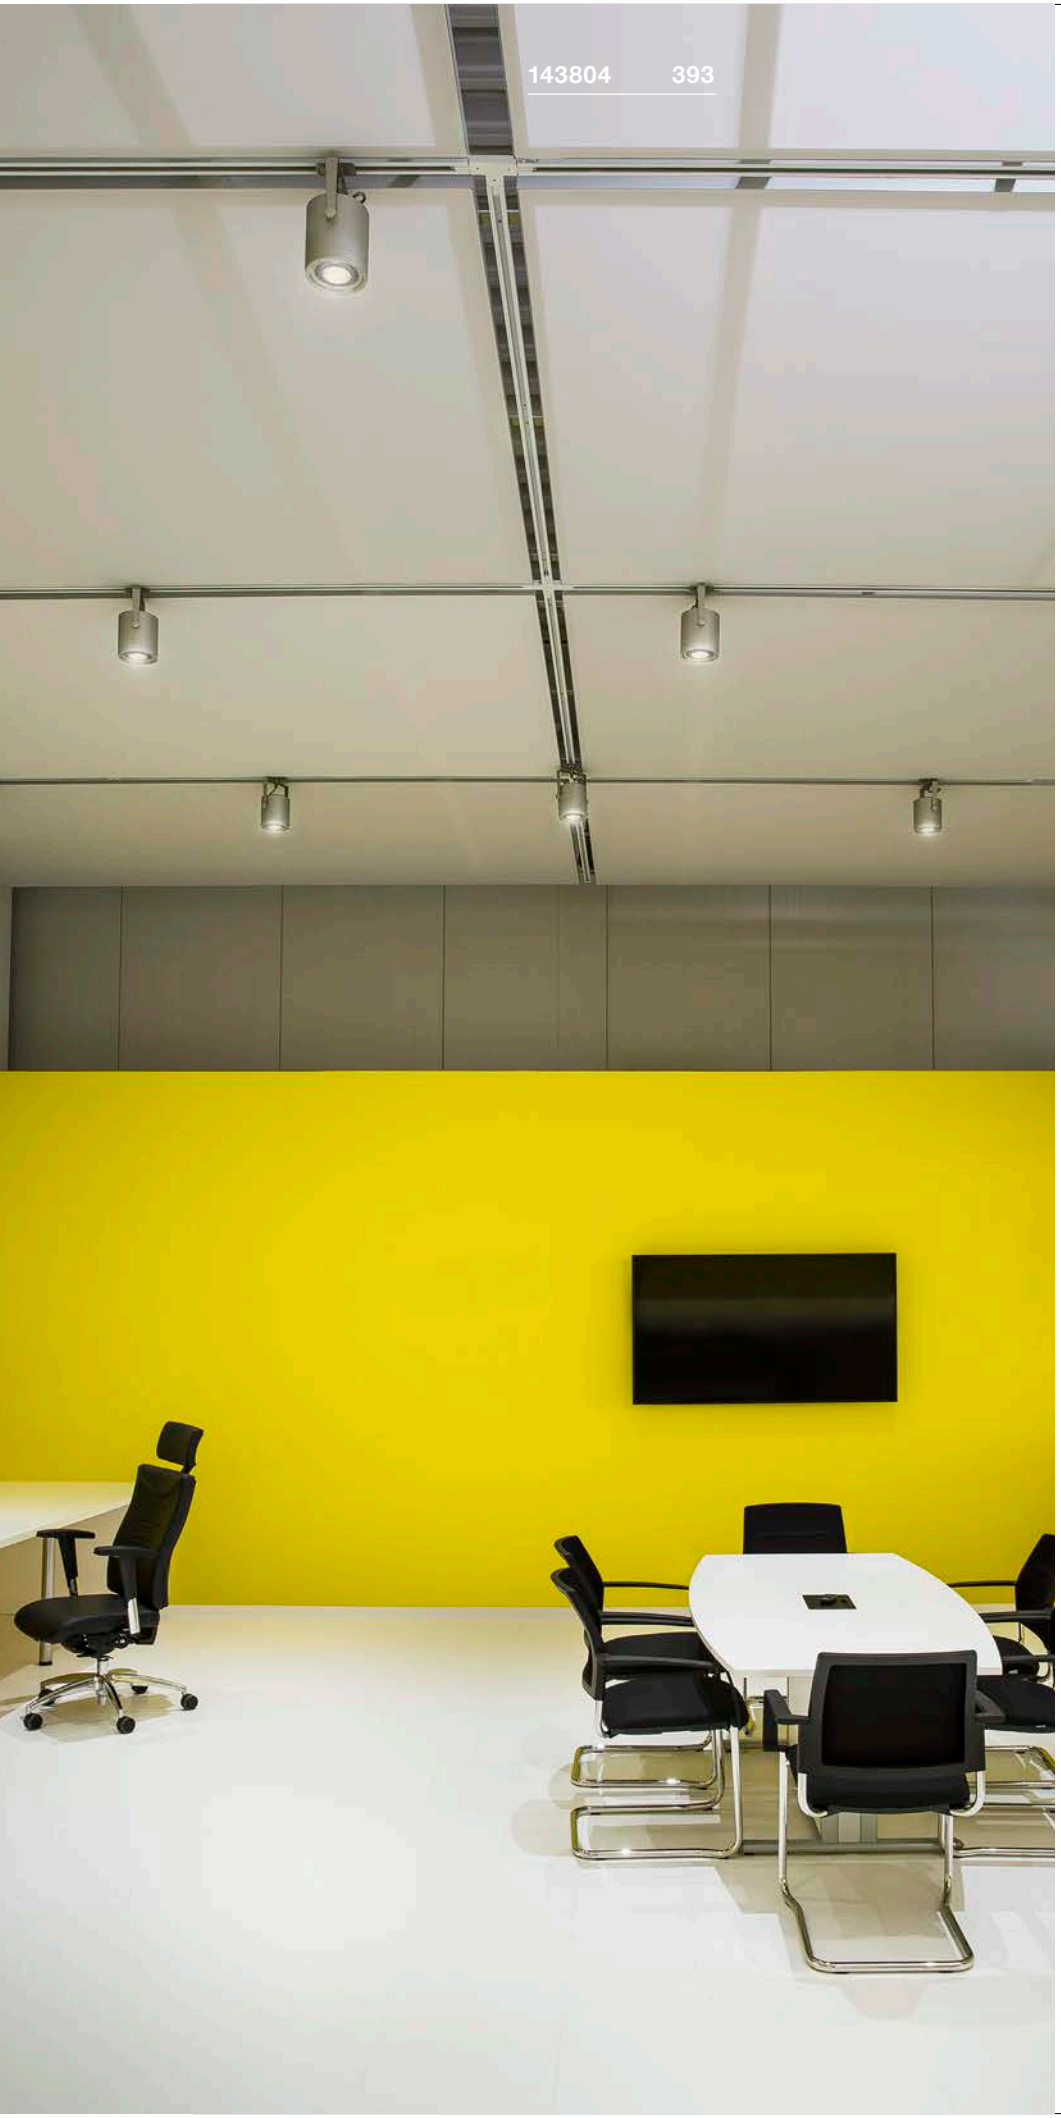

EURO SPOT TRACK
1-circuit QPAR111

886

E-A++ Spectrum A⁺⁺–E








Product details

230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

GU10 7W 13°
3000K 660lm EEI==A+
8kWh/1000h
Item no. 1001568 | 20,70 GBP




LED GU10 13W 30°
2700K 1100lm EEI=A+
13kWh/1000h
Item no. 1001242 | 76,50 GBP



Lamp details

max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 ■ black	**1001860**	**72,00**
GU10 | QPAR111 □ white	**143801**	**72,00**
GU10 | QPAR111 ■ grey	**143804**	**72,00**

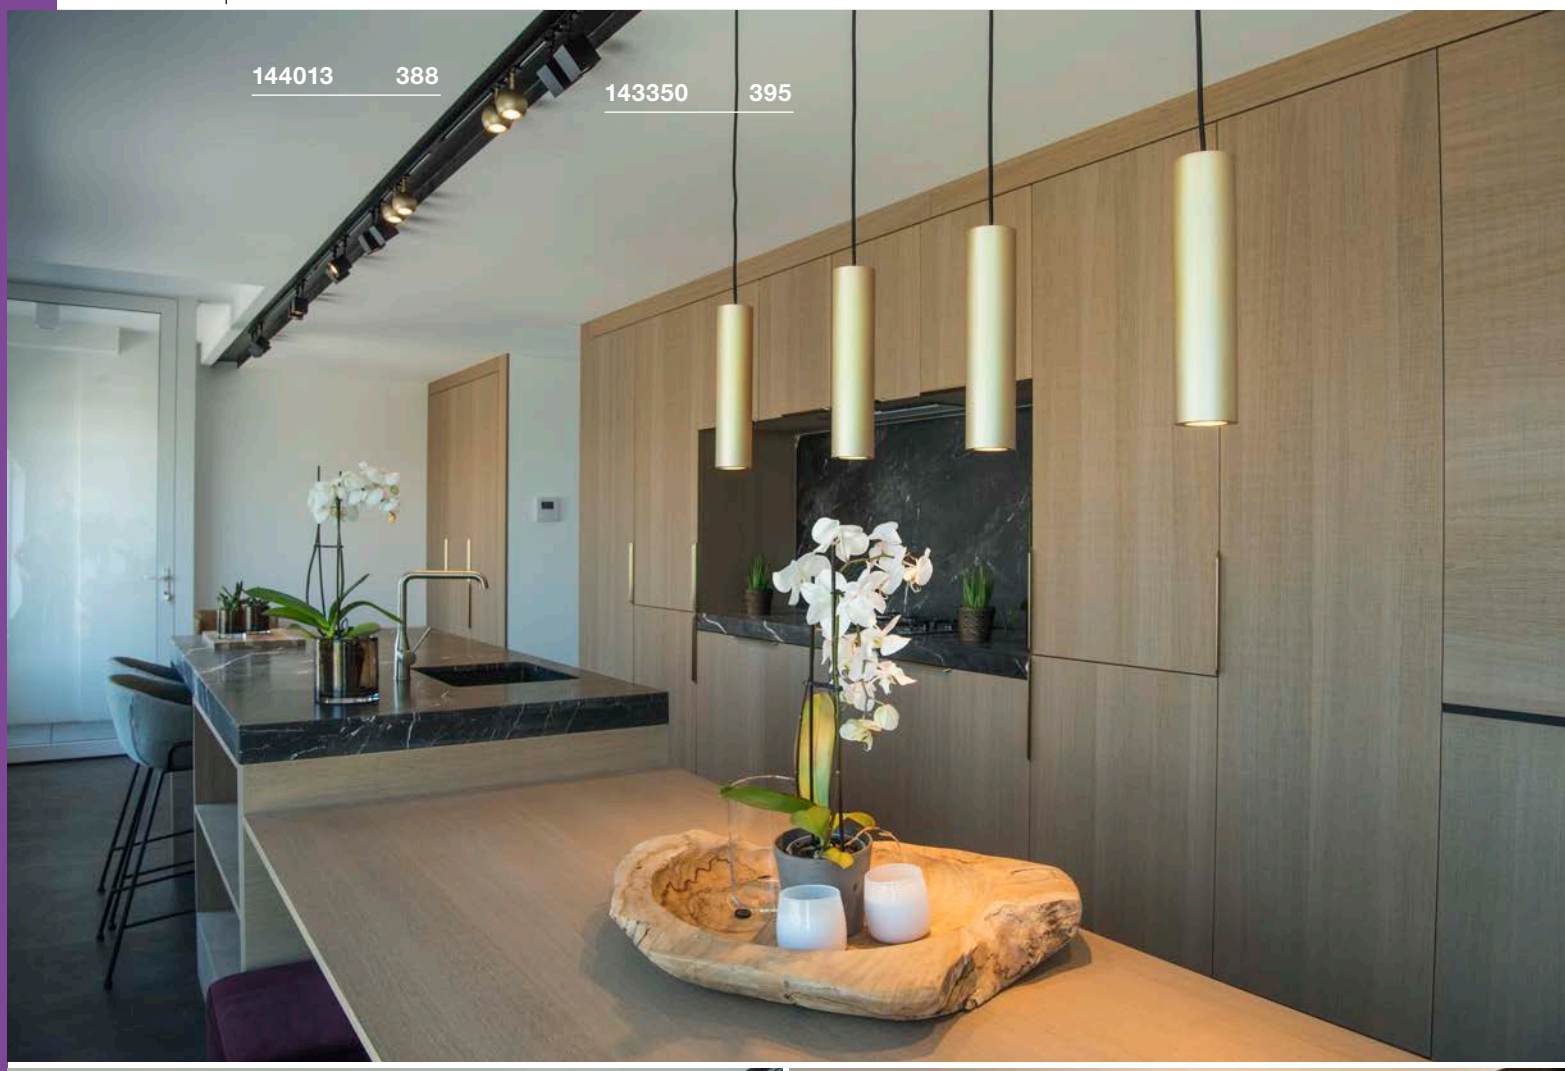
144013 388
143350 395


144013 388
143350 395


1002854 395

ALTRA DICE TRACK
1-circuit, QPAR51

883

E-A++ Spectrum A++–E








Product details

230V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**143350**	**76,50**
GU10 | QPAR51		
□ white	**143351**	**76,50**
GU10 | QPAR51		
■ grey	**143354**	**76,50**

KALU TRACK
1-circuit, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE

NEW COLOR









Product details

220-240V ~50/60Hz
Total consumption: 13W
Material: Aluminium
Dimmable: Triac C

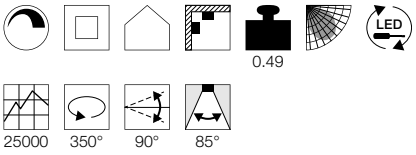

Dimensioned drawing



Lamp details

Variant	Item no.	GBP
860lm | 3000K | CRI>80		
■ black	**1002854**	**180,00**
860lm | 3000K | CRI>80		
□ white	**143731**	**180,00**

KALU TRACK
1-circuit, QPAR111

889

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Plastic



Dimensioned drawing



Recommended lamp

GU10 7.9W 25°
4000K 760lm EEI=A+
8kWh/1000h
Item no. 560704 | 20,70 GBP



LED GU10 13W 30°
4000K 1300lm EEI=A+
13kWh/1000h
Item no. 1001243 | 76,50 GBP



Lamp details

max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
■ matt black	**143540**	**72,00**
GU10 | QPAR111		
□ white	**143541**	**72,00**
GU10 | QPAR111		
■ grey	**143544**	**72,00**

NOBLO SPOT
1-circuit

892

A-A++ Spectrum A⁺⁺–E

LED INSIDE











Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.5W
Material: Aluminium

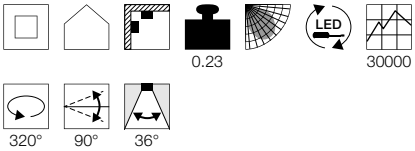

Dimensioned drawing



Variant	Item no.	GBP
620lm | 2700K | CRI>80 ■ black	1001862	49,50
620lm | 2700K | CRI>80 □ white	1001863	49,50
620lm | 2700K | CRI>80 ■ grey	1001864	49,50





HELIA 50 TRACK
1-circuit

888

A-A++ Spectrum A++–E

LED INSIDE







- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium

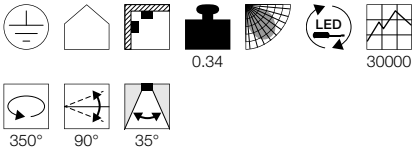

Dimensioned drawing



Variant	Item no.	GBP
750lm | 3000K | CRI>90		
■ black	**143580**	**99,00**
750lm | 3000K | CRI>90		
□ white	**143581**	**99,00**

ENOLA C TRACK
1-circuit

886

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass

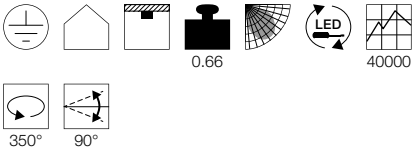

Dimensioned drawing



Variant	Item no.	GBP
900lm | 3000K | CRI>80 | 35°		
■ black	**1000711**	**153,00**
900lm | 3000K | CRI>80 | 35°		
□ white / transparent	**143941**	**153,00**
900lm | 3000K | CRI>80 | 55°		
■ black	**1000712**	**153,00**
900lm | 3000K | CRI>80 | 55°		
□ white	**143951**	**153,00**

STRUCTEC
1-circuit

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Premium LED with CRI>90

Product details

230V ~50/60Hz
Total consumption: 28W
Material: Aluminium

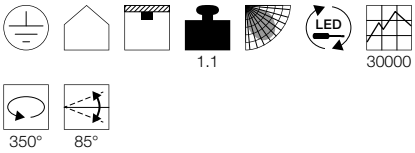

Dimensioned drawing



Variant	Item no.	GBP
2700lm | 3000K | CRI>90 | 36°		
■ black	**1000974**	**171,00**
2700lm | 3000K | CRI>90 | 36°		
□ white	**1000975**	**171,00**
2700lm | 3000K | CRI>90 | 36°		
■ grey	**1000976**	**171,00**
2650lm | 3000K | CRI>90 | 60°		
■ black	**1000977**	**171,00**
2650lm | 3000K | CRI>90 | 60°		
□ white	**1000978**	**171,00**
2650lm | 3000K | CRI>90 | 60°		
■ grey	**1000979**	**171,00**

BILAS TRACK
1-circuit, TRIAC

885

A-A++ Spectrum A⁺⁺–E

LED INSIDE







- 240V LED

Product details

230V ~50/60Hz
Total consumption: 16W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

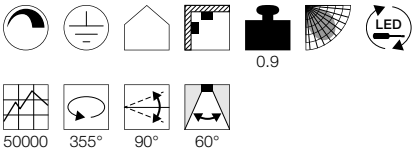

Dimensioned drawing




Variant	Item no.	GBP
1000lm | 2700K | CRI>80		
■ matt black	**143560**	**224,10**
1000lm | 2700K | CRI>80		
□ matt white	**143561**	**224,10**





DESIGNED BY
Vincent de Smedt

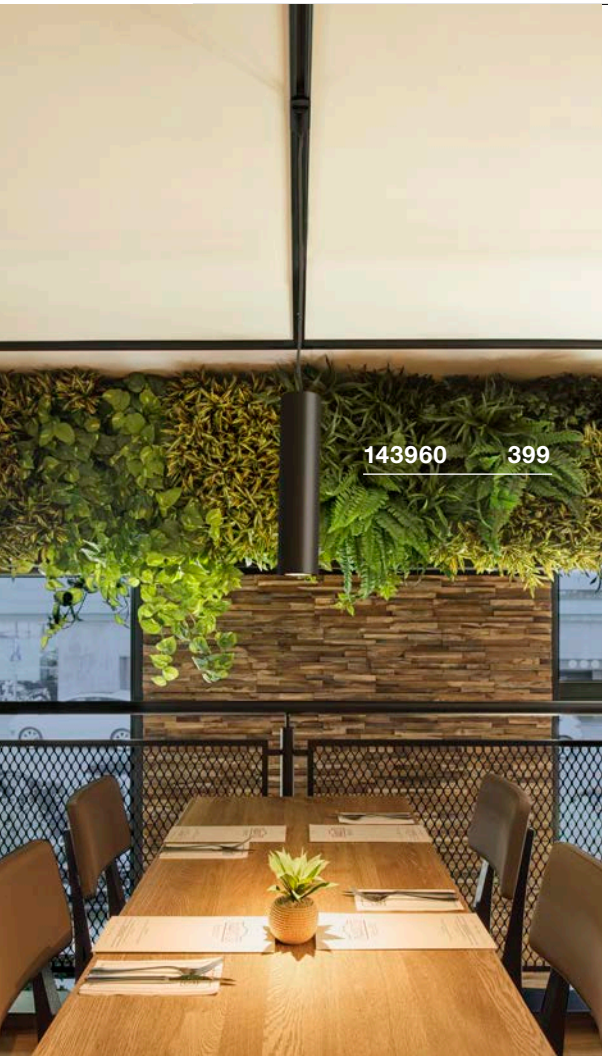



ENOLA B
PD, QPAR51

885

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Steel

0.6 150

Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP



Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
black	**143960**	**108,00**
GU10 | QPAR51		
white	**143961**	**108,00**
GU10 | QPAR51		
grey	**143964**	**108,00**

LIGHT EYE® 150
PD, QPAR111

890

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Steel

0.54 150

Dimensioned drawing



Recommended accessories

Ceiling hook
Item no. 132670 | 15,30 GBP



Ceiling hook
Item no. 132671 | 15,30 GBP



Cable hook
Item no. 132680 | 9,90 GBP



Cable hook
Item no. 132681 | 9,90 GBP



Recommended lamp

LED GU10 13W 30°
2700K 1100lm EEI=A+
13kWh/1000h
Item no. 1001242 | 76,50 GBP



LED GU10 13W 140°
2700K 1000lm EEI==A+
13kWh/1000h
Item no. 1001244 | 76,50 GBP



Lamp details

max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
black / chrome	**1000713**	**99,00**
GU10 | QPAR111		
chrome	**143620**	**108,00**
GU10 | QPAR111		
white / chrome	**143621**	**99,00**

PARA CONE 14
1-circuit, PD, QPAR51

893

E-A++ Spectrum A++–E









- Can be combined into a “lighting group” by means of individual configuration

Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details
max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
shiny black	**143990**	**90,00**
GU10 | QPAR51		
white	**143991**	**90,00**
GU10 | QPAR51		
copper	**1001968**	**94,50**

TONGA®
1-circuit. PD, E14


897

E-A++ Spectrum A++–E




- Ceramic shade

Product details
220-240V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

E14 3.4W 260°
3000K 250lm EEI=A+
4kWh/1000h
Item no. 560362 | 5,90 GBP

LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP




Lamp details
max. 60W C35
Ø: 5 cm max. L: 13 cm max.

Variant	Item no.	GBP
E14 | C35		
grey / shiny opaque	**143594**	**99,00**







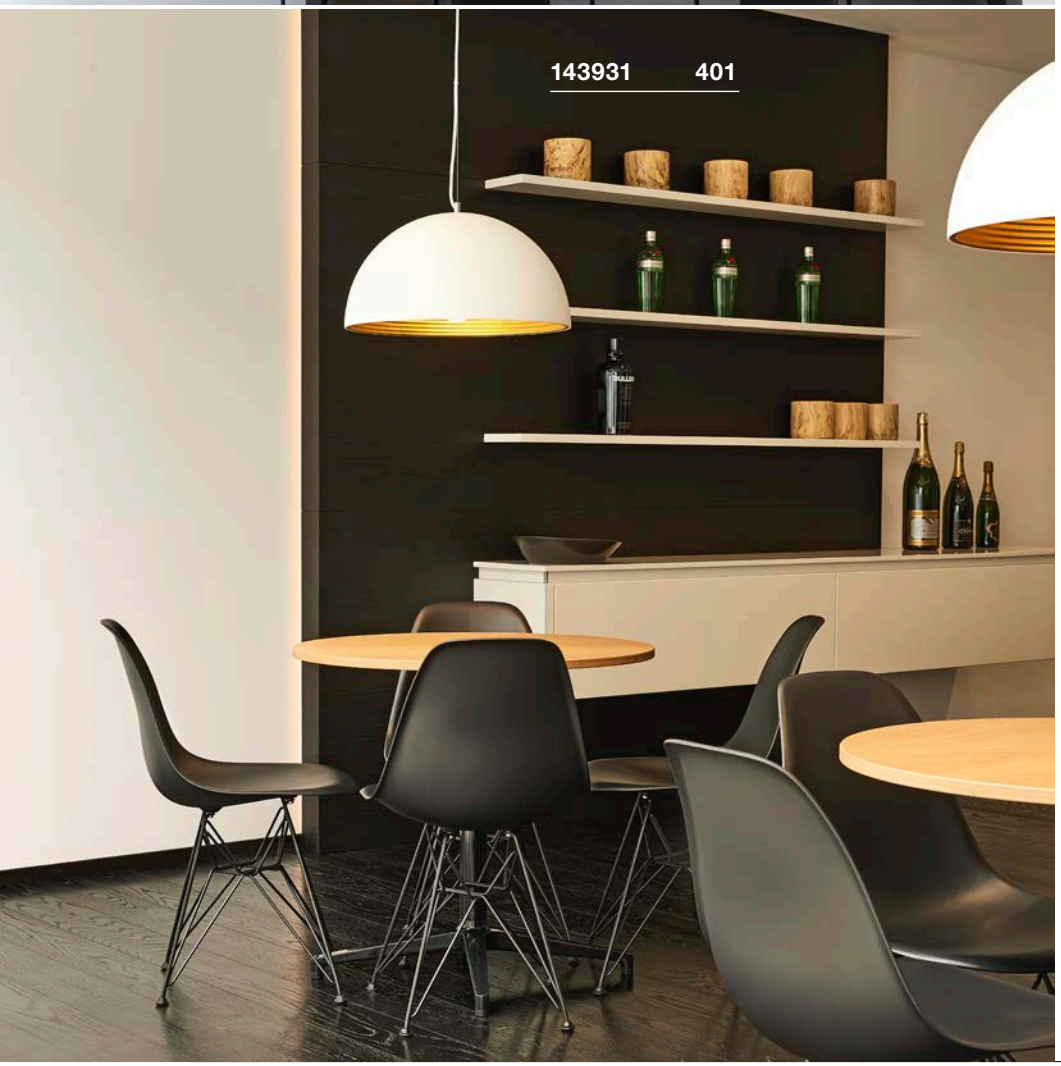

FORCHINI M 40 TRACK

1-circuit, E27

887

E-A++ Spectrum A⁺⁺–E








- Textured interior design with internal reflector
- Textile cable in housing colour

Product details

230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing



Note

Pendant adapter colour silver-grey [143930] / white [143931] / black [143932]

Recommended lamp

LED E27 7W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001035 | 15,30 GBP



LED E27 7W 280°
2200-2700K 830lm EEI==A++
7kWh/1000h
Item no. 1002126 | 17,10 GBP




Lamp details

max. 40W A60
Ø: 6.8 cm max. L: 15.2 cm max.

Variant	Item no.	GBP
E27 | A60 black / gold	**143930**	**180,00**
E27 | A60 white/gold	**143931**	**180,00**
E27 | A60 black / gold	**143932**	**180,00**

RECESSED TRACK 2 M





1-CIRCUIT RECESSED TRACK

Rated voltage	230V, 50Hz, 60Hz
Max. perm. current	16A
Feed-in capability	no
Material	Aluminium
Colour	white
Length	200 cm
Width	5.5 cm
Height	1.8 cm
Installation width	4 cm
Weight	1.16 kg
Item no.	**143221**
GBP	**54,00**



Ceiling suspension

Stainless steel / brass
L: 500 cm
Weight: 0.2 kg
2 pc.



Variant	Item no.	GBP
Nickel	1002845	31,50

Corner connector, earth on outside

16A max.
Plastic
L: 11.2 cm W: 11.2 cm H: 2 cm
Weight: 0.07 kg
External earth electrode
1 pc.



Variant	Item no.	GBP
white	143251	14,90

Cover

Plastic
L: 100 cm W: 1.8 cm
Weight: 0.04 kg
1 pc.

Variant	Item no.	GBP
white	143291	14,90

Retaining bracket

Steel
L: 7.5 cm W: 1.5 cm H: 4 cm
Weight: 0.03 kg
Required for reinforcement when installing several tracks of the long connector including stabiliser (143271)
Optional for reinforcement for corner installation of the corner connector stabiliser, long (143152), 1 pc.



Variant	Item no.	GBP
matt nickel	143230	2,00

Corner connector, earth on inside

16A max.
Plastic
L: 11.2 cm W: 11.2 cm H: 2 cm
Weight: 0.07 kg
Internal earth
1 pc.



Variant	Item no.	GBP
white	143261	14,90

Stabiliser, long corner connector

Steel
L: 11.5 cm W: 11.5 cm H: 0.5 cm
Weight: 0.06 kg
For reinforcement when mounting several tracks with ceiling suspension (143140/-1/-2)
1 pc.



Variant	Item no.	GBP
matt nickel	143152	5,90

Feed-in, earth on left side

16A max.
Plastic
L: 10.8 cm W: 5.5 cm H: 2 cm
Weight: 0.41 kg
Earth electrode, left-hand side
1 pc.



Variant	Item no.	GBP
white	143231	9,90

Long connector including longitudinal stiffener

Plastic / Steel
L: 6.5 cm W: 1.8 cm H: 1.7 cm
Weight: 0.09 kg
The connector is installed in the track, the stabiliser on the rear side of the track.
1 pc.



Variant	Item no.	GBP
white	143271	9,90

1-circuit adapter with hook

6A max.
Polycarbonate (PC)
L: 8.2 cm W: 3.5 cm H: 7.4 cm
Weight: 0.05 kg
Maximum mechanical load 20N.
For pendants with an additional mechanical suspension.
1 pc.



Variant	Item no.	GBP
black	143170	9,90
white	143171	9,90
grey	143172	9,90

Feed-in, earth on right side

16A max.
Plastic
L: 10.8 cm W: 5.5 cm H: 2 cm
Weight: 0.41 kg
Earth electrode, right-hand side
1 pc.



Variant	Item no.	GBP
white	143241	9,90

End caps, 2 pieces

Plastic
L: 2.7 cm W: 5.5 cm H: 1.8 cm
Weight: 0.01 kg
2 pc.



Variant	Item no.	GBP
white	143281	5,00


Pendant adapter

6A max.
Polycarbonate (PC)
L: 8.2 cm W: 3.5 cm H: 4.2 cm
Weight: 0.04 kg
Maximum mechanical load 20N.
Incl. strain relief
1 pc.



Variant	Item no.	GBP
black	143120	9,90
white	143121	9,90
grey	143124	9,90

1-CIRCUIT SURFACE MOUNTED TRACK PLANNING AID

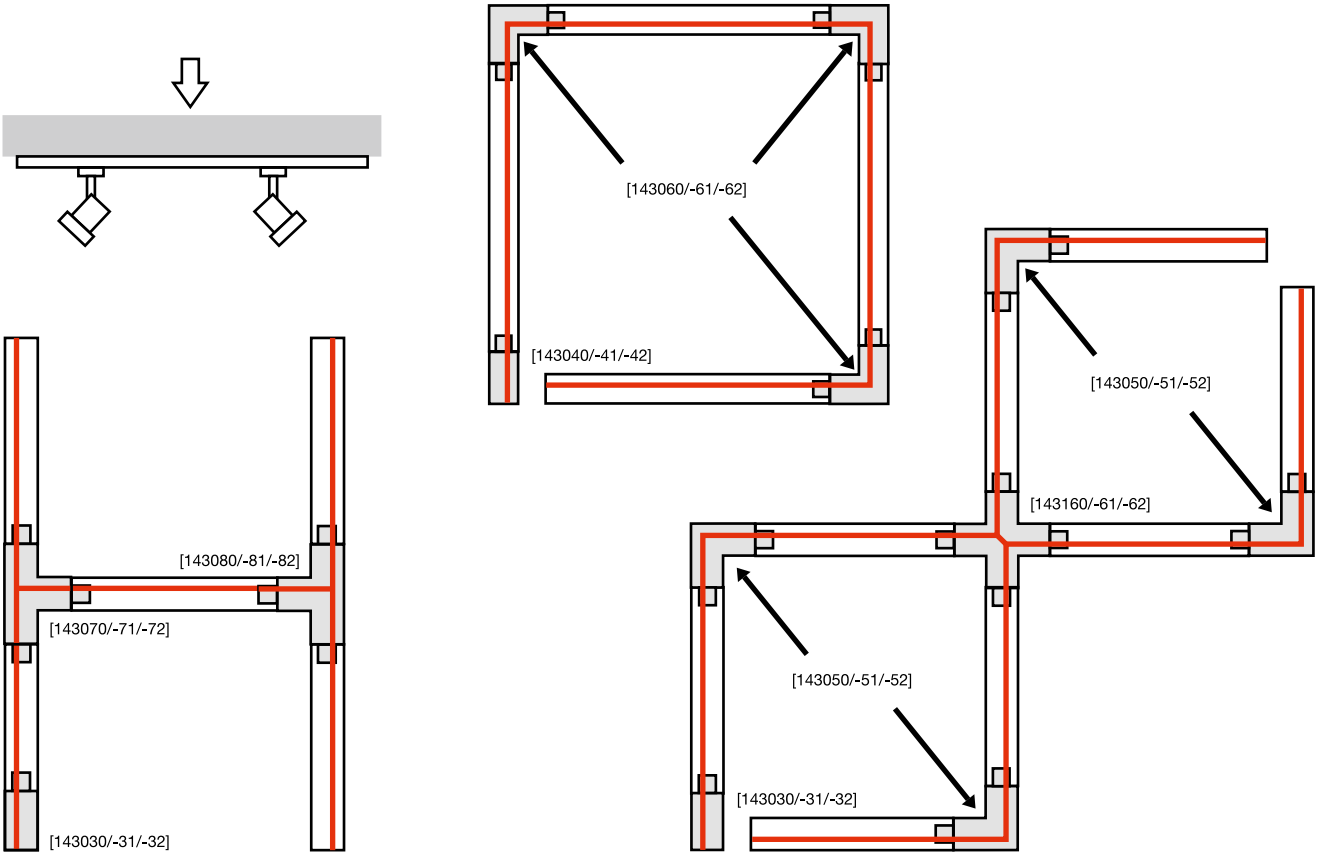



SURFACE-MOUNTED TRACKS 1 M



	 1-CIRCUIT SURFACE MOUNTED TRACK	 1-CIRCUIT SURFACE MOUNTED TRACK	 1-CIRCUIT SURFACE MOUNTED TRACK
Rated voltage	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50Hz
Max. perm. current	16A	16A	16
Feed-in capability	no	no	no
Material	Aluminium	Aluminium	Aluminium
Colour	matt black	white	grey
Length	100 cm	100 cm	100 cm
Width	3.5 cm	3.5 cm	3.5 cm
Height	1.8 cm	1.8 cm	1.8 cm
Weight	0.67 kg	0.67 kg	0.67 kg
Item no.	**143010**	**143011**	**143012**
GBP	**25,20**	**25,20**	**25,20**

SURFACE-MOUNTED TRACKS 2 M



	 1-CIRCUIT SURFACE MOUNTED TRACK	 1-CIRCUIT SURFACE MOUNTED TRACK	 1-CIRCUIT SURFACE MOUNTED TRACK
Rated voltage	220-240V ~50/60Hz	220-240V ~50Hz	220-240V ~50/60Hz
Max. perm. current	16A	16A	16A
Feed-in capability	no	no	no
Material	Aluminium	Aluminium	Aluminium
Colour	matt black	white	grey
Length	200 cm	200 cm	200 cm
Width	3.5	3.5 cm	3.5 cm
Height	1.8 cm	1.8 cm	1.8 cm
Weight	1.34 kg	1.34 kg	1.34 kg
Item no.	**143020**	**143021**	**143022**
GBP	**49,50**	**49,50**	**49,50**

SURFACE-MOUNTED TRACKS 3 M



	 1-CIRCUIT SURFACE MOUNTED TRACK	 1-CIRCUIT SURFACE MOUNTED TRACK	 1-CIRCUIT SURFACE MOUNTED TRACK
Rated voltage	230V, 50Hz, 60Hz	230V, 50Hz, 60Hz	230V, 50Hz, 60Hz
Max. perm. current	16A	16A	16A
Feed-in capability	no	no	no
Material	Aluminium	Aluminium	Aluminium
Colour	black	white	grey
Length	300 cm	300 cm	300 cm
Width	3.5 cm	3.5 cm	3.5 cm
Height	1.8 cm	1.8 cm	1.8 cm
Weight	1.6 kg	1.6 kg	1.6 kg
Item no.	**1002151**	**1002152**	**1002153**
GBP	**78,30**	**78,30**	**78,30**

1-CIRCUIT SURFACE MOUNTED TRACK ACCESSORIES

Ceiling suspension



Stainless steel / brass
L: 500 cm
Weight: 0.2 kg
2 pc.

Variant	Item no.	GBP
Nickel	1002845	31,50

Longitudinal connector, electric



16A max.
Polycarbonate (PC)
L: 6.4 cm W: 3.5 cm H: 1.8 cm
Weight: 0.02 kg
1 pc.

Variant	Item no.	GBP
black	143090	5,00
white	143091	5,00
grey	143092	5,00

End caps, 2 pieces



Polycarbonate (PC)
L: 0.4 cm W: 3.5 cm H: 1.8 cm
Weight: 0.01 kg
2 pc.

Variant	Item no.	GBP
black	143130	2,50
white	143131	2,50
grey	143132	2,50

Feed-in, earth on left side



16A max.
Polycarbonate (PC)
L: 10.4 cm W: 3.5 cm H: 1.8 cm
Weight: 0.04 kg
Earth electrode, left-hand side
1 pc.

Variant	Item no.	GBP
black	143030	6,80
white	143031	6,80
grey	143032	6,80

Longitudinal connector with feed-in capability



16A max.
Polycarbonate (PC)
L: 17.2 cm W: 3.5 cm H: 1.8 cm
Weight: 0.07 kg
1 pc.

Variant	Item no.	GBP
black	143100	12,60
white	143101	12,60
grey	143102	12,60

X-connector



16A max.
Polycarbonate (PC)
L: 9.5 cm W: 17.2 cm H: 1.8 cm
Weight: 0.13 kg
1 pc.

Variant	Item no.	GBP
black	143160	22,50
white	143161	22,50
grey	143162	22,50

Feed-in, earth on right side



16A max.
Polycarbonate (PC)
L: 10.4 cm W: 3.5 cm H: 1.8 cm
Weight: 0.04 kg
Earth electrode, right-hand side
1 pc.

Variant	Item no.	GBP
black	143040	6,80
white	143041	6,80
grey	143042	6,80

T-connector, earth on left side



16A max.
Polycarbonate (PC)
L: 17.2 cm W: 10.4 cm H: 1.8 cm
Weight: 0.1 kg
Earth electrode, left-hand side
1 pc.

Variant	Item no.	GBP
black	143070	14,90
white	143071	14,90
grey	143072	14,90

Stabiliser, X connector



Steel
L: 19.7 cm W: 19.7 cm H: 0.5 cm
Weight: 0.11 kg
For reinforcement when mounting several tracks with ceiling suspension (143140/-1/-2).
1 pc.

Variant	Item no.	GBP
grey	143169	9,00

Corner connector, earth on outside



16A max.
Polycarbonate (PC)
L: 10.4 cm W: 10.4 cm H: 1.8 cm
Weight: 0.07 kg
External earth electrode
1 pc.

Variant	Item no.	GBP
black	143050	11,70
white	143051	11,70
grey	143052	11,70

T-connector, earth on right



16A max.
Polycarbonate (PC)
L: 17.2 cm W: 10.4 cm H: 1.8 cm
Weight: 0.1 kg
Earth on right
1 pc.

Variant	Item no.	GBP
black	143080	14,90
white	143081	14,90
grey	143082	14,90

Stabiliser, long longitudinal connector



Steel
L: 19.7 cm W: 3.2 cm H: 1.3 cm
Weight: 0.08 kg
For reinforcement when mounting several tracks with ceiling suspension (143141/-2)
1 pc.

Variant	Item no.	GBP
matt nickel	143151	5,00

Corner connector, earth on inside



16A max.
Polycarbonate (PC)
L: 10.4 cm W: 10.4 cm H: 1.8 cm
Weight: 0.07 kg
Internal earth
1 pc.

Variant	Item no.	GBP
black	143060	11,70
white	143061	11,70
grey	143062	11,70

Flexible connector



16A max.
Polycarbonate (PC)
L: 16.4 cm W: 3.5 cm H: 1.8 cm
Weight: 0.1 kg
1 pc.

Variant	Item no.	GBP
black	143110	12,60
white	143111	12,60
grey	143112	12,60

Ceiling plate



6A max.
Polycarbonate (PC)
Ø: 12.1 cm H: 2.5 cm
Weight: 0.1 kg
1 pc.

Variant	Item no.	GBP
black	143380	14,90
white	143381	14,90
grey	143382	14,90

1-circuit Pendant adapter



6A max.
Plastic PC
L: 8.2 cm W: 3.5 cm H: 4.2 cm
Maximum mechanical load 20N.
1 pc.

Variant	Item no.	GBP
black	143120	9,90
white	143121	9,90
silver-grey	143124	9,90



SNAPPY AND CHIC.

THE DECORATIVE EASYTECH® II HIGH-VOLTAGE TRACK SYSTEM.


You can create an individual light atmosphere in just a few steps with the decorative track system. The aluminium carrier tracks are available in different colours, and can therefore be ideally attuned to your room environment.







184450 411

184440 411

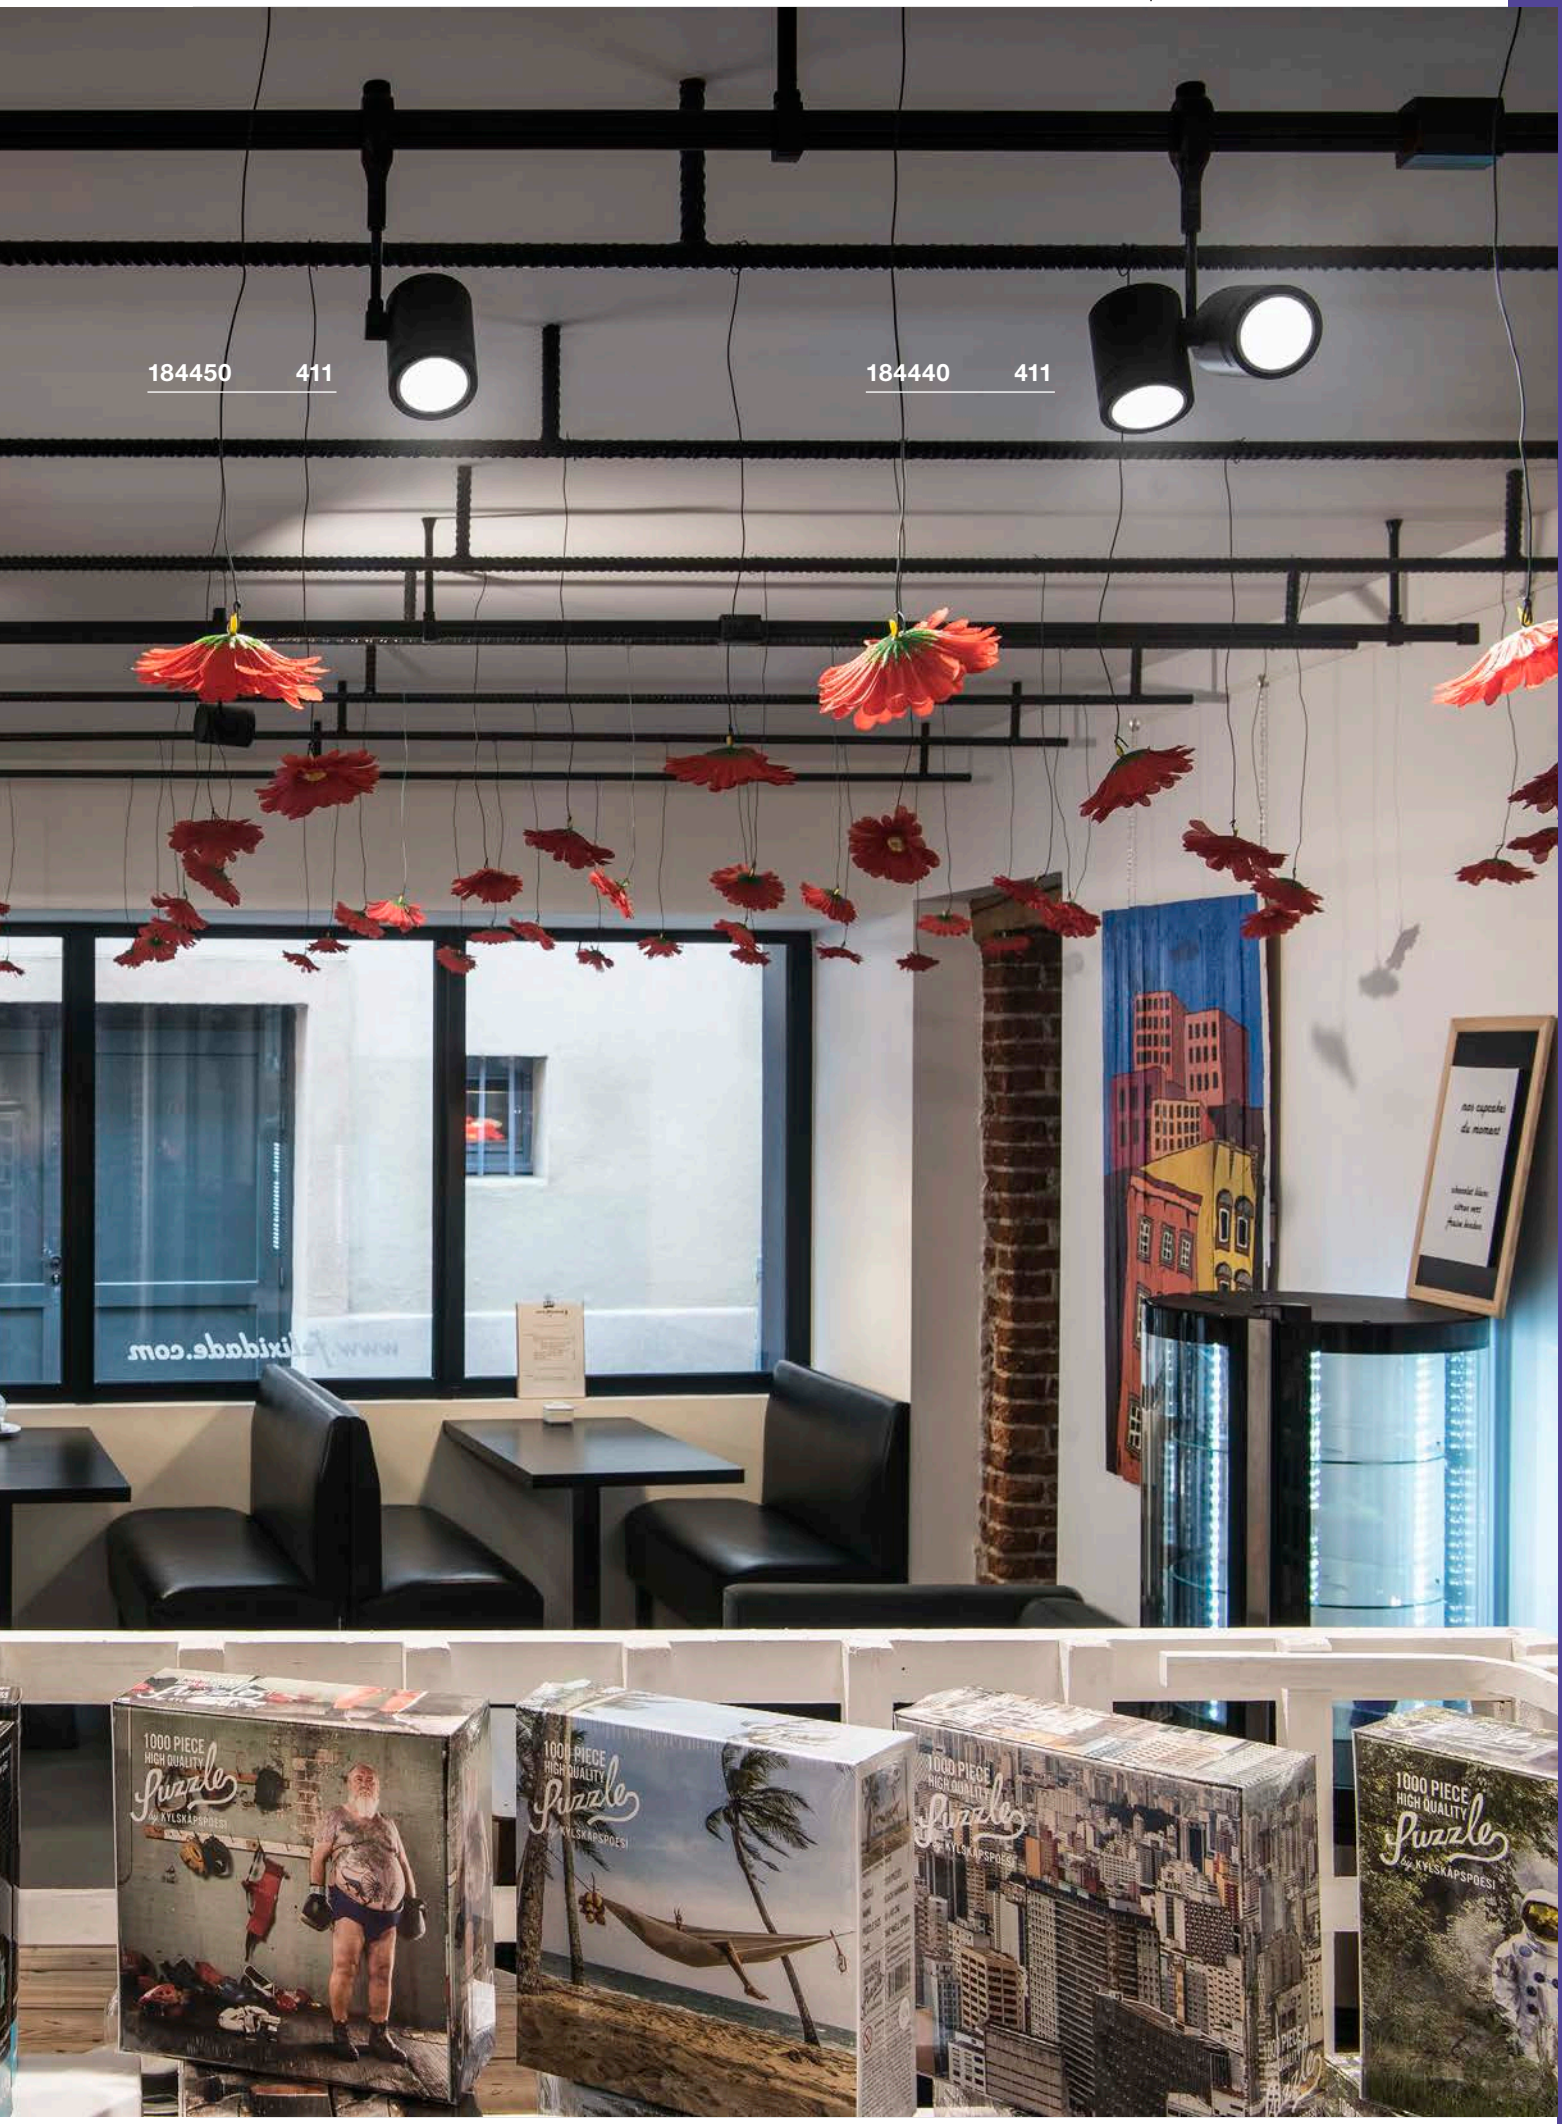

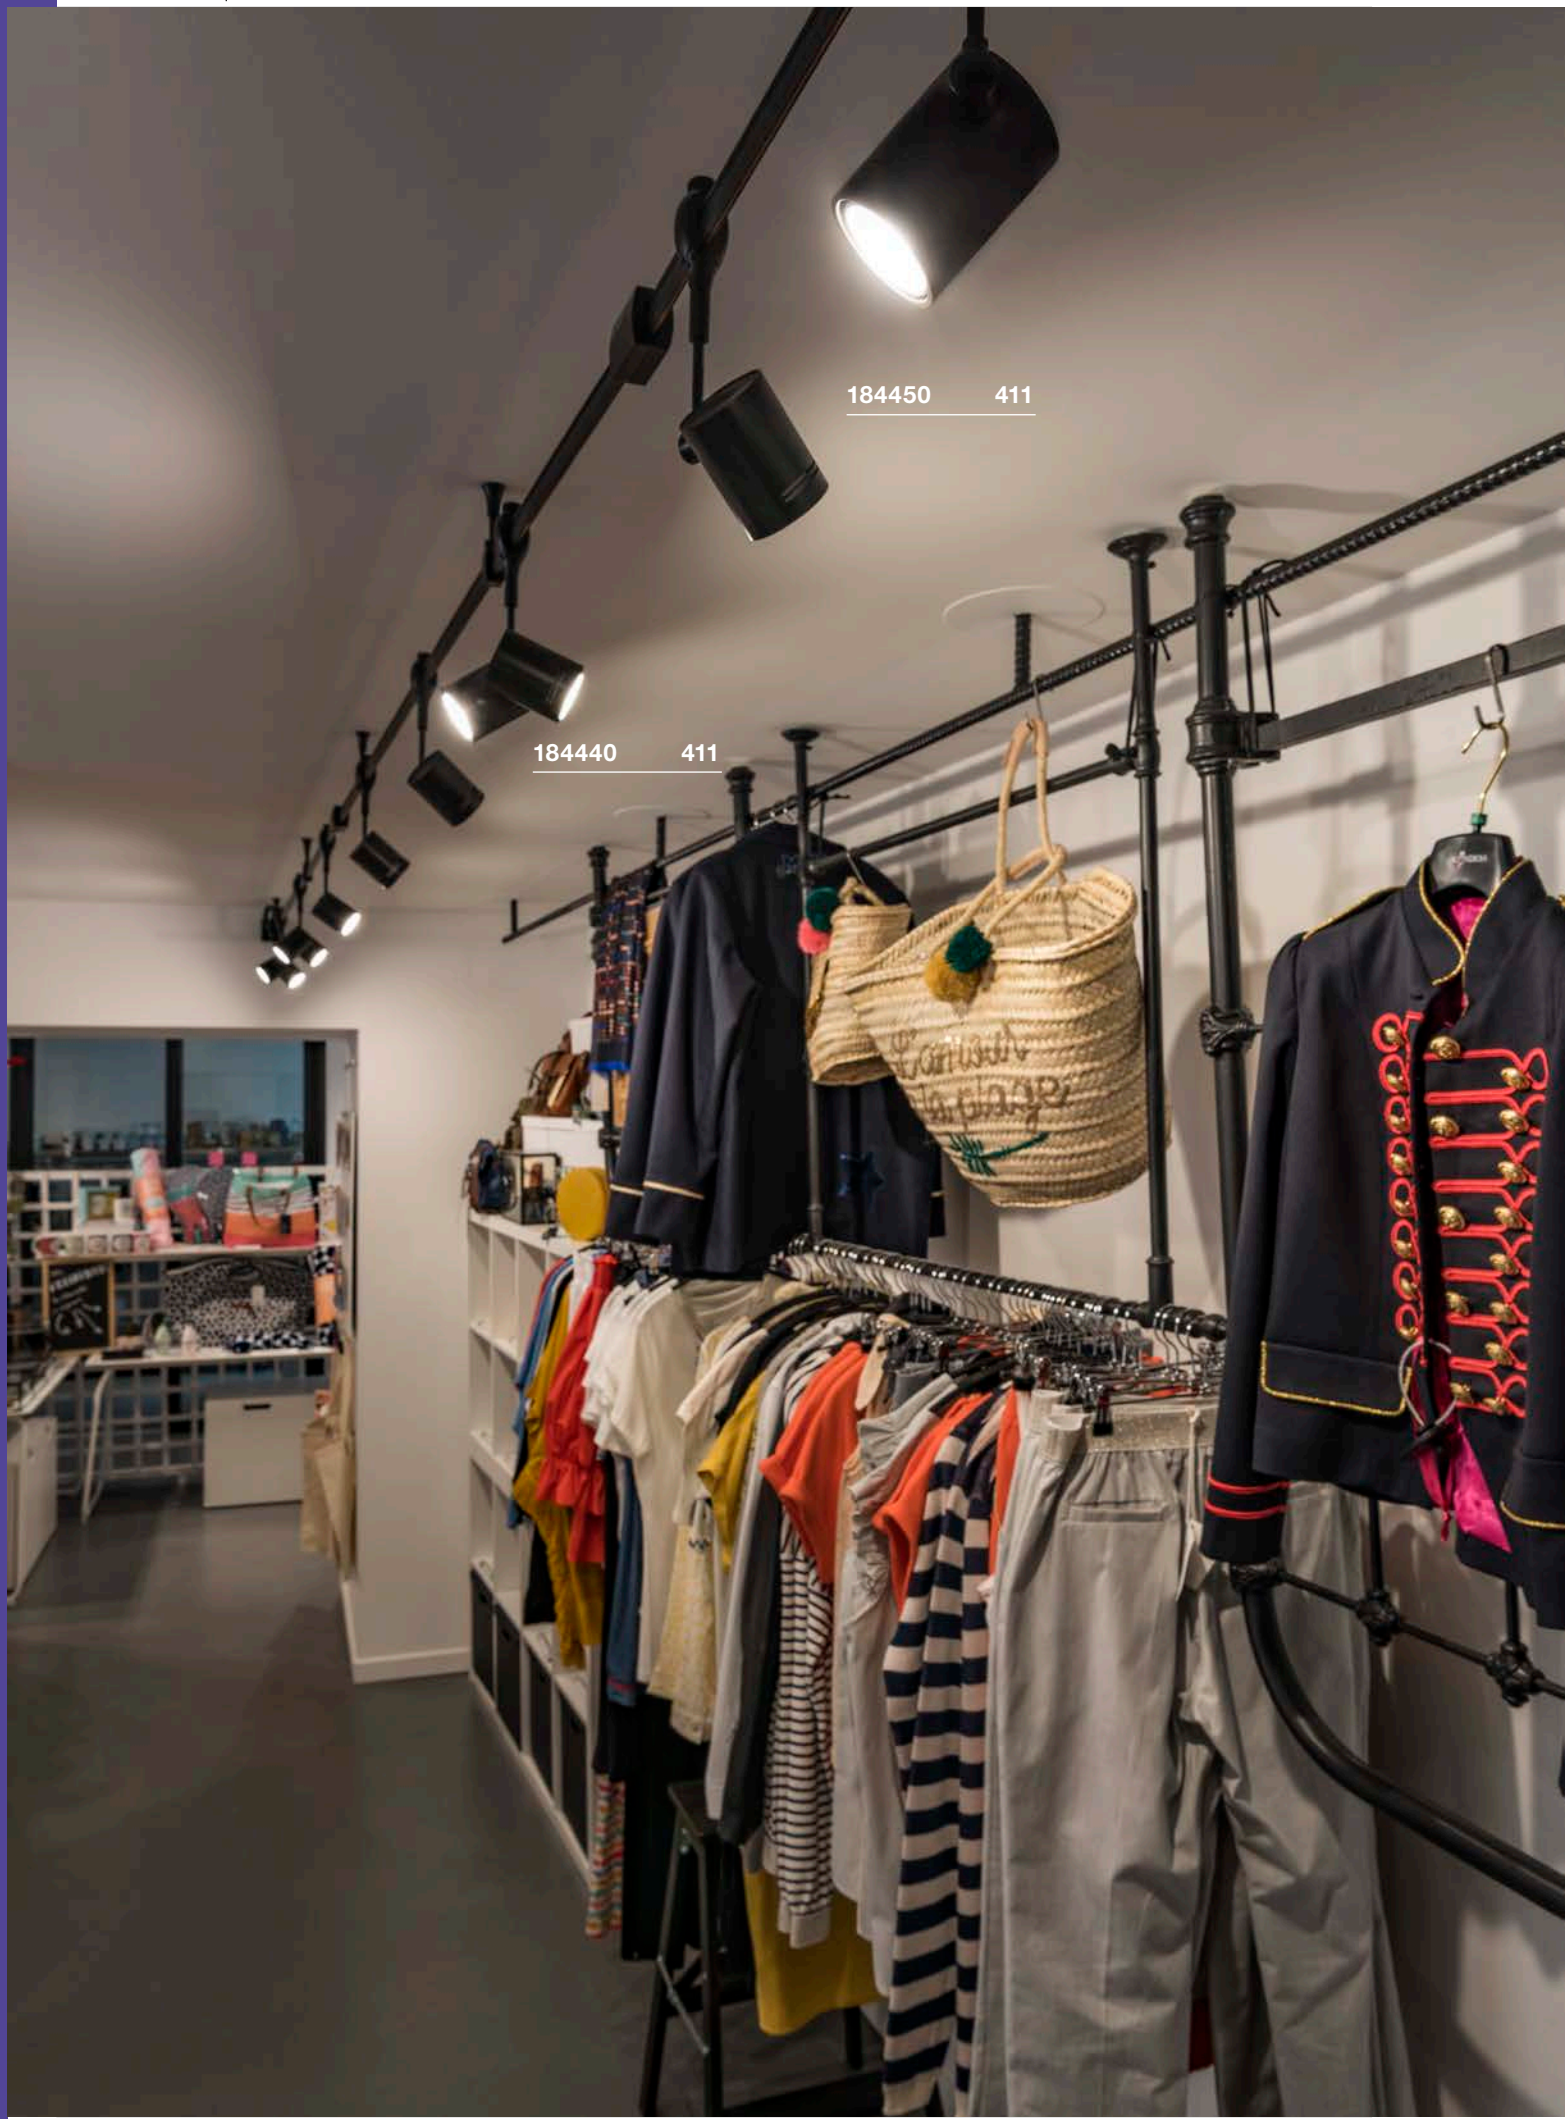
184450 411
184440 411

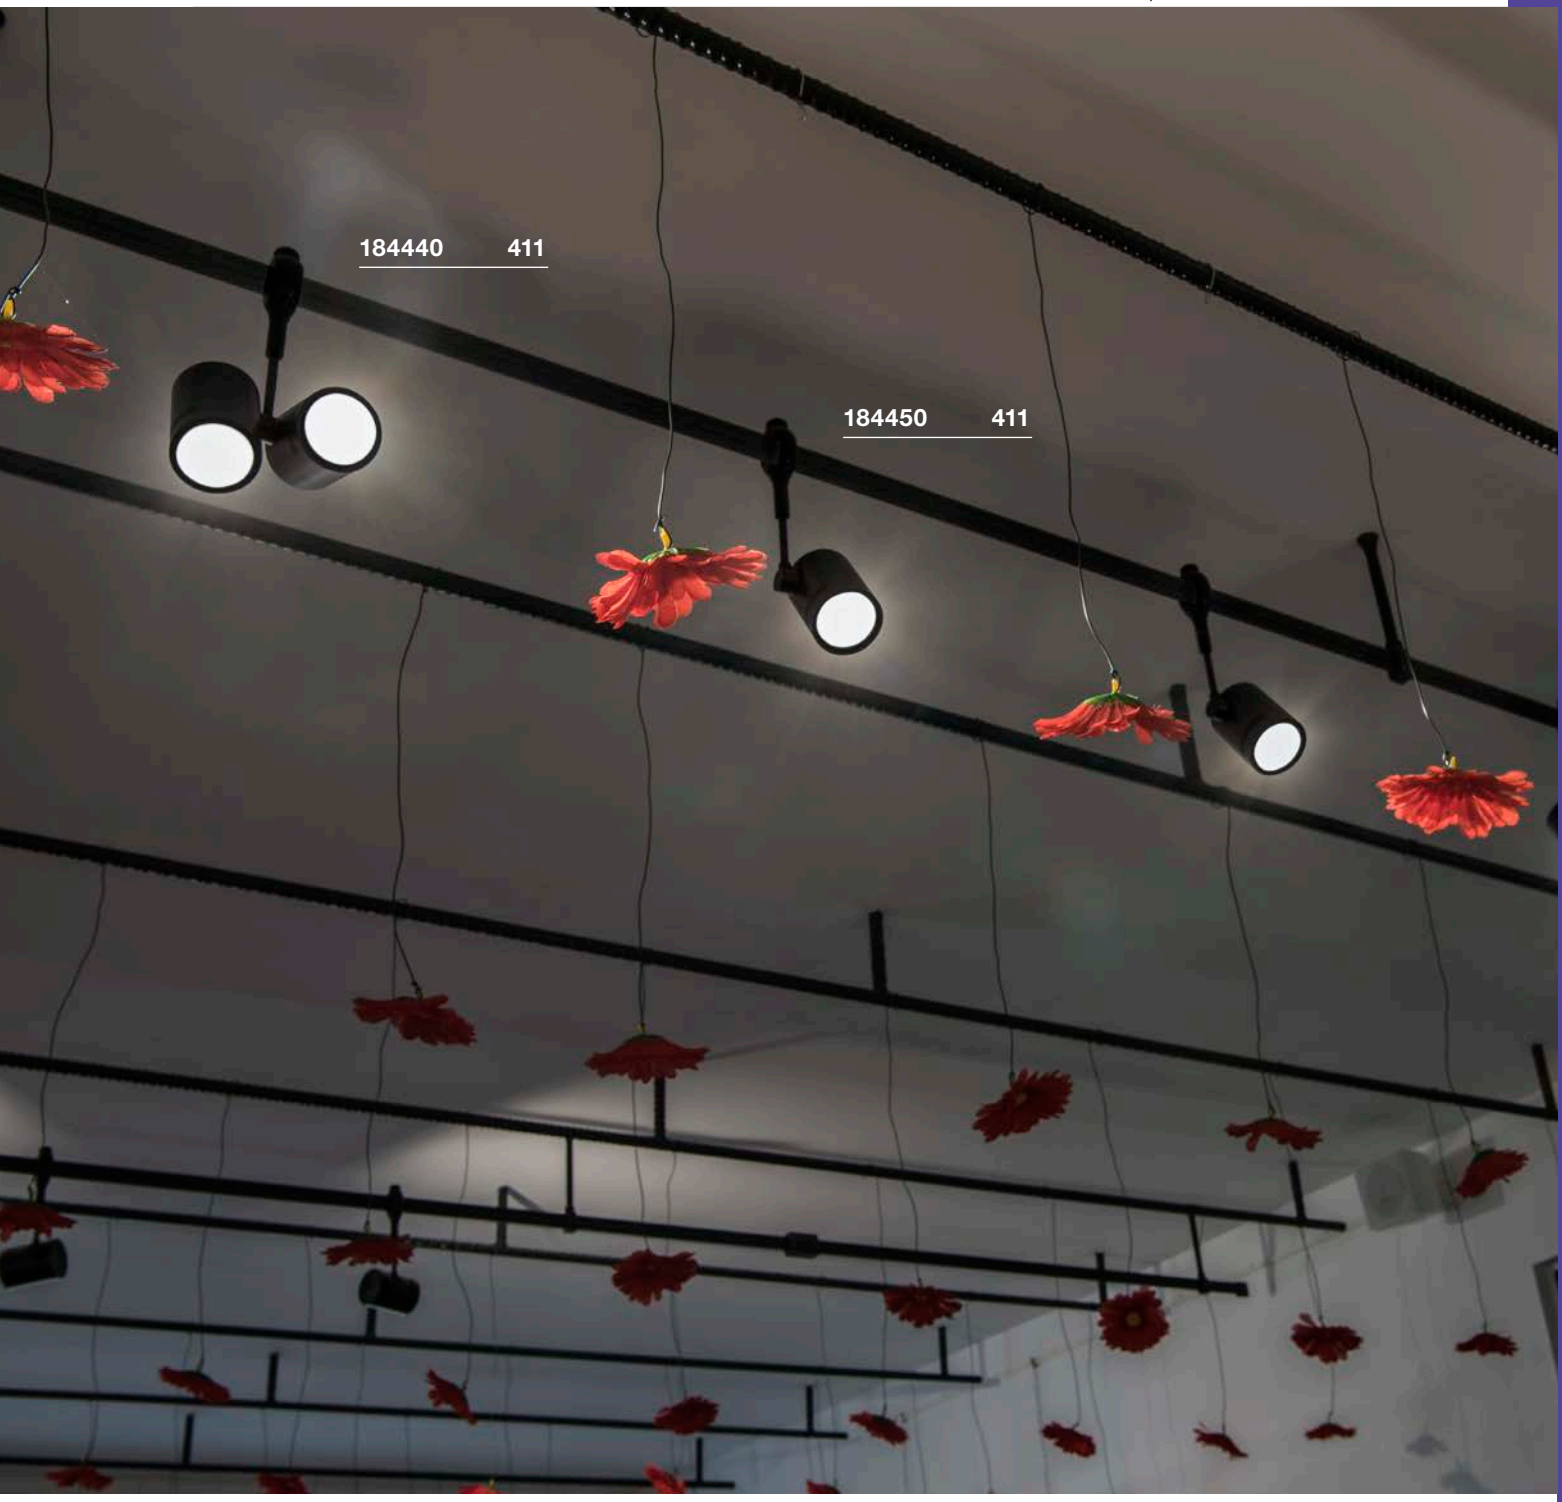

240V TRACK EASYTEC® II


410


411


411


412


412


412


413


413


414

414

Suitable tracks and accessories can be found on page 415

Other luminaires and variants can be found online at www.slv.com


HELIA 50 TRACK
EASYTEC® II

888

A-A++ Spectrum A++–E

LED INSIDE







- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium

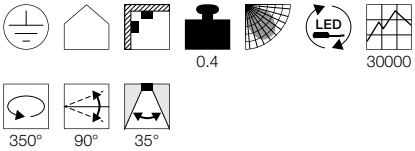


Dimensioned drawing




Variant	Item no.	GBP
750lm | 3000K | CRI>90		
■ black	**184560**	**99,00**



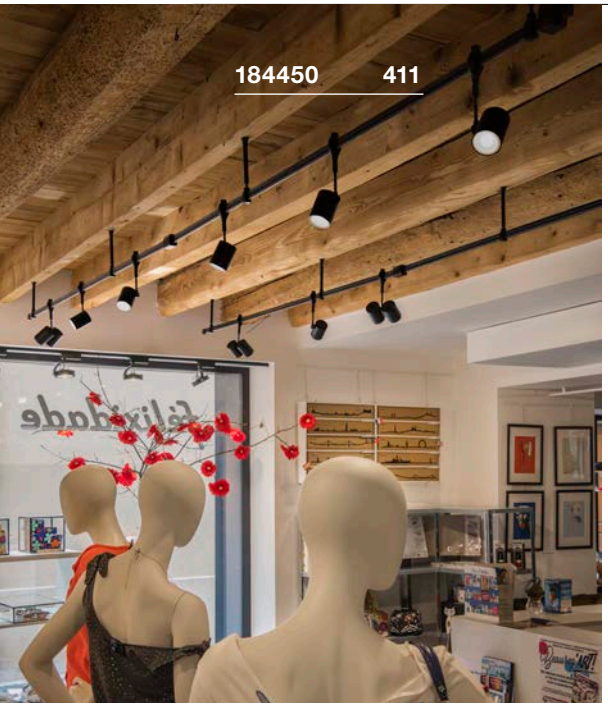



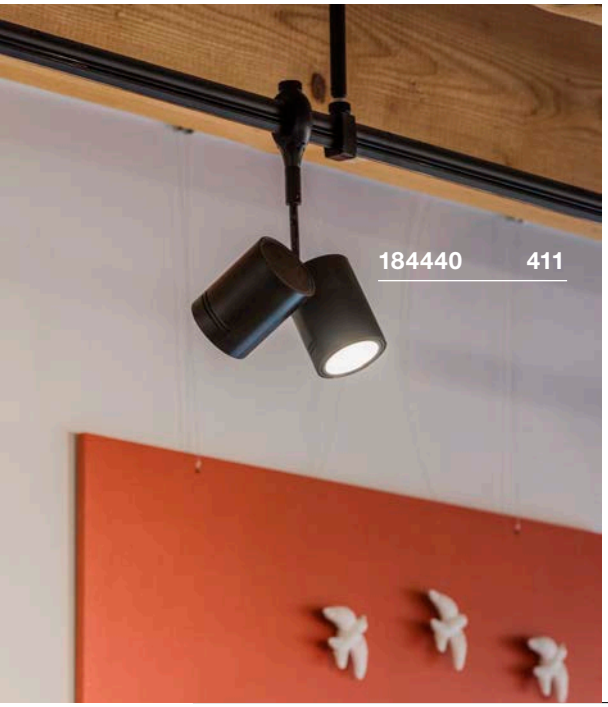

BIMA
EASYTEC® II, single, QPAR51

885


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details
max. 50W QPAR51
Ø: 5.1 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**184450**	**67,50**
GU10 | QPAR51		
◪ chrome / black	**185450**	**72,00**
GU10 | QPAR51		
■ grey	**184452**	**67,50**

BIMA 2
EASYTEC® II, double, QPAR51


885

E-A++ Spectrum A++–E






Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details
2x max. 50W QPAR51
Ø: 5.1 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**184440**	**99,00**
GU10 | QPAR51		
◪ chrome / black	**185440**	**108,00**


KANO
EASYTEC® II, QPAR51



Product details
220-240V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP




Lamp details
max. 50W QPAR51
Ø: 5.1 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
grey / matt transparent	**184071**	**63,00**


ANILA
EASYTEC® II, QPAR51



Product details
230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP




Lamp details
max. 50W QPAR51
Ø: 5.1 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
black	**184630**	**58,50**
GU10 | QPAR51		
chrome	**185632**	**67,50**
GU10 | QPAR51		
grey / transparent	**184634**	**58,50**


YOKI
EASYTEC® II, QPAR111



Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended lamp

GU10 7W 40°
3000K 560lm EEI=A+
8kWh/1000h
Item no. 1001573 | 20,70 GBP




LED GU10 13W 30°
2700K 1100lm EEI=A+
13kWh/1000h
Item no. 1001242 | 76,50 GBP



Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
black	**184620**	**67,50**
GU10 | QPAR111		
chrome	**185622**	**72,00**
GU10 | QPAR111		
grey	**184624**	**67,50**

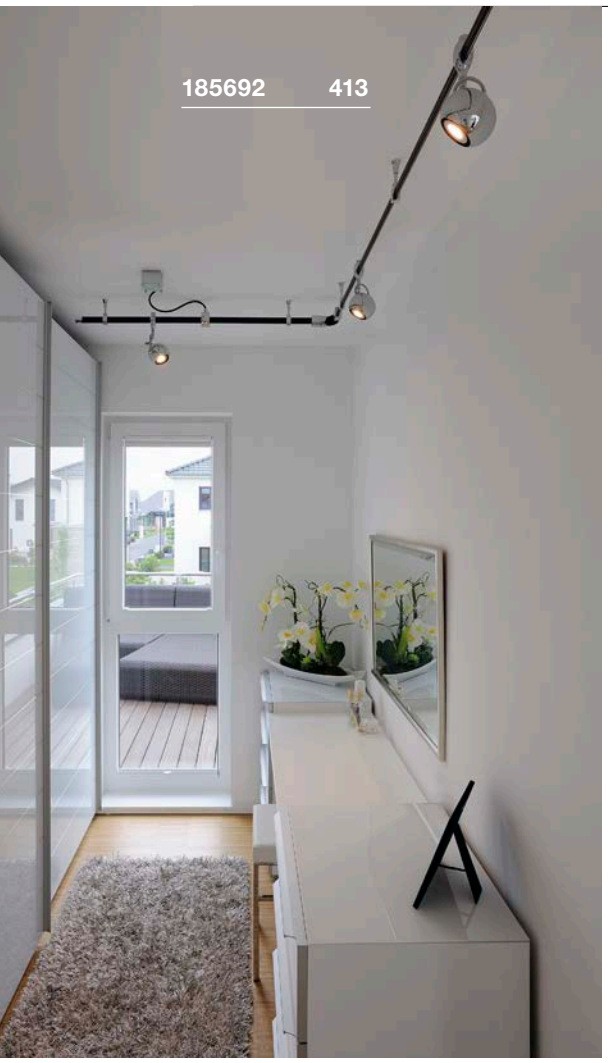



LIGHT EYE® 90 TRACK
EASYTEC® II, QPAR51

890

E-A++ Spectrum A++–E








- The optimal deco ring for the lamp in the appropriate colour reduces the distance between housing and lamp

Product details
230V ~50Hz
Material: Steel

0.29 350° 90°

Dimensioned drawing



Recommended accessories
Lamp deco ring diam. 5.7cm
Item no. 151049 | 5,90 GBP



Recommended lamp
LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP



Lamp details
max. 50W QPAR51
Ø: 5.1 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
black	**184690**	**67,50**
GU10 | QPAR51		
chrome	**185692**	**72,00**

LIGHT EYE® 150 TRACK
EASYTEC® II, QPAR111

890

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Steel

0.55 350° 90°

Dimensioned drawing



Recommended lamp
LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP



LED GU10 7W 13°
3000K 660lm EEI==A+
8kWh/1000h
Item no. 1001568 | 20,70 GBP



Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
black	**184580**	**99,00**
GU10 | QPAR111		
chrome	**185582**	**108,00**
GU10 | QPAR111		
black / chrome	**185580**	**108,00**

LIGHT EYE® 150 TRACK
EASYTEC® II, PD, QPAR111 890

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Steel



Dimensioned drawing



Recommended lamp
GU10 7.9W 40°
4000K 760lm EEI=A+
8kWh/1000h
Item no. 560724 | 20,70 GBP



LED GU10 13W 30°
2700K 1100lm EEI=A+
13kWh/1000h
Item no. 1001242 | 76,50 GBP



Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
black	**184590**	**99,00**
GU10 | QPAR111		
chrome / black	**185590**	**108,00**
GU10 | QPAR111		
chrome	**185592**	**108,00**

TONGA®
EASYTEC® II, PD, E14 897

E-A++ Spectrum A++–E






- Ceramic shade

Product details
230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp
E14 3.4W 260°
3000K 250lm EEI=A+
4kWh/1000h
Item no. 560362 | 5,90 GBP

LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP




Lamp details
max. 60W C35
Ø: 5 cm max. L: 13 cm max.

Variant	Item no.	GBP
E14 | C35		
black / white	**184530**	**108,00**
E14 | C35		
grey / shiny opaque	**184534**	**108,00**







	EASYTEC® II Track 2m, incl. end caps	EASYTEC® II Track 2m, incl. end caps	EASYTEC® II Track 2m, incl. end caps
Rated voltage	230V ~50Hz	230V ~50Hz	230V ~50Hz
Max. perm. current	16A	16A	16A
Feed-in capability	no	no	no
Material	Aluminium	Aluminium	Aluminium
Colour	black	black / chrome	grey
Length	200 cm	200 cm	200 cm
Width	1 cm	1 cm	1 cm
Height	3 cm	3 cm	3 cm
Weight	1 kg	1 kg	1 kg
Item no.	**184020**	**185020**	**184022**
GBP	**63,00**	**72,00**	**63,00**

Feed-in

16A max.
Aluminium / Glass
L: 7.5 cm W: 7.5 cm H: 6 cm
Weight: 0.23 kg
1 pc.



Variant	Item no.	GBP
black	184004	49,50
chrome	185002	59,40
grey	184002	49,50

Ceiling suspension, flexible

Aluminium
Weight: 0.11 kg
1 pc.

Variant	Item no.	GBP
black	184060	24,80
black / chrome	185062	27,00
grey	184062	24,80

Flexible connector

16A max.
Plastic
L: 21.5 cm W: 3 cm H: 4 cm
Weight: 0.3 kg
1 pc.



Variant	Item no.	GBP
black	184300	59,40
chrome	185302	63,00
grey	184302	59,40

Shortbox

16A max.
Aluminium / Steel
W: 22 cm H: 10.5 cm D: 6 cm
Weight: 0.57 kg
Simple installation of the tracks is possible with the Shortbox. In the case of a lateral protrusion of >75 cm, a 10 cm ceiling suspension is required.
1 pc.



Variant	Item no.	GBP
black	184010	81,00
black / chrome	185012	90,00
grey	184012	81,00

End caps

Plastic
Weight: 0.03 kg
2 pc.



Variant	Item no.	GBP
black	184140	5,00
chrome / black	185142	5,90
grey	184142	5,00

Flexible ceiling bracket

Aluminium
Weight: 0.1 kg
1 pc.



Variant	Item no.	GBP
grey	184332	29,70
black	184330	29,70

Long connector

16A max.
Aluminium
Weight: 0.08 kg
1 pc.



Variant	Item no.	GBP
black	184030	24,80
chrome	185032	27,00
grey	184032	24,80

Insulating connector

Aluminium
Weight: 0.08 kg
1 pc.



Variant	Item no.	GBP
black	184170	24,80
chrome	185172	29,70
grey	184172	24,80

Bending machine

Steel / Plastic
Weight: 2.76 kg
1 pc.



Variant	Item no.	GBP
grey	184000	242,10

Ceiling suspension

Aluminium
L: 10 cm
Weight: 0.1 kg
1 pc.



Variant	Item no.	GBP
black	184040	16,70
chrome	185042	20,70
grey	184042	16,70

Pendant adapter

3A max.
Aluminium / Plastic
L: 13 cm
Weight: 0.1 kg
1 pc.



Variant	Item no.	GBP
black	184290	31,50
chrome	185294	34,20
grey	184292	31,50

LOVE OF DETAIL.

LOW-VOLTAGE CABLE SYSTEM AND DISPLAY CASE RAILS CREATE EMPHASIS.

Light helps to give rooms atmosphere. Anywhere where it needs to be cosy and professional at the same time, low voltage cable systems are the right solution – because they provide room for individual lighting concepts and create cosiness. Our low-voltage display case rails are the ideal solution for accentuating product display cases.




139112 423


139131 422



LOW-VOLTAGE CABLE SYSTEM AND GLASS CABINET TRACK


420


420


421


421


422


422


424


425


425


428


428


430


430


Suitable accessories can be found on pages 426, 427, 429 and 431

Other luminaires and variants can be found online at www.slv.com

ASMARA
LV, QR-C51

C-A+ Spectrum A++–E









Product details

12V ~50Hz
Material: Stainless Steel



Dimensioned drawing



Recommended lamp

LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP



LED GU5.3 5.5W 36°
3000K 460lm EEI==A+
7kWh/1000h
Item no. 1001575 | 29,70 GBP



Lamp details

max. 35W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51 ■ black	139070	20,70
GX5.3 | QR-C51 □ white	139071	20,70
GX5.3 | QR-C51 ◪ chrome	139072	22,50

TELESKOP
LV, QR-C51

C-A+ Spectrum A++–E








Product details

12V ~50Hz
Material: Brass / Steel



Dimensioned drawing



Note

Telescopic from 21-51 cm

Recommended lamp

LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP



LED GU5.3 5.5W 36°
3000K 460lm EEI==A+
7kWh/1000h
Item no. 1001575 | 29,70 GBP




Lamp details

max. 20W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51 ■ black	139080	24,80
GX5.3 | QR-C51 □ white	139081	24,80
GX5.3 | QR-C51 ◪ chrome	139082	27,00





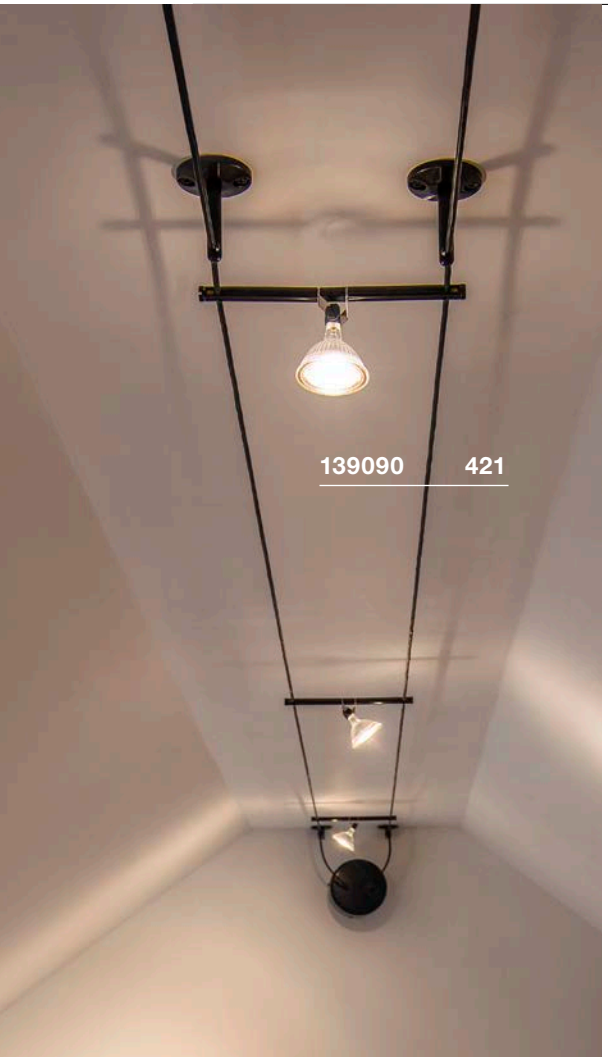



COSMIC
LV, QR-C51


C-A+ Spectrum A++–E








Product details
12V ~50Hz
Material: Steel / Brass



Dimensioned drawing



Recommended lamp

LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP



LED GU5.3 5.5W 36°
3000K 460lm EEI==A+
7kWh/1000h
Item no. 1001575 | 29,70 GBP



Lamp details
max. 35W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51		
■ black	**139090**	**29,70**
GX5.3 | QR-C51		
□ white	**139091**	**29,70**
GX5.3 | QR-C51		
▨ chrome	**139092**	**31,50**

SYROS
LV, QR-C51


C-A+ Spectrum A++–E








Product details
12V ~50Hz
Material: Steel / Brass



Dimensioned drawing



Recommended lamp

LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP



LED GU5.3 5.5W 36°
3000K 460lm EEI==A+
7kWh/1000h
Item no. 1001575 | 29,70 GBP



Lamp details
max. 50W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51		
■ black	**139100**	**40,50**
GX5.3 | QR-C51		
□ white	**139101**	**40,50**
GX5.3 | QR-C51		
▨ chrome	**139102**	**45,00**

SALUNA
LV, QR-C51

C-A+ Spectrum A++–E








Product details

12V ~50Hz
Material: Steel / Brass



Dimensioned drawing



Recommended lamp

LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP



LED GU5.3 5.5W 36°
3000K 460lm EEI==A+
7kWh/1000h
Item no. 1001575 | 29,70 GBP





Lamp details


max. 35W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51 ■ black	**139130**	**52,20**
GX5.3 | QR-C51 □ white	**139131**	**52,20**
GX5.3 | QR-C51 ▨ chrome	**139132**	**56,70**



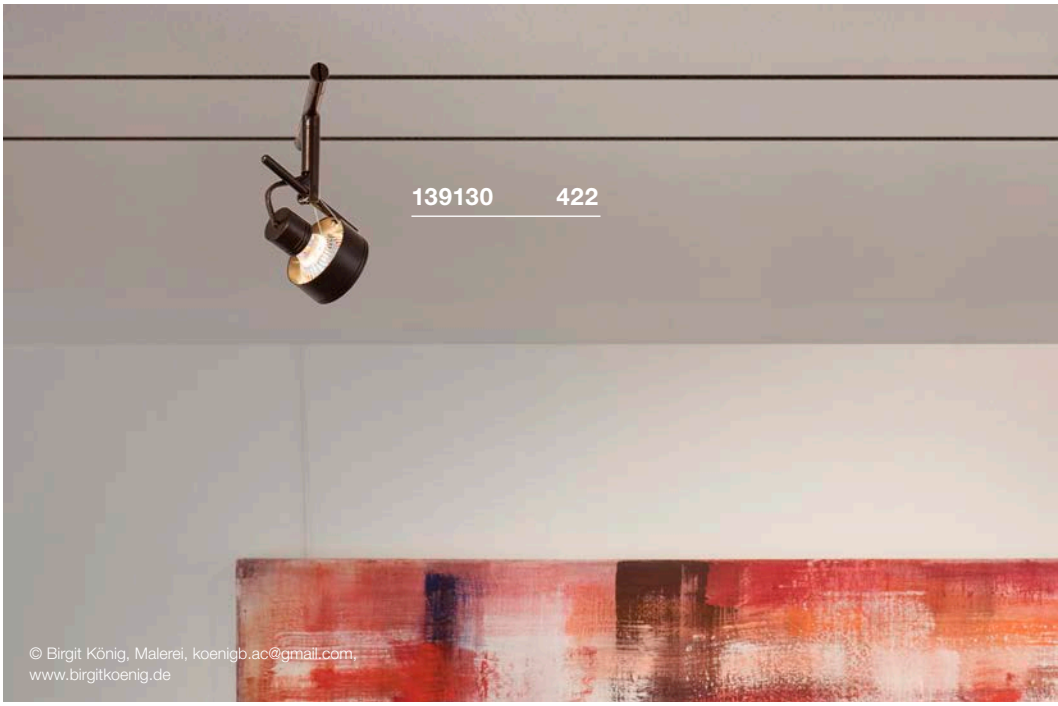

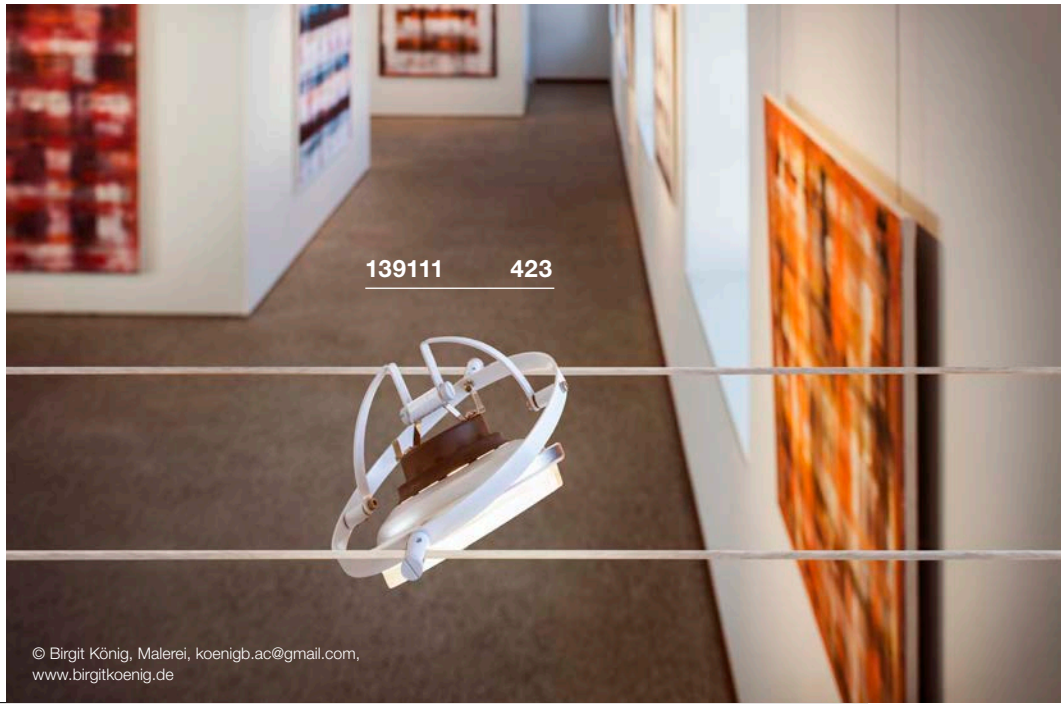

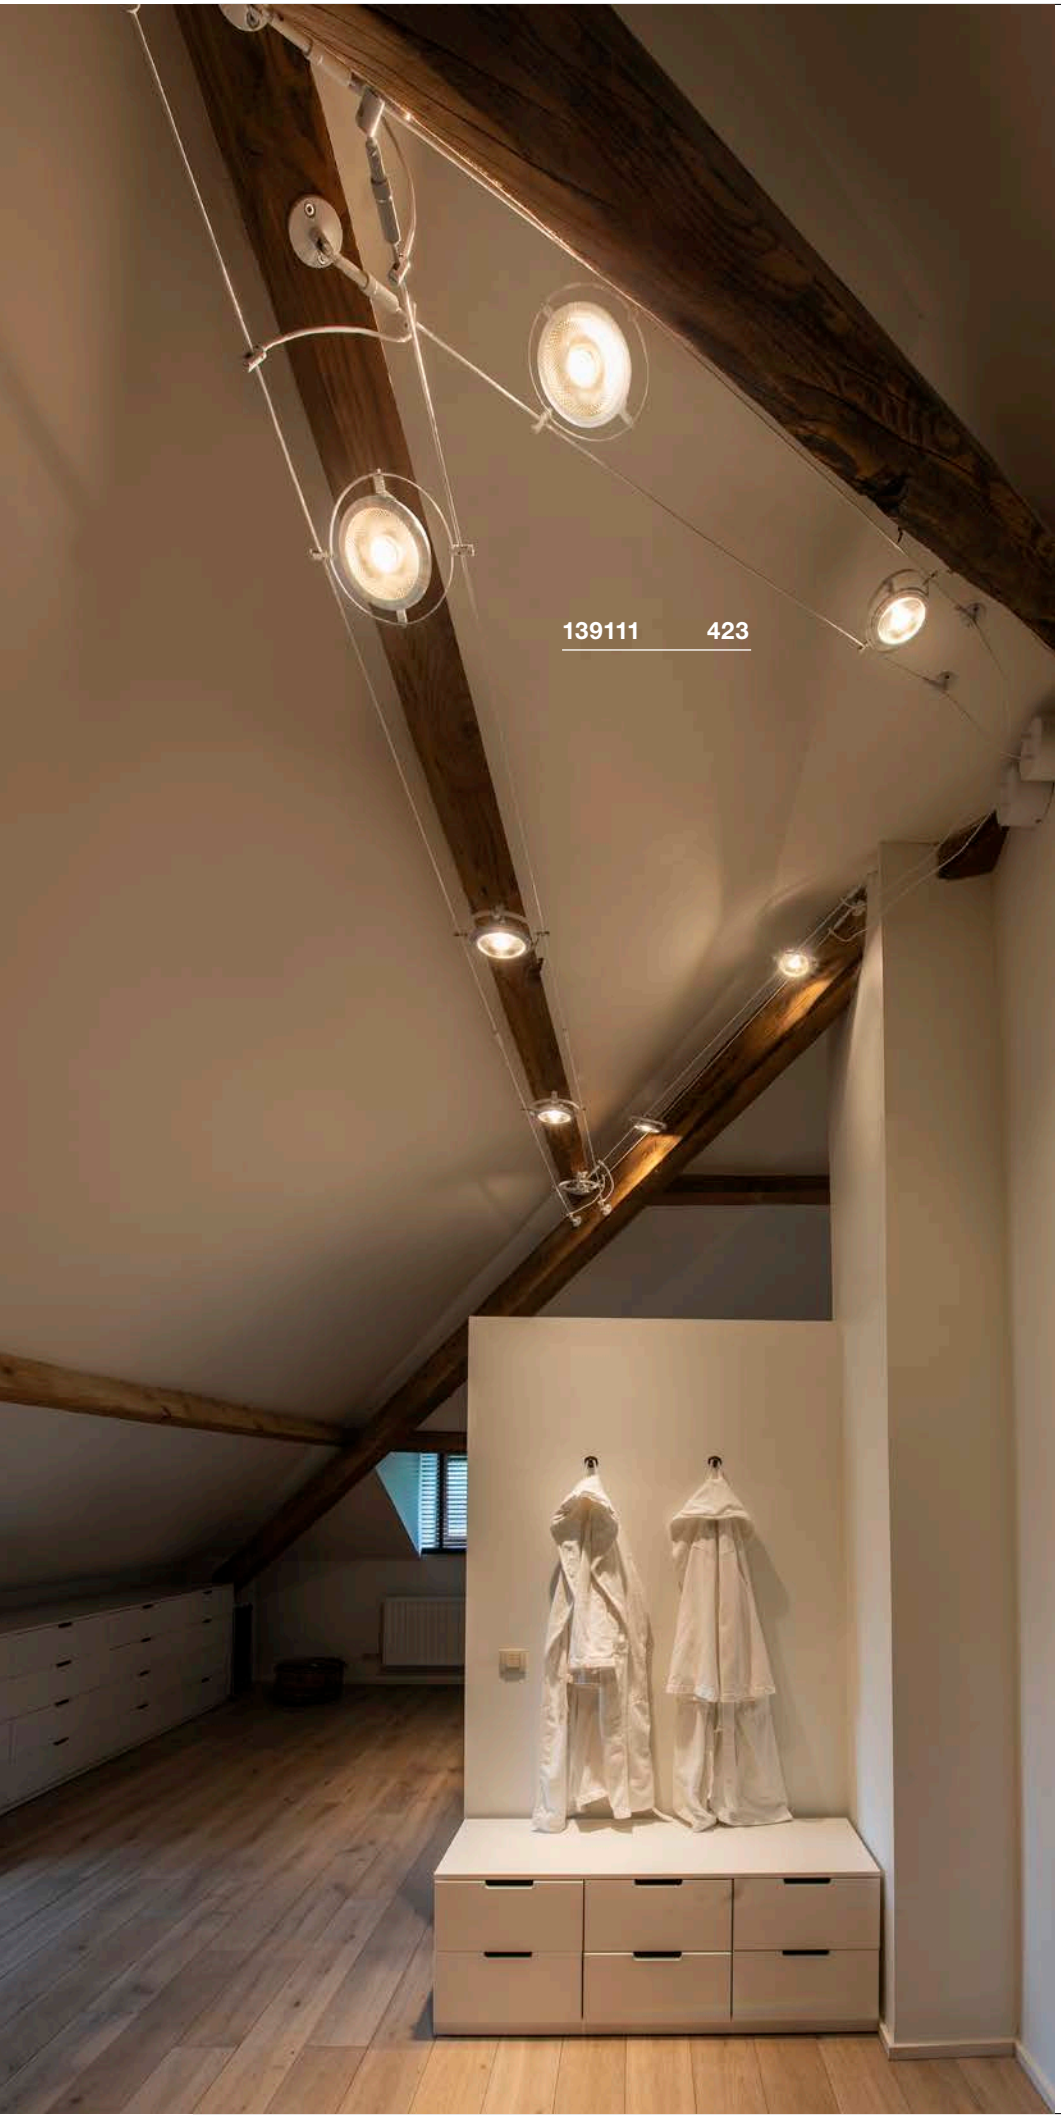

QRB
LV, QR111

C-A+ Spectrum A++–E









Product details

12V ~50Hz
Material: Steel



Dimensioned drawing



Recommended lamp

LED G53 15W 40°
2700K 750lm EEI=A
17kWh/1000h
Item no. 560232 | 90,00 GBP



LED G53 15W 40°
3000K 760lm EEI=A
17kWh/1000h
Item no. 560234 | 90,00 GBP



Lamp details

max. 50W QR111

Variant	Item no.	GBP
G53 | QR111 ■ black	**139110**	**40,50**
G53 | QR111 □ white	**139111**	**40,50**
G53 | QR111 ▨ chrome	**139112**	**43,20**

NOBLO SPOT
LV, Rope Track

892

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW VARIANT











Product details


12V ~50Hz
Material: Aluminium / Polymethylacrylate (PMMA)

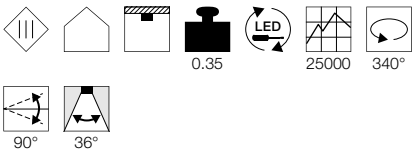


Dimensioned drawing



Variant	Item no.	GBP
420lm | 2700K | CRI>80		
black	1002694	67,50
450lm | 2700K | CRI>80		
white	1002695	67,50
450lm | 2700K | CRI>80		
chrome	1002696	72,00

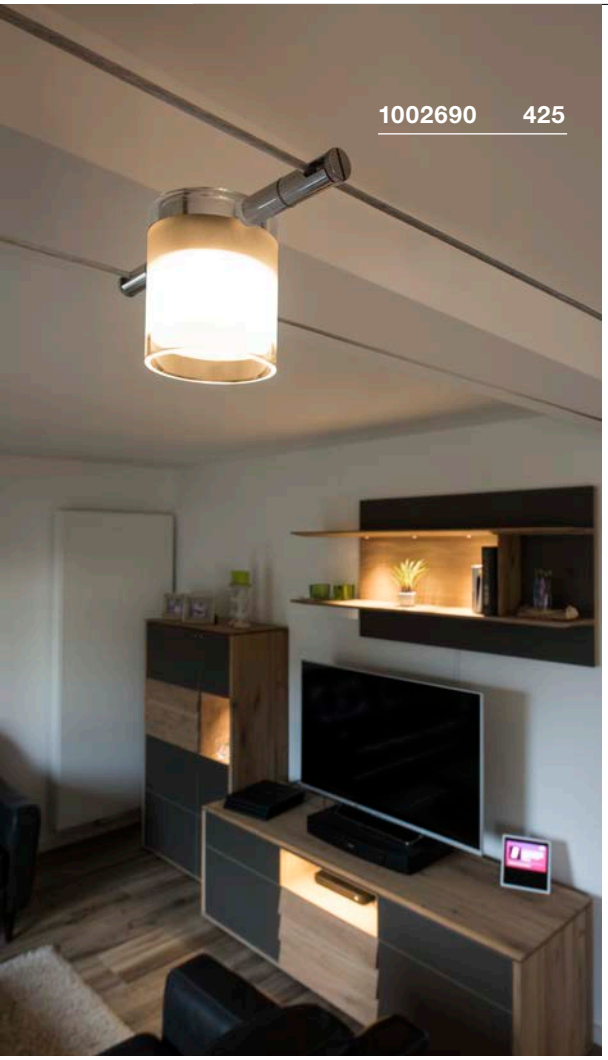

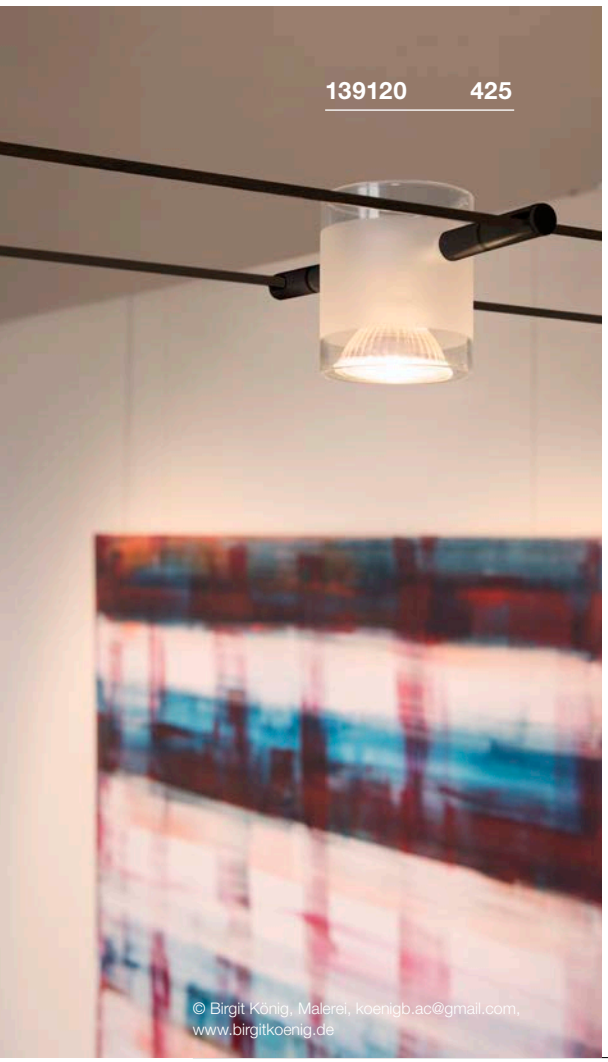

© Birgit König, Malerei, koenigb.ac@gmail.com,
www.birgitkoenig.de

COMET
LV, QR-C51

C-A+ Spectrum A++–E











Product details
12V ~50Hz
Material: Brass / Brass



Dimensioned drawing



Recommended lamp

LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP



LED GU5.3 5.5W 36°
3000K 460lm EEI==A+
7kWh/1000h
Item no. 1001575 | 29,70 GBP



Lamp details
max. 50W QR-C51

Variant	Item no.	GBP
GU5.3 | QR-C51		
black / transparent	**139120**	**40,50**
GU5.3 | QR-C51		
white/matt transparent	**139121**	**40,50**
GU5.3 | QR-C51		
chrome	**139122**	**45,00**

COMET LED
LV

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT








- Frosted glass body

Product details
12V ~50Hz
Total consumption: 6.3W
Material: Aluminium / Glass




Dimensioned drawing



Variant	Item no.	GBP
410lm | 2700K | CRI>80		
black / frosted	**1002688**	**58,50**
410lm | 2700K | CRI>80		
white / frosted	**1002689**	**58,50**
410lm | 2700K | CRI>80		
chrome / frosted	**1002690**	**60,30**

COMPOSITION SCHEME

Rope system, wall-to-wall installation scheme (rope system perpendicular to wall)

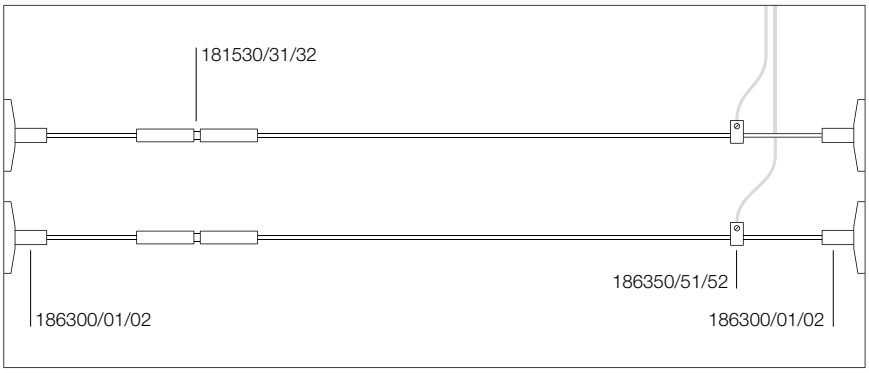

Articles/codes needed for this composition

Wall bracket	**186300/01/02**	**x 2pz**
Feed-in	**186350/51/52**	**x 1pz**
Wire tensioner	**181530/31/32**	**x 1pz**


Rope system, wall-to-wall installation scheme, no wire tensioner (rope system perpendicular to wall)



Articles/codes needed for this composition

Wall bracket	**186300/01/02**	**x 1pz**
Flexible wall bracket	**186310/11/12**	**x 1pz**
Feed-in	**186350/51/52**	**x 1pz**

Rope system, wall-to-wall installation scheme, with changing in direction

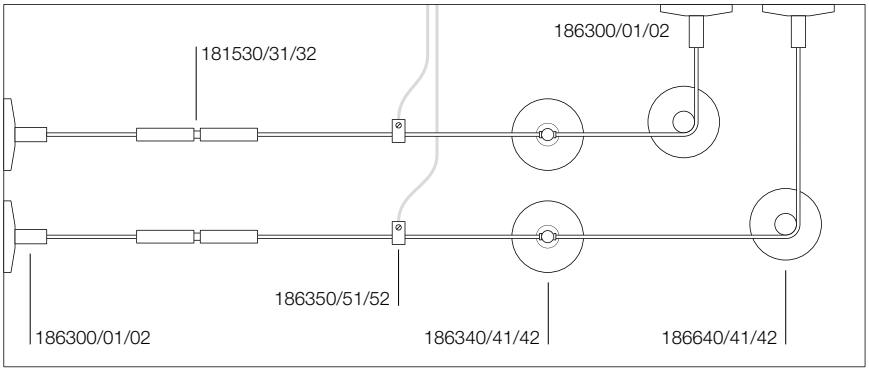


Articles/codes needed for this composition

Wall bracket	**186300/01/02**	**x 2pz**
Deviator*	**186640/41/42**	**x 1pz**
Ceiling support	**186340/41/42**	**x 1pz**
Wire tensioner	**181530/31/32**	**x 1pz**
Feed-in	**186350/51/52**	**x 1pz**

***Pay attention: deflectors don't work as support. Please choose ceiling supports as proper accessories to anchor the system to the ceiling.**

Cable lighting system, wall-to-wall installation scheme (walls NOT perpendicular to cable system)

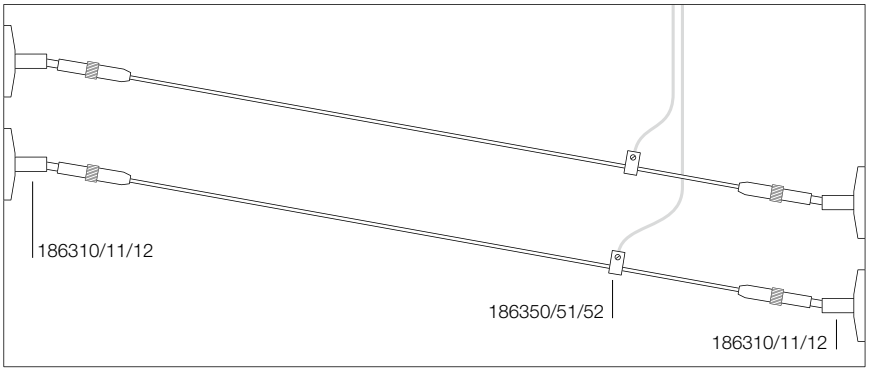


Articles/codes needed for this composition

Flexible wall bracket	**186310/11/12**	**x 2pz**
Feed-in	**186350/51/52**	**x 1pz**

COMPOSITION SCHEME


Rope system, wall-to-wall installation scheme, double switch

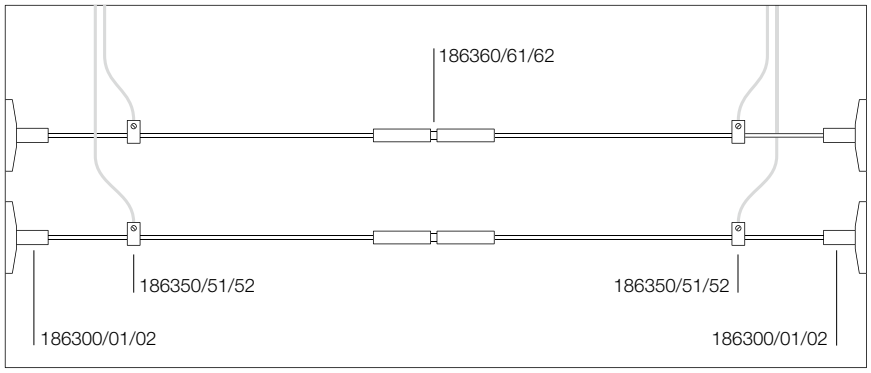

Articles/codes needed for this composition

Wall bracket	**186300/01/02**	**x 2pz**
Insulating connector	**186360/61/62**	**x 1pz**
Wire tensioner	**181530/31/32**	**x 1pz**
Feed-in	**186350/51/52**	**x 2pz**


Rope system, wall-to ceiling installation scheme

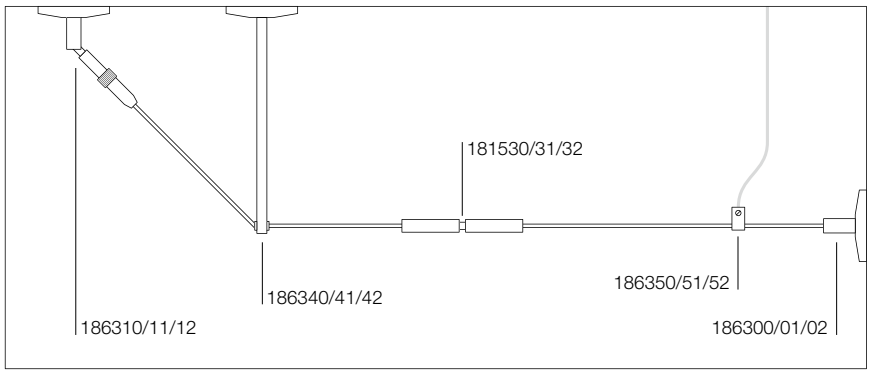

Articles/codes needed for this composition

Wall bracket	**186300/01/02**	**x 1pz**
Flexible wall bracket	**186310/11/12**	**x 1pz**
Wire tensioner	**181530/31/32**	**x 1pz**
Ceiling Spacer 16 cm	**186340/41/42**	**x 1pz**
Feed-in	**186350/51/52**	**x 1pz**

Rope system, ceiling-to-ceiling installation scheme

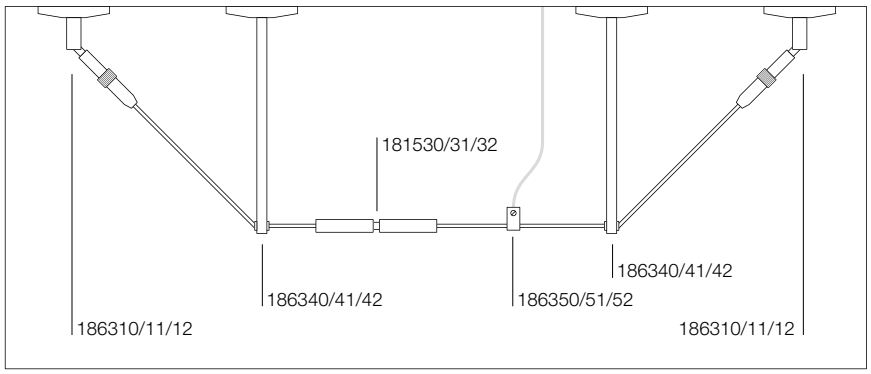

Articles/codes needed for this composition

Flexible wall bracket	**186310/11/12**	**x 2pz**
Wire tensioner	**181530/31/32**	**x 1pz**
Ceiling Spacer 16 cm	**186340/41/42**	**x 2pz**
Feed-in	**186350/51/52**	**x 1pz**

NOTE

All accessories are sold in 2 pieces per item number. The price is referred to a two pieces package.

12V cable is covered with insulating sheath.

Please use only toroidal transformer. Our toroidal transformer are dimmable TRIAC.
Please take into consideration the installed power load and choose your transformer accordingly.

Low-voltage cable 4 mm², 10 m





	TENSEO 4 mm², 10m	TENSEO 4 mm², 10 m	TENSEO 4 mm², 10 m
Max. perm. voltage	48V	48V	48V
Max. perm. current	25A	25A	25A
Material	Copper / Plastic	Copper / Plastic	Copper / Plastic
Colour	black	white	transparent
Diameter	0.4 cm	0.4 cm	0.4 cm
Length	1000 cm	1000 cm	1000 cm
Weight	0.48 kg	0.48 kg	0.48 kg
Item no.	**1002602**	**1002603**	**1002604**
GBP	**18,00**	**18,00**	**18,00**

Low-voltage cable 4 mm², 20 m





	TENSEO 4 mm², 20 m	TENSEO 4 mm², 20 m	TENSEO 4 mm², 20 m
Max. perm. voltage	48V	48V	48V
Max. perm. current	25A	25A	25A
Material	Copper / Plastic	Copper / Plastic	Copper / Plastic
Colour	black	white	transparent
Diameter	0.4 cm	0.4 cm	0.4 cm
Length	2000 cm	2000 cm	2000 cm
Weight	0.88 kg	0.88 kg	0.85 kg
Item no.	**139030**	**139031**	**139024**
GBP	**37,80**	**37,80**	**37,80**

Low-voltage cable 4 mm², 100 m





	TENSEO 4 mm², 100 m	TENSEO 4 mm², 100 m	TENSEO 4 mm², 100 m
Max. perm. voltage	48V	48V	48V
Max. perm. current	25A	25A	25A
Material	Copper / Plastic	Copper / Plastic	Copper / Plastic
Colour	black	white	transparent
Diameter	0.4 cm	0.4 cm	0.4 cm
Length	10000 cm	10000 cm	10000 cm
Weight	4.4 kg	4.4 kg	4.26 kg
Item no.	**139040**	**139041**	**139004**
GBP	**180,00**	**180,00**	**180,00**

Low-voltage cable 6 mm², 20 m





	TENSEO 6 mm², 20 m	TENSEO 6 mm², 20 m	TENSEO 6 mm², 20 m
Max. perm. voltage	48V	48V	48V
Max. perm. current	25A	25A	25A
Material	Copper / Plastic	Copper / Plastic	Copper / Plastic
Colour	black	white	transparent
Diameter	0.4 cm	0.4 cm	0.4 cm
Length	2000 cm	2000 cm	2000 cm
Weight	1.23 kg	1.23 kg	1.21 kg
Item no.	**139050**	**139051**	**139026**
GBP	**49,50**	**49,50**	**49,50**







Low-voltage cable
6 mm², 100 m





	TENSEO 6 mm², 100 m	TENSEO 6 mm², 100 m	TENSEO 6 mm², 100 m
Max. perm. voltage	48V	48V	48V
Max. perm. current	25A	25A	25A
Material	Copper / Plastic	Copper / Plastic	Copper / Plastic
Colour	black	white	transparent
Diameter	0.4 cm	0.4 cm	0.4 cm
Length	10000 cm	10000 cm	10000 cm
Weight	6.1 kg	6.1 kg	6 kg
Item no.	**139060**	**139061**	**139006**
GBP	**206,10**	**206,10**	**206,10**

ACCESSORIES LOW-VOLTAGE CABLE SYSTEM TENSEO

TRANSFORMER 12V AC | 50VA conventional

Steel / Brass
Ø: 11.1 cm H: 11 cm
Weight: 1.88 kg
1 pc.



Variant	Item no.	GBP
black	1002691	81,00
white	1002692	81,00
chrome	1002693	81,00

Transformer 12V | 105VA conventional

Steel / Brass
Ø: 11 cm H: 11 cm
Weight: 1.6 kg
1 pc.



Variant	Item no.	GBP
black	138980	99,00
white	138981	99,00
chrome	138982	108,00

Transformer 12V | 210VA conventional

Steel / Brass
Ø: 13.5 cm H: 11 cm
Weight: 3.05 kg
1 pc.



Variant	Item no.	GBP
black	138990	148,50
white	138991	148,50
chrome	138992	153,00

Cable tensioner

25A max.
Brass
Ø: 1 cm H: 11 cm
Weight: 0.04 kg
2 pc.



Variant	Item no.	GBP
black	181530	20,70
white	181531	20,70
chrome	181532	22,50

Wall bracket

Steel / Brass
Ø: 5 cm L: 3 cm
Weight: 0.05 kg
2 pc.



Variant	Item no.	GBP
black	186300	20,70
white	186301	20,70
chrome	186302	22,50

Wall bracket 10cm

Steel / Brass
Ø: 5 cm H: 11.5 cm
Weight: 0.08 kg
2 pc.



Variant	Item no.	GBP
black	186310	29,70
white	186311	29,70
chrome	186312	31,50

Deflector 6cm

Steel / Brass
Ø: 5 cm H: 6 cm
Weight: 0.05 kg
2 pc.



Variant	Item no.	GBP
black	186330	18,00
white	186331	18,00
chrome	186332	20,70

Diffuser

Steel / Brass
Ø: 5 cm H: 16 cm
Weight: 0.12 kg
2 pc.



Variant	Item no.	GBP
black	186340	20,70
white	186341	20,70
chrome	186342	22,50

Feed-in

25A max.
Brass
Ø: 1 cm H: 1.8 cm
Weight: 0.04 kg
2 pc.



Variant	Item no.	GBP
black	186350	9,00
white	186351	9,00
chrome	186352	9,90

Insulating connector

25A max.
Aluminium / Plastic
Ø: 1 cm L: 6.4 cm
Weight: 0.04 kg
2 pc.



Variant	Item no.	GBP
black	186360	16,70
white	186361	16,70
chrome	186362	18,00

Ceiling diffuser

Steel / Brass
Ø: 5 cm H: 16 cm
Weight: 0.39 kg
2 pc.



Variant	Item no.	GBP
black	186640	67,50
white	186641	67,50
chrome	186642	72,00

Suspension set 2m

Steel / Aluminium
Ø: 1.25 cm W: 18.6 cm
Weight: 0.162 kg
1 pc.



Variant	Item no.	GBP
black	1002697	29,70
white	1002698	29,70
chrome	1002699	31,50

Spacer

Aluminium
Ø: 1.25 cm W: 9 cm
Weight: 0.35 kg
2 pc.



Variant	Item no.	GBP
black	1002700	34,20
white	1002701	34,20
chrome	1002702	40,50

Spacer with connector

25A max.
Brass
Ø: 1.25 cm W: 9 cm
Weight: 0.82 kg
2 pc.



Variant	Item no.	GBP
black	1002703	40,50
white	1002704	40,50
chrome	1002705	45,00

M-TRACK
Adjustable light

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Spots easy to move due to magnetic holder

Product details

12V DC
Material: Aluminium / Polycarbonate (PC)

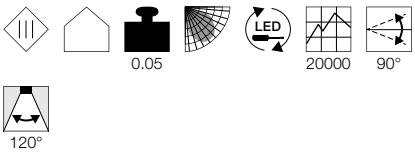

Dimensioned drawing



Variant	Item no.	GBP
260lm | 3000K | CRI>80		
■ black	**188550**	**58,50**

M-TRACK
Spot

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Spots easy to move due to magnetic holder

Product details


12V DC
Material: Aluminium / Polycarbonate (PC)

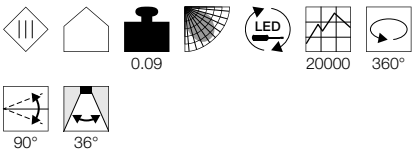

Dimensioned drawing




Variant	Item no.	GBP
400lm | 3000K | CRI>80		
■ black	**188530**	**54,00**

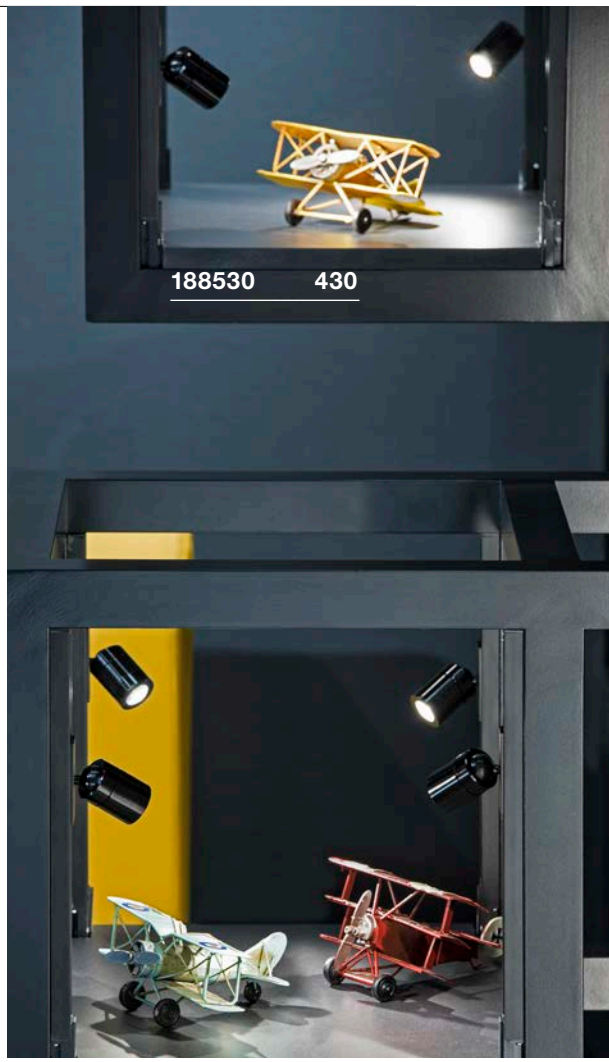





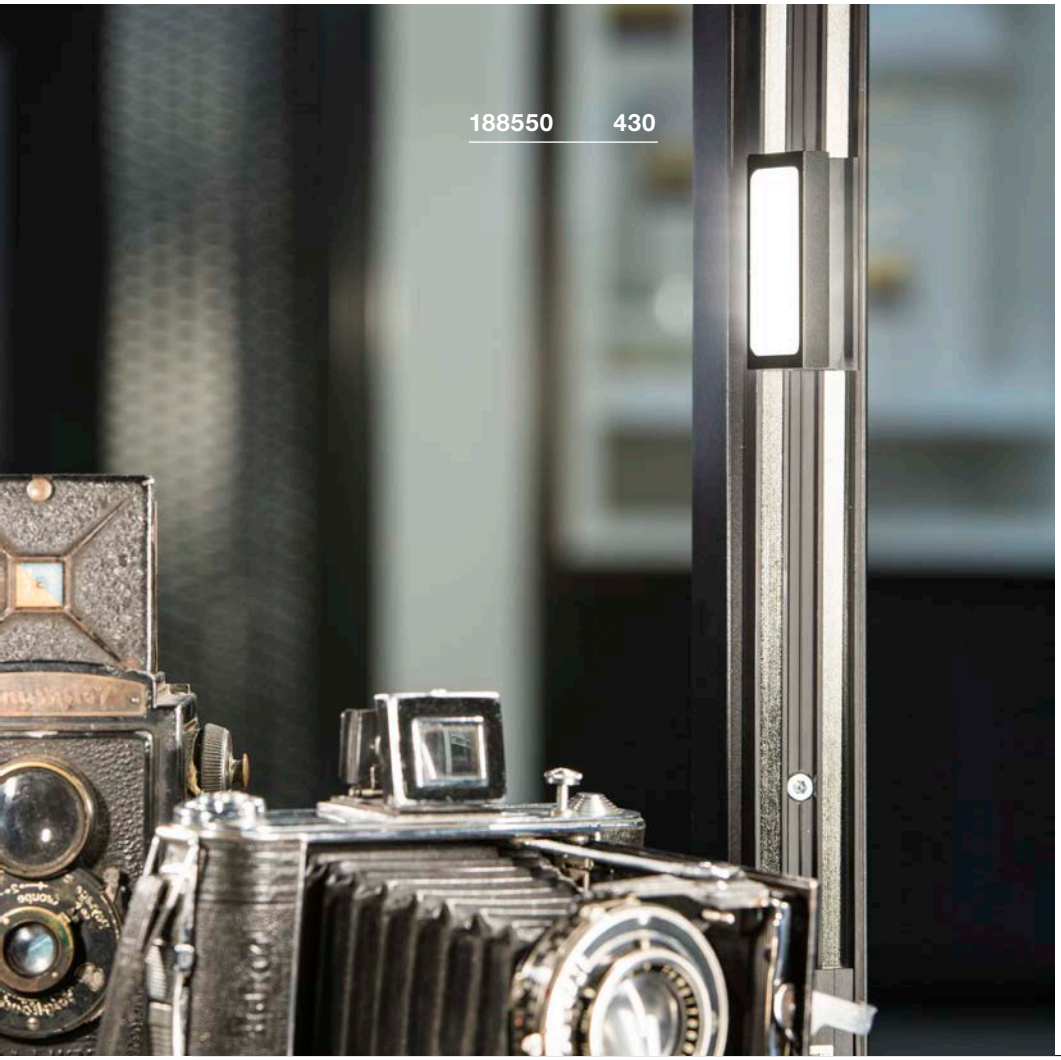



M-TRACK
Track

Rated voltage	12V DC
Max. perm. voltage	12V DC
Max. perm. current	9A
Material	Aluminium
Colour	black
Length	200 cm
Width	3 cm
Height	1.4 cm
Weight	1.05 kg
Item no.	**188500**
GBP	**63,00**

Feed-in

ABS / polycarbonate (PC)
L: 3.6 cm W: 3 cm H: 1.6 cm
Weight: 0.01 kg
1 pc.



Variant	Item no.	GBP
■ black	188510	11,70

End cap

ABS / polycarbonate (PC)
L: 3 cm W: 1.4 cm H: 0.5 cm
Weight: 0.01 kg
1 pc.



Variant	Item no.	GBP
■ black	188520	4,00

Recommended accessories

□ LED power supply, 12V DC | 12W
Item no. 470507 | 20,70 GBP







SOLO 90°
GLU-TRAX®, QR-C51


C-A+ Spectrum A++–E








Product details
12V ~50Hz
Material: Brass



Dimensioned drawing



Recommended lamp

GU5.3 5W 36°
2700K 345lm EEI=A+
6kWh/1000h
Item no. 551862 | 15,30 GBP



LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP





Lamp details
max. 35W QR-C51

Variant	Item no.	GBP
GU5.3 | QR-C51		
chrome	**186272**	**24,80**

POWER-LED SPOT
GLU-TRAX®


A-A++ Spectrum A++–E

LED INSIDE






Product details
12V ~50/60Hz
Material: Aluminium / Polycarbonate (PC)

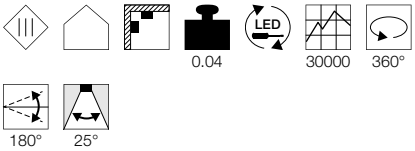

Dimensioned drawing



Note
Only operate with a conventional transformer.

Variant	Item no.	GBP
55lm | 3000K | CRI>80		
grey	**186042**	**58,50**







GLU-TRAX®
Track, 1.5m

Rated voltage	12V AC
Max. perm. current	20 A
Feed-in capability	no
Material	Polycarbonate (PC)
Colour	transparent
Length	150 cm
Width	1 cm
Height	0.5 cm
Weight	0.2 kg
Item no.	**186015**
GBP	**24,80**

Note: Simple installation using clips or by gluing together

ROBOT QR-C51 lamp holder

Steel / Plastic
L: 3 cm W: 2.2 cm H: 3 cm
Weight: 0.02 kg
1 pc.



Variant	Item no.	GBP
chrome	186762	12,60

Double-sided adhesive tape

L: 300 cm W: 0.9 cm
1 pc.



Variant	Item no.	GBP
	220000	11,70

Flexible long connector

20A max.
Steel
L: 7.3 cm W: 1.4 cm H: 0.8 cm
Weight: 0.02 kg
1 pc.



Variant	Item no.	GBP
grey	186772	12,60

Mounting clips, 10 pieces

Plastic PC
Ø: 1.7 cm H: 0.8 cm
10 pc.



Variant	Item no.	GBP
	186020	7,90

Feed-in cable/long connector

20A max.
Steel / Plastic
L: 1.5 cm W: 1.4 cm H: 0.8 cm
Weight: 0.01 kg
1 pc.



Variant	Item no.	GBP
grey	186952	5,90

DEEP ROOTED.

RECESSED FITTINGS RADIATE AN IMPRESSION.

Be it broad-beamed, flooded, static or swivelling: Recessed fittings are the core element of many lighting concepts, and provide a good alternative to freely suspended luminaires. You can adapt to any ambience and give yourself a great deal of furnishing freedom.




1001841 + 1001851 477
112242 450

OUR PROMISE OF QUALITY

INNOVATION AND DEVELOPMENT

German engineering

Customer and product feedback

Outstanding innovative power

The latest design and technology trends

MANUFACTURING

Qualified supplier

Strict adherence to regulations

Long-term cooperation

QUALITY ASSURANCE

2

State-of-the-art laboratories

Extensive safety and performance tests

Multi-stage product approval standards

Want to learn more about quality?
Watch the video now:
bit.ly/slv-quality












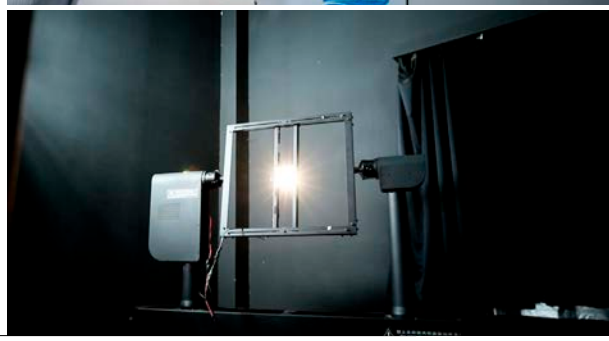

RECESSED FITTINGS


440

441

441

441

443

443

443

444

444

444

445

445

446

446

447

447

448

449

450

450

451

451

452

453

453

454

455

455

455

457

457

457

458

458

459

460

460

461

461

462

462

463

464

465

465

466

466

467

467

469

469

469

471

471

471

472

473

473

474

474

474

476

476

476

477

477

477

479

479

479

482

482

483

483

484

484

485

485

486

487

487

487

488

488

489

489

490

490


1001907 520
1001973 514


491


491


492


492


493


494


495


495


495


496


496


496


497


497


498


498


498


499


499


500


500


501


502


503


503


503


504


505


506


507


508


508


508


509

510

510

510

511

511

511

512

513

513

513

514

515

515

517

517

518

519

519

519

520

520

520

521

522

523

523

524

524

524

525

525


525


527

527

527

Other luminaires and variants can be found online at www.slv.com

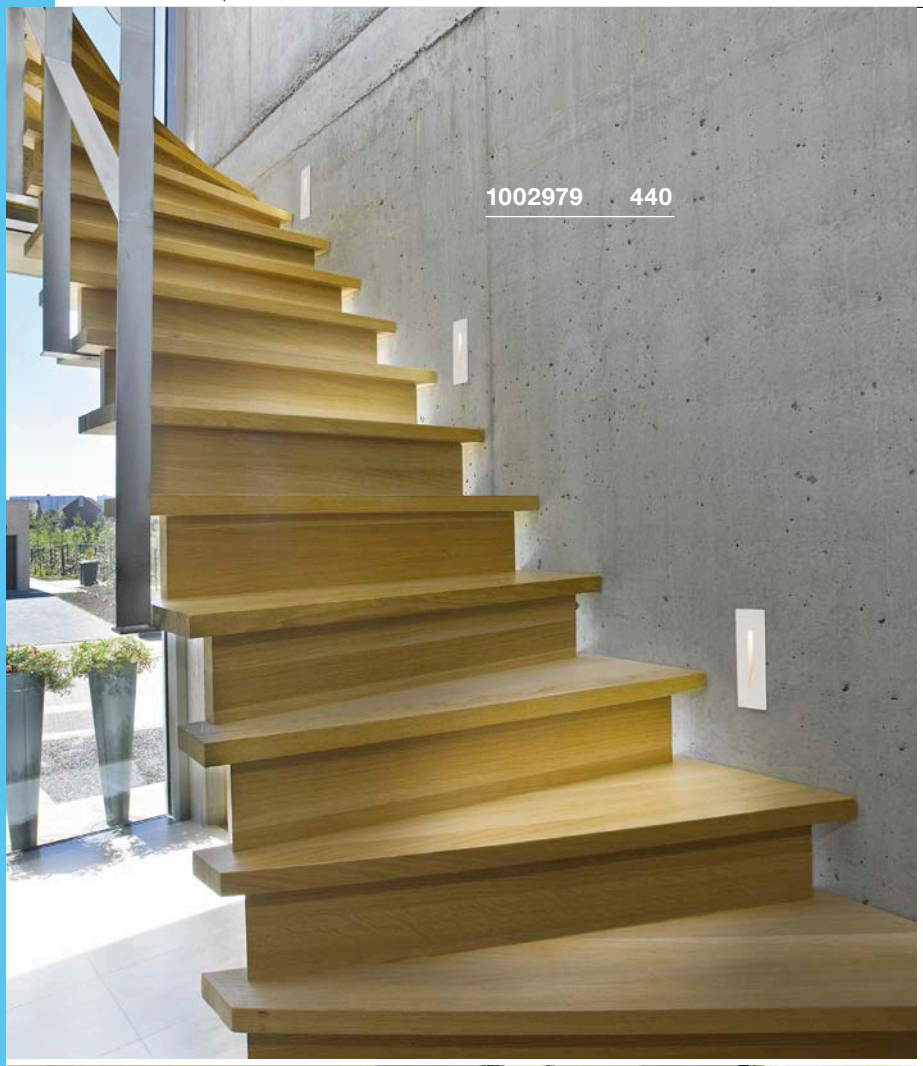

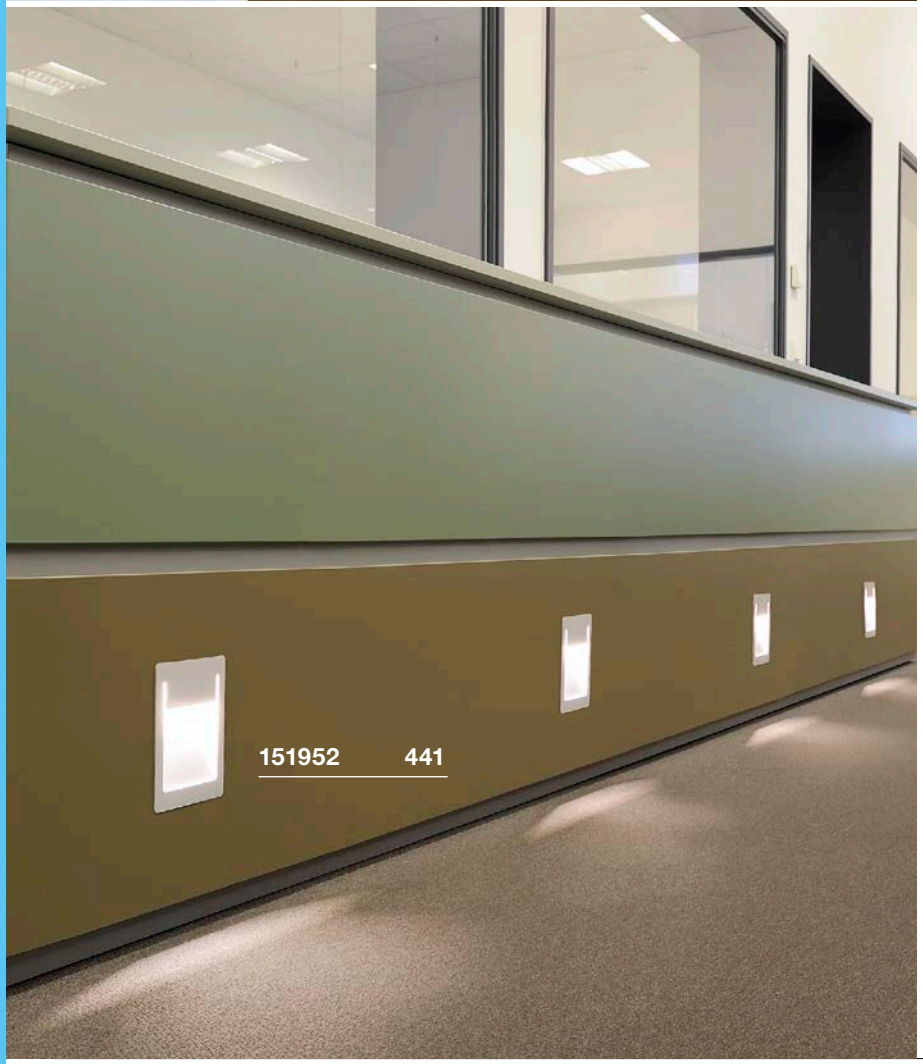


NOTAPO
WL

A-A++ Spectrum A++–E

LED INSIDE

NEW







Product details

700mA | 2.2W
Material: Aluminium
Product dimensions:
W: 3.6 cm H: 10.5 cm D: 3.8 cm





Note

When connecting several luminaires,
make sure that they are connected in series!
Open cable end

Recommended accessories

LED driver 700mA | 3W incl. strain relief
Item no. 464200 | 20,70 GBP



Installation frame
Item no. 1002981 | 18,00 GBP



Variant	Item no.	GBP
6lm | 3000K | CRI>90 W: 3.6 cm | H:10.5 cm | D: 3.8 cm | 0.07 kg		
matt white	1002979	43,20
6lm | 3000K | CRI>90 W: 3.6 cm | H:18 cm | D: 3.8 cm | 0.1 kg		
matt white	1002980	58,50

DOWNUNDER PUR 80
EL

A-A++ Spectrum A++–E

LED INSIDE






Product details

350mA | 3.6W
Material: Aluminium / Steel

0.11 30000

Dimensioned drawing



Note

When connecting several luminaires, make sure that they are connected in series!
Material thickness, mounting surface: 15 mm max.
The luminaires can be combined with the VALETO® system by using different drivers.
AMP plug incl. / driver excl.

Recommended accessories

LED driver 350mA | 10W
Item no. 464140 | 29,70 GBP

LED driver 350mA | 9W
Item no. 464109 | 25,20 GBP

Installation frame
Item no. 151960 | 6,80 GBP

Variant	Item no.	GBP
180lm | 3000K | CRI>80		
white	**151950**	**45,00**

DOWNUNDER PUR 120
EL

A-A++ Spectrum A++–E

LED INSIDE






Product details

350mA | 3.6W
Material: Aluminium / Steel

0.14 30000

Dimensioned drawing



Note

When connecting several luminaires, make sure that they are connected in series!
Material thickness, mounting surface: 15 mm max.
The luminaires can be combined with the VALETO® system by using different drivers.
AMP plug incl. / driver excl.

Recommended accessories

LED driver 15W |
350mA with strain relief
Item no. 464143 | 29,70 GBP

LED driver 350mA | 9W
Item no. 464109 | 25,20 GBP

Installation frame
Item no. 151961 | 8,60 GBP

Variant	Item no.	GBP
160lm | 3000K | CRI>80		
white	**151951**	**54,00**

DOWNUNDER PUR 150
EL

A-A++ Spectrum A++–E

LED INSIDE






Product details

500mA | 5.2W
Material: Aluminium / Steel

0.27 30000

Dimensioned drawing



Note

When connecting several luminaires, make sure that they are connected in series!
Material thickness, mounting surface: 15 mm max.
The luminaires can be combined with the VALETO® system by using different drivers.
AMP plug incl. / driver excl.


Recommended accessories


LED driver 500mA | 15W dimmable
Item no. 464144 | 29,70 GBP

LED driver 500mA | 9W
Item no. 464091 | 20,70 GBP

Installation frame
Item no. 151962 | 9,50 GBP

Variant	Item no.	GBP
230lm | 3000K | CRI>80		
white	**151952**	**63,00**

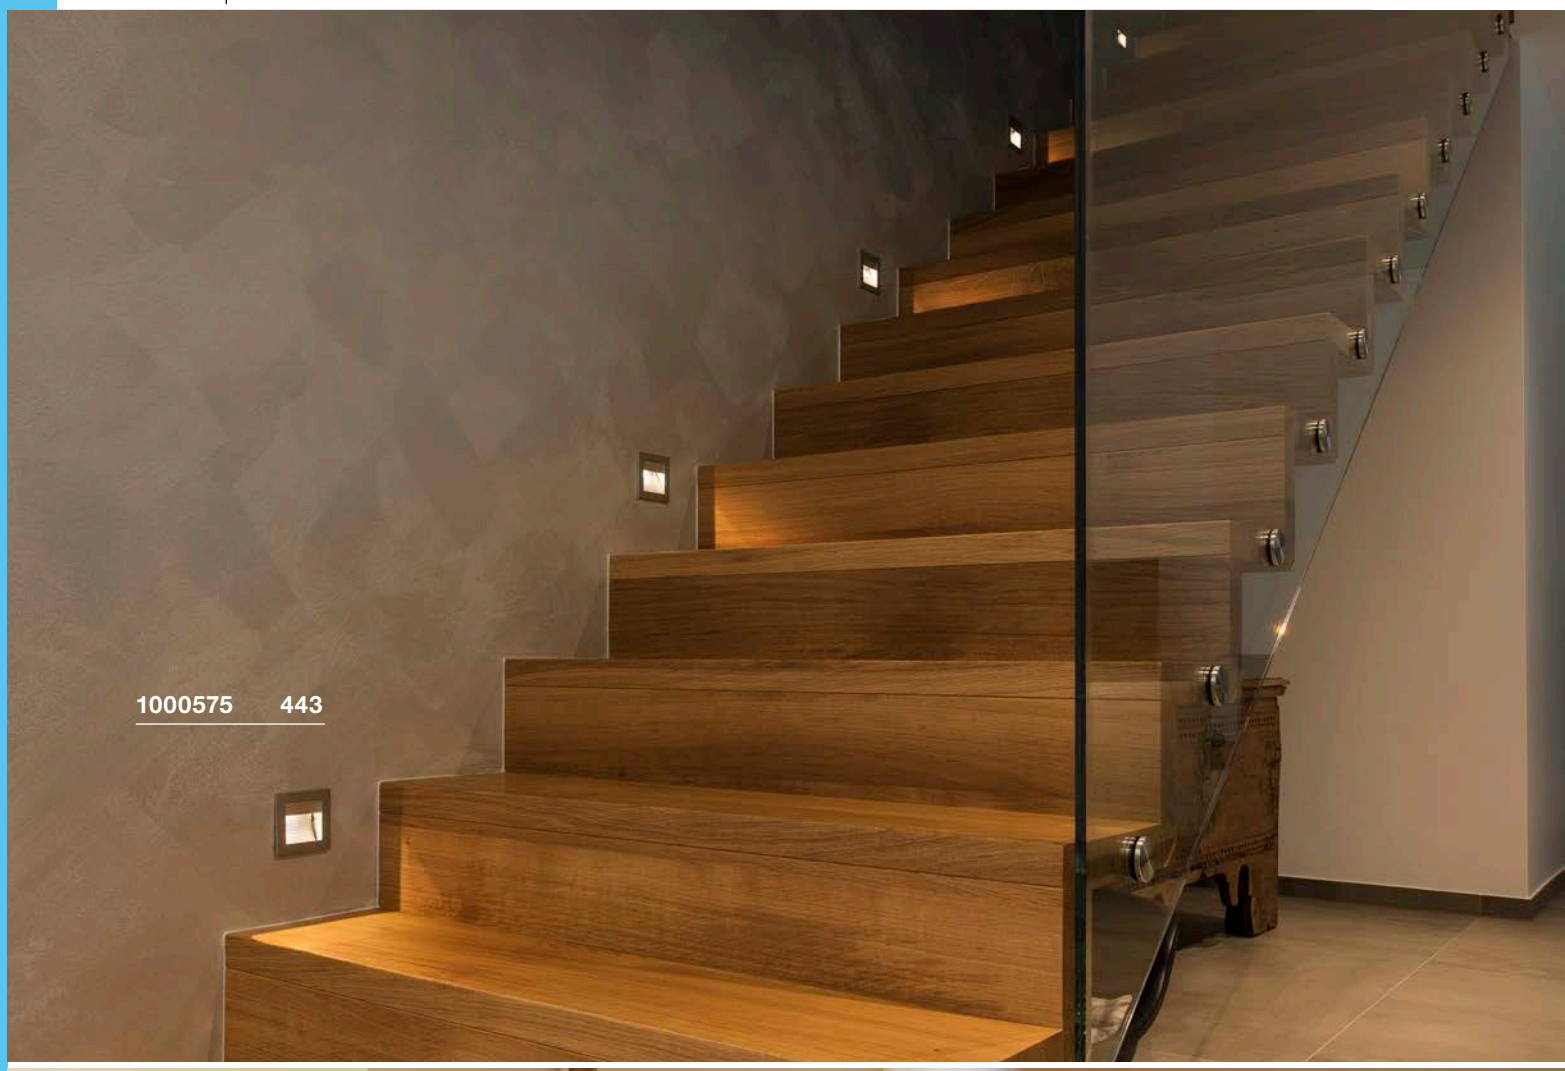
1000575 443

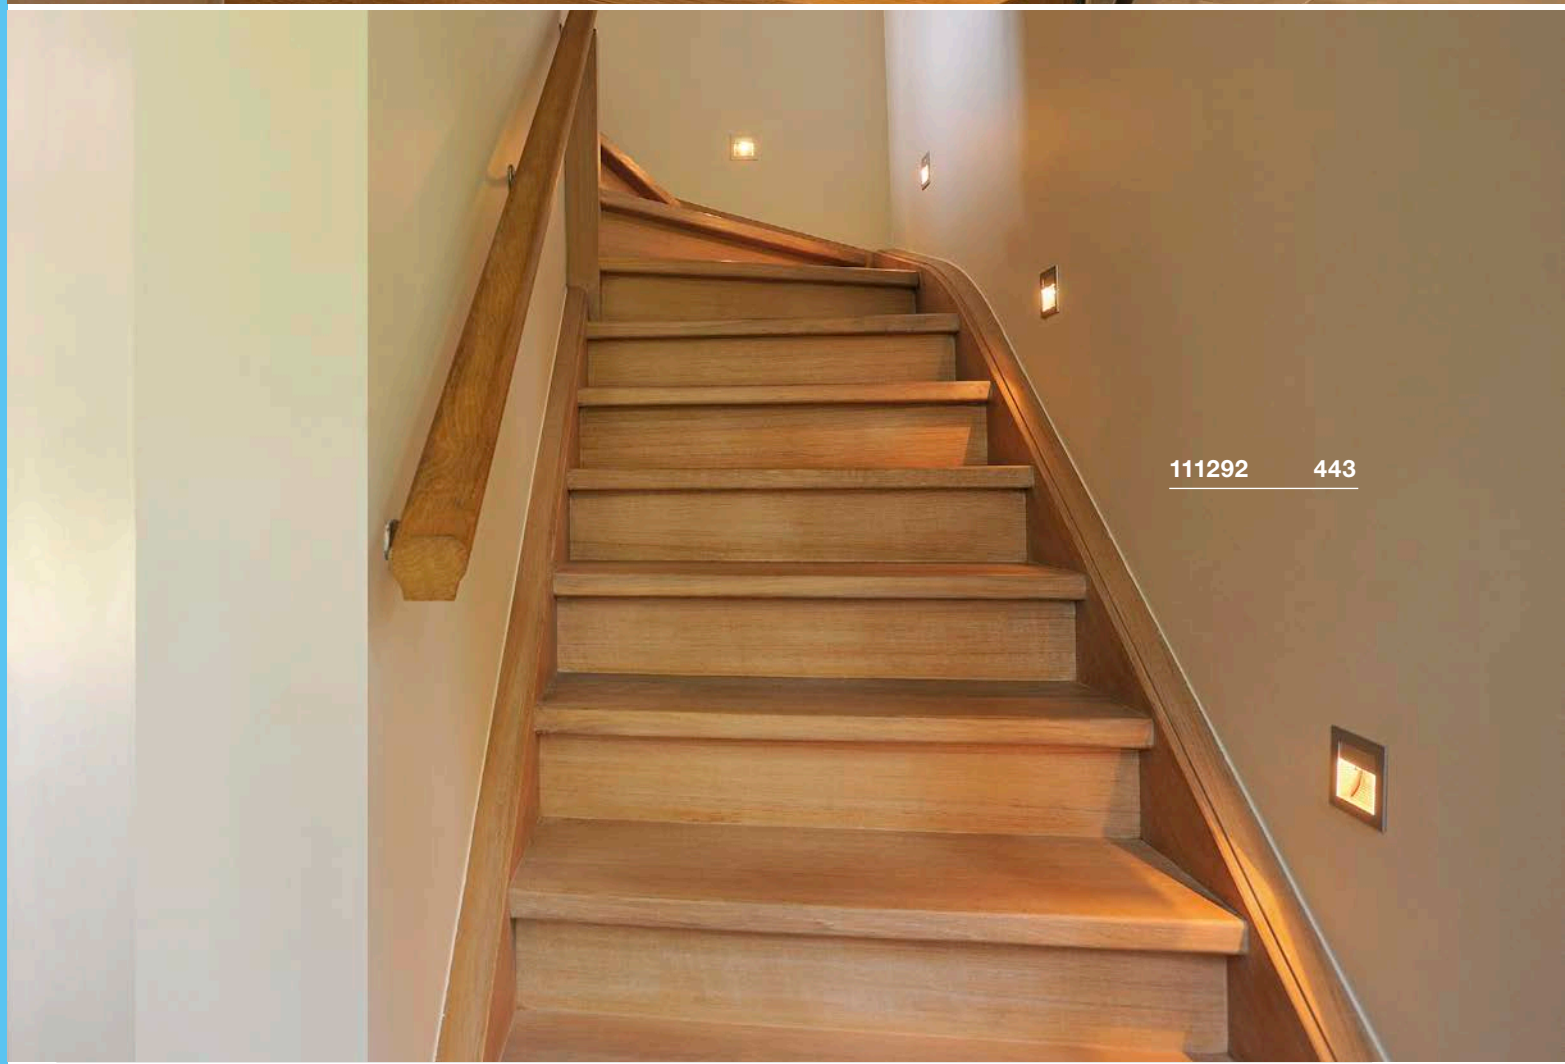
111292 443

FLAT FRAME CURVE
EL, QT9


C-A+ Spectrum A++–E








Product details
12V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note
Material thickness, mounting surface:
10-25 mm max.
Line drawing on left with installation box

Recommended accessories

Transformer 12V AC | 60VA
Item no. 461060 | 15,30 GBP



Installation box
Item no. 112781 | 7,70 GBP



Flush-mounted frame
Item no. 112780 | 4,00 GBP



Lamp details
max. 20W QT9

Variant	Item no.	GBP
G4 | QT9		
matt white	**112771**	**24,80**
G4 | QT9		
grey	**112772**	**24,80**

FRAME CURVE
EL, HV

A-A++ Spectrum A++–E

LED INSIDE








Product details
100-277V ~50/60Hz | 350mA
Total consumption: 3.1W
Material: Aluminium





Dimensioned drawing



Note
Material thickness, mounting surface: 10-30 mm

Recommended accessories

Installation box
Item no. 112781 | 7,70 GBP



Flush-mounted frame
Item no. 112780 | 4,00 GBP



Variant	Item no.	GBP
100lm | 2700K | CRI>80		
white	**1000574**	**58,50**
100lm | 2700K | CRI>80		
grey	**1000575**	**58,50**

FRAME CURVE
EL

A-A++ Spectrum A++–E

LED INSIDE








Product details
350mA | 1W
Material: Aluminium



Dimensioned drawing



Note
Material thickness, mounting surface:
10-30 mm max.
When connecting several luminaires, make sure that they are connected in series!
The luminaires can be combined with the VALETO® system by using different drivers.
Including AMP plug / excluding driver

Recommended accessories

LED driver 350mA | 3W
Item no. 464107 | 17,10 GBP



Installation box
Item no. 112781 | 7,70 GBP



Flush-mounted frame
Item no. 112780 | 4,00 GBP



Multiway connector with 3 outputs
Item no. 111850 | 9,90 GBP



Variant	Item no.	GBP
60lm | 4000K | CRI>80		
grey	**111290**	**40,50**
60lm | 3000K | CRI>80		
grey	**111292**	**40,50**
60lm | 4000K | CRI>80		
matt white	**113290**	**40,50**
60lm | 3000K | CRI>80		
matt white	**113292**	**40,50**

FLAT FRAME BASIC
EL, QT9


C-A+ Spectrum A++–E



Product details
12V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Note
Material thickness, mounting surface:
10-25 mm max.

Recommended accessories

Transformer 12V AC | 60VA
Item no. 461060 | 15,30 GBP

Installation box
Item no. 112781 | 7,70 GBP

Flush-mounted frame
Item no. 112780 | 4,00 GBP

Lamp details
max. 20W QT9

Variant	Item no.	GBP
G4 | QT9		
matt white	**112731**	**22,50**
G4 | QT9		
grey	**112732**	**22,50**

FRAME BASIC
EL, HV

A-A++ Spectrum A++–E


LED INSIDE








Product details
100-277V ~50/60Hz | 350mA
Total consumption: 3.1W
Material: Aluminium

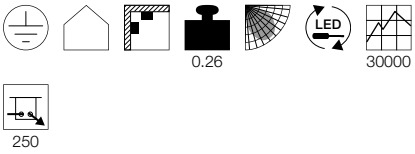

Dimensioned drawing



Note
Material thickness, mounting surface: 10-30 mm

Recommended accessories

Flush-mounted frame
Item no. 112780 | 4,00 GBP

Installation box
Item no. 112781 | 7,70 GBP

Variant	Item no.	GBP
140lm | 2700K | CRI>80		
white	**1000576**	**54,00**
140lm | 2700K | CRI>80		
grey	**1000577**	**54,00**

FRAME BASIC
EL

A-A++ Spectrum A++–E

LED INSIDE








- Use of slides and films is possible

Product details
350mA | 1W
Material: Aluminium / Glass



Dimensioned drawing



Note
Material thickness, mounting surface:
10-30 mm max.
When connecting several luminaires, make sure that they are connected in series!
The luminaires can be combined with the VALETO® system by using different drivers.
Including AMP plug / excluding driver
Material thickness, mounting surface: 10-30 mm

Recommended accessories


LED driver 350mA | 3W
Item no. 464107 | 17,10 GBP

Flush-mounted frame
Item no. 112780 | 4,00 GBP

Installation box
Item no. 112781 | 7,70 GBP

Multiway connector with 3 outputs
Item no. 111850 | 9,90 GBP

Variant	Item no.	GBP
45lm | 4000K | CRI>80		
grey	**111260**	**31,50**
40lm | 3000K | CRI>80		
grey	**111262**	**31,50**
45lm | 4000K | CRI>80		
matt white	**113260**	**31,50**
40lm | 3000K | CRI>80		
matt white	**113262**	**31,50**

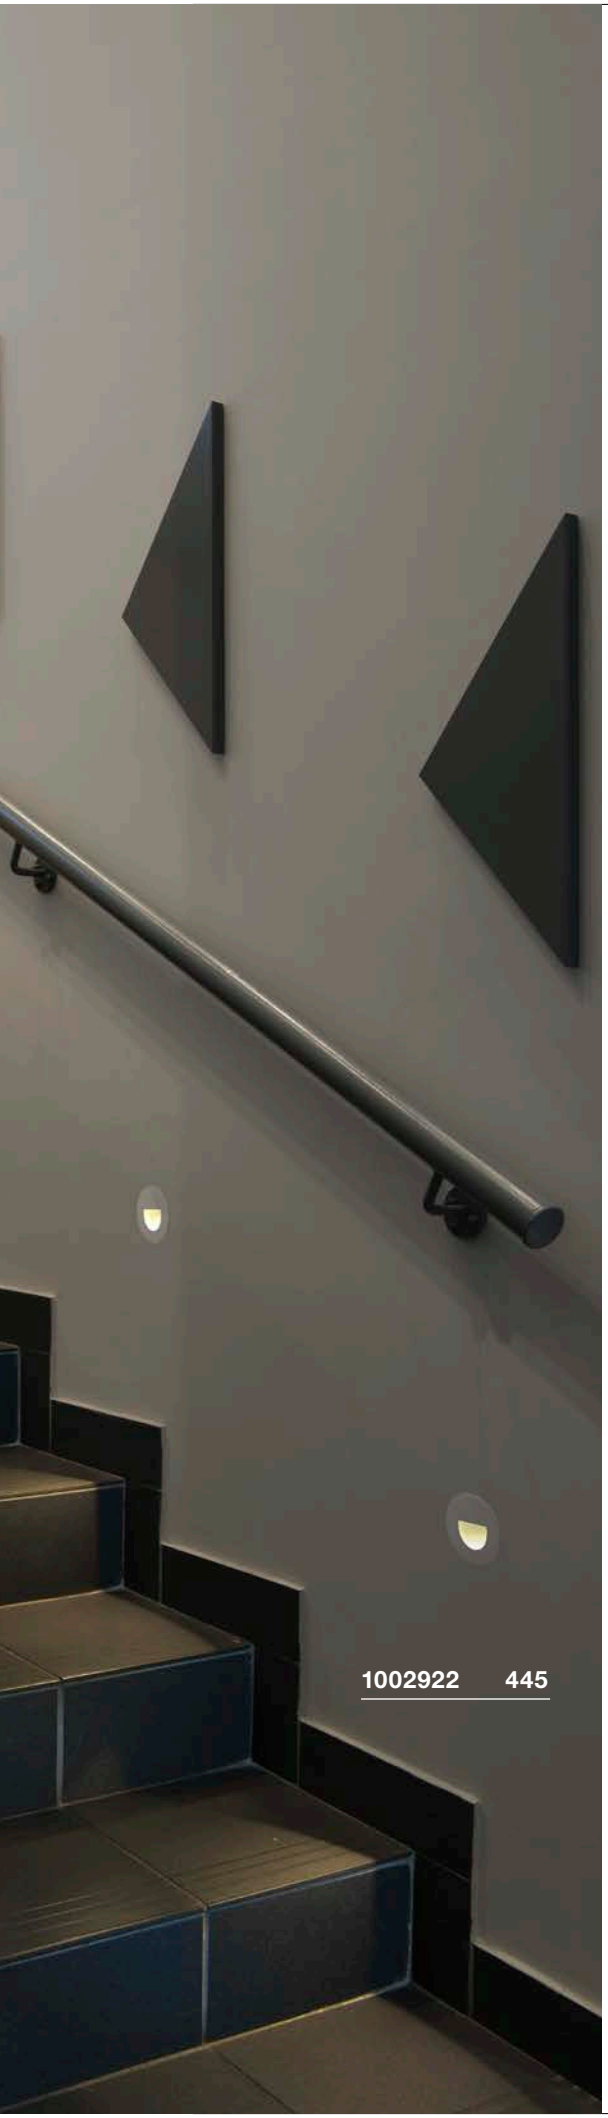

MOBALA
EL

A-A++ Spectrum A++–E

LED INSIDE

NEW






Product details

100-240V ~50/60Hz | 24V DC
Total consumption: 1.3W
Material: Aluminium



Dimensioned drawing



Recommended accessories

■ Installation box
Item no. 1002983 | 9,90 GBP



■ Installation frame
Item no. 1002984 | 9,90 GBP



Variant	Item no.	GBP
14lm | 3000K | CRI>80 □ matt white	**1002982**	**54,00**

WORO
EL

A-A++ Spectrum A++–E

LED INSIDE

NEW









• Installation in standard switch socket possible

Product details

350mA | 1.1W
Material: Steel

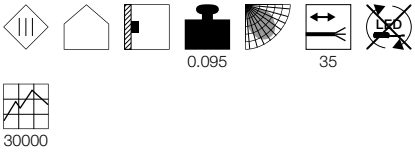

Dimensioned drawing



Note

When connecting several luminaires, make sure that they are connected in series!
The item is suitable for installation in flush-mounted and cavity wall boxes for switches/sockets.
Open cable end

Recommended accessories

□ LED driver 350mA | 9W
Item no. 464109 | 25,20 GBP



Variant	Item no.	GBP
50lm | 3000K | CRI>80 □ matt white	**1002922**	**49,50**

BEDSIDE
EL, left

A-A++ Spectrum A++–E

LED INSIDE









- “Dip-it” switching when swivelled out
- With blue orientation light when switched off
- Left version

Product details

700mA | 3W
Material: Aluminium

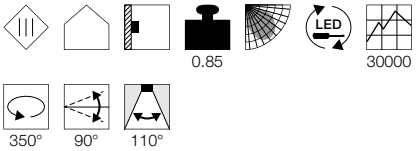

Dimensioned drawing



Note

Not suitable for series connection.
Only for operation with a 3W driver (464200).
Material thickness, mounting surface: 20 mm max.

Recommended accessories

LED driver 700mA | 3W incl. strain relief
Item no. 464200 | 20,70 GBP



Installation box
Item no. 146260 | 34,20 GBP



Variant	Item no.	GBP
110lm | 3000K | CRI>80 grey	146242	188,10

BEDSIDE
EL, right

A-A++ Spectrum A++–E

LED INSIDE









- “Dip-it” switching when swivelled out
- With blue orientation light when switched off
- Right version

Product details

700mA | 3W
Material: Aluminium

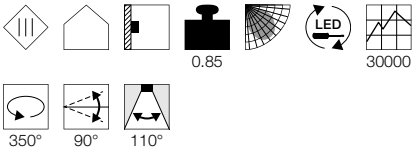

Dimensioned drawing



Note

Not suitable for series connection.
Only for operation with a 3W driver (464200).
Material thickness, mounting surface: 20 mm max.

Recommended accessories


LED driver 700mA | 3W incl. strain relief
Item no. 464200 | 20,70 GBP





Installation box
Item no. 146260 | 34,20 GBP





Variant	Item no.	GBP
110lm | 3000K | CRI>80 grey	146252	188,10

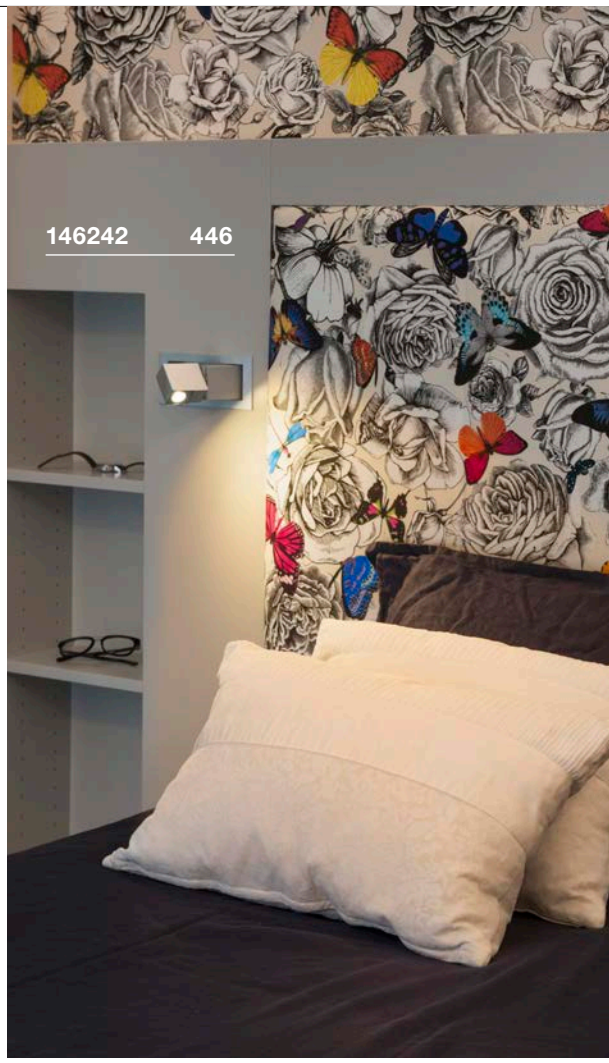

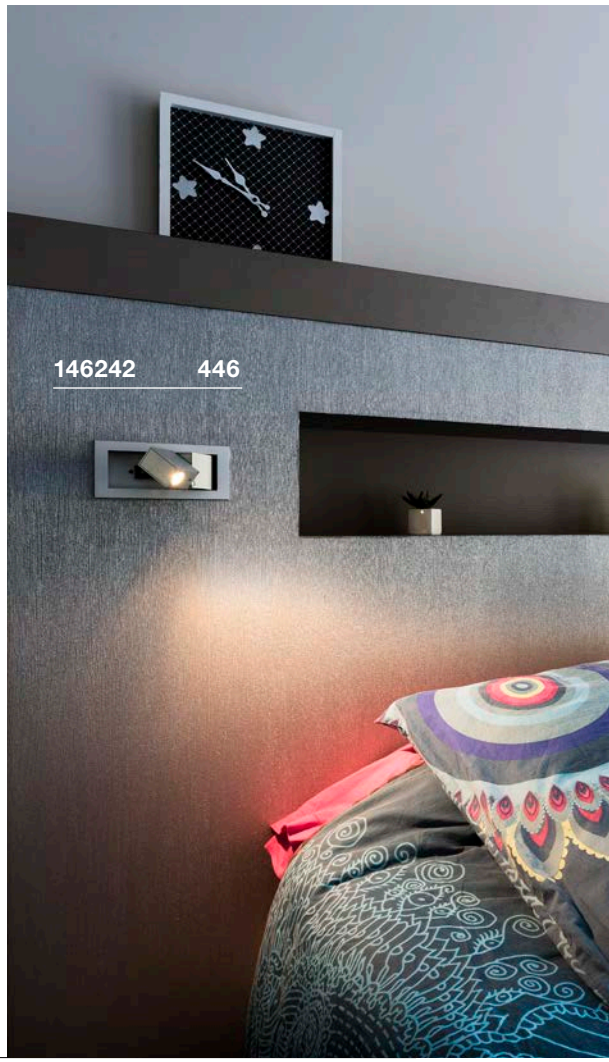

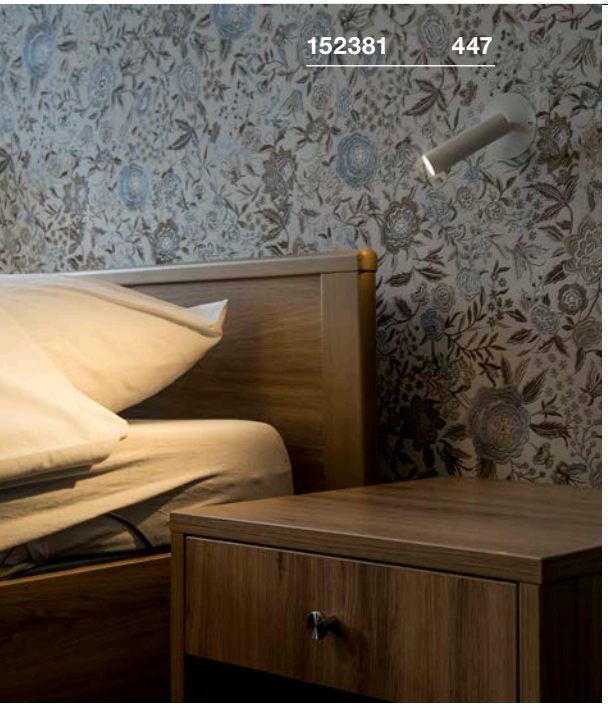

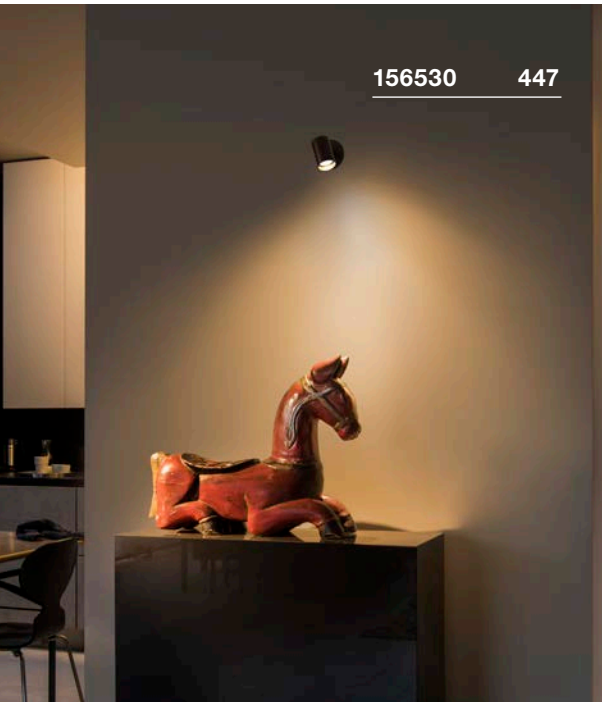

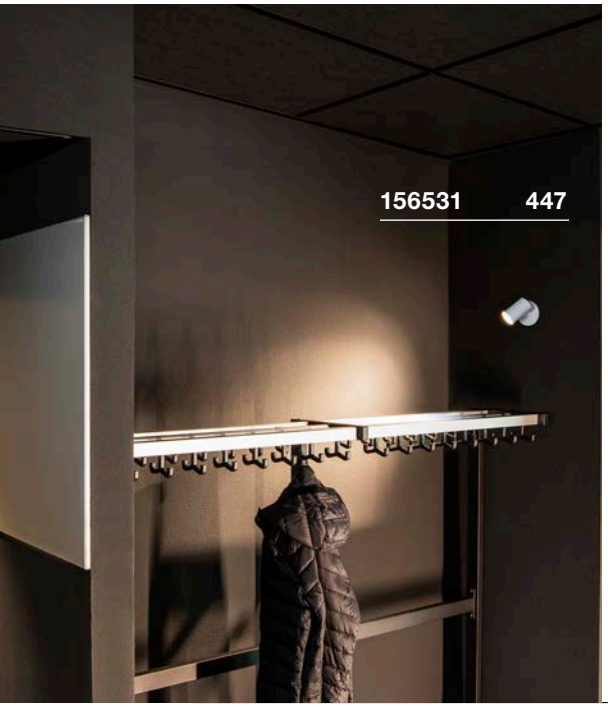

KARPO 30 EL

889

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90

Product details

500mA | 7.5W
Material: Aluminium / Steel

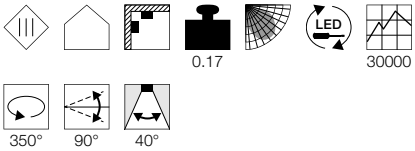

Dimensioned drawing



Note

Material thickness, mounting surface: 12 mm max.
When connecting several luminaires, make sure that they are connected in series!
When using different drivers, the luminaires can be combined with the VALETO® system.
Driver excl.

Recommended accessories

LED driver 500mA | 9W
Item no. 464091 | 20,70 GBP

Variant	Item no.	GBP
450lm | 3000K | CRI>90		
■ black	**152380**	**99,00**
470lm | 3000K | CRI>90		
□ white	**152381**	**99,00**

HELIA EL

888

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90
- Shallow installation depth

Product details

500mA | 9W
Material: Aluminium

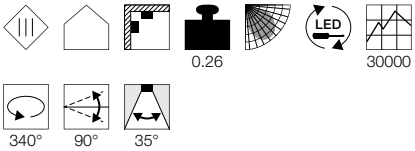

Dimensioned drawing



Note

Material thickness, mounting surface: 15 mm

Recommended accessories

LED driver 500mA | 9W
Item no. 464091 | 20,70 GBP

Variant	Item no.	GBP
700lm | 3000K | CRI>90		
■ black	**156530**	**99,00**
800lm | 3000K | CRI>90		
□ white	**156531**	**99,00**


LIGHTPOINT
EL

A-A++ Spectrum A⁺⁺–E







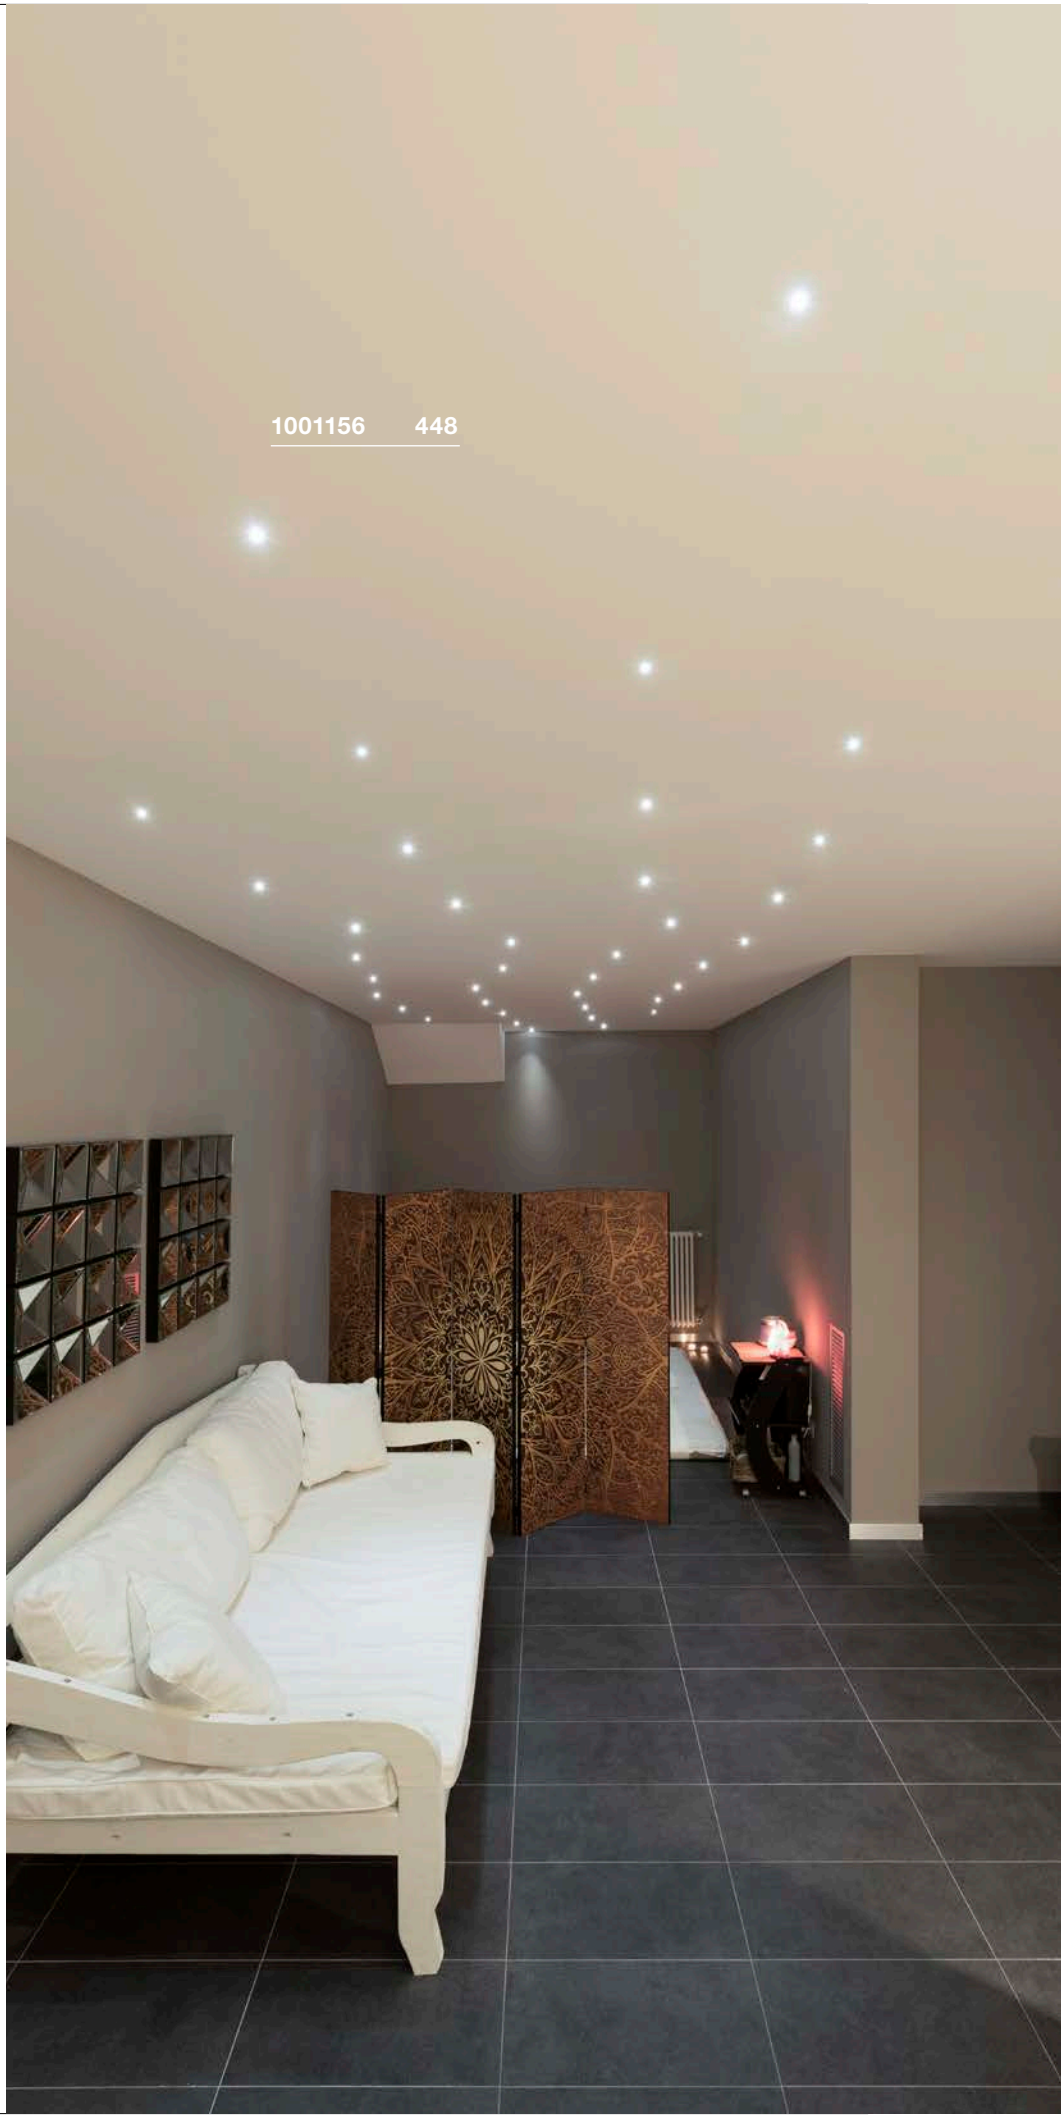


Product details

350mA | 1W
Material: Aluminium / Polymethylacrylate (PMMA)



Dimensioned drawing



Recommended accessories

■ Multiway connector with 3 outputs
Item no. 111850 | 9,90 GBP



□ LED driver 350mA | 3W
Item no. 464107 | 17,10 GBP



Variant	Item no.	GBP
100lm | 3000K | CRI>80 □ white	**1001156**	**20,70**
100lm | 3000K | CRI>80 ■ chrome	**1001155**	**25,20**




CRYSTAL
EL, TRIAC

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM








- Premium LED with CRI>90
- Dim to Warm (1800-3000K)

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.3W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L



Dimensioned drawing



Note

Products supplied with clip springs. Leaf springs included with the product and can be exchanged
Material thickness, mounting surface: 20 mm

An application video about Dim to Warm can be found at **http://bit.ly/dim-to-warm**

Variant	Item no.	GBP
460lm | 1800-3000K | CRI>95		
transparent	**1002120**	**76,50**

DEKLED
EL

A-A++ Spectrum A⁺⁺–E

LED INSIDE








Product details

350mA | 1W
Material: Aluminium / Polycarbonate (PC)

0.04 150 LED 30000

45°

Dimensioned drawing



Recommended accessories

LED driver 320mA | 3W incl. strain relief
Item no. 464108 | 20,70 GBP



Variant	Item no.	GBP
60lm | 4000K | CRI>80 grey	**112240**	**22,50**
60lm | 3000K | CRI>80 grey	**112242**	**22,50**

DL 126
EL

A-A++ Spectrum A⁺⁺–E

LED INSIDE








Product details

12V DC | 2.8W
Material: Aluminium / Plastic

0.11 200 LED 30000

90°

Dimensioned drawing





Recommended accessories

LED power supply, 12V DC | 12W
Item no. 470507 | 20,70 GBP




Variant	Item no.	GBP
160lm | 3000K | CRI>80 white	**112221**	**25,20**
160lm | 3000K | CRI>80 chrome	**112222**	**29,70**
160lm | 3000K | CRI>80 matt grey	**112225**	**25,20**
160lm | 2700K | CRI>80 white	**112161**	**25,20**
160lm | 2700K | CRI>80 chrome	**112162**	**29,70**
160lm | 2700K | CRI>80 matt grey	**112165**	**25,20**

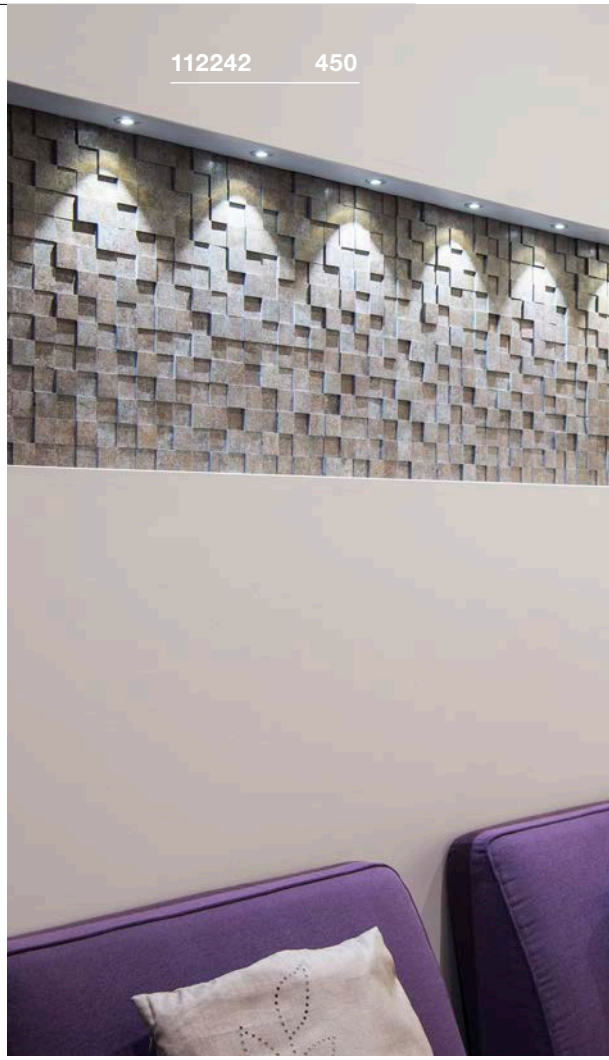

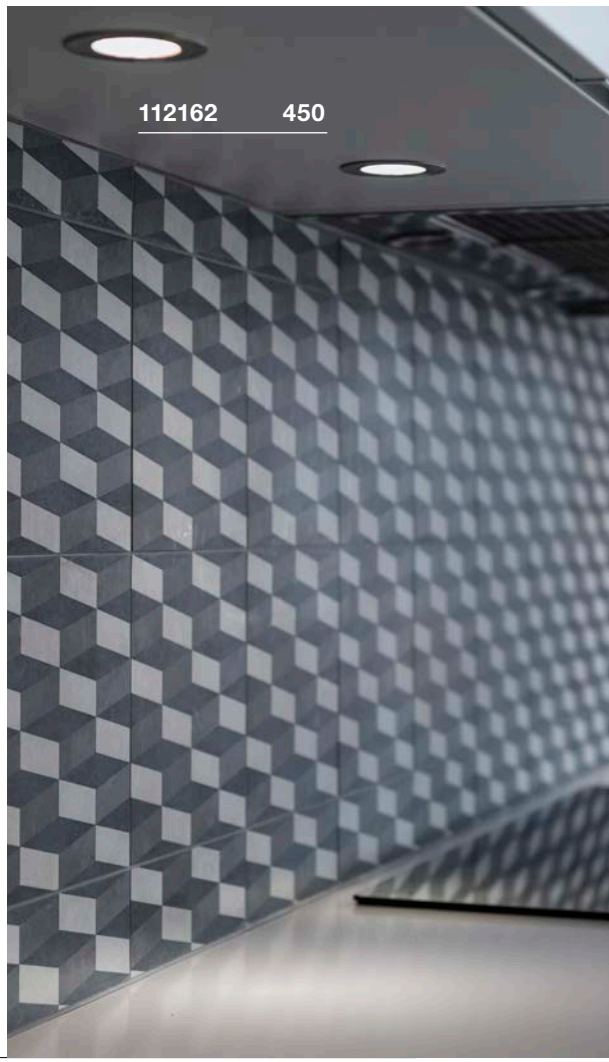



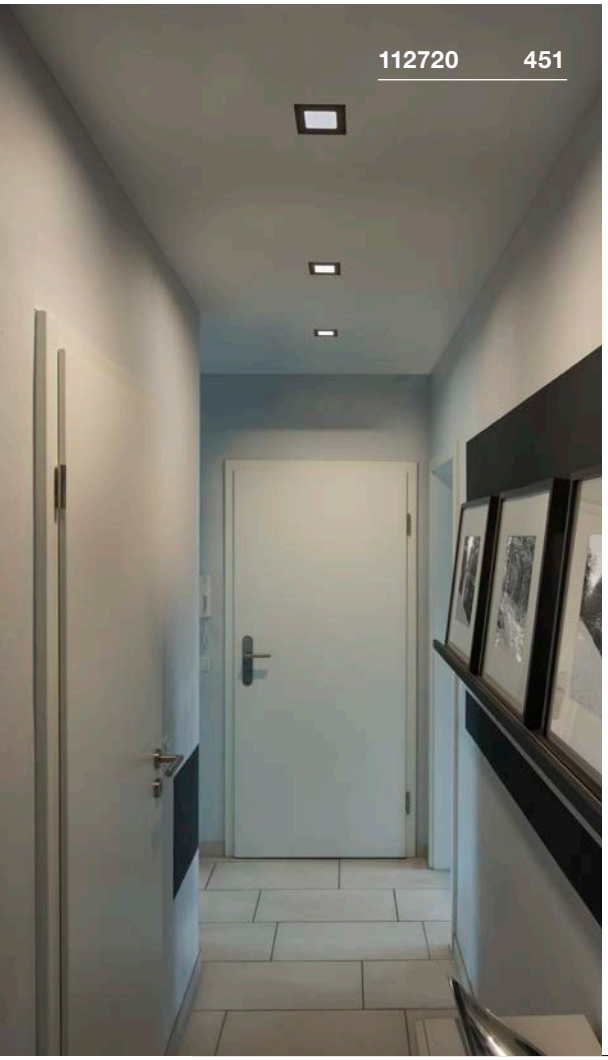


FRAME BASIC SET
EL

A-A++ Spectrum A++–E

LED INSIDE











Product details

220-240V ~50/60Hz | 350mA
Total consumption: 8.6W
Material: Aluminium / Acrylic

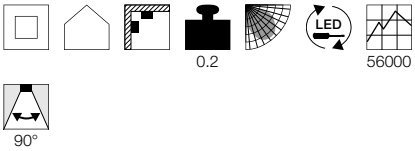

Dimensioned drawing



Note

Clip springs
Material thickness, mounting surface: 20 mm max.

Variant	Item no.	GBP
445lm | 3000K | CRI>80		
matt black	**112720**	**40,50**
445lm | 3000K | CRI>80		
matt white	**112721**	**40,50**
445lm | 3000K | CRI>80		
matt aluminium	**112726**	**45,00**

INDI REC
EL, QPAR51

E-A++ Spectrum A++–E

NEW COLOR




Product details

220-240V ~50/60Hz
Material: Aluminium / Steel



Dimensioned drawing



Note

Material thickness, mounting surface: 25 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560552 | 9,90 GBP

Lamp details

max. 20W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
matt black	**1002857**	**29,70**
GU10 | QPAR51		
matt white	**112471**	**29,70**
GU10 | QPAR51		
grey / black	**112474**	**29,70**

KAHOLO
EL, E27

E-A++ Spectrum A++–E









- Can be equipped with a wide range of E27 lamps
- Height-adjustable socket

Product details

230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing



Note


Material thickness, mounting surface: 20 mm max.


Recommended lamp


LED E27 11.5W 240°
2700K 1060lm EEI=A+
12kWh/1000h | **3 Step-Dim**
Item no. 560432 | 22,50 GBP

LED E27 9.5W 240°
2200-6700K 806lm EEI=A+
10kWh/1000h
Item no. 1001917 | 49,50 GBP

Variant	Item no.	GBP
E27 | PAR20 ■ black	**1000906**	**29,70**
E27 | PAR20 □ white	**1000907**	**29,70**
E27 | PAR20 ▨ matt aluminium	**1000908**	**31,50**

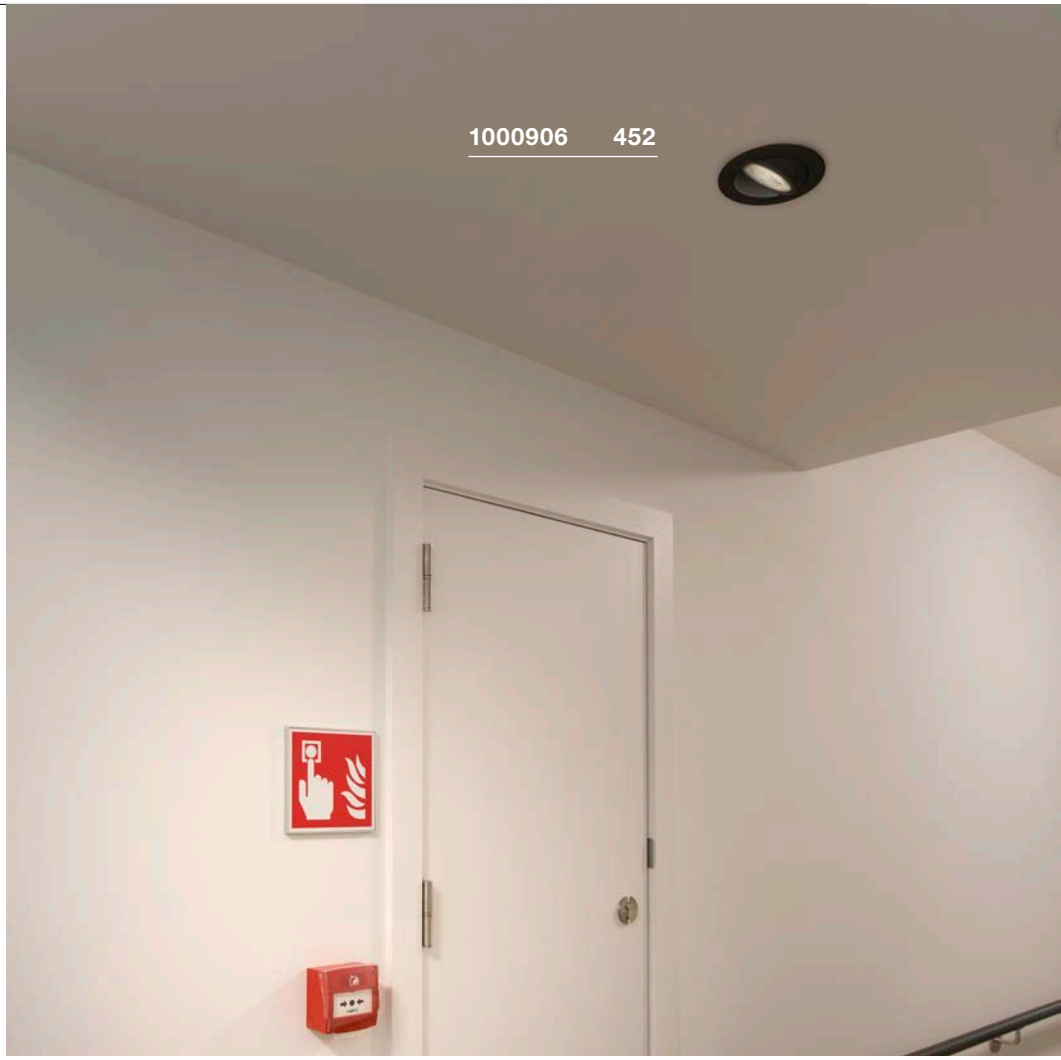

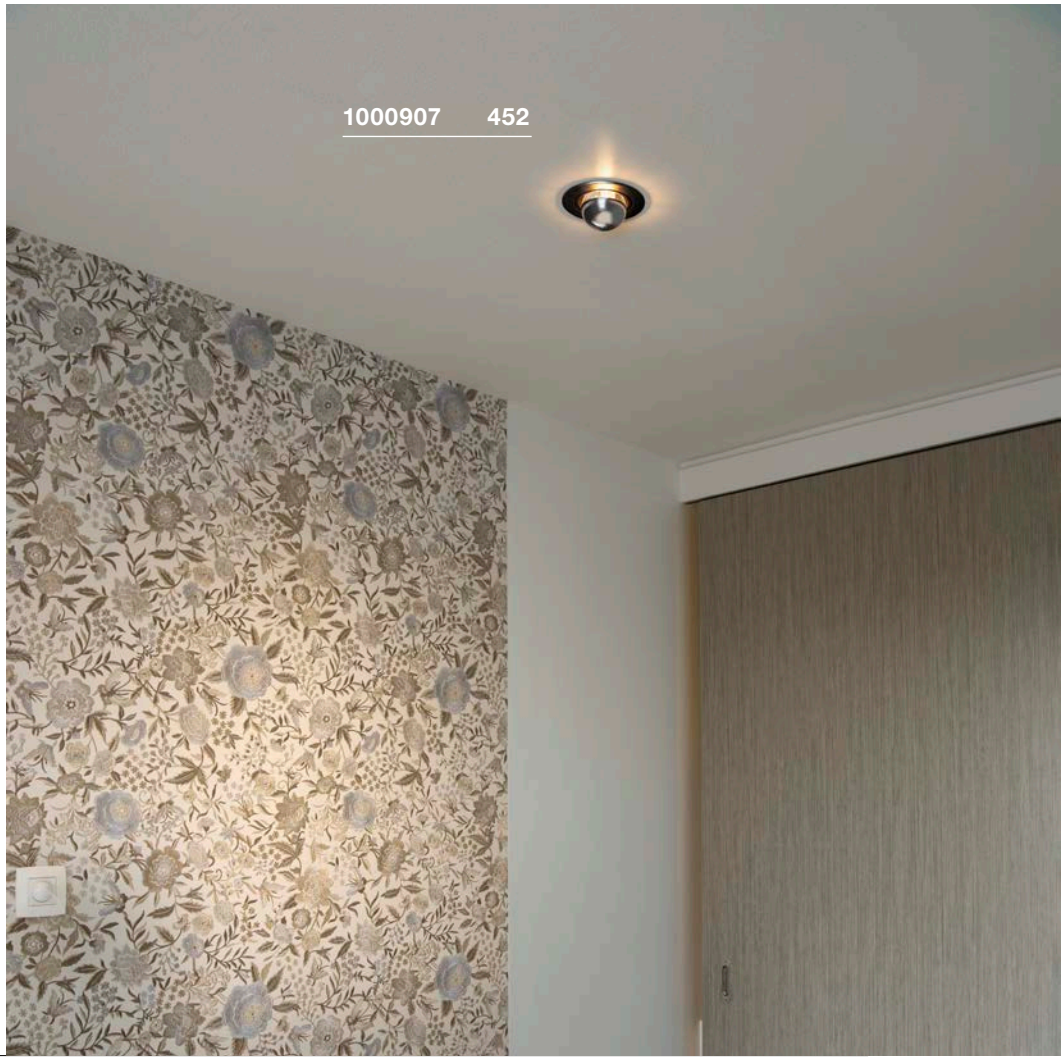

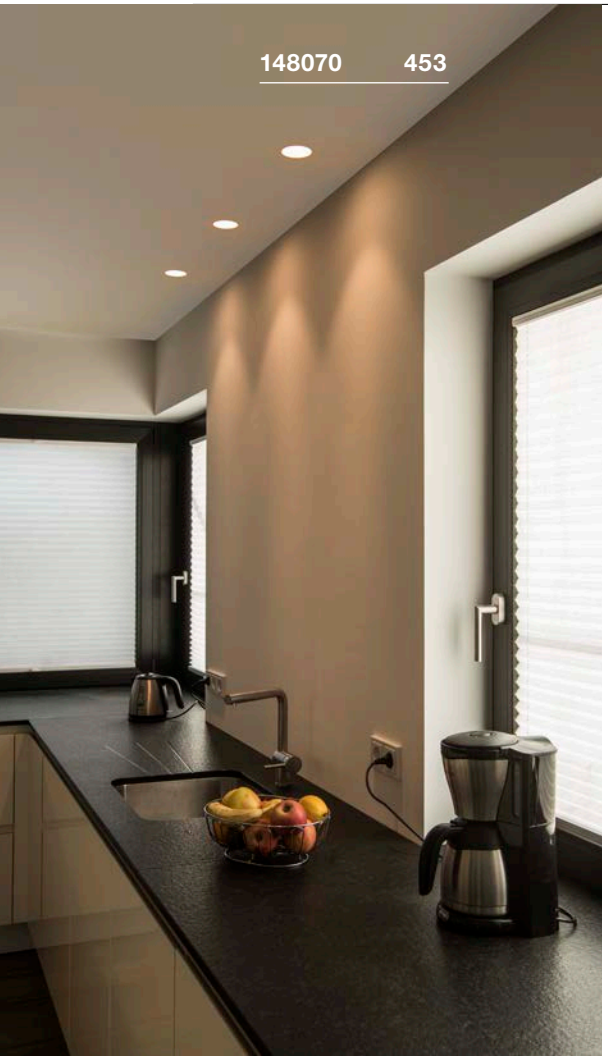



PLASTRA
EL, round, QPAR51

893

E-A++ Spectrum A++–E








- Flush installation possible
- Can be individually designed with colours, stickers and more

Product details
220-240V ~50/60Hz
Material: Plaster / Steel

0.5

Dimensioned drawing



Note
Material thickness, mounting surface: 25 mm max.

Recommended lamp
GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP

LED GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP

Lamp details
max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**148070**	**31,50**

PLASTRA
EL, square, QPAR51

893

E-A++ Spectrum A++–E








- Flush installation possible
- Can be individually designed with colours, stickers and more

Product details
220-240V ~50/60Hz
Material: Plaster / Steel

0.6

Dimensioned drawing



Note
Material thickness, mounting surface: 25 mm max.

Recommended lamp
LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560552 | 9,90 GBP

Lamp details
max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
white	**148071**	**31,50**

PIKA
EL, round, QPAR51, rigid

E-A++ Spectrum A++–E









• 3-pole loop-in/loop-out (for through-wire)

Product details

230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note

Material thickness, mounting surface: 13 mm max.

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP


LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	1000714	9,90
GU10 | QPAR51 chrome	1000715	13,50
GU10 | QPAR51 brass	1000716	13,50
GU10 | QPAR51 grey	1000717	9,90



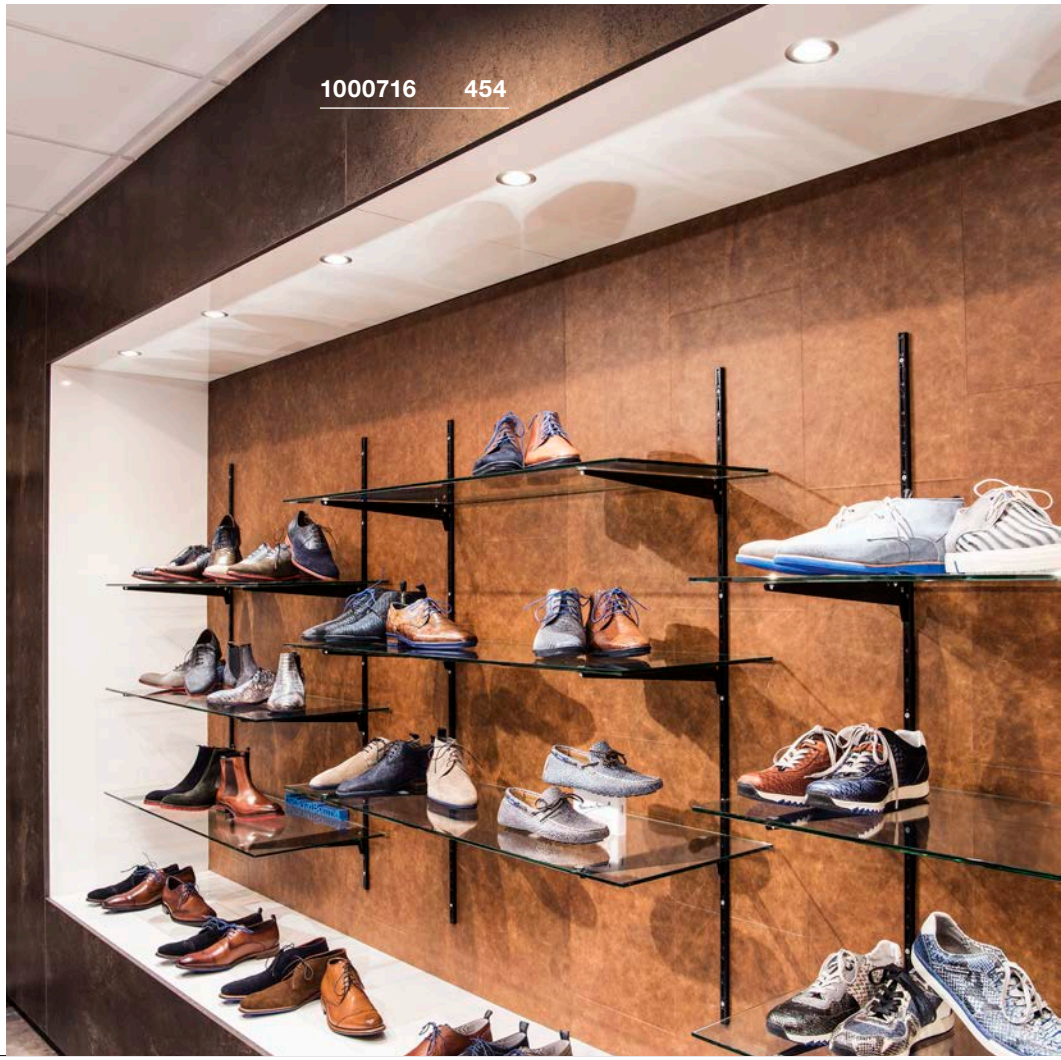

PIKA
EL, round, QPAR51









- 3-pole loop-in/loop-out (for through-wire)
- Lamp unit, can be tilted by 30°

Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note
Material thickness, mounting surface: 15 mm max.

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560552 | 9,90 GBP



Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**1000718**	**13,50**
GU10 | QPAR51 chrome	**1000719**	**15,30**
GU10 | QPAR51 brass	**1000720**	**15,30**
GU10 | QPAR51 grey	**1000721**	**13,50**

PIKA
EL, square, QPAR51, rigid








- 3-pole loop-in/loop-out (for through-wire)

Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note
Material thickness, mounting surface: 13 mm max.

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560552 | 9,90 GBP



Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**1002204**	**9,90**
GU10 | QPAR51 chrome	**1002205**	**13,50**
GU10 | QPAR51 brass	**1002206**	**13,50**
GU10 | QPAR51 grey	**1002207**	**9,90**

PIKA
EL, square, QPAR51, tiltable









- 3-pole loop-in/loop-out (for through-wire)
- Lamp unit, can be tilted by 30°

Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note
Material thickness, mounting surface: 15 mm max.

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP





LED GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP




Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**1002208**	**13,50**
GU10 | QPAR51 chrome	**1002209**	**15,30**
GU10 | QPAR51 brass	**1002210**	**15,30**
GU10 | QPAR51 grey	**1002211**	**13,50**

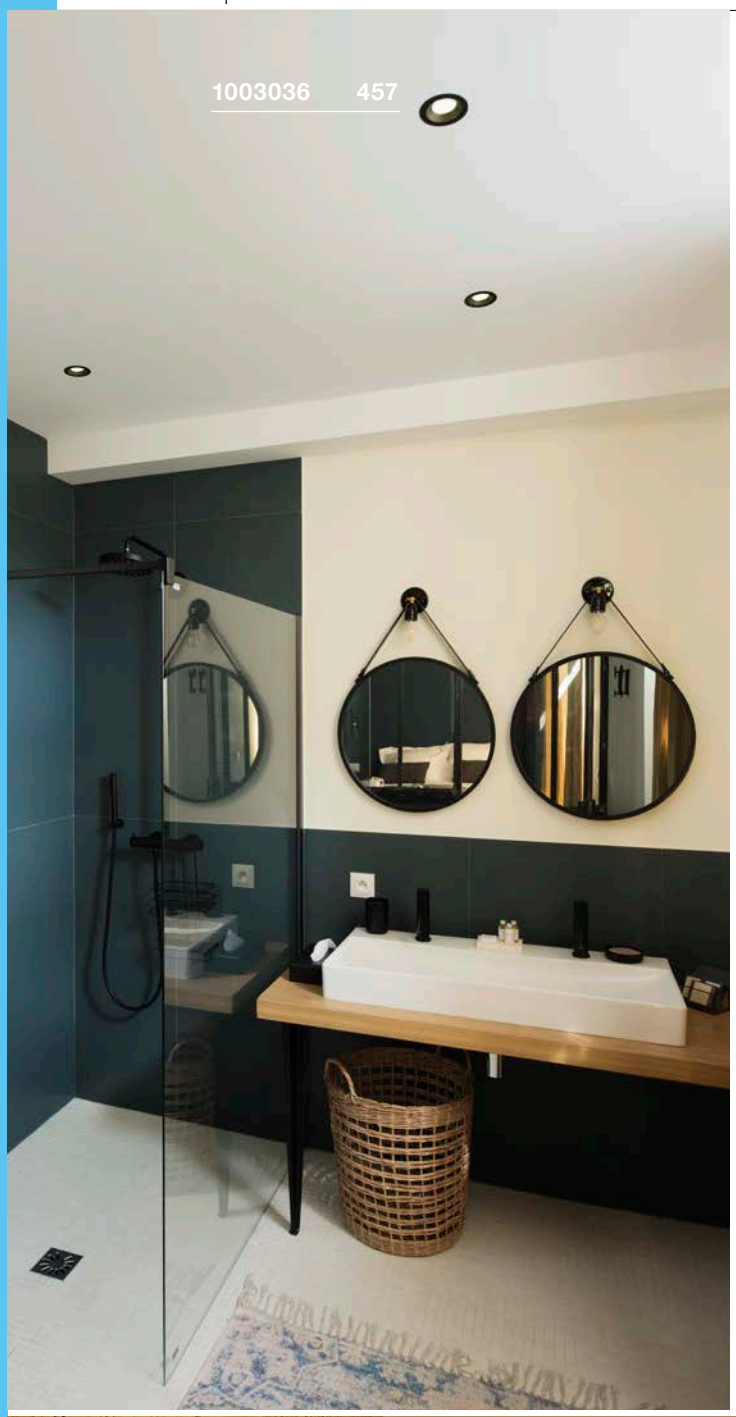
1003036 457

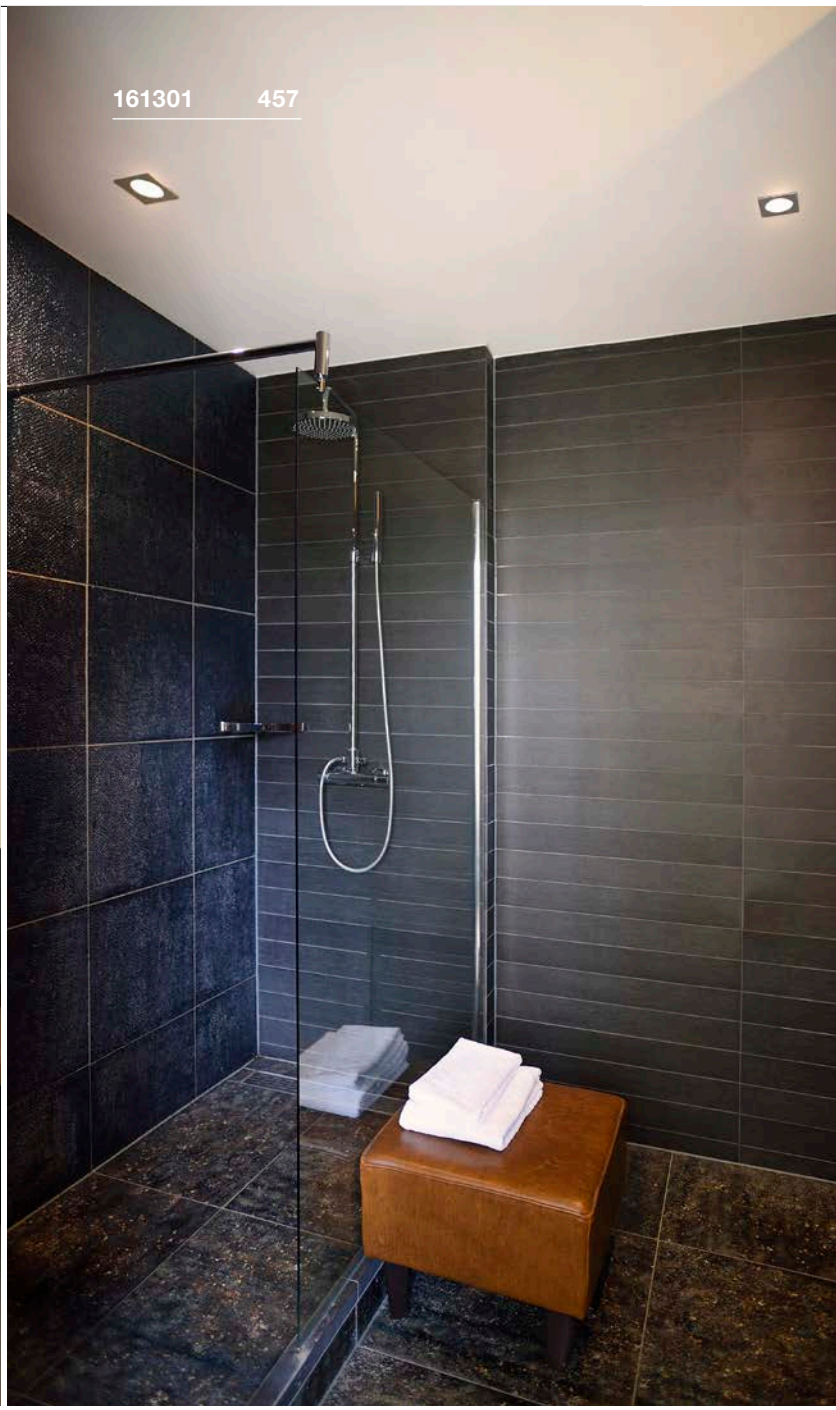
161301 457

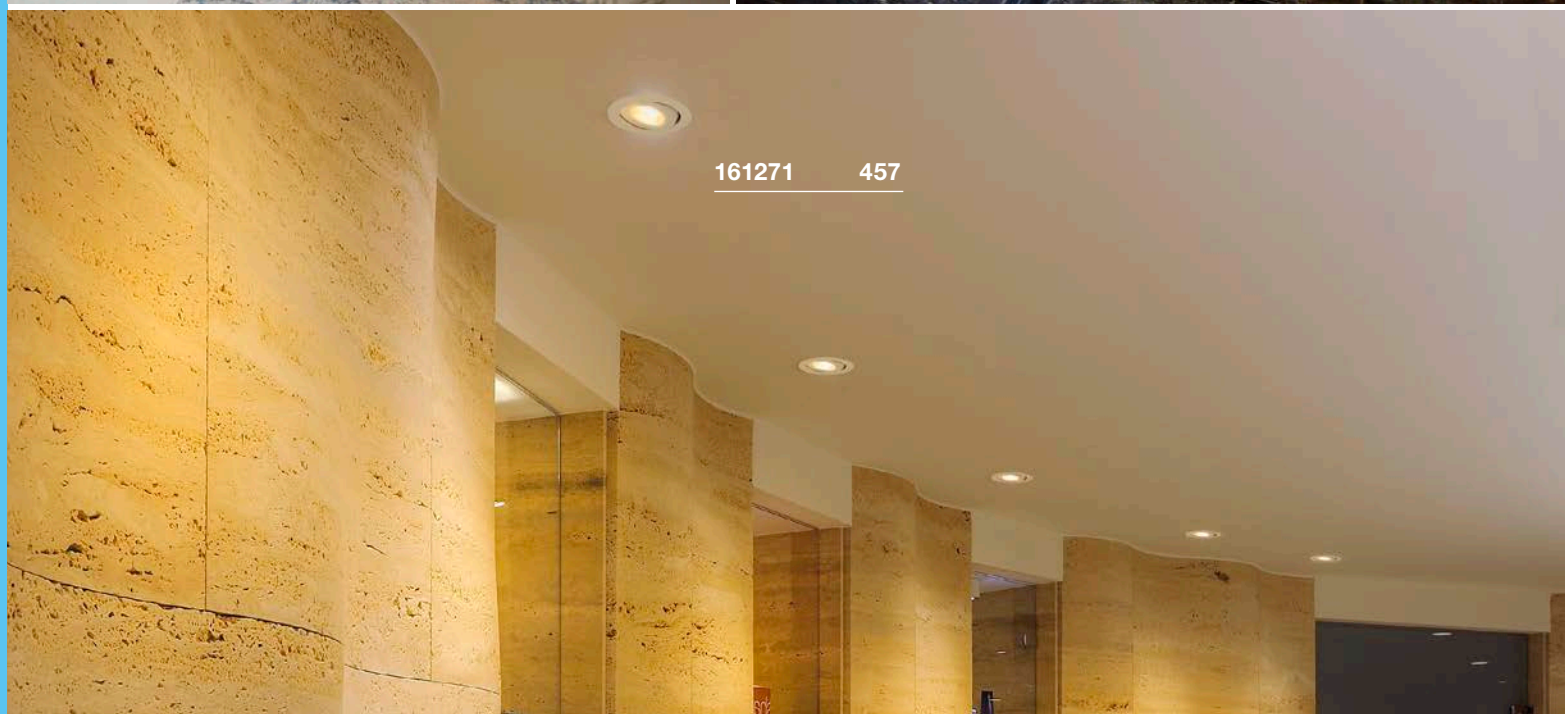

161271 457

CONTONE®
EL, round/square, adjustable, TRIAC




- Premium LED with CRI>90
- Colour of light changed by dimming

Product details
220-240V ~50/60Hz | 350mA
Total consumption: 16W
Material: Aluminium
Dimmable: Triac C, Triac L

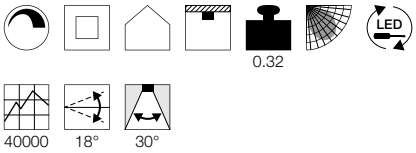

Dimensioned drawing

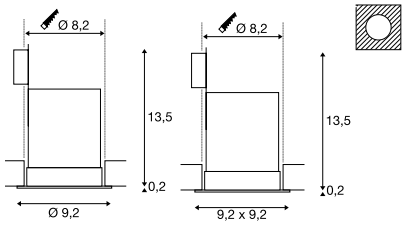

Note
Material thickness, mounting surface: 25 mm max.

An application video about Dim to Warm can be found at **http://bit.ly/dim-to-warm**


Variant	Item no.	GBP
890lm | 2000K-3000K | CRI>90		
white	**161271**	**90,00**
890lm | 2000K-3000K | CRI>90		
white	**161281**	**90,00**

CONTONE®
EL, round/square, rigid, TRIAC




- Premium LED with CRI>90
- Colour of light changed by dimming

Product details
220-240V ~50/60Hz | 350mA
Total consumption: 16W
Material: Aluminium
Dimmable: Triac C, Triac L

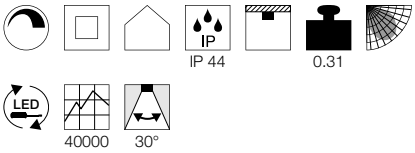

Dimensioned drawing

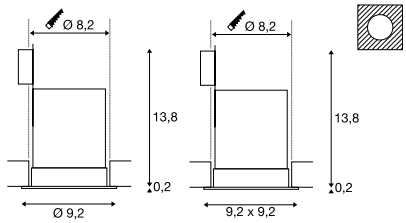

Note
Material thickness, mounting surface: 25 mm max.

An application video about Dim to Warm can be found at **http://bit.ly/dim-to-warm**


Variant	Item no.	GBP
890lm | 2000K-3000K | CRI>90		
white	**161291**	**90,00**
890lm | 2000K-3000K | CRI>90		
white	**161301**	**90,00**

DINGILO
EL, round, adjustable, TRIAC




- Premium LED with CRI>90

Product details
100-277V ~50/60Hz | 200mA
Total consumption: 4.4W
Material: Aluminium / Plastic

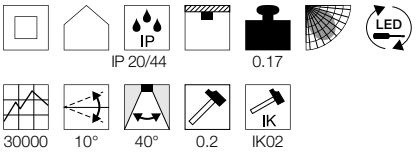

Dimensioned drawing



Note
Material thickness, mounting surface: 25 mm max.

Variant	Item no.	GBP
330lm | 2700K | CRI>90		
matt black / matt black	**1003036**	**76,50**
330lm | 2700K | CRI>90		
matt white / matt black	**1003037**	**76,50**
330lm | 3000K | CRI>90		
matt black / matt black	**1003038**	**76,50**
330lm | 3000K | CRI>90		
matt white / matt black	**1003039**	**76,50**

H-LIGHT
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- Close rotation-symmetrical distribution of light for accentuated lighting
- Generation of contoured light beams on vertical surfaces

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium
Dimmable: Triac C, Triac L

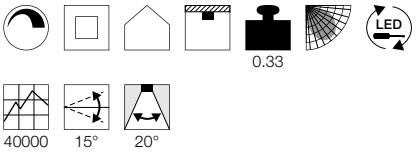


Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max.
Connection box incl.



Variant	Item no.	GBP
265lm | 2700K | CRI>80		
■ matt black	**114480**	**72,00**
265lm | 2700K | CRI>80		
□ matt white	**114481**	**72,00**

H-LIGHT
EL, oval, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- Close asymmetrical distribution of light for accentuated lighting
- Generation of contoured light beams on vertical surfaces

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium
Dimmable: Triac C, Triac L

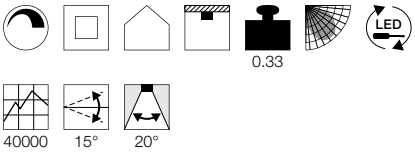

Dimensioned drawing





Note

Material thickness, mounting surface: 30 mm max.
Connection box incl.





Variant	Item no.	GBP
395lm | 2700K | CRI>80		
■ matt black	**114490**	**72,00**
395lm | 2700K | CRI>80		
□ matt white	**114491**	**72,00**

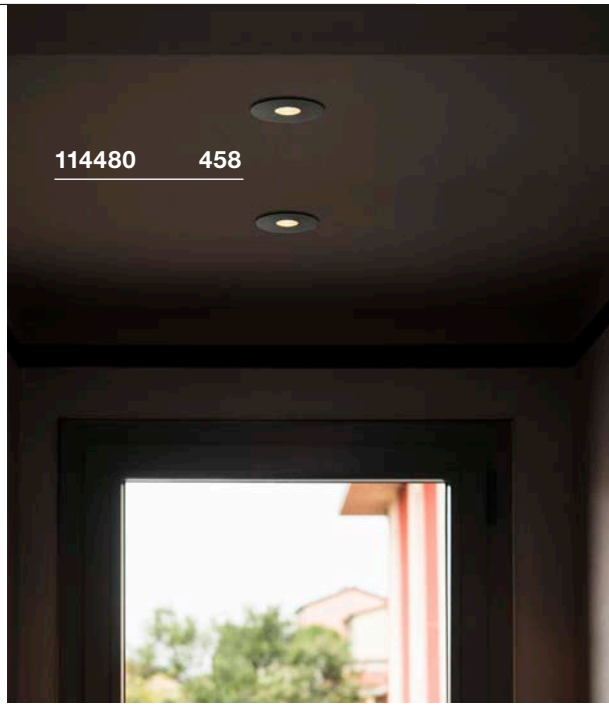

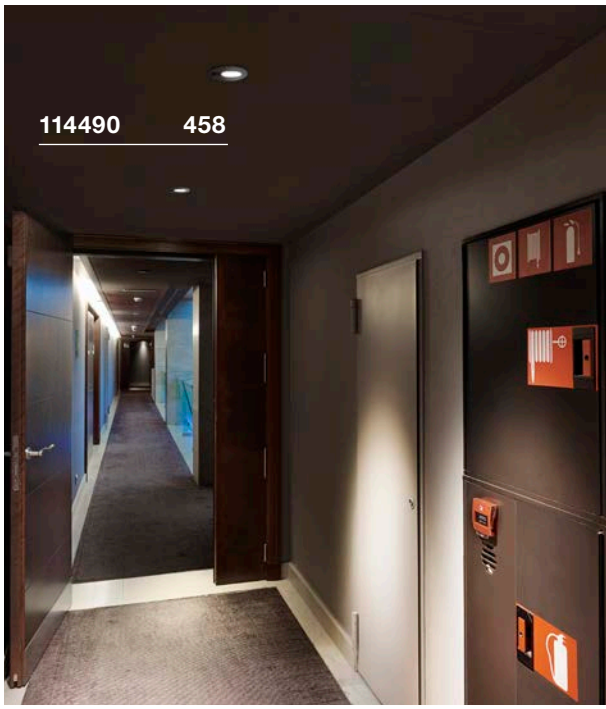



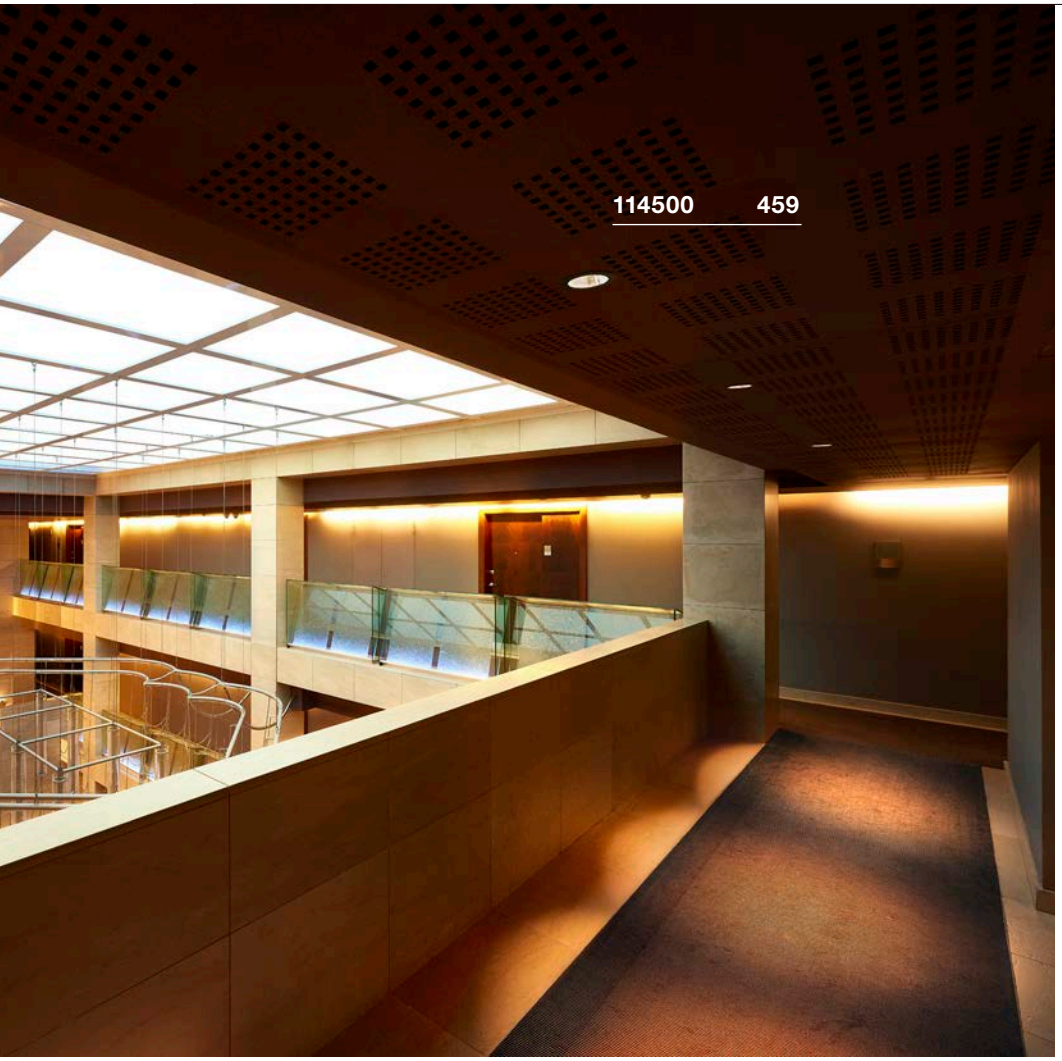

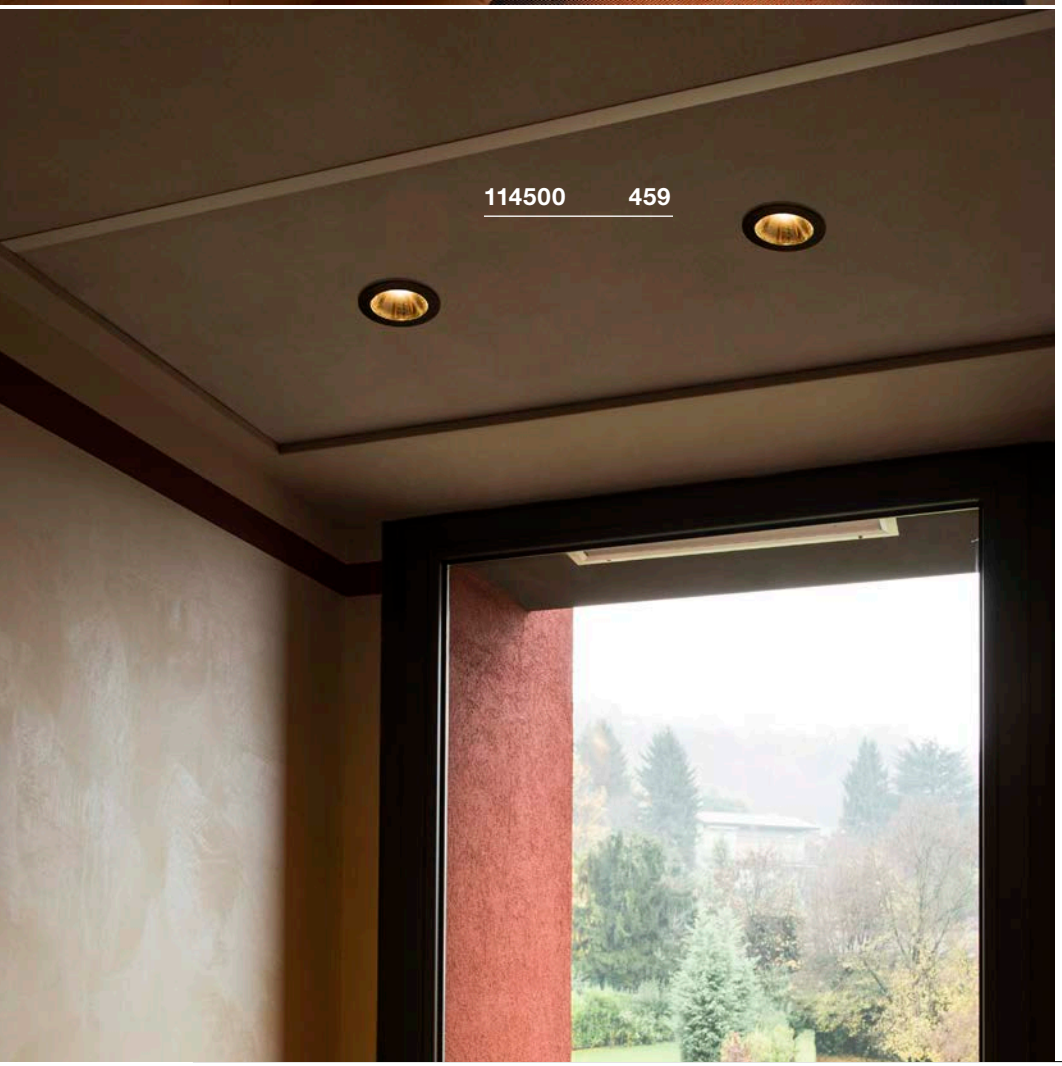

H-LIGHT
EL, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- Close rotation-symmetrical distribution of light for accentuated lighting
- Generation of contoured light beams on vertical surfaces


Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max.
Connection box incl.



Variant	Item no.	GBP
540lm | 2700K | CRI>80 ■ matt black	114500	76,50
540lm | 2700K | CRI>80 □ matt white	114501	76,50

DOLIX OUT
EL, round, QR-C51

C-A+ Spectrum A++–E








Product details

12V ~50Hz
Material: Aluminium / Glass

IP 65 | 0.15 | 0.2 | IK02

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm max.

Recommended lamp

LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP



Lamp details


max. 50W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51		
white	**1001157**	**27,00**

DOLIX OUT
EL, square, QR-C51

C-A+ Spectrum A++–E








Product details

12V ~50Hz
Material: Aluminium / Glass

IP 65 | 0.17 | 0.2 | IK02

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm max.

Recommended lamp


LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP




Lamp details

max. 50W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51		
white	**1001161**	**27,00**

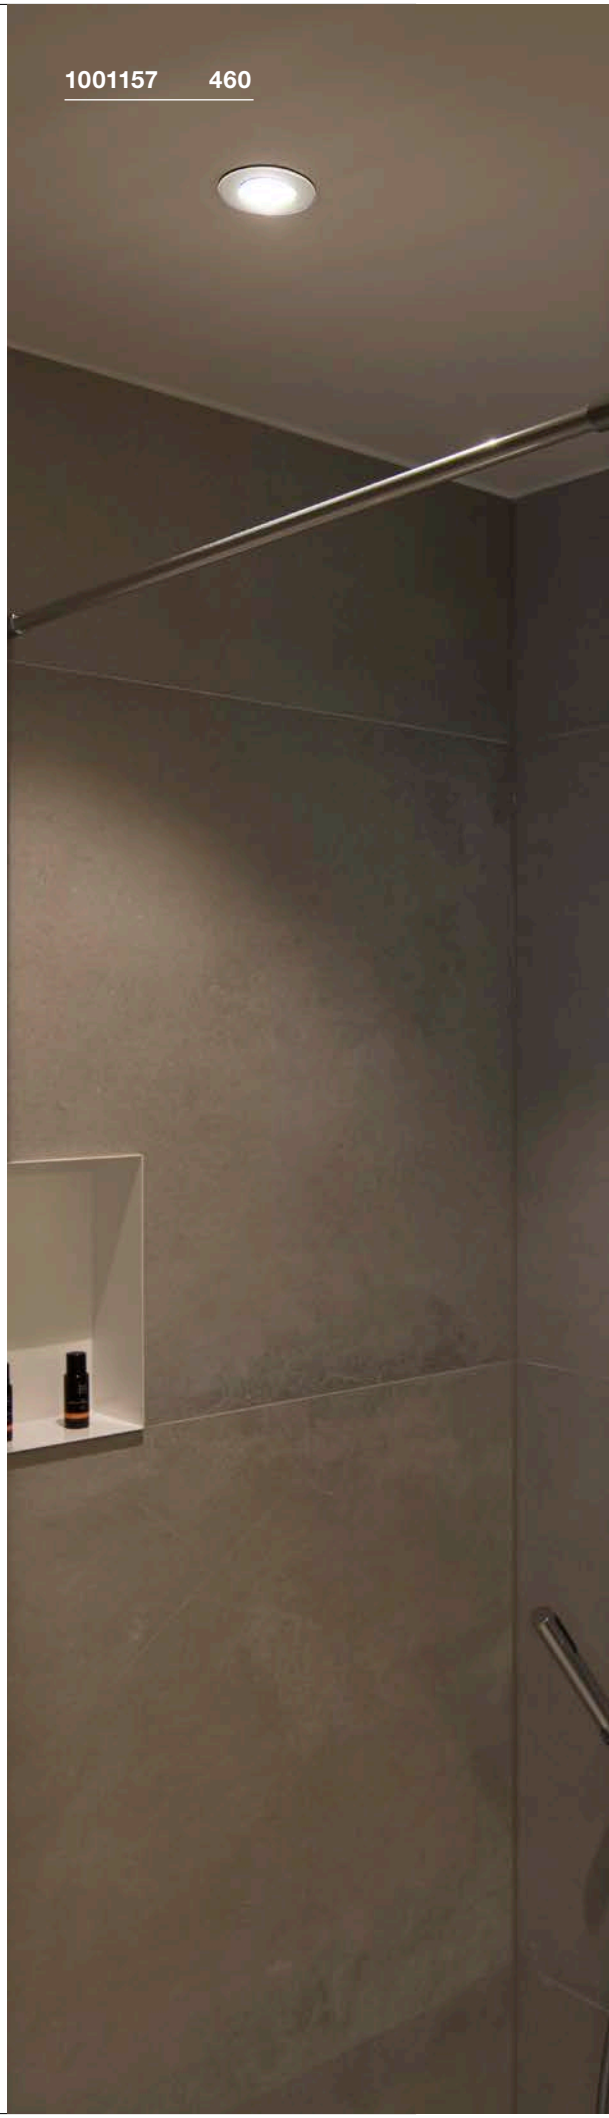

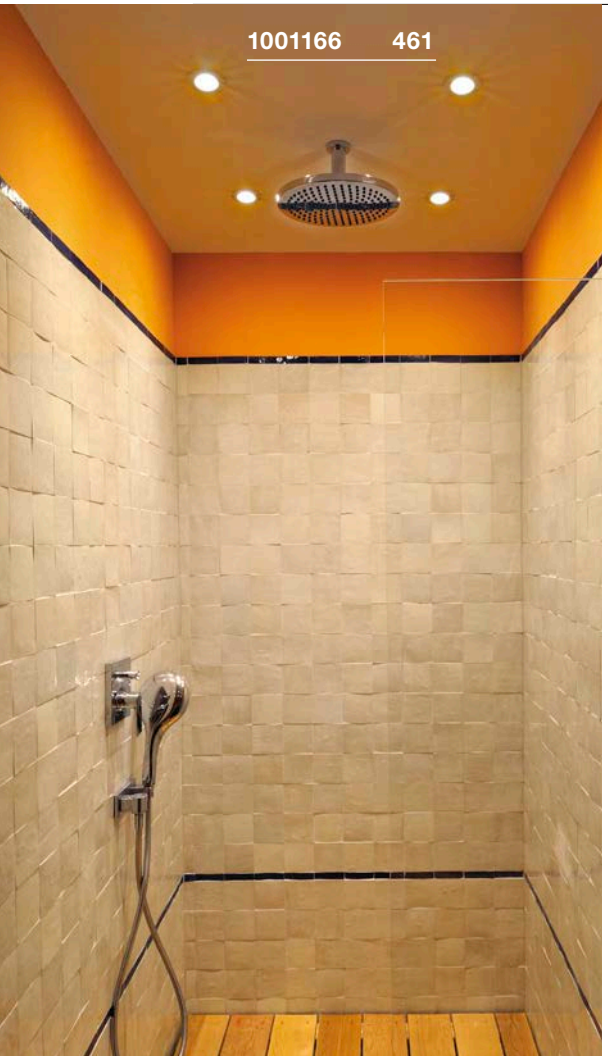



DOLIX OUT
EL, round, QPAR51

E-A++ Spectrum A++–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 65 | 0.17 | 0.2 | IK02

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm max.

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP

Lamp details


max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**1001165**	**27,00**
GU10 | QPAR51 chrome	**1001166**	**29,70**
GU10 | QPAR51 grey / transparent	**1001167**	**27,00**
GU10 | QPAR51 chrome	**1001168**	**29,70**

DOLIX OUT
EL, square, QPAR51

E-A++ Spectrum A++–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 65 | 0.19 | 0.2 | IK02

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm max.

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP

Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**1001169**	**27,00**
GU10 | QPAR51 chrome	**1001170**	**29,70**
GU10 | QPAR51 grey / transparent	**1001171**	**27,00**
GU10 | QPAR51 chrome	**1001172**	**29,70**

VARU
EL, QPAR51

A-A++ Spectrum A++–E







- High IP protection class
- Resistant housing

Product details
230V~50Hz
Material: Aluminium / Glass

IP 20/65 | 0.2 | 0.2 | IK02

Dimensioned drawing


Note
Material thickness, mounting surface: 15 mm

Recommended lamp
GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP




Lamp details
max. 5W LED GU10 51mm
Ø: 5 cm max. L: 4.6 cm max.

Variant	Item no.	GBP
GU10 | LED GU10 51mm		
■ black	**1001930**	**30,60**
GU10 | LED GU10 51mm		
□ white	**1001931**	**30,60**

VARU
EL

A-A++ Spectrum A++–E

LED INSIDE







- High IP protection class
- Resistant housing
- Reduced glare due to set-back LED

Product details
350mA | 5W
Material: Aluminium / Glass

IP 20/65 | 0.18 | LED

36000 | 0.2 | IK02

Dimensioned drawing


Note
Material thickness, mounting surface: 15 mm

Recommended accessories
□ LED driver 350mA | 9W
Item no. 464109 | 25,20 GBP



Variant	Item no.	GBP
400lm | 2700K | CRI>80		
■ black	**1001932**	**49,50**
400lm | 2700K | CRI>80		
□ white	**1001933**	**49,50**





KAMUELA ECO
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- Fire-resistant for at least 90 minutes in accordance with BS 476-21
- LED service life 35,000h
- IP 65 luminaire with efficient LED technology


Product details

220-240V ~50Hz
Total consumption: 6.5W
Material: Aluminium / Plastic
Dimmable: Triac C, Triac L






Dimensioned drawing




Note

Material thickness, mounting surface: 40 mm max.

Variant	Item no.	GBP
400lm | 3000K | CRI>80 ■ black	1001015	27,00
400lm | 3000K | CRI>80 □ white	1001016	27,00
400lm | 4000K | CRI>80 ■ black	1001017	27,00
400lm | 4000K | CRI>80 □ white	1001018	27,00

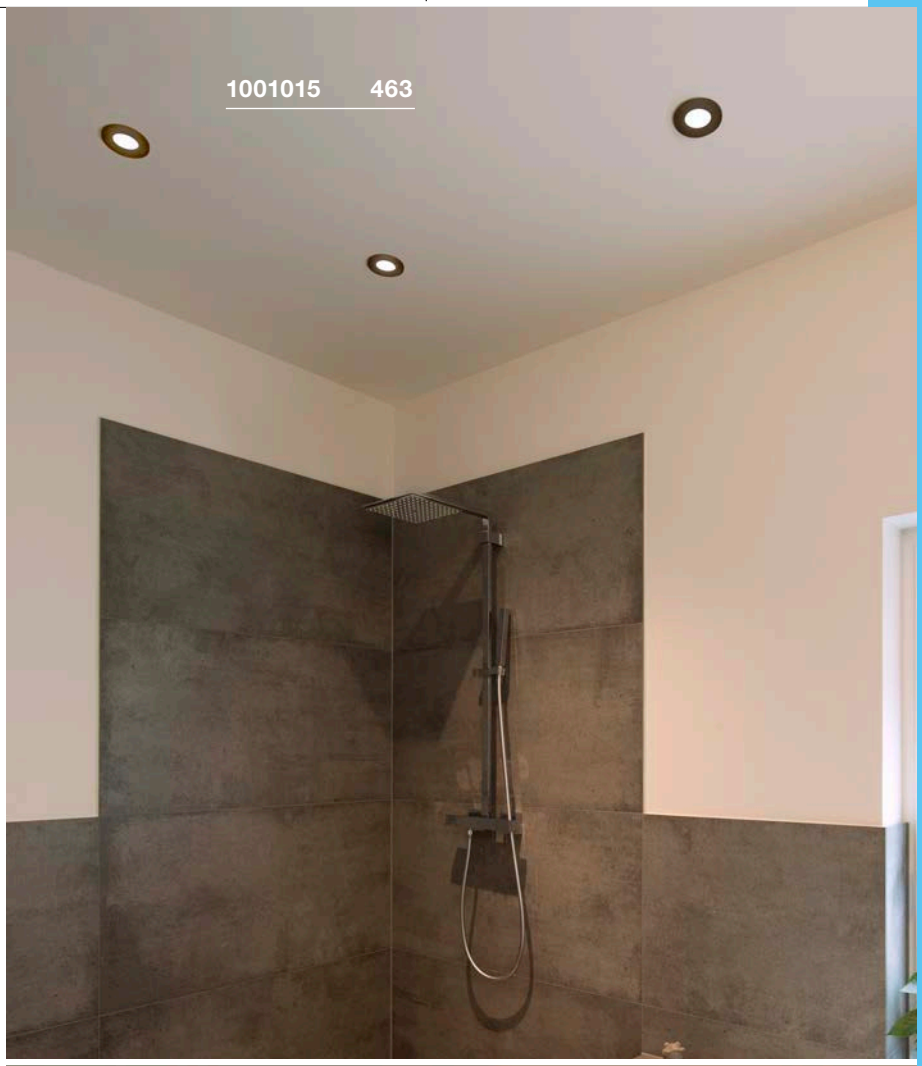

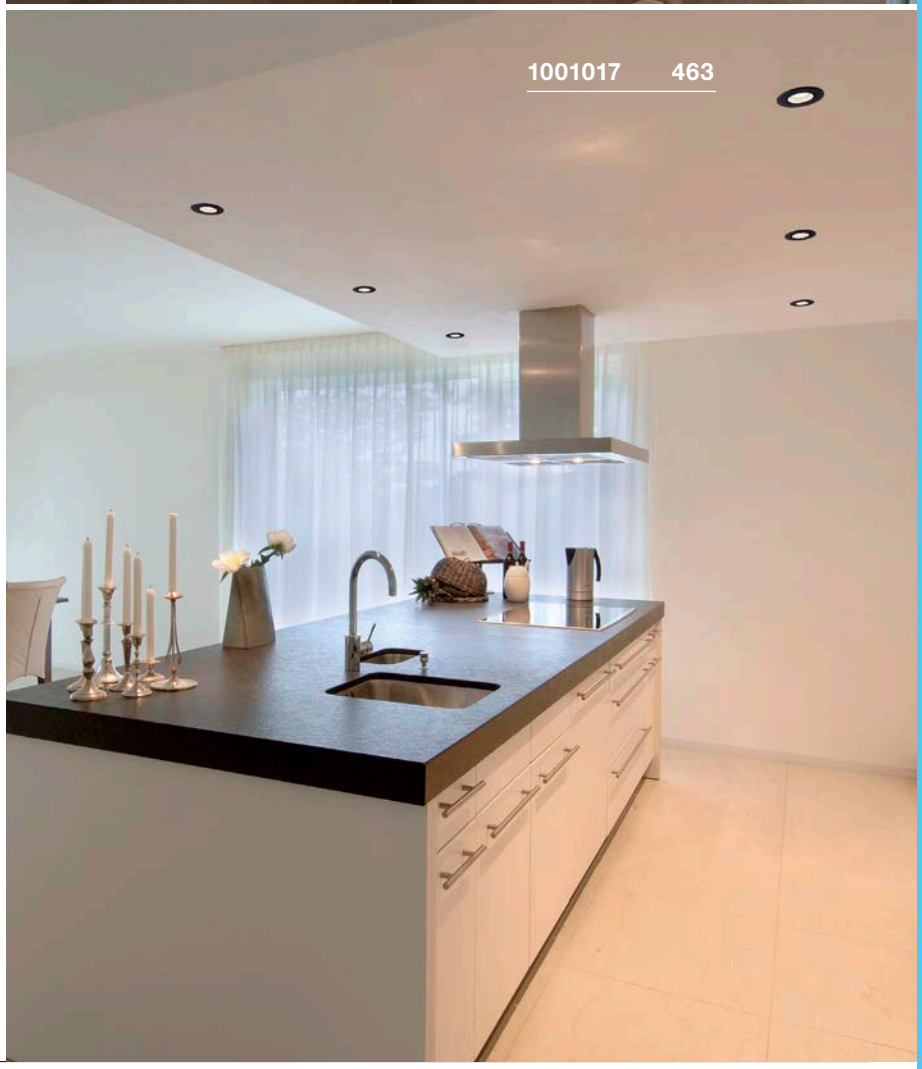

AKALO D83
EL, TRIAC

A-A++ Spectrum A++–E

LED INSIDE

NEW








- The light colour can be set using the switch on the rear

Product details

220-240V ~50/60Hz | 120mA
Total consumption: 9W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C




0.18




30000 90° 0.2 IK02

Dimensioned drawing




Note

Material thickness, mounting surface: 20 mm

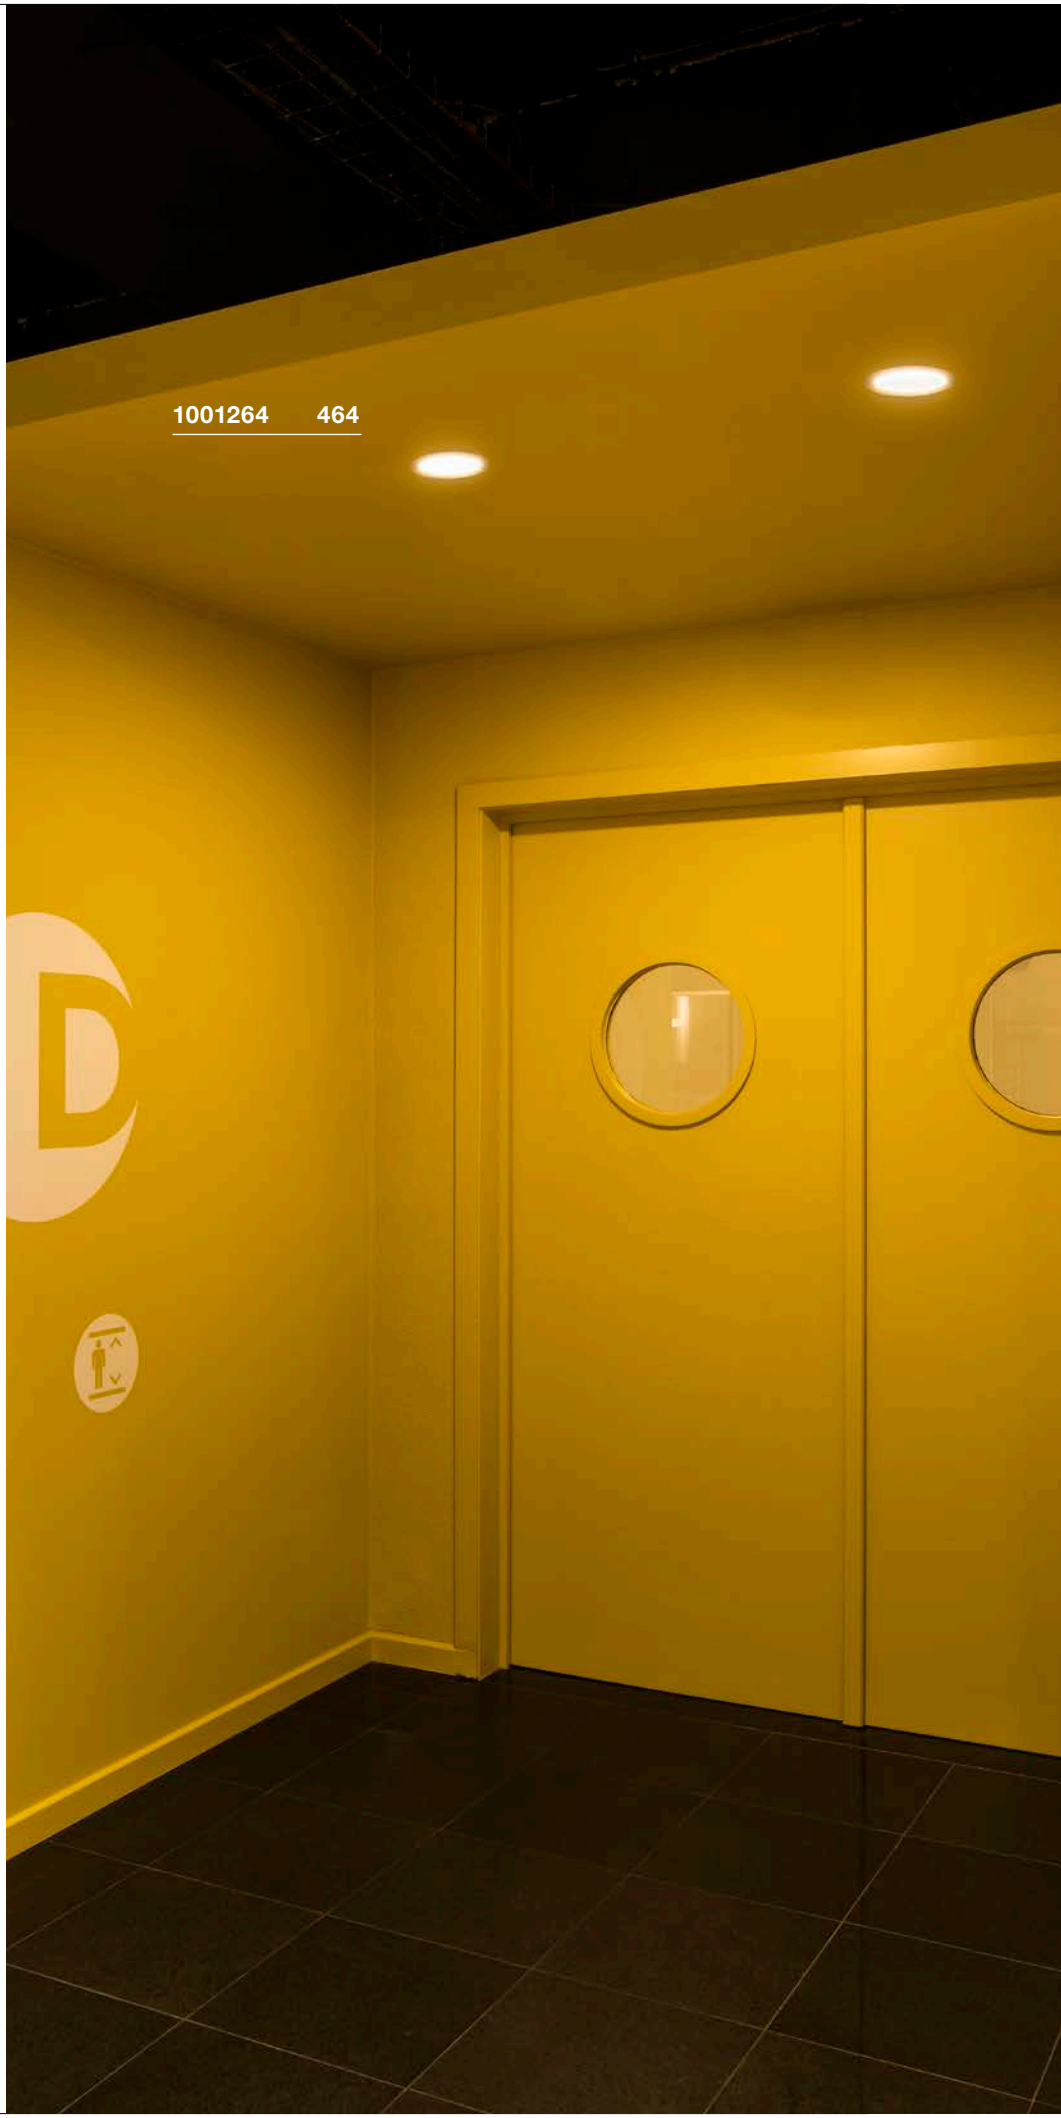

Variant	Item no.	GBP
800/880/850lm | 3000/4200/5700K | CRI>80		
white	1001264	31,50

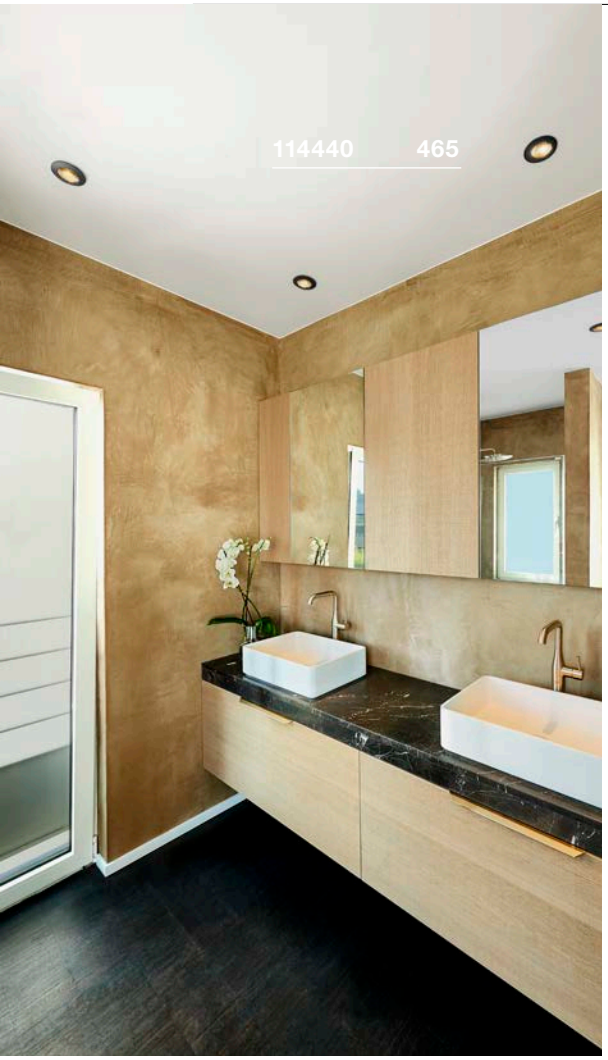



PATTA-F
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- High IP protection class (full-surface protection glass)

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

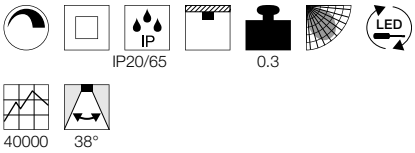

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
745lm | 3000K | CRI>80		
■ black	**114440**	**76,50**
860lm | 3000K | CRI>80		
□ white	**114441**	**76,50**

PATTA-F
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- High IP protection class (full-surface protection glass)

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

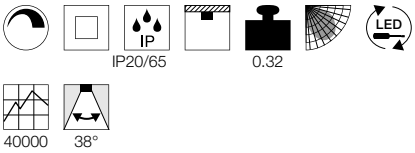

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
745lm | 3000K | CRI>80		
■ black	**114450**	**76,50**
860lm | 3000K | CRI>80		
□ white	**114451**	**76,50**

PATTA-I
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM









- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- High IP protection class

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.3W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

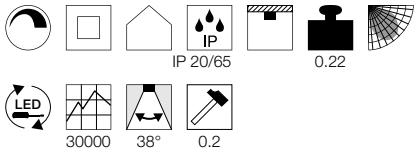

Dimensioned drawing



Note

Products supplied with clip springs. Leaf springs included with the product and can be exchanged
Material thickness, mounting surface: 20 mm

An application video about Dim to Warm can be found at **http://bit.ly/dim-to-warm**

Variant	Item no.	GBP
440lm | 1800-3000K | CRI>95		
■ black	**1002098**	**67,50**
440lm | 1800-3000K | CRI>95		
□ matt white	**1002099**	**67,50**
440lm | 1800-3000K | CRI>95		
▨ matt aluminium	**1002100**	**70,20**

PATTA-I
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM









- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- High IP protection class

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.3W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

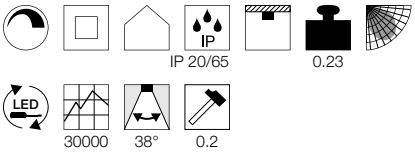

Dimensioned drawing





Note


Products supplied with clip springs. Leaf springs included with the product and can be exchanged
Material thickness, mounting surface: 20 mm


An application video about Dim to Warm can be found at **http://bit.ly/dim-to-warm**


Variant	Item no.	GBP
440lm | 1800-3000K | CRI95		
■ black	**1002101**	**67,50**
440lm | 1800-3000K | CRI95		
□ matt white	**1002102**	**67,50**
440lm | 1800-3000K | CRI95		
▨ matt aluminium	**1002103**	**70,20**

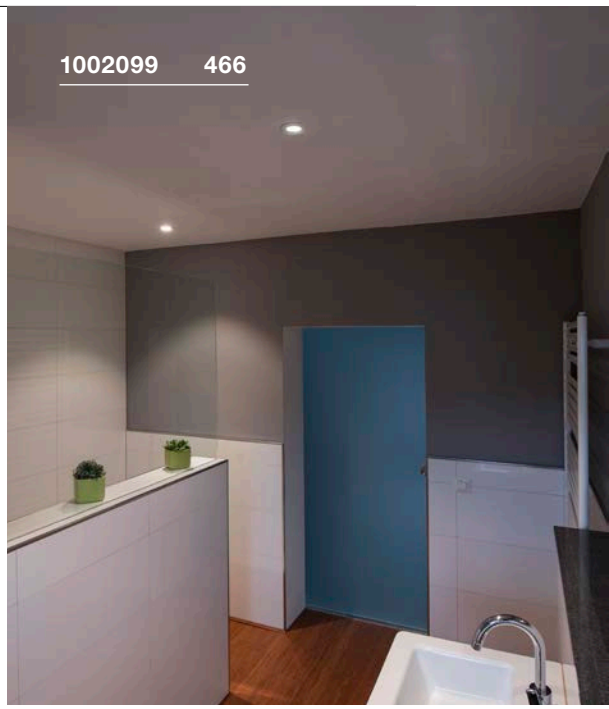

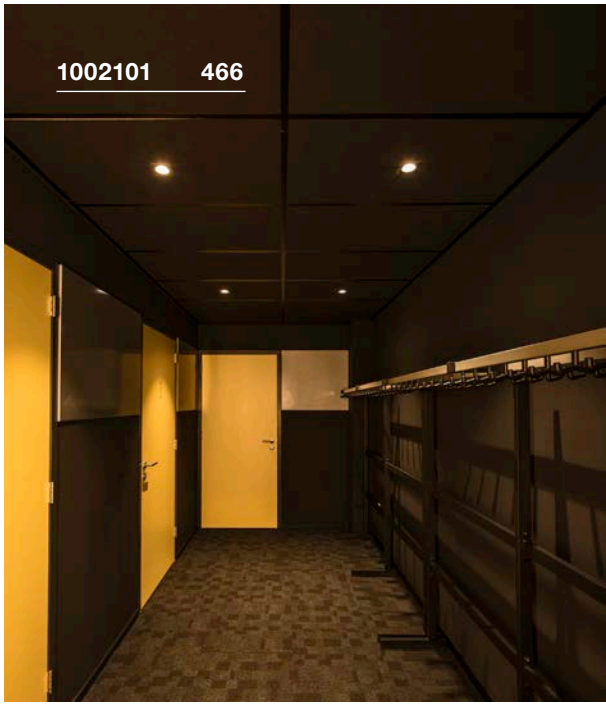

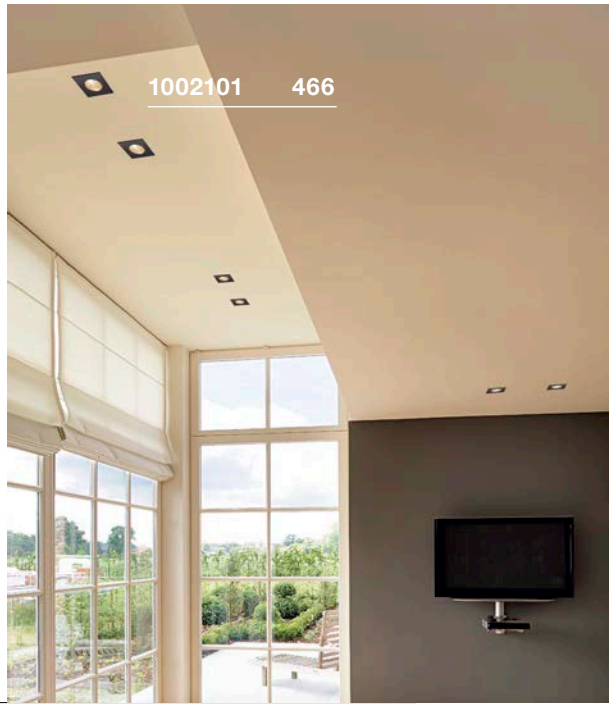

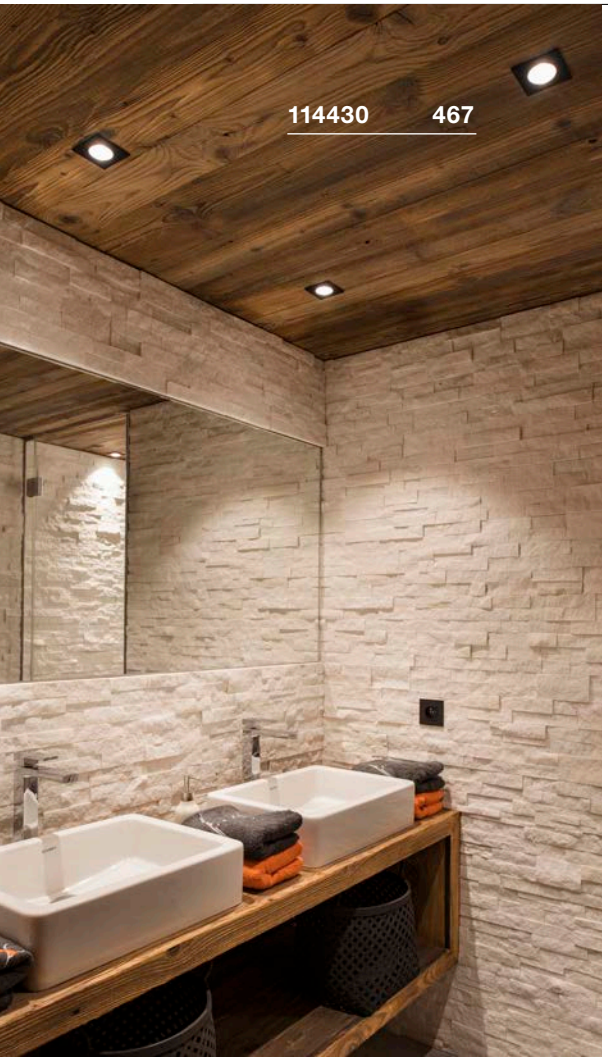


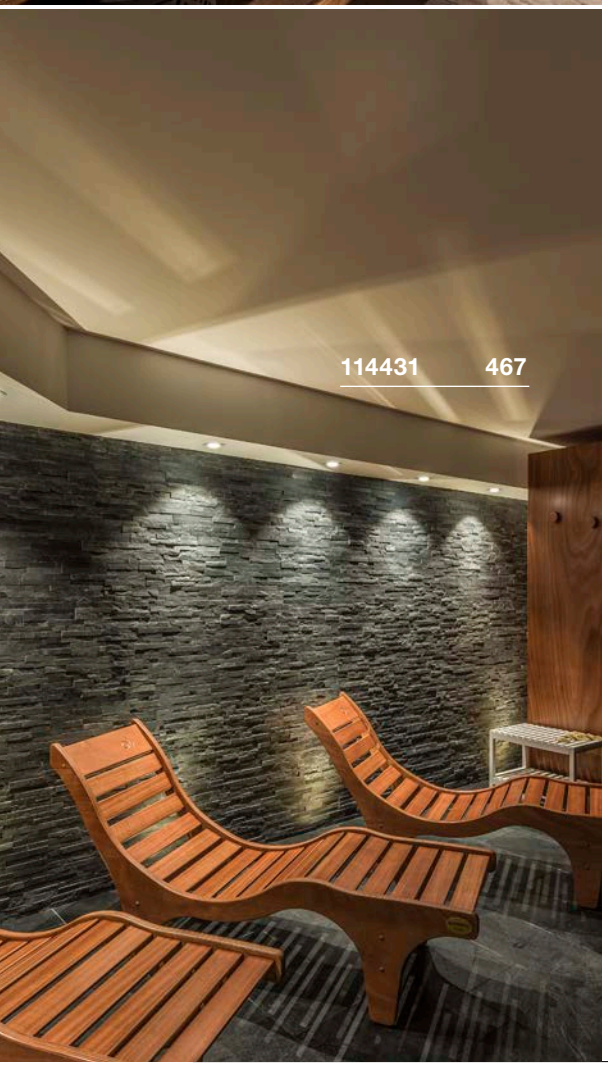

PATTA-I
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- High IP protection class (full-surface protection glass)

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

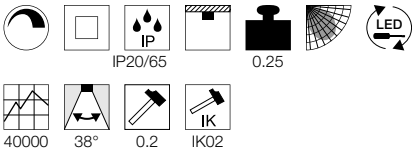

Dimensioned drawing



Note

Material thickness, mounting surface: 25 mm

Variant	Item no.	GBP
910lm | 3000K | CRI>80 ■ matt black	114420	76,50
910lm | 3000K | CRI>80 □ matt white	114421	76,50
910lm | 3000K | CRI>80 ▨ matt aluminium	114426	81,00

PATTA-I
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- High IP protection class (full-surface protection glass)

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

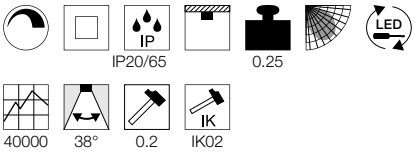


Dimensioned drawing





Note

Material thickness, mounting surface: 25 mm

Variant	Item no.	GBP
910lm | 3000K | CRI>80 ■ matt black	114430	76,50
910lm | 3000K | CRI>80 □ matt white	114431	76,50
910lm | 3000K | CRI>80 ▨ matt aluminium	114436	81,00

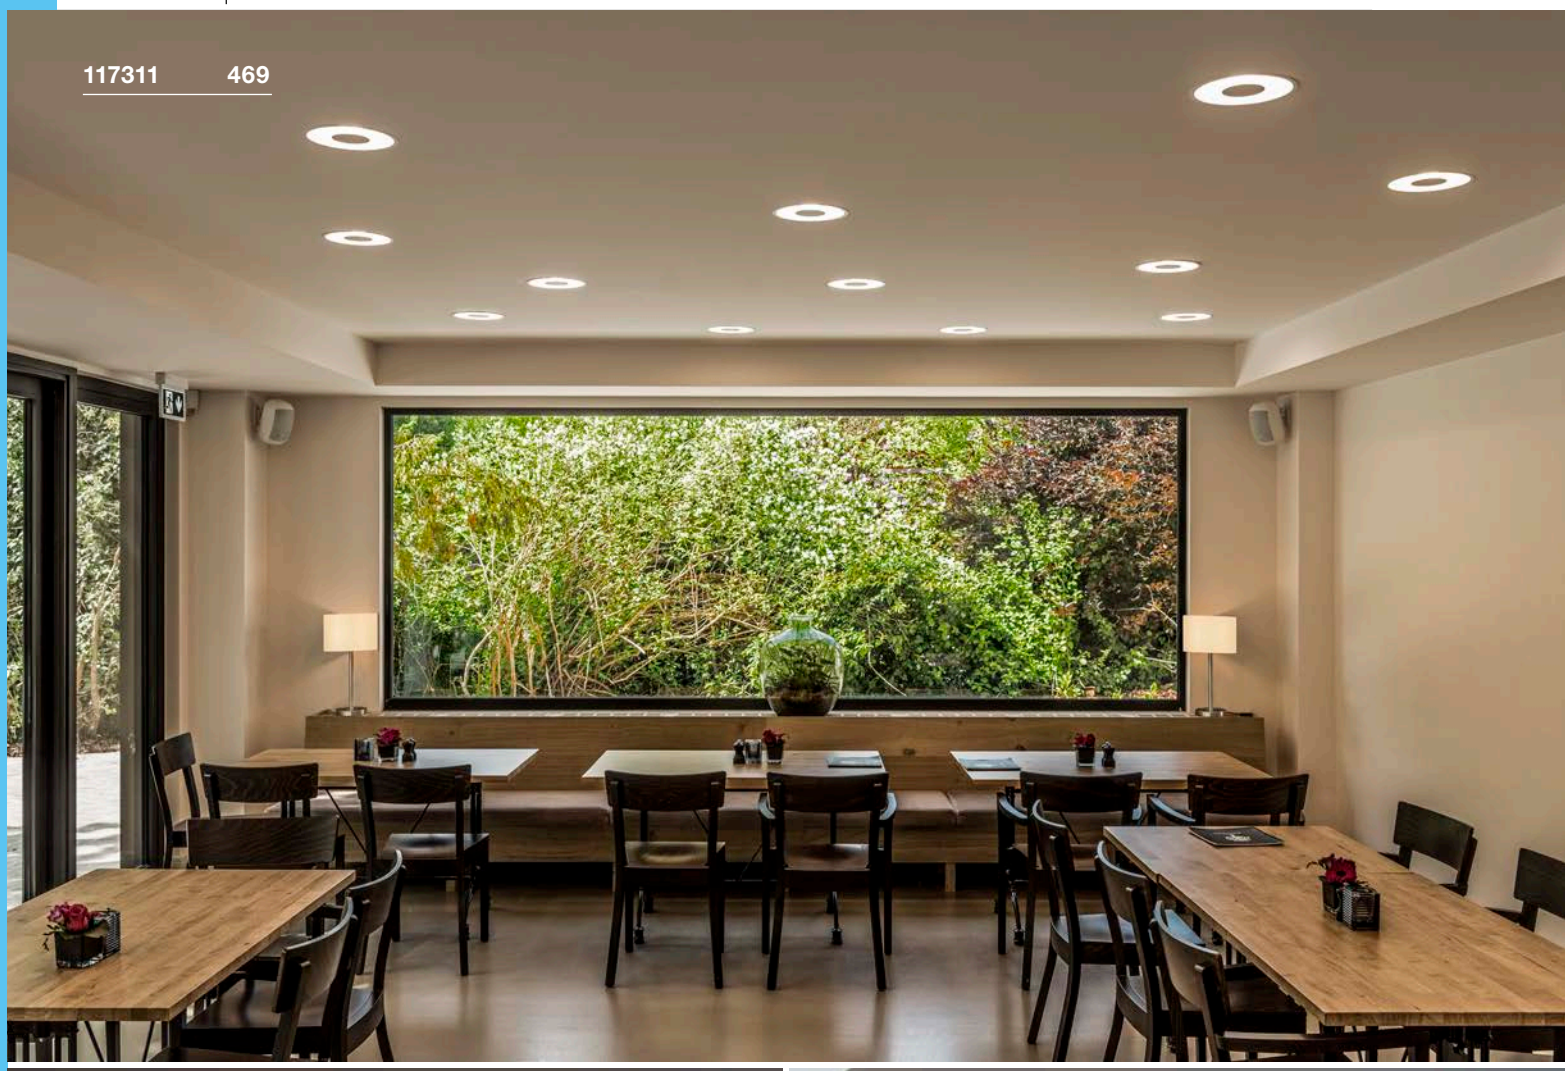
117311 469

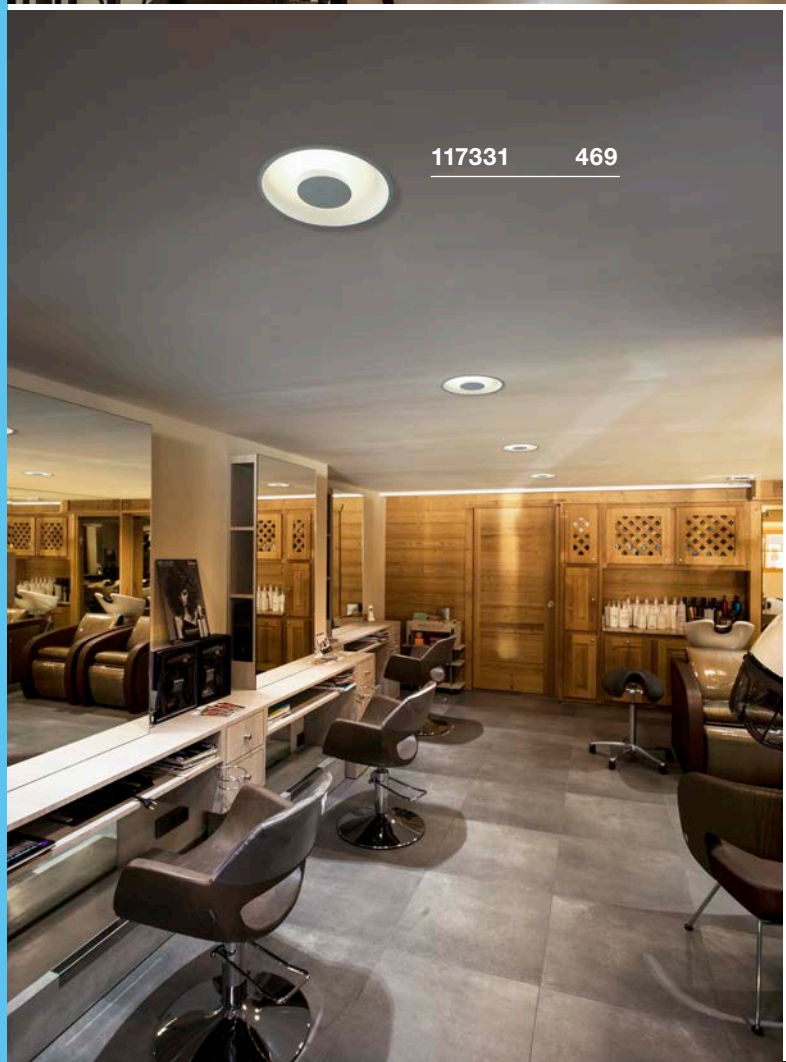
117331 469

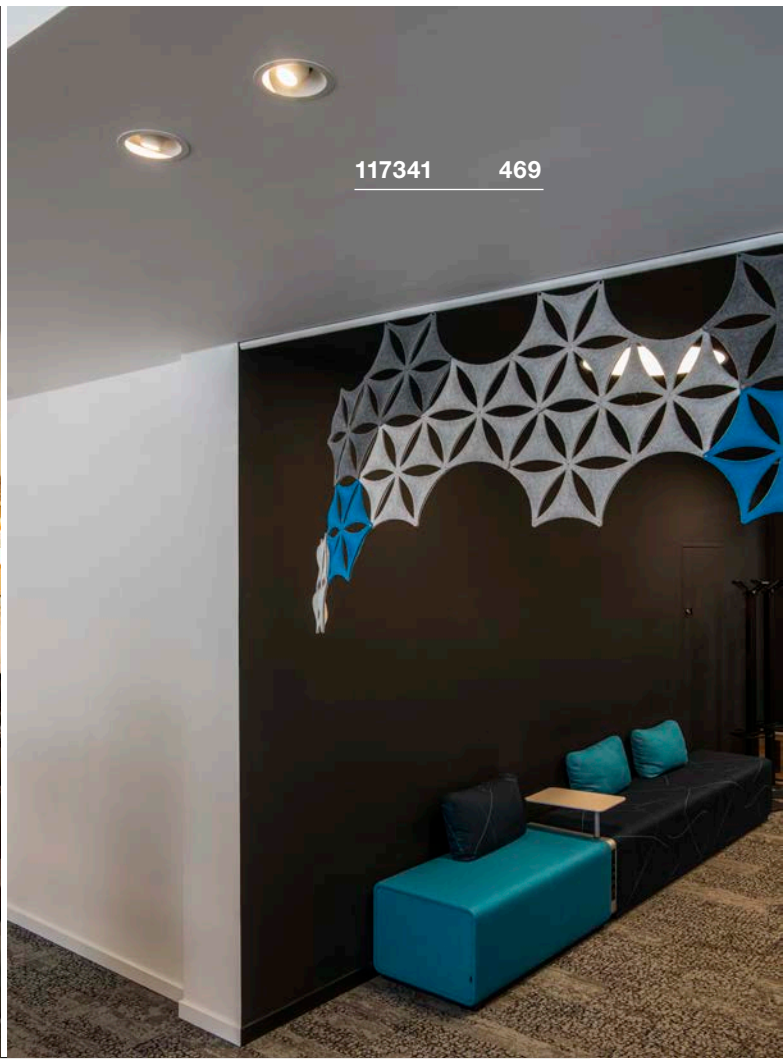
117341 469

OCCULDAS 23
EL, indirect, TRIAC

892

A-A++ Spectrum A++–E

LED INSIDE






- Glare-free, indirect light
- Extremely flat frame and shallow installation depth


Product details

200-240V ~50/60Hz | 700mA
Total consumption: 26W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L





Dimensioned drawing



Note

Material thickness, mounting surface:
10-30 mm max.

Variant	Item no.	GBP
1500lm | 3000K | CRI>80		
white	117311	233,10

OCCULDAS 14
EL, indirect, TRIAC

892

A-A++ Spectrum A++–E

LED INSIDE






- Glare-free, indirect light
- Extremely flat frame and shallow installation depth


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L





Dimensioned drawing



Note

Material thickness, mounting surface:
1-20 mm max.

Variant	Item no.	GBP
810lm | 3000K | CRI>80		
white	117331	126,00

OCCULDAS 14 MOVE
EL, TRIAC

892

A-A++ Spectrum A++–E

LED INSIDE








- Adjustable spot
- Extremely flat frame and shallow installation depth


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.8W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L






Dimensioned drawing




Note

Material thickness, mounting surface:
1-20 mm max.

Variant	Item no.	GBP
700lm | 3000K | CRI>80		
white	117341	171,00

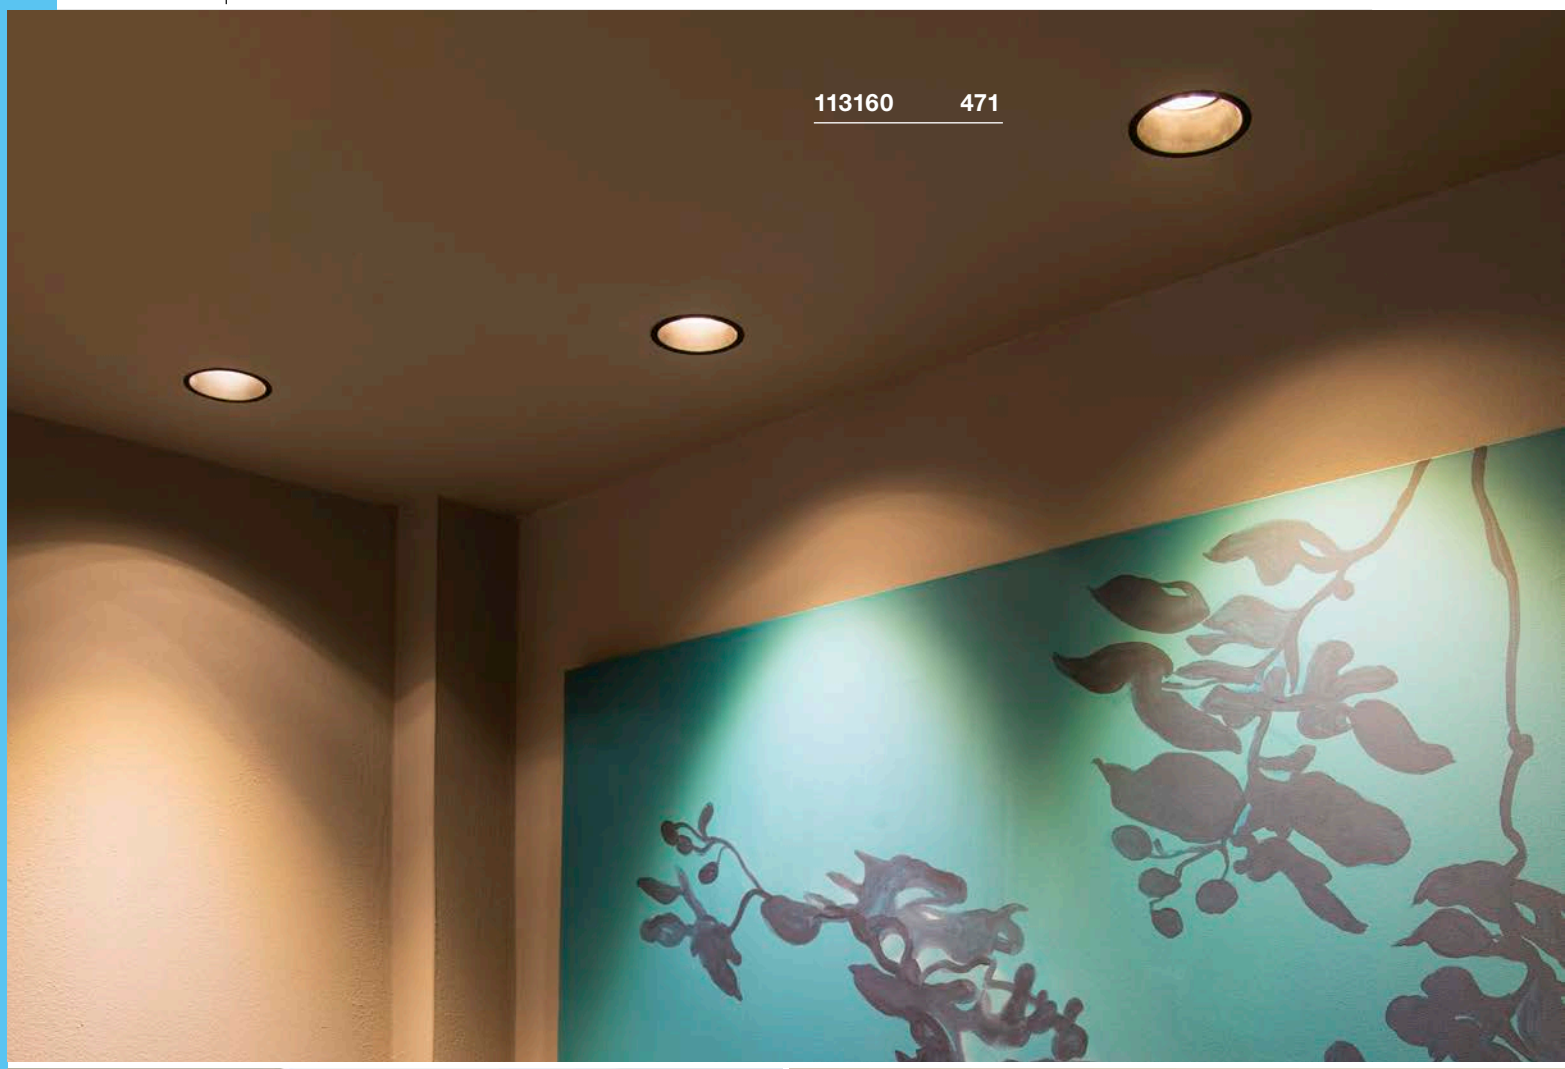
113160 471

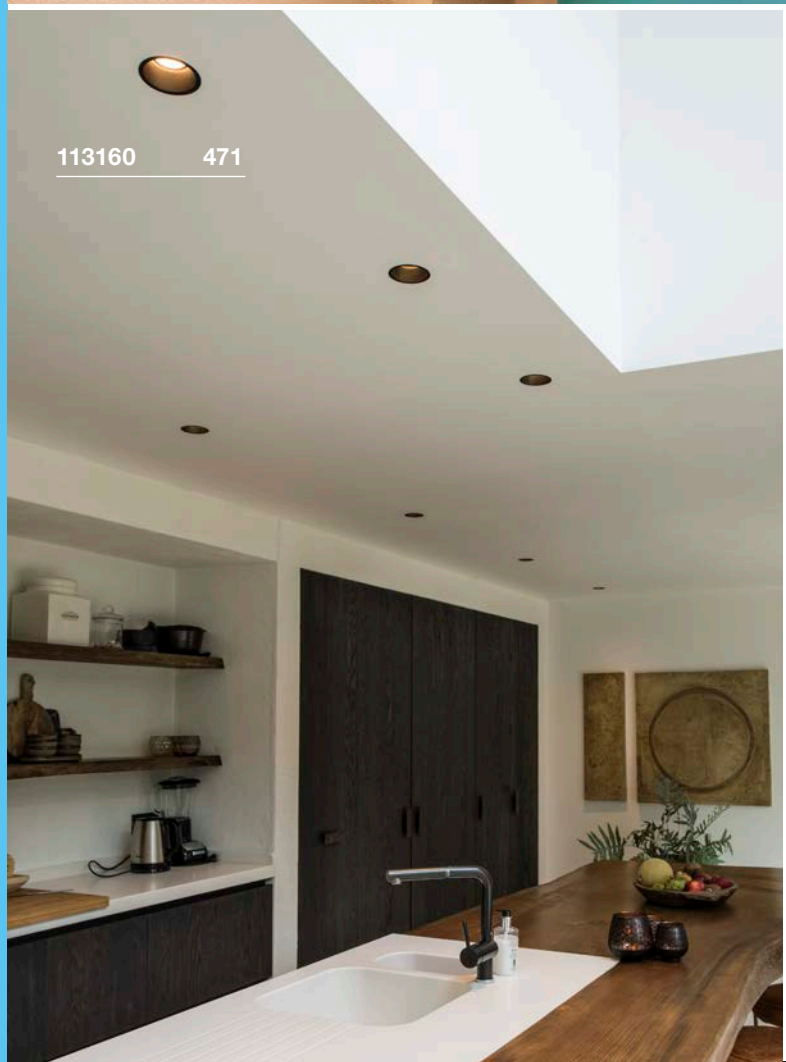
113160 471


113151 471

HORN-O
EL, QPAR51






- Narrow installation collar
- Protection glass for IP21 applications

Product details

230V ~50Hz
Material: Steel



Dimensioned drawing



Note

Material thickness, mounting surface: 25mm max.

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**113160**	**40,50**
GU10 | QPAR51		
□ matt white	**113161**	**40,50**

HORN-T
EL, QPAR51







- Narrow installation collar

Product details

220-240V ~50/60Hz
Material: Steel



Dimensioned drawing



Note

Material thickness, mounting surface: 25mm max.

Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP



Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**113140**	**40,50**
GU10 | QPAR51		
□ matt white	**113141**	**40,50**

HORN-A
EL, QPAR51







- Asymmetrical light emission
- Protection glass for IP21 applications

Product details

230V ~50Hz
Material: Steel



Dimensioned drawing



Note

Material thickness, mounting surface: 25 mm

Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP



Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**113150**	**43,20**
GU10 | QPAR51		
□ matt white	**113151**	**43,20**

HORN-T
EL, QPAR11

E-A++ Spectrum A++–E









- Narrow installation collar

Product details

230V ~50Hz
Material: Steel



Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max.

Recommended lamp


GU10 7.3W 13°
2700K 660lm EEI==A+
8kWh/1000h
Item no. 1000939 | 20,70 GBP


LED GU10 7.9W 40°
4000K 760lm EEI=A+
8kWh/1000h
Item no. 560724 | 20,70 GBP


Lamp details


max. 75W QPAR111


Variant	Item no.	GBP
GU10 | QPAR111 ■ matt black	**113170**	**54,00**
GU10 | QPAR111 □ matt white	**113171**	**54,00**

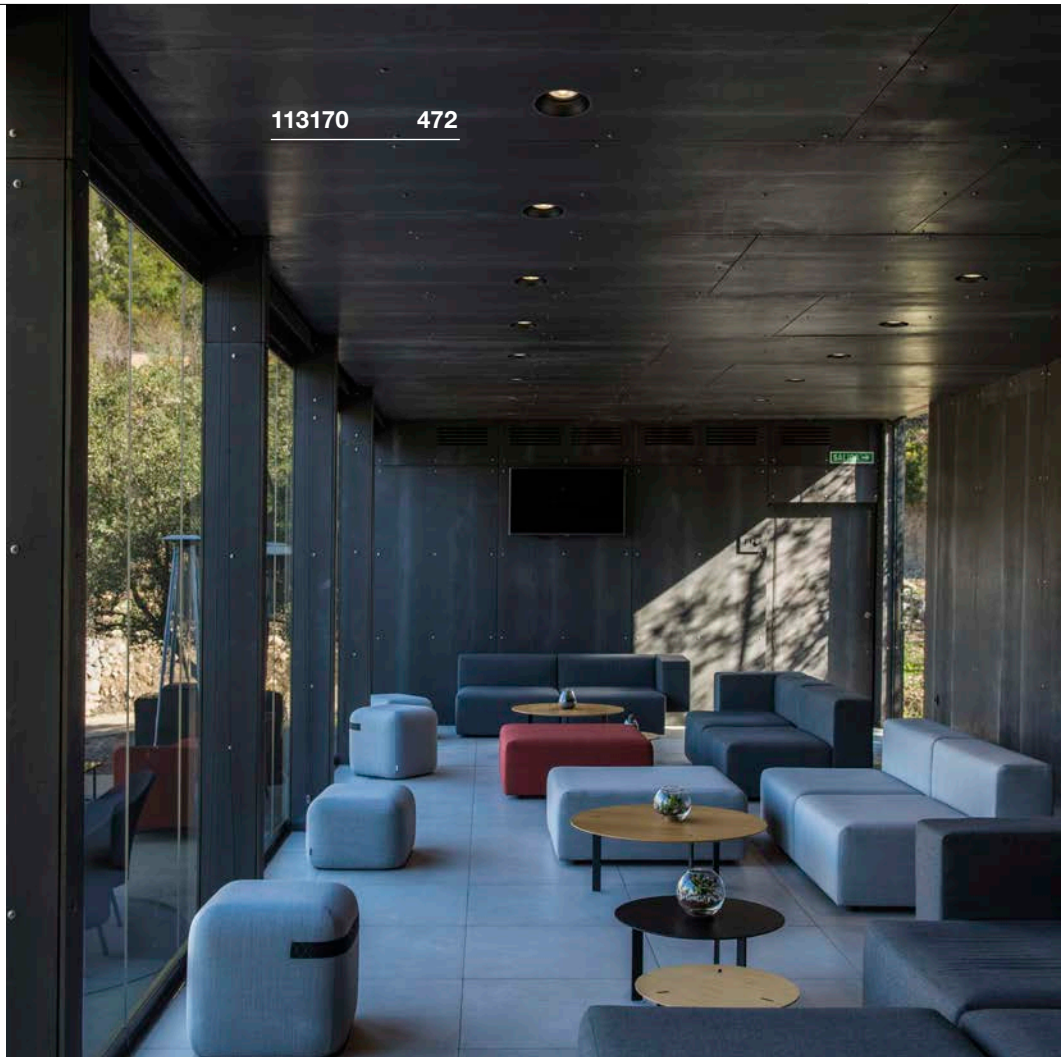

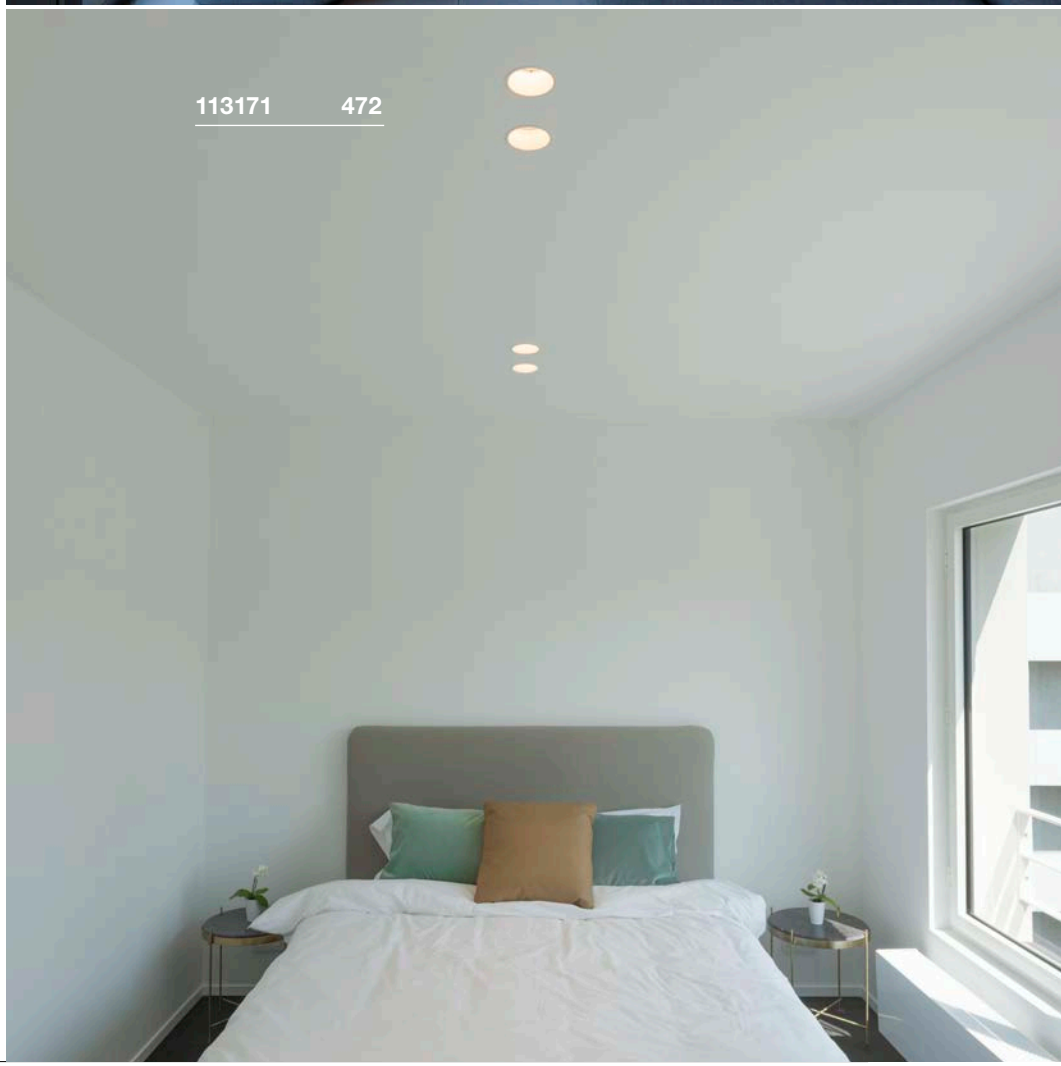

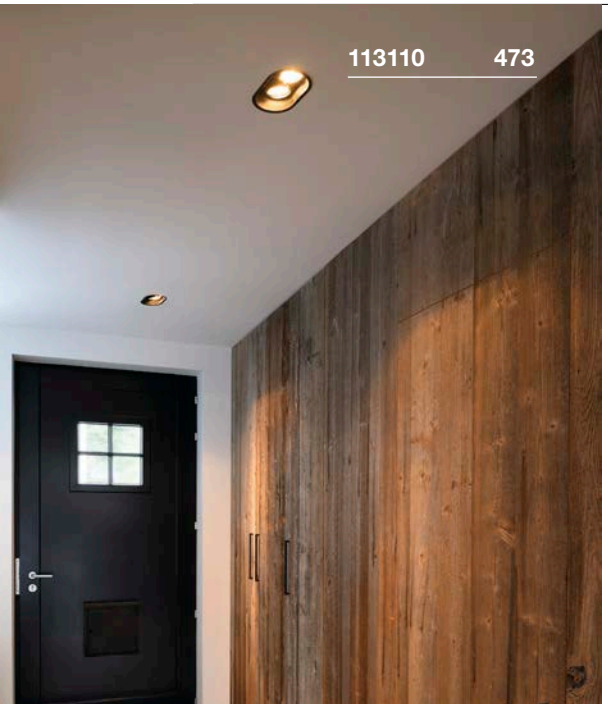

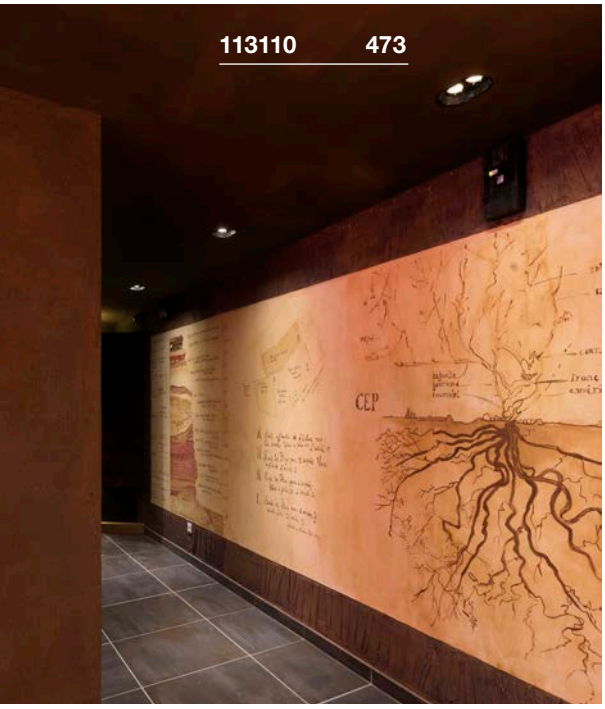

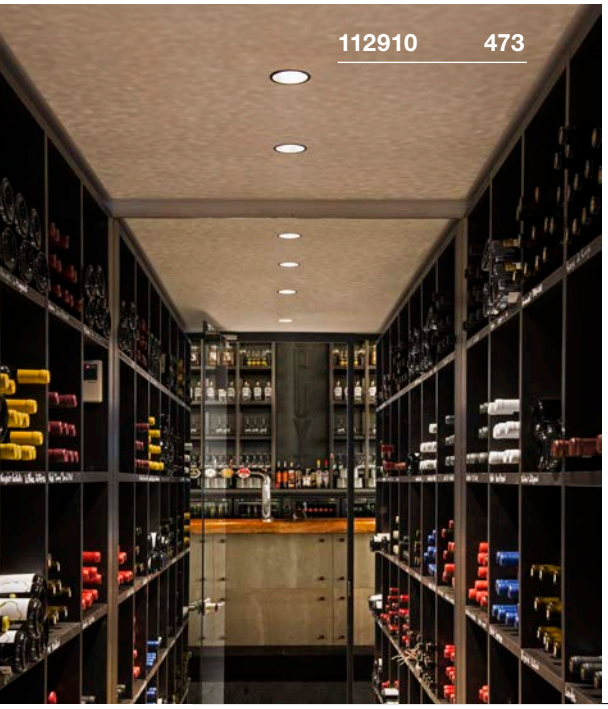

HORN
EL, QPAR51

E-A++ Spectrum A++–E









- Narrow installation collar

Product details
230V ~50Hz
Material: Steel



Dimensioned drawing



Note
Material thickness, mounting surface: 45 mm max

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**112910**	**22,50**
GU10 | QPAR51		
□ matt white	**112911**	**22,50**

HORN
EL, QPAR51

E-A++ Spectrum A++–E









- Narrow installation collar

Product details
230V ~50Hz
Material: Aluminium / Steel



Dimensioned drawing



Note
Material thickness, mounting surface: 45 mm max

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP



Lamp details
2x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**113110**	**67,50**
GU10 | QPAR51		
□ matt white	**113111**	**67,50**

HORN MINI
EL

A-A++ Spectrum A++–E

LED INSIDE









- Premium LED with CRI>90

Product details
350mA | 1.2W
Material: Aluminium / Polycarbonate (PC)

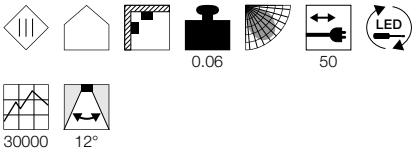

Dimensioned drawing



Note
Driver excl.
AMP plug included
Different light colour with gold reflector

Recommended accessories

LED driver 350mA | 3W
Item no. 464107 | 17,10 GBP



Multiway connector with 3 outputs
Item no. 111850 | 9,90 GBP



Variant	Item no.	GBP
70lm | 3000K | CRI>90 white	**1000914**	**31,50**
70lm | 3000K | CRI>90 black	**1000915**	**31,50**
70lm | 3000K | CRI>90 white / black	**1000916**	**31,50**
70lm | 3000K | CRI>90 black / gold	**1000917**	**34,20**

HORN MEDI
EL

A-A++ Spectrum A++–E


LED INSIDE








Product details
350mA | 5W
Material: Aluminium / Polycarbonate (PC)

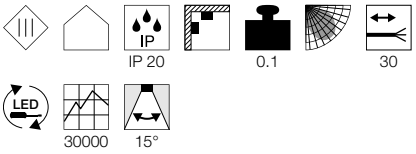

Dimensioned drawing



Note
Different light colour with gold reflector
Open cable end

Recommended accessories

LED driver 350mA | 10W
Item no. 464140 | 29,70 GBP



Variant	Item no.	GBP
350lm | 3000K | CRI>80 white	**1001924**	**49,50**
230lm | 3000K | CRI>80 black	**1001925**	**49,50**
230lm | 3000K | CRI>80 white / black	**1001926**	**49,50**
275lm | 3000K | CRI>80 black	**1001927**	**52,20**

HORN MAGNA
EL

A-A++ Spectrum A++–E

LED INSIDE


NEW VARIANT








Product details
500mA | 7.7W
Material: Aluminium / Polycarbonate (PC)

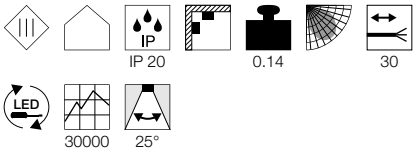

Dimensioned drawing



Note
Driver excl.
Different light colour with gold reflector
Open cable end

Recommended accessories


Honeycomb module
Item no. 1002596 | 3,00 GBP





LED driver 500mA | 9W
Item no. 464091 | 20,70 GBP



Variant	Item no.	GBP
470lm | 3000K | CRI>80 white	**1002591**	**56,70**
415lm | 3000K | CRI>80 black	**1002592**	**56,70**
415lm | 3000K | CRI>80 white / black	**1002593**	**56,70**
400lm | 3000K | CRI>80 black / gold	**1002594**	**58,50**

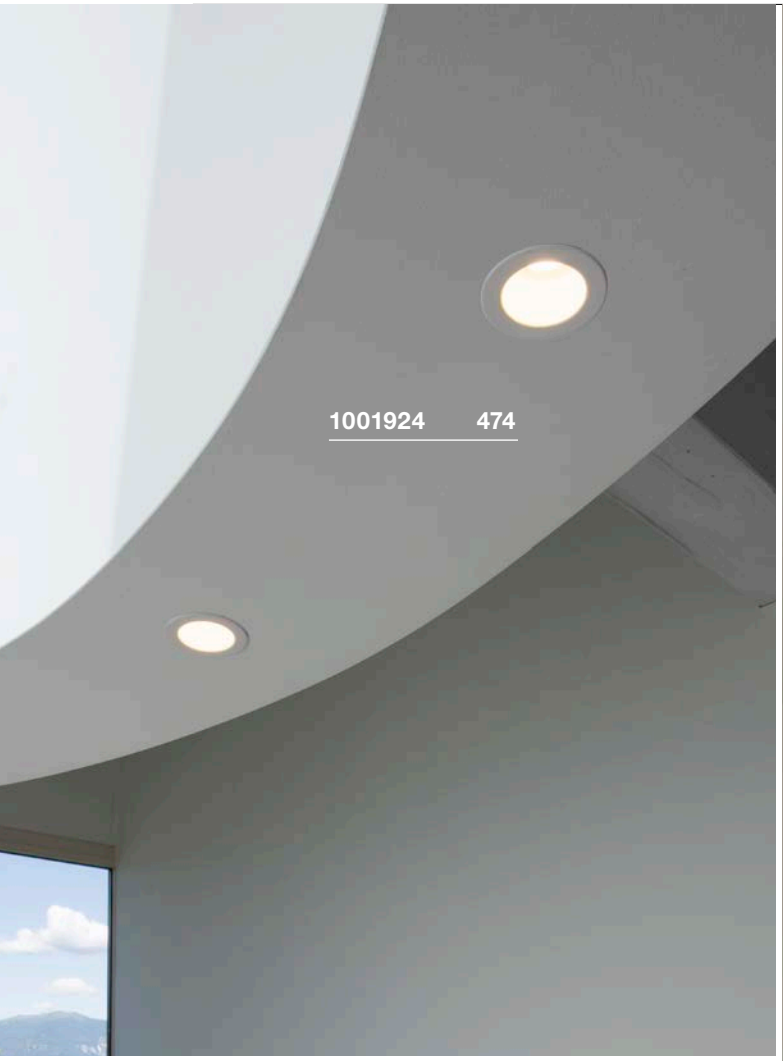
1001924 474

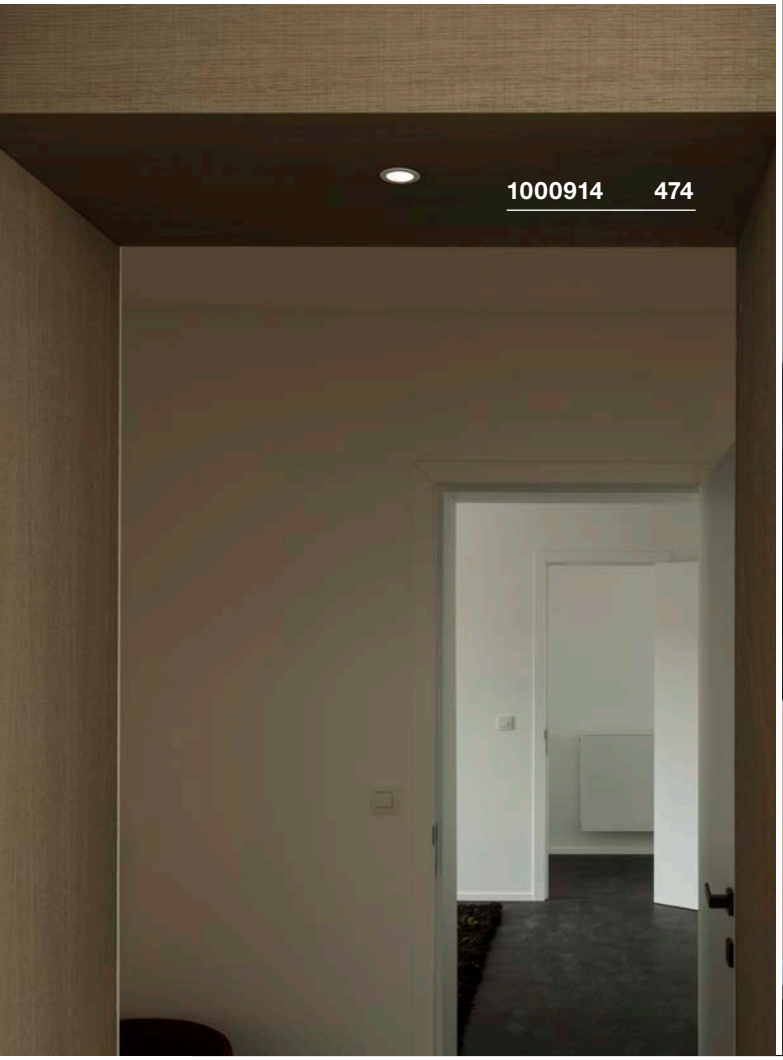
1000914 474

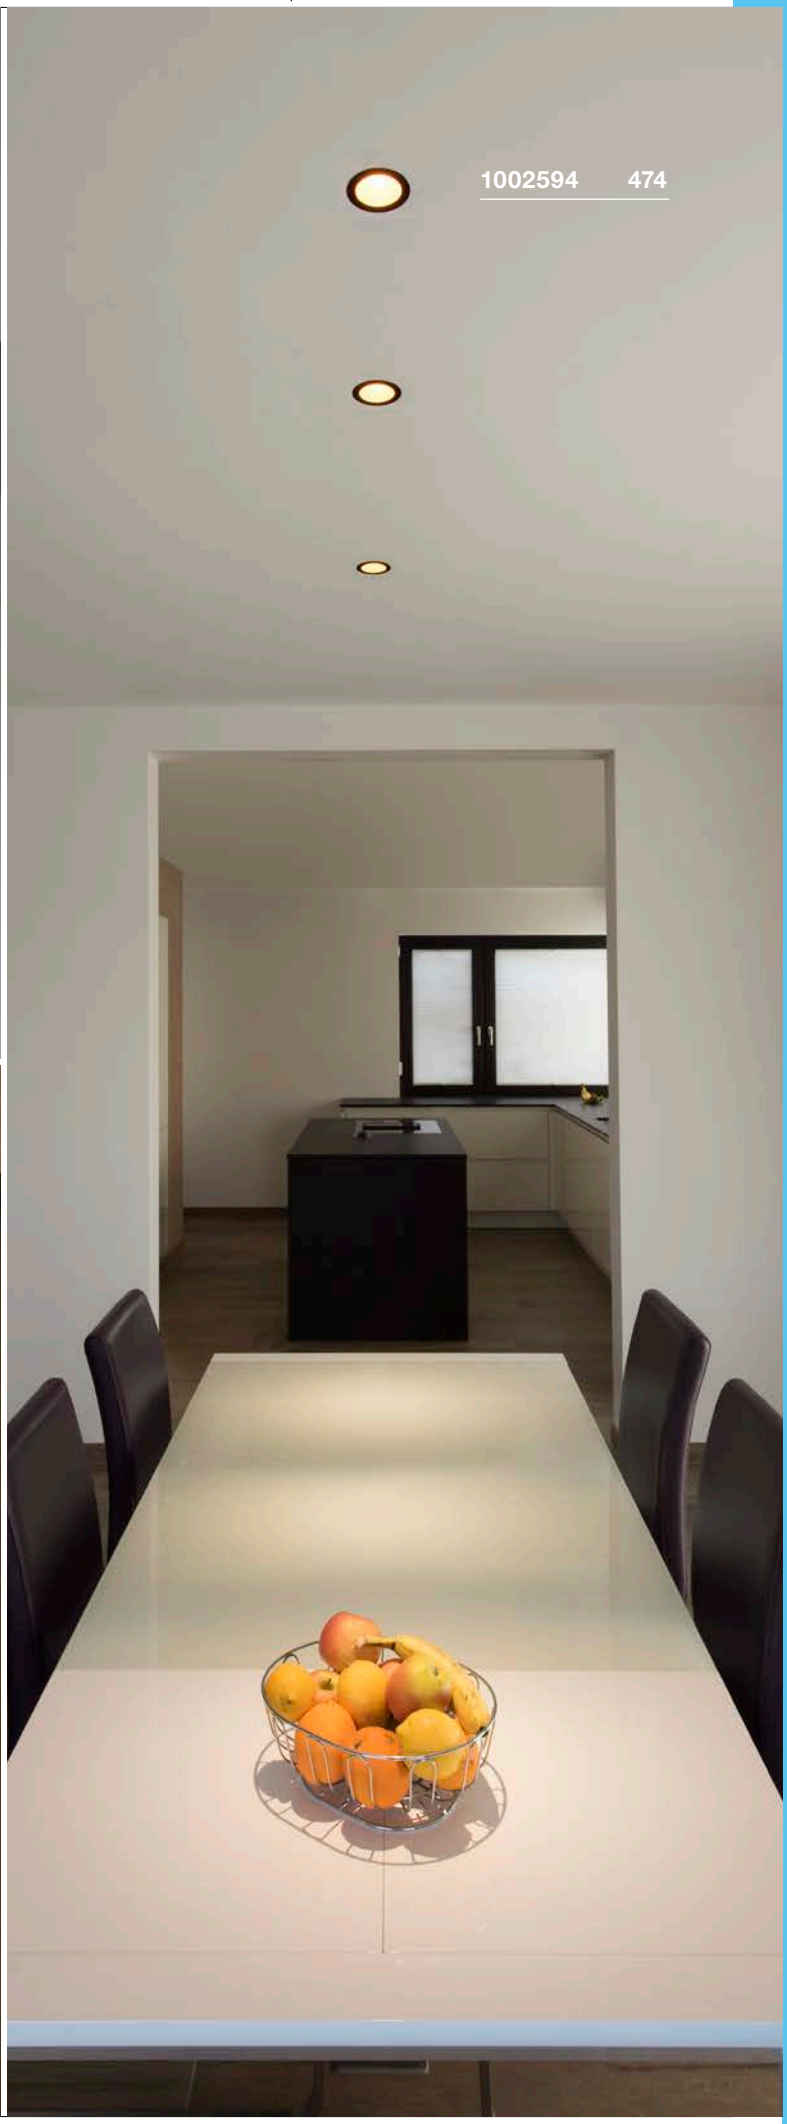
1002594 474

RENISTO
EL, square, housing, TRIAC

A-A++ Spectrum A++–E

- Homogeneous design
- Many different combinations of products in the family
- Inner cover can be chosen individually via accessories

IP 20

30000 350° 30°








Note

Material thickness, mounting surface: 30 mm
A suitable cover is required, see recommended accessory

RENISTO S
EL, square, housing, TRIAC


LED INSIDE



Product details

220-240V ~50/60Hz | 500mA
Total consumption: 9.6W
Material: Aluminium
Dimmable: Triac C, Triac L

Dimensioned drawing



Recommended accessories

White cover
Item no. 1001831 | 5,00 GBP
Silver cover
Item no. 1001832 | 9,90 GBP

Variant	Item no.	GBP
500lm | 3000K | CRI>80 | 0.206 kg | 36°		
white	1001828	67,50

RENISTO M
EL, square, housing, TRIAC


LED INSIDE



Product details

220-240V ~50/60Hz | 350mA
Total consumption: 16W
Material: Aluminium
Dimmable: Triac C

Dimensioned drawing



Recommended accessories

White cover
Item no. 1001833 | 6,90 GBP
Silver cover
Item no. 1001834 | 9,90 GBP

Variant	Item no.	GBP
900lm | 3000K | CRI>80 | 0.408 kg | 36°		
white	1001829	90,00

RENISTO L
EL, square, housing, TRIAC


LED INSIDE



Product details

220-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Aluminium
Dimmable: Triac C, Triac L

Dimensioned drawing



Recommended accessories

White cover
Item no. 1001835 | 9,90 GBP
Silver cover
Item no. 1001836 | 13,50 GBP

Variant	Item no.	GBP
2500lm | 3000K | CRI>80 | 0.991 kg | 40°		
white	1001830	153,00








RENISTO
EL, round, housing, TRIAC

A-A++ Spectrum A++–E

- Homogeneous design
- Many different combinations of products in the family
- Inner cover can be chosen individually via accessories

IP 20

30000 350° 30°

Note

Material thickness, mounting surface: 30 mm
A suitable cover is required, see recommended accessory

RENISTO S
EL, round, housing, TRIAC


LED INSIDE



Product details

220-240V ~50/60Hz | 500mA
Total consumption: 9.6W
Material: Aluminium
Dimmable: Triac C, Triac L

Dimensioned drawing



Recommended accessories

White cover
Item no. 1001849 | 5,00 GBP
Silver cover
Item no. 1001850 | 9,00 GBP

Variant	Item no.	GBP
500lm | 3000K | CRI>80 | 0.206 kg | 36°		
white	1001847	67,50

RENISTO M
EL, round, housing, TRIAC


LED INSIDE



Product details

220-240V ~50/60Hz | 350mA
Total consumption: 16W
Material: Aluminium
Dimmable: Triac C, Triac L

Dimensioned drawing



Recommended accessories

White cover
Item no. 1001851 | 6,90 GBP
Silver cover
Item no. 1001825 | 9,90 GBP

Variant	Item no.	GBP
900lm | 3000K | CRI>80 | 0.408 kg | 36°		
white	1001841	90,00

RENISTO L
EL, round, housing, TRIAC


LED INSIDE



Product details

220-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Aluminium
Dimmable: Triac C


Dimensioned drawing




Recommended accessories

White cover
Item no. 1001826 | 9,90 GBP
Silver cover
Item no. 1001827 | 13,50 GBP


Variant	Item no.	GBP
2500lm | 3000K | CRI>80 | 0.991 kg | 40°		
white	1001848	153,00

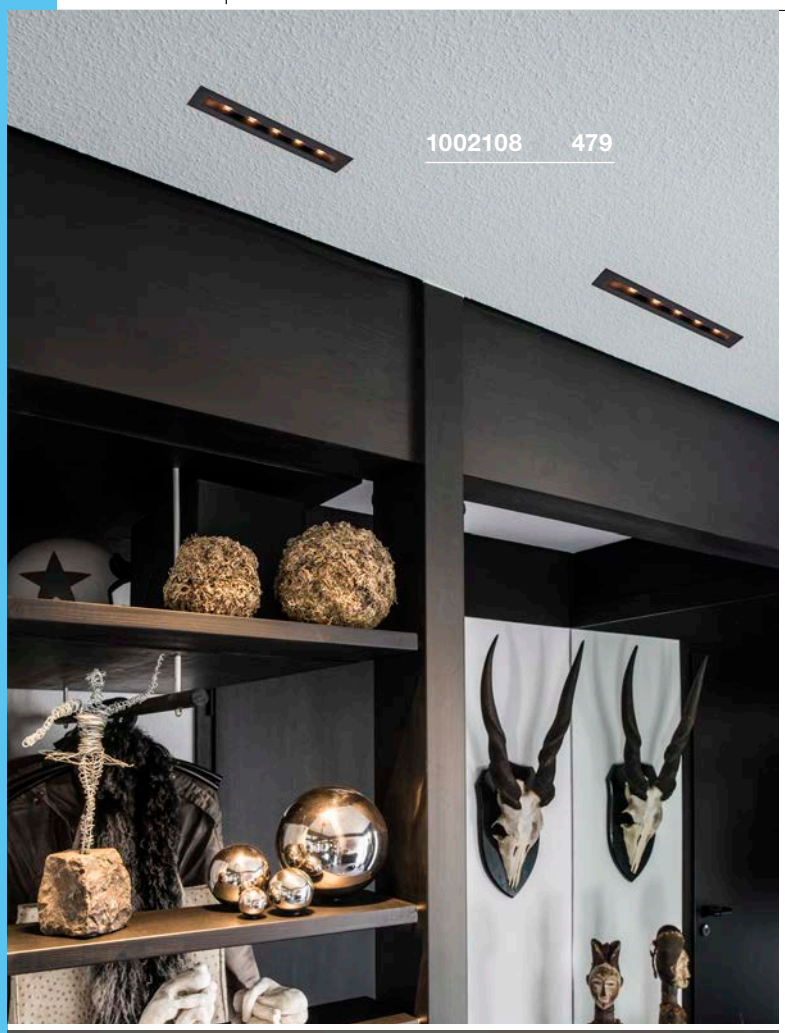

1002108 479

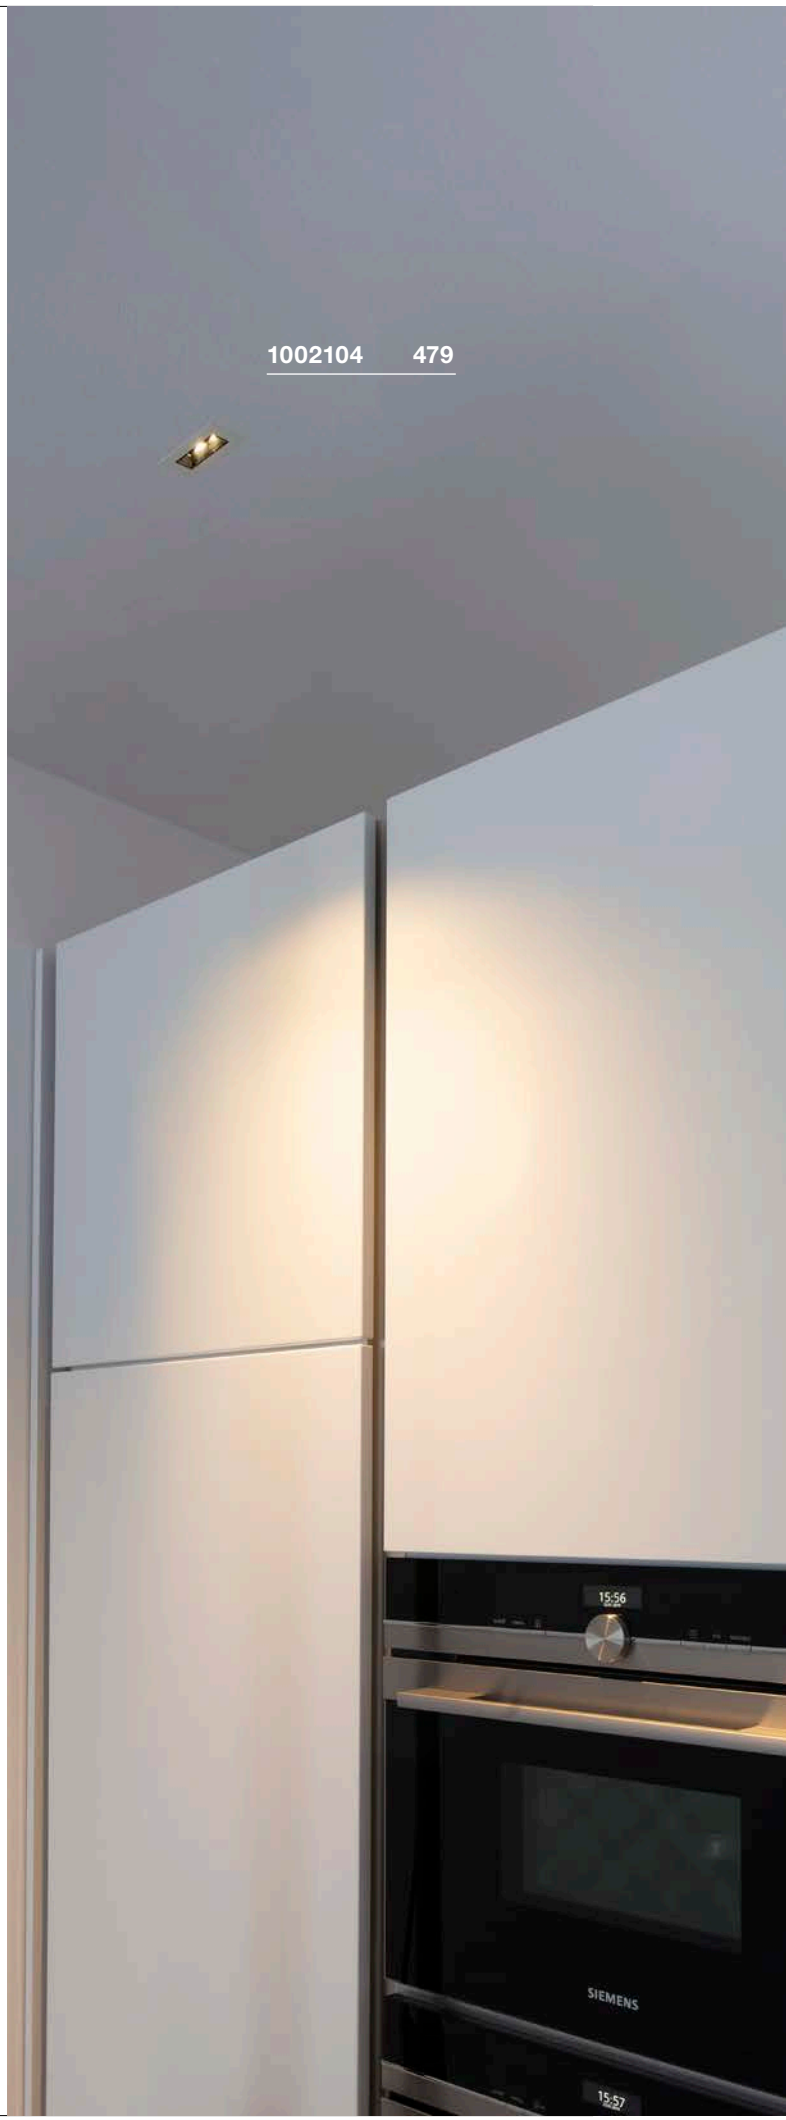

1002104 479

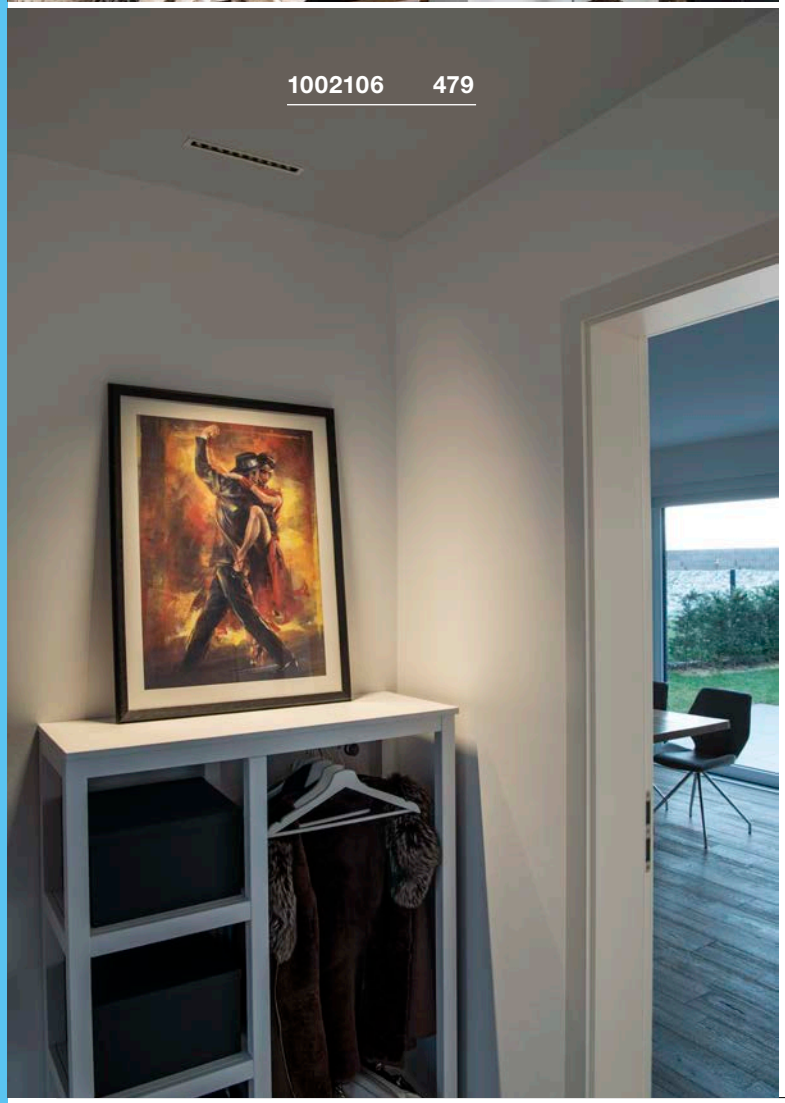

1002106 479

MILANDO 2
EL

A-A++ Spectrum A⁺⁺–E


LED INSIDE








Product details
700mA | 4.3W
Material: Steel / Polycarbonate (PC)

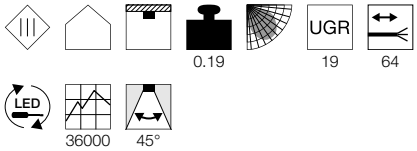

Dimensioned drawing



Note
Open cable end
Material thickness, mounting surface: 40 mm

Recommended accessories
☐ LED driver 700mA | 11W incl. strain relief
Item no. 464030 | 34,20 GBP



Variant	Item no.	GBP
280lm | 3000K | CRI>80		
■ black	**1002107**	**67,50**
280lm | 3000K | CRI>80		
◤ black/white	**1002104**	**67,50**

MILANDO 5
EL


A-A++ Spectrum A⁺⁺–E

LED INSIDE






Product details
700mA | 10.7W
Material: Steel / Polycarbonate (PC)

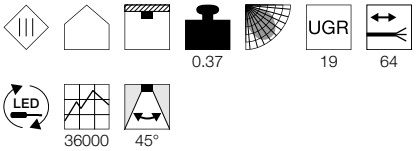

Dimensioned drawing



Note
Open cable end
Material thickness, mounting surface: 40 mm

Recommended accessories
☐ LED driver 700mA | 11W incl. strain relief
Item no. 464030 | 34,20 GBP



Variant	Item no.	GBP
640lm | 3000K | CRI>80		
■ black	**1002108**	**99,00**
640lm | 3000K | CRI>80		
◤ black/white	**1002105**	**99,00**

MILANDO 10
EL


A-A++ Spectrum A⁺⁺–E

LED INSIDE






Product details
700mA | 21.4W
Material: Steel / Polycarbonate (PC)

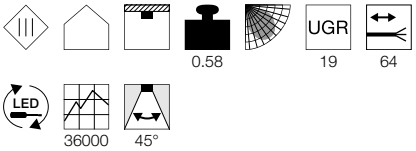

Dimensioned drawing



Note
Open cable end
Material thickness, mounting surface: 40 mm

Recommended accessories
☐ TRIAC LED driver 700mA | 40W
Item no. 1001267 | 52,20 GBP



Variant	Item no.	GBP
1240lm | 3000K | CRI>80		
■ black	**1002109**	**135,00**
1240lm | 3000K | CRI>80		
◤ black/white	**1002106**	**135,00**

NEW TRIA LIGHT SERIES.
RECESSED FITTING.

Conventional NEW TRIA	NEW TRIA 68	NEW TRIA 78 XL	NEW TRIA 78	NEW TRIA 78
Example				
Shape	○ □	○ □	○ □	○ □
Lamp	QPAR51	QPAR51	QPAR51	QPAR51
Lumen	–	–	–	–
Colour	–	–	–	–
Dimmable	–	–	–	–
Variant	Clip springs/leaf springs	Clip springs	Leaf springs	Clip springs
IP	–	–	–	–

LED NEW TRIA	NEW TRIA 45	NEW TRIA 68	NEW TRIA 68	NEW TRIA 68
Example				
Shape	○ □	○ □	○ □	○ □
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE DIM TO WARM
Lumen	143lm	300lm	800lm-890lm	440lm
Colour	3000K	2700K/3000K	2700K/3000K	1800K-3000K
Dimmable	–	–	Triac C, Triac L	Triac C, Triac L
Variant	Clip springs	Clip springs	Clip springs	Clip springs/leaf springs
IP	IP 44	–	–	–

	NEW TRIA 155	NEW TRIA 150	NEW TRIA 300
			
	QPAR51	QPAR111	QPAR111
	–	–	–
	–	–	–
	–	–	–
	Clip springs	Leaf springs	Clip springs
	–	–	–

	NEW TRIA 77	NEW TRIA 155	NEW TRIA 110	NEW TRIA 150
				
	INSIDE	INSIDE	INSIDE	INSIDE
	645lm-700lm	1160lm-1250lm	1010lm-1120lm	2210lm-2500lm
	2700K/3000K	2700K/3000K	2700K/3000K	2700K/3000K
	–	–	Triac C, Triac L	1-10V
	Clip springs	Clip springs	Clip springs	Clip springs
	–	–	–	–

NEW TRIA 68
Single, round, CS/LS, QPAR51


E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note
Products supplied with clip springs. Leaf springs included with the product and can be exchanged. Material thickness, mounting surface: 20 mm

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP




Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 ■ black	**1001980**	**22,50**
GU10 | QPAR51 □ white	**1001981**	**22,50**
GU10 | QPAR51 ▯ matt aluminium	**1001982**	**25,20**

NEW TRIA 68
Single, square, CS/LS, QPAR51

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note
Products supplied with clip springs. Leaf springs included with the product and can be exchanged. Material thickness, mounting surface: 20 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP





LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP




Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 ■ black	**1001994**	**22,50**
GU10 | QPAR51 □ white	**1001995**	**22,50**
GU10 | QPAR51 ▯ matt aluminium	**1001996**	**25,20**

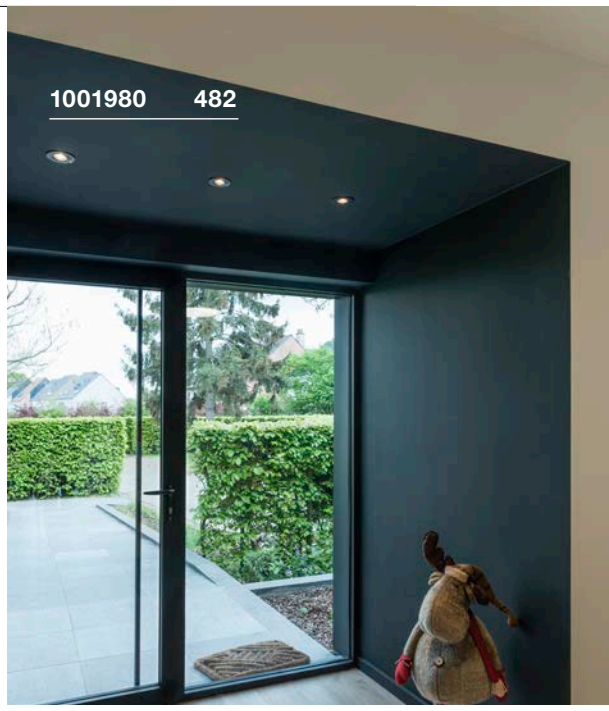

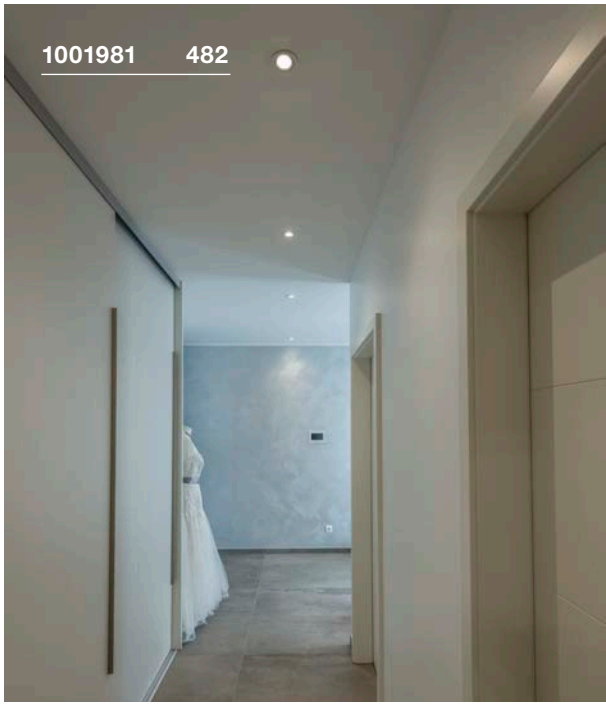

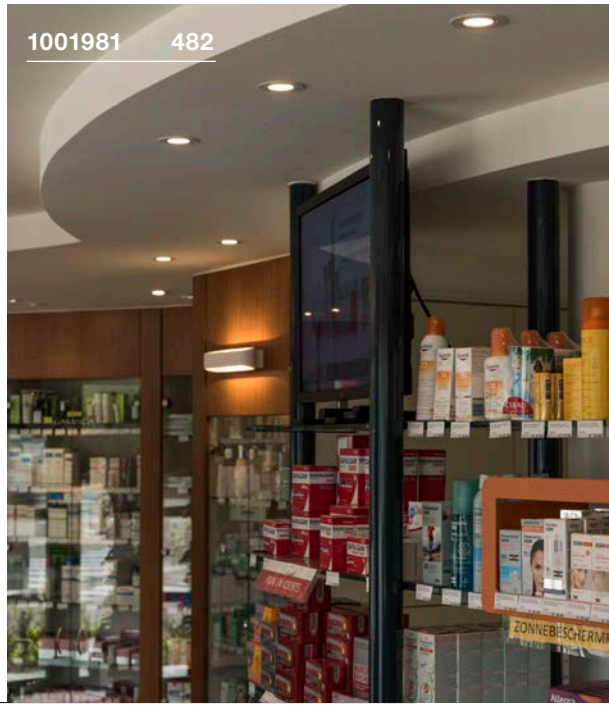





NEW TRIA 78 XL
Single, round, CS, QPAR51

E-A++ Spectrum A++–E









- Wide edge

Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note
Material thickness, mounting surface: 18 mm

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001561 | 9,90 GBP



Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**113440**	**27,00**
GU10 | QPAR51		
□ matt white	**113441**	**27,00**
GU10 | QPAR51		
▨ matt aluminium	**113446**	**29,70**

NEW TRIA 78 XL
Single, square, CS, QPAR51

E-A++ Spectrum A++–E









- Wide edge

Product details
230V ~50Hz
Material: Aluminium



Dimensioned drawing



Note
Material thickness, mounting surface: 18 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP



Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**113450**	**27,00**
GU10 | QPAR51		
□ matt white	**113451**	**27,00**
GU10 | QPAR51		
▨ matt aluminium	**113456**	**29,70**

NEW TRIA 78
Single, round, LS, QPAR51









Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Leaf springs
Material thickness, mounting surface: 20 mm max.

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 |15,30 GBP



LED GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 |49,50 GBP



Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**111710**	**25,20**
GU10 | QPAR51		
□ matt white	**111711**	**25,20**
GU10 | QPAR51		
▨ matt aluminium	**111716**	**27,00**

NEW TRIA 78
Single, square, LS, QPAR51









Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Leaf springs
Material thickness, mounting surface: 20 mm max.

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 |15,30 GBP




LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 |9,90 GBP





Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**111720**	**25,20**
GU10 | QPAR51		
□ matt white	**111721**	**25,20**
GU10 | QPAR51		
▨ matt aluminium	**111726**	**27,00**

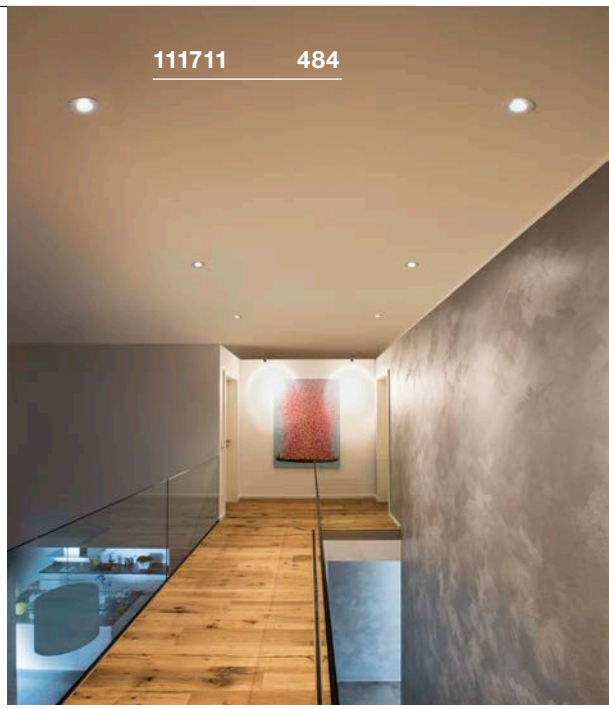


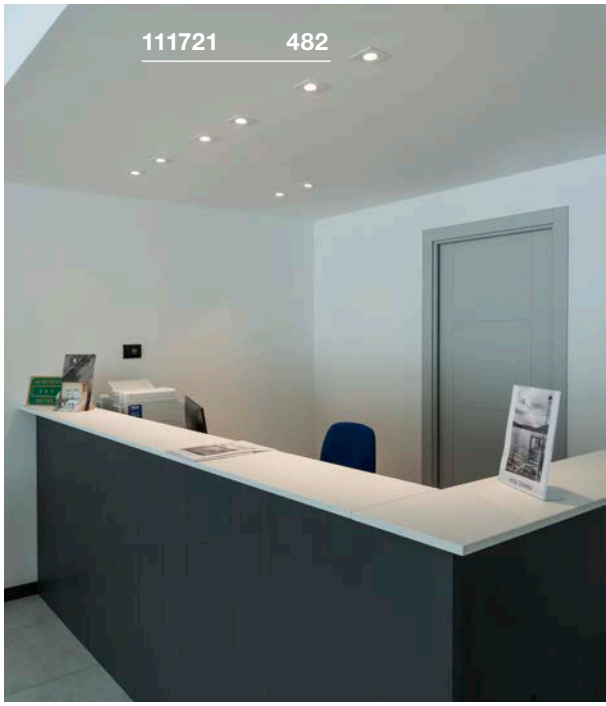

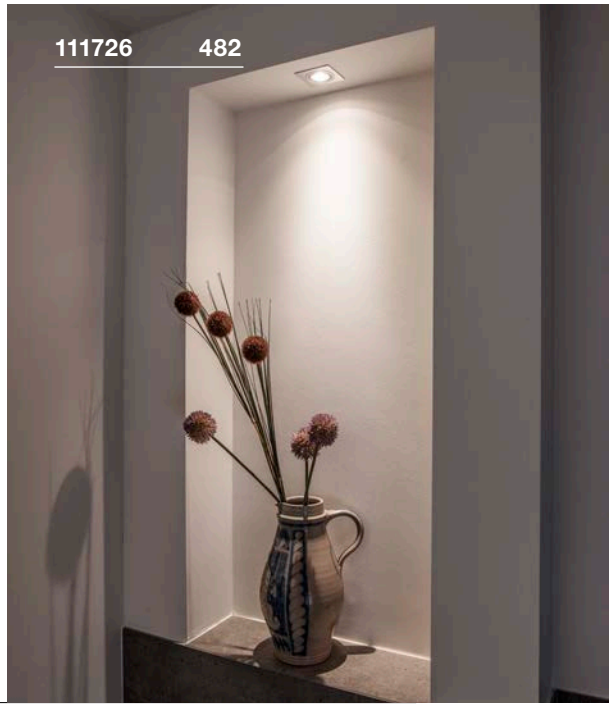





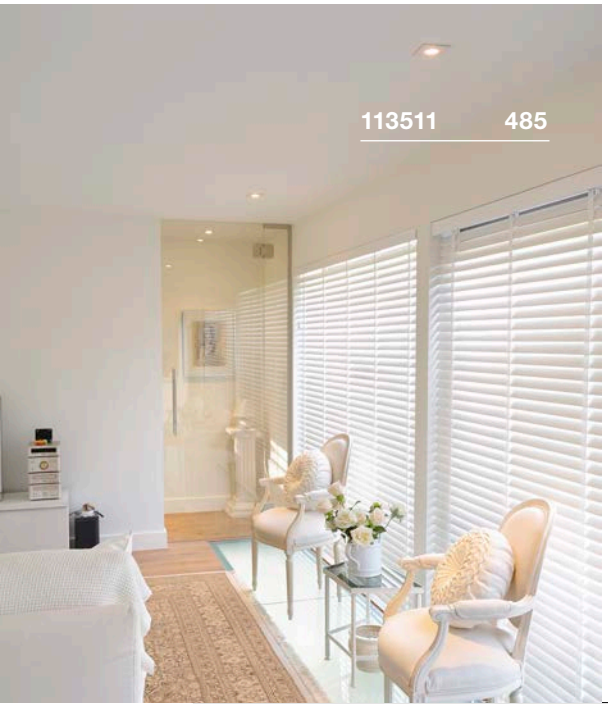

NEW TRIA 78
Single, round, CS, QPAR51


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note
Clip springs
Material thickness, mounting surface: 18 mm max.

Recommended lamp
LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP




Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**113490**	**22,50**
GU10 | QPAR51		
□ white	**113510**	**22,50**
GU10 | QPAR51		
▨ matt aluminium	**111360**	**25,20**

NEW TRIA 78
Single, square, CS, QPAR51


E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note
Clip springs
Material thickness, mounting surface: 18 mm max.

Recommended lamp
GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ black	**113491**	**22,50**
GU10 | QPAR51		
□ white	**113511**	**22,50**
GU10 | QPAR51		
▨ matt aluminium	**111361**	**25,20**


NEW TRIA 155
Double, CS, QPAR51


E-A++ Spectrum A⁺⁺–E








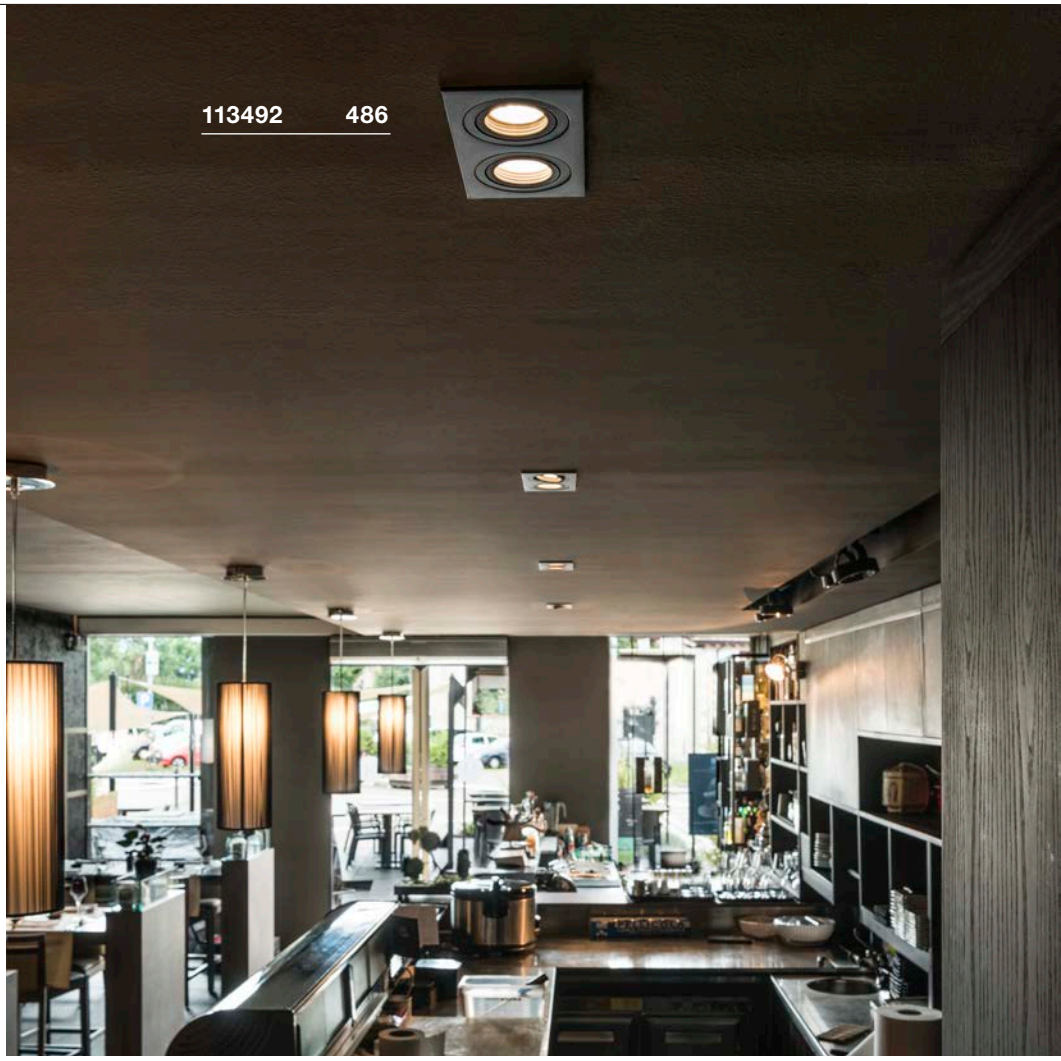

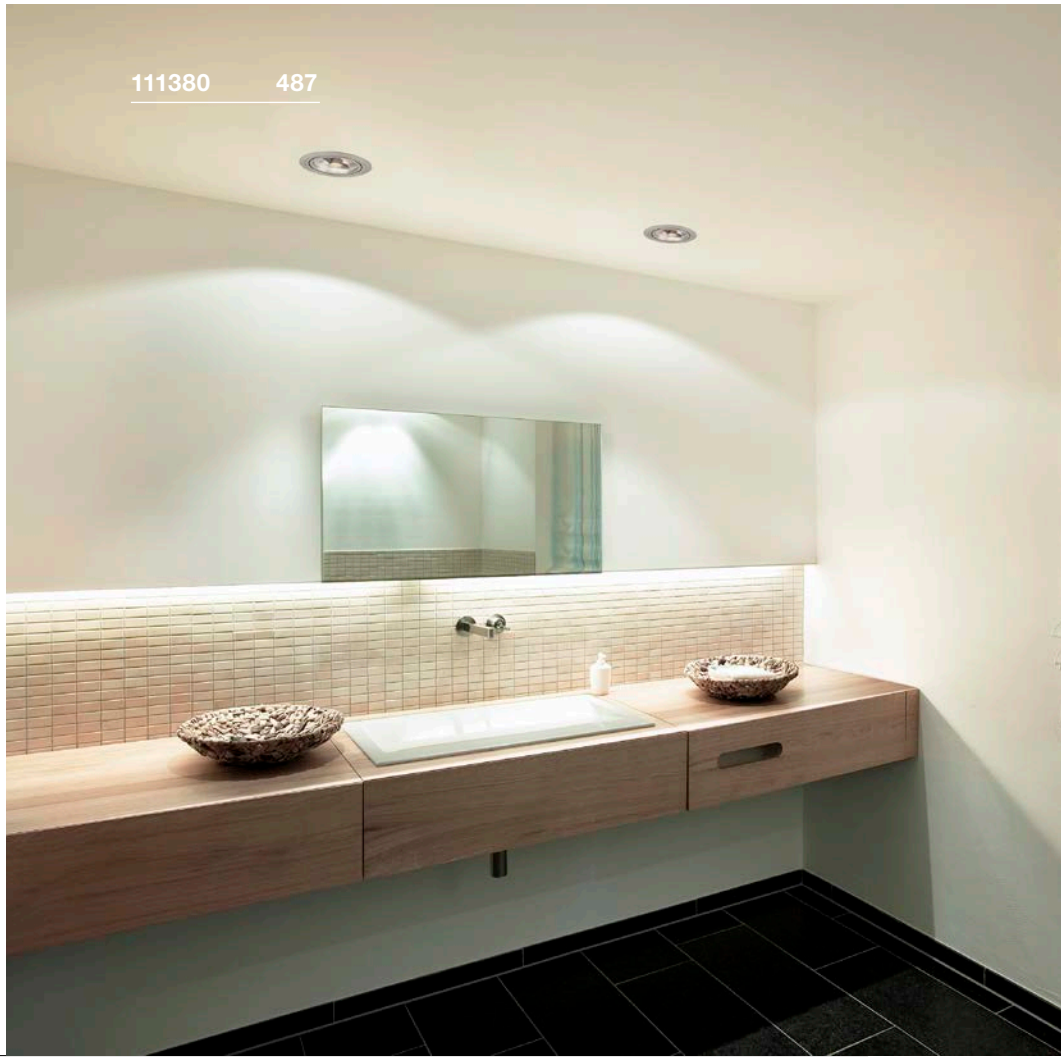


Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

Clip springs
Material thickness, mounting surface: 30 mm max

Recommended lamp

GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP

LED GU10 5.6W 60°
2200-6700K 350lm EEI==A+
6kWh/1000h
Item no. 1001919 | 49,50 GBP


Lamp details

2x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 ■ black	113492	40,50
GU10 | QPAR51 □ white	113512	40,50
GU10 | QPAR51 ▨ matt aluminium	111362	43,20

NEW TRIA 150
Single, round, LS, QPAR111








Product details
230V ~50Hz
Material: Aluminium

0.33 360° 30°

Dimensioned drawing


Note
Leaf springs
Material thickness, mounting surface: 30 mm max.

Recommended lamp
LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP

LED GU10 7W 13°
3000K 660lm EEI==A+
8kWh/1000h
Item no. 1001568 | 20,70 GBP

Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
matt black	**113550**	**45,00**
GU10 | QPAR111		
matt white	**113540**	**45,00**
GU10 | QPAR111		
aluminium	**111380**	**49,50**

NEW TRIA 150
Single, square, LS, QPAR111








Product details
230V ~50Hz
Material: Aluminium

0.38 360° 30°

Dimensioned drawing


Note
Leaf springs
Material thickness, mounting surface: 30 mm max.

Recommended lamp
LED GU10 13W 30°
2700K 1100lm EEI=A+
13kWh/1000h
Item no. 1001242 | 76,50 GBP

LED GU10 7.9W 40°
4000K 760lm EEI=A+
8kWh/1000h
Item no. 560724 | 20,70 GBP

Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
matt black	**113830**	**45,00**
GU10 | QPAR111		
matt white	**113541**	**45,00**
GU10 | QPAR111		
matt aluminium	**111381**	**49,50**

NEW TRIA 300
Double, CS, QPAR111








Product details
230V ~50Hz
Material: Aluminium

0.74 360° 30°

Dimensioned drawing


Note
Clip springs
Material thickness, mounting surface: 30 mm max.

Recommended lamp
LED GU10 17.5W 140°
2700K 750lm EEI=A
18kWh/1000h
Item no. 570532 | 90,00 GBP

LED GU10 9.5W 40°
2200-6700K 714lm
Item no. 1001923 | 49,50 GBP

Lamp details
2x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
matt black	**113840**	**90,00**
GU10 | QPAR111		
matt white	**113841**	**90,00**
GU10 | QPAR111		
matt aluminium	**111382**	**99,00**

NEW TRIA 45
Single, round, CS

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 700mA
Total consumption: 4.4W
Material: Aluminium

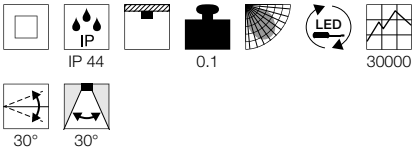

Dimensioned drawing



Note

Clip springs
Material thickness, mounting surface: 20 mm max.

Variant	Item no.	GBP
143lm | 3000K | CRI>80		
■ black	**113970**	**43,20**
143lm | 3000K | CRI>80		
□ matt white	**113971**	**43,20**
143lm | 3000K | CRI>80		
▨ matt aluminium	**113976**	**49,50**

NEW TRIA 45
Single, square, CS

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 700mA
Total consumption: 4.4W
Material: Aluminium

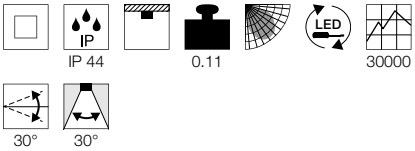


Dimensioned drawing




Note


Clip springs
Material thickness, mounting surface: 20 mm max.

Variant	Item no.	GBP
143lm | 3000K | CRI>80		
■ matt black	**114400**	**43,20**
143lm | 3000K | CRI>80		
□ matt white	**114401**	**43,20**
143lm | 3000K | CRI>80		
▨ matt aluminium	**114406**	**49,50**

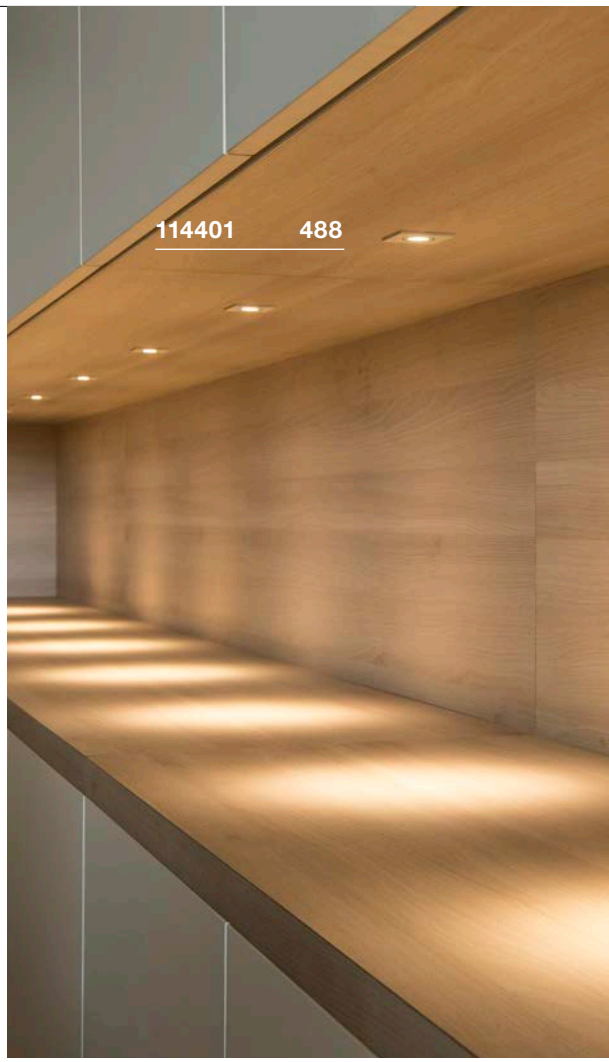



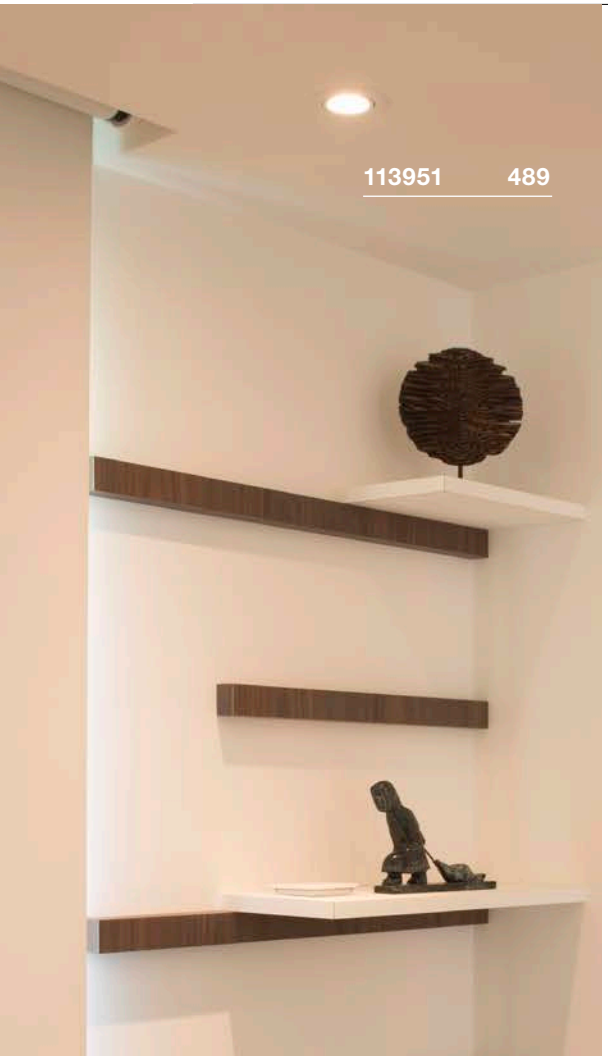

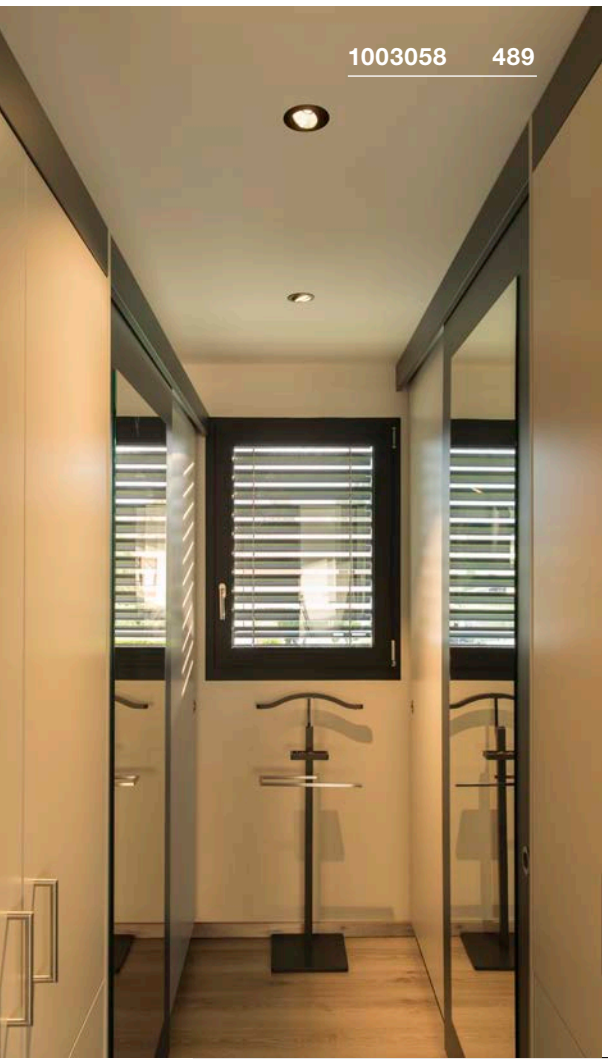

NEW TRIA 68
Single, round, CS

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









- Premium LED
- Installation depth <40 mm
- Convenient ceiling cut-out for standard drill bits

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 5.3W
Material: Aluminium

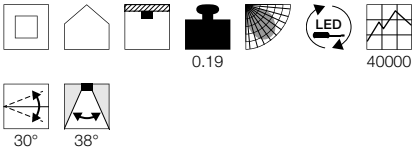

Dimensioned drawing



Note

Clip springs
Material thickness, mounting surface: 20 mm


Variant	Item no.	GBP
300lm | 3000K | CRI80		
matt black	1003057	40,50
300lm | 2700K | CRI80		
matt black	1003058	40,50
300lm | 2700K | CRI80		
matt white	1003059	40,50
300lm | 2700K | CRI80		
brushed aluminium	1003060	43,20
300lm | 3000K | CRI80		
matt white	113951	40,50
300lm | 3000K | CRI80		
brushed aluminium	113956	43,20

NEW TRIA 68
Single, square, CS

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









- Premium LED
- Installation depth <40 mm
- Convenient ceiling cut-out for standard drill bits

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 5.3W
Material: Aluminium

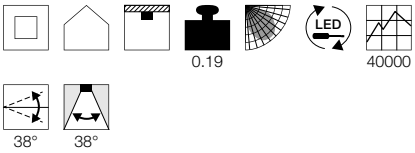

Dimensioned drawing



Note

Clip springs
Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
300lm | 3000K | CRI80		
matt black	1003061	40,50
300lm | 2700K | CRI80		
matt black	1003062	40,50
300lm | 2700K | CRI80		
matt white	1003063	40,50
300lm | 2700K | CRI80		
brushed aluminium	1003064	43,20
300lm | 3000K | CRI80		
matt white	113961	40,50
300lm | 3000K | CRI80		
brushed aluminium	113966	43,20

NEW TRIA 68
EL, single, round, CS, TRIAC

A-A++ Spectrum A++–E


LED INSIDE








Product details
220-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium
Dimmable: Triac C, Triac L

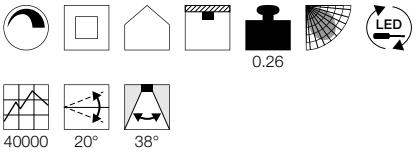

Dimensioned drawing



Note
Clip springs
Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
800lm | 2700K | CRI>80		
matt aluminium	1003067	72,00
890lm | 3000K | CRI>80		
matt black	114380	67,50
890lm | 3000K | CRI>80		
matt white	114381	67,50
890lm | 3000K | CRI>80		
brushed aluminium	114386	72,00

NEW TRIA 68
Single, square, CS, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- Installation depth <40mm

Product details
220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium
Dimmable: Triac C, Triac L

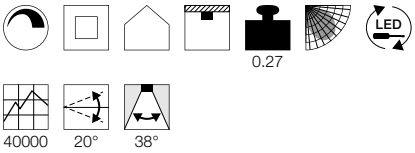

Dimensioned drawing




Note
Clip springs
Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
800lm | 2700K | CRI>80		
matt black	1003068	67,50
800lm | 2700K | CRI>80		
matt white	1003069	67,50
800lm | 2700K | CRI>80		
matt aluminium	1003070	72,00
890lm | 3000K | CRI>80		
matt black	114390	67,50
890lm | 3000K | CRI>80		
matt white	114391	67,50
890lm | 3000K | CRI>80		
brushed aluminium	114396	72,00





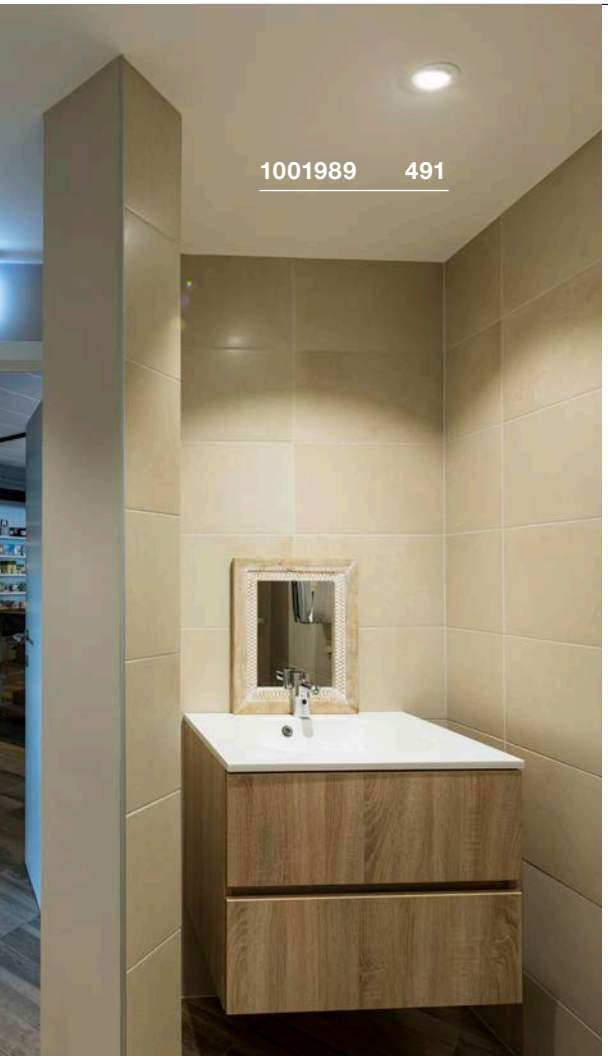



NEW TRIA 68
Single, round, CS/LS, TRIAC

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM









- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- Installation height <40mm

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.3W
Material: Aluminium
Dimmable: Triac C, Triac L

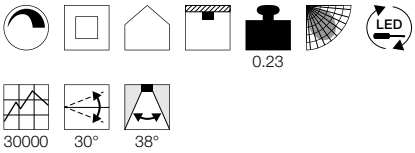

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm

An application video about
Dim to Warm can be found at
http://bit.ly/dim-to-warm

Variant	Item no.	GBP
440lm | 1800-3000K | CRI>95		
■ matt black	**1001978**	**67,50**
440lm | 1800-3000K | CRI>95		
□ matt white	**1001989**	**67,50**
440lm | 1800-3000K | CRI>95		
▨ matt aluminium	**1001990**	**72,00**

NEW TRIA 68
Single, square, CS/LS, TRIAC

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM









- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- Installation height <40mm

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.3W
Material: Aluminium
Dimmable: Triac C, Triac L

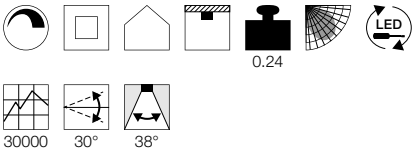

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm

An application video about
Dim to Warm can be found at
http://bit.ly/dim-to-warm

Variant	Item no.	GBP
440lm | 1800-3000K | CRI>95		
■ black	**1001991**	**67,50**
440lm | 1800-3000K | CRI>95		
□ matt white	**1001992**	**67,50**
440lm | 1800-3000K | CRI>95		
▨ brushed aluminium	**1001993**	**72,00**

NEW TRIA 77
Single, round, CS

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total consumption: 8W
Material: Aluminium

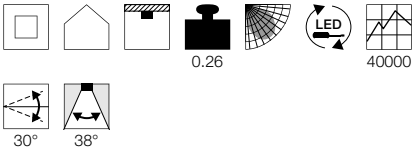

Dimensioned drawing



Note

Clip springs
Material thickness, mounting surface: 20 mm max.

Variant	Item no.	GBP
645lm | 2700K | CRI>80		
matt black	113870	49,50
645lm | 2700K | CRI>80		
white	113871	49,50
645lm | 2700K | CRI>80		
matt aluminium	113876	54,00
700lm | 3000K | CRI>80		
matt black	113900	49,50
700lm | 3000K | CRI>80		
white	113901	49,50
700lm | 3000K | CRI>80		
matt aluminium	113906	54,00

NEW TRIA 77
Single, square, CS

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total consumption: 8W
Material: Aluminium

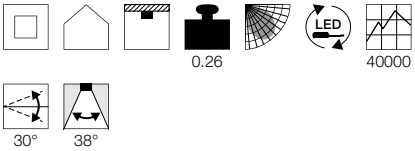


Dimensioned drawing





Note

Clip springs
Material thickness, mounting surface: 20 mm max.

Variant	Item no.	GBP
645lm | 2700K | CRI>80		
matt black	113880	49,50
645lm | 2700K | CRI>80		
white	113881	49,50
645lm | 2700K | CRI>80		
matt aluminium	113886	54,00
700lm | 3000K | CRI>80		
matt black	113910	49,50
700lm | 3000K | CRI>80		
white	113911	49,50
700lm | 3000K | CRI>80		
matt aluminium	113916	54,00

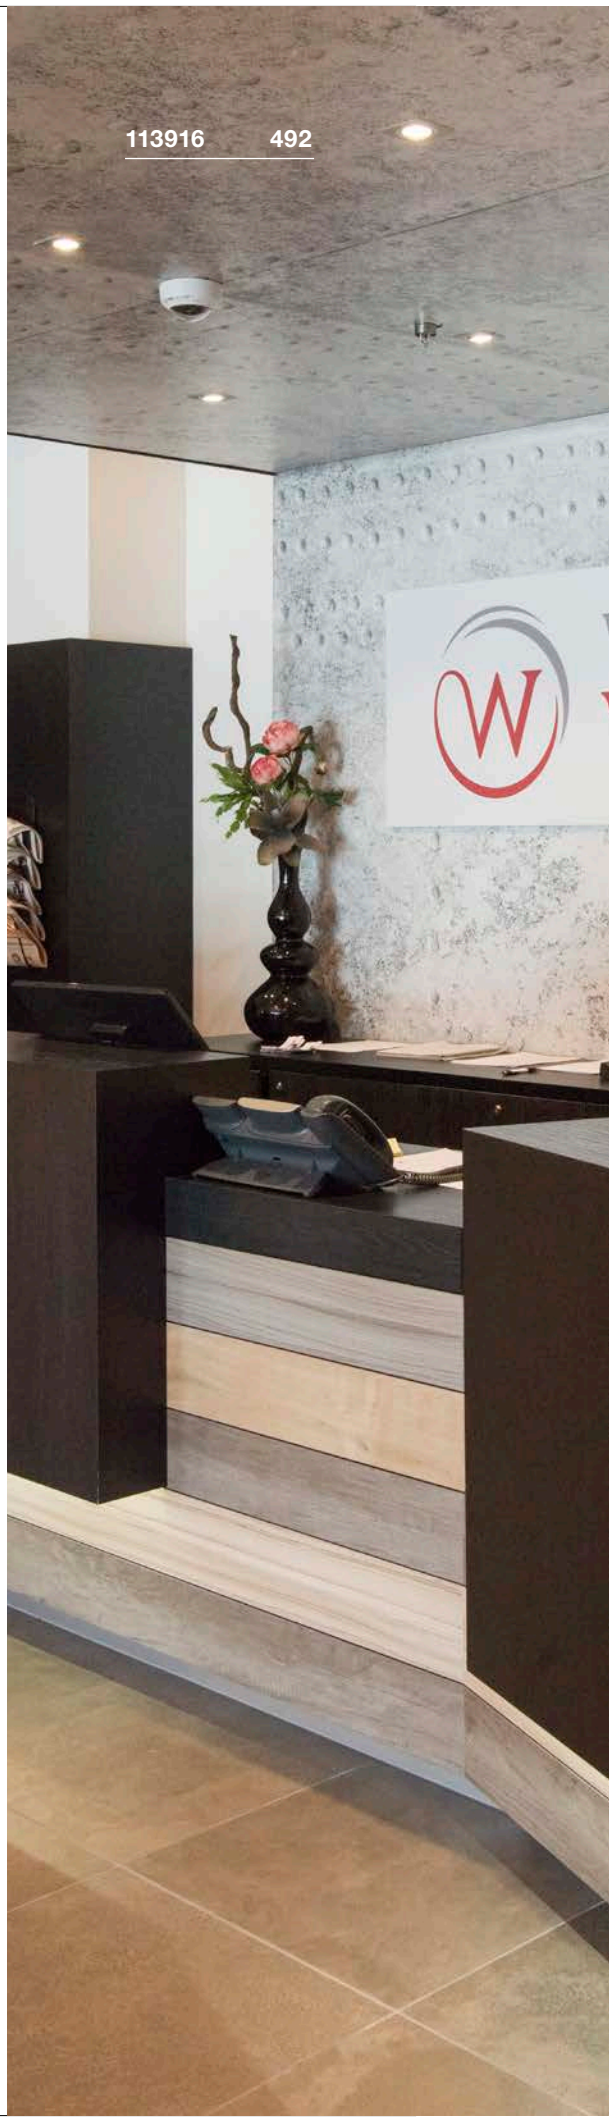

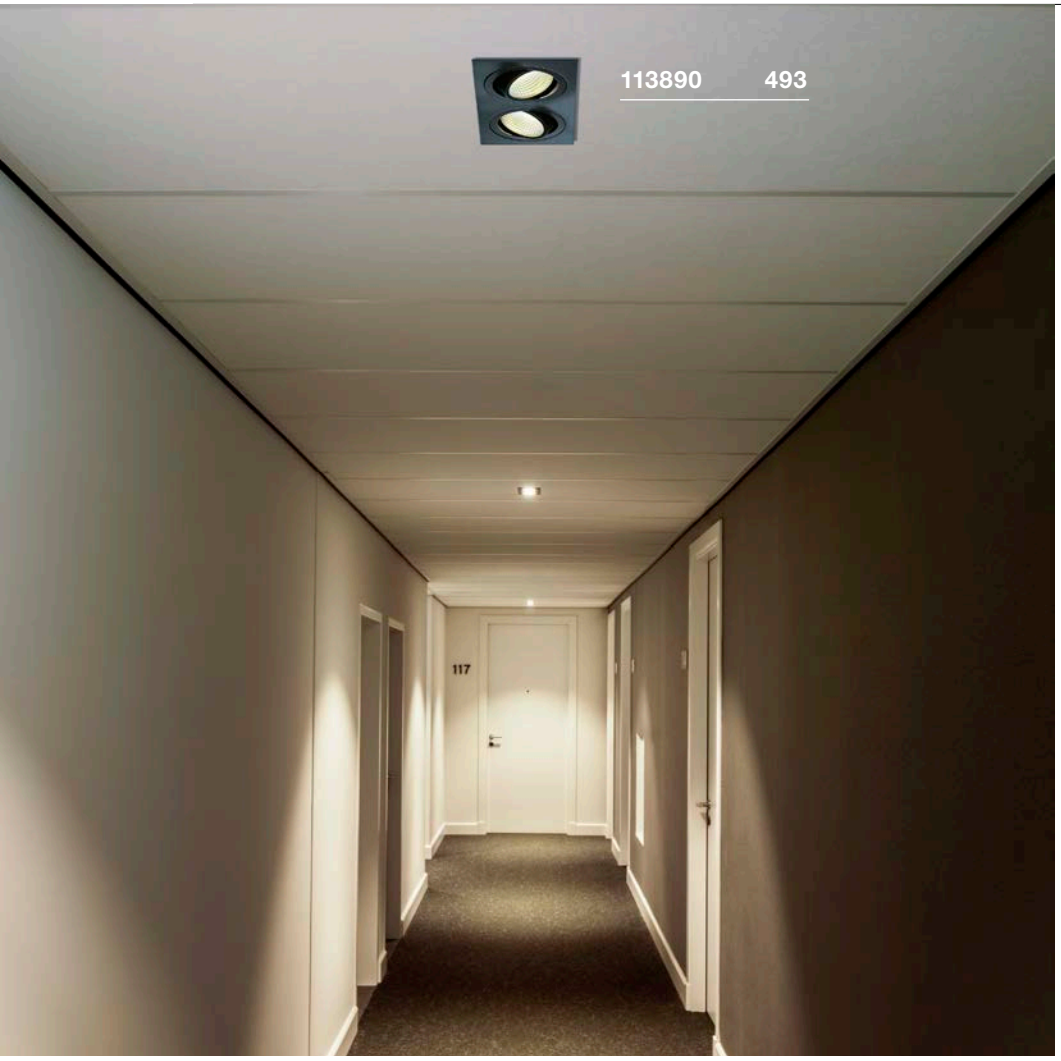

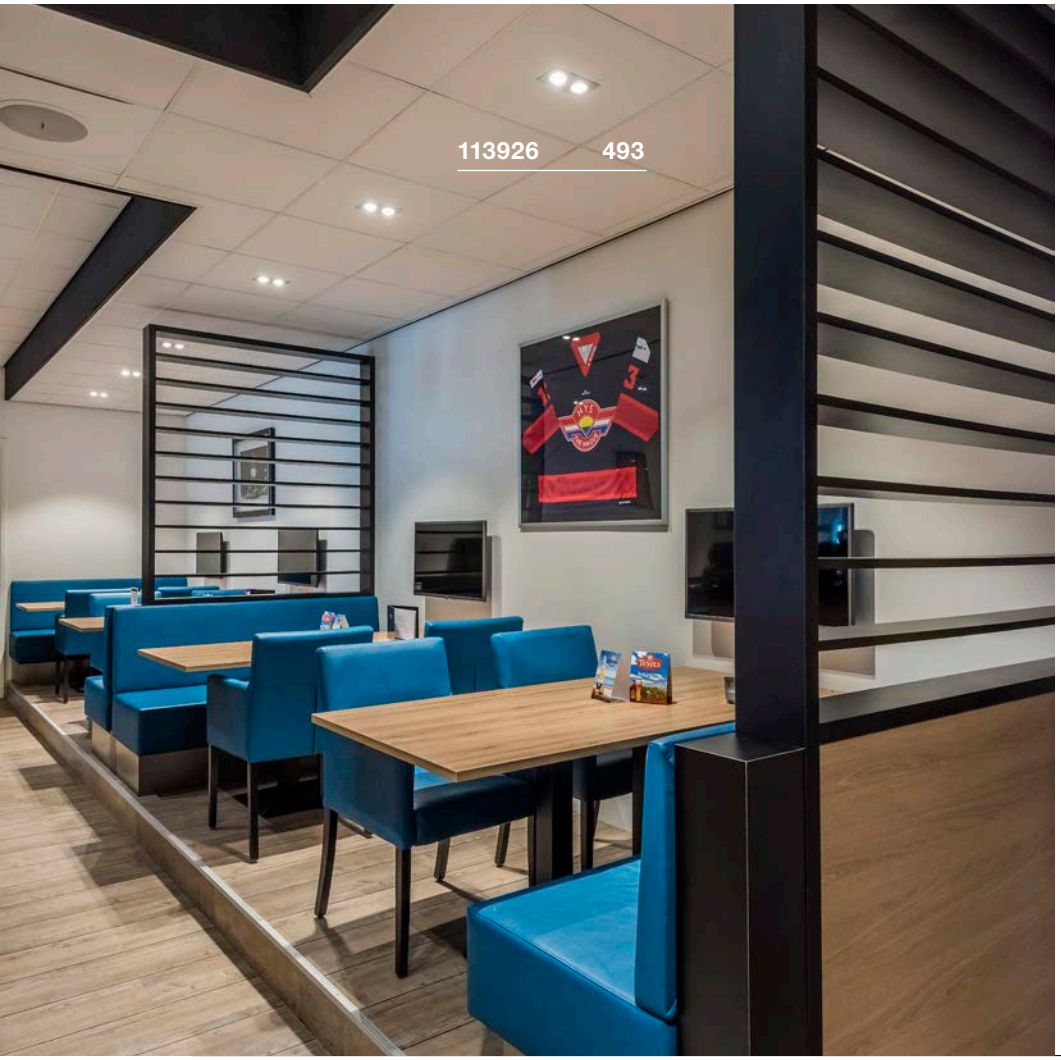

NEW TRIA 155
Double, CS

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total consumption: 14W
Material: Aluminium

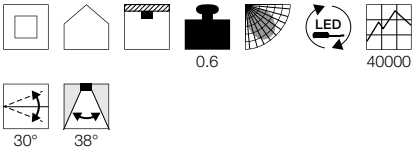


Dimensioned drawing



Note

Clip springs
Material thickness, mounting surface: 30 mm max.

Variant	Item no.	GBP
1160lm | 2700K | CRI>80		
■ matt black	**113890**	**99,00**
1160lm | 2700K | CRI>80		
□ white	**113891**	**99,00**
1160lm | 2700K | CRI>80		
▫ matt aluminium	**113896**	**103,50**
1250lm | 3000K | CRI>80		
■ matt black	**113920**	**99,00**
1250lm | 3000K | CRI>80		
□ white	**113921**	**99,00**
1250lm | 3000K | CRI>80		
▫ matt aluminium	**113926**	**103,50**

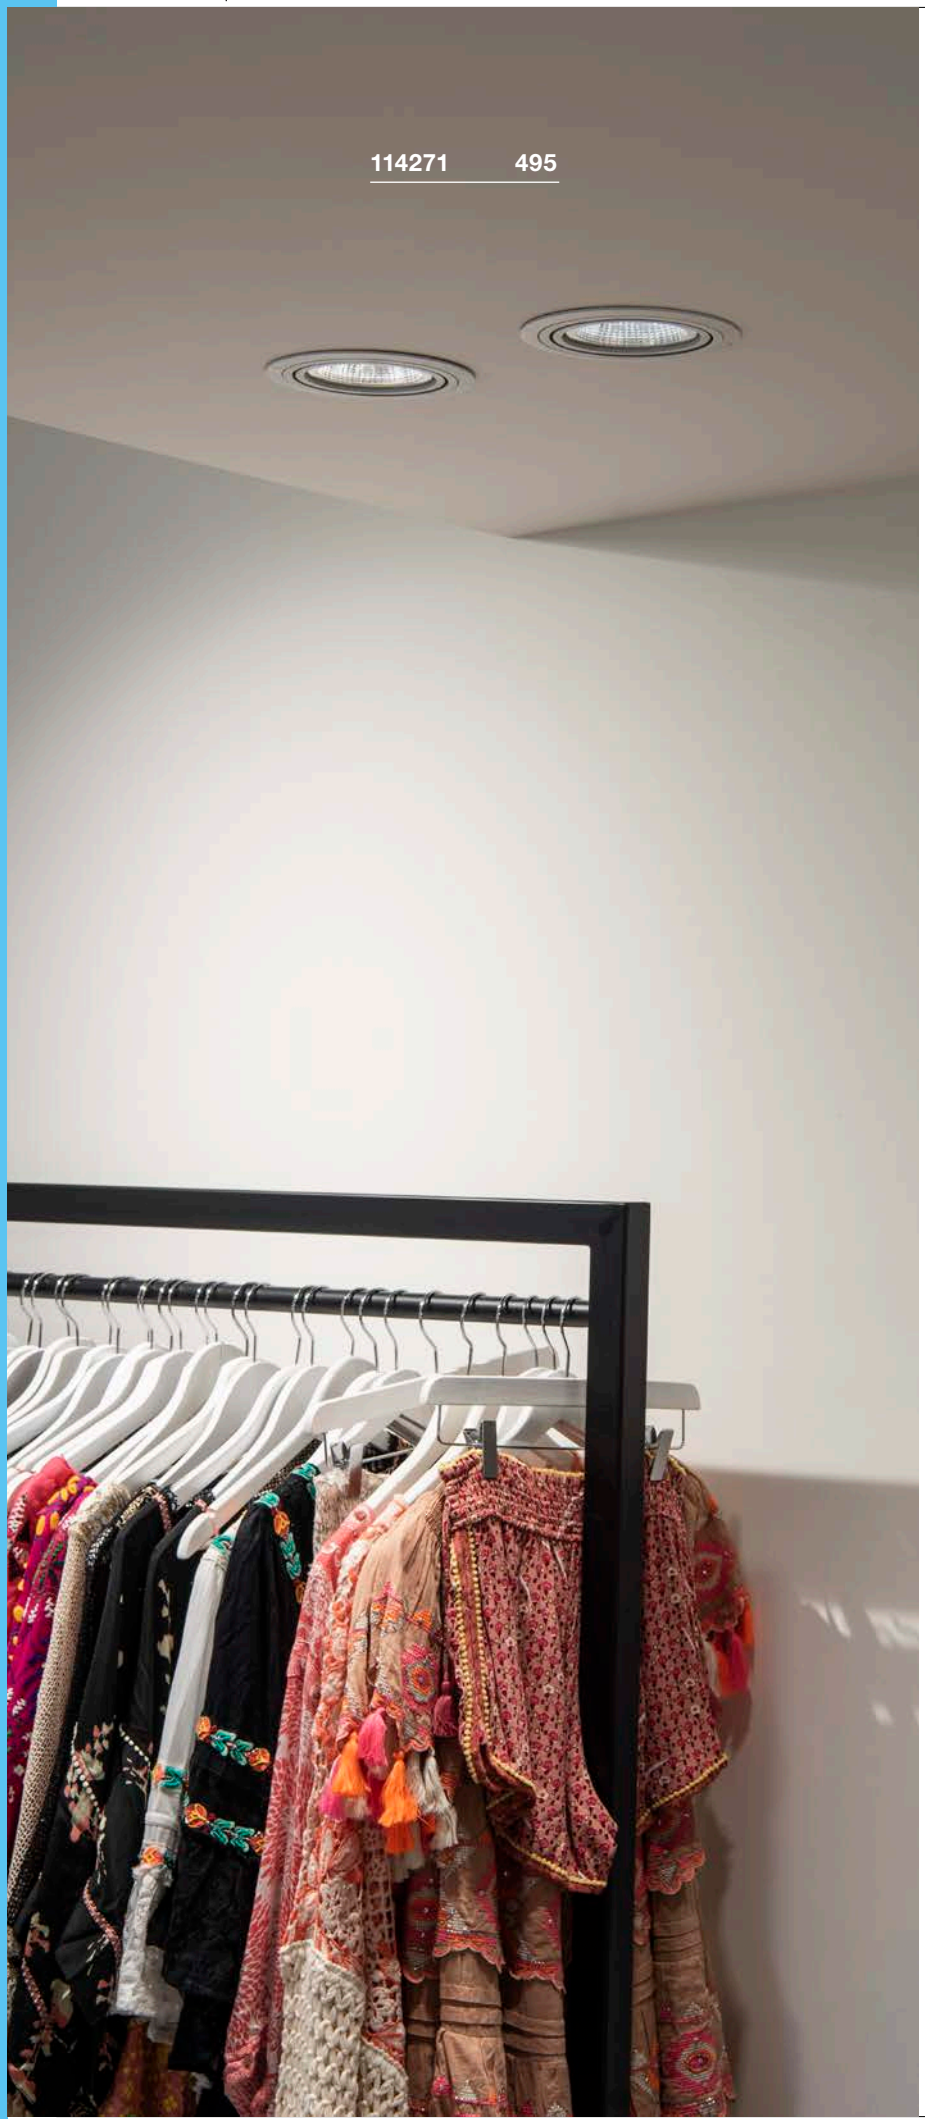

NEW TRIA 110
Single, round, CS, TRIAC

A-A++ Spectrum A++–E

LED INSIDE










Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing



Note

Clip springs
Material thickness, mounting surface: 20 mm max.

Variant	Item no.	GBP
1010lm | 2700K | CRI>80		
black	114220	153,00
1030lm | 2700K | CRI>80		
white	114221	153,00
1100lm | 3000K | CRI>80		
black	114230	153,00
1120lm | 3000K | CRI>80		
white	114231	153,00

NEW TRIA 110
Single, square, CS, TRIAC

A-A++ Spectrum A++–E


LED INSIDE








Product details
220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium
Dimmable: Triac C, Triac L

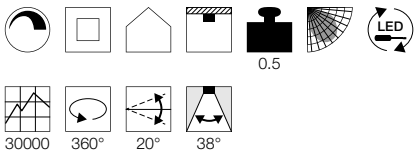

Dimensioned drawing



Note
Clip springs
Material thickness, mounting surface: 20 mm max.

Variant	Item no.	GBP
1010lm | 2700K | CRI>80		
■ black	**114240**	**153,00**
1030lm | 2700K | CRI>80		
□ white	**114241**	**153,00**
1100lm | 3000K | CRI>80		
■ black	**114250**	**153,00**
1120lm | 3000K | CRI>80		
□ white	**114251**	**153,00**

NEW TRIA 150
Single, round, CS, 1-10V

A-A++ Spectrum A++–E


LED INSIDE








Product details
100-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Aluminium
Dimmable: 1-10V

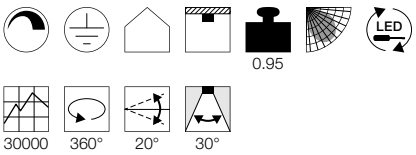

Dimensioned drawing



Note
Clip springs
Material thickness, mounting surface: 20 mm max.

Variant	Item no.	GBP
2210lm | 2700K | CRI>80		
■ black	**114260**	**206,10**
2275lm | 2700K | CRI>80		
□ white	**114261**	**206,10**
2425lm | 3000K | CRI>80		
■ black	**114270**	**206,10**
2500lm | 3000K | CRI>80		
□ white	**114271**	**206,10**

NEW TRIA 150
Single, square, CS, 1-10V

A-A++ Spectrum A++–E


LED INSIDE








Product details
100-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Aluminium
Dimmable: 1-10V

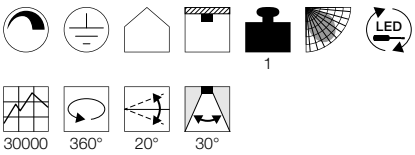


Dimensioned drawing



Note
Clip springs
Material thickness, mounting surface: 20 mm max.

Variant	Item no.	GBP
2210lm | 2700K | CRI>80		
■ black	**114280**	**206,10**
2275lm | 2700K | CRI>80		
□ white	**114281**	**206,10**
2425lm | 3000K | CRI>80		
■ black	**114290**	**206,10**
2500lm | 3000K | CRI>80		
□ white	**114291**	**206,10**

KADUX
EL, single, QPAR51








Product details

230V ~50Hz
Material: Aluminium / Steel

0.35

Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max.

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 560542 | 9,90 GBP



Lamp details

max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**115510**	**25,20**
GU10 | QPAR51		
□ matt white	**115511**	**25,20**
GU10 | QPAR51		
▨ matt aluminium	**115516**	**27,00**

KADUX
EL, double, QPAR51








Product details

230V ~50Hz
Material: Aluminium / Steel

0.55

Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max.

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 5.6W 60°
2200-6700K 350lm EEI==A+
6kWh/1000h
Item no. 1001919 | 49,50 GBP




Lamp details

2x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**115520**	**45,00**
GU10 | QPAR51		
□ matt white	**115521**	**45,00**
GU10 | QPAR51		
▨ matt aluminium	**115526**	**49,50**

KADUX
EL, triple, QPAR51








Product details

230V ~50Hz
Material: Aluminium / Steel

0.75

Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max.

Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001566 | 9,90 GBP




LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP



Lamp details

3x max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51		
■ matt black	**115530**	**63,00**
GU10 | QPAR51		
□ matt white	**115531**	**63,00**
GU10 | QPAR51		
▨ matt aluminium	**115536**	**67,50**

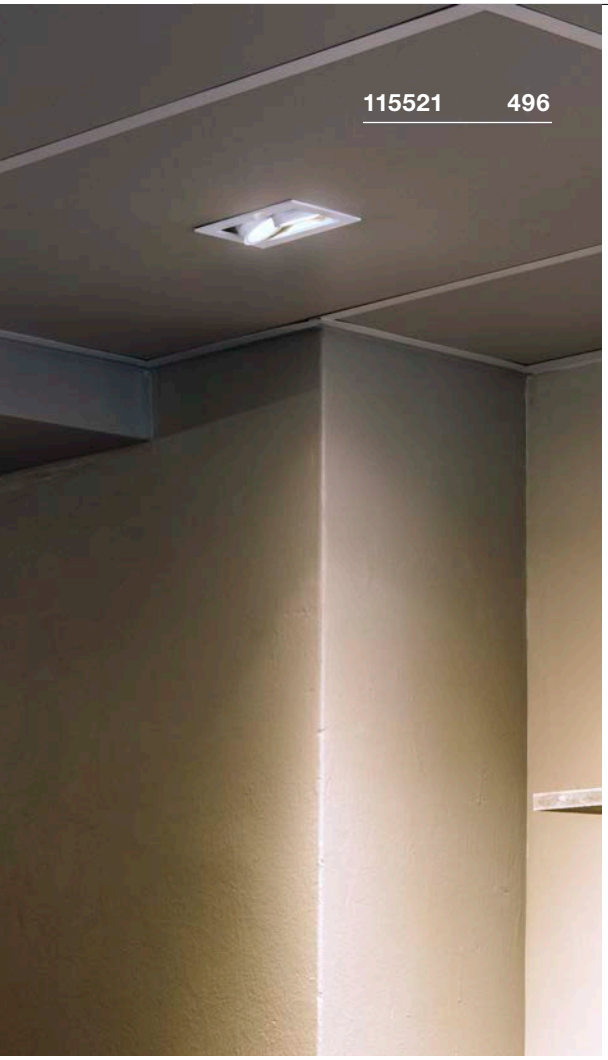



KADUX
EL, single, QPAR111

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Steel

1.1

Dimensioned drawing



Note
Material thickness, mounting surface: 25 mm max.

Recommended lamp
LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP

LED GU10 7W 13°
3000K 660lm EEI==A+
8kWh/1000h
Item no. 1001568 | 20,70 GBP

Lamp details
max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
matt black	115540	81,00
GU10 | QPAR111		
matt white	115541	81,00
GU10 | QPAR111		
matt aluminium	115546	85,50

KADUX
EL, double, QPAR111

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Steel

1.9

Dimensioned drawing



Note
Material thickness, mounting surface: 25 mm max.

Recommended lamp
GU10 9W 25°
2700-6500K 765lm EEI==A+
9kWh/1000h
Item no. 1001920 | 49,50 GBP

LED GU10 9W 40°
2700-6500K 765lm EEI==A+
9kWh/1000h
Item no. 1001921 | 49,50 GBP

Lamp details
2x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
matt black	115550	126,00
GU10 | QPAR111		
matt white	115551	126,00
GU10 | QPAR111		
matt aluminium	115556	135,00

KADUX
EL, single, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.5W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L

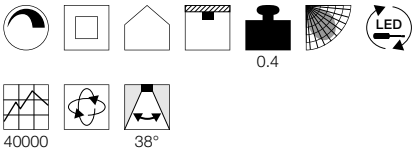

Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max.

Variant	Item no.	GBP
650lm | 3000K | CRI>80		
■ matt black	**115700**	**72,00**
650lm | 3000K | CRI>80		
□ matt white	**115701**	**72,00**
650lm | 3000K | CRI>80		
▨ matt aluminium	**115706**	**76,50**

KADUX
EL, double, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total consumption: 14W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L

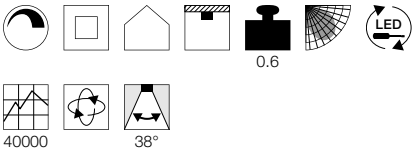

Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max.

Variant	Item no.	GBP
1290lm | 3000K | CRI>80		
■ matt black	**115710**	**135,00**
1290lm | 3000K | CRI>80		
□ matt white	**115711**	**135,00**
1290lm | 3000K | CRI>80		
▨ matt aluminium	**115716**	**153,00**

KADUX
EL, triple, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total consumption: 20W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L

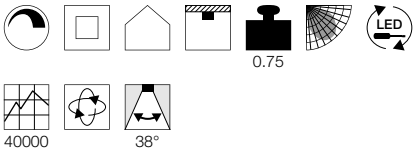


Dimensioned drawing




Note

Material thickness, mounting surface: 30 mm max.

Variant	Item no.	GBP
1920lm | 3000K | CRI>80		
■ matt black	**115720**	**180,00**
1920lm | 3000K | CRI>80		
□ matt white	**115721**	**180,00**
1920lm | 3000K | CRI>80		
▨ matt aluminium	**115726**	**188,10**

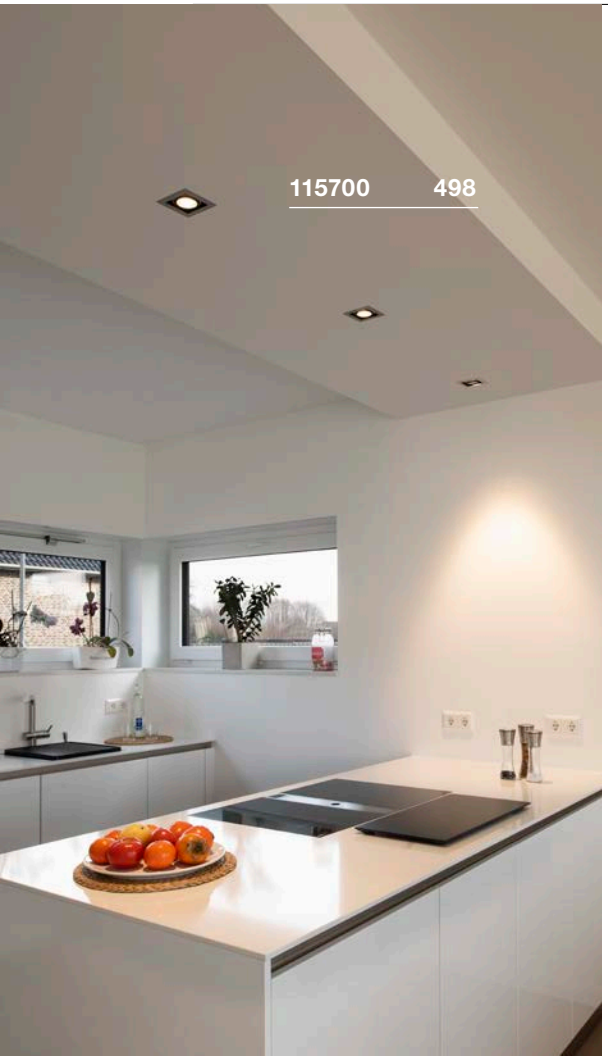

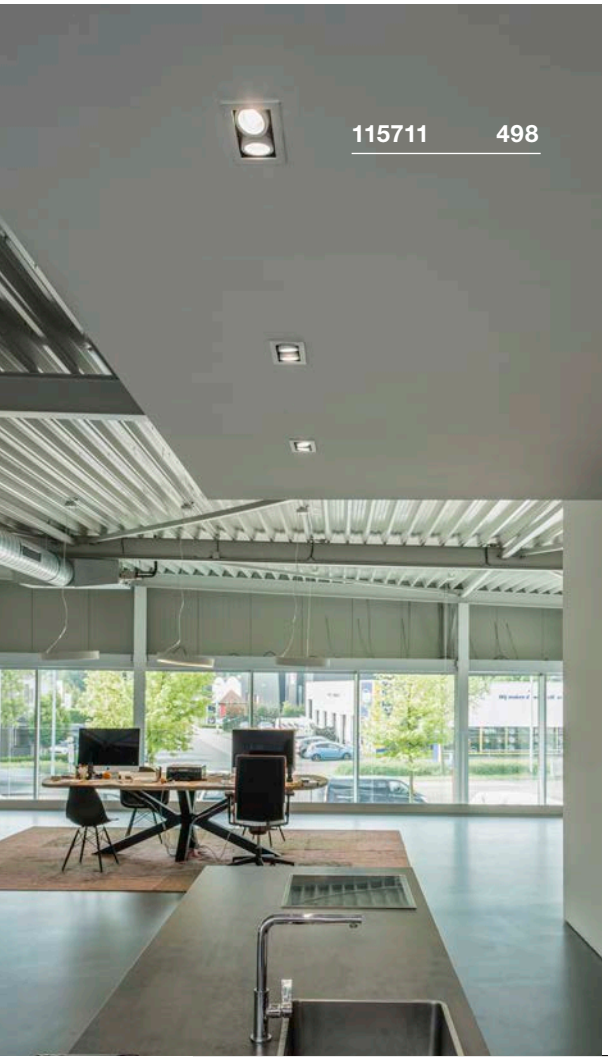

KADUX
EL, single, 1-10V

A-A++ Spectrum A++–E

LED INSIDE








Product details
100-240V ~50/60Hz | 700mA
Total consumption: 29W
Material: Aluminium / Steel
Dimmable: 1-10V





Dimensioned drawing



Note
Material thickness, mounting surface: 25 mm max.

Recommended accessories
1-10V dimming
Item no. 470505 |9,90 GBP


Variant	Item no.	GBP
2425lm | 3000K | CRI>80		
matt black	**115730**	**197,10**
2500lm | 3000K | CRI>80		
matt white	**115731**	**197,10**
2500lm | 3000K | CRI>80		
matt aluminium	**115736**	**215,10**

KADUX
EL, double, 1-10V

A-A++ Spectrum A++–E

LED INSIDE








Product details
100-240V ~50/60Hz | 1400mA
Total consumption: 54W
Material: Aluminium / Steel
Dimmable: 1-10V





Dimensioned drawing



Note
Material thickness, mounting surface: 25 mm max.

Recommended accessories
1-10V dimming
Item no. 470505 |9,90 GBP

Variant	Item no.	GBP
5200lm | 3000K | CRI>80		
matt black	**115740**	**341,10**
5300lm | 3000K | CRI>80		
matt white	**115741**	**341,10**
5300lm | 3000K | CRI>80		
matt aluminium	**115746**	**350,10**

AIXLIGHT® PRO 50
LED module

883

A-A++ Spectrum A⁺⁺–E

LED INSIDE


NEW VARIANT








Product details
350mA | 13.3W
Material: Aluminium / Glass

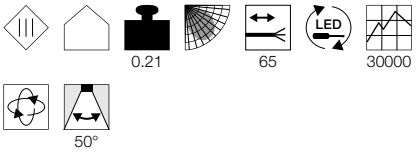

Dimensioned drawing



Note
Driver excl.
Open cable end

Variant	Item no.	GBP
1150lm | 3000K | CRI>80		
white / black	1002598	47,70
1150lm | 3000K | CRI>80		
grey / black	1002599	47,70
1185lm | 4000K | CRI>80		
white / black	1002600	47,70
1185lm | 4000K | CRI>80		
grey / black	1002601	47,70

AIXLIGHT® PRO 50
QPAR51 Module

883


E-A++ Spectrum A⁺⁺–E



Product details
230V ~50Hz
Material: Aluminium / Plastic



Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001566 | 9,90 GBP



LED GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP



Lamp details
max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
grey / black	115414	20,70

AIXLIGHT® PRO 50
1 FRAME

Steel
L: 10 cm W: 10 cm D: 10 cm
Weight: 0.33 kg
1 pc.



Variant	Item no.	GBP
grey / black	115304	14,90

AIXLIGHT® PRO 50
2 FRAME

Steel
L: 17.3 cm W: 10 cm D: 10 cm
Weight: 0.45 kg
1 pc.



Variant	Item no.	GBP
grey / black	115314	24,80

AIXLIGHT® PRO 50
1 FRAMELESS

Steel
L: 10.2 cm W: 10.2 cm D: 10.5 cm
Weight: 0.77 kg
1 pc.



Variant	Item no.	GBP
black	115351	72,00

AIXLIGHT® PRO 50
2 FRAMELESS

Steel
L: 18.8 cm W: 10.2 cm D: 10.5 cm
Weight: 1.09 kg
1 pc.



Variant	Item no.	GBP
black	115352	90,00














AIXLIGHT® PRO
EL, QPAR111 Module

883

E-A++ Spectrum A⁺⁺–E






Product details

230V ~50Hz
Material: Aluminium / Plastic



Dimensioned drawing



AIXLIGHT® PRO
1 FRAME

Steel
L: 17.5 cm W: 17.5 cm D: 19 cm
Weight: 1 kg
1 pc.



Variant	Item no.	GBP
grey / black	115104	45,00

AIXLIGHT® PRO
2 FRAMELESS

Steel
L: 31.5 cm W: 15.5 cm D: 18.5 cm
Weight: 3.5 kg
1 pc.



Variant	Item no.	GBP
black	115152	108,00

AIXLIGHT® PRO
2 FRAME

Steel
L: 31.5 cm W: 17.5 cm D: 19 cm
Weight: 1.45 kg
1 pc.



Variant	Item no.	GBP
grey / black	115114	54,00

AIXLIGHT® PRO
1 FRAMELESS


Steel / Steel
Ø: 15.5 cm D: 12 cm
Weight: 0.78 kg
1 pc.



Variant	Item no.	GBP
black	115624	81,00

AIXLIGHT® PRO
1 FRAMELESS

Steel
L: 15.5 cm W: 15.5 cm D: 18.5 cm
Weight: 2.15 kg
1 pc.



Variant	Item no.	GBP
black	115151	81,00

AIXLIGHT® PRO
2 FRAMELESS

Steel / Steel
L: 32.5 cm W: 15.5 cm D: 12 cm
Weight: 1.72 kg
1 pc.



Variant	Item no.	GBP
black	115634	126,00

Recommended accessories

Trim panel
Item no. 115600 | 16,20 GBP

Structured glass
Item no. 115170 | 11,70 GBP



Recommended lamp

LED GU10 13W 140°
4000K 1100lm EEl=A+
13kWh/1000h
Item no. 1001245 | 76,50 GBP



LED GU10 9W 40°
2700-6500K 765lm EEl==A+
9kWh/1000h
Item no. 1001921 | 49,50 GBP



Lamp details

max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
matt white	115011	31,50
GU10 | QPAR111		
grey / black	115014	31,50


AIXLIGHT® PRO
EL, COB LED module

883

A-A++ Spectrum A++–E

LED INSIDE






















115203
115233



115213
115243




115223
115253

Product details

700mA/1000mA/1050mA | 39W
Material: Aluminium / Glass



Dimensioned drawing



Note

Different voltages possible. 700mA, 25W, 2400lm – 1000/1050mA, 39W, 32000lm.
In our Smart Home Solutions chapter, you will find different VALETO® accessories to suit your choice of transformer.

Recommended accessories

■ LED driver 700mA | 40W incl. strain relief
Item no. 464168 | 40,50 GBP



□ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP



□ LED driver 1050mA | 40W Triac trailing edge dimmable
Item no. 464804 | 45,00 GBP



■ LED driver 1000mA | 40W incl. strain relief
Item no. 464170 | 40,50 GBP




□ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP



□ Trim panel
Item no. 115600 | 16,20 GBP

Variant	Item no.	GBP
2700/3500lm | 3000K | CRI>80 | 30°		
□ matt white	115183	153,00
2700/3500lm | 3000K | CRI>80 | 30°		
◪ grey / black	115193	153,00

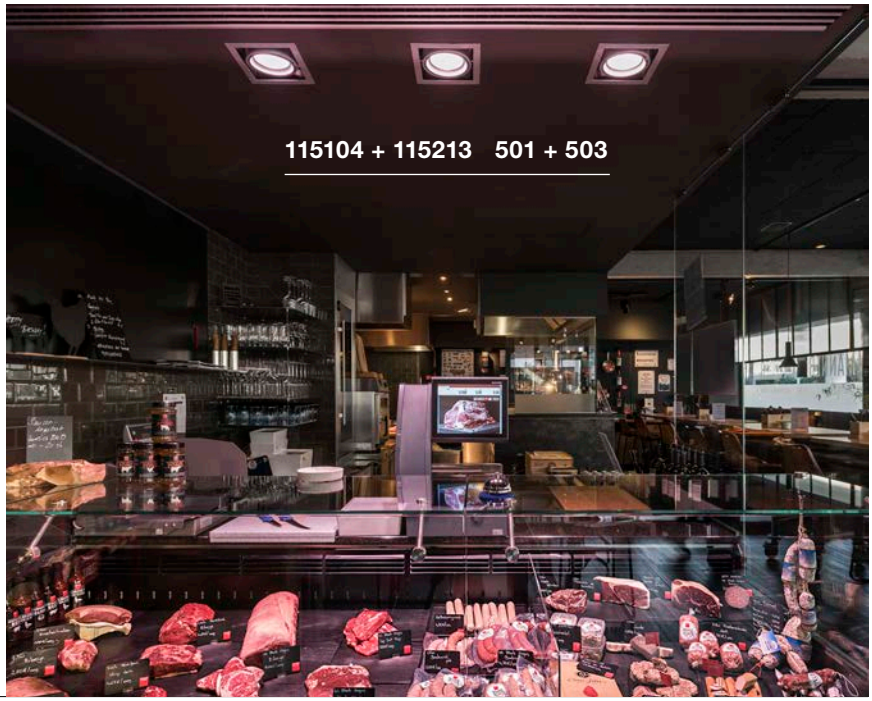

AIXLIGHT® PRO
EL, COB LED module

883

A-A++ Spectrum A⁺⁺–E

LED INSIDE






- Premium LED with CRI>90
- Lighting for fresh produce and clothing

Product details

700mA | 26W
Material: Aluminium / Glass



Dimensioned drawing



Note

In our Smart Home Solutions chapter, you will find different VALETO® accessories to suit your choice of transformer.

Recommended accessories

■ LED driver 700mA | 40W incl. strain relief
Item no. 464168 | 40,50 GBP



□ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP



□ Trim panel
Item no. 115600 | 16,20 GBP

Variant	Item no.	GBP
1950lm | 4200K | CRI>90 | 30°		
white / black	**115203**	**153,00**
1950lm | 4200K | CRI>90 | 30°		
grey / black	**115233**	**153,00**


AIXLIGHT® PRO
EL, COB LED module

883

A-A++ Spectrum A⁺⁺–E

LED INSIDE






- Lighting for meat products

Product details

700mA | 26W
Material: Aluminium / Glass



Dimensioned drawing



Note

This product is not suitable for general room lighting, since it is a specialised product for illuminating meat.
In our Smart Home Solutions chapter, you will find different VALETO® accessories to suit your choice of transformer.
Colour coordinates: X=0.3759 Y=0.3287

Recommended accessories

■ LED driver 700mA | 40W incl. strain relief
Item no. 464168 | 40,50 GBP



□ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP



□ Trim panel
Item no. 115600 | 16,20 GBP

Variant	Item no.	GBP
1300lm | 3600K | CRI>65 | 30°		
white / black	**115213**	**153,00**
1300lm | 3600K | CRI>65 | 30°		
grey / black	**115243**	**153,00**

AIXLIGHT® PRO
EL, COB LED module

883

A-A++ Spectrum A⁺⁺–E

LED INSIDE






- Premium LED with CRI>90
- Lighting for baked goods

Product details

700mA | 26W
Material: Aluminium / Glass



Dimensioned drawing



Note

In our Smart Home Solutions chapter, you will find different VALETO® accessories to suit your choice of transformer.

Recommended accessories

■ LED driver 700mA | 40W incl. strain relief
Item no. 464168 | 40,50 GBP



□ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP



□ Trim panel
Item no. 115600 | 16,20 GBP

Variant	Item no.	GBP
1650lm | 3200K | CRI>90 | 30°		
white / black	**115223**	**153,00**
1650lm | 3200K | CRI>90 | 30°		
grey / black	**115253**	**153,00**

SUPROS 78
EL, TRIAC

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE












Product details

220-240V ~50/60Hz | 250mA
Total consumption: 12W
Material: Aluminium
Dimmable: Triac C, Triac L





Dimensioned drawing



Note


Material thickness, mounting surface: 25 mm max.


Recommended accessories

Lens, 20°
Item no. 116302 | 3,00 GBP

Lens, 40°
Item no. 116304 | 3,00 GBP

Variant	Item no.	GBP
700lm | 3000K | CRI>80 ■ black	**116310**	**90,00**
700lm | 3000K | CRI>80 □ white	**116311**	**90,00**

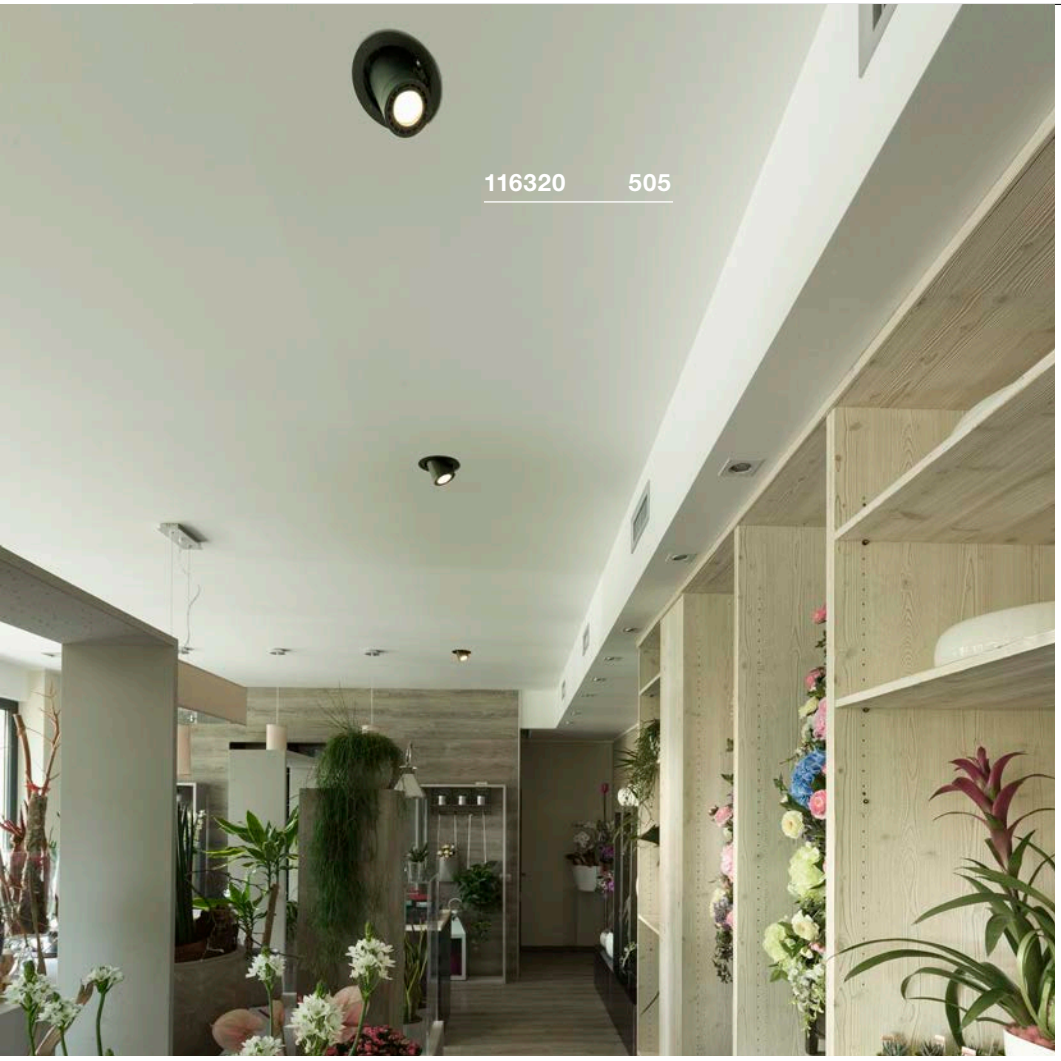

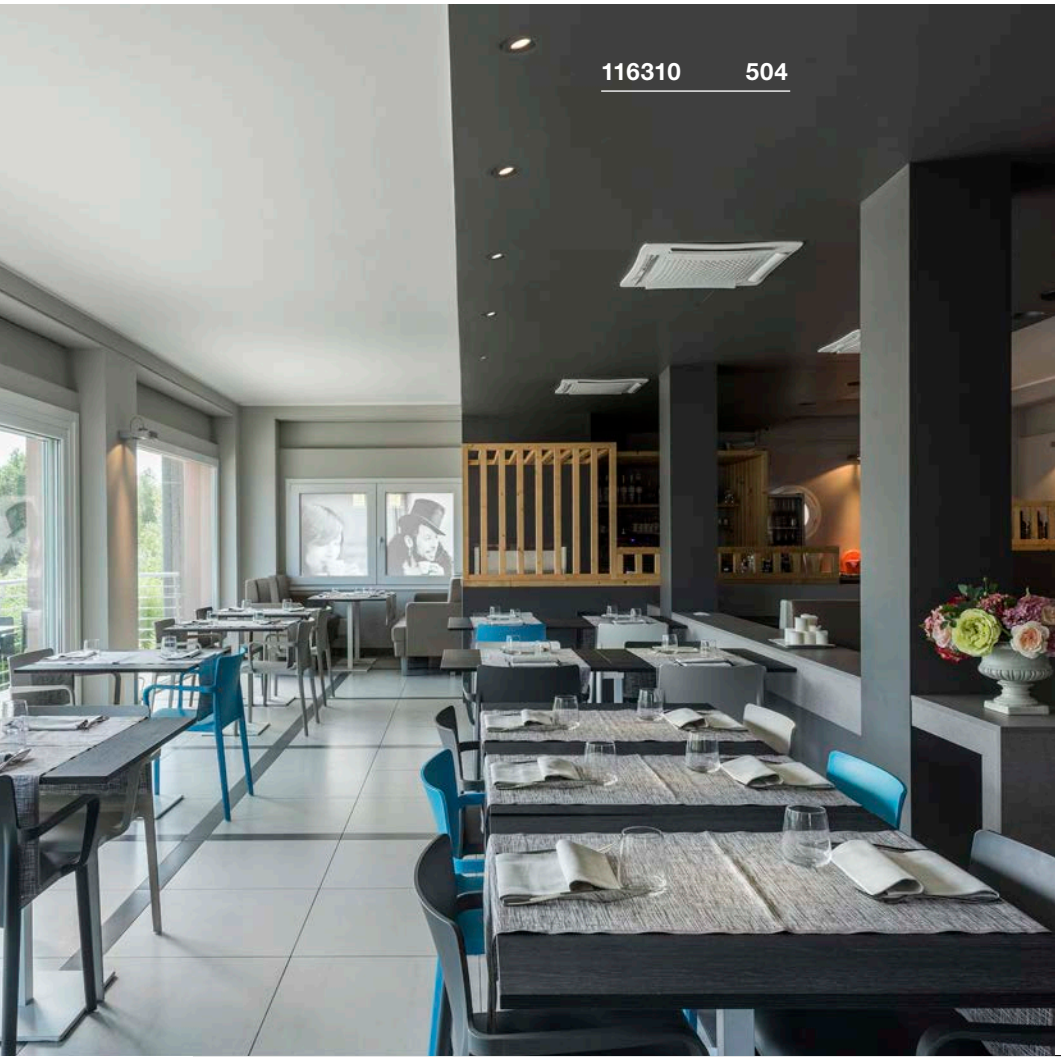

SUPROS 78
EL, Move, TRIAC

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

220-240V ~50/60Hz | 250mA
Total consumption: 12W
Material: Aluminium
Dimmable: Triac C, Triac L

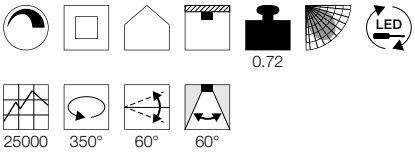

Dimensioned drawing



Note

Material thickness, mounting surface: 25 mm max.

Recommended accessories

Lens, 20°
Item no. 116302 | 3,00 GBP

Lens, 40°
Item no. 116304 | 3,00 GBP

Variant	Item no.	GBP
700lm | 3000K | CRI>80 ■ black	**116320**	**117,00**
700lm | 3000K | CRI>80 □ white	**116321**	**117,00**

SUPROS
EL

897

A-A++ Spectrum A++–E

LED INSIDE











Product details

220-240V ~50/60Hz | 950mA
Material: Aluminium / Glass

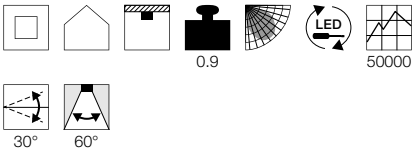

Dimensioned drawing



Note

Material thickness, mounting surface: 25 mm max.

Recommended accessories


Reflector 20°
Item no. 114102 |9,50 GBP



Reflector 40°
Item no. 114104 |9,50 GBP



Variant	Item no.	GBP
2600lm | 3000K | CRI>80 | 31W		
■ black	**114110**	**184,50**
2600lm | 3000K | CRI>80 | 31W		
□ white	**114111**	**184,50**
3100lm | 3000K | CRI>80 | 36W		
■ black	**118110**	**193,50**
3100lm | 3000K | CRI>80 | 36W		
□ white / transparent	**118111**	**193,50**
2850lm | 4000K | CRI>80 | 31W		
■ black	**114160**	**184,50**
2850lm | 4000K | CRI>80 | 31W		
□ white / transparent	**114161**	**184,50**
3300lm | 4000K | CRI>80 | 36W		
■ black	**118160**	**193,50**
3300lm | 4000K | CRI>80 | 36W		
□ white / transparent	**118161**	**193,50**

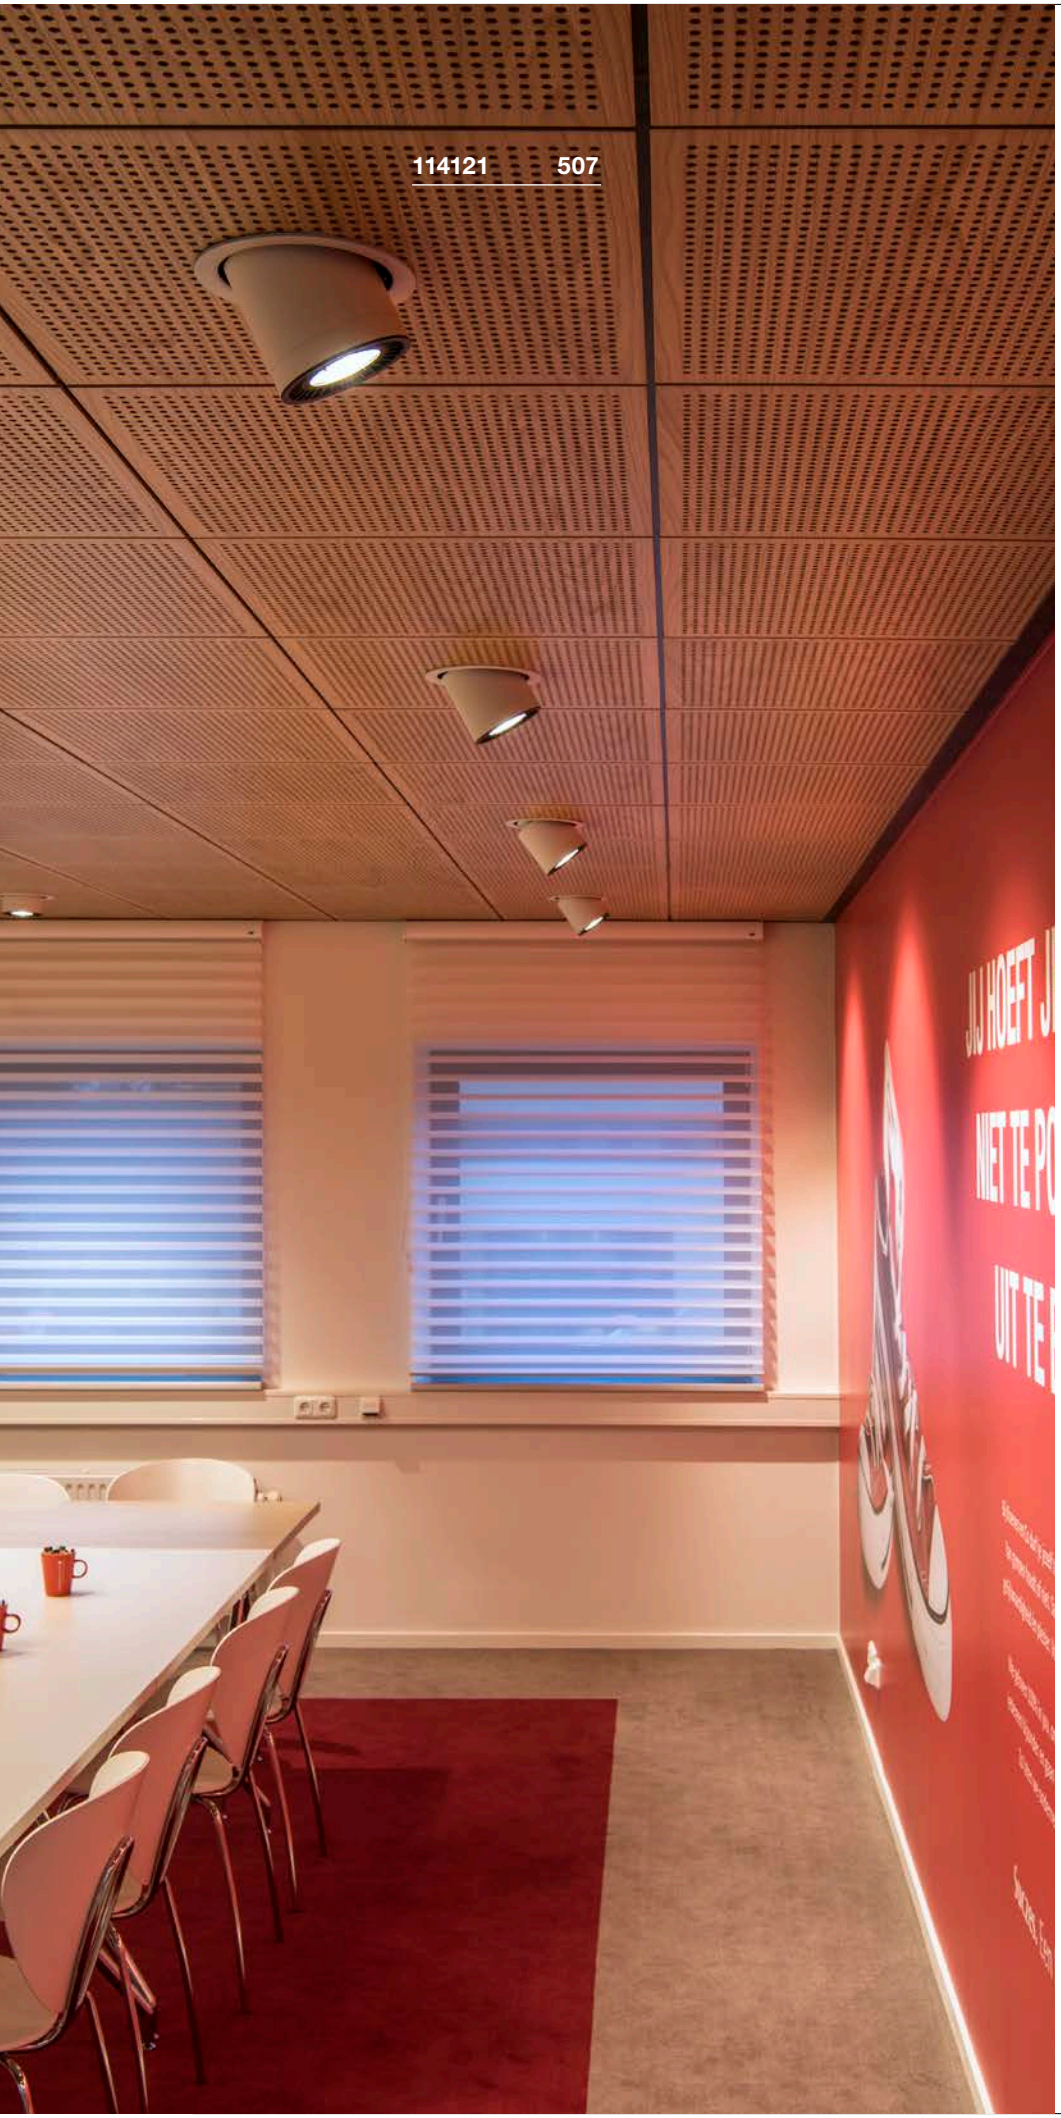

SUPROS
EL, Move

897

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

220-240V ~50/60Hz | 950mA
Material: Aluminium / Glass

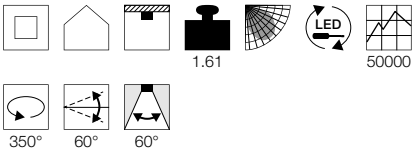

Dimensioned drawing



Note

Material thickness, mounting surface: 25 mm

Recommended accessories

Reflector 20°
Item no. 114102 | 9,50 GBP



Reflector 40°
Item no. 114104 | 9,50 GBP



Variant	Item no.	GBP
2600lm | 3000K | CRI>80 | 31W ■ black	**114120**	**220,50**
2600lm | 3000K | CRI>80 | 31W □ white	**114121**	**220,50**
3100lm | 3000K | CRI>80 | 36W ■ black	**118120**	**229,50**
3100lm | 3000K | CRI>80 | 36W □ white / transparent	**118121**	**229,50**
2850lm | 4000K | CRI>80 | 31W ■ black	**114170**	**220,50**
2850lm | 4000K | CRI>80 | 31W □ white / transparent	**114171**	**220,50**
3300lm | 4000K | CRI>80 | 36W ■ black	**118170**	**229,50**
3300lm | 4000K | CRI>80 | 36W □ white / transparent	**118171**	**229,50**

GIMBLE IN 68
EL

A-A++ Spectrum A++–E

LED INSIDE


NEW






- Premium LED with CRI>90
- Rotating and tilting light outlet

Product details
350mA | 6W
Material: Aluminium

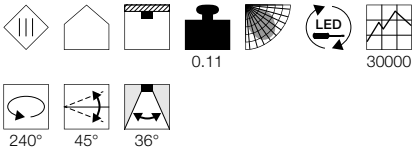

Dimensioned drawing



Note
Material thickness, mounting surface: 20 mm

Recommended accessories
LED driver 350mA | 10W
Item no. 464140 | 29,70 GBP



Variant	Item no.	GBP
520lm | 3000K | CRI>90		
matt white	1002879	49,50
560lm | 4000K | CRI>90		
matt white	1002885	49,50

GIMBLE IN 100
EL

A-A++ Spectrum A++–E

LED INSIDE


NEW






- Premium LED with CRI>90
- Rotating and tilting light outlet

Product details
350mA | 13W
Material: Aluminium

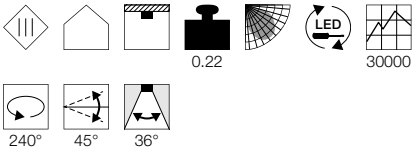

Dimensioned drawing



Note
Material thickness, mounting surface: 25 mm

Recommended accessories
LED driver 350mA | 15W
Item no. 464031 | 36,00 GBP



Variant	Item no.	GBP
990lm | 3000K | CRI>90		
matt white	1002880	63,00
1140lm | 4000K | CRI>90		
matt white	1002886	63,00

GIMBLE IN 150
EL

A-A++ Spectrum A++–E

LED INSIDE


NEW






- Premium LED with CRI>90
- Rotating and tilting light outlet

Product details
700mA | 25.5W
Material: Aluminium

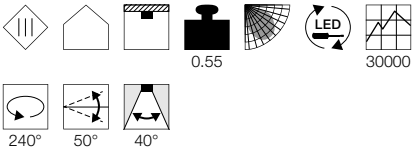

Dimensioned drawing



Note
Material thickness, mounting surface: 30 mm

Recommended accessories
LED driver 40W | 700mA | 1-10V/ DALI dimmable, incl. strain relief
Item no. 1002424 | 72,00 GBP



Variant	Item no.	GBP
2300lm | 3000K | CRI>90		
matt white	1002888	121,50
2490lm | 4000K | CRI>90		
matt white	1002889	121,50

GIMBLE IN 175
EL

A-A++ Spectrum A++–E

LED INSIDE

NEW









- Premium LED with CRI>90
- Rotating and tilting light outlet

Product details

1000mA/1050mA | 38W
Material: Aluminium

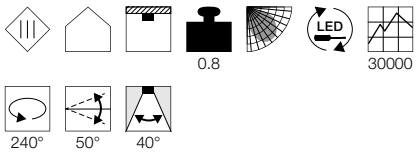

Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm

Recommended accessories

LED driver 1000mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001115 | 67,50 GBP



LED driver 50W | 1050mA | 1-10V/ DALI dimmable, incl. strain relief
Item no. 1002425 | 76,50 GBP



Variant	Item no.	GBP
3340lm | 3000K | CRI>90		
matt white	**1002881**	**139,50**
3550lm | 4000K | CRI>90		
matt white	**1002887**	**139,50**




SENSER 12
EL, round

895


A-A++ Spectrum A⁺⁺–E

- Shallow installation depth

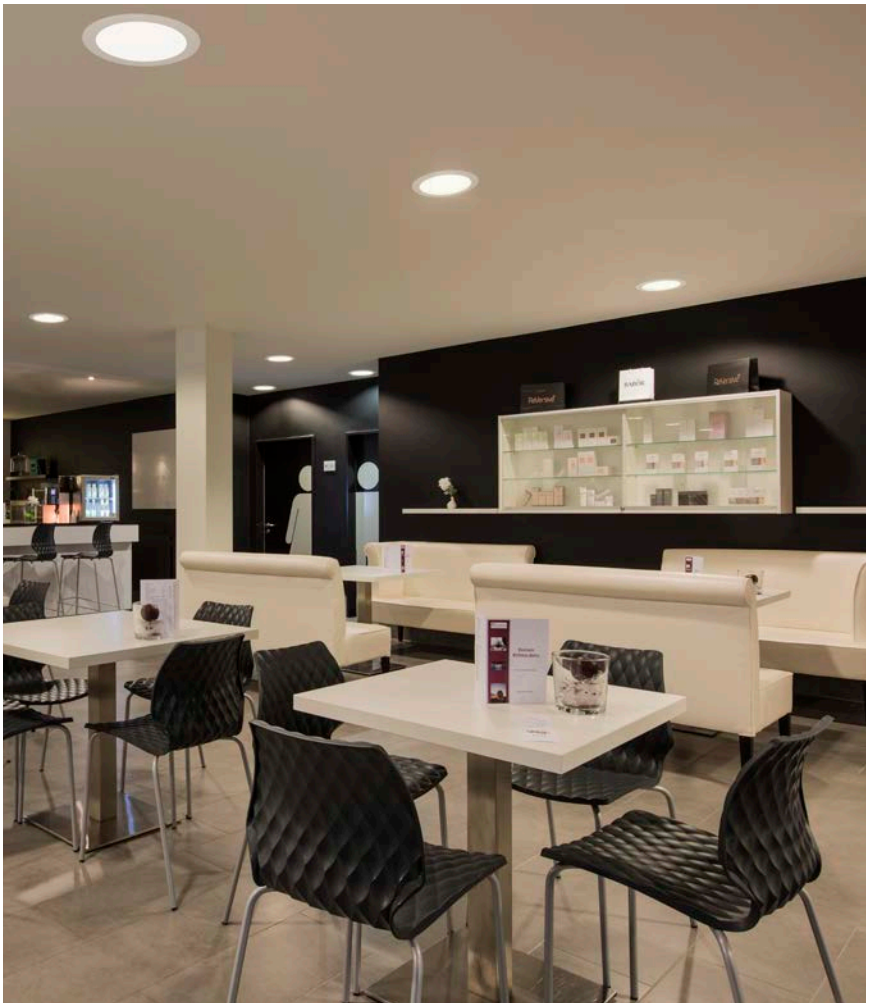

Product details

Material: Aluminium

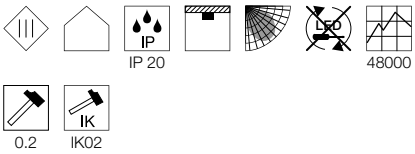

SENSER 12
EL, round

NEW VARIANT



Variant	Item no.	GBP
470lm | 3000K | CRI>80 | 200mA | 6W Ø: 11.5 cm | H: 2 cm | 0.1 kg		
matt white	1003008	19,80

SENSER 18
EL, round

NEW VARIANT



Variant	Item no.	GBP
950lm | 3000K | CRI>80 | 350mA | 9.7W Ø: 16.5 cm | H: 2 cm | 0.18 kg		
matt white	1003009	24,30

SENSER 24
EL, round

NEW VARIANT


Variant	Item no.	GBP
1200lm | 3000K | CRI>80 | 500mA | 12.5W Ø: 21.5 cm | H: 2 cm | 0.29 kg		
matt white	1003010	34,60

SENSER 12
EL, square

895

A-A++ Spectrum A⁺⁺–E

- Shallow installation depth

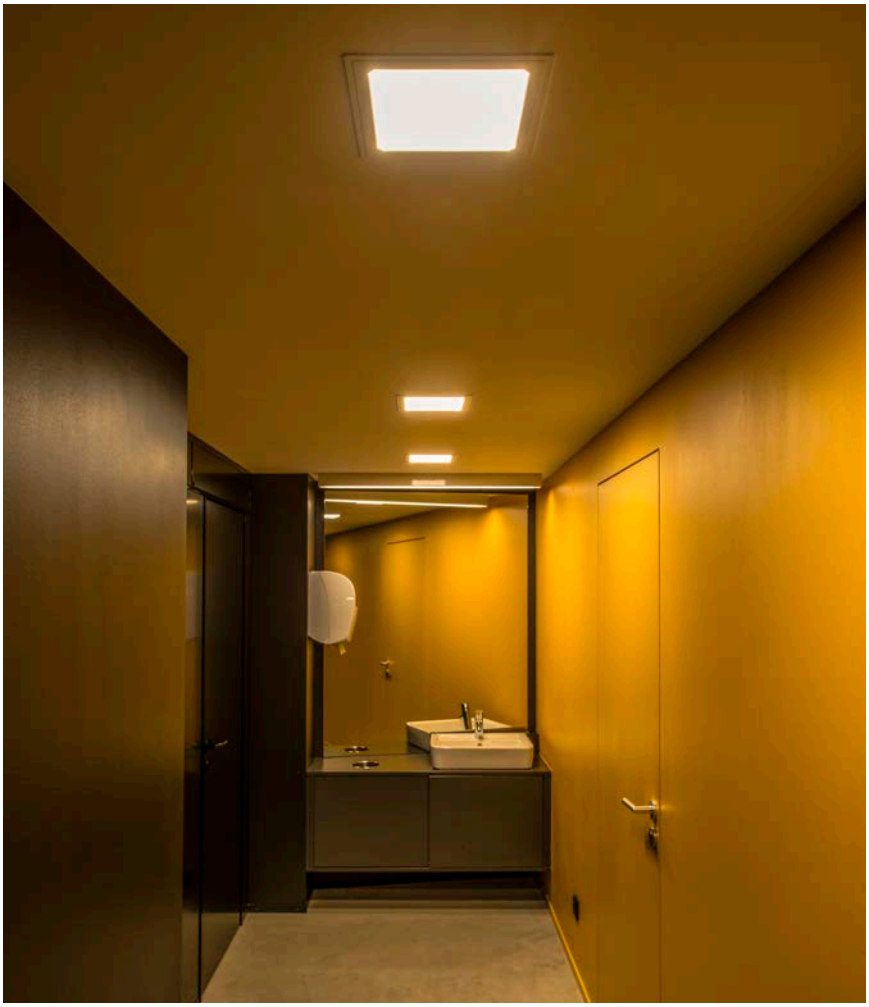


Product details

Material: Aluminium

IP 20 | 48000 | 0.2 | IK02

SENSER 12
EL, square



Variant	Item no.	GBP
440lm | 3000K | CRI>80 | 200mA | 6W L: 11.5 cm | W: 11.5 cm | H: 2 cm | 0.12 kg		
matt white	1003011	19,80

SENSER 18
EL, square



Variant	Item no.	GBP
820lm | 3000K | CRI>80 | 350mA | 9.7W L: 16.5 cm | W: 16.5 cm | H: 2 cm | 0.22 kg		
matt white	1003012	24,30

SENSER 24
EL, square

Variant	Item no.	GBP
1200lm | 3000K | CRI>80 | 500mA | 12.5W L: 21.5 cm | W: 21.5 cm | H: 2 cm | 0.36 kg		
matt white	1003013	34,60

VERLUX
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium / Plastic
Dimmable: Triac C, Triac L




0.15



35000 80° 0.2 IK02


Dimensioned drawing




Note

Material thickness, mounting surface: 30 mm max.
Can be integrated in the VALETO® with VALETO® Switch Box 420012.

Variant	Item no.	GBP
880lm | 3000K | CRI>80 matt white	**112682**	**67,50**

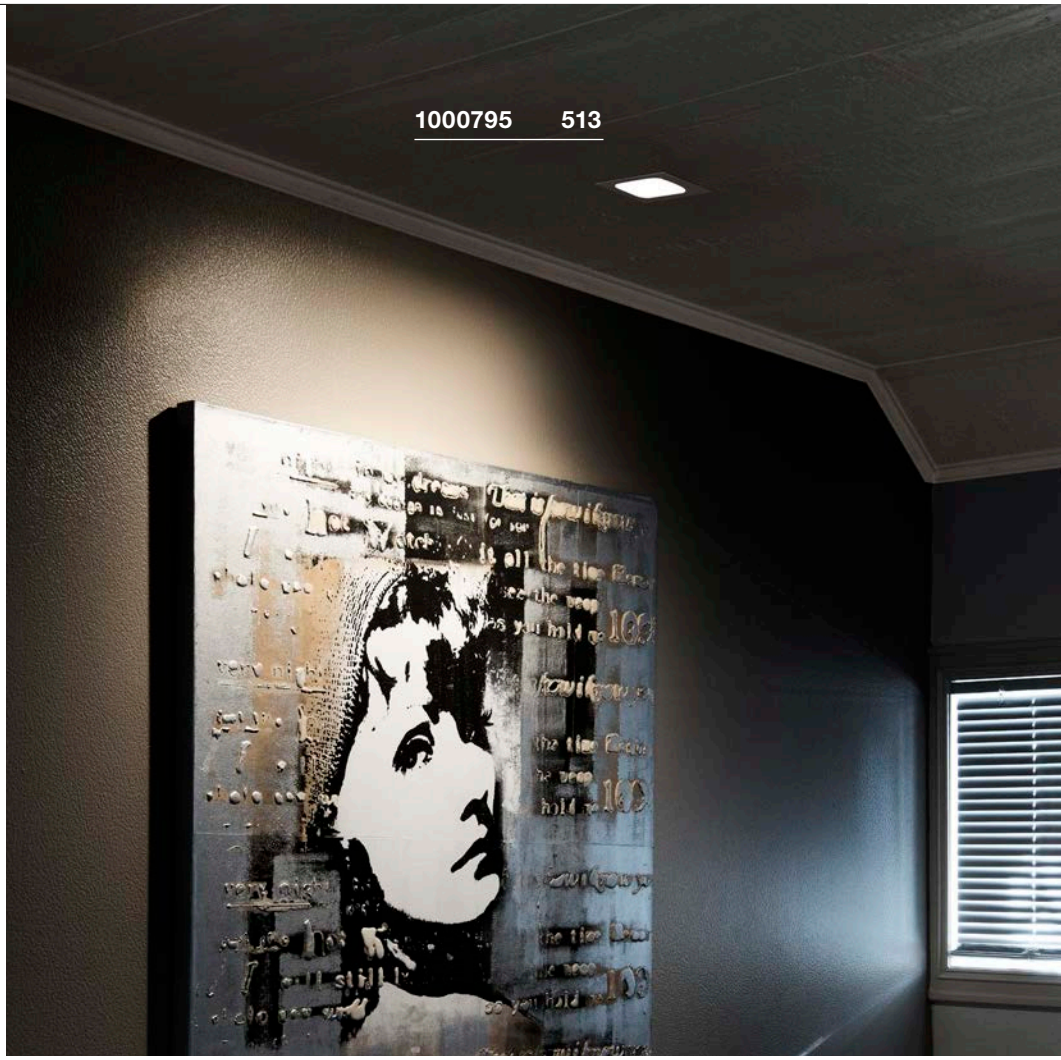

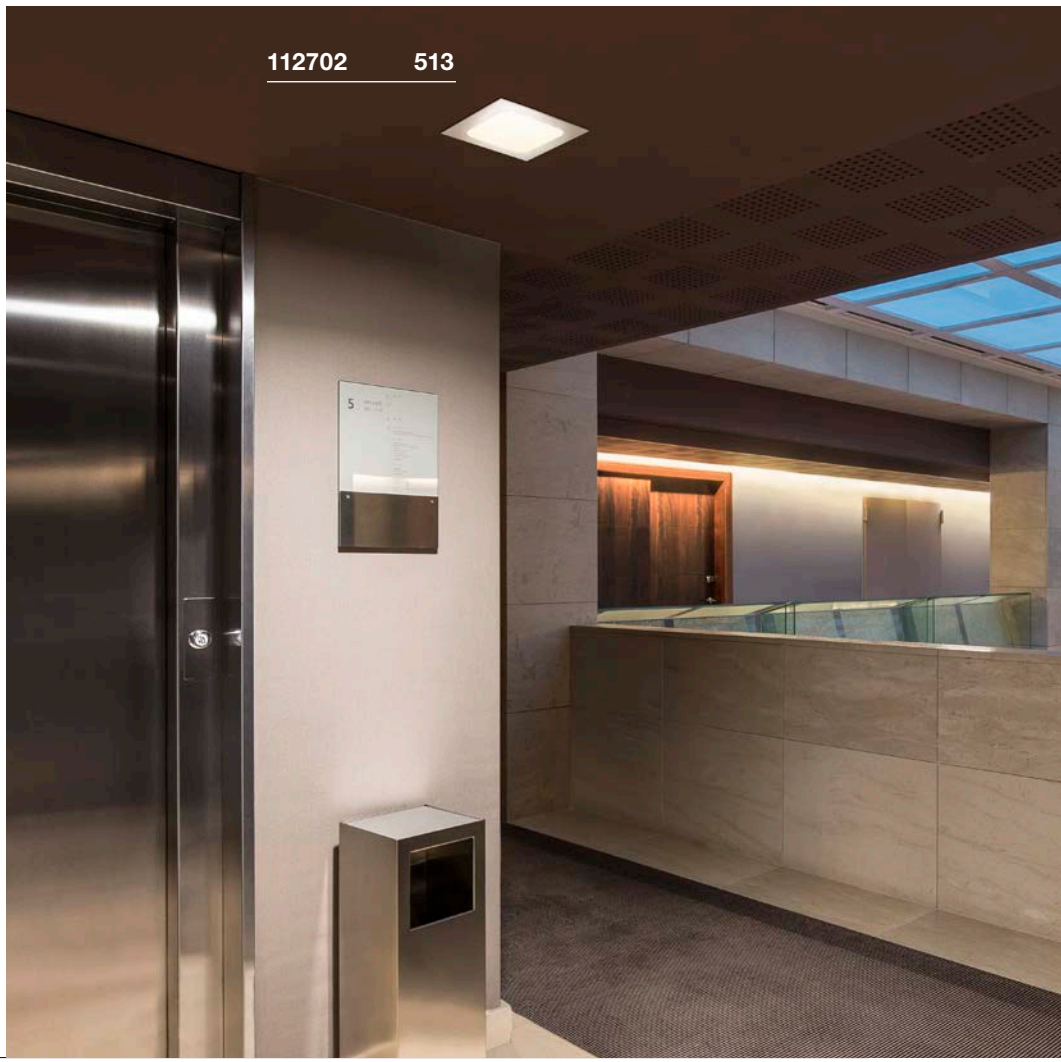

VERLUX
EL, square, TRIAC

A-A++ Spectrum A++–E


LED INSIDE






Product details

220-240V ~50/60Hz | 500mA
Total consumption: 22W
Material: Aluminium / Plastic
Dimmable: Triac C, Triac L

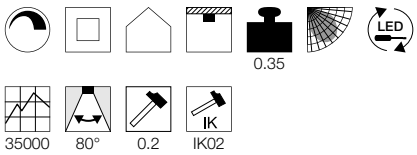

Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max. Can be integrated in the VALETO® with VALETO® Switch Box 420012.

Variant	Item no.	GBP
1800lm | 3000K | CRI>80		
matt white	**112692**	**99,00**

VERLUX
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 700mA
Total consumption: 31W
Material: Aluminium / Plastic
Dimmable: Triac C, Triac L

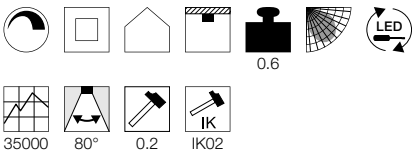

Dimensioned drawing



Note

Material thickness, mounting surface: 30 mm max. Can be integrated in the VALETO® with VALETO® Switch Box 420012.

Variant	Item no.	GBP
2360lm | 3000K | CRI>80		
matt white	**112702**	**126,00**

VERLUX
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE







- Asymmetrical light emission

Product details

220-240V ~50/60Hz | 350mA
Material: Aluminium / Plastic
Dimmable: Triac C, Triac L

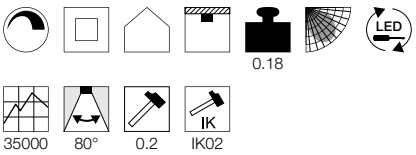

Dimensioned drawing

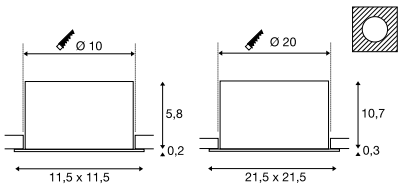

Note

Material thickness, mounting surface: 25 mm max.

Variant	Item no.	GBP
650lm | 3000K | CRI>80 | 8,6W		
L: 11.5 cm | W: 11.5 cm | H: 6 cm		
white	**1000795**	**81,00**
1370lm | 3000K | CRI>80 | 16W		
L: 21.5 cm | W: 21.5 cm | H:11 cm		
white	**1000796**	**99,00**

RILO
EL

A-A++ Spectrum A⁺⁺–E

LED INSIDE







- Premium LED with CRI>90
- Colour temperature (3000K/4000K) selectable using switch
- UGR<19


Product details

220-240V ~50/60Hz
Material: Aluminium / Polycarbonate (PC)






Dimensioned drawing

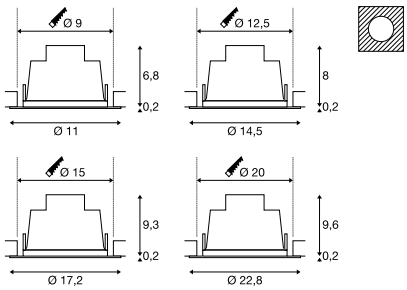


Note

Colour temperature can be adjusted during installation via a switch attached to the luminaire.
Material thickness, mounting surface: 35 mm

Variant	Item no.	GBP
350/400lm | 3000/4000K | CRI>90		
6W | diam.: 11 cm | 0.16 kg		
white / chrome	**1001973**	**49,50**
800/850lm | 3000/4000K | CRI>90		
13W | diam.: 14.5 cm | 0.26 kg		
white / chrome	**1001974**	**67,50**
1200/1300lm | 3000/4000K | CRI>90		
18W | diam.: 17.2 cm | 0.36 kg		
white / chrome	**1001975**	**90,00**
1550/1600lm | 3000/4000K | CRI>90		
21W | diam.: 22.8 cm | 0.56 kg		
white / chrome	**1001976**	**108,00**

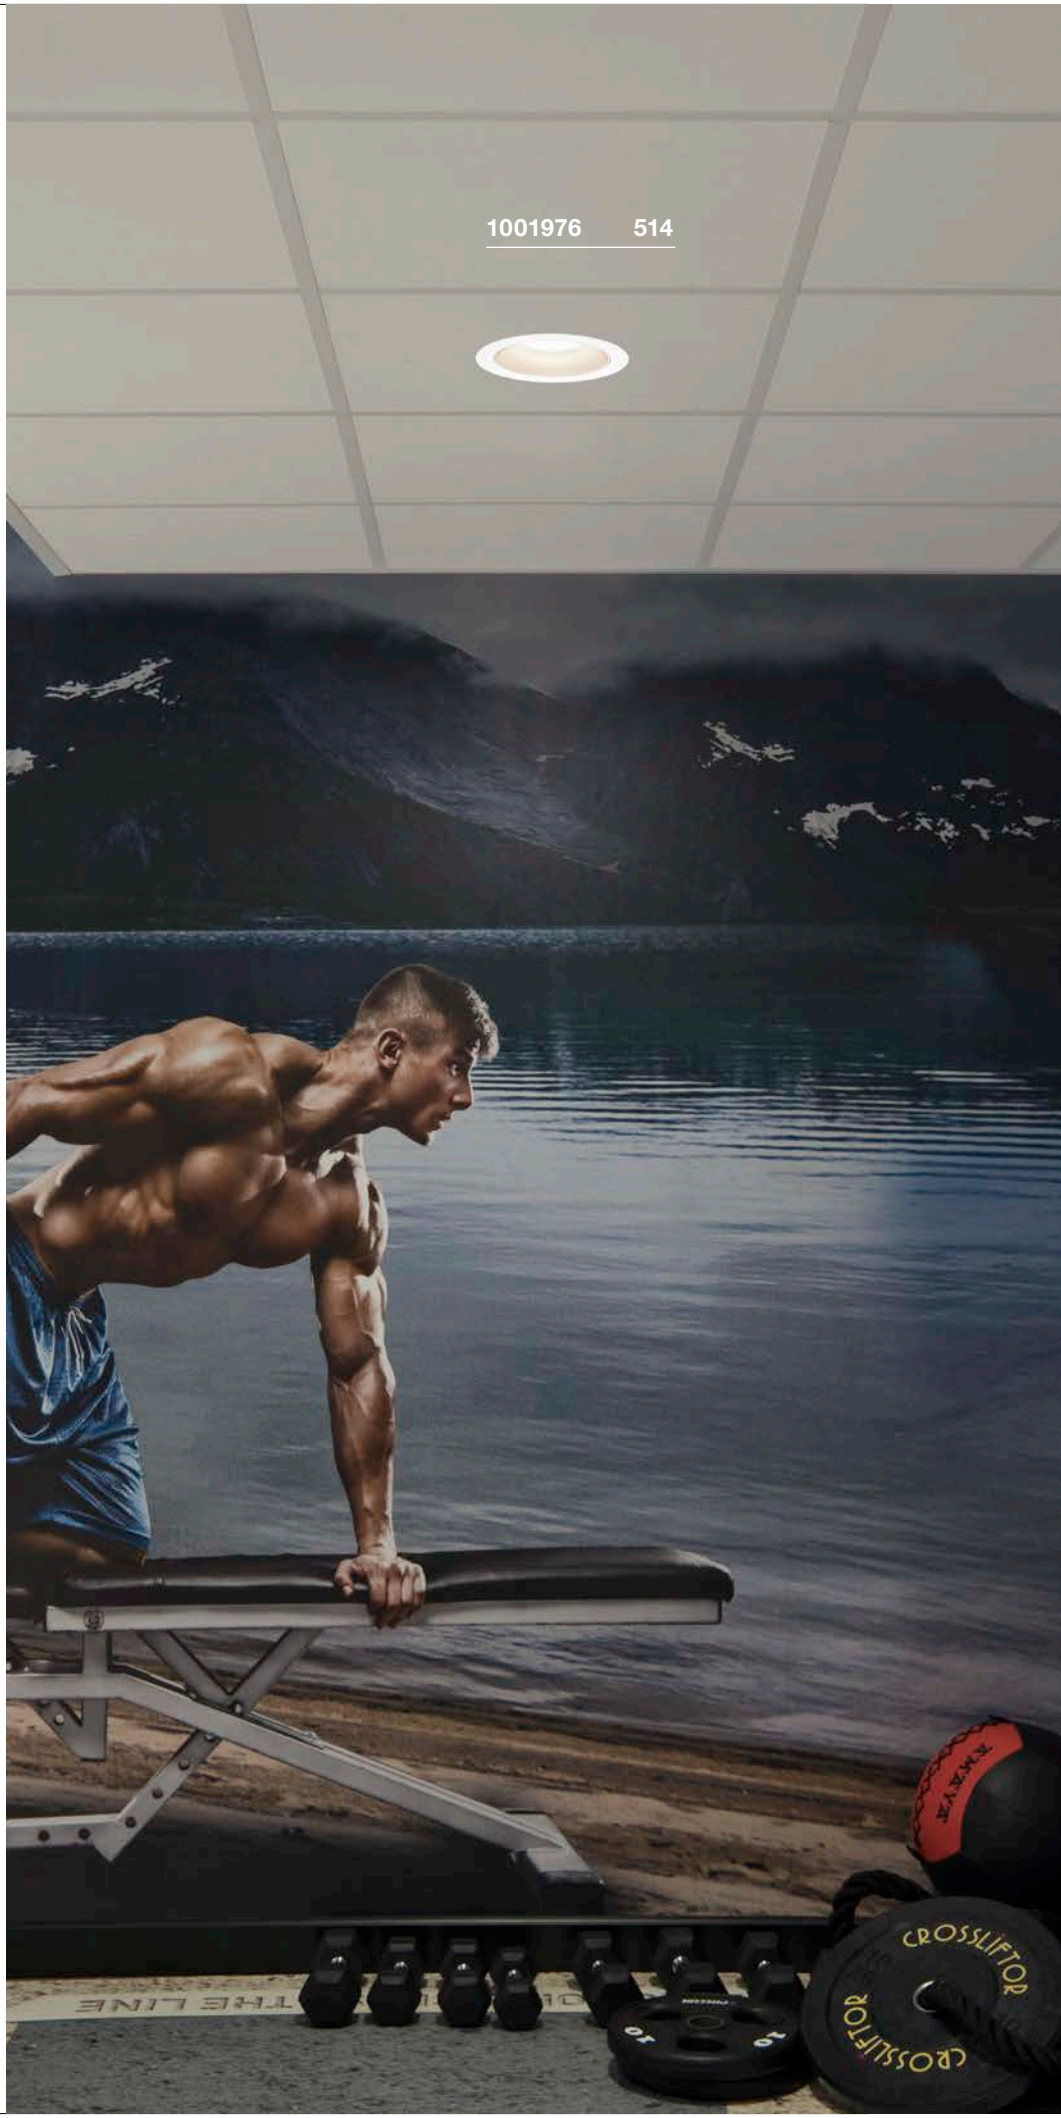

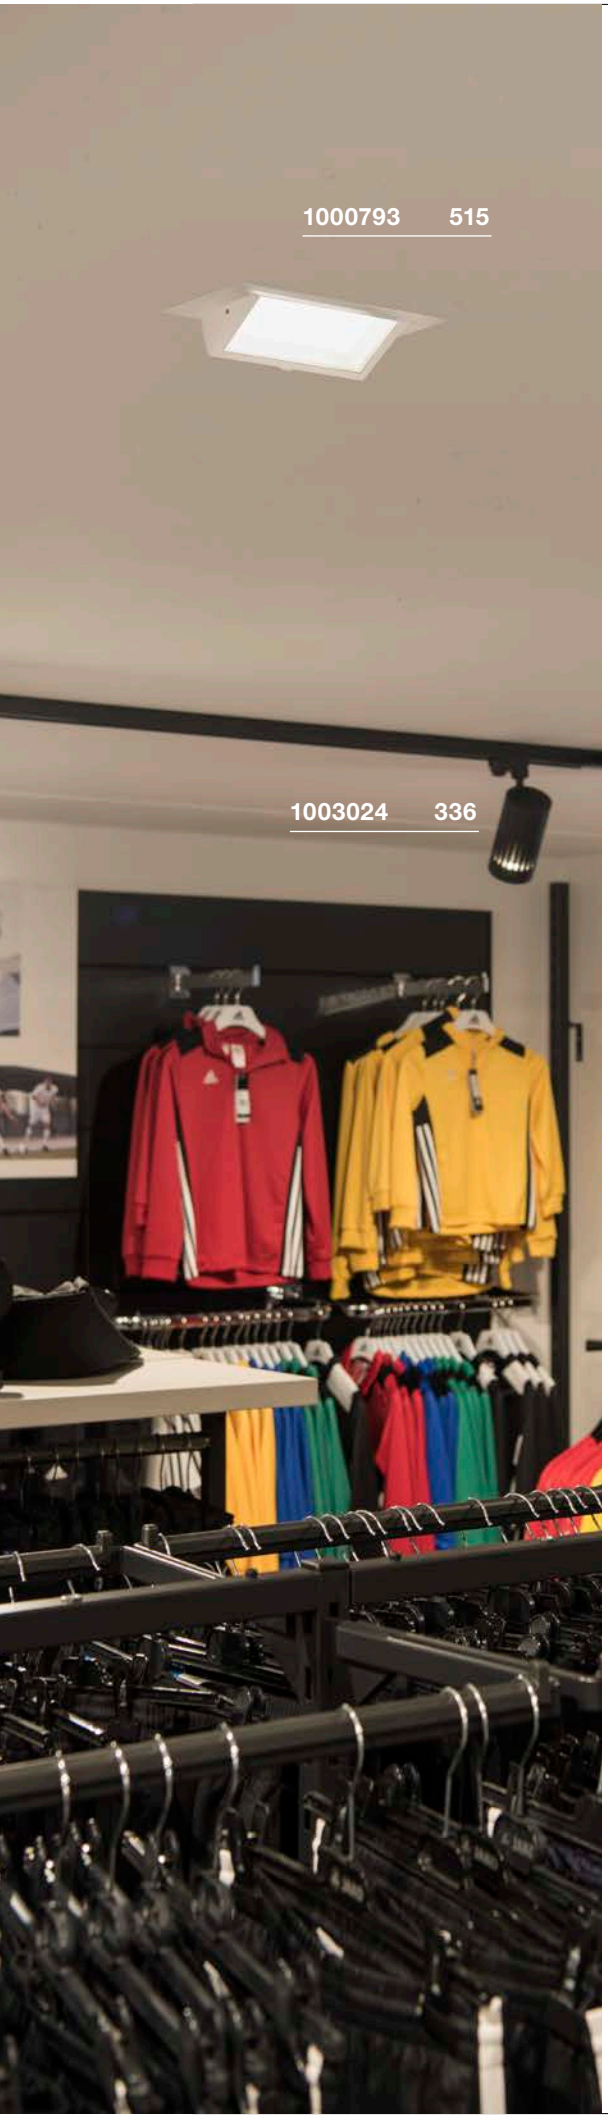

ALAMEA
EL

A-A++ Spectrum A++–E

LED INSIDE







- Premium LED with CRI>90
- Extensive tilting range


Product details

Material: Aluminium/Glass





Dimensioned drawing



Note

Material thickness, mounting surface: 40 mm max.

Recommended accessories

■ LED driver 1000mA | 40W incl. strain relief
Item no. 464170 | 40,50 GBP



□ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP



□ LED driver 1000mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001115 | 67,50 GBP



Variant	Item no.	GBP
2900lm | 700mA | 29.4W | 3000K | CRI>90		
□ white	**1000791**	**117,00**
3600lm | 1000mA | 36W | 3000K | CRI>90		
□ white	**1000792**	**135,00**

ALAMEA
EL

A-A++ Spectrum A++–E

LED INSIDE







- Premium LED with CRI>90
- Extensive tilting range


Product details

Material: Aluminium/Glass





Dimensioned drawing



Note

Material thickness, mounting surface: 40 mm max.

Recommended accessories

■ LED driver 700mA | 40W incl. strain relief
Item no. 464168 | 40,50 GBP




□ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP




□ LED driver 700mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001114 | 67,50 GBP



Variant	Item no.	GBP
2750lm | 700mA | 29.4W | 4000K | CRI>90		
□ white	**1000793**	**117,00**
3800lm | 1000mA | 36W | 4000K | CRI>90		
□ white	**1000794**	**135,00**

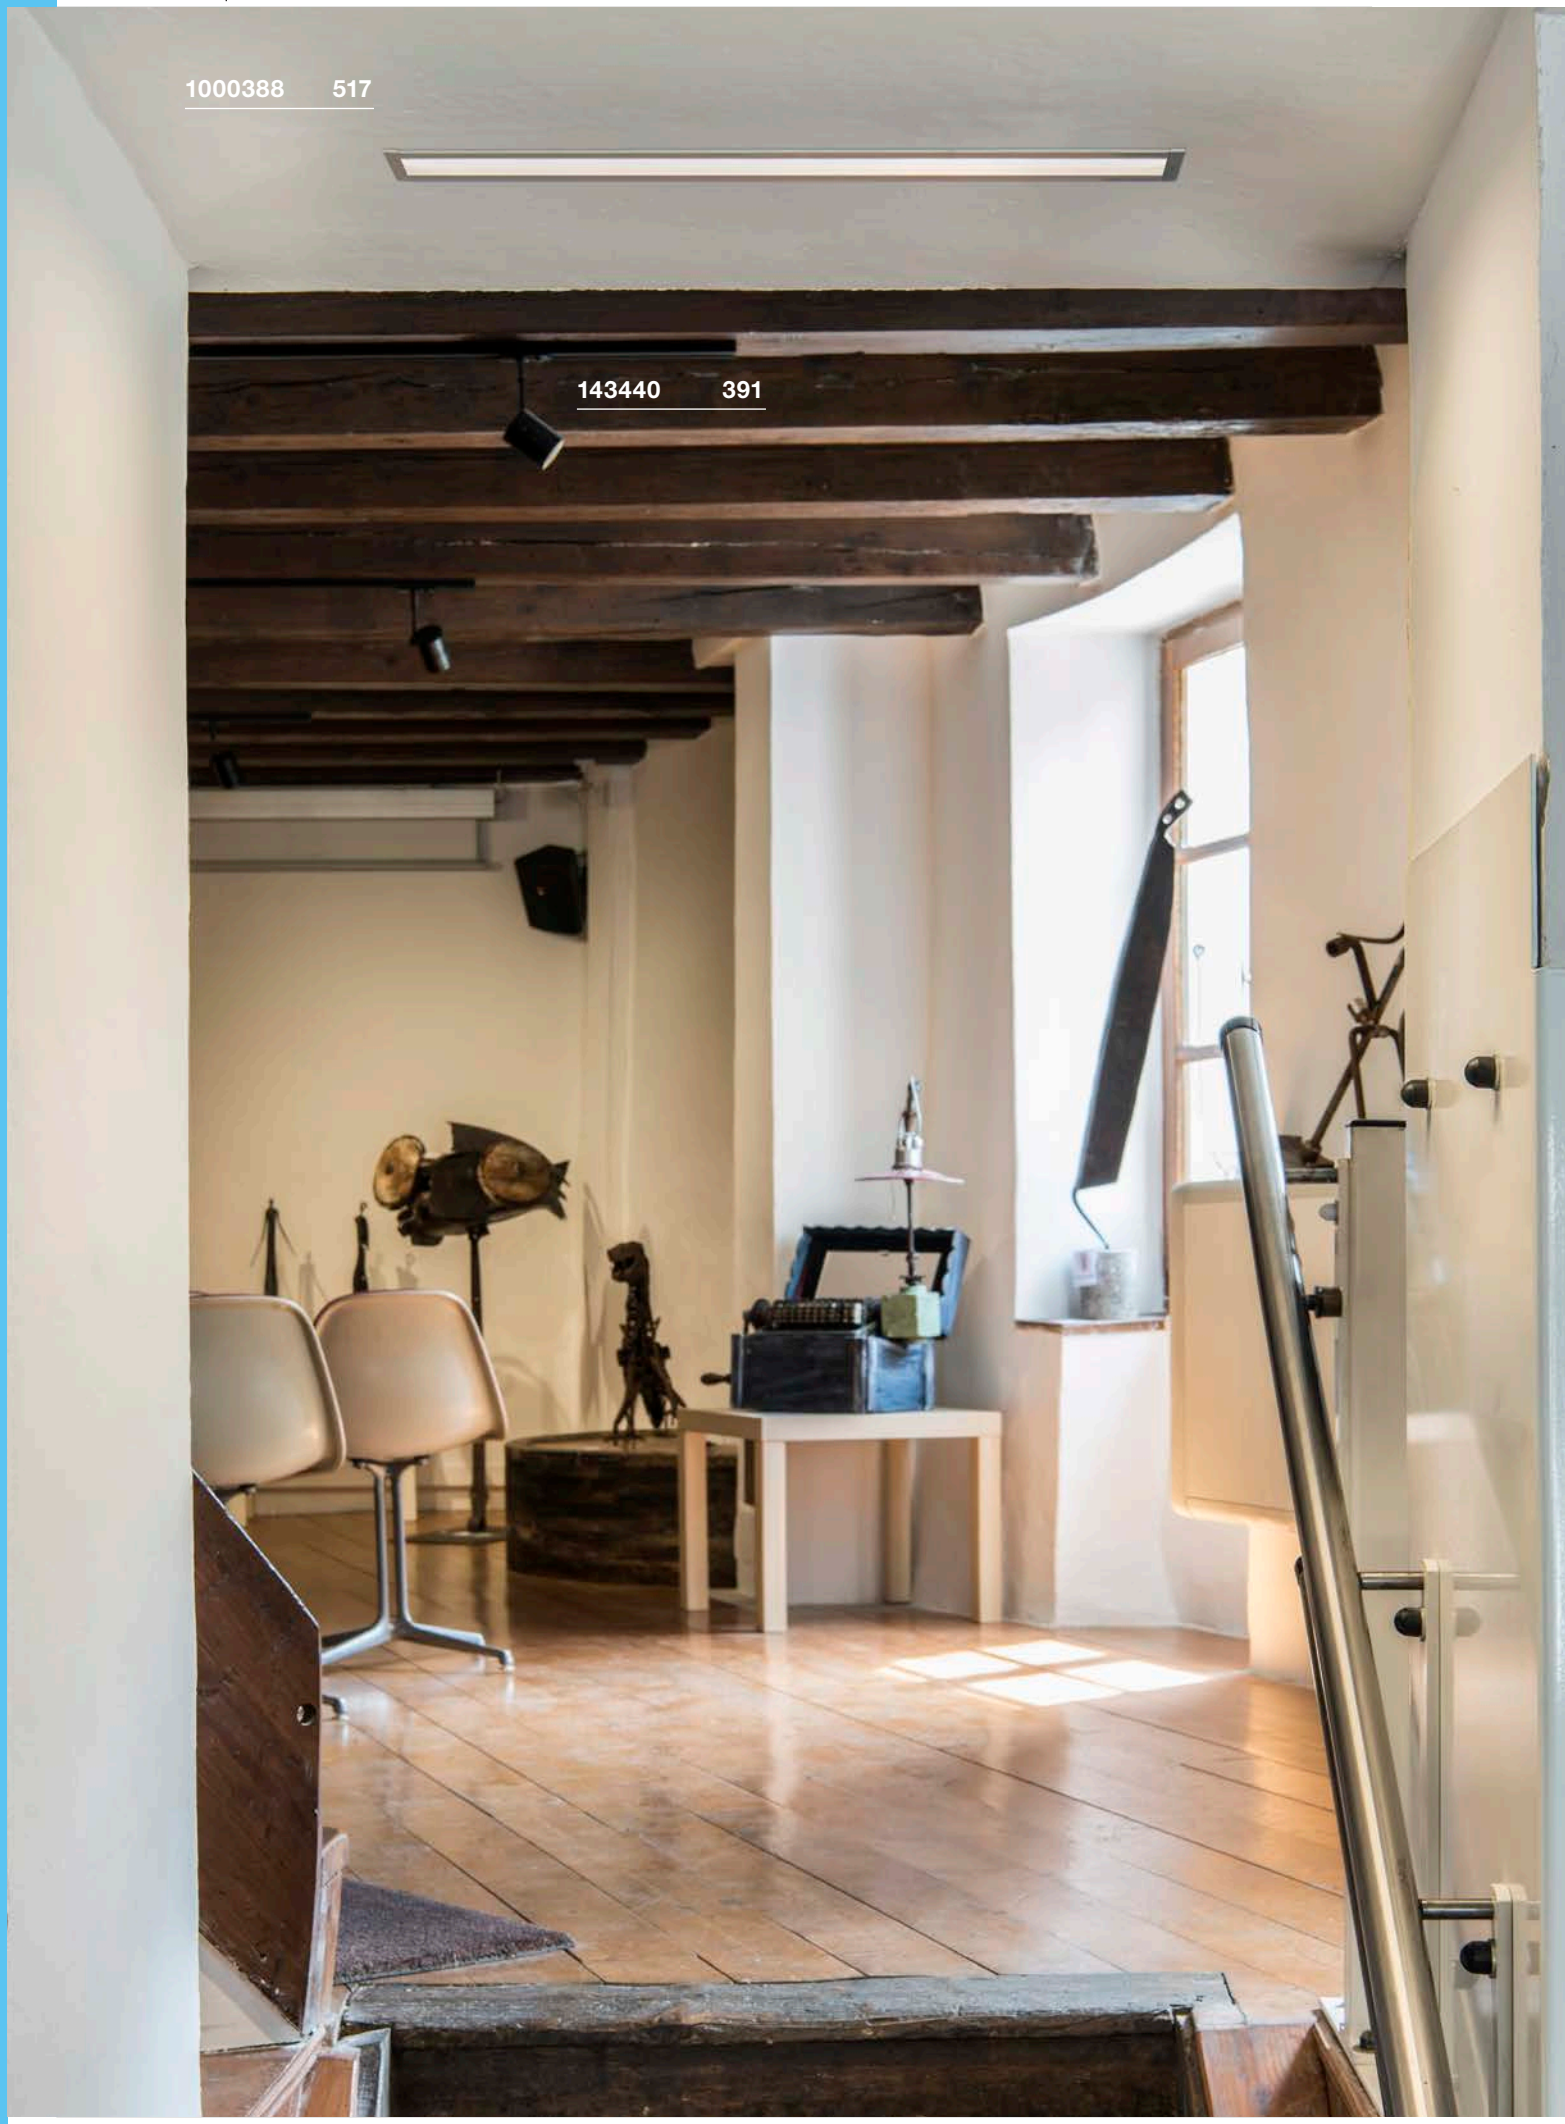
1000388 517
143440 391

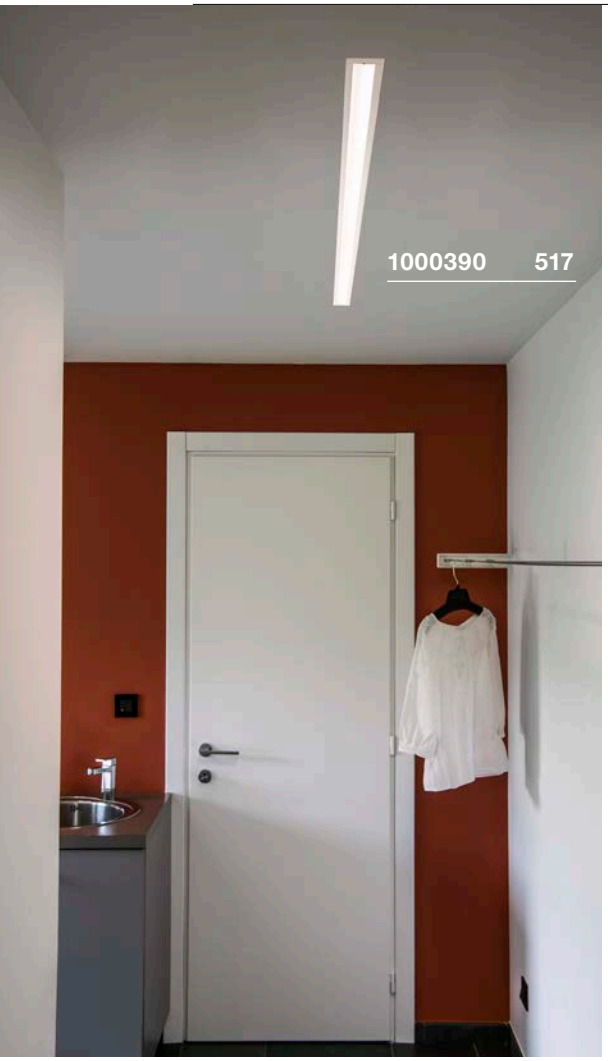



ANINDA 60
EL

A-A++ Spectrum A++–E

LED INSIDE








- Material thickness, mounting surface: 15 mm max.
- Other drivers on request.

Product details

700mA | 16W
Material: Aluminium / Acrylic



Dimensioned drawing



Note

Material thickness, mounting surface: 15 mm

Recommended accessories

☐ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP



☐ LED driver 25W | 700mA | Triac dimmable | incl. strain relief
Item no. 1001133 | 45,00 GBP



☐ LED driver 20W | 700mA
Item no. 1001136 | 34,60 GBP



Variant	Item no.	GBP
1040lm | 3000K | CRI>80 ■ matt black	**1000386**	**148,50**
1040lm | 3000K | CRI>80 ☐ matt white	**1000387**	**148,50**
1040lm | 3000K | CRI>80 ■ grey	**1000388**	**148,50**

ANINDA 120
EL

A-A++ Spectrum A++–E

LED INSIDE








Product details

700mA | 16W
Material: Aluminium / Acrylic



Dimensioned drawing



Note

Material thickness, mounting surface: 15 mm max.
Other drivers by request.

Recommended accessories

☐ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP



☐ LED driver 35W | 700mA | Triac dimmable | incl. strain relief
Item no. 1001132 | 63,00 GBP



■ LED driver 700mA | 40W incl. strain relief
Item no. 464168 | 40,50 GBP



Variant	Item no.	GBP
2230lm | 3000K | CRI>80 ■ matt black	**1000389**	**188,10**
2230lm | 3000K | CRI>80 ☐ matt white	**1000390**	**188,10**
2230lm | 3000K | CRI>80 ■ grey	**1000391**	**188,10**

MEDO 30
EL, frameless

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Colour temperature (3000K/4000K) selectable using a switch

Product details

350mA | 14W
Material: Aluminium / Polymethylacrylate (PMMA)

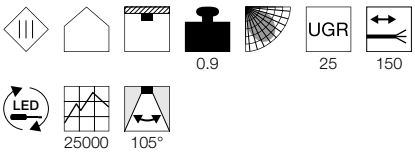

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 45 mm

Recommended accessories

LED driver 20W | 350mA | incl. strain relief
Item no. 1002420 | 37,80 GBP



LED driver 20W | 350mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002423 | 67,50 GBP





LED driver 20W | 350mA | TRIAC dimmable, incl. strain relief
Item no. 1002232 | 40,50 GBP



Variant	Item no.	GBP
1500/1600lm | 3000/4000K | CRI>80		
white	**1001901**	**162,00**



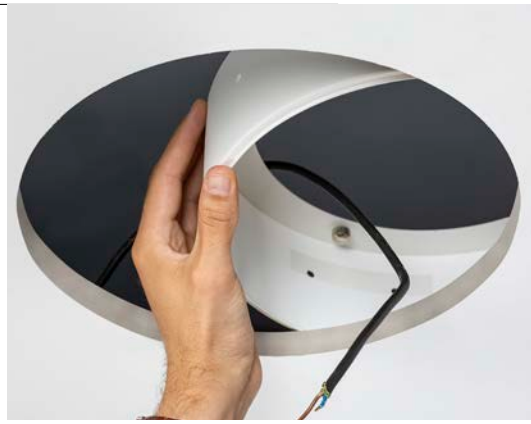

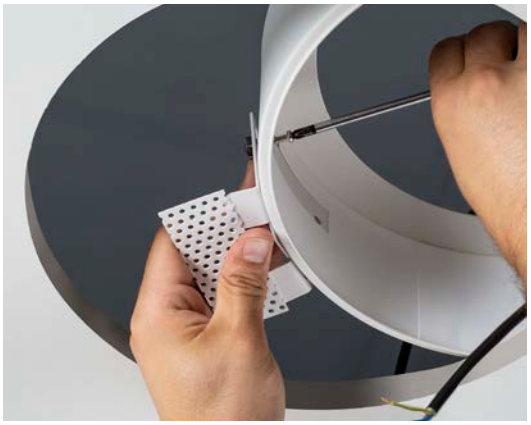













MEDO 40
EL, frameless

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE







- Colour temperature (3000K/4000K) selectable using a switch

Product details

700mA | 18W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 13 cm

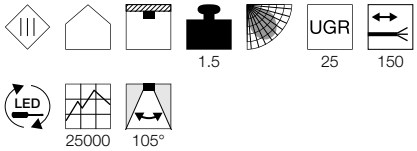

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 45 mm

Recommended accessories

■ LED driver 700mA | 40W incl. strain relief
Item no. 464168 |40,50 GBP



□ LED driver 40W | 700mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002424 |72,00 GBP



Variant	Item no.	GBP
3100/3300lm | 3000/4000K | CRI>80		
□ white	**1001902**	**180,00**

MEDO 60
EL, frameless

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Colour temperature (3000K/4000K) selectable using a switch

Product details

1000mA/1050mA | 28W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 16 cm

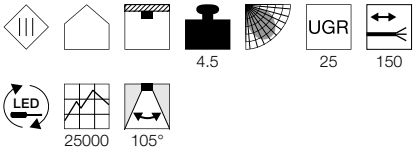

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 45 mm

Recommended accessories

■ LED driver 60W | 1000mA | incl. strain relief
Item no. 1002422 |67,50 GBP



□ LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425 |76,50 GBP



□ LED driver 1000mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001115 |67,50 GBP



Variant	Item no.	GBP
4700/5000lm | 3000/4000K | CRI>80		
□ white	**1001903**	**386,10**

MEDO 90
EL, frameless

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW VARIANT









- Colour temperature (3000K/4000K) selectable using a switch

Product details

1000mA/1050mA | 36W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 21 cm

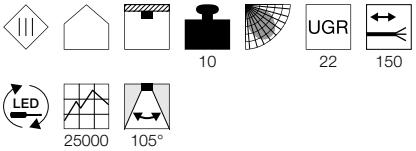

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 45 mm

Recommended accessories

■ LED driver 60W | 1000mA | incl. strain relief
Item no. 1002422 |67,50 GBP



□ LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425 |76,50 GBP



□ LED driver 1000mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001115 |67,50 GBP



Variant	Item no.	GBP
9550/10150lm | 3000/4000K | CRI>80		
□ white	**1001904**	**854,10**

MEDO 30
EL, installation frame

891

A-A++ Spectrum A++–E

LED INSIDE







- Colour temperature (3000K/4000K) selectable using a switch

Product details

350mA | 14W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 13 cm

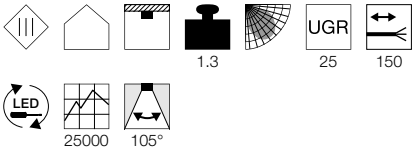

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 10-35 mm

Recommended accessories

☐ LED driver 20W | 350mA | incl. strain relief
Item no. 1002420 | 37,80 GBP



☐ LED driver 20W | 350mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002423 | 67,50 GBP



☐ LED driver 20W | 350mA | TRIAC dimmable, incl. strain relief
Item no. 1002232 | 40,50 GBP



Variant	Item no.	GBP
1500/1600lm | 3000/4000K | CRI>80		
☐ white	**1001905**	**171,00**

MEDO 40
EL, installation frame

891

A-A++ Spectrum A++–E


LED INSIDE




- Colour temperature (3000K/4000K) selectable using a switch

Product details

700mA | 18W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 13 cm

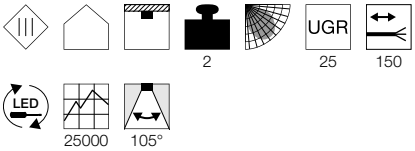

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 10-35 mm

Recommended accessories

■ LED driver 700mA | 40W incl. strain relief
Item no. 464168 | 40,50 GBP



☐ LED driver 40W | 700mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002424 | 72,00 GBP



Variant	Item no.	GBP
3100/3300lm | 3000/4000K | CRI>80		
☐ white	**1001906**	**188,10**

MEDO 60
EL, installation frame

891

A-A++ Spectrum A++–E

LED INSIDE







- Colour temperature (3000K/4000K) selectable using a switch

Product details

1000mA/1050mA | 28W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 16 cm

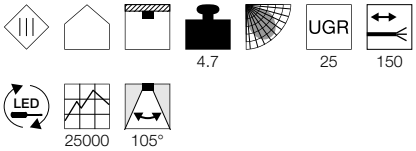

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 10-35 mm

Recommended accessories

■ LED driver 60W | 1000mA | incl. strain relief
Item no. 1002422 | 67,50 GBP



☐ LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425 | 76,50 GBP



☐ LED driver 1000mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001115 | 67,50 GBP



Variant	Item no.	GBP
4700/5000lm | 3000/4000K | CRI>80		
☐ white	**1001907**	**422,10**












MEDO 90
EL, installation frame

891

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW VARIANT








- Colour temperature (3000K/4000K) selectable using a switch

Product details

1000mA/1050mA | 36W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions: D: 21 cm

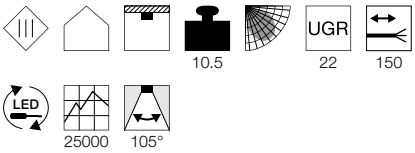

Dimensioned drawing



Note

Open cable end
Material thickness, mounting surface: 10-35 mm

Recommended accessories

LED driver 60W | 1000mA | incl. strain relief
Item no. 1002422 | 67,50 GBP



LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425 | 76,50 GBP



LED driver 1000mA | 40W | TRIAC dimmable, incl. strain relief
Item no. 1001115 | 67,50 GBP



Variant	Item no.	GBP
9550/10150lm | 3000/4000K | CRI>80		
white	1001908	854,10

PANEL 60
EL, round

A-A++ Spectrum A⁺⁺–E

LED INSIDE









• LED driver can be selected

Product details

1000mA/1050mA | 40W
Material: Aluminium

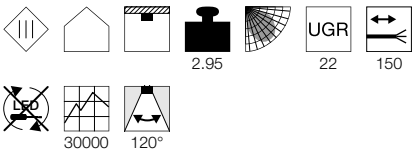

Dimensioned drawing



Note

1) Standard, non dimmable 40W/ 1000mA (464170).
2) DALI dimmable 50W/1050mA (464032).
3) TRIAC dimmable 40W/1050mA (464804).
In our Smart Home Solutions chapter, you will find different VALETO® accessories to suit your choice of transformer.
Open cable end
Material thickness, mounting surface: 30 mm max.

Recommended accessories

■ LED driver 1000mA | 40W incl. strain relief
Item no. 464170 | 40,50 GBP



□ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item no. 464032 | 117,00 GBP





□ LED driver 1050mA | 40W Triac trailing edge dimmable
Item no. 464804 | 45,00 GBP



Variant	Item no.	GBP
2630lm | 3000K | CRI>80		
□ white	**158663**	**242,10**
2930lm | 4000K | CRI>80		
□ white	**158664**	**242,10**



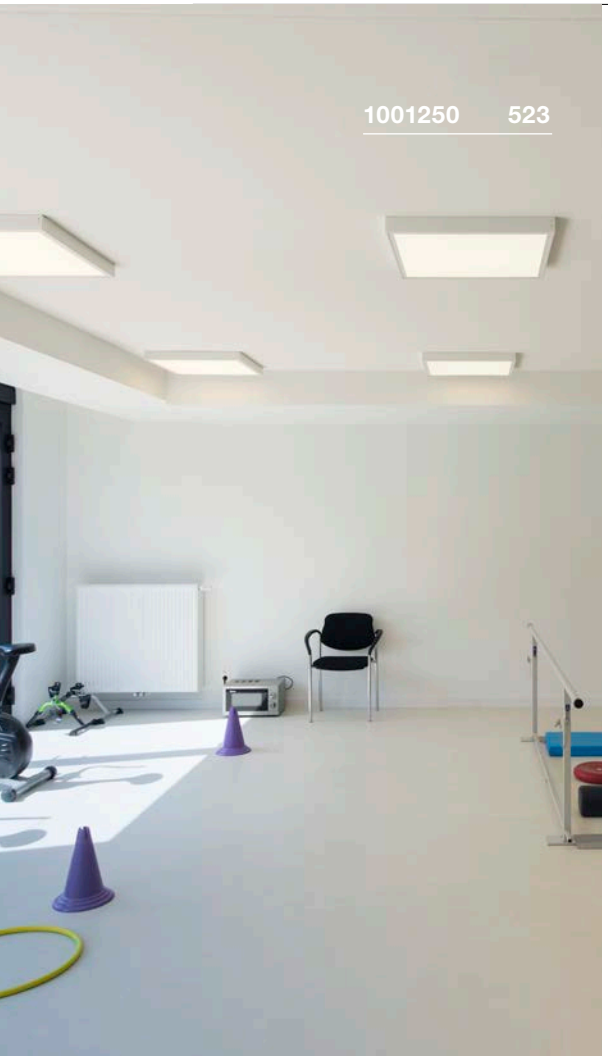

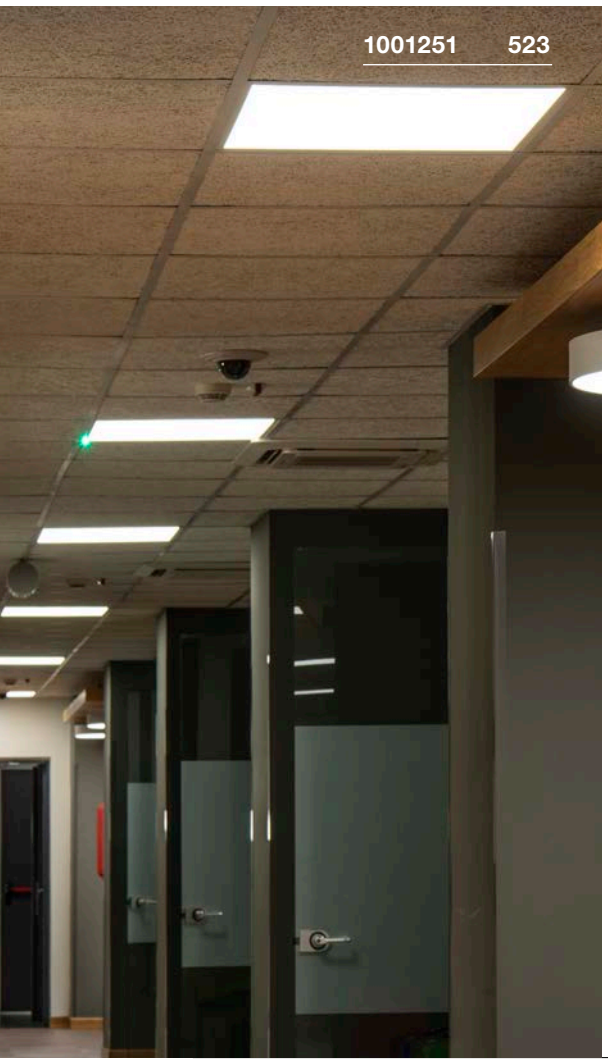


VALETO® LED PANEL
595x595mm, UGR<19

A-A++ Spectrum A++–E

LED INSIDE


DIM TO WARM

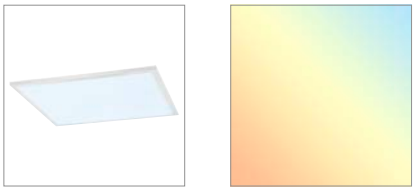


- Can be integrated into the VALETO® system

Product details

100-240V ~50/60Hz | 1050mA
Total consumption: 43W
Material: Aluminium / Acrylic

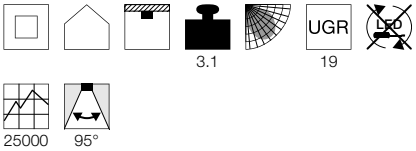

Dimensioned drawing



Note

Can be remotely controlled and dimmed using the remote control CCT/DIM [1002994] or gateway [1002411]

An application video about Dim to Warm can be found at **http://bit.ly/dim-to-warm**


Variant	Item no.	GBP
3200-3600lm | 2700-6500K | CRI>80		
white	**1001250**	**162,00**

VALETO® LED PANEL
620x620mm, UGR<19

A-A++ Spectrum A++–E

LED INSIDE


DIM TO WARM

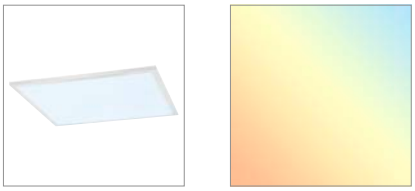


- Can be integrated into the VALETO® system

Product details

100-240V ~50/60Hz | 1050mA
Total consumption: 43W
Material: Aluminium / Acrylic

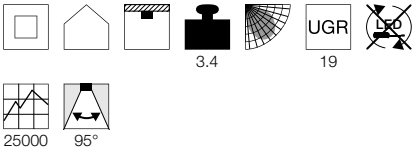

Dimensioned drawing



Note

Can be remotely controlled and dimmed using the remote control CCT/DIM [1002994] or gateway [1002411]

An application video about Dim to Warm can be found at **http://bit.ly/dim-to-warm**


Variant	Item no.	GBP
3200-3600lm | 2700-6500K | CRI>80		
white	**1001251**	**180,00**

LED PANEL
600x600mm

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









- Colour temperature selectable

Product details

700mA | 26W
Material: Aluminium / Polystyrene (PS)
Product dimensions: H: 3 cm
Installation dimensions: D: 5 cm

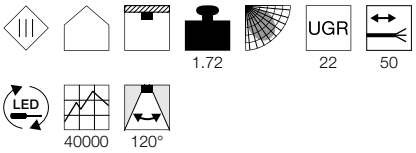

Dimensioned drawing



Note

Open cable end

Recommended accessories

LED driver 40W | 700mA |
1-10V/DALI dimmable, incl. strain relief
Item no. 1002424 |72,00 GBP



Variant	Item no.	GBP
2600/2800lm | 3000/4000K | CRI>80		
white	**1003071**	**76,50**

LED PANEL
620x620mm

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT









- Colour temperature selectable

Product details

700mA | 26W
Material: Aluminium / Polystyrene (PS)
Product dimensions: H: 3 cm
Installation dimensions: D: 5 cm

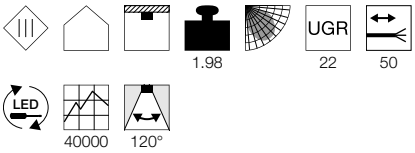

Dimensioned drawing



Note

Open cable end

Recommended accessories

LED driver 40W | 700mA |
1-10V/DALI dimmable, incl. strain relief
Item no. 1002424 |72,00 GBP



Variant	Item no.	GBP
2600/2800lm | 3000/4000K | CRI>80		
white	**1003072**	**85,50**

LED PANEL
620x620mm

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT







- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

1050mA | 35W
Material: Aluminium / Polystyrene (PS)
Product dimensions: H: 0,9 cm
Installation dimensions: D: 5 cm:

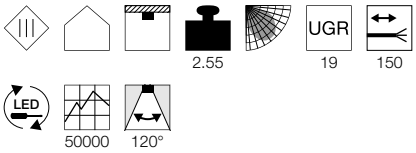

Dimensioned drawing



Note

Open cable end

Recommended accessories

LED driver 1050mA |
40W Triac trailing edge dimmable
Item no. 464804 |45,00 GBP



LED driver 50W | 1050mA |
1-10V/DALI dimmable, incl. strain relief
Item no. 1002425 |76,50 GBP



Variant	Item no.	GBP
4000lm | 4000K | CRI>90		
white	**1003074**	**162,00**

LED PANEL
620x620mm

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT







- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

1050mA | 35W
Material: Aluminium / Polystyrene (PS)
Product dimensions: H: 0,9
Installation dimensions: D: 5 cm

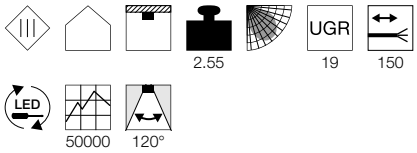

Dimensioned drawing



Note

Open cable end

Recommended accessories

LED driver 1050mA | 40W Triac trailing edge dimmable
Item no. 464804 |45,00 GBP



LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425 |76,50 GBP



Variant	Item no.	GBP
4000lm | 3000K | CRI>90		
white	**1003073**	**162,00**

LED PANEL
600x600mm

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT







- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

1050mA | 35W
Material: Aluminium / Polystyrene (PS)
Product dimensions: H: 0.9 cm
Installation dimensions: D: 5 cm

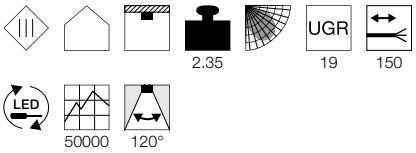

Dimensioned drawing



Note

Open cable end

Recommended accessories

LED driver 1050mA | 40W Triac trailing edge dimmable
Item no. 464804 |45,00 GBP



LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425 |76,50 GBP



Variant	Item no.	GBP
4000lm | 3000K | CRI>90		
white	**1003083**	**162,00**
4000lm | 4000K | CRI>90		
white	**1003084**	**162,00**

LED PANEL
300x120mm

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT








- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

900mA | 31W
Material: Aluminium / Polystyrene (PS)
Product dimensions:
L: 119.5 cm W: 29.5 cm H: 0.9 cm
Installation dimensions: D: 5 cm

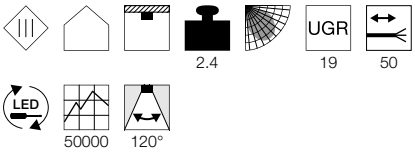

Note


Open cable end

Recommended accessories

LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002425 |76,50 GBP



Variant	Item no.	GBP
3600lm | 3000/4000K | CRI>90		
white	**1003075**	**162,00**

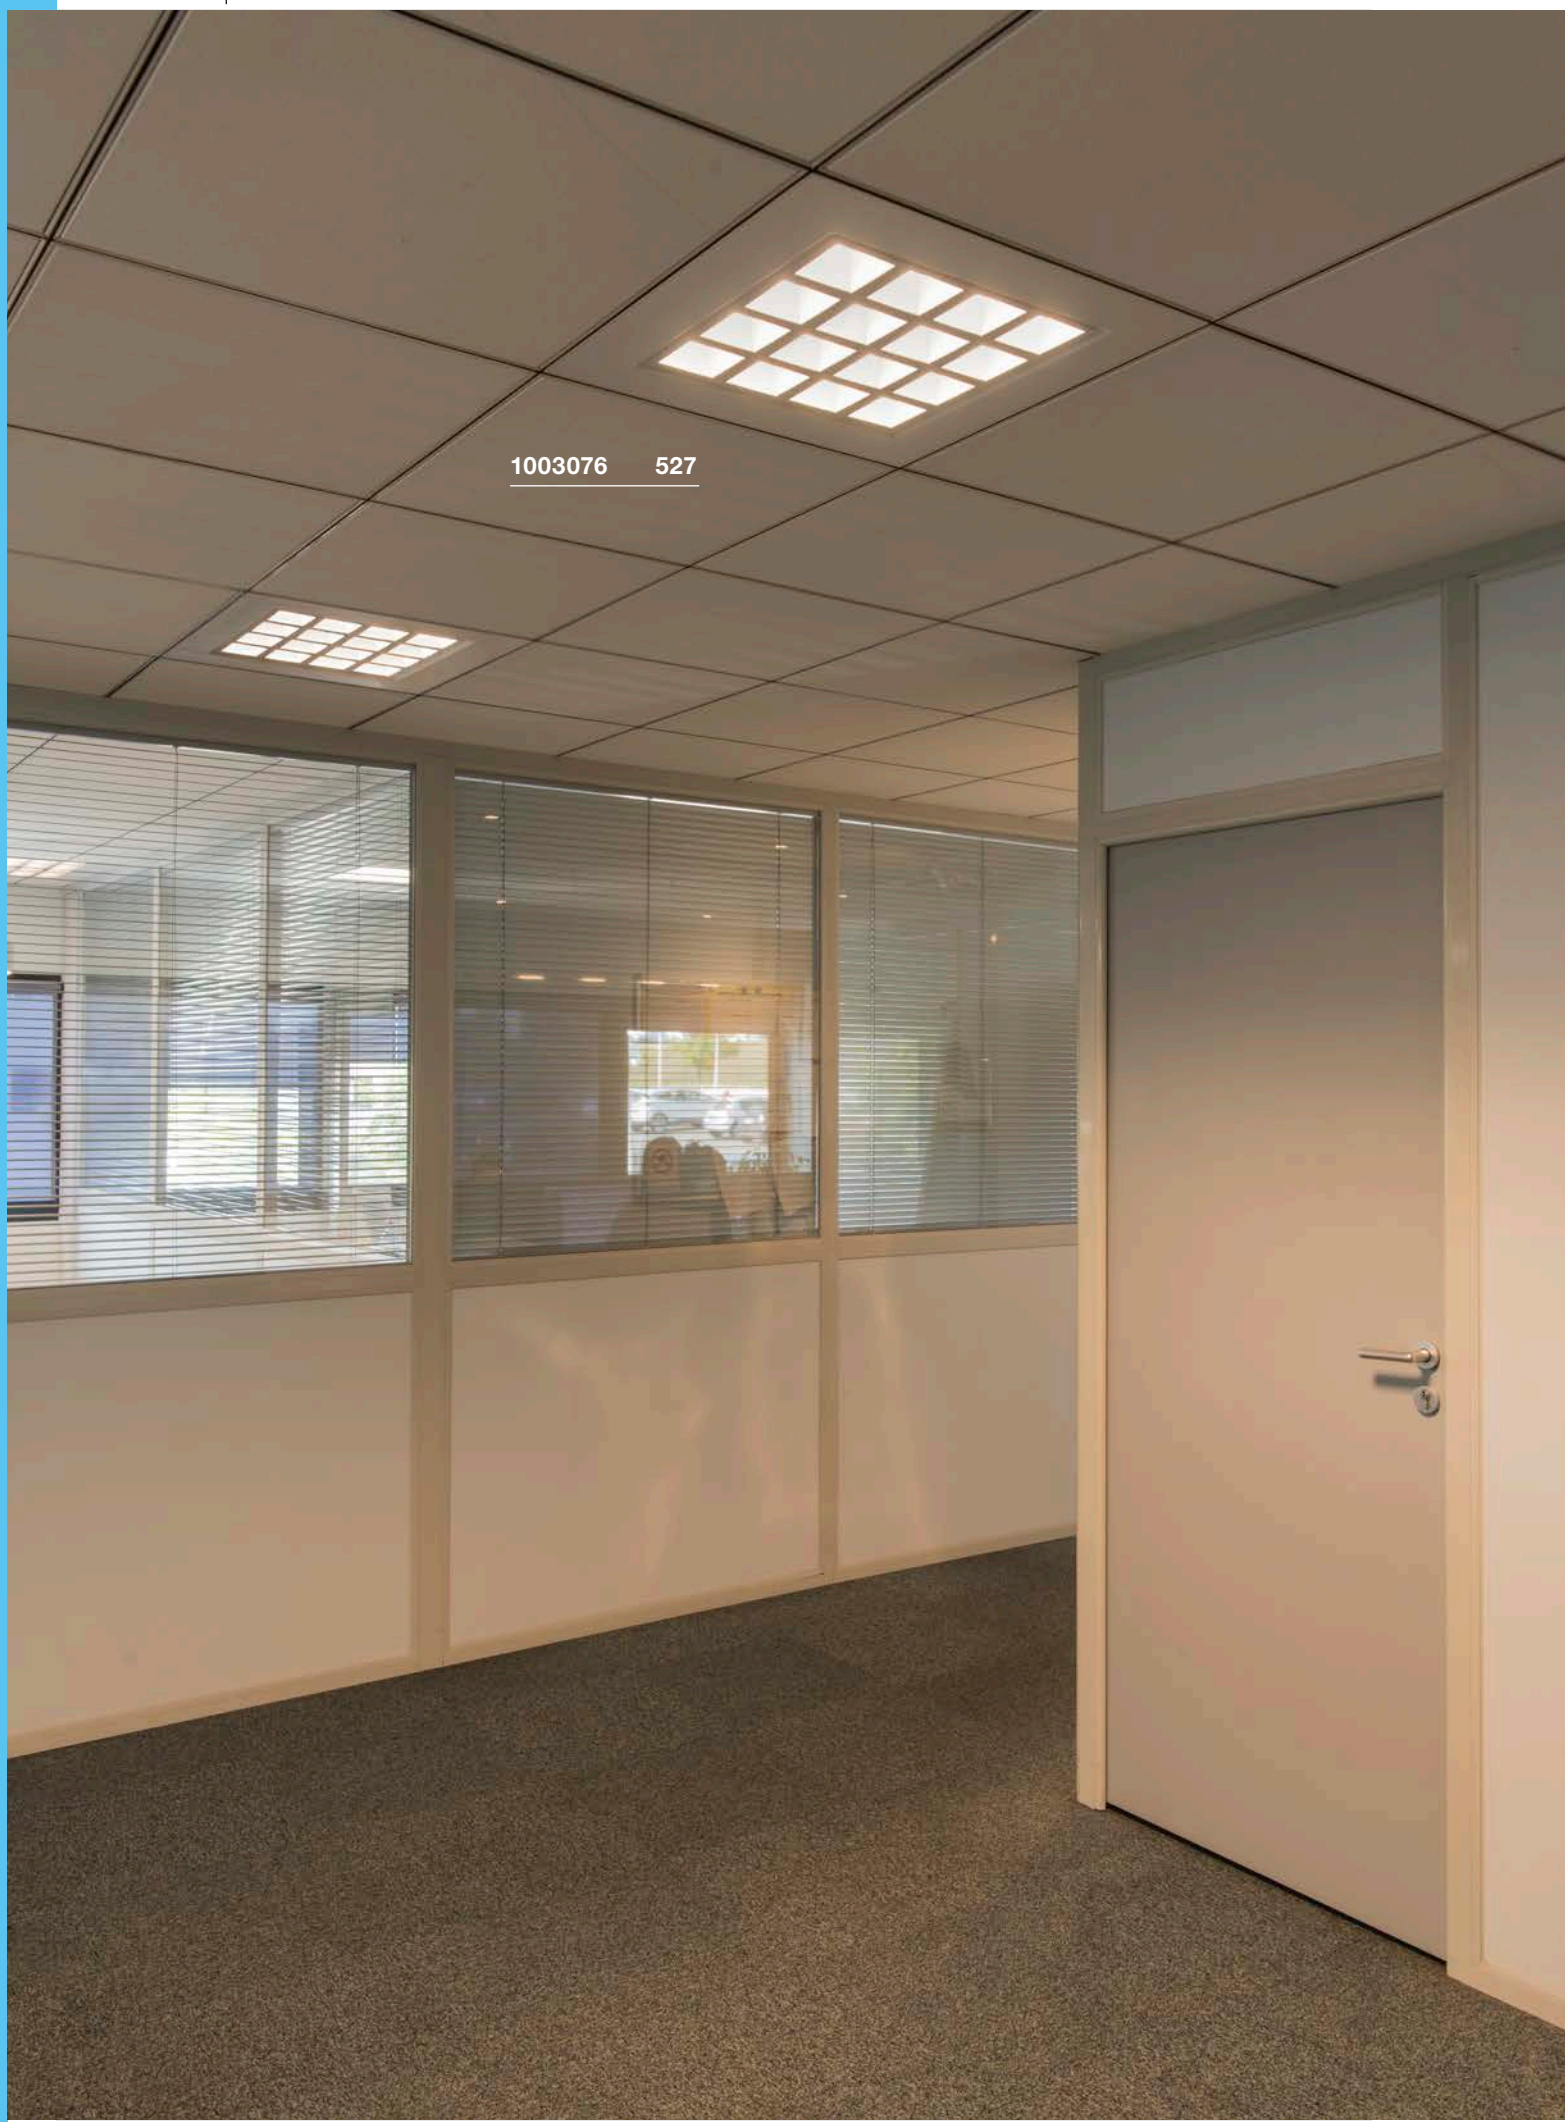
1003076 527

PAVANO
300x1200mm

A-A++ Spectrum A++–E

LED INSIDE

NEW








- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

700mA | 25W
Material: Steel / Polycarbonate (PC)
Product dimensions:
L: 119.5 cm W: 29.5 cm H: 3.6 cm
Installation dimensions: D: 5 cm

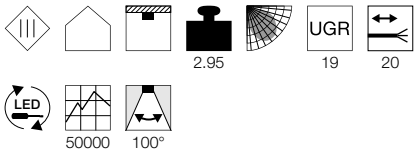

Note

Open cable end

Recommended accessories

LED driver 40W | 700mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002424 |72,00 GBP



Variant	Item no.	GBP
3300lm | 3000K | CRI>90		
white	**1003080**	**188,10**
3550lm | 4000K | CRI>90		
white	**1003081**	**188,10**

PAVANO
600x600mm

A-A++ Spectrum A++–E

LED INSIDE

NEW








- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

700mA | 25W
Material: Steel / Polycarbonate (PC)
Product dimensions:
L: 59.5 cm W: 59.5 cm H: 3.6 cm
Installation dimensions: D: 5 cm

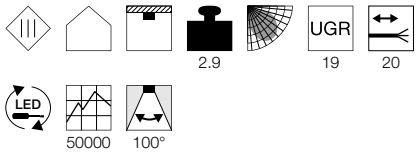

Note

Open cable end

Recommended accessories

LED driver 40W | 700mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002424 |72,00 GBP



Variant	Item no.	GBP
3300lm | 3000K | CRI>90		
white	**1003076**	**188,10**
3550lm | 4000K | CRI>90		
white	**1003077**	**188,10**

PAVANO
620x620mm

A-A++ Spectrum A++–E

LED INSIDE

NEW








- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

700mA | 25W
Material: Steel / Polycarbonate (PC)
Product dimensions:
L: 62 cm W: 62 cm H: 3.6 cm
Installation dimensions: D: 5 cm

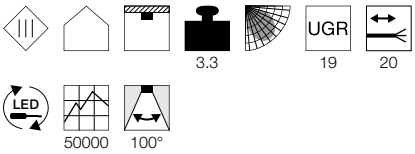

Note

Open cable end

Recommended accessories

LED driver 40W | 700mA | 1-10V/DALI dimmable, incl. strain relief
Item no. 1002424 |72,00 GBP




Variant	Item no.	GBP
3300lm | 3000K | CRI>90		
white	**1003078**	**188,10**
3550lm | 4000K | CRI>90		
white	**1003079**	**188,10**

SHOWING THE WAY.

MOBILE LUMINAIRES AND FLOOR STANDS.

Nobody has to flounder in the dark any more: Mobile luminaires and floor stands are a popular design element for outdoor systems, and provide orientation and safety. The special appearance of the outdoor luminaires is due to their high-quality materials, modern designs and innovative technologies.

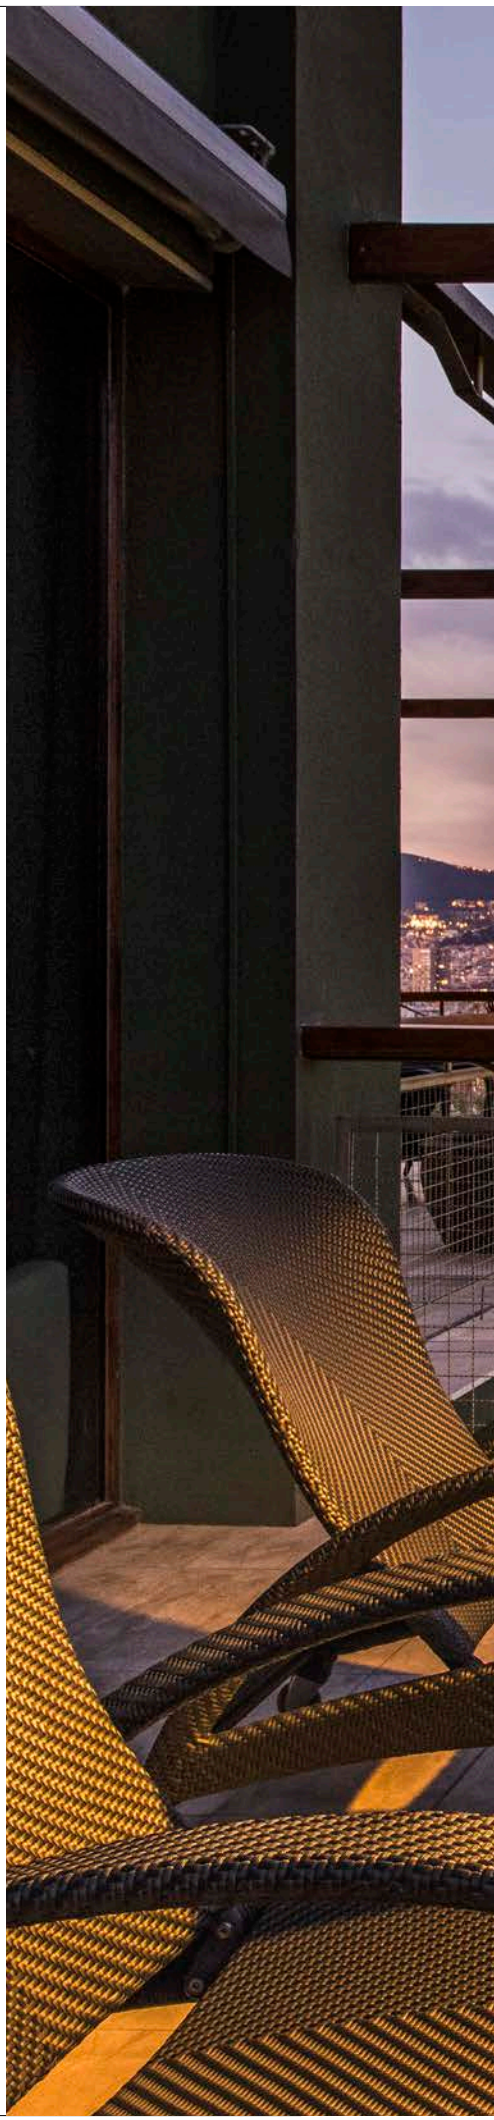


231245 533


1000822 550

MOBILE LUMINAIRES AND FLOOR STANDS


532

532

533

533

534

537

537

538

539

540

541

541

542

543

544

544

545

545

546

547

547

548

548

549

549

550

550

551

551

552

552

553

553

554

554

555

555

556

557

558

559

559

560

560

561

562

563

563

564

565

566

567

568

569

570

570

571

571

572

573

573

574

575

575

576

576

577

577

578

578

579

580

580

581

582

583

583

583

Other luminaires and variants can be found online at www.slv.com

PHOTONIA
PD, E27

893

E-A++ Spectrum A⁺⁺–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 44 | 1.86 | 250 | 500 | 0.35

IK03

Dimensioned drawing



Note

Suspension chain included

Recommended accessories

■ Ceiling plate
Item no. 1000398 | 56,70 GBP

Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP

LED E27 4.5W 280°
2200-2700K 500lm EEI==A++
5kWh/1000h
Item no. 1002125 | 13,50 GBP

Lamp details

max. 60W
Ø: 9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
■ anthracite	**232065**	**193,50**

MOLAT
PD, E27

891

E-A++ Spectrum A⁺⁺–E








Product details

230V ~50/60Hz
Material: Aluminium / Glass

IP 44 | 1.6 | 250 | 500 | 0.2

IK02

Dimensioned drawing



Note

Suspension chain included

Recommended accessories

■ Ceiling plate
Item no. 1000398 | 56,70 GBP

Recommended lamp


E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 560741 | 25,20 GBP


LED E27 4.5W 280°
2200-2700K 500lm EEI==A++
5kWh/1000h
Item no. 1002125 | 13,50 GBP


Lamp details


max. 60W
Ø: 6.5 cm max. L: 14.5 cm max.


Variant	Item no.	GBP
E27		
■ anthracite	**1000821**	**108,00**

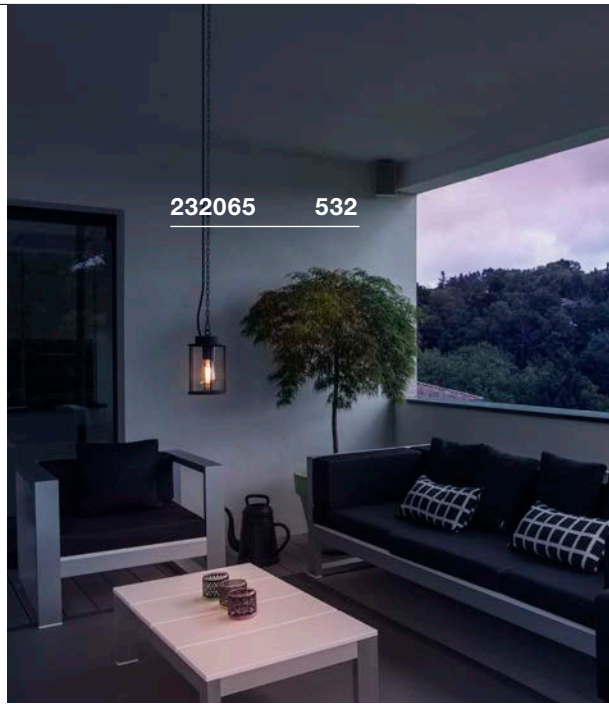


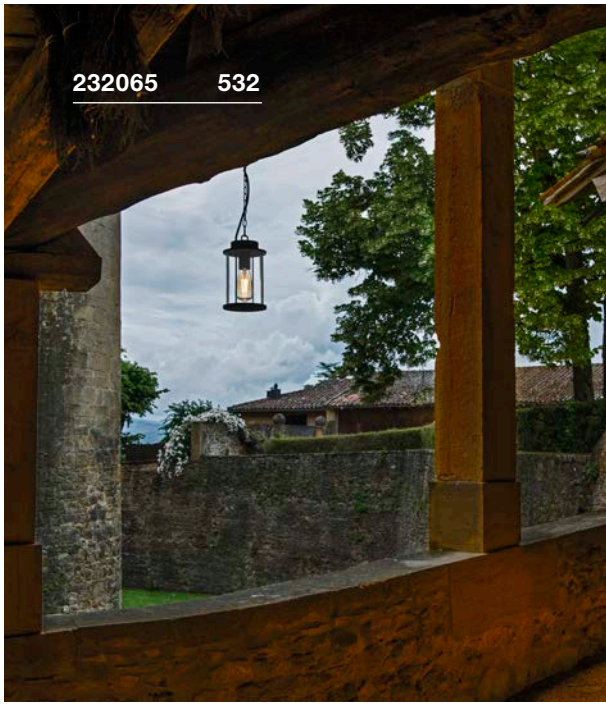

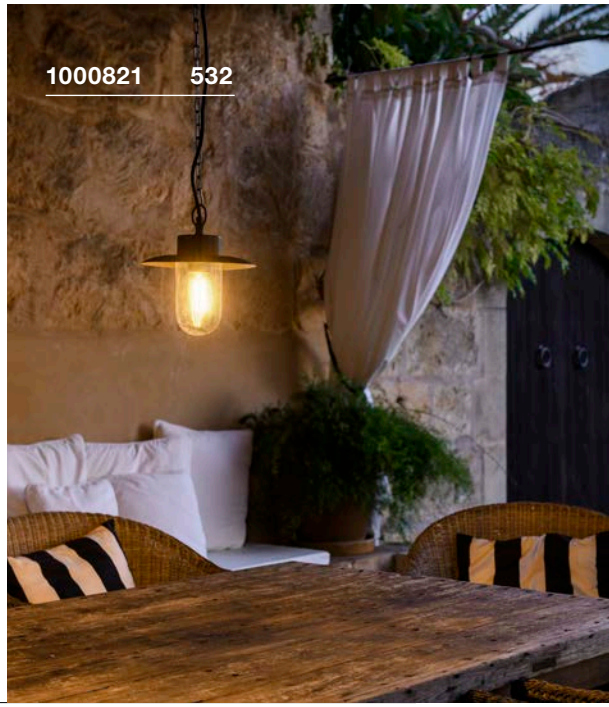

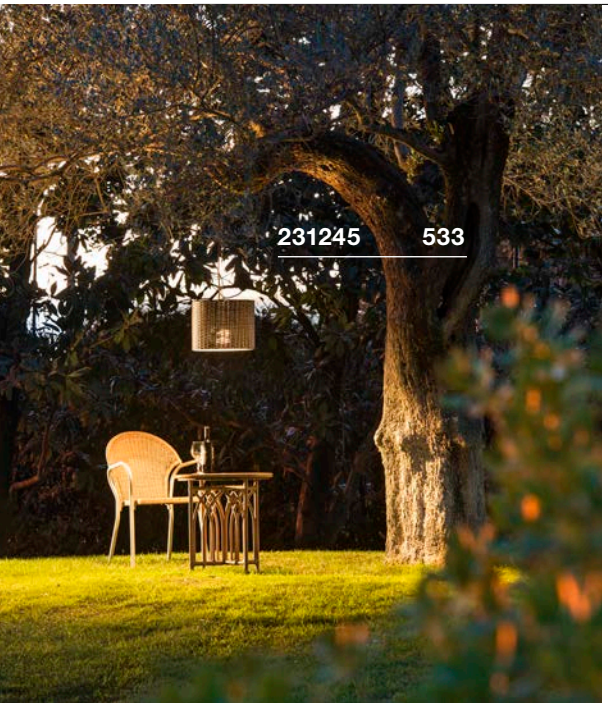

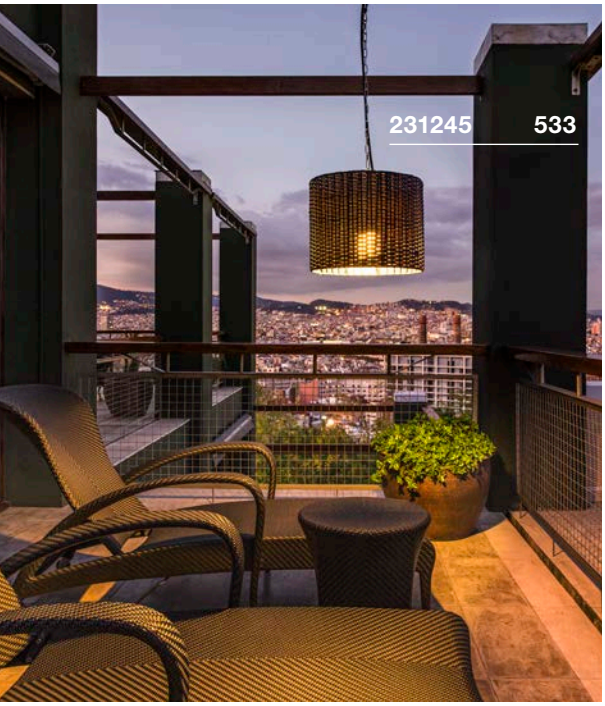

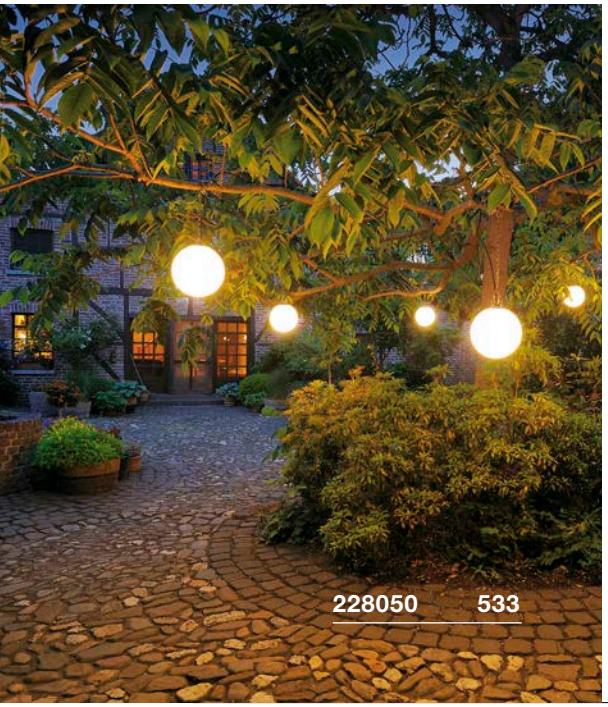

ADEGAN MANILA
PD, E27

882

A-A++ Spectrum A++–E









- Weather-resistant braiding

Product details

230V ~50Hz
Material: Steel / Polyethylene (PE)



Dimensioned drawing



Note

Suspension chain and hook included
IP 2-pin mains plug

Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

LED E27 12W 240°
3000K 1055lm EEI==A+
12kWh/1000h
Item no. 1001032 | 20,70 GBP

Lamp details

max. 24W
Ø: 4.8 cm max. L: 14 cm max.

Variant	Item no.	GBP
E27		
anthracite	**231245**	**251,10**

ROTOBALL 25/40
PD, E27

895

A-A++ Spectrum A++–E









- Harmonious design
- Homogeneous light distribution
- For decorative lighting and aesthetic accentuation in indoor and outdoor areas

Product details

230V ~50/60Hz
Material: Aluminium / Plastic



Dimensioned drawing



Note

Suspension chain and hook included
IP 2-pin mains plug

Recommended lamp



LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 9.5W 240°
2200-6700K 806lm EEI=A+
10kWh/1000h
Item no. 1001917 | 49,50 GBP

Lamp details

max. 24W

Variant	Item no.	GBP
E27 | Ø: 25 cm | 1.25 kg		
grey / white	**228050**	**135,00**
E27 | Ø: 40 cm | 2.3 kg		
grey / white	**228051**	**188,10**

KIROCONE
TL, E27

E-A++ Spectrum A⁺⁺–E

NEW






Product details

230V ~50Hz
Material: Steel / Polycarbonate (PC)

	IP				IK
	IP 44	0.9	300	0.2	IK02

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended lamp

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 9.5W 240°
2200-6700K 806lm EEI=A+
10kWh/1000h
Item no. 1001917 | 49,50 GBP

Lamp details

max. 60W
Ø: 9.5 cm max. L: 14.5 cm max.


Variant	Item no.	GBP
E27		
white	**1001778** NEW	**85,50**




1001778 534


227550 537



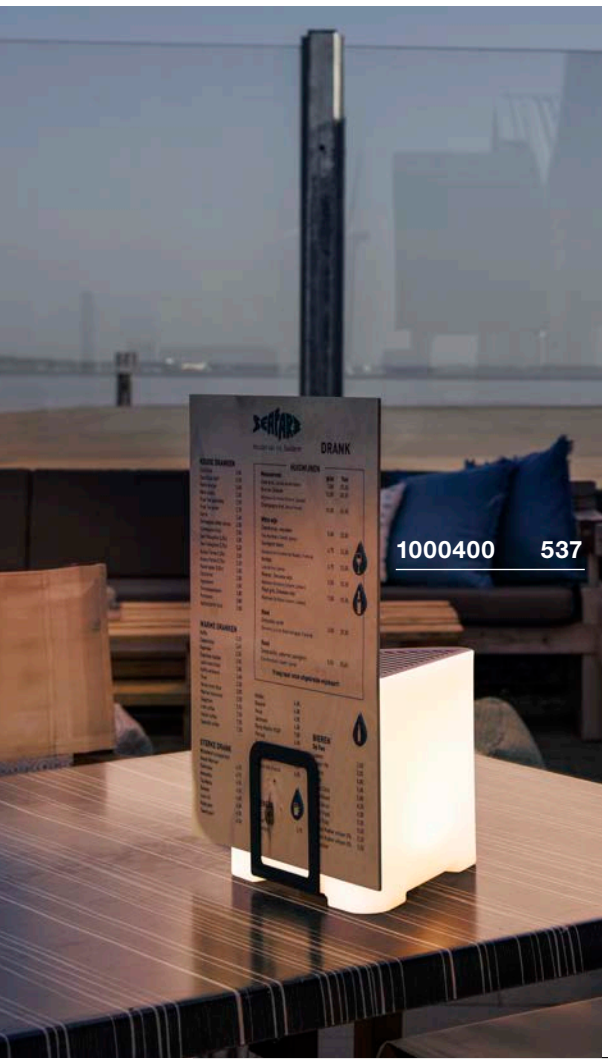

KENGA 17
TL

A-A++ Spectrum A++–E

LED INSIDE








- Mobile, wireless luminaire with removable menu holder
- Infinitely variable dimming using the button
- Convenient charging via USB

Product details

5V DC battery operation
Total consumption: 3.2W
Material: Plastic / Wood
Dimmable: Switch

IP 44 | 0.8 | LED | 30000 | 1 | IK IK06

Dimensioned drawing



Note

The operating time is 5 hours at full brightness and 10 hours at half brightness.
The product can be charged using any 5V USB power supply.
The bracket can be adjusted in order to hold menus or serviettes.


Variant	Item no.	GBP
200lm | 3000K | CRI>80		
matt white / matt brown	1000400	94,50

KENGA 45
FL, E27

E-A++ Spectrum A++–E








- Mobile luminaire
- Luminaire and seat in one

Product details

230V ~50/60Hz
Material: Polyethylene (PE) / Steel

IP 54 | 5.8 | 300 | 0.13 | 1 | IK IK06

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended lamp

E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 | 25,20 GBP

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002127 | 11,70 GBP

Lamp details

max. 24W
L: 22 cm max.

Variant	Item no.	GBP
E27		
white	227550	256,50

ROTOBALL 25/40/50
FL, E27

895

A-A++ Spectrum A⁺⁺–E




- Harmonious design
- Homogeneous light distribution
- For decorative lighting and aesthetic accentuation in indoor and outdoor areas

Product details

230V ~50Hz
Material: Steel / Polyethylene (PE)

IP 44 200

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

max. 24W
Ø: 9.5 cm max.

Variant	Item no.	GBP
E27 | Ø: 25 cm | 1.05 kg		
white	227219	126,00
E27 | Ø: 40 cm | 2.2 kg		
white	227220	144,00
E27 | Ø: 50 cm | 3.12 kg		
white	227221	188,10








ADEGAN MANILA
FL, E27

882

A-A++ Spectrum A++–E

FOLLOWER








Product details

230V ~50Hz
Material: Granite / Stainless Steel



Dimensioned drawing



Note

IP 2-pin mains plug

Lamp details

max. 15W
Ø: 4.8 cm max. L: 18 cm max.

Variant	Item no.	GBP
E27		
stainless steel / anthracite	1002494	341,10

ADEGAN
FL, E27

A-A++ Spectrum A++–E








- Mobile luminaire
- Lamp shade: extremely UV-resistant polycarbonate
- Feel-good light for every style

Product details

220-240V ~50/60Hz
Material: Aluminium / Polycarbonate (PC)



Dimensioned drawing



Note

IP 2-pin contour plug

Recommended accessories

Earth spike
Item no. 228960 | 27,00 GBP




Recommended lamp

E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 | 25,20 GBP

Lamp details

max. 24W
Ø: 5.2 cm max.

Variant	Item no.	GBP
E27 white	228961	296,10
E27 anthracite / white	228965	296,10

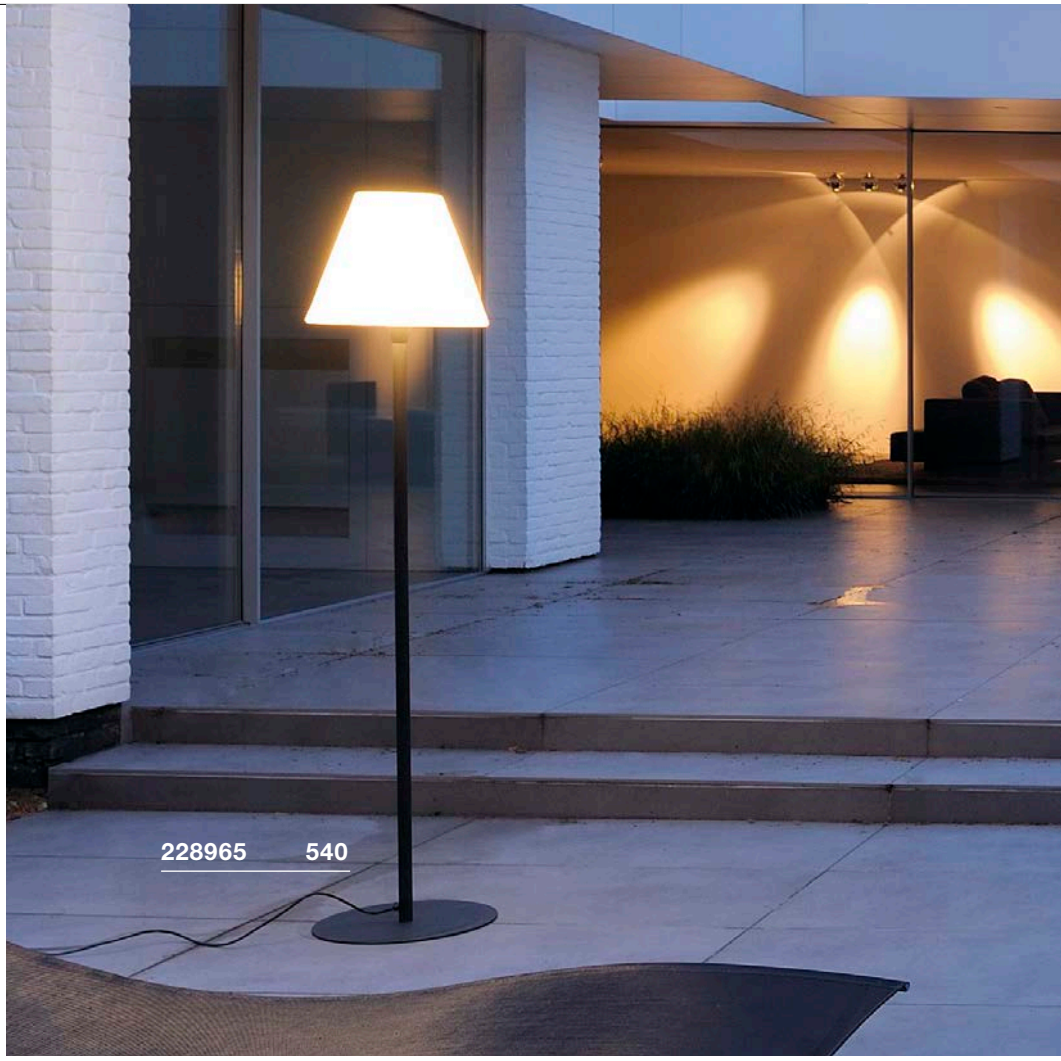







PHOTONIA
TL, E27

893

E-A++ Spectrum A++–E








- Extra-long connecting cable with IP 2-pin mains plug

Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 44 | 1.81 | 500 | 0.35 | IK03

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended lamp

E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP



LED E27 4.5W 280°
2700K 530lm EEI=A++
5kWh/1000h
Item no. 1002123 | 6,80 GBP



Lamp details

max. 60W
Ø: 9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
anthracite	**232095**	**184,50**

LISENNE
TL, E27

890

E-A++ Spectrum A++–E








- Basalt and smoked glass
- Switch on underside of luminaire

Product details

230V ~50/60Hz
Material: Basalt / Glass

IP 44 | 2.8 | 300

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP



Lamp details

max. 23W
Ø: 5.9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
grey / brown	**231360**	**171,00**

CUBIX
FL, QPAR51

E-A++ Spectrum A++–E






- Mobile luminaire

Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 0.5 | 150

Dimensioned drawing



Note

IP 2-pin mains plug


Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

Lamp details

max. 25W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 grey	132832	90,00
GU10 | QPAR51 anthracite	132835	90,00

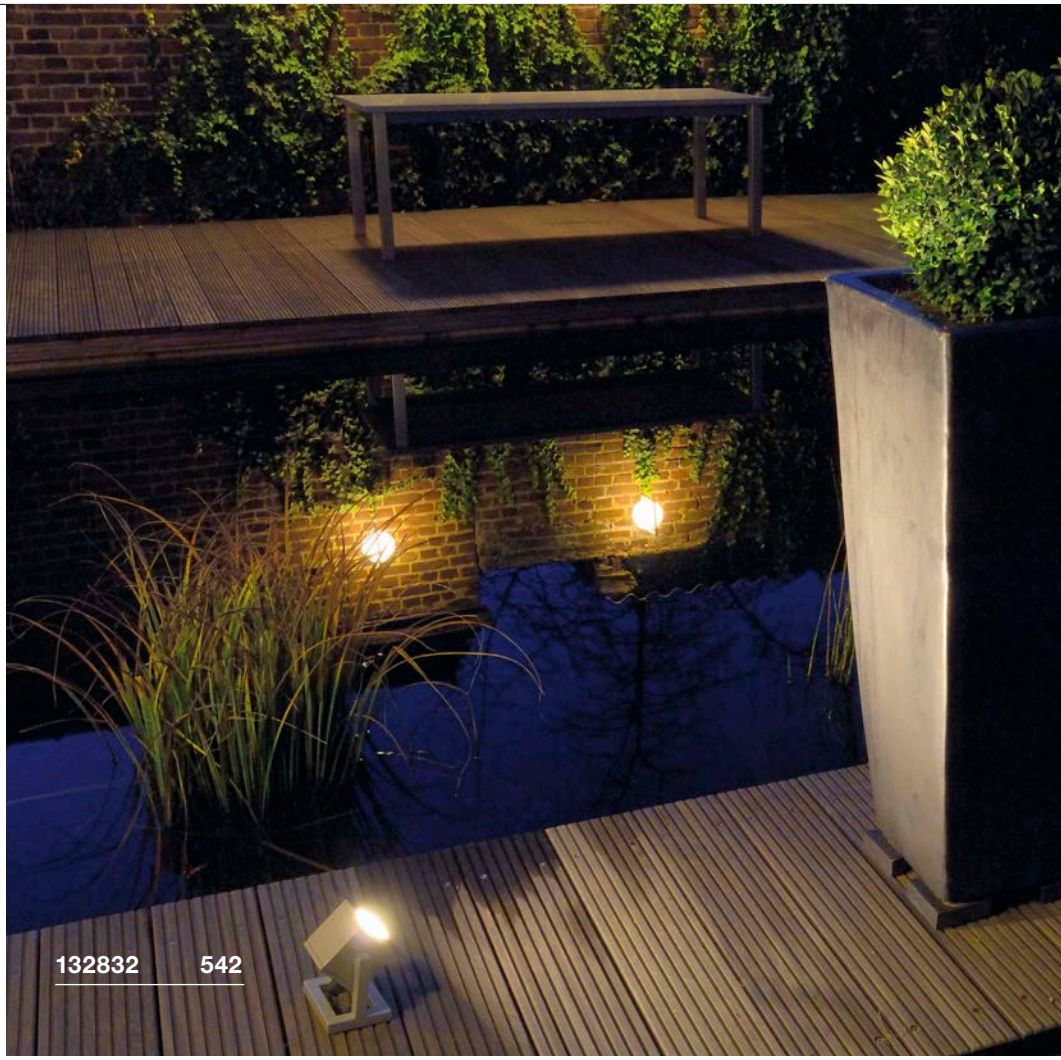





CONE
FL, E27

E-A++ Spectrum A++–E






Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 54 2.55

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP

Lamp details

max. 100W
L: 15 cm max.

Variant	Item no.	GBP
E27		
anthracite	**230435**	**72,00**

RUSTY® CONE
FL, E14

A-A++ Spectrum A++–E






- Rusty steel
- Each fitting is unique
- Small walkway light for entrance and garden

Product details

230V ~50Hz
Material: FeCSi-Steel / Polycarbonate (PC)



Dimensioned drawing



Recommended lamp

E14 3.4W 260°
3000K 250lm EEI=A+
4kWh/1000h
Item no. 560362 | 5,90 GBP

LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP



Lamp details

max. 40W C35
Ø: 4.8 cm max. L: 13.9 cm max.

Variant	Item no.	GBP
E14 | C35		
rust	229430	206,10

RUSTY® CONE 40/70
Pole, E27

A-A++ Spectrum A++–E









- Rusty steel
- Each fitting is unique

Product details

230V ~50Hz
Material: FeCSi-Steel / Polycarbonate (PC)



Dimensioned drawing



Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Earth spike
Item no. 229423 | 38,70 GBP




Recommended lamp


E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

Lamp details

max. 11W
Ø: 4.8 cm max. L: 13.9 cm max.

Variant	Item no.	GBP
E27 | H: 40 cm | 12.2 kg		
rust	229431	359,10
E27 | H: 70 cm | 18.8 kg		
rust	229432	431,10

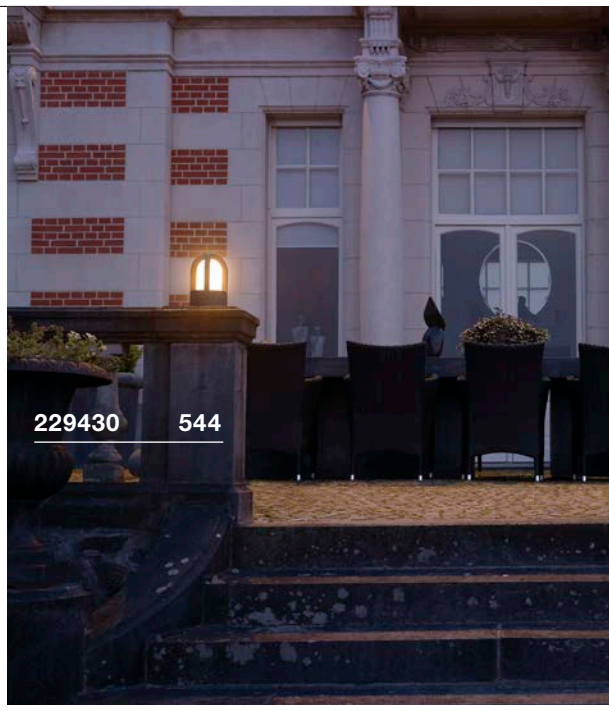

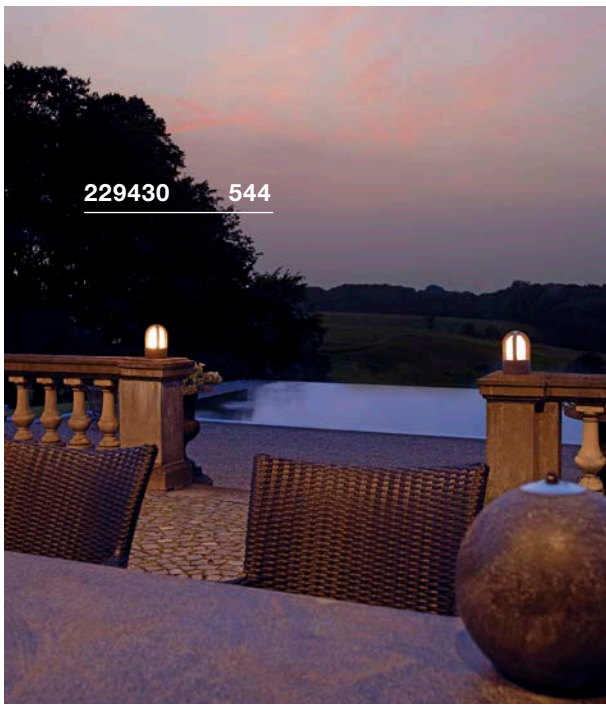







RUSTY® 40/70
Pole, E27


A-A++ Spectrum A++–E



- Rusty steel
- Each fitting is unique

Product details
230V ~50Hz
Material: FeCSi-Steel / Polycarbonate (PC)

IP 55

Dimensioned drawing


Recommended accessories
■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP
Earth spike
Item no. 229022 | 38,70 GBP

Recommended lamp
E27 4.7W 360°
3000K 380lm EEI=A+
5kWh/1000h
Item no. 551532 | 20,70 GBP

LED E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

Lamp details
max. 11W
Ø: 4.8 cm max. L: 13.9 cm max.

Variant	Item no.	GBP
E27 | H: 40 cm | 11 kg		
rust	229020	242,10
E27 | H: 70 cm | 17.5 kg		
rust	229021	296,10

RUSTY® 40/70
Pole

A-A++ Spectrum A++–E


LED INSIDE



- Rusty steel
- Each fitting is unique
- 240V LED

Product details
220-240V ~50/60Hz
Total consumption: 8.6W
Material: FeCSi-Steel / Polycarbonate (PC)

IP 55 35000

Dimensioned drawing


Note
Open cable end

Recommended accessories
■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP
Earth spike
Item no. 229022 | 38,70 GBP

Variant	Item no.	GBP
70lm | 3000K | CRI>80 | H: 40 cm | 11 kg		
rust	233407	296,10
70lm | 3000K | CRI>80 | H: 70 cm | 17.5 kg		
rust	233417	359,10

LISENNE 40/70
Pole, E27

890

E-A++ Spectrum A++–E








• Basalt and smoked glass

Product details

230V ~50/60Hz
Material: Basalt / Glass

IP 54

Dimensioned drawing



Recommended accessories

Earth spike
Item no. 229422 | 34,20 GBP

Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP

Lamp details

max. 23W
Ø: 5.9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27 | H: 40 cm | 5.65 kg grey / brown	**1000665**	**314,10**
E27 | H: 70 cm | 12.4 kg grey / brown	**1000666**	**359,10**



1000665 546





PHOTONIA
Pole, E27

893

E-A++ Spectrum A++–E






Product details
220-240V ~50/60Hz
Material: Aluminium / Glass

IP 55 | 2.3 | 20 | 0.35

IK03

Dimensioned drawing



Note
Open cable end

Recommended accessories
Concrete anchor
Item no. 232085 | 38,70 GBP

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

Recommended lamp
E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP

Lamp details
max. 60W
Ø: 9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27 anthracite	232075	238,50

OTOS GLAS
Pole, E27

A-A++ Spectrum A++–E






Product details
230V ~50Hz
Material: Aluminium / Glass

IP 43 | 2.6

Dimensioned drawing



Recommended accessories
Screw set
Item no. 228753 | 6,80 GBP

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

Recommended lamp
LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 6.8W 330°
2700K 806lm EEI=A++
7kWh/1000h
Item no. 560762 | 25,20 GBP

Lamp details
max. 15W
Ø: 6.5 cm max. L: 14.5 cm max.

Variant	Item no.	GBP
E27 anthracite	230465	108,00

GLOO PURE 27/44/70
Pole, E27

887

E-A++ Spectrum A++–E




Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 20 | IK02

Dimensioned drawing

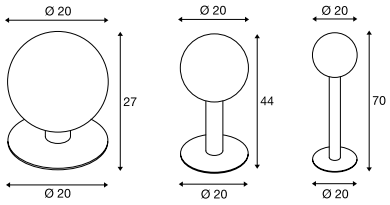

Note

Open cable end

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

■ Earth spike
Item no. 231234 | 38,70 GBP

Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

LED E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 | 25,20 GBP

Lamp details

max. 23W
Ø: 4.8 cm max. L: 18 cm max.

Variant	Item no.	GBP
E27 | H: 27 cm | 1.5 kg		
■ anthracite/matt transparent	**1001999**	**67,50**
E27 | H: 44 cm | 1.7 kg		
■ anthracite/matt transparent	**1002000**	**90,00**
E27 | H: 70 cm | 1.9 kg		
■ anthracite/matt transparent	**1002001**	**99,00**

ALPA CONE 100
Pole, E27

A-A++ Spectrum A++–E




Product details

220-240V ~50/60Hz
Material: Aluminium / Polycarbonate (PC)

IP 55 | 1.45

Dimensioned drawing



Note

Open cable end

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

■ Earth spike
Item no. 228722 | 45,00 GBP

Concrete anchor
Item no. 228712 | 47,70 GBP

Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

LED E27 12W 240°
3000K 1055lm EEI==A+
12kWh/1000h
Item no. 1001032 | 20,70 GBP


Lamp details


max. 24W
Ø: 5.2 cm max. L: 17.5 cm max.


Variant	Item no.	GBP
E27		
■ grey	**228922**	**153,00**
E27		
■ anthracite	**228925**	**153,00**





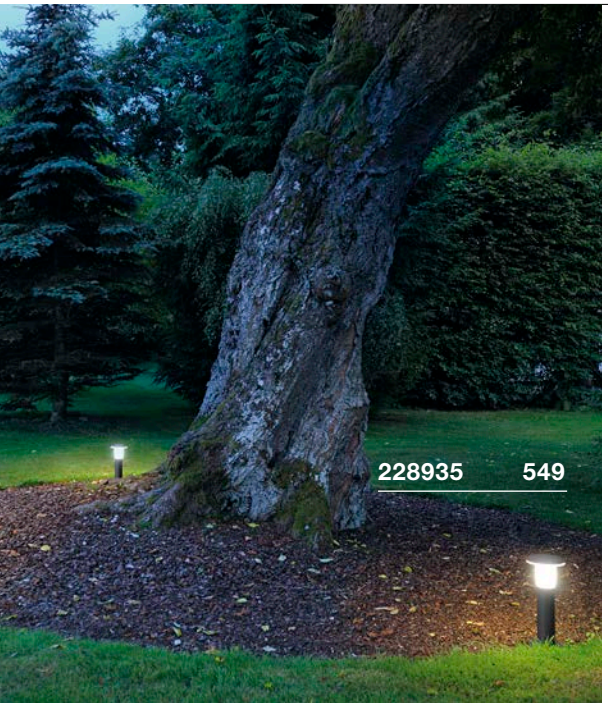

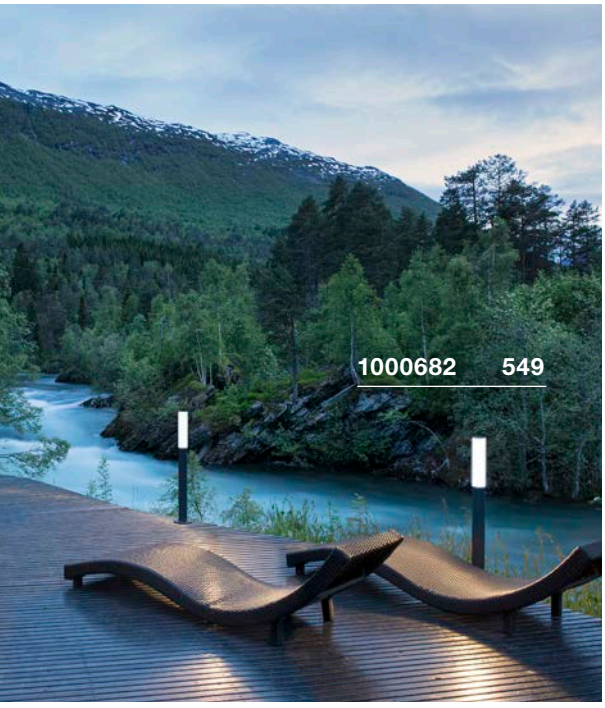


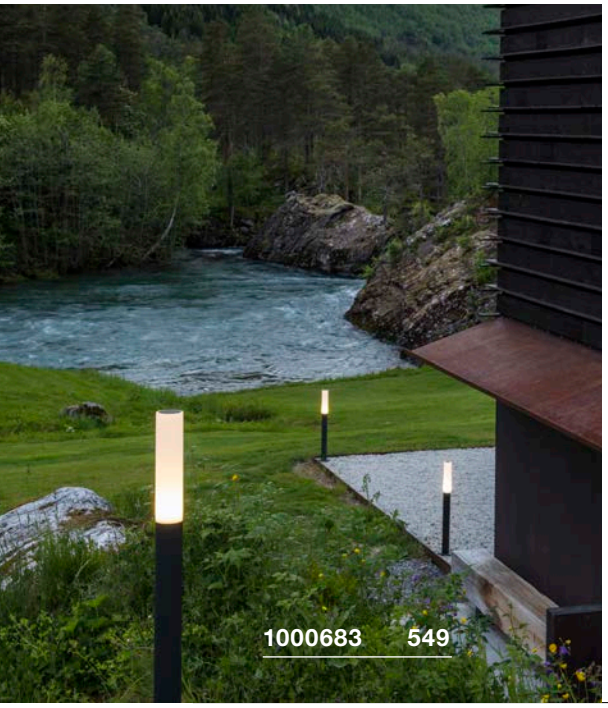

ALPA MUSHROOM 45/75
Pole, E27


A-A++ Spectrum A++–E






• 240V LED

Product details
220-240V ~50/60Hz
Material: Aluminium / Polycarbonate (PC)



Dimensioned drawing



Note
Open cable end

Recommended accessories
■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



■ Earth spike
Item no. 228722 | 45,00 GBP



Concrete anchor
Item no. 228712 | 47,70 GBP



Recommended lamp
E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 | 25,20 GBP

Lamp details
max. 24W
Ø: 5.2 cm max. L: 16 cm max.

Variant	Item no.	GBP
E27 | H: 45 cm | 0.9 kg		
■ anthracite	**228935**	**103,50**
E27 | H: 75 cm | 2 kg		
■ anthracite	**228945**	**130,50**

APONI 90/120
Pole, TRIAC

883

A-A++ Spectrum A++–E

LED INSIDE






Product details
220-240V ~50/60Hz
Total consumption: 8W
Material: Aluminium
Dimmable: Triac L





Dimensioned drawing



Note
Open cable end

Recommended accessories
■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP




Variant	Item no.	GBP
440lm | 3000K | CRI>80 | H: 90 cm | 1.466 kg		
■ anthracite	**1000682**	**188,10**
440lm | 3000K | CRI>80 | H: 120 cm | 1.845 kg		
■ anthracite	**1000683**	**233,10**

LIGHT PIPE 60/90/140
Pole, TRIAC

890

A-A++ Spectrum A++–E

LED INSIDE

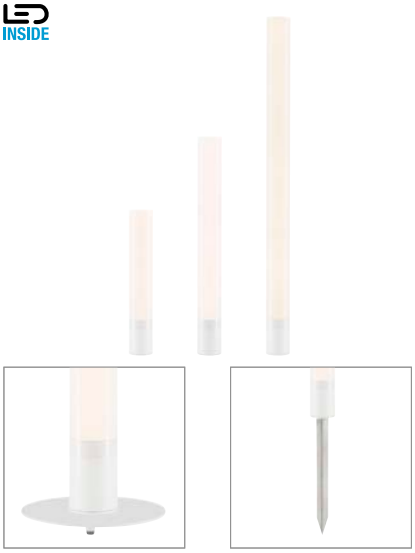


- Suitable for indoor and outdoor use


Product details

220-240V ~50/60Hz
Total consumption: 11W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C, Triac L





Dimensioned drawing



Note

Luminaire supplied without a mounting plate
Indoor installation plate with foot switch on the connection lead
Outdoor installation plate without foot switch, with IP44 shock-proof 2-pin plug

Recommended accessories

Earth spike
Item no. 234430 | 38,70 GBP



Outdoor installation plate
Item no. 234431 | 43,20 GBP



Indoor installation plate
Item no. 234441 | 43,20 GBP



Variant	Item no.	GBP
630lm | 2700K | CRI>80 | H: 60 cm | 1.5 kg		
white	234401	161,10
630lm | 2700K | CRI>80 | H: 90 cm | 1.71 kg		
white	234411	188,10
630lm | 2700K | CRI>80 | H: 140 cm | 2.06 kg		
white	234421	242,10

MOLAT
Pole, E27

891

E-A++ Spectrum A++–E






Product details

230V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended accessories

Earth spike
Item no. 230060 | 38,70 GBP



Recommended lamp

E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 560741 | 25,20 GBP




LED E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP


Lamp details

max. 60W
Ø: 6.5 cm max. L: 14.5 cm max.

Variant	Item no.	GBP
E27		
anthracite	1000822	144,00

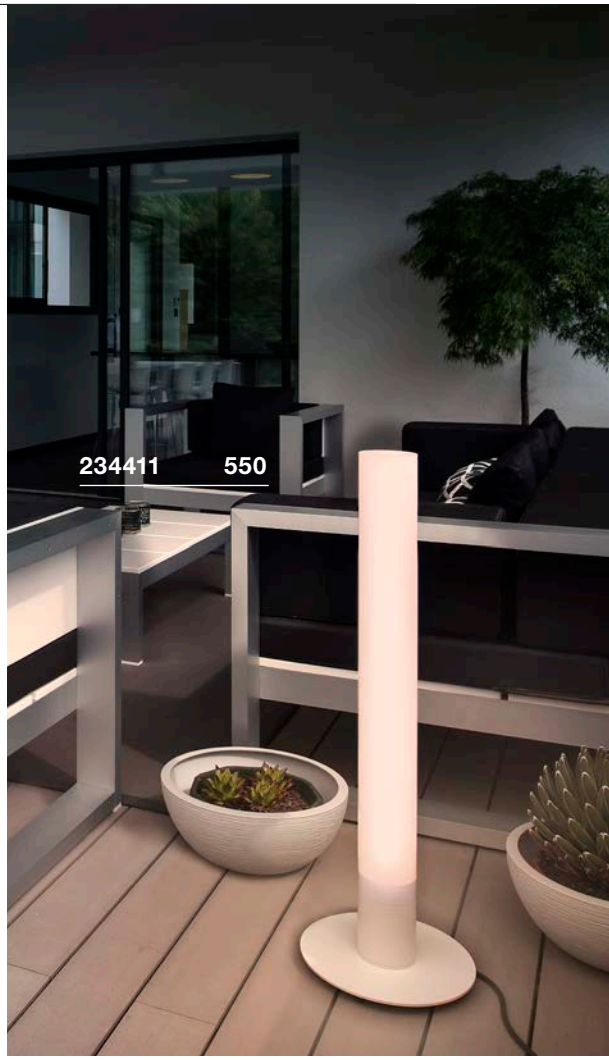



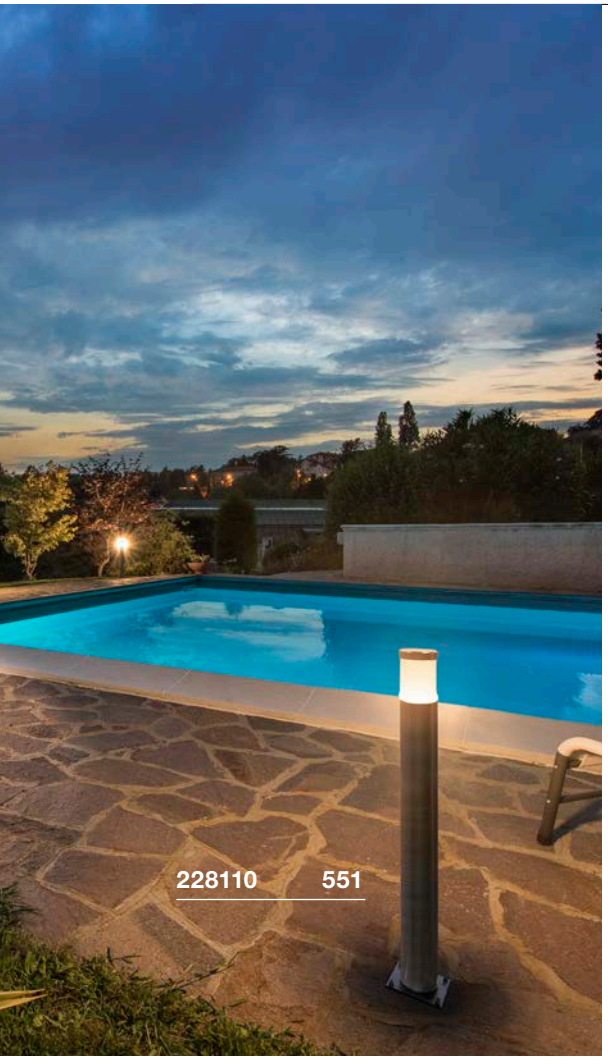



TRUST 30/60
Pole

898

A-A++ Spectrum A++–E

LED INSIDE








- Stainless steel 316
- 240V LED
- Sleek walkway lighting for wide range of outdoor arrangements

Product details

220-240V ~50/60Hz
Total consumption: 8.6W
Material: Stainless Steel 316

IP 55 | 35000 | 2 | IK07

Dimensioned drawing



Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

■ Earth spike
Item no. 227922 | 38,70 GBP

■ Grid, helical
Item no. 1000449 | 52,20 GBP

■ Grid, circular
Item no. 228130 | 72,00 GBP

Variant	Item no.	GBP
400lm | 3000K | CRI>80 | H: 30 cm | 1.4 kg		
■ stainless steel	**228100**	**188,10**
400lm | 3000K | CRI>80 | H: 60.5 cm | 2.25 kg		
■ stainless steel	**228110**	**242,10**


BIG NAILS PLUS 50/80
Pole, E27

884

A-A+ Spectrum A++–E








- Stainless steel 304

Product details

230V ~50Hz
Material: Stainless Steel 304 / Acrylic

IP 44

Dimensioned drawing



Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



■ Earth spike
Item no. 227922 | 38,70 GBP



Recommended lamp

E27 12W 240°
3000K 1055lm EEI==A+
12kWh/1000h
Item no. 1001032 | 20,70 GBP

LED E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 | 25,20 GBP

Lamp details

max. 23W
Ø: 4.8 cm max. L: 14.8 cm max.

Variant	Item no.	GBP
E27 | H: 50 cm | 1.13 kg		
■ stainless steel	**231602**	**148,50**
E27 | H: 80 cm | 1.54 kg		
■ stainless steel	**231612**	**175,50**

BIG NAILS 50/80
Pole

884

A-A++ Spectrum A++–E

LED INSIDE



BIG NAILS 50/80
Pole, E27

884

A-A+ Spectrum A++–E






- Stainless steel 304
- Sleek walkway light for wide range of outdoor arrangements

Product details

230V ~50Hz
Total consumption: 8.5W
Material: Stainless Steel 316



Dimensioned drawing



Recommended accessories

■ Earth spike
Item no. 227922 | 38,70 GBP



Recommended lamp

E27 4.7W 360°
3000K 380lm EEI=A+
5kWh/1000h
Item no. 551532 | 20,70 GBP



LED E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

Lamp details

max. 15W
Ø: 4.5 cm max. L: 17 cm max.


Variant	Item no.	GBP
480lm | 3000K | CRI>80 | H: 50 cm | 0.9 kg		
stainless steel	**1001997**	**130,50**
480lm | 3000K | CRI>80 | H: 80 cm | 1.235 kg		
stainless steel	**1001998**	**148,50**

Variant	Item no.	GBP
E27 | H: 51 cm | 1.1 kg		
stainless steel	**229162**	**121,50**
E27 | H: 81 cm | 1.6 kg		
stainless steel	**229172**	**130,50**







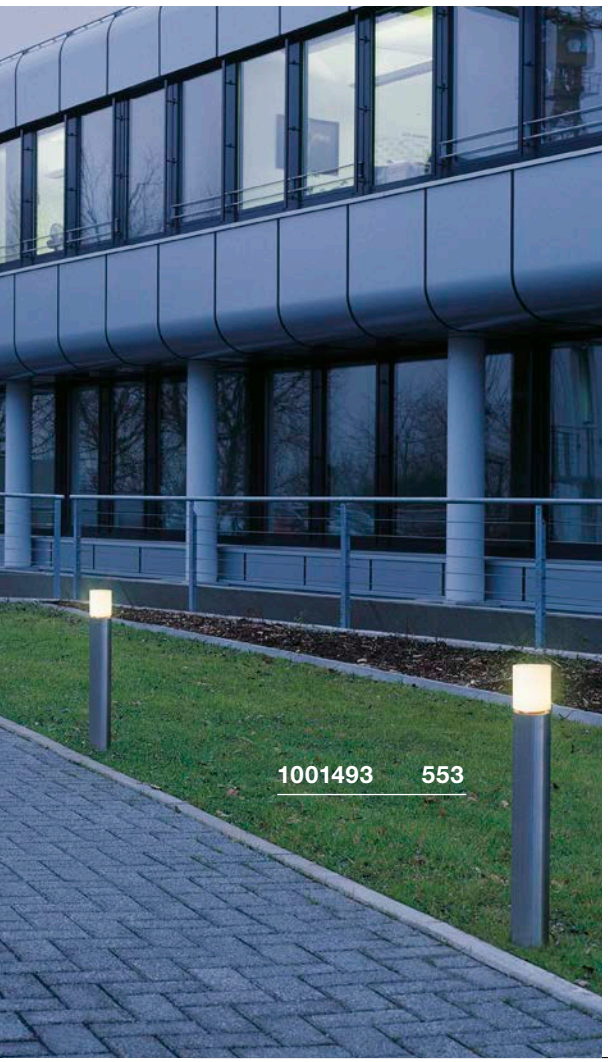

ROX ACRYL 30/60/90
Pole, TRIAC

895

A-A++ Spectrum A++–E

LED INSIDE






Product details

220-240V ~50/60Hz
Total consumption: 12W
Material: Stainless Steel 316
Dimmable: Triac C, Triac L

IP 44 | LED | 30000 | 0.2 | IK02

Dimensioned drawing



Recommended accessories

■ T-connector box
Item no. 228726 | 20,70 GBP

■ Concrete anchor
Item no. 1001494 | 20,70 GBP

■ Earth spike
Item no. 231234 | 38,70 GBP

Variant	Item no.	GBP
690lm | 3000K | CRI>80 | H: 30 cm | 1.55 kg		
stainless steel	**1001491**	**162,00**
690lm | 3000K | CRI>80 | H: 60 cm | 2.55 kg		
stainless steel	**1001492**	**188,10**
690lm | 3000K | CRI>80 | H: 90 cm | 3.45 kg		
stainless steel	**1001493**	**233,10**

ROX ACRYL 30/60/90
Pole, E27

895

A-A++ Spectrum A++–E






• High-quality brushed finish

Product details

220-240V ~50/60Hz
Material: Stainless Steel 304

IP 44 | 0.2 | IK02

Dimensioned drawing

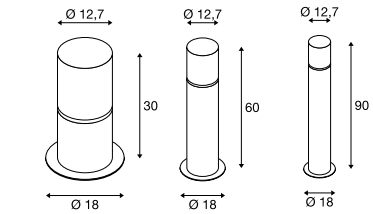

Recommended accessories

■ T-connector box
Item no. 228726 | 20,70 GBP

■ Concrete anchor
Item no. 1001494 | 20,70 GBP

■ Earth spike
Item no. 231234 | 38,70 GBP

Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

Lamp details

max. 20W
Ø: 6 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27 | H: 30 cm | 1.1 kg		
stainless steel	**1001488**	**126,00**
E27 | H: 60 cm | 2.1 kg		
stainless steel	**1001489**	**144,00**
E27 | H: 90 cm | 3 kg		
stainless steel	**1001490**	**162,00**

VAP SLIM 30/60/90
Pole, E27

A-A++ Spectrum A++–E




- Stainless steel 304
- Sleek walkway light for wide range of outdoor arrangements

Product details
230V ~50Hz
Material: Stainless steel 304

IP 44

Dimensioned drawing



Recommended accessories

Earth spike
Item no. 230060 | 38,70 GBP

Concrete anchor
Item no. 230061 | 19,80 GBP

Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

Lamp details
max. 20W
Ø: 5 cm max. L: 12.6 cm max.

Variant	Item no.	GBP
E27 | H: 30 cm | 1.5 kg matt stainless steel	230063	126,00
E27 | H: 60 cm | 2.5 kg matt stainless steel	230066	144,00
E27 | H: 90 cm | 3.4 kg matt stainless steel	230069	171,00

VAP 40/70/100
Pole, E27

A-A++ Spectrum A++–E




- Stainless steel 304

Product details
230V ~50Hz
Material: Stainless steel 304

IP 44

Dimensioned drawing



Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

Concrete anchor
Item no. 229059 | 28,80 GBP

Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP


Lamp details
max. 23W
Ø: 5.2 cm max. L: 12.1 cm max.

Variant	Item no.	GBP
E27 | H: 40 cm | 4.4 kg stainless steel	229054	332,10
E27 | H: 70 cm | 6 kg stainless steel	229057	422,10
E27 | H: 100 cm | 7.6 kg stainless steel	229050	512,10







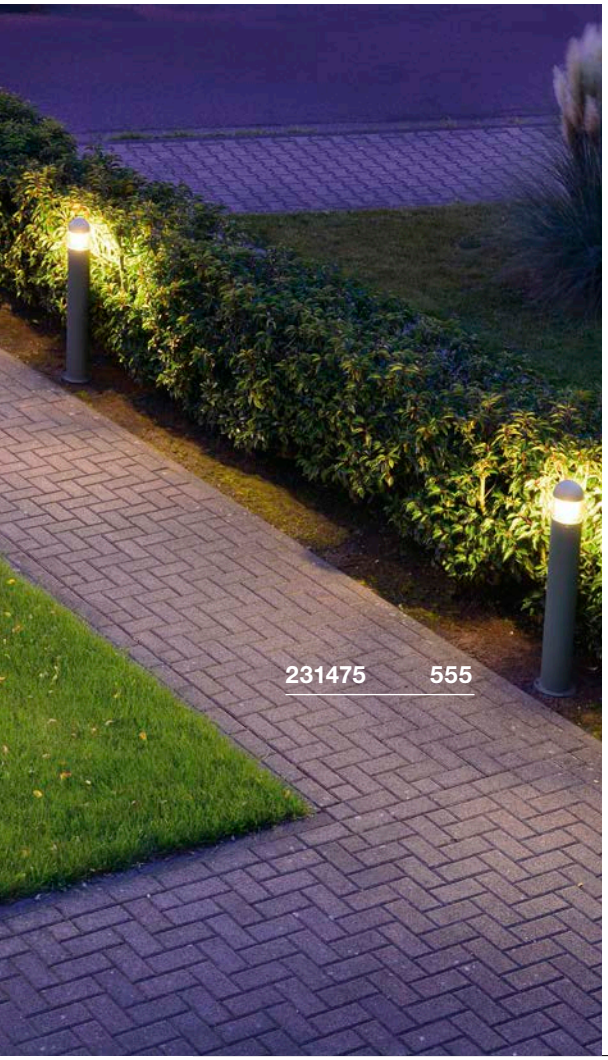

F-POL
Pole, E27

887

A-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Polycarbonate (PC)

IP 54 2.85

Dimensioned drawing



Recommended accessories
■ IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP

Recommended lamp
E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 |25,20 GBP

Lamp details
max. 20W
Ø: 5 cm max. L: 14.8 cm max.

Variant	Item no.	GBP
E27		
■ anthracite	**231595**	**148,50**

C-POL
Pole, E27

885

A-A++ Spectrum A++–E






Product details
230V ~50Hz
Material: Aluminium / Polycarbonate (PC)

IP 54 2.9

Dimensioned drawing



Recommended accessories
■ IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP

Recommended lamp
E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 |15,30 GBP

Lamp details
max. 24W
Ø: 5.2 cm max. L: 17.3 cm max.

Variant	Item no.	GBP
E27		
■ anthracite	**231475**	**153,00**

POLE PARC 90/150/200

Pole

894

A-A++ Spectrum A++–E

LED INSIDE







- Technical lighting system for targeted floor illumination
- Homogeneous, rotation-symmetrical light distribution
- Modern design for discreet, glare-free lighting


Product details

100-240V ~50/60Hz | 1450mA
Material: Aluminium / Plastic



IP 44 35000 IK06

Dimensioned drawing





Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Variant	Item no.	GBP
1000lm | 3000K | CRI>80 90 cm | 5.2 kg | 145mA | 21W		
anthracite	**1000760**	**341,10**
1800lm | 3000K | CRI>80 150 cm | 8.3 kg | 840mA | 33W		
anthracite	**1000761**	**557,10**
2600lm | 3000K | CRI>80 200 cm | 11.5 kg | 1430mA | 50W		
anthracite	**1000762**	**647,10**

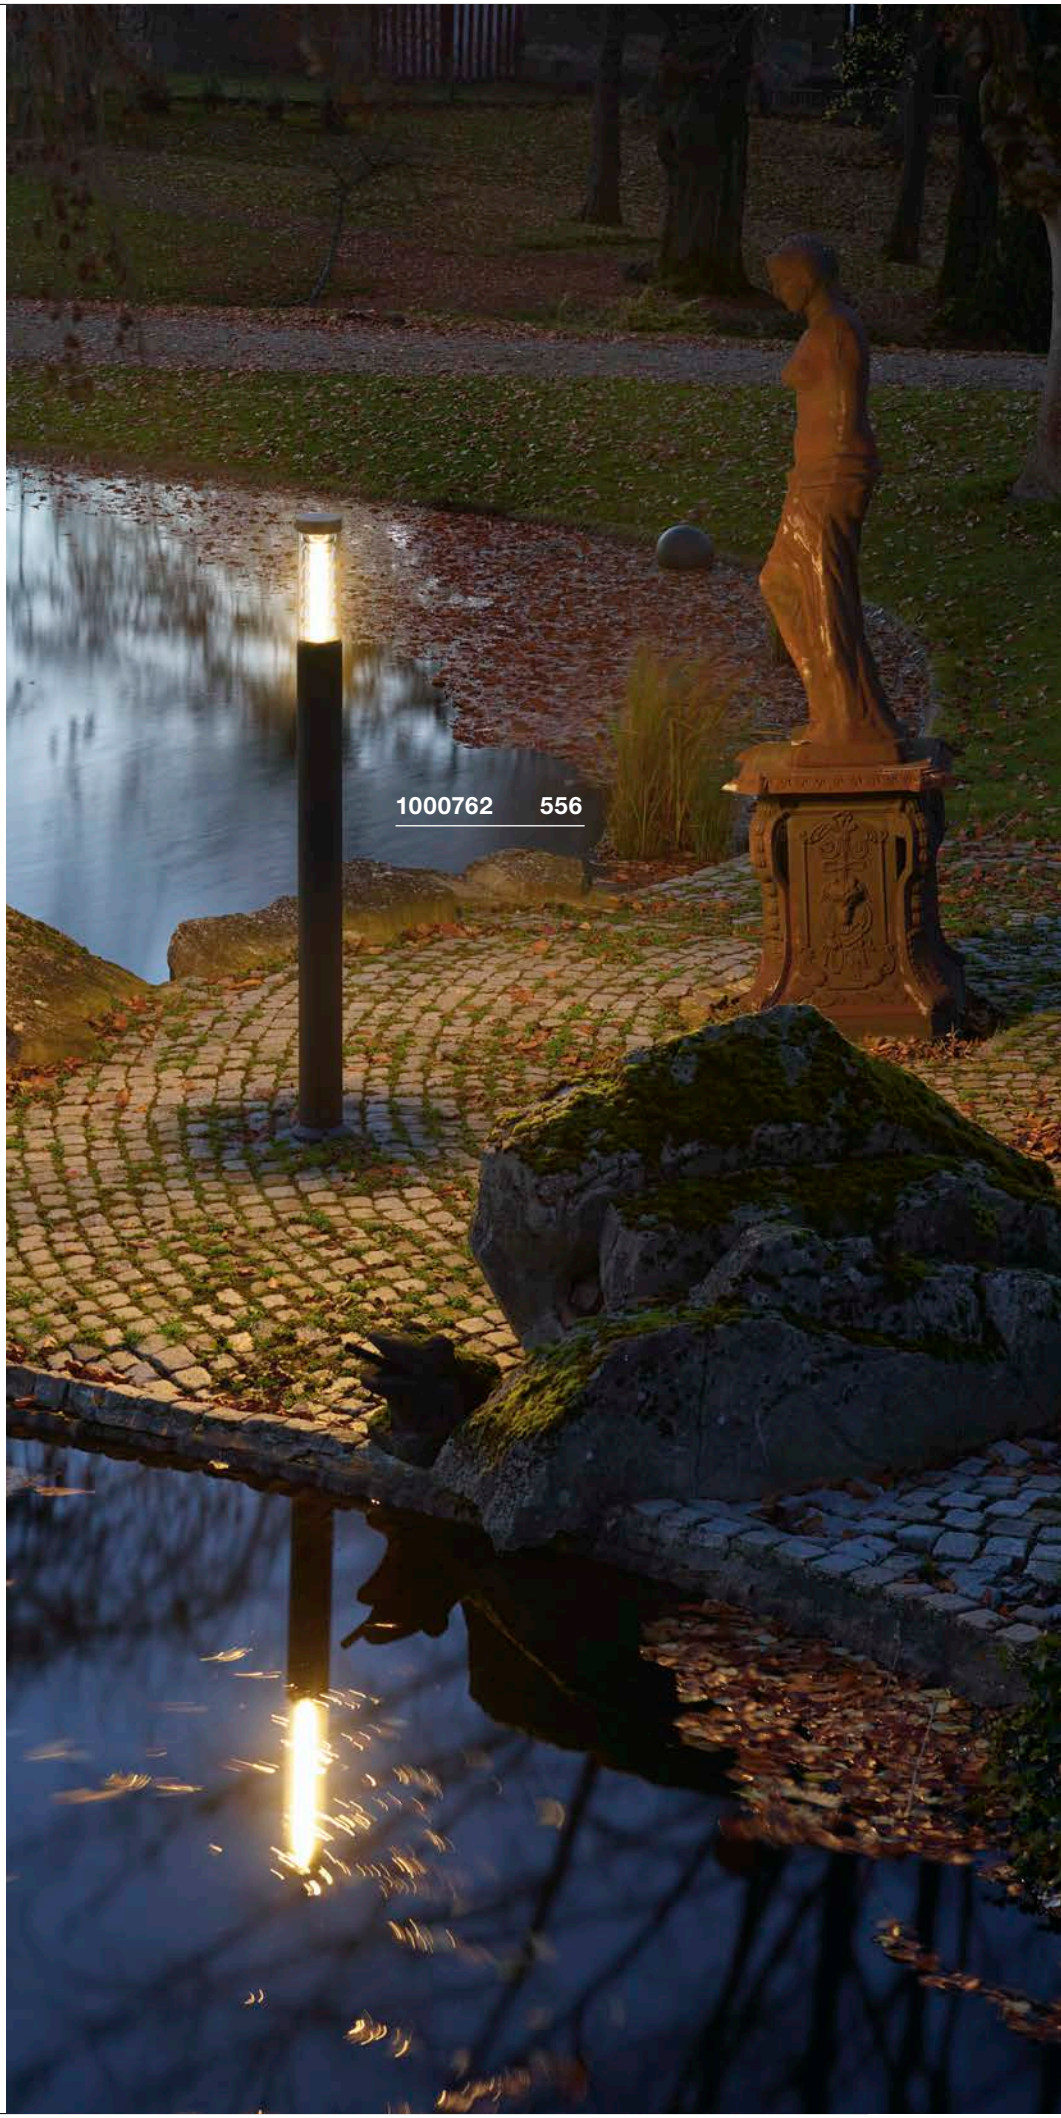

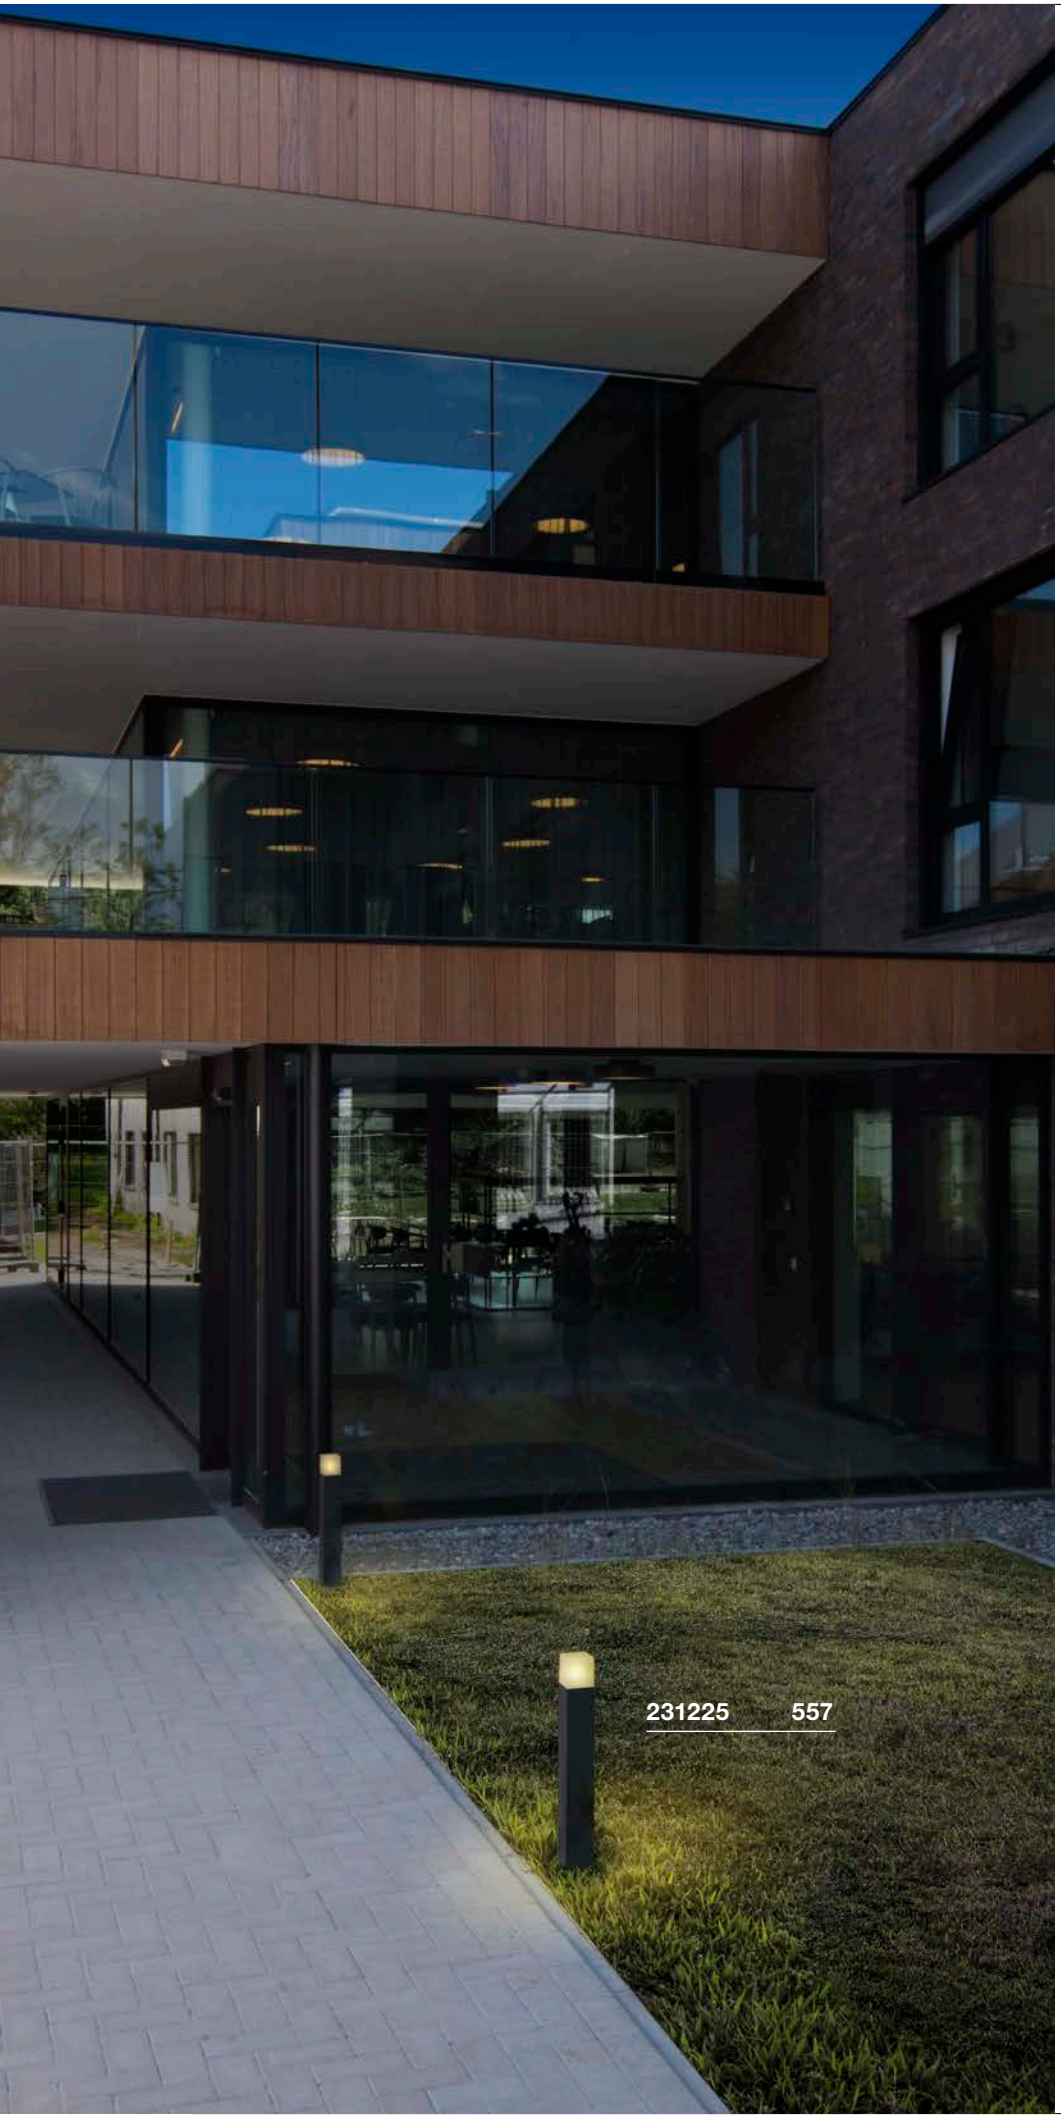

GRAFIT 30/60
Pole, E27

887

A-A++ Spectrum A++–E






Product details

230V ~50Hz
Material: Aluminium / Plastic

IP 44

Dimensioned drawing



Recommended accessories

Screw set
Item no. 228752 | 5,00 GBP

Earth spike
Item no. 231230 | 34,20 GBP

Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

Lamp details

max. 11W
Ø: 6 cm max. L: 11.5 cm max.

Variant	Item no.	GBP
E27 | H: 30 cm | 0.8 kg anthracite	231215	61,20
E27 | H: 60 cm | 1.4 kg anthracite	231225	80,10

LOGS 40/70
Pole

890

A-A++ Spectrum A++–E

LED INSIDE









Product details

100-240V ~50/60Hz | 500mA
Total consumption: 8W
Material: Aluminium



IP 44 40000

Dimensioned drawing





232125 558

Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Earth spike
Item no. 231230 | 34,20 GBP




Screw set
Item no. 228754 | 3,00 GBP




Concrete anchor
Item no. 232119 | 47,70 GBP



Variant	Item no.	GBP
420lm | 3000K | CRI>80 | H: 39.5 cm | 2 kg		
anthracite	232115	224,10
420lm | 3000K | CRI>80 | H: 69.5 cm | 2.8 kg		
anthracite	232125	269,10

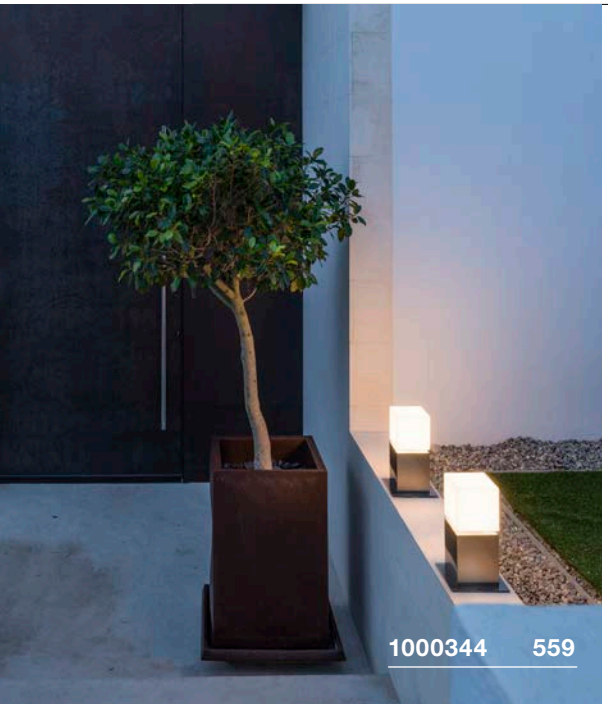

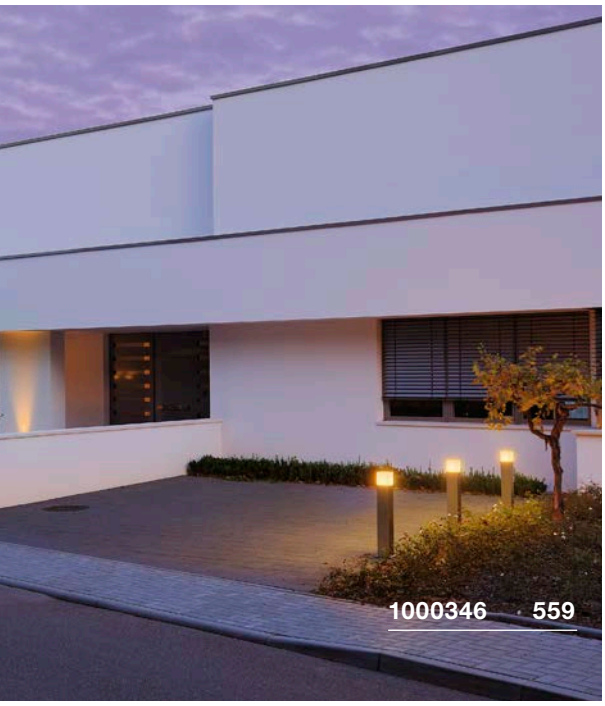




SQUARE POLE 30/60/90
Pole, TRIAC

896

A-A++ Spectrum A++–E

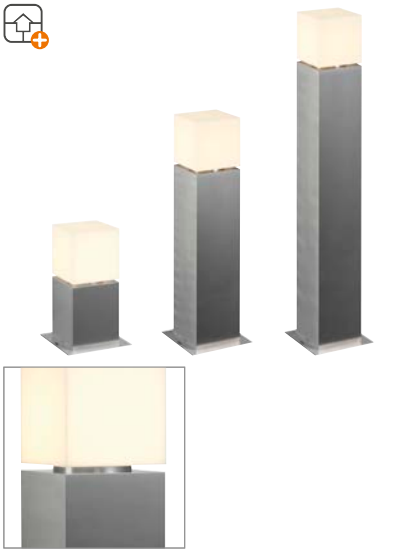


- Luminaire made from stainless steel 304
- Modern design for walkway lighting
- Diffuse light distribution for brightening the surroundings

Product details

220-240V ~50/60Hz
Material: Stainless Steel 304

IP 44 | 0.2 | IK02

Dimensioned drawing

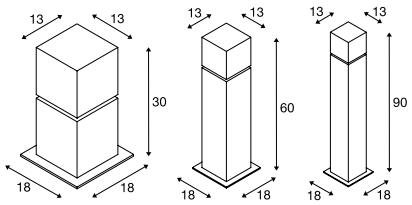

Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

Concrete anchor
Item no. 1000343 | 40,50 GBP

Earth spike
Item no. 231234 | 38,70 GBP

Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

max. 20W
Ø: 6 cm max. L: 15 cm max.


Variant	Item no.	GBP
E27 | H: 30 cm | 1.2 kg		
stainless steel	**1000344**	**188,10**
E27 | H: 60 cm | 2.5 kg		
stainless steel	**1000345**	**233,10**
E27 | H: 90 cm | 3.9 kg		
stainless steel	**1000346**	**278,10**

SQUARE POLE 30/60/90
Pole, TRIAC

896

A-A++ Spectrum A++–E

LED INSIDE

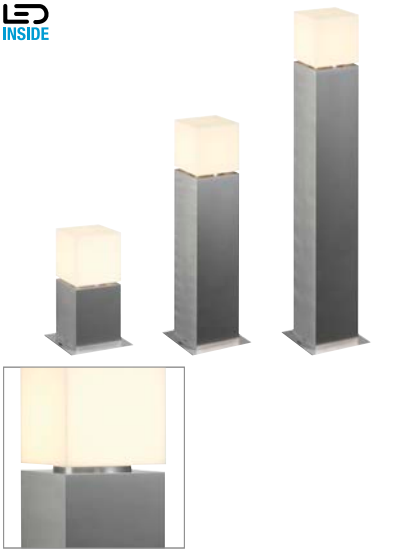


- Luminaire made from high-quality 316 stainless steel
- Modern design for walkway lighting
- Diffuse light distribution for brightening the surroundings

Product details

220-240V ~50/60Hz
Total consumption: 12W
Material: Stainless Steel 316
Dimmable: Triac C, Triac L

IP 44 | LED | 30000 | 0.2 | IK02

Dimensioned drawing

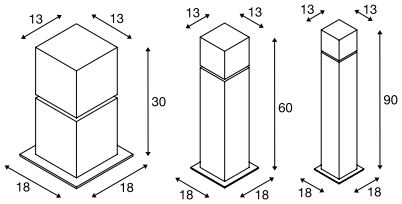

Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

Concrete anchor
Item no. 1000343 | 40,50 GBP

Earth spike
Item no. 231234 | 38,70 GBP

Variant	Item no.	GBP
760lm | 3000K | CRI>80 | H: 30 cm | 2 kg		
stainless steel	**1000416**	**243,00**
760lm | 3000K | CRI>80 | H: 60 cm | 3.4 kg		
stainless steel	**1000417**	**288,00**
760lm | 3000K | CRI>80 | H: 90 cm | 4.7 kg		
stainless steel	**1000418**	**333,00**

RUSTY® 40/70
Pole, E27

A-A++ Spectrum A⁺⁺–E






- Rusty steel
- Each fitting is unique

Product details
230V ~50Hz
Material: FeCSi-Steel / Polycarbonate (PC)

IP 55

Dimensioned drawing



Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

Earth spike
Item no. 229422 | 34,20 GBP

Recommended lamp

E27 4.7W 360°
3000K 380lm EEI=A+
5kWh/1000h
Item no. 551532 | 20,70 GBP

LED E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

Lamp details
max. 11W
Ø: 4.8 cm max. L: 13.9 cm max.

Variant	Item no.	GBP
E27 | H: 40 cm | 11 kg rust	229420	242,10
E27 | H: 71 cm | 22 kg rust	229421	296,10

RUSTY® 40/70
Pole

A-A++ Spectrum A⁺⁺–E

LED INSIDE






- Rusty steel
- Each fitting is unique
- 240V LED

Product details
220-240V ~50/60Hz
Total consumption: 8.6W
Material: FeCSi-Steel / Polycarbonate (PC)

IP 55 35000

Dimensioned drawing



Note
Open cable end


Recommended accessories


IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

Earth spike
Item no. 229422 | 34,20 GBP

Variant	Item no.	GBP
90lm | 3000K | CRI>80 | H: 40 cm | 11 kg rust	233427	296,10
90lm | 3000K | CRI>80 | H: 71 cm | 22 kg rust	233437	359,10



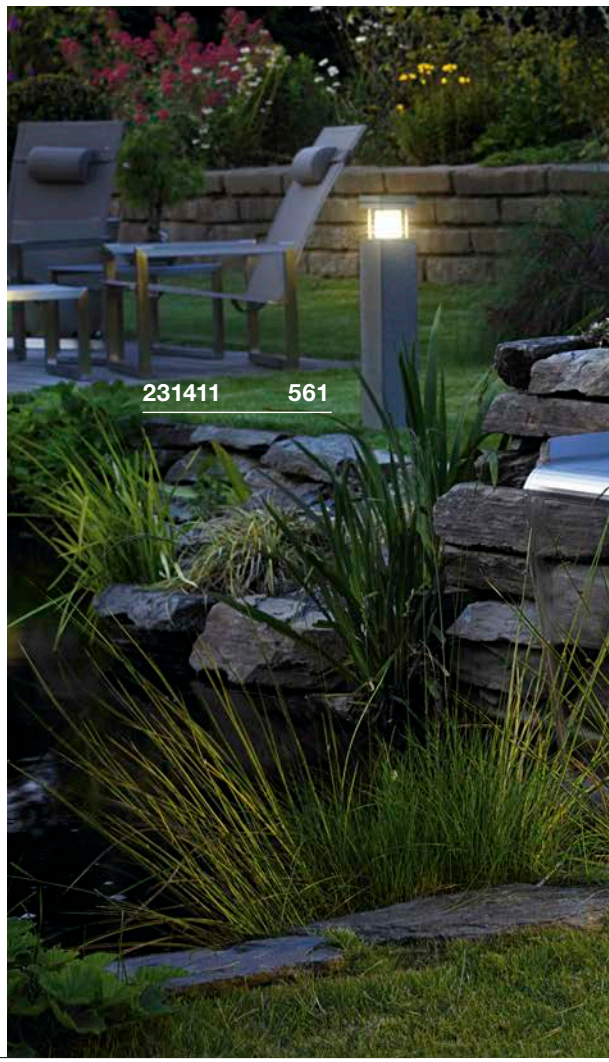

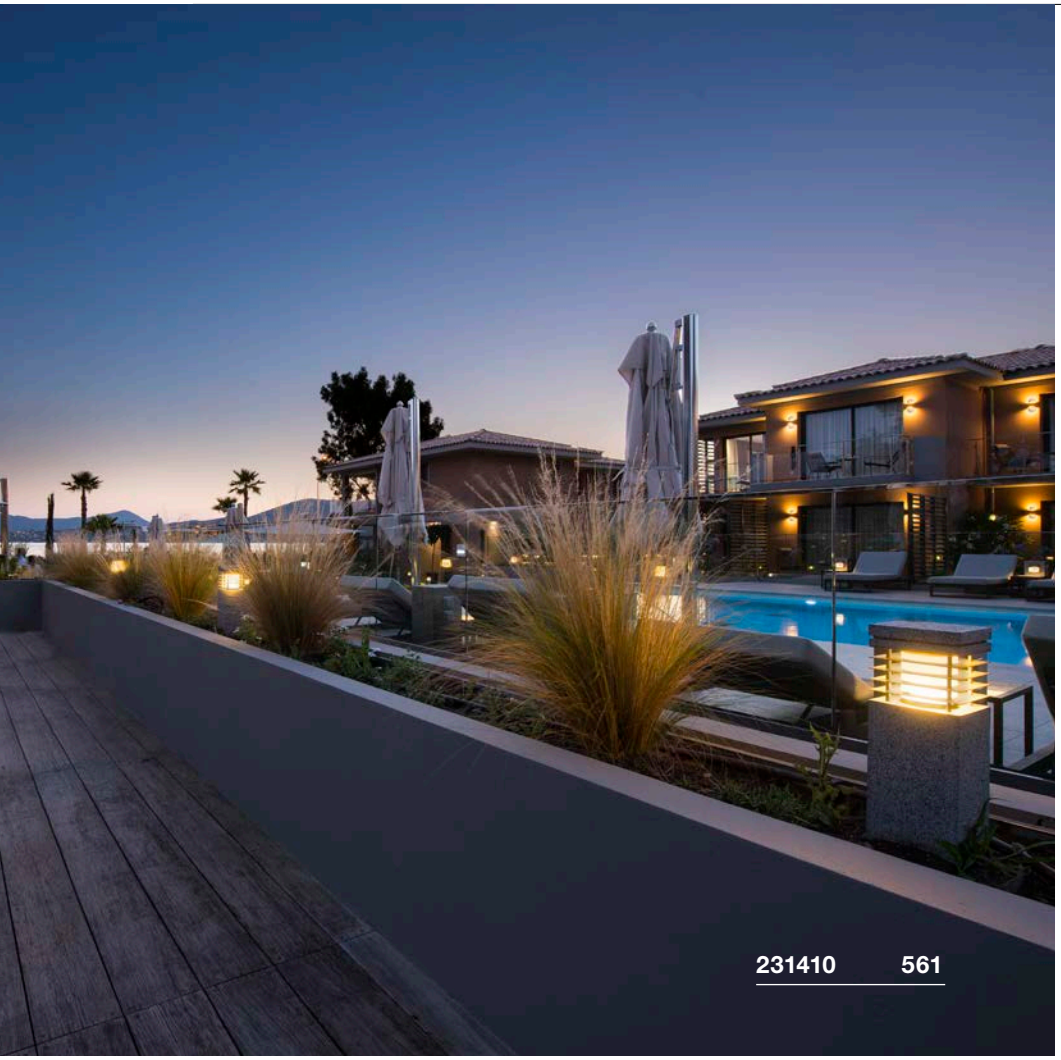



ARROCK GRANITE 40/70
Pole, square, E27

A-A++ Spectrum A++–E




- Natural stone, granite, stainless steel
- Natural look with glare-free lighting effect

Product details

230V ~50Hz
Material: Granite / Stainless Steel 304

IP 44

Dimensioned drawing



Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



■ Earth spike
Item no. 229422 | 34,20 GBP



Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

Lamp details


max. 15W
Ø: 5.2 cm max. L: 11.5 cm max.

Variant	Item no.	GBP
E27 | H: 40 cm | 11 kg		
grey / chrome	**231410**	**287,10**
E27 | H: 70 cm | 22.5 kg		
grey / chrome	**231411**	**350,10**

ARROCK ARC
Pole, QPAR51

E-A++ Spectrum A++–E






- Natural stone, granite, stainless steel
- Flat design with extraordinary lighting effect

Product details

230V ~50Hz
Material: Granite / Stainless Steel 304

IP 44 12.3

Dimensioned drawing



Recommended accessories

Earth spike
Item no. 231233 | 38,70 GBP

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP


LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001564 | 9,90 GBP

Lamp details

max. 35W QPAR51
Ø: 5 cm max. L: 7.6 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
grey / chrome	**231420**	**287,10**



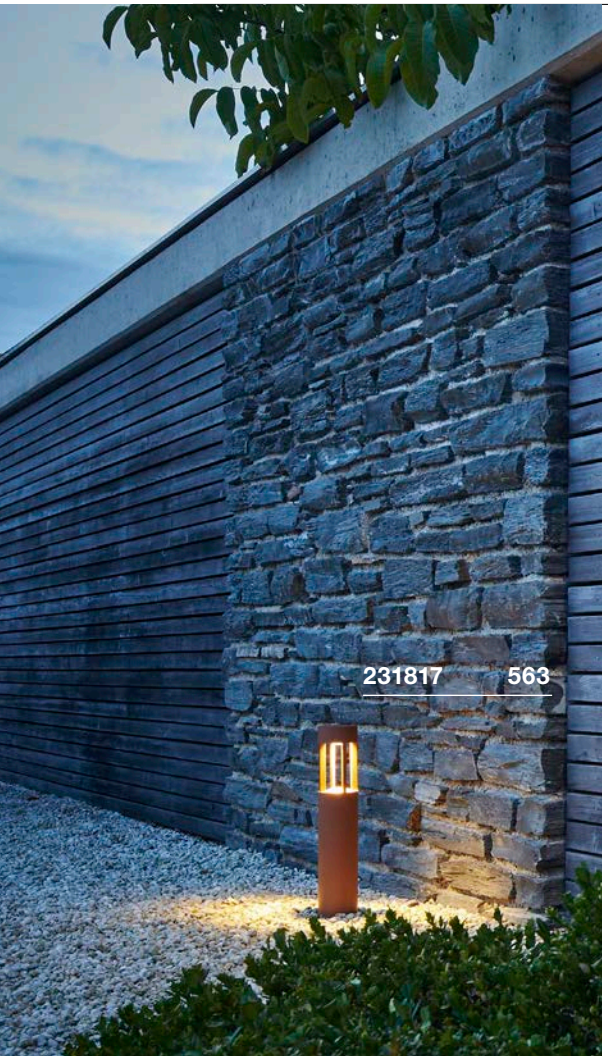



SLOTS 45
Pole

896

A-A++ Spectrum A⁺⁺–E

LED INSIDE








- Indirect light emission
- Unusual lighting effect for safe footing

Product details

220-240V ~50/60Hz
Total consumption: 6.3W
Material: Aluminium



Dimensioned drawing



Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



■ screw set
Item no. 228753 | 6,80 GBP



Variant	Item no.	GBP
200lm | 3000K | CRI>80 ■ anthracite	**231815**	**135,00**
200lm | 3000K | CRI>80 ■ rust	**231817**	**135,00**

SLOTS 65
Pole

896

A-A++ Spectrum A⁺⁺–E

LED INSIDE








- Indirect light emission
- Unusual lighting effect for safe footing

Product details

220-240V ~50/60Hz
Total consumption: 6.3W
Material: Aluminium



Dimensioned drawing



Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



■ screw set
Item no. 228753 | 6,80 GBP



Variant	Item no.	GBP
200lm | 3000K | CRI>80 ■ anthracite	**231455**	**144,00**
200lm | 3000K | CRI>80 ■ rust	**231457**	**144,00**

BOOKAT
Pole, TRIAC

A-A++ Spectrum A++–E

LED INSIDE






• 240V LED

Product details

230V ~50Hz
Total consumption: 13W
Material: Aluminium
Dimmable: Triac C, Triac L


IP 44 | 2.5 | 50000


Dimensioned drawing



Note

Open cable end

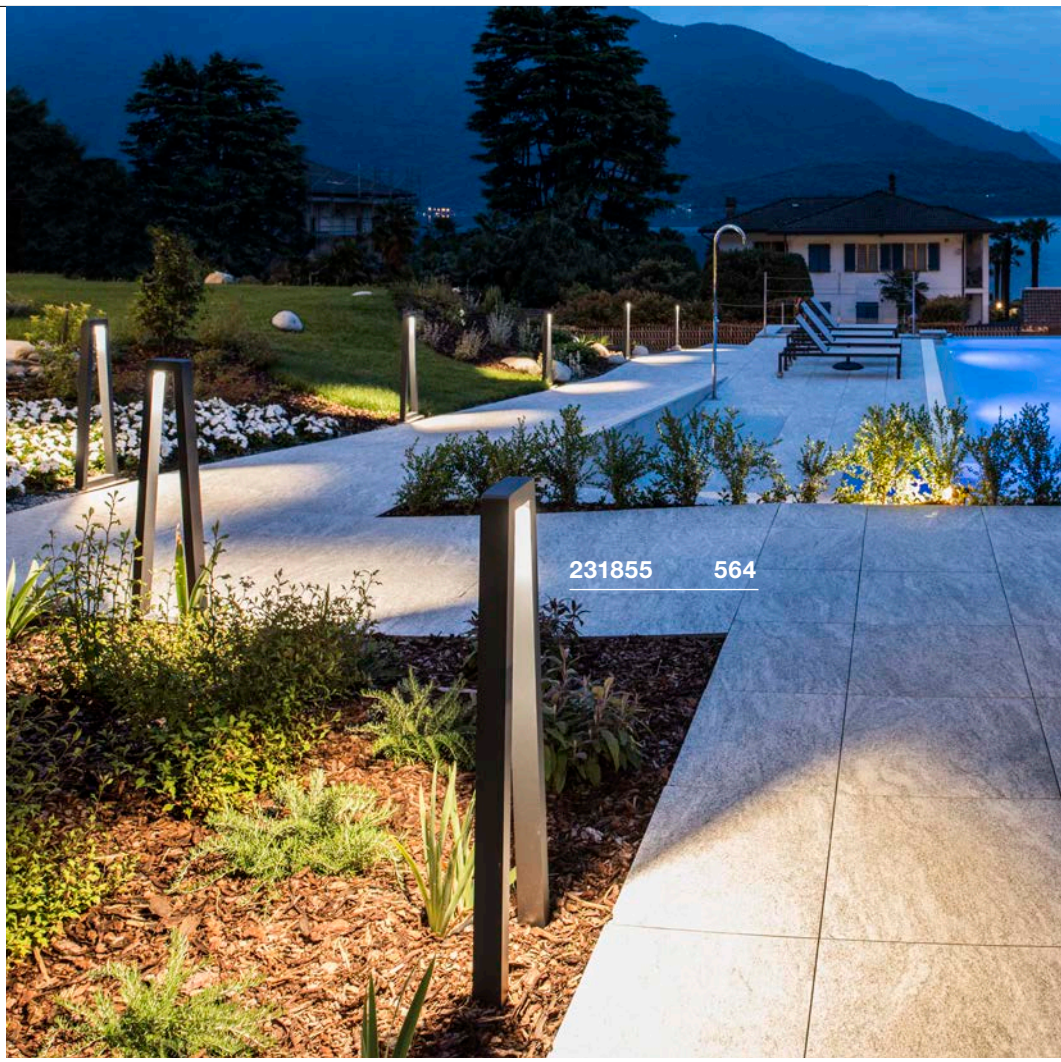

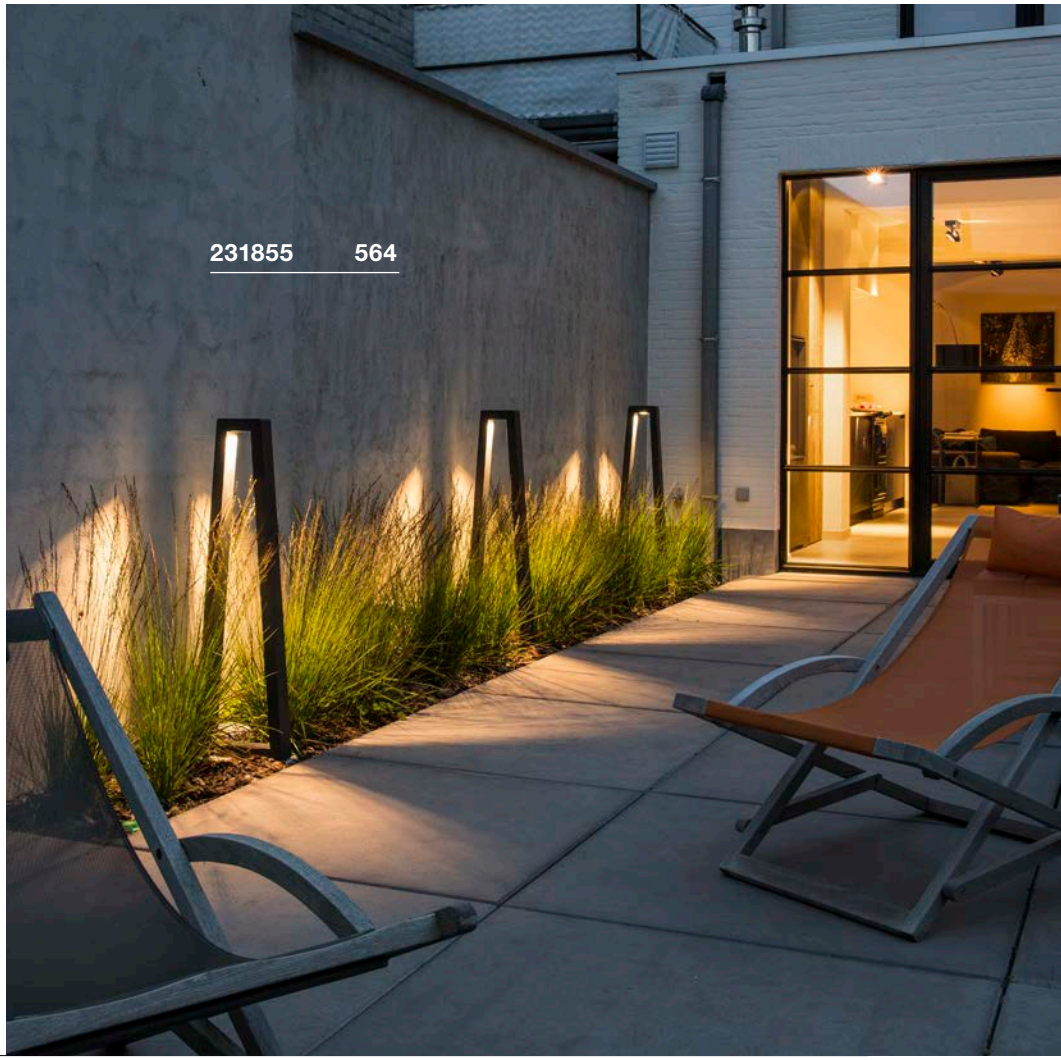


Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP



Variant	Item no.	GBP
370lm | 3000K | CRI>80		
■ anthracite	**231855**	**337,50**

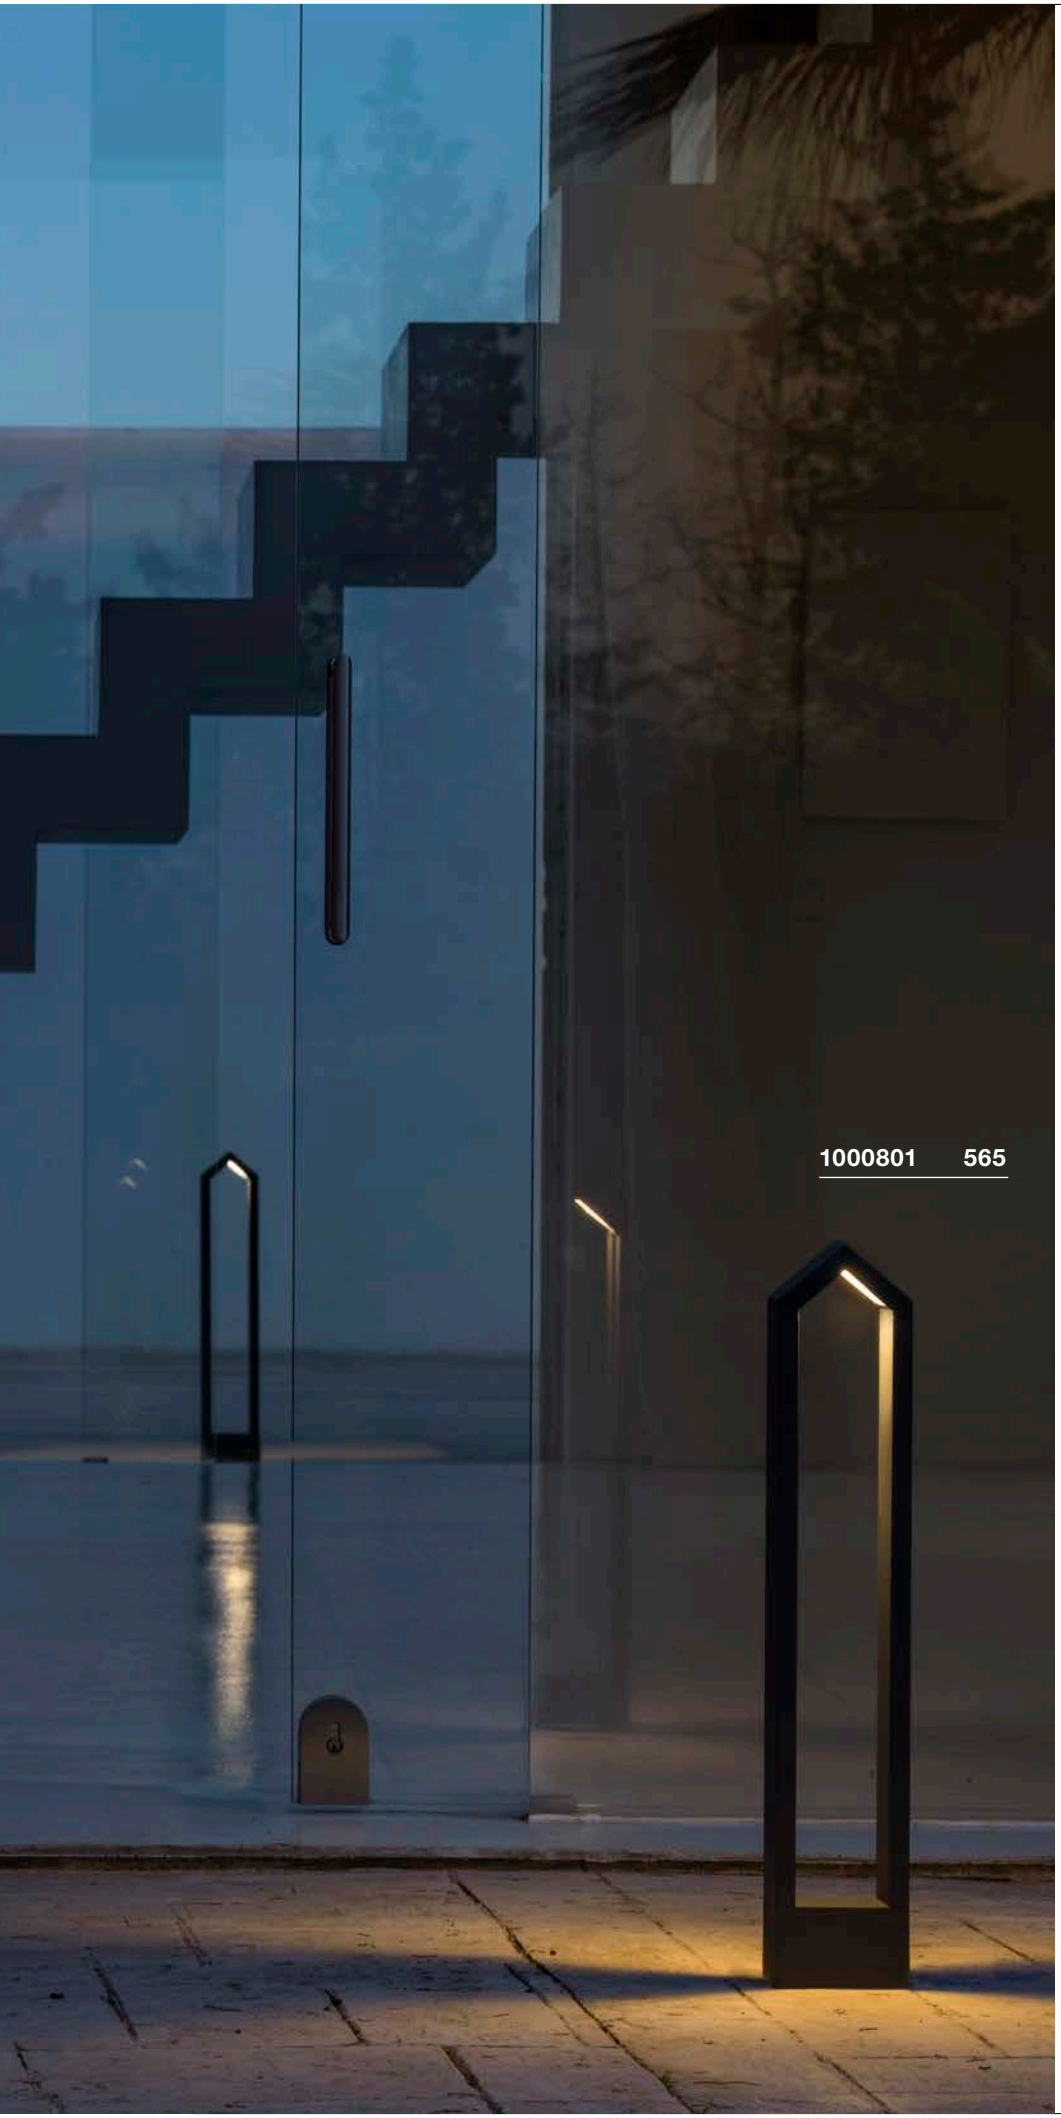

RASCALI 45/65
Pole

894

A-A++ Spectrum A++–E

LED INSIDE







- Unusual design
- Axis-symmetrical light distribution for accentuating paths and surfaces

Product details

220-240V ~50Hz
Total consumption: 8W
Material: Aluminium




IP 65 | 30000 | 0.2



IK02

Dimensioned drawing



Variant	Item no.	GBP
360lm | 3000K | CRI>80 | H: 45 cm | 2.25 kg		
anthracite	1000799	135,00
360lm | 3000K | CRI>80 | H: 65 cm | 2.8 kg		
anthracite	1000801	153,00


H-POL 30/60
Pole

A-A++ Spectrum A++–E

LED INSIDE



- One-sided light emission

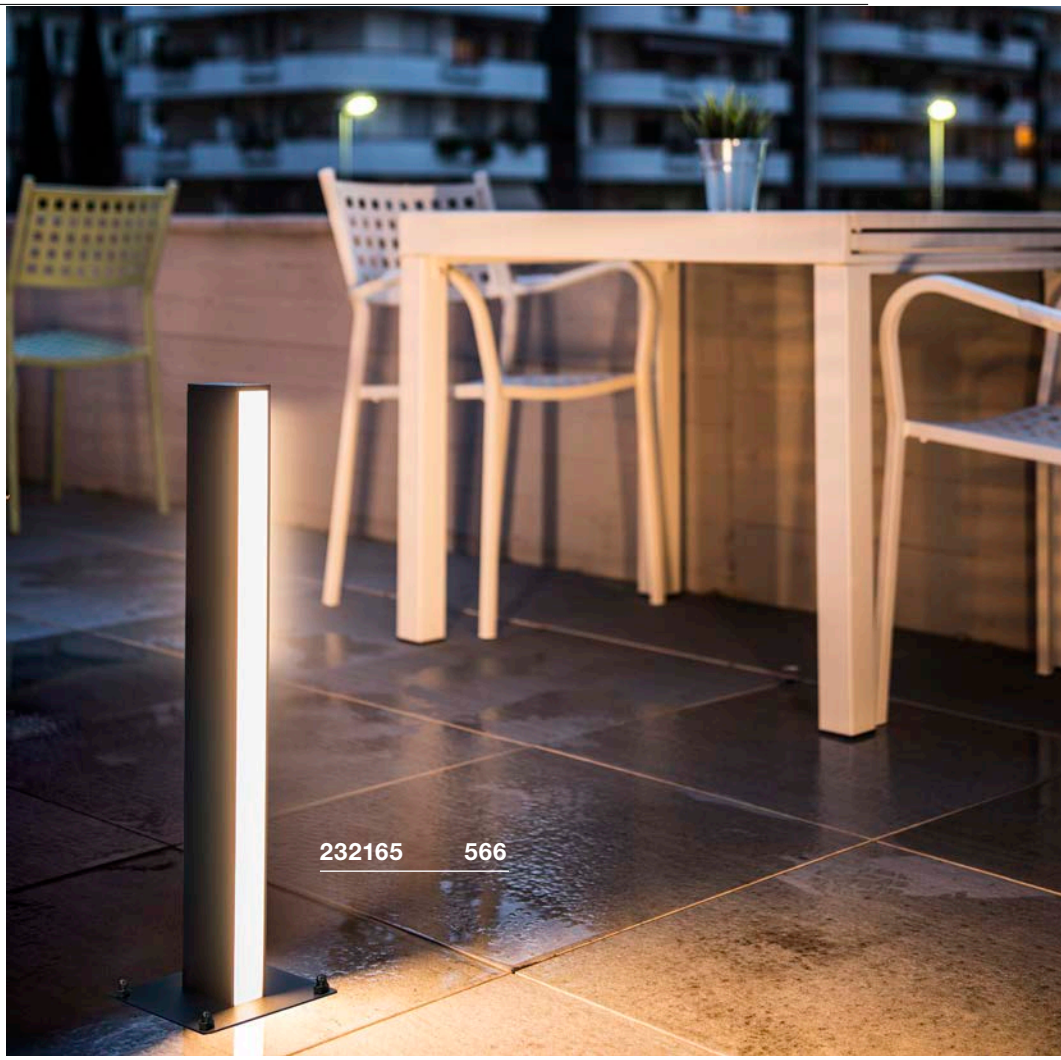


Product details

100-277V ~50/60Hz | 500mA
Material: Aluminium / Plastic
Installation dimensions:
W: 11.8 cm L: 11.8 cm D: 10 cm



Dimensioned drawing



Note

The product is intended for inground installation. A large mounting pot is available for optimum inground installation. Installation dimensions of the optional installation pot:
L: 14 cm W: 14 cm D:16 cm.



Recommended accessories

■ Installation pot
Item no. 232195 |38,70 GBP

Variant	Item no.	GBP
350lm | 3000K | CRI>80 | 9W | H: 36 cm | 1.4 kg		
■ anthracite	**232155**	**206,10**
700lm | 3000K | CRI>80 | 18W | H: 66 cm | 2.3 kg		
■ anthracite	**232165**	**296,10**



H-POL TWIN 30/60
Pole

A-A++ Spectrum A++–E

LED INSIDE



- Two-sided light emission


Product details

220-240V ~50/60Hz | 1000mA
Material: Aluminium / Plastic
Installation dimensions:
W: 11.8 cm L: 11.8 cm D: 10 cm



IP 55 30000 9/18

Dimensioned drawing

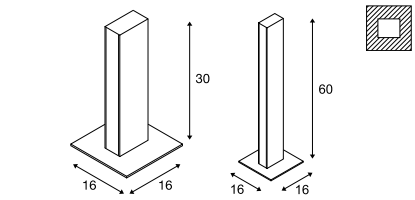

Note

The product is intended for inground installation. A large mounting pot is available for optimum inground installation. Installation dimensions of the optional mounting pot:
L: 14 cm W: 14 cm D:16 cm.

Recommended accessories

■ Installation pot
Item no. 232195 | 38,70 GBP

Variant	Item no.	GBP
Direct: 350lm | 3000K | CRI>80 Indirect: 350lm | 3000K | CRI>80 18W | H: 36 cm | 1.6 kg		
■ anthracite	**232175**	**278,10**
Direct: 700lm | 3000K | CRI>80 Indirect: 700lm | 3000K | CRI>80 35W | H: 66 cm | 2.5 kg		
■ anthracite	**232185**	**386,10**


SLOTBOX 40/70
Pole

A-A++ Spectrum A++–E

LED INSIDE





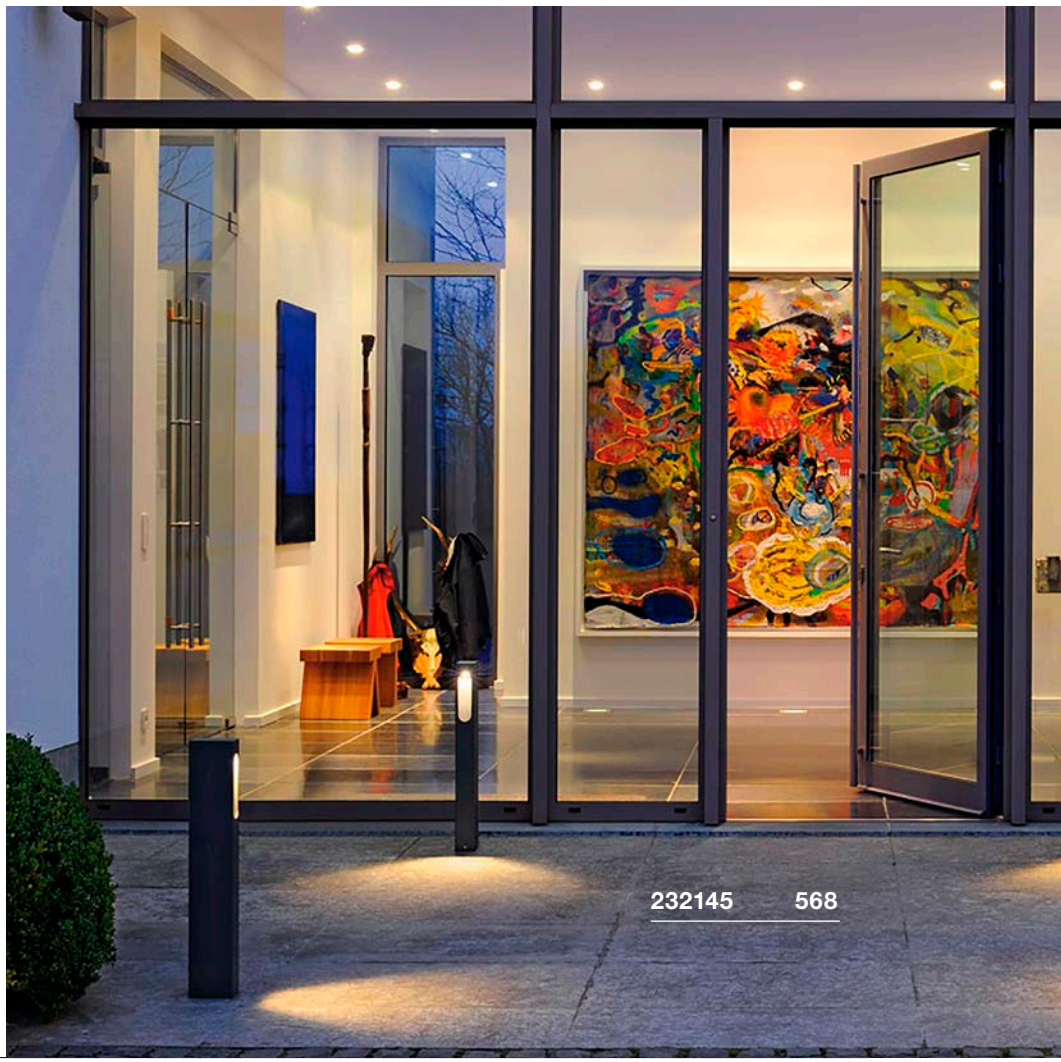


Product details

200-240V ~50/60Hz | 700mA
Total consumption: 8W
Material: Aluminium





Dimensioned drawing



Note

Open cable end


Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP



Variant	Item no.	GBP
160lm | 3000K | CRI>80 | H: 40 cm | 1.45 kg		
■ anthracite	**232135**	**153,00**
160lm | 3000K | CRI>80 | H: 70 cm | 2.1 kg		
■ anthracite	**232145**	**180,00**



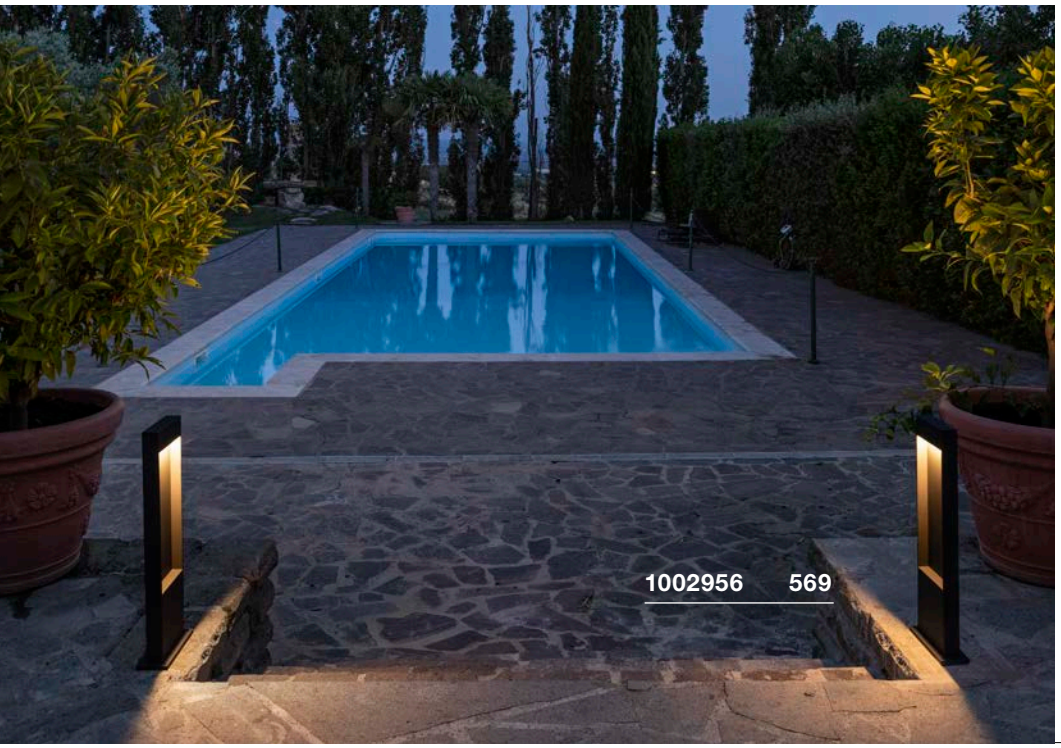

FLATT 65/100
Pole

887

A-A++ Spectrum A++–E

INSIDE

NEW



- Switchable light colour

Product details

100-240V ~50/60Hz | 350mA
Total consumption: 9.7W
Material: Aluminium / Aluminium

IP 65 0.35 IK03

Variant	Item no.	GBP
400lm | 3000/4000K | CRI80 L: 18 cm | W: 4.5 cm | H: 65 cm | 3.2 kg matt anthracite / matt anthracite	1002956	180,00
400lm | 3000/4000K | CRI80 L: 18 cm | W: 4.5 cm | H: 65 cm | 3.2 kg matt anthracite / matt brown	1002957	180,00
400lm | 3000/4000K | CRI80 L: 18 cm | W: 4.5 cm | H: 100 cm | 4.47 kg matt anthracite / matt anthracite	1002958	225,00
400lm | 3000/4000K | CRI80 L: 18 cm | W: 4.5 cm | H: 100 cm | 4.47 kg matt anthracite / matt brown	1002959	225,00

ARROCK STONE 50/70
Pole

A-A++ Spectrum A++–E

LED INSIDE







- Basalt / stainless steel
- Unusual lighting effect

Product details

100-240V ~50/60Hz | 700mA
Total consumption: 9W
Material: Granite / Stainless Steel 304



Dimensioned drawing



Recommended accessories

Earth spike
Item no. 231235 | 38,70 GBP



Variant	Item no.	GBP
330lm | 3000K | CRI>80 | H: 50 cm | 15.5 kg		
grey	**231370**	**332,10**
330lm | 3000K | CRI>80 | H: 75 cm | 22.2 kg		
grey	**231371**	**377,10**

ARROCK SLOT
Pole, QPAR51

A-A++ Spectrum A++–E









- Natural stone, granite, stainless steel
- Unusual lighting effect, natural look

Product details

230V ~50Hz
Material: Granite / Stainless Steel 304



Dimensioned drawing



Note

Open cable end

Recommended accessories

Earth spike
Item no. 231235 | 38,70 GBP



IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Recommended lamp


LED GU10 3.7W 36°
2700K 260lm EEI=A+
4kWh/1000h
Item no. 560122 | 29,70 GBP





Lamp details


max. 4W LED GU10 51mm


Variant	Item no.	GBP
GU10 | LED GU10 51mm		
grey / chrome	**231440**	**332,10**

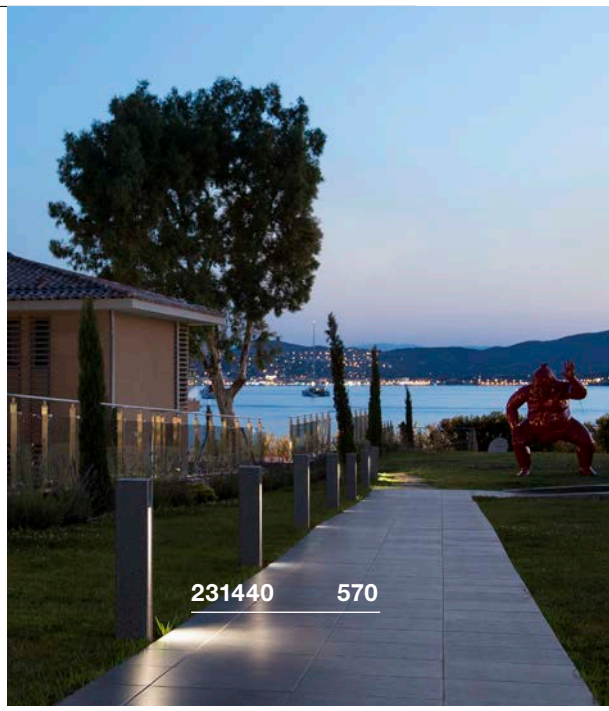


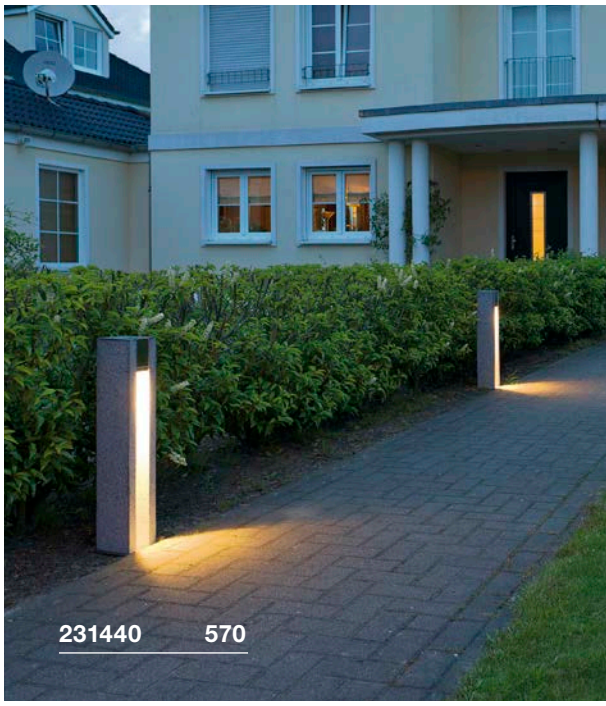

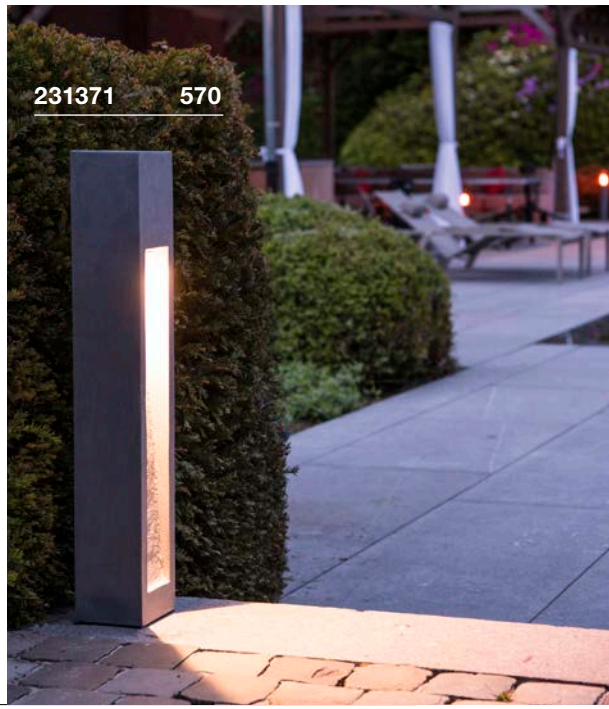

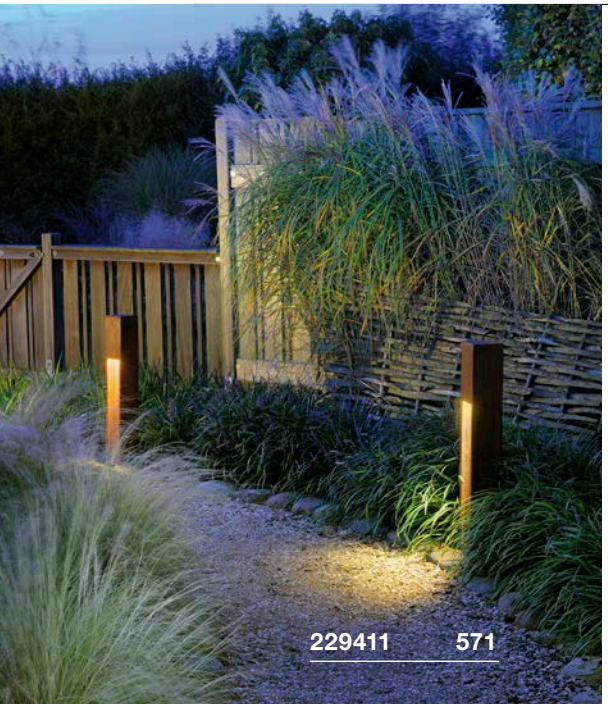

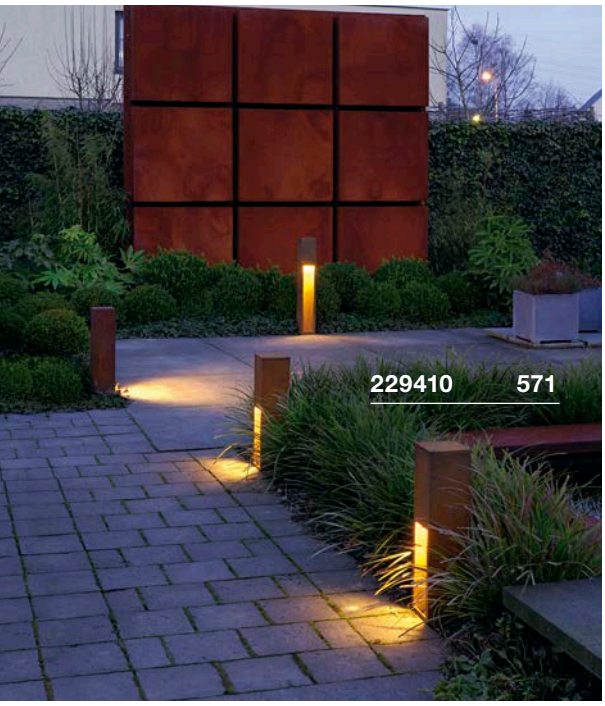

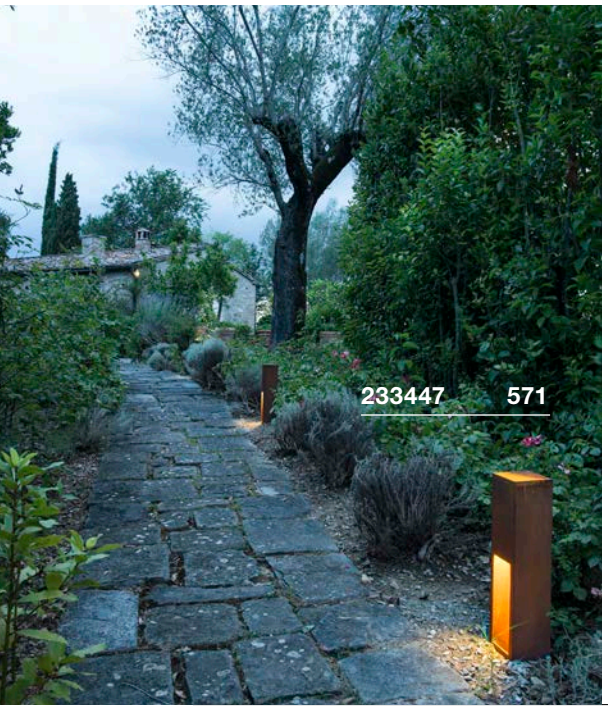

RUSTY® SLOT 50/80
Pole, E27

A-A++ Spectrum A++–E






- Rusty steel
- Each fitting is unique
- Unusual lighting effect

Product details
230V ~50Hz
Material: FeCSi-Steel / Polycarbonate (PC)

IP 44

Dimensioned drawing



Recommended accessories
■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



■ Earth spike
Item no. 231230 | 34,20 GBP



Recommended lamp
E27 4.7W 360°
3000K 380lm EEI=A+
5kWh/1000h
Item no. 551532 | 20,70 GBP



LED E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

Lamp details
max. 11W
Ø: 4.8 cm max. L: 13.9 cm max.

Variant	Item no.	GBP
E27 | H: 50 cm | 12.5 kg		
■ rust	**229410**	**242,10**
E27 | H: 80 cm | 18.5 kg		
■ rust	**229411**	**296,10**

RUSTY® SLOT 50/80
Pole

A-A++ Spectrum A++–E

LED INSIDE






- Rusty steel
- Each fitting is unique
- Unusual lighting effect

Product details
220-240V ~50/60Hz
Total consumption: 8.6W
Material: FeCSi-Steel / Polycarbonate (PC)

IP 55 35000

Dimensioned drawing



Note
Open cable end

Recommended accessories
■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



■ Earth spike
Item no. 231230 | 34,20 GBP



Variant	Item no.	GBP
30lm | 3000K | CRI>80 | H: 50 cm | 12.5 kg		
■ rust	**233447**	**296,10**
30lm | 3000K | CRI>80 | H: 80 cm | 18.5 kg		
■ rust	**233457**	**386,10**

BENDO 80/220
Pole, TRIAC

884

A-A++ Spectrum A++–E

LED INSIDE

reddot award 2018 winner




- 240V LED
- Exclusive design for an extraordinary outdoor area

Product details

220-240V ~50/60Hz
Material: Aluminium / Glass
Dimmable: Triac C, Triac L




IP 55 35000



80° 60 1 IK06

Dimensioned drawing



Recommended accessories

Concrete anchor
Item no. 231849 | 47,70 GBP




IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP




T-connector box
Item no. 228726 | 20,70 GBP




Variant	Item no.	GBP
700lm | 3000K | CRI>80 | H: 80 cm | 11W | 2.7 kg		
anthracite	**231835**	**395,10**
1800lm | 3000K | CRI>80 | H: 225 cm | 31W | 7.3 kg		
anthracite	**231845**	**575,10**

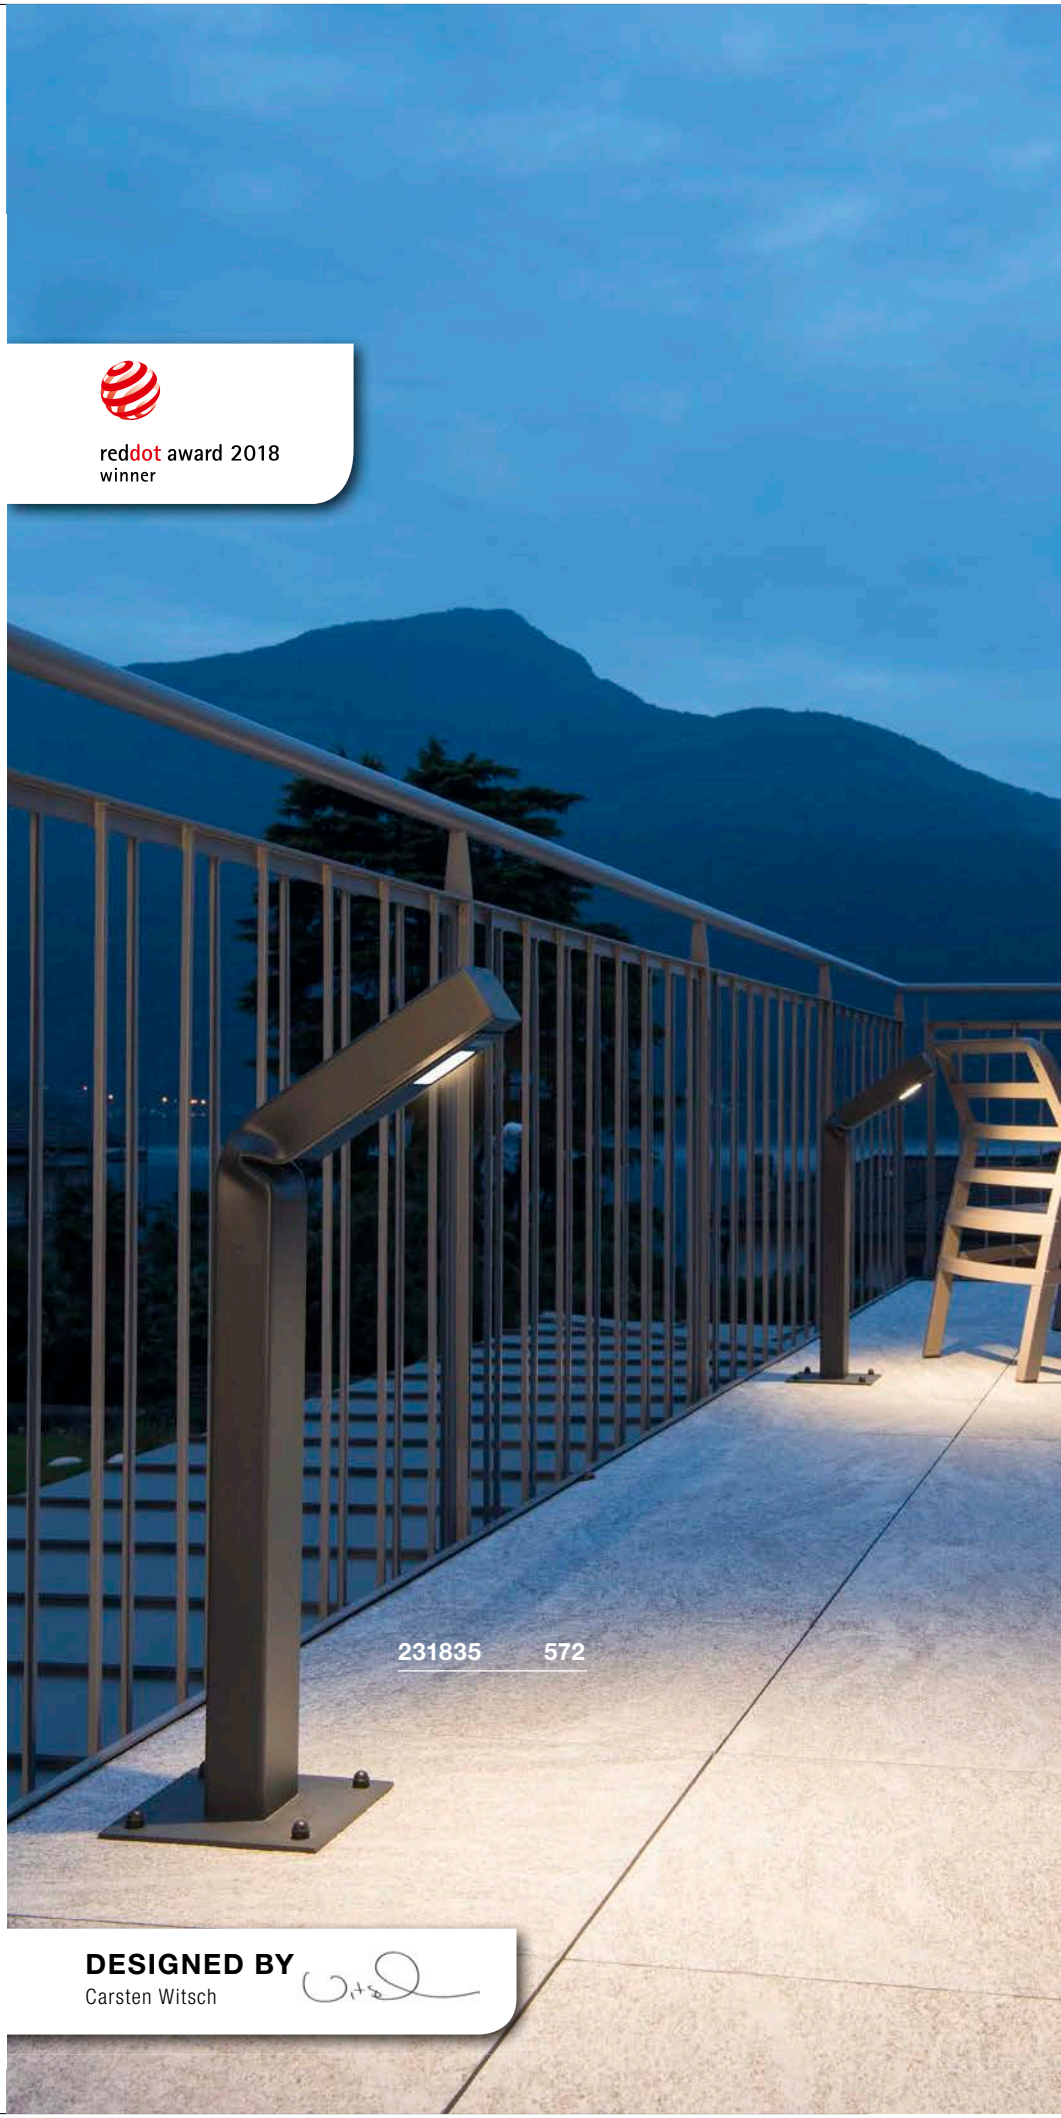

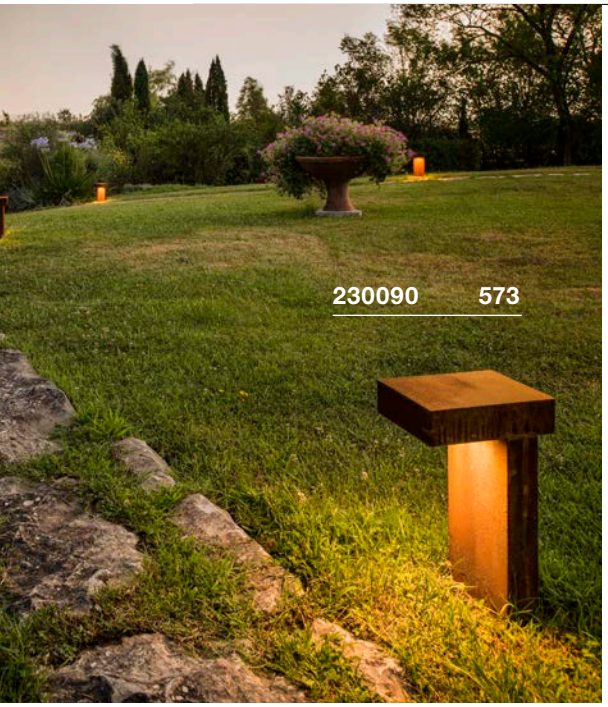



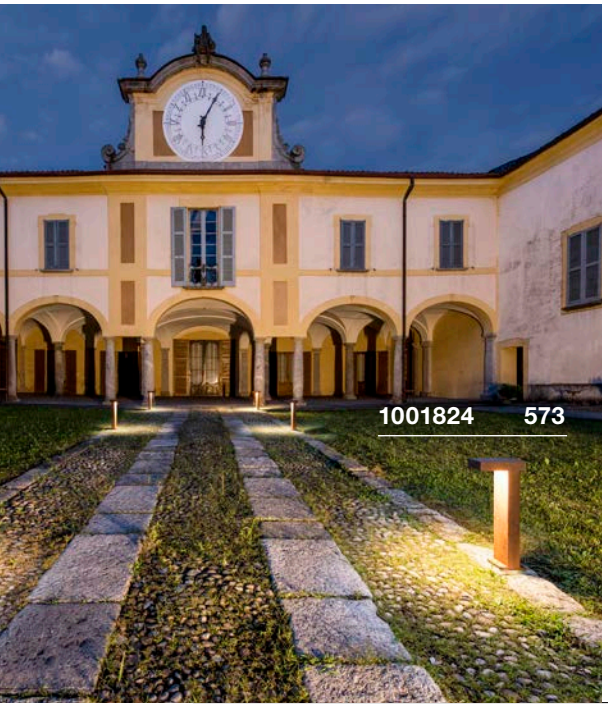

RUSTY® PATHLIGHT
Pole, TCR-TSE

B-A++ Spectrum A++–E









- Rusty steel
- Each fitting is unique
- Straight-lined, natural look

Product details

230V ~50Hz
Material: FeCSi-Steel / Polycarbonate (PC)



Dimensioned drawing



Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



■ Earth spike
Item no. 229422 | 34,20 GBP



Recommended lamp

GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP



Lamp details

max. 9W TCR-TSE
Ø: 7.5 cm max. L: 2.7 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE		
■ rust	**230090**	**233,10**

RUSTY® PATHLIGHT 40/70
Pole

A-A++ Spectrum A++–E

LED INSIDE









- Rusty steel
- Each fitting is unique

Product details

220-240V ~50/60Hz
Total consumption: 8.9W
Material: FeCSi-Steel / Polycarbonate (PC)

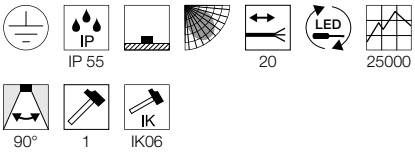

Dimensioned drawing



Note

Open cable end

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



■ Earth spike
Item no. 229422 | 34,20 GBP



Variant	Item no.	GBP
400lm | 3000K | CRI>80 | H: 40 cm | 12.5 kg		
■ rust	**1001823**	**260,10**
400lm | 3000K | CRI>80 | H: 70 cm | 18.9 kg		
■ rust	**1001824**	**314,10**

ABRIDOR 60/100
Pole

882

A-A++ Spectrum A++–E

LED INSIDE

NEW







- Switchable light colour
- Tilting lamp head

Product details

100-277V ~50/60Hz | 300mA
Total consumption: 14W
Material: Aluminium
Product dimensions: 14 cm W: 3.6 cm H: 60 cm

IP 55 | 45° | 0,35

IK03

Note

Open cable end




Recommended accessories


■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Variant	Item no.	GBP
750lm | 3000/4000K | CRI80 | H: 60 cm | 2.3 kg		
■ matt anthracite	**1002991**	**180,00**
750lm | 3000/4000K | CRI80 | H: 100 cm | 3.4 kg		
■ matt anthracite	**1002992**	**224,10**

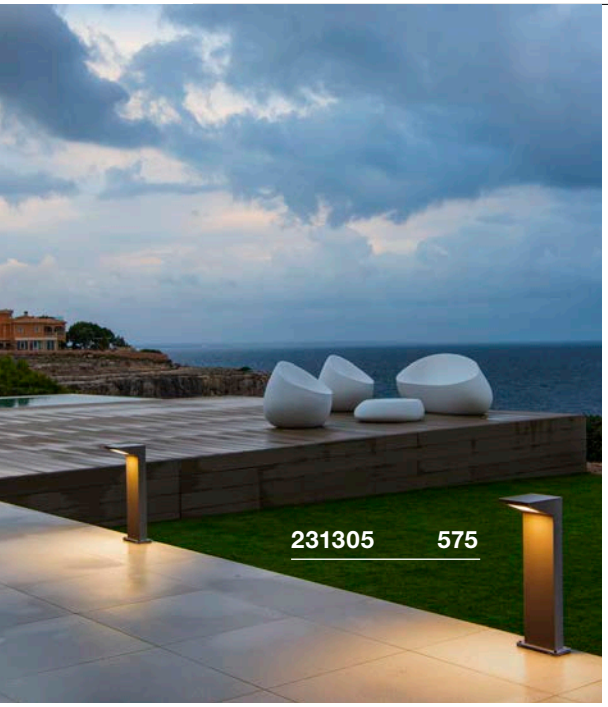



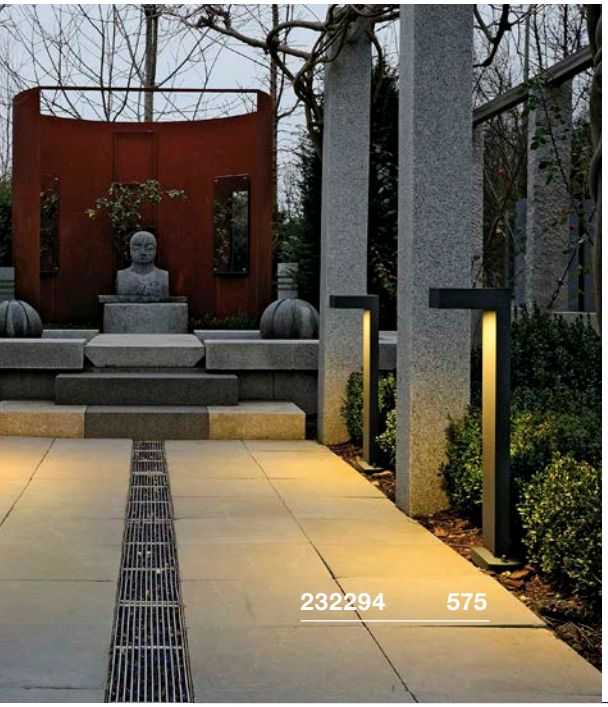

IPERI 50
Pole

888

A-A++ Spectrum A++–E

LED INSIDE








• Walkway light for entrance and garden

Product details
230V ~50Hz
Total consumption: 5W
Material: Aluminium / Plastic



Dimensioned drawing



Recommended accessories
Earth spike
Item no. 231231 | 38,70 GBP



Variant	Item no.	GBP
320lm | 4000K | CRI>70		
anthracite	**231305**	**108,00**

QUADRASYL 75
Pole, TCR-TSE

894


B-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended accessories
T-connector box
Item no. 228726 | 20,70 GBP



Recommended lamp
GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP



Lamp details
max. 11W TCR-TSE
Ø: 7.5 cm max. L: 2.7 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE		
grey	**232294**	**130,50**
GX53 | TCR-TSE		
anthracite	**232295**	**130,50**

TRAPECCO
Pole

898

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

230V ~50Hz
Total consumption: 10W
Material: Aluminium

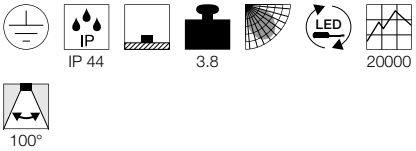

Dimensioned drawing



Note

Open cable end

MALU
Pole

890

A-A++ Spectrum A⁺⁺–E

LED INSIDE

reddot award 2019 winner









- Unusual design
- Homogeneous illumination of paths and areas
- Extremely wide light distribution

Product details

220-240V ~50/60Hz
Total consumption: 9.2W
Material: Aluminium / Glass

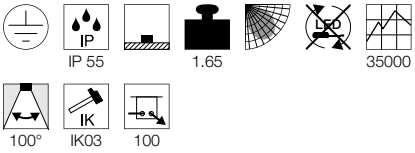

Dimensioned drawing



Note

Integrated connection box


Recommended accessories


■ IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP




Variant	Item no.	GBP
850lm | 3000K | CRI>80		
■ anthracite	**231765**	**126,00**

Variant	Item no.	GBP
360lm | 3000K | CRI>80		
■ anthracite	**1002158**	**252,00**

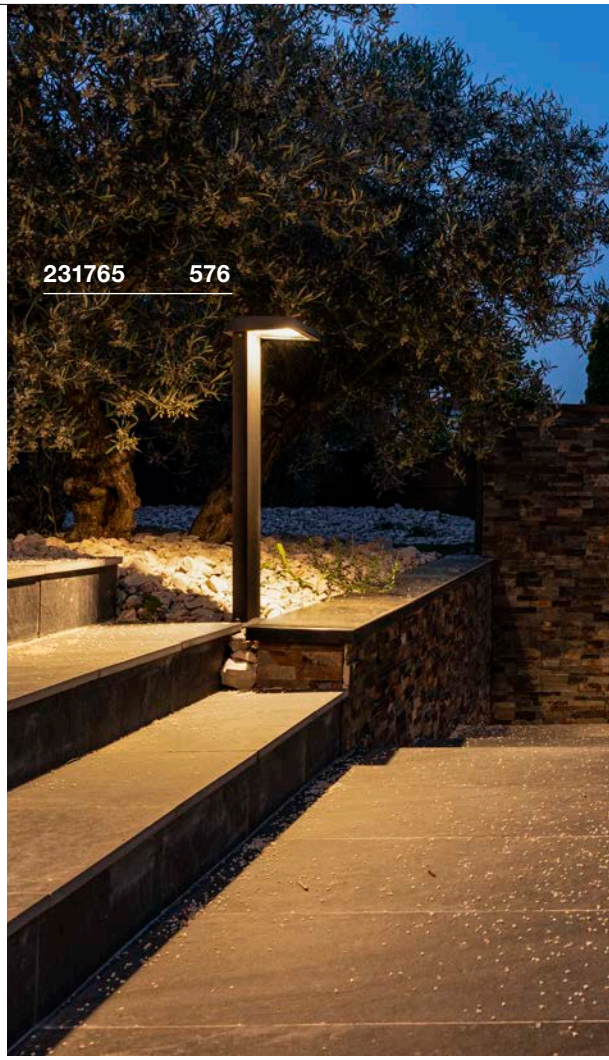

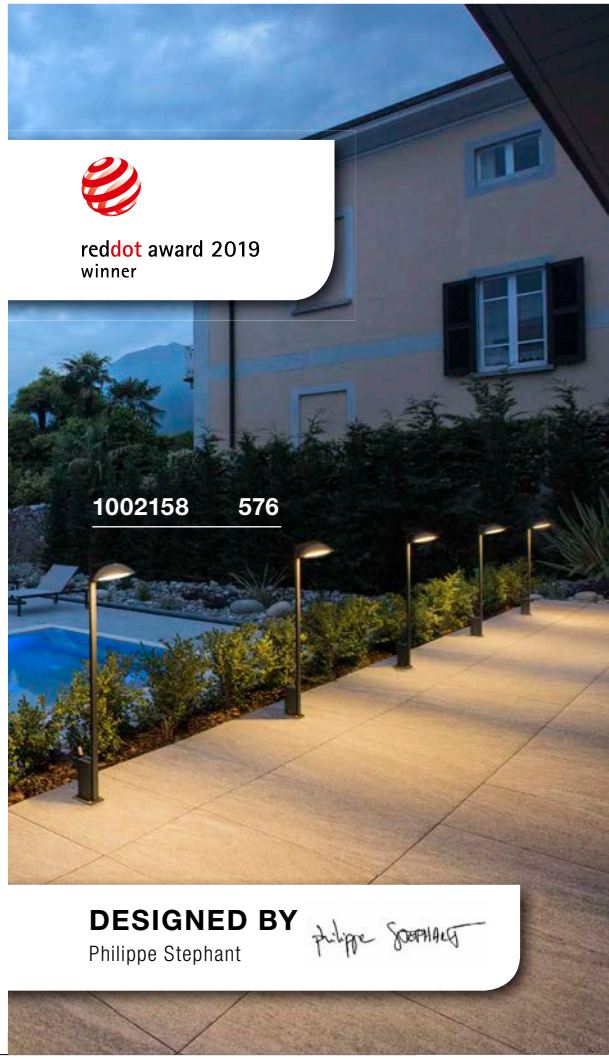

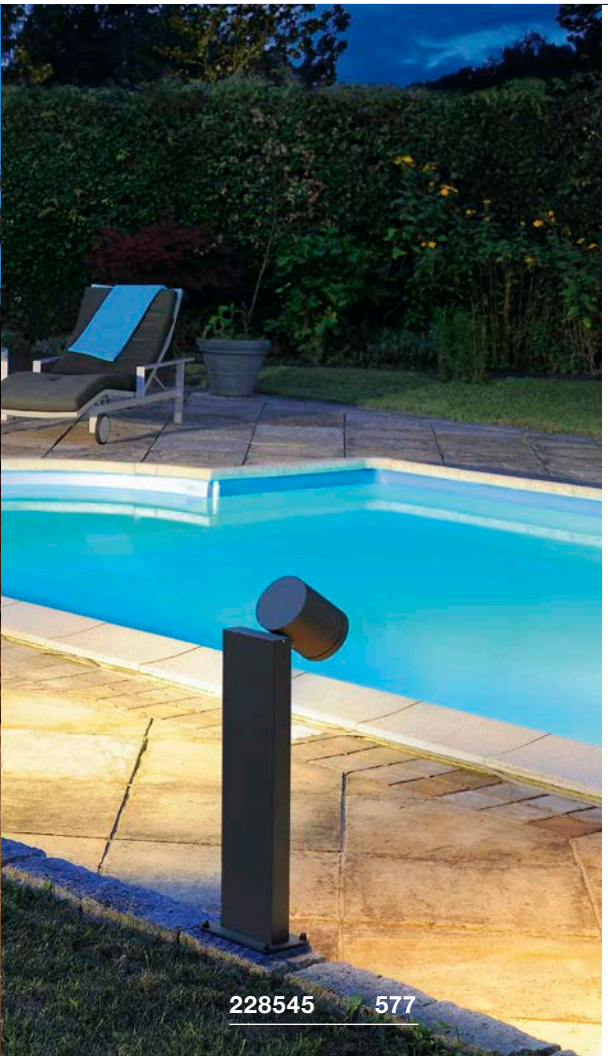



ENOLA C
Pole

886

A-A++ Spectrum A++–E


LED INSIDE






Product details

100-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium / Glass

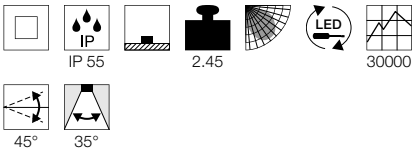

Dimensioned drawing



Note

Open cable end

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP



Variant	Item no.	GBP
800lm | 3000K | CRI>80 ■ anthracite	**228545**	**251,10**

ESKINA 30/80
Pole

886

A-A++ Spectrum A++–E

LED INSIDE

NEW









• Switchable light colour

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 14.5W
Material: Aluminium
Dimmable: Triac C

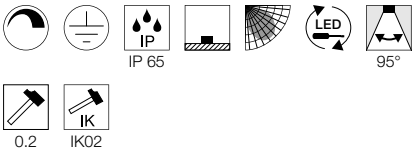

Dimensioned drawing

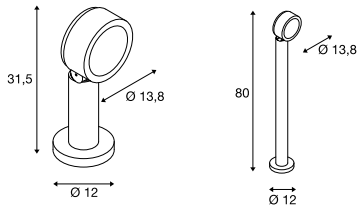

Note

1002906 – IP 2-pin mains plug
1002907 – Open cable end

Recommended accessories

■ Earth spike
Item no. 230060 |38,70 GBP



Variant	Item no.	GBP
1000lm | 3000/4000K | CRI>80 Ø: 31.5 cm | 1.3 kg ■ matt anthracite	**1002906**	**216,00**
1000lm | 3000/4000K | CRI>80 Ø: 80 cm | 1.89 kg ■ matt anthracite	**1002907**	**234,00**

THEO PATHLIGHT
Pole, single

897

A-A++ Spectrum A++–E

NEW







Product details

200-240V ~50/60Hz
Material: Aluminium
Product dimensions: W: 14 cm H: 72.5 cm

IP 44 | 2.8 | 20 | 90° | 0.2 | IK02

Note

Open cable end

Recommended lamp

LED GU10 3.7W 36°
2700K 260lm EEI=A+
4kWh/1000h
Item no. 560122 | 29,70 GBP

Lamp details

max. 7W

Variant	Item no.	GBP
GU10		
■ matt anthracite	**1002870**	**144,00**

THEO PATHLIGHT
Pole, double

897

A-A++ Spectrum A++–E

NEW







Product details

200-240V ~50/60Hz
Material: Aluminium
Product dimensions: W: 21.2 cm H: 72.5 cm

IP 44 | 3.3 | 20 | 90° | 0.2 | IK02

Note

Open cable end

Recommended lamp

LED GU10 3.7W 36°
2700K 260lm EEI=A+
4kWh/1000h
Item no. 560122 | 29,70 GBP


Lamp details

2x max. 7W

Variant	Item no.	GBP
GU10		
■ matt anthracite	**1002871**	**188,10**



1002871 578

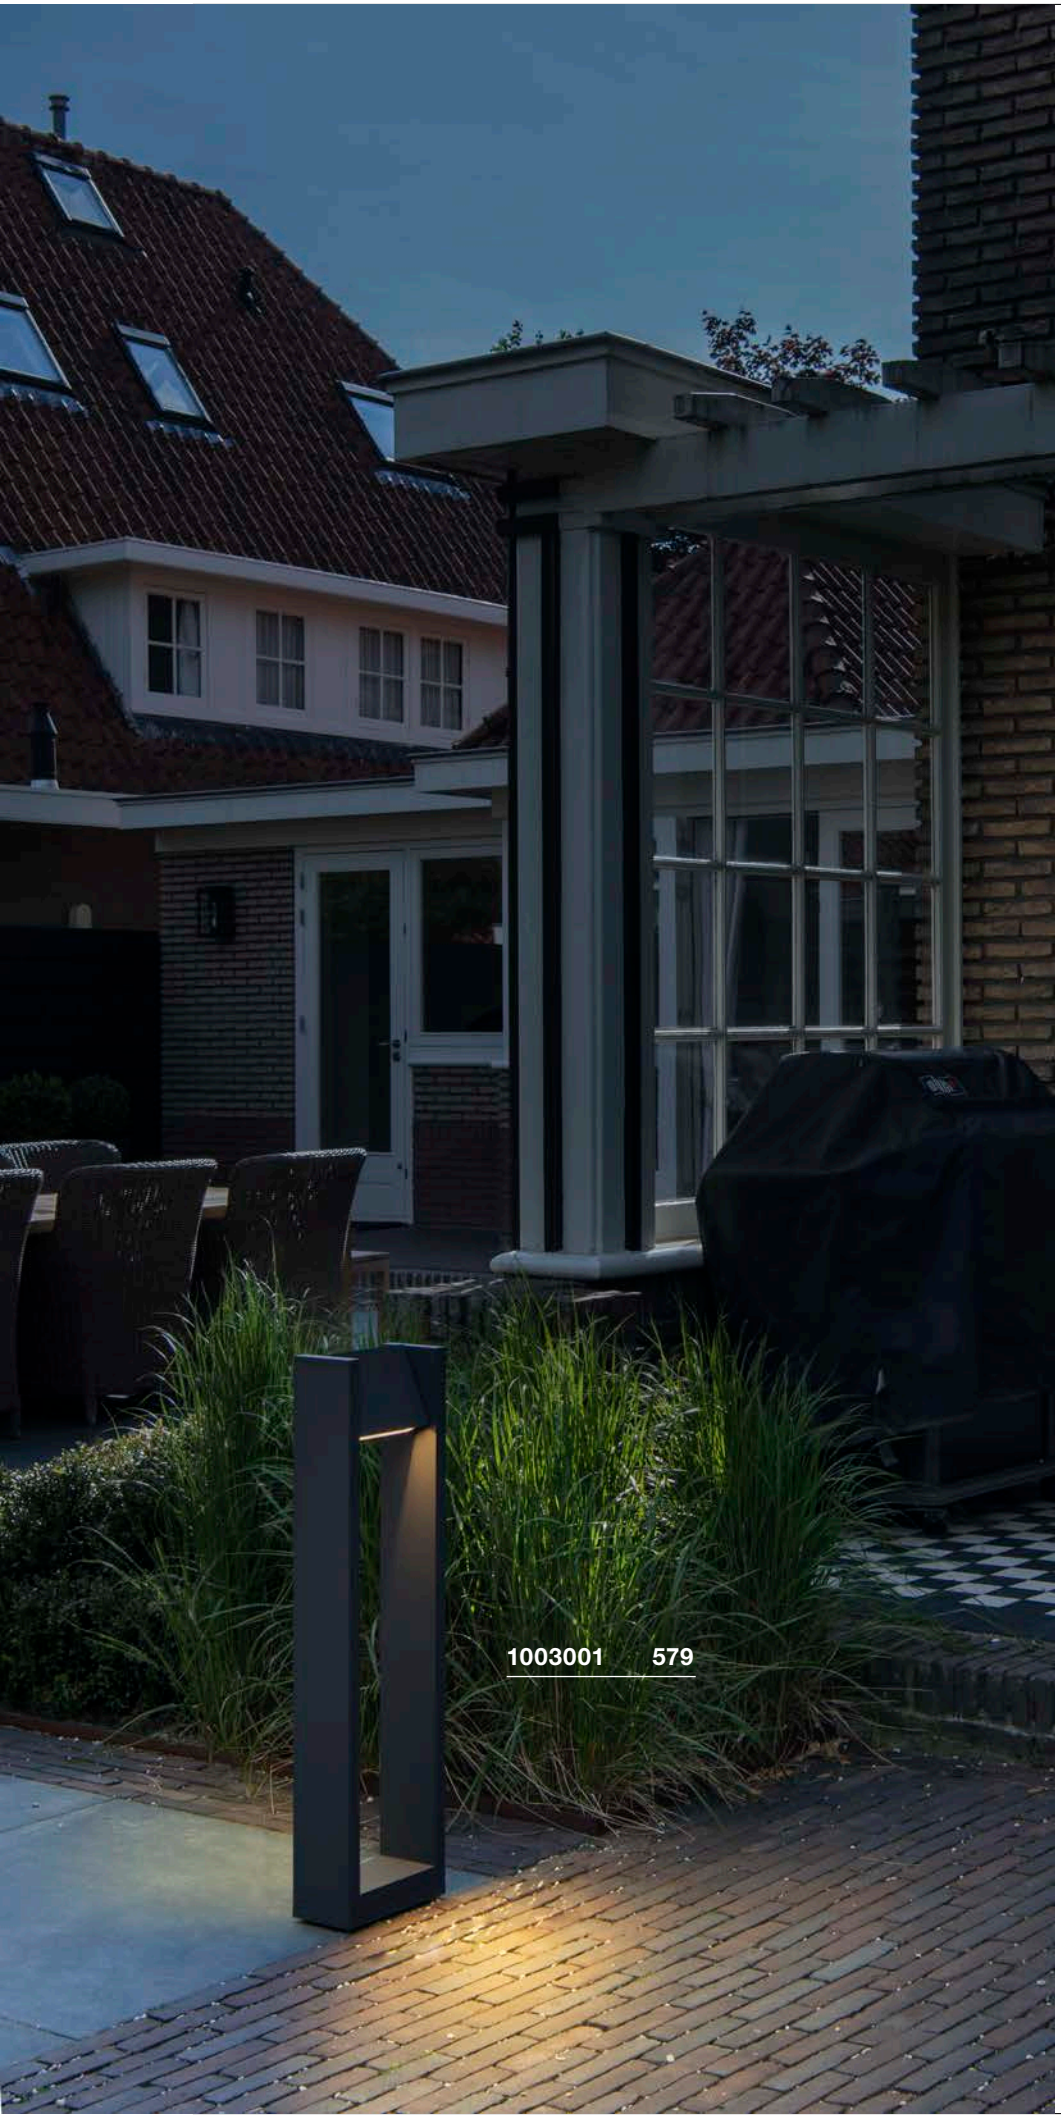

QUAD POLE

894

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW








- Tilting lamp head

Product details

100-277V ~50/60Hz | 500mA
Total consumption: 18W
Material: Aluminium / Glass
Product dimensions: L: 12 cm W: 23 cm H: 90 cm



Dimensioned drawing



Note

Open cable end

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Variant	Item no.	GBP
1550lm | 3000K | CRI>80		
■ matt anthracite	**1003001**	**323,10**

HELIA
Pole, single, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE









- 240V LED

Product details

220-240V ~50/60Hz
Total consumption: 8W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

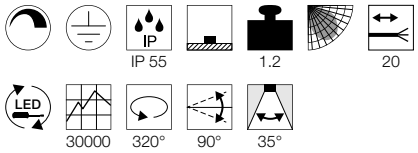

Dimensioned drawing



Note

Open cable end

Recommended accessories

Earth spike
Item no. 1000736 |16,20 GBP



IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP



Variant	Item no.	GBP
450lm | 3000K | CRI>80		
anthracite	**1002198**	**188,10**

HELIA SENSOR
Single

888

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT

IR









- Integrated infrared sensor
- 240V LED

Product details

220-240V ~50/60Hz
Total consumption: 8W
Material: Aluminium

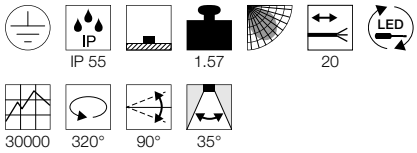

Dimensioned drawing



Note

Open cable end

Recommended accessories


Earth spike
Item no. 1000736 |16,20 GBP





IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP



Variant	Item no.	GBP
450lm | 3000K | CRI>80		
anthracite	**1002199**	**233,10**

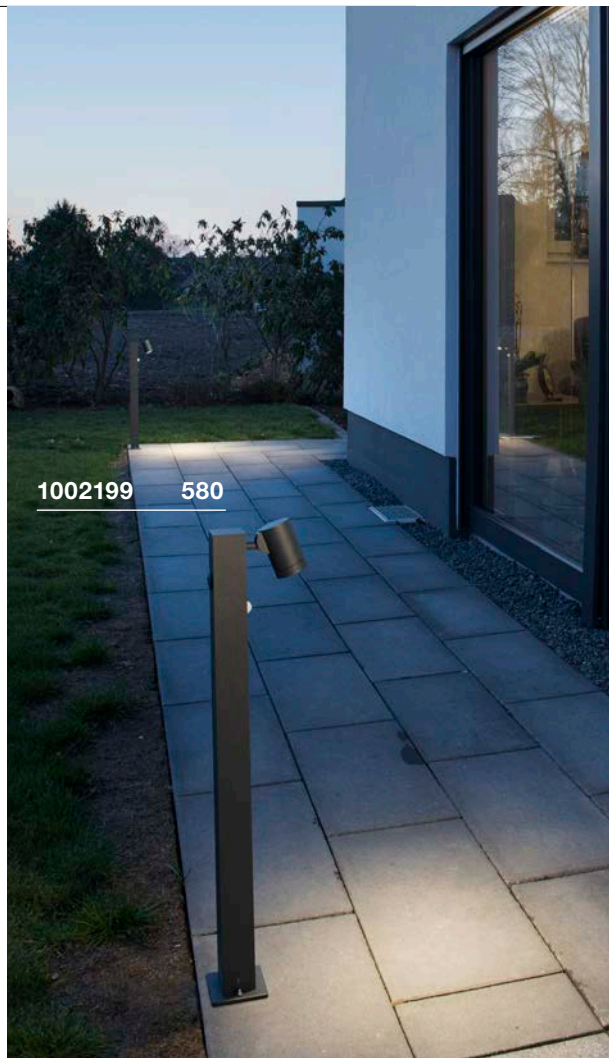

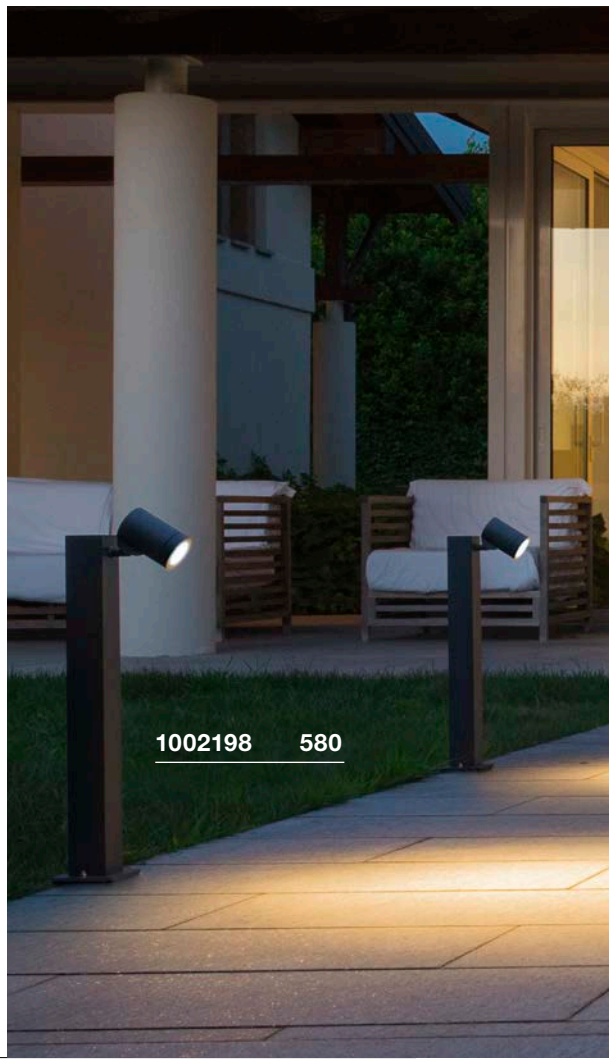

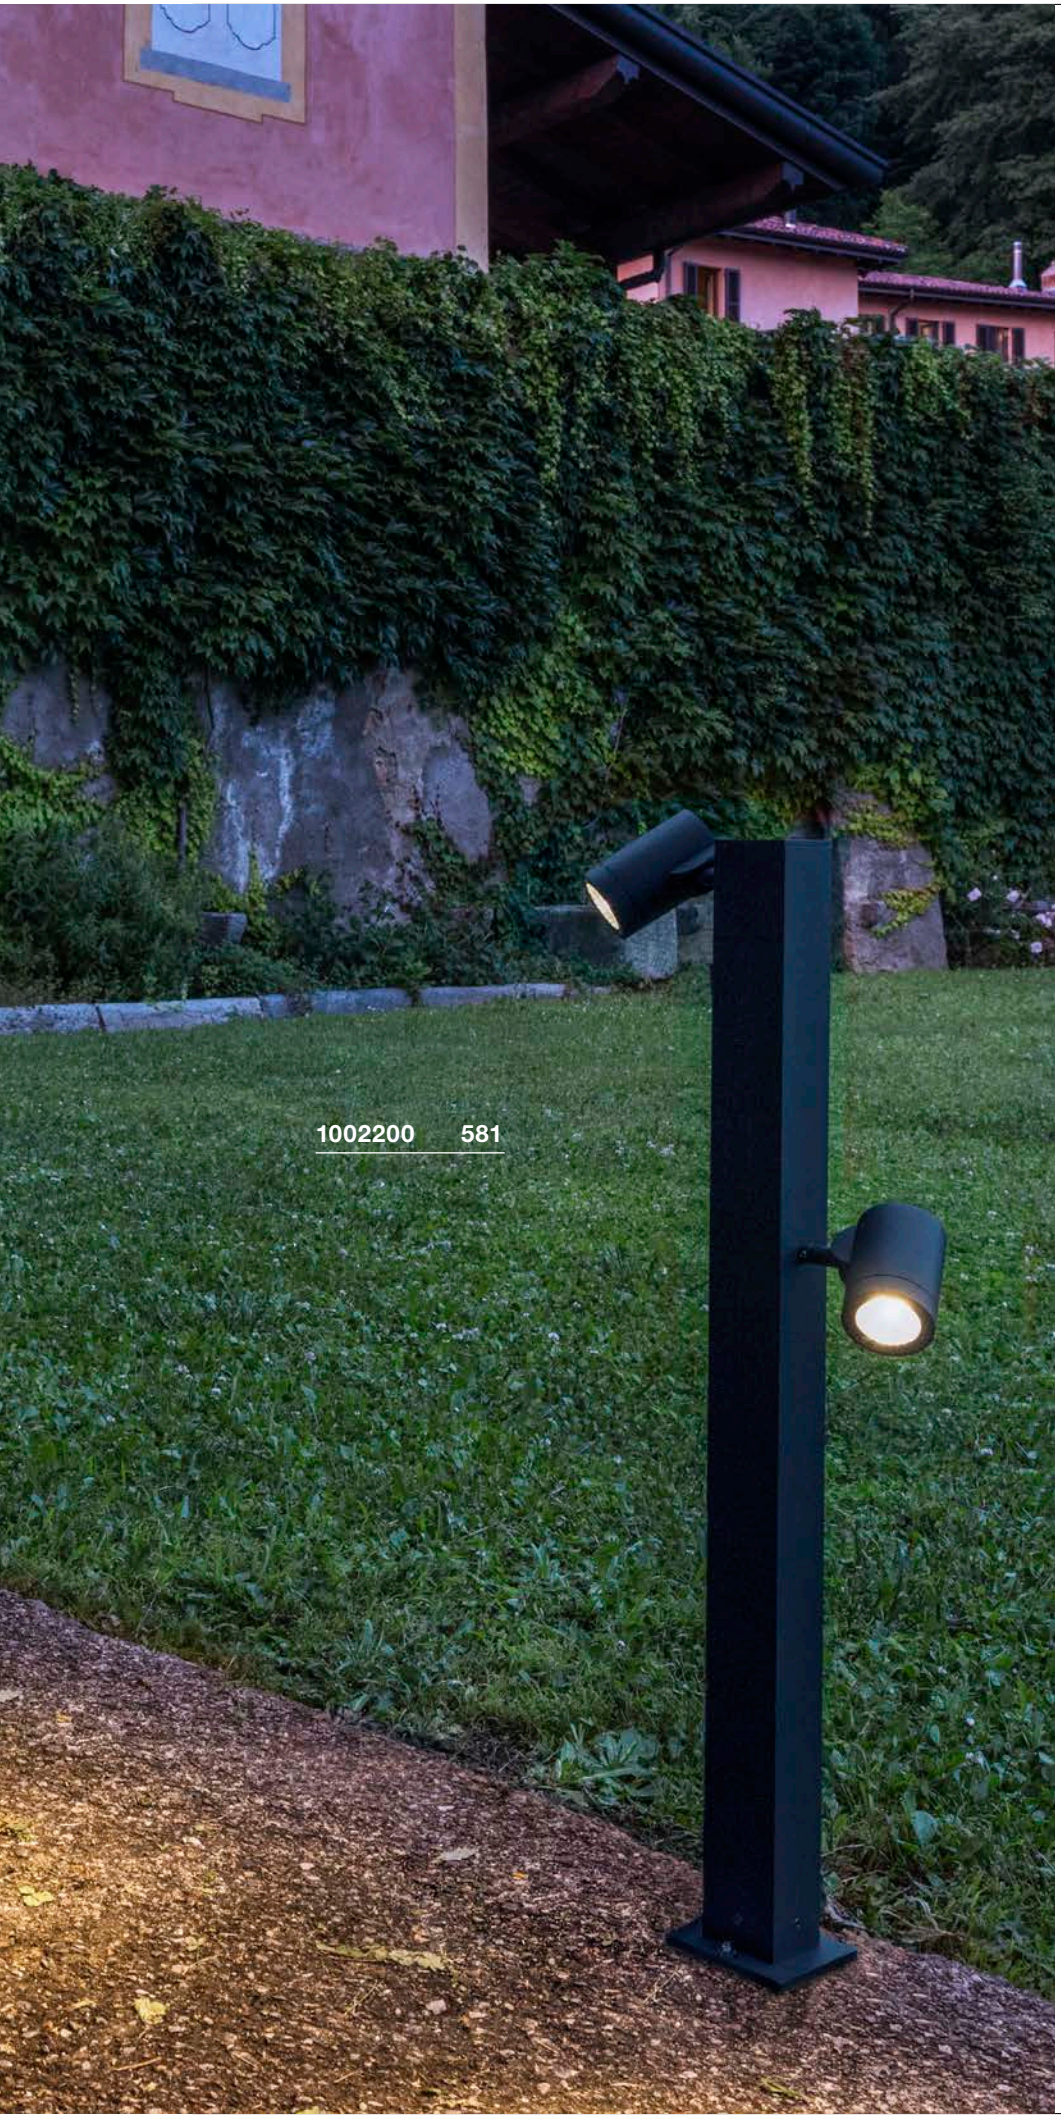

HELIA
Pole, double, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE









• 240V LED

Product details

220-240V ~50/60Hz
Total consumption: 16W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

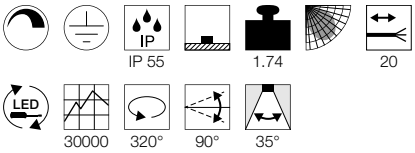

Dimensioned drawing



Note

Open cable end

Recommended accessories

Earth spike
Item no. 1000736 | 16,20 GBP



IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Variant	Item no.	GBP
900lm | 3000K | CRI>80 anthracite	**1002200**	**296,10**

SITRA 360
Pole, TCR-TSE

896

B-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 1.7 | 90° | 90°

Dimensioned drawing



Recommended accessories

Earth spike
Item no. 230060 | 38,70 GBP

Recommended lamp


GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP

LED GX53 8.2W 120°
4000K 620lm EEI=A+
9kWh/1000h
Item no. 550074 | 20,70 GBP

Lamp details

2x max. 9W TCR-TSE
Ø: 7.5 cm max. L: 3.5 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE		
anthracite	231505	126,00

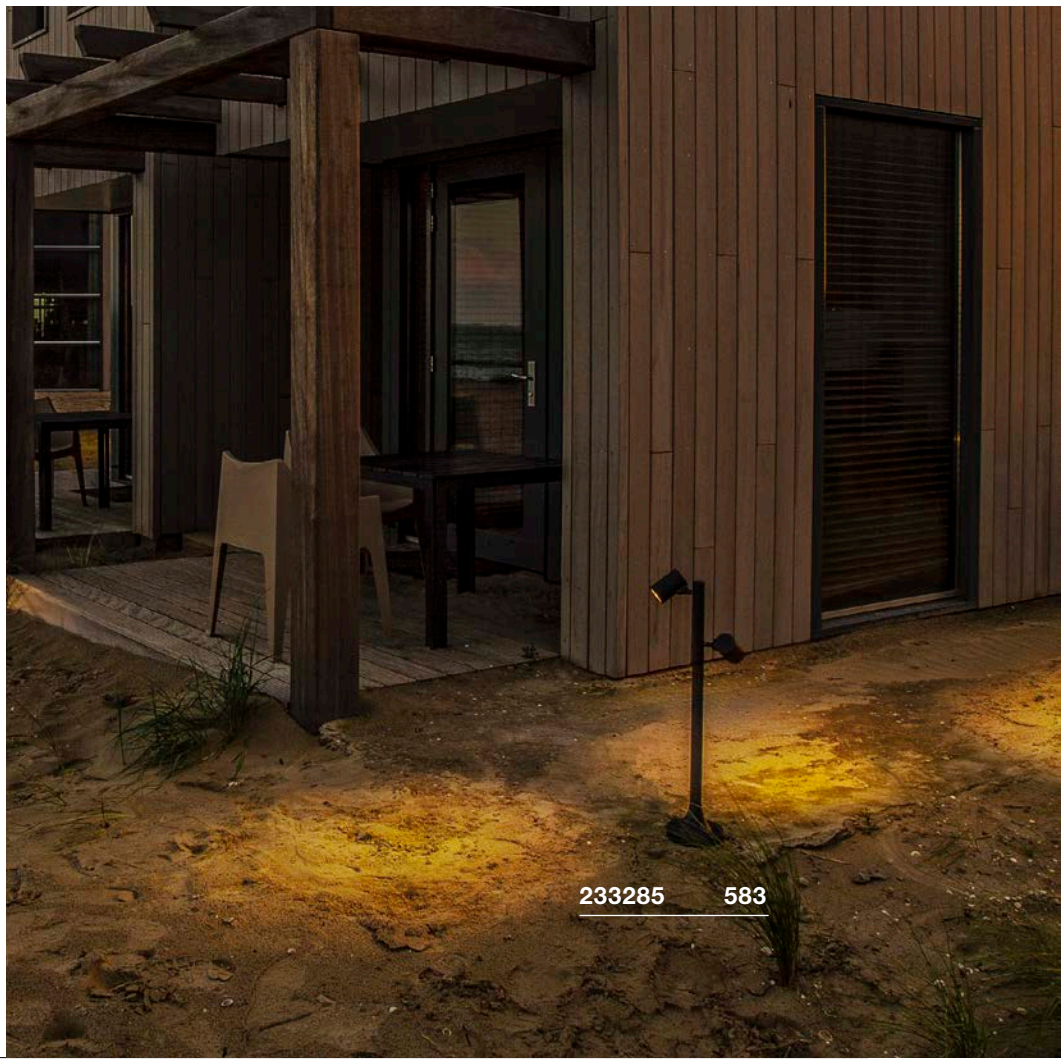

MYRA SPOT
Double, GU10

892

A-A++ Spectrum A++–E








- Can be extended
- Unusual design for safe footing

Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Note

The luminaire height can be increased
by max. 2 extension rods.
Open cable end

Recommended accessories

Screw set
Item no. 228752 |5,00 GBP



Concrete anchor
Item no. 228712 |47,70 GBP



Extension rod 30 cm
Art. Nr. 233164 |19,80 GBP



Stand
Item no. 233144 |19,80 GBP



Extension rod 30 cm
Item no. 233165 |19,80 GBP



Stand
Item no. 233145 |19,80 GBP



Recommended lamp

LED GU10 3.7W 36°
2700K 260lm EEI=A+
4kWh/1000h
Item no. 560122 |29,70 GBP



Lamp details

2x max. 4.5W LED GU10 51mm
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | LED GU10 51mm		
grey	233184	153,00
GU10 | LED GU10 51mm		
anthracite	233185	153,00

HELIA
Pole, single, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE








- 240V LED

Product details

220-240V ~50/60Hz
Total consumption: 8W
Material: Aluminium
Dimmable: Triac C, Triac L



Dimensioned drawing



Note

The luminaire height can be increased
by max. 2 extension rods.
Open cable end

Recommended accessories

Extension rod 30 cm
Item no. 233165 |19,80 GBP



Stand
Item no. 233145 |19,80 GBP



Screw set
Item no. 228752 |5,00 GBP



Concrete anchor
Item no. 228712 |47,70 GBP



Variant	Item no.	GBP
450lm | 3000K | CRI>80		
anthracite	233275	162,00

HELIA
Pole, double, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE






- 240V LED

Product details

220-240V ~50/60Hz
Total consumption: 16W
Material: Aluminium
Dimmable: Triac C, Triac L



Dimensioned drawing



Note

The luminaire height can be increased
by max. 2 extension rods.
Open cable end

Recommended accessories

Extension rod 30 cm
Item no. 233165 |19,80 GBP



Stand
Item no. 233145 |19,80 GBP



Screw set
Item no. 228752 |5,00 GBP



Concrete anchor
Item no. 228712 |47,70 GBP




Variant	Item no.	GBP
900lm | 3000K | CRI>80		
anthracite	233285	202,50


THE SUN'S COMING UP.


FLOODLIGHTS CREATE DYNAMIC LIGHT EMPHASIS.

Do you want effective outdoor lighting?
If so, discover the wide range of floodlights which make individual lighting possible. On buildings, squares, pavements and in gardens.

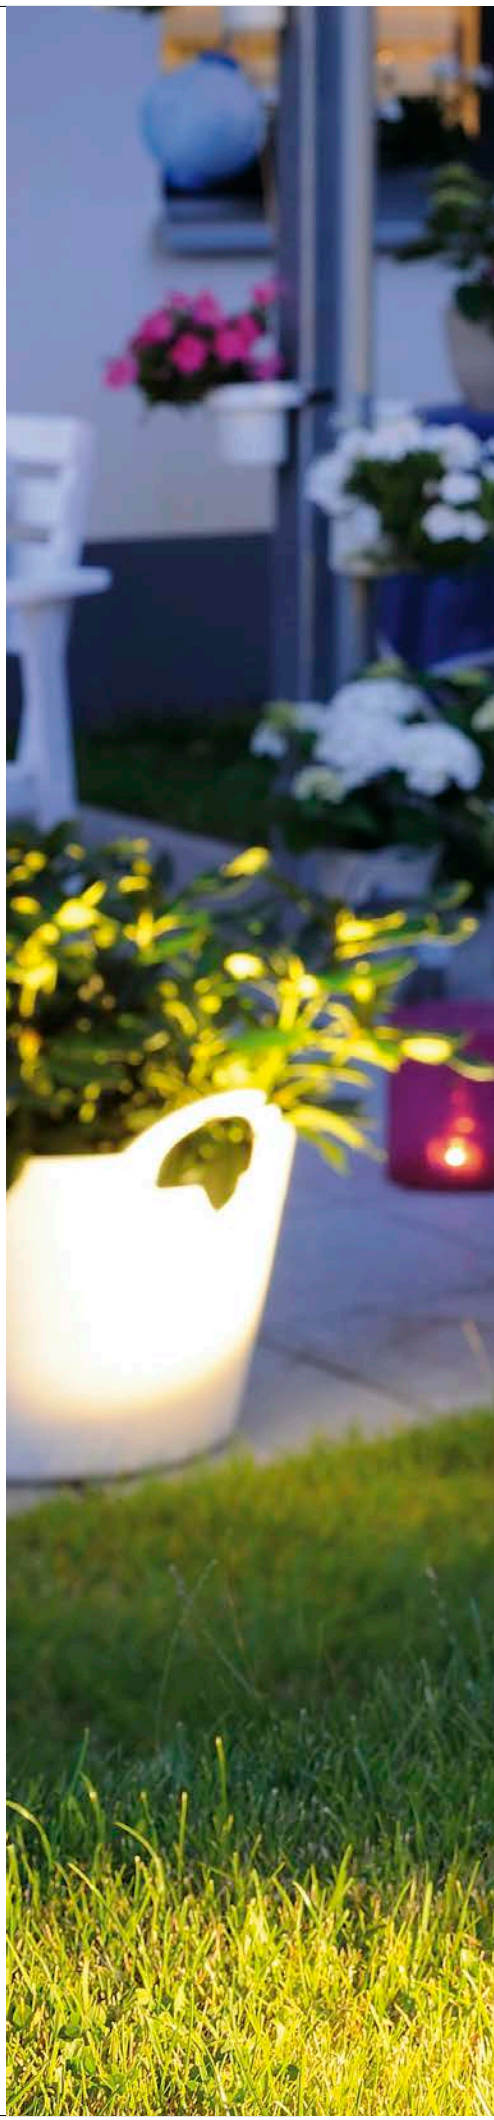


231035 589

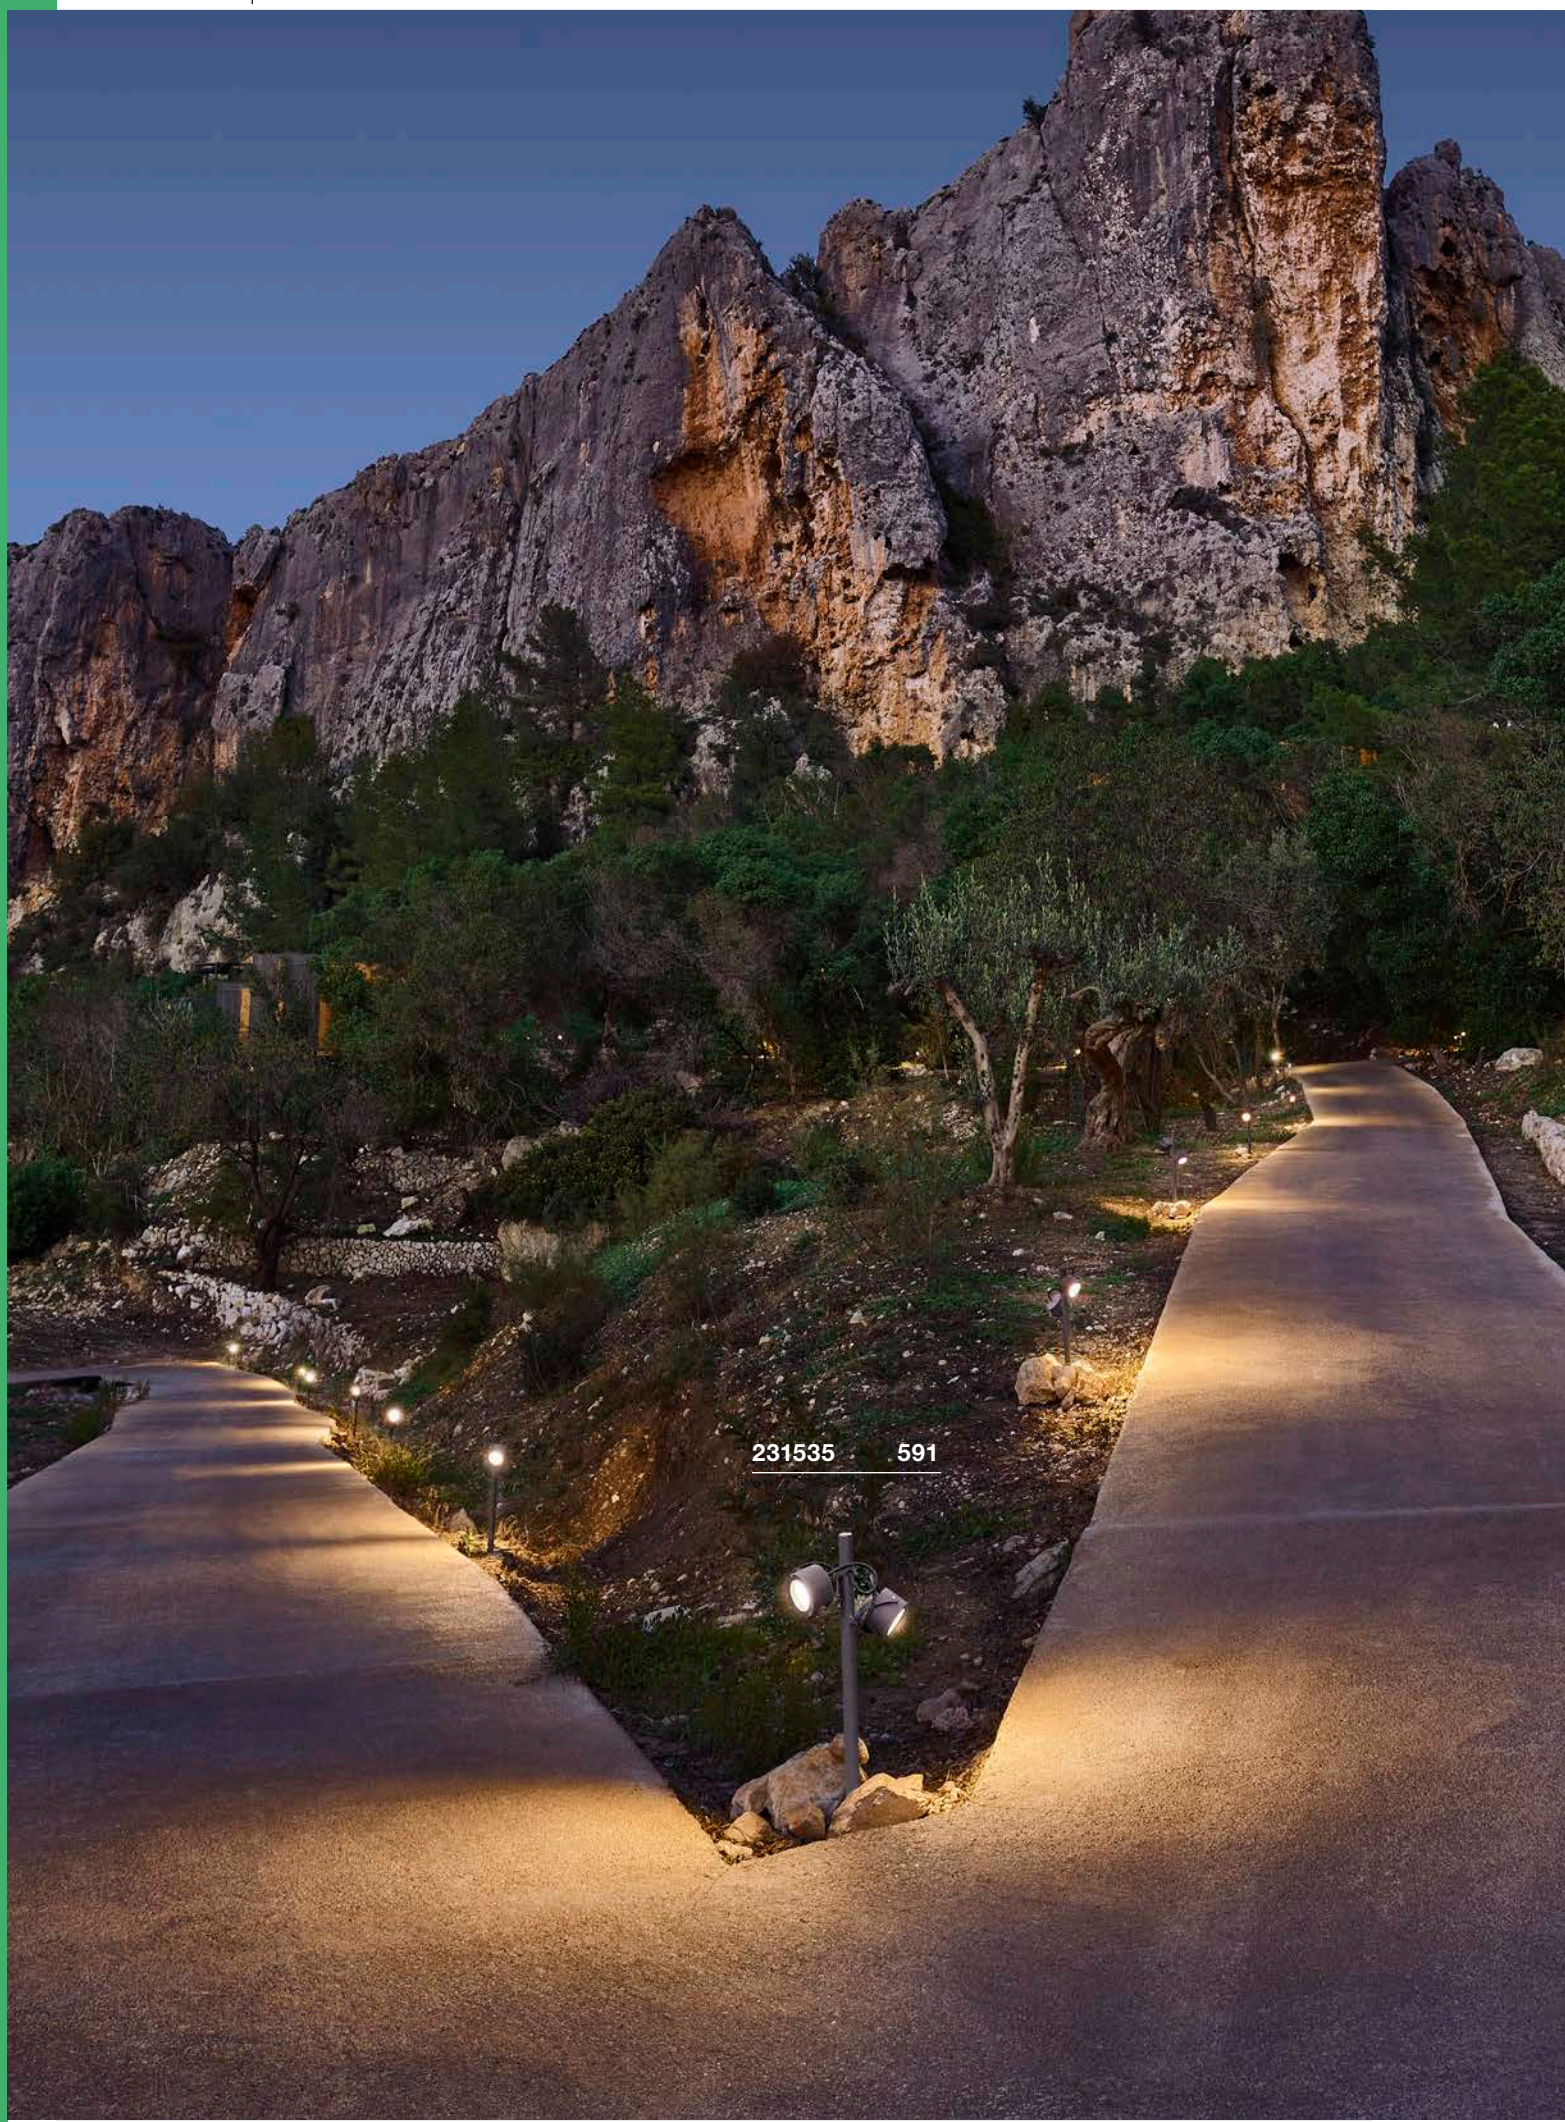
231535 591

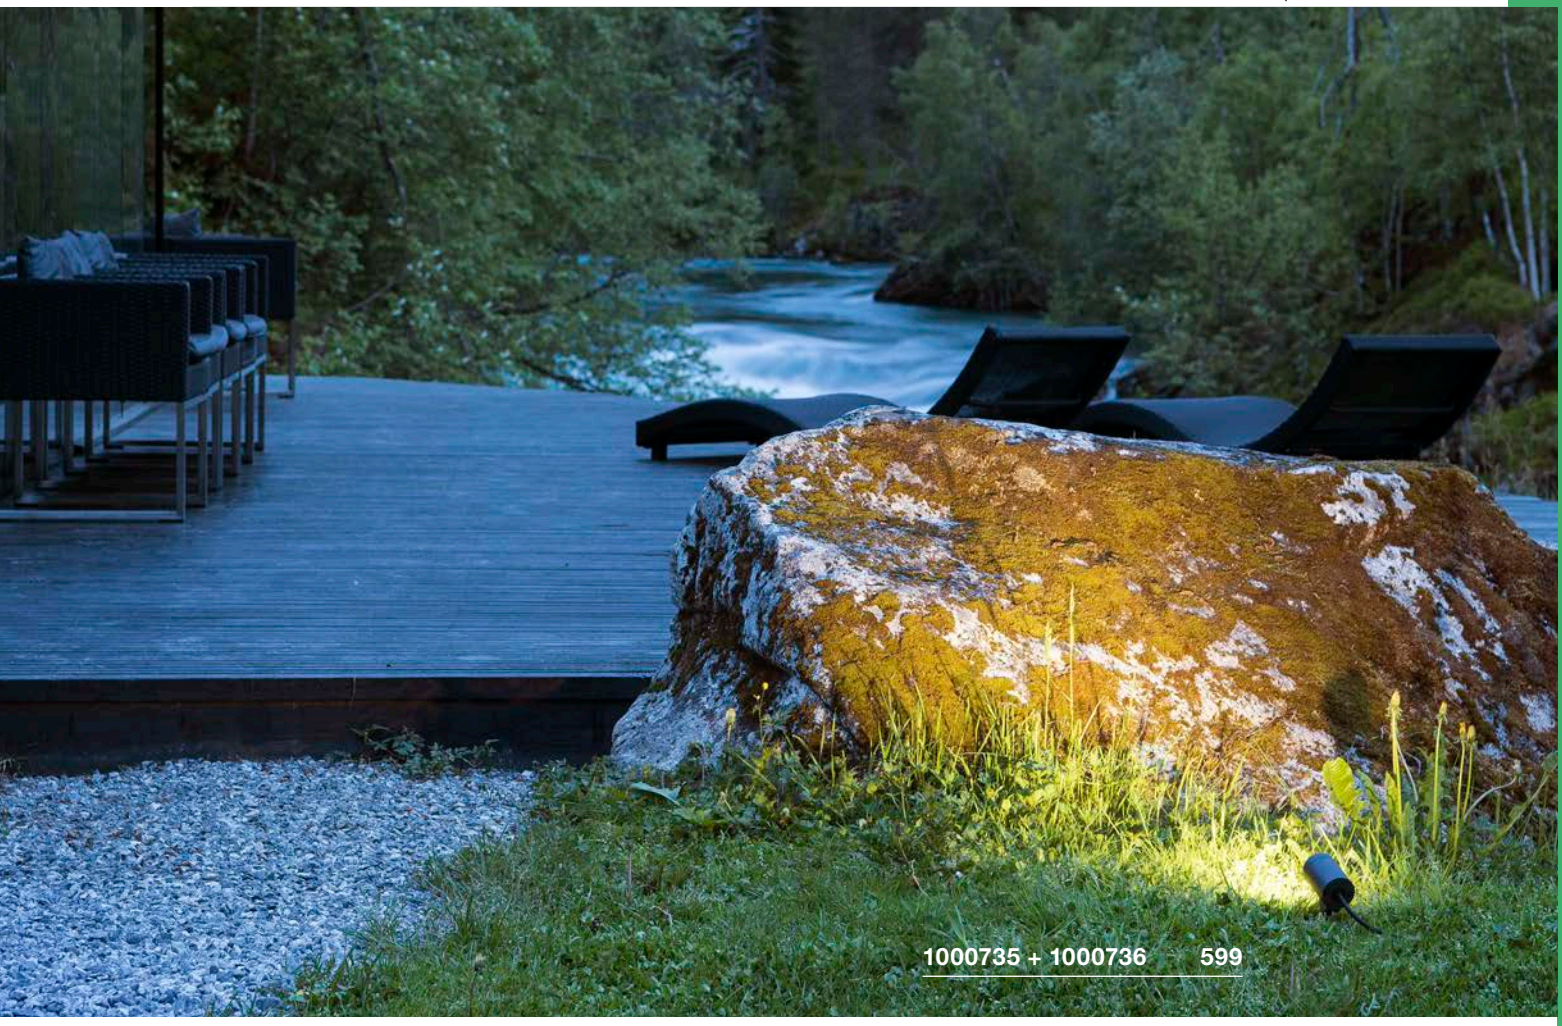

SPOT


588

588

589

589

590

590

591

591

593

593

595

597

597

597

598

598

599

599

600

601

603

603

603

604

604

605

605

606

606

607

607

608

609

609

Other luminaires and variants can be found online at www.slv.com

NAUTILUS 10
SP, round, QPAR51

892

E-A++ Spectrum A⁺⁺–E








Product details
230V ~50Hz
Material: Aluminium

IP 65 | 0.75 | 150 | 180°

Dimensioned drawing



Note
IP 2-pin mains plug
Earth spike incl.

Recommended lamp
LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

LED GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP

Lamp details
max. 35W QPAR51
L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
grey	227418	27,00

BIG NAUTILUS
SP, round, QPAR51

892

B-A++ Spectrum A⁺⁺–E








Product details
230V ~50Hz
Material: Aluminium

IP 65 | 0.63 | 150 | 1 | 180°

IK
IK06

Dimensioned drawing



Note
IP 2-pin mains plug
Earth spike incl.


Recommended lamp
LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP


LED GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP


Lamp details
max. 11W QPAR51
Ø: 5 cm max. L: 8.3 cm max.

Variant	Item no.	GBP
GU10 | LED GU10 51mm		
black	227410	31,50
GU10 | LED GU10 51mm		
rust	1001964	31,50
GU10 | LED GU10 51mm		
green	1001965	31,50



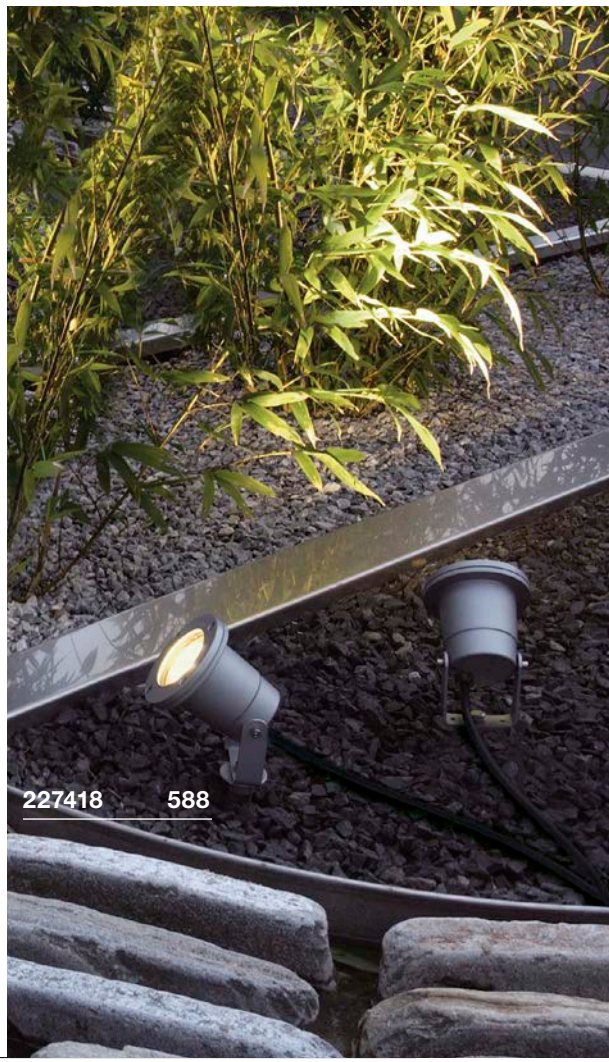

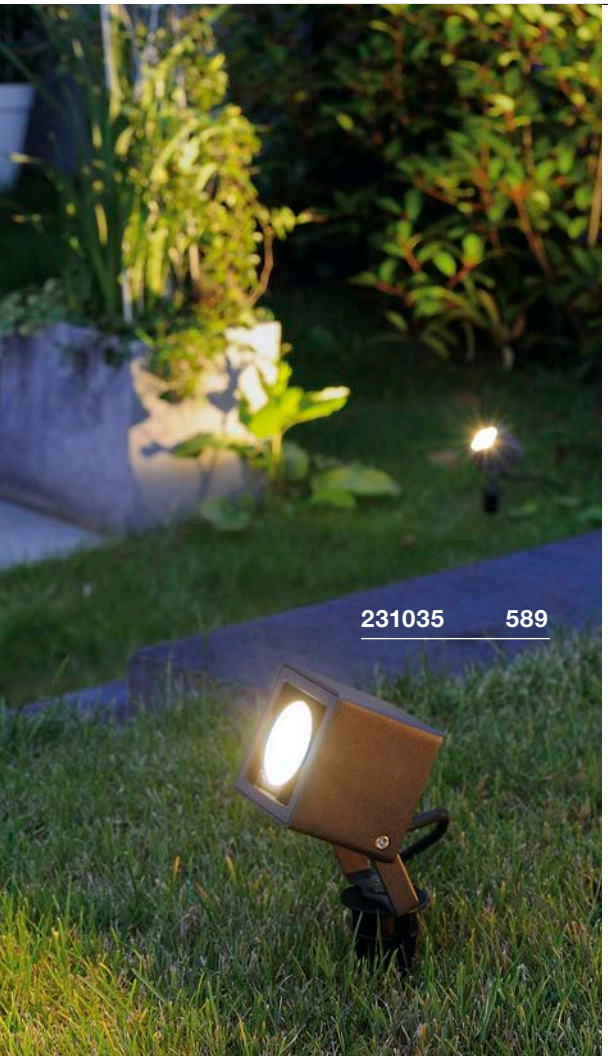

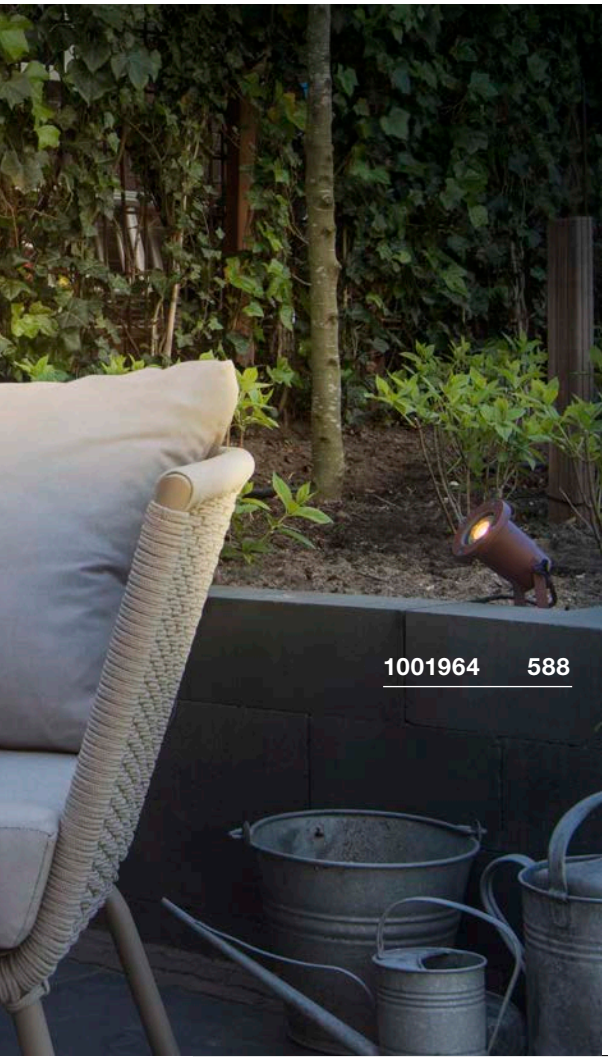

NAUTILUS 10
SP, round, QPAR51

892

E-A++ Spectrum A++–E








- Stainless steel 316

Product details

230V ~50Hz
Material: Stainless Steel 316

IP 55 | 0.6 | 150 | 180°

Dimensioned drawing



Note

IP 2-pin mains plug
Earth spike incl.

Recommended lamp



GU10 4.3W 40°
3000K 245lm EEI=A+
5kWh/1000h
Item no. 551253 | 15,30 GBP



LED GU10 5.6W 60°
2200-6700K 350lm EEI==A+
6kWh/1000h
Item no. 1001919 | 49,50 GBP

Lamp details

max. 25W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
matt stainless steel	229740	90,00

NAUTILUS 10
SP, square

892

A-A++ Spectrum A++–E

LED INSIDE








- Ideal for targeted accentuation of objects and areas

Product details

100-240V ~50/60Hz | 700mA
Total consumption: 8.5W
Material: Aluminium / Glass

IP 65 | 0.8 | 200 | LED | 30000 | 90° | 45°

Dimensioned drawing



Note

IP 2-pin mains plug
Earth spike incl.

Variant	Item no.	GBP
620lm | 3000K | CRI>80		
anthracite	231035	126,00
620lm | 3000K | CRI>80		
rust	1001937	126,00
620lm | 3000K | CRI>80		
green	1001938	126,00

LED SPIKE
SP

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Ideal for targeted accentuation of objects and areas

Product details

100-240V ~50/60Hz | 240mA
Total consumption: 6W
Material: Aluminium / Glass

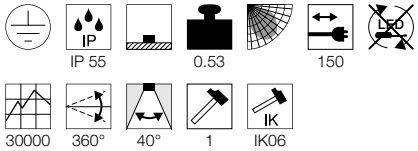

Dimensioned drawing



Note

IP 2-pin mains plug
Earth spike incl.

Variant	Item no.	GBP
400lm | 3000K | CRI>80		
anthracite	**1002201**	**49,50**
400lm | 3000K | CRI>80		
green	**1002202**	**49,50**
400lm | 3000K | CRI>80		
rust	**1002203**	**49,50**

SYNA
SP

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- 240V LED

Product details

220-240V ~50/60Hz
Total consumption: 8.6W
Material: Aluminium / Glass

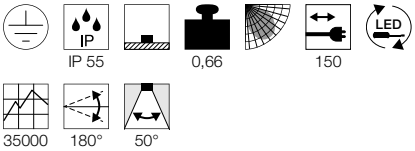

Dimensioned drawing



Note

IP 2-pin mains plug
Earth spike incl.

Variant	Item no.	GBP
470lm | 3000K | CRI>80		
grey / transparent	**227504**	**67,50**
470lm | 3000K | CRI>80		
anthracite	**227505**	**67,50**
470lm | 3000K | CRI>80		
rust	**227507**	**67,50**
470lm | 3000K | CRI>80		
green	**227508**	**67,50**









SITRA 360 SPIKE
SP, single, TCR-TSE

896

B-A++ Spectrum A⁺⁺–E






Product details

230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Note

IP 2-pin mains plug
Earth spike incl.

Recommended lamp

GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP

LED GX53 8.2W 120°
4000K 620lm EEI=A+
9kWh/1000h
Item no. 550074 | 20,70 GBP

Lamp details

max. 9W TCR-TSE
Ø: 7.5 cm max. L: 3.5 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE ■ anthracite	**231525**	**49,50**

SITRA 360 SPIKE
SP, double, TCR-TSE

896

B-A++ Spectrum A⁺⁺–E






Product details

230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Note

IP 2-pin mains plug
Earth spike incl.

Recommended lamp

GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP

LED GX53 8.2W 120°
4000K 620lm EEI=A+
9kWh/1000h
Item no. 550074 | 20,70 GBP

Lamp details

2x max. 9W TCR-TSE
Ø: 7.5 cm max. L: 3.5 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE ■ anthracite	**231535**	**153,00**


231682 593




CV SPOT
SP, short

A-A++ Spectrum A++–E








- Stainless steel 304

Product details

230V ~50Hz
Material: Stainless Steel 304

IP 65 | 1.15 | 200 | 180°

Dimensioned drawing



Note

IP 2-pin mains plug
Earth spike incl.

Recommended lamp

LED GU10 3.7W 36°
2700K 260lm EEI=A+
4kWh/1000h
Item no. 560122 | 29,70 GBP

Lamp details

max. 4W LED GU10 51mm
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | LED GU10 51mm matt stainless steel	231672	153,00

CV SPOT
SP, long

A-A++ Spectrum A++–E






- Stainless steel 304

Product details

230V ~50Hz
Material: Stainless Steel 304

IP 65 | 1.45 | 200 | 180°

Dimensioned drawing



Note

IP 2-pin mains plug
Earth spike incl.

Recommended lamp

LED GU10 3.7W 36°
2700K 260lm EEI=A+
4kWh/1000h
Item no. 560122 | 29,70 GBP

Lamp details

max. 4W LED GU10 51mm
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | LED GU10 51mm matt stainless steel	231682	162,00



229090 595



NAUTILUS
SP, QR-C51

892

C-A+ Spectrum A++–E






- Stainless steel 304

Product details

12V ~50Hz
Material: Stainless Steel 304 / Glass



Dimensioned drawing



Recommended accessories

Transformer 12V AC | 60VA IP44
Item no. 227160 | 38,70 GBP



Recommended lamp

GU5.3 3.8W 40°
2700K 245lm EEI=A+
5kWh/1000h
Item no. 551242 | 15,30 GBP



LED GU5.3 3.8W 40°
3000K 245lm EEI=A+
5kWh/1000h
Item no. 551243 | 15,30 GBP



Lamp details

max. 35W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51 stainless steel	**229090**	**81,00**



229741 597

NAUTILUS 10 SPOT
SP, QPAR51

892

E-A++ Spectrum A++–E









- Stainless steel 316

Product details
230V ~50Hz
Material: Stainless Steel 316

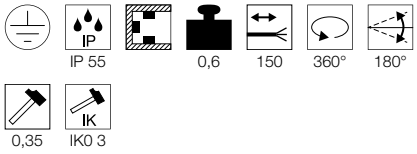

Dimensioned drawing



Note
Suitable plugs and other accessories
can be found in our accessories chapter.
Open cable end

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Recommended lamp

GU10 4.3W 40°
3000K 245lm EEI=A+
5kWh/1000h
Item no. 551253 | 15,30 GBP



LED GU10 5.6W 60°
2200-6700K 350lm EEI==A+
6kWh/1000h
Item no. 1001919 | 49,50 GBP



Lamp details
max. 25W QPAR51
Ø: 5 cm max. L: 6 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
■ stainless steel	**229741**	**90,00**

NAUTILUS
SP

892

A-A++ Spectrum A++–E


LED INSIDE






- Stainless steel 316

Product details
220-240V ~50/60Hz
Total consumption: 9W
Material: Stainless Steel 316

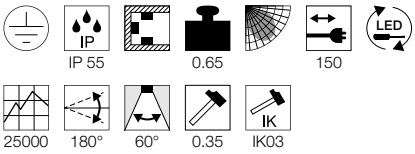

Dimensioned drawing



Note
IP 2-pin mains plug

Recommended accessories

■ Plate installation
Item no. 1001963 | 6,80 GBP



■ Plastic earth spike
Item no. 900011 | 3,00 GBP



Lamp details
520lm | 3000K | CRI>80

Variant	Item no.	GBP
■ matt stainless steel	**1001962**	**99,00**

NAUTILUS SPOT
SP, PAR38, E27

892

D-A+ Spectrum A++–E








- Stainless steel 304

Product details
230V ~50Hz
Material: Stainless Steel 304



Dimensioned drawing



Note
Suitable plugs and other accessories
can be found in our accessories chapter.
Open cable end

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Recommended lamp

E27 17W 45°
3000K 1430lm EEI=A+
17kWh/1000h
Item no. 560473 | 60,30 GBP



Lamp details
max. 80W PAR38
optional: QPAR30

Variant	Item no.	GBP
E27 | PAR38		
■ stainless steel	**229100**	**117,00**

DASAR® PROJECTOR
SP, 12/24V

A-A++ Spectrum A⁺⁺–E

LED INSIDE




DASAR® PROJECTOR
SP, 230V

A-A++ Spectrum A⁺⁺–E

LED INSIDE



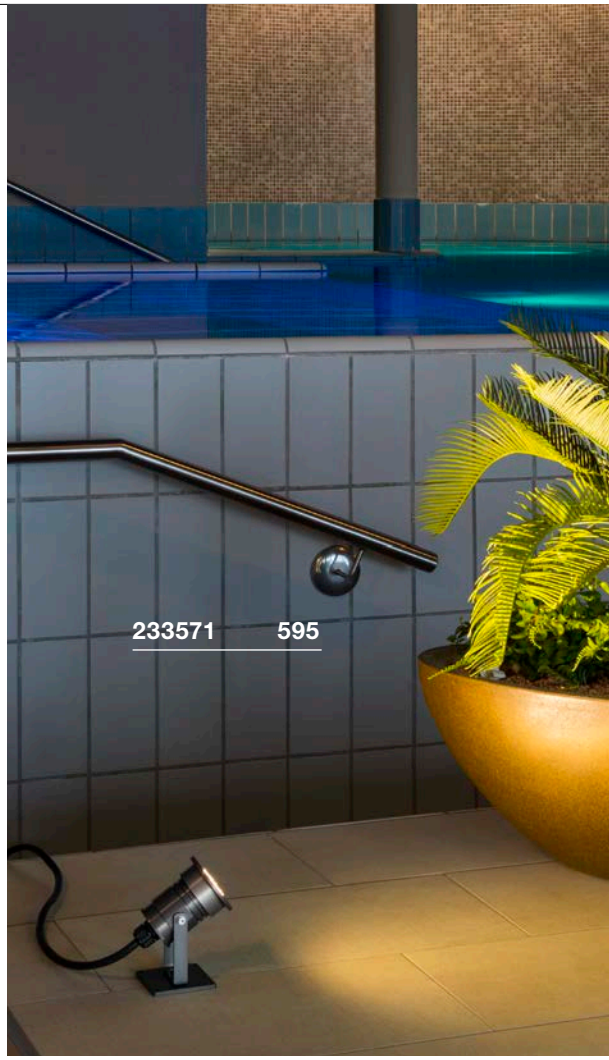

Product details

12V/24V DC
Material: Stainless Steel 316 / Glass


IP 68 | 1 | 250 | LED | 25000 | 90° | 40°

Product details


220-240V ~50/60Hz | 400mA
Total consumption: 5.5W
Material: Stainless Steel 316 / Glass

IP 67 | 1.15 | 200 | LED | 25000 | 90° | 40°

Dimensioned drawing



Dimensioned drawing



Note

Connection box 229269 provides enough room for the recommended power supply, see accessories chapter
Open cable end

Note

IP 2-pin mains plug

Recommended accessories

LED power supply 24V DC | 12W
Item no. 470502 |20,70 GBP

LED power supply, 12V DC | 12W
Item no. 470507 |20,70 GBP

Earth spike stainless steel 316
Item no. 233580 |14,40 GBP

Installation plate stainless steel 316
Item no. 233582 |19,80 GBP

Plastic earth spike
Item no. 900011 |3,00 GBP

Recommended accessories

Earth spike stainless steel 316
Item no. 233580 |14,40 GBP


Installation plate stainless steel 316
Item no. 233582 |19,80 GBP


Plastic earth spike
Item no. 900011 |3,00 GBP


Variant	Item no.	GBP
360lm | 3000K | CRI>80 stainless steel	**233570**	**188,10**

Variant	Item no.	GBP
300lm | 3000K | CRI>80 stainless steel	**233571**	**242,10**



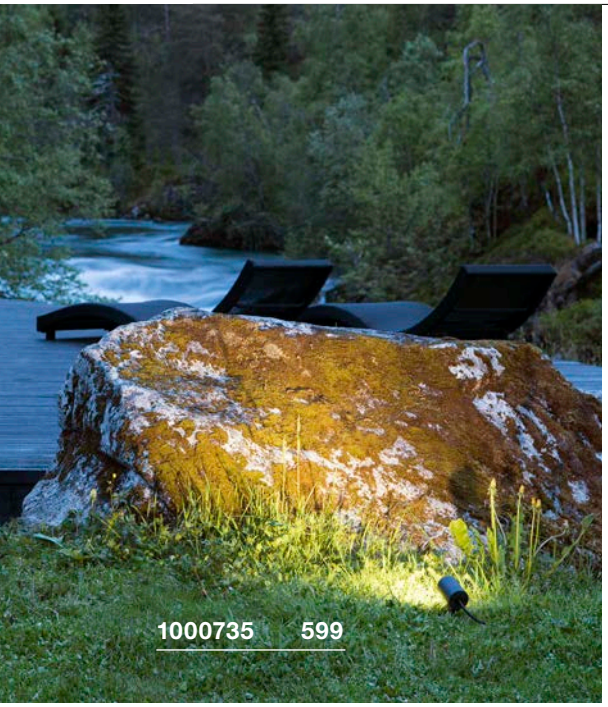

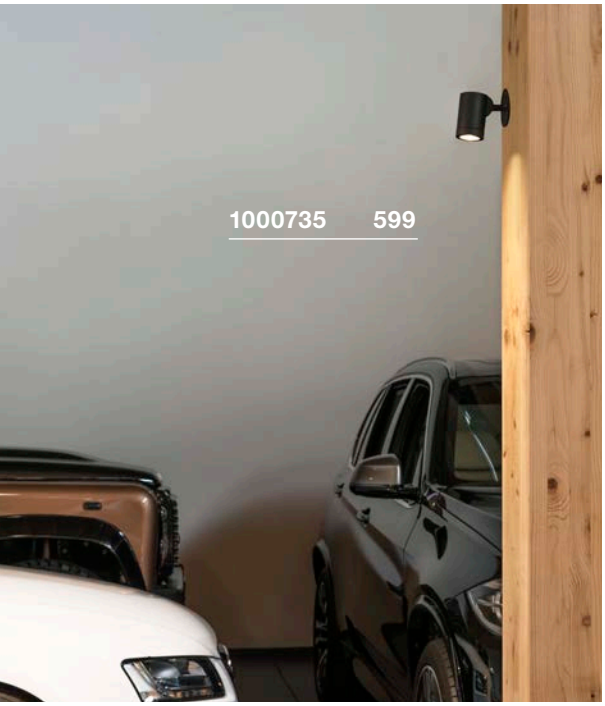

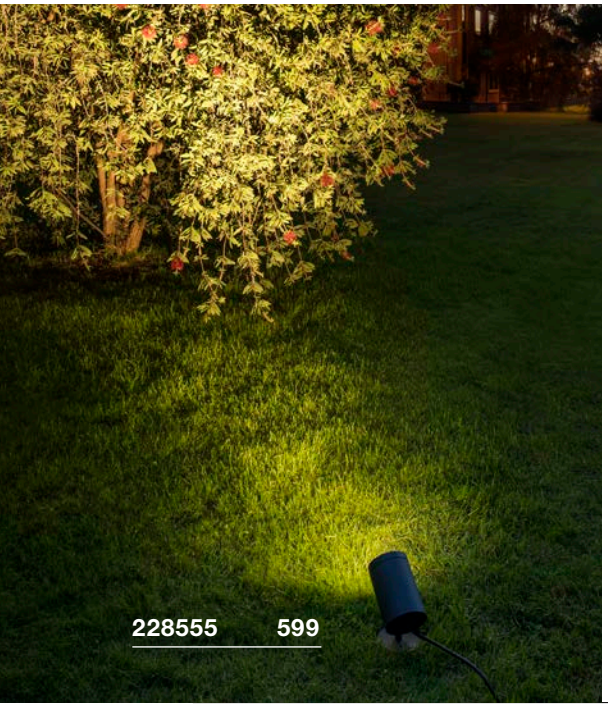

HELIA SPOT S
SP, single, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz
Total consumption: 8W
Material: Aluminium
Dimmable: Triac C, Triac L

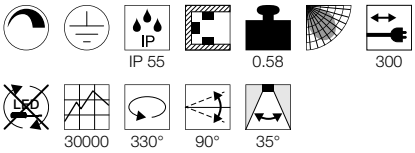

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended accessories

Earth spike
Item no. 1000736 |16,20 GBP



Variant	Item no.	GBP
480lm | 3000K | CRI>80		
anthracite	**1000735**	**153,00**

HELIA SPOT L
SP, single, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE









- 240V LED

Product details

220-240V ~50/60Hz
Total consumption: 17W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

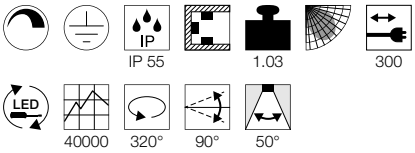

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended accessories

Earth spike
Item no. 228560 |19,80 GBP



Variant	Item no.	GBP
1050lm | 3000K | CRI>80		
anthracite	**228555**	**197,10**

SPOODI 15
SP

A-A++ Spectrum A++–E

LED INSIDE









Product details

230V ~50Hz
Total consumption: 10W
Material: Aluminium / Glass

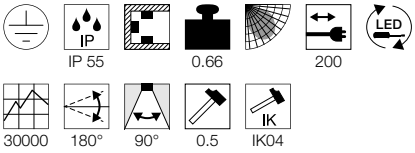

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended accessories

■ Plastic earth spike
Item no. 900011 | 3,00 GBP




■ Wall bracket 50 cm
Item no. 234340 | 38,70 GBP




■ Wall bracket 80 cm
Item no. 234350 | 47,70 GBP



Variant	Item no.	GBP
760lm | 3000K | CRI>80		
■ black	**232800**	**54,00**
830lm | 4000K | CRI>80		
■ black	**232810**	**54,00**

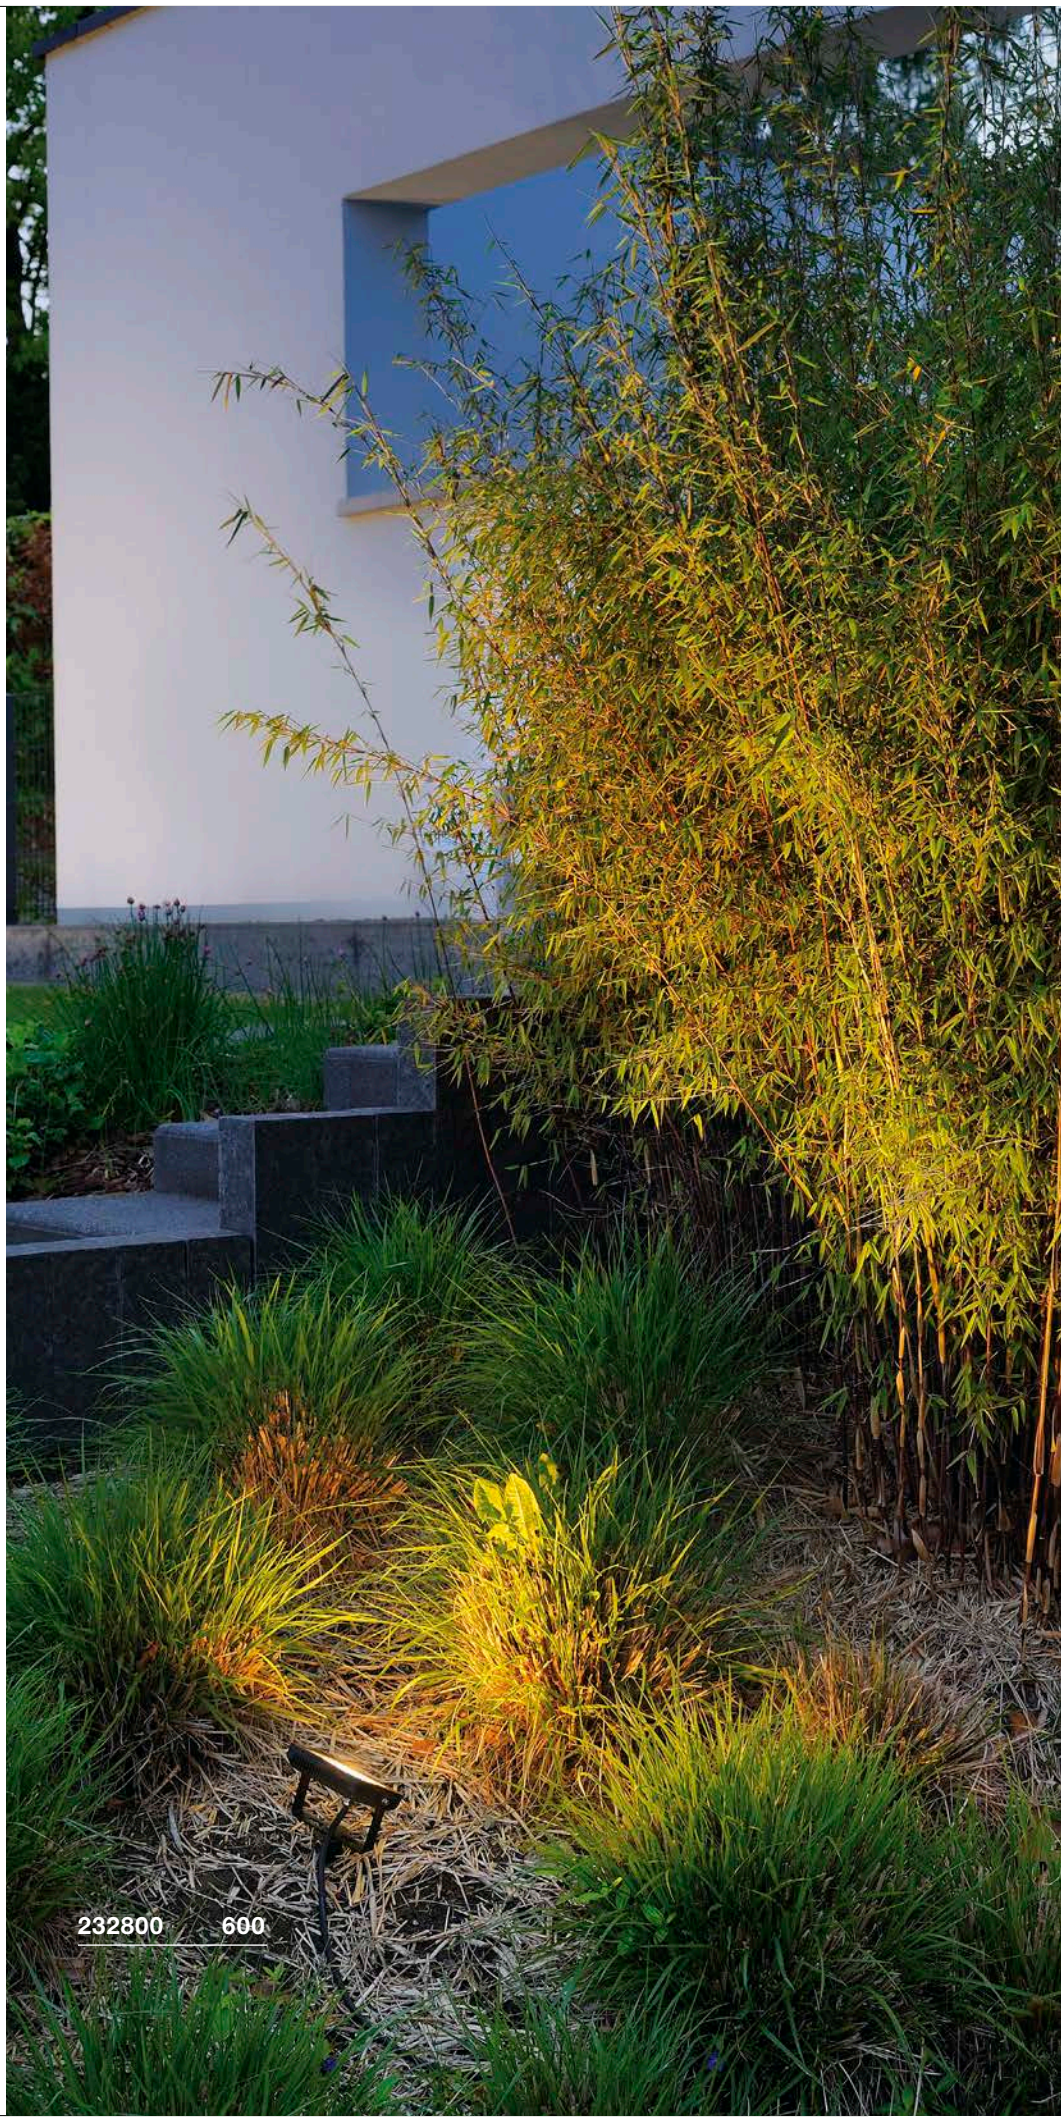

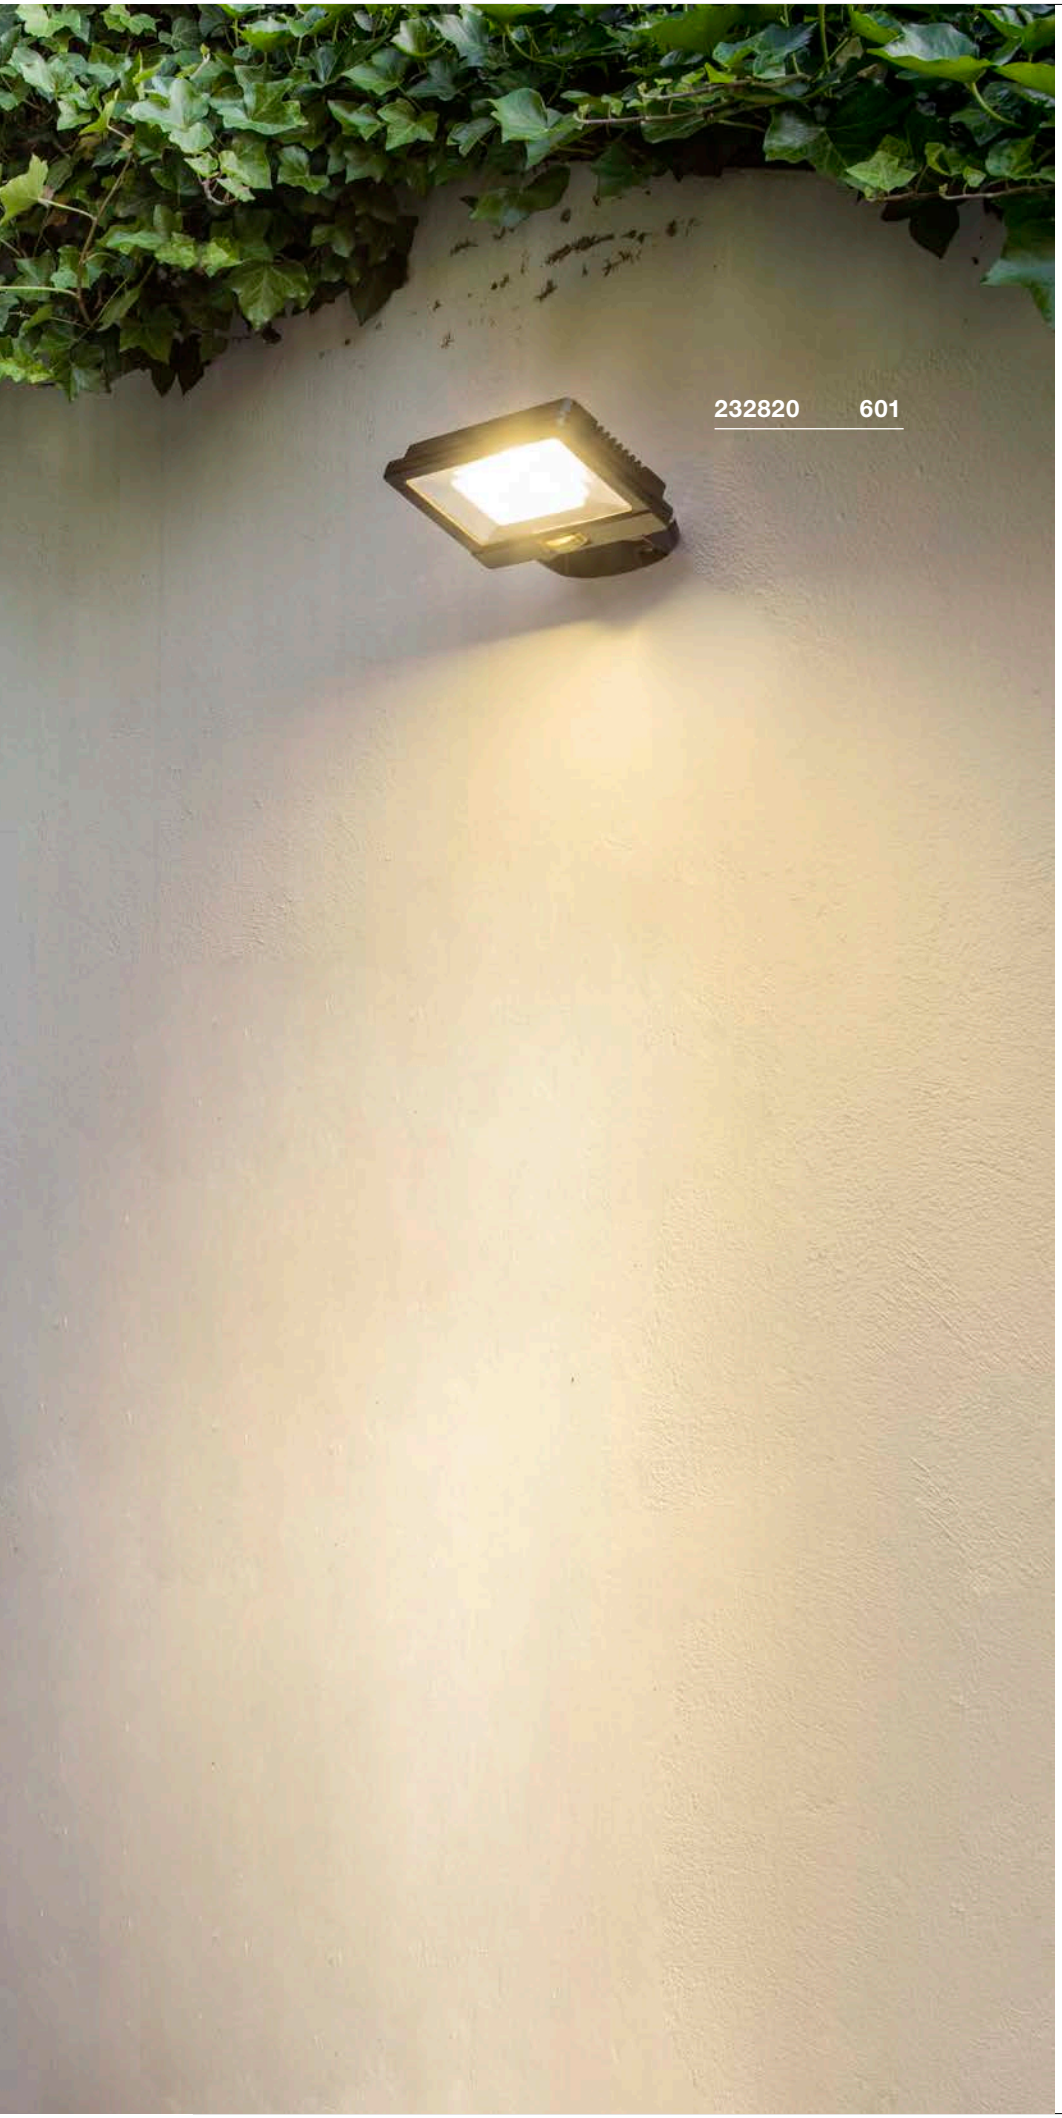

SPOODI 20
SP

A-A++ Spectrum A++–E

LED INSIDE









Product details

230V ~50Hz
Total consumption: 30W
Material: Aluminium / Glass

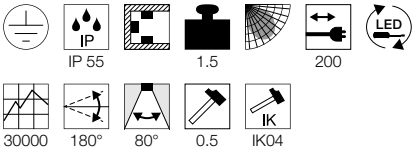

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended accessories

■ Plastic earth spike
Item no. 900011 | 3,00 GBP



■ Wall bracket 50 cm
Item no. 234340 | 38,70 GBP



■ Wall bracket 80 cm
Item no. 234350 | 47,70 GBP



Variant	Item no.	GBP
2365lm | 3000K | CRI>80		
■ black	**232820**	**121,50**
2680lm | 4000K | CRI>80		
■ black	**232830**	**121,50**


232850 603
LOUNGE
vivoon

SPOODI 31
SP

A-A++ Spectrum A⁺⁺–E


LED INSIDE








Product details
230V ~50Hz
Total consumption: 60W
Material: Aluminium / Glass

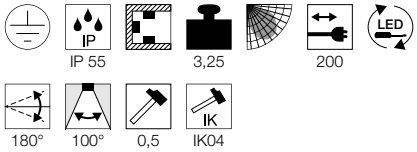

Dimensioned drawing



Note
IP 2-pin mains plug

Recommended accessories

■ Wall bracket 50cm
Item no. 234340 | 38,70 GBP



■ Wall bracket 80cm
Item no. 234350 | 47,70 GBP



Variant	Item no.	GBP
5100lm | 3000K | CRI>80		
■ black	**232840**	**184,50**
5500lm | 4000K | CRI>80		
■ black	**232850**	**184,50**

SPOODI 13
SP, SENSOR

A-A++ Spectrum A⁺⁺–E

LED INSIDE

IR









- Integrated infrared sensor
- Convenient sensor setting via remote control

Product details
220-240V ~50/60Hz
Total consumption: 11W
Material: Aluminium / Glass

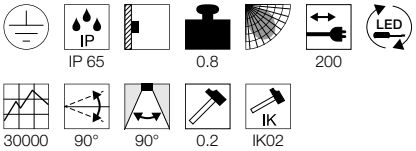

Dimensioned drawing



Note
Detection angle 110°, max. detection distance 8m, day/night mode, adjustable activation time
IP 2-pin mains plug
Remote control incl.

Variant	Item no.	GBP
800lm | 3000K | CRI>80		
■ black	**232860**	**58,50**
800lm | 3000K | CRI>80		
◪ grey / transparent	**232864**	**58,50**
870lm | 4000K | CRI>80		
■ black	**232870**	**58,50**
870lm | 4000K | CRI>80		
◪ grey / transparent	**232874**	**58,50**

SPOODI 20
SP, SENSOR

A-A++ Spectrum A⁺⁺–E

LED INSIDE

IR









- Integrated infrared sensor
- Convenient sensor setting via remote control

Product details
220-240V ~50/60Hz
Total consumption: 30W
Material: Aluminium / Glass

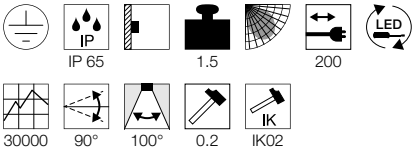

Dimensioned drawing



Note
Detection angle 110°, max. detection distance 8m, day/night mode, adjustable activation time
IP 2-pin mains plug
Remote control incl.

Variant	Item no.	GBP
2250lm | 3000K | CRI>80		
■ black	**232880**	**94,50**
2250lm | 3000K | CRI>80		
◪ grey / transparent	**232884**	**94,50**
2500lm | 4000K | CRI>80		
■ black	**232890**	**94,50**
2500lm | 4000K | CRI>80		
◪ grey / transparent	**232894**	**94,50**

OUTDOOR BEAM 11
SP

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 120mA
Total consumption: 11W
Material: Aluminium / Glass



Dimensioned drawing



Note

IP 2-pin mains plug

Recommended accessories

■ Plastic earth spike
Item no. 900011 |3,00 GBP

■ Wall bracket 50 cm
Item no. 234344 |38,70 GBP

■ Wall bracket 80 cm
Item no. 234354 |52,20 GBP

Variant	Item no.	GBP
800lm | 5700K | CRI>80 grey / transparent	1001633	54,00
725lm | 3000K | CRI>80 grey / transparent	1001634	54,00

OUTDOOR BEAM 22
SP

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 760mA
Total consumption: 32W
Material: Aluminium / Glass



Dimensioned drawing



Note

IP 2-pin mains plug

Recommended accessories


■ Plastic earth spike
Item no. 900011 |3,00 GBP


■ Wall bracket 50 cm
Item no. 234344 |38,70 GBP

■ Wall bracket 80 cm
Item no. 234354 |52,20 GBP

Variant	Item no.	GBP
2900lm | 5700K | CRI>80 grey / transparent	1001635	153,00
2900lm | 3000K | CRI>80 grey / transparent	1001636	153,00



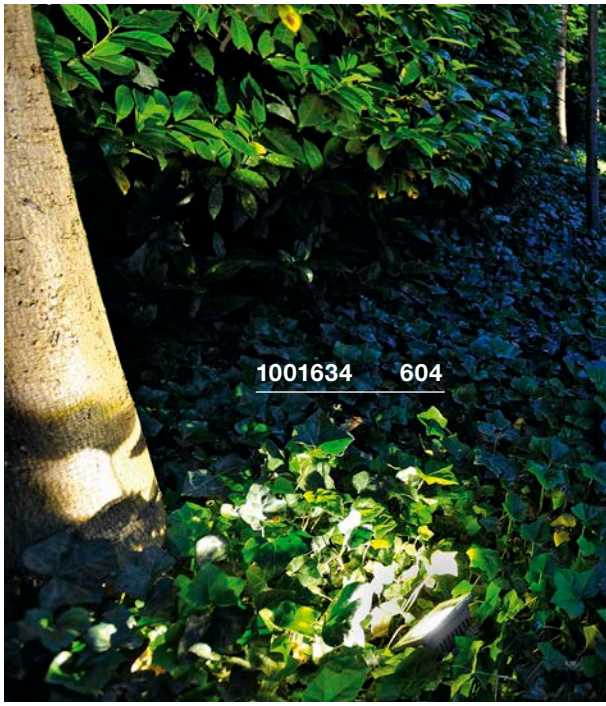

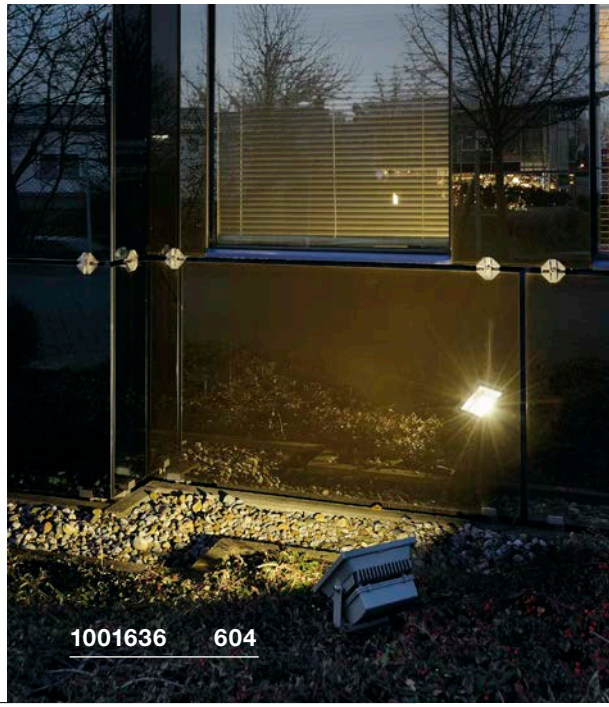




OUTDOOR BEAM 28
SP

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 640mA
Total consumption: 54W
Material: Aluminium / Glass

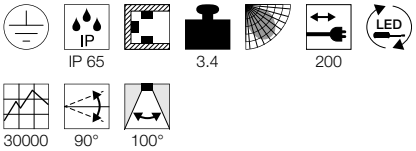

Dimensioned drawing



Note

IP 2-pin mains plug

Recommended accessories

Wall bracket 50 cm
Item no. 234344 | 38,70 GBP



Wall bracket 80 cm
Item no. 234354 | 52,20 GBP



Variant	Item no.	GBP
5100lm | 5700K | CRI>80		
grey / transparent	**1001637**	**270,00**
5100lm | 3000K | CRI>80		
grey / transparent	**1001638**	**270,00**

FLAC BEAM®
SP

A-A++ Spectrum A++–E


LED INSIDE






Product details

220-240V ~50/60Hz
Material: Aluminium

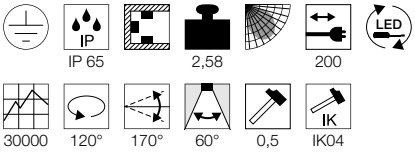

Dimensioned drawing



Note

IP 2-pin mains plug

Variant	Item no.	GBP
1250lm | 3000K | CRI>80 | 18W		
grey	**231092**	**332,10**
1800lm | 3000K | CRI>80 | 27W		
grey	**231072**	**359,10**

FLOOD LIGHT 25
SP

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 760mA
Total consumption: 32W
Material: Aluminium / Glass



Dimensioned drawing



Note

IP 2-pin mains plug

Recommended accessories

■ Plastic earth spike
Item no. 900011 |3,00 GBP

■ Wall bracket 50 cm
Item no. 234340 |38,70 GBP

■ Wall bracket 80 cm
Item no. 234350 |47,70 GBP

Variant	Item no.	GBP
2350lm | 5700K | CRI>80		
■ matt black	**1001642**	**242,10**
2200lm | 3000K | CRI>80		
■ matt black	**1001643**	**242,10**

FLOOD LIGHT 32
SP

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 1150mA
Total consumption: 81W
Material: Aluminium / Glass



Dimensioned drawing



Note

Open cable end

Recommended accessories

■ Wall bracket 50 cm
Item no. 234340 |38,70 GBP


■ Wall bracket 80 cm
Item no. 234350 |47,70 GBP

■ IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP

Variant	Item no.	GBP
7200lm | 5700K | CRI>80		
■ matt black	**1001644**	**387,00**
6300lm | 3000K | CRI>80		
■ matt black	**1001645**	**387,00**





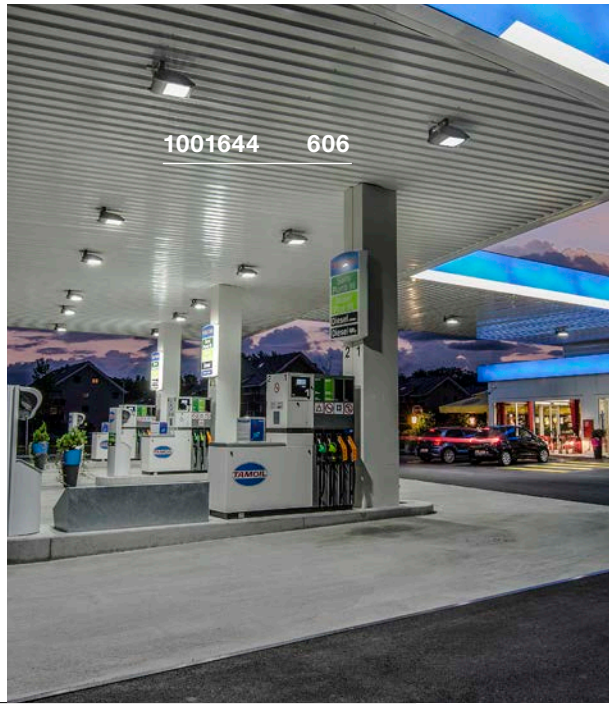





WILRON S
SP

A-A++ Spectrum A⁺⁺–E

LED INSIDE








Product details

100-277V ~50/60Hz | 500mA
Total consumption: 20W
Material: Aluminium / Glass

IP 55 | 1,1 | LED | 35000 | 0,5 | IK IK04

Dimensioned drawing



Note

A wall bracket [234225] is needed for installation.
A wall bracket [234245] is needed for installation in facade corners.
The lamp is suitable for a connecting piece with a diameter of 40mm.

Recommended accessories

Wall bracket
Item no. 234225 | 24,30 GBP

Corner wall bracket
Item no. 234245 | 28,80 GBP

Variant	Item no.	GBP
2010lm | 4000K | CRI>80 anthracite	**234205**	**225,00**

WILRON L
SP

A-A++ Spectrum A⁺⁺–E

LED INSIDE






Product details

220-240V ~50/60Hz | 1500mA
Total consumption: 65W
Material: Aluminium / Glass

IP 55 | 4 | LED | 35000 | 0,5 | IK IK04

Dimensioned drawing



Note

A wall bracket [234235] is needed for installation.
A wall bracket [234255] is needed for installation in facade corners.
The lamp is suitable for a connecting piece with a diameter of 60mm.

Recommended accessories

Wall bracket
Item no. 234235 | 28,80 GBP

Corner connector
Item no. 234255 | 38,70 GBP

Variant	Item no.	GBP
5900lm | 4000K | CRI>80 anthracite	**234215**	**396,00**

VANO WING
SP, 1-10V

A-A++ Spectrum A++–E

LED INSIDE









- Asymmetric light distribution
- Homogeneous illumination of vertical surfaces

Product details

120-277V ~50/60Hz | 525mA
Material: Aluminium / Glass
Dimmable: 1-10V

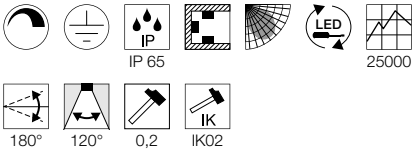

Dimensioned drawing








Variant	Item no.	GBP
1500lm | 3000K | CRI>80 35W | B: 63.5 cm | 3.29 kg grey / transparent	227734	342,00
3340lm | 3000K | CRI>80 48W | B: 119.5 cm | 6 kg grey / transparent	227744	432,00



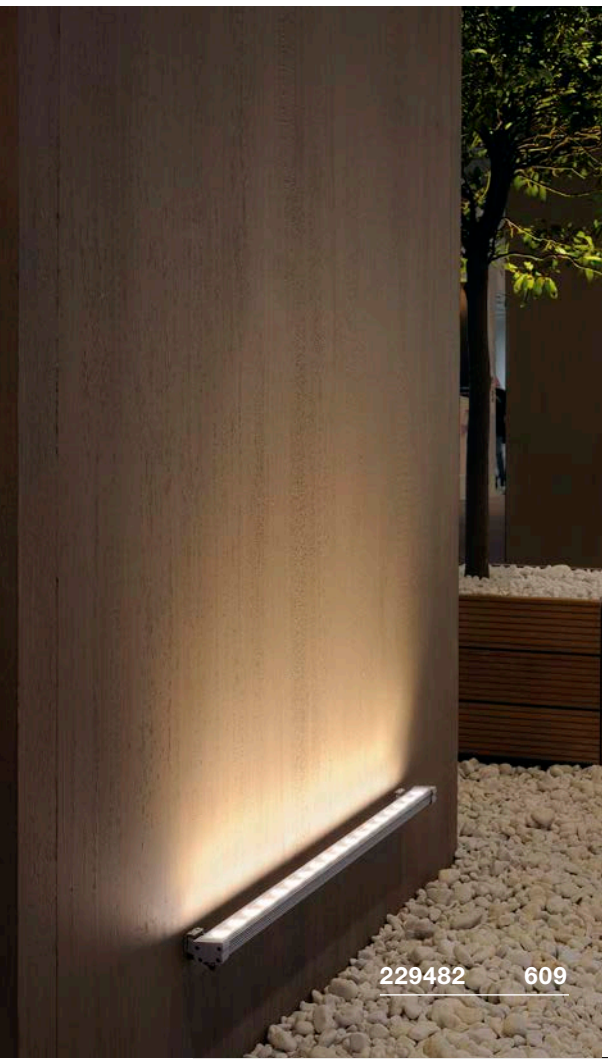

GALEN
SP, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- 240V LED
- IP plug connector

Product details

220-240V ~50/60Hz
Total consumption: 18W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

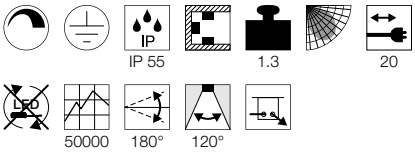

Dimensioned drawing



Recommended accessories

■ Connection lead 500 cm
Item no. 231960 | 22,50 GBP



■ Connection cable 100 cm
Item no. 231961 | 14,40 GBP



Variant	Item no.	GBP
850lm | 3000K | CRI>80		
grey / matt transparent	231954	224,10
850lm | 3000K | CRI>80		
anthracite	231955	224,10

GALEN 100
SP

A-A++ Spectrum A++–E


LED INSIDE






Product details

24V DC
Total consumption: 25W
Material: Aluminium / Glass

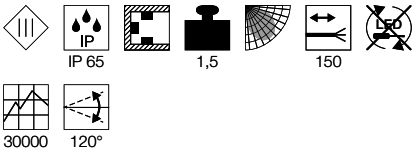

Dimensioned drawing



Note

Open cable end

Recommended accessories


■ LED power supply 24V DC | 36W
Item no. 470544 | 72,00 GBP



□ LED power supply 24V DC | 60W
Item no. 470506 | 81,00 GBP




Variant	Item no.	GBP
1070lm | 6500K | CRI>70		
grey / transparent	229481	296,10
970lm | 3000K | CRI>70		
grey / transparent	229482	296,10

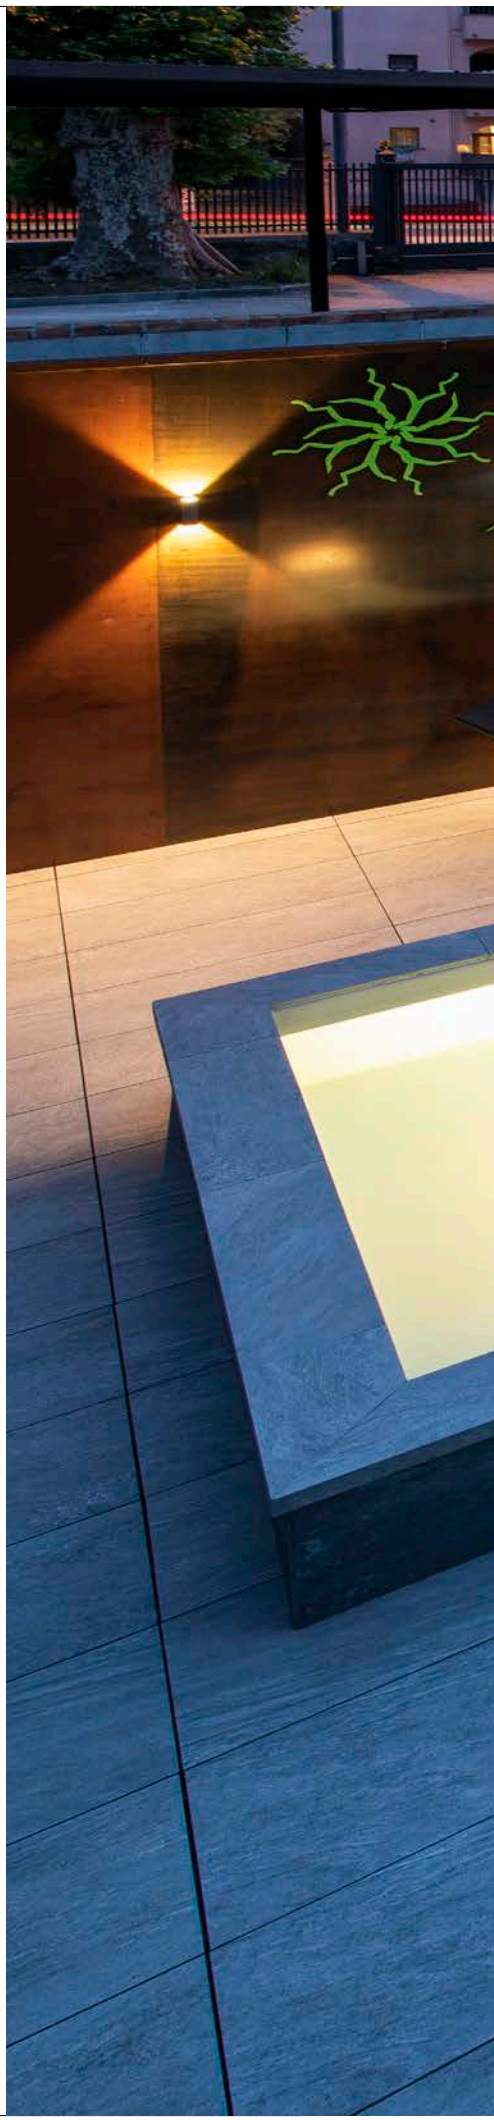

BRINGING LIGHT INTO THE DARK.

PRACTICAL WALL AND CEILING LIGHTS.

They beam out, even under the worst weather conditions: Our wall and ceiling lights are robust, energy-efficient and powerful. However, as well as all of the functionality you can also choose between different designs. Do you prefer modern? Traditional? Round? Or would you like square?

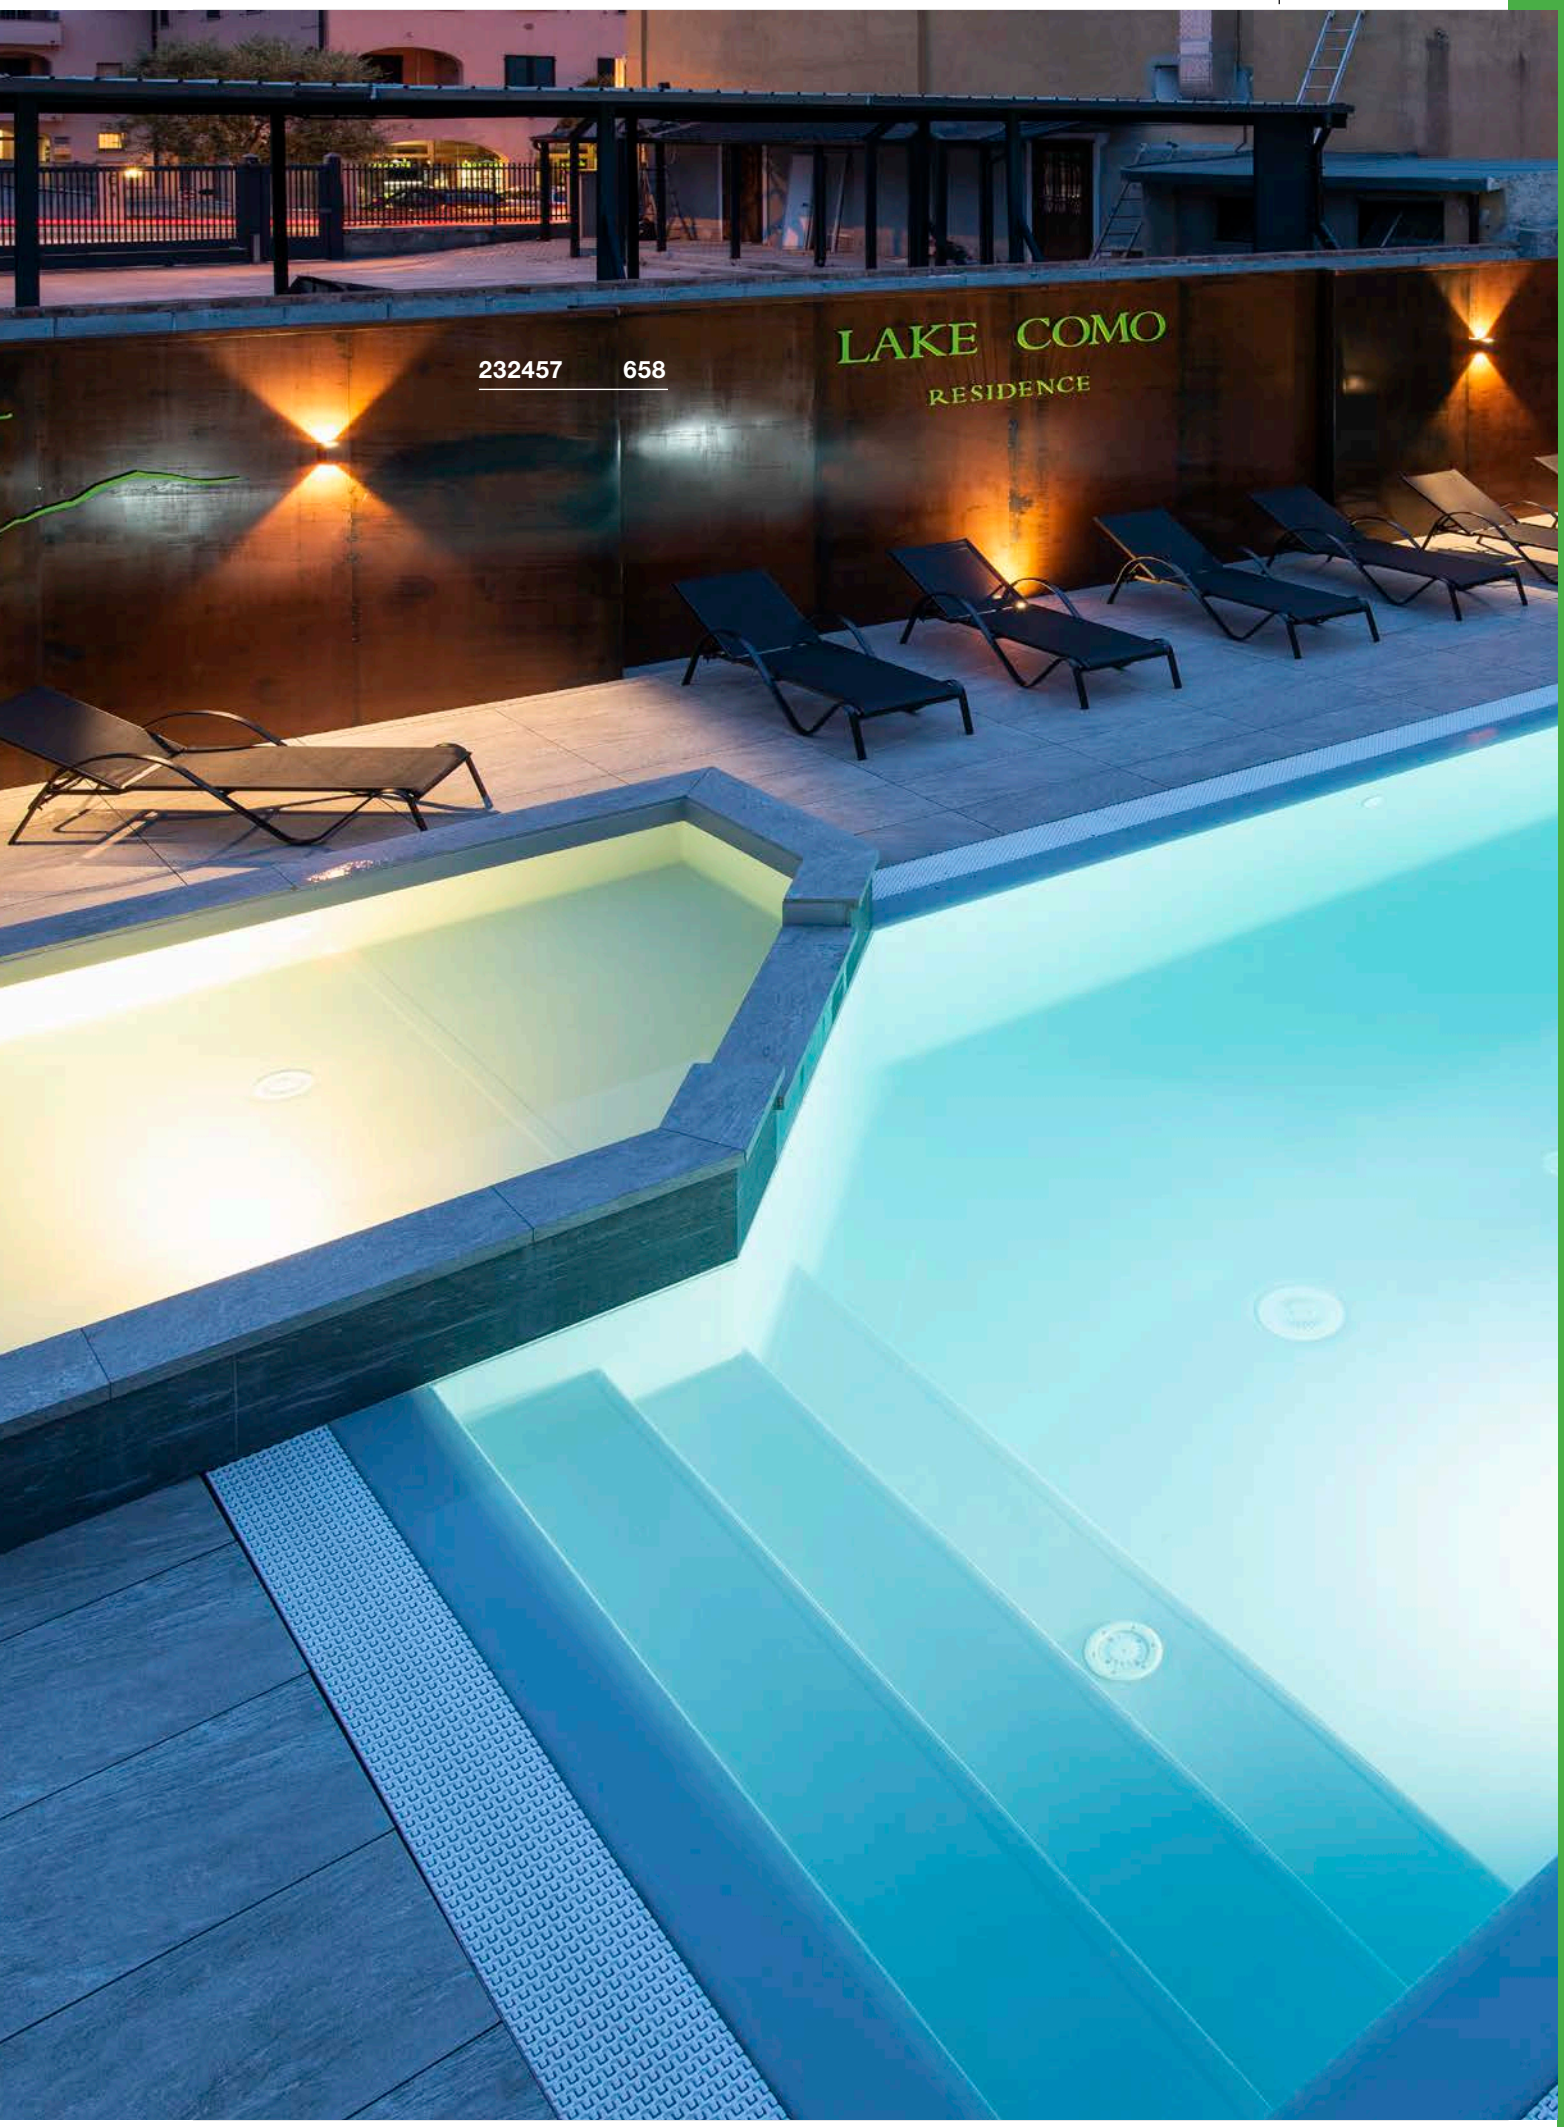

232457 658



WALL AND CEILING LIGHTS


614

614

614

616

617

618

618

619

619

620

620

620

622

623

624

625

626

627

627

628

629

629

629

630

631

632

632

633

633

634

635

636

637

637

638

639

639

639

640

640

641

641

641

642

643

643

644

644



Other luminaires and variants can be found online at www.slv.com


PHOTONIA
WL, E27

893

E-A++ Spectrum A++–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 55 | 1.44 | 0.35 | IK03

Dimensioned drawing



Recommended lamp

E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP



LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002127 | 11,70 GBP



Lamp details

max. 60W
Ø: 9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
anthracite	232045	175,50

GLOO PURE
WL, E27

887

E-A++ Spectrum A++–E






Product details

230V ~50/60Hz
Material: Aluminium / Glass

IP 44 | 1.6 | IK02

Dimensioned drawing



Recommended lamp

E27 4.7W 360°
3000K 380lm EEI=A+
5kWh/1000h
Item no. 551532 | 20,70 GBP



LED E27 12W 240°
3000K 1055lm EEI==A+
12kWh/1000h
Item no. 1001032 | 20,70 GBP

Lamp details

max. 23W
Ø: 4.8 cm max. L: 18 cm max.

Variant	Item no.	GBP
E27		
anthracite / matt transparent	1002002	67,50

MOLAT
WL, E27

891

E-A++ Spectrum A++–E








Product details

230V ~50/60Hz
Material: Aluminium / Glass

IP 44 | 0.95 | 0.2 | IK02

Dimensioned drawing



Recommended lamp

LED E27 4.8W 330°
2700K 470lm EEI=A++
5kWh/1000h
Item no. 560752 | 18,00 GBP




LED E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP





Lamp details

max. 60W
Ø: 6.5 cm max. L: 14.5 cm max.

Variant	Item no.	GBP
E27		
anthracite	1000820	81,00

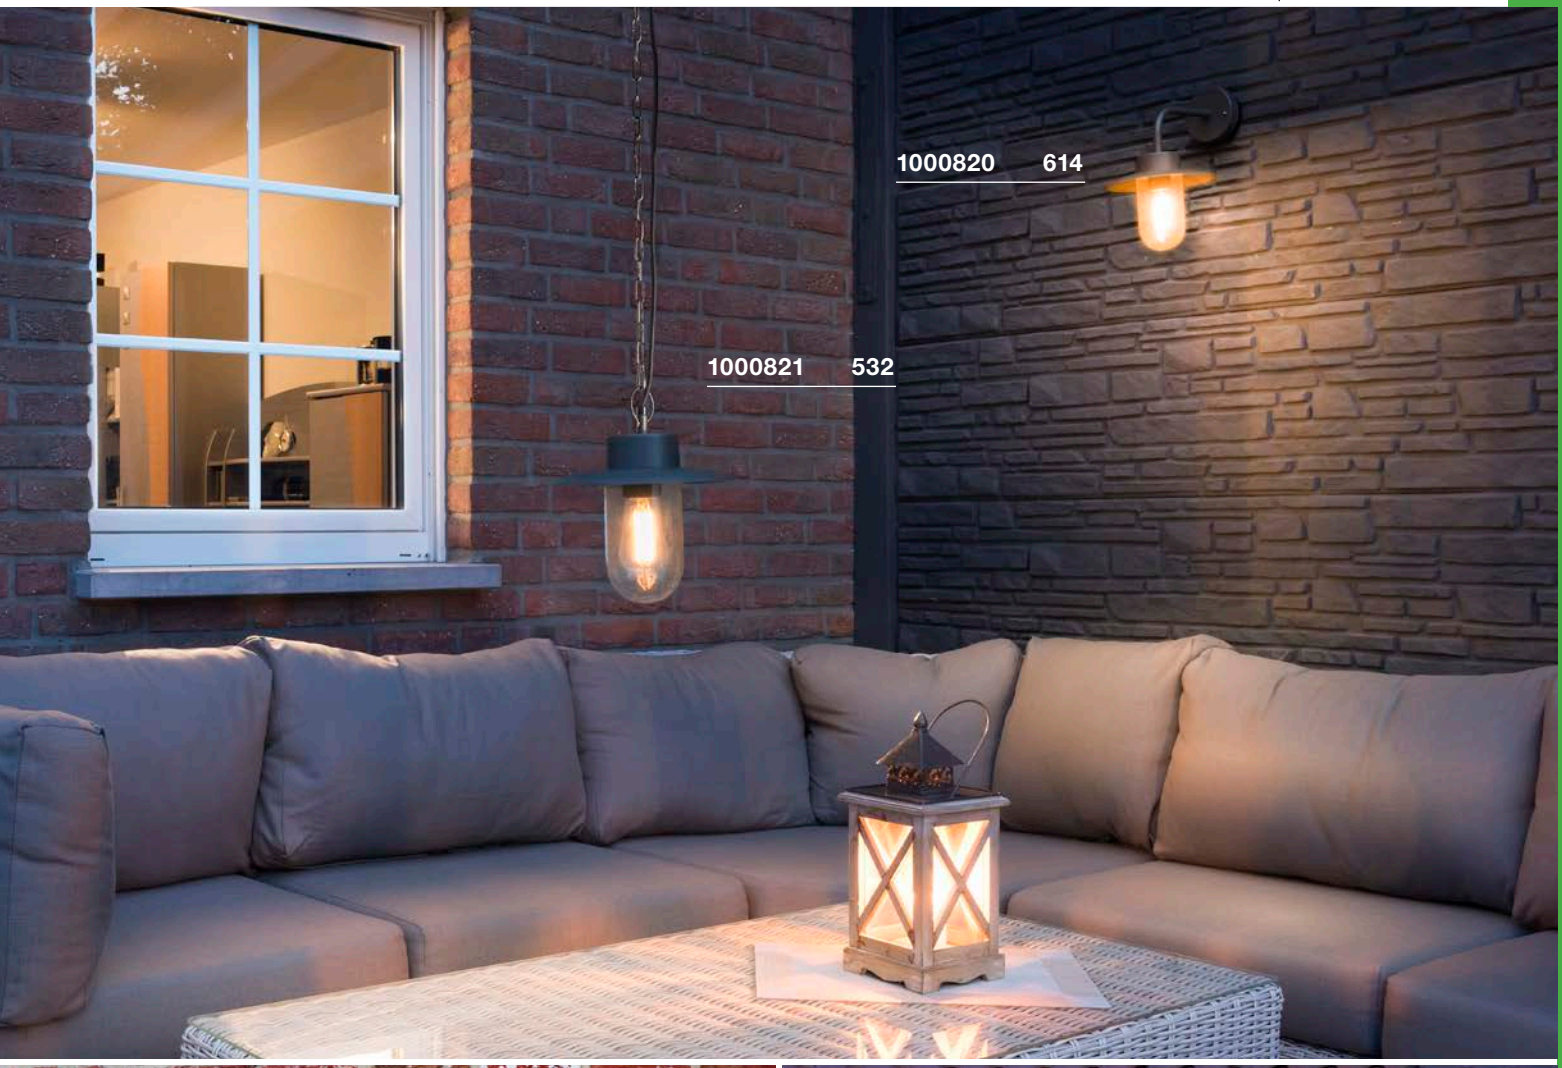
1000820 614
1000821 532

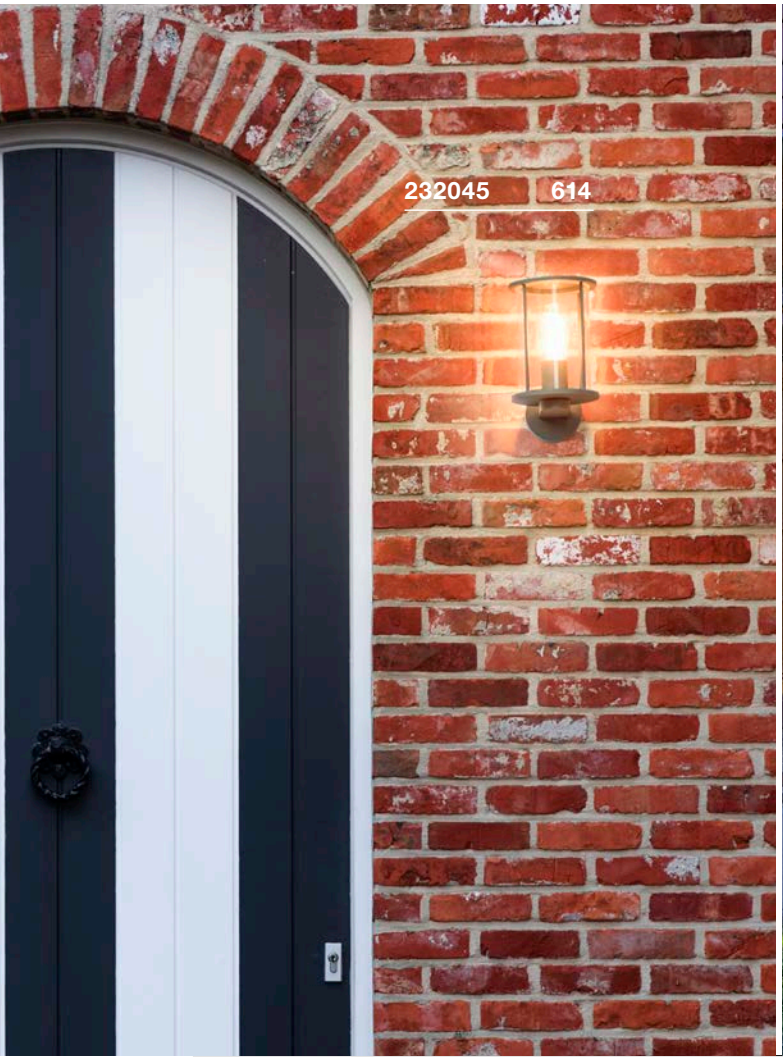
232045 614

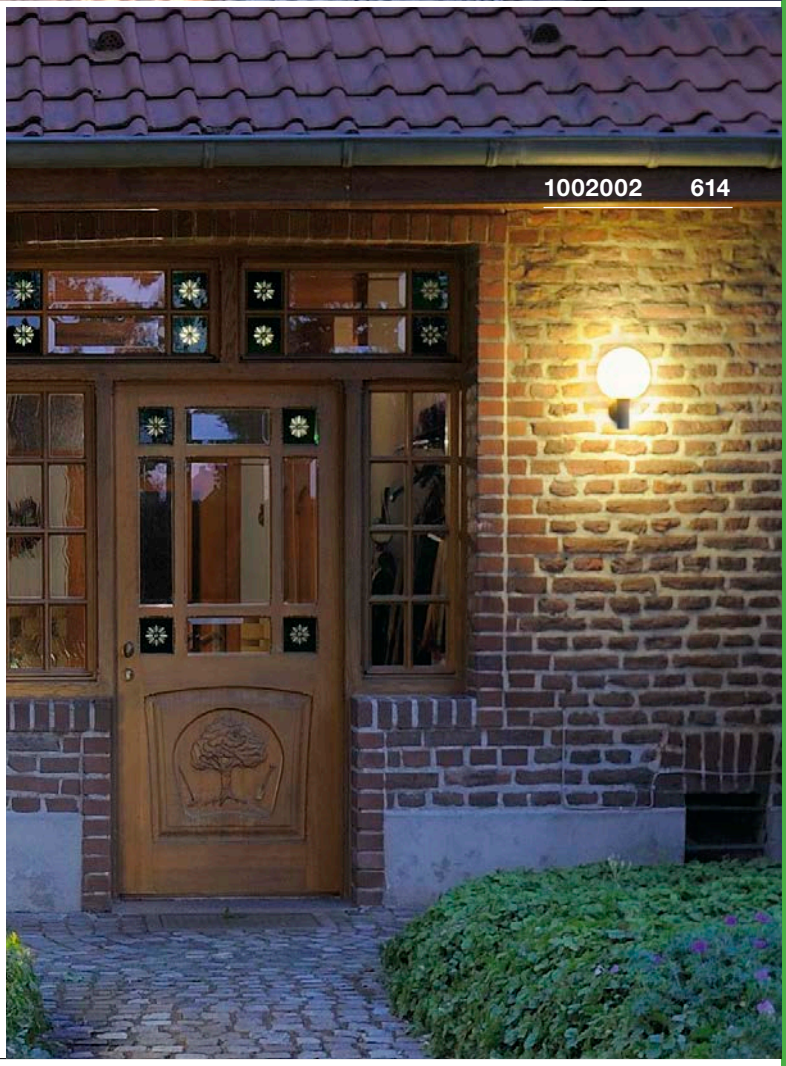
1002002 614

SLOTS
WL

896

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz
Total consumption: 6.3W
Material: Aluminium / Glass


IP 44 | 0.85 | 25000

Dimensioned drawing



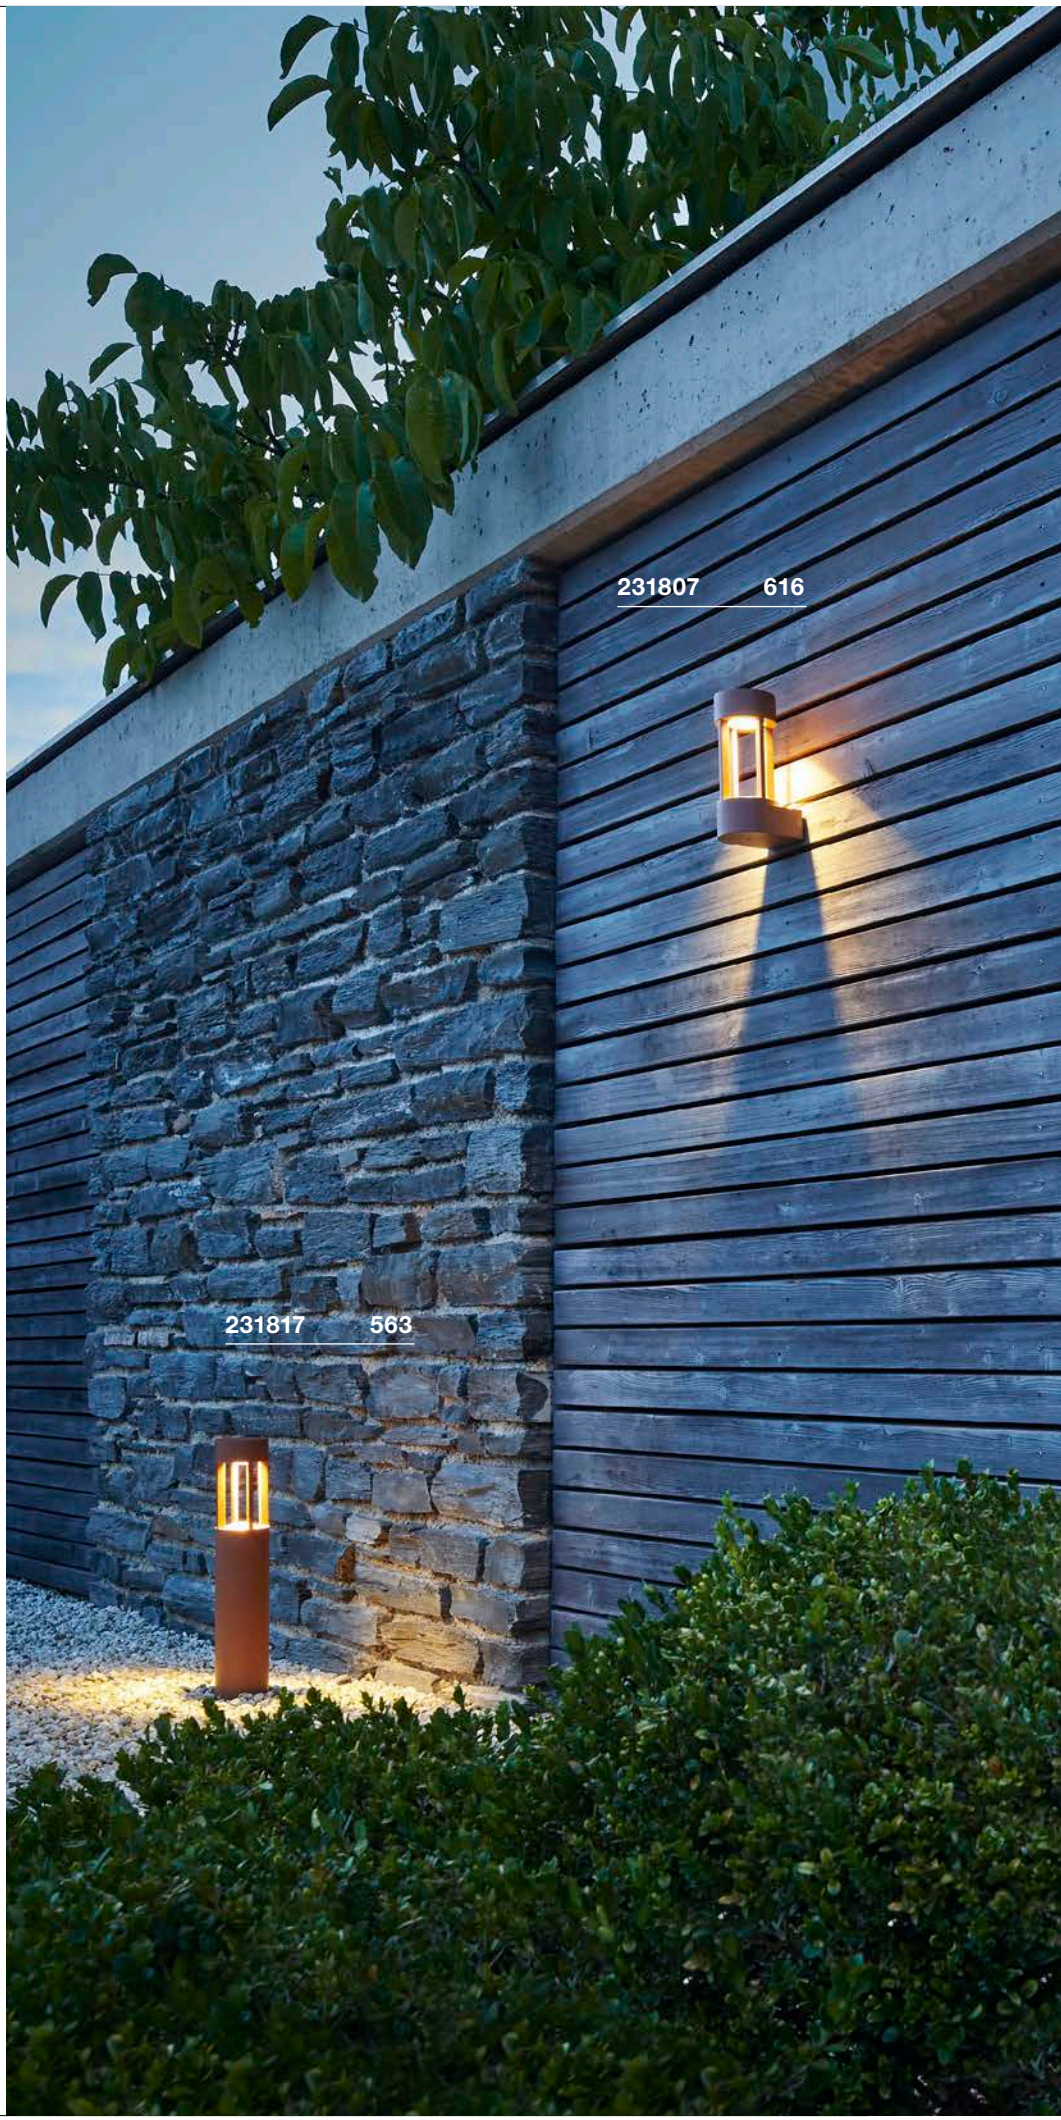

Variant	Item no.	GBP
140lm | 3000K | CRI>80 anthracite	231805	126,00
140lm | 3000K | CRI>80 rust	231807	126,00

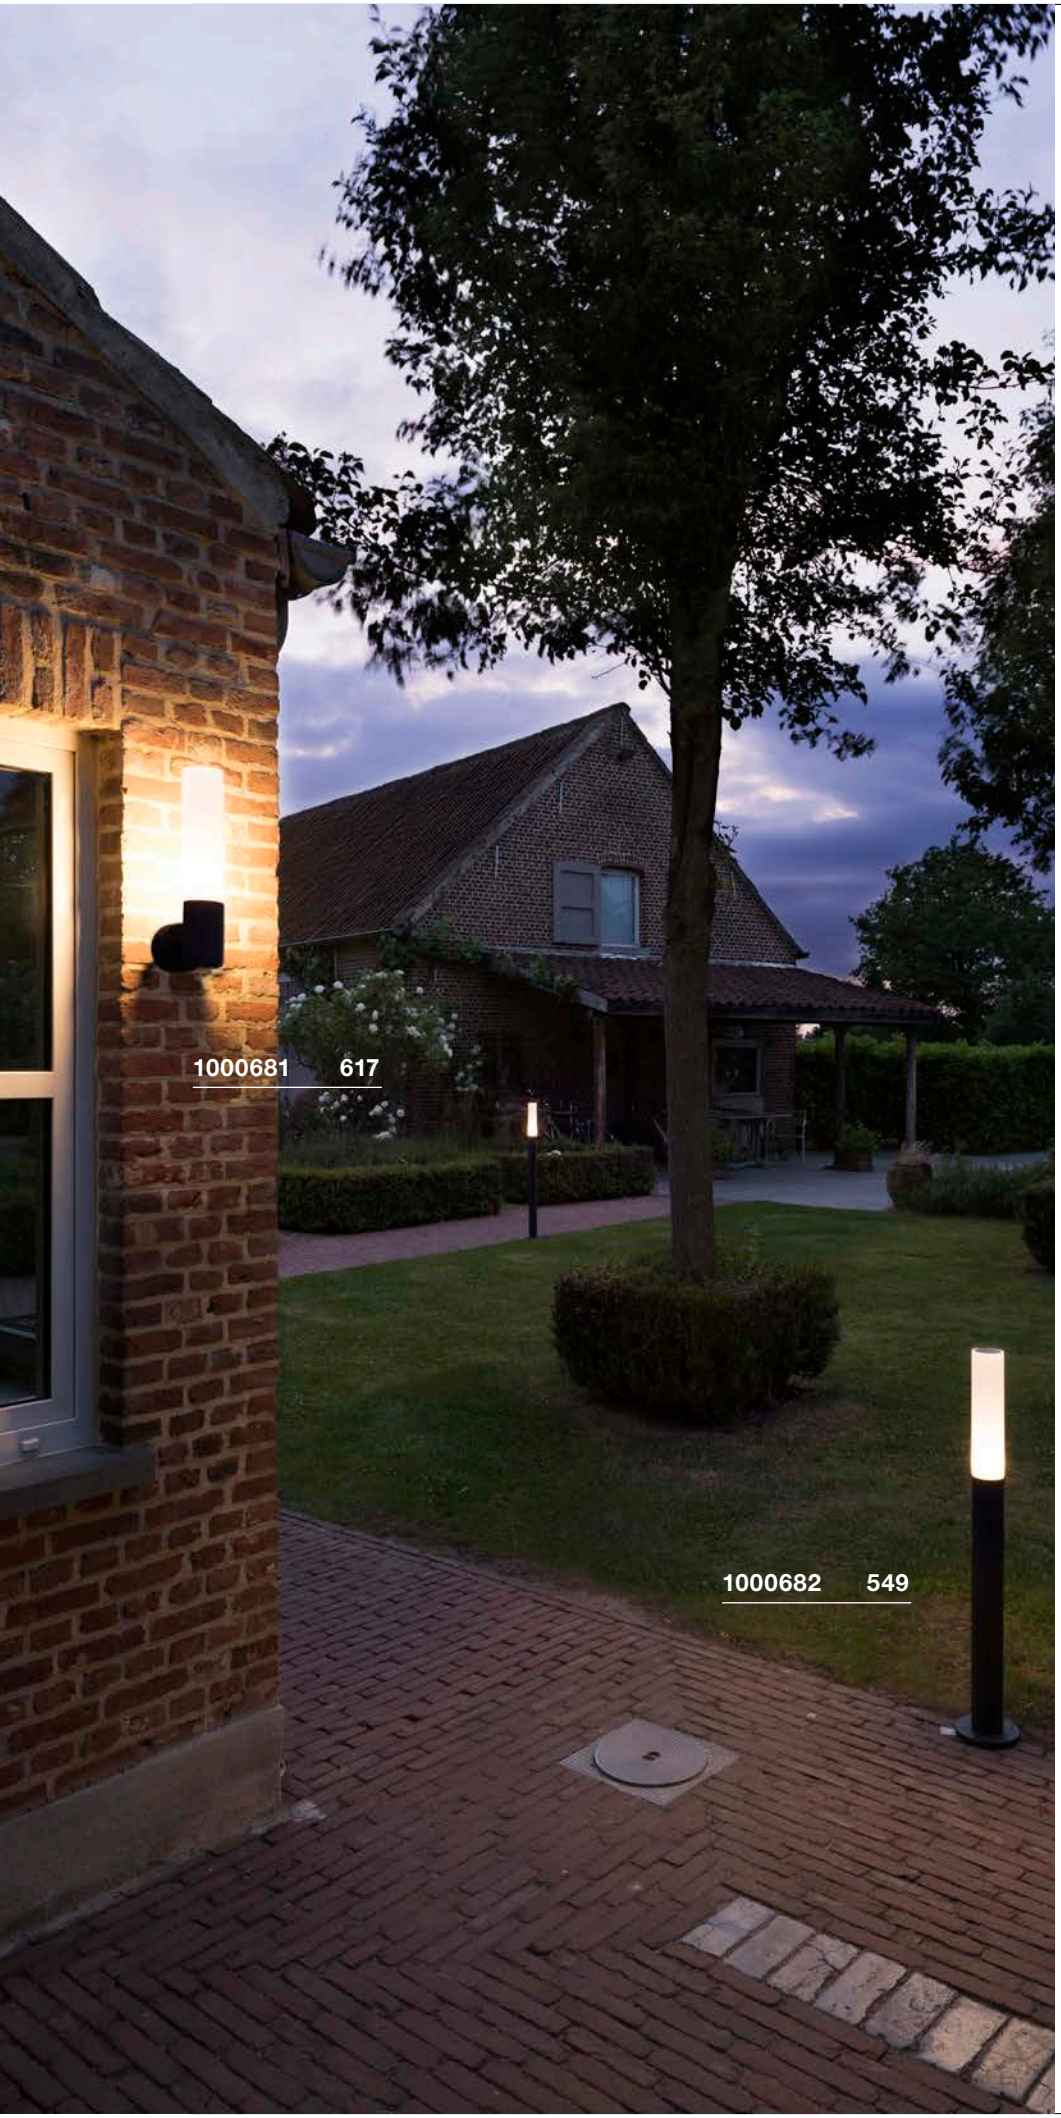

APONI
WL, TRIAC

883

A-A++ Spectrum A⁺⁺–E

LED INSIDE








- 240V LED


Product details

220-240V ~50/60Hz
Total consumption: 8W
Material: Aluminium
Dimmable: Triac L





Dimensioned drawing



Variant	Item no.	GBP
440lm | 3000K | CRI>80 anthracite	**1000681**	**148,50**

F-POL
WL, E27

887

A-A++ Spectrum A++–E









- Highly polished reflector for effective lighting
- Diffuse light distribution for illuminating the surroundings of the building

Product details

230V ~50Hz
Material: Aluminium / Polycarbonate (PC)



Dimensioned drawing



Recommended lamp

E27 12W 240°
3000K 1055lm EEI==A+
12kWh/1000h
Item no. 1001032 | 20,70 GBP

Lamp details

max. 20W
Ø: 5 cm max. L: 14 cm max.

Variant	Item no.	GBP
E27		
anthracite	**231585**	**108,00**

C-POL
WL, E27

885

A-A++ Spectrum A++–E









- Highly polished reflector for effective lighting
- Diffuse light distribution for illuminating the surroundings of the building

Product details

230V ~50Hz
Material: Aluminium / Polycarbonate (PC)



Dimensioned drawing



Recommended lamp


E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 | 25,20 GBP


Lamp details


max. 24W
Ø: 5.2 cm max. L: 17.3 cm max.

Variant	Item no.	GBP
E27		
anthracite	**231465**	**117,00**



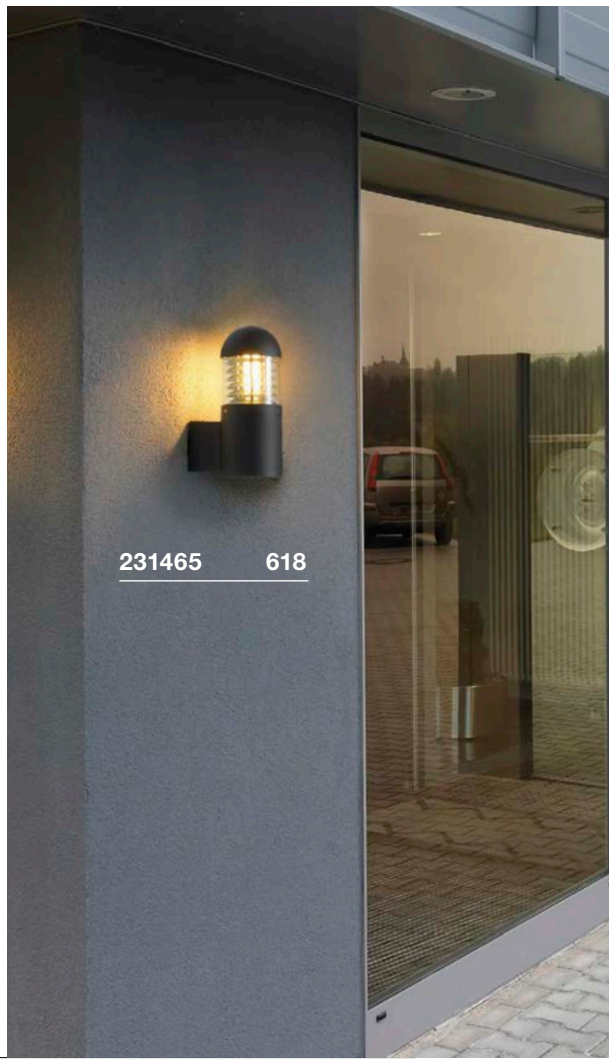

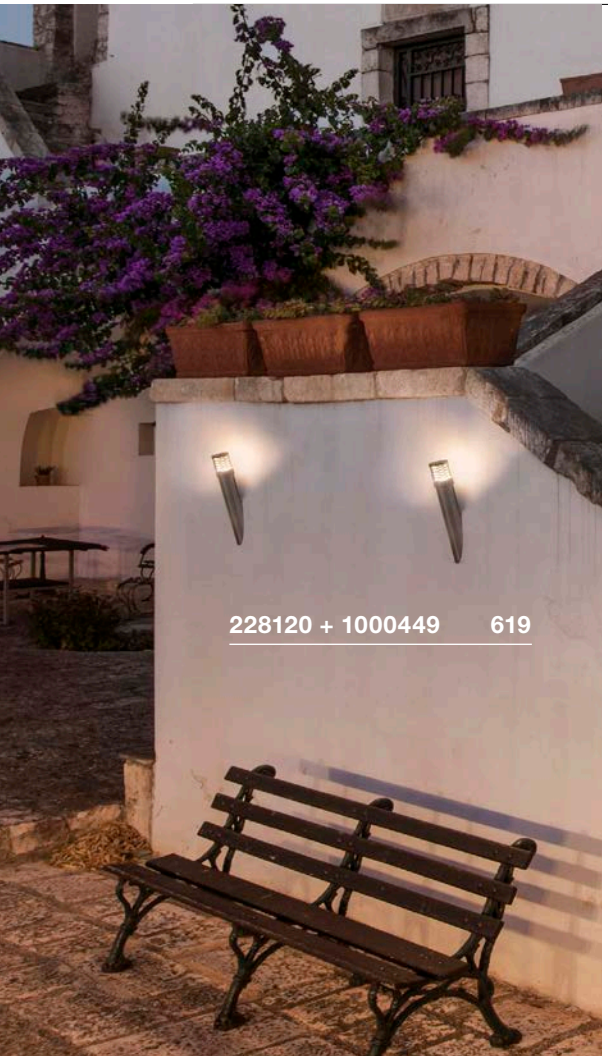

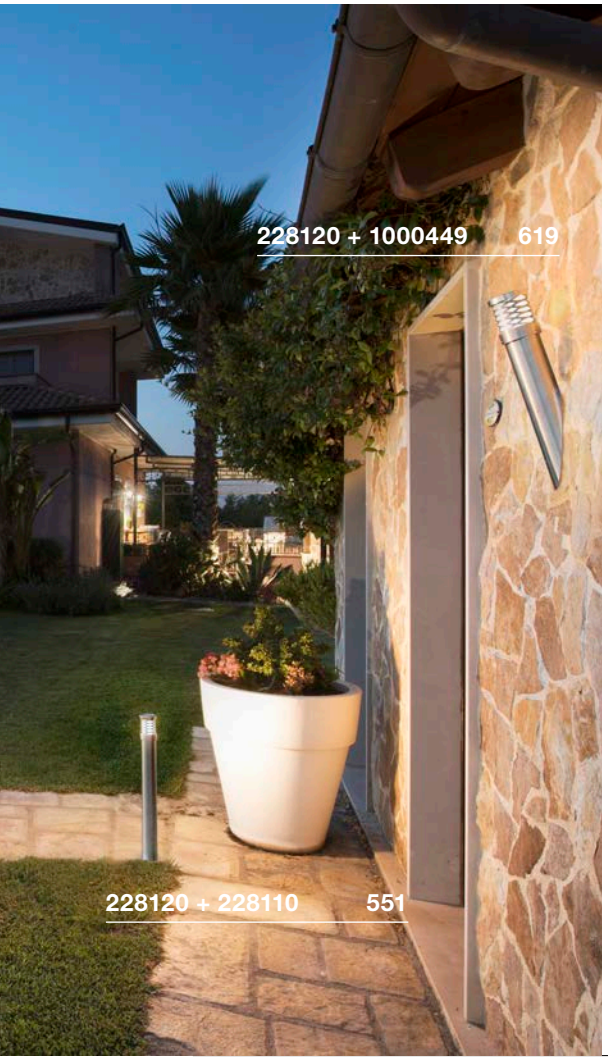

TRUST
WL

898

A-A++ Spectrum A⁺⁺–E

LED INSIDE








- 240V LED
- Stainless steel 316

Product details

220-240V ~50/60Hz
Total consumption: 8.6W
Material: Stainless Steel 316



Dimensioned drawing



Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Grid, circular
Item no. 228130 | 72,00 GBP



Grid, helical
Item no. 1000449 | 52,20 GBP



Variant	Item no.	GBP
400lm | 3000K | CRI>80		
Stainless steel	**228120**	**162,00**

BIG NAILS
WL, E27

884

A-A++ Spectrum A⁺⁺–E









- Stainless steel 304
- Sleek design, glare-free outdoor lighting

Product details

230V ~50Hz
Material: Stainless Steel 304 / Polycarbonate (PC)



Dimensioned drawing



Recommended lamp

E27 4.7W 360°
3000K 380lm EEI=A+
5kWh/1000h
Item no. 551532 | 20,70 GBP



LED E27 12W 240°
3000K 1055lm EEI==A+
12kWh/1000h
Item no. 1001032 | 20,70 GBP

Lamp details

max. 15W
Ø: 4.5 cm max. L: 17 cm max.

Variant	Item no.	GBP
E27		
Stainless steel	**229182**	**130,50**

GRAFIT
WL, E27

887

A-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Plastic

IP 44 | 0.52

Dimensioned drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002127 | 11,70 GBP

LED E27 6.8W 330°
2700K 806lm EEI=A++
7kWh/1000h
Item no. 560762 | 25,20 GBP

Lamp details

max. 11W
Ø: 6 cm max. L: 11.5 cm max.

Variant	Item no.	GBP
E27		
anthracite	**231205**	**60,30**

SQUARE
WL, E27

896

A-A++ Spectrum A++–E








Product details

220-240V ~50/60Hz
Material: Stainless Steel 304

IP 44 | 1.15 | 0.2 | IK02

Dimensioned drawing



Recommended lamp

LED E27 4.5W 280°
2700K 530lm EEI=A++
5kWh/1000h
Item no. 1002123 | 6,80 GBP

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP

Lamp details

max. 20W
Ø: 7 cm max. L: 13 cm max.

Variant	Item no.	GBP
E27		
Stainless steel	**1000336**	**171,00**

SQUARE
WL, TRIAC

896

A-A++ Spectrum A++–E

LED INSIDE








- Luminaire made from high-quality 316 stainless steel
- Modern design
- Diffuse light distribution for illuminating the surroundings of the building

Product details

220-240V ~50/60Hz
Total consumption: 12W
Material: Stainless Steel 316
Dimmable: Triac C, Triac L

IP 44 | 1.662 | LED | 30000 | 0.2 | IK02

Dimensioned drawing



Variant	Item no.	GBP
760lm | 3000K | CRI>80		
Stainless steel	**1000834**	**188,10**


1000336 620




1000336 620

KERAS ELT
WL, E27

A-A++ Spectrum A++–E







• Unusual design




227174 622

Product details

230V ~50Hz
Material: Aluminium / Polycarbonate (PC)

IP 54 1.6

Dimensioned drawing



Recommended lamp


LED E27 14.5W 200°
2700K 1521lm EEI=A+
15kWh/1000h
Item no. 560422 | 29,70 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

max. 25W
Ø: 7 cm max. L: 17.5 cm max.

Variant	Item no.	GBP
E27 grey	227174	126,00
E27 anthracite	227176	126,00

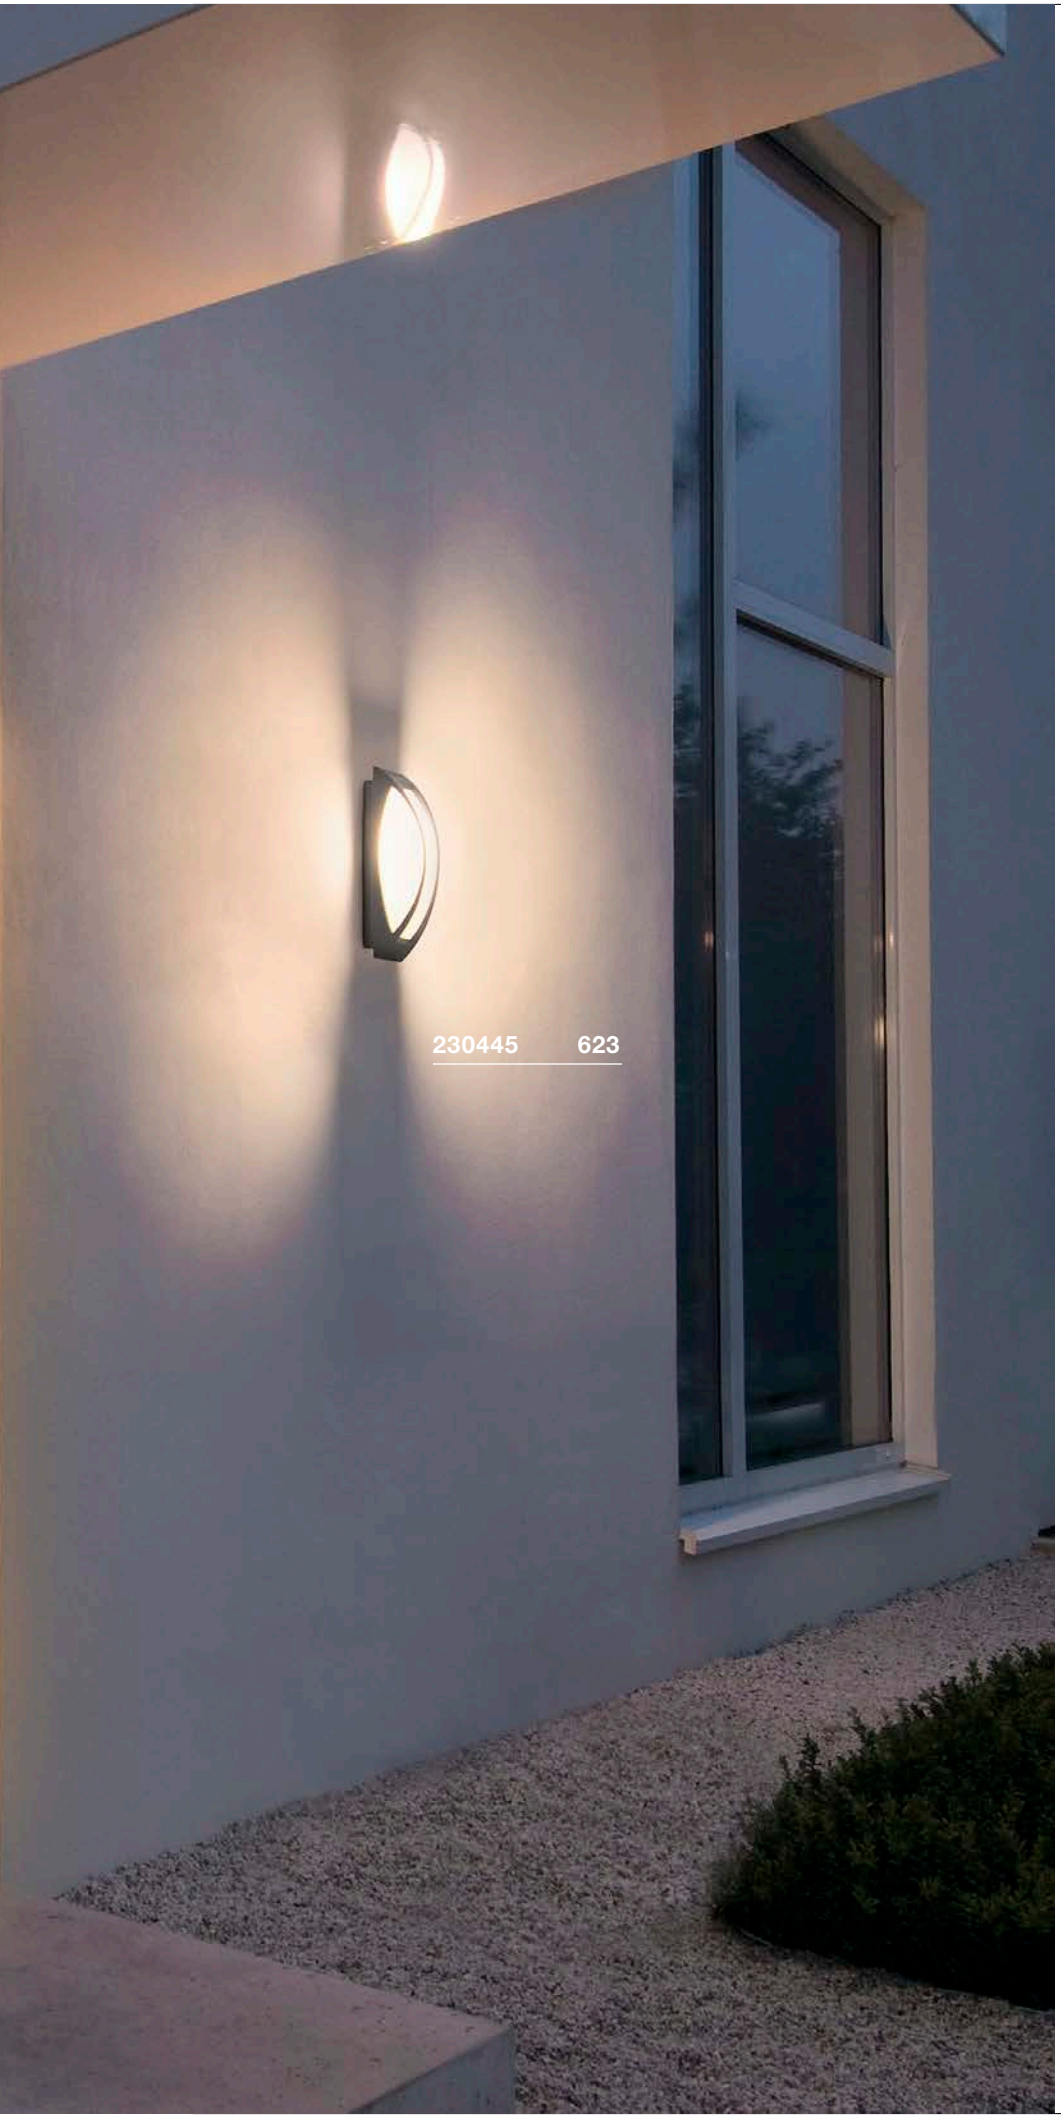

MERIDIAN
WL, E27

A-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Polycarbonate (PC)

IP 54 1.25

Dimensioned drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

max. 25W
Ø: 7 cm max. L: 17.5 cm max.


Variant	Item no.	GBP
E27 grey	230444	63,00
E27 anthracite	230445	63,00

QUADRULO SENSOR
WL, E27

E-A++ Spectrum A++–E





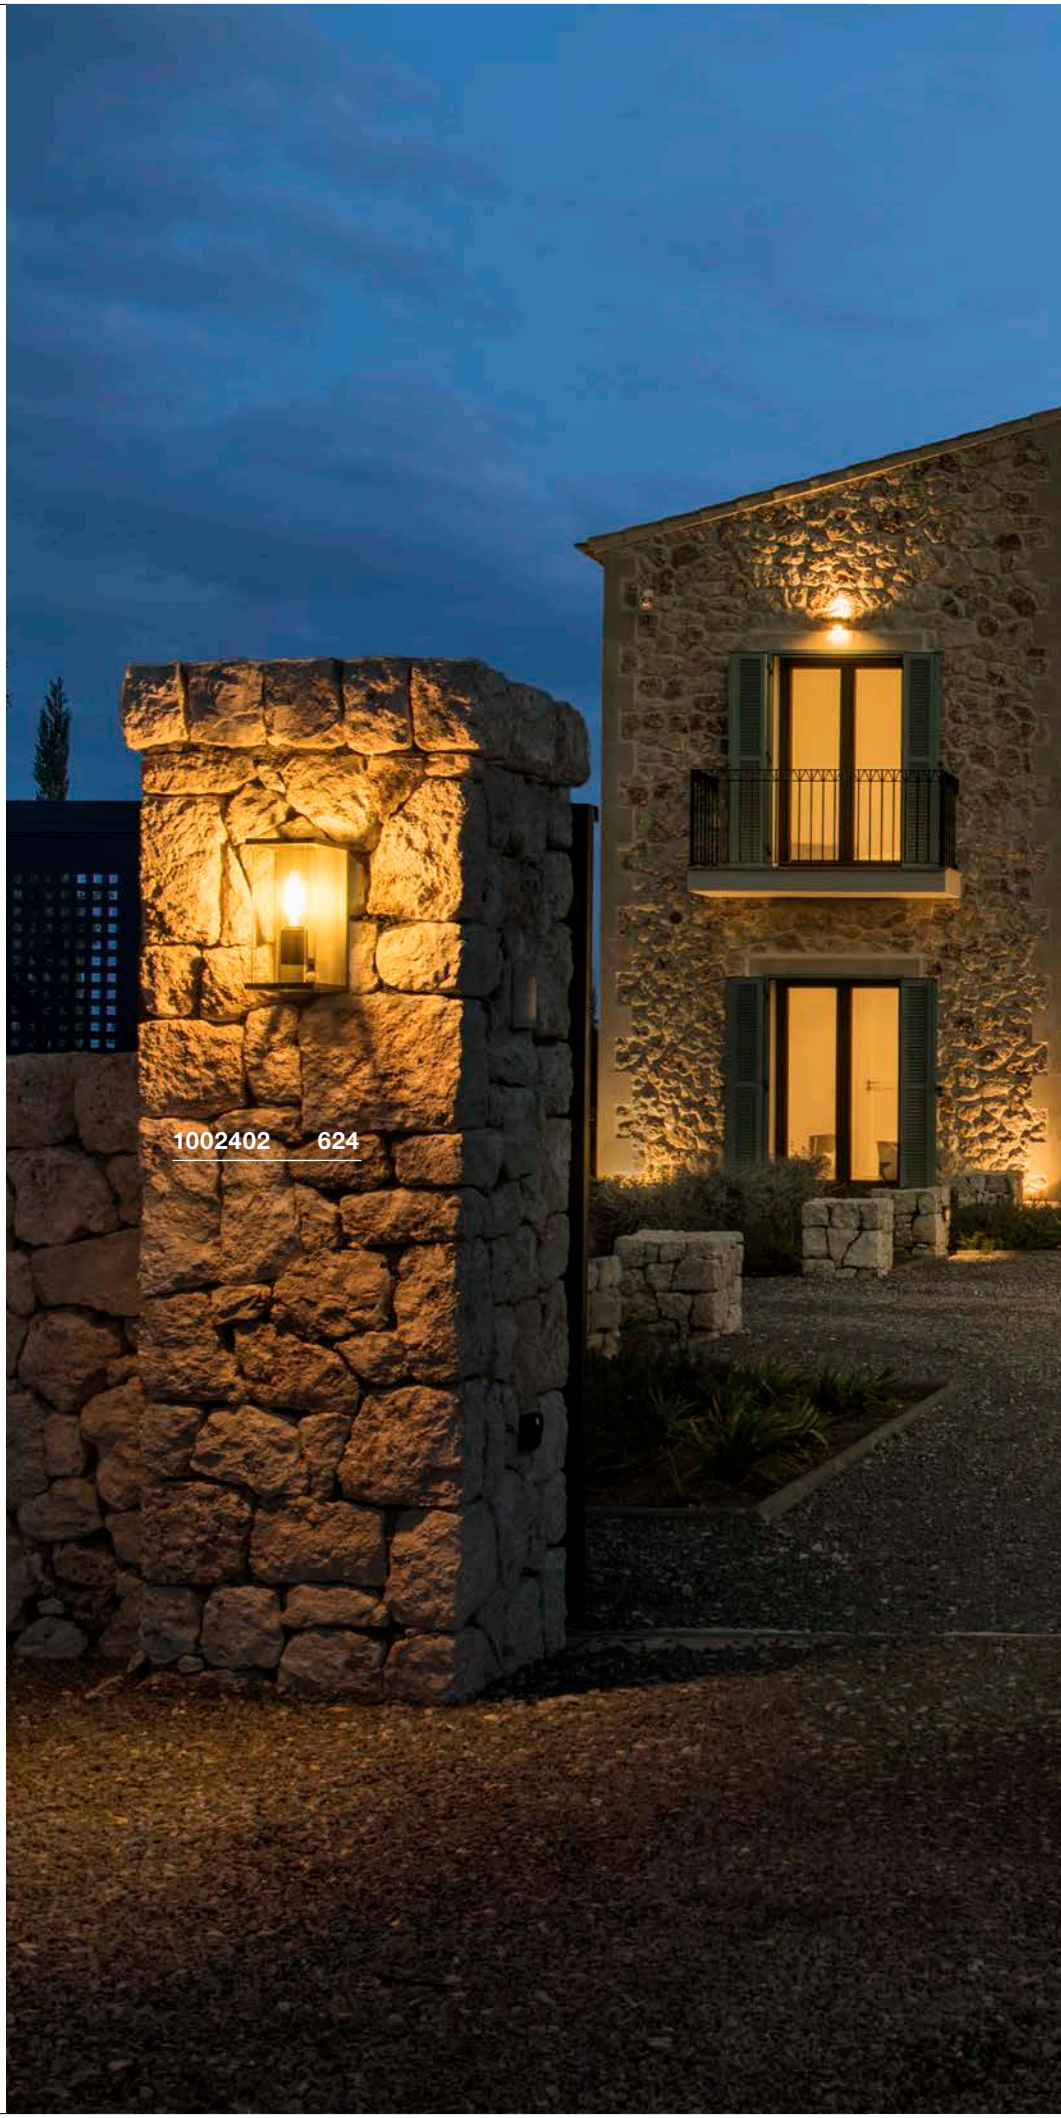


Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 2.24

Dimensioned drawing



Recommended lamp

LED E27 4.5W 280°
2700K 530lm EEI=A++
5kWh/1000h
Item no. 1002123 | 6,80 GBP

LED E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP

Lamp details

max. 15W
Ø: 8 cm max. L: 18 cm max.

Variant	Item no.	GBP
E27		
anthracite	**1002402**	**135,00**



QUADRULO
WL, E27

E-A++ Spectrum A++–E

NEW








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44

2.21

Dimensioned drawing



Recommended lamp

LED E27 4.5W 280°
2700K 530lm EEI=A++
5kWh/1000h
Item no. 1002123 | 6,80 GBP

LED E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP

Lamp details

max. 15W
Ø: 8 cm max. L: 18 cm max.

Variant	Item no.	GBP
E27		
anthracite	**1002403**	**117,00**

MERIDIAN BOX
WL, E27

A-A++ Spectrum A++–E










Product details

230V ~50Hz
Material: Aluminium / Polycarbonate (PC)

IP 54 1.7

Dimensioned drawing



Recommended lamp


LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP


LED E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP

Lamp details

max. 25W
Ø: 7 cm max. L: 17.5 cm max.

Variant	Item no.	GBP
E27 anthracite	230655	90,00
E27 rust	230657	90,00

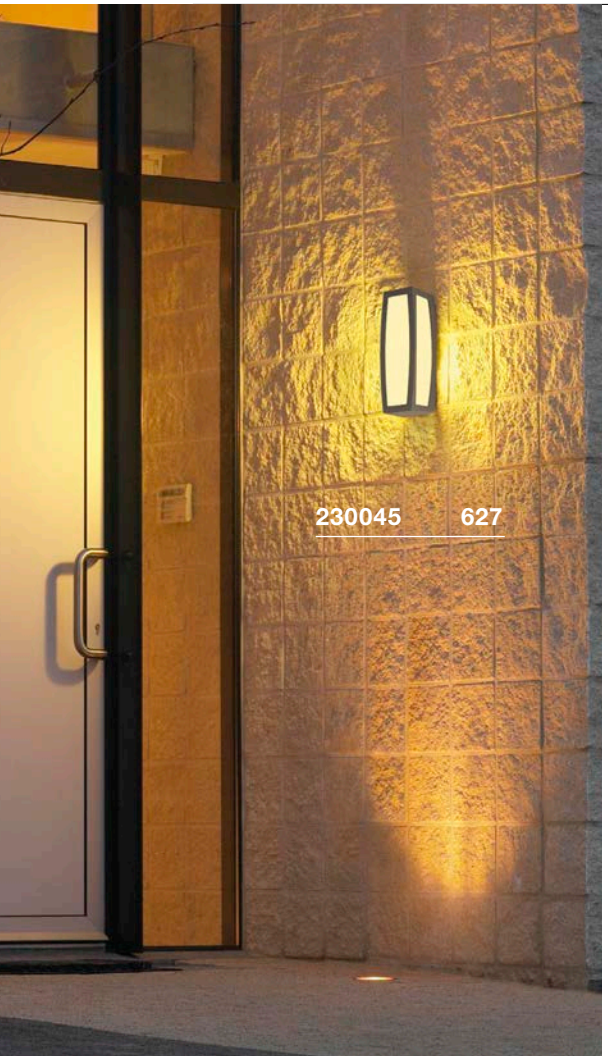

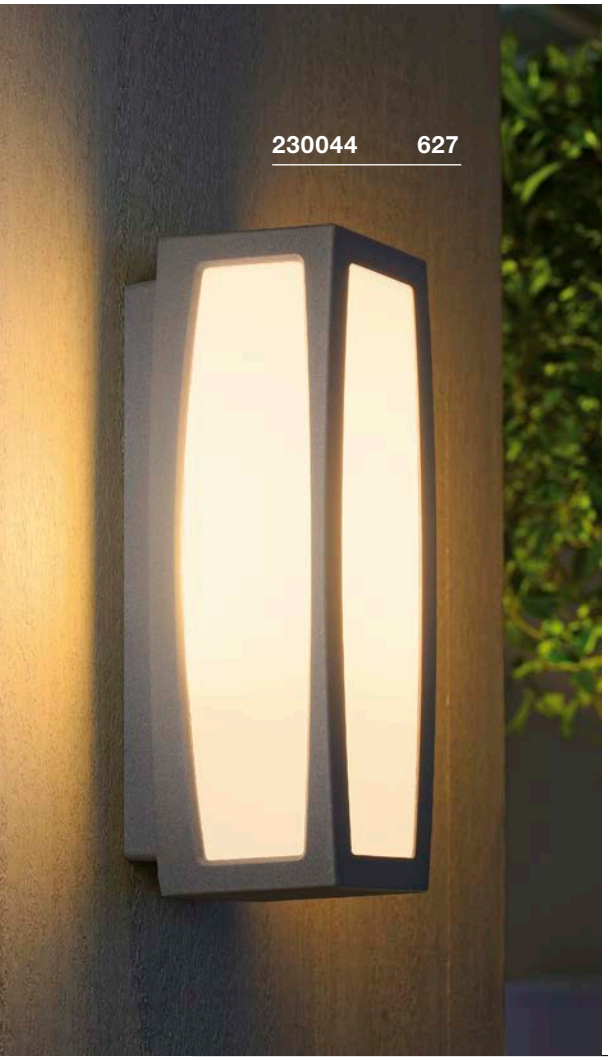

MERIDIAN BOX
WL, E27

A-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Polycarbonate (PC)

IP 54 | 1.7

Dimensioned drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP



LED E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP



Lamp details

max. 25W
Ø: 7 cm max. L: 17.5 cm max.

Variant	Item no.	GBP
E27		
grey	**230044**	**81,00**
E27		
anthracite	**230045**	**81,00**

MERIDIAN BOX
WL, E27, MR

A-A++ Spectrum A++–E








- Motion sensor with MR (microwave) technology integrated in the luminaire housing

Product details

230V ~50Hz
Material: Aluminium / Polycarbonate (PC)

IP 54 | 1.75

Dimensioned drawing



Note

Motion sensor: Detection angle: 180° detection distance: 1-5 m
The switch-on ambient brightness and switch-on delay can be adjusted.

Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

LED E27 12W 240°
3000K 1055lm EEI==A+
12kWh/1000h
Item no. 1001032 | 20,70 GBP

Lamp details

max. 25W
Ø: 7 cm max. L: 17.5 cm max.

Variant	Item no.	GBP
E27		
grey	**230084**	**135,00**
E27		
anthracite	**230085**	**135,00**

ENOLA C
WL

886


A-A++ Spectrum A++–E

LED INSIDE







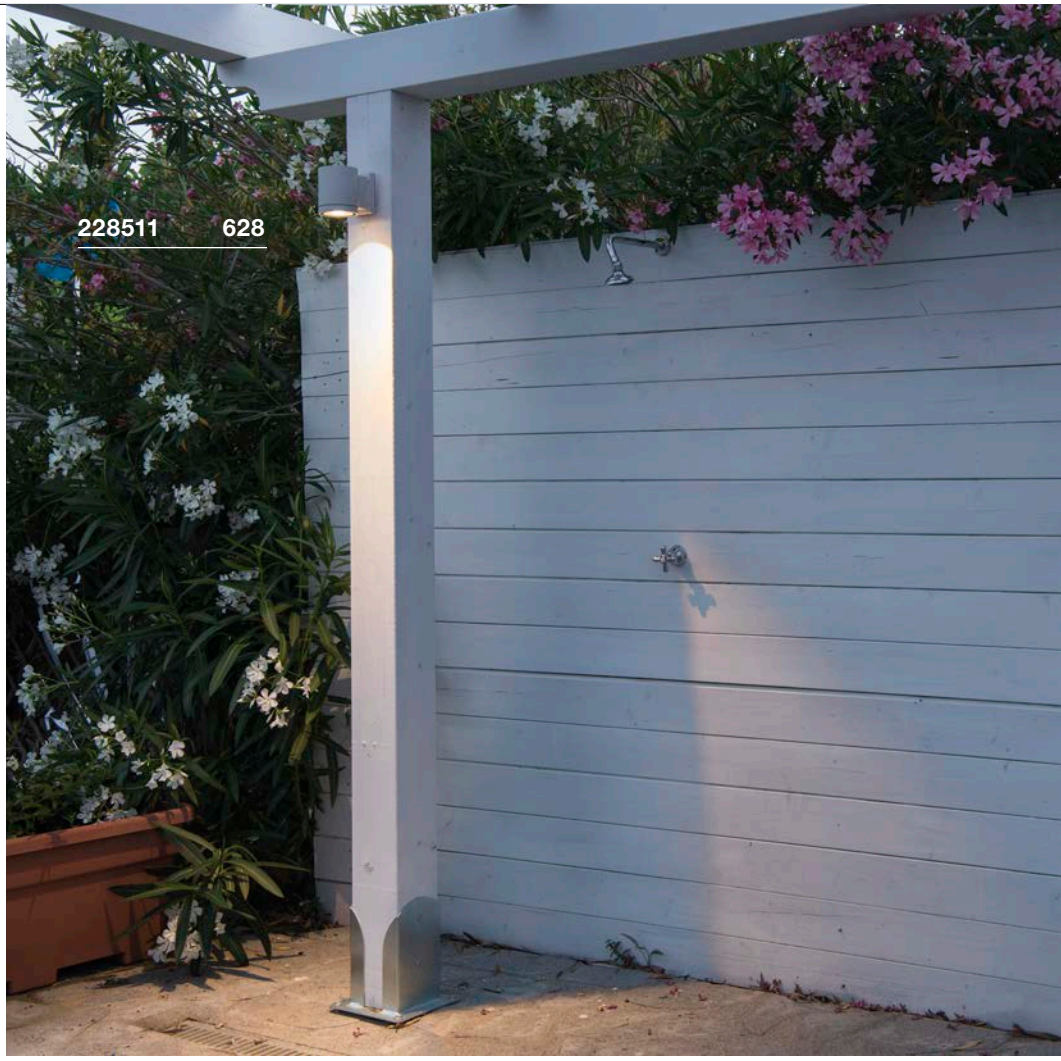

Product details

100-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium / Glass




IP 55 | 0.86 | 40000



35°

Dimensioned drawing





Recommended accessories

Frame for surface mounting
Item no. 233211 | 16,20 GBP



Frame for surface mounting
Item no. 233215 | 16,20 GBP



Variant	Item no.	
900lm | 3000K | CRI>80 white	228511	197,10
900lm | 3000K | CRI>80 anthracite	228515	197,10

HELIA
WL, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE









- 240V LED


Product details

220-240V ~50/60Hz
Total consumption: 8W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
450lm | 3000K | CRI>80 anthracite	**233225**	**135,00**

SITRA
WL, TCR-TSE

896

B-A++ Spectrum A++–E









Product details

230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

GX53 4.2W 35°
3000K 200lm EEI=A
5kWh/1000h
Item no. 550092 | 40,50 GBP



LED GX53 7.5W 120°
4000K 620lm EEI=A+
8kWh/1000h
Item no. 1001221 | 29,70 GBP



Lamp details

max. 9W TCR-TSE
Ø: 7.5 cm max. L: 3.5 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE anthracite	**230355**	**67,50**

SITRA
WL

896

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz
Total consumption: 9W
Material: Aluminium / Glass





Dimensioned drawing



Variant	Item no.	GBP
450lm | 3000K | CRI>80 anthracite	**1002016**	**67,50**
450lm | 3000K | CRI>80 white	**1002017**	**67,50**

ROX
WL, QPAR111

895

E-A++ Spectrum A⁺⁺–E








• High-quality brushed finish

Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 0.9

Dimensioned drawing



Recommended lamp

LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP

LED GU10 13W 30°
4000K 1300lm EEI=A+
13kWh/1000h
Item no. 1001243 | 76,50 GBP

Lamp details

max. 50W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
brushed aluminium	**1000333**	**117,00**





POLE PARC
WL

894

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Ideal for effective accentuation of the building architecture
- Rotation-symmetric light distribution

Product details

100-240V ~50/60Hz | 700mA
Total consumption: 28W
Material: Aluminium / Glass

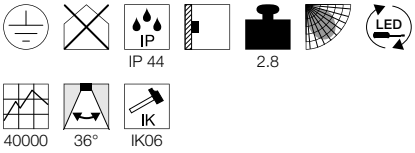

Dimensioned drawing



Variant	Item no.	GBP
2900lm | 3000K | CRI>80		
anthracite	**1000448**	**193,50**

DOWNUNDER OUT
Round

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW








- The light colour can be set using a switch during installation

Product details

100-277V ~50/60Hz | 500mA
Total consumption: 4.5W
Material: Aluminium



Dimensioned drawing



Variant	Item no.	GBP
140lm | 3000/4000K | CRI>80		
matt anthracite	1002868	99,00

DOWNUNDER OUT
Square

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW








- The light colour can be set using a switch during installation

Product details


100-277V ~50/60Hz | 500mA
Total consumption: 4.5W
Material: Aluminium




Dimensioned drawing




Variant	Item no.	GBP
150lm | 3000/4000K | CRI>80		
matt anthracite	1002869	99,00

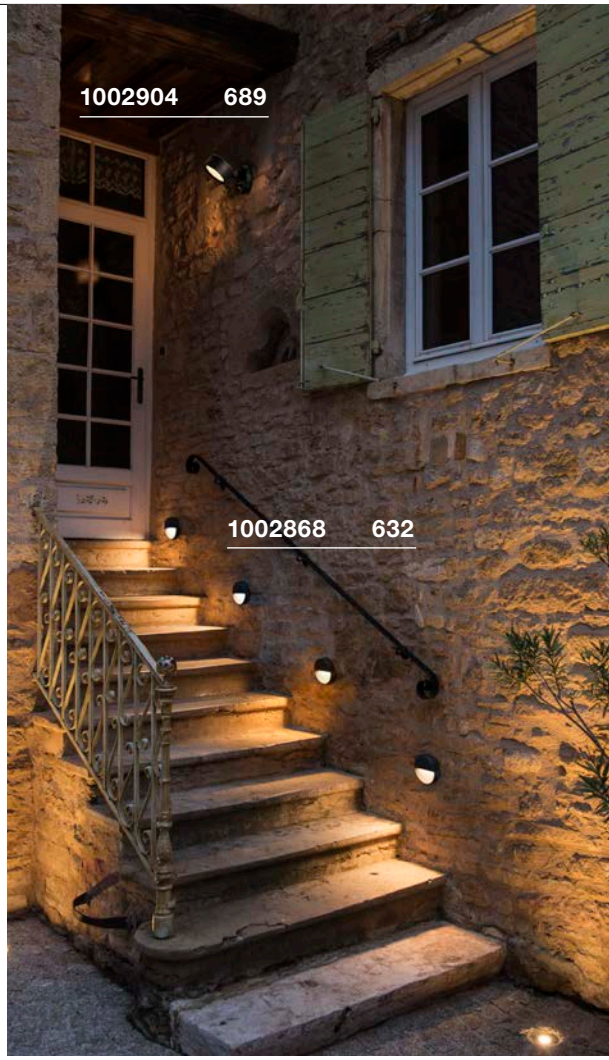

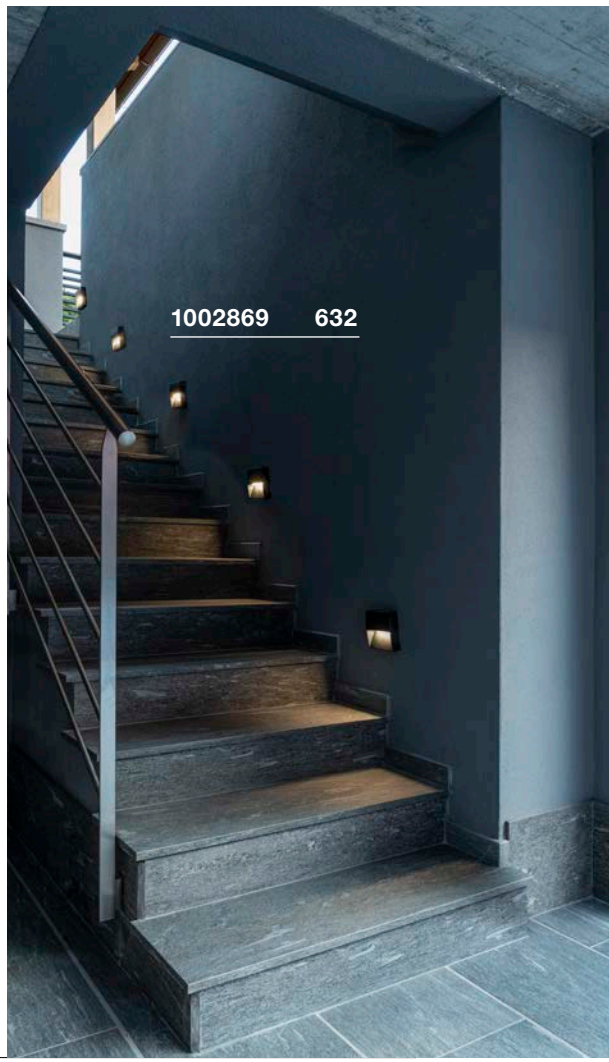



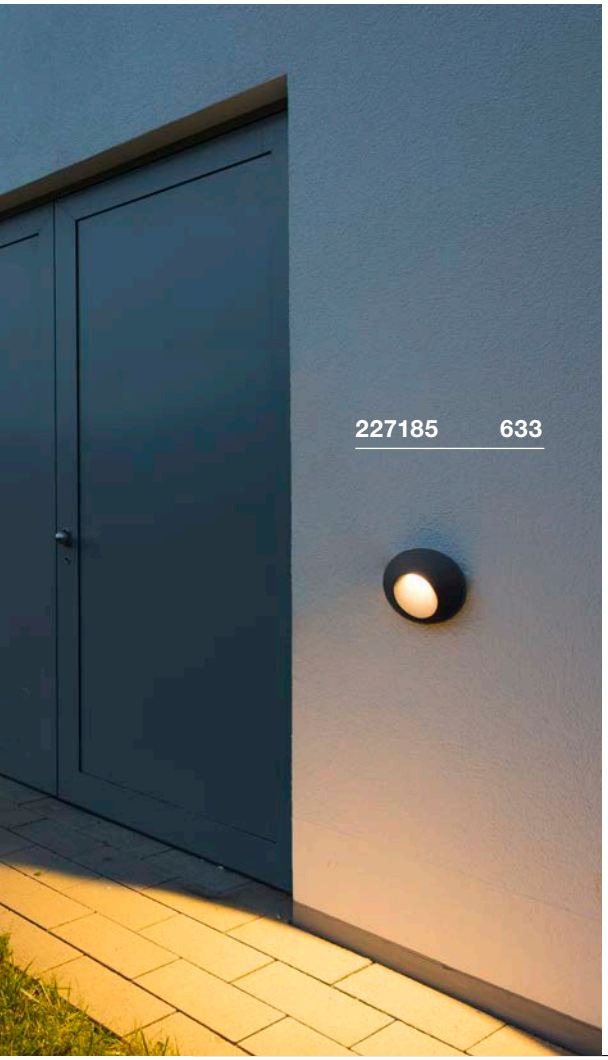


PEMA®
WL

A-A++ Spectrum A++–E

LED INSIDE








Product details

230V ~50Hz
Total consumption: 4.7W
Material: Aluminium

IP 44 | 0.3 | 30000

Dimensioned drawing



Note

Protection class IP44 only when mounted with the light emission opening pointing downwards.

Variant	Item no.	GBP
125lm | 3000K | CRI>80		
white	231010	90,00
125lm | 3000K | CRI>80		
grey	231012	90,00
125lm | 3000K | CRI>80		
anthracite	231015	90,00

DELO
WL

A-A++ Spectrum A++–E

LED INSIDE








Product details

100-240V ~50/60Hz | 500mA
Total consumption: 5.8W
Material: Aluminium / Glass

IP 55 | 0.8 | 30000 | 250

Dimensioned drawing



Note

Protection class IP55 only when mounted with the light emission opening pointing downwards.

Variant	Item no.	GBP
170lm | 3000K | CRI>80		
anthracite	227185	153,00

RASCALI
WL

894

A-A++ Spectrum A⁺⁺–E

LED INSIDE








- Unusual design
- Aesthetic accentuation of outdoor areas


Product details

220-240V ~50Hz
Total consumption: 8W
Material: Aluminium





Dimensioned drawing



Variant	Item no.	GBP
330lm | 3000K | CRI>80 anthracite	**1000797**	**90,00**





WALLYX
WL, QPAR51

E-A++ Spectrum A⁺⁺–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 44 | 0.67

Dimensioned drawing



Recommended lamp


LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001563 | 9,90 GBP

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

Lamp details

max. 50W QPAR51
L: 7.6 cm max.

Variant	Item no.	GBP
GU10 | QPAR51 grey / transparent	227194	85,50
GU10 | QPAR51 anthracite	227195	85,50
GU10 | QPAR51 bronze	227198	85,50

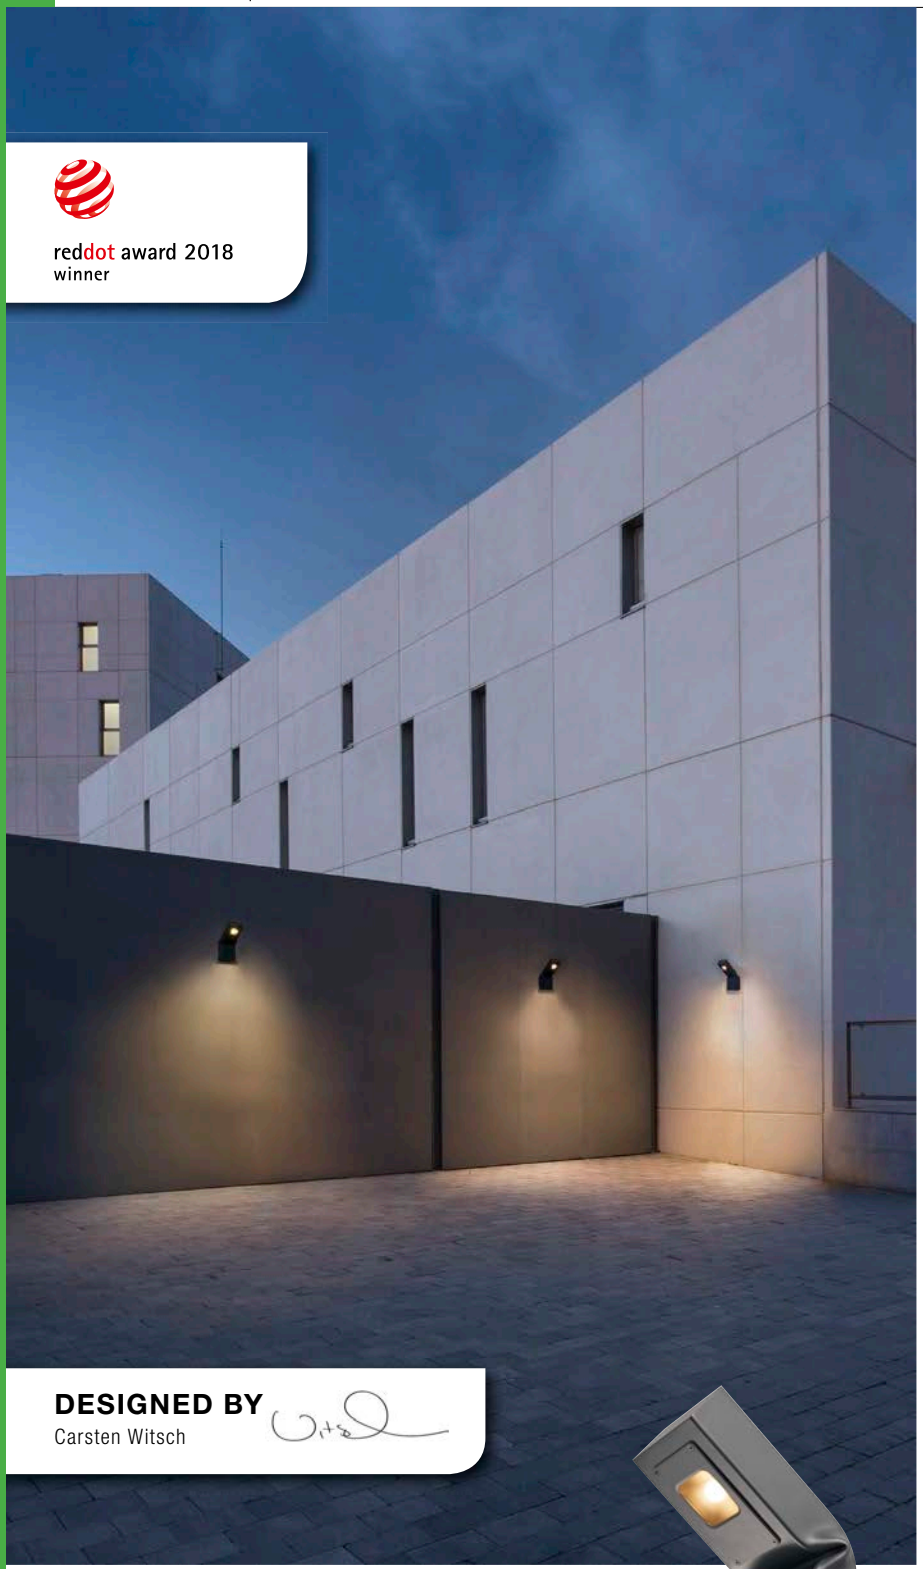



"Form, function, processing and ease of use should be harmonious in a product. Good design is characterized not only by the appearance of the products, but also by its functionality."

BENDO
WL, TRIAC

884

A-A++ Spectrum A++–E

LED INSIDE

reddot award 2018 winner









- 240V LED

Product details


220-240V ~50/60Hz
Total consumption: 12W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

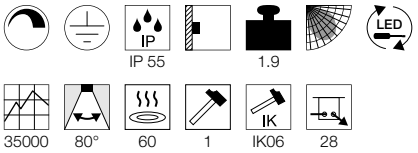

Dimensioned drawing



Variant	Item no.	GBP
820lm | 3000K | CRI>80 anthracite	231865	296,10

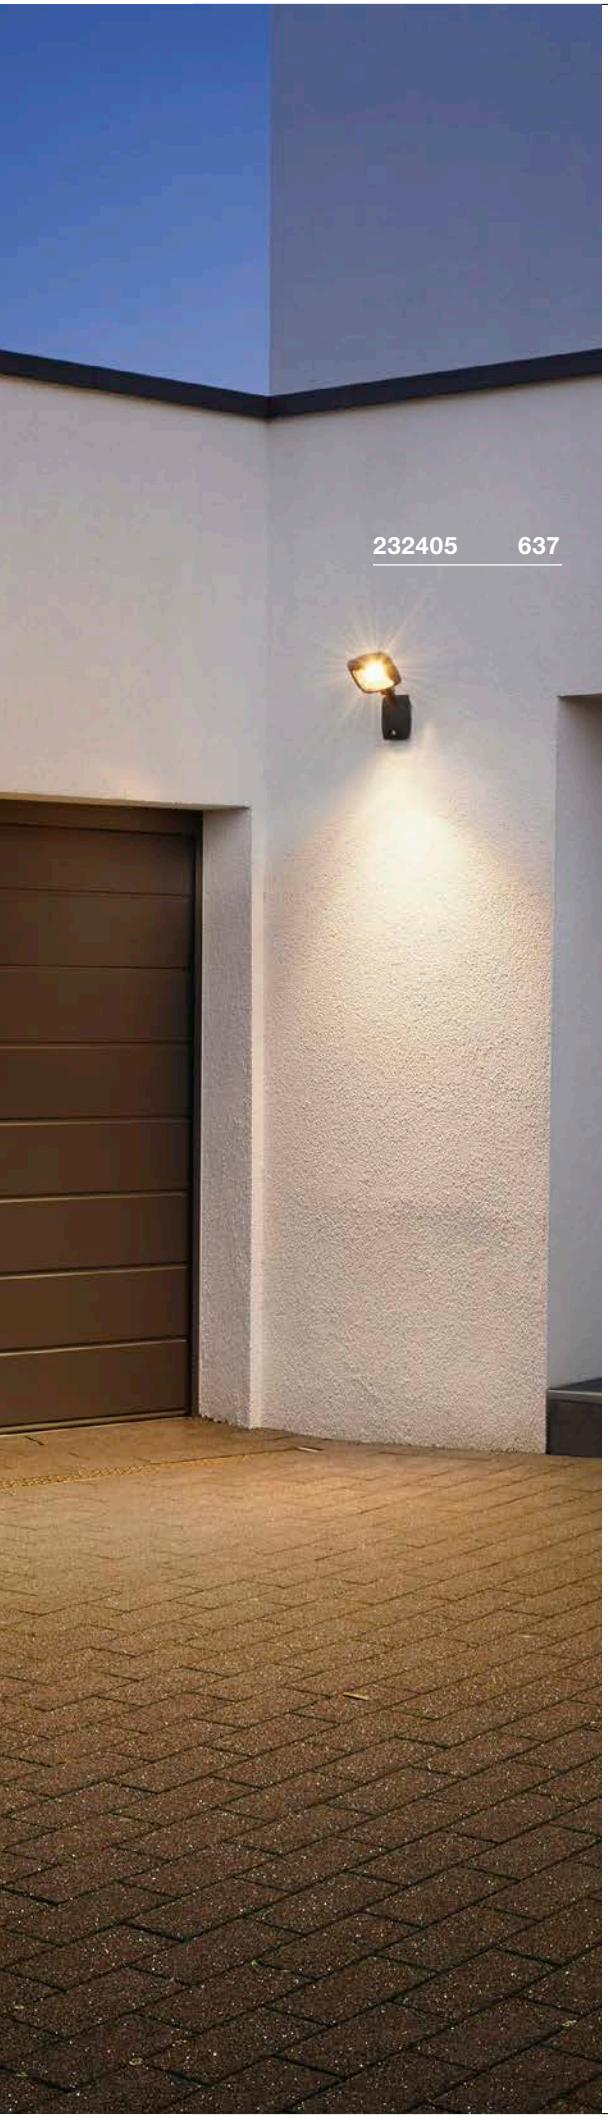

MERVALED SENSOR
WL

A-A++ Spectrum A⁺⁺–E

LED INSIDE

IR









- Integrated infrared sensor

Product details

220-240V ~50/60Hz | 300mA
Total consumption: 14W
Material: Aluminium / Acrylic

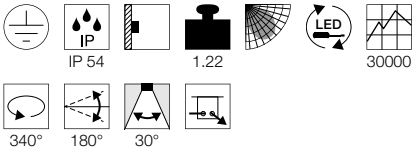

Dimensioned drawing



Note

Detection angle/range: 140°/8 m day/night mode the sensitivity and the switch-on time can be adjusted.

Variant	Item no.	GBP
1000lm | 3000K | CRI>80		
anthracite	**232405**	**188,10**

MERVALED
WL

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

220-240V ~50/60Hz | 300mA
Total consumption: 14W
Material: Aluminium / Acrylic

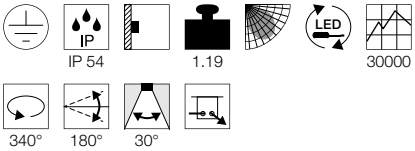

Dimensioned drawing



Variant	Item no.	GBP
1000lm | 3000K | CRI>80		
anthracite	**232415**	**171,00**

ABRIDOR
WL

882

A-A++ Spectrum A++–E

LED INSIDE

NEW








- Switchable light colour
- Tilting lamp head

Product details

100-277V ~50/60Hz | 300mA
Total consumption: 14W
Material: Aluminium
Product dimensions:
L: 14 cm H: 16 cm D: 17.5 cm





IP 55 | 1.2 | 45°



0.35 | IK03

Variant	Item no.	GBP
750lm | 3000/4000K | CRI>80		
matt anthracite	1002989	144,00

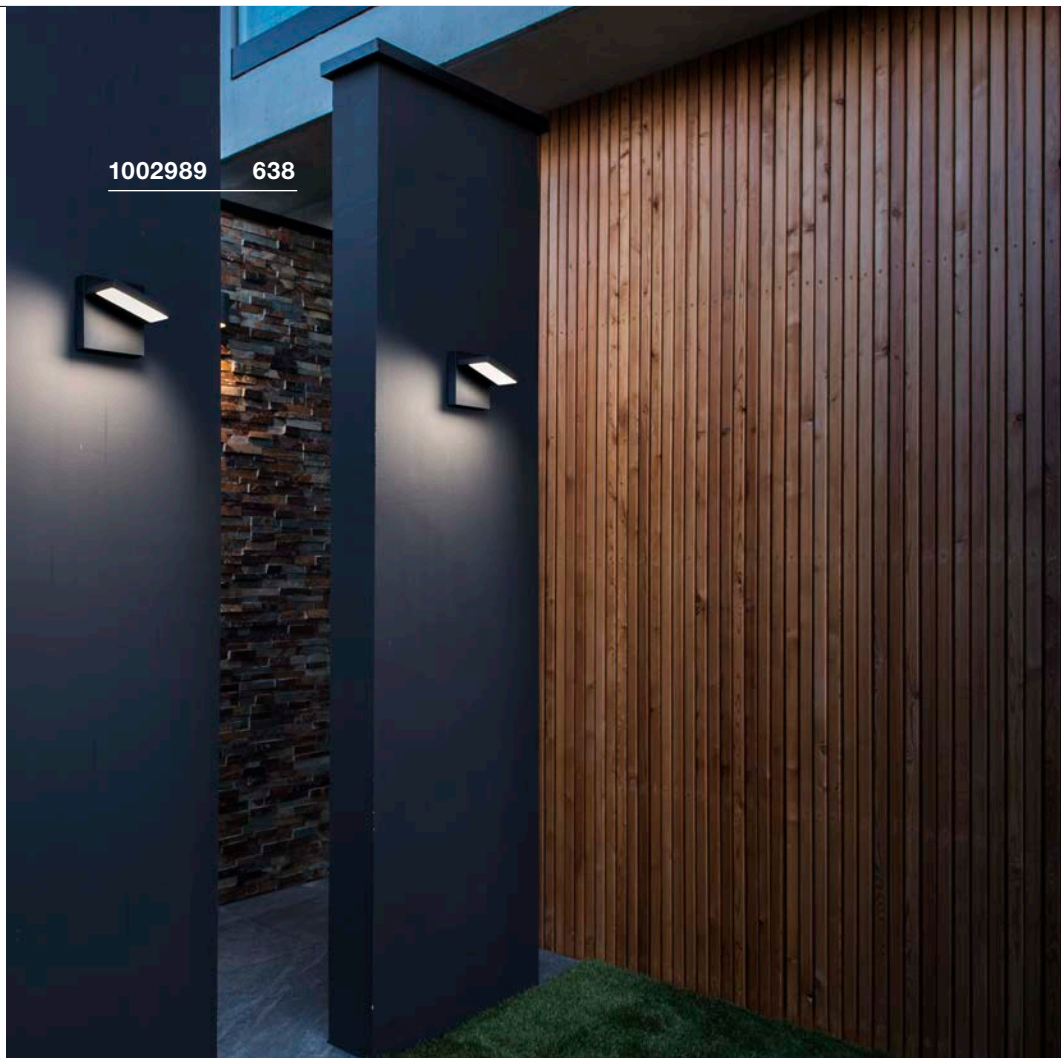

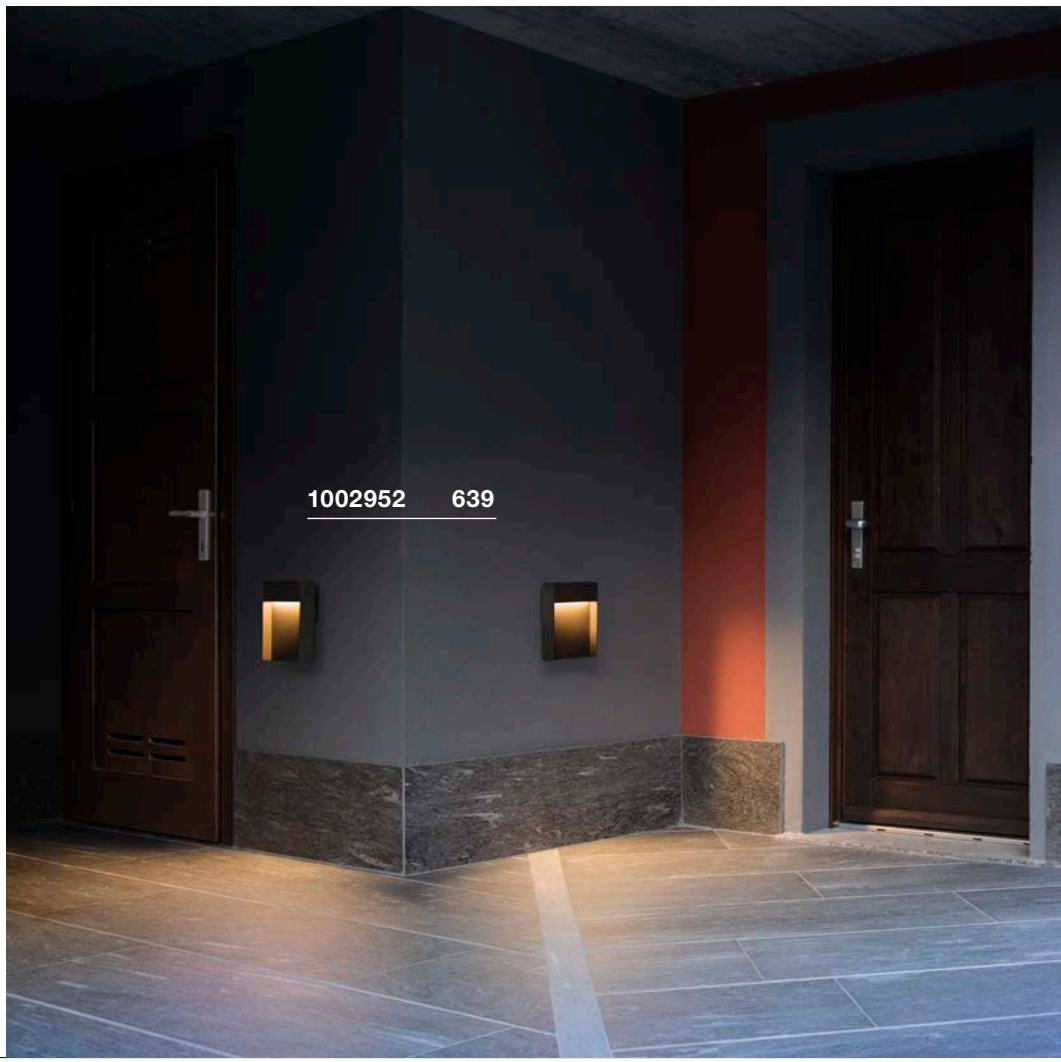

ABRIDOR SENSOR
WL

882

A-A++ Spectrum A++–E


LED INSIDE

NEW

IR







- Switchable light colour
- Tilting lamp head
- With integrated infrared motion detector

Product details

100-277V ~50/60Hz | 500mA
Total consumption: 14W
Material: Aluminium
Product dimensions:
L: 14 cm H: 16 cm D: 17.5 cm

IP 54 | 1.2 | LED | 45°

0.35 | IK03

Variant	Item no.	GBP
750lm | 3000/4000K | CRI80		
matt anthracite	1002990	162,00

FLATT
WL

887

A-A++ Spectrum A++–E

LED INSIDE

NEW







- Switchable light colour

Product details

100-277V ~50/60Hz | 300mA
Total consumption: 14W
Material: Aluminium / Aluminium
Product dimensions:
W: 18 cm H: 23 cm D: 7 cm

IP 65 | 1.94 | LED | 0.35

IK03

Variant	Item no.	GBP
460lm | 3000/4000K | CRI80		
matt anthracite / matt anthracite	1002952	135,00
500lm | 3000/4000K | CRI80		
matt anthracite / matt brown	1002953	135,00

FLATT SENSOR
WL

887

A-A++ Spectrum A++–E

LED INSIDE

NEW

IR







- Switchable light colour
- With integrated infrared motion detector

Product details

100-277V ~50/60Hz | 500mA
Total consumption: 16W
Material: Aluminium / Aluminium
Product dimensions:
W: 18 cm H: 23 cm D: 7 cm

IP 54 | 1.98 | LED | 0.35

IK03

Variant	Item no.	GBP
600lm | 3000/4000K | CRI80		
matt anthracite / matt anthracite	1002954	157,50
600lm | 3000/4000K | CRI80		
matt anthracite / matt brown	1002955	157,50


ORDI
WL

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

220-240V ~50/60Hz
Total consumption: 9W
Material: Aluminium

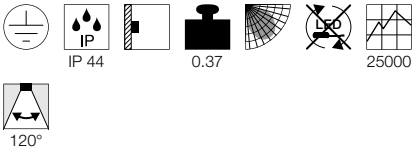

Dimensioned drawing



Variant	Item no.	GBP
500lm | 3000K | CRI>80		
anthracite	**232905**	**135,00**

ORDI SENSOR
WL

A-A++ Spectrum A⁺⁺–E

LED INSIDE

IR









- With integrated infrared motion detector

Product details

220-240V ~50/60Hz
Total consumption: 9W
Material: Aluminium

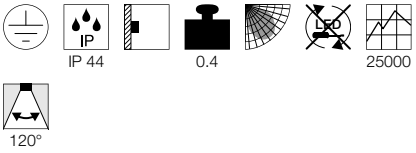


Dimensioned drawing





Note

Sensor range adjustable up to 9 m,
detection angle 120°

Variant	Item no.	GBP
500lm | 3000K | CRI>80		
anthracite	**232915**	**153,00**

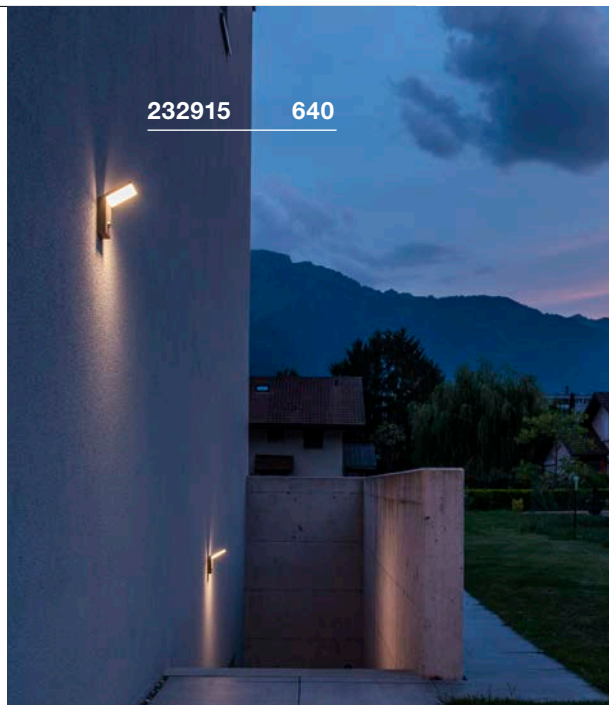

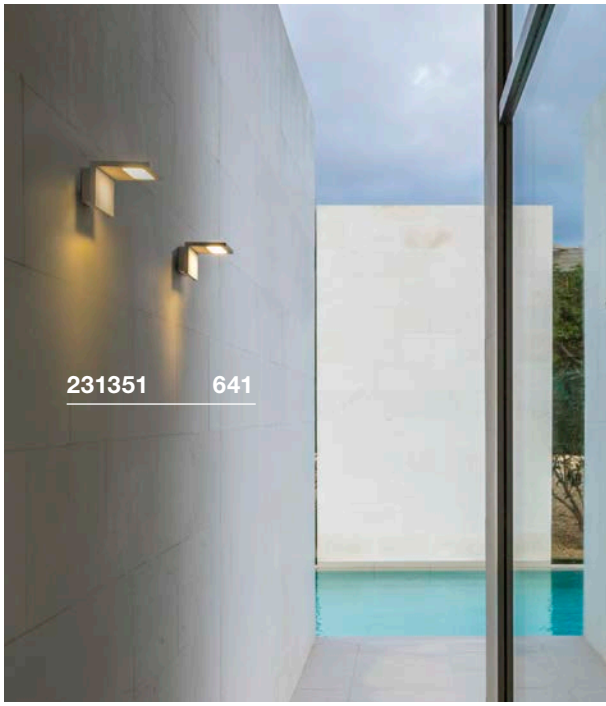

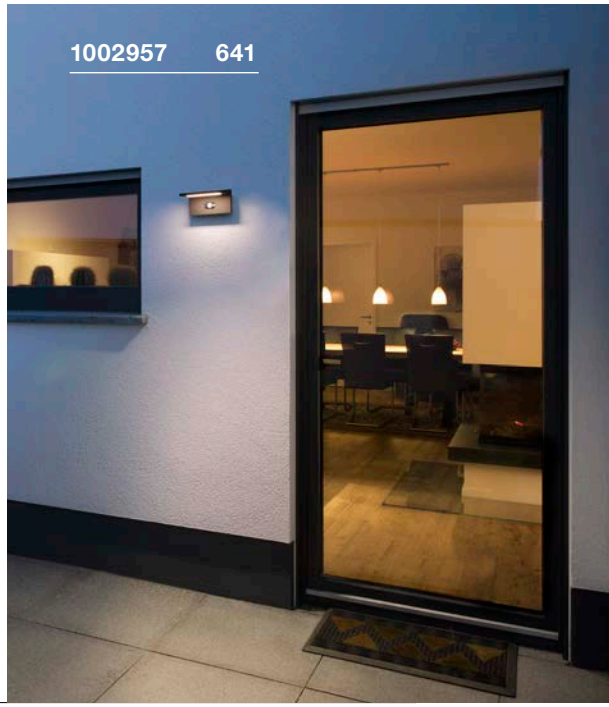

ANGOLUX
WL

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz | 80mA
Total consumption: 7.6W
Material: Aluminium / Plastic

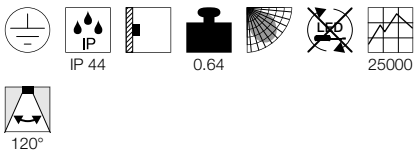

Dimensioned drawing



Note

Protection class IP44 only when mounted with the light emission opening pointing downwards.

Variant	Item no.	GBP
500lm | 3000K | CRI>80		
white	231351	126,00
500lm | 3000K | CRI>80		
anthracite	231355	126,00

ANGOLUX SENSOR
WL

A-A++ Spectrum A++–E

LED INSIDE

IR









- Integrated infrared sensor

Product details

100-240V ~50/60Hz | 240mA
Total consumption: 9.8W
Material: Aluminium / Plastic

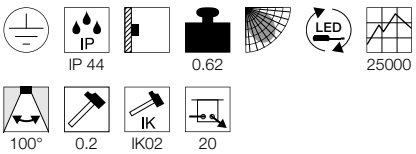

Dimensioned drawing



Note

Detection angle 120°, max. detection distance 9 m, adjustable actuation sensitivity and activation time
Protection class IP44 only when mounted with the light emission opening pointing downwards

Variant	Item no.	GBP
560lm | 3000K | CRI>80		
anthracite	1001969	144,00
560lm | 3000K | CRI>80		
white	1001970	144,00

ANGOLUX SOLAR
WL

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT

IR









- Convenient charging using integrated solar technology

Product details

Battery operated
Total consumption: 1.8W
Material: Aluminium

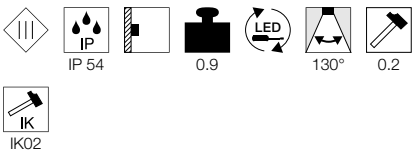

Dimensioned drawing



Note

Motion sensor & solar panel incl.
Battery 3.7V 2200mAh incl.

Variant	Item no.	GBP
150lm | 3000K | CRI>80		
anthracite	1002597	153,00

IPERI
WL

888


A-A++ Spectrum A++–E

LED INSIDE







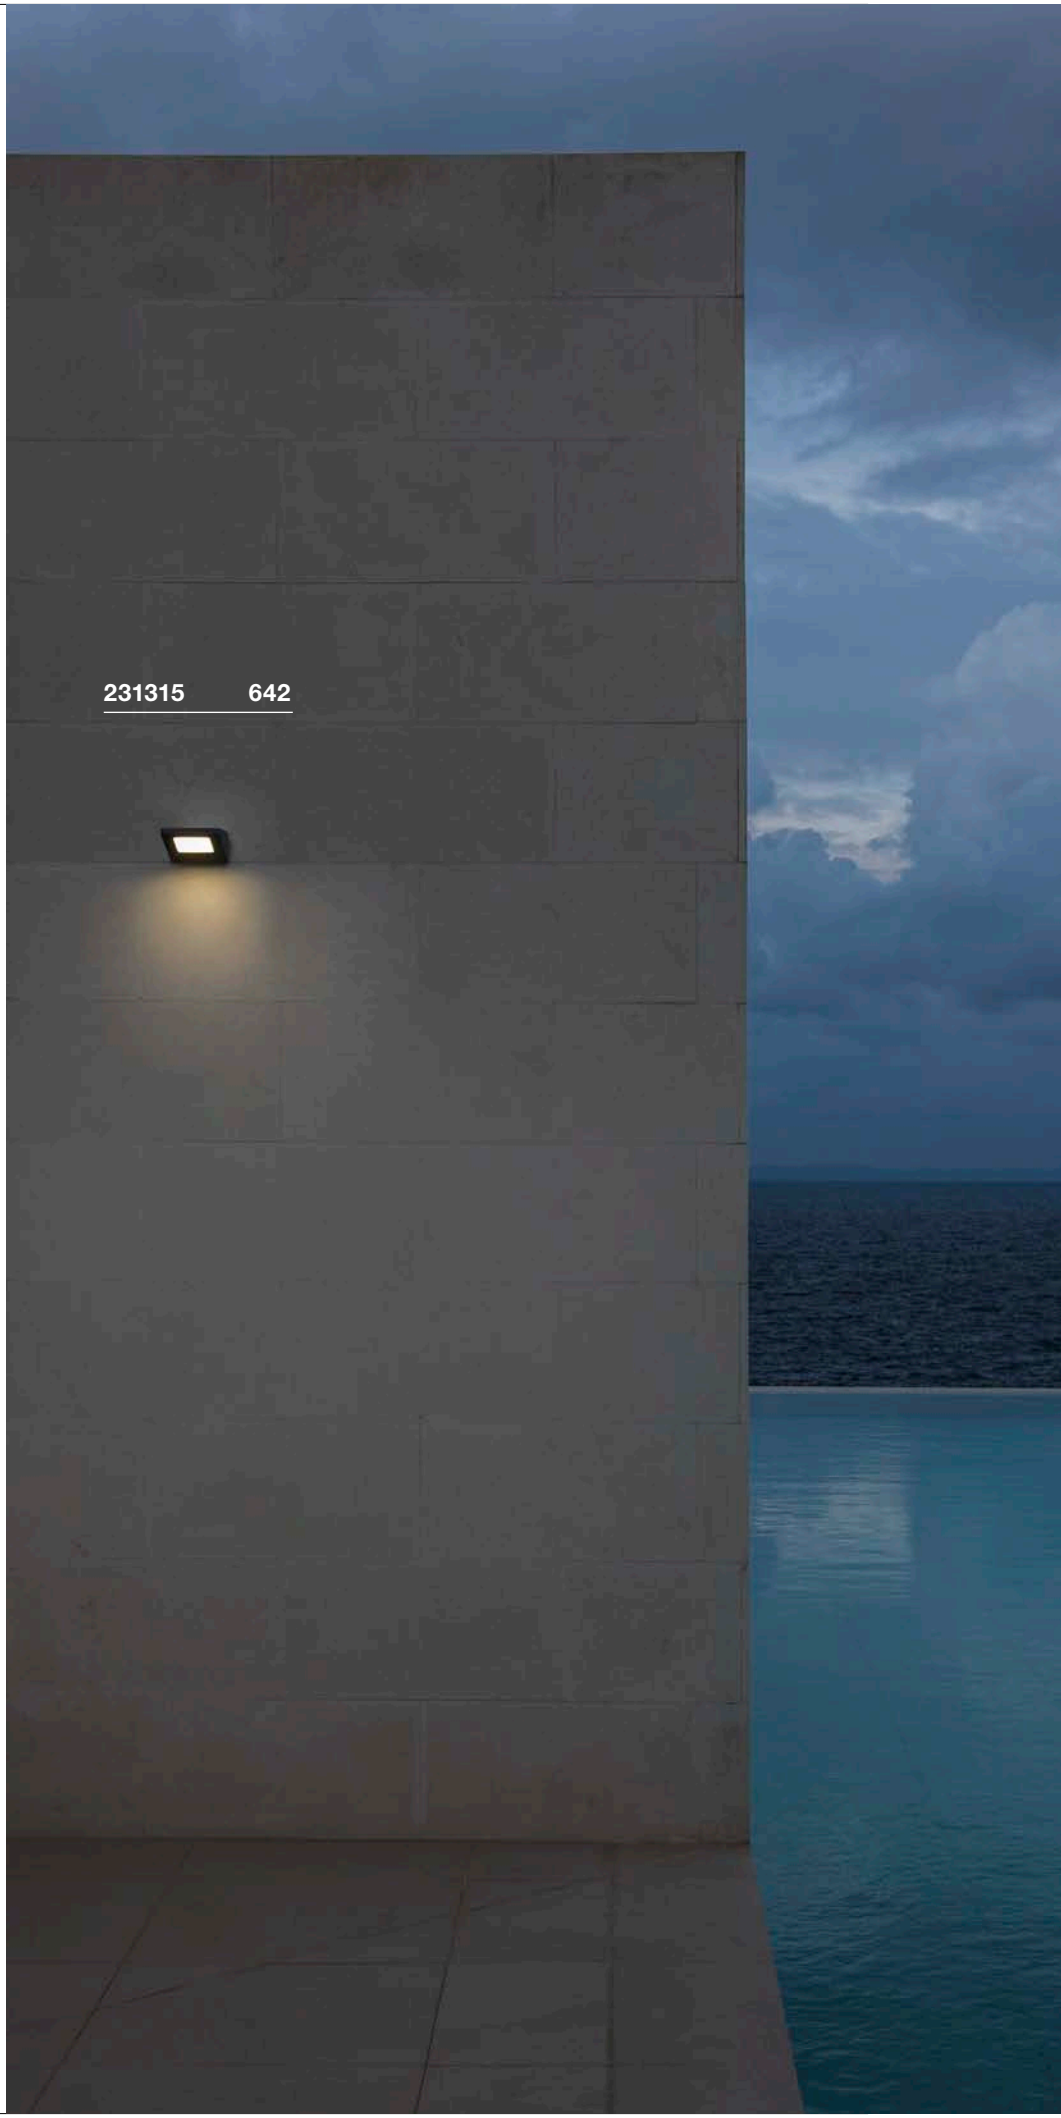


Product details

230V ~50Hz
Total consumption: 5W
Material: Aluminium / Plastic



IP 44 | 0.5 | 25000


Dimensioned drawing



Note

Protection class IP44 only when mounted with the light emission opening pointing downwards.

Variant	Item no.	GBP
320lm | 4000K | CRI>70		
anthracite	**231315**	**90,00**

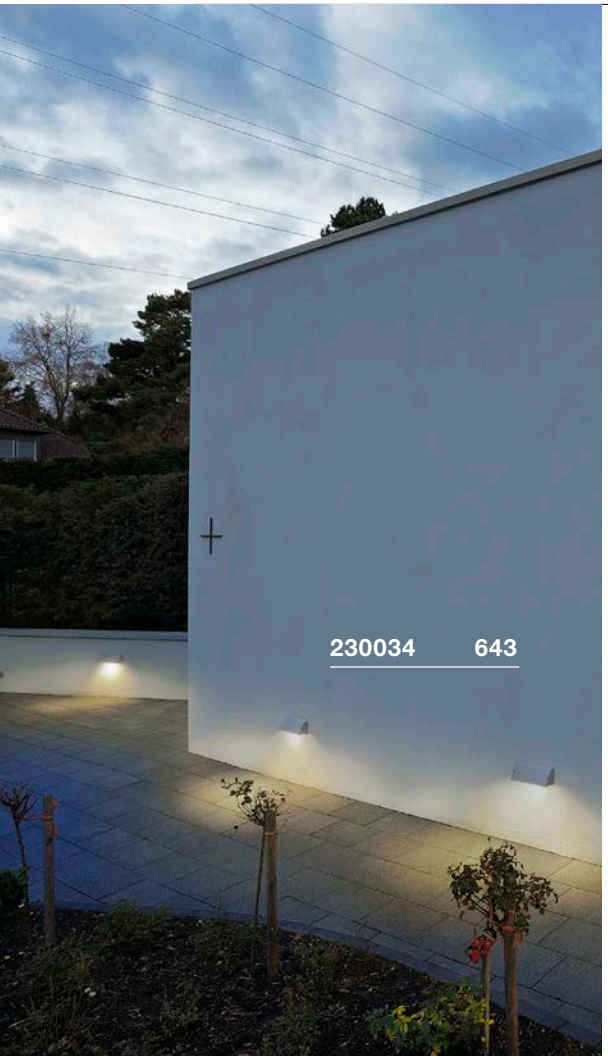




PEMA®
WL, E27

A-A++ Spectrum A⁺⁺–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 1.05

Dimensioned drawing



Note

Protection class IP44 only when mounted with the light emission opening pointing downwards.

Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

LED E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 | 25,20 GBP

Lamp details


max. 15W
Ø: 4.5 cm max. L: 21 cm max.

Variant	Item no.	GBP
E27		
■ black	**230030**	**81,00**
E27		
◪ grey / transparent	**230034**	**81,00**


PEMA®
WL

A-A++ Spectrum A⁺⁺–E

LED INSIDE








Product details

230V ~50Hz
Total consumption: 7.7W
Material: Aluminium / Glass

IP 54 | 0.7 | 30000 | 110° | 0.7 | IK05

Dimensioned drawing



Note

Protection class IP54 only when mounted with the light emission opening pointing downwards.

Variant	Item no.	GBP
450lm | 3000K | CRI>80		
■ anthracite	**1002069**	**99,00**
450lm | 3000K | CRI>80		
□ white	**1002070**	**99,00**
450lm | 3000K | CRI>80		
◪ grey / transparent	**1002071**	**99,00**

MALU
WL

890

A-A++ Spectrum A⁺⁺–E

LED INSIDE

reddot award 2019 winner









- Unusual design
- Homogeneous illumination
- Extremely wide light distribution

Product details

220-240V ~50/60Hz
Total consumption: 9.2W
Material: Aluminium / Glass

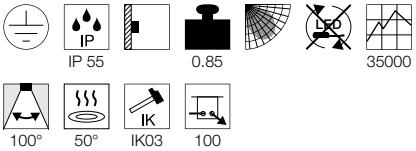

Dimensioned drawing



Variant	Item no.	GBP
360lm | 3000K | CRI>80		
anthracite	**1002155**	**166,50**

TRAPECCO DOWN
WL

898

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details


230V ~50Hz
Total consumption: 10W
Material: Aluminium

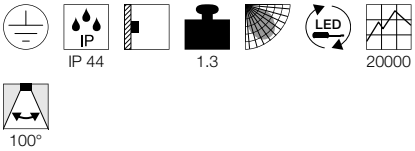

Dimensioned drawing



Variant	Item no.	GBP
850lm | 3000K | CRI>80		
anthracite	**231745**	**157,50**

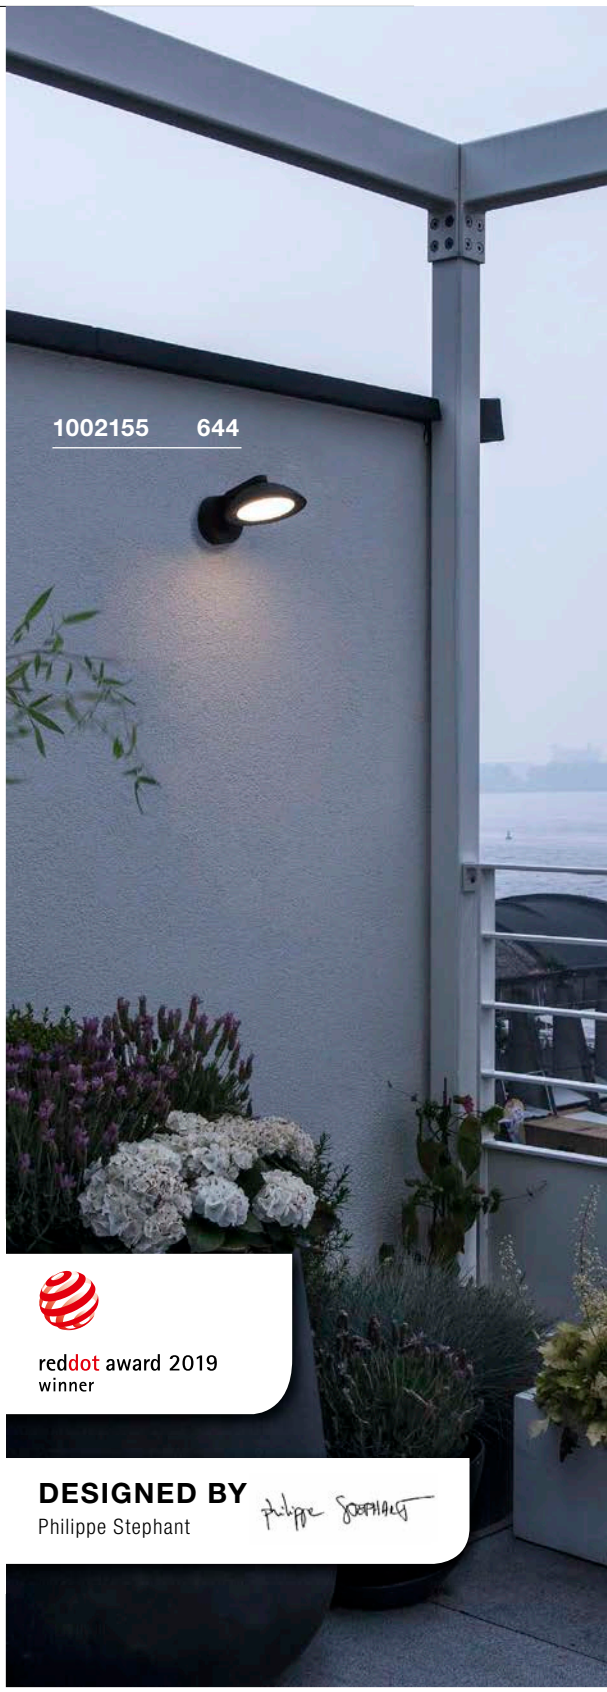





QUADRASYL
WL, TCR-TSE

894

B-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 0.86

Dimensioned drawing



Recommended lamp

GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP

Lamp details

max. 11W TCR-TSE
Ø: 7.5 cm max. L: 2.7 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE anthracite	**232285**	**49,50**

QUADRASYL
CW, TCR-TSE

894

B-A++ Spectrum A++–E






- Panel: Stainless steel 304

Product details

230V ~50Hz
Material: Aluminium / Stainless Steel 304

IP 44 | 0.45

Dimensioned drawing



Note

Attached to the rear


Recommended lamp

GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP

Lamp details

max. 9W TCR-TSE
Ø: 7.5 cm max. L: 2.7 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE grey	**111482**	**71,10**

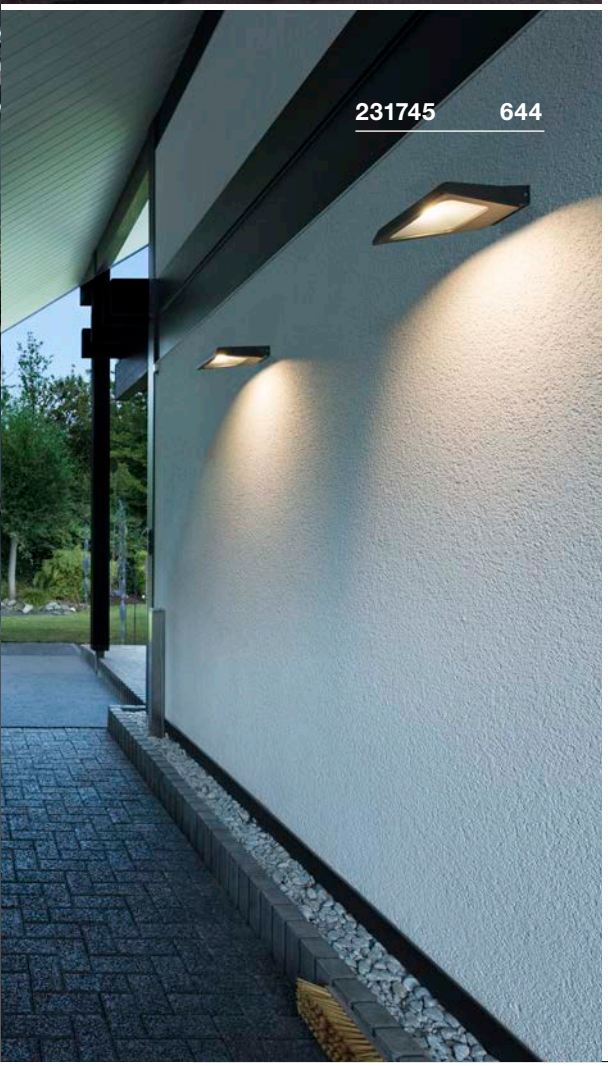

QUAD
WL


894

A-A++ Spectrum A++–E

LED INSIDE








Product details

200-240V ~50/60Hz | 700mA
Total consumption: 4.6W
Material: Aluminium / Glass



IP 44 | 0.25 | 30000 | 90°

Dimensioned drawing



Variant	Item no.	GBP
100lm | 3000K | CRI>80		
white	232461	72,00
80lm | 3000K | CRI>80		
anthracite	232465	72,00

BIG QUAD
WL


894

A-A++ Spectrum A++–E

LED INSIDE








Product details

100-277V ~50/60Hz | 350mA
Total consumption: 4.5W
Material: Aluminium / Glass





IP 44 | 0.63 | 30000 | 110°


Dimensioned drawing



Variant	Item no.	GBP
290lm | 3000K | CRI>80		
white	232431	103,50
260lm | 3000K | CRI>80		
anthracite	232435	103,50

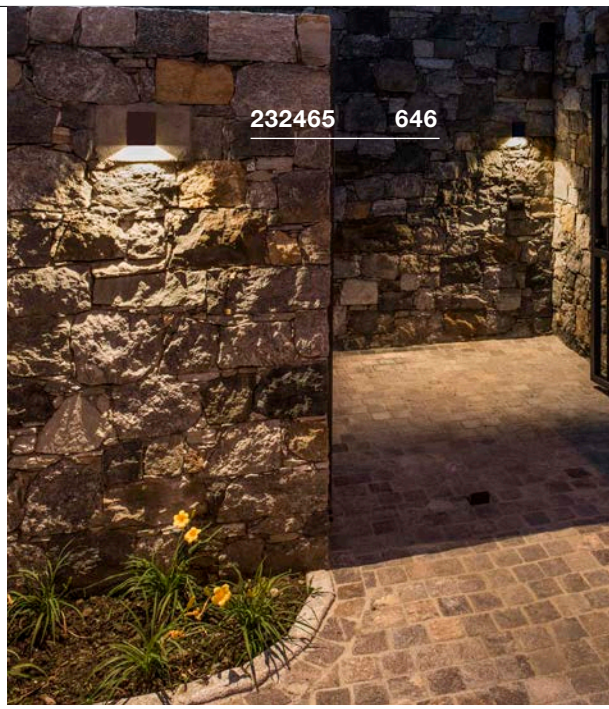

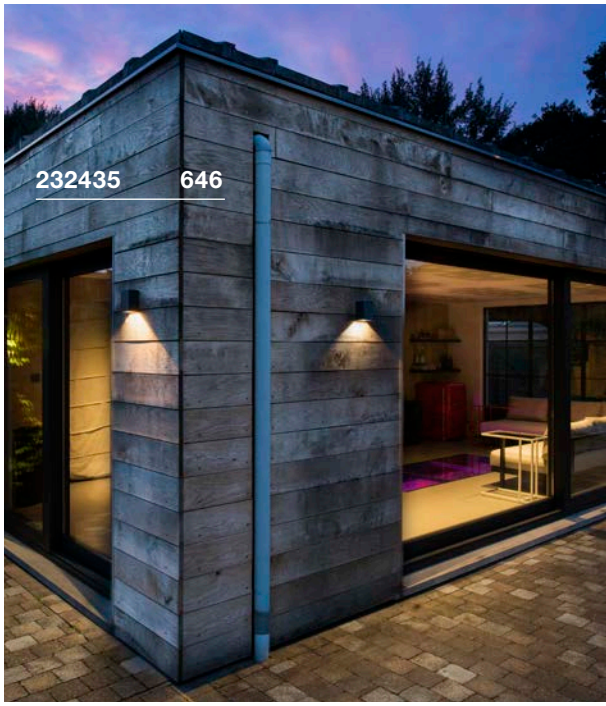

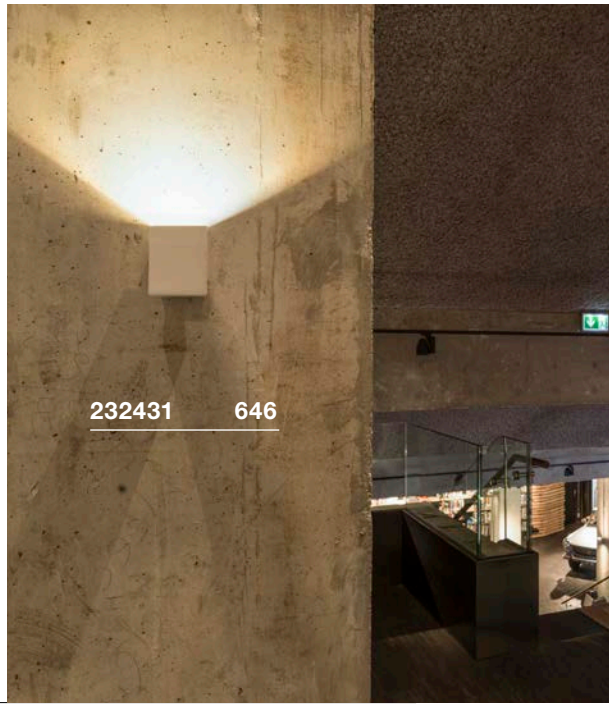



SAIL
WL

889


A-A++ Spectrum A++–E

LED INSIDE

NEW









Product details

200-240V ~50Hz
Total consumption: 18W
Material: Aluminium

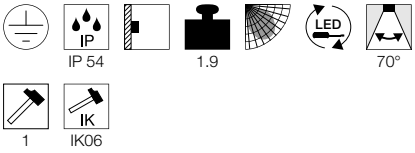

Dimensioned drawing



Variant	Item no.	GBP
400lm | 3000K | CRI>80		
anthracite	**1002605**	**139,50**
590lm | 3000K | CRI>80		
white	**1002606**	**139,50**


VILUA S
WL

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW









Product details

100-277V ~50/60Hz | 700mA
Total consumption: 8.3W
Material: Aluminium / Glass




Dimensioned drawing



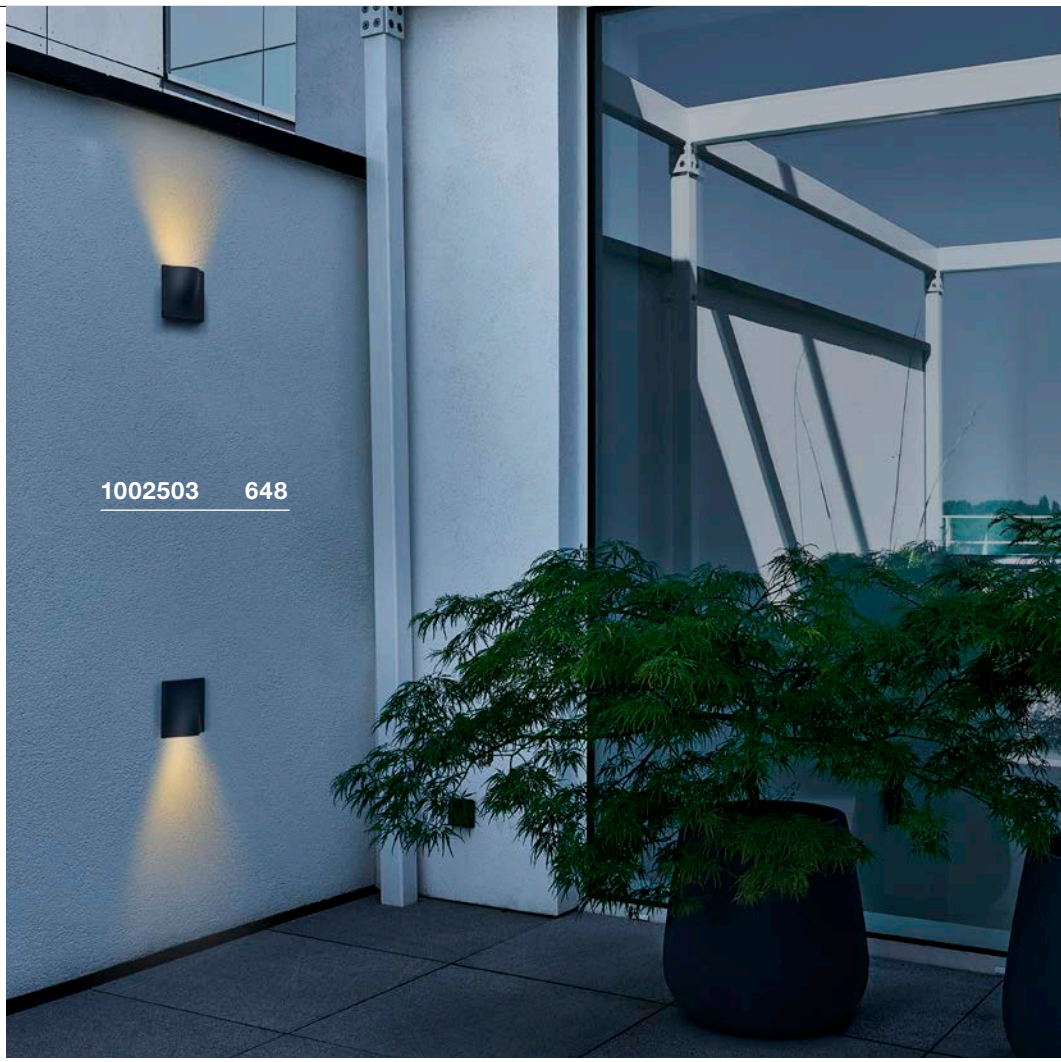



Variant	Item no.	GBP
405lm | 3000K | CRI>80		
anthracite	1002503 NEW	117,00

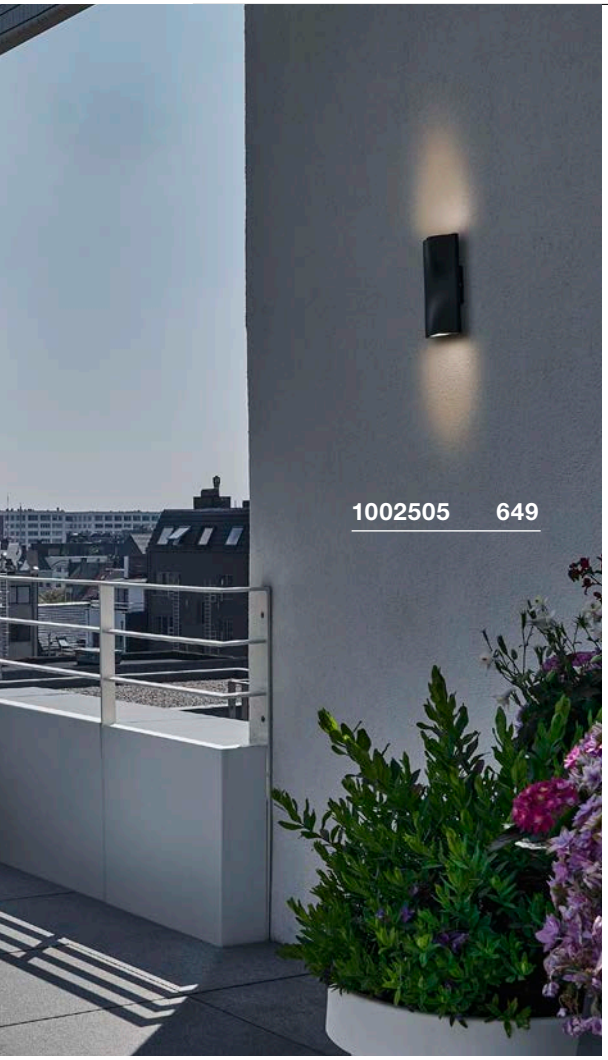




VILUA L
WL

A-A++ Spectrum A++–E

LED INSIDE

NEW








Product details

100-277V ~50/60Hz | 350mA
Total consumption: 16W
Material: Aluminium / Glass



Dimensioned drawing



Variant	Item no.	GBP
810lm | 3000K | CRI>80 anthracite	1002504	153,00


VILUA
UP/DOWN, WL

A-A++ Spectrum A++–E

LED INSIDE

NEW








Product details

100-277V ~50/60Hz | 700mA
Total consumption: 16W
Material: Aluminium / Glass



Dimensioned drawing



Variant	Item no.	GBP
Up: 392lm | 3000K | CRI>80 Down: 392lm | 3000K | CRI>80 anthracite	1002505	153,00


THEO
WL, QPAR51

897

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 0.66

Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001566 | 9,90 GBP

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

Lamp details

max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	229521	67,50
GU10 | QPAR51 grey / transparent	229524	67,50
GU10 | QPAR51 anthracite	229525	67,50

BIG THEO
WL, QPAR111

884

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 1

Dimensioned drawing



Recommended lamp

GU10 7W 13°
3000K 660lm EEI==A+
8kWh/1000h
Item no. 1001568 | 20,70 GBP

LED GU10 13W 140°
2700K 1000lm EEI==A+
13kWh/1000h
Item no. 1001244 | 76,50 GBP


Lamp details


max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 white	229561	90,00
GU10 | QPAR111 grey / transparent	229564	90,00
GU10 | QPAR111 anthracite	229565	90,00





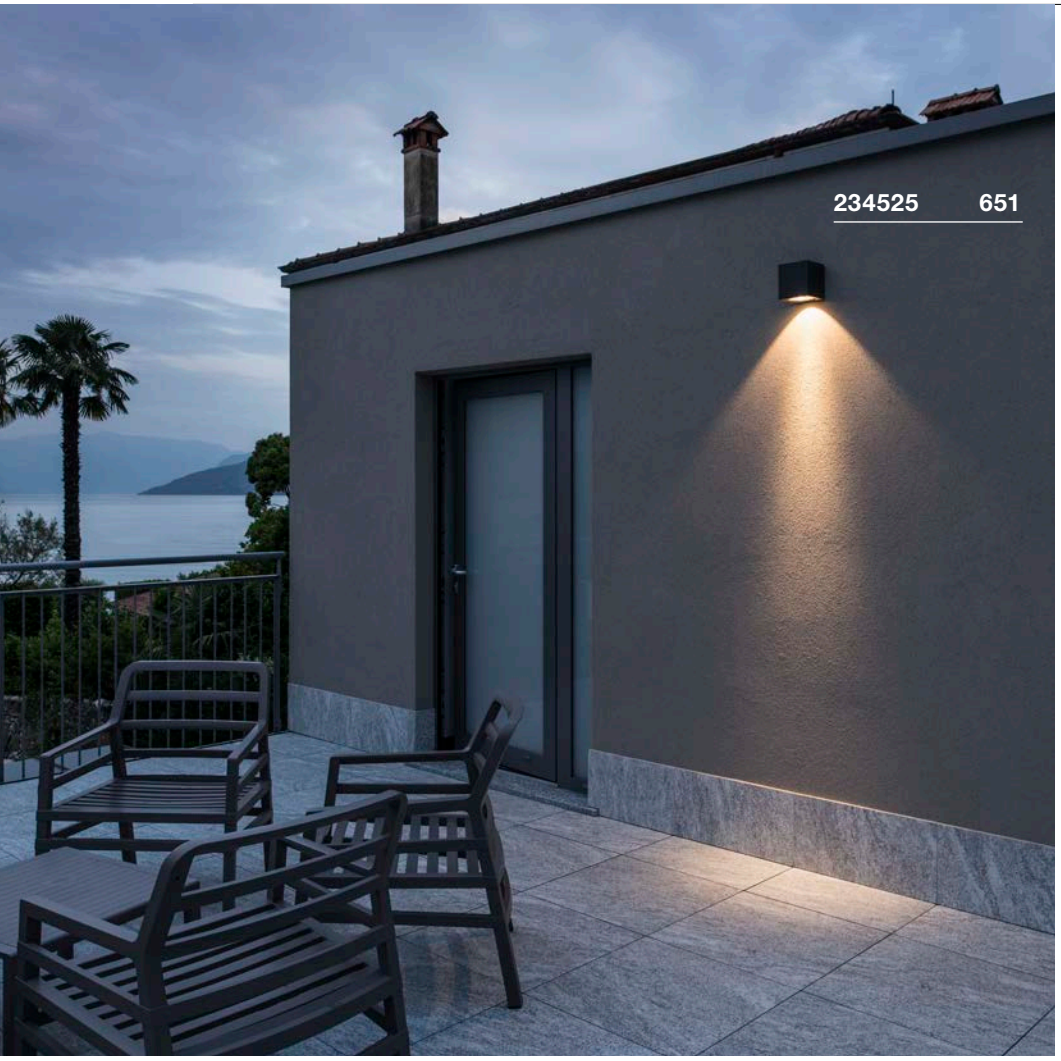

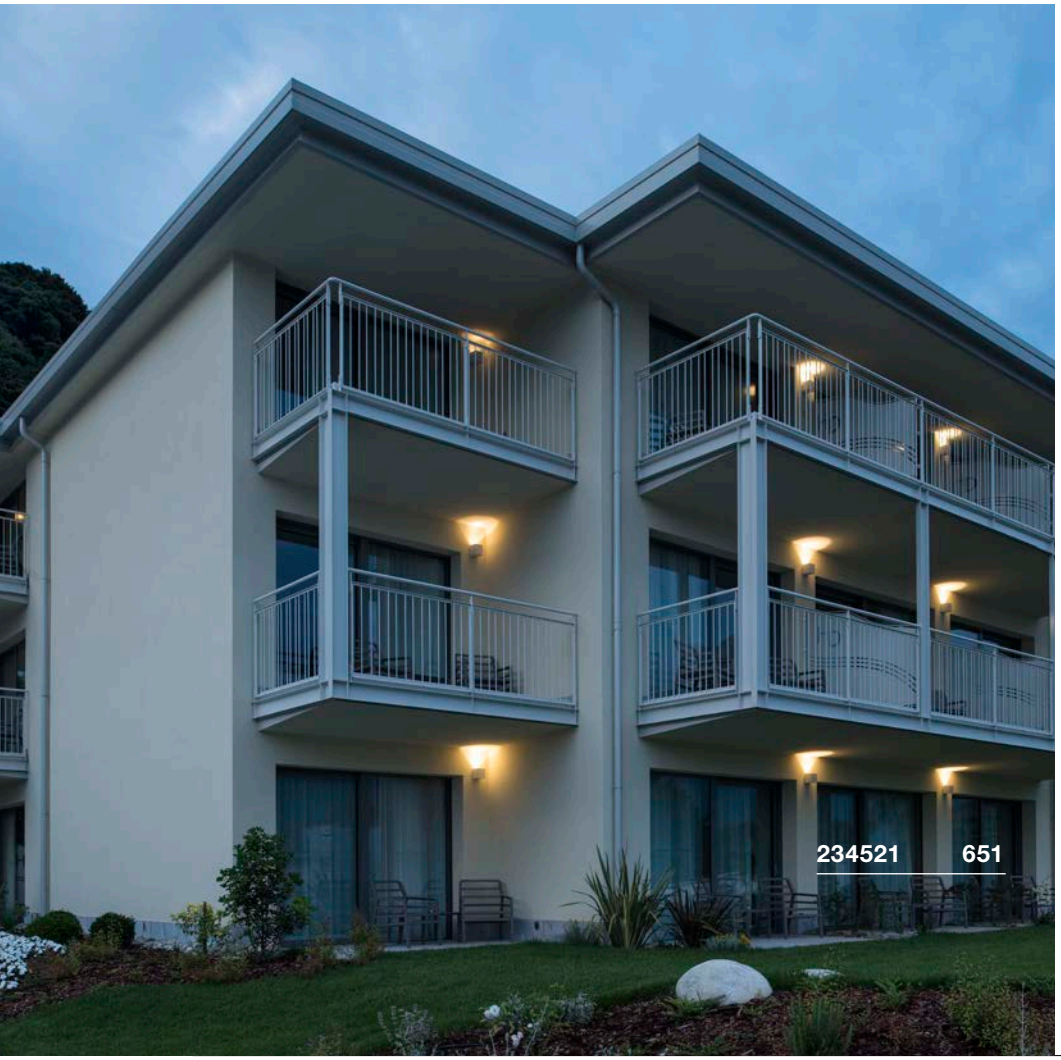

BIG THEO
WL

885

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

100-277V ~50/60Hz | 500mA
Total consumption: 21W
Material: Aluminium / Glass

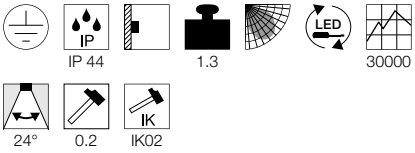

Dimensioned drawing



Variant	Item no.	GBP
2000lm | 3000K | CRI>80 white	**234521**	**180,00**
2000lm | 3000K | CRI>80 grey / transparent	**234524**	**180,00**
2000lm | 3000K | CRI>80 anthracite	**234525**	**180,00**


DELWA
WL

A-A++ Spectrum A++–E

LED INSIDE









Product details

100-240V ~50/60Hz | 700mA
Total consumption: 10W
Material: Aluminium / Glass

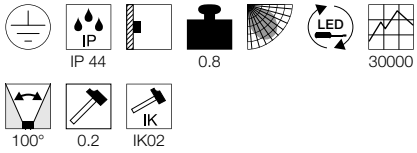

Dimensioned drawing






230791 652

Variant	Item no.	GBP
910lm | 3000K | CRI>80 white	1000340	162,00
910lm | 3000K | CRI>80 grey	1000341	162,00
910lm | 3000K | CRI>80 anthracite	1000342	162,00



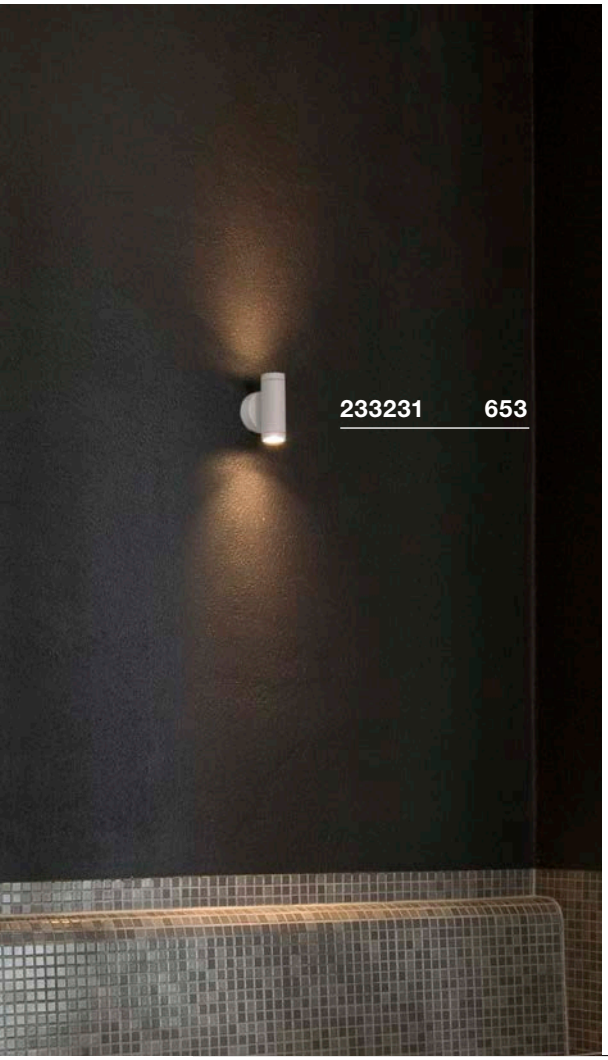

MYRA UP/DOWN
WL, QPAR51

892

E-A++ Spectrum A++–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended accessories

Frame for surface mounting
Item no. 233214 | 16,20 GBP



Frame for surface mounting
Item no. 233215 | 16,20 GBP

Recommended lamp

LED GU10 4.3W 40°
2700K 365lm EEI=A++
5kWh/1000h
Item no. 560142 | 34,20 GBP



LED GU10 4.3W 40°
3000K 375lm EEI=A++
5kWh/1000h
Item no. 560143 | 31,50 GBP



Lamp details

2x max. 35W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
grey	**233114**	**99,00**
GU10 | QPAR51		
anthracite	**233115**	**99,00**

HELIA UP/DOWN
WL, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE








• 240V LED


Product details

220-240V ~50/60Hz
Total consumption: 12W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
Up: 350lm | 3000K | CRI>80 Down: 350lm | 3000K | CRI>80 white	**233231**	**180,00**
Up: 350lm | 3000K | CRI>80 Down: 350lm | 3000K | CRI>80 anthracite	**233235**	**180,00**

SITRA UP/DOWN
WL, TCR-TSE

896

B-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 1.4

Dimensioned drawing



Recommended lamp

GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP

Lamp details

2x max. 9W TCR-TSE
Ø: 7.5 cm max. L: 3.5 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE		
anthracite	230365	76,50

SITRA UP/DOWN
WL

896

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz
Total consumption: 17W
Material: Aluminium / Glass

IP 44 1.1 LED 35000 55°

Dimensioned drawing



Variant	Item no.	GBP
Up: 488lm | 3000K | CRI>80 Down: 488lm | 3000K | CRI>80 anthracite	1002018	117,00
Up: 488lm | 3000K | CRI>80 Down: 488lm | 3000K | CRI>80 white	1002041	117,00

ASTINA
WL, QPAR51

884

B-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 0.8

Dimensioned drawing



Recommended lamp


GU10 4.3W 40°
2700K 245lm EEI=A+
5kWh/1000h
Item no. 551252 | 15,30 GBP

LED GU10 5.1W 48°
2700-6500K 350lm EEI==A+
6kWh/1000h
Item no. 1001918 | 49,50 GBP

Lamp details

2x max. 11W TCR50-SE
L: 9 cm max.

Variant	Item no.	GBP
GU10 | TCR50-SE		
white	228771	63,00
GU10 | TCR50-SE		
anthracite	228775	63,00
GU10 | TCR50-SE		
matt aluminium	228776	67,50

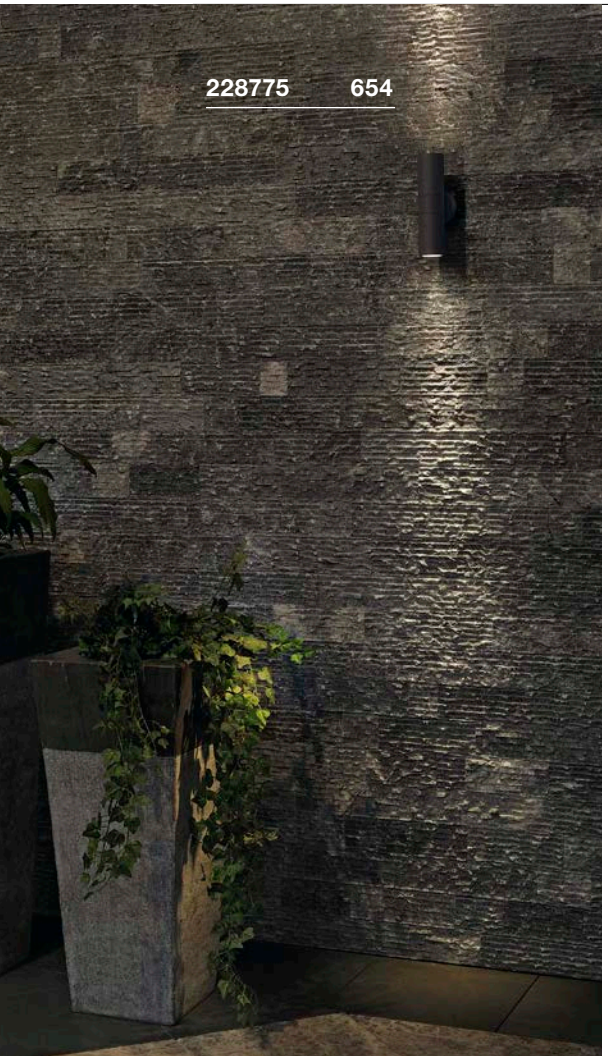

228775 654



233302 655

ASTINA STEEL
WL, QPAR51

884

E-A++ Spectrum A++–E








- Luminaire made from stainless steel 304
- Narrow beam characteristic for contoured accentuation of vertical surfaces

Product details

230V ~50Hz
Material: Stainless Steel 304

IP 44 | 1.02

Dimensioned drawing



Recommended lamp

LED GU10 3.7W 36°
2700K 260lm EEI=A+
4kWh/1000h
Item no. 560122 | 29,70 GBP



LED GU10 4.3W 40°
2700K 365lm EEI=A++
5kWh/1000h
Item no. 560142 | 34,20 GBP



Lamp details

2x max. 35W QPAR51
Ø: 5.1 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
Stainless steel	233302	94,50

ASTINA STEEL
WL

884

A-A++ Spectrum A++–E

LED INSIDE








- Luminaire made from high-quality stainless steel 316
- Narrow beam characteristic for contoured accentuation of vertical surfaces

Product details

100-277V ~50/60Hz | 350mA
Total consumption: 8.7W
Material: Stainless Steel 316

IP 44 | 1.38 | LED | 25000 | 24°

Dimensioned drawing



Variant	Item no.	GBP
510lm | 3000K | CRI>80		
Stainless steel	233312	184,50


ROX UP/DOWN
WL, QPAR111

895

E-A++ Spectrum A⁺⁺–E








- High-quality brushed finish

Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 1.2

Dimensioned drawing



Recommended lamp

LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP

LED GU10 13W 30°
4000K 1300lm EEI=A+
13kWh/1000h
Item no. 1001243 | 76,50 GBP

Lamp details

2x max. 50W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
brushed aluminium	**1000334**	**144,00**

ENOLA C UP/DOWN
WL

886

A-A++ Spectrum A⁺⁺–E

LED INSIDE








Product details

220-240V ~50/60Hz | 500mA
Total consumption: 23W
Material: Aluminium / Glass

IP 55 | 1.48 | LED | 40000 | 35°

Dimensioned drawing





Recommended accessories

Frame for surface mounting
Item no. 233211 | 16,20 GBP

Frame for surface mounting
Item no. 233215 | 16,20 GBP

Variant	Item no.	
1800lm | 3000K | CRI>80		
white	**228521**	**269,10**
1800lm | 3000K | CRI>80		
anthracite	**228525**	**269,10**

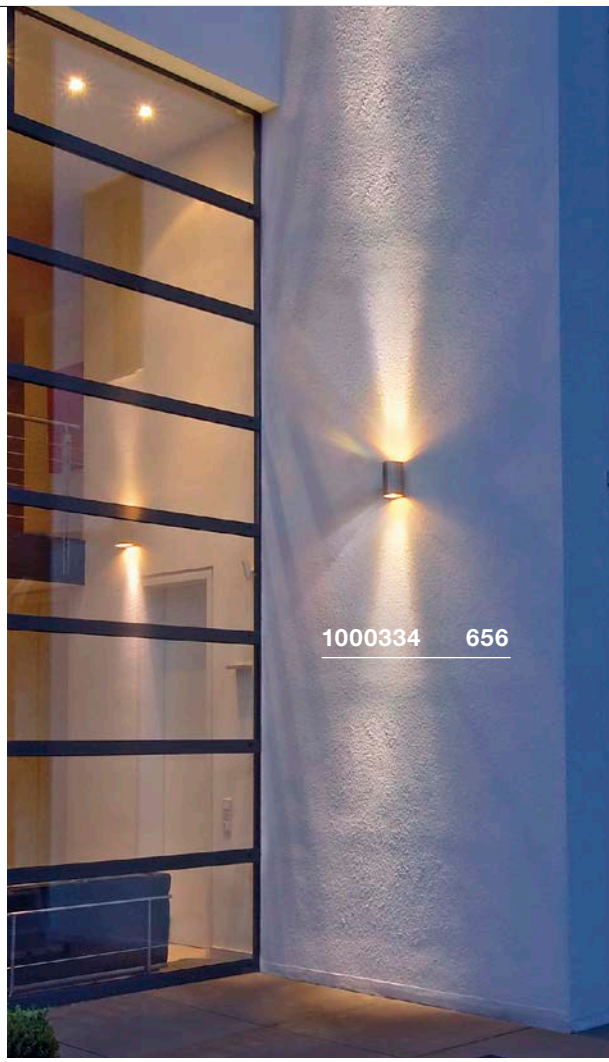

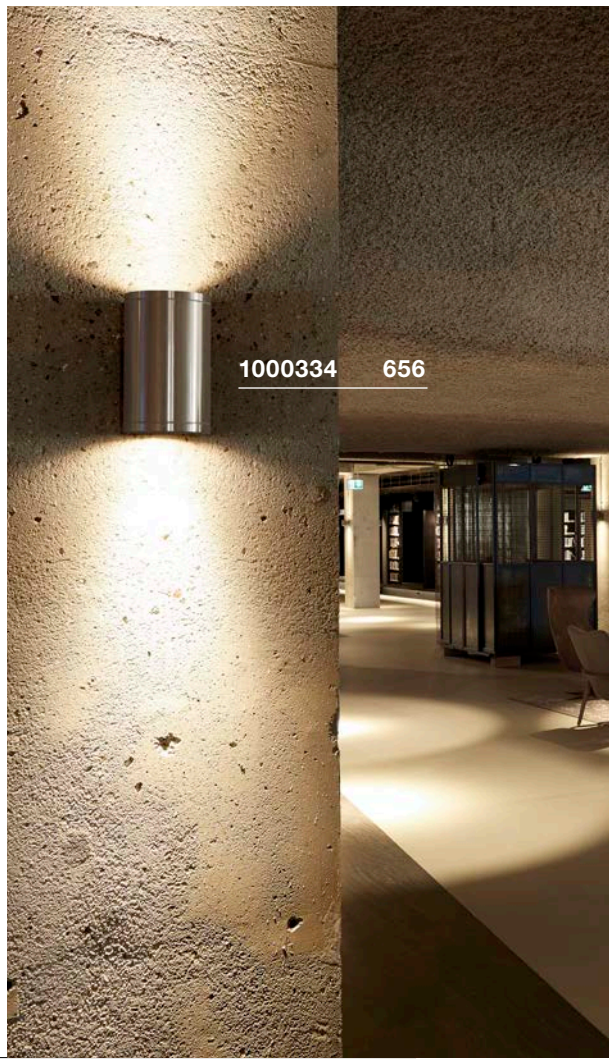





POLE PARC UP/DOWN
WL

894

A-A++ Spectrum A++–E

LED INSIDE









- Direct/indirect rotation-symmetric light distribution
- Ideal for effective accentuation of the building architecture

Product details

100-240V ~50/60Hz | 700mA
Total consumption: 56W
Material: Aluminium / Glass

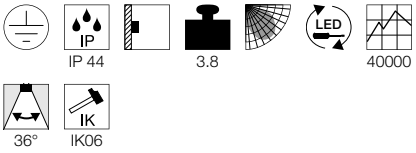

Dimensioned drawing





Variant	Item no.	GBP
Up: 2900lm | 3000K | CRI>80 Down: 2900lm | 3000K | CRI>80		
anthracite	1000446	386,10

SQUARE TURN
WL, G9

896

D-A+ Spectrum A++–E








- Front part can be rotated by 360°

Product details

230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

G9 2.5W
2700K 180lm EEI=A+
3kWh/1000h
Item no. 560302 | 10,80 GBP



LED G9 3.5W
2800K 300lm EEI=A+
4kWh/1000h
Item no. 1002131 | 17,10 GBP





Lamp details

max. 42W QT14
Ø: 3.5 cm max. L: 8 cm max.

Variant	Item no.	GBP
G9 | QT14		
grey	1000335	162,00

QUAD UP/DOWN 12
WL

894

A-A++ Spectrum A++–E

LED INSIDE









Product details

200-240V ~50/60Hz | 700mA
Total consumption: 6.8W
Material: Aluminium / Glass

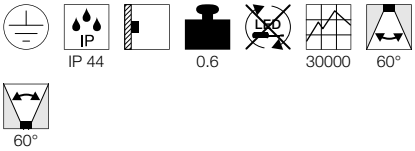

Dimensioned drawing



Note

Installation surface at narrow side of housing

Variant	Item no.	GBP
175lm | 3000K | CRI>80		
white	232471	99,00
140lm | 3000K | CRI>80		
anthracite	232475	99,00

QUAD UP/DOWN 15
WL

894

A-A++ Spectrum A++–E

LED INSIDE









Product details

100-277V ~50/60Hz | 350mA
Total consumption: 8.6W
Material: Aluminium / Glass

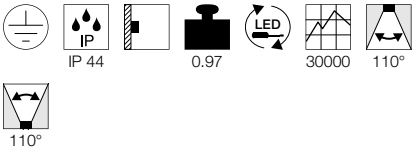

Dimensioned drawing





Note

Installation surface at narrow side of housing

Variant	Item no.	GBP
290lm | 3000K | CRI>80		
white	232441	117,00
260lm | 3000K | CRI>80		
anthracite	232445	117,00



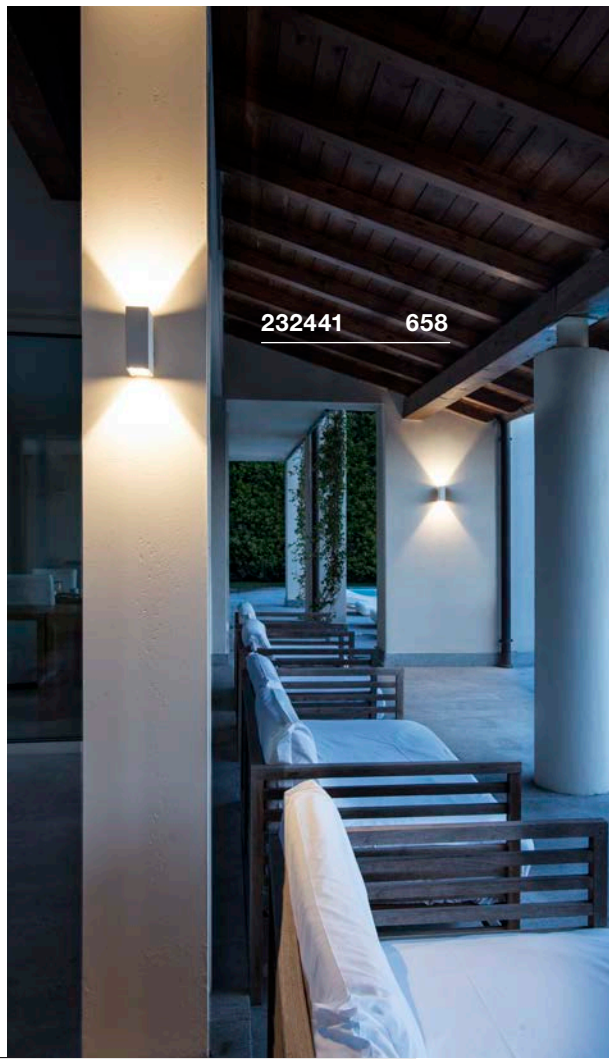

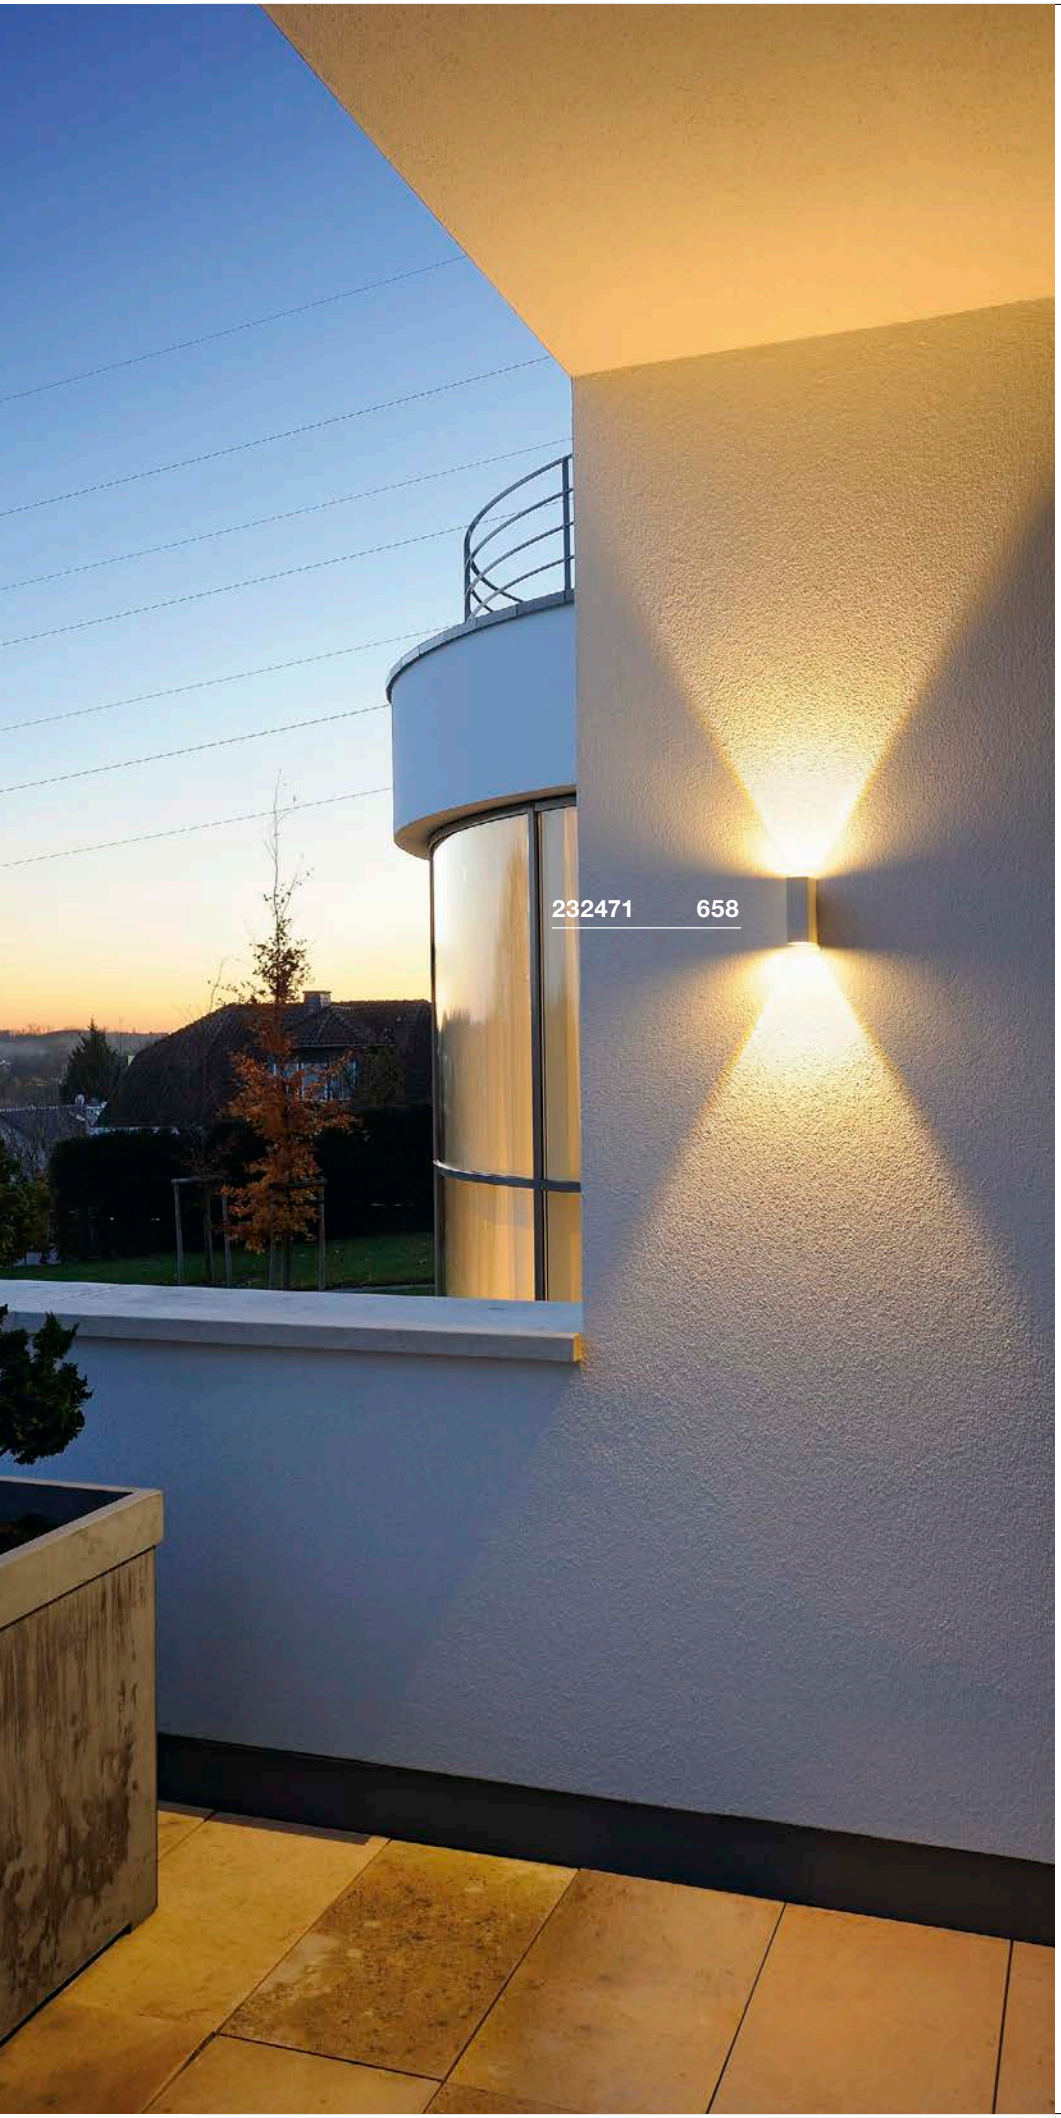

BIG QUAD UP/DOWN
WL

A-A++ Spectrum A++–E

LED INSIDE









Product details

200-240V ~50/60Hz | 350mA
Total consumption: 8.8W
Material: Aluminium / Glass

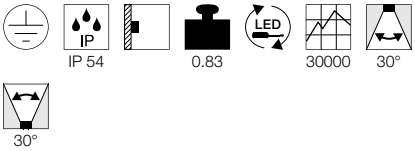

Dimensioned drawing



Variant	Item no.	GBP
240lm | 3000K | CRI>80		
white	232451	132,30
240lm | 3000K | CRI>80		
anthracite	232455	132,30

MANA OUT WL

891

A-A++ Spectrum A++–E

LED INSIDE

NEW







- Narrower beam possible using provided accessory

Product details


220-240V ~50/60Hz
Total consumption: 12W
Material: Aluminium / Steel
Dimmable: Triac C, Triac L
Product dimensions:
L: 16 cm W: 16 cm H: 9.3 cm


IP 65 | 1.47 | 30000

60°



Variant	Item no.	GBP
650lm | 3000K | CRI>80 anthracite	1002900	197,10
650lm | 3000K | CRI>80 rust / anthracite	1002902	215,10

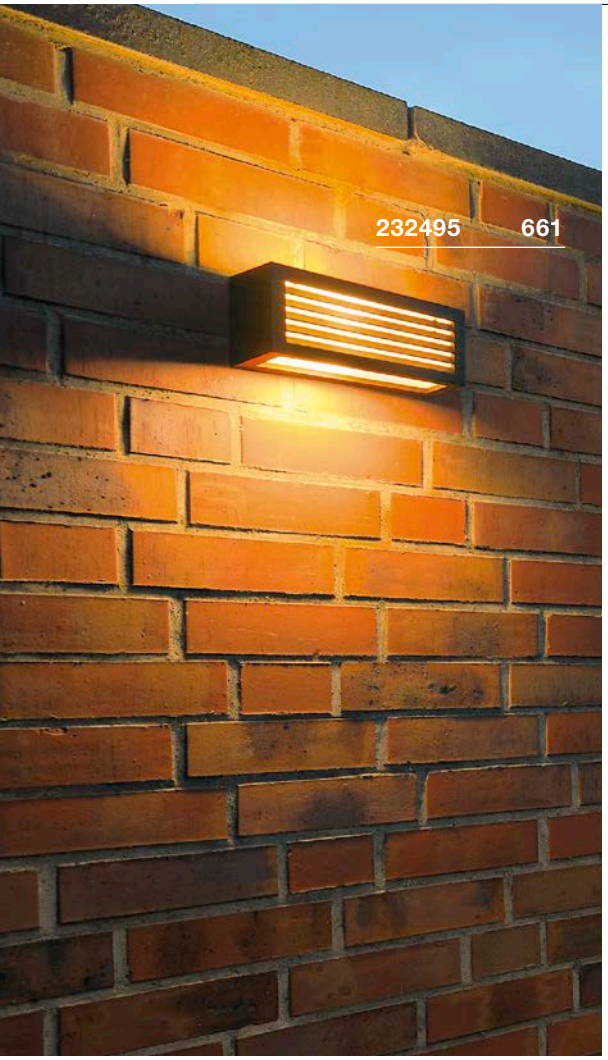

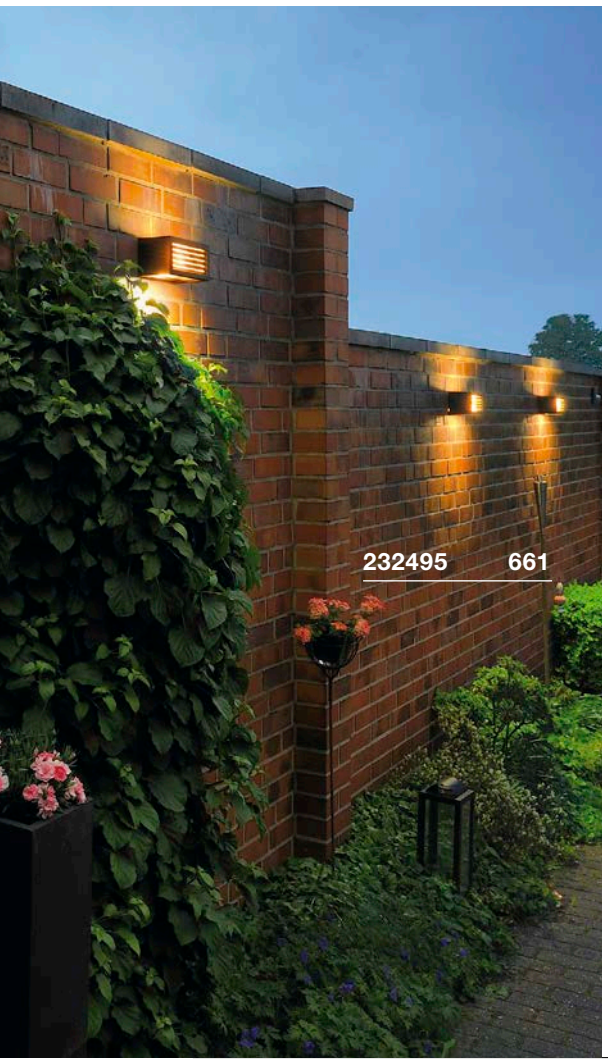

BOX-L
WL, E27

A-A++ Spectrum A++–E









- Direct/indirect radiating luminaire with additional light emission towards the front
- Accentuated wall floodlighting and homogeneous basic lighting in one

Product details

220-240V ~50/60Hz
Material: Aluminium / Acrylic



Dimensioned drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP



LED E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

Lamp details

max. 18W
Ø: 6 cm max. L: 17.5 cm max.

Variant	Item no.	GBP
E27 white	**232491**	**81,00**
E27 anthracite	**232495**	**81,00**
E27 rust	**232497**	**81,00**


BOX-L
WL

A-A++ Spectrum A++–E

LED INSIDE









Product details

220-240V ~50/60Hz
Total consumption: 19W
Material: Aluminium / Acrylic

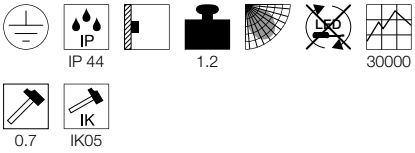

Dimensioned drawing




Variant	Item no.	GBP
480lm | 3000K | CRI>80 white	**1002037**	**99,00**
480lm | 3000K | CRI>80 anthracite	**1002035**	**99,00**
480lm | 3000K | CRI>80 rust	**1002036**	**99,00**


BOX UP/DOWN
WL, QT-DE12

D-C Spectrum A++–E








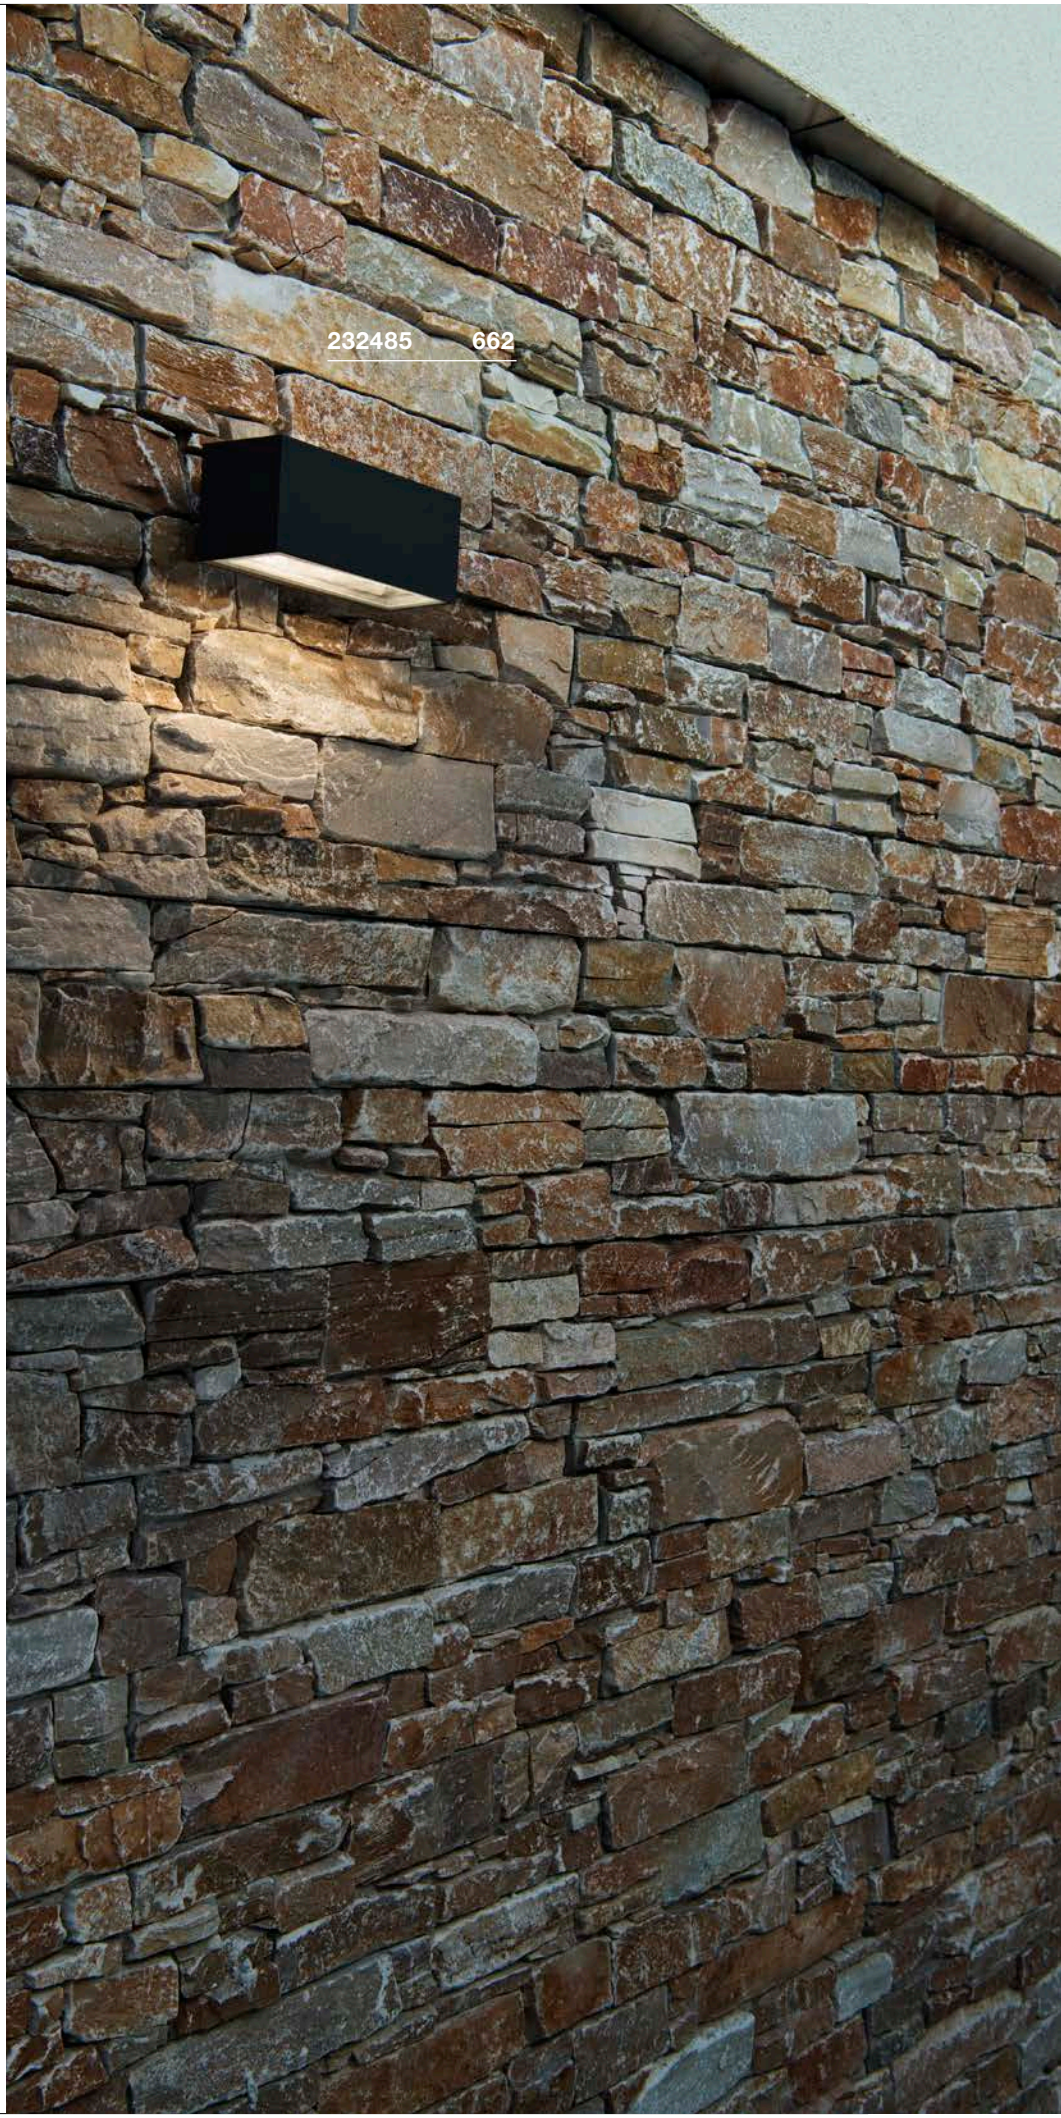


Product details

220-240V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing




Recommended lamp


R7s 78mm 5.5W 330°
3000K 530lm EEI=A+
6kWh/1000h
Item no. 560332 | 9,90 GBP


Lamp details

max. 80W QT-DE12

Variant	Item no.	GBP
R7s 78mm | QT-DE12		
white	**232481**	**76,50**
R7s 78mm | QT-DE12		
anthracite	**232485**	**76,50**

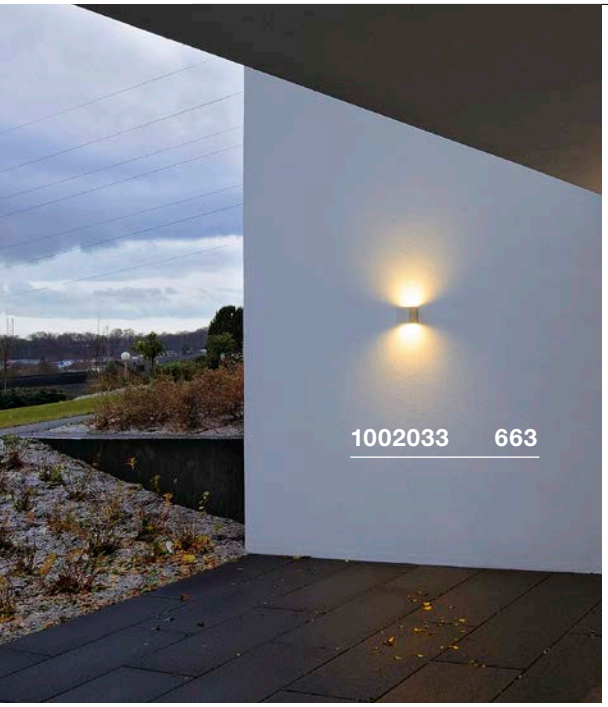

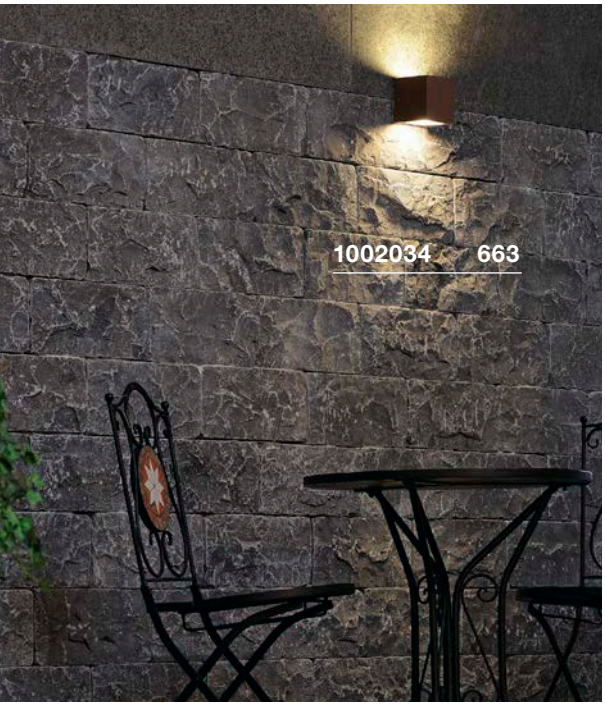


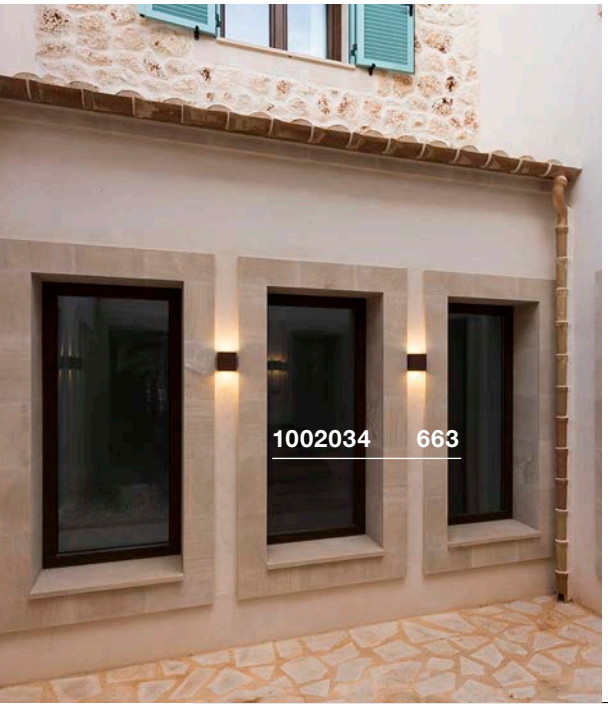

SITRA CUBE
WL, TCR-TSE

896

B-A++ Spectrum A++–E











Product details

220-240V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP



Lamp details

2x max. 9W TCR-TSE
Ø: 7.5 cm max. L: 2.7 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE		
white	**232531**	**60,30**
GX53 | TCR-TSE		
anthracite	**232535**	**60,30**
GX53 | TCR-TSE		
rust	**232537**	**60,30**


SITRA CUBE
WL

896

A-A++ Spectrum A++–E

INSIDE









Product details

100-277V ~50/60Hz | 500mA
Total consumption: 10W
Material: Aluminium / Glass

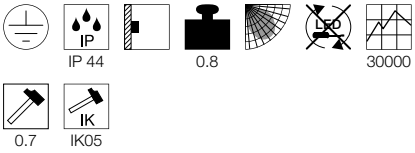

Dimensioned drawing



Variant	Item no.	GBP
Up: 560lm | 3000K | CRI>80 Down: 560lm | 3000K | CRI>80 anthracite	**1002032**	**90,00**
Up: 560lm | 3000K | CRI>80 Down: 560lm | 3000K | CRI>80 white	**1002033**	**90,00**
Up: 560lm | 3000K | CRI>80 Down: 560lm | 3000K | CRI>80 rust	**1002034**	**90,00**

LOGS
WL


890

A-A++ Spectrum A++–E

LED INSIDE










Product details

100-240V ~50/60Hz | 500mA
Total consumption: 8W
Material: Aluminium




Dimensioned drawing



Variant	Item no.	GBP
650lm | 3000K | CRI>80 white	232101	180,00
550lm | 3000K | CRI>80 grey	232104	180,00
420lm | 3000K | CRI>80 anthracite	232105	180,00



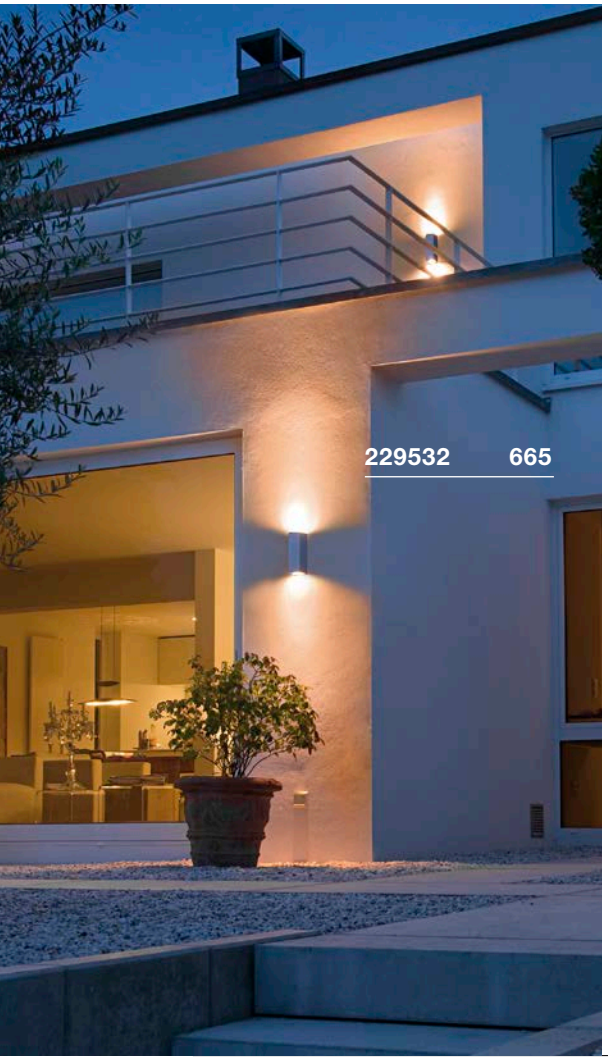

THEO UP/DOWN
WL, QPAR51

897

E-A++ Spectrum A++–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Glass

IP 44 | 0.79 | 0.2 | IK02

Dimensioned drawing



Recommended lamp

LED GU10 7W 25/40/55°
3000K 300lm EEI=A
7kWh/1000h
Item no. 560603 | 22,50 GBP

LED GU10 4.3W 40°
2700K 365lm EEI=A++
5kWh/1000h
Item no. 560142 | 34,20 GBP

Lamp details

2x max. 35W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	229531	81,00
GU10 | QPAR51 grey / transparent	229532	81,00
GU10 | QPAR51 anthracite	229535	81,00
GU10 | QPAR51 matt aluminium	1000331	90,00

BIG THEO UP/DOWN
WL, QPAR111

884

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 1.7 | 0.2 | IK02

Dimensioned drawing



Recommended lamp

LED GU10 10W 38°
3000K 630lm EEI=A+
10kWh/1000h
Item no. 1001029 | 45,00 GBP

LED GU10 7.3W 13°
4000K 660lm EEI==A+
8kWh/1000h
Item no. 1000942 | 20,70 GBP

Lamp details

2x max. 75W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111 white	229571	144,00
GU10 | QPAR111 grey / transparent	229574	144,00
GU10 | QPAR111 anthracite	229575	144,00

BIG THEO FLOOD UP/DOWN WL

885

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

100-240V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Glass

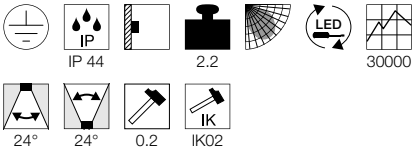

Dimensioned drawing



Variant	Item no.	GBP
Up: 2000lm | 3000K | CRI>80 Down: 2000lm | 3000K | CRI>80 white	234501	251,10
Up: 2000lm | 3000K | CRI>80 Down: 2000lm | 3000K | CRI>80 grey / transparent	234504	251,10
Up: 2000lm | 3000K | CRI>80 Down: 2000lm | 3000K | CRI>80 anthracite	234505	251,10

BIG THEO BEAM UP/ FLOOD DOWN WL

885

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

120-240V ~50/60Hz | 500mA
Total consumption: 29W
Material: Aluminium / Glass

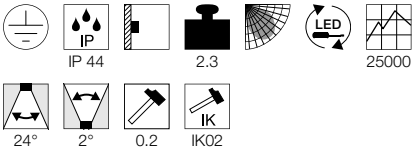

Dimensioned drawing



Variant	Item no.	GBP
Flood: 2000lm | 3000K | CRI>80 Beam: 130lm | 3000K | CRI>80 white	234511	224,10
Flood: 2000lm | 3000K | CRI>80 Beam: 130lm | 3000K | CRI>80 grey / transparent	234514	224,10
Flood: 2000lm | 3000K | CRI>80 Beam: 130lm | 3000K | CRI>80 anthracite	234515	224,10








234504 666

OUT-BEAM UP/DOWN
WL, QT-DE12

D-C Spectrum A++–E








Product details

230V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Lamp details

80W QT-DE12
L: 7.8 cm max.

Variant	Item no.	GBP
R7s 78mm | QT-DE12		
grey	1000587	99,00
R7s 78mm | QT-DE12		
anthracite	1000588	99,00

OUT-BEAM UP/DOWN
WL

A-A++ Spectrum A++–E

LED INSIDE









Product details


120-277V ~50/60Hz | 500mA
Total consumption: 15W
Material: Aluminium / Glass

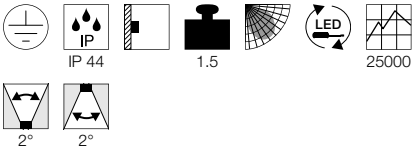



Dimensioned drawing



Variant	Item no.	GBP
Up: 50lm | 3000K | CRI>80		
Down: 50lm | 3000K | CRI>80		
grey / transparent	229694	247,50
Up: 50lm | 3000K | CRI>80		
Down: 50lm | 3000K | CRI>80		
anthracite	229695	247,50

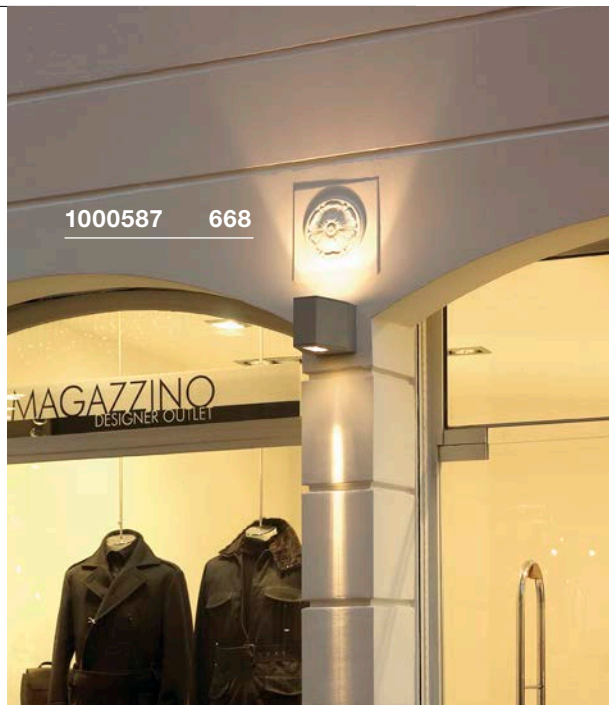

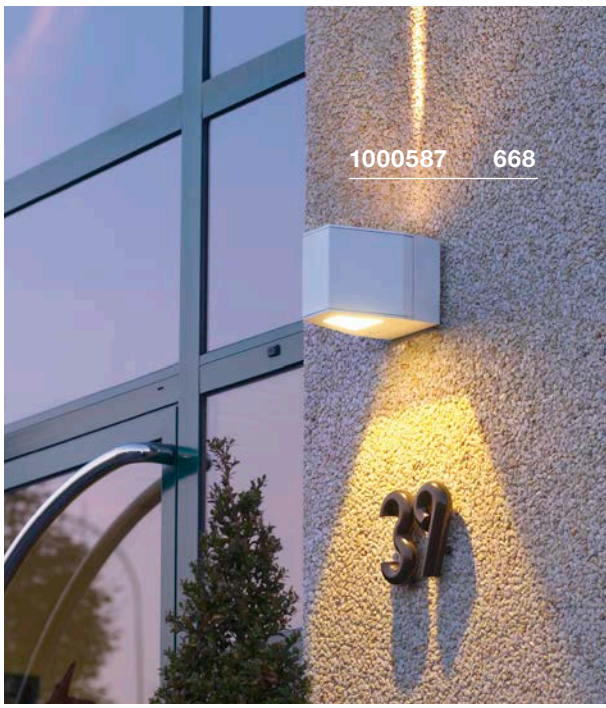

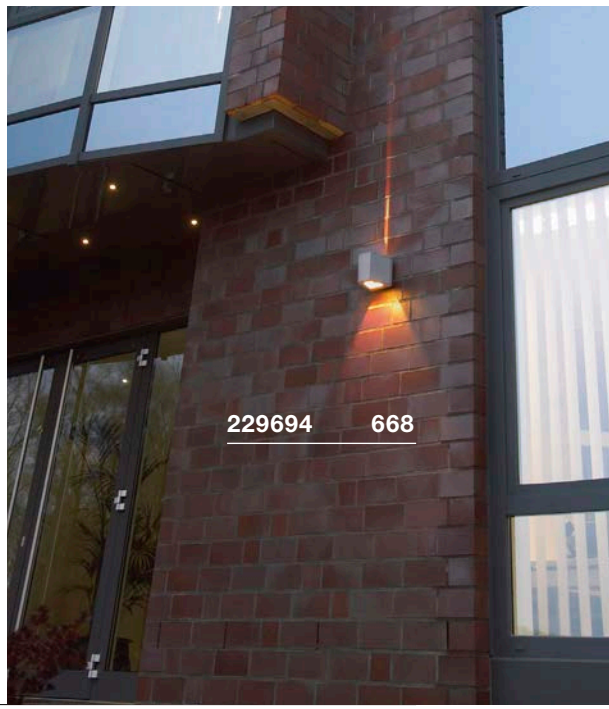




OUT-BEAM UP/FLOOD DOWN
WL

A-A++ Spectrum A++–E

LED INSIDE










Product details

120-277V ~50/60Hz | 500mA
Total consumption: 18W
Material: Aluminium / Glass





Dimensioned drawing



Variant	Item no.	GBP
Flood: 690lm | 3000K | CRI>80 Beam: 50lm | 3000K | CRI>80 grey / transparent	229664	220,50
Flood: 690lm | 3000K | CRI>80 Beam: 50lm | 3000K | CRI>80 anthracite	229665	220,50

ESKINA D
Display

886

A-A++ Spectrum A⁺⁺–E

LED INSIDE

NEW









• Switchable light colour

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 14.5W
Material: Aluminium
Dimmable: C

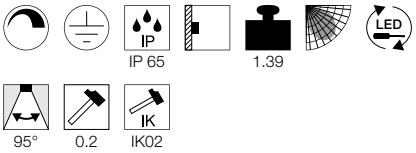

Dimensioned drawing



Variant	Item no.	GBP
1000lm | 3000/4000K | CRI>80		
matt anthracite	1002905	207,00

TODAY PRO
Display

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

220-240V ~50/60Hz | 640mA
Total consumption: 29W
Material: Aluminium

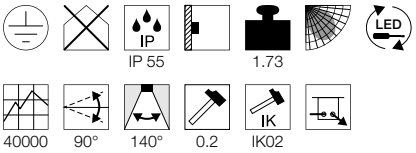

Dimensioned drawing



Variant	Item no.	GBP
2800lm | 4000K | CRI>70		
black	1000880	171,00
2800lm | 4000K | CRI>70		
white	1000881	171,00
2800lm | 4000K | CRI>70		
grey	1000882	171,00

TODAY
Display

A-A++ Spectrum A⁺⁺–E

LED INSIDE









Product details

220-240V ~50/60Hz | 640mA
Total consumption: 29W
Material: Aluminium

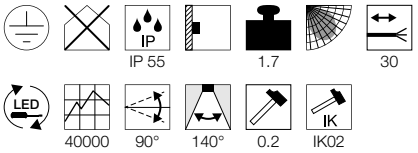


Dimensioned drawing



Note

Open cable end

Variant	Item no.	GBP
2800lm | 4000K | CRI>70		
black	227700	171,00
2800lm | 4000K | CRI>70		
white	227701	171,00

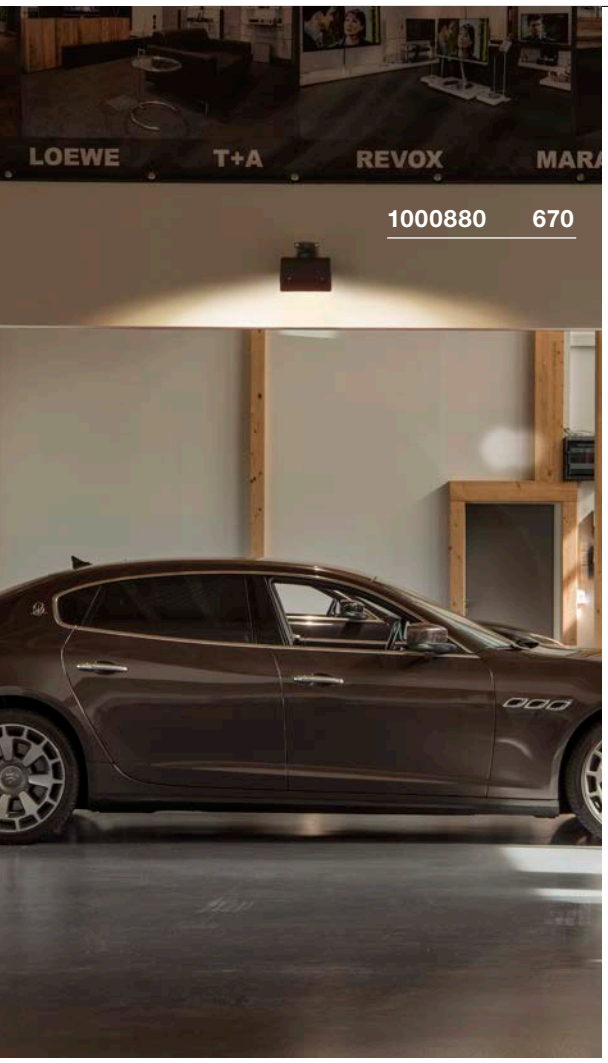



MYRA DISPLAY
WL, straight, QPAR51

892

E-A++ Spectrum A++–E









Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended accessories

Frame for surface mounting
Item no. 233214 | 16,20 GBP



Frame for surface mounting
Item no. 233215 | 16,20 GBP



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001564 | 9,90 GBP



LED GU10 4.3W 40°
2700K 365lm EEI=A++
5kWh/1000h
Item no. 560142 | 34,20 GBP



Lamp details

max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
grey	**233124**	**126,00**
GU10 | QPAR51		
anthracite	**233125**	**126,00**

MYRA DISPLAY
WL, curved, QPAR51

892

E-A++ Spectrum A++–E









Product details

220-240V ~50/60Hz
Material: Aluminium



Dimensioned drawing



Recommended accessories

Frame for surface mounting
Item no. 233214 | 16,20 GBP



Frame for surface mounting
Item no. 233215 | 16,20 GBP



Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 3.7W 36°
2700K 260lm EEI=A+
4kWh/1000h
Item no. 560122 | 29,70 GBP



Lamp details

max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
grey	**233134**	**144,00**
GU10 | QPAR51		
anthracite	**233135**	**144,00**

PHOTONIA
CL, E27

893

E-A++ Spectrum A++–E








Product details

220-240V ~50/60Hz
Material: Aluminium / Glass





Dimensioned drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP



LED E27 5W 330°
2000K 500lm EEI=A+
5kWh/1000h
Item no. 560741 | 25,20 GBP



Lamp details

max. 60W
Ø: 9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
■ anthracite	**232055**	**166,50**

MOLAT
CL, E27

891

E-A++ Spectrum A++–E






Product details

230V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

LED E27 4.8W 330°
2700K 470lm EEI=A++
5kWh/1000h
Item no. 560752 | 18,00 GBP



LED E27 4.5W 280°
2200-2700K 500lm EEI=A++
5kWh/1000h
Item no. 1002125 | 13,50 GBP




Lamp details

max. 60W
Ø: 6.5 cm max. L: 14.5 cm max.

Variant	Item no.	GBP
E27		
■ anthracite	**1000823**	**99,00**



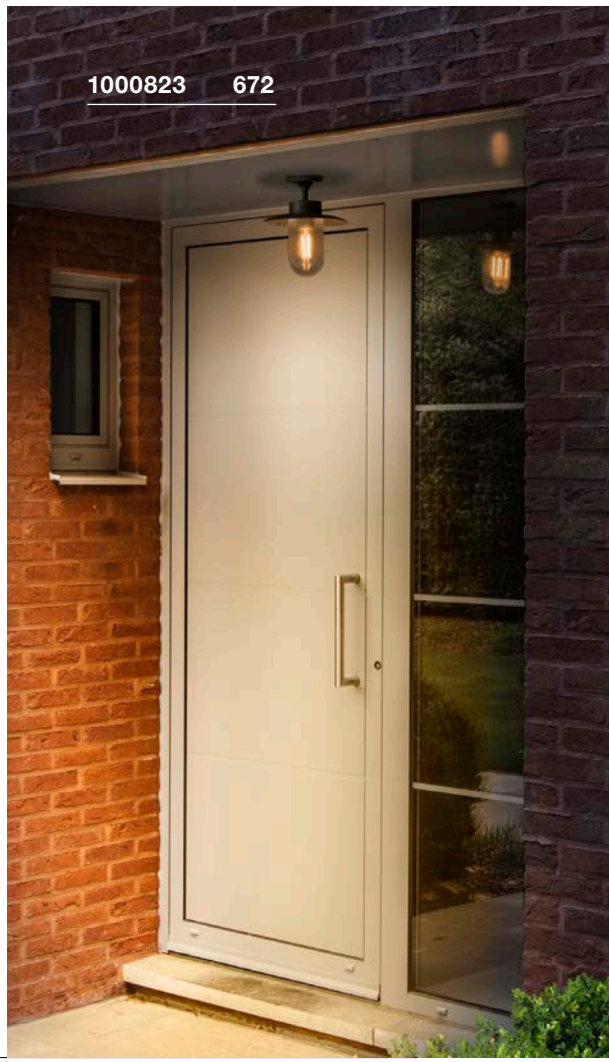



LISENNE
CL, E27

890

E-A++ Spectrum A++–E








- Basalt and smoked glass

Product details

230V ~50/60Hz
Material: Basalt / Glass

IP 44 2.6

Dimensioned drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm EEI=A+
8kWh/1000h
Item no. 1001756 | 20,70 GBP

Lamp details

max. 23W
Ø: 5.9 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
grey / brown	**231361**	**171,00**

SITRA
CL, TCR-TSE


896


B-A++ Spectrum A++–E







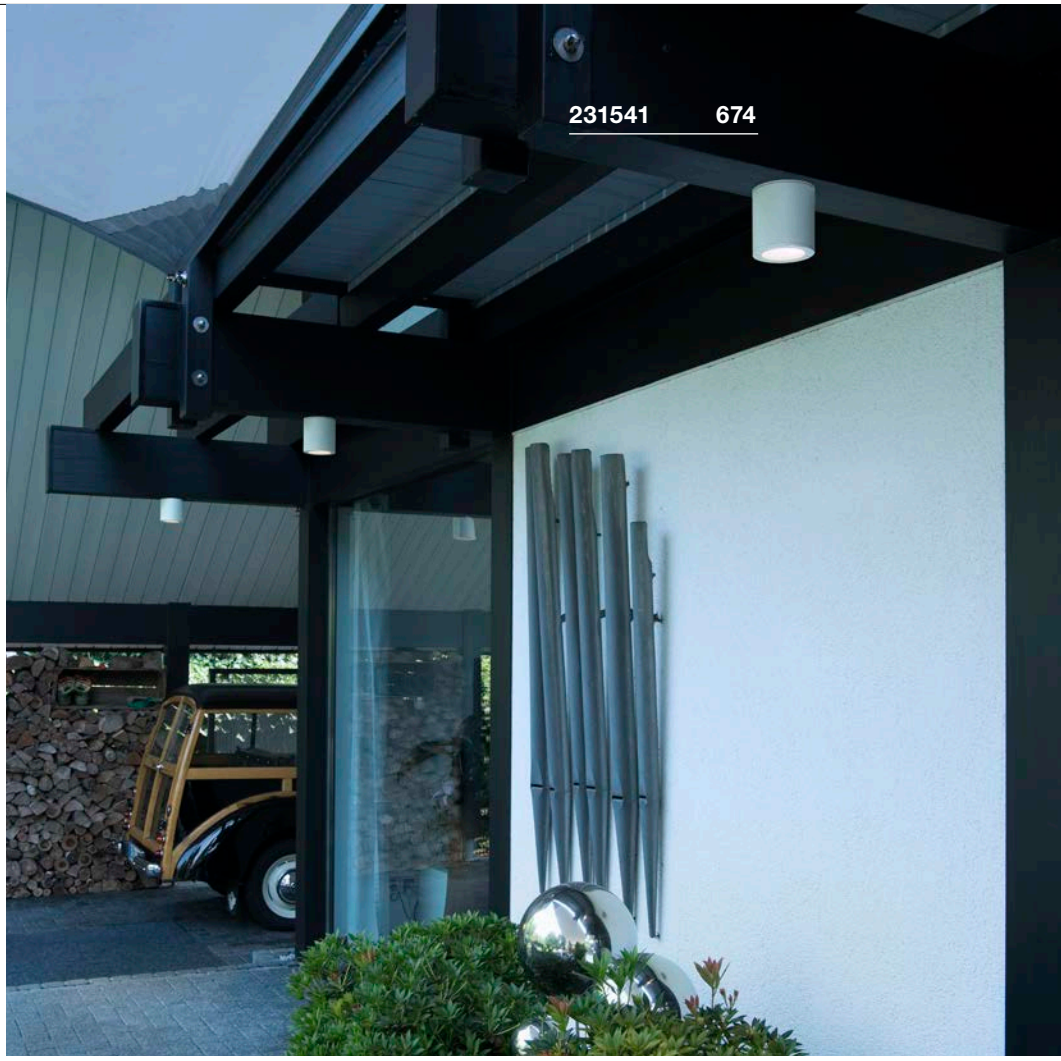

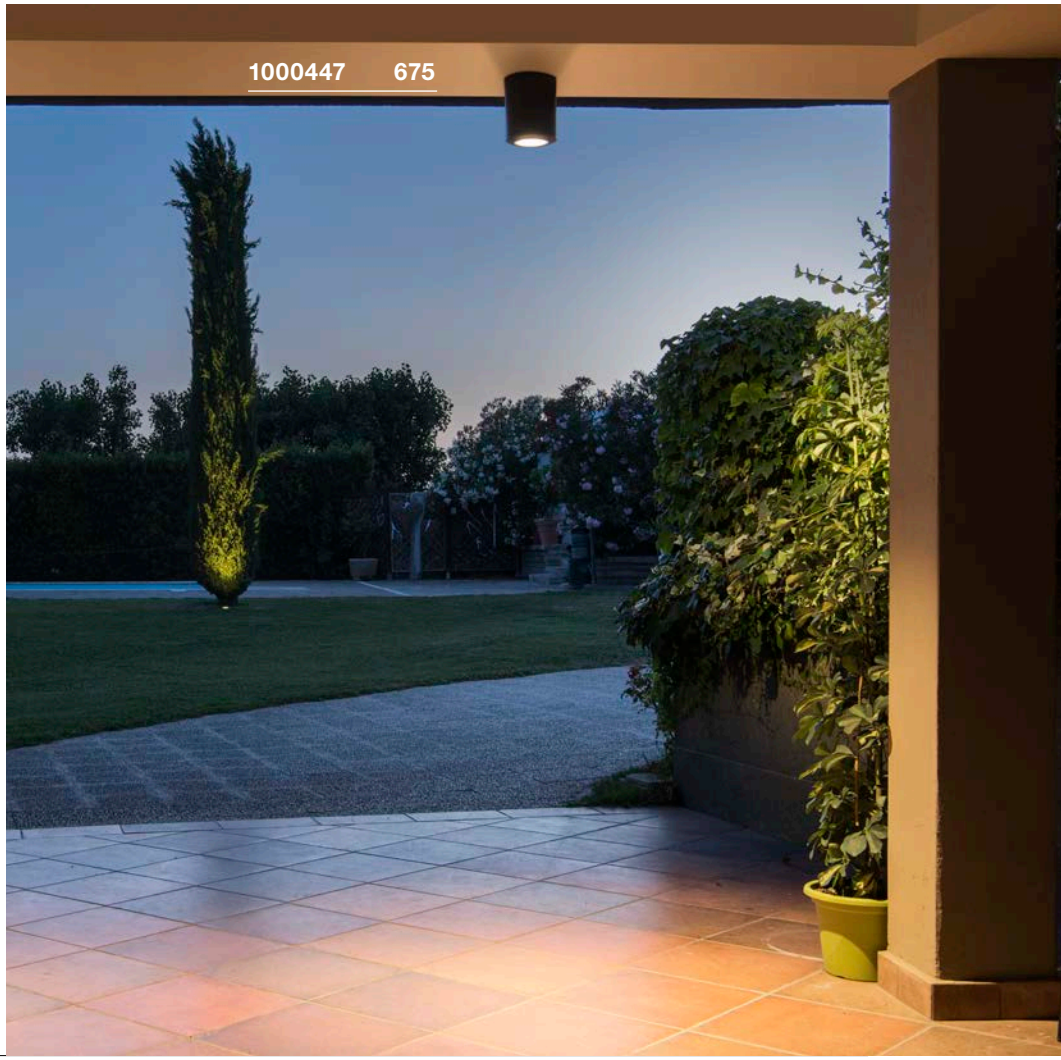


Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 0.66

Dimensioned drawing



Recommended lamp

GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 | 20,70 GBP

LED GX53 8.2W 120°
4000K 620lm EEI=A+
9kWh/1000h
Item no. 550074 | 20,70 GBP

Lamp details

max. 9W TCR-TSE
Ø: 7.5 cm max. L: 3.5 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE white	231541	72,00
GX53 | TCR-TSE anthracite	231545	72,00

ENOLA C
CL

886

A-A++ Spectrum A++–E


LED INSIDE






Product details

100-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium / Glass

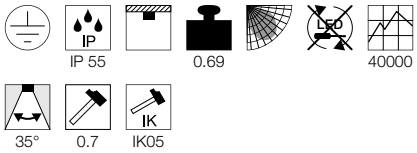

Dimensioned drawing



Variant	Item no.	
900lm | 3000K | CRI>80		
anthracite	**228505**	**180,00**

ENOLA C
CL, TRIAC

886

A-A++ Spectrum A++–E

LED INSIDE

DIM TO WARM









- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 15W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

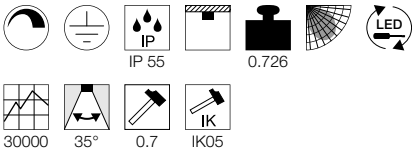

Dimensioned drawing



Variant	Item no.	GBP
725lm | 2000-3000K | CRI>90		
anthracite	**1002154**	**188,10**

POLE PARC
CL

894

A-A++ Spectrum A++–E


LED INSIDE






Product details

100-240V ~50/60Hz | 700mA
Total consumption: 28W
Material: Aluminium / Glass

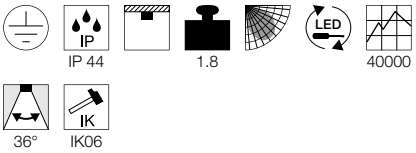

Dimensioned drawing



Variant	Item no.	GBP
2900lm | 3000K | CRI>80		
anthracite	**1000447**	**193,50**

ROX
CL, GX53

895

B-A++ Spectrum A++–E






- High-quality brushed finish

Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 0.63

Dimensioned drawing



Recommended lamp

GX53 7.5W 25°
3000K 450lm EEI=A
8kWh/1000h
Item no. 550082 | 49,50 GBP

LED GX53 7.5W 120°
4000K 620lm EEI=A+
8kWh/1000h
Item no. 1001221 | 29,70 GBP

Lamp details

max. 11W TCR-TSE
Ø: 7.5 cm max. L: 3.5 cm max.


Variant	Item no.	GBP
GX53 | TCR-TSE		
matt aluminium	1000339	126,00

ROX
CL, QPAR111

895

E-A++ Spectrum A++–E








- High-quality brushed finish

Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 0.8

Dimensioned drawing



Recommended lamp

GU10 7.9W 25°
2700K 730lm EEI=A+
8kWh/1000h
Item no. 560702 | 20,70 GBP

LED GU10 9W 25°
2700-6500K 765lm EEI==A+
9kWh/1000h
Item no. 1001920 | 49,50 GBP

Lamp details

max. 50W QPAR111

Variant	Item no.	GBP
GU10 | QPAR111		
brushed aluminium	1000332	99,00

ROX ACRYL
CL, E27

895

A-A++ Spectrum A++–E






- High-quality brushed finish

Product details

230V ~50Hz
Material: Aluminium / Acrylic

IP 44 0.85

Dimensioned drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm EEI=A+
10kWh/1000h
Item no. 560402 | 15,30 GBP

LED E27 9W 240°
2700-6500K 806lm EEI=A+
9kWh/1000h
Item no. 1001916 | 40,50 GBP

Lamp details

max. 20W
Ø: 6 cm max. L: 15 cm max.

Variant	Item no.	GBP
E27		
matt aluminium	1000338	126,00





SQUARE C
CL, E27

896

A-A++ Spectrum A⁺⁺–E






- Luminaire made from high-quality 316 stainless steel
- Modern design
- Diffuse light distribution for homogeneous basic lighting

Product details

220-240V ~50/60Hz
Material: Stainless Steel 304

IP 44 | 0.969 | 0.2 | IK02

Dimensioned drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm EEI=A++
7kWh/1000h
Item no. 1002124 | 9,90 GBP

LED E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

Lamp details

max. 20W
Ø: 7 cm max. L: 13 cm max.

Variant	Item no.	GBP
E27		
Stainless steel	**1000337**	**171,00**

SQUARE
CL, TRIAC

896

A-A++ Spectrum A⁺⁺–E

LED INSIDE






Product details

220-240V ~50/60Hz
Total consumption: 12W
Material: Stainless Steel 316
Dimmable: Triac C, Triac L

IP 44 | 1.434 | LED | 30000 | 0.2 | IK02

Dimensioned drawing



Variant	Item no.	GBP
760lm | 3000K | CRI>80		
Stainless steel	**1000835**	**188,10**

THEO
CL, QPAR51

897

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 21 | 0.5

Dimensioned drawing



Recommended lamp

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001561 | 9,90 GBP



LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001564 | 9,90 GBP



Lamp details

max. 35W QPAR51
Ø: 5 cm max. L: 6.8 cm max.

Variant	Item no.	GBP
GU10 | QPAR51 white	229581	49,50
GU10 | QPAR51 grey / transparent	229584	49,50
GU10 | QPAR51 anthracite	229585	49,50

BIG THEO
CL

885

A-A++ Spectrum A++–E

LED INSIDE








Product details

100-277V ~50/60Hz | 500mA
Total consumption: 21W
Material: Aluminium / Glass

IP 44 | 1.3 | LED | 30000 | 24° | 0.2 | IK02

Dimensioned drawing




BIG THEO
CL, QPAR111

884

E-A++ Spectrum A++–E








Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 1

Dimensioned drawing



Recommended lamp

GU10 7W 13°
3000K 660lm EEI==A+
8kWh/1000h
Item no. 1001568 | 20,70 GBP




LED GU10 7.9W 40°
4000K 760lm EEI=A+
8kWh/1000h
Item no. 560734 | 20,70 GBP


Lamp details

max. 75W QPAR111

Variant	Item no.	GBP
2000lm | 3000K | CRI>80 white	234531	162,00
2000lm | 3000K | CRI>80 grey / transparent	234534	162,00
2000lm | 3000K | CRI>80 anthracite	234535	162,00

Variant	Item no.	GBP
GU10 | QPAR111 white	229551	99,00
GU10 | QPAR111 grey / transparent	229554	99,00
GU10 | QPAR111 anthracite	229555	99,00

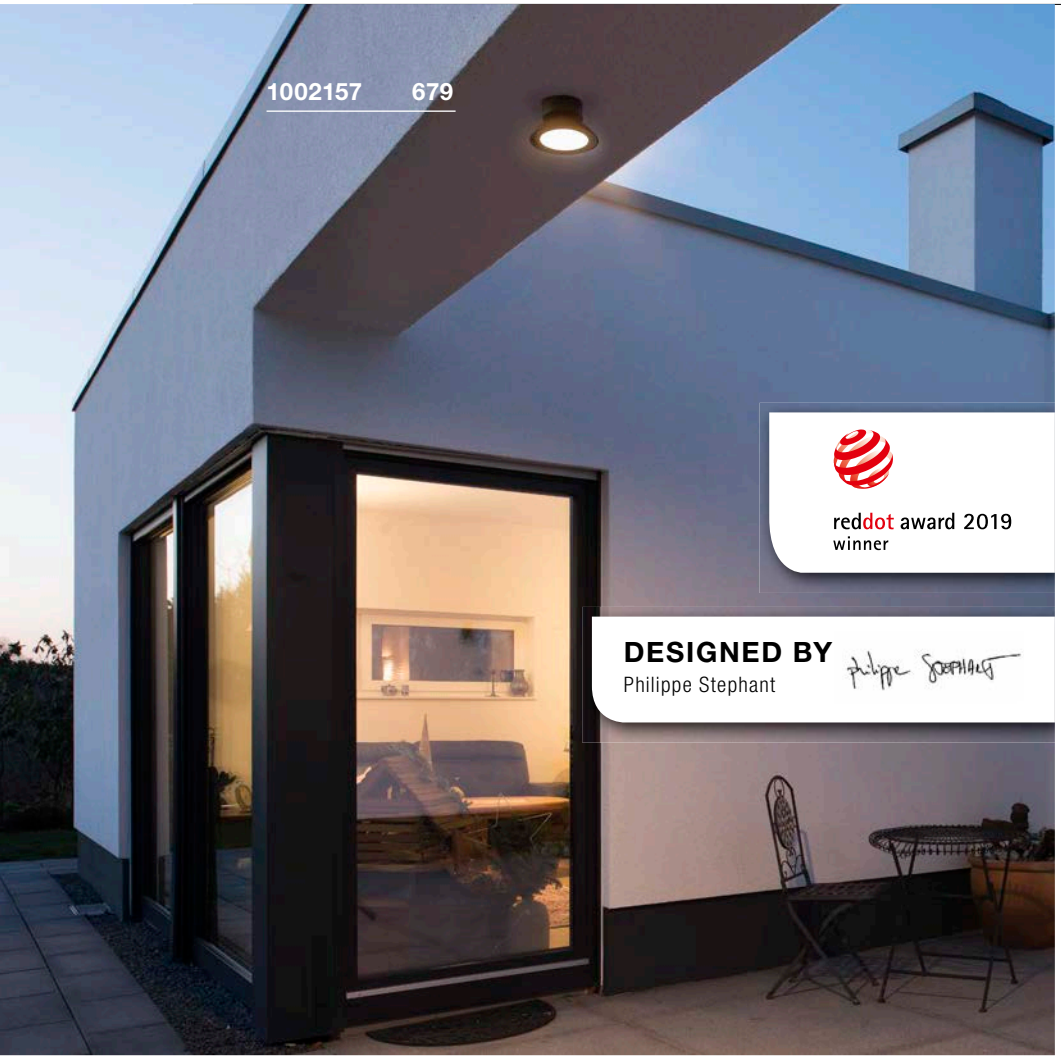

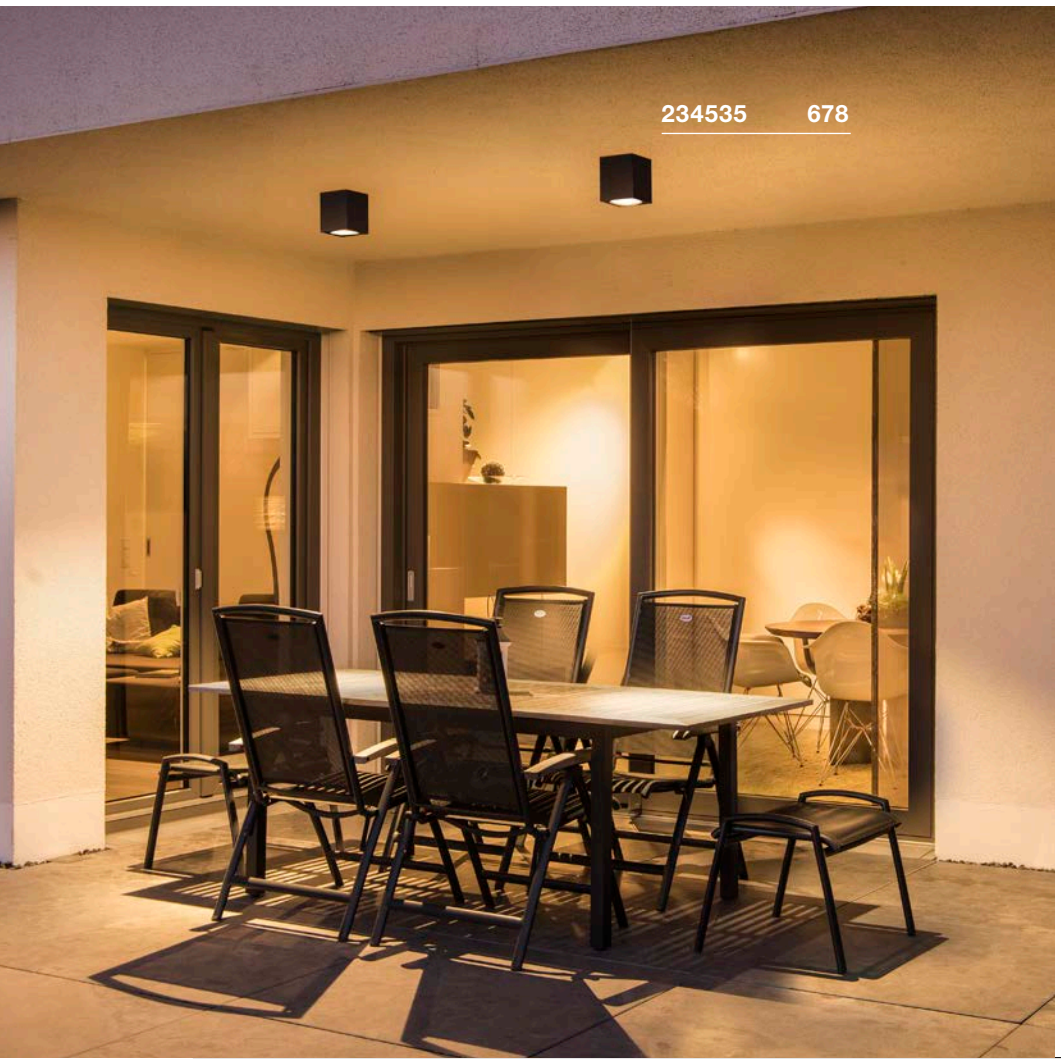

MALU
CL

890

A-A++ Spectrum A⁺⁺–E

LED INSIDE

reddot award 2019
winner









- Unusual design
- Homogeneous illumination

Product details

220-240V ~50/60Hz
Total consumption: 9.2W
Material: Aluminium / Glass

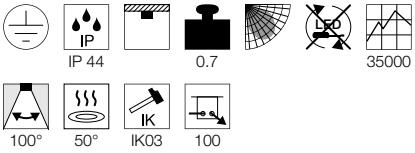

Dimensioned drawing



Variant	Item no.	GBP
360lm | 3000K | CRI>80		
anthracite	**1002157**	**153,00**

AINOS
CW

A-A++ Spectrum A⁺⁺–E


LED INSIDE






Product details

100-277V ~50/60Hz | 500mA
Total consumption: 21W
Material: Aluminium / Polycarbonate (PC)

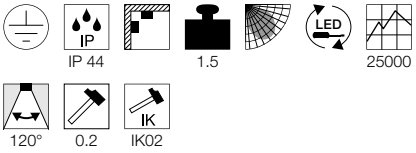

Dimensioned drawing



Variant	Item no.	GBP
1430lm | 3000K | CRI>80		
white	229961	117,00
1430lm | 3000K | CRI>80		
anthracite	229965	117,00

AINOS
CW Sensor

A-A++ Spectrum A⁺⁺–E

LED INSIDE

MR









- Motion sensor with microwave technology integrated into the luminaire housing

Product details

100-277V ~50/60Hz | 500mA
Total consumption: 22W
Material: Aluminium / Polycarbonate (PC)

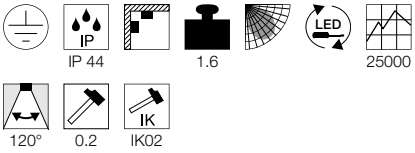

Dimensioned drawing



Note


Motion sensor: The detection angle of the sensor is 360°. The detection distance, switch-on ambient brightness and switch-on delay are adjustable.


Variant	Item no.	GBP
1430lm | 3000K | CRI>80		
white	229971	153,00
1430lm | 3000K | CRI>80		
anthracite	229975	153,00







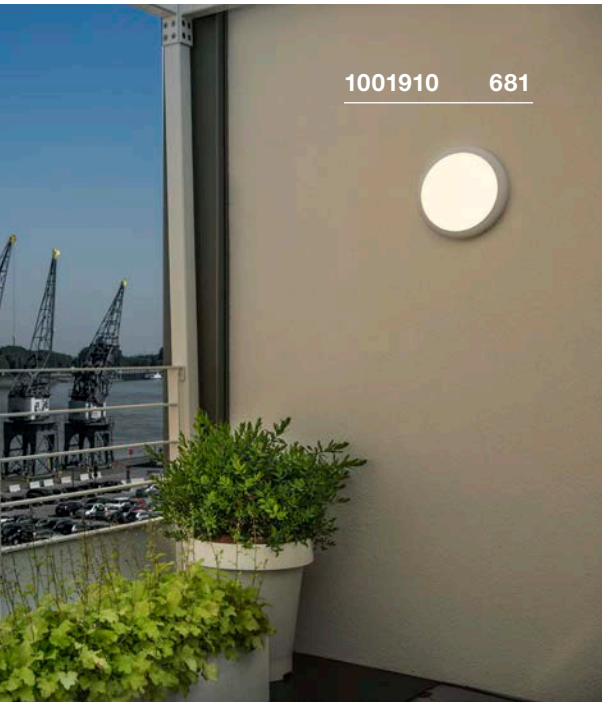

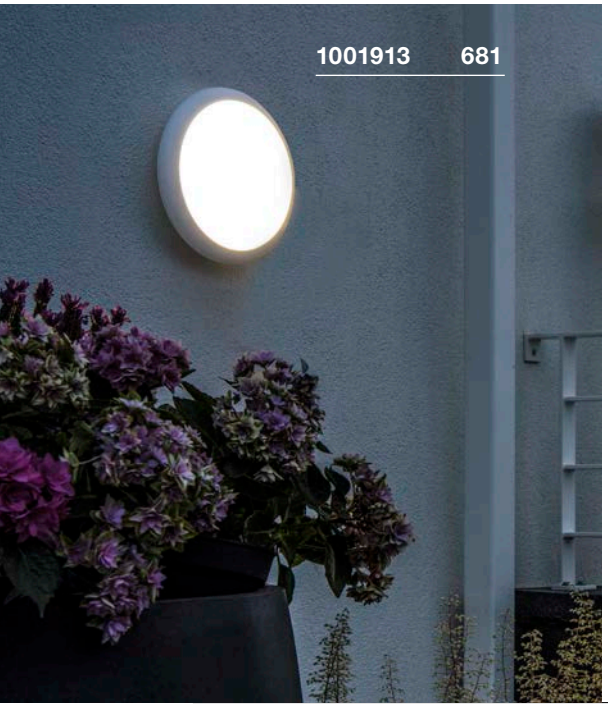

RUBA 10/16/20
CW

A-A++ Spectrum A++–E


LED INSIDE




- CCT 3000K or 4000K selectable using switch
- The light colour can be set using a switch during installation

Product details

220-240V ~50/60Hz | 600mA
Material: Polycarbonate (PC)

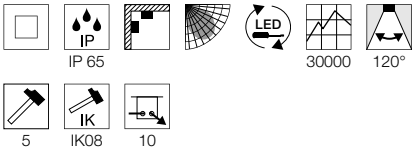

Dimensioned drawing



Variant	Item no.	GBP
1050lm | 3000/4000K | CRI>80 | 13W Ø: 27 cm | 0.8 kg white	**1001909**	**99,00**
2230lm | 3000/4000K | CRI>80 | 24W Ø: 42 cm | 1.1 kg white	**1001910**	**189,00**
2500lm | 3000/4000K | CRI>80 | 27W Ø: 52 cm | 1.6 kg white	**1001911**	**216,00**

RUBA 10/16/20
CW, Sensor

A-A++ Spectrum A++–E

LED INSIDE


MR




- CCT 3000K or 4000K selectable using switch
- The light colour can be set using a switch during installation
- Motion sensor with microwave technology integrated into the luminaire housing

Product details

220-240V ~50/60Hz | 700mA
Material: Polycarbonate (PC)

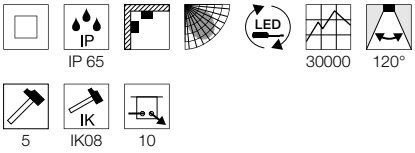

Dimensioned drawing



Variant	Item no.	GBP
1050lm | 3000/4000K | CRI>80 | 13W Ø: 27 cm | 0.8 kg white	**1001912**	**126,00**
2230lm | 3000/4000K | CRI>80 | 24W Ø: 42 cm | 1.1 kg white	**1001913**	**216,00**
2500lm | 3000/4000K | CRI>80 | 27W Ø: 52 cm | 1.6 kg white	**1001914**	**252,00**

BULAN GRID
CW, E27

E-A++ Spectrum A++–E








- Simple design for a wide range of application areas

Product details
230V ~50Hz
Material: Aluminium / Polycarbonate (PC)



Dimensioned drawing



Recommended lamp

E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP

LED E27 15W 240°
3000K 1521lm EEI=A+
15kWh/1000h
Item no. 1001033 | 25,20 GBP


Lamp details
2x max. 25W
Ø: 5.2 cm max. L: 17.3 cm max.

Variant	Item no.	GBP
E27		
white	229081	49,50
E27		
grey / matt transparent	229084	49,50
E27		
anthracite	229085	49,50

BULAN
CW, E14

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp


LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP


Lamp details
max. 60W C35
Ø: 4.8 cm max. L: 13 cm max.

Variant	Item no.	GBP
E14 | C35		
white	229071	49,50
E14 | C35		
grey / transparent	229072	49,50
E14 | C35		
anthracite	229075	49,50





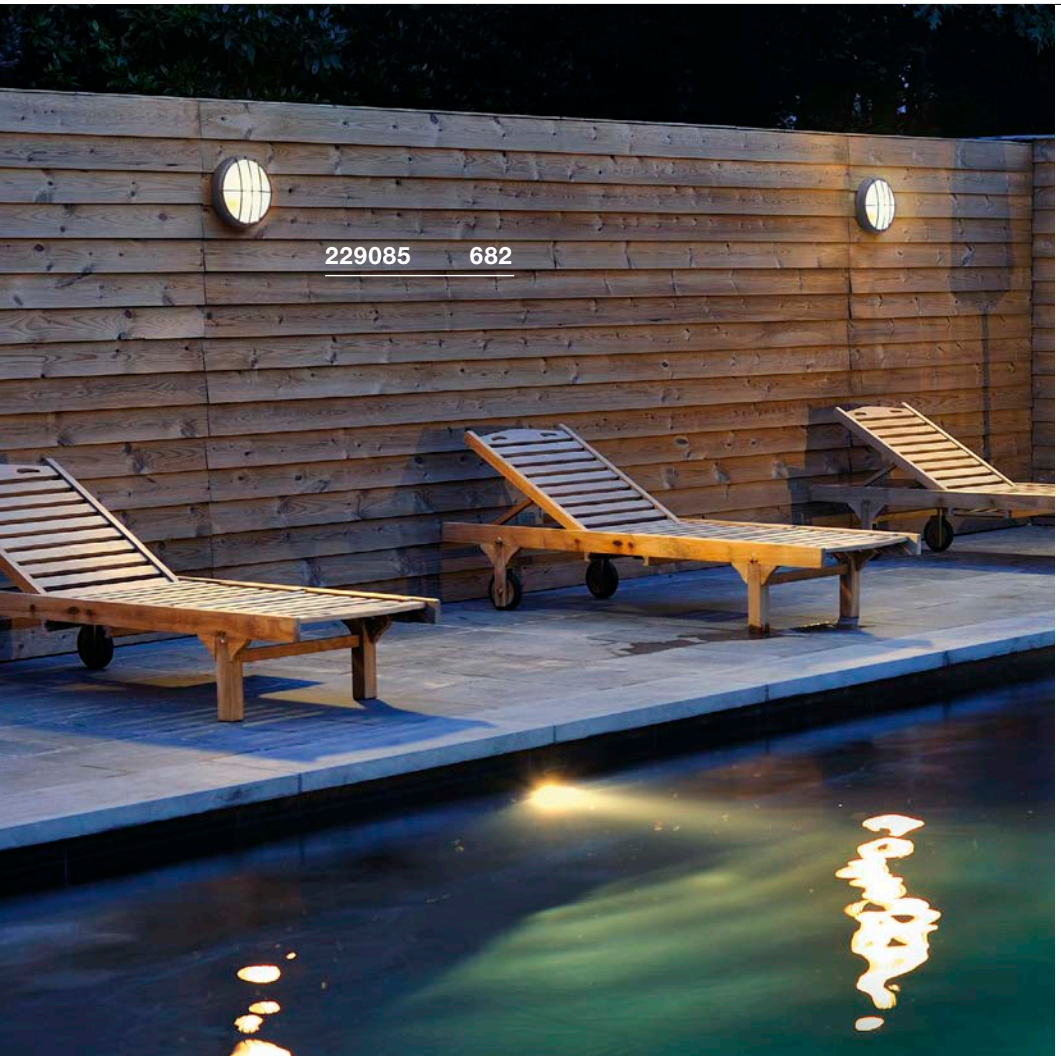

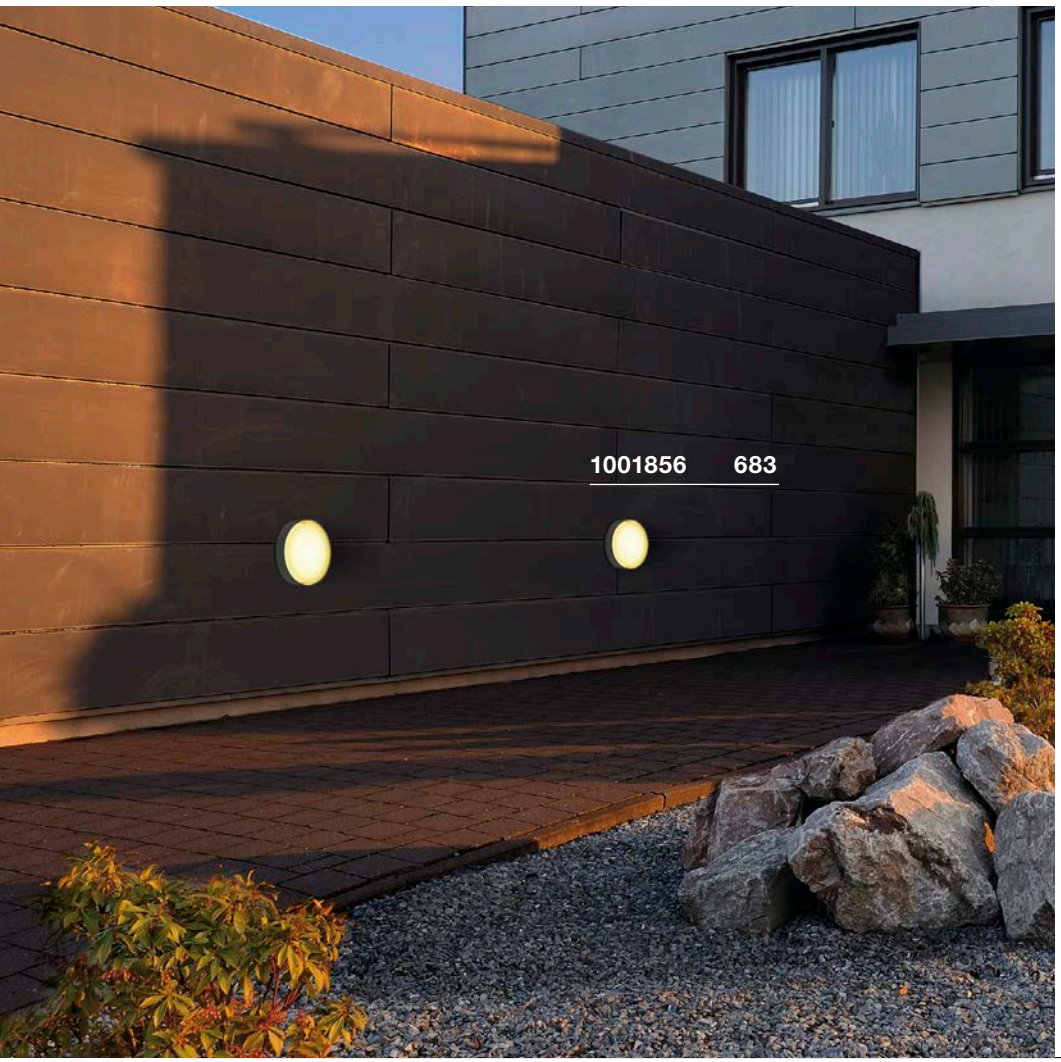

LIPA
CW, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- Colour temperature 3000K or 4000K selectable using switch
- Unusual design

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 24W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

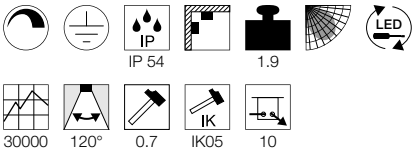

Dimensioned drawing



Variant	Item no.	GBP
1600lm | 3000/4000K | CRI>80		
white	**1001855**	**224,10**
1500lm | 3000/4000K | CRI>80		
anthracite	**1001856**	**224,10**

TERANG 200
CW

A-A++ Spectrum A++–E

LED INSIDE









- 240V LED

Product details
220-240V ~50Hz
Total consumption: 11W
Material: Aluminium / Polycarbonate (PC)

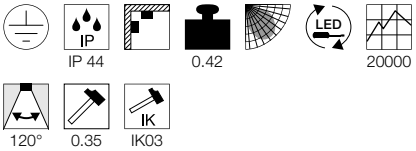

Dimensioned drawing



Variant	Item no.	GBP
680lm | 3000K | CRI>80		
white	229931	58,50
680lm | 3000K | CRI>80		
anthracite	229935	58,50

TERANG 270
CW

A-A++ Spectrum A++–E

LED INSIDE









- 240V LED

Product details
220-240V ~50Hz
Total consumption: 22W
Material: Aluminium / Polycarbonate (PC)

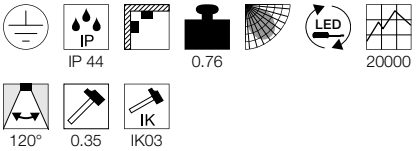

Dimensioned drawing



Variant	Item no.	GBP
1300lm | 3000K | CRI>80		
white	229941	76,50
1300lm | 3000K | CRI>80		
anthracite	229945	76,50

TERANG 270
CW, Sensor

A-A++ Spectrum A++–E

LED INSIDE

MR









- 240V LED
- Motion sensor with microwave technology integrated in the luminaire housing

Product details
220-240V ~50Hz
Total consumption: 23W
Material: Aluminium / Polycarbonate (PC)

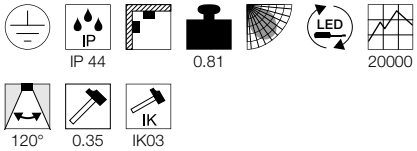

Dimensioned drawing



Note
Motion sensor: The detection angle of the sensor is 360°. The detection distance, switch-on ambient brightness and switch-on delay can be adjusted.

Variant	Item no.	GBP
1300lm | 3000K | CRI>80		
white	229951	112,50
1300lm | 3000K | CRI>80		
anthracite	229955	112,50



229955 684


1001316 687

IMPERVA 120
CW

A-A++ Spectrum A++–E

LED INSIDE









- High IP protection class
- Extremely hard-wearing luminaire housing

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 40W
Material: Polycarbonate (PC)

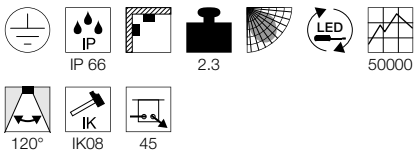

Dimensioned drawing



Note

Suspension chain not included

Variant	Item no.	GBP
4200lm | 3000K | CRI>80		
grey	**1001314**	**135,00**
4600lm | 4000K | CRI>80		
grey	**1001315**	**135,00**

IMPERVA 150
CW

A-A++ Spectrum A++–E

LED INSIDE









- High IP protection class
- Extremely hard-wearing luminaire housing

Product details

220-240V ~50/60Hz | 1050mA
Total consumption: 55W
Material: Polycarbonate (PC)

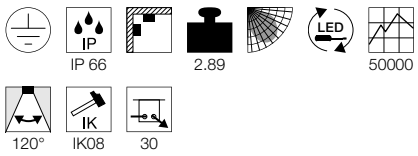

Dimensioned drawing



Note

Suspension chain not included

Variant	Item no.	GBP
6600lm | 3000K | CRI>80		
grey	**1001316**	**180,00**
7100lm | 4000K | CRI>80		
grey	**1001317**	**180,00**

ALMINO
PD, quad, UGR<19

883

A-A++ Spectrum A++–E

LED INSIDE









- Extremely suitable for industrial areas, warehouse and logistical areas
- Efficient basic lighting with limited direct glare, UGR<19
- Extremely hard-wearing housing

Product details

220-240V ~50/60Hz | 1200mA
Total consumption: 190W
Material: Steel / Polycarbonate (PC)

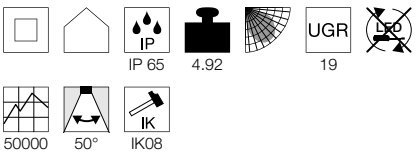

Dimensioned drawing



Recommended accessories

Suspension set 3m
Item no. 1002196 | 40,50 GBP

Installation bracket
Item no. 1002197 | 14,90 GBP

Variant	Item no.	GBP
24000lm | 4000K | CRI>80		
grey / white	**1002194**	**503,10**

NAUTILUS 25 CL

892

A-A++ Spectrum A++–E


NEW










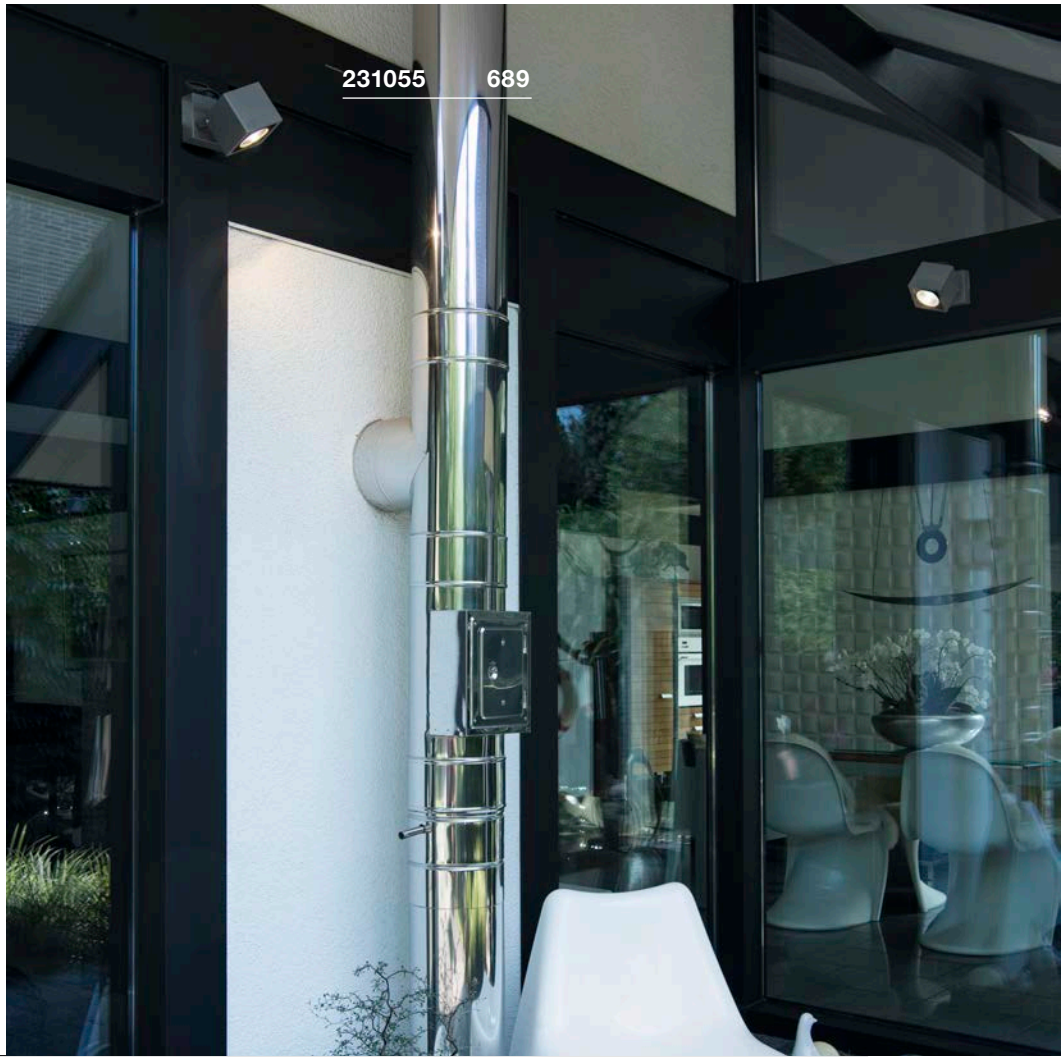


Product details

220-240V ~50/60Hz
Material: Aluminium



IP 54 | 0.7 | 0.2 | IK02

Dimensioned drawing



Recommended accessories

■ Installation plate
Item no. 1002884 |4,00 GBP



Lamp details

max. 11W
Ø: 5 cm max. L: 8.3 cm max.

Variant	Item no.	GBP
GU10		
■ matt black	**1002867** NEW	**49,50**

NAUTILUS
WL, square

892

A-A++ Spectrum A++–E

LED INSIDE








Product details

100-240V ~50/60Hz | 700mA
Total consumption: 9W
Material: Aluminium / Glass

IP 54 | 0.85 | LED | 30000

180° | 90° | 45°

Dimensioned drawing



Variant	Item no.	GBP
520lm | 3000K | CRI>80		
anthracite	231045	135,00

NAUTILUS 10
WL, square

892

A-A++ Spectrum A++–E

LED INSIDE








Product details

100-277V ~50/60Hz | 350mA
Total consumption: 17W
Material: Aluminium / Glass

IP 54 | 1.45 | LED | 30000

180° | 90° | 25°

Dimensioned drawing



Variant	Item no.	GBP
950lm | 3000K | CRI>80		
anthracite	231055	197,10

ESKINA SPOT/ SPOT SENSOR
CW

886

A-A++ Spectrum A++–E

LED INSIDE

NEW

IR







- Switchable light colour
- 1002904 with infrared motion sensor


Product details

220-240V ~50/60Hz | 350mA
Total consumption: 14.5W
Material: Aluminium
Dimmable: Triac C

IP 54 | 1.22 | LED

95° | 0.2 | IK | IK02

Dimensioned drawing



Note

Item no. 1002904 – Motion sensor: Detection angle: 100° detection distance: max. 10 m
The switch-on ambient brightness and switch-on delay can be adjusted.

Variant	Item no.	GBP
1000lm | 3000/4000K | CRI>80		
matt anthracite	1002903	189,00
1000lm | 3000/4000K | CRI>80		
matt anthracite	1002904	207,00


SITRA 360
CW, TCR-TSE

896


B-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

GX53 3W 120°
3000K 250lm EEI=A++
3kWh/1000h
Item no. 551372 |20,70 GBP



LED GX53 8.2W 120°
4000K 620lm EEI=A+
9kWh/1000h
Item no. 550074 |20,70 GBP

Lamp details
max. 9W TCR-TSE
Ø: 7.5 cm max. L: 3.5 cm max.

Variant	Item no.	GBP
GX53 | TCR-TSE		
anthracite	231515	60,30

MYRA
CW, single, QPAR51

892

E-A++ Spectrum A++–E








Product details
230V ~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Note
Adapter frame available for surface mounting

Recommended accessories

Frame for surface mounting
Item no. 233214 |16,20 GBP



Frame for surface mounting
Item no. 233215 |16,20 GBP



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm EEI=A+
8kWh/1000h
Item no. 1001565 |9,90 GBP



LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 |9,90 GBP



Lamp details
max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
grey / transparent	233104	81,00
GU10 | QPAR51		
anthracite	233105	81,00

MYRA
WL, double, QPAR51

892

E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium / Glass



Dimensioned drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 |15,30 GBP



LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 |9,90 GBP



Lamp details
2x max. 50W QPAR51
Ø: 5 cm max. L: 5.7 cm max.

Variant	Item no.	GBP
GU10 | QPAR51		
grey / transparent	233094	153,00
GU10 | QPAR51		
anthracite	233095	153,00





HELIA
CW, single, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE







- 240V LED


Product details

220-240V ~50/60Hz
Total consumption: 8W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
450lm | 3000K | CRI>80		
anthracite	233245	153,00
450lm | 3000K | CRI>80		
white	233241	153,00

HELIA
CW, double, TRIAC

888

A-A++ Spectrum A++–E

LED INSIDE







- 240V LED


Product details

220-240V ~50/60Hz
Total consumption: 16W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L





Dimensioned drawing



Variant	Item no.	GBP
900lm | 3000K | CRI>80		
anthracite	233255	269,10
900lm | 3000K | CRI>80		
white	233251	269,10



TOUGH COOKIE.

RECESSED FITTINGS – THE RELIABLE WAY OF LIGHTING.

Recessed fittings are a good alternative to suspended luminaires, particularly in the outdoor area, since they are individually adjustable and can be set, directed and flooded statically. And they are equipped to cope with any weather. Thanks to high-quality workmanship and materials and individual IP protection classes.


228412 722




227604 719


RECESSED FITTING



Other luminaires and variants can be found online at www.slv.com

RECESSED WALL LIGHTS

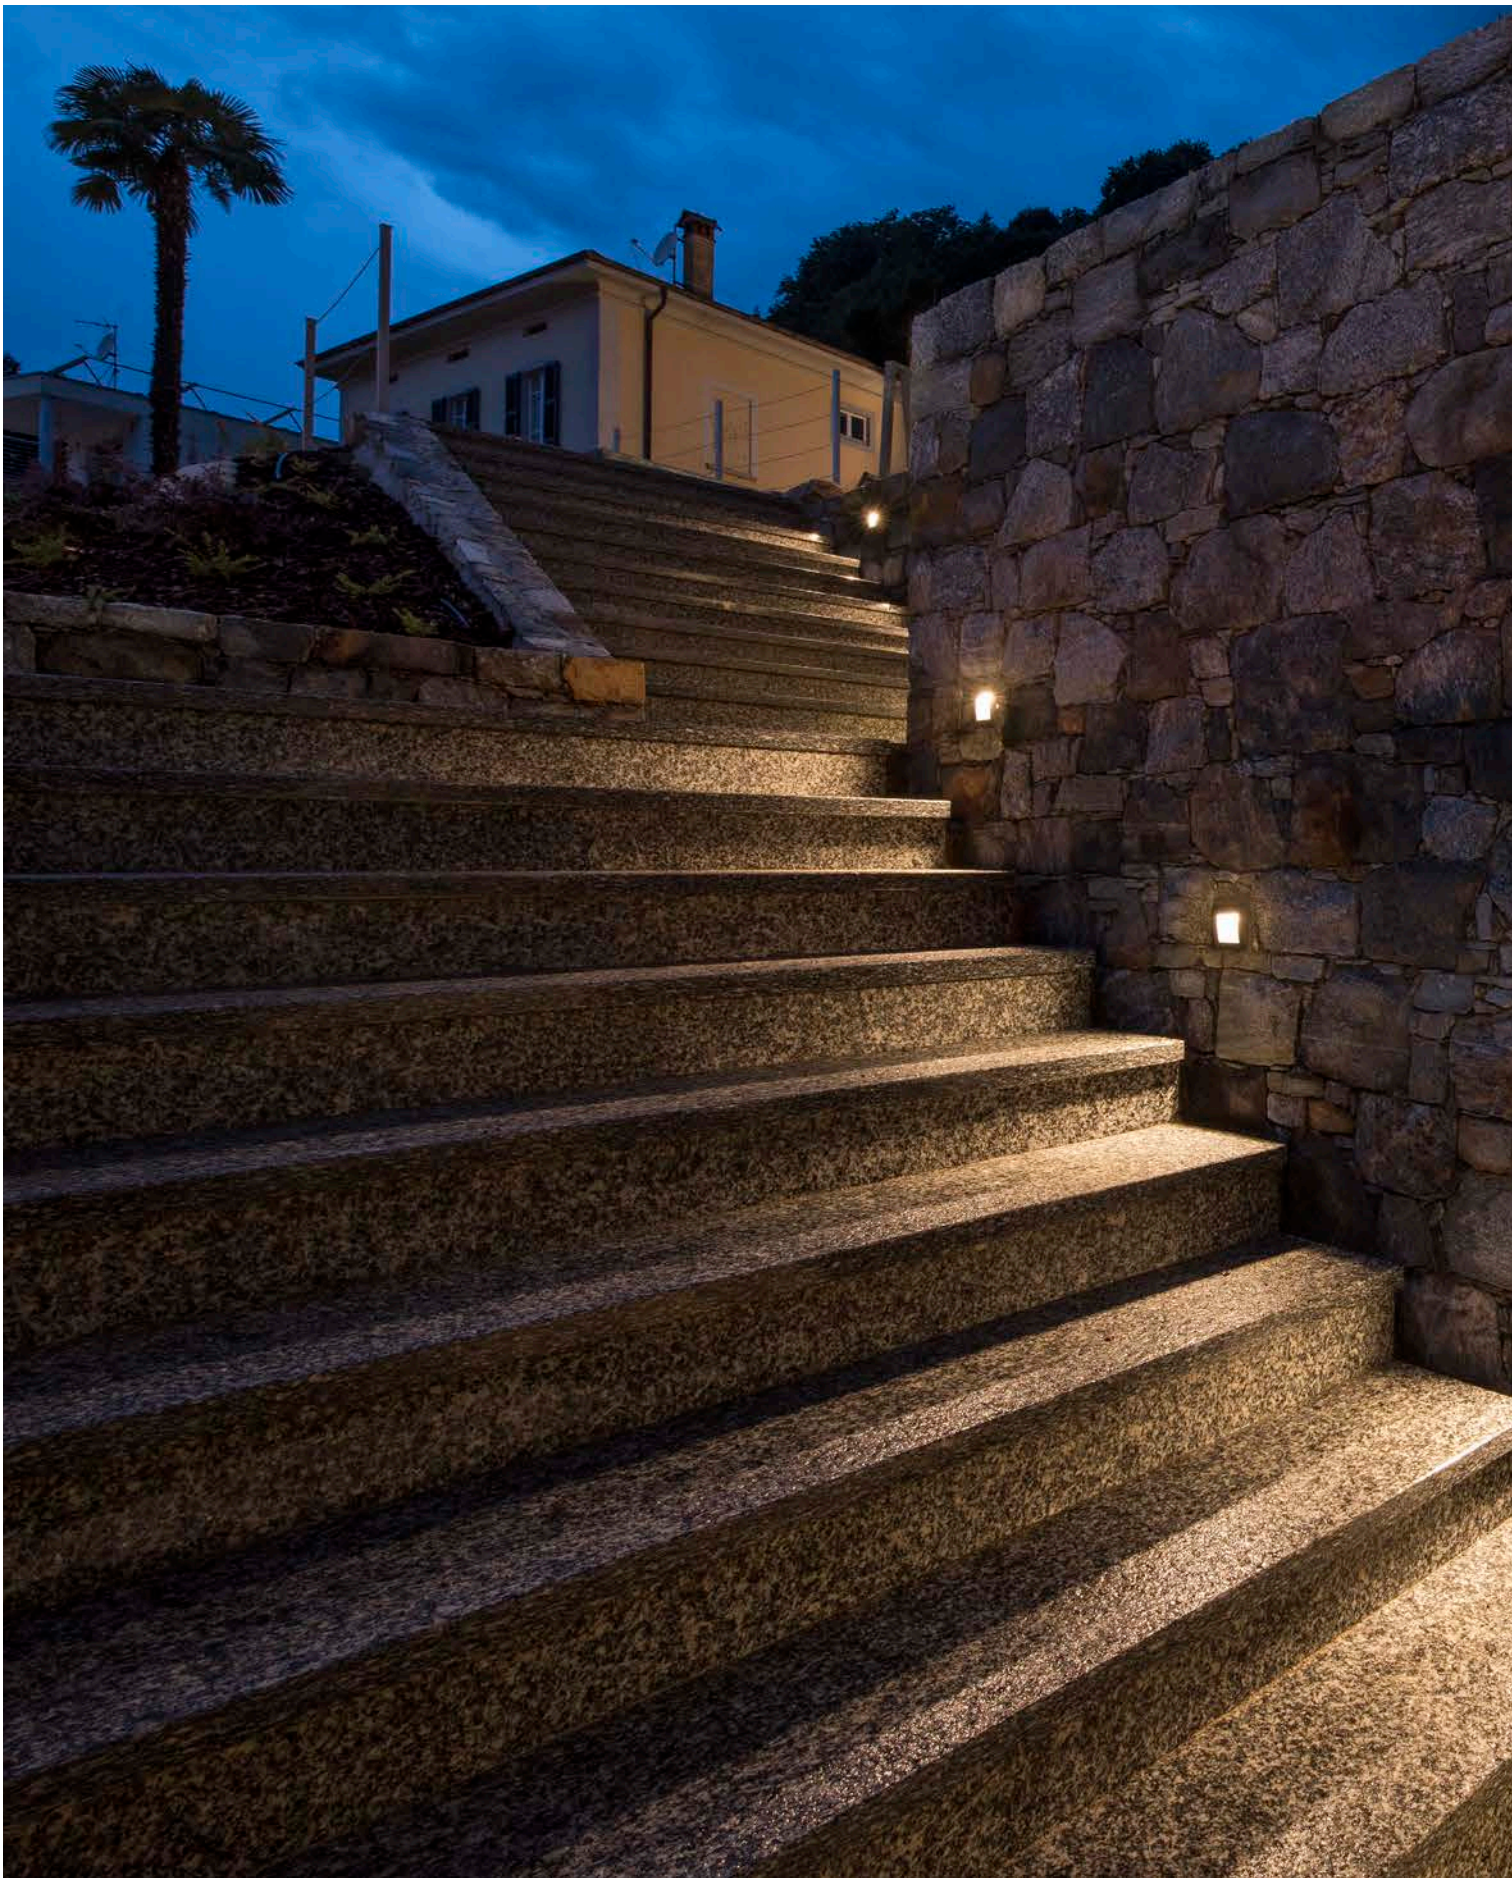

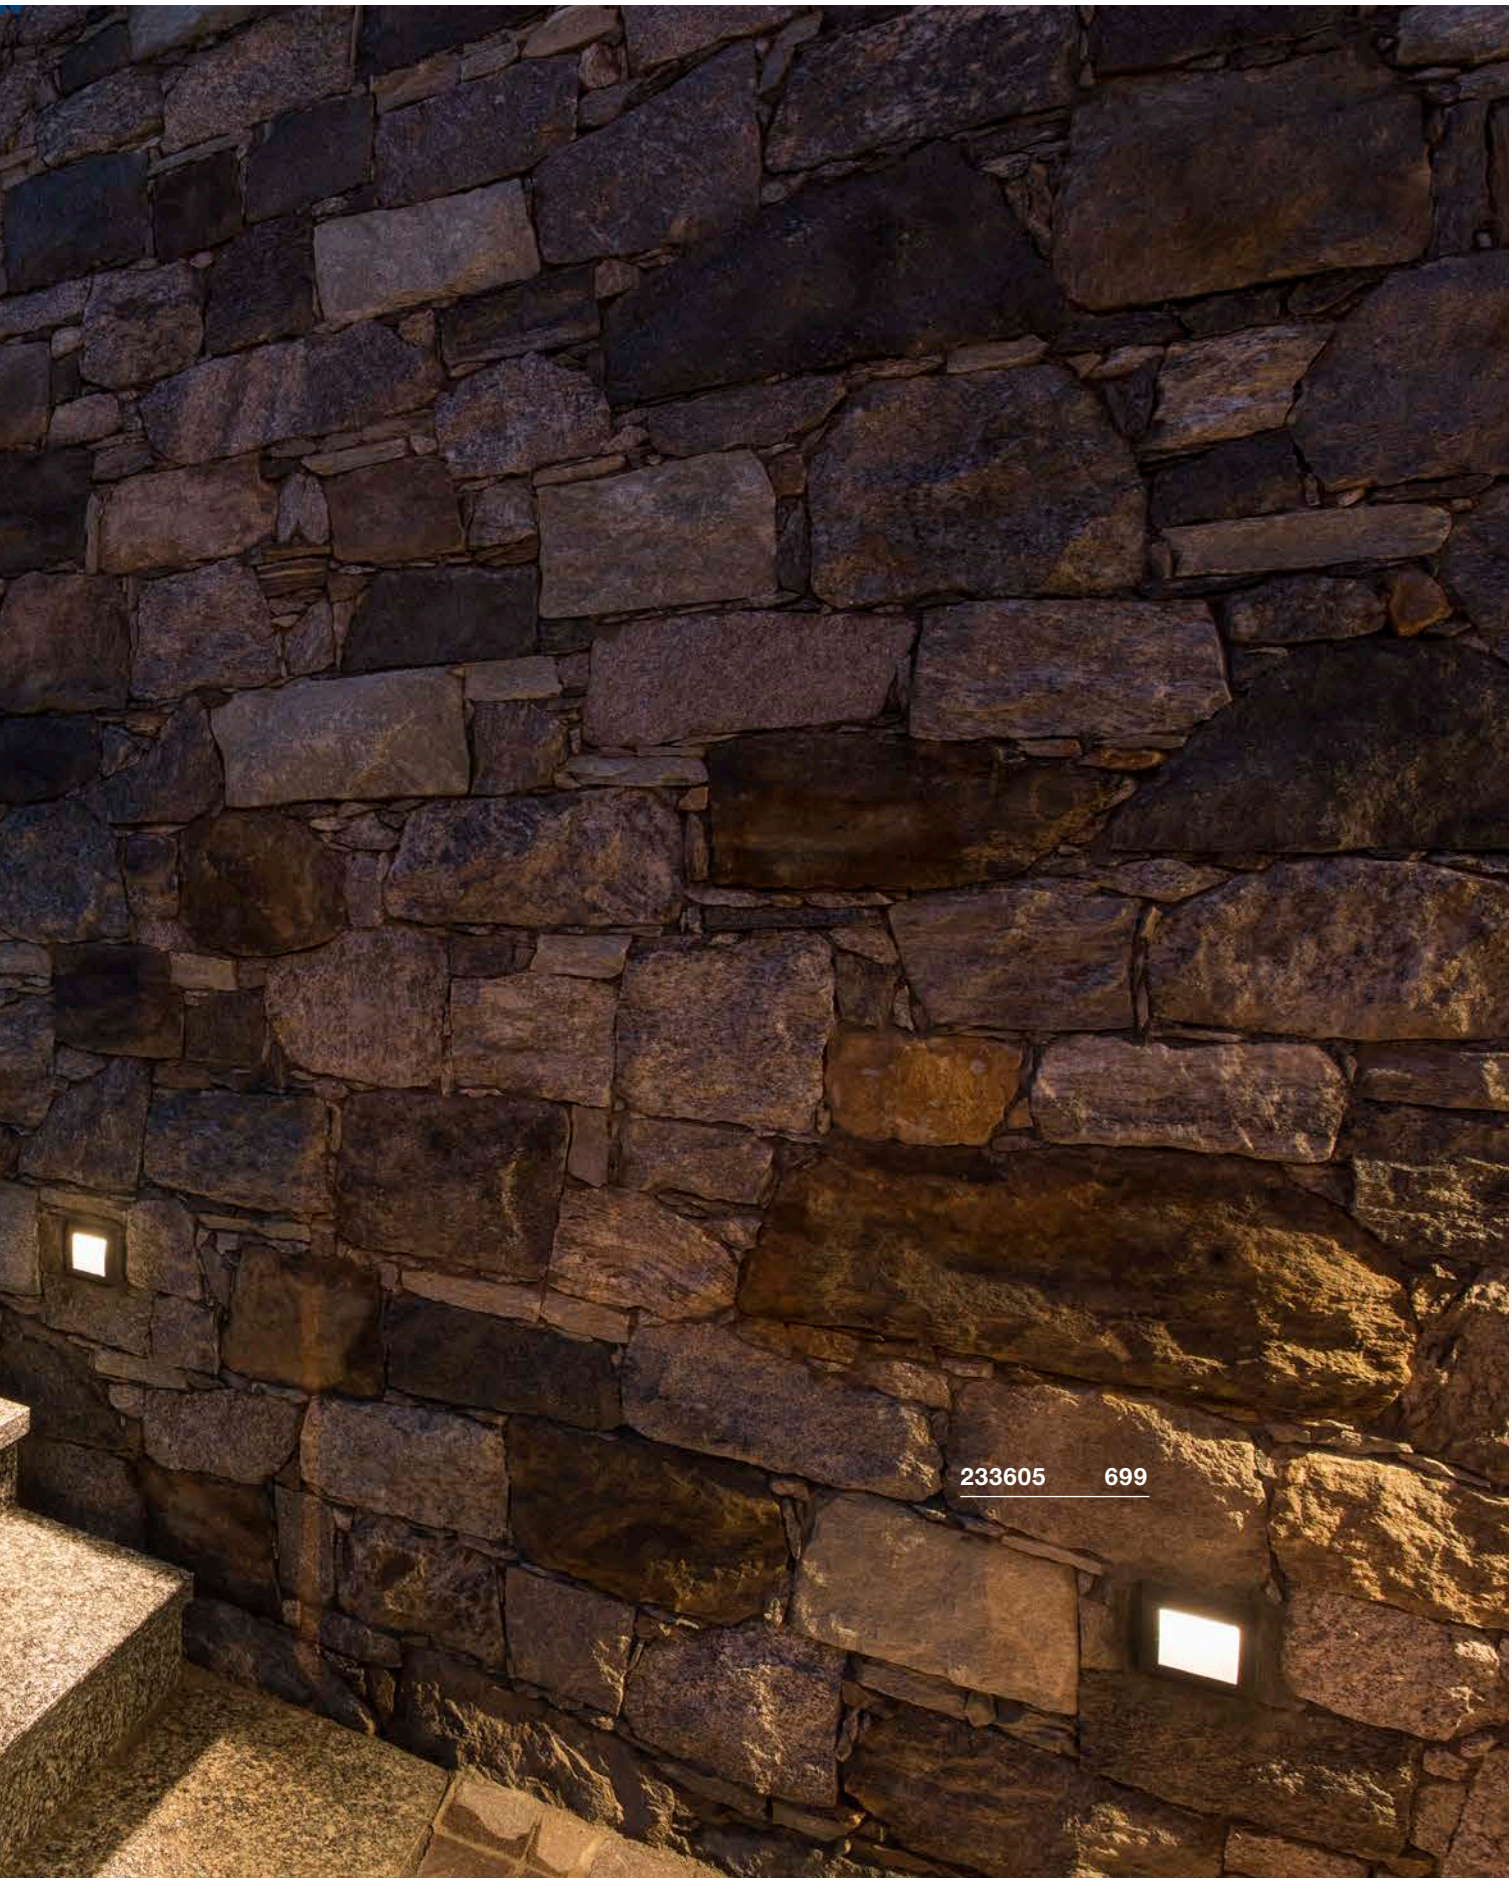
233605 699

BRICK DOWNUNDER
EL, E14

E-A++ Spectrum A++–E




Product details

230V ~50Hz
Material: Aluminium / Glass

IP 44 | 0.6

Dimensioned drawing



Note

No mounting pot needed.

Recommended lamp

E14 3.4W 260°
3000K 250lm EEI=A+
4kWh/1000h
Item no. 560362 | 5,90 GBP

LED E14 6.5W 280°
3000K 480lm EEI=A+
7kWh/1000h
Item no. 560372 | 13,50 GBP

Lamp details

max. 40W C35
Ø: 4.3 cm max. L: 12 cm max.

Variant	Item no.	GBP
E14 | C35		
grey / transparent	229062	31,50

BRICK DOWNUNDER
EL

A-A++ Spectrum A++–E

LED INSIDE








Product details

230V ~50Hz
Total consumption: 1.4W
Material: Aluminium / Glass

IP 54 | 0.8 | LED | 20000

Dimensioned drawing



Note

Mounting pot incl.

Variant	Item no.	GBP
30lm | 3000K | CRI>80		
grey / transparent	229702	49,50






DOWNUNDER OUT S
EL

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 20mA
Total consumption: 1.7W
Material: Aluminium / Plastic



Dimensioned drawing



Note

Always install the luminaires with the light outlet pointing downwards. Max. connecting cable diameter 8.5 mm.
Mounting pot incl.

Variant	Item no.	GBP
40lm | 3000K | CRI>80		
white	**233601**	**45,90**
25lm | 3000K | CRI>80		
anthracite	**233605**	**45,90**

DOWNUNDER OUT M
EL

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 20mA
Total consumption: 3.3W
Material: Aluminium / Plastic



Dimensioned drawing



Note

Always install the luminaires with the light outlet pointing downwards. Max. connecting cable diameter 8.5 mm.
Mounting pot incl.

Variant	Item no.	GBP
155lm | 3000K | CRI>80		
white	**233621**	**45,90**
85lm | 3000K | CRI>80		
anthracite	**233625**	**45,90**

DOWNUNDER OUT L
EL

A-A++ Spectrum A++–E

LED INSIDE








Product details

220-240V ~50/60Hz | 20mA
Total consumption: 3.3W
Material: Aluminium / Plastic



Dimensioned drawing



Note

Always install the luminaires with the light outlet pointing downwards. Max. connecting cable diameter 8.5 mm.
Mounting pot incl.

Variant	Item no.	GBP
155lm | 3000K | CRI>80		
white	**233611**	**64,80**
85lm | 3000K | CRI>80		
anthracite	**233615**	**64,80**

ADI
EL


A-A++ Spectrum A++–E

LED INSIDE







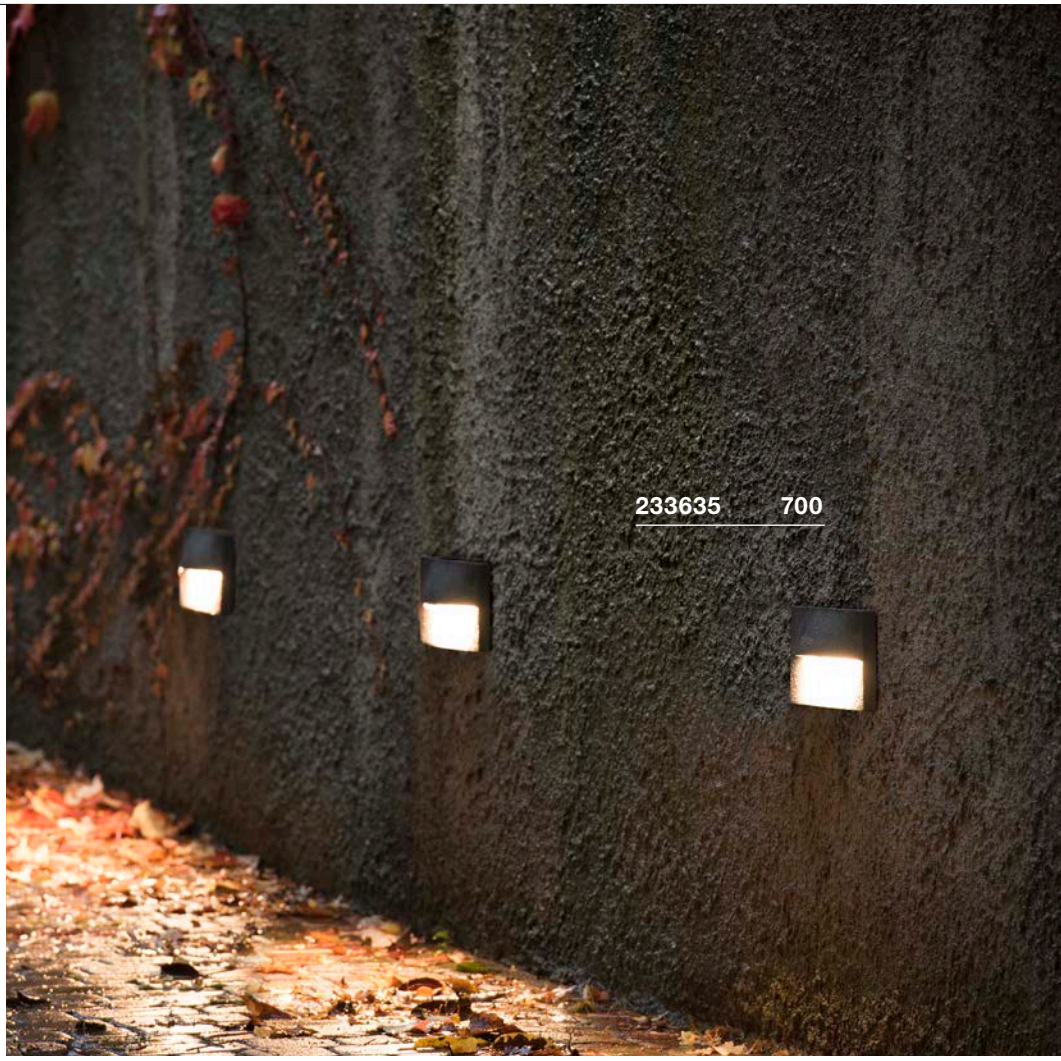




Product details

100-277V ~50/60Hz | 500mA
Total consumption: 18W
Material: Aluminium / Polycarbonate (PC)



IP 55 | 1.5 | 25000

Dimensioned drawing



Note

Always install the luminaires with the light outlet pointing downwards.

Recommended accessories

■ Mounting pot
Item no. 233639 | 14,40 GBP



Variant	Item no.	GBP
870lm | 3000K | CRI>80		
■ anthracite	**233635**	**207,00**

BRICK MESH
EL

A-A++ Spectrum A++–E

LED INSIDE






- Panel: Stainless Steel 316

Product details

100-240V ~50/60Hz | 24V DC
Total consumption: 3.7W
Material: Stainless Steel 316 / Glass



Dimensioned drawing



Note

Mounting pot incl.

Variant	Item no.	GBP
52lm | 3000K | CRI>80		
stainless steel	**229110**	**188,10**

BRICK
EL, symmetrical

A-A++ Spectrum A++–E

LED INSIDE









- Symmetrical light emission
- Panel stainless steel 316L, housing aluminium

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 11W
Material: Aluminium / Stainless Steel 316

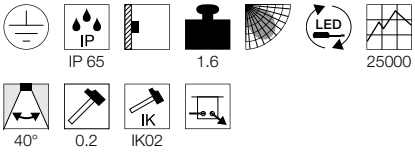

Dimensioned drawing



Note

Mounting pot incl.

Variant	Item no.	GBP
950lm | 3000K | CRI>80		
stainless steel	**233650**	**244,80**

BRICK
EL, asymmetrical

A-A++ Spectrum A++–E

LED INSIDE









- Asymmetrical light emission
- Panel stainless steel 316L, housing aluminium

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 11W
Material: Aluminium / Stainless Steel 316

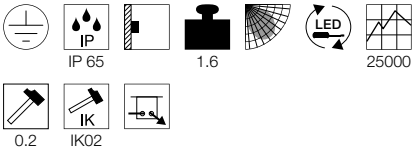

Dimensioned drawing



Note


Mounting pot incl.


Variant	Item no.	GBP
850lm | 3000K | CRI>80		
stainless steel	**233660**	**244,80**


RECESSED CEILING LIGHTS




114420 711

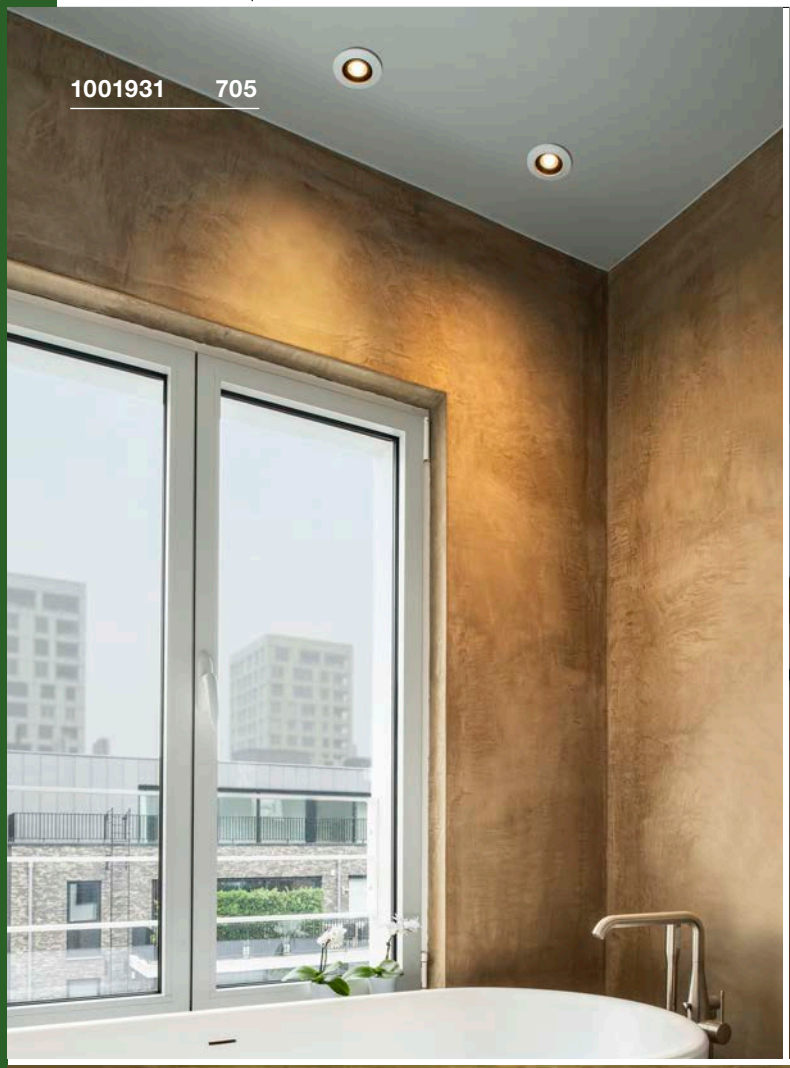
1001931 705

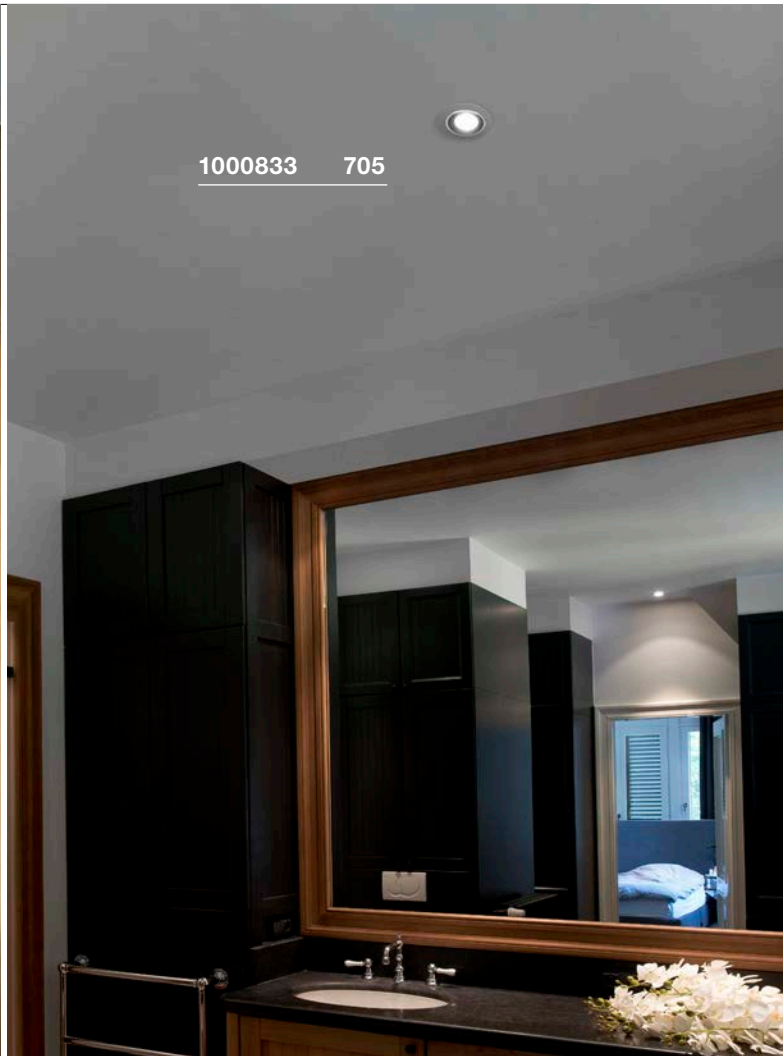
1000833 705

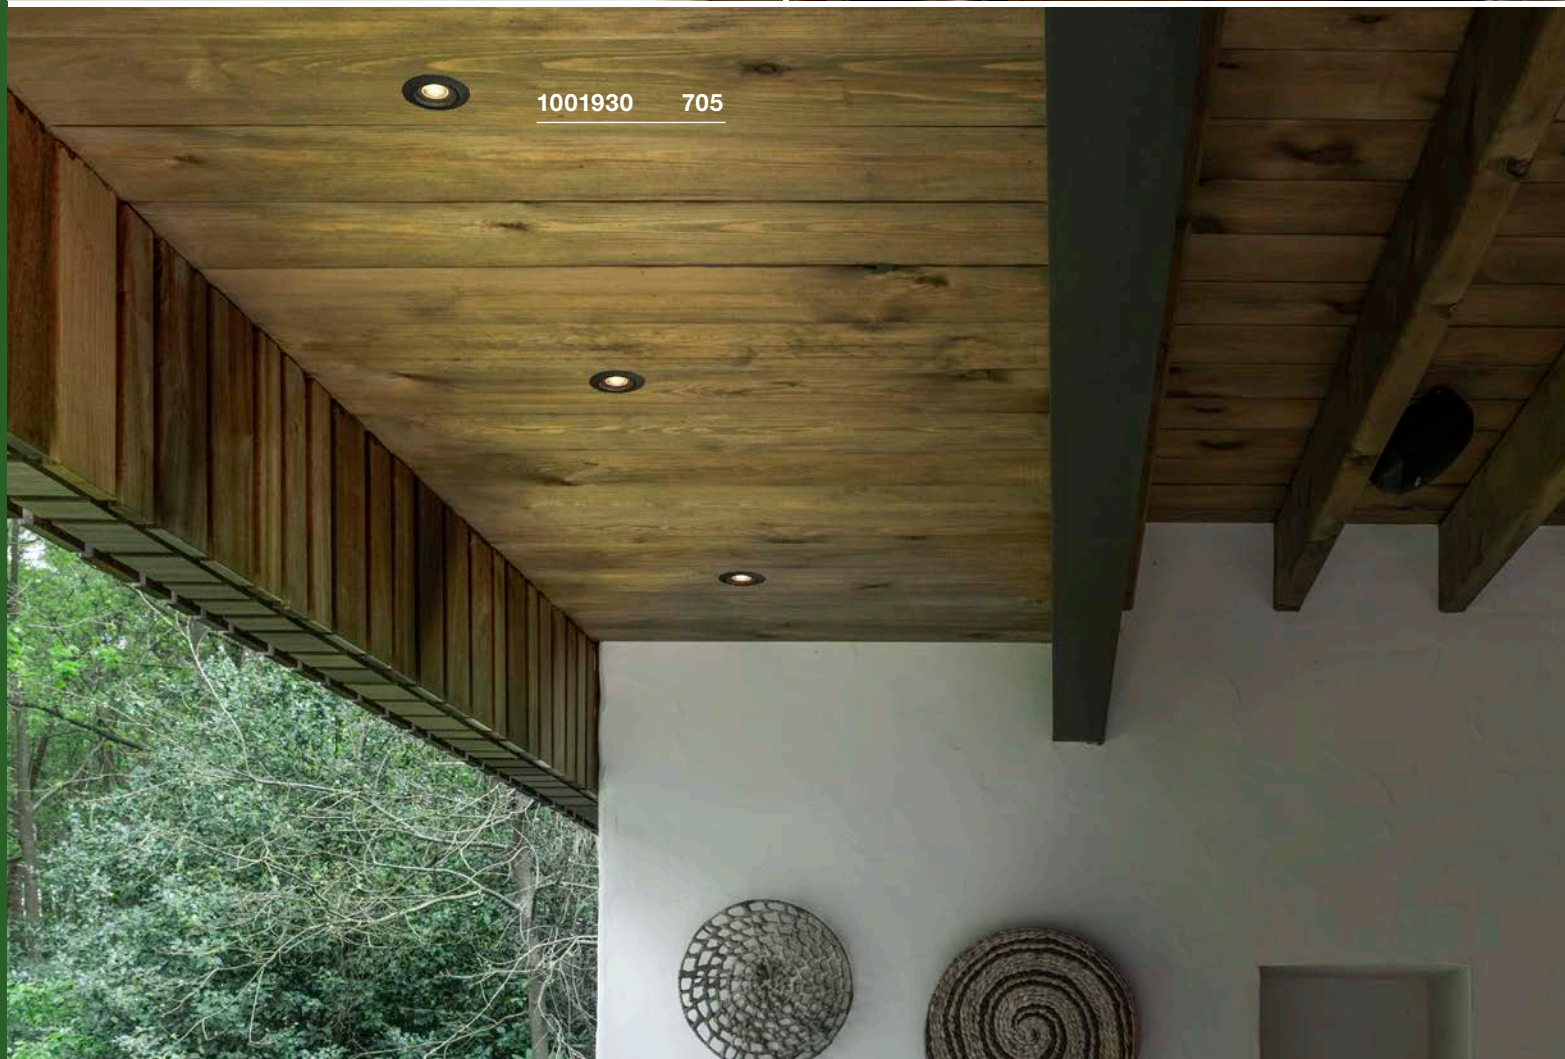
1001930 705

VARU
EL, QPAR51

A-A++ Spectrum A++–E







- High IP protection class
- Resistant housing

Product details

230V~50Hz
Material: Aluminium / Glass



Dimensioned drawing



Note

Material thickness, mounting surface: 15 mm

Recommended lamp

GU10 5.5W 36°
2800K 420lm EEI=A+
6kWh/1000h
Item no. 1001217 |15,30 GBP



LED GU10 7.2W 36°
2700K 520lm EEI=A+
8kWh/1000h
Item no. 1001560 |9,90 GBP



Lamp details

max. 5W LED GU10 51 mm
Ø: 5 cm max. L: 4.6 cm max.


Variant	Item no.	GBP
GU10 | LED GU10 51mm		
■ black	**1001930**	**30,60**
GU10 | LED GU10 51mm		
□ white/black	**1001931**	**30,60**

VARU
EL

A-A++ Spectrum A++–E

LED INSIDE




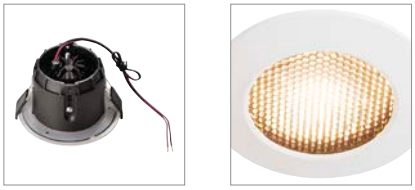


- High IP protection class
- Resistant housing
- Reduced glare due to set-back LED

Product details

350mA | 5W
Material: Aluminium / Glass

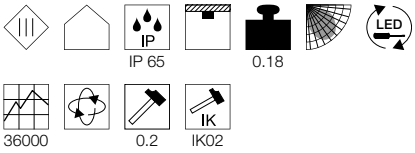

Dimensioned drawing



Note

Material thickness, mounting surface: 15 mm

Recommended accessories

□ LED driver 350mA | 9W
Item no. 464109 |25,20 GBP



□ Honeycomb filter
Item no. 1001934 |5,00 GBP



Variant	Item no.	GBP
400lm | 2700K | CRI>80		
■ black	**1001932**	**49,50**
400lm | 2700K | CRI>80		
□ white/black	**1001933**	**49,50**

KINI
EL, TRIAC

A-A++ Spectrum A++–E

LED INSIDE







- High IP protection class
- Suitable for wet rooms
- Tiltable

Product details

220-240V ~50/60Hz | 260mA
Total consumption: 12W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C, Triac L

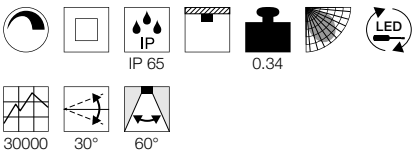

Dimensioned drawing



Note

Material thickness, mounting surface: 5-20 mm

Variant	Item no.	GBP
850lm | 3000K | CRI>80		
□ white	**1000833**	**99,00**

DOLIX OUT
EL, round, QR-C51

C-A+ Spectrum A++–E








Product details
12V ~50Hz
Material: Aluminium / Glass

IP 65 | 0.15 | 0.2 | IK02

Dimensioned drawing



Note
Material thickness, mounting surface: 20 mm

Recommended lamp
LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP


Lamp details
max. 50W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51		
white	**1001157**	**27,00**

DOLIX OUT
EL, square, QR-C51

C-A+ Spectrum A++–E








Product details
12V ~50Hz
Material: Aluminium / Glass

IP 65 | 0.17 | 0.2 | IK02

Dimensioned drawing



Note
Material thickness, mounting surface: 20 mm


Recommended lamp
LED GU5.3 5.5W 36°
2700K 450lm EEI=A+
7kWh/1000h
Item no. 1001574 | 29,70 GBP

Lamp details
max. 50W QR-C51

Variant	Item no.	GBP
GX5.3 | QR-C51		
white	**1001161**	**27,00**

1001157 **706**



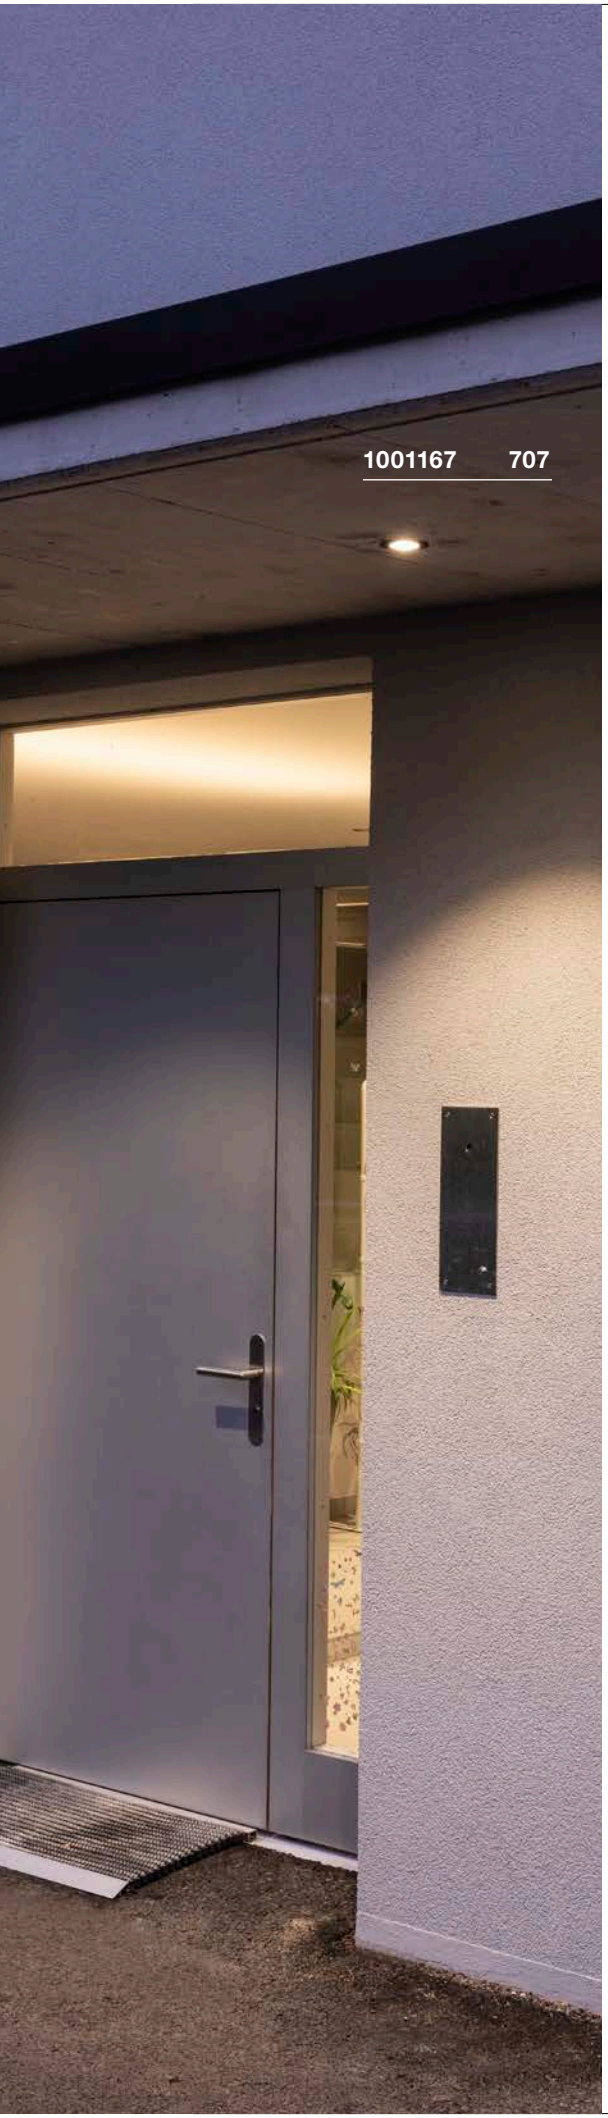

DOLIX OUT
EL, round, QPAR51

E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium / Glass

IP 65 | 0.17 | 0.2 | IK02

Dimensioned drawing



Note
Material thickness, mounting surface: 20 mm

Recommended lamp
LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP


Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**1001165**	**27,00**
GU10 | QPAR51 chrome	**1001166**	**29,70**
GU10 | QPAR51 grey / transparent	**1001167**	**27,00**
GU10 | QPAR51 chrome	**1001168**	**29,70**

DOLIX OUT
EL, square, QPAR51

E-A++ Spectrum A++–E








Product details
220-240V ~50/60Hz
Material: Aluminium / Glass

IP 65 | 0.19 | 0.2 | IK02

Dimensioned drawing



Note
Material thickness, mounting surface: 20 mm

Recommended lamp
LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h
Item no. 1001030 | 15,30 GBP

LED GU10 7.2W 36°
3000K 520lm EEI=A+
8kWh/1000h
Item no. 1001562 | 9,90 GBP

Lamp details
max. 50W QPAR51

Variant	Item no.	GBP
GU10 | QPAR51 white	**1001169**	**27,00**
GU10 | QPAR51 chrome	**1001170**	**29,70**
GU10 | QPAR51 grey / transparent	**1001171**	**27,00**
GU10 | QPAR51 chrome	**1001172**	**29,70**

OUT 65
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- High IP protection class

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

IP 65 | 0.3 | LED | 40000 | 38°

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
510lm | 3000K | CRI>80		
■ black	**114460**	**76,50**
640lm | 3000K | CRI>80		
□ white	**114461**	**76,50**

OUT 65
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- High IP protection class

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

IP 65 | 0.32 | LED | 40000 | 38°

Dimensioned drawing




Note

Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
510lm | 3000K | CRI>80		
■ black	**114470**	**76,50**
640lm | 3000K | CRI>80		
□ white	**114471**	**76,50**



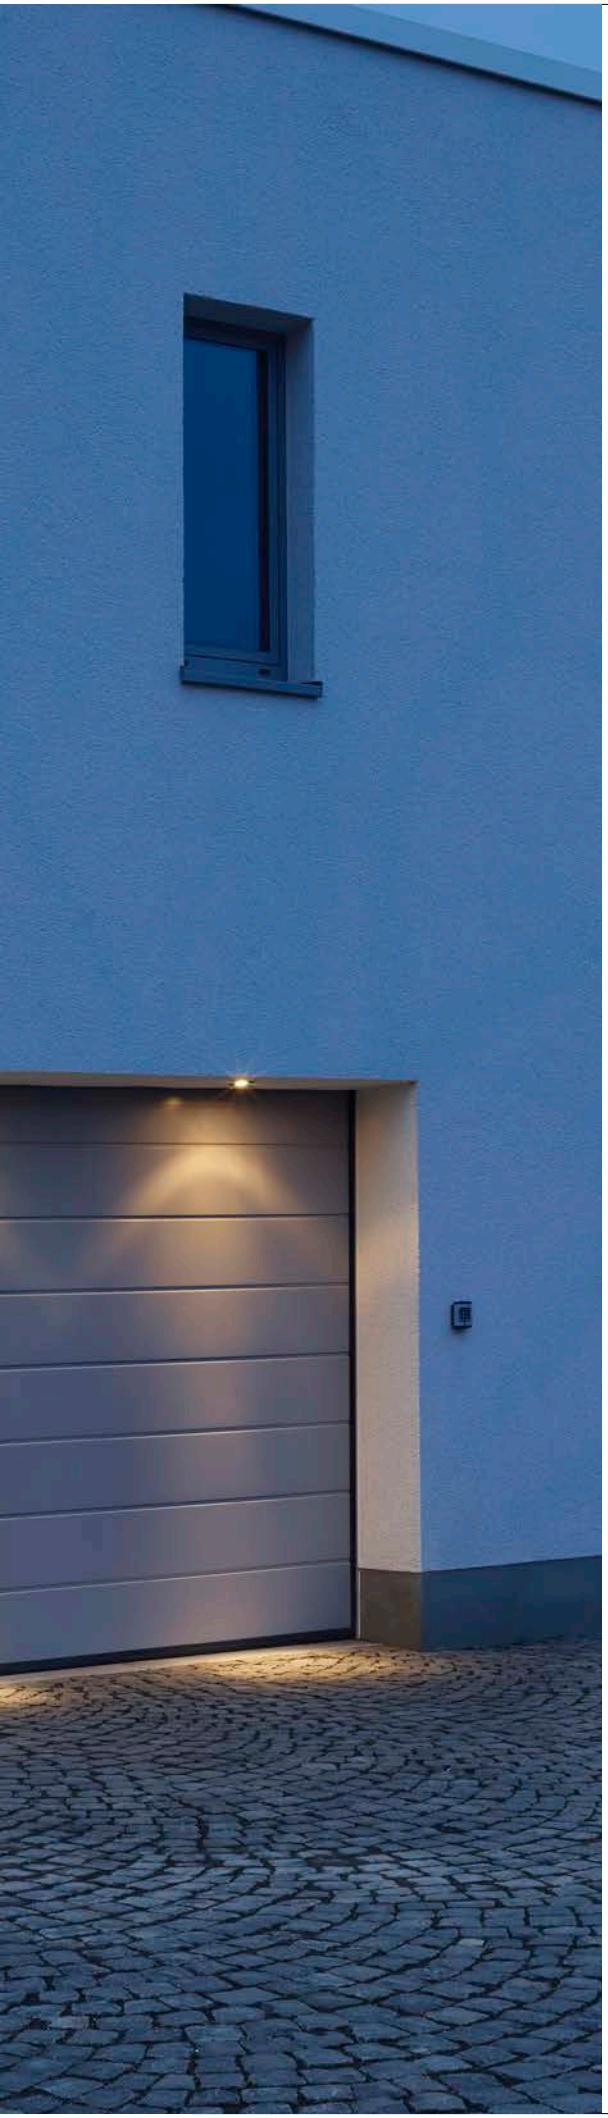

PATTA-F
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- High IP protection class

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

IP 65 | 0.3 | LED | 40000 | 38°

Dimensioned drawing



Note


Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
745lm | 3000K | CRI>80		
■ black	**114440**	**76,50**
860lm | 3000K | CRI>80		
□ white	**114441**	**76,50**

PATTA-F
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- High IP protection class

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

IP 65 | 0.32 | LED | 40000 | 38°

Dimensioned drawing



Note

Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
745lm | 3000K | CRI>80		
■ black	**114450**	**76,50**
860lm | 3000K | CRI>80		
□ white	**114451**	**76,50**

PATTA-I
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT

DIM TO WARM









- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- High IP protection class

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.3W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

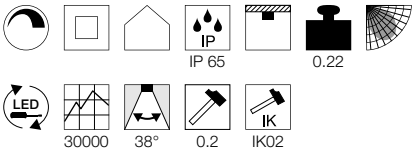

Dimensioned drawing



Note

Products supplied with clip springs. Leaf springs included with the product and can be exchanged. Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
440lm | 1800-3000K | CRI>95		
■ black	1002098	67,50
440lm | 1800-3000K | CRI>95		
□ matt white	1002099	67,50
440lm | 1800-3000K | CRI>95		
▨ matt aluminium	1002100	70,20

PATTA-I
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE

NEW VARIANT

DIM TO WARM









- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- High IP protection class

Product details

220-240V ~50/60Hz | 350mA
Total consumption: 7.3W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

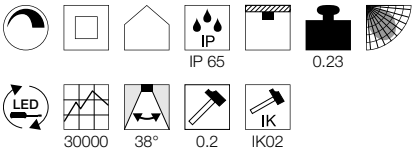


Dimensioned drawing




Note

Products supplied with clip springs. Leaf springs included with the product and can be exchanged. Material thickness, mounting surface: 20 mm

Variant	Item no.	GBP
440lm | 1800-3000K | CRI95		
■ black	1002101	67,50
440lm | 1800-3000K | CRI95		
□ matt white	1002102	67,50
440lm | 1800-3000K | CRI95		
▨ matt aluminium	1002103	70,20

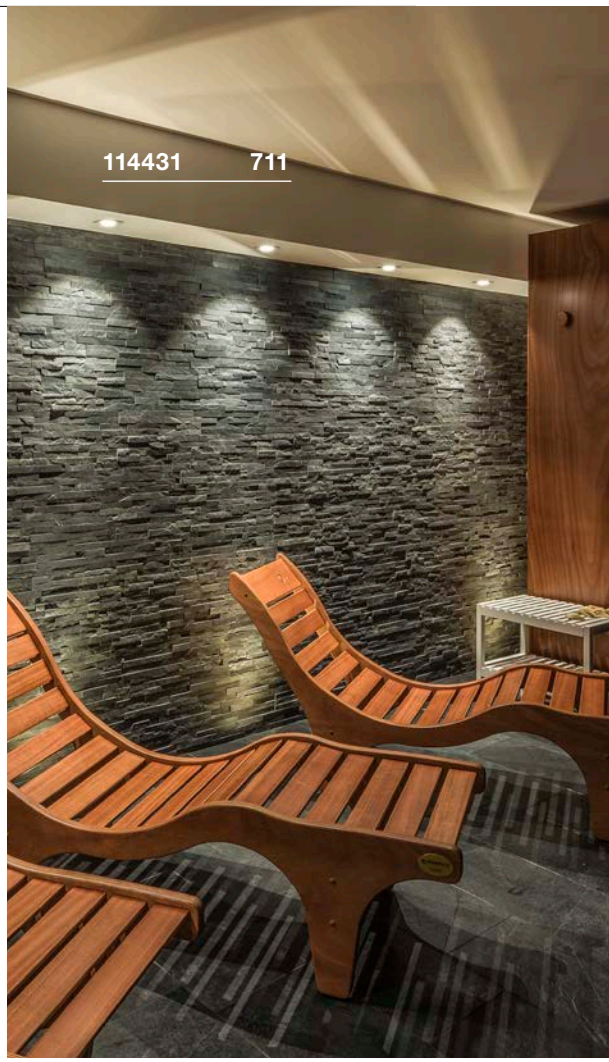


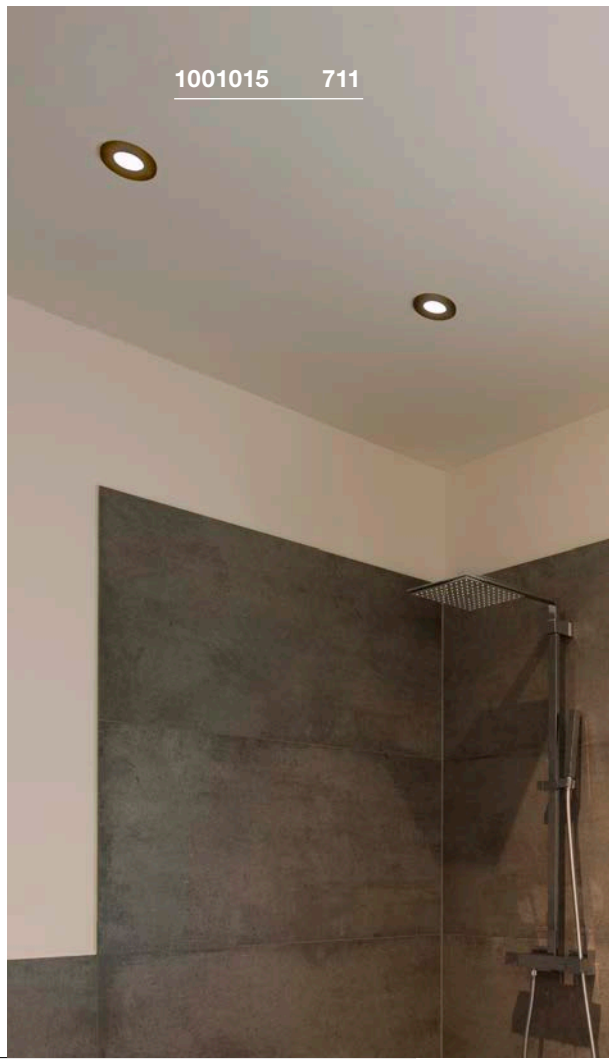

PATTA-I
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- High IP protection class

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

IP 65 | 0.25 | LED | 40000 | 38°

Dimensioned drawing



Note

Material thickness, mounting surface: 25 mm

Variant	Item no.	GBP
910lm | 3000K | CRI>80		
matt black	**114420**	**76,50**
910lm | 3000K | CRI>80		
matt white	**114421**	**76,50**
910lm | 3000K | CRI>80		
matt aluminium	**114426**	**81,00**

PATTA-I
EL, square, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- High IP protection class

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium / Glass
Dimmable: Triac C, Triac L

IP 65 | 0.25 | LED | 40000 | 38°

Dimensioned drawing



Note

Material thickness, mounting surface: 25 mm

Variant	Item no.	GBP
910lm | 3000K | CRI>80		
matt black	**114430**	**76,50**
910lm | 3000K | CRI>80		
matt white	**114431**	**76,50**
910lm | 3000K | CRI>80		
matt aluminium	**114436**	**81,00**

KAMUELA ECO
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE








- Fire-resistant for at least 90 minutes in accordance with BS 476-21
- IP 65 luminaire with efficient LED technology

Product details

220-240V ~50Hz
Total consumption: 6.5W
Material: Aluminium / Plastic
Dimmable: Triac C, Triac L

IP 65 | 0.26 | LED | 25000 | 38° | IK | IK02

Dimensioned drawing





Note

Material thickness, mounting surface: 40 mm max.

Variant	Item no.	GBP
400lm | 3000K | CRI>80		
black	**1001015**	**27,00**
400lm | 3000K | CRI>80		
white	**1001016**	**27,00**
400lm | 4000K | CRI>80		
black	**1001017**	**27,00**
400lm | 4000K | CRI>80		
white	**1001018**	**27,00**

INGROUND FITTINGS

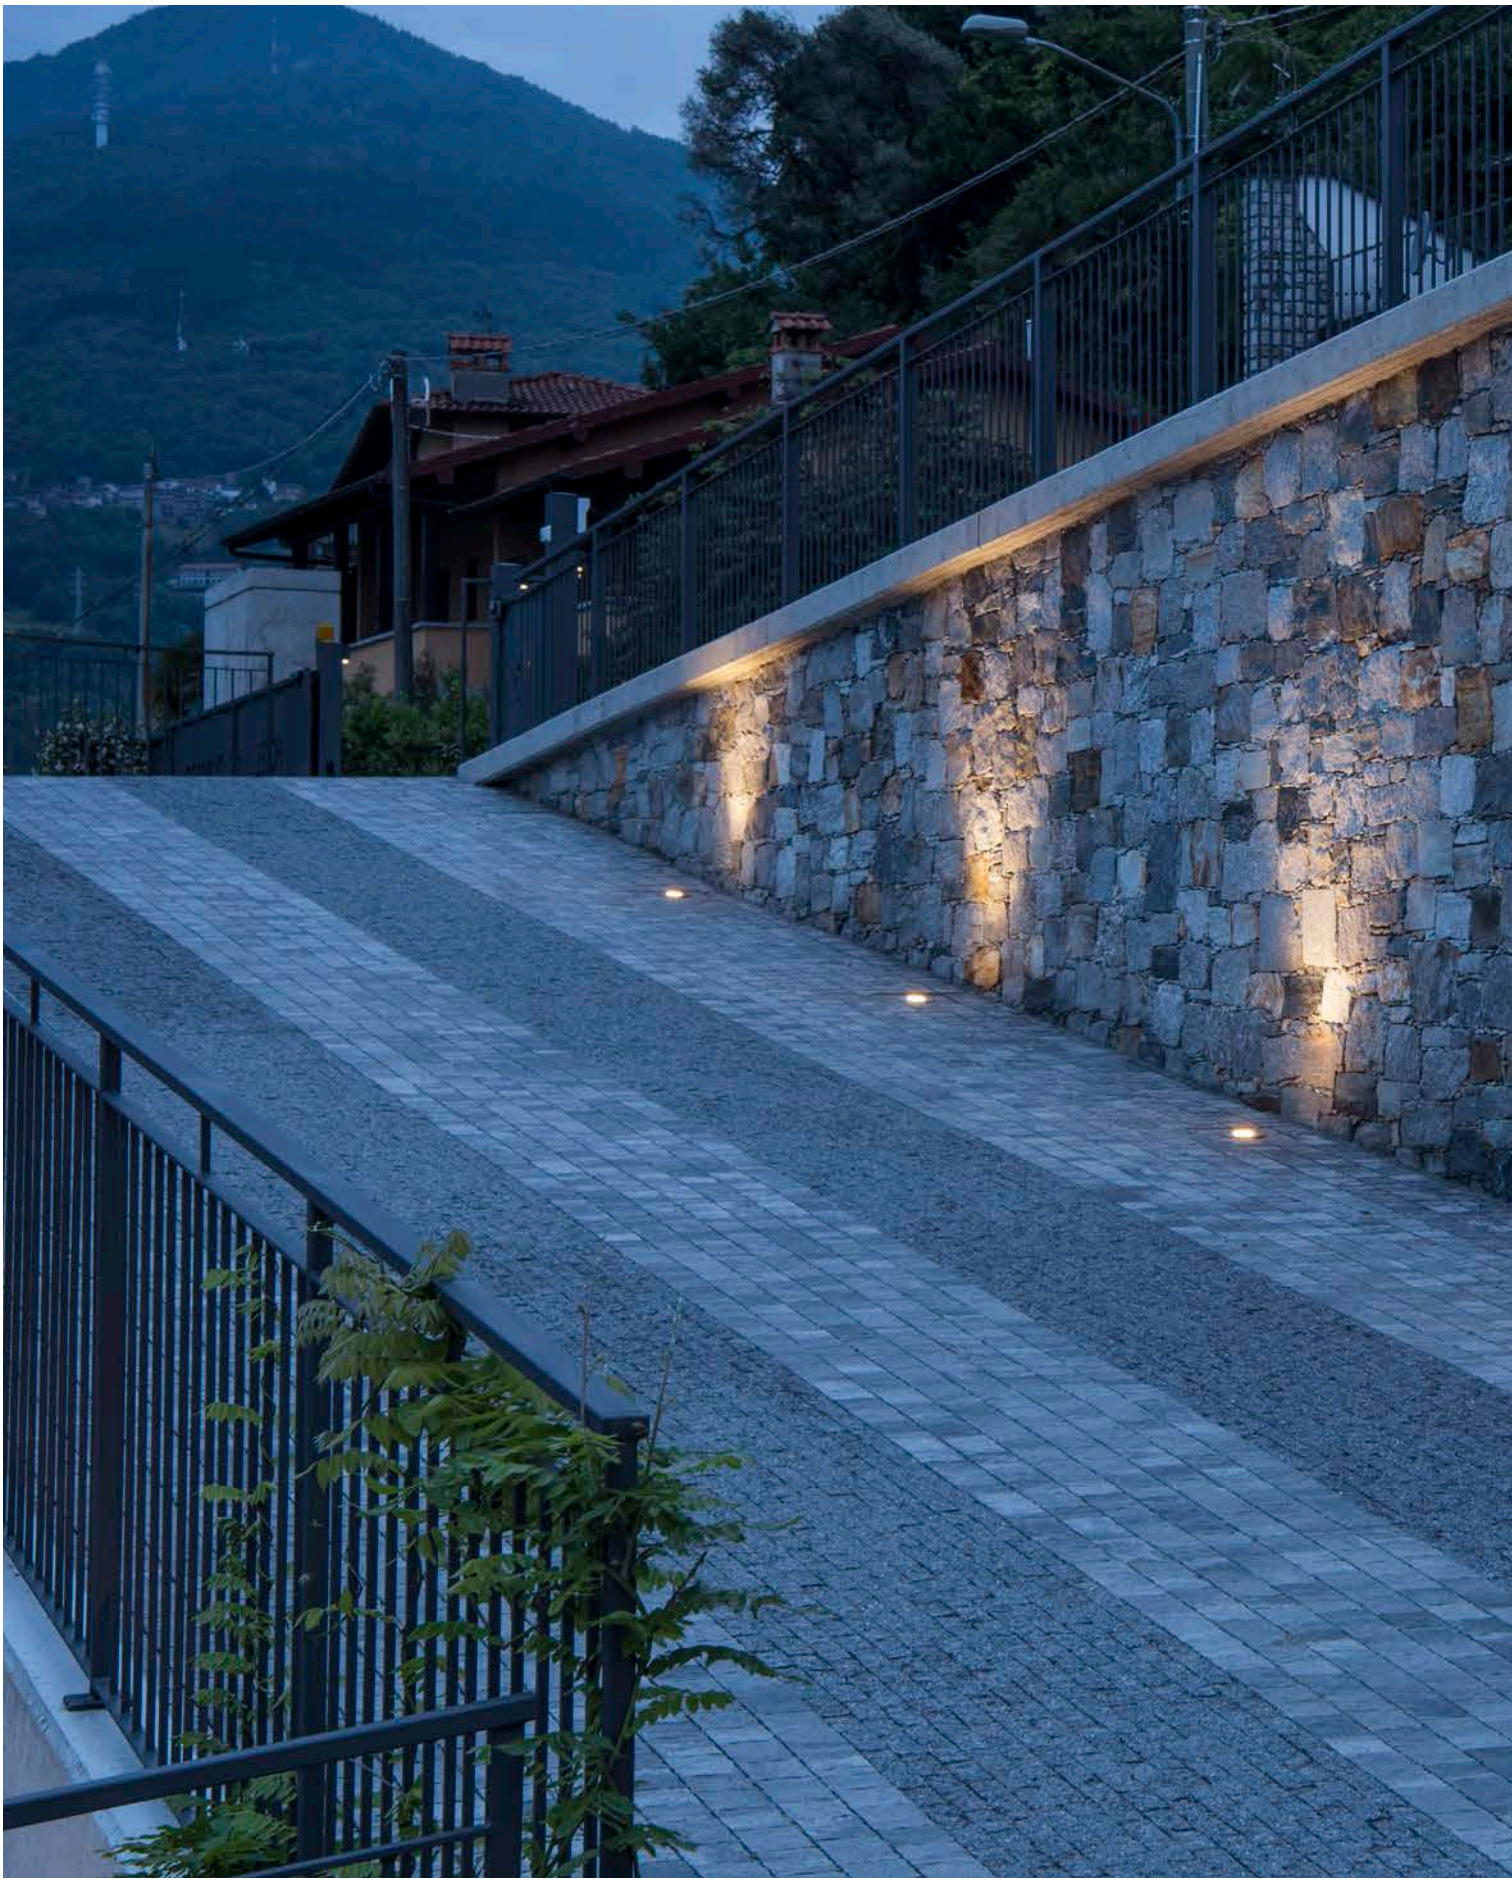

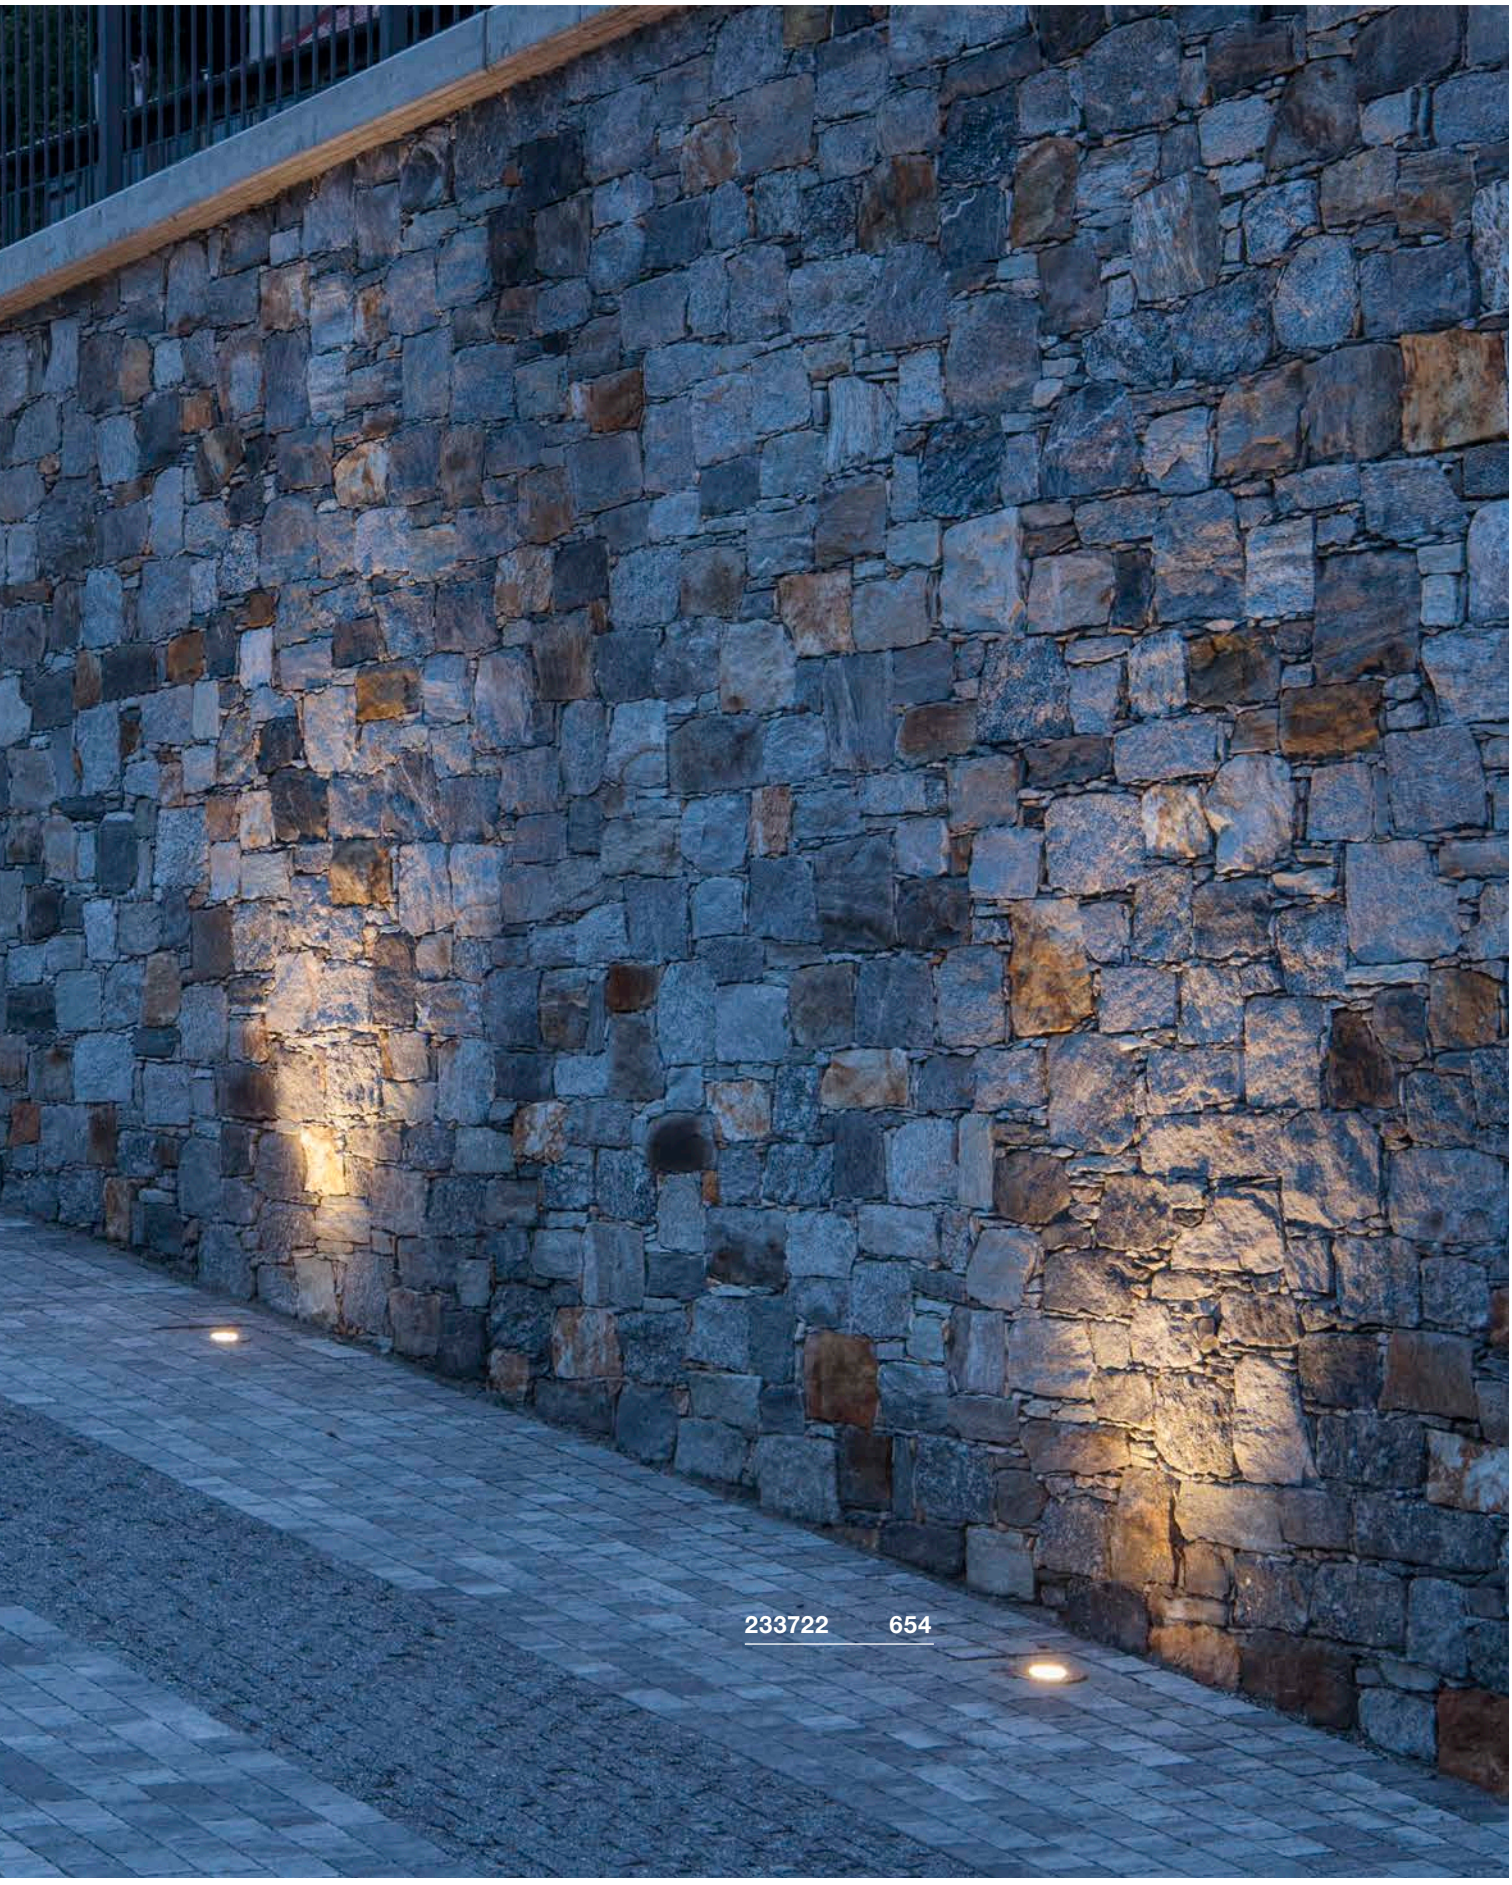
233722 654

BIG PLOT
Modules

A-A++ Spectrum A++–E

LED INSIDE





- Stainless steel 316
- Extremely high IP protection class
- Different lighting effect can be achieved with the aid of suitable covers


Product details

220-240V ~50/60Hz 16mA
Total consumption: 5.5W
Material: Stainless steel 316L/PMMA



IP 67 | 0.53 | 35000 | IK06

Dimensioned drawing



Note


Open cable end
Product is supplied without cover.
Suitable covers can be found on page 715.

Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Variant	Item no.	GBP
460lm | 3000K | CRI>80 stainless steel	**1001359**	**99,00**

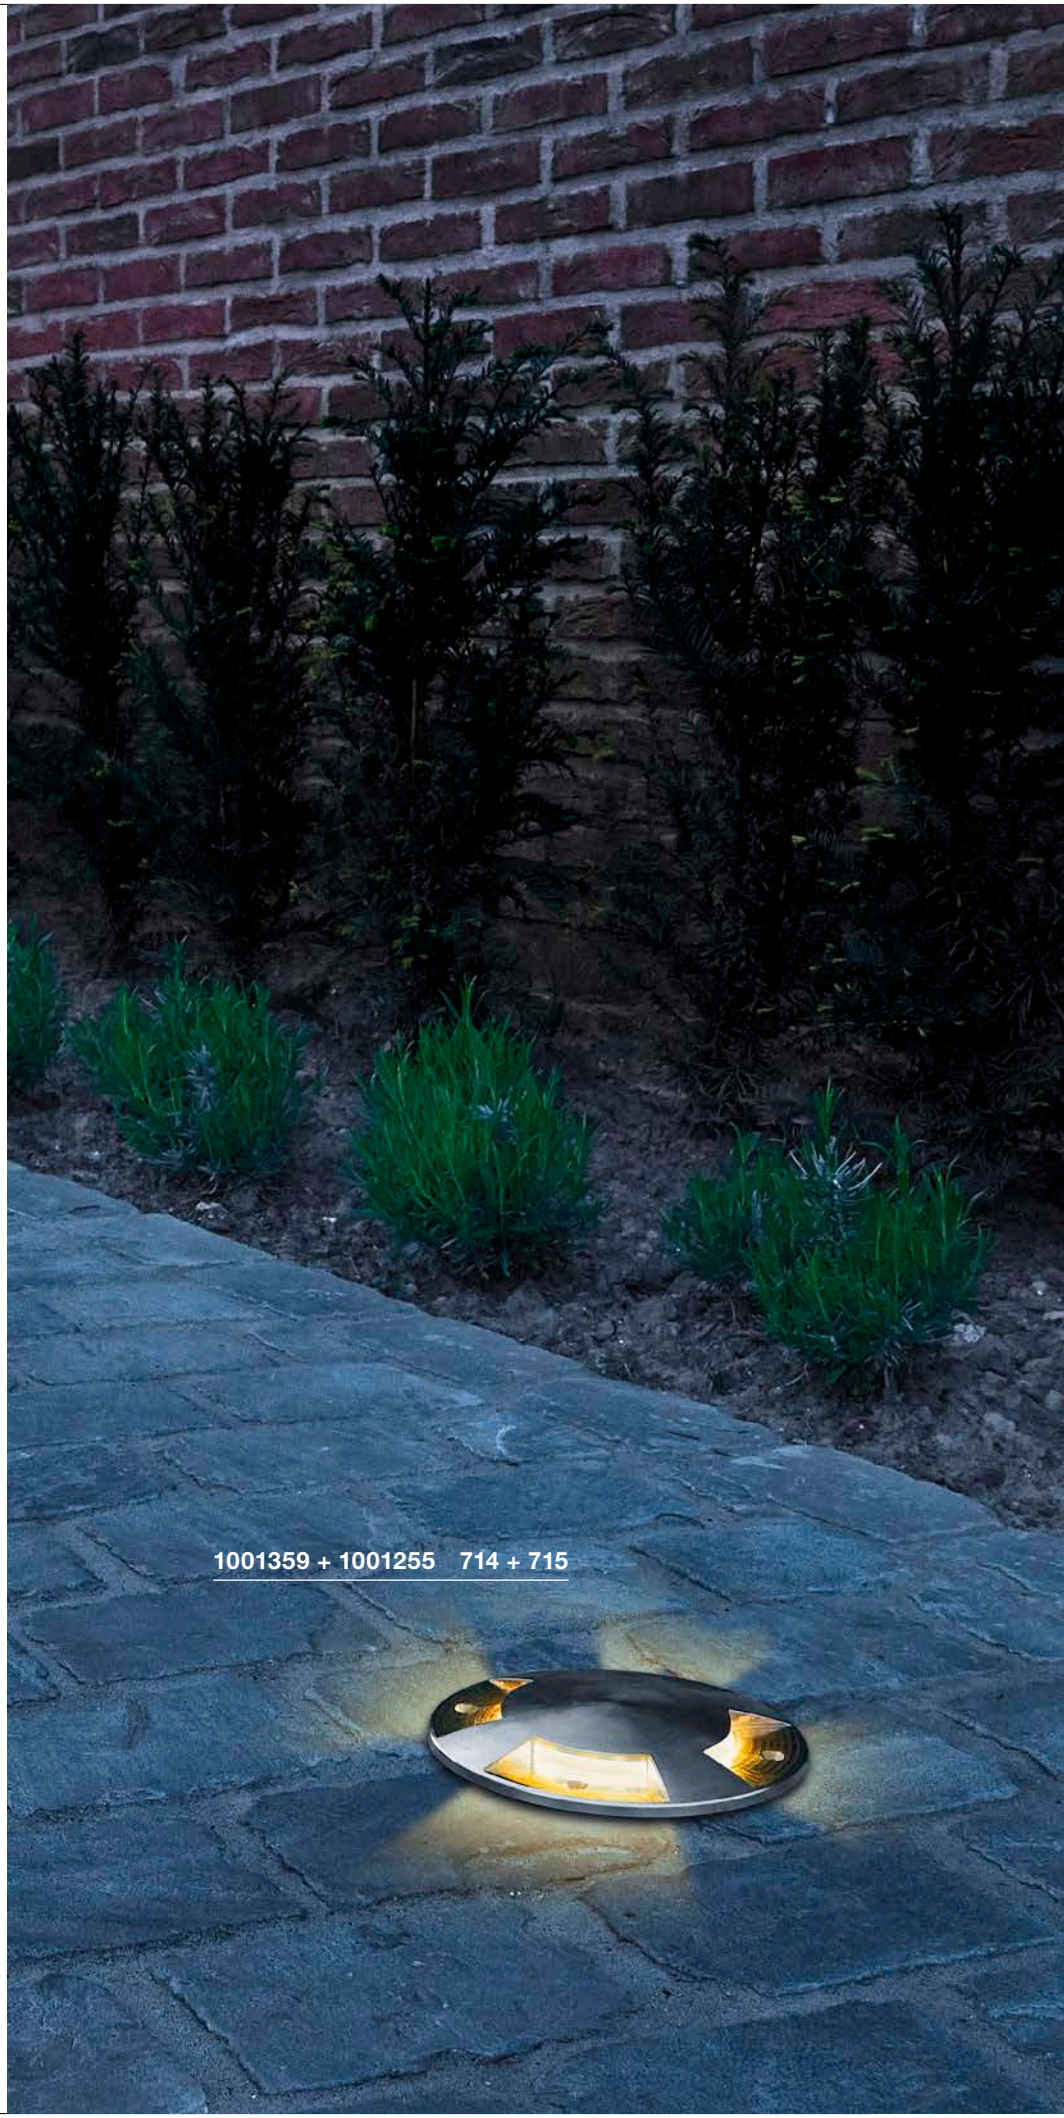

BIG PLOT
Modules

A-A++ Spectrum A⁺⁺–E

LED INSIDE





- Extremely high IP protection class
- Different lighting effect can be achieved with the aid of suitable covers


Product details

220-240V ~50/60Hz 16mA
Total consumption: 5.5W
Material: Aluminium/ PMMA



IP 67 | 0.34 | 35000 | IK06

Dimensioned drawing



Note

Open cable end
Product is supplied without cover.
Suitable covers can be found on page 715.

Recommended accessories

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Variant	Item no.	GBP
460lm | 3000K | CRI>80		
silver-grey	**1001256**	**67,50**

BIG PLOT
Cover, 2 slots








Product details

Material 1001254: Stainless steel 316
Material 1001252/1001262: Aluminium




Dimensioned drawing




Variant	Item no.	GBP
0.91 kg | 0.8 t		
stainless steel	**1001254**	**148,50**
0.34 kg | 0.5 t		
silver-grey	**1001252**	**41,40**
0.34 kg | 0.5 t		
anthracite	**1001262**	**41,40**

BIG PLOT
Cover, 4 slots








Product details

Material 1001255: Stainless steel 316
Material 1001253/1001263: Aluminium



Dimensioned drawing



Variant	Item no.	GBP
0.85 kg | 0.8 t		
stainless steel	**1001255**	**148,50**
0.33 kg | 0.5 t		
silver-grey	**1001253**	**41,40**
0.33 kg | 0.5 t		
anthracite	**1001263**	**41,40**

TRAIL-LITE® 60
EL


A-A++ Spectrum A++–E







• Panel: Stainless steel 316

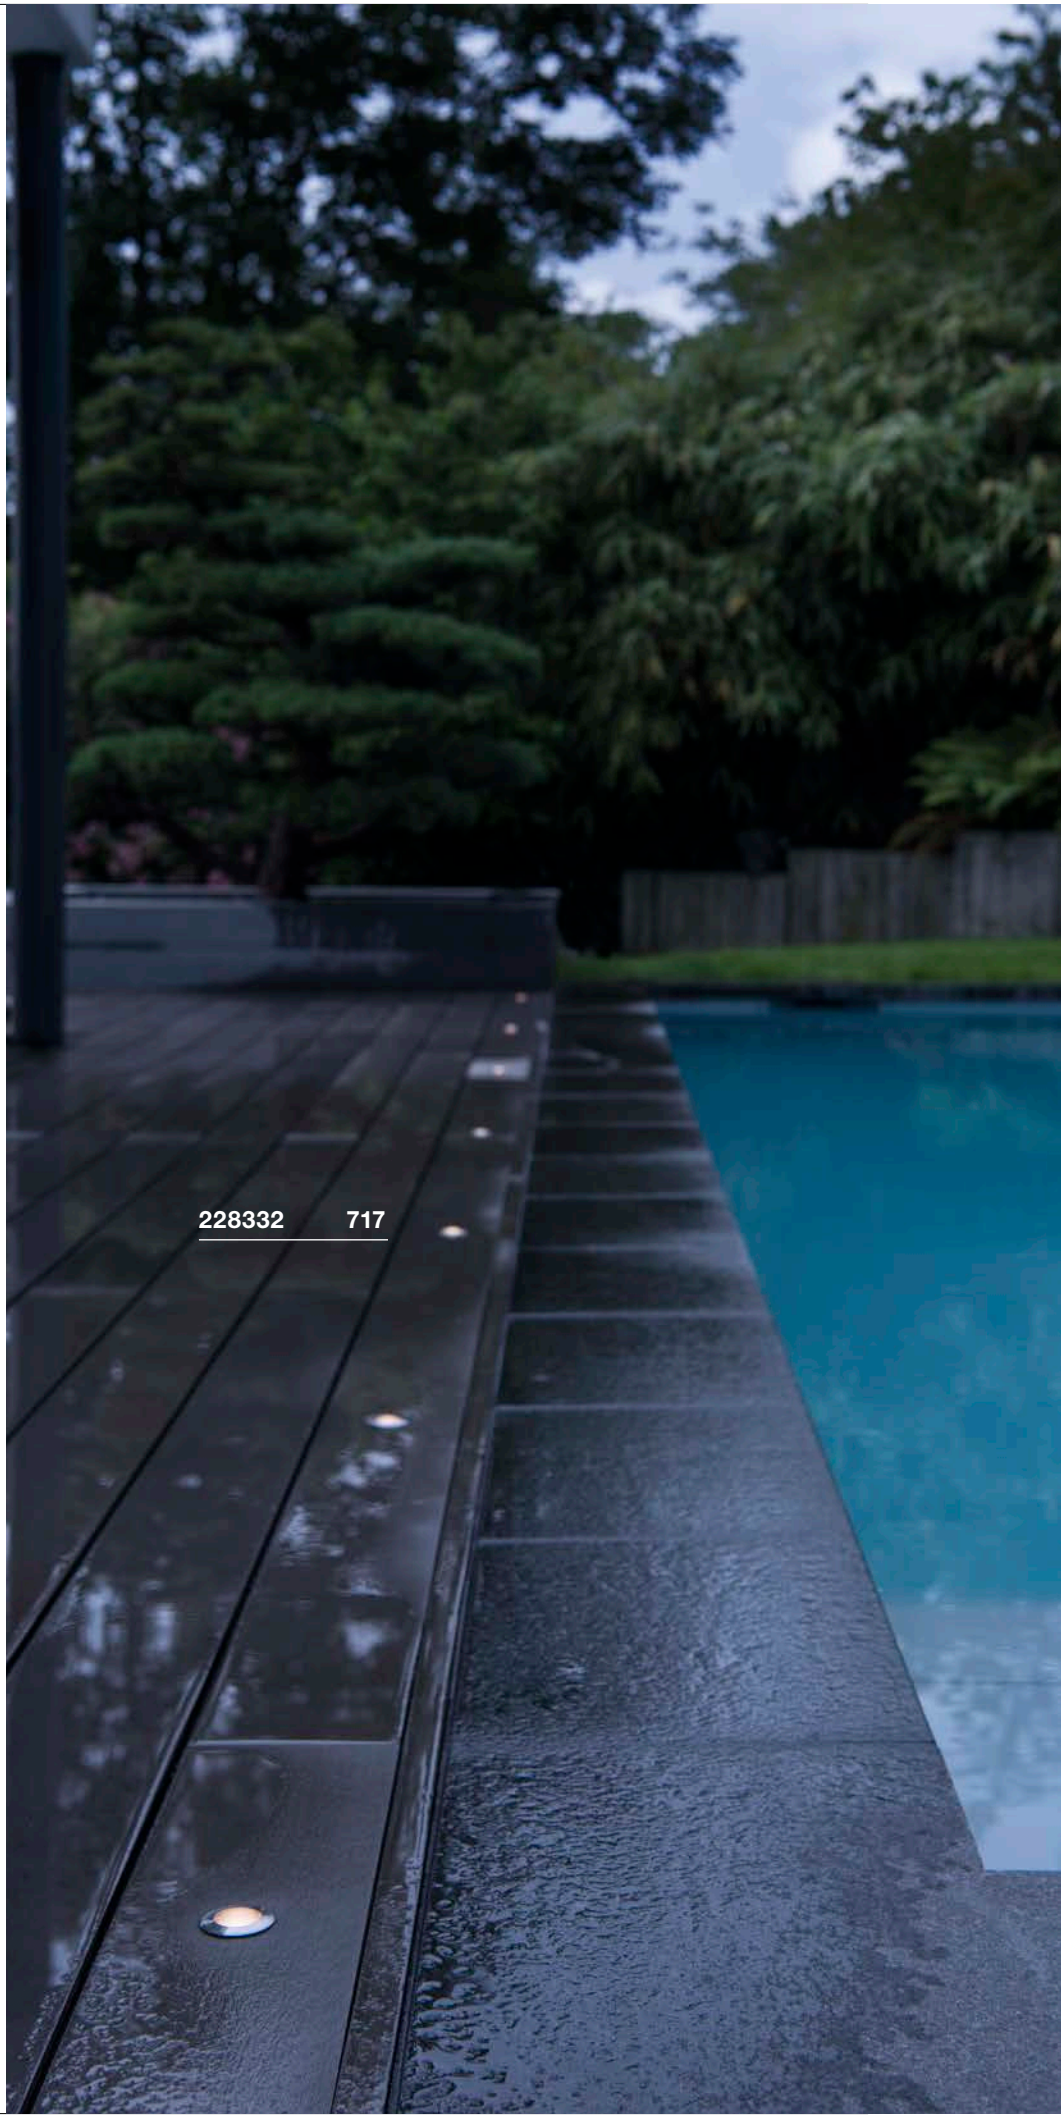


228332 717

Product details

12V /0.3W
Material: Stainless steel 316 / Glass



Dimensioned drawing



Note


Only operate with a conventional transformer.
Mounting pot included
The luminaire is suitable for installation in wood

Recommended accessories

■ Transformer 12V AC | 10VA IP44
Item no. 227140 | 34,60 GBP

Variant	Item no.	GBP
10lm | 6500K | CRI>80		
brushed stainless steel	**227461**	**49,50**
10lm | 3000K | CRI>80		
brushed stainless steel	**227462**	**49,50**



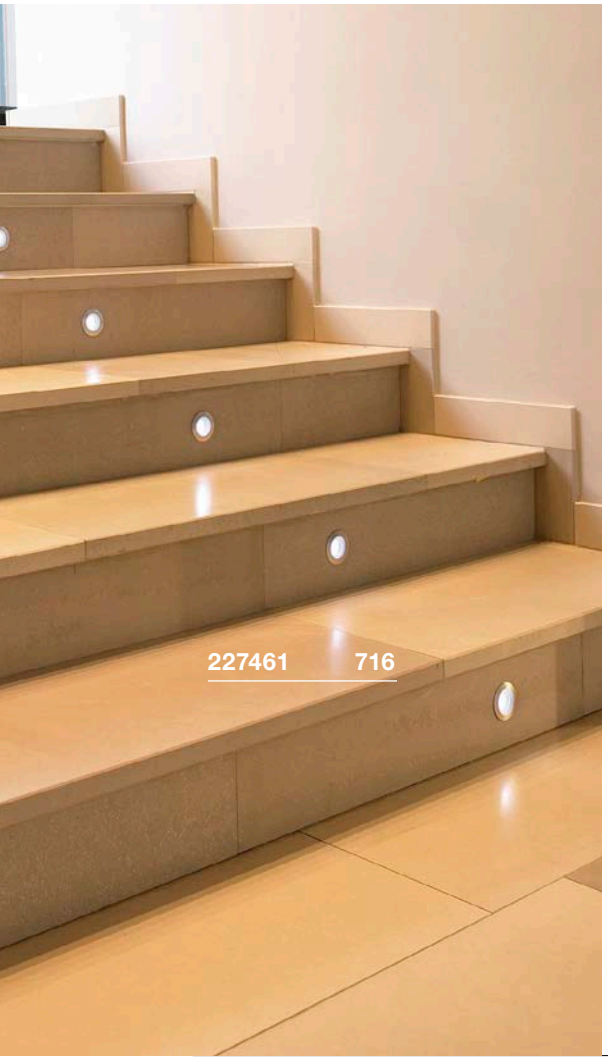


POWER TRAIL-LITE®
EL, round

A-A++ Spectrum A++–E








- Panel: Stainless steel 316
- Premium LED

Product details
350mA /1.4W
Material: Stainless steel 316 / Glass



Dimensioned drawing



Note
Only operate with a 350mA driver. Only wire several PowerLEDs together in series!
Installation sleeve incl.
The luminaire is suitable for installation in wood.

Recommended accessories



LED driver 350mA | 3W
incl. strain relief
Item no. 464108 | 20,70 GBP



LED driver 350mA | 9W
Item no. 464109 | 25,20 GBP


Variant	Item no.	GBP
45lm | 3000K | CRI>90 stainless steel	228332	58,50
48lm | 4000K | CRI>90 stainless steel	1002189	58,50

POWER TRAIL-LITE®
EL, square

A-A++ Spectrum A++–E








Product details
350mA /1.4W
Material: Stainless steel 316 / Glass



Dimensioned drawing



Note
Only operate with a 350mA driver. Only wire several PowerLEDs together in series!
Installation sleeve incl.
The luminaire is suitable for installation in wood.

Recommended accessories



LED driver 350mA | 3W
incl. strain relief
Item no. 464108 | 20,70 GBP



Connection box
Item no. 229260 | 25,20 GBP

Variant	Item no.	GBP
45lm | 3000K | CRI>90 stainless steel	228342	58,50

SOLASTO
EL, square/round

A-A++ Spectrum A++–E




- Panel: Stainless steel 316

Product details

230V ~50Hz
Material: Plastic / Stainless steel 304 / Glass

IP 67 | 0.61 | 6000 | 5

Dimensioned drawing

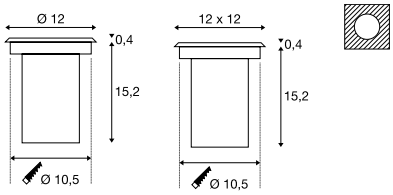

Note

Mounting pot incl.

Recommended lamp


LED GU10 5.5W 36°
2800K 500lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h | **3 Step-Dim**
Item no. 1001030 | 15,30 GBP

Lamp details

6W max.

Variant	Item no.	GBP
GU10 | LED GU10 51mm stainless steel	227680	54,00
GU10 | LED GU10 51mm stainless steel	227684	54,00

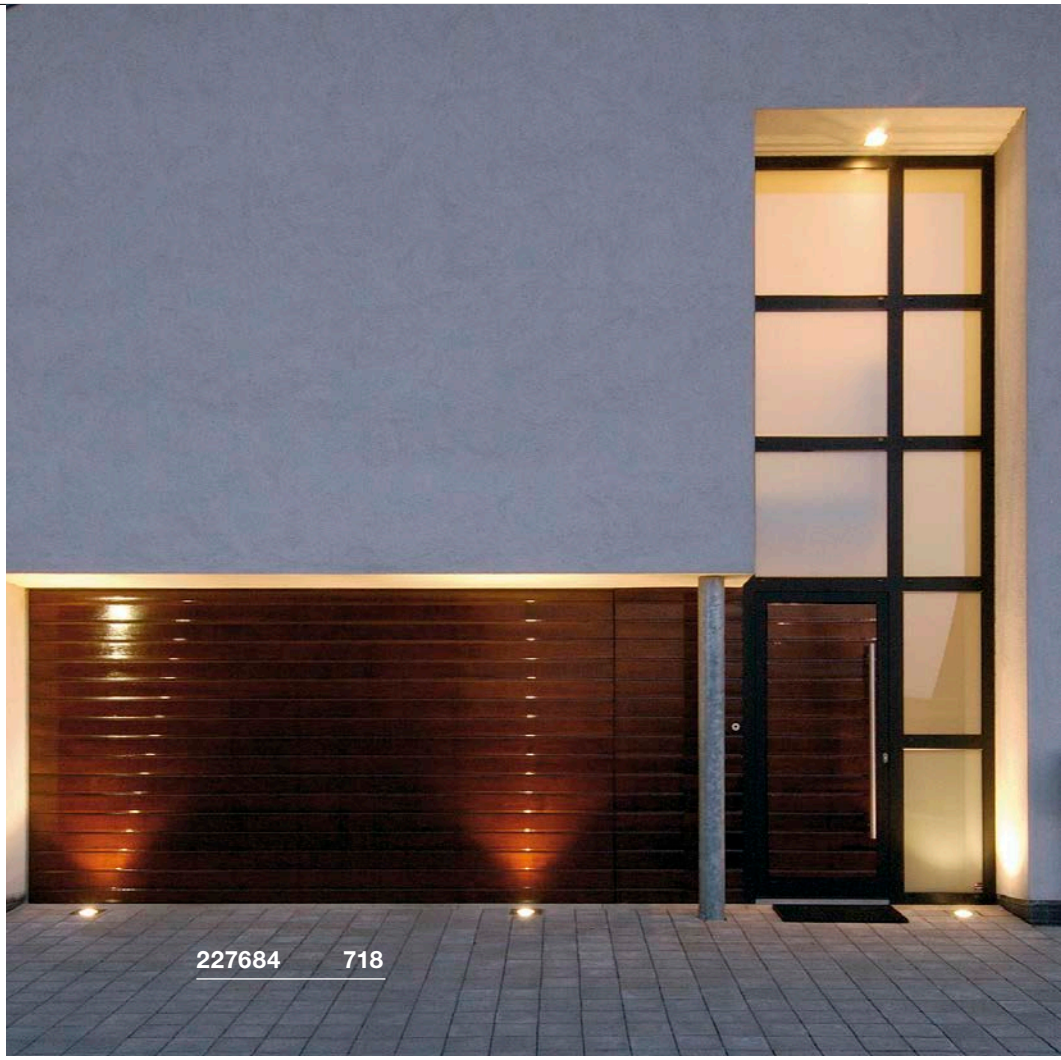




WETSY
EL, square/round

A-A++ Spectrum A⁺⁺–E

LED INSIDE




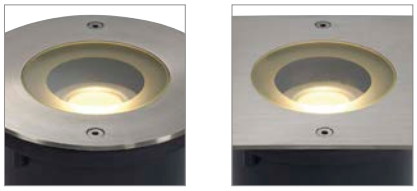


- Panel: Stainless steel 316

Product details

220-240V ~50/60Hz
Total consumption: 6.3W
Material: Stainless steel 316 / Aluminium / Glass

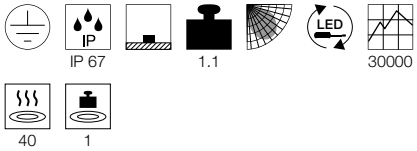

Dimensioned drawing

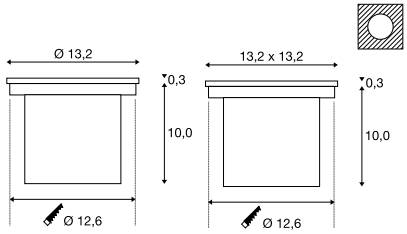

Note

Mounting pot incl.

ROCCI
EL, round

A-A++ Spectrum A⁺⁺–E

LED INSIDE







- Panel: Stainless steel 316
- Premium LED

Product details

200-240V ~50/60Hz 700mA
Total consumption: 9.8W
Material: Stainless steel 316 / Aluminium / Glass

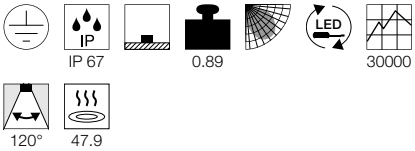

Dimensioned drawing



Note

Mounting pot incl.

ROCCI
EL, square

A-A++ Spectrum A⁺⁺–E

LED INSIDE







- Panel: Stainless steel 316
- Premium LED

Product details

200-240V ~50/60Hz 700mA
Total consumption: 9.8W
Material: Stainless steel 316 / Aluminium / Glass

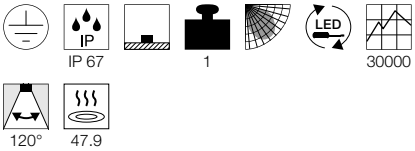

Dimensioned drawing



Note

Mounting pot incl.

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 |13,50 GBP



Variant	Item no.	GBP
300lm | 3000K | CRI>80		
○ ◧ stainless steel	**230170**	**180,00**
300lm | 3000K | CRI>80		
□ ◧ stainless steel	**230174**	**180,00**

Variant	Item no.	GBP
580lm | 3000K | CRI>80		
◧ stainless steel	**227600**	**126,00**
630lm | 4000K | CRI>80		
◧ stainless steel	**1002185**	**126,00**

Variant	Item no.	GBP
580lm | 3000K | CRI>80		
◧ stainless steel	**227604**	**126,00**
630lm | 4000K | CRI>80		
◧ stainless steel	**1002186**	**126,00**

GIMBLE OUT
EL

A-A++ Spectrum A⁺⁺–E

LED INSIDE








- Housing and panel: Stainless steel 316L
- Premium LED

Product details

220-240V ~50/60Hz 600mA
Total consumption: 13W
Material: Stainless steel 316L / Glass




IP 67 | 2.8 | 35000 | 350°



90° | 36° | IK08

Dimensioned drawing



Note

Open cable end

Recommended accessories

Installation tube DN160
Item no. 233792 | 40,50 GBP

IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP

Inground pot
Item no. 1000655 | 54,00 GBP

DN160 Installation spring for wood installation
Item no. 233797 | 72,00 GBP

Variant	Item no.	GBP
1000lm | 3000K | CRI>80		
brushed stainless steel	**1000384**	**314,10**



ADJUST 135
EL, square/round, QPAR51

E-A++ Spectrum A++–E






- Panel: Stainless steel 304

Product details
230V ~50Hz
Material: Plastic

IP 67 | 1.1 | 5

Dimensioned drawing



Note
Mounting pot incl.

Recommended lamp
LED GU10 7.2W 36°
4000K 590lm EEI=A+
8kWh/1000h
Item no. 1001565 | 9,90 GBP



LED GU10 7.2W 36°
2700K 470lm EEI=A+
8kWh/1000h
Item no. 1001560 | 9,90 GBP



Lamp details
35W max.
Ø: 5 cm max. L: 5.7 cm max.
optional: LED

Variant	Item no.	GBP
GU10 | QPAR51		
stainless steel	228210	99,00
GU10 | QPAR51		
stainless steel	228214	99,00

ADJUST 190
EL, square/round, QR111

D-A+ Spectrum A++–E






- Panel: Stainless steel 304
- Tiltable

Product details
230V ~50Hz 12V AC
Material: Stainless steel 304 / Aluminium / Glass

IP 67 | 2.4 | 90° | 20° | 120 | 1.5

Dimensioned drawing

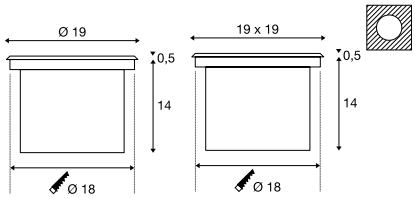

Note
Mounting pot incl.

Recommended lamp
LED G53 9W 13°
4000K 800lm EEI=A+
10kWh/1000h
Item no. 560624 | 25,20 GBP



LED G53 15W 24°
3000K 770lm EEI=A
17kWh/1000h
Item no. 560233 | 90,00 GBP




Lamp details
50W max.
optional: LED

Variant	Item no.	GBP
G53 | QR111		
stainless steel	227090	206,10
G53 | QR111		
stainless steel	227092	206,10

ADJUST 265
EL, round, HIT-CE

A-A+ Spectrum A++–E



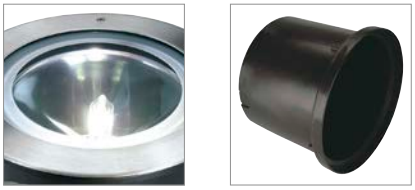


- Panel: Stainless steel 304

Product details
230V ~50Hz
Material: Stainless steel 304 / Aluminium / Glass

IP 67 | 5.1 | 15° | 101 | 5

Dimensioned drawing



Note
Mounting pot incl.

Lamp details
70W

Variant	Item no.	GBP
G12 | HIT-CE		
anthracite grey RAL7016	228240	296,10

DASAR® FLAT 80
EL

A-A++ Spectrum A⁺⁺–E









- Panel: Stainless steel 304
- Extremely flat design

Product details

230V ~50/60Hz
Total consumption: 4.3W
Material: Stainless steel 304 / Aluminium / Glass

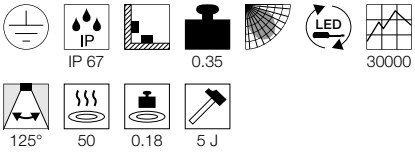


Dimensioned drawing



Note

Mounting pot incl.

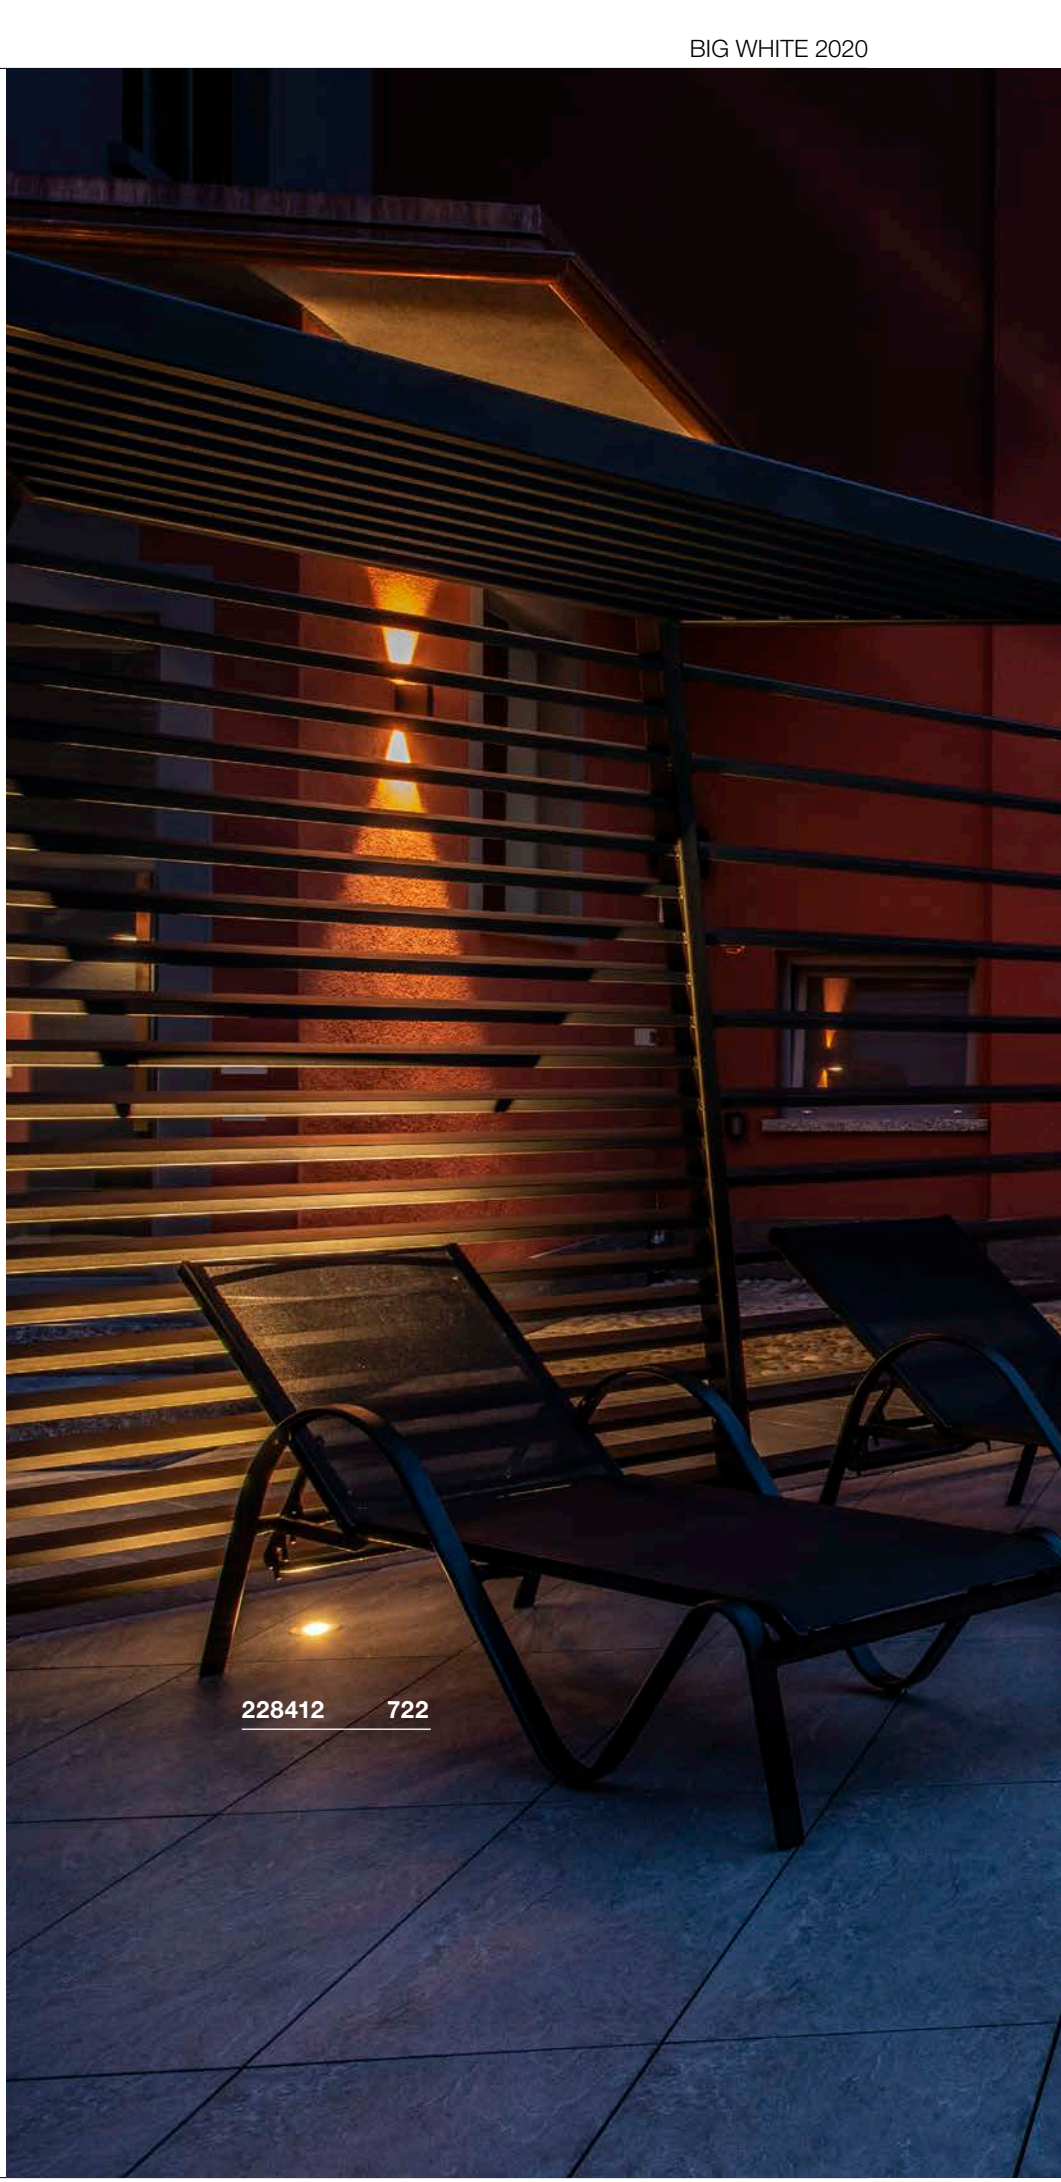


228412 722

Recommended accessories

■ IP68 connection box, 3-pole
Item no. 228730 | 13,50 GBP



Variant	Item no.	GBP
140lm | 3000K | CRI>80		
brushed stainless steel	**228412**	**99,00**
150lm | 5000K | CRI>80		
brushed stainless steel	**228411**	**99,00**
140lm | 4000K | CRI>80		
brushed stainless steel	**1002188**	**99,00**

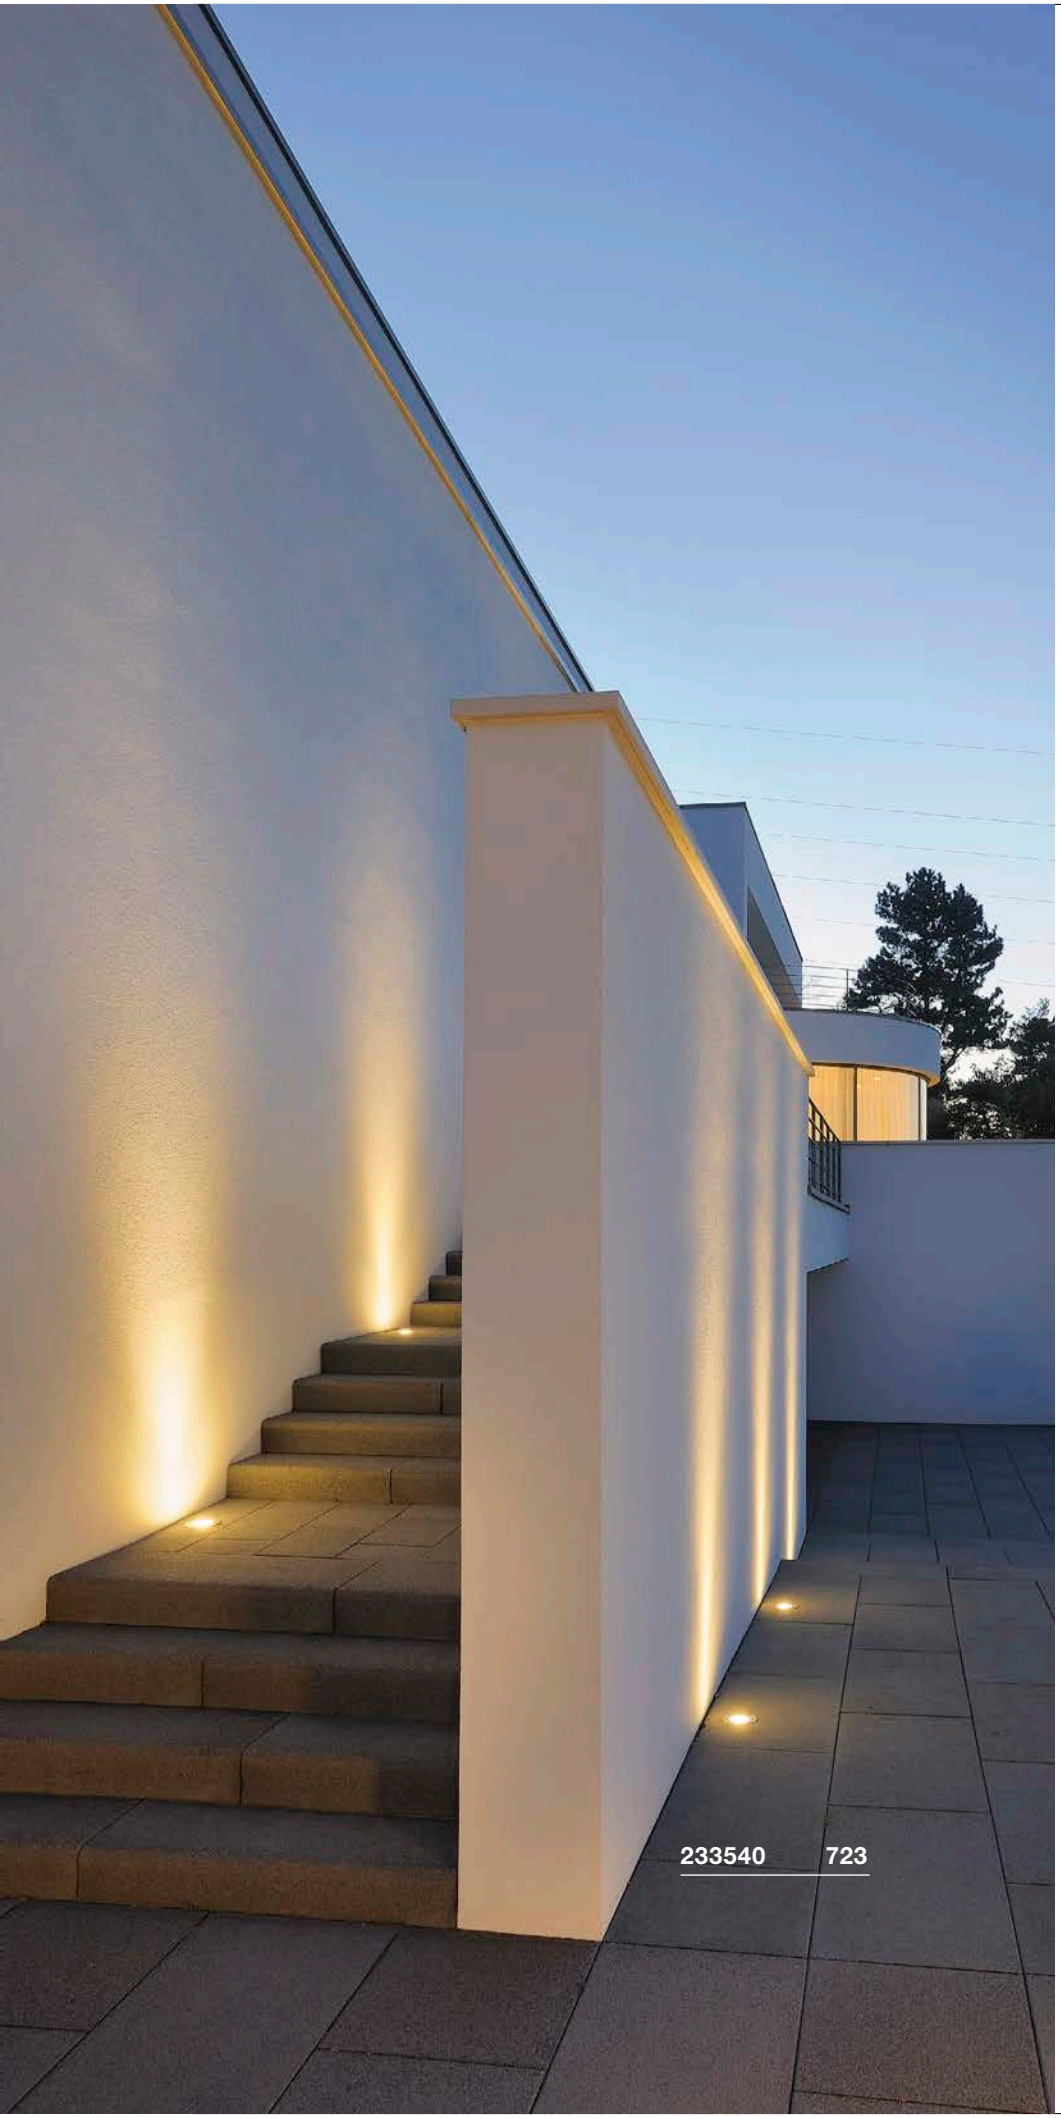


DASAR® 370
EL, square/round

A-A++ Spectrum A⁺⁺–E

LED INSIDE









- Housing and panel: Stainless steel 316L
- Premium LED

Product details

12V/24V DC
Material: Stainless steel 316L / Glass

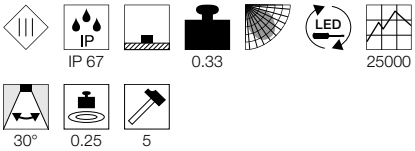

Dimensioned drawing

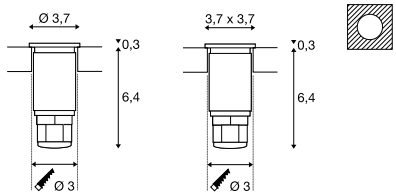

Note

Open cable end

Recommended accessories

LED power supply 24V DC | 12W
Item no. 470502 | 20,70 GBP




LED power supply, 12V DC | 12W
Item no. 470507 | 20,70 GBP



Variant	Item no.	GBP
120lm | 3000K | CRI>80		
brushed stainless steel	**233540**	**135,00**
120lm | 3000K | CRI>80		
brushed stainless steel	**233550**	**135,00**

DASAR® HIGHLIGHTS.
NO COMPROMISES – STAINLESS STEEL 316.



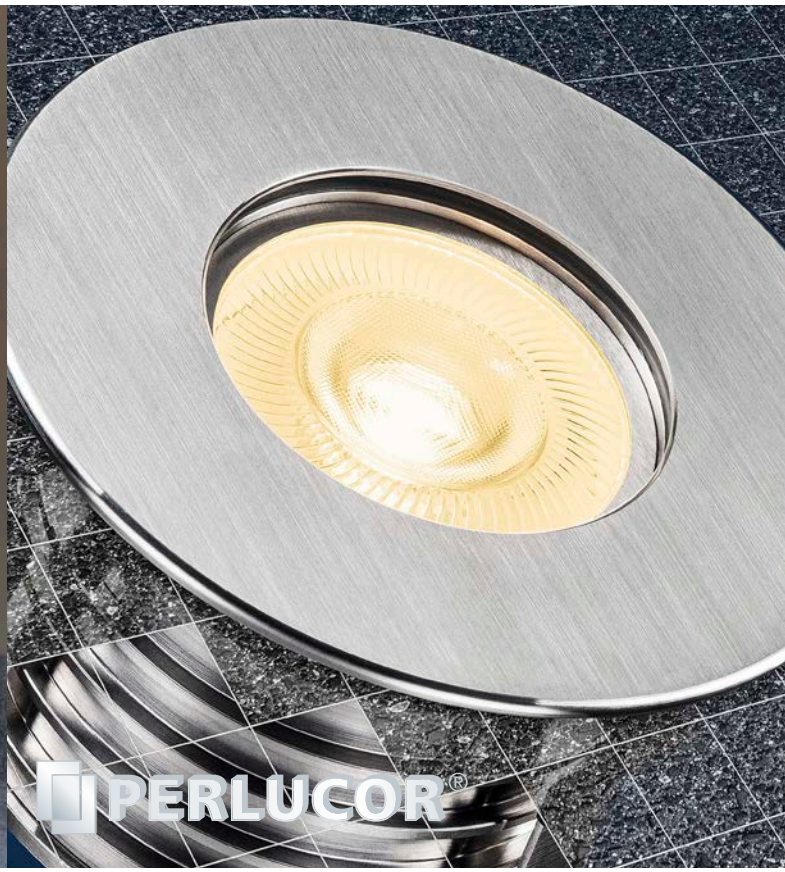



DASAR® 920 | 725

Variants:
- **Panel** stainless steel 316
- **Housing and panel** stainless steel 316



DASAR® 100 PREMIUM | 726-727

- **Round** and **square**
- **Cover** stainless steel 316L
- **PERLUCOR®** Glass:
  5x harder and **100x more** scratch resistant than conventional glass



DASAR® 150 PREMIUM | 727

- **Round** and **square**
- **Cover** stainless steel 316L
- **PERLUCOR®** Glass:
  5x harder and **100x more** scratch resistant than conventional glass

DASAR® 920
EL

A-A++ Spectrum A++–E

LED INSIDE







- Panel: Stainless steel 316
- Premium LED

Product details

12V DC / 24V DC / 7W
Material: Stainless steel 316 / Aluminium / Glass

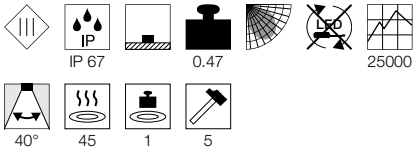

Dimensioned drawing



Note

Mounting pot incl.
Open cable end

Recommended accessories

LED power supply 24V DC | 12W
Item no. 470502 | 20,70 GBP



LED power supply 12V DC | 12W
Item no. 470507 | 20,70 GBP



Variant	Item no.	GBP
360lm | 3000K | CRI>80 brushed stainless steel	**233500**	**117,00**

DASAR® 920
EL

A-A++ Spectrum A++–E

LED INSIDE







- Panel: Stainless steel 316
- Premium LED

Product details

220-240V ~50/60Hz 400mA
Total consumption: 5.5W
Material: Stainless steel 316 / Aluminium / Glass

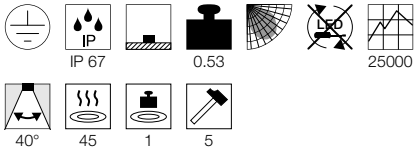

Dimensioned drawing



Note

Mounting pot incl.
Open cable end

Variant	Item no.	GBP
300lm | 3000K | CRI>80 brushed stainless steel	**233520**	**153,00**

DASAR® 920
EL

A-A++ Spectrum A++–E

LED INSIDE







- Housing and panel: Stainless steel 316
- Premium LED

Product details

220-240V ~50/60Hz 400mA
Total consumption: 5.5W
Material: Stainless steel 316 / Glass

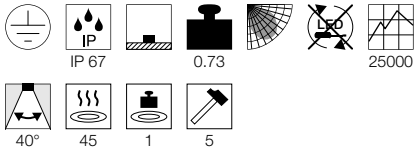


Dimensioned drawing




Note

Mounting pot incl.
Open cable end

Variant	Item no.	GBP
300lm | 3000K | CRI>80 brushed stainless steel	**233530**	**188,10**
360lm | 4000K | CRI>80 brushed stainless steel	**1002187**	**188,10**

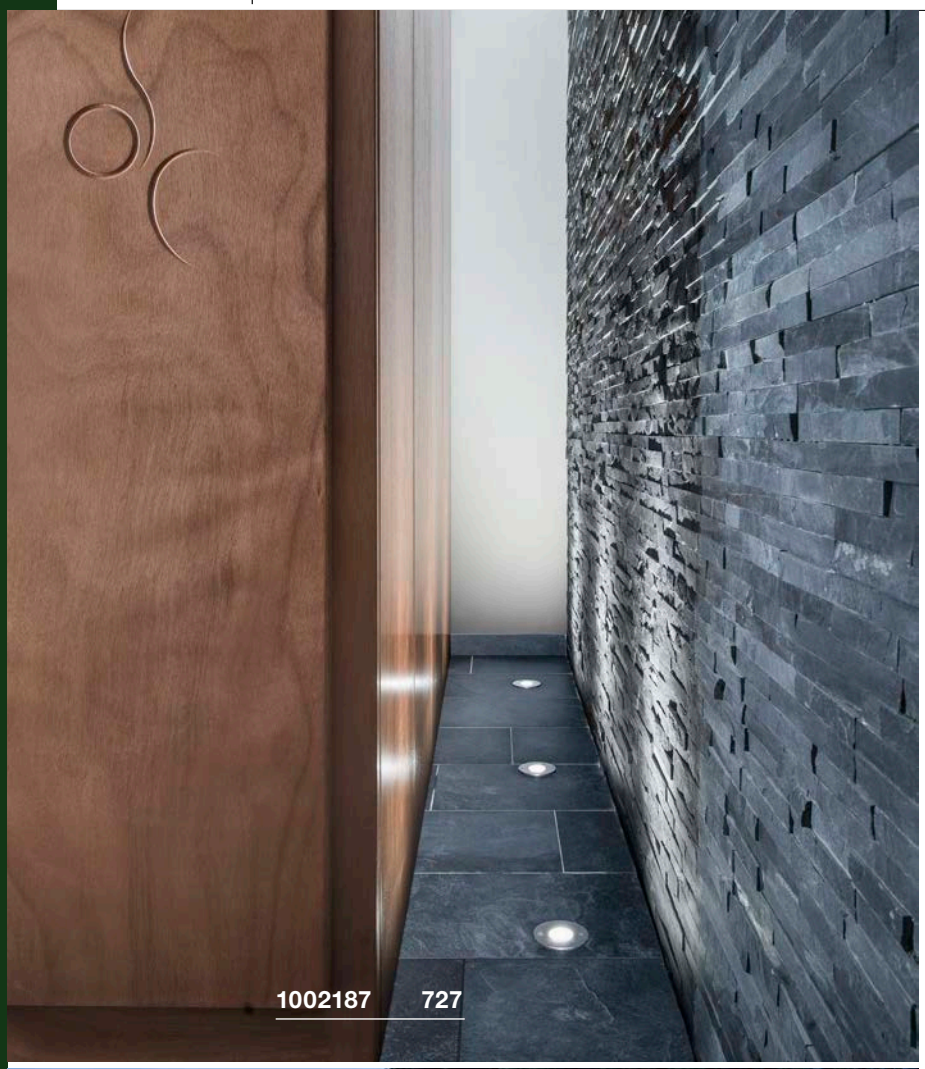

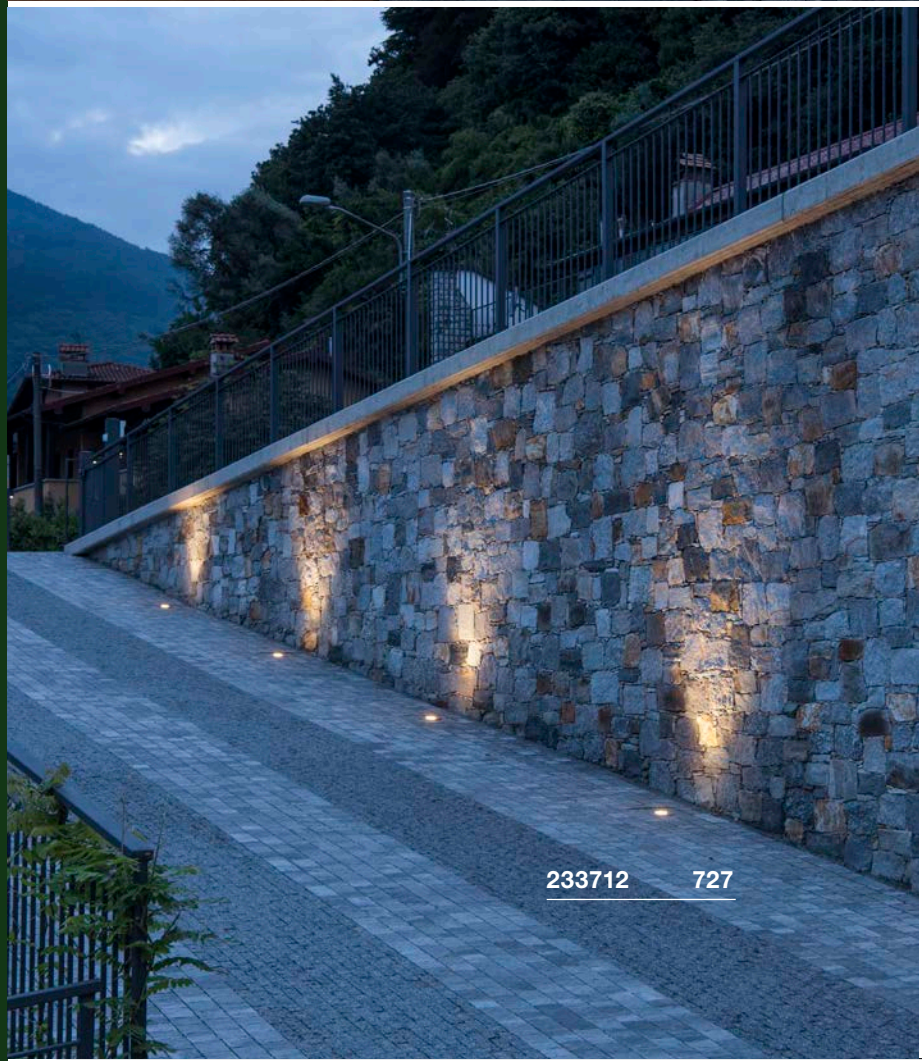

DASAR® 100 PREMIUM
EL, square

A-A++ Spectrum A++–E

LED INSIDE

PERLUCOR®









- 5x harder and 100x more scratch resistant than conventional glass
- Panel: Stainless steel 316L
- The glass is thermally, chemically, mechanically and optically resistant. Can be walked on and is scratch resistant. A surface which is almost self-cleaning. Can withstand extreme loads

Product details

220-240V ~50/60Hz 400mA
Total consumption: 5.5W
Material: Aluminium / Stainless steel 316L / Glass

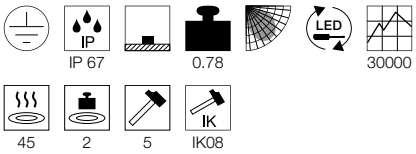

Dimensioned drawing



Note

Excludes inground tube or pot.
With installation tube (233790), can withstand load of 2t, With inground tube (1000653), can withstand load of 0.5t. Suitable for installation tubes, Open cable end, Mounting clips incl.

Recommended accessories

T-connector box
Item no. 228726 | 20,70 GBP



Installation tube DN90
Item no. 233790 | 20,70 GBP

DN90 installation spring for wood installation
Item no. 233795 | 20,70 GBP



Inground pot
Item no. 1000653 | 40,50 GBP



Variant	Item no.	GBP
300lm | 3000K | CRI>80 | 24°		
stainless steel	**233692**	**224,10**
300lm | 3000K | CRI>80 | 60°		
stainless steel	**233696**	**224,10**

DASAR® 100 PREMIUM
EL, round

A-A++ Spectrum A++–E

LED INSIDE PERLUCOR®









- 5x harder and 100x more scratch resistant than conventional glass
- Panel: Stainless steel 316L
- The glass is thermally, chemically, mechanically and optically resistant. Can be walked on and is scratch resistant. A surface which is almost self-cleaning. Can withstand extreme loads

Product details

220-240V ~50/60Hz 400mA
Total consumption: 5.5W
Material: Aluminium / Stainless steel 316L / Glass

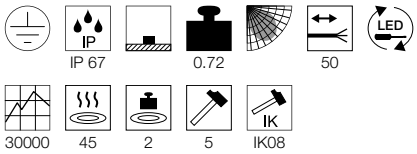

Dimensioned drawing



Note

Excludes inground tube or pot.
With installation tube (233790), can withstand load of 2t, With inground pot (1000653), can withstand load of 0.5t. Suitable for inground tubes, Open cable end, Mounting clips incl.

Recommended accessories

- T-connector box
  Item no. 228726 | 20,70 GBP
- Installation tube DN90
  Item no. 233790 | 20,70 GBP
- DN90 installation spring for wood installation
  Item no. 233795 | 20,70 GBP
- Inground pot
  Item no. 1000653 | 40,50 GBP

Variant	Item no.	GBP
300lm | 3000K | CRI>80 | 24°		
stainless steel	233672	224,10
300lm | 3000K | CRI>80 | 60°		
stainless steel	233676	224,10

DASAR® 150 PREMIUM
EL, round

A-A++ Spectrum A++–E

LED INSIDE PERLUCOR®









- 5x harder and 100x more scratch resistant than conventional glass
- Panel: Stainless steel 316L
- The glass is thermally, chemically, mechanically and optically resistant. Can be walked on and is scratch resistant. A surface which is almost self-cleaning. Can withstand extreme loads

Product details

220-240V ~50/60Hz 620mA
Total consumption: 17W
Material: Aluminium / Stainless steel 316L / Glass

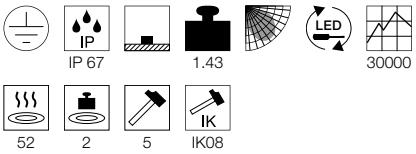

Dimensioned drawing



Note

Excludes inground tube or pot.
With installation tube (233791), can withstand load of 2t, With inground tube (1000654), can withstand load of 0.5t. Suitable for installation tubes, Open cable end, Mounting clips incl.

Recommended accessories

- T-connector box
  Item no. 228726 | 20,70 GBP
- Installation tube DN125
  Item no. 233791 | 40,50 GBP
- DN125 installation spring for wood installation
  Item no. 233796 | 49,50 GBP
- Inground pot
  Item no. 1000654 | 45,00 GBP

Variant	Item no.	GBP
1200lm | 3000K | CRI>80 | 30°		
stainless steel	233712	422,10
1200lm | 3000K | CRI>80 | 60°		
stainless steel	233716	422,10

DASAR® 150 PREMIUM
EL, square

A-A++ Spectrum A++–E

LED INSIDE PERLUCOR®









- 5x harder and 100x more scratch resistant than conventional glass
- Panel: Stainless steel 316L
- The glass is thermally, chemically, mechanically and optically resistant. Can be walked on and is scratch resistant. A surface which is almost self-cleaning. Can withstand extreme loads

Product details

220-240V ~50/60Hz 620mA
Total consumption: 17W
Material: Aluminium / Stainless steel 316L / Glass

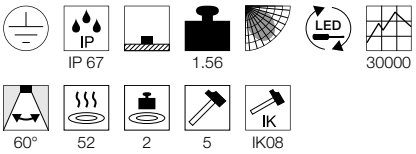

Dimensioned drawing




Note


Excludes inground tube or pot.
With installation tube (233791), can withstand load of 2t, With inground tube (1000654), can withstand load of 0.5t. Suitable for installation tubes, Open cable end, Mounting clips incl.


Recommended accessories

- T-connector box
  Item no. 228726 | 20,70 GBP
- Installation tube DN125
  Item no. 233791 | 40,50 GBP
- DN125 installation spring for wood installation
  Item no. 233796 | 49,50 GBP
- Inground pot
  Item no. 1000654 | 45,00 GBP

Variant	Item no.	GBP
1200lm | 3000K | CRI>80 | 30°		
stainless steel	233732	422,10
1200lm | 3000K | CRI>80 | 60°		
stainless steel	233736	422,10

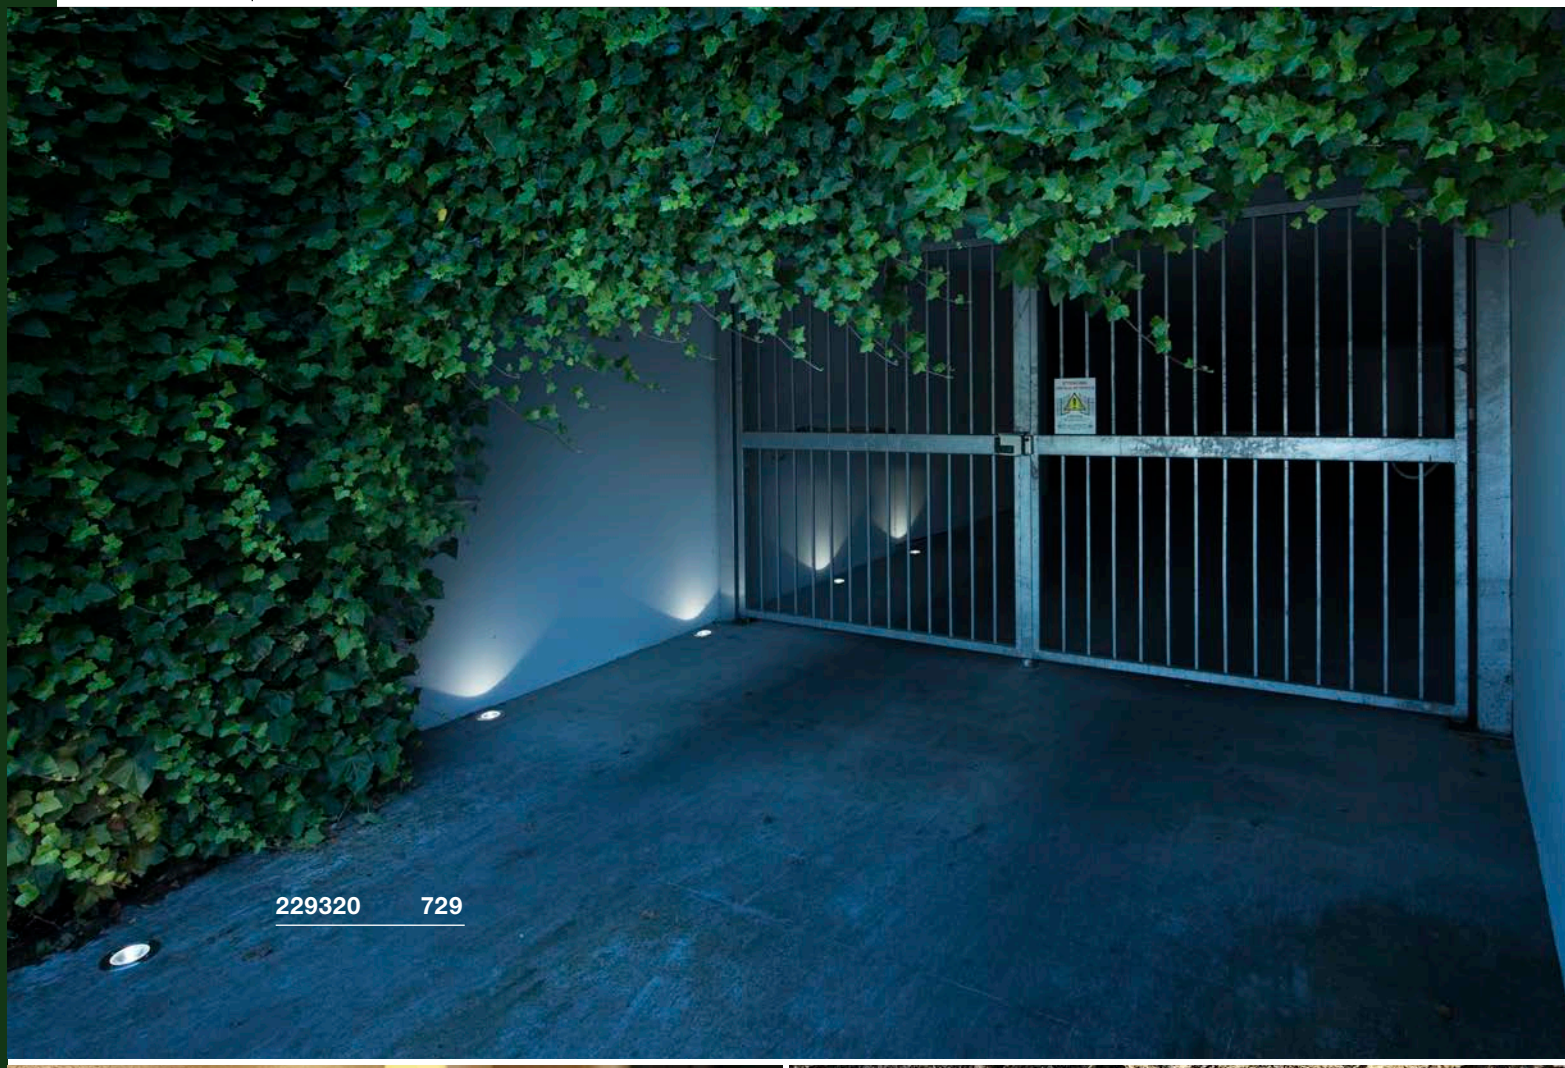
229320 729

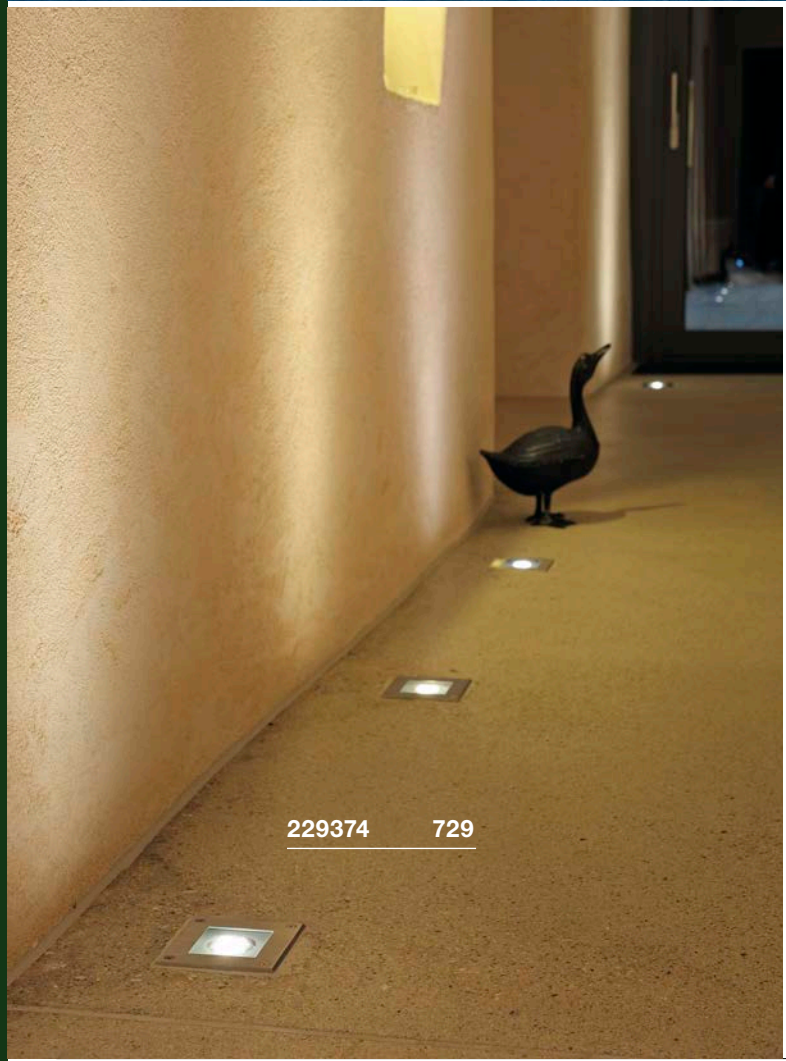
229374 729

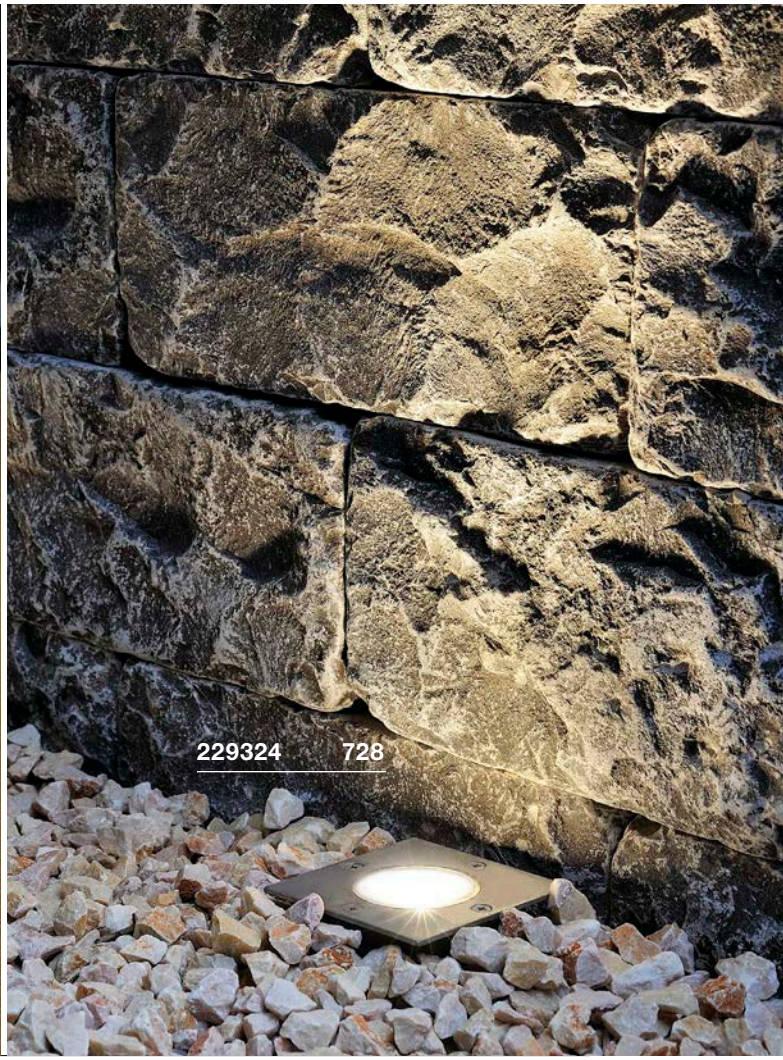
229324 728

DASAR® 80
EL, square/round, QPAR51




- Panel: Stainless steel 316

Product details
230V ~50Hz
Material: Stainless steel 316 / Aluminium / Glass

IP 67 | 0.9 | 90° | 30° | 110 | 2 | 5

Dimensioned drawing



Note
Mounting pot incl.

Recommended lamp
LED GU10 5.5W 38°
3000K 440lm EEI=A+
6kWh/1000h | **3 Step-Dim**
Item no. 551902 |13,50 GBP

LED GU10 7.2W 36°
3000K 470lm EEI=A+
8kWh/1000h

Item no. 1001562 |9,90 GBP

Lamp details
35W max.
Ø: 5 cm max. L: 6 cm max.
optional: LED

Variant	Item no.	GBP
GU10 | QPAR51		
stainless steel	**229320**	**99,00**
GU10 | QPAR51		
stainless steel	**229324**	**99,00**

DASAR® 70
EL, square, QPAR51




- Panel: Stainless steel 304

Product details
230V ~50Hz
Material: Stainless steel 304 / Aluminium / Glass

IP 67 | 1.15 | 90° | 30° | 127 | 2 | 5

Dimensioned drawing



Note
Mounting pot incl.

Recommended lamp
LED GU10 5.5W 36°
2800K 500lm EEI=A+
6kWh/1000h
Item no. 1001217 |15,30 GBP

LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h | **3 Step-Dim**

Item no. 1001030 |15,30 GBP

Lamp details
35W max.
Ø: 5 cm max. L: 6 cm max.
optional: LED

Variant	Item no.	GBP
GU10 | QPAR51		
stainless steel	**229374**	**99,00**

DASAR® EXACT 116
EL, square/round, QPAR51




- Panel: Stainless steel 316
- For inground installation

Product details
230V ~50Hz
Material: Stainless steel 316 / Aluminium / Glass

IP 67 | 0.96 | 90° | 30° | 96 | 2 | 5

Dimensioned drawing



Note
Mounting pot incl.

Recommended lamp
LED GU10 5.5W 38°
3000K 440lm EEI=A+
6kWh/1000h | **3 Step-Dim**
Item no. 551902 |13,50 GBP

LED GU10 7.2W 36°
3000K 470lm EEI=A+
8kWh/1000h

Item no. 1001562 |9,90 GBP

Lamp details
35W max.
Ø: 5 cm max. L: 6 cm max.
optional: LED

Variant	Item no.	GBP
GU10 | QPAR51		
brushed stainless steel	**228430**	**108,00**
GU10 | QPAR51		
brushed stainless steel	**228434**	**108,00**

DASAR® 215
EL, square/round, QPAR111


E-A++ Spectrum A++–E






- Panel: Stainless steel 316
- Straight, sophisticated design for maximum adaptability

Product details
230V ~50Hz
Material: Stainless steel 316 / Aluminium / Glass



Dimensioned drawing

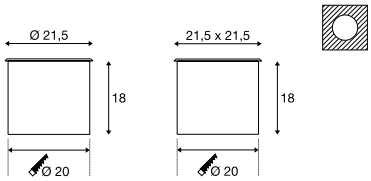

Note
Mounting pot incl.

Recommended lamp
LED GU10 5.5W 36°
2800K 500lm EEI=A+
6kWh/1000h
Item no. 1001217 | 15,30 GBP



LED GU10 5.5W 38°
2700K 400lm EEI=A+
6kWh/1000h | **3 Step-Dim**
Item no. 1001030 | 15,30 GBP



Lamp details
75W max.
optional: LED

Variant	Item no.	GBP
GU10 | QPAR111		
stainless steel	**229230**	**215,10**
GU10 | QPAR111		
stainless steel	**229234**	**215,10**

DASAR® 218
EL, QR111


D-A+ Spectrum A++–E






- Panel: Stainless steel 316
- Bigger swivelling range than conventional inground fittings

Product details
230V ~50Hz 12V AC
Material: Stainless steel 316 / Aluminium / Glass

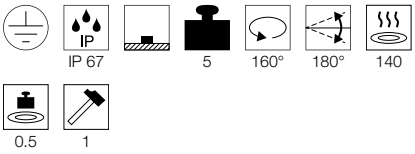

Dimensioned drawing



Note
Mounting pot incl.

Recommended lamp
LED G53 9W 13°
4000K 800lm EEI=A+
10kWh/1000h
Item no. 560624 | 25,20 GBP



LED G53 15W 24°
3000K 770lm EEI=A
17kWh/1000h
Item no. 560233 | 90,00 GBP



Lamp details
50W max.
optional: LED

Variant	Item no.	GBP
G53 | QR111		
stainless steel	**228370**	**260,10**

DASAR® 215
EL, round, E27

A-A++ Spectrum A++–E









- Panel: Stainless steel 316
- Straight, sophisticated design for maximum adaptability

Product details
230V ~50Hz
Material: Stainless steel 316 / Aluminium / Glass



Dimensioned drawing




Note
Surface temperature:
Energy saver = 48°C/ PAR 30 = 119°C/
PAR 38 = 108°C
Mounting pot incl.


Recommended lamp
LED E27 9W 240°
3000K 810lm EEI=A+
10kWh/1000h
Item no. 1001031 | 15,30 GBP



Lamp details
11W max.
Ø: 4.5 cm max. L: 13.4 cm max.
optional: LED PAR30 PAR38

Variant	Item no.	GBP
E27 | TC(…)SE		
stainless steel	**229200**	**206,10**

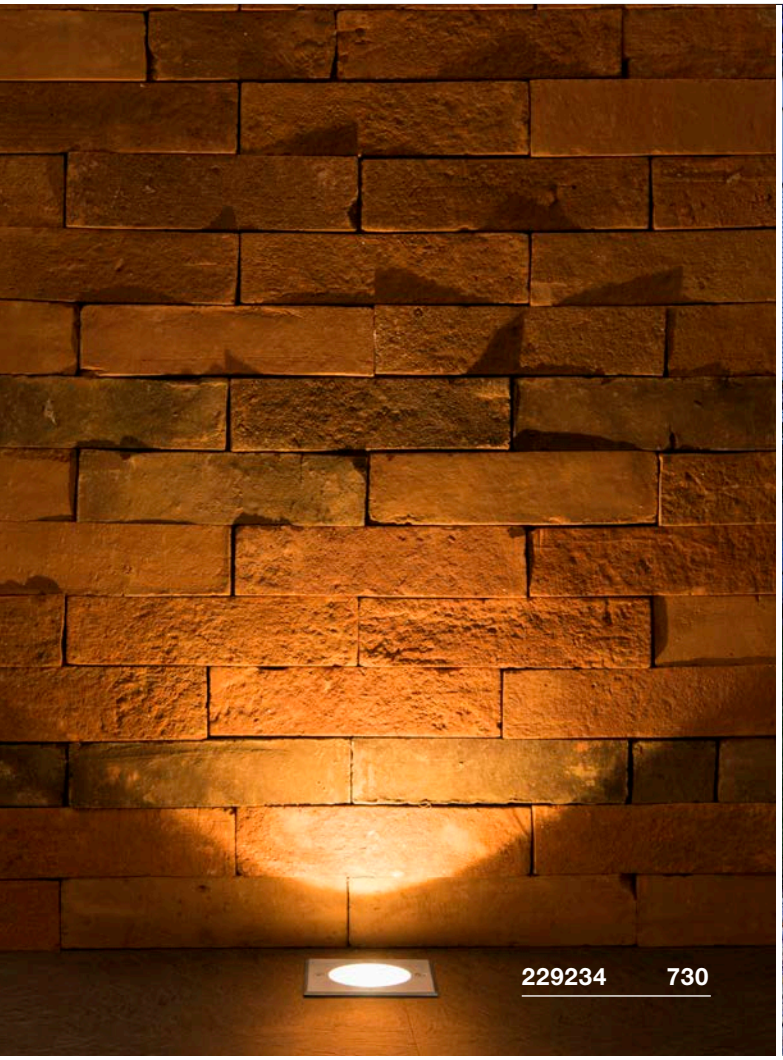
229234 730

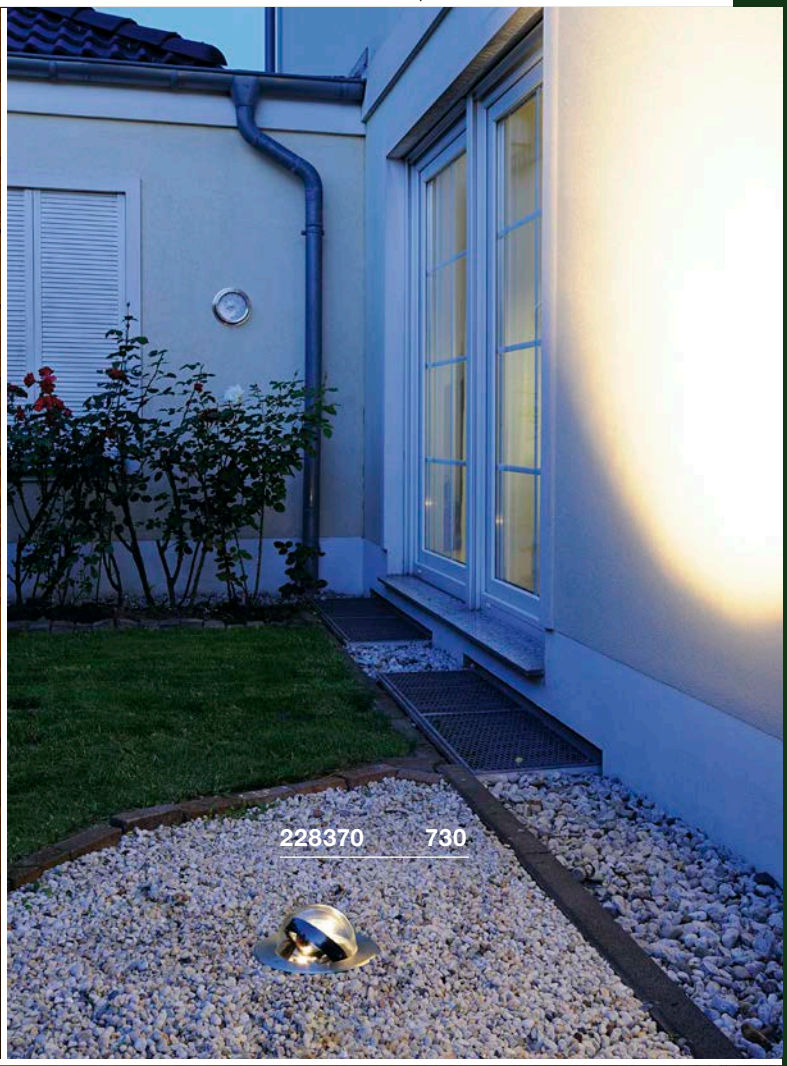
228370 730


229230 730



1002893 733

DASAR® 255
EL

A-A++ Spectrum A++–E

LED INSIDE









- Panel: Stainless steel 316
- Asymmetrical reflector

Product details

220-240V ~50/60Hz 750mA
Total consumption: 34W
Material: Stainless steel 316 / Aluminium / Glass

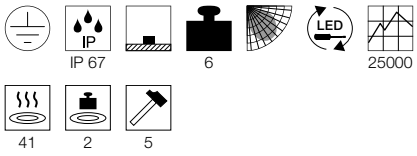

Dimensioned drawing



Note

Mounting pot incl.

Variant	Item no.	GBP
1620lm | 4000K | CRI>80		
stainless steel	229381	314,10
1620lm | 3000K | CRI>80		
stainless steel	229383	314,10

DASAR® 270
EL, asymmetrical

A-A++ Spectrum A++–E

LED INSIDE

NEW








- Asymmetric light distribution

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Stainless Steel 316
Product dimensions: Ø: 27 cm H: 20.3 cm
Installation dimensions: Installation
Ø: 25 cm D: 19.9 cm

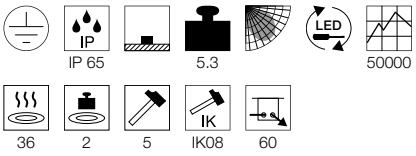

Note

Mounting pot incl.

Variant	Item no.	GBP
2000lm | 3000K | CRI>80		
matt black / brushed stainless steel	1002893	359,10
2100lm | 4000K | CRI>80		
matt black / brushed stainless steel	1002895	359,10

DASAR® 270
EL, symmetrical

A-A++ Spectrum A++–E

LED INSIDE

NEW








- Symmetric light distribution
- Tilting lamp head

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Stainless Steel 316
Product dimensions: Ø: 27 cm H: 20.3 cm
Installation dimensions: Installation
Ø: 25 cm D: 19.9 cm

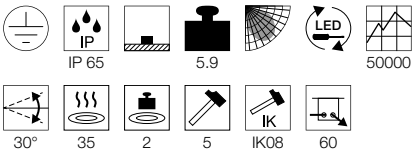

Note

Mounting pot incl.

Recommended accessories

Honeycomb cover
Item no. 1002899 |9,90 GBP




Variant	Item no.	GBP
2500lm | 3000K | CRI>80		
matt black / brushed stainless steel	1002897	359,10
2600lm | 4000K | CRI>80		
matt black / brushed stainless steel	1002898	359,10

DASAR®
EL, T16

A-A+ Spectrum A⁺⁺–E





- Panel: Stainless steel 316


Product details

230V ~50Hz
Total consumption: 13.6W
Material: Stainless steel 316 / Aluminium / Glass





Dimensioned drawing



Note

Mounting pot incl.

Recommended lamp

G5 14W
3000K 1200lm EEI=A+
6kWh/1000h
Item no. 548014 | 9,00 GBP

Lamp details


14W

Variant	Item no.	GBP
G5 | T16		
stainless steel	**230100**	**404,10**

DASAR®
EL, T16

A-A+ Spectrum A⁺⁺–E





- Panel: Stainless steel 316


Product details

230V ~50Hz
Total consumption: 23.3W
Material: Stainless steel 316 / Aluminium / Glass





Dimensioned drawing



Note

Mounting pot incl.


Recommended lamp


G5 21W
3000K 1900lm EEI=A+
23kWh/1000h
Item no. 548021 | 9,90 GBP


Lamp details


21W

Variant	Item no.	GBP
G5 | T16		
stainless steel	**230110**	**431,10**

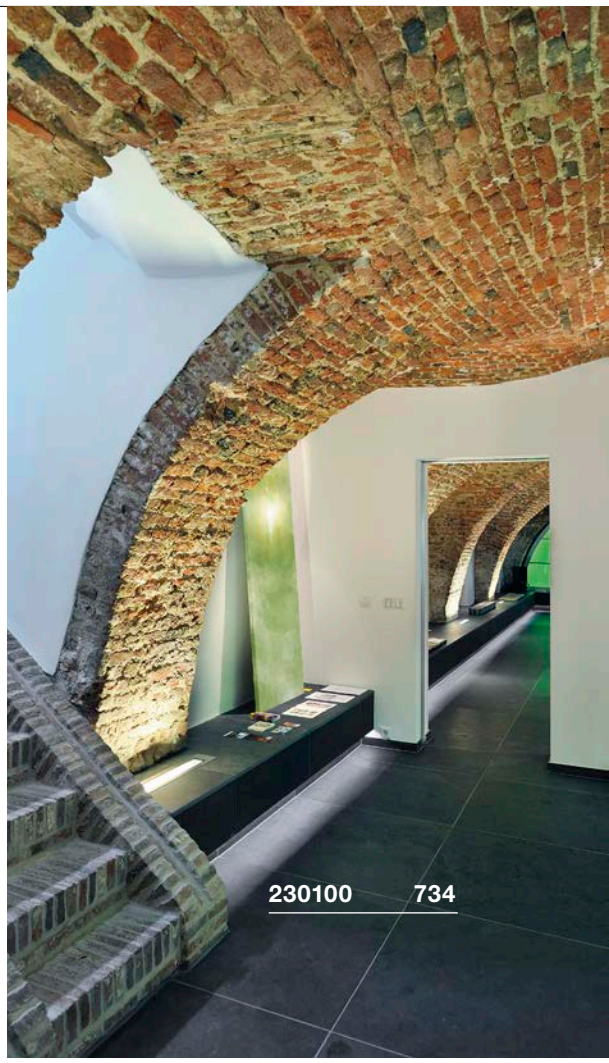

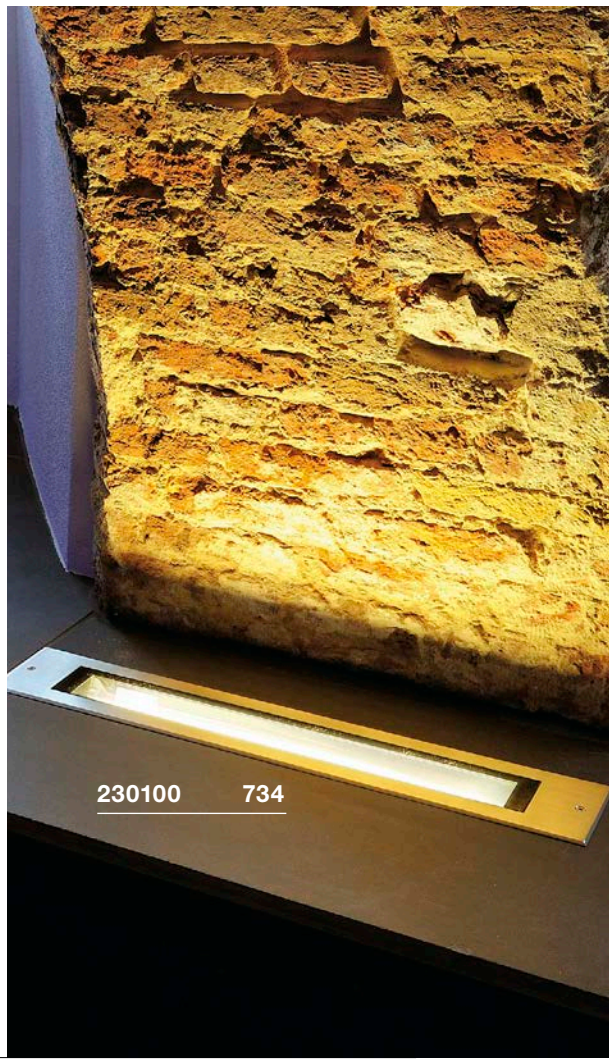


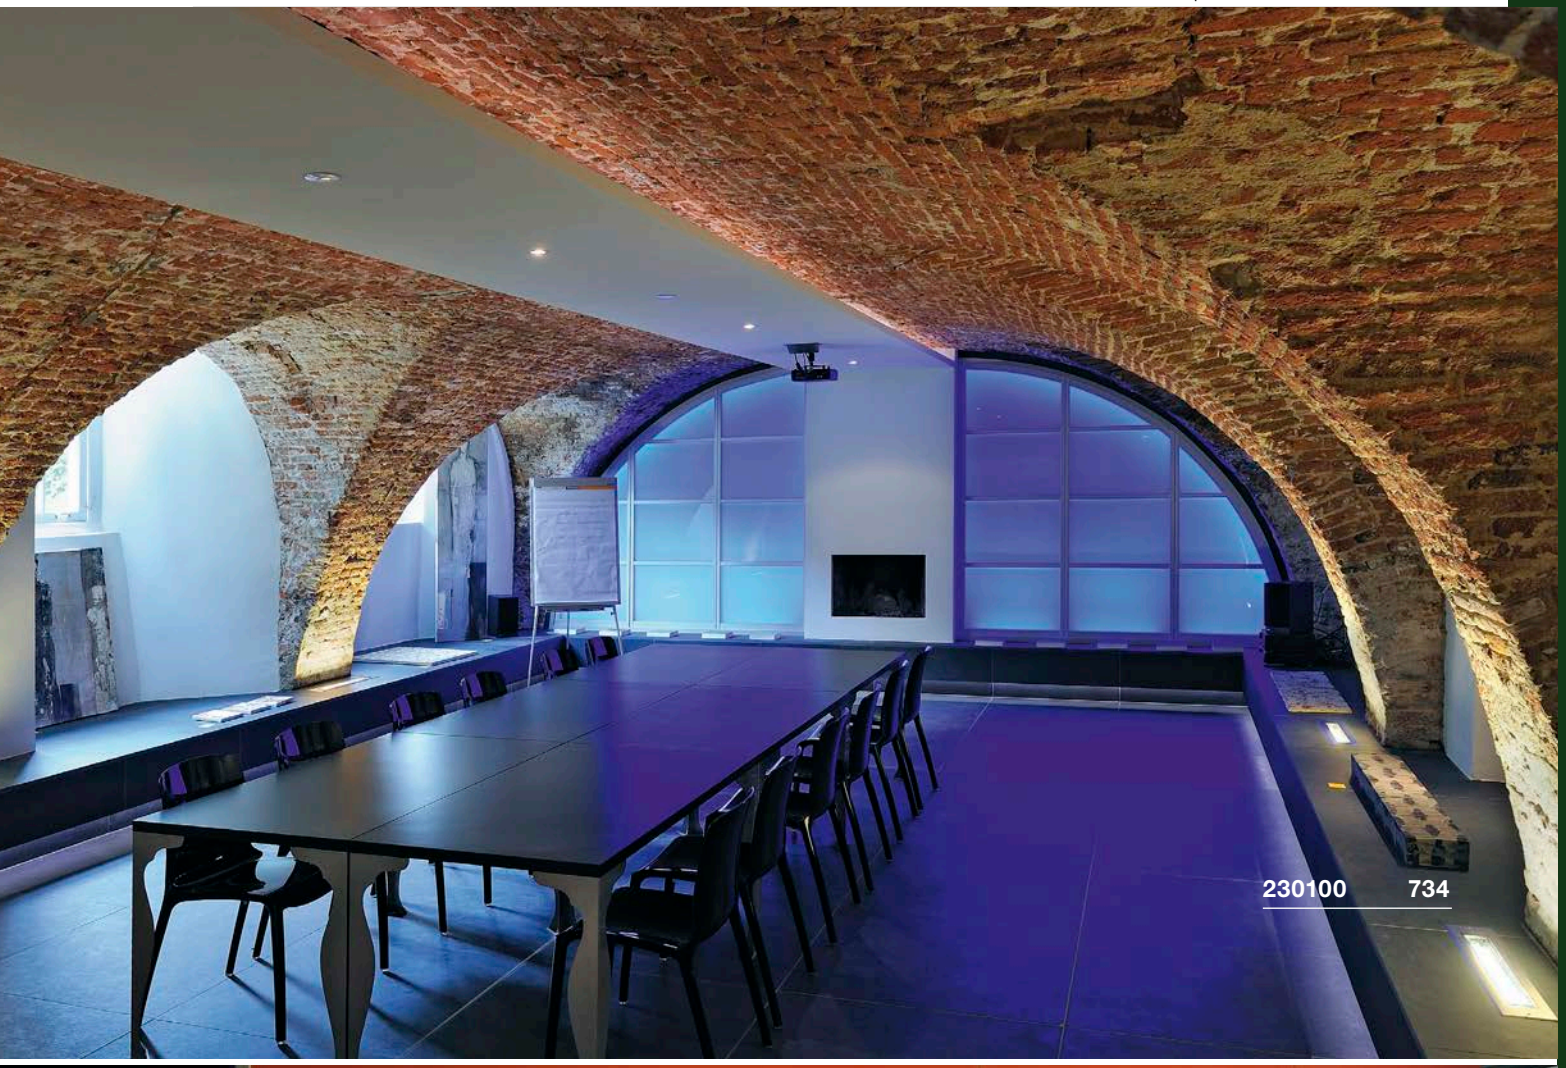
230100 734

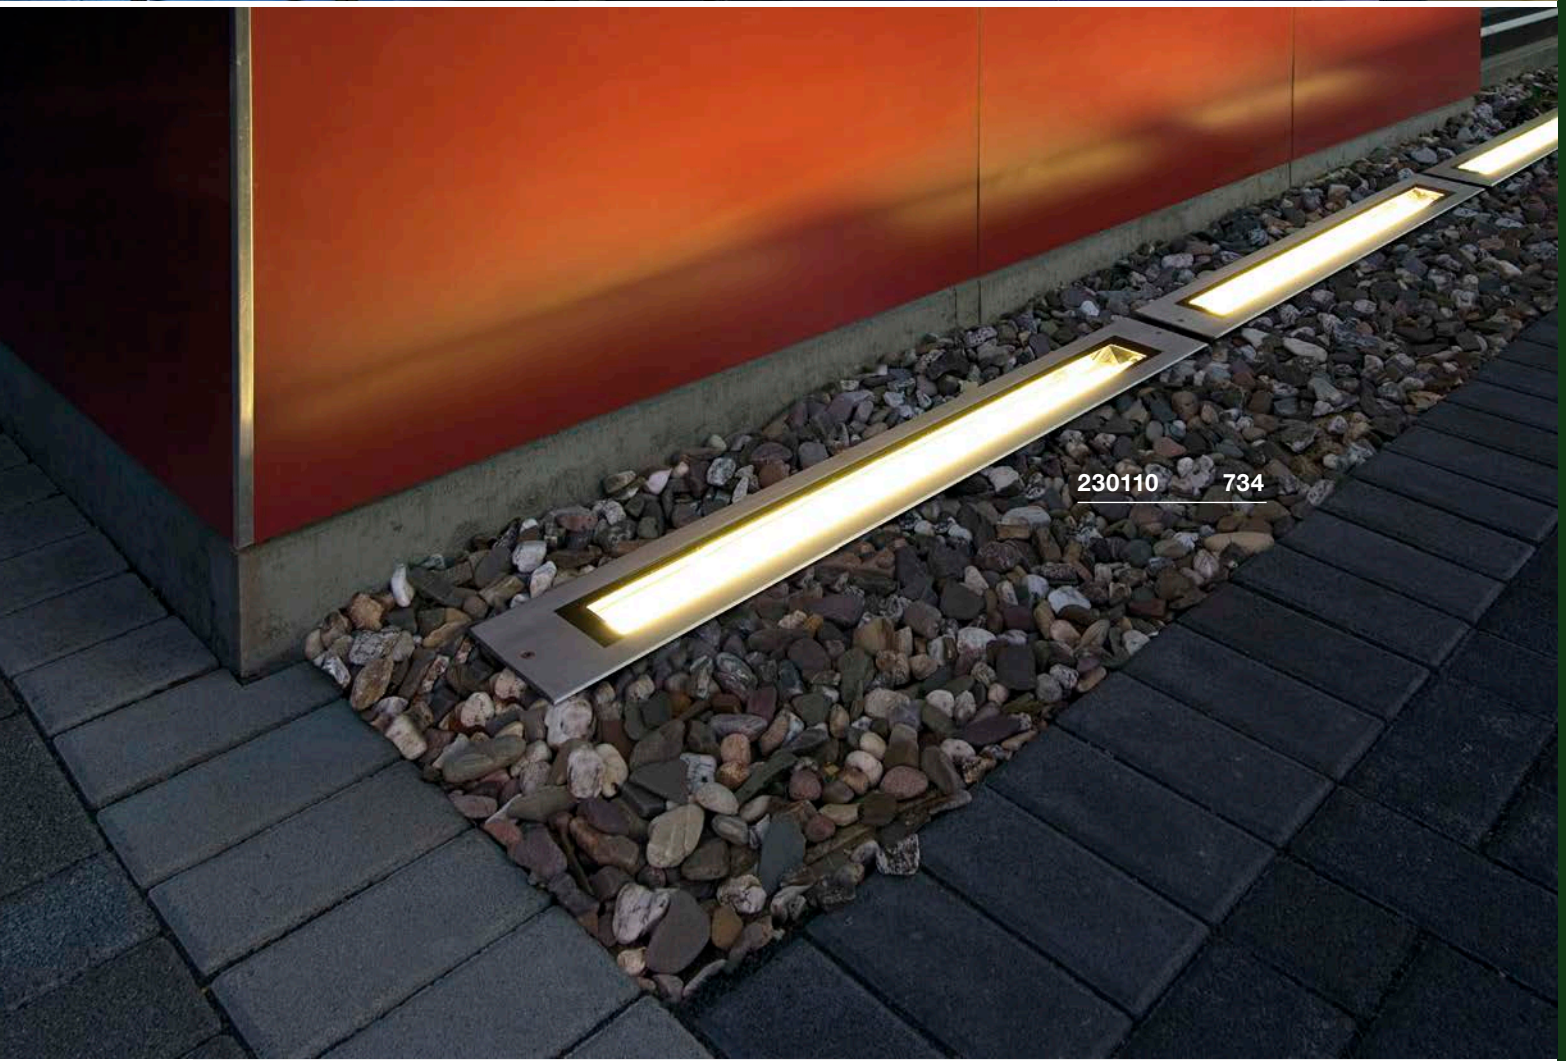
230110 734

IN CASE OF EMERGENCY.

Feel safe: With our fireproof solutions for standard-compliant increased fire protection in F90 ceilings. You are well prepared for emergencies with the SLV recessed and surface mounted luminaires for escape routes.

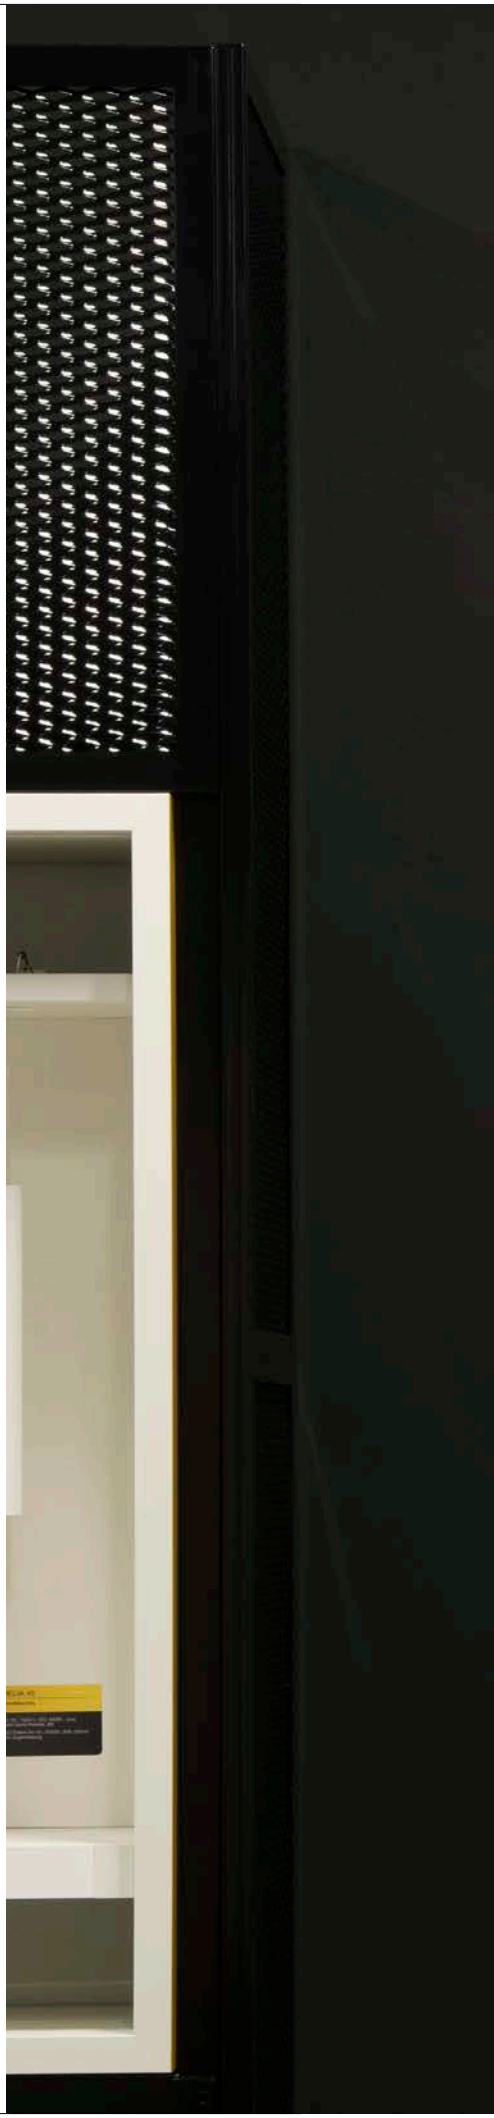



240000 740


240002 741

240000 740



SAFETY SOLUTIONS


740


741


742


743


745

Other luminaires and variants can be found online at www.slv.com

P-LIGHT
CW

894

A-A++ Spectrum A++–E

LED INSIDE









- Detection range 24 m
- Easy to install
- Flexibly deployable as surface-mounted variant on ceiling or wall
- Flat emergency lighting with efficient LED technology
- Set of 4 pictograms for inserting enclosed

Product details

220-240V ~50Hz
Total consumption: 3.5W
Material: ABS / Polycarbonate (PC)



Dimensioned drawing



Note

Detection range 24 m, 3 rescue route symbols (right / left / down) and 1 white transparency enclosed. Emergency lighting with in-built Ni-Mh battery, with automatic self-test. Emergency operating time 3 hrs. luminance>15cd/m². Operating mode: Continuously on / standby

Recommended accessories

Rechg. battery 3.6V | 900mA
Item no. 240020 | 14,40 GBP



Set of pictogram transparencies
Item no. 240007 | 27,00 GBP



Variant	Item no.	GBP
32lm | 6000K | CRI>70		
white	240000	117,00

Pictogram transparencies

Polypropylene (PP)
W: 24 cm H: 13.1 cm



Set of 5 pictograms for inserting (left diagonally upwards / left diagonally downwards / right diagonally upwards / right diagonally downwards / upwards).
1 piece

Variant	Item no.	GBP
green	240007	27,00
















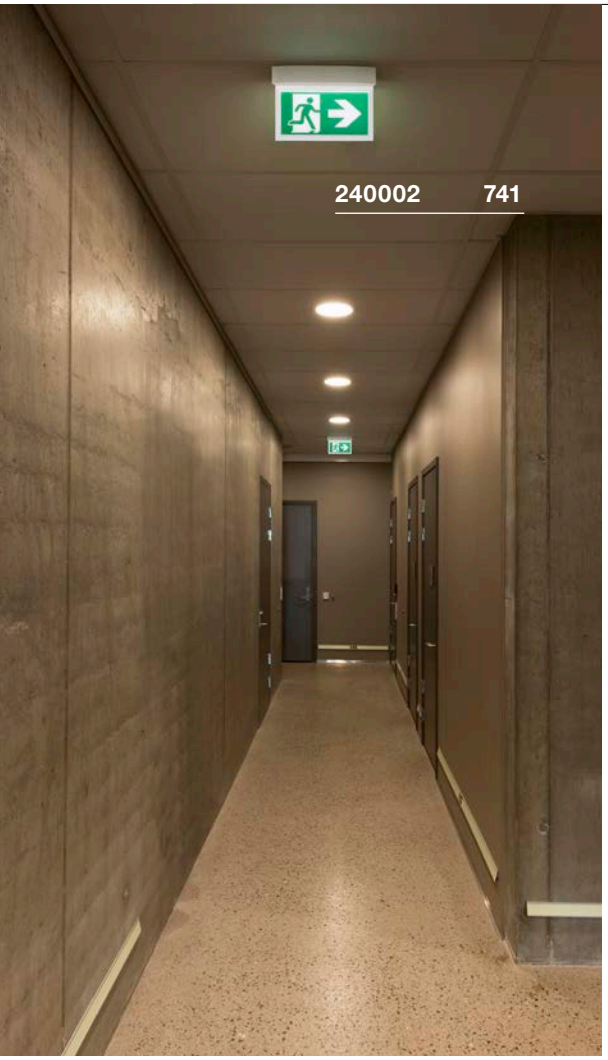



P-LIGHT
CW

894

A-A++ Spectrum A++–E

LED INSIDE



Pictogram transparencies

Polypropylene (PP)
W: 30 cm H: 16.1 cm



Set of 5 pictograms for inserting (left diagonally upwards / left diagonally downwards / right diagonally upwards / right diagonally downwards / upwards).
1 piece

Variant	Item no.	GBP
green	240008	29,70

















- Detection range 30 m
- Tested in accordance with DIN EN 60598-2-22
- Flexibly deployable as surface-mounted variant on ceiling or wall
- Extremely low maintenance costs due to efficient LED technology
- Set of 4 pictograms for inserting enclosed
- Easy to install

Product details

220-240V ~50/60Hz
Total consumption: 4W
Material: ABS / Polycarbonate (PC)



Dimensioned drawing



Note

Detection range 30 m, 3 rescue route symbols (right / left / down) and 1 white transparency enclosed. Emergency lighting with in-built Ni-Mh battery, with automatic self-test. Emergency operating time 3 hrs. luminance>15cd/m^2. Operating mode: Continuously on / standby

Recommended accessories

Rechg. battery 3.6V | 1000mA
Item no. 240021 | 16,20 GBP



Set of pictogram transparencies
Item no. 240008 | 29,70 GBP



Variant	Item no.	GBP
32lm | 6000K | CRI>70		
white	240002	153,00

P-LIGHT
CL

894

A-A++ Spectrum A⁺⁺–E

LED INSIDE







- Tested in accordance with DIN EN 60598-2-22
- Recessed ceiling light with efficient LED technology

Product details

220-240V ~50Hz
Total consumption: 5W
Material: ABS / Polycarbonate (PC)




0.37 25000



90°

Dimensioned drawing



Note

Can be used as emergency lighting. Auto test function, Ni-Mh battery 2x 3.6V 1.5Ah included. Emergency battery operation 3 hrs. half beam angle 90° material thickness of installation surface: 25 mm max.


Recommended accessories

Rechg. battery 7.2V | 1000mA
Item no. 240024 | 34,20 GBP



Variant	Item no.	GBP
120lm | 6000K | CRI>70 white	240006	153,00



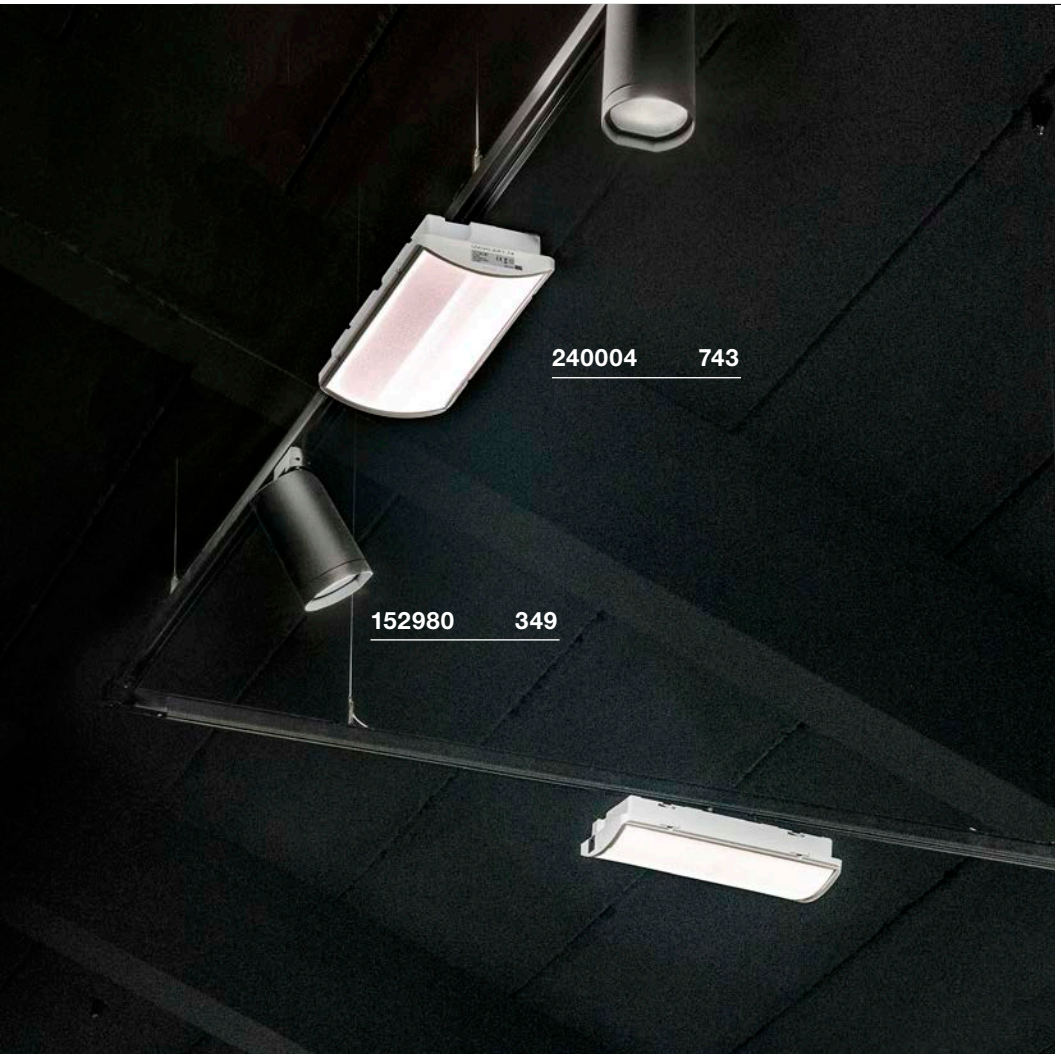

P-LIGHT
CW

894

A-A++ Spectrum A⁺⁺–E

LED INSIDE






- Detection range 30 m
- IP 65 luminaire with efficient LED technology
- Tested in accordance with DIN EN 60598-2-22
- Flexibly deployable as surface-mounted variant on ceiling or wall
- Easy to install

Product details

220-240V ~50Hz
Total consumption: 6.5W
Material: Polycarbonate (PC)

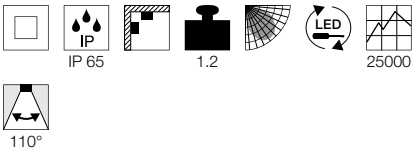

Pictogram transparencies

Polypropylene (PP)
W: 35.3 cm H: 16.5 cm

Set of 2 pictograms for inserting (right diagonally upwards / right diagonally downwards)
1 piece



Variant	Item no.	GBP
green	240010	17,10



Pictogram transparencies

Polypropylene (PP)
W: 35.3 cm H: 16.5 cm


Set of 3 pictograms for inserting (top, bottom, right)
1 piece



Variant	Item no.	GBP
green	240009	20,70



Dimensioned drawing



Note

Detection distance 30 m. Use as emergency lighting. Auto test function, Ni-Mh battery 2x 3.6V 1.0Ah included. Emergency battery operation 2 hrs. Rescue route signs optionally available and usable as emergency indication luminaire.

Recommended accessories

Rechg. battery 3.6V | 1000mA, 2 pcs.
Item no. 240022 | 28,80 GBP




Set of pictogram transparencies
Item no. 240009 | 20,70 GBP



Set of pictogram transparencies
Item no. 240010 | 17,10 GBP



Variant	Item no.	GBP
100lm | 6000K | CRI>70		
white	240004	180,00

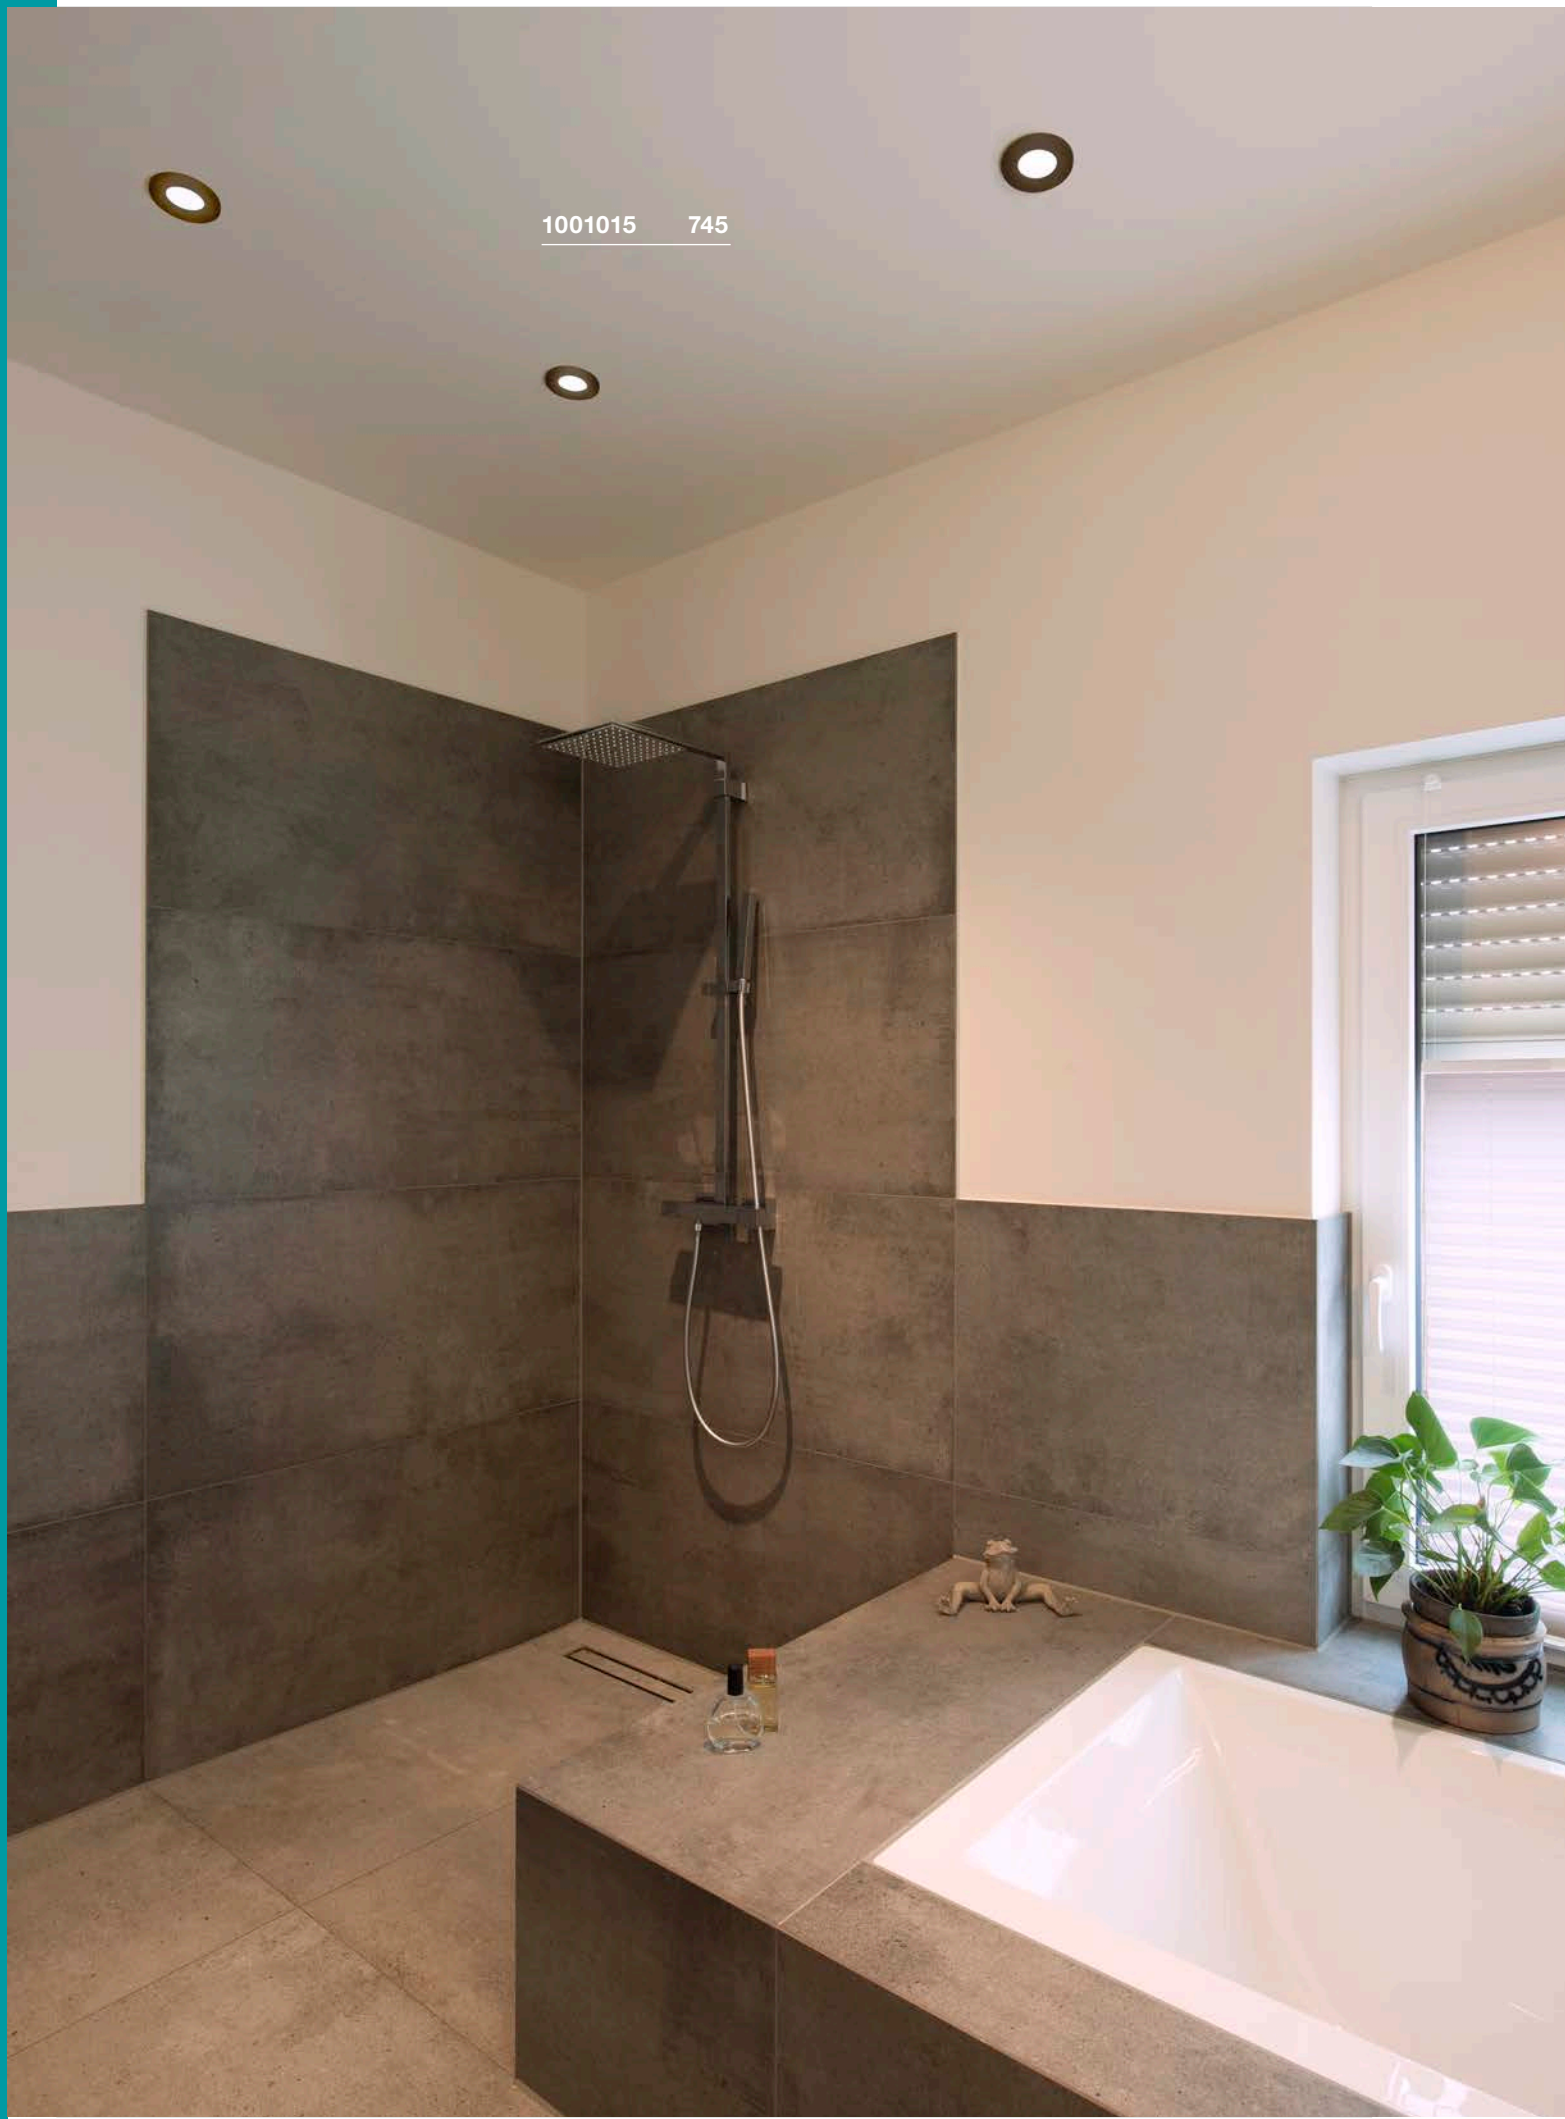
1001015 745



KAMUELA ECO
EL, round, TRIAC

A-A++ Spectrum A++–E

LED INSIDE









- Fire-resistant for at least 90 minutes in accordance with BS 476-21
- LED service life 35,000h
- IP 65 luminaire with efficient LED technology

Product details

220-240V ~50Hz
Total consumption: 6.5W
Material: Aluminium / Plastic
Dimmable: Triac C, Triac L

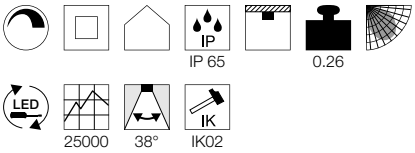

Dimensioned drawing



Note









Material thickness, mounting surface: 40 mm max.






























Variant	Item no.	GBP
400lm | 3000K | CRI>80 ■ black	1001015	27,00
400lm | 3000K | CRI>80 □ white	1001016	27,00
400lm | 4000K | CRI>80 ■ black	1001017	27,00
400lm | 4000K | CRI>80 □ white	1001018	27,00

LED PROFILES

OVERVIEW



LED profile			Mounting method			Cross-section	Beam angle	Page
			Surface mounted	Recessed	Pendant			
GRAZIA 10	Standard		✓	–	–			749
	Flat		✓	–	–			749
	Recessed		–	✓	–			749

LED profile			Mounting method			Cross-section	Beam angle	Page
			Surface mounted	Recessed	Pendant			
GRAZIA 20	Standard		✓	–	✓			753
	Flat		✓	–	✓			753
	Recessed		–	✓	–			754
H-PROFILE			✓	–	✓			758
KENAI			✓	–	–			762
GLENOS Linear profile 1107			✓	–	–			764
GLENOS Linear recessed profile 2508			–	✓	–			766
GLENOS Corner profile 2720			✓	–	–			768
GLENOS Professional profile 3030			✓	–	✓			770
GLENOS Professional profile 4970			✓	–	✓			772
GLENOS Professional recessed profile 8832			–	✓	–			774
GLENOS Professional profile 2020			✓	–	–			776

Suitable LED strips and components can be found on page 778 onwards, and the relevant accessories (power supplies, drivers etc.) from page 842 onwards


GRAZIA 10


SURFACE MOUNTED AND RECESSED PROFILE





SURFACE MOUNTED PROFILE, STANDARD

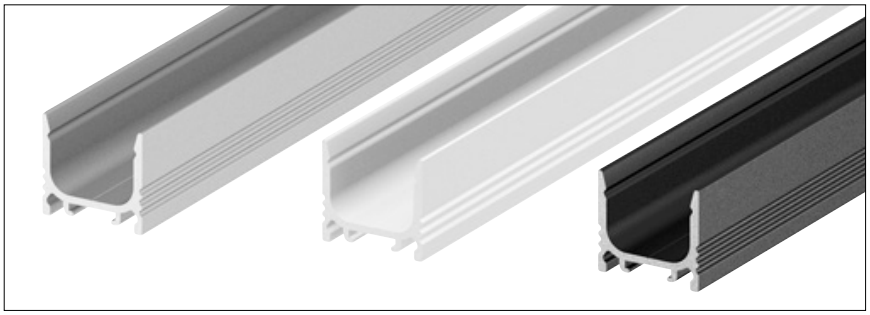




Surface mounted profile, standard, aluminium, white, black

Length	Colour	Weight (kg)	Item no.	GBP
200 cm	aluminium	0.35	**1000463**	**27,00**
	white	0.46	**1000464**	**22,50**
	black	0.46	**1000465**	**22,50**

Material: aluminium, width / height: 1.75/1.62 cm, max. Width of LED strip: 1.0 cm, cover excl.

SURFACE-MOUNTED PROFILE, FLAT






Surface mounted profile, flat, aluminium, white, black

Length	Colour	Weight (kg)	Item no.	GBP
200 cm	aluminium	0.27	**1000460**	**27,00**
	white	0.36	**1000461**	**22,50**
	black	0.36	**1000462**	**22,50**

Material: aluminium, width / height: 1.75/1.1 cm, max. width of LED strip: 1.0 cm, cover excl.

INSTALLATION PROFILE





Recessed profile, flat, anodised aluminium, white, black


Length	Colour	Weight (kg)	Item no.	GBP
200 cm	aluminium	0.42	**1000457**	**27,00**
	white	0.53	**1000458**	**22,50**
	black	0.53	**1000459**	**22,50**


Material: aluminium, width / height: 3.0/1.62 cm, max. width of LED strip: 1.0 cm, cover excl.


GRAZIA 10


ACCESSORIES


COVERS

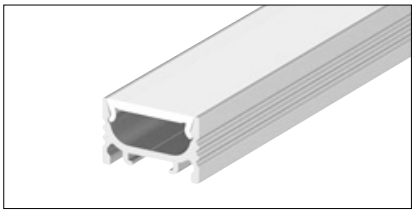
flat, opaque

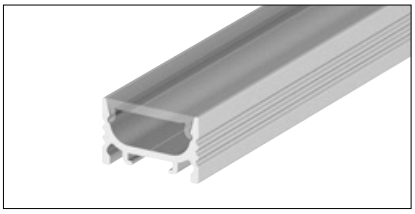
flat, transparent

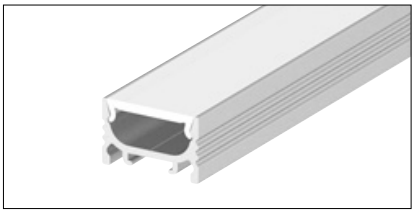
flat, matt transparent

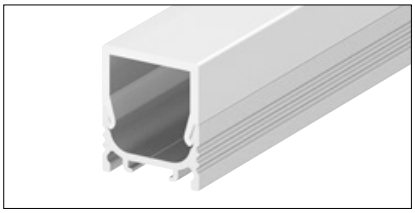
high, opaque (only suitable for surface-mounted profiles)

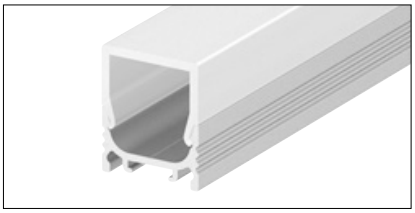

high, matt transparent (only suitable for surface-mounted profiles)


Length	Colour	Material	Item no.	GBP
200 cm	flat, opaque	Plastic PC	**1000466**	**15,30**
	flat, opaque	Plastic PMMA	**1000468**	**20,70**
	flat, transparent	Plastic PC	**1000467**	**15,30**
	flat, matt transparent	Plastic PMMA	**1000469**	**20,70**
	high, opaque *	Plastic PC	**1000470**	**20,70**
	flat, matt transparent *	Plastic PC	**1000471**	**22,50**


Plastic PMMA/PC:
Profile covers made from PMMA are particularly homogeneous.
Profile covers made from PC are unbreakable and are suitable for applications with high durability demands.

* The high covers are only suitable for GRAZIA 10 surface-mounted profiles, not recessed profiles.

MOUNTING CLIPS

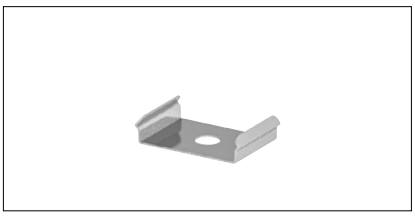
Mounting clip, invisible

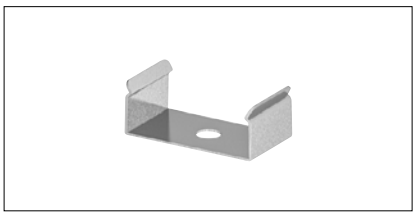

Mounting clip, visible

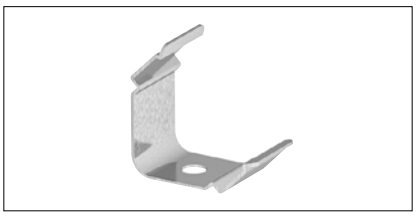

Mounting clip, 45°


Description	Dimensions	Item no.	GBP
Mounting clip, invisible	W/H/D: 1.53/0.3/1 cm	**1000487**	**3,00**
Mounting clip, visible	W/H/D: 1.87/0.7/1 cm	**1000488**	**5,90**
Mounting clip, 45°	W/H/D: 1.62/1.62/1 cm	**1000489**	**4,50**


Material: Stainless Steel, packing unit: 2 pieces


END CAPS FOR SURFACE-MOUNTED PROFILES

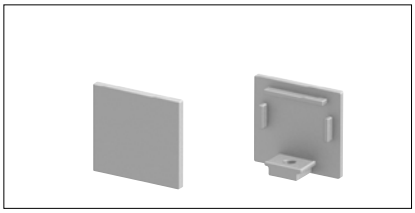

For standard profile, flat cover

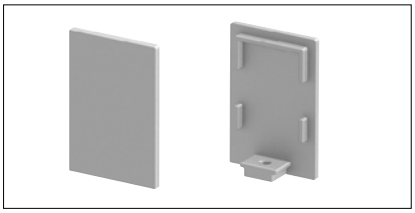
For standard profile, high cover

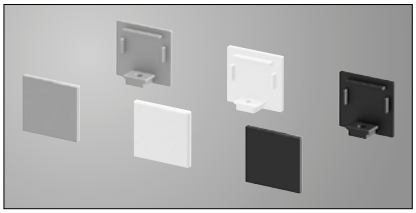
Available colour variants

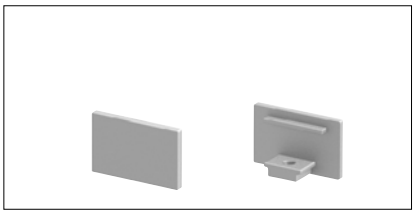
For flat profile, flat cover

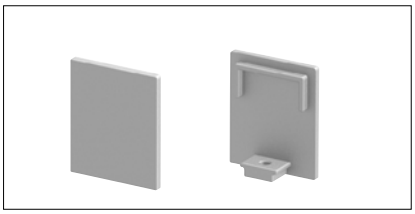

For flat profile, high cover

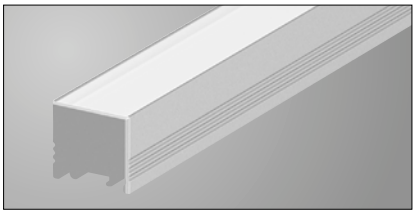

Profile with mounted end cap


Description	Colour	Visible depth	Item no.	GBP
End cap for standard profile, flat cover	aluminium	0.2 cm	1000478	5,90
	white		1000479	5,00
	black		1000480	5,00
End cap for standard profile, high cover	aluminium	0.2 cm	1000484	5,90
	white		1000485	5,00
	black		1000486	5,00
End cap for flat profile, flat cover	aluminium	0.2 cm	1000475	5,90
	white		1000476	5,00
	black		1000477	5,00
End cap for flat profile, high cover	aluminium	0.2 cm	1000481	5,90
	white		1000482	5,00
	black		1000483	5,00

Material: aluminium, packing unit: 2 pieces

END CAPS FOR RECESS-MOUNTED PROFILE

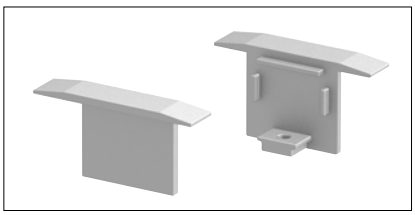
For recess-mounted profile

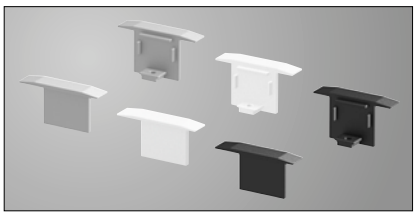
Available colour variants

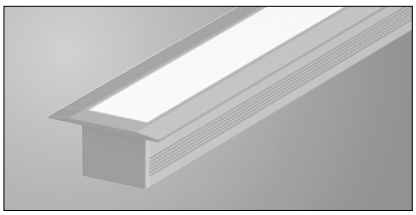
Profile with mounted end cap

Description	Colour	Visible depth	Item no.	GBP
End caps for recess-mounted profile	aluminium	0.7 cm	1000472	5,90
	white		1000473	5,00
	black		1000474	5,00

Material: aluminium, packing unit: 2 pieces

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length


GRAZIA 20

ASSEMBLY PROFILE






Can also be used as pendant (for pendant suspension see pg. 757)

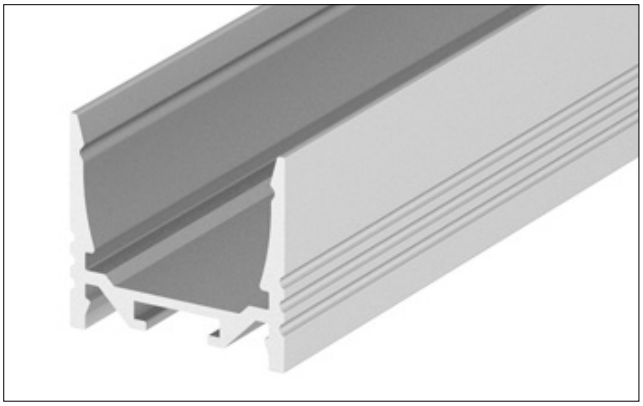


High-quality powder-coated aluminium finish

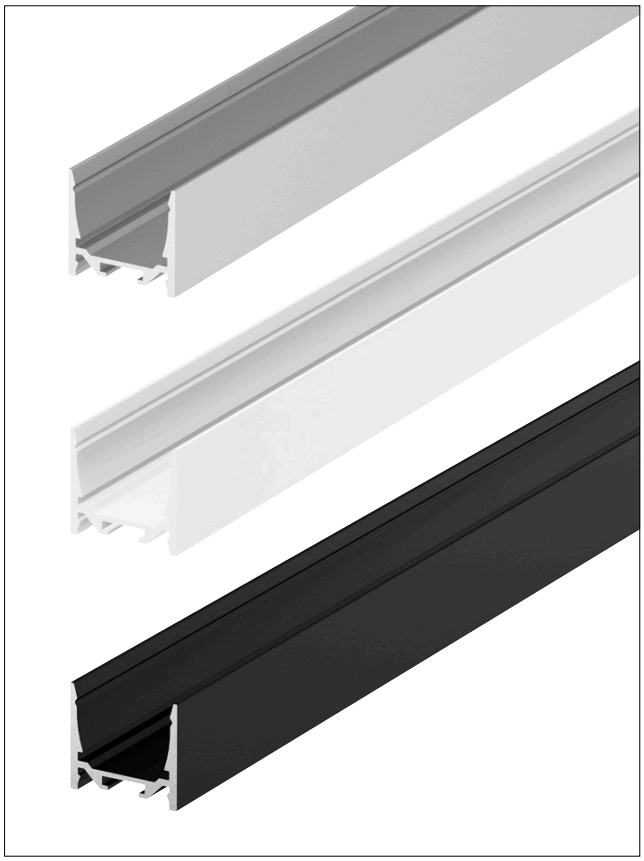


Available colour variants: aluminium, white, black


STANDARD

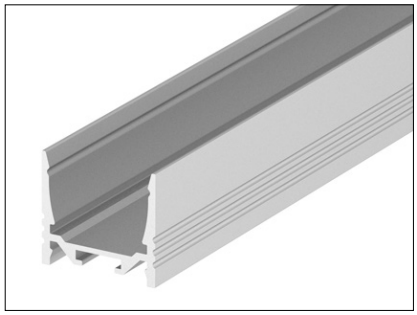

Grooved

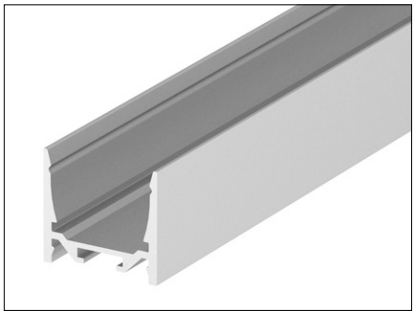


Smooth




Description	Length	Colour	Weight (kg)	Item no.	GBP
Standard, grooved	100 cm	aluminium	0.8	**1000508**	**25,20**
		white	0.82	**1000509**	**22,50**
		black	0.82	**1000510**	**22,50**
	200 cm	aluminium	1.6	**1000511**	**49,50**
		white	1.64	**1000512**	**45,00**
		black	1.64	**1000513**	**45,00**
	300 cm	aluminium	2.4	**1000514**	**76,50**
		white	2.46	**1000515**	**72,00**
		black	2.46	**1000516**	**72,00**
Standard, smooth	100 cm	aluminium	0.83	**1000517**	**22,50**
		white	0.85	**1000518**	**20,70**
		black	0.85	**1000519**	**20,70**
	200 cm	aluminium	1.66	**1000520**	**45,00**
		white	1.7	**1000521**	**43,20**
		black	1.7	**1000522**	**43,20**
	300 cm	aluminium	2.49	**1000523**	**72,00**
		white	2.55	**1000524**	**67,50**
		black	2.55	**1000525**	**67,50**

Material: aluminium, width / height: 3.5/3.2 cm, max. width of LED strip: 2.0 cm, cover excl.


FLAT

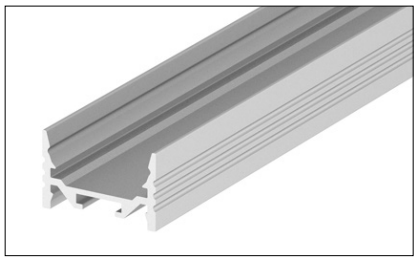

Grooved

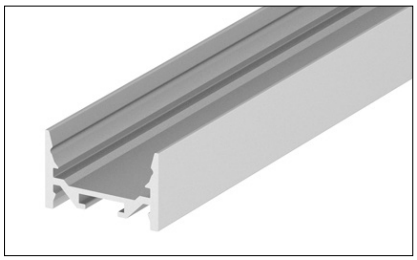

Smooth




Description	Length	Colour	Weight (kg)	Item no.	GBP
Flat, grooved	100 cm	aluminium	0.49	**1000499**	**25,20**
		white	0.51	**1000500**	**22,50**
		black	0.51	**1000501**	**22,50**
	200 cm	aluminium	0.98	**1000502**	**45,00**
		white	1.02	**1000503**	**40,50**
		black	1.02	**1000504**	**40,50**
	300 cm	aluminium	1.47	**1000505**	**58,50**
		white	1.53	**1000506**	**54,00**
		black	1.53	**1000507**	**54,00**
Flat, smooth	100 cm	aluminium	0.52	**1000526**	**22,50**
		white	0.54	**1000527**	**20,70**
		black	0.54	**1000528**	**20,70**
	200 cm	aluminium	1.04	**1000529**	**43,20**
		white	1.08	**1000530**	**38,70**
		black	1.08	**1000531**	**38,70**
	300 cm	aluminium	1.56	**1000532**	**54,00**
		white	1.62	**1000533**	**49,50**
		black	1.62	**1000534**	**49,50**


Material: aluminium, width / height: 3.5/2.2 cm, max. width of LED strip: 2.0 cm, cover excl.

GRAZIA 20


INSTALLATION PROFILE

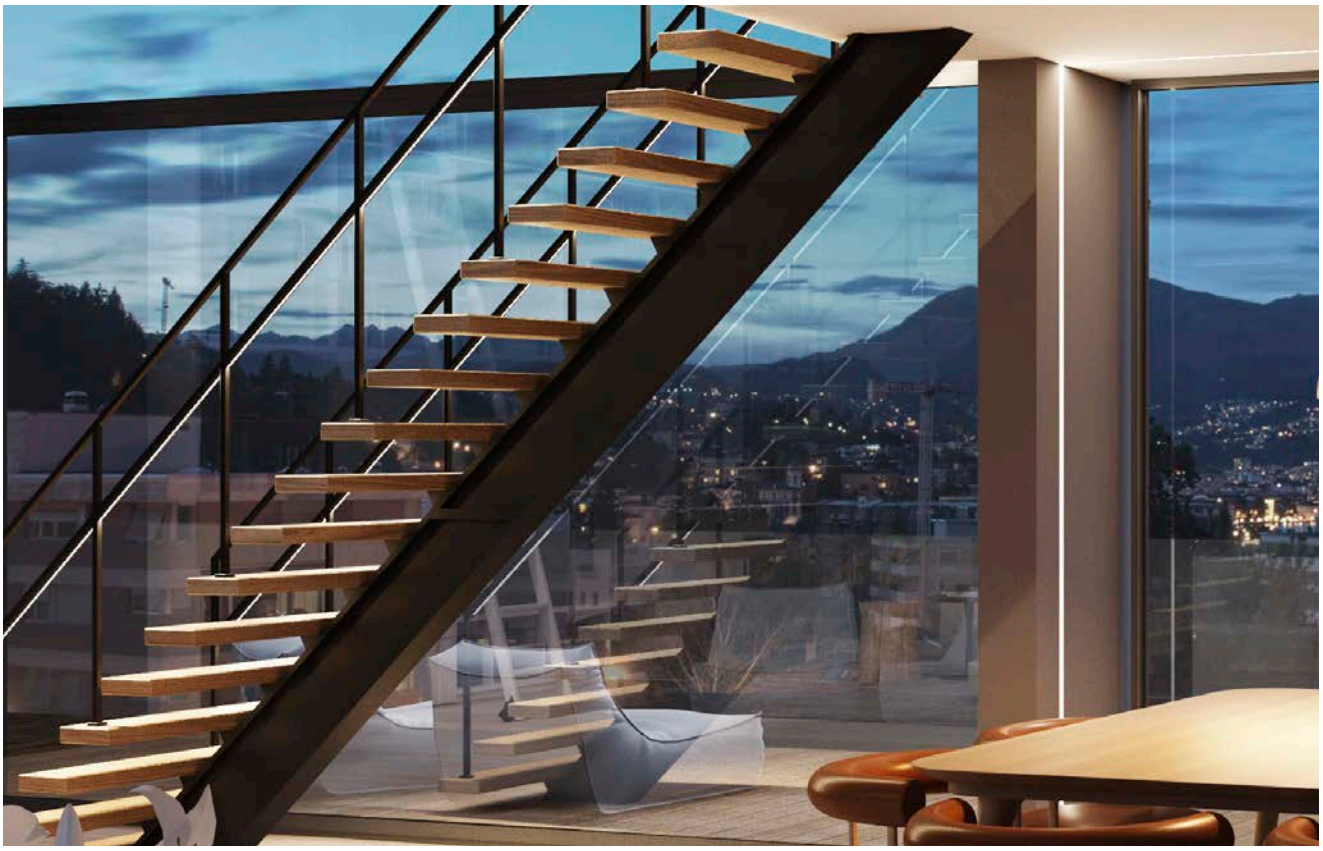

INSTALLATION PROFILE

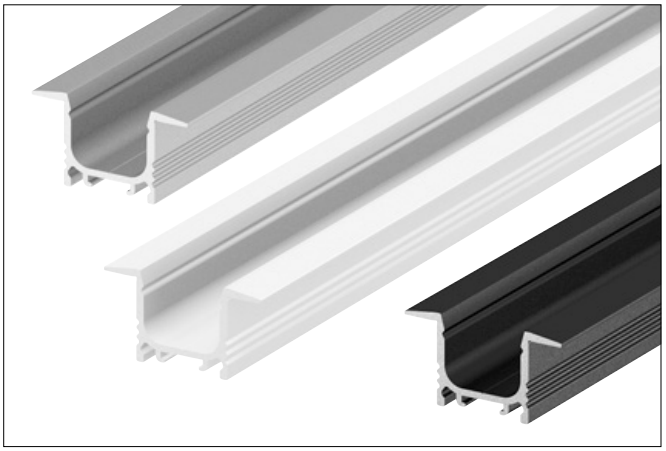

Installation profile, aluminium, white, black





Length	Colour	Weight (kg)	Item no.	GBP
100 cm	aluminium	0.76	**1000490**	**27,00**
	white	0.78	**1000491**	**25,20**
	black	0.78	**1000492**	**25,20**
200 cm	aluminium	1.52	**1000493**	**49,50**
	white	1.56	**1000494**	**45,00**
	black	1.56	**1000495**	**45,00**
300 cm	aluminium	2.28	**1000496**	**85,50**
	white	2.34	**1000497**	**81,00**
	black	2.34	**1000498**	**81,00**


Material: aluminium, width / height: 5.2/3.2 cm, max. width of LED strip: 2.0 cm, cover excl.


GRAZIA 20
ACCESSORIES


COVERS

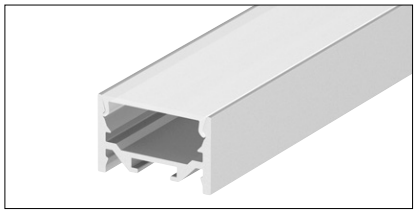
flat, matt transparent

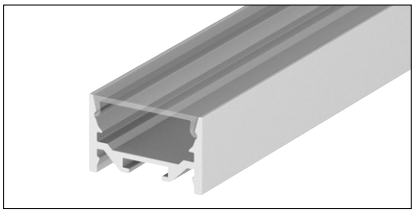
flat, matt transparent

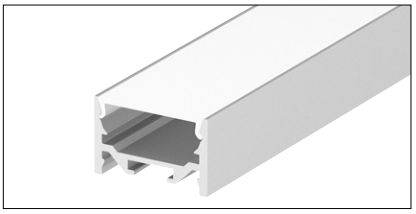
flat, opaque

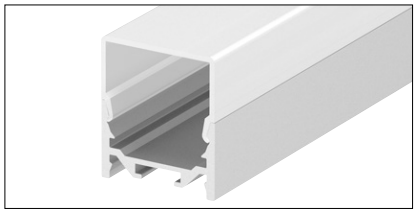
high, matt transparent

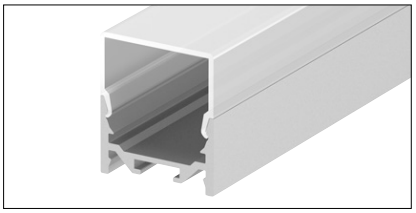

high, opaque

Length	Colour	Material	Item no.	GBP
100 cm	flat, matt transparent	Plastic PC	**1000538**	**8,10**
	flat, matt transparent	Plastic PMMA	**1000544**	**12,60**
	flat, transparent	Plastic PC	**1000541**	**9,90**
	flat, opaque	Plastic PMMA	**1000547**	**12,60**
	flat, matt transparent *	Plastic PMMA	**1000553**	**17,10**
	high, opaque *	Plastic PC	**1000550**	**17,10**
200 cm	flat, matt transparent	Plastic PC	**1000539**	**15,30**
	flat, matt transparent	Plastic PMMA	**1000545**	**25,20**
	flat, transparent	Plastic PC	**1000542**	**12,60**
	flat, opaque	Plastic PMMA	**1000548**	**25,20**
	flat, matt transparent *	Plastic PMMA	**1000554**	**34,20**
	high, opaque *	Plastic PC	**1000551**	**27,00**
300 cm	flat, matt transparent	Plastic PC	**1000540**	**25,20**
	flat, matt transparent	Plastic PMMA	**1000546**	**34,20**
	flat, transparent	Plastic PC	**1000543**	**17,10**
	flat, opaque	Plastic PMMA	**1000549**	**36,00**
	flat, matt transparent *	Plastic PMMA	**1000555**	**49,50**
	high, opaque *	Plastic PC	**1000552**	**31,50**

Plastic PMMA/PC:
Profile covers made from PMMA are particularly homogeneous.
Profile covers made from PC are unbreakable and are extremely suitable for applications with high durability demands.

* The high covers are only suitable for GRAZIA 20 surface-mounted profiles, not recessed profiles.

LONG CONNECTOR

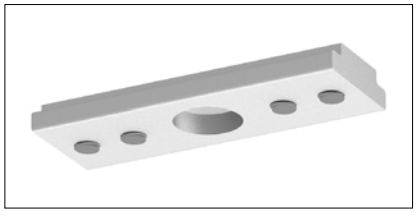



Description	Colour	Dimensions	Item no.	GBP
Long connector	aluminium	L/W/H: 3.8/1.4/0.4 cm	**1000571**	**9,90**


Material: aluminium, packing unit: 2 pieces


GRAZIA 20
ACCESSORIES


END CAPS FOR SURFACE-MOUNTED PROFILE

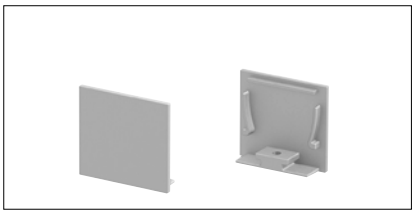

For standard profile, flat cover

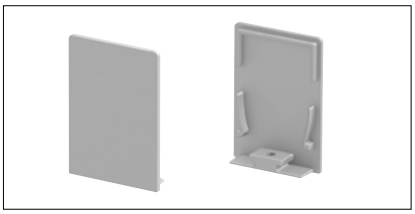
For standard profile, high cover

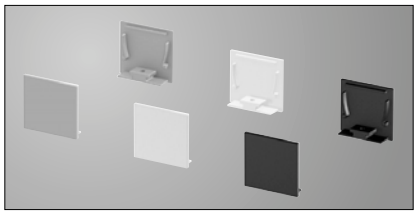
Available colour variants

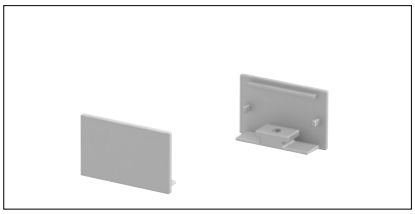
For flat profile, flat cover

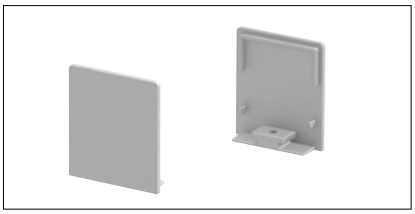
For flat profile, high cover

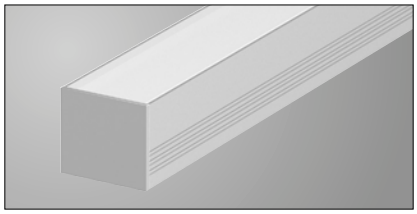

Profile with mounted end cap


Description	Colour	Visible depth	Item no.	GBP
Standard profile, flat cover	aluminium	0.25 cm	1000565	8,10
	white		1000566	6,80
	black		1000567	6,80
Standard profile, high cover	aluminium	0.25 cm	1000568	8,10
	white		1000569	6,80
	black		1000570	6,80
Flat profile, flat cover	aluminium	0.25 cm	1000559	8,10
	white		1000560	6,80
	black		1000561	6,80
Flat profile, high cover	aluminium	0.25 cm	1000562	8,10
	white		1000563	6,80
	black		1000564	6,80


Material: aluminium, packing unit: 2 pieces

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length

END CAPS FOR RECESS-MOUNTED PROFILE

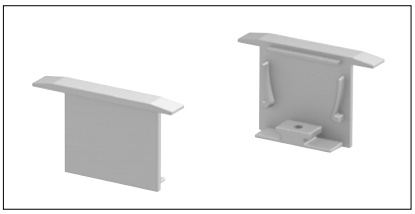
For recess-mounted profile

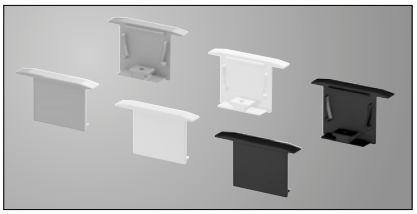
Available colour variants

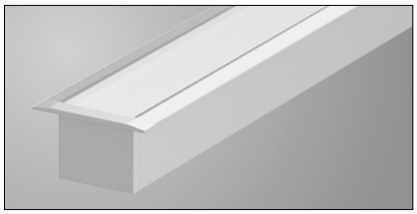
Profile with mounted end cap

Description	Colour	Visible depth	Item no.	GBP
End caps for recess-mounted profile	aluminium	0.085 cm	1000556	9,00
	white	0.085 cm	1000557	8,10
	black	0.085 cm	1000558	8,10


Material: aluminium, packing unit: 2 pieces

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length


PENDANT SUSPENSION AND MOUNTING CLIPS



Pendant suspension (for surface-mounted profiles only)

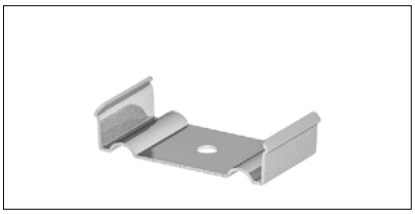

Mounting clip, invisible

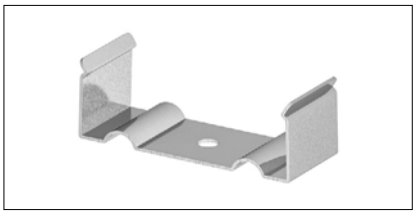

Mounting clip, visible (for grooved surface-mounted profiles only)

Description	Dimensions	Item no.	GBP
Pendant suspension *	Pendant L: 200 cm	**1000535**	**31,50**
Mounting clip, invisible	L/W/H: 2.82/1.2/1.4 cm	**1000536**	**2,70**
Mounting clip, visible **	L/W/H: 3.65/6.2/1.5 cm	**1000537**	**2,30**

Material: Stainless Steel, packing unit: 2 pieces

* Pendant suspension is only suitable for surface-mounted profiles.
** The visible mounting clip is only suitable for the **GRAZIA 20 standard, grooved** and **GRAZIA 20 flat, grooved** profiles.




H-PROFILE


2 m





H-PROFILE 2m

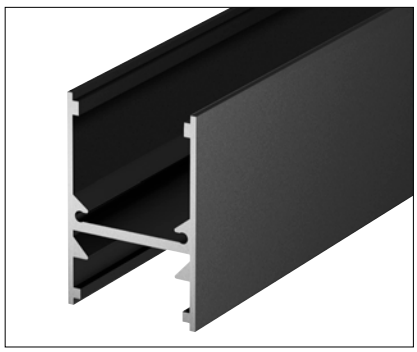




Length	Colour	Weight (kg)	Item no.	GBP
200 cm	black	1	**1001814**	**45,00**
	white		**1001816**	**45,00**
	aluminium		**1001817**	**45,00**

Material: aluminium, width / height: 2.7/4.1 cm, max. width of LED strip: 1.6 cm, cover excl.


H-PROFILE

2 m – ACCESSORY


COVER

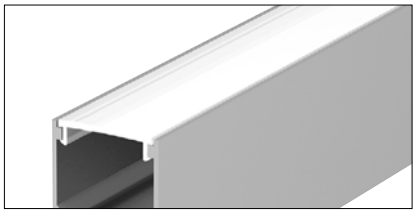

Cover, opaque

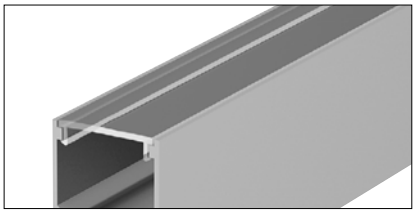

Cover, transparent

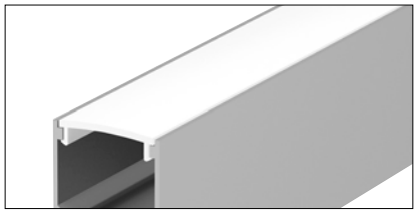


Cover, frosted

Length	Colour	Material	Item no.	GBP
200 cm	opaque	Plastic PC	**1001813**	**17,10**
	transparent	Plastic PC	**1001815**	**17,10**
	transparent	Plastic PMMA	**214350**	**25,20**
	matt transparent	Plastic PMMA	**214351**	**25,20**

Packing unit: 1 piece

END CAPS



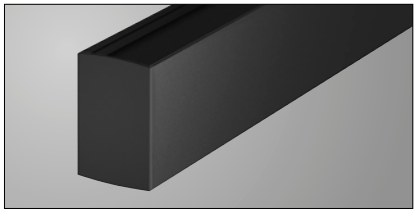


Description	Colour	Visible depth	Item no.	GBP
End caps	black	0.14 cm	**1001807**	**29,70**
	white	0.14 cm	**1001808**	**29,70**
	grey	0.14 cm	**1001809**	**29,70**

Material: aluminium, packing unit: 2 pieces

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length


CONNECTOR

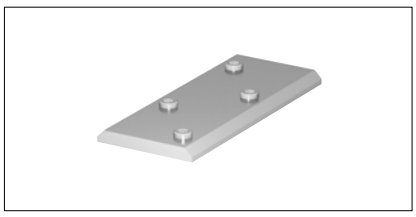


Description	Colour	Dimensions	Item no.	GBP
Connector	grey	L/W/H: 5.6/2.4/0.3 cm	**1001806**	**6,80**

Material: aluminium

MOUNTING ACCESSORIES

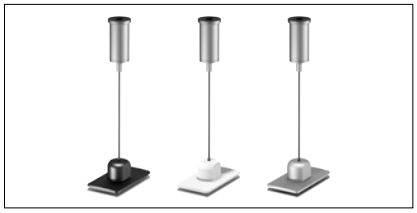

Pendant suspension

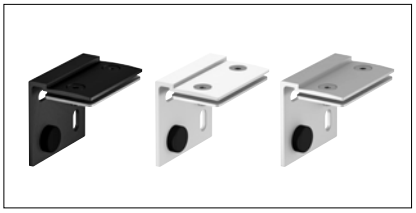


Wall bracket



Adapter for track

Description	Colour	Material	Dimensions	Item no.	GBP
Pendant suspension, 2 pieces	black	Aluminium / Steel	L/W/H: 4.4/2.4/2 cm Pendant L: 200 cm	**1001796**	**29,70**
	white			**1001797**	**29,70**
	aluminium			**1001798**	**29,70**
Wall holder, 2 pieces	black	Aluminium / Plastic	L/W/H: 4.4/3.2/4 cm	**1001802**	**10,80**
	white			**1002236**	**10,80**
	aluminium			**1002237**	**10,80**
Adapter for SLV D-TRACK (2-circuit) Track, 5 pieces	silver	Steel	L/W/H: 2/2.2/0.3 cm	**1001810**	**6,80**


STRAIN RELIEF

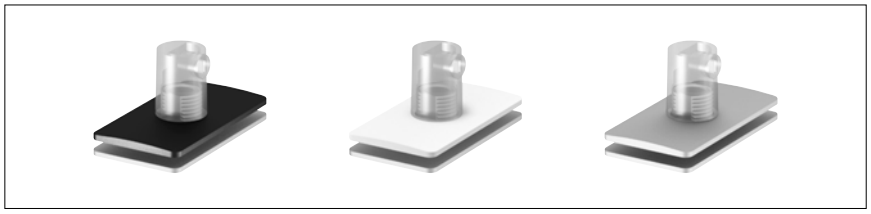

Description	Colour	Dimensions	Item no.	GBP
Strain relief	black	L/W/H: 4.4/2.4/2.6 cm	**1001799**	**13,50**
	white		**1001800**	**13,50**
	aluminium		**1001801**	**13,50**

Material: aluminium / Steel, max. cable diameter 6.5 mm, packing unit: 1 piece

CONNECTION BOX

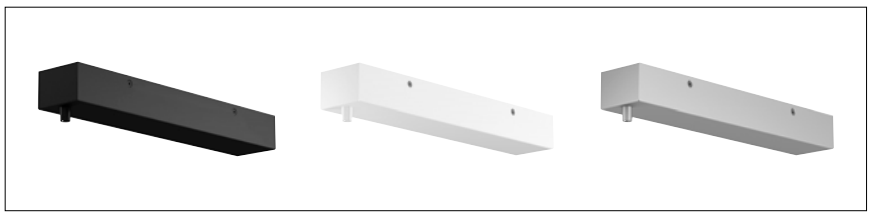

Description	Colour	Dimensions	Item no.	GBP
Connection box	black	L/W/H: 37.6/6.6/4.7 cm	**1001803**	**40,50**
	white		**1001804**	**40,50**
	grey		**1001805**	**40,50**


Material: aluminium / Steel, ceiling plate is prepared for installation of operating devices and cables. Operating device and cables available separately. Available installation space for driver max. 6.2 x 25 x 4 cm. Packing unit: 1 piece

KENAI


ASSEMBLY PROFILE




KENAI ASSEMBLY PROFILE

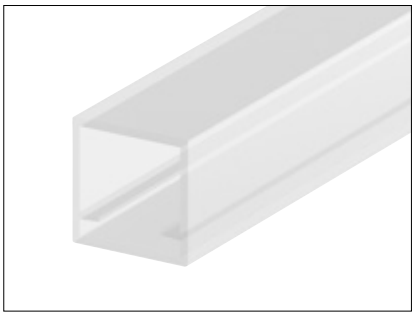


transparent

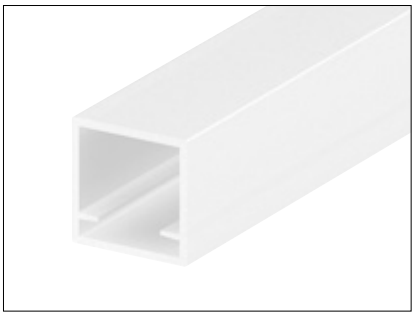


frosted

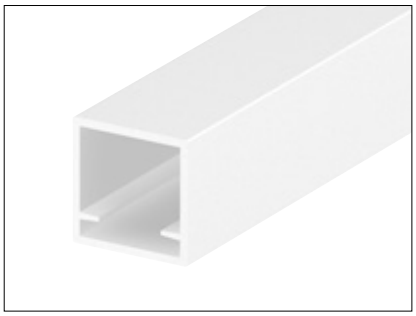

opaque






Colour	Material	L (cm)	W (cm)	H (cm)	Weight (kg)	Item no.	GBP
transparent	PMMA	200	1.2	1.2	0.1	**214100**	**22,50**
matt transparent						**214101**	**22,50**
opaque						**214102**	**22,50**

Max. width of LED strip: 1.0 cm, cover incl., maximum strip output 10W/m.

KENAI

SURFACE-MOUNTED PROFILE – ACCESSORIES

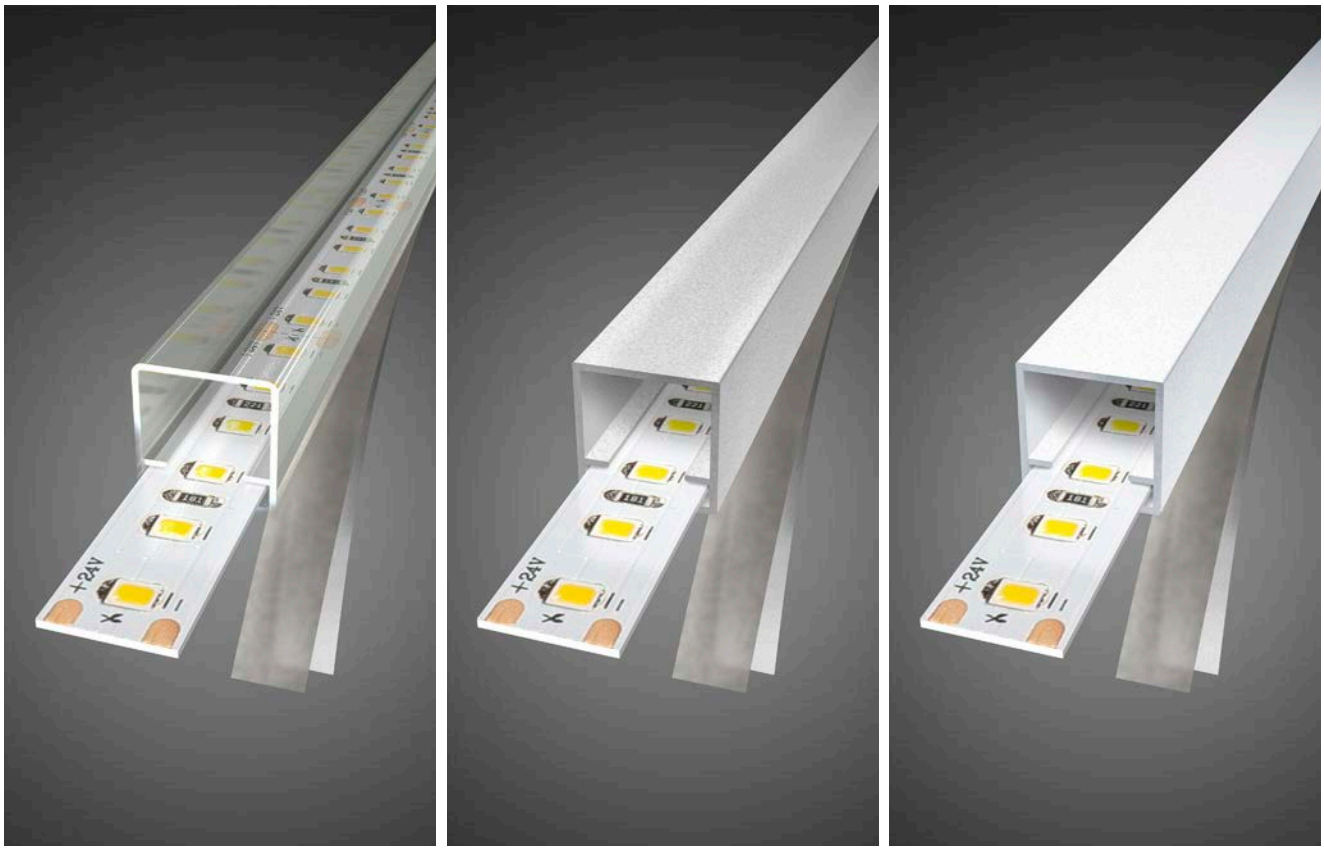

DOUBLE-SIDED ADHESIVE TAPE



Description	Colour	Material	Dimensions	Item no.	GBP
Double-sided adhesive tape	transparent	Plastic	L/W: 300/0.9 cm	**220000**	**11,70**


GLENOS

LINEAR PROFILE 1107



GLENOS linear profile 1107





Length	Colour	Weight (kg)	Item no.	GBP
200 cm	matt black	0.14	213950	20,70
	matt white		213951	20,70
	aluminium		213954	22,50

Material: aluminium, width / height: 1.1/0.6 cm, max. width of LED strip: 0.75 cm, cover excl.

GLENOS

LINEAR PROFILE 1107 – ACCESSORIES

COVER





Cover, white

Length	Colour	Material	Item no.	GBP
200 cm	white	Plastic PC	**213962**	**17,10**

Plastic PMMA/PC:
Profile covers made from PMMA are particularly homogeneous.
Profile covers made from PC are unbreakable and are suitable for applications with high durability demands.

END CAPS

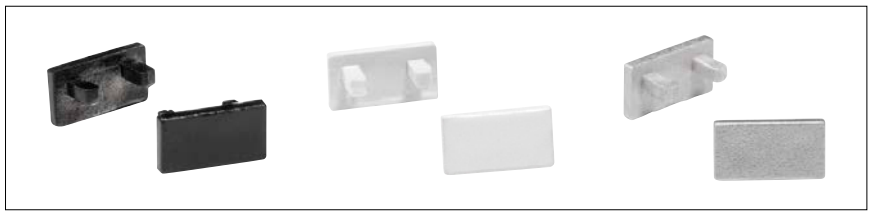

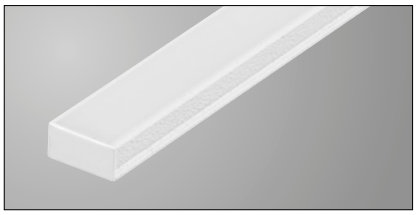


Description	Colour	Visible depth	Item no.	GBP
End caps	matt black	0.015 cm	**213970**	**2,40**
	matt white	0.015 cm	**213971**	**2,40**
	grey	0.015 cm	**213974**	**2,40**

Material: Plastic, packing unit: 2 pieces

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length



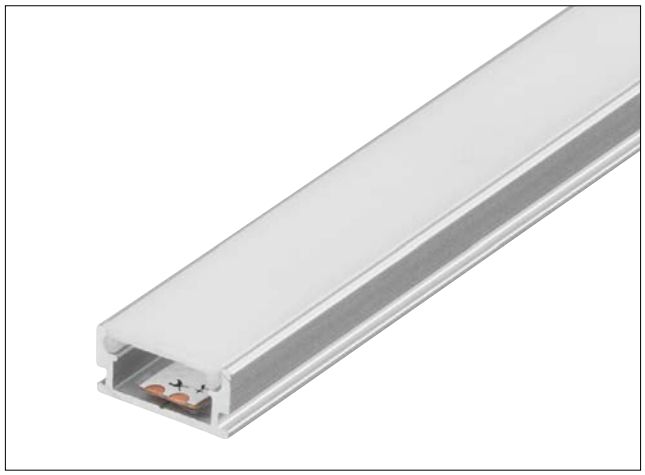

GLENOS linear profile 1107 with glued-in LED strip and cover

GLENOS

LINEAR RECESSED PROFILE 2508




GLENOS

LINEAR RECESSED PROFILE 2508

GLENOS Linear recessed profile 2508






Length	Colour	Weight (kg)	Item no.	GBP
200 cm	aluminium	0.58	**213862**	**22,50**


Material: aluminium, width / height: 2.5/0.7 cm, max. width of LED strip: 1.2 cm, cover excl.

ACCESSORIES

COVER AND END CAPS

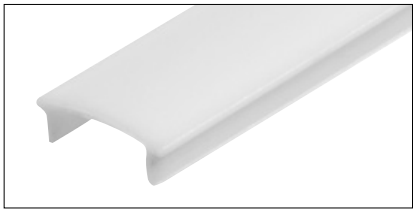

Cover, white

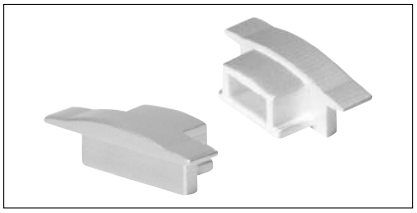

End caps

Description	Colour	Material	Dimensions	Item no.	GBP
Cover	white	Plastic PC	L/W/H: 200/1.5/0.5 cm	**213822**	**13,50**
End caps, 2 pieces	grey	Plastic	L/W/H: 2.4/0.5/0.8 cm Visible depth: 0.05 cm	**213874**	**2,40**

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length

GLENOS


CORNER PROFILE 2720



STANDARD



Grooved




Length	Colour	Weight (kg)	Item no.	GBP
200 cm	matt white	0.54	213911	40,50
	aluminium		213914	45,00

Material: aluminium, width / height: 2.6/1.7 cm, max. width of LED strip: 1.0 cm, cover excl.


GLENOS

CORNER PROFILE 2720 ACCESSORY

COVER

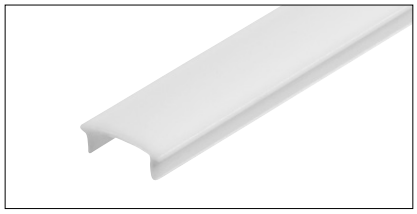

Cover, white

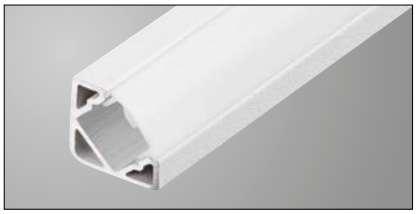



GLENOS corner profile 2720 with cover

Length	Description	W (cm)	H (cm)	Item no.	GBP
100 cm	opaque	1.5	0.5	**213821**	**6,80**
200 cm				**213822**	**13,50**

Material: Plastic PC, packing unit: 1 piece

END CAPS

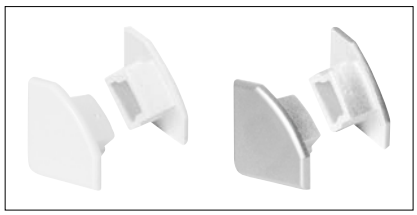

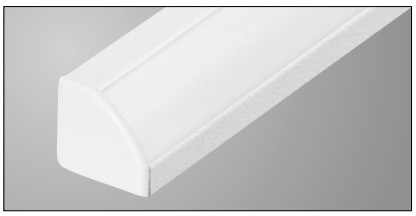


Description	Colour	Visible depth	Item no.	GBP
End caps	matt white	0.2 cm	**213931**	**3,00**
	grey	0.2 cm	**213934**	**3,00**

Material: Plastic, packing unit: 2 pieces

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length

MOUNTING CLIP

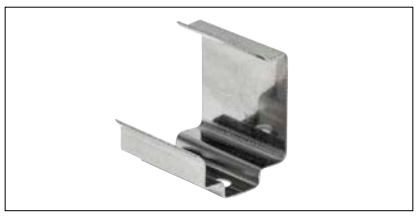

Description	Dimensions	Item no.	GBP
Mounting clip	L/W/H: 2.4/2.1/2 cm	**213939**	**4,00**


Material: Stainless Steel, packing unit: 2 pieces


GLENOS

PROFESSIONAL PROFILE 3030



GLENOS Professional profile 3030

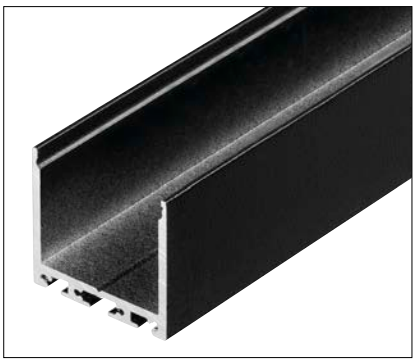




Length	Colour	Weight (kg)	Item no.	GBP
200 cm	matt black	1.4	213620	58,50
	matt white		213621	58,50
	grey		213624	63,00
300 cm	matt black	2.1	213630	90,00
	matt white		213631	90,00
	grey		213634	99,00


Material: aluminium, width / height: 3.5/3.5 cm, max. width of LED strip: 3 cm, cover excl.

GLENOS

PROFESSIONAL PROFILE 3030 ACCESSORY

COVER

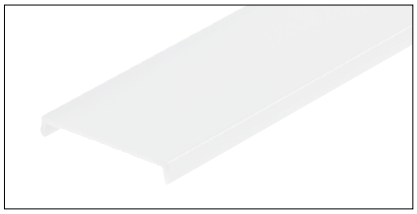


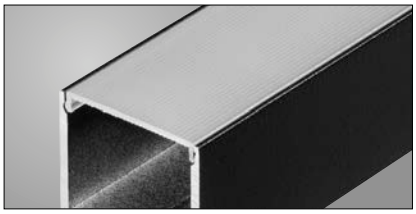

Length	Description	W (cm)	H (cm)	Item no.	GBP
200 cm	Polycarbonate (PC)	3.3	0.5	**213642**	**25,20**
300 cm				**213643**	**40,50**

Material: Plastic PC, packing unit: 1 piece

END CAPS

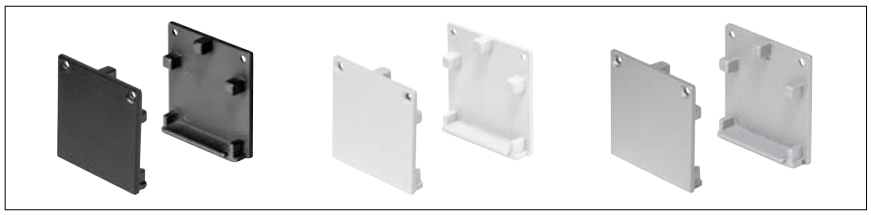




Description	Colour	Visible depth	Item no.	GBP
End caps	matt black	0.2 cm	**213650**	**15,30**
	matt white	0.2 cm	**213651**	**15,30**
	grey	0.2 cm	**213654**	**15,30**

Material: Zinc, packing unit: 2 pieces

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length

SUSPENSION SET

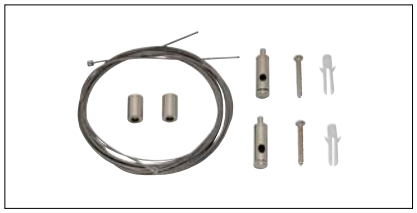



Description	Colour	Dimensions	Item no.	GBP
Suspension set	chrome	Pendant L: 250 cm	**213488**	**25,20**

Material: Steel, packing unit: 1 piece


GLENOS


PROFESSIONAL PROFILE 4970

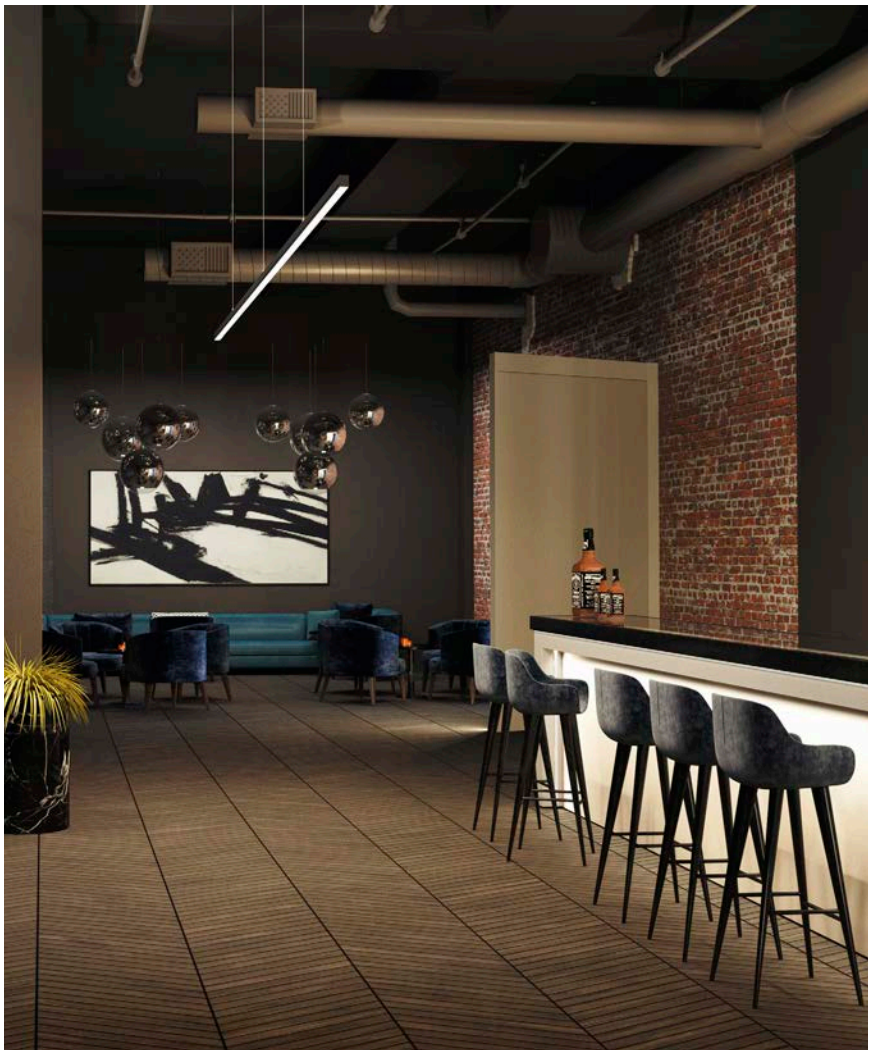

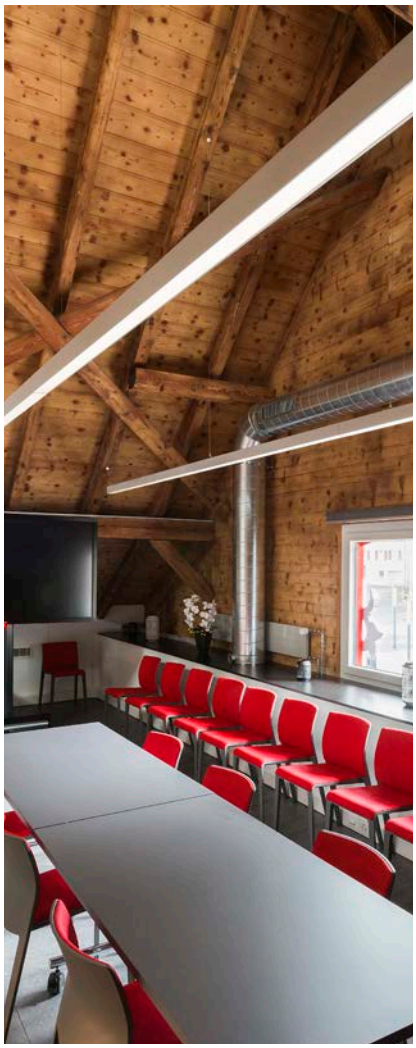

GLENOS Professional profile 4970

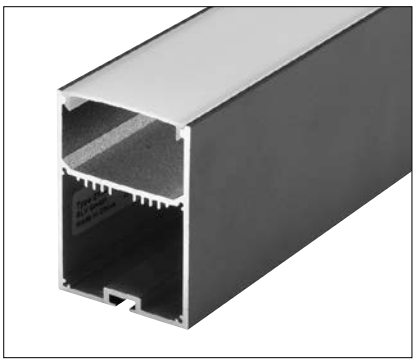




Length	Colour	Weight (kg)	Item no.	GBP
200 cm	matt black	3	213470	197,10
	white		213471	197,10
	aluminium		213474	206,10


Material: aluminium / Plastic PC, width / height: 4.9/7 cm, max. width of LED strip: 3.7 cm, cover incl.

GLENOS

PROFESSIONAL PROFILE 4970 ACCESSORY

END CAPS

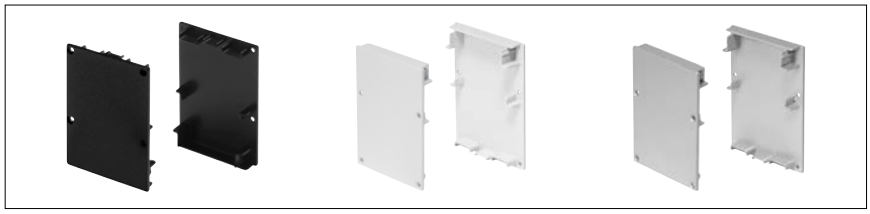

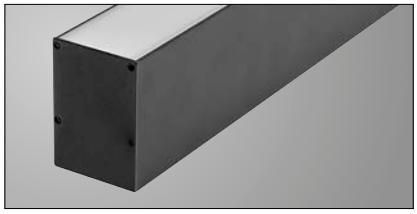


Description	Colour	Visible depth	Item no.	GBP
End caps	matt black	0.8 cm	213480	17,10
	white	0.8 cm	213481	17,10
	aluminium	0.8 cm	213484	17,10

Material: Zinc, packing unit: 2 pieces

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length


CONNECTOR

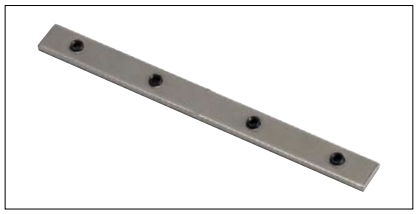


Description	Colour	Dimensions	Item no.	GBP
Connector for aluminium profile, galv.	grey	L/W/H: 10/0.95/0.3 cm	213489	5,40

Material: Steel, packing unit: 1 piece

SUSPENSION SET

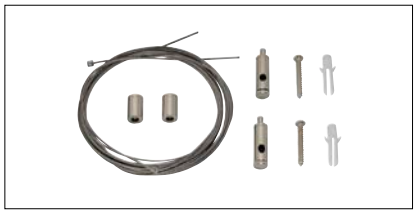

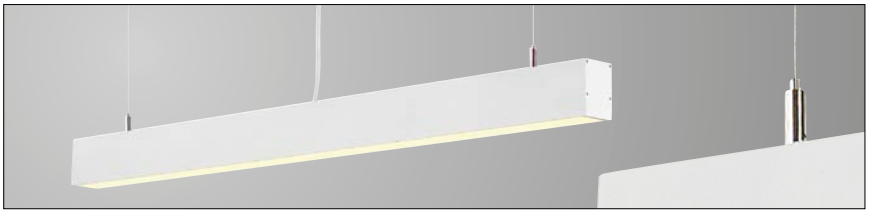

Description	Colour	Dimensions	Item no.	GBP
Suspension set	chrome	Pendant L: 250 cm	213488	25,20

Material: Steel, packing unit: 1 piece

POWER SUPPLY





Description	Colour	Dimensions	Item no.	GBP
LED power supply 24V 60W	white	L/W/H: 28/3/2.2 cm	977399	99,00

Material: Steel / Plastic, packing unit: 1 piece


GLENOS


PROFESSIONAL RECESSED PROFILE 8832

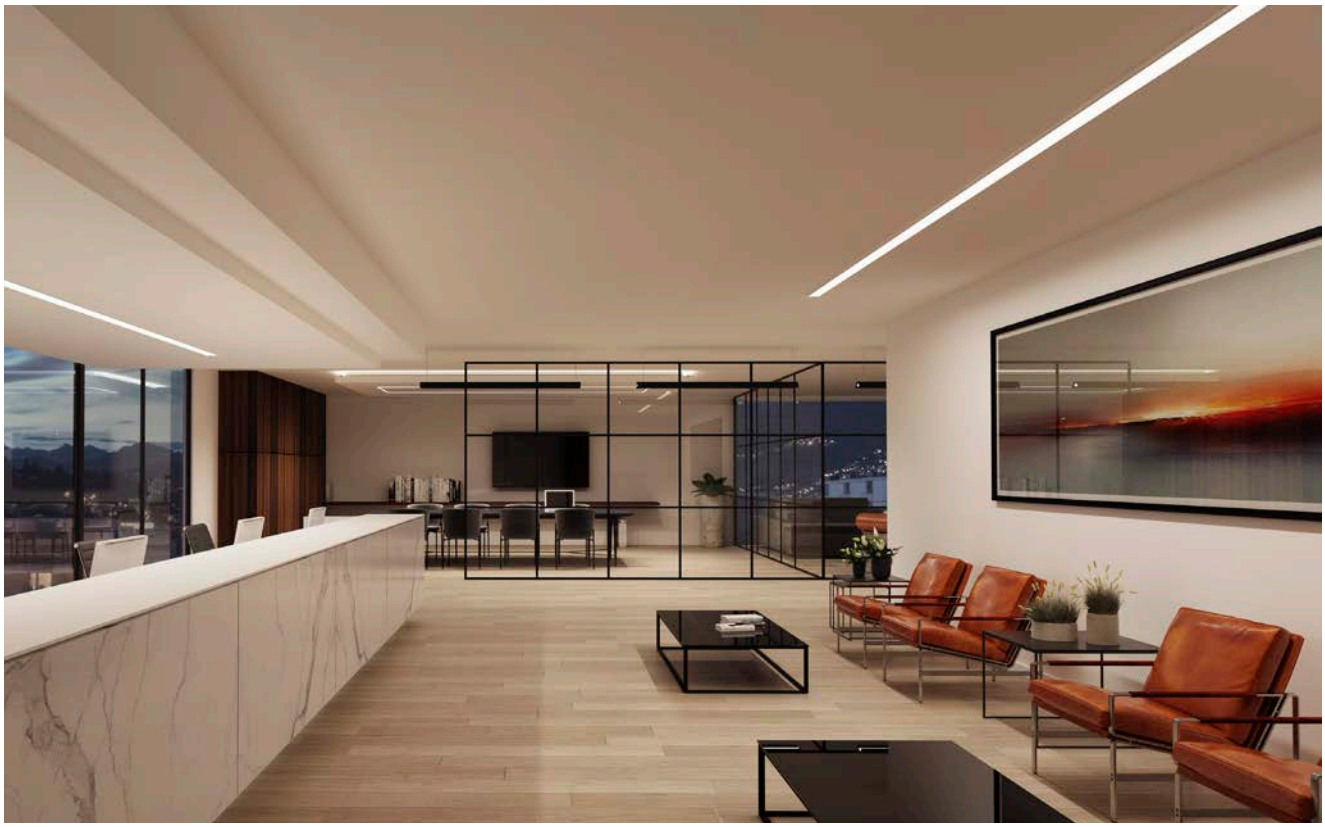

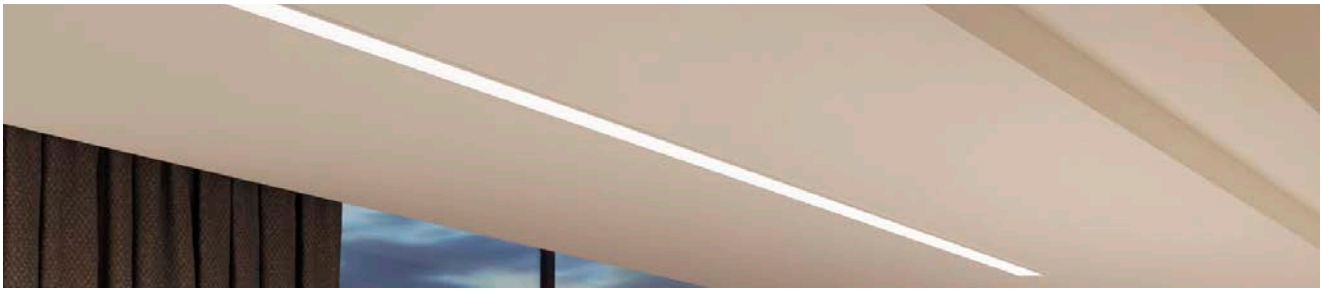

GLENOS Professional recessed profile 8832

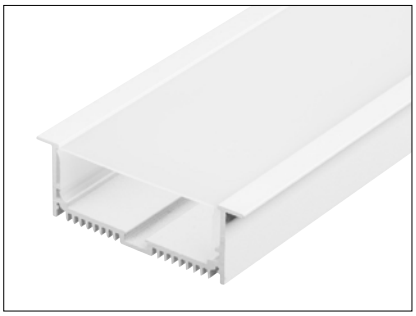




Length	Colour	Weight (kg)	Item no.	GBP
200 cm	white	2.3	**213511**	**171,00**
	aluminium		**213514**	**180,00**


Material: aluminium / Polycarbonate (PC), width / height: 8.8/3.2 cm, max. width of LED strip:
2 cm, material thickness of mounting surface: max. 24 mm, cover incl. To ensure that cooling takes place, do not glue the strip in the middle.

GLENOS

PROFESSIONAL INSTALLATION PROFILE 8832 ACCESSORY

END CAPS

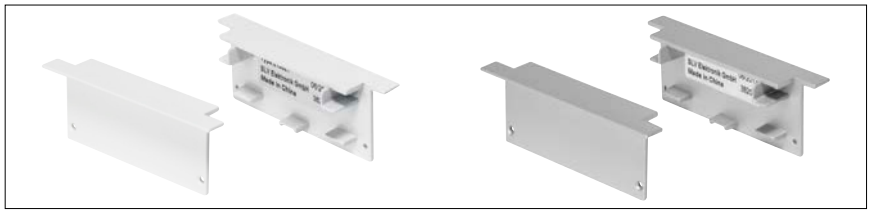

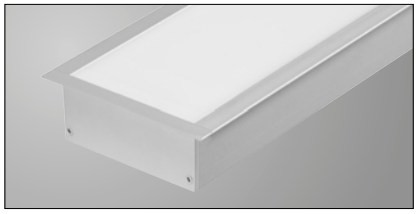


Description	Colour	Visible depth	Item no.	GBP
End caps	white	1.80 cm	213521	20,70
	aluminium	1.80 cm	213524	20,70

Material: Zinc, packing unit: 2 pieces

Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length

MOUNTING BRACKET

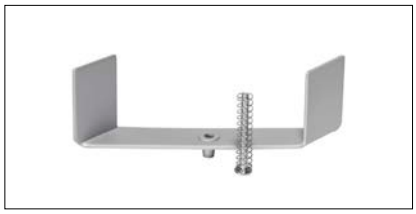


Description	Dimensions	Item no.	GBP
Mounting bracket	L/W/H: 11.2/2/3 cm	213529	15,30

Material: aluminium, packing unit: 2 pieces


GLENOS

PROFESSIONAL PROFILE 2020

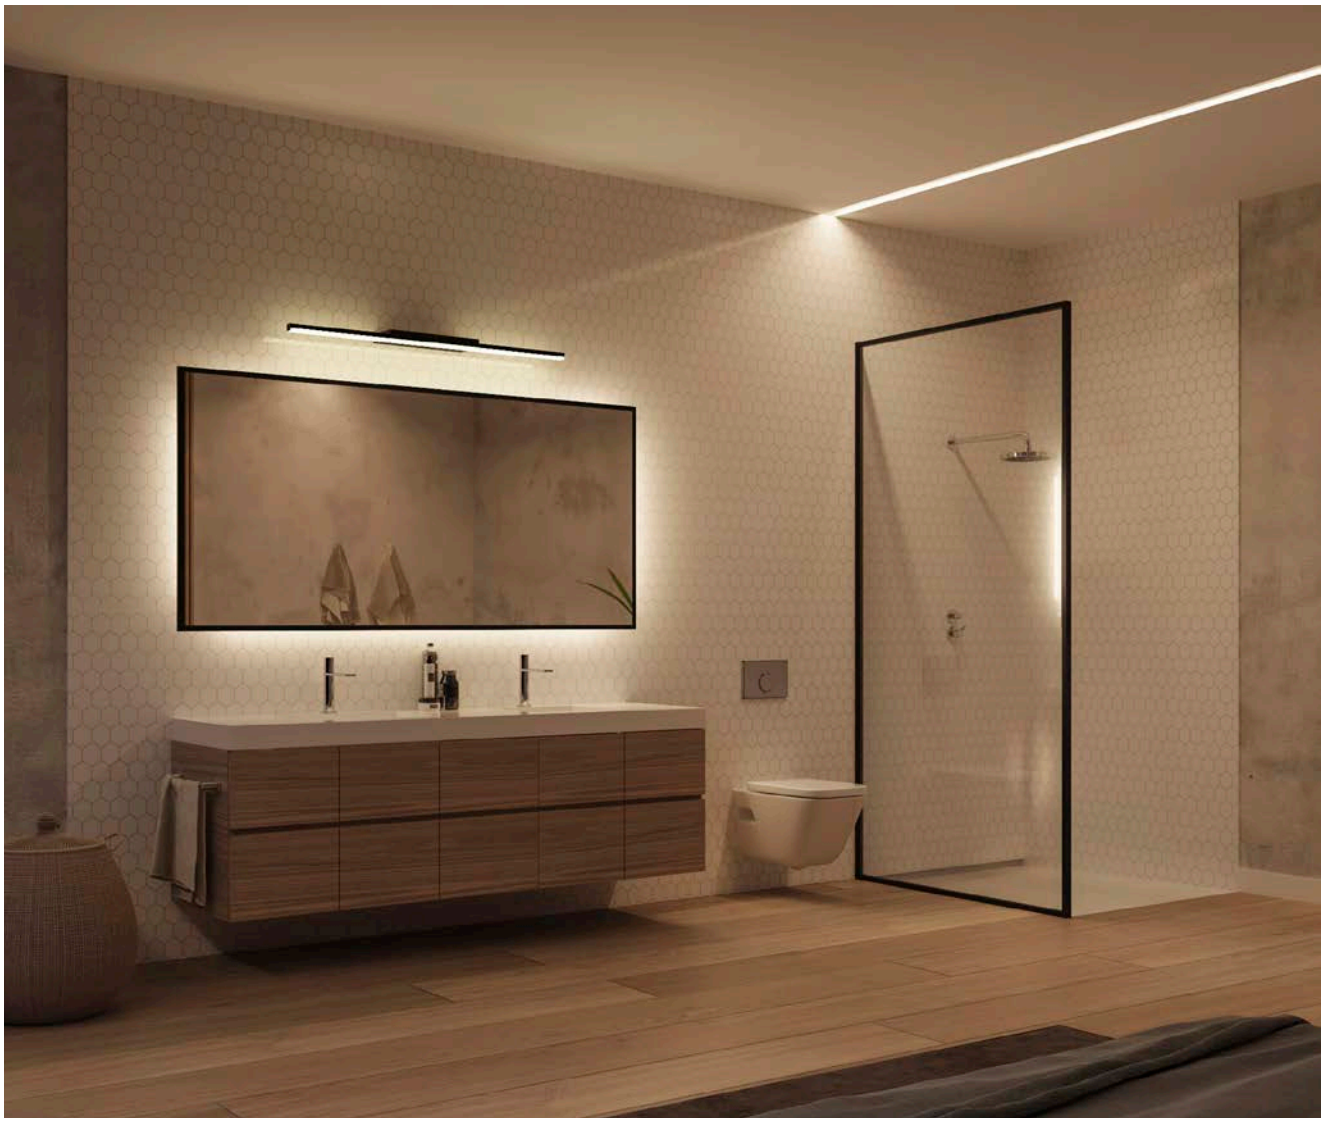

GLENOS Professional profile 2020





Length	Colour	Weight (kg)	Item no.	GBP
200 cm	black	0.56	**213440**	**58,50**
	white		**213441**	**58,50**
	aluminium / white		**213444**	**63,00**


Material: aluminium / Polycarbonate, width / height: 2.0/2.0 cm, max. width of LED strip: 1.6 cm, cover incl., diffuser incl.

GLENOS


PROFESSIONAL PROFILE 2020 ACCESSORY



END CAPS AND LONGITUDINAL CONNECTORS

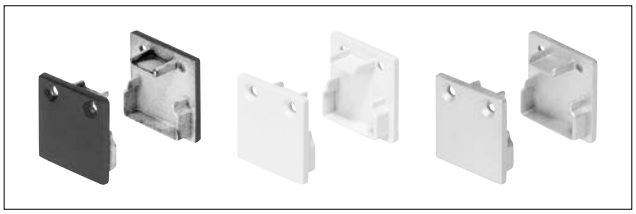

End caps

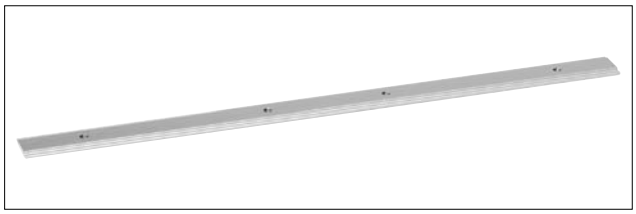

Long connector


Description	Colour	Material	Dimensions	Item no.	GBP
End caps, 2 pieces	black	Zinc	L/W/H: 2/0.2/2 cm Visible depth: 0.2 cm	**213450**	**12,60**
	white			**213451**	**12,60**
	grey			**213454**	**12,60**
Long connector, 1 piece	aluminium	Aluminium	L/W/H: 20/1.3/0.3 cm	**213459**	**9,90**


Please note that the visible depth must be subtracted from the profile length when using end caps in order to obtain the required total length.
Visible depth of end caps + profile length = total length

IMPRESSIVE LINE-UP.

LED STRIP LIGHTS AND LIGHT BARS FOR A SPECIAL ATMOSPHERE.

Want to introduce a bit of variety? LED strip lights and light bars are modern and extraordinary design elements giving rooms a special atmosphere. The elongated luminaires with many different colours make a good impression as signposts.

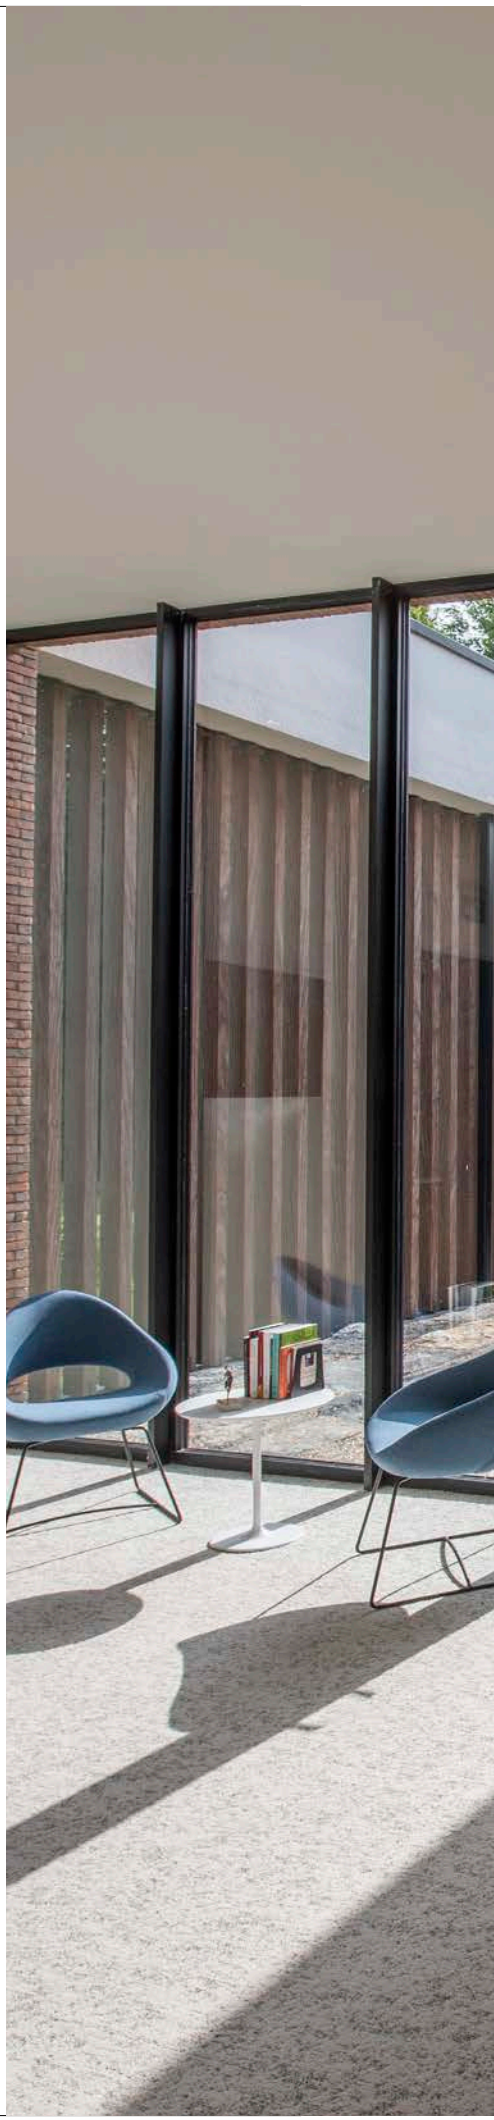

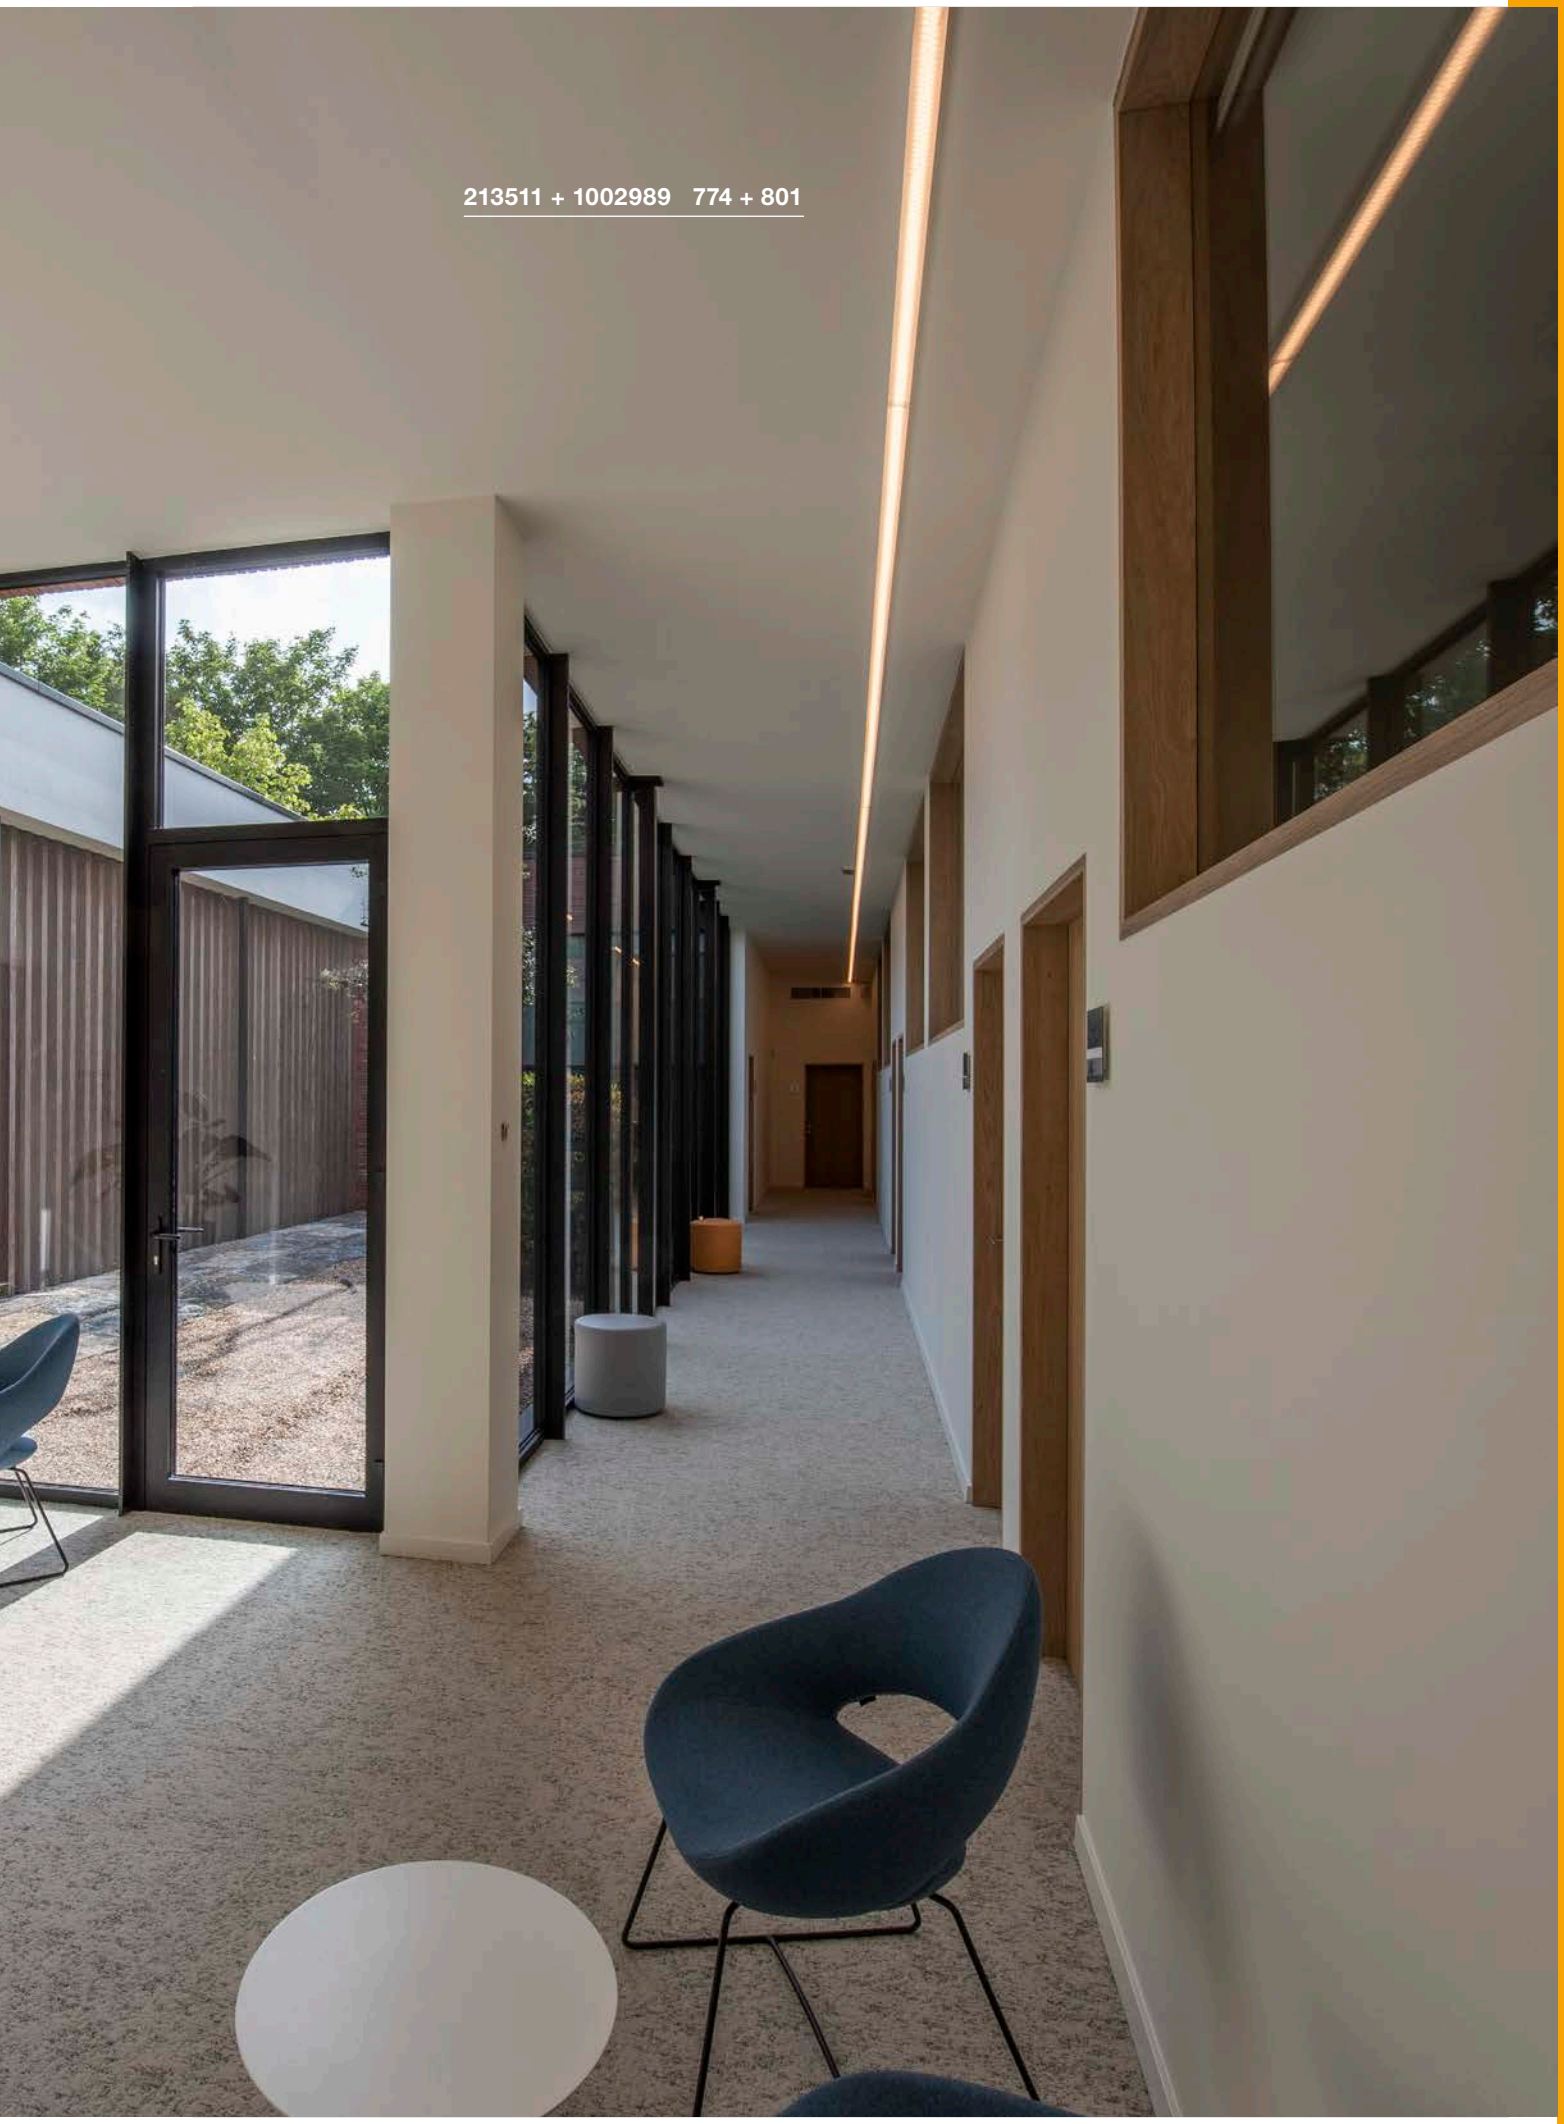
213511 + 1002989 774 + 801

PROFILE STRIP, STANDARD

OVERVIEW


Detailed information about the products can be found on the specific catalogue page.

		Profile strip, standard			
Lumen per meter		**850lm/m**	**1000lm/m**	**1200lm/m**	**2000lm/m**
LEDs per meter		**120 LEDs/m**		**180 LEDs/m**	
Colour rendering index		**CRI>80**			
					
Colour temperature	**2700K**	**552732**	**552742**	**552752**	**552762**
Colour temperature	**3000K**	**552733**	**552743**	**552753**	**552763**
Colour temperature	**4000K**	**552734**	**552744**	**552754**	**552764**
Catalogue page		**783**	**783**	**783**	**783**
suitable LED profiles	**LED strips**				
GRAZIA 10	**Recessed**	✓	✓	✓	–
	Flat	✓	✓	✓	✓
	Standard	✓	✓	✓	✓
GRAZIA 20	**Recessed**	✓	✓	✓	✓
	Flat, smooth	✓	✓	✓	✓
	Flat, grooved	✓	✓	✓	✓
	Standard, smooth	✓	✓	✓	✓
	Standard, grooved	✓	✓	✓	✓

Suitable profiles and components can be found on page 746 onwards and the relevant accessories (power supplies, drivers etc.) from page 842 onwards

Profile strip, standard

750lm/m	1600lm/m	1600lm/m
180 LEDs/m		120 LEDs/m
CRI>80		CRI 90
		
552772	552782	552792
552773	552783	552793
552774	552784	552794
782	782/783	782/783
✓	–	✓
✓	–	✓
✓	✓	✓
✓	–	✓
✓	✓	✓
✓	✓	✓
✓	✓	✓
✓	✓	✓

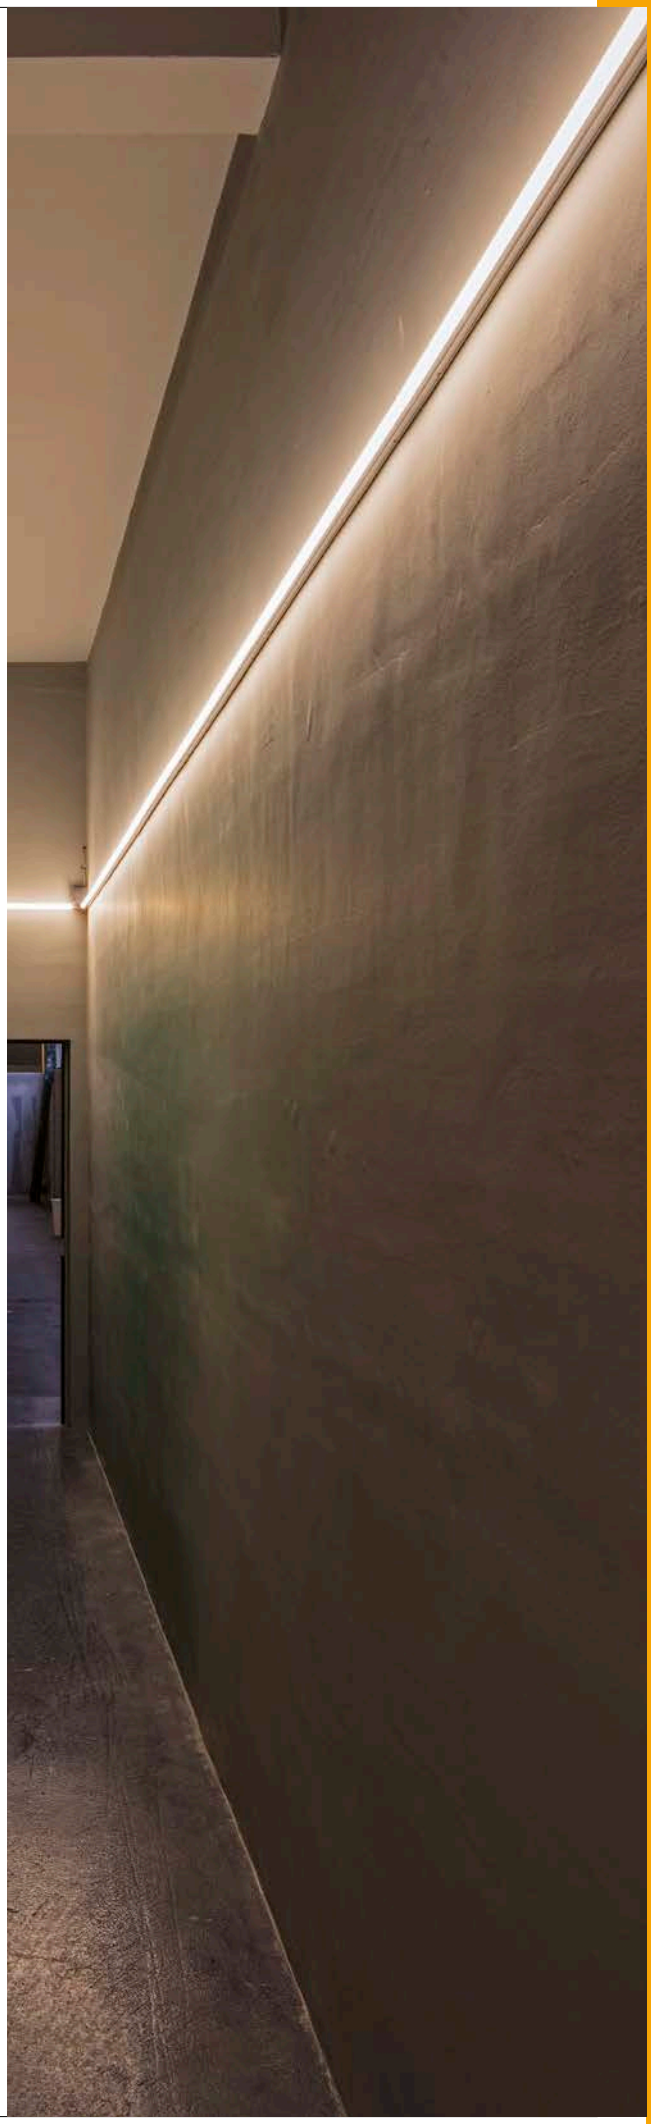

PROFILE STRIP, STANDARD

24V



PROFILE STRIP, STANDARD, 24V



180 LEDs per m
Width / height: 1/0.2 cm
LED spacing: 0.55 cm
Can be separated every 3.4 cm
Minimum bend radius: 3.8 cm

3 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	2250	25	>80	3SDCM	300	A+	552772	63,00
	4800	55				A	552782	72,00
3000K	2250	25				A+	552773	63,00
	4800	50				A+	552783	72,00
4000K	2250	25				A+	552774	63,00
	4800	45				A+	552784	72,00

To obtain consistent light output from a length of 1.5 m, we recommend supplying power the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.

PROFILE STRIP, STANDARD, 24V



120 LEDs per m
Width / height: 1/0.2 cm
LED spacing: 0.8 cm
Can be separated every 5 cm
Minimum bend radius: 3.8 cm

3 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	2550	30	>80	3SDCM	300	A	552732	63,00
	3000	40				A	552742	63,00
	3600	45				A	552752	63,00
	6000	80				A	552762	67,50
3000K	2550	25				A+	552733	63,00
	3000	35				A	552743	63,00
	3600	40				A	552753	63,00
	6300	75				A	552763	67,50
4000K	2550	25				A+	552734	63,00
	3000	30				A+	552744	63,00
	3600	35				A+	552754	63,00
	6600	70				A	552764	67,50


For lengths in excess of 2.5 m, a power supply must be provided at both ends. For lengths in excess of 5 m, a new power supply must be added.

3 m, CRI>90

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	4800	65	>90	3SDCM	300	A	552792	72,00
3000K							552793	72,00
4000K							552794	72,00

To obtain consistent light output from a length of 1.5 m, we recommend supplying power the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.

PROFILE STRIP, STANDARD, 24V ACCESSORIES



Power supply, 50 cm cable



Direct connector

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
Power supply, 1 piece	3A	Plastic	2	1	0.4	1002141	3,00
Direct connector, 1 piece	3A	Plastic	2.3	1	0.4	1002142	1,80

To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

PROFILE STRIP, GRAND

OVERVIEW

Detailed information about the products can be found on the specific catalogue page.


		Profile strip, Grand				
Lumen per meter		**1600lm/m**	**2000lm/m**	**3000lm/m**	**3700lm/m**	**2600lm/m**
LEDs per meter		**240 LEDs/m**				
Colour rendering index		**CRI>80**				**CRI 90**
						
Colour temperature	**2700K**	**552802**	**552812**	**552822**	**552832**	**552852**
Colour temperature	**3000K**	**552803**	**552813**	**552823**	**552833**	**552853**
Colour temperature	**4000K**	**552804**	**552814**	**552824**	**552834**	**552854**
Catalogue page		**787**	**787**	**787**	**787**	**787**
suitable LED profiles	**LED strips**					
GRAZIA 10	**Recessed**	–	–	–	–	–
	Flat	–	–	–	–	–
	Standard	–	–	–	–	–
GRAZIA 20	**Recessed**	✓	✓	✓	–	✓
	Flat, smooth	✓	✓	✓	✓	✓
	Flat, grooved	✓	✓	✓	✓	✓
	Standard, smooth	✓	✓	✓	✓	✓
	Standard, grooved	✓	✓	✓	✓	✓

Suitable profiles and components can be found on page 746 onwards and the relevant accessories (power supplies, drivers etc.) from page 842 onwards



PROFILE STRIP, GRAND

24V

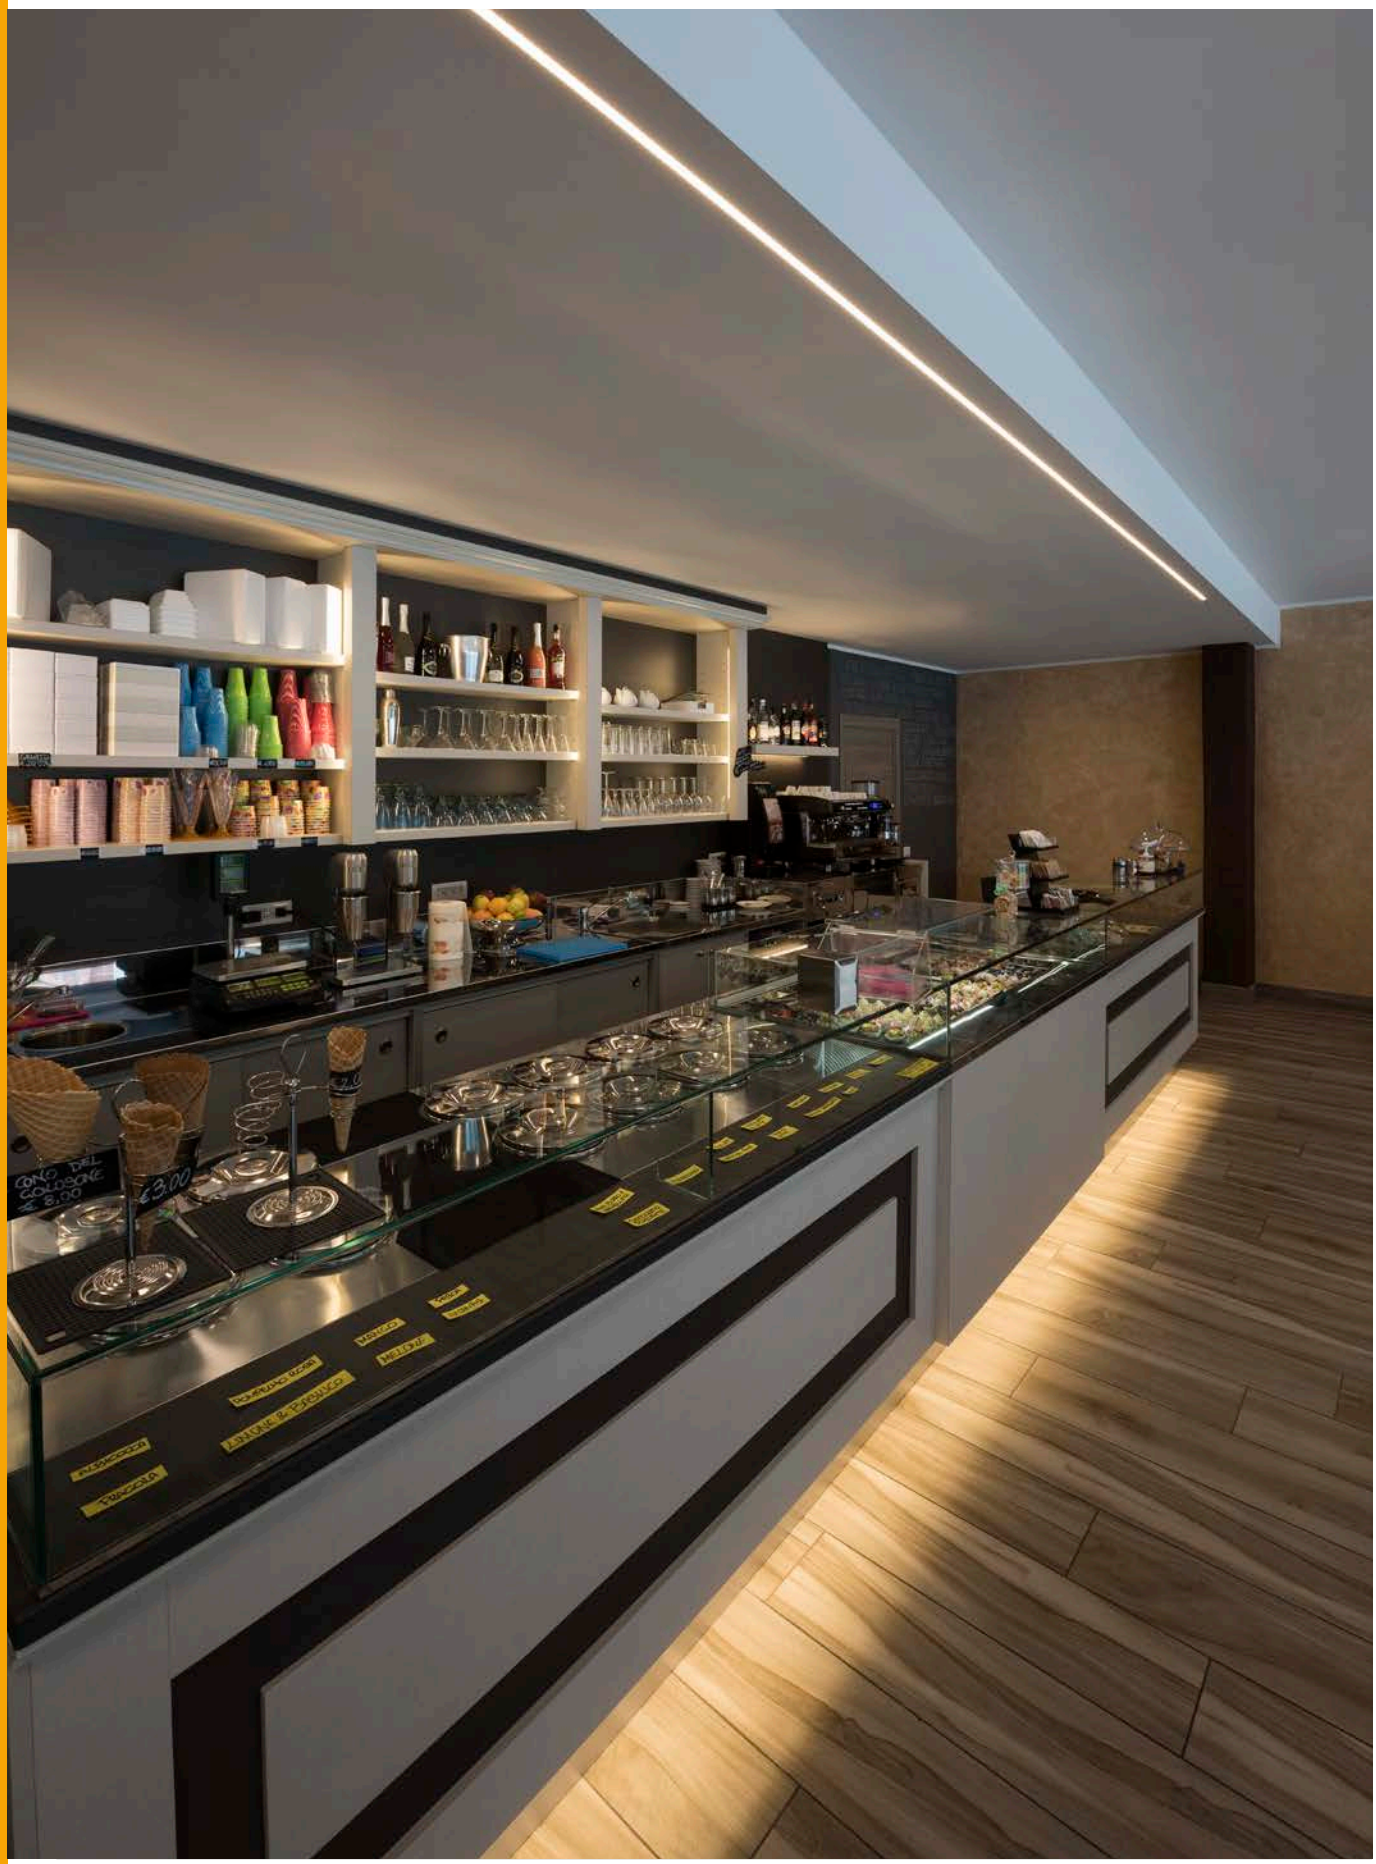

PROFILE STRIP, GRAND, 24V



240 LEDs per m
Width / height: 2/0.2 cm
LED spacing: 0.4 cm
Can be separated every 2.5 cm
Minimum bend radius: 3.8 cm

2 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	7400	92	>80	4SDCM	200	A+	552832	90,00
3000K		102					552833	90,00
4000K		84					552834	90,00

To obtain consistent light output from a length of 1 m, we recommend supplying power the strips at both ends.
For lengths in excess of 2 m, a new power supply must be added.

3 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	4800	52	>80	4SDCM	300	A+	552802	90,00
	6000	68					552812	99,00
	9000	102					552822	117,00
3000K	4800	52				A+	552803	90,00
	6000	68					552813	99,00
	9000	105				A+	552823	117,00
4000K	4800	48				A+	552804	90,00
	6000	62					552814	99,00
	9000	96					552824	117,00


To obtain consistent light output from a length of 1.5m, we recommend supplying power the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.

3 m, CRI>90

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	7800	114	>90	6SDCM	300	A	552852	117,00
3000K		106					552853	117,00
4000K		100					552854	117,00

For lengths in excess of 1.5 m, a power supply must be provided at both ends. For lengths in excess of 3 m, a new power supply must be added.

PROFILE STRIP, GRAND, 24V ACCESSORIES



Power supply, 50 cm cable



Direct connector

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
☐ Power supply, 1 piece	3A	Plastic	2	2	0.4	1002143	3,50
☐ Direct connector, 1 piece	3A	Plastic	2.3	2	0.4	1002144	2,00


To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.


OTHER LED STRIPS

OVERVIEW

Detailed information about the products can be found on the specific catalogue page.

		PROFILE STRIP X-SLIM				PROFILE STRIP SELECT
Lumen per meter		–	300lm/m	400lm/m	500lm/m	800lm/m
LEDs per meter		60 LEDs/m	120 LEDs/m			
Colour rendering index		–	CRI>80			
LED strip width		0.5 cm				0.8 cm
						
Colour temperature	**2700K**		552702	552712	552722	552692
Colour temperature	**3000K**		552703	552713	552723	552693
Colour temperature	**4000K**		552704	552714	552724	552694
Colour temperature	**Blue**	552727				
Catalogue page		793	793	793	793	795

		FLEX ROLL
Lumen per meter		300lm/m
LEDs per meter		60 LEDs/m
Colour rendering index		CRI>80
LED strip width		
		 IP55
Colour temperature	**2700K**	
Colour temperature	**3000K**	552273
Colour temperature	**4000K**	
Catalogue page		812


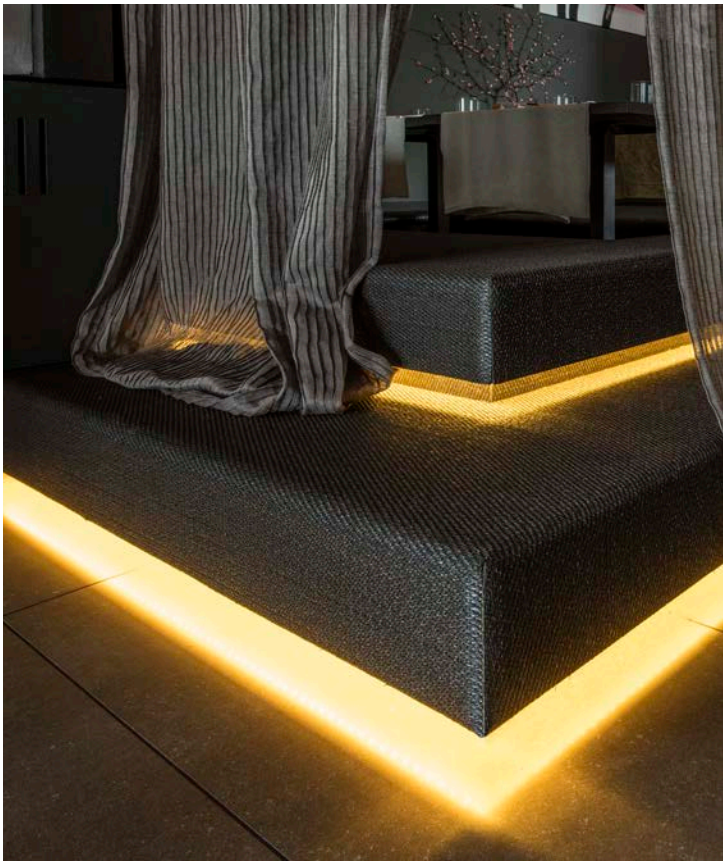


Suitable profiles and components can be found on page 746 onwards and the relevant accessories (power supplies, drivers etc.) from page 842 onwards

		LED STRIP		
Lumen per meter		**925lm/m**	**1000lm/m**	**1200lm/m**
LEDs per meter		**60 LEDs/m**		
Colour rendering index		**CRI>80**		
LED strip width		**1 cm**		
				
Colour temperature	**2700K**	**552442**		
Colour temperature	**3000K**		**552443**	
Colour temperature	**5000K**			**552445**
Catalogue page		**798**	**798**	**798**

		FLEXLED		
Lumen per meter		**500lm/m**	**510lm/m**	**570lm/m**
LEDs per meter		**60 LEDs/m**		
Colour rendering index		**CRI>80**		
LED strip width		**0.8 cm**		
				
Colour temperature	**2700K**	**552422**		
Colour temperature	**3000K**		**552423**	
Colour temperature	**5000K**			**552425**
Catalogue page		**797**	**797**	**797**



		FLEXLED ROLL			FLEXLED		
Lumen per meter		370lm/m			385lm/m	395lm/m	470lm/m
LEDs per meter		60 LEDs/m			60 LEDs/m		
Colour rendering index		CRI>80			CRI>80		
LED strip width		1 cm			0.6 cm		
							
Colour temperature	2700K	552120			552522		
Colour temperature	3000K		552122			552523	
Colour temperature	5000K			552121			552525
Catalogue page		799	799	799	805	805	805

		FLEXLED STRIP					
Lumen per meter		17600lm/m	19200lm/m	21600lm/m	1050lm/m	1200lm/m	1280lm/m
LEDs per meter		48 LEDs/m			120 LEDs/m		
Colour rendering index		CRI>90			CRI>80		
LED strip width		1 cm					
							
Colour temperature	2200K	1002996			1001972		
Colour temperature	2700K		1002997			1002026	
Colour temperature	3000K		1002998			1002027	
Colour temperature	4000K			1002999			1002028
Catalogue page		801	801	801	800	800	800

		FLEXSTRIP LED HIGH LUMEN		
Lumen per meter		1900lm/m	1940lm/m	2150lm/m
LEDs per meter		120 LEDs/m		
Colour rendering index		CRI>80		
LED strip width		1 cm		
				
Colour temperature	2700K	552482		
Colour temperature	3000K		552483	
Colour temperature	5000K			552485
Catalogue page		803	803	803

		KELVIN CONTROL STRIP	
Lumen per meter		**627-1307lm/m**	**1174-2410lm/m**
LEDs per meter		**240lm/m**	
Colour rendering index		**CRI>80**	
LED strip width		**1 cm**	
			
Colour temperature	**2700-6500K**	**552863**	**552883**
Catalogue page		**807**	**807**

		FLEXSTRIP LED RGB	FLEXLED ROLL RGB	FLEXLED ROLL MULTICOLOUR RGBW
Colour temperature		**RGB**	**RGB**	**RGBW**
LED strip width		**1 cm**	**2 cm**	**1.2 cm**
				
LEDs per meter	**48 LEDs/m**			
LEDs per meter	**60 LEDs/m**	**552649**		**552453**
LEDs per meter	**120 LEDs/m**		**1001971**	
Catalogue page		**809**	**811**	**810**



Suitable profiles and components can be found on page 746 onwards and the relevant accessories (power supplies, drivers etc.) from page 842 onwards

PROFILE STRIP X-SLIM

24V



PROFILE STRIP X-SLIM, 24V



120 LEDs per m
Width / height: 0.5/0.2 cm
LED spacing: 0.8 cm
Can be separated every 5 cm
Minimum bend radius: 3.8 cm
Extra-narrow LED strip

3 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	900	8	>80	3SDCM	300	A+	552702	45,00
	1200	12				A+	552712	45,00
	1500	15				A+	552722	45,00
3000K	900	6				A++	552703	45,00
	1200	12				A+	552713	45,00
	1500	15				A+	552723	45,00
4000K	900	7				A++	552704	45,00
	1200	12				A+	552714	45,00
	1500	15				A+	552724	45,00

To obtain consistent light output from a length of 1.5 m, we recommend supplying power the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.

PROFILE STRIP X-SLIM, 24V




60 LEDs per m
Width / height: 0.5/0.3 cm
LED spacing: 0.8 cm
Can be separated every 10 cm
Minimum bend radius: 3.8 cm
Extra-narrow LED strip

3 m

Colour temperature	Output (W)	L (cm)	Item no.	GBP
blue	12	300	552727	45,00

To obtain consistent light output from a length of 1.5 m, we recommend supplying power the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.

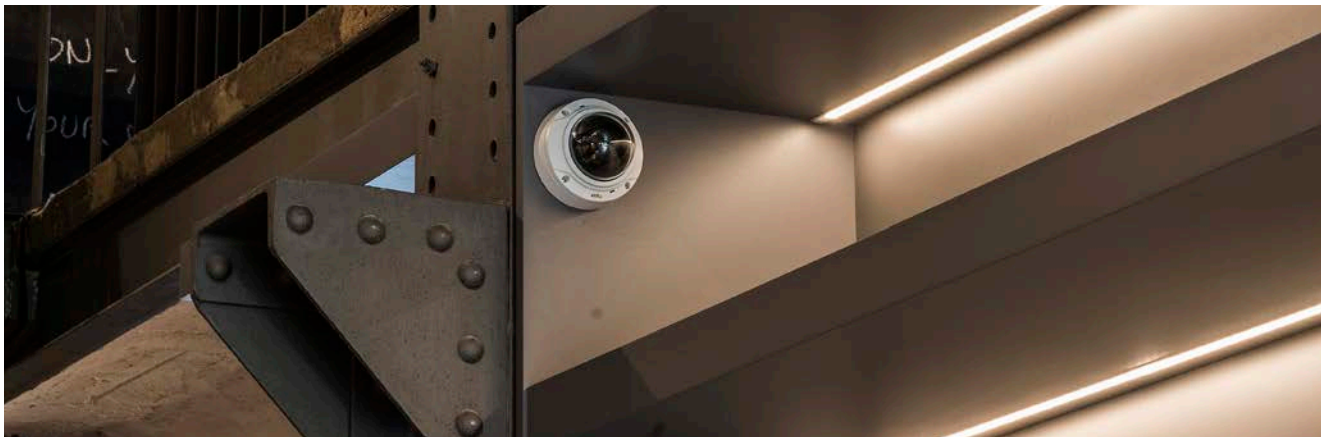

To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

PROFILE STRIP SELECT

24V



PROFILE STRIP SELECT, 24V




120 LEDs per m
Width / height: 0.8/0.2 cm
LED spacing: 0.8 cm
Can be separated every 5 cm
Minimum bend radius: 3.8 cm

5 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	4000	40	>80	3SDCM	500	A+	552692	90,00
3000K							552693	90,00
4000K							552694	90,00

To obtain consistent light output from a length of 2.5 m, we recommend supplying power the strips at both ends.
For lengths in excess of 5 m, a new power supply must be added.

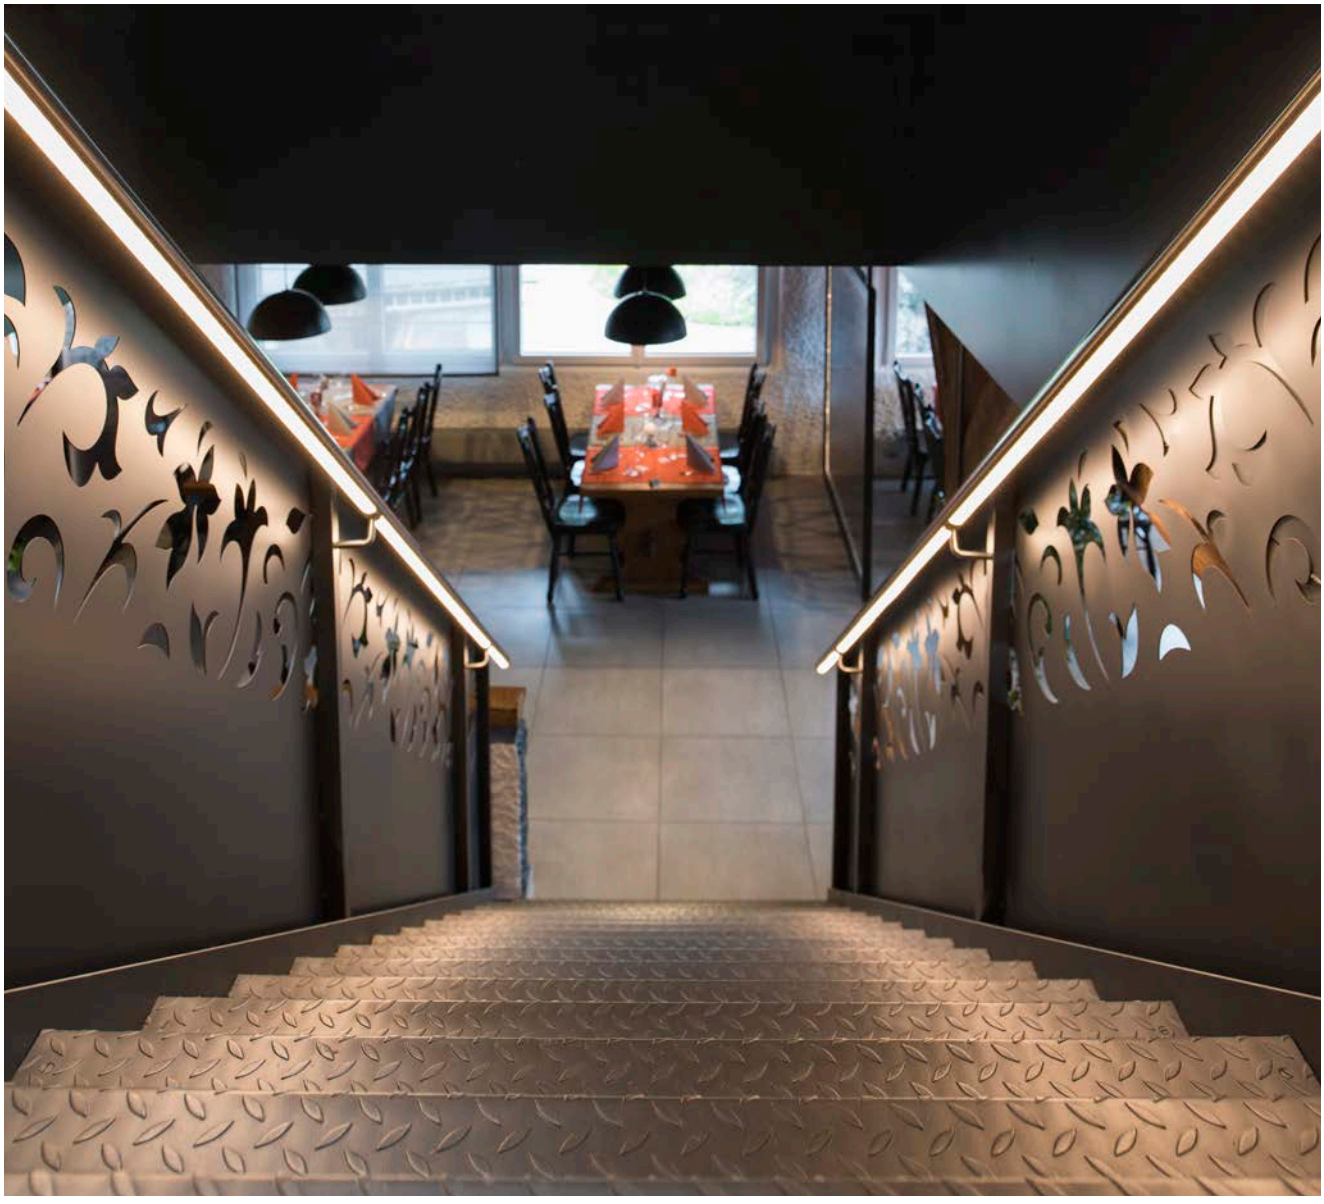

To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

FLEXLED ROLL SELECT

24V



FLEXLED ROLL SELECT, 24V




60 LEDs per m
Width / height: 0.8/0.1 cm
LED spacing: 1.7 cm
Can be separated every 10 cm
Minimum bend radius: 1.3 cm

5 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	2500	25	>80	3SDCM	500	A+	**552422**	**54,00**
3000K	2550						**552423**	**54,00**
5000K	2850						**552425**	**54,00**

To obtain constant light output over long lengths, the strips should be powered on both ends.
For lengths in excess of 5 m, a new power supply must be added.


FLEXLED ROLL SELECT, 24V ACCESSORIES




Power supply, 30 cm cable



Direct connector




Connector



90° solder corners


Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
■ Power supply, 1 piece	2A	Plastic	50	1.5	0.5	**550412**	**3,00**
■ Direct connector, 2 pieces	2A	Plastic	1.4	1.4	0.4	**550415**	**4,00**
□ Connector, 1 piece	10A	Plastic PC	2.7	1.4	1.1	**550560**	**5,00**
■ 90° solder corners, 1 piece	2A	–	5	0.8	–	**550571**	**3,00**

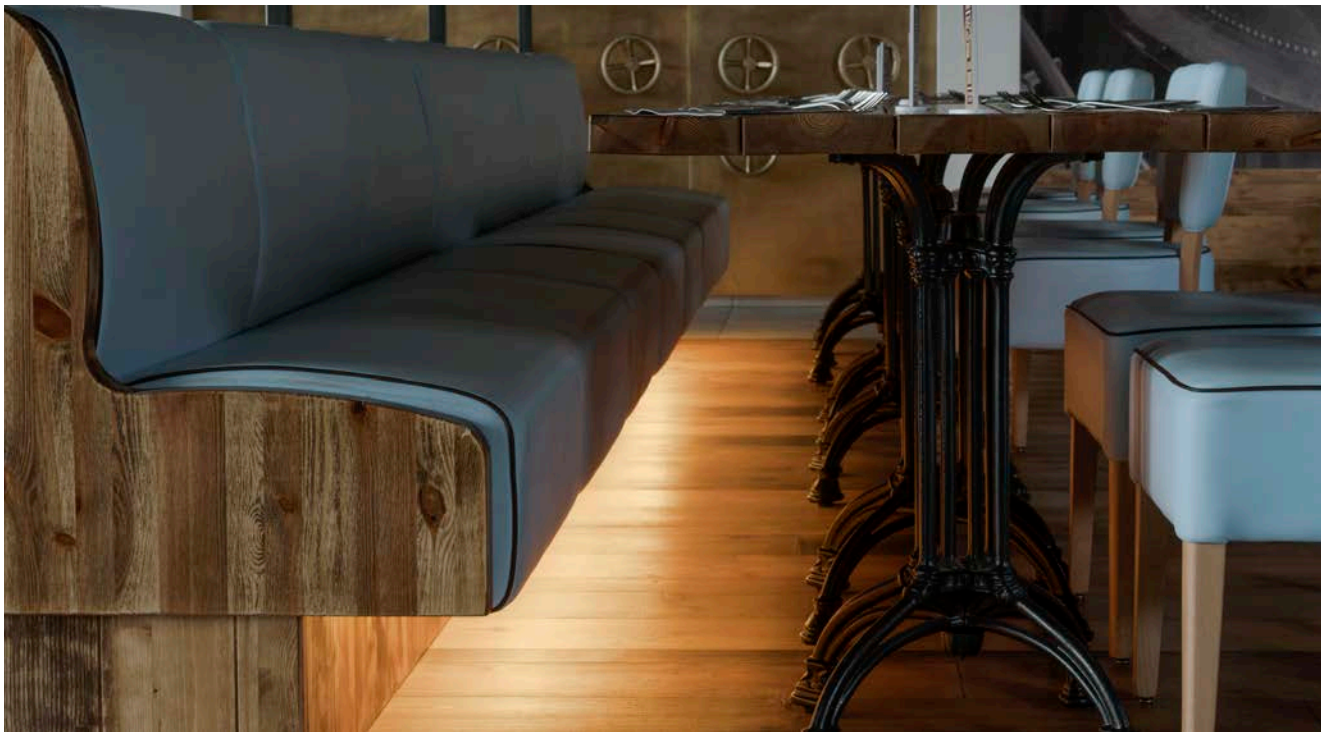

To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

LED STRIP

24V

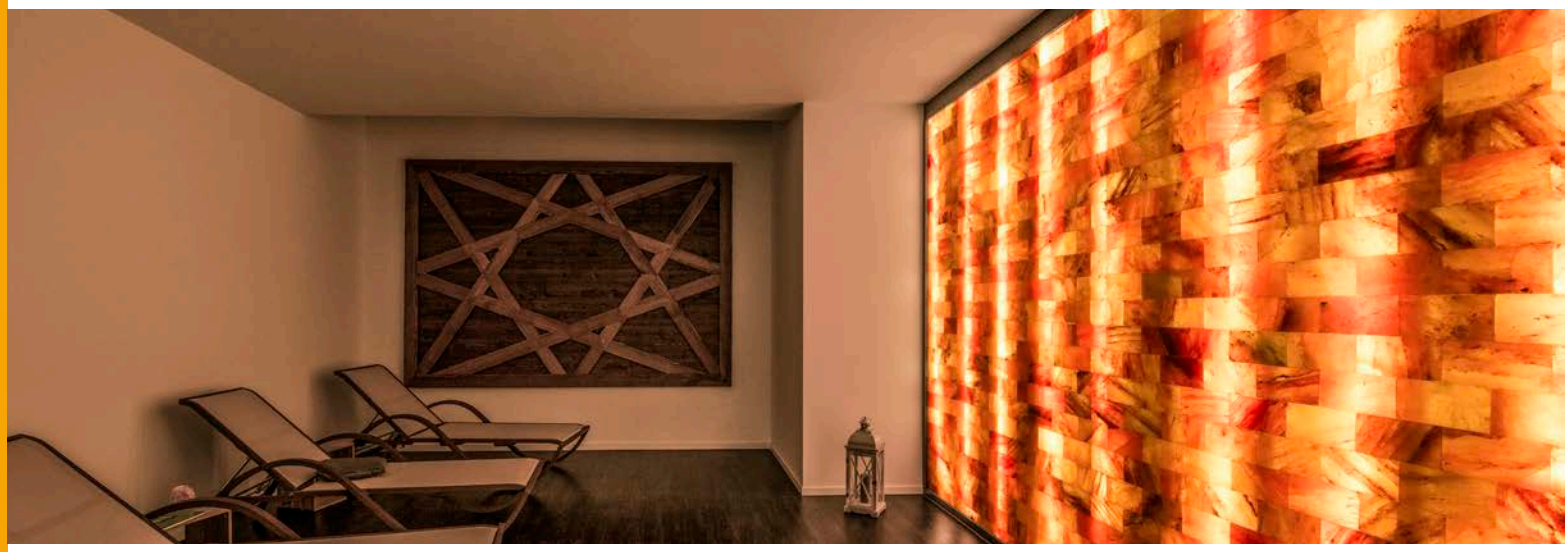

LED STRIP, 24V




60 LEDs per m
Width / height: 1/0.2 cm
LED spacing: 1.7 cm
Can be separated every 10 cm
Minimum bend radius: 1.3 cm

3 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	2775	30	>80	3SDCM	300	A+	**552442**	**81,00**
3000K	3000						**552443**	**81,00**
4000K	3600						**552445**	**81,00**

To obtain constant light output over long lengths, the strips should be powered on both ends.
For lengths in excess of 3 m, a new power supply must be added.


LED STRIP ACCESSORIES




Power supply, 30 cm cable



Direct connector



Connector




90° solder corners

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
■ Power supply, 1 piece	2A	Plastic	30	–	–	**550413**	**3,00**
■ Direct connector, 2 pieces	2A	Plastic	1.4	1.6	0.4	**550416**	**4,00**
□ Connector, 1 piece	10A	Plastic PC	2.7	1.4	1.1	**550560**	**5,00**
■ 90° solder corners, 1 piece	2A	–	5	0.8	–	**550570**	**4,00**


To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

FLEXLED ROLL

24V

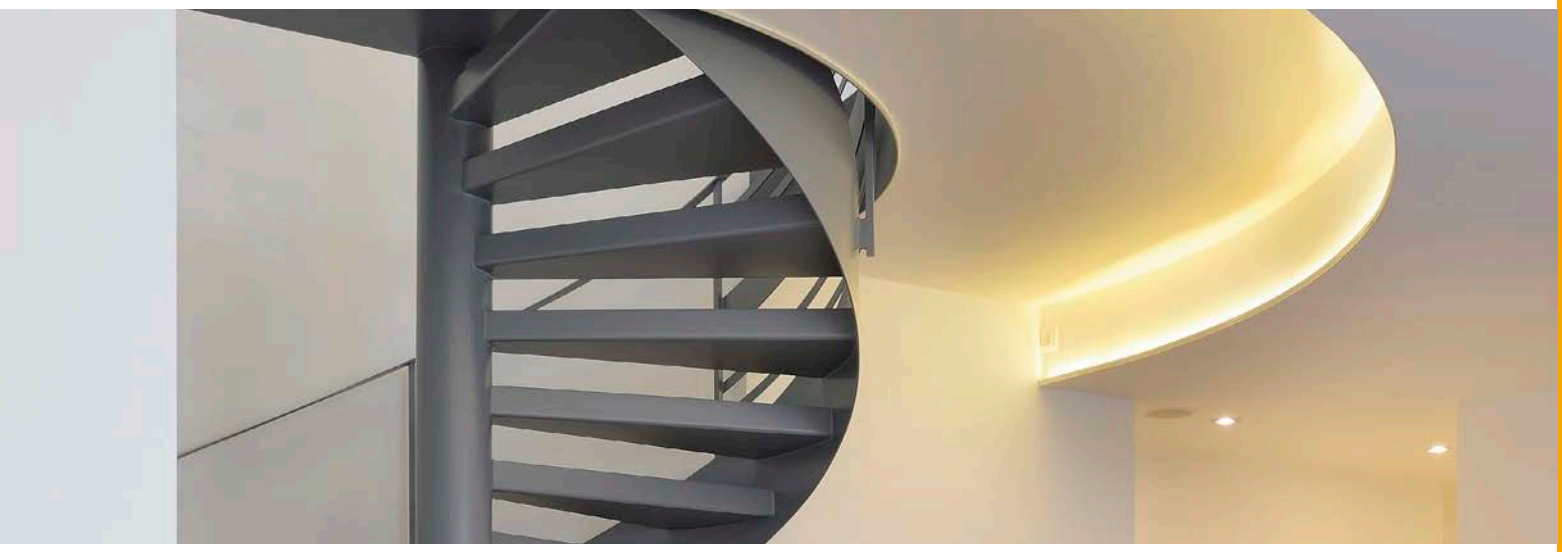

FLEXLED ROLL, 24V

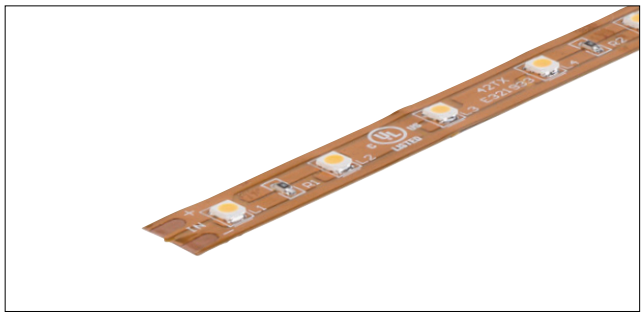


60 LEDs per m
Width / height: 1/0.2 cm
LED spacing: 1.7 cm
Can be separated every 10 cm
Minimum bend radius: 1.3 cm

5 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	1850	20	>80	6SDCM	500	A+	**552120**	**54,00**
3000K							**552122**	**54,00**
5000K							**552121**	**54,00**

To obtain constant light output over long lengths, the strips should be powered on both ends.
For lengths in excess of 5 m, a new power supply must be added.

FLEXLED ROLL, 24V ACCESSORIES




Power supply, 30 cm cable



Direct connector



Connector




90° solder corners

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
■ Power supply, 1 piece	2A	Plastic	30	–	–	**550413**	**3,00**
■ Direct connector, 2 pieces	2A	Plastic	1.4	1.6	0.4	**550416**	**4,00**
□ Connector, 1 piece	10A	Plastic PC	2.7	1.4	1.1	**550560**	**5,00**
■ 90° solder corners, 1 piece	2A	–	5	0.8	–	**550570**	**4,00**

To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

FLEXLED STRIP

24V

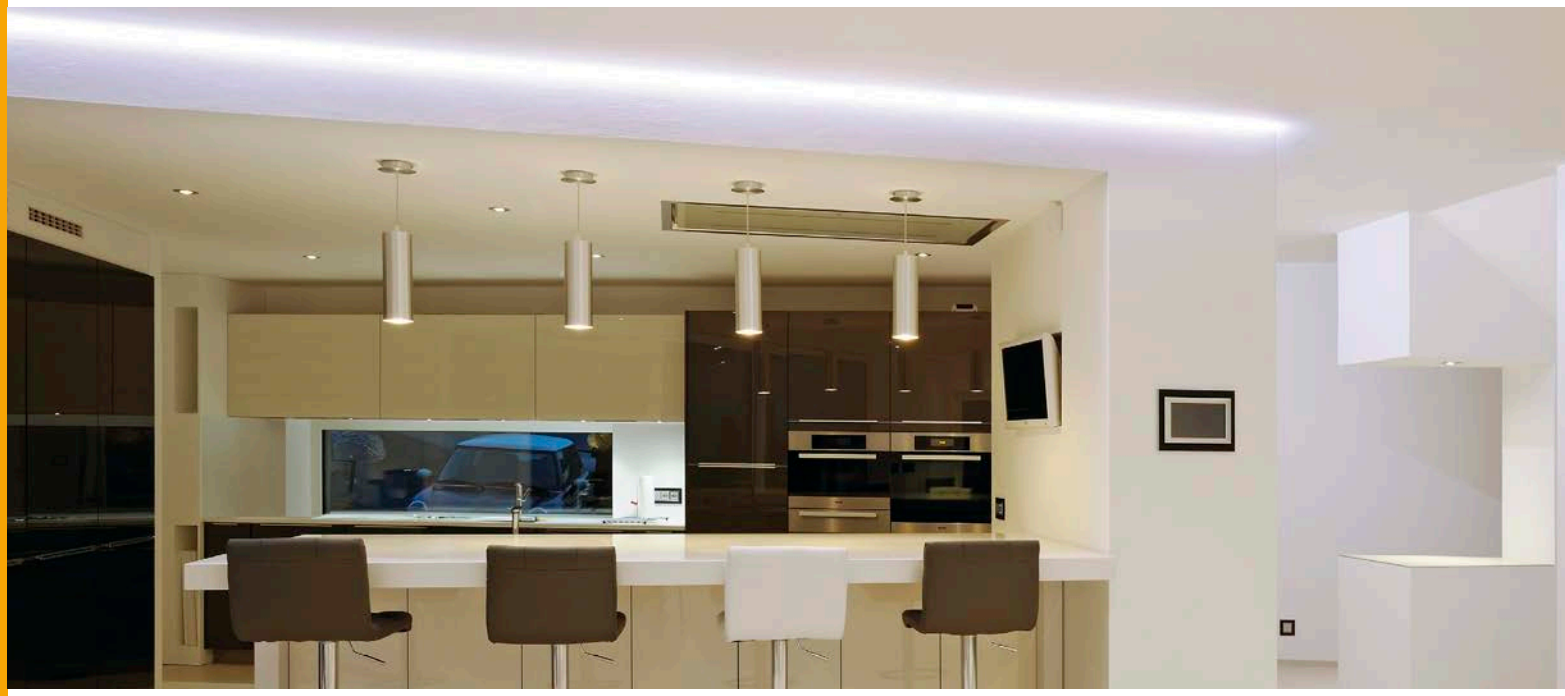

FLEXLED STRIP, 24V



120 LEDs per m
Width / height: 1/0.12 cm
LED spacing: 0.84 cm
Can be separated every 5 cm
Minimum bend radius: 6 cm

10 m, CRI>80


Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2200K	10500	121.5	>80	3SDCM	1000	A	**1001972**	**224,10**
2700K	12000					A+	**1002026**	**224,10**
3000K	12000						**1002027**	**224,10**
4000K	12800						**1002028**	**224,10**

To obtain constant light output over long lengths, the strips should be powered on both ends.

To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.



FLEXLED STRIP, 24V

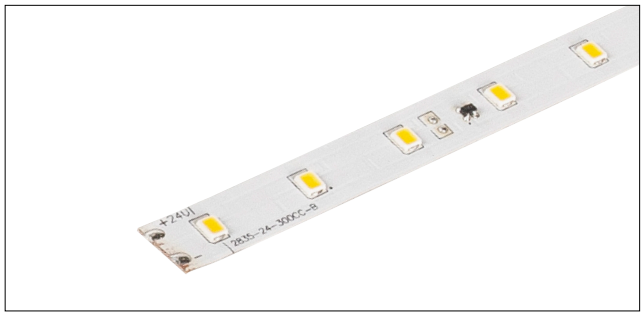

48 LEDs per m
Width / height: 1/0.12 cm
LED spacing: 1.7 cm
Can be separated every 10 cm
Minimum bend radius: 3 cm

80 m, CRI>90

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2200K	17600	211.2	>90	4SDCM	8000	A	**1002996**	**899,10**
2700K	19200					A+	**1002997**	**899,10**
3000K	19200						**1002998**	**899,10**
4000K	21600						**1002999**	**899,10**

To obtain consistent light output with a length of 80 m, we recommend providing a power supply to the strips at both ends.
With a one-sided power supply, a new power supply must be provided from a length of 40 m.




Extra-long strip **80 m**

To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

FLEXSTRIP LED HIGH LUMEN

24V

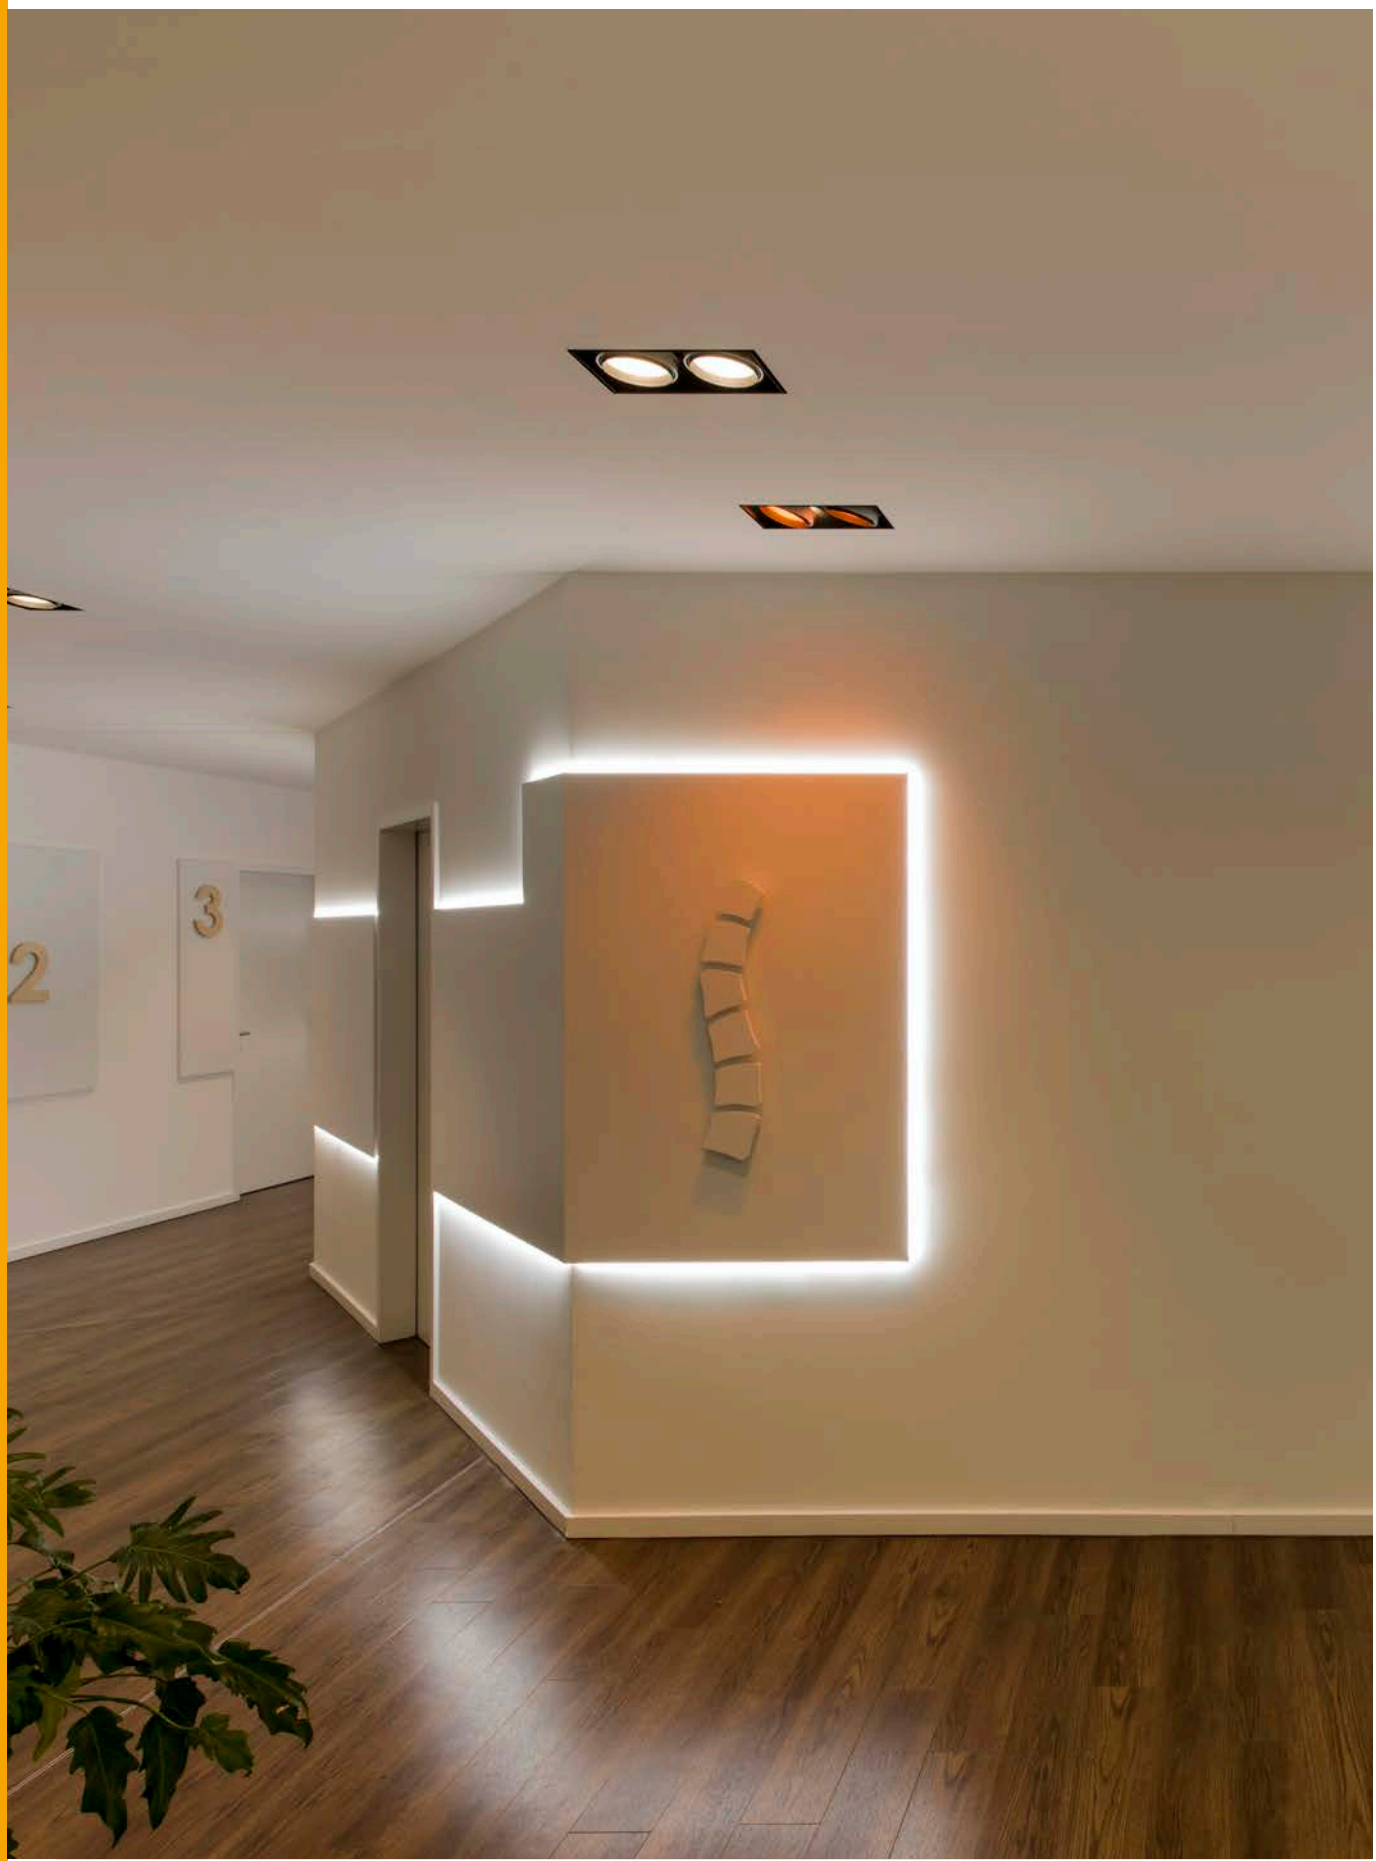

FLEXSTRIP LED HIGH LUMEN, 24V




120 LEDs per m
Width / height: 1/0.1 cm
LED spacing: 0.8 cm
Can be separated every 5 cm
Minimum bend radius: 1.3 cm

2 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	3800	42	>80	3SDCM	200	A	**552482**	**36,00**
3000K	3880						**552483**	**36,00**
5000K	4300					A+	**552485**	**36,00**

To obtain constant light output over long lengths, the strips should be powered on both ends.


FLEXSTRIP LED HIGH LUMEN, 24V ACCESSORIES



Power supply, 30 cm cable



Direct connector



Connector


Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
■ Power supply, 1 piece	2A	Plastic	30	–	–	**550413**	**3,00**
■ Direct connector, 2 pieces	2A	Plastic	1.4	1.6	0.4	**550416**	**4,00**
□ Connector, 1 piece	10A	Plastic PC	2.7	1.4	1.1	**550560**	**5,00**



To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

FLEXLED ROLL

24V

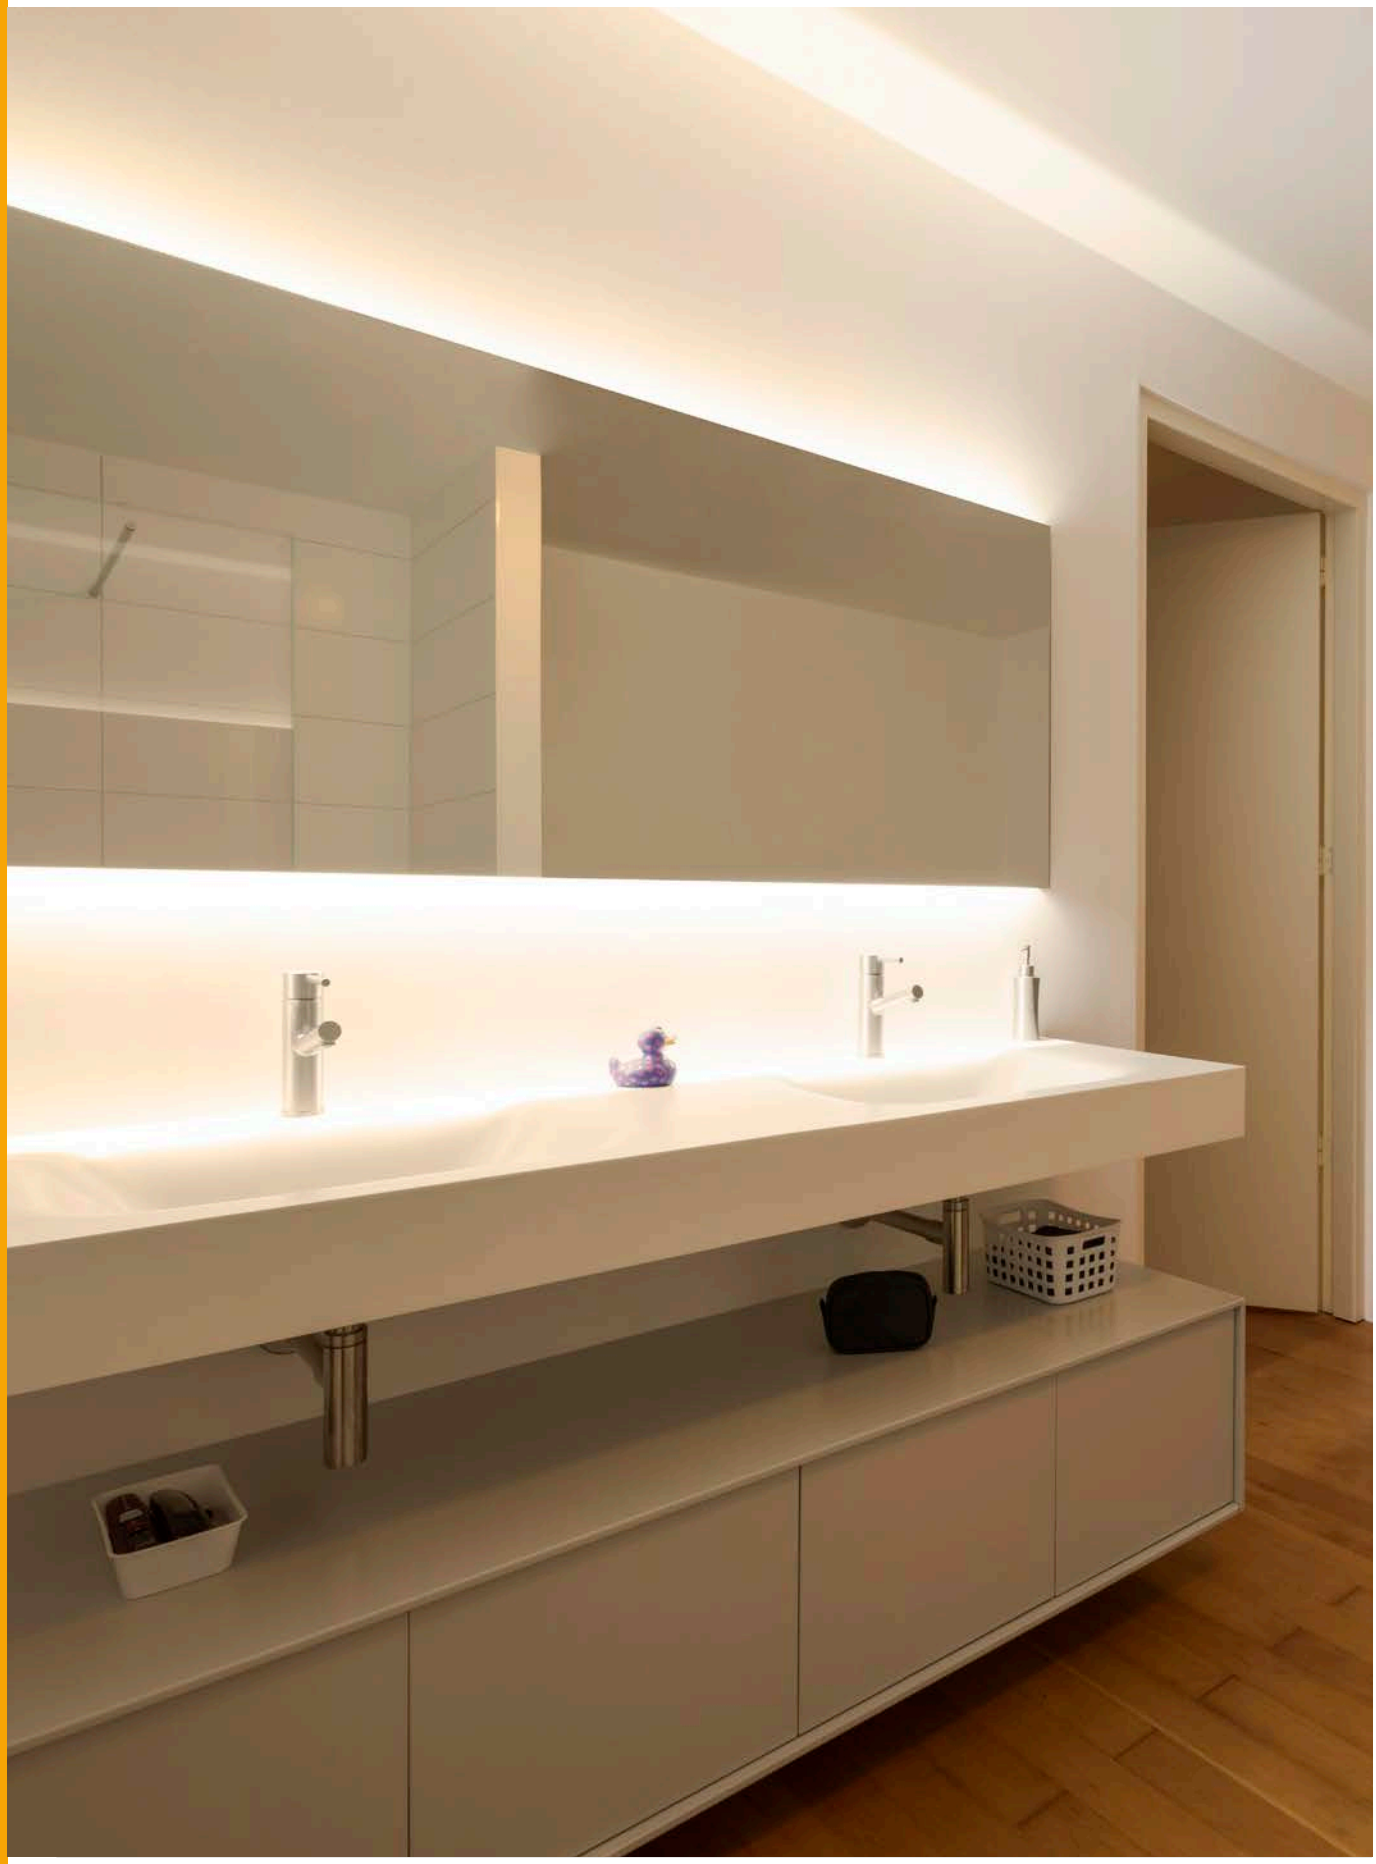

FLEXLED ROLL, 24V




60 LEDs per m
Width / height: 0.6/0.1 cm
LED spacing: 1.6 cm
Can be separated every 10 cm

5 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K	1925	20	>80	3SDCM	500	A+	**552522**	**54,00**
3000K	1975						**552523**	**54,00**
5000K	2350						**552525**	**54,00**

To obtain constant light output over long lengths, the strips should be powered on both ends.


FLEXLED ROLL 24V ACCESSORIES



Power supply, 30 cm cable



Direct connector



Connector


Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
☐ Power supply, 1 piece	2A	Plastic	50	–	–	**550412**	**3,00**
■ Direct connector, 2 pieces	2A	Plastic	1.4	1.4	0.4	**550415**	**4,00**
☐ Connector, 1 piece	10A	Plastic PC	2.7	1.4	1.1	**550560**	**5,00**



To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

KELVIN CONTROL STRIP

24V

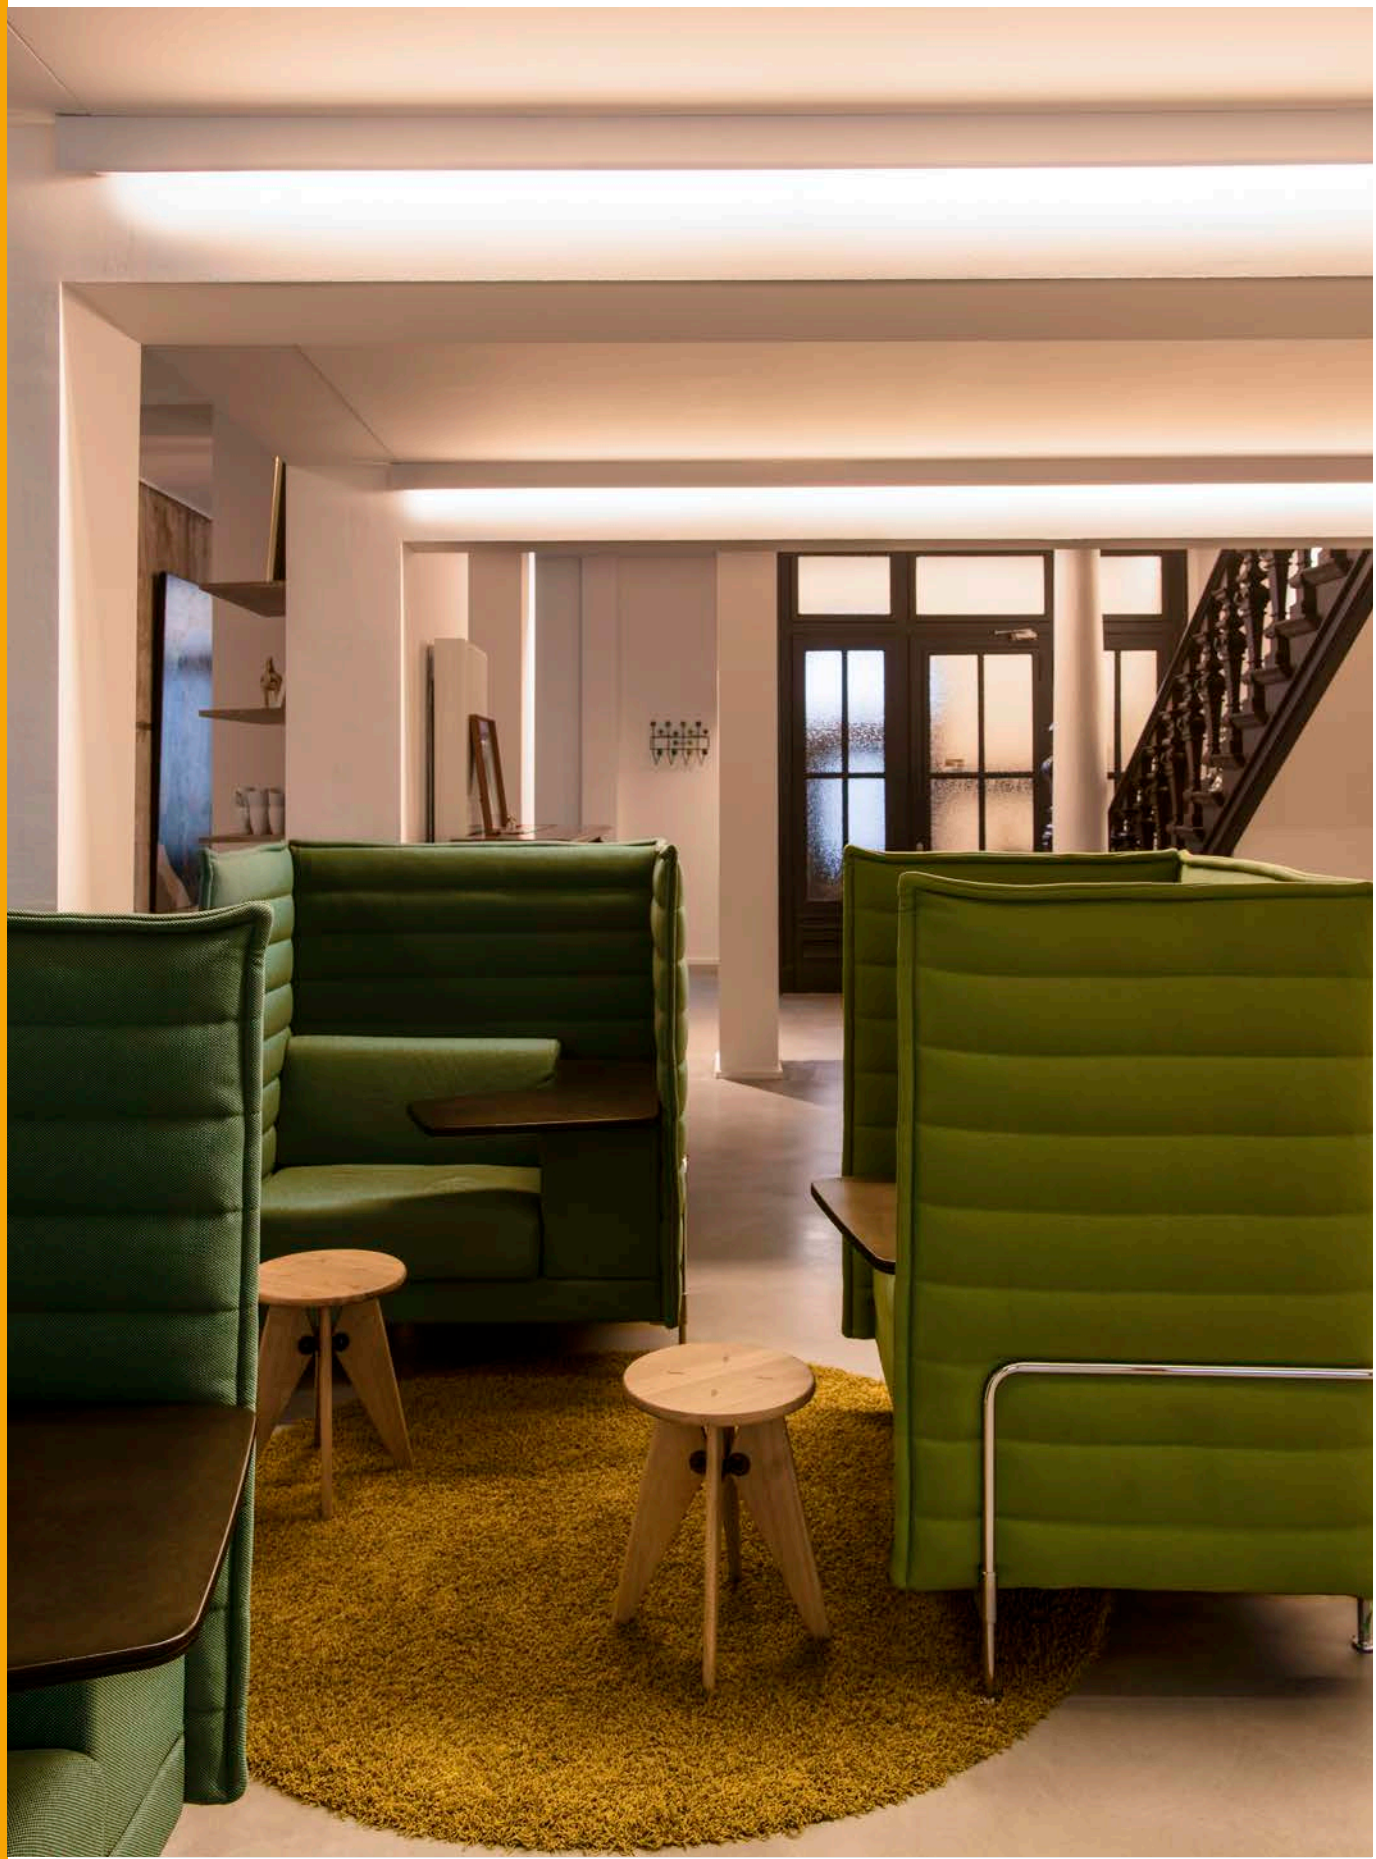

KELVIN CONTROL STRIP, 24V



240 LEDs per m
Width / height: 1/0.2 cm
Can be separated every 5 cm
Minimum bend radius: 3.8 cm
For the Kelvin Control System
Light colour adjustable from 2700K-6500K

3 m, CRI>80


Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K - 6500K	1881 – 3921	18 – 36	>80	3SDCM	300	A+	**552863**	**90,00**
2700K - 6500K	3522 – 7230	37.5 – 75				A	**552883**	**99,00**

To obtain consistent light output from a length of 1.5 m, we recommend supplying power the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.

KELVIN CONTROL STRIP, 24V ACCESSORIES



KELVIN CONTROL master controller with remote control



KELVIN CONTROL slave controller



KELVIN CONTROL remote control


Variant	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
☐ KELVIN CONTROL master controller, 1 piece	Plastic PC	8.6	2.1	0.9	**470681**	**72,00**
☐ KELVIN CONTROL slave controller, 1 piece	Plastic PC	8.6	2.1	0.9	**470682**	**54,00**
☐ KELVIN CONTROL remote control, 1 piece	Plastic PC	11.4	5.6	2.4	**470683**	**22,50**




To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

FLEXSTRIP LED RGB

24V

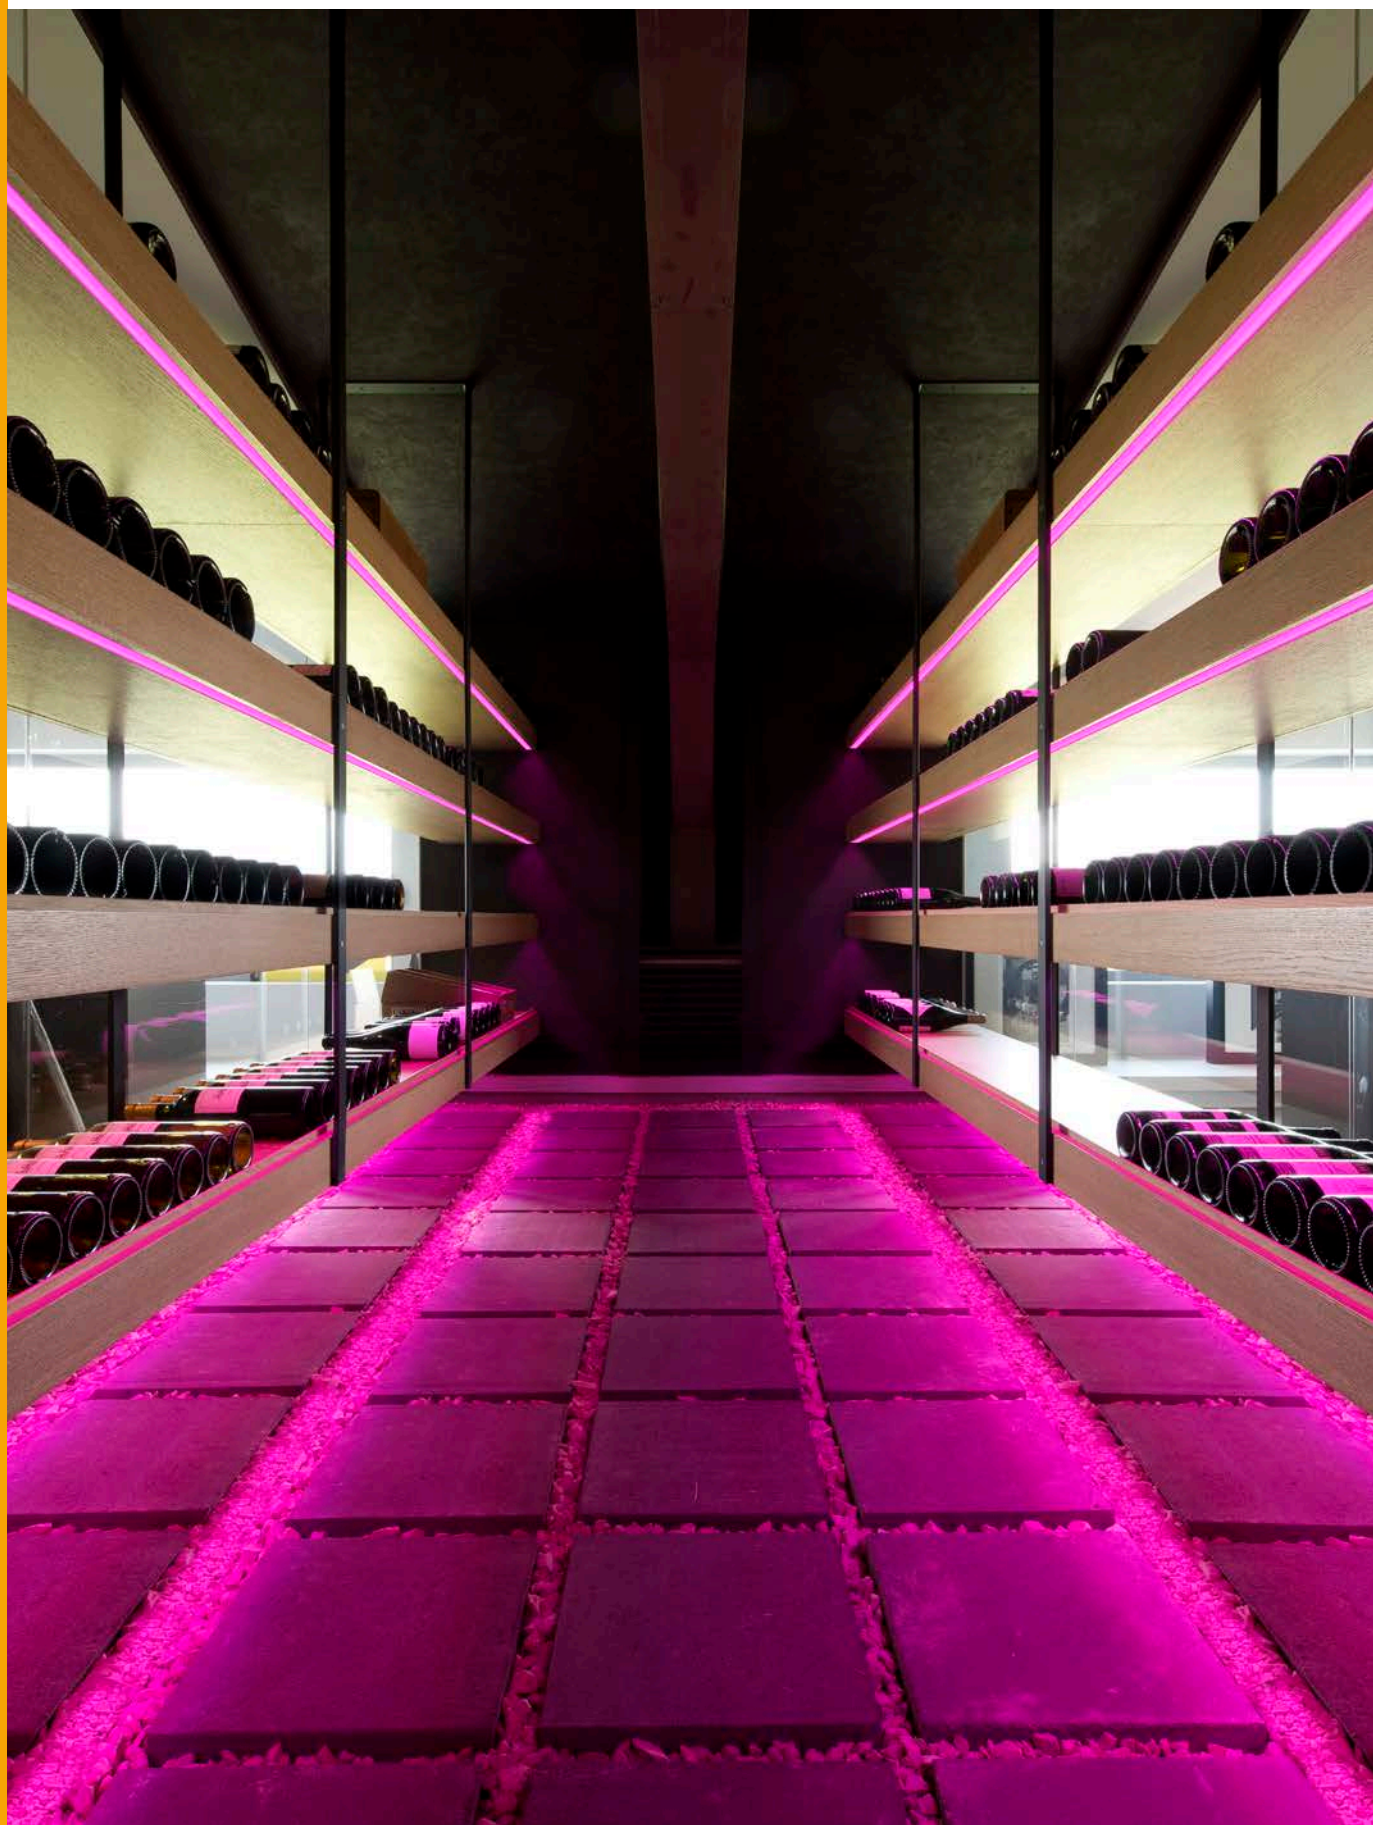

FLEXSTRIP LED RGB, 24V

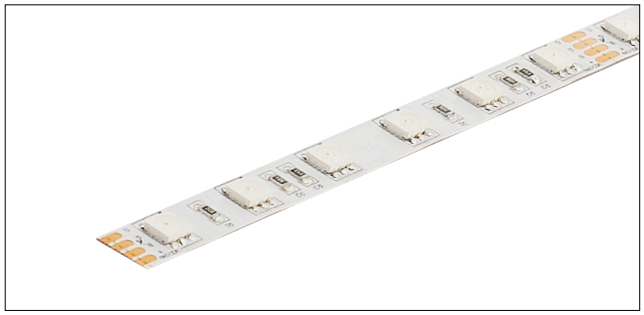


60 LEDs per m
Width / height: 1/0.2 cm
LED spacing: 1.6 cm
Can be separated every 10 cm
Minimum bend radius: 1.3 cm

5 m

Colour temperature	Output (W)	L (cm)	Item no.	GBP
RGB	75	500	**552649**	**126,00**

For lengths in excess of 1.5 m, a power supply must be provided at both ends. For lengths in excess of 3 m, a new power supply must be added.


FLEXSTRIP LED RGB, 24V ACCESSORIES




Power supply, 50 cm cable



Direct connector



Flexible connector, 10 cm cable



Solder corners 90°

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
Power supply, 1 piece	2.1A	Plastic	30	1.5	0.5	**552650**	**4,00**
Direct connector, 1 piece	2.1A	Plastic	1.6	1.4	0.5	**552651**	**1,50**
Flexible connector, 1 piece	2.1A	Plastic	1.7	1.5	0.5	**552652**	**3,00**
Soldering corners 90°, 1 piece	2A		5.2	5.2	0.01	**552653**	**5,00**



To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

FLEXLED ROLL MULTICOLOUR RGBW, 24V



FLEXLED ROLL MULTICOLOUR RGBW, 24V




60 LEDs per m
Width / height: 1.2/0.2 cm
LED spacing: 1.7 cm
Can be separated every 10 cm
Minimum bend radius: 1.3 cm

3 m, CRI>80

Colour temperature	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
RGBW	48	>80	6SDCM	300	A	**552453**	**117,00**

To obtain consistent light output from a length of 1.5 m, we recommend supplying power the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.


FLEXLED ROLL MULTICOLOUR RGBW 24V ACCESSORIES




Power supply, 50 cm cable



Direct connector



Connector, 10 cm cable




Solder corners 90°

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
Power supply, 1 piece	2A	Plastic	50	–	–	**552460**	**4,00**
Direct connector, 1 piece	2A	Plastic	1.6	1.6	0.5	**552461**	**1,50**
Connector, 1 piece	2A		10	–	–	**552462**	**3,00**
Soldering corners 90°, 2 pieces	2A		5.2	5.2	0.01	**552463**	**5,90**


To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

FLEXLED ROLL RGB

24V

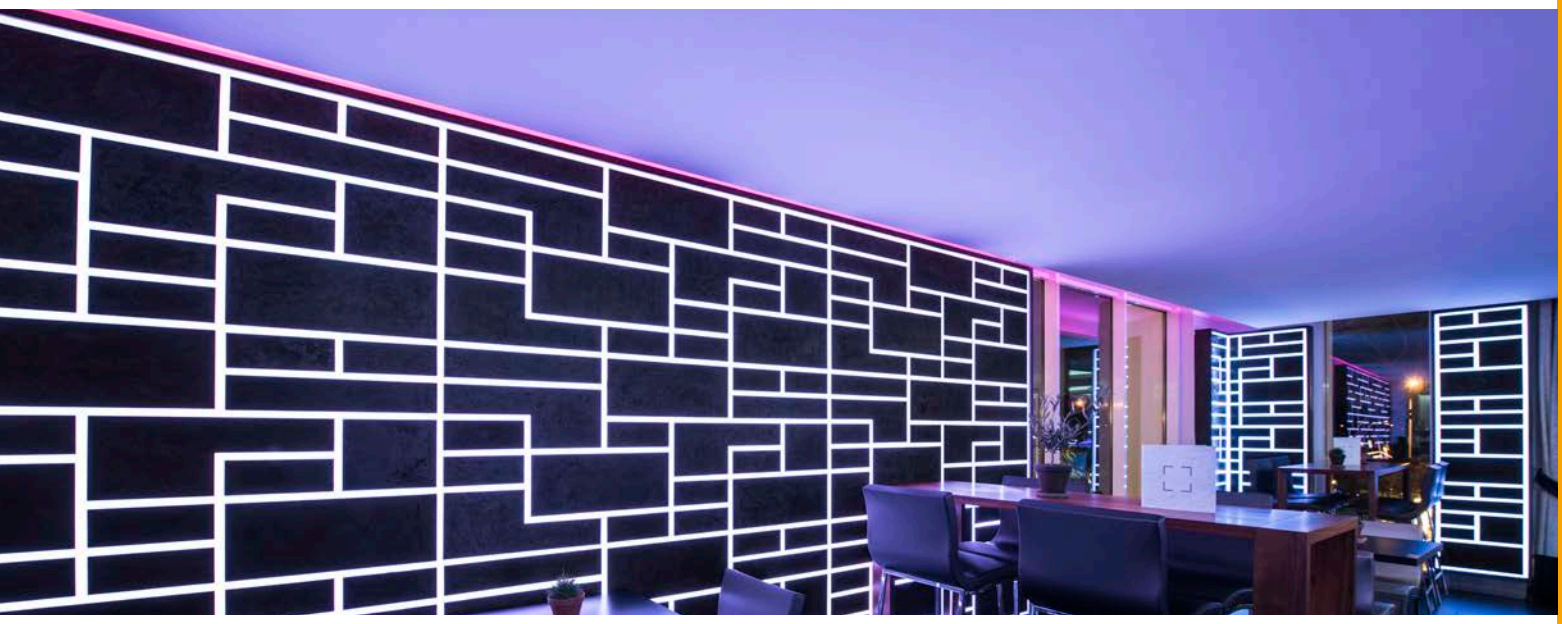

FLEXLED ROLL RGB, 24V

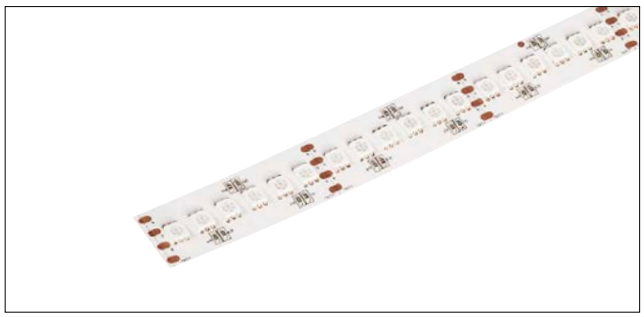

120 LEDs per m
Width / height: 2/0.15 cm
LED spacing: 0.8 cm
Can be separated every 5 cm
Minimum bend radius: 3.8 cm
IP protection class: IP20

3 m

Colour temperature	Output (W)	L (cm)	Item no.	GBP
RGB	72	300	**1001971**	**117,00**

To obtain consistent light output from a length of 1.5 m, we recommend supplying power the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.


To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

FLEX ROLL

24V



FLEX ROLL, 24V

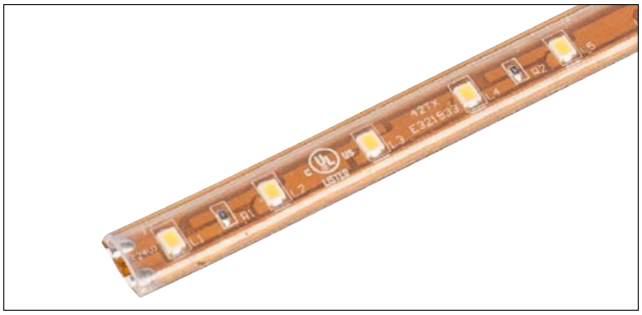

60 LEDs per m
Width / height: 1.3/0.5 cm
LED spacing: 1.7 cm
Can be separated every 10 cm
Minimum bend radius: 3.75 cm
IP protection class: IP55

5 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
3000K	1500	25	>80	6SDCM	500	A	**552273**	**90,00**

To obtain consistent light output over long lengths, we recommend providing a power supply to the strips at both ends.
For lengths in excess of 5 m, a new power supply must be added.


To ensure that heat is dissipated, the LED strips must be glued into an aluminium profile.
There is adhesive tape on the rear of the LED strips.

DELF D

24V



DELF D, 24V

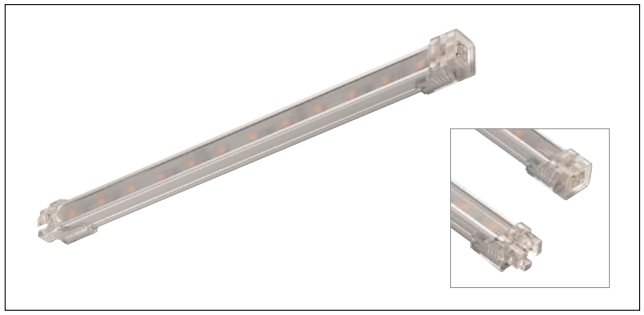

24V DC
Width / height: 1.5/1.4 cm
Material: Aluminium / Plastic
Protection class: III
Half beam angle: 110°

Plug-in system, can be lengthened without tools up to 3 m

aluminium

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	L (cm)	Weight (kg)	Energy efficiency index	Item no.	GBP
3000K	105	1.5	>80	10.5	0.02	A-A++	**631501**	**9,90**
	190	2.6		20.5	0.04		**631502**	**12,60**
	500	6.3		50.5	0.08		**631505**	**22,50**
	1000	13.4		100.5	0.15		**631510**	**31,50**
	1100	15.7		120.5	0.19		**631512**	**49,50**


DELF D, 24V ACCESSORIES




Power supply, 1.5 m cable



Connector, 12 cm cable



Mounting clips



45° mounting clips

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
Power supply, 1 piece	2A	Plastic	150	–	–	**631520**	**5,90**
Connector, 1 piece	2A	Plastic	15	–	–	**631521**	**6,80**
Mounting clips, 10 pieces	–	Stainless Steel	1	1.5	0.9	**631522**	**5,00**
Mounting clips 45°, 10 pieces	–	Stainless Steel	1	1.5	1.7	**631523**	**3,00**

BATTEN LED

220-240V ~50/60HZ



BATTEN LED 220-240V ~50/60Hz



220-240V ~50/60Hz 67V DC
Width / height: 2.5/3.5cm
Material: Plastic PC
Protection class: II
Ambient temperature -20°C to 40°C
Half beam angle 155°

Can be lengthened without tools


matt white

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	L (cm)	Weight (kg)	Energy efficiency index	Item no.	GBP
3000K	735	8.1	>80	57.5	0.17	A-A++	**631313**	**34,20**
	1065	12.4		87.5	0.23		**631315**	**40,50**
	1470	16.5		117.5	0.29		**631317**	**45,00**
4000K	855	8.1		57.5	0.17		**631323**	**34,20**
	1235	12.4		87.5	0.23		**631325**	**40,50**
	1710	16.5		117.5	0.28		**631327**	**45,00**


BATTEN LED ACCESSORY 220-240V ~50/60Hz




Power supply cable with switch, 1.5 m cable




Power supply cable, 1.5 m cable



Connecting cable, 15 cm cable



Connecting cable, 15 cm cable



Mounting clips 45°



Connector

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
Power supply cable with switch, 1 piece	2A	Plastic	150	–	–	**631300**	**9,90**
Power supply cable, 1 piece	2A	Plastic	150	–	–	**631301**	**8,10**
Connecting cable, 1 piece	2A	Plastic	15	–	–	**631302**	**5,00**
Connecting cable, 1 piece	2A	Plastic	50	–	–	**631303**	**5,90**
Mounting clips 45°, 3 pieces	–	Steel	2.5	1.3	1.2	**631304**	**1,50**
Connector, 1 piece	2A	Plastic	2.2	2	1.1	**631305**	**1,30**



SIMPLE. COMPATIBLE. SMART.

The SLV VALETO® SMART LIGHT SYSTEM is the intelligent light solution for the home and for hotel, restaurant and shop concepts. Thanks to the ZigBee® 3.0 standard, you can enjoy compatibility with many of the most popular Smart Home systems:

Philips Hue | **Osram** Smart+ | **Amazon** Alexa

Control is very simple via remote control, app or voice command using Amazon Alexa. And of course, SLV VALETO® SMART LIGHT SYSTEM can also be integrated into existing electrical installations.



Adobe Stock, © Mathias Wegert, © blackzheep

Scalable:
Installations with up to 200 luminaires can be realised using the SLV VALETO® Gateway.

Integrable:
Thanks to the ZigBee® 3.0 standard, SLV VALETO® is compatible with products and systems from other manufacturers.


Controllable:
Very easy to control using an app, remote control or voice assistant systems.

Long range:
SLV VALETO® products can also be controlled over long distances by setting up your own mesh network.*

Secure:
The gateway only stores your information locally, and does not store anything in the cloud.

SLV VALETO®

*Excludes battery-operated devices.

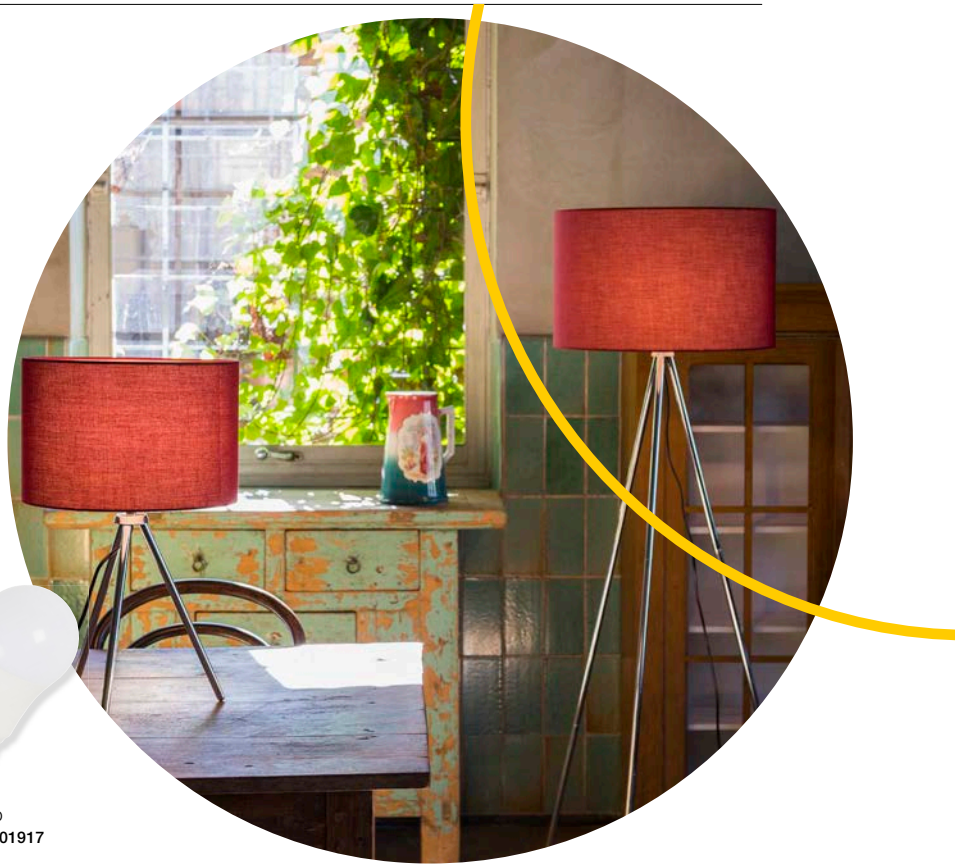


SIMPLE.

The ideal entry point into smart light control: Simply connect our SLV VALETO® remote controls (e.g.: 1002994) with the SLV VALETO® lamps (e.g.: 1001917) and see how simple smart can be.



Remote control
Item no. 1002994

Lamp
Item no. 1001917

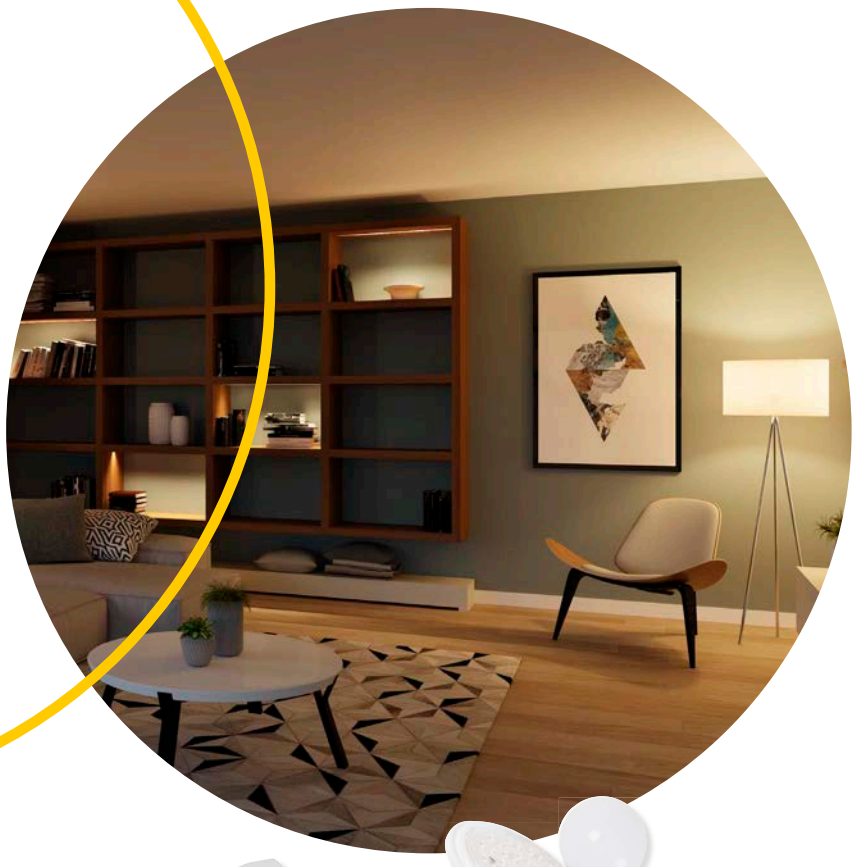

ADVANCE.

Do you want a little more?
With our SLV VALETO® SMART LIGHT SYSTEM the choice is yours: Control your light at home with our SLV VALETO® remote control (1002994), or an app on your Smartphone via our SLV VALETO® Gateway (1002411).
Thanks to the latest ZigBee standard (ZigBee® 3.0) there are no limits to your smart light control.



12/24V strip, control module
Item no. 1001859




Lamp



Remote control
Item no. 1002994



Gateway
Item no. 1002411

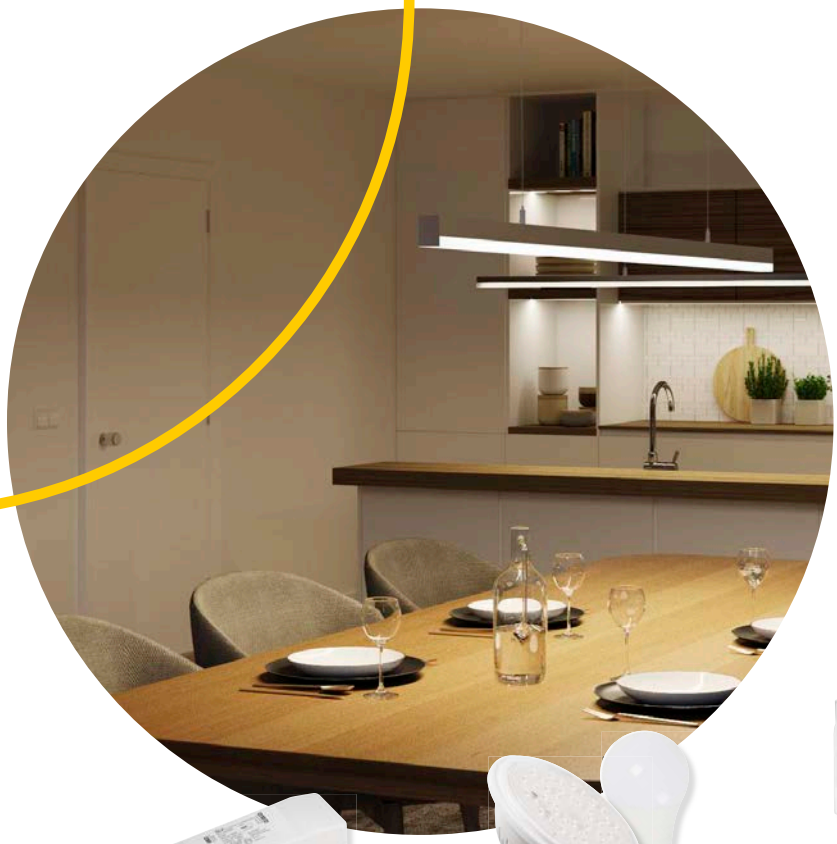

PROFESSIONAL.

Big plans?
More than 150 smart products can be integrated in a smart light control system with our SLV VALETO® SMART LIGHT SYSTEM. You can control your devices from anywhere and any time and set the scene for your project in a perfect way with ease.



12/24V strip, control module
Item no. 1001859

Lamp




Phase cut dimmer
Item no. 1002995



Gateway
Item no. 1002411

MORE COMFORT AND SAFETY

The ideal solution for wireless operation and monitoring of individual luminaires, from entire rooms to the complete living environment.

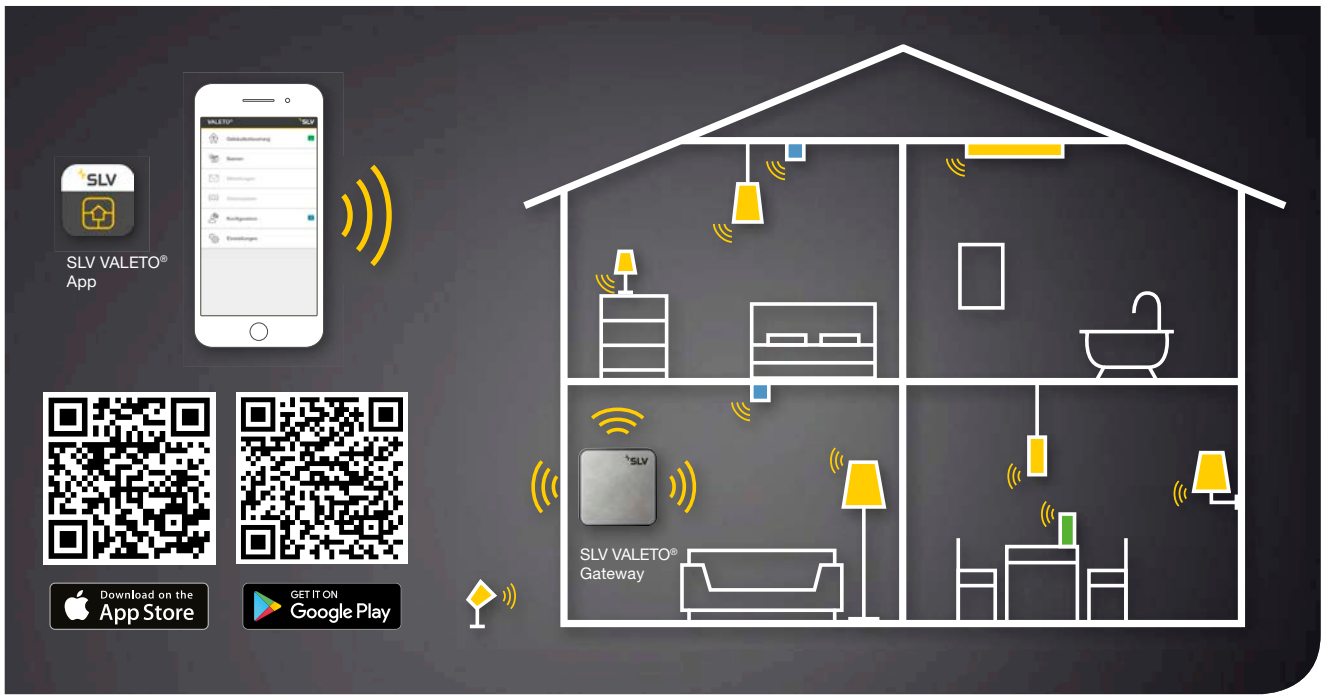

COMMUNICATION.

The heart of the Smart Light System is the SLV VALETO® gateway

SLV VALETO®
Gateway

0.19





Product details

220-240V ~50/60Hz
Operating voltage: 5V DC
Output: <1W
L: 10.6 cm W: 10.6 cm H: 2.6 cm
Material: Aluminium / Plastic

Note

ZigBee® 3.0 certified product.
A connection to a router via a LAN cable is required to control the gateway.

Scope of delivery

SLV VALETO® Gateway
Connector power supply 5V, 1A
Network cable, CAT6, 2m, black

Variant	Item no.	GBP
brushed metal / black	1002411	359,10

INTEGRABLE

GERMAN ENGINEERING

LONG RANGE

SECURE

LIGHTING SYSTEMS.

LED A60
E27, CCT



25000 0.07 240°

Product details

220-240V ~50/60Hz
Output: 9W
Ø: 6 cm H: 12 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.052A
Output	9W
Energy consump./1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	806lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001916	40,50

LED A60
E27, RGBW



25000 0.07 240°

Product details

220-240V ~50/60Hz
Output: 9.5W
Ø: 6 cm H: 12 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.054A
Output	9.5W
Energy consump./1000h	10kWh
Colour temperature	RGBW
Luminous flux	806lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001917	49,50

LED QPAR51
GU10, CCT



25000 0.04 48°

Product details

220-240V ~50/60Hz
Output: 5.1W
Ø: 5 cm H: 5.4 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.027A
Output	5.1W
Energy consump./1000h	6kWh
Colour temperature	2700-6500K
Luminous flux	350lm
Max. luminous intensity	500cd
Colour rendering index	>80

Variant	Item no.	GBP
	1001918	49,50

LIGHTING SYSTEMS.

LED QPAR51
GU10, RGBW



25000 0.04 60°

Product details

220-240V ~50/60Hz
Output: 5.6W
Ø: 5 cm H: 5.4 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.041A
Output	5.6W
Energy consump./1000h	6kWh
Colour temperature	RGBW
Luminous flux	350lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001919	49,50

LED QPAR111
GU10, CCT



25000 0.15 25°

Product details

220-240V ~50/60Hz
Output: 9W
Ø: 11.1 cm H: 7 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Output	9W
Energy consump./1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	800lm
Max. luminous intensity	3300cd
Colour rendering index	>80

Variant	Item no.	GBP
	1001920	49,50

LED QPAR111
GU10, CCT



25000 0.15 40°

Product details

220-240V ~50/60Hz
Output: 9W
Ø: 11.1 cm H: 7 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Output	9W
Energy consump./1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	800lm
Max. luminous intensity	1900cd
Colour rendering index	>80

Variant	Item no.	GBP
	1001921	49,50

LED QPAR111
GU10, RGBW



25000 0.15 25°

Product details

220-240V ~50/60Hz
Output: 9W
Ø: 11.1 cm H: 7 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Output	9W
Energy consump./1000h	9kWh
Colour temperature	RGBW
Luminous flux	800lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001922	49,50

LED QPAR111
GU10, RGBW



25000 0.15 40°

Product details

220-240V ~50/60Hz
Output: 9W
Ø: 11.1 cm H: 7 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Output	9W
Energy consump./1000h	9kWh
Colour temperature	RGBW
Luminous flux	800lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001923	49,50

CONTROL ELEMENTS:

SLV VALETO®
Remote control, CCT/RGBW



IP 20 0.068

Product details

Voltage: 3 V battery operation
L: 6.5 cm W: 6.5 cm H: 1.95 cm
Material: Plastic PC

Note

The SLV VALETO® CCT/RGBW remote control can control up to 20 ZigBee® devices in three groups. CCT and RGBW settings are possible.

Variant	Item no.	GBP
white	1002994	43,20

SLV VALETO®
Remote control



IP 20 0.06

Product details

Voltage: 3 V battery operation
L: 10 cm W: 5.7 cm H: 1.8 cm
Material: ABS / Plastic PC

Note

This remote control can only be used for dimming SLV VALETO® products and switching them on and off. CCT and RGBW settings are not possible.

Variant	Item no.	GBP
white / anthracite	1002097	49,50

CONTROL DEVICES.

SLV VALETO®
Phase cut dimmer



IP 20 0.04

Product details


220-240V ~50/60Hz
Output: max. 200W
L: 4.5 cm W: 4.5 cm H: 2.2 cm
Material: Plastic PC


Note

Can be controlled using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]
Can be used as an independent dimmer without ZigBee®. Dimming procedure: trailing edge. Dimmer for ohmic (high-voltage halogen lamp) and capacitive loads (LED driver). Suitable for any 60mm UP switch socket with a depth of 42mm. 200W LED load.

Variant	Item no.	GBP
black	1002995	171,00



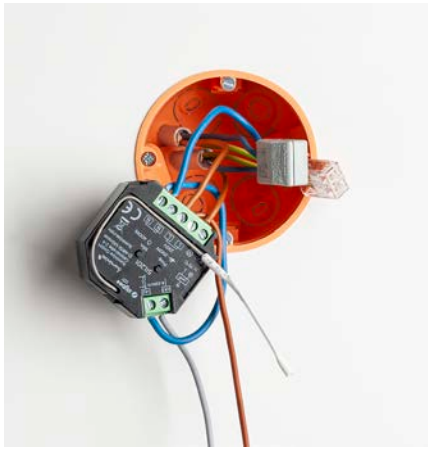

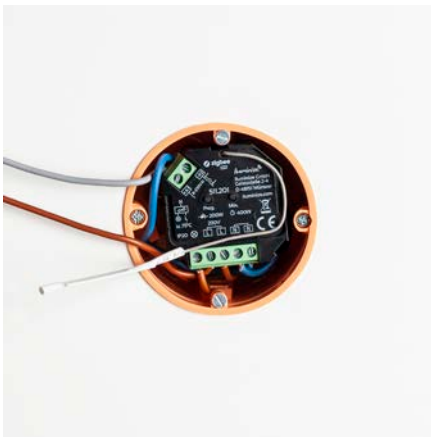



CONTROL DEVICES.

SLV VALETO®
12/24V Strip control module | CCT



IP 20 0.063

Product details

12V/24V DC
Output: max. 192W per channel
L: 13.4 cm W: 3.9 cm H: 2.4 cm
Material: Plastic

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411] The control module is suitable for controlling CCT LED strips.

Variant	Item no.	GBP
white	1001859	126,00

SLV VALETO®
12/24V Strip control module | RGBW



IP 20 0.063

Product details

12V/24V DC
Output: max. 96W per channel
L: 13.4 cm W: 3.9 cm H: 2.4 cm
Material: Plastic

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411] The control module is suitable for controlling RGBW LED strips.

Variant	Item no.	GBP
white	1002892	135,00

SLV VALETO®
15W, LED driver



IP 20 0.16

Product details

220-240V~50/60Hz
Output: 15W
L: 19 cm W: 6.1 cm H: 3 cm
Material: Plastic

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Variant	Item no.	GBP
white	1002082	72,00



LED power supply, 24V DC | 60W
Item no. 470500



12/24V Strip control module | RGBW
Item no. 1002892



Flexled roll multicolour RGBW | 24V
Item no. 552453



Remote control
Item no. 1002994

MALANG
CW, SLV VALETO®

A-A++ Spectrum A⁺⁺–E

LED INSIDE


NEW











- Can be integrated in the SLV VALETO® system and other ZigBee® systems
- Panel can be controlled separately from warm white to cool white and dimmed
- The ring can be controlled separately in RGBW colours and dimmed


Product details

100-240V ~50/60Hz | 24V DC
Total consumption: 39W
Material: Aluminium / Polycarbonate (PC)

IP 20 | 4.6 | UGR 19

LED | 30000 | 110°

Dimensioned drawing



Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Recommended accessories

- Suspension set 1.5m
  Item no. 135250 | 34,20 GBP
- Suspension set 1.5m
  Item no. 135251 | 34,20 GBP
- Suspension set 1.5m
  Item no. 135254 | 34,20 GBP
- Suspension set 5m
  Item no. 1001950 | 76,50 GBP
- Suspension set 5m
  Item no. 1001951 | 76,50 GBP
- Suspension set 5m
  Item no. 1001952 | 76,50 GBP
- Remote control CCT/RGBW
  Item no. 1002994 | 43,20 GBP

Variant	Item no.	GBP
Ring: 350lm | RGB+W (3000K) | CRI>80 Panel: 2100-2400lm | 2700-6500K | CRI>80		
white	1002858	629,10

The decorative **RING** can be controlled separately. Create an atmospheric ambience by setting different light colours and dimming the light.

The **PANEL** can be controlled separately. You can set the colour temperature to 2700-6500K and dim the light.



With our SLV VALETO® SMART LIGHT SYSTEM the choice is yours: Control your light at home with our SLV VALETO® remote control (1002994), or an app on your Smartphone via our SLV VALETO® Gateway (1002411).

Thanks to the latest ZigBee standard (ZigBee® 3.0) there are no limits to your smart light control.




Remote control
Item no. 1002994




Gateway
Item no. 1002411



SLV VALETO®
App

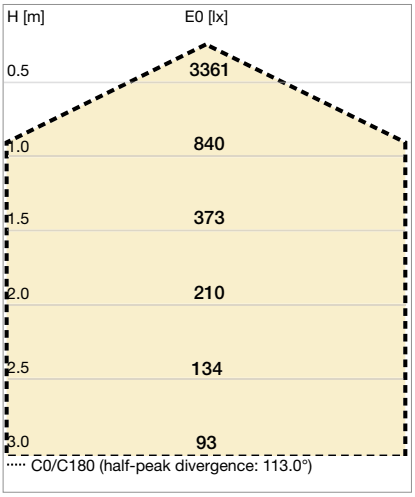

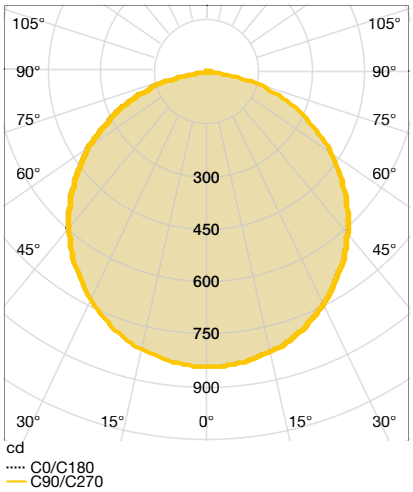

LIPSY®
CW, VALETO®

• Can be integrated into the VALETO® system





Product details

230V ~50/60Hz
Total consumption: 14,5W/17W/31,5W
Material: Polymethylacrylate (PMMA) / Steel




Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

LIPSY® 30
CW, VALETO®

LED INSIDE

Dimensioned drawing




Variant	Item no.	GBP
1400lm | 3000K | CRI>80 | 0.4 kg		
white	**1002132**	**94,50**

LIPSY® 40
CW, VALETO®

LED INSIDE

Dimensioned drawing




Variant	Item no.	GBP
1700lm | 3000K | CRI>80 | 0.77 kg		
white	**1002133**	**121,50**

LIPSY® 50
CW, VALETO®

LED INSIDE

Dimensioned drawing



Variant	Item no.	GBP
2800lm | 3000K | CRI>80 | 1.36 kg		
white	**1002134**	**157,50**

SO SIMPLE, SO CLEVER!

OTHER SLV LIGHT CONTROLLERS



SLV COLOR CONTROL

Bring colour into your life! With the **SLV COLOR CONTROL** system. This allows you to switch luminaires on and off and to adjust their colour.

Dimming, colour control, grouping function

Accessories and components:

- App
- Remote control
- Wall control panel
- Master controller + remote control
- Slave controller
- Signal amplifier
- Bluetooth® adapter for app control
- Actuatable luminaires

All information from page 828 onwards



SLV KELVIN CONTROL


Nice and bright! With **SLV KELVIN CONTROL**, colour brightness and colour temperature can be controlled independently of each other and adapted to your desired lighting situation.

Dimming, colour temperature control, grouping function

Accessories and components:

- App
- Remote control
- Wall control panel
- Master controller + remote control
- Slave controller
- Signal amplifier
- Bluetooth® adapter for app control
- Actuatable luminaires

All information from page 832 onwards

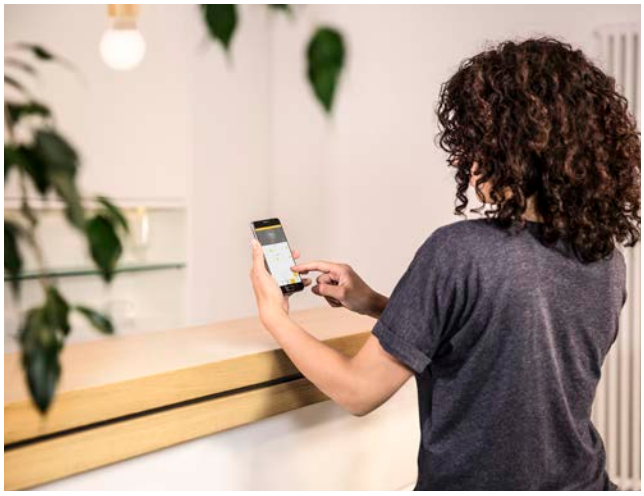

SLV BLUETOOTH CONTROL

Sounds simply brilliant: With the **SLV BLUETOOTH CONTROL** system you can switch light installations on and off and control the brightness. Light installations can be grouped or controlled individually using the app.

Dimmability, grouping function

Accessories and components:

- App
- Dimming module

All information from page 835 onwards



SLV CONTROL BY TRUST

Wireless rather than clueless: **SLV CONTROL BY TRUST** is a self-contained, comprehensive Smart Home System for wireless control of luminaires and other technical devices.

Remote control (Internet), dimmability, timer function, grouping function

Accessories and components:

- App
- Remote control
- Internet Control Station
- Sensors
- Sockets
- Signal amplifier

All information from page 836 onwards



Download on the App Store

GET IT ON Google Play



SLV COLOR CONTROL.

YOUR COMPLETE SYSTEM FOR COLOURED LIGHT CONTROL.

Using SLV COLOR CONTROL you can individually control the coloured light of your RGB/W devices indoors as you wish. Wireless technology using a wall-mounted control panel or with the optional Bluetooth® expansion to control via an App. The SLV COLOR CONTROL system uses the master/slave principle and can be expanded at any time. Your mood decides: If it should be red, yellow, blue or green light, or dimmable white background lighting.

SLV COLOR CONTROL gives you plenty of comfort. The system can control as many rooms as desired which can be divided up to three different colour zones and expanded within 15 m with many light sources. The colour control system can be combined with our SLV LIPSY luminaires or even RGB/W LED strips depending on the application and your taste.

YOUR COMPLETE SYSTEM IN EITHER 2 OR 3 STEPS:

TRANSMITTER



RECEIVER



PRODUCT



SLV COLOR CONTROL
Wall operating panel, recessed/surface mounted



0.18

Product details

100-240V ~50/60Hz
Output up to: 2W
Product dimensions: L: 8.6 cm W: 8.6 cm H: 5 cm
Installation dimensions: Ø: 5.5 cm, D: 4 cm
Material: Plastic PC / Glass

Note

Touch panel with glass-fronted panel for actuating slave controller [470672]. Range of touch panel can be increased with WLAN signal amplifier [470674]; Transmit frequency WLAN 2.4~2.48GHz; Range approx. 15m depending on the local conditions. Bluetooth® module [470675] which can be retrofitted for operation via Smartphone/tablet app. 34 pre-set programs, 10 speed levels, 30 pre-set static colours, 5 brightness levels for RGB, 10 brightness levels for white. Can be optionally controlled using a remote control [470677]. Suitable for installation in a switch box with a minimum depth of 40 mm. Accessories / included: Surface-mounted housing [incl.]

Output up to	2W
Min. ambient temp.	-30°C
Max. ambient temp.	50°C

Variant	Item no.	GBP
white	**470670**	**90,00**

SLV COLOR CONTROL
Remote control



0.06

Product details

Prim. voltage: Battery operated
Product dimensions: L: 11.4 cm W: 5.6 cm H: 2.4 cm
Material: Plastic PC

Note

Remote control as optional operation for the RGBW touch controller wall panel [470670]; Replacement remote control for master controller [470671]; Transmit frequency: 433.92MHz.
Accessories / included: 2 batteries AAA 1.5V [excl.]

Min. ambient temp.	-30°C
Max. ambient temp.	50°C

Variant	Item no.	GBP
white	**470677**	**22,50**

SLV COLOR CONTROL
Master controller with remote control



0.08

Product details

12V DC / 24V DC
Output up to: 72/144W
Product dimensions: L 8.6 cm W: 2.1 cm H:0.9 cm
Material: Plastic PC

Note

Master Controller with remote control for connecting LED strips 12-24VDC, can be extended with the Slave Controller [470672]. Range of the controller can be increased using WLAN Sync. Signal amplifier [470674]; Transmit frequency WLAN 2.4~2.48GHz; Range approx. 15 m depending on the local conditions. Range can be increased using the Repeater [470674].
34 fixed programs, 30 fixed static colours; 10 speed settings, 5 RGB dimmer settings, 10 dimmer settings for white. Reverse polarity protection, overload; Short-circuit and overheating. Accessories / included: Remote control incl. [L/W/H: 11.4/5.6/2.4], power supply cable length:
12 cm, 2 batteries AAA 1.5V [excl.]

Prim. voltage:	12V DC / 24V DC
Voltage sec.	12V DC / 24V DC
Output up to	72 /144W
Wattage per output	18 / 36W
Min. ambient temp.	-30°C
Max. ambient temp.	50°C
Fault protection	Shut-off temperature
No. of fuses (sec)	3
Max. no. slaves	unlimited

Variant	Item no.	GBP
white	**470671**	**81,00**

SLV COLOR CONTROL
Slave controller



0.02

Product details

12V DC / 24V DC
Output up to: 72/144W
Product dimensions: L 8.6 cm W: 2.1 cm H:0.9 cm
Material: Plastic PC

Note

Slave controller for extending the master controller [470670, 470671]; Receive frequency WLAN 2.4~2.48GHz; Reverse polarity protection, overload; Short-circuit and overheating.

Prim. voltage:	12V DC / 24V DC
Voltage sec.	12V DC / 24V DC
Output up to	72 /144W
Wattage per output	18 / 36W
Min. ambient temp.	-30°C
Max. ambient temp.	50°C
Fault protection	Shut-off temperature
No. of fuses (sec)	3

Variant	Item no.	GBP
white	**470672**	**63,00**

FLEXLED ROLL MULTICOLOUR RGBW, 24V



60 LEDs per m
Width / height: 1.2/0.2 cm
LED spacing: 1.7 cm
Can be separated every 10 cm
Minimum bend radius: 1.3 cm

3 m, CRI>80

Colour temperature	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
RGBW	48	>80	6SDCM	300	A	**552453**	**117,00**

To obtain consistent light output from a length of 1.5 m, we recommend supplying power to the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.

FLEXLED ROLL MULTICOLOUR RGBW, 24V ACCESSORIES



LED power supply, 20W



LED power supply, 60W

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
LED power supply	24V, 20W	Plastic PC	16.7	3.8	3	**470542**	**40,50**
LED power supply	24V, 60W	Plastic PC	17.5	7.8	3.5	**470506**	**81,00**

SIGNAL AMPLIFIER



0.19

Product details

100-240V ~50/60Hz
L: 8 cm W: 8 cm H: 2 cm
Material: Plastic PC

Note

Signal amplifier for increasing the range of the wall touch panel [470670] and the master controller [470671] / range: Indoors 15 m, outdoors 30 m max., depending on the local conditions. Receive/transmit frequency WLAN 2.4~2.48GHz. Reverse polarity protection, overload; Short-circuit and overheating. Accessories / included: Power supply incl. [prim. 100-240V/50-60Hz, sec. 12Vdc/500mA]

Min. ambient temp.	-30°C
Max. ambient temp.	50°C

Variant	Item no.	GBP
white	**470674**	**126,00**

BLUETOOTH® ADAPTER




Note

Optional Bluetooth module® for installing in the wall panel [470670] for operation via a Smartphone or tablet with Bluetooth® V2.1 or higher; App iOS, Android available for downloading, Windows in preparation. Communication range 10 m depending on the local conditions.
This product can be found on page 833.

Min. ambient temp.	-30°C
Max. ambient temp.	50°C

Variant	Item no.	GBP
white	**470675**	**40,50**



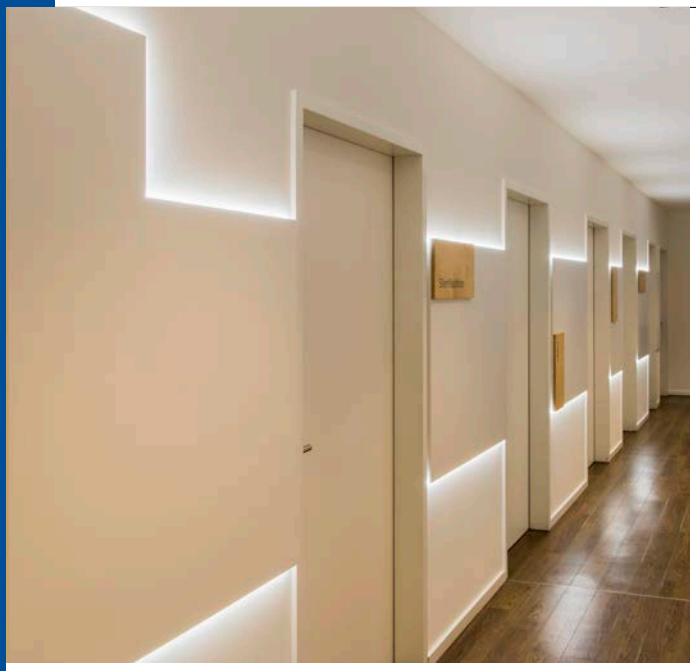



Download on the App Store

GET IT ON Google Play

SLV KELVIN CONTROL.

SLV fulfils a wide range of demands and needs regarding modern light control. With SLV KELVIN CONTROL, colour brightness and colour temperature can be controlled independently of each other and adapted to your desired lighting situation. You decide on the shades of white, from daylight to warm feel-good lighting. Wireless technology using a wall-mounted control panel or with the optional Bluetooth® expansion to control via an App.

YOUR COMPLETE SYSTEM IN EITHER 2 OR 3 STEPS:

TRANSMITTER



RECEIVER



PRODUCT



SLV KELVIN CONTROL
Wall operating panel, recessed/surface mounted



0.18

Product details

100-240V ~50/60Hz
Output up to: 2W
Product: W: 8.6 cm H: 8.6 cm D:5 cm
Installation: Ø: 5.5 cm D: 4 cm
Material: Plastic PC

Output up to	2W
Min. ambient temp.	-30°C
Max. ambient temp.	50°C

Variant	Item no.	GBP
white	470680	81,00

SLV KELVIN CONTROL
Remote control



0.06

Product details

Prim. voltage: Battery operated
L: 11.4 cm W: 5.6 cm H: 2.4 cm
Material: Plastic PC

Min. ambient temp.	-30°C
Max. ambient temp.	50°C

Variant	Item no.	GBP
white	470683	22,50

SIGNAL AMPLIFIER



0.19

Product details

100-240V ~50/60Hz
L: 8 cm W: 8 cm H: 2 cm
Material: Plastic PC

Note

Signal amplifier for increasing the range of the wall touch panel [470670] and the master controller [470671] / range: Indoors 15 m, outdoors 30 m max., depending on the local conditions. Receive/transmit frequency WLAN 2.4~2.48GHz. Reverse polarity protection, overload; Short-circuit and overheating. Accessories / included: Power supply incl. [prim. 100-240V/50-60Hz, sec. 12Vdc/500mA].

Min. ambient temp.	-30°C
Max. ambient temp.	50°C

Variant	Item no.	GBP
white	470674	126,00

SLV KELVIN CONTROL
Master controller with remote control



0.08

Product details

12V DC / 24V DC
Output up to: 72/144W
L: 8.6 cm W: 2.1 cm H: 0.9 cm
Material: Plastic PC

Prim. voltage:	12V DC / 24V DC
Voltage sec.	12V DC / 24V DC
Output current	6000mA
No. of outputs (sec.)	2
Output up to	72/144W
Wattage per output	36 / 72W
Min. ambient temp.	-30°C
Max. ambient temp.	50°C
Temperature protection	110°C
Fault protection	Shut-off temperature
Max. sec. cable L	20m
No. of fuses (sec)	2

Variant	Item no.	GBP
white	470681	72,00

SLV KELVIN CONTROL
Slave controller



0.02

Product details

12V DC / 24V DC
Output up to: 72/144W
L: 8.6 cm W: 2.1 cm H: 0.9 cm
Material: Plastic PC

Prim. voltage:	12V DC / 24V DC
Voltage sec.	12V DC / 24V DC
Output current	6000 mA
No. of outputs (sec.)	2
Output up to	72/144W
Wattage per output	36 / 72W
Min. ambient temp.	-30°C
Max. ambient temp.	50°C
Temperature protection	110°C
Fault protection	Shut-off temperature
Max. sec. cable L	20m
No. of fuses (sec)	2

Variant	Item no.	GBP
white	470682	54,00

BLUETOOTH® ADAPTER



Note

Optional Bluetooth® module for installing in the wall panel [470670] for operation via a Smartphone or tablet with Bluetooth V2.1 or higher; App iOS, Android available for downloading, Windows in preparation. Communication range 10m depending on the local conditions.

Min. ambient temp.	-30°C
Max. ambient temp.	50°C

Variant	Item no.	GBP
	470675	40,50

KELVIN CONTROL STRIP, 24V



240 LEDs per m
Width / height: 1/0.2 cm
Can be separated every 5 cm
Minimum bend radius: 3.8 cm
For the Kelvin Control System
Light colour adjustable from 2700K-6500K

3 m, CRI>80

Colour temperature	Luminous flux (lm)	Output (W)	Colour rend. index (CRI)	Colour consistency	L (cm)	Energy efficiency index	Item no.	GBP
2700K-6500K	1881 – 3921	18 – 36	>80	3SDCM	300	A+	**552863**	**90,00**
2700K-6500K	3522 – 7230	37.5 – 75				A	**552883**	**99,00**

To obtain consistent light output from a length of 1.5 m, we recommend supplying power to the strips at both ends.
For lengths in excess of 3 m, a new power supply must be added.

KELVIN CONTROL STRIP, 24V ACCESSORIES



LED power supply, 36W



LED power supply, 100W

Variant	Max. perm. current	Material	L (cm)	W (cm)	H (cm)	Item no.	GBP
■ LED power supply	24V, 36W	Plastic PC	12.9	7.5	3.2	**470544**	**72,00**
■ LED power supply	24V, 100W	Plastic PC	18.5	8.8	3.5	**470500**	**108,00**

2700K 3000K 4000K



SLV BLUETOOTH® CONTROL

Advanced wireless light control, simple and everywhere based on Bluetooth® Low Energy (BLE).
The SLV BLUETOOTH® CONTROL system allows you to switch light installations on and off and control the brightness. Light installations can be grouped or controlled individually using the app.



Download on the App Store
GET IT ON Google Play

SLV BLUETOOTH®
Dimmer wall installation, TRIAC




IP 40 0.04

Product details

220-240V ~50/60Hz
Output: 300W
Dimmable: Triac C, Triac L
L: 4.5 cm W: 4.5 cm H: 2.2 cm
Material: Plastic PC

Note

Can be used as an independent dimmer without Bluetooth. Dimming procedure: Trailing edge. Dimmer for ohmic (high-voltage halogen lamp) and capacitive loads (LED driver). Suitable for any 60mm UP switch socket with a depth of 42mm. Low minimum load of 2W.

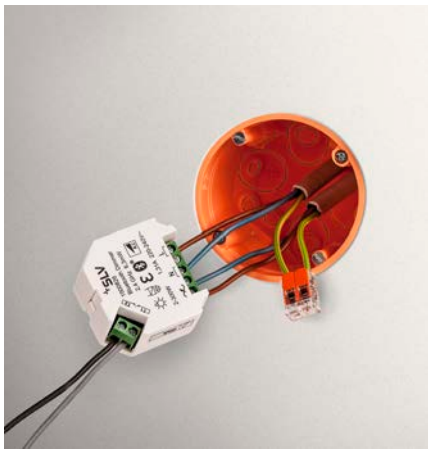

Prim. voltage:	220-240V ~50/60Hz
Voltage sec.	220-240VAC
Output current	1.31 mA
No. of outputs (sec.)	1
Output	300W
Watts from	2W
Output up to	300W
Watts/output	300W
Max. ambient temp.	40°C
Fault protection	electronic

Variant	Item no.	GBP
white	1000826	81,00



SLV CONTROL BY TRUST.

MAXIMUM FLEXIBILITY.

Do you want to control your lights or blinds easily using a remote control? Fit switches at a later date where you always need them? Even add further devices into the system? And all of this without needing to cut into walls and lay new power cables? All of this is feasible: take advantage of our solution, particularly when modernising your own four walls.

All transmitters work with radio signals (433/866 MHz) and are specially encoded for our receivers. Other wireless devices - such as modems, telephones or baby monitors - use a different encoding system and/or another frequency. Why is this so important? Because it prevents our receivers being switched on or off unintentionally.

MORE COMFORT IN 3 SIMPLE STEPS:


TRANSMITTER



RECEIVER



PRODUCT

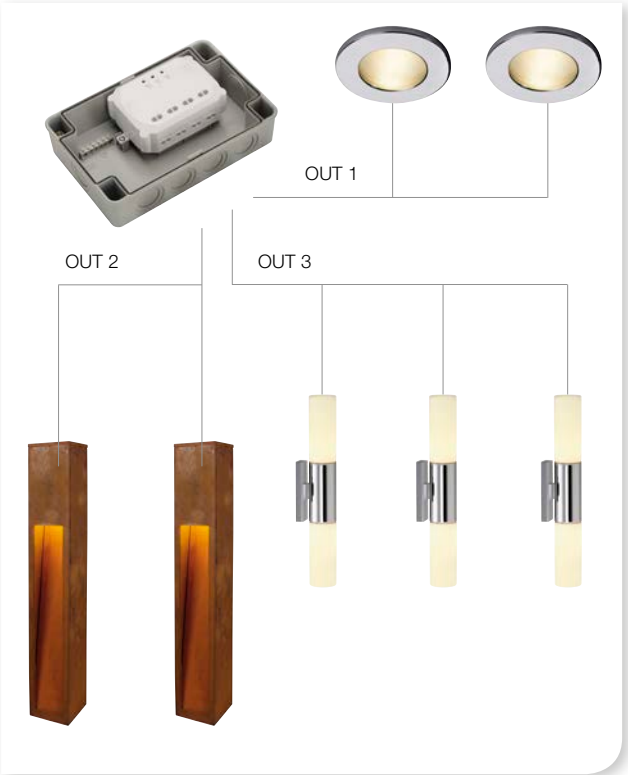



CONTROL LIGHTS; BLINDS AND MUCH MORE

MORE POSSIBILITIES –
our transmitters and receivers can be combined in any way you like and thereby offer you a wide range of application options. Benefit: using a remote controlled radio socket, you can control mobile luminaires easily using the radio remote control. Our wireless system, SLV CONTROL BY TRUST, can be expanded at any time using further components.


MORE COMFORT –
switch or dim from wherever you want, be it at home or on the move. It's extremely easy using SLV CONTROL BY TRUST. For example, using a remote control or even with our App and the Internet Control Station using a Smartphone, tablet PC or your browser on a PC.

MORE SECURITY –
would you like your lighting to switch on automatically without having to operate a switch? For example, when you go down the cellar stairs or at night on the path to your front door from the garage. Not a problem when you use our wireless motion sensors. Another safety-plus of our wireless solution: Using timers, you can simulate being at home and help deter burglars.

TRANSMITTER

SLV CONTROL BY TRUST
Wall switch, 1-way





Product details

Prim. voltage: Battery operated
W: 7.9 cm H: 8 cm D: 1.7 cm
Material: Plastic

Note

Battery CR2032 [incl.] Switch-off delay: 5s, 30s, 2min, 10min, 30min, 1h, 3h or permanent operation/manual switch on/off. Can be fastened or stuck onto smooth surfaces.

RF range max. (indoor)	30.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
white	470812	34,20

SLV CONTROL BY TRUST
16 channel remote control





Product details

Prim. voltage: Battery operated
L: 13 cm W: 3.4 cm H:1.2 cm
Material: Plastic

Note


1x 3V lithium battery CR2032 [incl.]. Automatic code system. 16 channels with group function. To control the receiver mode.

RF range max. (indoor)	30.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
white	470800	29,70

SLV CONTROL BY TRUST
Internet Control Station ICS 2000





Product details

100-240V ~50/60Hz
W: 12.7 cm H: 12.6 cm D: 3.3 cm
Material: Plastic

Note

With SLV's free App for iOS or Android, all pre-programmed lighting scenes/sources/circuits can be controlled simply and wirelessly. The App can be obtained for iOS or Android from the Apple Store / Google Play Store. Also possible to operate using a web browser. Various times can be programmed for individual luminaires and/or lighting sequences. Operation of more than 200 independent lamps and devices in up to 16 rooms. Create time switching intervals to automatically switch the luminaires or devices. Create sequences with which you can operate several lamps or devices in a certain order with just one button. Dawn/Dusk function. Several tablets/Smartphones can be connected to the Internet Control Station. Includes power supply and power cable.

RF range max. (indoor)	30.0 m	70.0 m
RF frequency	433.92 MHz	868 MHz

Variant	Item no.	GBP
black	1001153	296,10



Transmitter > Receiver Page 839-840 > Product

RECEIVER

SLV CONTROL BY TRUST
Wireless socket switch, indoor



0.15

Product details

220-240V ~50/60Hz
Ø: 4.78 cm H: 7 cm
Material: PC

Note

Up to 32 radio transmitters can be taught in.

RF range max. (indoor)	30.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
white	1002409	49,50

SLV CONTROL BY TRUST
Wireless socket switch, outdoor



IP 44 0.17

Product details

220-240V ~50/60Hz
Output up to: 3500W
L: 12.3 cm W: 8.3 cm H: 3.7 cm
Material: Plastic

Note

Up to 6 radio transmitters can be taught in.

RF range max. (indoor)	30.0 m
RF range max. (outdoor)	70.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
black	470808	40,50

SLV CONTROL BY TRUST
Wireless socket switch, UK



0.11

Product details

220-240V ~50/60Hz
Output up to: 3000W
L: 5.3 cm W: 9.8 cm H: 5.3 cm
Material: PVC

Note

Up to 6 radio transmitters can be taught in.

RF range max. (indoor)	30.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
white	470821	34,20

SLV CONTROL BY TRUST
Wireless socket switch IT



0.12

Product details

220-240V ~50/60Hz
Output up to: 1000W
W: 5.3 cm H: 9.8 cm D: 7 cm
Material: PVC

Note

Up to 6 radio transmitters can be taught in.

RF range max. (indoor)	30.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
white	470822	34,20

SLV CONTROL BY TRUST
Radio socket switch
BE/FR Indoor



0.11

Product details

220-240V ~50/60Hz
Output up to: 1000W
W: 5.3 cm H: 9.8 cm D: 6.6 cm
Material: PVC

Note

Up to 6 radio transmitters can be taught in.

RF range max. (indoor)	30.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
white	470823	34,20

SLV CONTROL BY TRUST
Radio socket switch
BE/FR Outdoor



IP 44 0.17

Product details

220-240V ~50/60Hz
Output up to: 3500W
W: 6 cm H: 12.2 cm H: 7.3 cm
Material: PVC

Note

Up to 6 radio transmitters can be taught in.

RF range max. (indoor)	30.0 m
RF range max. (outdoor)	70.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
black	470824	40,50

Transmitter page 838 Receiver Product

RECEIVER

SLV CONTROL BY TRUST
Radio multi-dimmer installation



0.04

Product details

220-240V ~50/60Hz
Output up to: 200W
W: 6.9 cm H: 5.4 cm D: 2.9 cm
Material: Plastic

Note

Up to 6 radio transmitters can be taught in. Compatible with conventional bulbs, halogen lamps, compact fluorescent tubes and LED lamps. Not compatible with fluorescent tubes with conventional ballasts.
With halogen lamps, only one transformer per receiver.

No. of outputs (sec.)	1
Output up to	200W
RF range max. (indoor)	30.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
white	470807	54,00

SLV CONTROL BY TRUST
Radio built-in switch



0.05

Product details

220-240V ~50/60Hz
Output up to: 1000W
W: 6.8 cm H: 5.3 cm D: 2.5 cm
Material: Plastic

Note

Up to 6 radio transmitters can be taught in. Compatible with conventional bulbs, halogen bulbs, compact fluorescent tubes, LED lamps and fluorescent tubes with electronic ballasts. Not compatible with fluorescent tubes with conventional ballasts.

No. of outputs (sec.)	1
Output up to	1000W
RF range max. (indoor)	30.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
white	470806	34,20

SLV CONTROL BY TRUST
Radio receiver model, 3-channel



0.12

Product details

220-240V ~50/60Hz
Output up to: 3500W
L: 9.8 cm W: 3 cm H: 6.1 cm
Material: Plastic

Note

Radio range up to 30 m indoors (depending on the local conditions). Radio range up to 70 m outdoors (under optimal conditions). Up to 6 radio transmitters can be taught in per channel. Compatible with conventional bulbs, halogen bulbs, compact fluorescent tubes, LED lamps and fluorescent tubes with electronic ballasts. Not compatible with fluorescent tubes with conventional ballasts.

No. of outputs (sec.)	3
Output up to	3500W
RF range max. (indoor)	30.0 m
RF frequency	433.92 MHz

Variant	Item no.	GBP
white	470803	63,00

SLV CONTROL BY TRUST
IP56 connection housing, 3 channel



IP 56 0.23

Product details

L: 16.4 cm W: 4.8 cm H: 10.9 cm
Material: Plastic

Note

Screws [incl.], 4 cable glands [incl.] for IP protected installation of the receiver [470803] outdoors.

Variant	Item no.	GBP
grey	470804	29,70


Transmitter page 838 Receiver Product


147326 304
228965 540
233650 701

YOUR BEAMING COMPANION.

ACCESSORIES FOR INDIVIDUAL LIGHT AESTHETICS.

There are many different aspects to light. The possibilities are just as numerous when it is a case of lighting rooms and outside areas. These options can be extended with our accessories, and environments can literally be immersed in new light with different light installations.

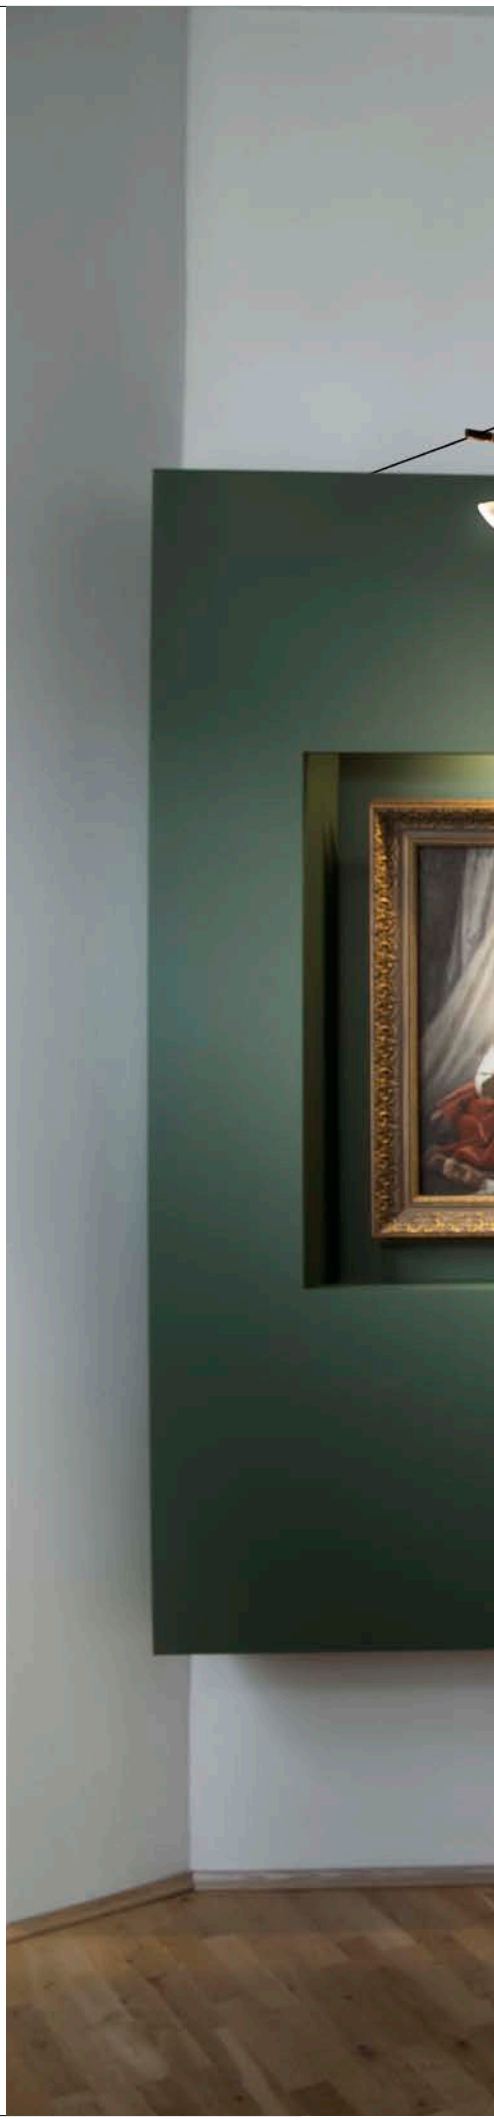


139100 421

FIND A DIMMER. GOOD COMBINATION.

ATMOSPHERIC ROOM LIGHTING THANKS TO THE PERFECT COMBINATION OF LUMINAIRE AND DIMMER. **AT FIND-A-DIMMER.SLV.COM**

Attention must be paid to the compatibility of the luminaires or lamps with the dimmer when dimming. And particularly with LED lamps, it must be checked beforehand which dimmer is required. In view of the many different products, it is not always easy to find the best combination. Our "Find a Dimmer" overview should help you to do this. As well as numerous combinations consisting of different luminaires and lamps and dimmers, at **find-a-dimmer.slv.com** you will also find more information about the minimum number of luminaires or lamps that are needed for problem-free operation. **The overview is updated and extended at regular intervals.**

For specific enquiries , please contact our technical support at **service@slv.de**.



1 Suitable

- Ideal dimming behaviour
- The minimum number of luminaires/ lamps that are needed for problem-free operation is specified as a number.

Conditionally suitable

- No optimum dimming behaviour
- Flickering possible

Not compatible



find-a-dimmer.slv.com

ACCESSORIES

Transformers
12V AC

846

IP44 transformers
12V AC

846

TENSEO transformers
12V AC

847

Transformers
12V AC

848

Transformers
12V AC

848

Strip control module
VALETO®

848

DALI interface
0-10V

849

DALI Universal Dimmer

849

DALI controller

849

PWM transformer

849

1-10V Dimmer

849

LED power supplies
12V/24V DC

850

LED power supplies
24V DC

850

LED power supplies
24V DC

851

Compensation module

852

LED driver
dimmable

852-853

LED driver
VALETO®

853

LED driver
DALI dimmable

854-855

LED driver
non-dimmable

856-857

Ceiling hook

858

Cable clamp

858

Ceiling plates

859

Textile cable
5 m

859

Textile cable
10 m

859

Cable
10 m clear

859

Wire cable suspension

859

Stopper
for wire cable

859

Multiway connector
3 outputs
6 outputs

860-861

Socket
GU10

860

Cable extensions
1 m
2 m

860-861

Socket
GU10

860

Nepro Display tube kit

861

Double-sided adhesive tape


861

Garden outlets
Country-spec.
1.5 m

862

Garden outlets
Country-spec.
10 m

863

Energy pack

864

Connection boxes

864

T-connector boxes

864-865

SLV cable

865

Motion sensor
Infra-red

865

More accessories can be found online at www.slv.com

TRANSFORMER
12V AC | 105VA



2.5 IP 40

Product details

230V ~50Hz
L: 11 cm W: 7.5 cm H: 8 cm
Dimmable: L

Voltage sec.	12V AC
No. of outputs (sec.)	1
Rated output VA	105
Output up to	105W
Temperature protection	110°C

Variant	Item no.	GBP
white	451105	49,50

TRANSFORMER
12V AC | 300VA



3.9 IP 40

Product details

230V ~50Hz
L: 9 cm W: 13 cm H: 11 cm
Dimmable: L

Voltage sec.	12V AC
No. of outputs (sec.)	1
Rated output VA	300
Output up to	300W
Temperature protection	110°C

Variant	Item no.	GBP
white	451301	135,00

TRANSFORMER
12V AC | 10VA IP44



0.7 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 7.5 cm W: 5 cm H: 4.5 cm
Dimmable: L

Voltage sec.	12V AC
No. of outputs (sec.)	1
Rated output VA	10
Output up to	10W
Temperature protection	133°C

Variant	Item no.	GBP
black	227140	34,60

TRANSFORMER
12V AC | 60VA IP44




1.3 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 6 cm W: 10 cm H: 6.3 cm
Dimmable: L

Voltage sec.	12V AC
No. of outputs (sec.)	1
Rated output VA	60
Output up to	60W
Temperature protection	133°C

Variant	Item no.	GBP
black	227160	38,70

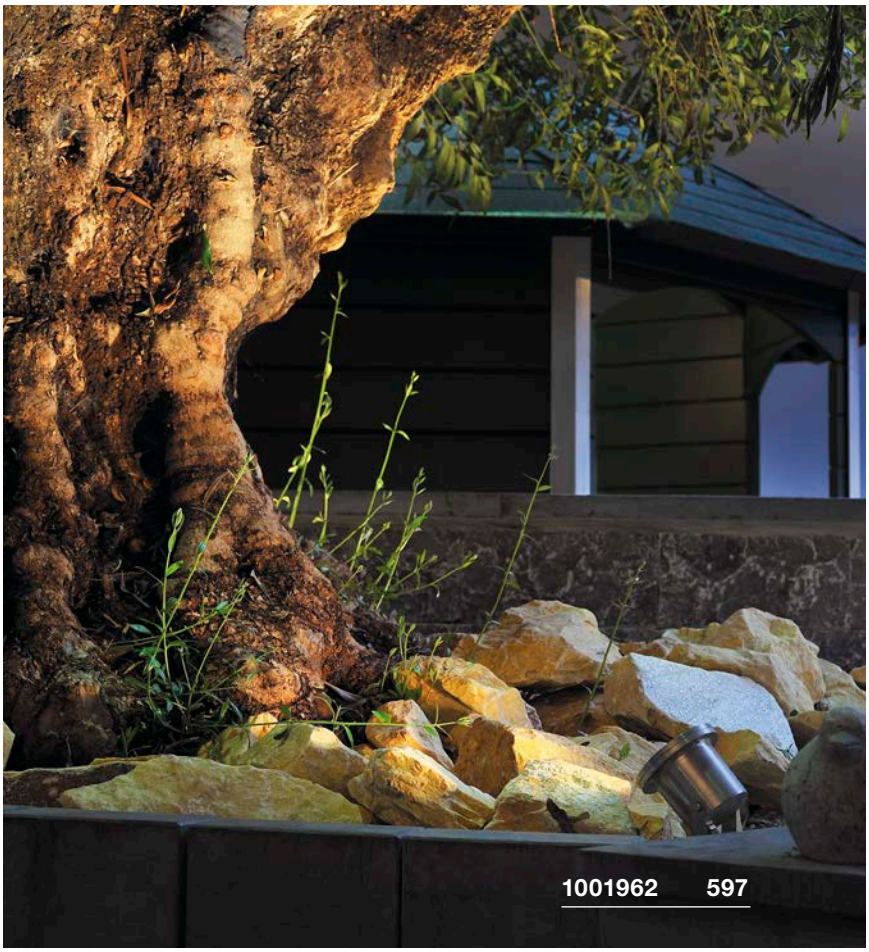

TENSEO TRANSFORMER
12V AC | 50VA

NEW





Product details

230V ~50Hz
Material: Steel / Brass
Ø: 11.1 cm H: 11 cm
Dimmable: L

Voltage sec.	12V AC
No. of outputs (sec.)	1
Rated output VA	50
Output up to	50W
Temperature protection	130°C
Fuse (prim.)	1.6A

Variant	Item no.	GBP
black	1002691	81,00
white	1002692	81,00
chrome	1002693	81,00

TENSEO TRANSFORMER
12V AC | 105VA





Product details

230V ~50Hz
Material: Steel / Brass
Ø: 11 cm H: 11 cm
Dimmable: L

Voltage sec.	12V AC
No. of outputs (sec.)	1
Rated output VA	105
Output up to	105W
Temperature protection	130°C
Fuse (prim.)	1.6A

Variant	Item no.	GBP
black	138980	99,00
white	138981	99,00
chrome	138982	108,00

TENSEO TRANSFORMER
12V AC | 210VA






Product details

230V ~50Hz
Material: Steel / Brass
Ø: 13.5 cm H: 11 cm
Dimmable: L

Voltage sec.	12V AC
No. of outputs (sec.)	1
Rated output VA	210
Output up to	210W
Temperature protection	130°C
Fuse (prim.)	3.15A

Variant	Item no.	GBP
black	138990	148,50
white	138991	148,50
chrome	138992	153,00

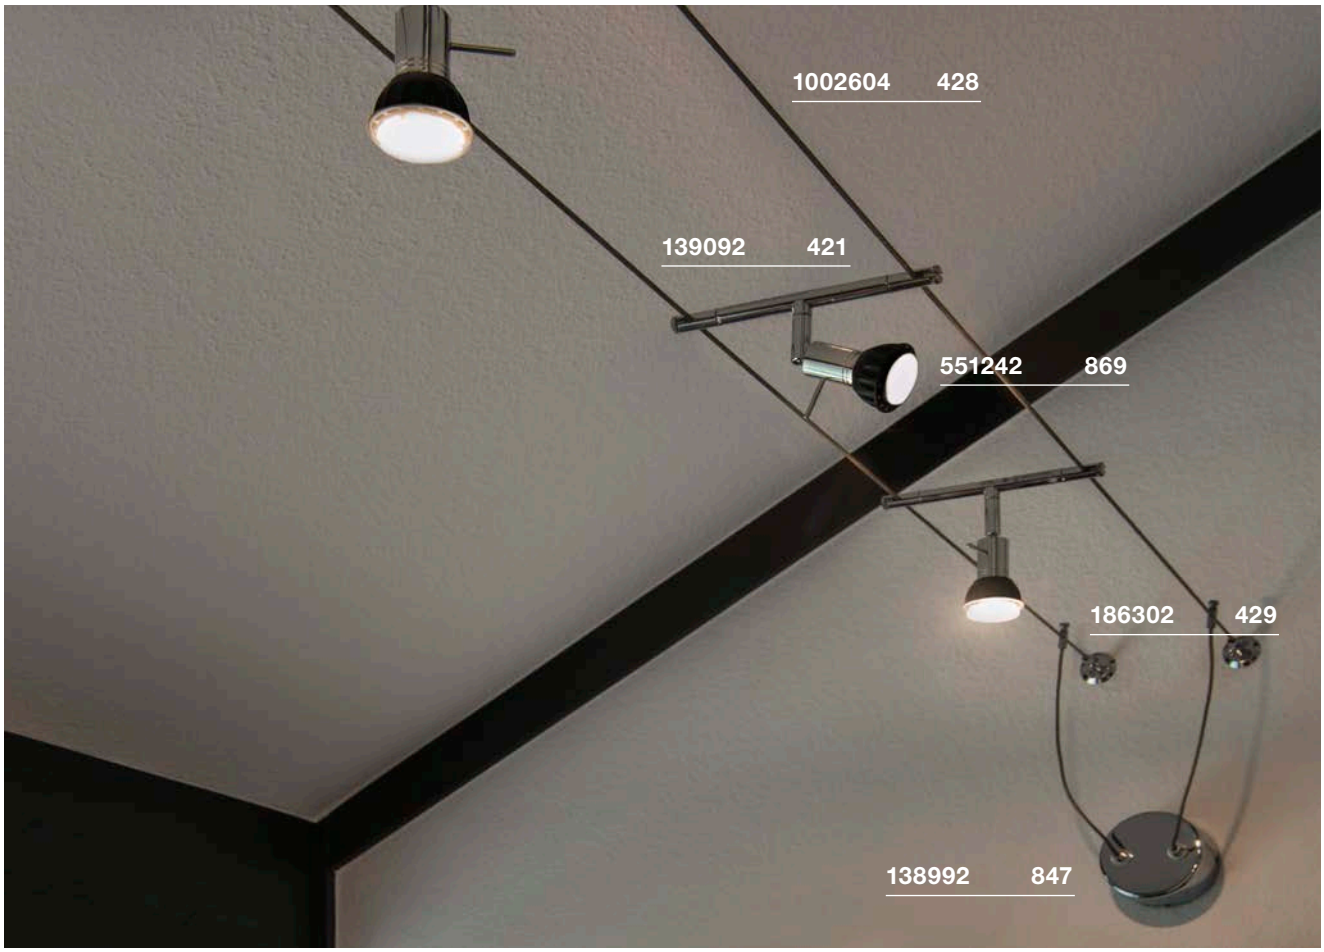

TRANSFORMER
12V AC | 60VA



0.1

Product details

230V ~50Hz
Material: Plastic PC
Ø: 5.5 cm D: 2.3 cm
Dimmable: C

Voltage sec.	12V AC
No. of outputs (sec.)	1
Watts from	10W
Output up to	70W
Power factor	0.98
Temperature protection	110°C

Variant	Item no.	GBP
white	461050	20,70

TRANSFORMER
12V AC | 60VA



0.06

Product details

230V ~50Hz
Material: Plastic PC
L: 10.5 cm W: 3.3 cm H: 2.2 cm
Dimmable: C

Voltage sec.	12V AC
No. of outputs (sec.)	1
Watts from	10W
Output up to	60W
Power factor	0.98
Temperature protection	110°C

Variant	Item no.	GBP
white	461060	15,30

TRANSFORMER
12V AC | 150VA



0.18

Product details

230V ~50Hz
Material: Plastic
L: 16.6 cm W: 3.9 cm H: 3.3 cm
Dimmable: C

Voltage sec.	12V AC
No. of outputs (sec.)	3
Watts from	50W
Output up to	150W
Temperature protection	110°C
Fuse (prim.)	3.15A

Variant	Item no.	GBP
black	461157	40,50

TRANSFORMER
12V AC | 210VA



0.29

Product details

230V ~50Hz
Material: Plastic
L: 20 cm W: 4.3 cm H: 3.9 cm
Dimmable: C

Voltage sec.	12V AC
No. of outputs (sec.)	3
Watts from	50W
Output up to	210W
Temperature protection	110°C
Fuse (prim.)	3.15A

Variant	Item no.	GBP
black	461217	43,20

SLV VALETO®
12/24V Strip control module | CCT

NEW



IP 20 0.063

Product details

12V/24V DC
Output: max. 192W per channel
L: 13.4 cm W: 3.9 cm H: 2.4 cm
Material: Plastic

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411] The control module is suitable for controlling CCT LED strips.

Variant	Item no.	GBP
white	1001859	126,00

SLV VALETO®
12/24V Strip control module | RGBW

NEW



IP 20 0.063

Product details

12V/24V DC
Output: max. 96W per channel
L: 13.4 cm W: 3.9 cm H: 2.4 cm
Material: Plastic

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411] The control module is suitable for controlling RGBW LED strips.

Variant	Item no.	GBP
white	1002892	135,00

DALI INTERFACE
0-10V + on/off



0.02

Product details

220-240V ~50/60Hz
Material: Plastic
L: 5.85 cm W: 3.25 cm H: 1.5 cm

Note

For actuating electronic ballasts with a 1-10V control input. Switching relay for additional on/off switching of the electronic ballast power supply. Galvanic separation of DALI input and 1-10V output.

Output up to	1000W

Variant	Item no.	GBP
	1002218	112,50

DALI UNIVERSAL DIMMER
3-25W



0.02

Product details

220-240V ~50/60Hz
Material: Plastic
L: 5.85 cm W: 3.25 cm H: 1.5 cm

Note

Suitable for R, L and C load thanks to automatic load detection. DALI power consumption: 6mA.

Watts from	3W
Output up to	25W

Variant	Item no.	GBP
	1002220	97,20

DALI UNIVERSAL DIMMER
10-300W



0.05

Product details

220-240V ~50/60Hz
Material: Plastic
L: 12.02 cm W: 3.02 cm H: 2.16 cm

Note

Suitable for R, L and C load thanks to automatic load detection. DALI power consumption: 6mA.

Watts from	10W
Output up to	300W

Variant	Item no.	GBP
	1002221	153,00

DALI CONTROLLER
24V DC



0.051

Product details

10-24V DC
Material: Plastic PC
L: 11.6 cm W: 4.2 cm H: 1.8 cm

Note

Suitable for controlling LEDs with a constant voltage of 10-24V / DC – DALI control signal or Push-Dim.

Variant	Item no.	GBP
white / grey	1003106	47,70

PWM TRANSFORMER
12V DC / 24V DC



0.1

Product details

12V DC / 24V DC
Material: Plastic PC
L: 17 cm W: 4 cm H: 3 cm

Note

1 channel PWM actuator for dimming LEDs which are operated with a constant voltage of 12V/DC – 24V/DC.
1-10V control signal

Voltage sec.	12V DC / 24V DC
No. of outputs (sec.)	1
Output up to	50 / 100W

Variant	Item no.	GBP
white	470550	108,00

1-10V DIMMER
10W



0.04

Product details

10W
Material: Plastic PC
L: 2.3 cm W: 3.9 cm H: 2 cm

Note

Suitable for dimming ballast of 1-10V.

Variant	Item no.	GBP
white	470505	9,90

LED POWER SUPPLY
12V/24V DC | 12W round



0.06

Product details

100-240V ~50/60Hz
Material: Plastic PC
Ø: 5.5 cm H: 2.2 cm

Voltage sec.	12V/24V DC
No. of outputs (sec.)	1
Rated output VA	12
Output up to	12W
Temperature protection	110°C

Variant	Item no.	GBP
12V	**470545**	**20,70**
24V	**470546**	**20,70**

LED POWER SUPPLY
12V/24V DC | 12W



0.06

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 8.5 cm W: 4 cm H: 2.2 cm

Voltage sec.	12V/24V DC
No. of outputs (sec.)	2
Output up to	12W
Temperature protection	110°C

Variant	Item no.	GBP
12V	**470507**	**20,70**
24V	**470502**	**20,70**

LED POWER SUPPLY
12V/24V DC | 20W



0.13

Product details

230V ~50Hz
Material: Plastic PC
L: 16.6 cm W: 3.9 cm H: 3.3 cm

Voltage sec.	12V/24V DC
No. of outputs (sec.)	1
Output up to	20W
Temperature protection	110°C

Variant	Item no.	GBP
12V	**470541**	**40,50**
24V	**470542**	**40,50**

LED POWER SUPPLY
24V DC | 36W



0.35

Product details

100-240 V~50/60Hz
Material: Plastic PC
L: 12.9 cm W: 7.5 cm H: 3.2 cm

Voltage sec.	24V DC
No. of outputs (sec.)	1
Output up to	36W
Power factor	0.9
Temperature protection	110°C

Variant	Item no.	GBP
■ black	**470544**	**72,00**

LED POWER SUPPLY
24V DC | 60W



0.3

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 17.5 cm W: 7.8 cm H: 3.5 cm

Voltage sec.	24V DC
No. of outputs (sec.)	2
Output up to	60W
Power factor	0.95
Temperature protection	110°C

Variant	Item no.	GBP
□ white	**470506**	**81,00**

LED POWER SUPPLY
24V DC | 100W



0.6

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 18.2 cm W: 8.8 cm H: 3.5 cm

Voltage sec.	24V DC
No. of outputs (sec.)	2
Output up to	100W
Power factor	0.95
Temperature protection	110°C

Variant	Item no.	GBP
■ black	**470500**	**108,00**

LED POWER SUPPLY
24V DC | 150W



0.73

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 20.7 cm W: 11 cm H: 4.5 cm

Voltage sec.	24V DC
No. of outputs (sec.)	1
Output up to	150W
Temperature protection	110°C

Variant	Item no.	GBP
black	470549	144,00

LED POWER SUPPLY
24V DC | 150W



0.82 IP 44

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 23.4 cm W: 11.4 cm H: 4.9 cm

Voltage sec.	24V DC
No. of outputs (sec.)	1
Output up to	150W
Temperature protection	110°C

Variant	Item no.	GBP
black	470548	153,00

LED POWER SUPPLY
24V DC | 20W



0.12

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 14.6 cm W: 5.5 cm H: 1.9 cm
Dimmable: 1-10V

Voltage sec.	24V DC
No. of outputs (sec.)	1
Output up to	20W
Temperature protection	100°C

Variant	Item no.	GBP
white	470547	40,50

LED POWER SUPPLY
24V DC | 100W



0.51

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 19 cm W: 13 cm H: 3.5 cm
Dimmable: 1-10V

Voltage sec.	24V DC
No. of outputs (sec.)	3
Output up to	100W
Watts/output	33W
Power factor	0.95
Temperature protection	110°C
Fault protection	Short circuit and open circuit-proof °C

Variant	Item no.	GBP
black	470540	242,10

LED POWER SUPPLY
24V | 50W

NEW



0.24

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 18.4 cm W: 6.1 cm H: 3.2 cm
Dimmable: C

Voltage sec.	24V DC
Watts from	12W
Output up to	50W
Temperature protection	110°C

Variant	Item no.	GBP
white / blue	1003104	38,70

LED POWER SUPPLY
24V | 100W

NEW



0.36

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 21 cm W: 6.7 cm H: 3.4 cm
Dimmable: C

Voltage sec.	24V DC
Watts from	34W
Output up to	100W
Temperature protection	110°C

Variant	Item no.	GBP
white / blue	1003105	94,50

COMPENSATION MODULE

NEW



0.035

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 9.5 cm Ø: 1.5 cm


Note

Reduces or rectifies dimming problems such as flickering, flashing or if the LED lighting does not go off 100% when it is switched off.
The compensator is always connected downstream of the dimmer or switch and in parallel to the downlight spot or LED driver.

Variant	Item no.	GBP
black	1002785	38,70

LED DRIVER
350mA | 6W

NEW



0.045

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 6.3 cm W: 4 cm H: 2.3 cm
Dimmable: C

Voltage sec.	10-17V DC
Watts from	3.5W
Output up to	5.9W
Power factor	0.9
Temperature protection	110°C

Variant	Item no.	GBP
	1002791	22,50

LED DRIVER
350mA | 10W



0.08

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

Voltage sec.	17-29V DC
Output current	350mA
Output	10W
Watts from	5.95W
Output up to	10.15W
Power factor	0.9
Temperature protection	110°C

Variant	Item no.	GBP
white	464140	29,70

LED DRIVER
350mA | 15W

NEW



0.08

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

Voltage sec.	18-30V DC
Output current	350mA
Watts from	9W
Output up to	15W
Power factor	0.9
Temperature protection	110°C

Variant	Item no.	GBP
white	1002803	30,60

LED DRIVER
500mA | 15W



0.08

Product details


220-240V ~50/60Hz
Material: Plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

Voltage sec.	26-43V DC
Output current	500mA
Watts from	9.1W
Output up to	15W
Power factor	0.9
Temperature protection	110°C

Variant	Item no.	GBP
white	464144	29,70

LED DRIVER
700mA | 6W

NEW



0.045

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 6.3 cm W: 4 cm H: 2.3 cm
Dimmable: C

Note


Suitable for flush-mounted sockets Ø 60 mm and a min. installation depth of 42 mm

Voltage sec.	4.8-8.6V
Output current	700mA
Watts from	3.4W
Output up to	6W
Power factor	0.9
Temperature protection	110°C

Variant	Item no.	GBP
white	1002792	22,50

LED DRIVER
700mA | 10W incl. strain relief





Product details


220-240V ~50/60Hz
Material: Plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

Voltage sec.	40~57V
Output current	700mA
Watts from	6W
Output up to	10.5W
Power factor	0.9
Temperature protection	110°C

Variant	Item no.	GBP
white	464142	29,70

TRIAC LED DRIVER
700mA | 39W incl. strain relief





Product details


220-240V ~50/60Hz
Material: PC
L: 16.6 cm W: 5.2 cm H: 2.4 cm
Dimmable: C

Voltage sec.	28-56V
Output current	700mA
Watts from	20W
Output up to	39W
Power factor	0.95
Temperature protection	110°C

Variant	Item no.	GBP
white / blue	1001267	52,20

LED DRIVER
700mA | 40W incl. strain relief





Product details


220-240V ~50/60Hz
Material: Plastic PC
L: 15.3 cm W: 6.7 cm H: 3 cm
Dimmable: C

Voltage sec.	40~57V
Output current	700mA
Watts from	28W
Output up to	39.9W
Power factor	0.9
Temperature protection	110°C

Variant	Item no.	GBP
white	1001114	67,50

LED DRIVER
1000mA





Product details


220-240V ~50/60Hz
Material: Plastic PC
L: 15.3 cm W: 6.7 cm H: 3 cm
Dimmable: C

Voltage sec.	28~40V
Output current	1000mA
No. of outputs (sec.)	1
Output	40W
Watts from	28W
Output up to	40W
Power factor	0.9
Temperature protection	110°C

Variant	Item no.	GBP
white	1001115	67,50

LED DRIVER
1050mA | 40W incl. strain relief





Product details


220-240V ~50/60Hz
Material: Plastic PC
L: 16.6 cm W: 5.2 cm H: 2.4 cm
Dimmable: C

Voltage sec.	19-38
Output current	1050mA
No. of outputs (sec.)	2
Output up to	40W
Power factor	0.95
Temperature protection	110°C

Variant	Item no.	GBP
white	464804	45,00

SLV VALETO®
15W, LED driver





Product details

220-240V~50/60Hz
Output: 15W
L: 19 cm W: 6.1 cm H: 3 cm
Material: Plastic

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Variant	Item no.	GBP
white	1002082	72,00



DALI – THE FLEXIBLE LIGHTING SOLUTION

What is DALI? DALI is a system for freely configuring flexible light scenarios and arrangements. This bus-compatible system makes it possible to individually access, control and evaluate light and all components of a lighting system. Luminaires, groups of luminaires and even the lighting of entire buildings are controlled in this way.

You can create a special atmosphere in your retail premises with our DALI system. Your lighting is configured in a flexible way by using DALI spotlights in conjunction with our special DALI adapters and tracks. Thanks to the wide range of accessories, any configuration that is required can be realised. Be it ceiling or wall installation, or as a pendant.
The tracks consist of an extruded aluminium profile that is painted in white or black. The tracks are available in different lengths with an integrated 2-core DALI cable, and can be cut to length in accordance with requirements. Suitable luminaires with a high CRI of >90 are also available for this system.

LED DRIVER DALI
250-700mA | 20W



0.2

Product details

220-240V ~50/60Hz
Material: PC
L: 15 cm W: 5.2 cm H: 2.8 cm
Dimmable: 1-10V / Dali

Note

250/350/500/700mA
Output current adjustable via DIP switch

Voltage sec.	6-60V
Watts from	1.5W
Output up to	20W
Temperature protection	110°C
Power factor	0.9

Variant	Item no.	GBP
white	1002423	67,50

LED DRIVER DALI
250-700mA | 40W



0.2

Product details

220-240V ~50/60Hz
Material: PC
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Dimmable: 1-10V / Dali

Note

250/350/500/700mA
Output current adjustable via DIP switch

Voltage sec.	6-58V
Watts from	1.5W
Output up to	40W
Temperature protection	110°C
Power factor	0.9

Variant	Item no.	GBP
white	1002424	72,00

LED DRIVER DALI
700-1500mA | 50W



0.21

Product details

220-240V ~50/60Hz
Material: PC
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Dimmable: 1-10V / Dali

Note

700/800/900/1050/1200/1300/1400mA
Output current adjustable via DIP switch

Voltage sec.	6-58V
Watts from	4.2W
Output up to	50W
Temperature protection	110°C
Power factor	0.9

Variant	Item no.	GBP
white	1002425	76,50

LED DRIVER DALI
350-1050mA | 60W



0.21

Product details


220-240V ~50/60Hz
Material: PC
L: 12.4 cm W: 7.9 cm H: 2.2 cm
Dimmable: 1-10V / Dali

Note

350/500/550/650/700/750/850/900/1000/1050mA
Output current adjustable via DIP switch

Voltage sec.	2-74V
Watts from	1W
Output up to	60W
Temperature protection	110°C
Power factor	0.95

Variant	Item no.	GBP
white	464032	117,00

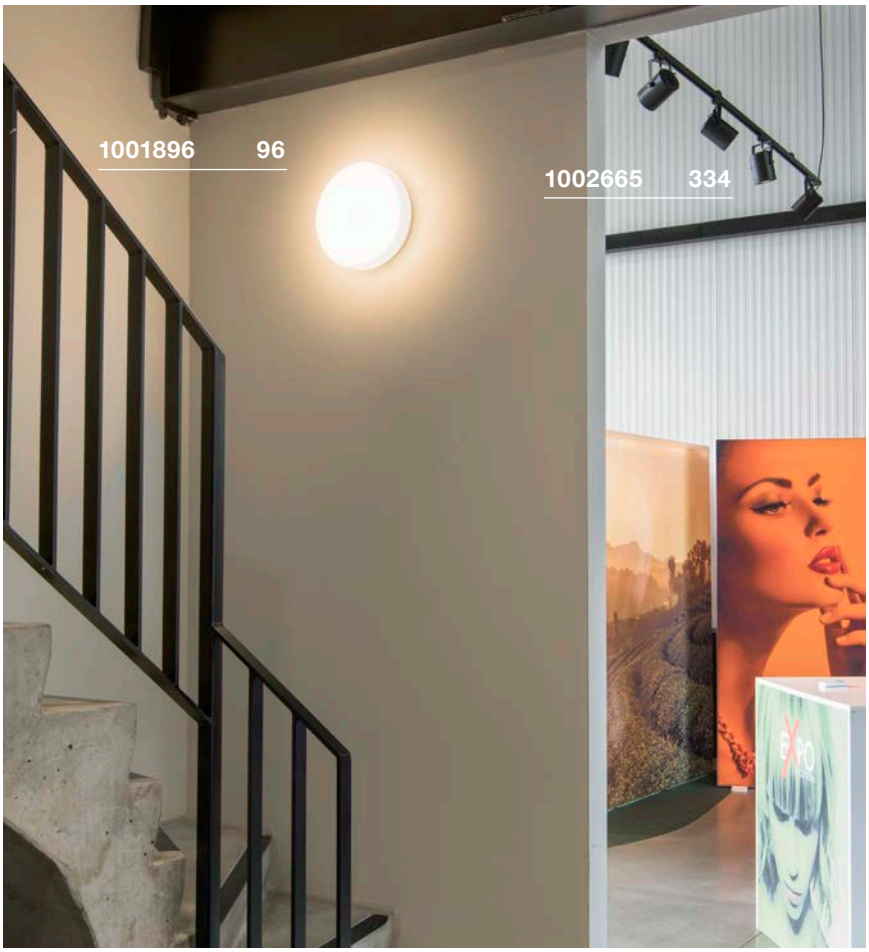

LED DRIVER
320mA | 3W



0.05

Product details

100-240V ~50/60Hz
Material: Plastic PC
L: 5.5 cm W: 3.9 cm H: 2 cm

Voltage sec.	3-9V
Output current	320mA
Watts from	1W
Output up to	3W
Power factor	0.4
Temperature protection	110°C
Max. sec. cable L	2 m

Variant	Item no.	GBP
white	464108	20,70

LED DRIVER
350mA | 3W



0.04

Product details

230V ~50Hz
Material: Plastic PC
L: 5.6 cm W: 3.9 cm H: 2 cm

Note

Includes AMP plug 350mA

Voltage sec.	3-9V
Output current	350mA
Watts from	1W
Output up to	3W
Power factor	0.4
Temperature protection	110°C
Max. sec. cable L	2 m

Variant	Item no.	GBP
white	464107	17,10

LED DRIVER
350mA | 9W



0.06

Product details

230V ~50Hz
Material: Plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm

Voltage sec.	3-26V
Output current	350mA
Watts from	1W
Output up to	9W
Power factor	0.4
Temperature protection	110°C
Max. sec. cable L	2 m

Variant	Item no.	GBP
white	464109	25,20

LED DRIVER
350mA incl. strain relief



0.05

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 15.8 cm W: 2.2 cm H: 1.9 cm

Output current	350mA
No. of outputs (sec.)	1
Output up to	15W
Power factor	0.6
Temperature protection	100°C

Variant	Item no.	GBP
white	464031	36,00

LED DRIVER
500mA | 9W




0.05

Product details

100-240V ~50/60Hz
Material: Plastic PC
L: 6.5 cm W: 3.9 cm H: 2 cm

Voltage sec.	12-19V
Output current	500mA
No. of outputs (sec.)	1
Watts from	6W
Output up to	9W
Power factor	0.9
Temperature protection	110°C
Max. sec. cable L	2 m

Variant	Item no.	GBP
white	464091	20,70

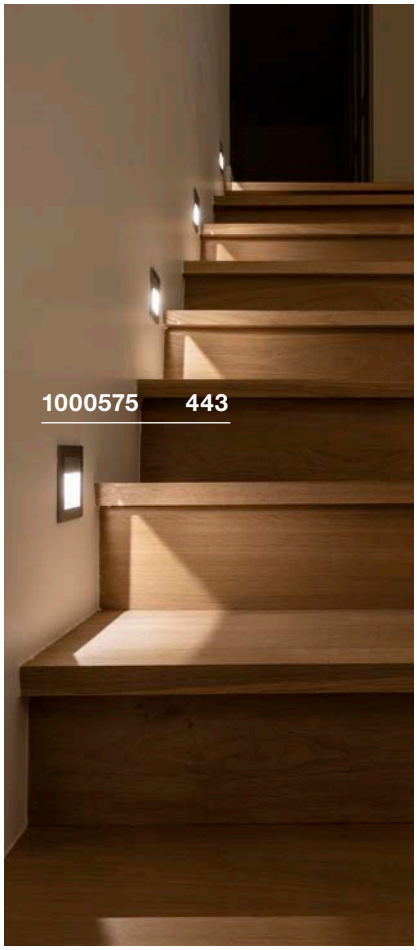

LED DRIVER
700mA | 3W incl. strain relief



0.03

Product details

230V ~50Hz
Material: Plastic PC
L: 5.5 cm W: 3.9 cm H: 2 cm

Voltage sec.	4-5V
Output current	700mA
Output up to	3W
Power factor	0.4
Temperature protection	110°C
Max. sec. cable L	2 m

Variant	Item no.	GBP
white	464200	20,70

LED DRIVER
700mA | 11W incl. strain relief



0.06

Product details

220-240V ~50/60Hz
Material: Plastic PC
L: 15.5 cm W: 2.2 cm H: 1.9 cm

Output current	700mA
Output up to	11W
Power factor	0.6
Temperature protection	100°C

Variant	Item no.	GBP
white	464030	34,20

LED DRIVER
700mA | 40W incl. strain relief



0.2

Product details

100-240V ~50/60Hz
Material: Plastic PC
L: 12.9 cm W: 7.5 cm H: 3.2 cm

Voltage sec.	29-58V
Output current	700mA
Watts from	20W
Output up to	40W
Power factor	0.9
Temperature protection	110°C
Max. sec. cable L	2 m

Variant	Item no.	GBP
black	464168	40,50

VALETO® LED DRIVER
1050mA



0.21

Product details

100-240V ~50/60Hz
Material: Plastic
L: 19 cm W: 6.1 cm H: 3 cm

Note

Can be remote controlled and dimmed with Gateway [1002411]

Voltage sec.	30-42V
Output current	1050mA
No. of outputs (sec.)	1
Output	42W
Watts from	31.5W
Output up to	45W
Power factor	0.95
Temperature protection	110°C
Max. sec. cable L	2 m

Variant	Item no.	GBP
white	1001249	76,50

LED DRIVER
1000mA | 40W incl. strain relief




0.2

Product details

100-240V ~50/60Hz
Material: Plastic PC
L: 12.9 cm W: 7.5 cm H: 3.2 cm

Voltage sec.	20-40V
Output current	1000mA
No. of outputs (sec.)	1
Watts from	20W
Output up to	40W
Power factor	0.9
Temperature protection	110°C
Max. sec. cable L	2 m

Variant	Item no.	GBP
black	464170	40,50

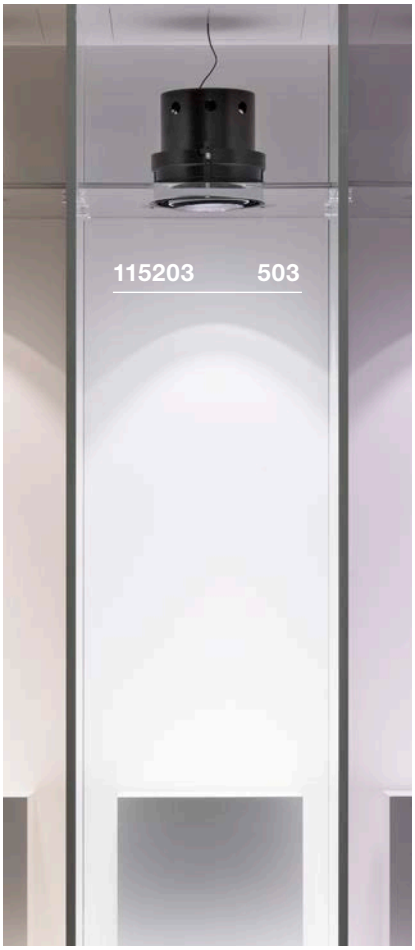

CEILING HOOK



0.04

Product details

Material: Aluminium
Ø: 1.8 cm L: 4.6 cm

Variant	Item no.	GBP
black	132670	15,30

CEILING HOOK



0.04

Product details

Material: Aluminium
Ø: 1.8 cm L: 4.6 cm

Variant	Item no.	GBP
white	132671	15,30



CABLE CLAMP



0.01

Product details

Material: Aluminium
Ø: 1.4 cm L: 3.1 cm

Variant	Item no.	GBP
black	132680	9,90

CABLE CLAMP

0.01

Product details

Material: Aluminium
Ø: 1.4 cm L: 3.1 cm

Variant	Item no.	GBP
white	132681	9,90



CEILING PLATE



0.36

Product details

230V ~50Hz
Material: Aluminium
L: 8.5 cm W: 8.5 cm H: 2.7 cm

Max. perm. current 8.5mA

Variant	Item no.	GBP
matt black	210060	25,20
matt white	210061	25,20
silver	210064	25,20

TEXTILE CABLE
3-pin, 3 x 0.75 mm², 5 m



0.29

Product details

Max. voltage 300V
Max. ambient temp. 70°C
Material: PVC
Ø: 0.6 cm L: 500 cm

Variant	Item no.	GBP
black	961370	25,20
white	961371	25,20
red	961376	25,20

TEXTILE CABLE
3-pin, 3 x 0.75 mm², 10m



0.58

Product details

Max. voltage 300V
Material: PVC
Ø: 0.6 cm L: 1000 cm

Variant	Item no.	GBP
black	961270	40,50
white	961271	40,50
red	961276	40,50

CABLE



0.04

Product details

Max. voltage 300V
L: 1000 cm

Variant	Item no.	GBP
transparent	961250	20,70

WIRE CABLE SUSPENSION



0.02

Product details

Material: Steel / Plastic
Ø: 0.15 cm L: 500 cm

Mech. max. load 40 kg

Variant	Item no.	GBP
silver	961037	15,30

STOPPER FOR WIRE CABLE



0.01

Product details

Material: Steel
Ø: 0.8 cm

Variant	Item no.	GBP
silver	961034	20,70

MULTIWAY CONNECTOR
3 outputs



0.02

Product details

Material: Plastic
L: 5.2 cm W: 1.4 cm H: 1.3 cm

Note

For 350mA plug-in system

Variant	Item no.	GBP
black	111850	9,90

MULTIWAY CONNECTOR
6 outputs



0.04

Product details

Material: Plastic
L: 5.2 cm W: 3 cm H: 1.3 cm

Note

For 350mA plug-in system

Variant	Item no.	GBP
black	111860	20,70

GU10 SOCKET
With connection box and quick terminal



0.065

Product details

L: 27 cm

Variant	Item no.	GBP
white / black	1000909	5,90

CABLE EXTENSION



0.02

Product details

Material: Plastic
L: 100 cm

Note

With AMP plug and coupling
For 350mA plug-in system

Variant	Item no.	GBP
	111861	5,90

CABLE EXTENSION



0.03

Product details

Material: Plastic
L: 200 cm

Note

With AMP plug and coupling
For 350mA plug-in system

Variant	Item no.	GBP
	111862	9,00

GU10 SOCKET



0.02

Product details

230V ~50Hz
Material: Ceramic
L: 300 cm W: 0.9 cm

Variant	Item no.	GBP
white	955135	1,50

NEPRO DISPLAY TUBE KIT



Product details

Material: Plastic

Note

Pipe kit, 2-part, plastic. For attaching to pipes and bars with a diameter of 32-42 mm.

Variant	Item no.	GBP
black	146479	6,30

MULTIWAY CONNECTOR
3 outputs



0.02

Product details

Material: Plastic
L: 5.5 cm W: 1.4 cm H: 1.2 cm

Note

For 700mA plug-in system

Variant	Item no.	GBP
black	111830	9,90

MULTIWAY CONNECTOR
6 outputs



0.03

Product details

Material: Plastic
L: 5.1 cm W: 2.9 cm H: 1.2 cm

Note

For 700mA plug-in system

Variant	Item no.	GBP
black	111831	20,70

DOUBLE-SIDED ADHESIVE TAPE



Product details

L: 300 cm W: 0.9 cm

Variant	Item no.	GBP
clear	220000	11,70

CABLE EXTENSION



0.01

Product details

Material: Plastic
L: 100 cm

Note

With AMP plug and coupling
For 700mA plug-in system

Variant	Item no.	GBP
	111832	5,90

CABLE EXTENSION



0.02

Product details

Material: Plastic
L: 200 cm

Note

With AMP plug and coupling
For 700mA plug-in system

Variant	Item no.	GBP
	111833	9,00

4-WAY GARDEN SOCKET



0.9 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.5 cm W: 13 cm H: 21 cm
Connection lead length: 1.5 m

Note

For use in Germany.

Max. perm. current 16mA

Variant	Item no.	GBP
black	1000868	34,20

4-WAY GARDEN SOCKET



0.92 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.5 cm W: 13 cm H: 21 cm
Connection lead length: 1.5 m

Note

For use in France.

Max. perm. current 16mA

Variant	Item no.	GBP
black	1000869	34,20

4-WAY GARDEN SOCKET



0.79 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.5 cm W: 13 cm H: 21 cm
Connection lead length: 1.5 m

Note

For use in Switzerland.

Max. perm. current 10mA

Variant	Item no.	GBP
black	1000870	34,20

4-WAY GARDEN SOCKET



0.93 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 14.5 cm W: 13 cm H: 21 cm
Connection lead length: 1.5 m

Note

For use in Great Britain.

Max. perm. current 13mA

Variant	Item no.	GBP
black	1000871	34,20

4-WAY GARDEN SOCKET



0.9 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.5 cm W: 13 cm H: 21 cm
Connection lead length: 1.5 m

Note

For use in Denmark.

Max. perm. current 10mA

Variant	Item no.	GBP
black	1000872	34,20

4-WAY GARDEN SOCKET



0.79 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.8 cm W: 12.7 cm H: 21 cm
Connection lead length: 1.5 m

Note

For use in Italy.

Max. perm. current 10mA

Variant	Item no.	GBP
black	1000873	40,50

4-WAY GARDEN SOCKET



2.09 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.5 cm W: 13 cm H: 21 cm
Connection lead length: 10 m

Note

For use in Germany.

Max. perm. current 16mA

Variant	Item no.	GBP
■ black	1000874	49,50

4-WAY GARDEN SOCKET



2.21 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.5 cm W: 13 cm H: 21 cm
Connection lead length: 10 m

Note

For use in France.

Max. perm. current 16mA

Variant	Item no.	GBP
■ black	1000875	49,50

4-WAY GARDEN SOCKET



1.98 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.5 cm W: 13 cm H: 21 cm
Connection lead length: 10 m

Note

For use in Switzerland.

Max. perm. current 10mA

Variant	Item no.	GBP
■ black	1000876	49,50

4-WAY GARDEN SOCKET



2.12 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 14.5 cm W: 13 cm H: 21 cm
Connection lead length: 10 m

Note

For use in Great Britain.

Max. perm. current 13mA

Variant	Item no.	GBP
■ black	1000877	49,50

4-WAY GARDEN SOCKET



2.09 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.5 cm W: 13 cm H: 21 cm
Connection lead length: 10 m

Note

For use in Denmark.

Max. perm. current 10mA

Variant	Item no.	GBP
■ black	1000878	49,50

4-WAY GARDEN SOCKET



1.98 IP 44

Product details

230V ~50Hz
Material: Plastic
L: 10.8 cm W: 12.7 cm H: 21 cm
Connection lead length: 10 m

Note

For use in Italy.

Max. perm. current 10mA

Variant	Item no.	GBP
■ black	1000879	63,00

ENERGY PACK
230V



4.21 IP 54

Product details

230V ~50Hz
Material: Steel / Plastic
L: 35 cm W: 12 cm H: 12 cm

Note

Only drivers that are suitable for outdoors may be housed in the energy pack.
3 outputs for metric cable gland in accordance with EN 50262 M12.
1 input for metric cable gland in accordance with EN 50262 M25.

Max. perm. current 16mA

Variant	Item no.	GBP
grey	227000	126,00

CONNECTION BOX



0.02 IP 68

Product details

230V ~50Hz
Material: PA66 GF
Ø: 2.7 cm L: 11.5 cm

Note

3-pin

Max. perm. voltage 450V
Max. perm. current 17.5mA

Variant	Item no.	GBP
black	228730	13,50

CONNECTION BOX



0.07 IP 68

Product details

230V ~50Hz
Material: PA66 GF
Ø: 3.2 cm L: 13 cm

Note

5-pin

Max. perm. voltage 450V
Max. perm. current 32mA

Variant	Item no.	GBP
black	228725	13,50

CONNECTION BOX
4-way



0.21 IP 68

Product details

230V ~50Hz
Material: PP
Ø: 7.2 cm L: 16 cm

Note

Max. cable diameter 5-14 mm

Max. perm. voltage 1000V

Variant	Item no.	GBP
yellow / black	229269	49,50

T-CONNECTOR BOX



0.11 IP 68

Product details

230V ~50Hz
Material: PA 66
L: 11 cm W: 6.4 cm H: 3 cm

Max. perm. voltage 500V
Max. perm. current 17.5mA

Variant	Item no.	GBP
black	228726	20,70

T-CONNECTOR BOX



0.25 IP 55

Product details

230V ~50Hz
Material: PA 66
Ø: 15.5 cm H: 4.6 cm

Max. perm. voltage 500V

Variant	Item no.	GBP
black	229260	25,20

T-CONNECTOR BOX




0.18 IP 67

Product details

230V ~50Hz
Material: PA 66
L: 25 cm W: 4.5 cm H: 6 cm

Max. perm. voltage 500V

Variant	Item no.	GBP
black	229262	20,70

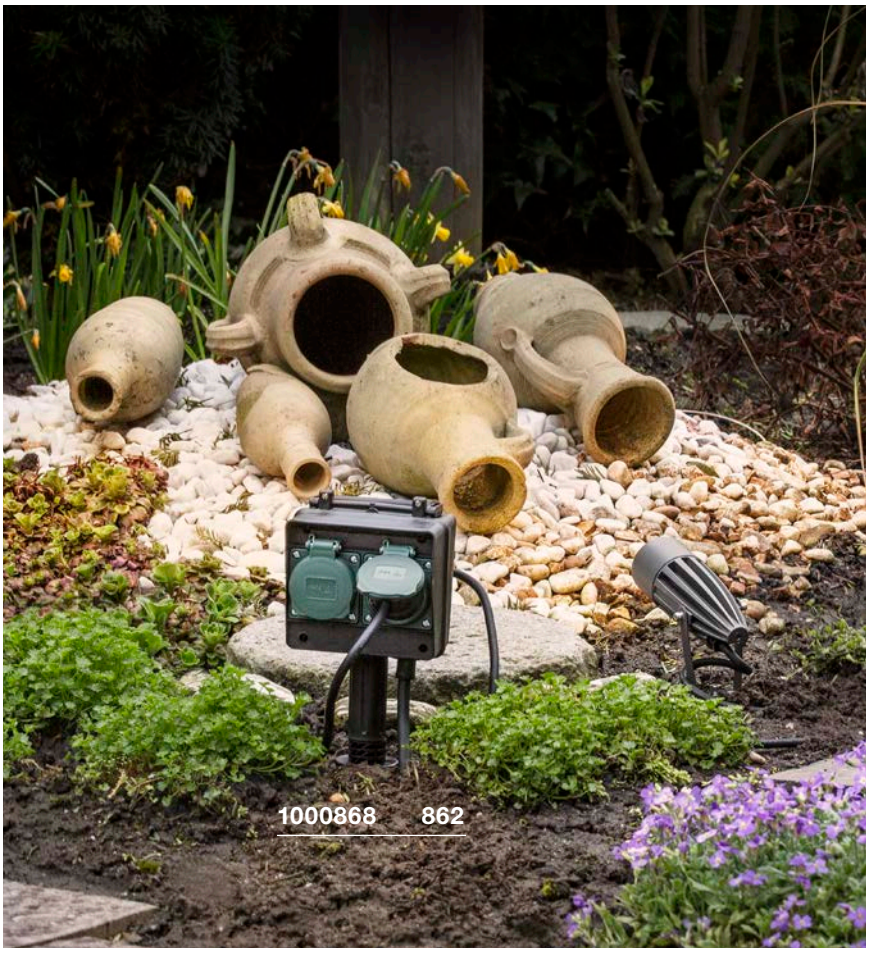

SLV CABLE
H05RN-F



1.9

Product details

300V /500V
Material: Copper / Rubber
Ø: 7.2 cm L: 2000 cm
3-wire

Variant	Item no.	GBP
black	1000700	49,50

SLV CABLE
H07RN-F



2.63

Product details

450V /750V
Material: Copper / Rubber
Ø: 9.1 cm L: 2000 cm
3-wire

Variant	Item no.	GBP
black	1000701	60,30

MOTION SENSOR
Infra-red



0.15 IP 44

Product details

220-240V ~50Hz
Material: Plastic
W: 6.5 cm H: 9.5 cm D: 10 cm

Note

Detection angle 180°. Range max. 12 m. Switch-on time controllable between approx. 10 seconds and approx 4 minutes.

Variant	Item no.	GBP
white	410861	29,70
anthracite	410865	29,70

THE SOURCE OF ALL LIGHT.

THE RIGHT LAMP FOR ANY LIGHTING SOLUTION.

The right lighting effect is the result of perfect interaction between the luminaire and the lamp. As well as the design, energy efficiency is also an important criterion. Many alternatives to the classic light bulb have gained a foothold on the market in recent years. This means that the right lighting element is available for every kind of application or luminaire.

LAMPS

GENERAL INFORMATION.

• The energy efficiency indexes specified correspond to European Council Regulation No. 874/2012. The energy stickers for the individual articles are available to download at slv.com.

• Operating in open luminaires without protection glass is only permitted with low-pressure lamps. Lamps with this symbol (IEC 357 standard) are suitable for use in luminaires without protection glass.

• Halogen lamps and metal halide discharge lamps (HID) can cause the lamp housing to heat up. The latter may therefore only be touched when they have cooled down. Adjustable luminaires or lamp heads which do not have an adjusting handle fitted or which are used with lamps at the maximum wattage meaning that the maximum housing temperature permitted is exceeded on the obvious adjustment point, must be installed out of hands' reach. Our LED retrofit lamps are available as a low temperature alternative for most of our halogen luminaires. You can find corresponding solutions in this chapter.

• Low-voltage lamps can be operated using suitable LED retrofit lamps in many cases. However, not every combination of luminaires with apparently suitable lamps is possible due to the conflicting individual cases, where there are transformer and LED technology-specific issues. If you have any questions about compatibility, visit slv.com or contact our sales department.

• The dimensions specified for the lamps always refer to the complete exterior dimensions of a lamp. This means that the threaded base is included.

• All bulbs must be disposed of separately and do not belong in the household waste.



LED QT14
G9



15000 0.01

Product details

220-240V ~50/60Hz
Output: 2.5W
Ø: 1.6 cm L: 4.8 cm

Lamp current	0.012A
Output	2.5W
Energy consump./1000h	3kWh
Colour temperature	3000K
Luminous flux	180lm
Colour rendering index	>80

Variant	Item no.	GBP
	560302	10,80

LED FILAMENT
G9

NEW



15000 0.013

Product details

220-240V ~50/60Hz
Output: 2.7W
Ø: 1.4 cm L: 6.8 cm
Dimmable: C

Lamp current	0.0135A
Output	2.7W
Energy consump./1000h	3kWh
Colour temperature	2600K
Luminous flux	250lm
Colour rendering index	>90

Variant	Item no.	GBP
	1003102	29,70

LED QT-DE12
R7S 78mm



15000 0.02 330°

Product details

220-240V ~50/60Hz
Output: 5.5W
Ø: 2.5 cm L: 7.8 cm

Lamp current	0.044A
Output	5.5W
Energy consump./1000h	6kWh
Colour temperature	3000K
Luminous flux	530lm
Colour rendering index	>80

Variant	Item no.	GBP
	560332	9,90

LED QT-DE12
R7S 118mm



15000 0.04 330°


Product details

220-240V ~50/60Hz
Output: 10.5W
Ø: 2.5 cm L: 11.8 cm

Lamp current	0.081A
Output	10.5W
Energy consump./1000h	11kWh
Colour temperature	2700K
Luminous flux	1050lm
Colour rendering index	>80

Variant	Item no.	GBP
	560352	22,50

LED QT-DE12
R7S 118mm



15000 0.09

Product details

220-240V ~50/60Hz
Output: 14W
Ø: 2.9 cm L: 11.8 cm
Dimmable: L, C

Lamp current	0.075A
Output	14W
Energy consump./1000h	14kWh
Colour temperature	3000K
Luminous flux	2000lm
Colour rendering index	>80

Variant	Item no.	GBP
	1002135	60,30

LED QR51
GU5.3



25000 0.04 40°

Product details

12V ~50Hz
Output: 3.8W
Ø: 5 cm H: 4.7 cm

Note

Only operate with a conventional transformer.

Lamp current	0.52A
Output	3.8W
Energy consump./1000h	5kWh
Luminous flux	225lm
Max. luminous intensity	500cd
Colour rendering index	>80

Variant	Item no.	GBP
2700K	**551242**	**15,30**
3000K	**551243**	**15,30**

LED QR51
GU5.3



25000 0.05 36°

Product details

12V AC
Output: 5.5W
Ø: 5 cm H: 4.5 cm

Note

Only operate with a conventional transformer.

Lamp current	0.63A
Output	5.5W
Energy consump./1000h	7kWh
Max. luminous intensity	1000cd
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 450lm	**1001574**	**29,70**
3000K | 460lm	**1001575**	**29,70**



LED T32 FILAMENT
GU10



20000 0.06 38°

Product details

220-240V ~50/60Hz
Output: 4W
Ø: 3.2 cm L: 10 cm
Dimmable: C

Lamp current	0.02A
Output	4W
Energy consump./1000h	4kWh
Colour temperature	2600K
Luminous flux	260lm
Max. luminous intensity	700cd
Colour rendering index	>90

Variant	Item no.	GBP
	1003101	**39,60**

LED QPAR51
GU10, SLV VALETO®



25000 0.04

Product details

220-240V ~50/60Hz
Ø: 5 cm L: 5.4 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Energy consump./1000h	6kWh
Luminous flux	350lm
Colour rendering index	>80

Variant	Item no.	GBP
Tunable white | 2700-6500K 5.1W | 48°	**1001918**	**49,50**
RGBW | 5.6W | 60°	**1001919**	**49,50**

LED QPAR51
GU10



25000 0.04 36°

Product details

220-240V ~50/60Hz
Output: 3.7W
Ø: 5 cm H: 5.4 cm
Dimmable: L, C

Note

Particularly suitable for outdoor fittings.

Lamp current	0.02A
Output	3.7W
Energy consump./1000h	4kWh
Colour temperature	2700K
Luminous flux	260lm
Max. luminous intensity	500cd
Colour rendering index	>90

Variant	Item no.	GBP
	560122	**29,70**

LED QPAR51
GU10



15000 0.05 36°

Product details

220-240V ~50/60Hz
Output: 7.2W
Ø: 5 cm H: 5.7 cm
Dimmable: L, C

Lamp current	0.036A
Output	7.2W
Energy consump./1000h	8kWh
Colour temperature	2700K
Luminous flux	520lm
Max. luminous intensity	1000cd
Colour rendering index	>80

Variant	Item no.	GBP
silver	**560542**	**9,90**
white	**560552**	**9,90**
black	**1001560**	**9,90**

LED QPAR51
GU10



15000 0.05 36°

Product details

220-240V ~50/60Hz
Output: 7.2W
Ø: 5 cm H: 5.4 cm
Dimmable: L, C

Lamp current	0.036A
Output	7.2W
Energy consump./1000h	8kWh
Colour temperature	3000K
Luminous flux	520lm
Max. luminous intensity	1000cd
Colour rendering index	>80

Variant	Item no.	GBP
silver	**1001561**	**9,90**
white	**1001562**	**9,90**
black	**1001563**	**9,90**

LED QPAR51
GU10



15000 0.05 36°

Product details

220-240V ~50/60Hz
Output: 7.2W
Ø: 5 cm H: 5.4 cm
Dimmable: L, C

Lamp current	0.036A
Output	7.2W
Energy consump./1000h	8kWh
Colour temperature	4000K
Luminous flux	540lm
Max. luminous intensity	1035cd
Colour rendering index	>80

Variant	Item no.	GBP
silver	**1001564**	**9,90**
white	**1001565**	**9,90**
black	**1001566**	**9,90**

LED QPAR51
GU10



20000 0.06 38°

Product details

220-240V ~50/60Hz
Output: 5.5W
Ø: 5 cm H: 5.5 cm
Dimmable: Switch

Lamp current	0.038A
Output	5.5W
Energy consump./1000h	6kWh
Colour temperature	2700K
Luminous flux	400lm
Max. luminous intensity	700cd
Colour rendering index	>80

Variant	Item no.	GBP
	1001030	15,30

LED QPAR51
GU10



20000 0.06 38°

Product details

220-240V ~50/60Hz
Output: 5.5W
Ø: 5 cm H: 5.2 cm
Dimmable: Switch

Note

3 stages, dimmable with normal wall switch.
The lamp dims in stages by switching it off and on again.

Lamp current	0.038A
Output	5.5W
Energy consump./1000h	6kWh
Colour temperature	3000K
Luminous flux	440lm
Max. luminous intensity	770cd
Colour rendering index	>80

Variant	Item no.	GBP
	551902	13,50

LED QPAR51
GU10



25000 0.04 40°

Product details

220-240V ~50/60Hz
Output: 4.3W
Ø: 5 cm H: 5.4 cm

Lamp current	0.039A
Output	4.3W
Energy consump./1000h	5kWh
Luminous flux	245lm
Max. luminous intensity	530cd
Colour rendering index	>80

Variant	Item no.	GBP
2700K	551252	15,30
3000K	551253	15,30



LED QPAR111
GU10



40000 0.19 55°

Product details

220-240V ~50/60Hz
Output: 13W
Ø: 11 cm L: 7 cm
Dimmable: C

Lamp current	0.052A
Output	13W
Energy consump./1000h	13kWh
Colour rendering index	>90

Variant	Item no.	GBP
2700K | 840lm	**1003094**	**103,50**
4000K | 950lm	**1003095**	**103,50**

LED QPAR111
GU10, CCT, SLV VALETO®



25000 0.15

Product details

220-240V ~50/60Hz
Output: 9W
Ø: 11.1 cm H: 7 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Output	9W
Energy consump./1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	800lm
Colour rendering index	>80

Variant	Item no.	GBP
3300cd | 25°	**1001920**	**49,50**
1900cd | 40°	**1001921**	**49,50**

LED QPAR111
GU10, RGBW, SLV VALETO®



25000 0.15

Product details

220-240V ~50/60Hz
Output: 9W
Ø: 11.1 cm H: 7 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Output	9W
Energy consump./1000h	9kWh
Colour temperature	RGBW
Luminous flux	800lm
Max. luminous intensity	3700cd
Colour rendering index	>80

Variant	Item no.	GBP
25°	**1001922**	**49,50**
40°	**1001923**	**49,50**

LED QPAR111
GU10



40000 0.19

Product details

230V ~50Hz
Output: 13W
Ø: 11.1 cm H: 7.1 cm
Dimmable: C

Lamp current	0.052A
Output	13W
Energy consump./1000h	13kWh
Colour temperature	2700K
Colour rendering index	>80

Variant	Item no.	GBP
1100lm | 1670cd | 30°	**1001242**	**76,50**
1000lm | 140°	**1001244**	**76,50**

LED QPAR111
GU10



40000 0.19

Product details

230V ~50Hz
Output: 13W
Ø: 11.1 cm H: 7.1 cm
Dimmable: C

Lamp current	0.052A
Output	13W
Colour temperature	4000K
Colour rendering index	>80

Variant	Item no.	GBP
13kWh | 1300lm | 1950cd | 30°	**1001243**	**76,50**
30kWh | 1100lm | 140°	**1001245**	**76,50**

LED QPAR111
GU10



35000 0.2

Product details

220-240V ~50/60Hz
Output: 13W
Ø: 11 cm H: 7.1 cm
Dimmable: C

Lamp current	0.052A
Output	13W
Energy consump./1000h	13kWh
Colour temperature	4000K
Colour rendering index	>90

Variant	Item no.	GBP
1100lm | 30°	**1003087**	**94,50**
1000lm | 140°	**1003088**	**94,50**

LED QPAR111
GU10



30000 0.2 38°

Product details

220-240V ~50/60Hz
Output: 6.5W
Ø: 11 cm H: 7 cm

Lamp current	0.046A
Output	6.5W
Energy consump./1000h	7kWh
Colour temperature	2700K
Luminous flux	390lm
Max. luminous intensity	785cd
Colour rendering index	>80

Variant	Item no.	GBP
	551882	**40,50**

LED QPAR111
GU10



20000 0.24 30°

Product details

220-240V ~50/60Hz
Output: 6.5W
Ø: 11.1 cm H: 7 cm
Dimmable: Switch

Note

3 stages, dimmable with normal wall switch.
The lamp dims in stages by switching it off and on again.

Lamp current	0.048A
Output	6.5W
Energy consump./1000h	7kWh
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 400lm | 720cd	**1000684**	**40,50**
3000K | 420lm | 750cd	**551912**	**40,50**

LED QPAR111
GU10



20000 0.28 38°

Product details

220-240V ~50/60Hz
Output: 10W
Ø: 11.1 cm H: 7 cm
Dimmable: Switch

Note

3 stages, dimmable with normal wall switch.
The lamp dims in stages by switching it off and on again.

Lamp current	0.82A
Output	10W
Energy consump./1000h	10kWh
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 540lm | 890cd	**1001028**	**45,00**
3000K | 630lm | 1040cd	**1001029**	**45,00**

LED QPAR11
GU10



25000 0.14 13°

Product details

220-240V ~50/60Hz
Ø: 11.1 cm H: 7.3 cm

Energy consump./1000h	8kWh
Luminous flux	730lm
Max. luminous intensity	5600cd
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 7.3W | 0.069A	**1000939**	**20,70**
3000K | 7W | 0.04A	**1001568**	**20,70**
4000K | 7.3W | 0.069A	**1000940**	**20,70**

LED QPAR111
GU10



25000 0.14 13°

Product details

220-240V ~50/60Hz
Ø: 11.1 cm H: 7.3 cm

Lamp current	0.04A
Output	7W
Energy consump./1000h	8kWh
Luminous flux	730lm
Max. luminous intensity	5600cd
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 7.3W | 0.069A	**1000941**	**20,70**
3000K | 7W | 0.04A	**1001569**	**20,70**
4000K | 7.3W | 0.069A	**1000942**	**20,70**

LED QPAR111
GU10



25000 0.13 25°

Product details

220-240V ~50/60Hz
Output: 7.9W
Ø: 11.1 cm

Energy consump./1000h	8kWh
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 730lm | 7.9W | 0.039A | 1900cd H: 7cm	**560702**	**20,70**
3000K | 730lm | 7W | 0.04A | 1800cd H: 7.3 cm	**1001570**	**20,70**
4000K | 760lm | 7.9W | 0.04A | 1800cd H: 7cm	**560704**	**20,70**

LED QPAR111
GU10



25000 0.13 25°

Product details

220-240V ~50/60Hz
Ø: 11.1 cm H: 7 cm

Energy consump./1000h	8kWh
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 730lm | 7.9W | 0.039A 1800cd | 0.13 kg	**560712**	**20,70**
3000K | 730lm | 7W | 0.04A 1800cd | 0.14 kg	**1001571**	**20,70**
4000K | 760lm | 7.9W | 0.039A 1900cd | 0.12 kg	**560714**	**20,70**

LED QPAR111
GU10



25000 0.12 40°

Product details

220-240V ~50/60Hz
Ø: 11.1 cm

Energy consump./1000h	8kWh
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 730lm | 7.9W | 0.039A | 1800cd 0.13 kg | H: 7 cm	**560722**	**20,70**
3000K | 730lm | 7W | 0.04A | 870cd 0.14 kg | H: 7.3 cm	**1001572**	**20,70**
4000K | 760lm | 7.9W | 0.039A | 920cd 0.12 kg | H: 7 cm	**560724**	**20,70**

LED QPAR111
GU10



25000 0.12 40°

Product details

220-240V ~50/60Hz
Output: 7.9W
Ø: 11.1 cm H: 7 cm

Energy consump./1000h	8kWh
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 730lm | 7.9W | 0.039A | 870cd 0.12 kg | H: 7 cm	**560732**	**20,70**
3000K | 730lm | 7W | 0.04A | 870cd 0.14 kg | H: 7.3 cm	**1001573**	**20,70**
4000K | 760lm | 7.9W | 0.039A | 920cd 0.12 kg | H: 7 cm	**560734**	**20,70**

LED QR111
G53



40000 0.17

Product details

12V AC
Output: 15W
Ø: 11.1 cm H: 6.2 cm

Lamp current	1.8A
Output	15W
Energy consump./1000h	17kWh
Colour temperature	2700K
Colour rendering index	>90

Variant	Item no.	GBP
760lm | 3900cd | 24°	**560231**	**90,00**
750lm | 1400cd | 40°	**560232**	**90,00**

LED QR111
G53



40000 0.17

Product details

12V AC
Output: 15W
Ø: 11.1 cm H: 6.2 cm

Lamp current	1.8A
Output	15W
Energy consump./1000h	17kWh
Colour temperature	3000K
Colour rendering index	>90

Variant	Item no.	GBP
770lm | 4000cd | 24°	**560233**	**90,00**
760lm | 1450cd | 40°	**560234**	**90,00**

LED QR111
G53



35000 0.14

Product details

12V AC
Output: 19.5W
Ø: 11 cm H: 6.1 cm

Lamp current	1.85A
Output	19.5W
Energy consump./1000h	21kWh
Colour temperature	2700K
Max. luminous intensity	1625cd
Colour rendering index	>80

Variant	Item no.	GBP
1070lm | 1625cd | 30°	**551402**	**90,00**
900lm | 400cd | 140°	**551412**	**90,00**

LED QR111
G53



35000 0.14

Product details

12V ~50Hz
Output: 15W
Ø: 11 cm H: 6 cm

Note

Only operate with a conventional transformer.

Lamp current	1.75A
Output	15W
Energy consump./1000h	16kWh
Colour temperature	2700K
Colour rendering index	>80

Variant	Item no.	GBP
810lm | 1230cd | 30°	**551602**	**49,50**
680lm | 300cd | 140°	**551612**	**49,50**

LED QR111
G53



25000 0.13 13°

Product details

12V ~50Hz
Output: 9W
Ø: 11.1 cm H: 5.7 cm

Note

Only operate with a conventional transformer.

Lamp current	1.29A
Output	9W
Energy consump./1000h	10kWh
Luminous flux	800lm
Max. luminous intensity	5600cd
Colour rendering index	>80

Variant	Item no.	GBP
2700K	**560622**	**25,20**
4000K	**560624**	**25,20**

LED QR111
G53



25000 0.13 40°

Product details

12V ~50Hz
Output: 9W
Ø: 11.1 cm H: 5.4 cm

Note

Only operate with a conventional transformer.

Lamp current	1.29A
Output	9W
Energy consump./1000h	10kWh
Luminous flux	800lm
Colour rendering index	>80

Variant	Item no.	GBP
2700K | 1000cd	**560662**	**25,20**

LED C35
E14



15000 0.03 280°

Product details

220-240V ~50/60Hz
Output: 4.5W
Ø: 3.5 cm H: 12.1 cm
Dimmable: L, C

Lamp current	0.022A
Output	4.5W
Energy consump./1000h	5kWh
Colour temperature	2700K
Luminous flux	490lm
Colour rendering index	>80

Variant	Item no.	GBP
	1002128	**7,20**

LED C35
E14



15000 0.04 280°

Product details

220-240V ~50/60Hz
Output: 6.5W
Ø: 3.8 cm H: 11 cm
Dimmable: L, C

Lamp current	0.033A
Output	6.5W
Energy consump./1000h	7kWh
Colour temperature	3000K
Luminous flux	480lm
Colour rendering index	>80

Variant	Item no.	GBP
	560372	**13,50**

LED C35
E14



15000 0.03 280°

Product details

220-240V ~50/60Hz
Output: 4W
Ø: 3.7 cm H: 11.3 cm

Lamp current	0.035A
Output	4W
Energy consump./1000h	4kWh
Colour temperature	2700K
Luminous flux	250lm
Colour rendering index	>80

Variant	Item no.	GBP
	560222	**12,60**

LED A60
E27, CCT



25000 0.07 240°

Product details

220-240V ~50/60Hz
Output: 9W
Ø: 6 cm H: 12 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.052A
Output	9W
Energy consump./1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	806lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001916	40,50

LED A60
E27, RGBW



25000 0.07 240°

Product details


220-240V ~50/60Hz
Output: 9.5W
Ø: 6 cm H: 12 cm

Note

Can be remote controlled and dimmed using SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.054A
Output	9.5W
Energy consump./1000h	10kWh
Colour temperature	RGBW
Luminous flux	806lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001917	49,50

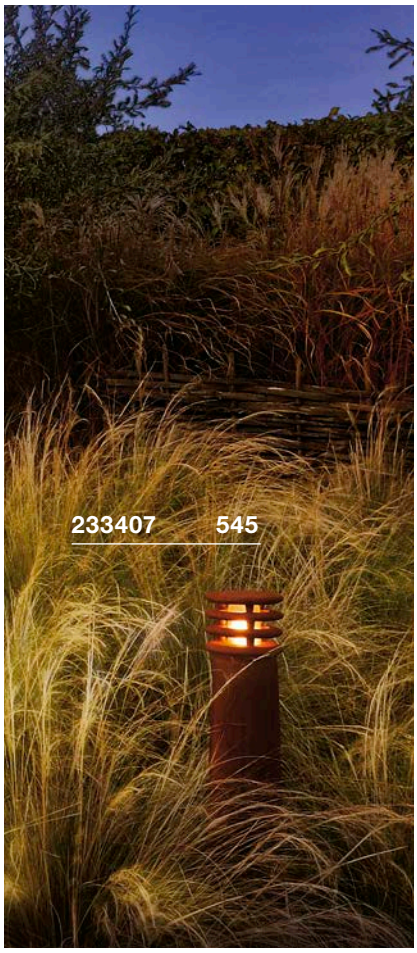

LED A60
E27



15000 0.06 240°

Product details

220-240V ~50/60Hz
Output: 9.1W
Ø: 6 cm H: 11 cm
Dimmable: L, C

Lamp current	0.043A
Output	9.1W
Energy consump./1000h	10kWh
Colour temperature	2700K
Luminous flux	760lm
Colour rendering index	>80

Variant	Item no.	GBP
	560402	15,30

LED A60
E27



15000 0.13 200°

Product details

220-240V ~50/60Hz
Output: 14.5W
Ø: 6 cm H: 12.2 cm
Dimmable: L, C

Lamp current	0.064A
Output	14.5W
Energy consump./1000h	15kWh
Colour temperature	2700K
Luminous flux	1521lm
Colour rendering index	>80

Variant	Item no.	GBP
	560422	29,70

LED T45
E27



20000 0.1 330°

Product details

230V ~50Hz
Output: 4.7W
Ø: 4.5 cm H: 13.9 cm

Lamp current	0.037A
Output	4.7W
Energy consump./1000h	5kWh
Colour temperature	3000K
Luminous flux	380lm
Colour rendering index	>80

Variant	Item no.	GBP
	551532	20,70

LED T38
E27



15000 0.05 240°

Product details

100-240V ~50/60Hz
Output: 9W
Ø: 3.8 cm H: 11.5 cm

Lamp current	0.046A
Output	9W
Energy consump./1000h	10kWh
Colour rendering index	>80

Variant	Item no.	GBP
3000K | 810lm	**1001031**	**15,30**
4000K | 850lm	**1002827**	**15,30**

LED T45
E27



15000 0.08 240°

Product details

100-240V ~50/60Hz
Output: 12W
Ø: 4.5 cm H: 13.6 cm

Lamp current	0.052A
Output	12W
Energy consump./1000h	12kWh
Colour temperature	3000K
Luminous flux	1060lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001032	**20,70**

LED T45
E27



15000 0.08 240°

Product details

100-240V ~50/60Hz
Output: 15W
Ø: 4.5 cm H: 13.6 cm

Lamp current	0.063A
Output	15W
Energy consump./1000h	15kWh
Colour rendering index	>80

Variant	Item no.	GBP
3000K | 1521lm	**1001033**	**25,20**
4000K | 1600lm	**1002828**	**25,20**

LED A60
E27



15000 0.03

Product details

220-240V ~50/60Hz
Output: 7W
Ø: 6 cm L: 10.5 cm
Dimmable: C, L

Lamp current	0.032A
Output	7W
Energy consump./1000h	7kWh
Colour temperature	2700K
Luminous flux	810lm
Colour rendering index	>80

Variant	Item no.	GBP
	1003090	**7,70**

LED FRISBEE
E27




25000 0.2

Product details

220-240V ~50/60Hz
Output: 10.5W
Ø: 19.2 cm L: 11.8 cm
Dimmable: C

Lamp current	0.055A
Output	10.5W
Energy consump./1000h	10.5kWh
Colour temperature	2700K
Luminous flux	1000lm
Colour rendering index	>80

Variant	Item no.	GBP
	1003093	**24,30**

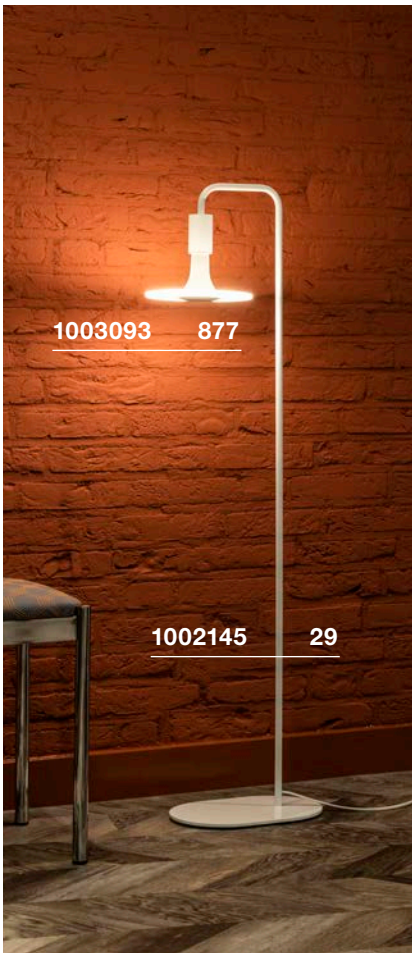

LED A60
E27



15000 0.03 280°

Product details

220-240V ~50/60Hz
Output: 4.5W
Ø: 6 cm H: 10.5 cm
Dimmable: L, C

Lamp current	0.022A
Output	4.5W
Energy consump./1000h	5kWh
Colour temperature	2700K
Luminous flux	530lm
Colour rendering index	>80

Variant	Item no.	GBP
	1002123	6,80

LED A60
E27



15000 0.03 280°

Product details

220-240V ~50/60Hz
Output: 7W
Ø: 6 cm H: 10.5 cm
Dimmable: L, C

Lamp current	0.031A
Output	7W
Energy consump./1000h	7kWh
Colour temperature	2700K
Luminous flux	790lm
Colour rendering index	>80

Variant	Item no.	GBP
	1002124	9,90

LED A60
E27



15000 0.03 280°

Product details

220-240V ~50/60Hz
Output: 7W
Ø: 6 cm H: 10.5 cm
Dimmable: Switch

Lamp current	0.053A
Output	7W
Energy consump./1000h	7kWh
Colour temperature	2700K
Luminous flux	790lm
Colour rendering index	>80

Variant	Item no.	GBP
	1002127	11,70

LED A60
E27



15000 0.04 280°

Product details

220-240V ~50/60Hz
Output: 4.5W
Ø: 6 cm H: 11.4 cm
Dimmable: L, C

Lamp current	0.022A
Output	4.5W
Energy consump./1000h	5kWh
Colour temperature	2200-2700K
Luminous flux	500lm
Colour rendering index	>80

Variant	Item no.	GBP
	1002125	13,50

LED A60
E27



15000 0.04 280°

Product details

220-240V ~50/60Hz
Output: 7W
Ø: 6 cm H: 11.4 cm
Dimmable: L, C

Lamp current	0.031A
Output	7W
Energy consump./1000h	7kWh
Colour temperature	2200-2700K
Luminous flux	830lm
Colour rendering index	>80

Variant	Item no.	GBP
	1002126	17,10

LED A60
E27



15000 0.15

Product details

220-240V ~50/60Hz
Output: 15W
Ø: 9 cm L: 23 cm
Dimmable: C

Lamp current	0.09A
Output	15W
Energy consump./1000h	15kWh
Colour temperature	2700K
Luminous flux	1600lm
Colour rendering index	>90

Variant	Item no.	GBP
	1003097	90,00

LED ST58
E27



15000 0.04 330°

Product details

220-240V ~50/60Hz
Output: 7.1W
Ø: 5.8 cm H: 12.8 cm
Dimmable: L, C

Lamp current	0.035A
Output	7.1W
Energy consump./1000h	8kWh
Colour temperature	2700K
Luminous flux	806lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001756	20,70

LED ST64
E27



15000 0.05 330°

Product details

220-240V ~50/60Hz
Output: 5W
Ø: 6.4 cm H: 14.5 cm

Lamp current	0.043A
Output	5W
Energy consump./1000h	5kWh
Colour temperature	2000K
Luminous flux	500lm
Colour rendering index	>80

Variant	Item no.	GBP
	560741	25,20

LED T32
E27



25000 0.05 350°

Product details

220-240V ~50/60Hz
Output: 8W
Ø: 3.2 cm H: 18.5 cm

Lamp current	0.03A
Output	8W
Energy consump./1000h	8kWh
Colour temperature	2200K
Luminous flux	250lm
Colour rendering index	>95

Variant	Item no.	GBP
	1003100	52,20

LED A60
E27, Mirrorhead, chrome



15000 0.031

Product details

220-240V ~50/60Hz
Output: 7W
Ø: 6 cm H: 10.5 cm
Dimmable: L, C

Lamp current	0.032A
Output	7W
Energy consump./1000h	7kWh
Colour temperature	2700K
Luminous flux	640lm
Colour rendering index	>80

Variant	Item no.	GBP
	1003085	8,10

LED A60
E27, Mirrorhead, gold



20000 0.04 180°

Product details

220-240V ~50/60Hz
Output: 4W
Ø: 6 cm L: 10.6 cm
Dimmable: C

Lamp current	0.02A
Output	4W
Energy consump./1000h	4kWh
Colour temperature	2000-2900K
Luminous flux	200lm
Colour rendering index	>90

Variant	Item no.	GBP
	1003098	47,70



LED G95/G125
E27



15000 330°

Product details

220-240V ~50/60Hz
Output: 7W
Dimmable: L, C

Lamp current	0.043A
Output	7W
Energy consump./1000h	8kWh
Colour temperature	2700K
Luminous flux	806lm
Colour rendering index	>80

Variant	Item no.	GBP
Ø: 9.5 cm | H: 13.2 cm 0.06 kg	**1001035**	**15,30**
Ø: 12.5 cm | H: 17.8 cm 0.1 kg	**1001038**	**20,70**

LED G95/G125
E27, smoked glass



15000

Product details

220-240V ~50/60Hz
Output: 7W
Dimmable: C

Lamp current	0.032A
Output	7W
Energy consump./1000h	7kWh
Colour temperature	2700K
Colour rendering index	>80

Variant	Item no.	GBP
360lm | Ø: 9.5 cm | H: 13.5 cm 0.054 kg	**1003091**	**9,90**
440lm | Ø: 12.4 cm | H: 16.8 cm 0.124 kg	**1003092**	**11,70**

LED G125
E27



15000 0.1 330°

Product details

220-240V ~50/60Hz
Output: 7W
Ø: 12.5 cm H: 17.8 cm
Dimmable: L, C

Lamp current	0.043A
Output	7W
Energy consump./1000h	8kWh
Colour temperature	2700K
Luminous flux	630lm
Colour rendering index	>80

Variant	Item no.	GBP
	1001357	**29,70**

LED G125
E27, Mirrorhead, gold



20000 0.1 180°

Product details

220-240V ~50/60Hz
Output: 8W
Ø: 12.5 cm H: 18 cm

Lamp current	0.04A
Output	8W
Energy consump./1000h	8kWh
Colour temperature	2000-2900K
Luminous flux	400lm
Colour rendering index	>90

Variant	Item no.	GBP
	1003099	**67,50**

LED G125
E27, smoked glass




20000 0.11

Product details

220-240V ~50/60Hz
Output: 8W
Ø: 12.5 cm H: 18 cm

Lamp current	0.032A
Output	8W
Energy consump./1000h	8kWh
Colour temperature	2000-2900K
Luminous flux	500lm
Colour rendering index	>90

Variant	Item no.	GBP
	1003096	**67,50**

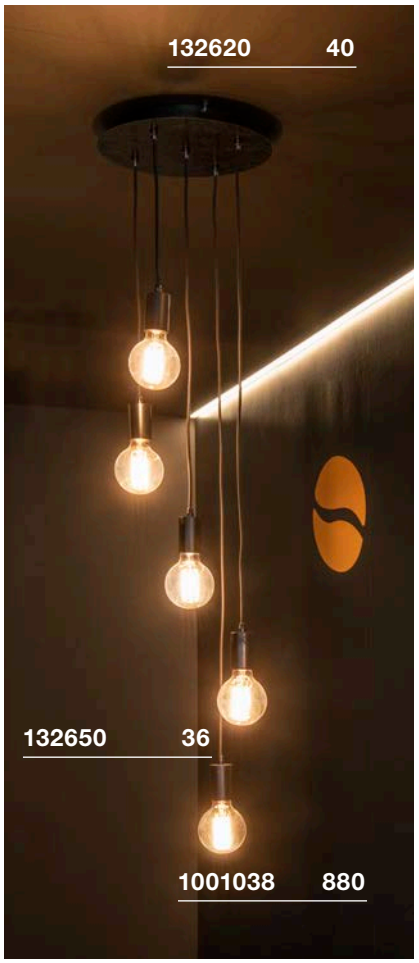

LED PAR30
E27



40000 0.18 45°

Product details

220-240V ~50/60Hz
Output: 11W
Ø: 9.5 cm H: 11.6 cm

Lamp current	0.051A
Output	11W
Energy consump./1000h	11kWh
Colour temperature	3000K
Luminous flux	900lm
Max. luminous intensity	1300cd
Colour rendering index	>80

Variant	Item no.	GBP
	560463	**40,50**

LED PAR38
E27



40000 0.39 45°

Product details

220-240V ~50/60Hz
Output: 17W
Ø: 12.2 cm H: 13.5 cm

Lamp current	0.079A
Output	17W
Energy consump./1000h	17kWh
Colour temperature	3000K
Luminous flux	1430lm
Max. luminous intensity	1630cd
Colour rendering index	>80

Variant	Item no.	GBP
	560473	**60,30**

LED TCR-TSE
GX53



25000 0.05 120°

Product details

230V ~50Hz
Output: 3W
Ø: 7.6 cm H: 2.6 cm

Lamp current	0.03A
Output	3W
Energy consump./1000h	3kWh
Colour temperature	3000K
Luminous flux	250lm
Colour rendering index	>80

Variant	Item no.	GBP
	551372	**20,70**

LED TCR-TSE
GX53



20000 0.1 35°

Product details

230V ~50Hz
Output: 4.2W
Ø: 7.5 cm H: 3.5 cm

Lamp current	0.041A
Output	4.2W
Energy consump./1000h	5kWh
Colour temperature	3000K
Luminous flux	200lm
Max. luminous intensity	550cd
Colour rendering index	>80

Variant	Item no.	GBP
	550092	**40,50**

LED TCR-TSE
GX53



20000 0.13 25°

Product details

230V ~50Hz
Output: 7.5W
Ø: 7.6 cm H: 3.5 cm

Lamp current	0.037A
Output	7.5W
Energy consump./1000h	8kWh
Colour temperature	3000K
Luminous flux	450lm
Max. luminous intensity	1235cd
Colour rendering index	>80

Variant	Item no.	GBP
	550082	**49,50**

LED TCR-TSE
GX53


25000 0.08 120°

Product details

220-240V ~50/60Hz
Output: 8.2W
Ø: 7.5 cm H: 2.9 cm

Lamp current	0.062A
Output	8.2W
Energy consump./1000h	9kWh
Colour rendering index	>80

Variant	Item no.	GBP
3000K | 600lm	**550073**	**20,70**
4000K | 620lm	**550074**	**20,70**

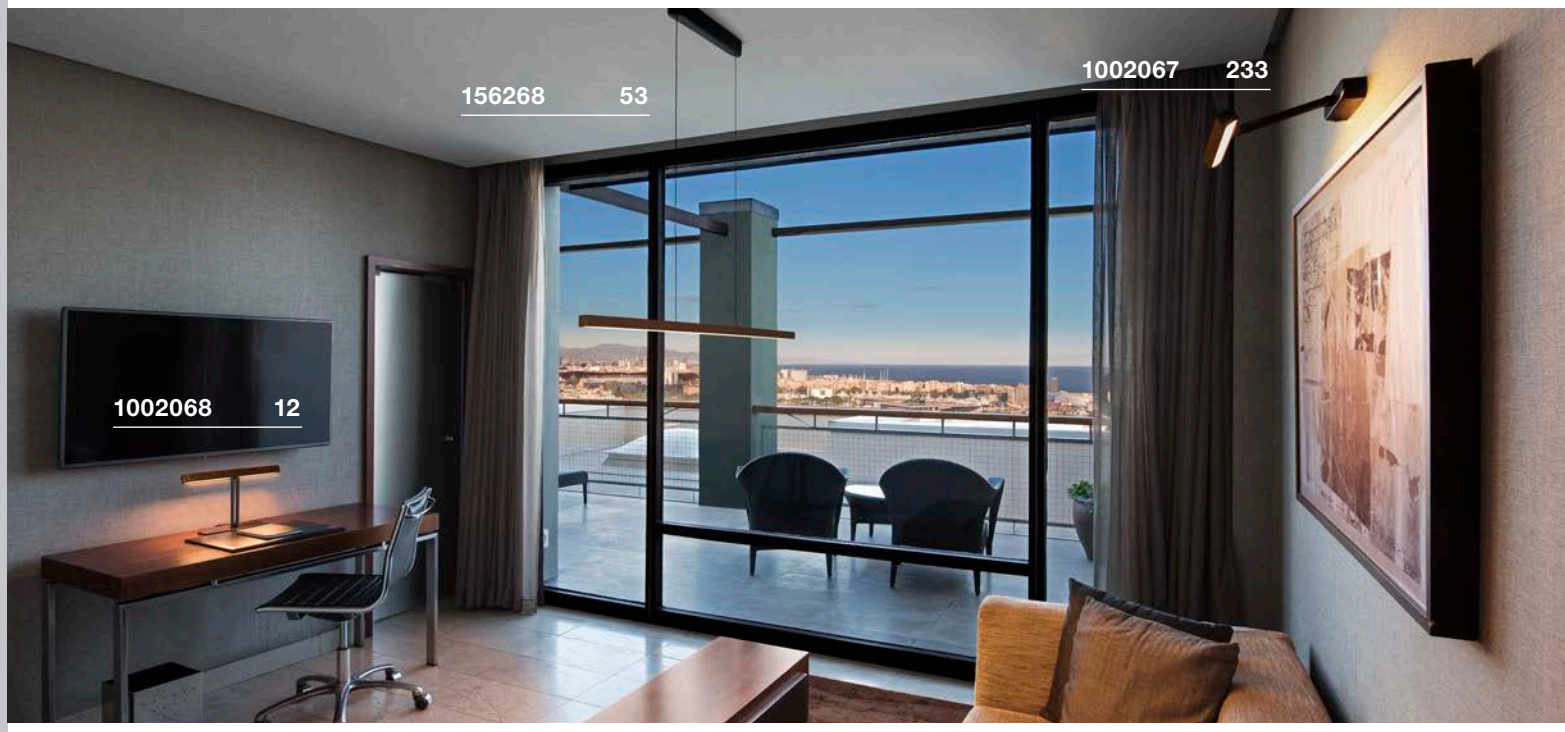

IT'S A FAMILY AFFAIR:

OUR SLV LUMINAIRE FAMILIES.

Particularly when visual continuity is required, our range of luminaires is ideal for designing different rooms or room situations in a uniform way, yet still remain versatile.

ABRIDOR

Path / Stand	Path / Stand	Wall	Wall
574	574	638	639

ACCANTO

Pendant	Wall	Wall	Ceiling
083	194	195	236

ADEGAN MANILA

Pendant	Stand
533	539

AIXLIGHT®

Recessed

500

Recessed

501

Recessed

500

Recessed

502

Recessed

503

Recessed

503

Recessed

503

Recessed

500

Recessed

500

Recessed

500

Recessed

500

Recessed

501

Recessed

501

Recessed

501

Recessed

501


Recessed

501

Recessed

501

AIXLIGHT® R2

Pendant

117

Pendant

118

Pendant

118

Pendant

118

ALMINO

Pendant

123

Pendant

123

Wall

190

Pendant

687

ALTRA DICE

Wall

185

Wall

267

Wall / Ceiling

267, 284

3-Circuit Track

343

1-Circuit Track

395

ANELA

Pendant

074

Wall/display

227

Ceiling

265

APONI

Path / Stand

549

Path / Stand

549

Wall

617

ASTINA

Pendant

069

Wall

177

Ceiling

264

Wall

654

Wall

655

Wall

655

AVO

Wall / Ceiling

299

Wall / Ceiling

299

Wall / Ceiling

299

Wall / Ceiling

299

3-Circuit Track

343

1-Circuit Track

387

BATO

Pendant

058

Pendant

058

Pendant

058

Pendant

059

Wall

139

Wall

139

Ceiling

238

Ceiling

238

BENDO

reddot award 2018 winner

Path / Stand

572

Path / Stand

572

Wall

636

BIG NAILS

Path / Stand

551

Path / Stand

552

Path / Stand

552

Wall

619

BIG THEO

Wall

650

Wall

665

Ceiling

678

BIG THEO LED

Wall

651

Wall

666

Wall

666

Ceiling

678

BILAS
Design:
Vincent de Smedt

Wall / Ceiling

288

3-Circuit Track

349

1-Circuit Track

398

BIMA

3-Circuit Track

351

3-Circuit Track


351

1-Circuit Track

391

1-Circuit Track

391

Easytec® II

411

Easytec® II

411

BISHADE

Table

024

Stand

024

Pendant

082

BRENDA
Design:
Johannes Tomm

reddot award 2018 winner

Table

015

Pendant

080

Wall

142

C-POLE

Path / Stand

555

Wall

618

ENOLA B

Pendant

070

Pendant

071

Wall

177

Wall

204

Ceiling

265

Wall / Ceiling

289

Wall / Ceiling

289

Wall / Ceiling

290

Wall / Ceiling

290

1-Circuit Track

390

1-Circuit Track

399

ENOLA C

Ceiling

266

Ceiling

266

3-Circuit Track

346

1-Circuit Track

397

Path / Stand

577

Wall

628

Wall

656

Wall / Ceiling

675

Wall / Ceiling

675

ESKINA

Path / Stand

577

Wall

670

Wall

689

EURO SPOT

3-Circuit Track

334

3-Circuit Track

334

3-Circuit Track

335

3-Circuit Track

360

3-Circuit Track

360

3-Circuit Track

361

3-Circuit Track

361

3-Circuit Track

361

1-Circuit Track

392

1-Circuit Track

392

1-Circuit Track


393

FENDA

MIX & MATCH


Table


018

Stand

018

Table

020

Stand

020

Stand

022

Pendant

044

Wall

148

Wall

192

Wall

193

Ceiling

234

Shades

018, 020, 046

Shades

019, 021, 022, 047, 235

Shades

022, 044

Shades

044

Shades

148

Shades

192

FITU
MIX & MATCH

Stand

010

Stand

029

Pendant


036

Pendant

036

Pendant

037

Pendant

038

Pendant

039

Wall

146

Wall / Ceiling

285

FLATT

Path / Stand

569

Wall

639

Wall

639

FORCHINI

Pendant

062

Pendant

062

Pendant

062

Pendant

065

Pendant

065

3-Circuit Track

363

1-Circuit Track

401

F-POL

Path / Stand

555

Wall

618

GLOO PURE

Path / Stand

548

Wall / Ceiling

614

GRAFIT

Path / Stand

557

Path / Stand

557

Wall

620

HELIA

Pendant


072

Pendant

072

Pendant

073

Pendant

073

Wall / Ceiling

292

Wall / Ceiling

292

3-Circuit Track

346

1-Circuit Track


397

Easytec® II

410

Recessed

447

Path / Stand

580

Path / Stand

580

Path / Stand

581

Path / Stand

583

Path / Stand

583

Spot

599

Spot

599

Wall

629

Wall

653

Wall

691

Wall

691

IPERI

Path / Stand

575

Wall

642

KALU LED

Wall / Ceiling

306

Wall / Ceiling

306

Wall / Ceiling

306

Wall / Ceiling

307

Wall / Ceiling

307

Wall / Ceiling

307

3-Circuit Track

359

3-Circuit Track

359

1-Circuit Track

395

KALU
QPAR111

Stand

010

Wall / Ceiling

304

Wall / Ceiling

304

Wall / Ceiling

304

Wall / Ceiling

304

3-Circuit Track

358

1-Circuit Track

395

KARPO

Table

025

Stand

025

Wall

177

Wall

205

Wall

205

Wall / Ceiling

286

Wall / Ceiling

286

Recessed

447

LASSON

Pendant

084

Pendant

084

Pendant

085

Wall

149

LED SAIL

Wall

173

Wall

173

Wall / Ceiling

647

LENITO

Wall

188

Wall

227

3-Circuit Track

345

LIGHT EYE 150

Pendant

050

3-Circuit Track

344

3-Circuit Track

363

1-Circuit Track

399

Easytec® II

413

Easytec® II

414

LIGHT EYE 90

Pendant

050

Wall / Ceiling

291

Wall / Ceiling

291

1-Circuit Track

388

Easytec® II

413

LIGHT PIPE

Pendant

075

Pendant

075

Path / Stand

028, 550

Path / Stand

028, 550

Path / Stand

028, 550

LISENNE

Pendant

076

Wall

143

Table

541

Path / Stand

546

Path / Stand

546

Ceiling

673

LOGS

Wall

156

Wall

156

Wall

157

Wall

157

Path / Stand

558

Path / Stand

558

Wall

664

LYNAH

Pendant

119

Wall

184

MAGANDA

Table

012

Wall

210

MALU

Stand

576

Wall / Ceiling

644

Wall / Ceiling

679

MANA

Wall

150

Shade

151

Shade

151

Wall

152

Shade

153, 199

Shade

153, 199

Shade

153, 199

Wall

198

Wall

660

MEDO LED

Pendant/ceiling

090, 246

Pendant/ceiling

091, 247

Pendant/ceiling

092, 248

Pendant/ceiling


092, 248

Pendant/ceiling

092, 248


Pendant/ceiling

093, 249

Pendant/ceiling

094, 250, 321

Pendant/ceiling

095, 251, 321

Pendant/ceiling

095, 251, 321

Pendant/ceiling


095, 251

Pendant/ceiling

096, 252

Pendant/ceiling

096, 252

Pendant/ceiling

096, 252

Pendant/ceiling

097, 253

Pendant/ceiling

098, 254

Pendant/ceiling

099, 255

Pendant

100

Pendant

100

Pendant

101

Recessed

518, 519

Recessed

520, 521

MERADO FLOOD

Wall

189

3-Circuit Track

345

MOLAT

Pendant

532

Path / Stand

550

Wall

614

Ceiling

672

MYRA

Path / Stand	Wall	Wall	Wall	Wall / Ceiling	Wall / Ceiling
					
583	653	671	671	690	690

NAUTILUS

Spike	Spike	Spike	Spike	Spot	Spot	Spot
						
588	588	589	589	595	597	597

Spot	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling
			
597	688	689	689

NOBLO

Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	3-Circuit Track	1-Circuit Track	1-Circuit Track	Low-voltage cable system
						
297	297	297	346	386	396	424

OCCULDAS

Design:
David Morgan

Ceiling	Ceiling	Ceiling	Ceiling	Recessed	Recessed	Recessed fitting
						
262	263	263	263	469	469	469

ONE

Pendant	Pendant	Pendant	Wall	Wall
				
103	103	103	140	140

OPEN GRILL

Pendant	Pendant	Wall / Ceiling
		
116	116	329

PARA CONE

Pendant  066

Pendant  066

Pendant  066

3-Circuit Track  344

3-Circuit Track  363


1-Circuit Track  389

1-Circuit Track  400

PHELIA

Design:
Markus Becker

Table  026

Floor stand  026

Pendant  056

Pendant  057

Pendant  057

Pendant  057

Wall  203

PHOTONIA

Pendant  532

Table  541

Path / Stand  547

Wall  614

Ceiling  672

PLASTRA

Pendant 048

Pendant  049

Pendant  049

Pendant  070

Wall 137

Wall  137

Wall  154

Wall  155

Wall 159

Wall  159

Wall 170

Wall  174

Wall 174

Wall  175

Wall  180

Wall  180

Wall 180

Ceiling  240

Ceiling  240

Ceiling 240

Ceiling  272

Ceiling 272

Ceiling 273

Ceiling 273

Recessed 453

Recessed 453

P-LIGHT

Wall / Ceiling

740

Wall / Ceiling

741

Recessed

742

Wall / Ceiling

743

POLE PARC

Path / Stand

556

Path / Stand

556

Path / Stand

556

Wall

631

Wall

657

Ceiling

675

PURI

Wall / Ceiling

303

Wall / Ceiling

303

Wall / Ceiling

303

Wall / Ceiling

303

3-Circuit Track

350

3-Circuit Track

351

1-Circuit Track

386


1-Circuit Track


387

1-Circuit Track

388

Q-LINE

Pendant

113

Pendant

113

Pendant

114

Pendant

114

Wall

221

Ceiling

259

Ceiling

259

QUAD

Wall

158, 658

Wall

158, 658

Wall

183, 646

Path / Stand

579

QUADRASYL

Path / Stand

575

Wall / Ceiling

645

Wall / Ceiling

645

RASCALI

Path / Stand

565

Wall

634

ROTOBALL

Pendant

080

Pendant

080

Pendant

080

Ceiling

260

Ceiling

260

Pendant

533

Pendant

533

Stand

538

Stand

538

Stand

538

ROX

Wall

178, 630

Wall

178, 656

Ceiling

266, 676

Path / Stand

553

Path / Stand

553

Path / Stand

553

Ceiling

676

Ceiling

676

SENSER

Wall / Ceiling

324

Wall / Ceiling

324

Wall / Ceiling

324

Wall / Ceiling

325

Wall / Ceiling

325

Wall / Ceiling

325

Recessed

510

Recessed

510

Recessed

510

Recessed

511

Recessed

511

Recessed

511

SIGHT LED

Wall / Ceiling

328

Wall / Ceiling

328

3-Circuit Track

337

3-Circuit Track

349

3-Circuit Track

362

SITRA

Path / Stand



582

Spike



591

Spike



591

Wall



629

Wall



629

Wall



654

Wall



654

Wall



663

Wall



663

Ceiling



674

Wall / Ceiling



690

SLOTS

Path / Stand



563

Path / Stand



563

Wall



616

SOPRANA

Pendant



082

Wall



147

Wall



149

Ceiling



237

SPOT E27

Wall



225

Wall / Ceiling



282

3-Circuit Track



342

1-Circuit Track



388

SQUARE

Path / Stand



559

Path / Stand



559

Path / Stand



559

Wall



620

Wall



620

Wall



657

Ceiling



677

Ceiling



677

STRUCTEC

3-Circuit Track  336

3-Circuit Track  356

3-Circuit Track  356

3-Circuit Track  356

3-Circuit Track  357

1-Circuit Track  398

SUPROS

Pendant  125

Ceiling  277

3-Circuit Track  355

Recessed  506

Recessed  507

SUPROS 78

Pendant  124

Wall  179

Ceiling  277

3-Circuit Track  354

Recessed 504

Recessed  505

TEC KALU

Wall / Ceiling  268

Wall / Ceiling  268

3-Circuit Track  352


3-Circuit Track  352

TENORA

Wall  191

Ceiling  237

THEO

Wall  161

Path / Stand  578

Path / Stand  578

Wall  650

Wall  665

Ceiling  678

TONGA

Pendant 077

1-Circuit Track 400

Easytec® II  414

TOTHEE

Wall / Ceiling  287

2-Circuit Track  378

TRAPECCO

Path / Stand



576

Wall



644

TRUST

Path / Stand



551

Path / Stand



551

Wall



619

VINCELLI D

Table



012

Pendant



053

Wall



223

Wall



223

WORKLIGHT

Stand


030

Stand




031

Pendant



120

Pendant



121


1000681 617
1000683 549

Information: You will find the 7-digit item number from page 906 onwards

111000
111260 444
111262 444
111290 443
111292 443
111360 485
111361 485
111362 486
111380 487
111381 487
111382 487
111482 645
111710 484
111711 484
111716 484
111720 484
111721 484
111726 484
111830 861
111831 861
111832 861
111833 861
111850 860
111860 860
111861 860
111862 860

112000
112161 450
112162 450
112165 450
112221 450
112222 450
112225 450
112240 450
112242 450
112471 451
112474 451
112682 512
112692 513
112702 513
112720 451
112721 451
112726 451
112731 444
112732 444
112771 443
112772 443
112780 443
112781 443
112910 473
112911 473

113000
113110 473
113111 473
113140 471
113141 471
113150 471
113151 471
113160 471
113161 471
113170 472
113171 472
113260 444
113262 444
113290 443
113292 443
113440 483
113441 483
113446 483
113450 483
113451 483
113456 483
113490 485
113491 485
113492 486
113510 485
113511 485
113512 486
113540 487
113541 487
113550 487
113830 487
113840 487
113841 487
113870 492
113871 492
113876 492
113880 492
113881 492
113886 492
113890 493
113891 493
113896 493
113900 492
113901 492
113906 492
113910 492
113911 492
113916 492
113920 493
113921 493
113926 493
113930 271
113931 271
113936 271
113940 271
113941 271
113946 271
113951 489
113956 489
113961 489
113966 489
113970 488
113971 488
113976 488

114000
114102 125
114104 125
114110 506
114111 506
114120 507
114121 507
114130 277
114131 277
114160 506
114161 506
114170 507
114171 507
114180 277
114181 277
114220 494
114221 494
114230 494
114231 494
114240 495
114241 495
114250 495
114251 495
114260 495
114261 495
114270 495
114271 495
114280 495
114281 495
114290 495
114291 495
114380 490
114381 490
114386 490
114390 490
114391 490
114396 490
114400 488
114401 488
114406 488
114420 467, 711
114421 467, 711
114426 467, 711
114430 467, 711
114431 467, 711
114436 467, 711
114440 465, 709
114441 465, 709
114450 465, 709
114451 465, 709
114460 708
114461 708
114470 708
114471 708
114480 458
114481 458
114490 458
114491 458
114500 459
114501 459

115000
115011 501
115014 501
115104 501
115114 501
115151 501
115152 501
115183 502
115193 502
115203 503
115213 503
115223 503
115233 503
115243 503
115253 503
115304 500
115314 500
115351 500
115352 500
115414 500
115510 496
115511 496
115516 496
115520 496
115521 496
115526 496
115530 496
115531 496
115536 496
115540 497
115541 497
115546 497
115550 497
115551 497
115556 497
115600 501
115624 501
115634 501
115700 498
115701 498
115706 498
115710 498
115711 498
115716 498
115720 498
115721 498
115726 498
115730 499
115731 499
115736 499
115740 499
115741 499
115746 499

116000
116302 124
116304 124
116310 504
116311 504
116320 505
116321 505
116330 277
116331 277
116340 179
116341 179

117000
117100 274
117101 274
117110 274
117111 274
117120 275
117121 275
117130 275
117131 275
117160 276
117161 276
117180 276
117181 276
117311 469
117321 263
117331 469
117341 469
117351 262
117361 263
117381 263

118000
118110 506
118111 506
118120 507
118121 507
118130 277
118131 277
118160 506
118161 506
118170 507
118171 507
118180 277
118181 277

132000
132020 283
132021 283
132024 283

132600 040
132601 040
132605 040
132610 040
132611 040
132615 040
132620 040
132621 040
132625 040
132650 036
132651 036
132660 044
132661 044
132662 044
132670 858
132671 858
132680 858
132681 858
132690 037
132691 037
132832 542
132835 542

133000
133001 066
133005 066
133009 066
133011 066
133015 066
133019 066
133050 066
133060 066
133070 066
133100 125
133101 125
133110 125
133111 125
133120 124
133121 124
133140 125
133141 125
133150 125
133151 125
133300 056
133310 057
133320 057
133330 057
133341 068
133351 068
133444 077
133464 077
133481 050
133482 050
133483 050
133489 050
133490 050
133491 050
133493 050
133499 050
133840 100
133841 100
133850 100
133851 100
133881 061
133886 061
133887 061
133891 061
133896 061
133897 061

134000
134001 075
134011 075
134323 315
134333 315
134343 315

135000
135020 090, 246
135021 090, 246
135024 090, 246
135026 090, 246
135070 091, 247
135071 091, 247
135074 091, 247
135076 091, 247
135120 092, 248
135121 092, 248
135124 092, 248
135126 092, 248
135170 093, 249
135171 093, 249
135174 093, 249
135176 093, 249
135250 067
135251 067
135254 067

138000
138980 429, 847
138981 429, 847
138982 429, 847
138990 429, 847
138991 429, 847
138992 429, 847

139000
139004 428
139006 429
139024 428
139026 428
139030 428
139031 428
139040 428
139041 428
139050 428
139051 428
139060 429
139061 429
139070 420
139071 420
139072 420
139080 420
139081 420
139082 420
139090 421
139091 421
139092 421
139100 421
139101 421
139102 421
139110 423
139111 423
139112 423
139120 425
139121 425
139122 425
139130 422
139131 422
139132 422

140000
140200 378
140201 378
140210 378
140211 378
140221 378
140240 378
140241 378
140243 378
140250 378
140251 378
140260 378
140261 378

143000
143010 404
143011 404
143012 404
143020 404
143021 404
143022 404
143030 405
143031 405
143032 405
143040 405
143041 405
143042 405
143050 405
143051 405
143052 405
143060 405
143061 405
143062 405
143070 405
143071 405
143072 405
143080 405
143081 405
143082 405
143090 405
143091 405
143092 405
143100 405
143101 405
143102 405
143110 405
143111 405
143112 405
143120 040
143121 040
143124 040
143130 405
143131 405
143132 405
143151 405
143152 402
143160 405
143161 405
143162 405
143169 405
143170 402
143171 402
143172 402
143190 386
143191 386
143194 386
143221 402
143230 402
143231 402
143241 402
143251 402
143261 402
143271 402
143281 402
143291 402
143350 395
143351 395
143354 395
143380 405
143381 405
143382 405
143390 388
143391 388
143392 388
143430 391
143431 391
143432 391
143440 391
143441 391
143442 391
143450 387
143451 387
143454 387
143540 395
143541 395
143544 395
143560 398
143561 398
143580 397
143581 397
143594 400
143620 399
143621 399
143731 395
143801 393
143804 393
143811 392
143814 392
143930 401
143931 401
143932 401
143941 397
143951 397
143960 399
143961 399
143964 399
143990 400
143991 400

144000
144010 388
144011 388
144013 388
144019 388
144200 387
144201 387
144204 387

145000
145100 369
145102 369
145200 369
145202 369
145300 369
145302 369
145510 370
145514 370
145520 370
145524 370
145530 370
145534 370
145551 373
145560 370
145564 370
145580 371
145581 371
145584 371
145590 371
145594 371
145600 371
145604 371

145630 370
145634 370
145640 370
145644 370
145660 370
145664 370
145670 370
145674 370
145680 371
145684 371
145690 371
145694 371
145700 371
145710 371
145714 371
145720 371
145724 371
145730 371
145734 371
145830 371
145834 371
145990 040
145994 040

146000
146000 026
146001 026
146010 026
146011 026
146111 015
146242 446
146252 446
146260 446
146332 225
146452 224
146472 228
146479 861
146482 224
146512 209
146680 208
146682 208
146692 207
146700 206
146701 206
146704 206
146800 219
146801 219
146804 219
146942 260

147000
147301 304
147306 304
147311 304
147316 304
147321 304
147326 304
147360 303
147361 303
147370 303
147371 303
147380 303
147381 303
147411 295
147412 295
147414 295
147441 301
147442 301
147443 301
147444 301
147529 145
147550 283
147551 283
147559 283
147566 162
147821 171
147823 171
147826 171
147841 171
147843 171
147846 171

148000
148001 240
148002 240
148004 272
148005 240
148010 159
148012 180
148013 180
148015 159
148016 174
148018 155
148019 137
148040 049
148042 070
148051 272
148052 273
148053 273
148060 175
148061 180
148062 170
148070 453
148071 453
148091 137
148540 203

149000
149060 291
149061 291
149070 291
149071 291
149380 077
149381 071
149385 071
149387 071
149388 071
149431 142
149452 196
149471 163
149472 163
149511 163
149512 163
149752 211
149762 211
149772 211
149782 210

151000
151040 050
151041 050
151049 050
151271 167
151275 167
151282 214
151311 166
151315 166
151320 156
151321 156
151325 156
151410 168
151411 168
151416 168
151450 168
151451 168
151456 168
151511 267
151514 267
151531 267, 284
151534 267, 284
151553 212
151561 185
151564 185
151591 145
151600 173
151601 173
151610 173
151611 173
151710 172
151711 172
151740 172
151741 172
151781 164
151786 164
151791 164
151796 164
151800 177
151801 177
151803 177
151804 177
151810 265
151811 265
151813 265
151814 265
151820 290
151821 290
151830 290
151831 290
151840 177
151850 070
151851 070
151853 070
151854 070
151950 441
151951 441
151952 441
151960 441
151961 441
151962 441

152000
152010 289
152011 289
152013 289
152020 289
152021 289
152023 289
152101 266
152200 342
152201 342
152204 342
152230 351
152231 351
152232 351
152240 351
152241 351
152242 351
152320 343
152321 343
152324 343
152330 286
152331 286
152340 205
152341 205
152360 073
152361 073
152370 073
152371 073
152380 447
152381 447
152420 346
152421 346
152430 346
152431 346
152600 359
152601 359
152610 358
152611 358
152614 358
152620 355
152621 355
152640 343
152641 343
152644 343
152660 354
152661 354
152680 355
152681 355
152750 353
152751 353
152754 353
152760 353
152761 353
152764 353
152780 353
152781 353
152784 353
152790 353
152791 353
152794 353
152800 355
152801 355
152810 355
152811 355
152960 346
152961 346
152980 349
152981 349

153000
153102 344
153112 363
153130 363
153131 363
153140 363
153141 363
153420 360
153421 360
153424 360
153560 350
153561 350
153564 350
153580 358
153581 358
153584 358
153600 359
153810 361
153811 361
153814 361
153850 360
153851 360
153854 360

155000
155100 200
155101 200
155104 200
155114 200
155152 314
155156 314
155180 317
155185 317
155206 169
155216 169

155221 ... 162
155228 ... 162
155236 ... 316
155290 ... 085
155300 ... 084
155340 ... 149
155372 ... 237
155373 ... 237
155380 ... 084
155462 ... 082
155463 ... 082
155471 ... 066
155475 ... 066
155479 ... 066
155490 ... 020
155492 ... 020
155500 ... 062
155510 ... 062
155511 ... 062
155520 ... 062
155530 ... 062
155531 ... 062
155540 ... 020
155550 ... 234
155551 ... 234
155552 ... 234
155570 ... 047
155582 ... 019, 021, 047, 235
155583 ... 019, 021, 047, 235
155592 ... 019, 021, 047, 235
155643 ... 149
155650 ... 082
155651 ... 024
155652 ... 024
155670 ... 194
155673 ... 194
155714 ... 076
155752 ... 143
155780 ... 018
155785 ... 018
155790 ... 018
155795 ... 018
155861 ... 147
155870 ... 083
155871 ... 083
155900 ... 065
155901 ... 065
155910 ... 065
155911 ... 065
155920 ... 065
155921 ... 065
155930 ... 065
155931 ... 065
155960 ... 055
155970 ... 055

156000
156020 ... 191
156021 ... 191
156050 ... 237
156051 ... 237
156100 ... 022
156111 ... 019, 021, 022, 047, 235
156113 ... 019, 021, 022, 047, 235
156122 ... 019, 021, 022, 047, 235
156141 ... 018, 020, 046
156143 ... 018, 020, 046
156152 ... 018, 020, 046
156268 ... 053
156420 ... 288
156421 ... 288
156500 ... 292
156501 ... 292
156510 ... 292
156511 ... 292
156530 ... 447
156531 ... 447

157000
157671 ... 116
157701 ... 080
157901 ... 030
157905 ... 030

158000
158400 ... 072
158401 ... 072
158410 ... 072
158411 ... 072
158663 ... 522
158664 ... 522
158723 ... 107
158724 ... 107
158733 ... 107
158734 ... 107
158853 ... 106
158854 ... 106
158941 ... 258
158951 ... 258
158961 ... 258
158969 ... 258
158971 ... 258

159000
159140 ... 117
159141 ... 117
159144 ... 117
159210 ... 118
159211 ... 118
159214 ... 118
159220 ... 118
159221 ... 118
159224 ... 118
159230 ... 118
159231 ... 118
159234 ... 118

160000
160900 ... 108
160901 ... 108
160904 ... 108

161000
161271 ... 457
161281 ... 457
161291 ... 457
161301 ... 457
161461 ... 241
161464 ... 241

163000
163020 ... 318
163021 ... 319
163030 ... 319
163031 ... 319

165000
165100 ... 129
165160 ... 129
165221 ... 129
165222 ... 129
165350 ... 128
165356 ... 128
165358 ... 128
165359 ... 128
165390 ... 080
165400 ... 080
165410 ... 080

170000
170401 ... 229
170402 ... 229

172000
172010 ... 380
172011 ... 380
172020 ... 380
172021 ... 380
172030 ... 380
172031 ... 380
172040 ... 381
172041 ... 381
172050 ... 381
172051 ... 381
172060 ... 381
172061 ... 381
172070 ... 381
172071 ... 381
172080 ... 381
172081 ... 381
172090 ... 381
172091 ... 381
172100 ... 381
172101 ... 381
172110 ... 381
172111 ... 381
172120 ... 381
172121 ... 381
172134 ... 381
172145 ... 381
172190 ... 381
172191 ... 381
172200 ... 381
172201 ... 381
172220 ... 381
172221 ... 381

175000
175010 ... 365
175014 ... 365
175020 ... 365
175024 ... 365
175030 ... 365
175034 ... 365
175040 ... 367
175044 ... 367
175050 ... 367
175054 ... 367
175060 ... 341, 367
175064 ... 367
175070 ... 367
175074 ... 367
175080 ... 367
175084 ... 367
175090 ... 367
175094 ... 367
175100 ... 367
175104 ... 367
175110 ... 367
175114 ... 367
175120 ... 367
175124 ... 367
175130 ... 367
175134 ... 367
175140 ... 367
175144 ... 367
175150 ... 367
175154 ... 367
175160 ... 341, 367
175164 ... 367
175180 ... 367
175184 ... 367
175190 ... 341, 367
175194 ... 367
175200 ... 367
175204 ... 367
175210 ... 367
175214 ... 367

176000
176080 ... 356
176081 ... 356
176090 ... 356
176091 ... 356

181000
181530 ... 429
181531 ... 429
181532 ... 429

184000
184000 ... 415
184002 ... 415
184004 ... 415
184010 ... 415
184012 ... 415
184020 ... 415
184022 ... 415
184030 ... 415
184032 ... 415
184040 ... 415
184042 ... 415
184060 ... 415
184062 ... 415
184071 ... 412
184140 ... 415
184142 ... 415
184170 ... 415
184172 ... 415
184290 ... 415
184292 ... 415
184300 ... 415
184302 ... 415
184330 ... 415
184332 ... 415
184440 ... 411
184450 ... 411
184452 ... 411
184530 ... 414
184534 ... 414
184560 ... 410
184580 ... 413
184590 ... 414
184620 ... 412
184624 ... 412
184630 ... 412
184634 ... 412
184690 ... 413

185000
185002 ... 415
185012 ... 415
185020 ... 415
185032 ... 415
185042 ... 415
185062 ... 415
185142 ... 415
185172 ... 415
185294 ... 415
185302 ... 415
185440 ... 411
185450 ... 411

185580 413
185582 413
185590 414
185592 414
185622 412
185632 412
185692 413

186000
186015 433
186020 433
186042 432
186272 432
186300 429
186301 429
186302 429
186310 429
186311 429
186312 429
186330 429
186331 429
186332 429
186340 429
186341 429
186342 429
186350 429
186351 429
186352 429
186360 429
186361 429
186362 429
186640 429
186641 429
186642 429
186762 433
186772 433
186952 433

188000
188500 431
188510 431
188520 431
188530 430
188550 430

210000
210060 859
210061 859
210064 859

213000
213440 776
213441 776
213444 776
213450 777
213451 777
213454 777
213459 777
213470 772
213471 772
213474 772
213480 773
213481 773
213484 773
213488 771, 773
213489 773
213511 774
213514 774
213521 775
213524 775
213529 775
213620 770
213621 770
213624 770
213630 770
213631 770
213634 770
213642 771
213643 771
213650 771
213651 771
213654 771
213821 769
213822 767, 769
213862 767
213874 767
213911 768
213914 768
213931 769
213934 769
213939 769
213950 764
213951 764
213954 764
213962 765
213970 765
213971 765
213974 765

214000
214100 762
214101 762
214102 762
214350 760
214351 760

220000
220000 861

227000
227000 864
227090 721
227092 721
227140 846
227160 846
227174 622
227176 622
227185 633
227194 635
227195 635
227198 635
227219 538
227220 538
227221 538
227410 588
227418 588
227461 716
227462 716
227504 590
227505 590
227507 590
227508 590
227550 537
227600 719
227604 719
227680 718
227684 718
227700 670
227701 670
227734 608
227744 608
227922 551

228000
228050 533
228051 533
228100 551
228110 551
228120 619
228130 551
228210 721
228214 721
228240 721
228332 717
228342 717
228370 730
228411 722
228412 722
228430 729
228434 729
228505 675
228511 628
228515 628
228521 656
228525 656
228545 577
228555 599
228560 599
228712 548
228722 548
228725 864
228726 864
228730 864
228752 557
228753 547
228754 558
228771 654
228775 654
228776 654
228922 548
228925 548
228935 549
228945 549
228960 540
228961 540
228965 540

229000
229020 545
229021 545
229022 545
229050 554
229054 554
229057 554
229059 554
229062 698
229071 682
229072 682
229075 682
229081 682
229084 682
229085 682
229090 595
229100 597
229110 701
229162 552
229172 552
229182 619
229200 730
229230 730
229234 730
229260 864
229262 865
229269 864
229320 729
229324 729
229374 729
229381 733
229383 733
229410 571
229411 571
229420 560
229421 560
229422 546
229423 544
229430 544
229431 544
229432 544
229481 609
229482 609
229521 650
229524 650
229525 650
229531 665
229532 665
229535 665
229551 678
229554 678
229555 678
229561 650
229564 650
229565 650
229571 665
229574 665
229575 665
229581 678
229584 678
229585 678
229664 669
229665 669
229694 668
229695 668
229702 698
229740 589
229741 597
229931 684
229935 684
229941 684
229945 684
229951 684
229955 684
229961 680
229965 680
229971 680
229975 680

230000
230030 643
230034 643
230044 627
230045 627
230060 550
230061 554
230063 554
230066 554
230069 554
230084 627
230085 627
230090 573
230100 734
230110 734
230170 719
230174 719
230355 629
230365 654
230435 543
230444 623
230445 623
230465 547
230655 626
230657 626

231000
231010 184, 633
231012 184, 633
231015 184, 633

231035 589
231045 689
231055 689
231072 605
231092 605
231205 620
231215 557
231225 557
231230 557
231231 575
231233 562
231234 548
231235 570
231245 533
231305 575
231315 642
231351 641
231355 641
231360 541
231361 673
231370 570
231371 570
231410 561
231411 561
231420 562
231440 570
231455 563
231457 563
231465 618
231475 555
231505 582
231515 690
231525 591
231535 591
231541 674
231545 674
231585 618
231595 555
231602 551
231612 551
231672 593
231682 593
231745 644
231765 576
231805 616
231807 616
231815 563
231817 563
231835 572
231845 572
231849 572
231855 564
231865 636
231954 609
231955 609
231960 609
231961 609

232000
232045 614
232055 672
232065 532
232075 547
232085 547
232095 541
232101 664
232104 664
232105 664
232115 558
232119 558
232125 558
232135 568
232145 568
232155 566
232165 566
232175 567
232185 567
232195 566
232285 645
232294 575
232295 575
232405 637
232415 637
232431 183, 646
232435 183, 646
232441 158, 658
232445 158, 658
232451 659
232455 659
232461 183, 646
232465 183, 646
232471 158, 658
232475 158, 658
232481 662
232485 662
232491 661
232495 661
232497 661
232531 663
232535 663
232537 663
232800 600
232810 600
232820 601
232830 601
232840 603
232850 603
232860 603
232864 603
232870 603
232874 603
232880 603
232884 603
232890 603
232894 603
232905 640
232915 640

233000
233094 690
233095 690
233104 690
233105 690
233114 653
233115 653
233124 671
233125 671
233134 671
233135 671
233144 583
233145 583
233164 583
233165 583
233184 583
233185 583
233211 628
233214 653
233215 628
233225 629
233231 653
233235 653
233241 691
233245 691
233251 691
233255 691
233275 583
233285 583
233302 655
233312 655
233407 545
233417 545
233427 560
233437 560
233447 571
233457 571
233500 725
233520 725
233530 725
233540 723
233550 723
233570 598
233571 598
233580 598
233582 598
233601 699
233605 699
233611 699
233615 699
233621 699
233625 699
233635 700
233639 700
233650 701
233660 701
233672 727
233676 727
233692 726
233696 726
233712 727
233716 727
233732 727
233736 727
233790 727
233791 727
233792 720
233795 727
233796 727
233797 720

234000
234205 607
234215 607
234225 607
234235 607
234245 607
234255 607
234340 600
234344 604
234350 600
234354 604
234401 028, 550
234411 028, 550
234421 028, 550
234430 028
234431 028
234441 028
234501 666
234504 666
234505 666
234511 666
234514 666
234515 666
234521 651
234524 651
234525 651
234531 678
234534 678
234535 678

240000
240000 740
240002 741
240004 743
240006 742
240007 740
240008 741
240009 743
240010 743
240020 740
240021 741
240022 743
240024 742

410000
410861 865
410865 865

451000
451105 846
451301 846

461000
461050 848
461060 848
461157 848
461217 848

464000
464030 857
464031 856
464032 855
464091 856
464107 856
464108 856
464109 856
464140 852
464142 853
464143 441
464144 852
464168 857
464170 857
464200 857
464804 853

470000
470500 850
470502 850
470505 849
470506 850
470507 850
470540 851
470541 850
470542 850
470544 850
470545 850
470546 850
470547 851
470548 851
470549 851
470550 849
470670 829
470671 829
470672 829
470674 830, 833
470675 830, 833
470677 829
470680 833
470681 807, 833
470682 807, 833
470683 807, 833
470800 838
470803 840
470804 840
470806 840
470807 840
470808 839

470812 838
470821 839
470822 839
470823 839
470824 839

508000
508211 240

548000
548014 734
548021 734
548028 169

550000
550073 881
550074 881
550082 881
550092 881
550412 797, 805
550413 798, 799, 803
550415 797, 805
550416 798, 799, 803
550560 797, 798, 799, 803, 805
550570 798, 799
550571 797

551000
551242 869
551243 869
551252 871
551253 871
551372 881
551402 874
551412 874
551532 876
551602 875
551612 875
551862 432
551882 873
551893 228
551902 871
551912 873
551933 282
551944 127

552000
552120 799
552121 799
552122 799
552273 812
552422 797
552423 797
552425 797
552442 798
552443 798
552445 798
552453 810, 830
552460 810
552461 810
552462 810
552463 810
552482 803
552483 803
552485 803
552522 805
552523 805
552525 805
552649 809
552650 809
552651 809
552652 809
552653 809
552692 795
552693 795
552694 795
552702 793
552703 793
552704 793
552712 793
552713 793
552714 793
552722 793
552723 793
552724 793
552727 793
552732 783
552733 783
552734 783
552742 783
552743 783
552744 783
552752 783
552753 783
552754 783
552762 783
552763 783
552764 783
552772 782
552773 782
552774 782
552782 782
552783 782
552784 782
552792 783
552793 783
552794 783
552802 787
552803 787
552804 787
552812 787
552813 787
552814 787
552822 787
552823 787
552824 787
552832 787
552833 787
552834 787
552852 787
552853 787
552854 787
552863 807, 834
552883 807, 834

560000
560122 870
560142 653
560143 267
560161 020
560222 875
560231 874
560232 874
560233 874
560234 874
560302 868
560332 868
560352 868
560362 077
560372 875
560402 876
560422 876
560432 018
560463 881
560473 881
560542 870
560552 870
560603 070
560622 875
560624 875
560662 875
560702 873
560704 873
560712 874
560714 874
560722 874
560724 874
560732 874
560734 874
560741 879
560752 018
560762 547

570000
570532 118
570672 010

631000
631300 815
631301 815
631302 815
631303 815
631304 815
631305 815
631313 815
631315 815
631317 815
631323 815
631325 815
631327 815
631337 327
631339 327
631347 327
631349 327
631501 813
631502 813
631505 813
631510 813
631512 813
631520 813
631521 813
631522 813
631523 813

900000
900011 597

955000
955135 860

961000
961034 859
961037 859
961250 859
961270 859
961271 859
961276 859
961370 859
961371 859
961376 859

977000
977399 773

1000100
1000127 306
1000128 306
1000129 306
1000130 306
1000131 306
1000132 306
1000133 307
1000134 307
1000135 307
1000136 307
1000137 307
1000138 307

1000300
1000324 203
1000325 203
1000326 203
1000327 161
1000328 161
1000329 161
1000330 161
1000331 665
1000332 266, 676
1000333 178, 630
1000334 178, 656
1000335 657
1000336 620
1000337 677
1000338 676
1000339 676
1000340 183, 652
1000341 183, 652
1000342 183, 652
1000343 559
1000344 559
1000345 559
1000346 559
1000384 720
1000386 517
1000387 517
1000388 517
1000389 517
1000390 517
1000391 517
1000398 532

1000400
1000400 537
1000412 119
1000413 119
1000414 184
1000415 184
1000416 559
1000417 559
1000418 559
1000422 186
1000423 186
1000424 287
1000425 287
1000426 287
1000427 287
1000433 059
1000434 058
1000435 058
1000436 058
1000437 238
1000438 059
1000439 058
1000440 058
1000441 058
1000442 238
1000443 238
1000445 238
1000446 657
1000447 675
1000448 631
1000449 551
1000457 749
1000458 749
1000459 749
1000460 749

1000461 749
1000462 749
1000463 749
1000464 749
1000465 749
1000466 750
1000467 750
1000468 750
1000469 750
1000470 750
1000471 750
1000472 751
1000473 751
1000474 751
1000475 751
1000476 751
1000477 751
1000478 751
1000479 751
1000480 751
1000481 751
1000482 751
1000483 751
1000484 751
1000485 751
1000486 751
1000487 750
1000488 750
1000489 750
1000490 754
1000491 754
1000492 754
1000493 754
1000494 754
1000495 754
1000496 754
1000497 754
1000498 754
1000499 753

1000500
1000500 753
1000501 753
1000502 753
1000503 753
1000504 753
1000505 753
1000506 753
1000507 753
1000508 753
1000509 753
1000510 753
1000511 753
1000512 753
1000513 753
1000514 753
1000515 753
1000516 753
1000517 753
1000518 753
1000519 753
1000520 753
1000521 753
1000522 753
1000523 753
1000524 753
1000525 753
1000526 753
1000527 753
1000528 753
1000529 753
1000530 753
1000531 753
1000532 753
1000533 753
1000534 753
1000535 757
1000536 757
1000537 757
1000538 755
1000539 755
1000540 755
1000541 755
1000542 755
1000543 755
1000544 755
1000545 755
1000546 755
1000547 755
1000548 755
1000549 755
1000550 755
1000551 755
1000552 755
1000553 755
1000554 755
1000555 755
1000556 756
1000557 756
1000558 756
1000559 756
1000560 756
1000561 756
1000562 756
1000563 756
1000564 756
1000565 756
1000566 756
1000567 756
1000568 756
1000569 756
1000570 756
1000571 755
1000574 443
1000575 443
1000576 444
1000577 444
1000579 019, 021, 047, 235
1000580 019, 021, 047, 235
1000581 036
1000587 668
1000588 668

1000600
1000613 150
1000614 152
1000615 198
1000616 151
1000618 151
1000619 151
1000621 153, 199
1000623 153, 199
1000624 153, 199
1000626 153, 199
1000628 153, 199
1000629 153, 199
1000631 266
1000634 167
1000635 167
1000636 167
1000637 167
1000638 156
1000639 156
1000640 156
1000650 171
1000651 171
1000652 171
1000653 726
1000654 727
1000655 720
1000656 357
1000657 357
1000658 357
1000665 546
1000666 546
1000668 221
1000669 221
1000670 221
1000675 177
1000676 177
1000677 354
1000678 354
1000679 355
1000680 355
1000681 617
1000682 549
1000683 549
1000684 873
1000685 259
1000686 259
1000687 259
1000688 259
1000689 259
1000690 259
1000691 259
1000692 259
1000693 259
1000694 259
1000695 259
1000696 259

1000700
1000700 865
1000701 865
1000702 304
1000703 304
1000704 304
1000707 344
1000708 344
1000709 363
1000710 363
1000711 397
1000712 397
1000713 399
1000714 454
1000715 454
1000716 454
1000717 454
1000718 455
1000719 455
1000720 455
1000721 455
1000722 010
1000723 010
1000724 010
1000725 098, 254
1000726 098, 254
1000727 098, 254
1000729 204
1000730 204
1000731 204
1000732 204
1000733 227
1000734 227
1000735 599
1000736 580
1000743 139
1000745 139
1000746 139
1000748 139
1000760 556
1000761 556
1000762 556
1000763 022
1000764 022, 044
1000769 359
1000773 044
1000777 215
1000778 215
1000780 215
1000781 215
1000782 048
1000783 256
1000784 256
1000785 256
1000786 256
1000791 515
1000792 515
1000793 515
1000794 515
1000795 513
1000796 513
1000797 634
1000799 565

1000800
1000801 565
1000807 265
1000808 265
1000809 074
1000810 074, 265
1000811 074, 265
1000812 074, 265
1000813 074
1000814 074
1000816 216
1000818 216
1000820 614
1000821 532
1000822 550
1000823 672
1000824 151
1000825 153, 199
1000826 835
1000827 130
1000828 130
1000833 705
1000834 620
1000835 677
1000855 092, 248
1000856 092, 248
1000857 092, 248
1000864 092, 248
1000865 092, 248
1000866 092, 248
1000868 862
1000869 862
1000870 862
1000871 862
1000872 862
1000873 862
1000874 863
1000875 863
1000876 863
1000877 863
1000878 863
1000879 863
1000880 670
1000881 670
1000882 670
1000886 299
1000887 299
1000888 299
1000889 299
1000890 299
1000891 299

1000892 ... 299
1000893 ... 299
1000894 ... 299
1000895 ... 299
1000896 ... 299
1000897 ... 299

1000900
1000906 ... 452
1000907 ... 452
1000908 ... 452
1000909 ... 860
1000910 ... 155
1000911 ... 155
1000914 ... 474
1000915 ... 474
1000916 ... 474
1000917 ... 474
1000918 ... 130
1000926 ... 114
1000927 ... 114
1000928 ... 114
1000929 ... 114
1000930 ... 114
1000931 ... 114
1000932 ... 114
1000933 ... 114
1000934 ... 114
1000935 ... 114
1000936 ... 114
1000937 ... 114
1000939 ... 873
1000940 ... 873
1000941 ... 873
1000942 ... 873
1000957 ... 047
1000974 ... 398
1000975 ... 398
1000976 ... 398
1000977 ... 398
1000978 ... 398
1000979 ... 398
1000980 ... 356
1000981 ... 356
1000982 ... 356
1000983 ... 356
1000984 ... 356
1000985 ... 356
1000986 ... 356
1000987 ... 356
1000988 ... 356
1000989 ... 356
1000990 ... 356
1000991 ... 356
1000992 ... 356
1000993 ... 356
1000994 ... 356
1000995 ... 356
1000996 ... 356
1000997 ... 356
1000998 ... 356
1000999 ... 356

1001000
1001000 ... 356
1001001 ... 356
1001002 ... 356
1001003 ... 356
1001009 ... 227
1001010 ... 227
1001015 ... 463, 711, 745
1001016 ... 463, 711, 745
1001017 ... 463, 711, 745
1001018 ... 463, 711, 745
1001019 ... 329
1001020 ... 329
1001028 ... 873
1001029 ... 873
1001030 ... 871
1001031 ... 877
1001032 ... 877
1001033 ... 877
1001035 ... 880
1001038 ... 880

1001100
1001114 ... 853
1001115 ... 853
1001132 ... 517
1001133 ... 517
1001136 ... 517
1001153 ... 838
1001155 ... 448
1001156 ... 448
1001157 ... 460, 706
1001161 ... 460, 706
1001165 ... 461, 707
1001166 ... 461, 707
1001167 ... 461, 707
1001168 ... 461, 707
1001169 ... 461, 707
1001170 ... 461, 707
1001171 ... 461, 707
1001172 ... 461, 707

1001200
1001217 ... 026
1001220 ... 048
1001221 ... 049
1001242 ... 872
1001243 ... 872
1001244 ... 872
1001245 ... 872
1001249 ... 857
1001250 ... 523
1001251 ... 523
1001252 ... 715
1001253 ... 715
1001254 ... 715
1001255 ... 715
1001256 ... 715
1001262 ... 715
1001263 ... 715
1001264 ... 464
1001265 ... 059
1001266 ... 058
1001267 ... 853
1001269 ... 348
1001270 ... 348
1001271 ... 174
1001272 ... 148
1001273 ... 148
1001274 ... 148
1001275 ... 148
1001276 ... 148
1001283 ... 328
1001284 ... 328
1001285 ... 328
1001286 ... 328
1001287 ... 328
1001288 ... 328
1001289 ... 349
1001290 ... 349
1001292 ... 349
1001293 ... 329
1001294 ... 329
1001295 ... 116
1001296 ... 116
1001297 ... 116
1001299 ... 220

1001300
1001300 ... 220
1001301 ... 220
1001303 ... 220
1001304 ... 220
1001305 ... 220
1001306 ... 113
1001307 ... 113
1001308 ... 113
1001309 ... 113
1001310 ... 113
1001312 ... 113
1001314 ... 687
1001315 ... 687
1001316 ... 687
1001317 ... 687
1001343 ... 104
1001344 ... 104
1001345 ... 104
1001346 ... 104
1001347 ... 104
1001348 ... 104
1001350 ... 058
1001351 ... 058
1001352 ... 378
1001354 ... 378
1001355 ... 378
1001357 ... 880
1001359 ... 714
1001367 ... 361
1001368 ... 361
1001369 ... 361
1001375 ... 365
1001376 ... 365
1001377 ... 365
1001378 ... 367
1001379 ... 367
1001380 ... 341, 367
1001381 ... 367
1001382 ... 367
1001383 ... 367
1001384 ... 367
1001385 ... 367
1001386 ... 367
1001387 ... 367
1001388 ... 367
1001389 ... 367
1001390 ... 341, 367
1001392 ... 367
1001393 ... 341, 367
1001394 ... 367
1001395 ... 367

1001400
1001400 ... 112
1001401 ... 112
1001402 ... 112
1001403 ... 112
1001404 ... 112
1001405 ... 112
1001406 ... 112
1001407 ... 112
1001408 ... 112
1001409 ... 112
1001410 ... 112
1001411 ... 112
1001419 ... 352
1001420 ... 352
1001421 ... 352
1001422 ... 352
1001423 ... 268
1001424 ... 268
1001425 ... 268
1001426 ... 268
1001427 ... 352
1001428 ... 352
1001429 ... 352
1001430 ... 352
1001431 ... 268
1001432 ... 268
1001433 ... 268
1001434 ... 268
1001435 ... 293
1001436 ... 293
1001447 ... 107
1001448 ... 107
1001449 ... 192
1001450 ... 192
1001451 ... 192
1001452 ... 192
1001453 ... 192
1001454 ... 192
1001460 ... 025
1001461 ... 025
1001462 ... 025
1001463 ... 025
1001464 ... 227
1001465 ... 227
1001466 ... 345
1001467 ... 345
1001468 ... 189
1001469 ... 189
1001470 ... 345
1001471 ... 345
1001472 ... 189
1001473 ... 189
1001474 ... 345
1001475 ... 345
1001476 ... 361
1001477 ... 361
1001478 ... 361
1001479 ... 361
1001480 ... 361
1001481 ... 361
1001482 ... 361
1001483 ... 361
1001484 ... 361
1001485 ... 392
1001486 ... 392
1001487 ... 392
1001488 ... 553
1001489 ... 553
1001490 ... 553
1001491 ... 553
1001492 ... 553
1001493 ... 553
1001494 ... 553
1001495 ... 286
1001496 ... 286

1001500
1001502 ... 012
1001503 ... 210
1001505 ... 257
1001506 ... 257
1001508 ... 257
1001509 ... 257
1001510 ... 369
1001511 ... 369
1001512 ... 369
1001513 ... 370
1001514 ... 370
1001515 ... 370
1001516 ... 370
1001517 ... 370

1001518 370
1001519 370
1001520 370
1001521 371
1001522 371
1001523 371
1001524 371
1001525 371
1001526 371
1001527 371
1001528 371
1001529 371
1001530 371
1001531 373
1001532 373
1001533 373
1001534 373
1001536 373
1001537 373
1001538 373
1001539 373
1001542 040
1001560 870
1001561 870
1001562 870
1001563 870
1001564 870
1001565 870
1001566 870
1001568 873
1001569 873
1001570 873
1001571 874
1001572 874
1001573 874
1001574 869
1001575 869

1001600
1001633 604
1001634 604
1001635 604
1001636 604
1001637 605
1001638 605
1001642 606
1001643 606
1001644 606
1001645 606
1001647 107
1001648 107
1001676 010
1001677 010
1001678 010
1001691 130
1001692 130

1001700
1001701 062
1001756 879
1001778 534
1001796 761
1001797 761
1001798 761
1001799 761

1001800
1001800 761
1001801 761
1001802 761
1001803 761
1001804 761
1001805 761
1001806 760
1001807 760
1001808 760
1001809 760
1001810 761
1001813 760
1001814 759
1001815 760
1001816 759
1001817 759
1001818 040
1001819 040
1001820 040
1001821 040
1001822 200
1001823 573
1001824 573
1001825 477
1001826 477
1001827 477
1001828 476
1001829 476
1001830 476
1001831 476
1001832 476
1001833 476
1001834 476
1001835 476
1001836 476
1001841 477
1001847 477
1001848 477
1001849 477
1001850 477
1001851 477
1001855 683
1001856 683
1001857 228
1001858 228
1001859 823, 848
1001860 393
1001861 392
1001862 396
1001863 396
1001864 396
1001865 346
1001866 346
1001867 346
1001868 387
1001869 387
1001870 387
1001871 351
1001872 351
1001873 351
1001874 388
1001875 388
1001876 388
1001877 094, 250, 321
1001878 095, 251
1001879 095, 251
1001880 095, 291
1001881 094, 250, 321
1001882 094, 250, 321
1001883 095, 251, 321
1001884 095, 251, 321
1001885 095, 251, 321
1001886 095, 251, 321
1001887 095, 251, 321
1001888 095, 251, 321
1001889 096, 252
1001890 097, 253
1001891 097, 253
1001892 097, 253
1001893 096, 252
1001894 096, 252
1001895 096, 252
1001896 096, 252
1001897 096, 252
1001898 096, 252
1001899 096, 252

1001900
1001900 096, 252
1001901 518
1001902 519
1001903 519
1001904 519
1001905 520
1001906 520
1001907 520
1001908 521
1001909 681
1001910 681
1001911 681
1001912 681
1001913 681
1001914 681
1001916 876
1001917 876
1001918 870
1001919 870
1001920 872
1001921 872
1001922 872
1001923 872
1001924 474
1001925 474
1001926 474
1001927 474
1001930 462, 705
1001931 462, 705
1001932 462, 705
1001933 462, 705
1001934 705
1001937 589
1001938 589
1001939 241
1001940 053
1001941 053
1001942 053
1001943 053
1001944 053
1001945 053
1001950 067
1001951 067
1001952 067
1001962 597
1001963 597
1001964 588
1001965 588
1001968 400
1001969 641
1001970 641
1001971 811
1001972 800
1001973 514
1001974 514
1001975 514
1001976 514
1001978 491
1001980 482
1001981 482
1001982 482
1001989 491
1001990 491
1001991 491
1001992 491
1001993 491
1001994 482
1001995 482
1001996 482
1001997 552
1001998 552
1001999 548

1002000
1002000 548
1002001 548
1002002 614
1002003 271
1002004 269
1002005 270
1002006 270
1002008 271
1002010 269
1002011 269
1002012 269
1002013 269
1002015 269
1002016 629
1002017 629
1002018 654
1002020 311
1002021 311
1002022 311
1002023 304
1002024 304
1002025 304
1002026 800
1002027 800
1002028 800
1002029 303
1002030 303
1002032 663
1002033 663
1002034 663
1002035 661
1002036 661
1002037 661
1002041 654
1002045 080
1002046 080
1002047 049
1002048 362
1002049 362
1002050 362
1002051 260
1002052 260
1002053 127
1002054 127
1002055 127
1002056 127
1002057 127
1002058 127
1002059 127
1002066 223
1002067 223
1002068 012
1002069 643
1002070 643
1002071 643
1002072 282
1002073 282
1002074 282
1002075 312
1002076 312
1002077 312
1002082 823, 853
1002097 822
1002098 466, 710
1002099 466, 710

1002100
1002100 ... 466, 710
1002101 ... 466, 710
1002102 ... 466, 710
1002103 ... 466, 710
1002104 ... 479
1002105 ... 479
1002106 ... 479
1002107 ... 479
1002108 ... 479
1002109 ... 479
1002110 ... 390
1002111 ... 390
1002113 ... 390
1002116 ... 208
1002117 ... 208
1002118 ... 208
1002119 ... 208
1002120 ... 449
1002122 ... 203
1002123 ... 878
1002124 ... 878
1002125 ... 878
1002126 ... 878
1002127 ... 878
1002128 ... 875
1002131 ... 155
1002132 ... 310, 825
1002133 ... 310, 825
1002134 ... 310, 825
1002135 ... 868
1002136 ... 056
1002137 ... 057
1002138 ... 057
1002139 ... 057
1002140 ... 205
1002141 ... 783
1002142 ... 783
1002143 ... 787
1002144 ... 787
1002145 ... 029
1002146 ... 029
1002147 ... 146
1002148 ... 146
1002149 ... 146
1002150 ... 029
1002151 ... 404
1002152 ... 404
1002153 ... 404
1002154 ... 675
1002155 ... 644
1002157 ... 679
1002158 ... 576
1002159 ... 038
1002160 ... 038
1002161 ... 038
1002162 ... 038
1002163 ... 040
1002164 ... 040
1002165 ... 040
1002167 ... 036
1002168 ... 037
1002169 ... 072
1002170 ... 072
1002171 ... 073
1002172 ... 073
1002173 ... 205
1002174 ... 177
1002175 ... 286
1002185 ... 719
1002186 ... 719
1002187 ... 725
1002188 ... 722
1002189 ... 717
1002190 ... 212
1002191 ... 212
1002192 ... 212
1002193 ... 123
1002194 ... 123, 687
1002195 ... 190
1002196 ... 123
1002197 ... 123
1002198 ... 580
1002199 ... 580

1002200
1002200 ... 581
1002201 ... 590
1002202 ... 590
1002203 ... 590
1002204 ... 455
1002205 ... 455
1002206 ... 455
1002207 ... 455
1002208 ... 455
1002209 ... 455
1002210 ... 455
1002211 ... 455
1002213 ... 185
1002215 ... 267, 284
1002216 ... 267
1002217 ... 044
1002218 ... 849
1002220 ... 849
1002221 ... 849
1002228 ... 213
1002229 ... 213
1002232 ... 518
1002236 ... 761
1002237 ... 761
1002238 ... 154
1002239 ... 169
1002240 ... 169
1002264 ... 040
1002265 ... 040

1002400
1002402 ... 624
1002403 ... 625
1002404 ... 027
1002405 ... 027
1002409 ... 839
1002411 ... 820
1002420 ... 518
1002422 ... 519
1002423 ... 855
1002424 ... 855
1002425 ... 855
1002430 ... 208
1002431 ... 208
1002432 ... 208
1002494 ... 539

1002500
1002503 ... 648
1002504 ... 649
1002505 ... 649
1002558 ... 039
1002562 ... 039
1002563 ... 039
1002564 ... 039
1002582 ... 011
1002583 ... 011
1002584 ... 285
1002585 ... 285
1002591 ... 474
1002592 ... 474
1002593 ... 474
1002594 ... 474
1002596 ... 474
1002597 ... 641
1002598 ... 500
1002599 ... 500

1002600
1002600 ... 500
1002601 ... 500
1002602 ... 428
1002603 ... 428
1002604 ... 428
1002605 ... 647
1002606 ... 647
1002607 ... 207
1002608 ... 207
1002610 ... 386
1002611 ... 386
1002612 ... 386
1002631 ... 339
1002632 ... 339
1002633 ... 339
1002634 ... 339
1002637 ... 341
1002638 ... 341
1002639 ... 341
1002640 ... 341
1002641 ... 341
1002642 ... 341
1002643 ... 341
1002644 ... 341
1002645 ... 341
1002646 ... 341
1002647 ... 341
1002648 ... 341
1002649 ... 341
1002650 ... 341
1002651 ... 341
1002652 ... 341
1002653 ... 341
1002654 ... 341
1002655 ... 341
1002656 ... 341
1002657 ... 341
1002658 ... 341
1002659 ... 341
1002660 ... 341
1002661 ... 337
1002662 ... 337
1002663 ... 334
1002664 ... 334
1002665 ... 334
1002666 ... 334
1002667 ... 335
1002668 ... 335
1002669 ... 335
1002670 ... 335
1002671 ... 335
1002672 ... 335
1002673 ... 335
1002674 ... 335
1002675 ... 335
1002676 ... 335
1002677 ... 335
1002678 ... 335
1002686 ... 363
1002688 ... 425
1002689 ... 425
1002690 ... 425
1002691 ... 847
1002692 ... 847
1002693 ... 847
1002694 ... 424
1002695 ... 424
1002696 ... 424
1002697 ... 429
1002698 ... 429
1002699 ... 429

1002700
1002700 ... 429
1002701 ... 429
1002702 ... 429
1002703 ... 429
1002704 ... 429
1002705 ... 429
1002785 ... 852
1002791 ... 852
1002792 ... 852


1002800
1002803 ... 852
1002809 ... 334
1002810 ... 334
1002811 ... 334
1002812 ... 334
1002813 ... 334
1002814 ... 334
1002815 ... 334
1002816 ... 334
1002817 ... 334
1002818 ... 334
1002819 ... 334
1002820 ... 334
1002827 ... 877
1002828 ... 877
1002838 ... 120
1002839 ... 120
1002842 ... 157
1002843 ... 157
1002844 ... 157
1002845 ... 341
1002847 ... 031
1002848 ... 031
1002849 ... 121
1002850 ... 121
1002854 ... 395
1002855 ... 194
1002856 ... 194
1002857 ... 451
1002858 ... 067, 322, 824
1002859 ... 197
1002860 ... 225
1002867 ... 688
1002868 ... 632
1002869 ... 632
1002870 ... 578
1002871 ... 578
1002873 ... 389
1002874 ... 389
1002875 ... 389
1002876 ... 344
1002877 ... 344
1002878 ... 344
1002879 ... 508
1002880 ... 508
1002881 ... 509
1002882 ... 099, 255
1002884 ... 688
1002885 ... 508
1002886 ... 508
1002887 ... 509
1002888 ... 508
1002889 ... 508
1002890 ... 101
1002891 ... 101
1002892 ... 848
1002893 ... 733

1002895 733
1002897 733
1002898 733
1002899 733

1002900
1002900 660
1002902 660
1002903 689
1002904 689
1002905 670
1002906 577
1002907 577
1002909 103
1002910 103
1002911 103
1002912 103
1002913 103
1002914 103
1002915 140
1002917 140
1002918 140
1002919 140
1002920 188
1002921 188
1002922 445
1002925 144
1002926 144
1002927 144
1002928 157
1002929 157
1002930 157
1002931 177
1002932 177
1002933 177
1002934 264
1002935 264
1002936 264
1002937 069
1002938 069
1002939 069
1002940 313
1002941 313
1002942 195
1002943 195
1002944 236
1002945 236
1002946 083
1002947 083
1002948 056
1002949 057
1002950 057
1002951 057
1002952 639
1002953 639
1002954 639
1002955 639
1002956 569
1002957 569
1002958 569
1002959 569
1002960 223
1002961 223
1002962 164
1002964 164
1002965 264
1002967 241
1002968 241
1002969 297
1002970 297
1002971 297
1002973 297
1002974 297
1002975 297
1002976 297
1002977 297
1002978 297
1002979 440
1002980 440
1002981 440
1002982 445
1002983 445
1002984 445
1002985 225
1002986 225
1002987 225
1002989 638
1002990 639
1002991 574
1002992 574
1002993 145
1002994 822
1002995 822
1002996 801
1002997 801
1002998 801
1002999 801

1003000
1003001 579
1003002 079
1003003 079
1003004 079
1003005 079
1003006 079
1003007 079
1003008 510
1003009 510
1003010 510
1003011 511
1003012 511
1003013 511
1003014 325
1003015 325
1003016 325
1003017 324
1003018 324
1003019 324
1003024 336
1003025 336
1003026 336
1003027 336
1003028 022
1003029 022
1003030 018
1003031 018
1003032 020
1003033 020
1003034 193
1003035 193
1003036 457
1003037 457
1003038 457
1003039 457
1003040 257
1003041 257
1003042 257
1003043 257
1003044 105
1003045 105
1003046 105
1003047 105
1003048 107
1003049 107
1003050 107
1003051 107
1003052 257
1003053 257
1003054 257
1003055 257
1003057 489
1003058 489
1003059 489
1003060 489
1003061 489
1003062 489
1003063 489
1003064 489
1003067 490
1003068 490
1003069 490
1003070 490
1003071 524
1003072 524
1003073 525
1003074 524
1003075 525
1003076 527
1003077 527
1003078 527
1003079 527
1003080 527
1003081 527
1003083 525
1003084 525
1003085 879
1003087 872
1003088 872
1003090 877
1003091 880
1003092 880
1003093 877
1003094 872
1003095 872
1003096 880
1003097 878
1003098 879
1003099 880

1003100
1003100 879
1003101 870
1003102 868
1003104 851
1003105 851
1003106 849
1003107 131

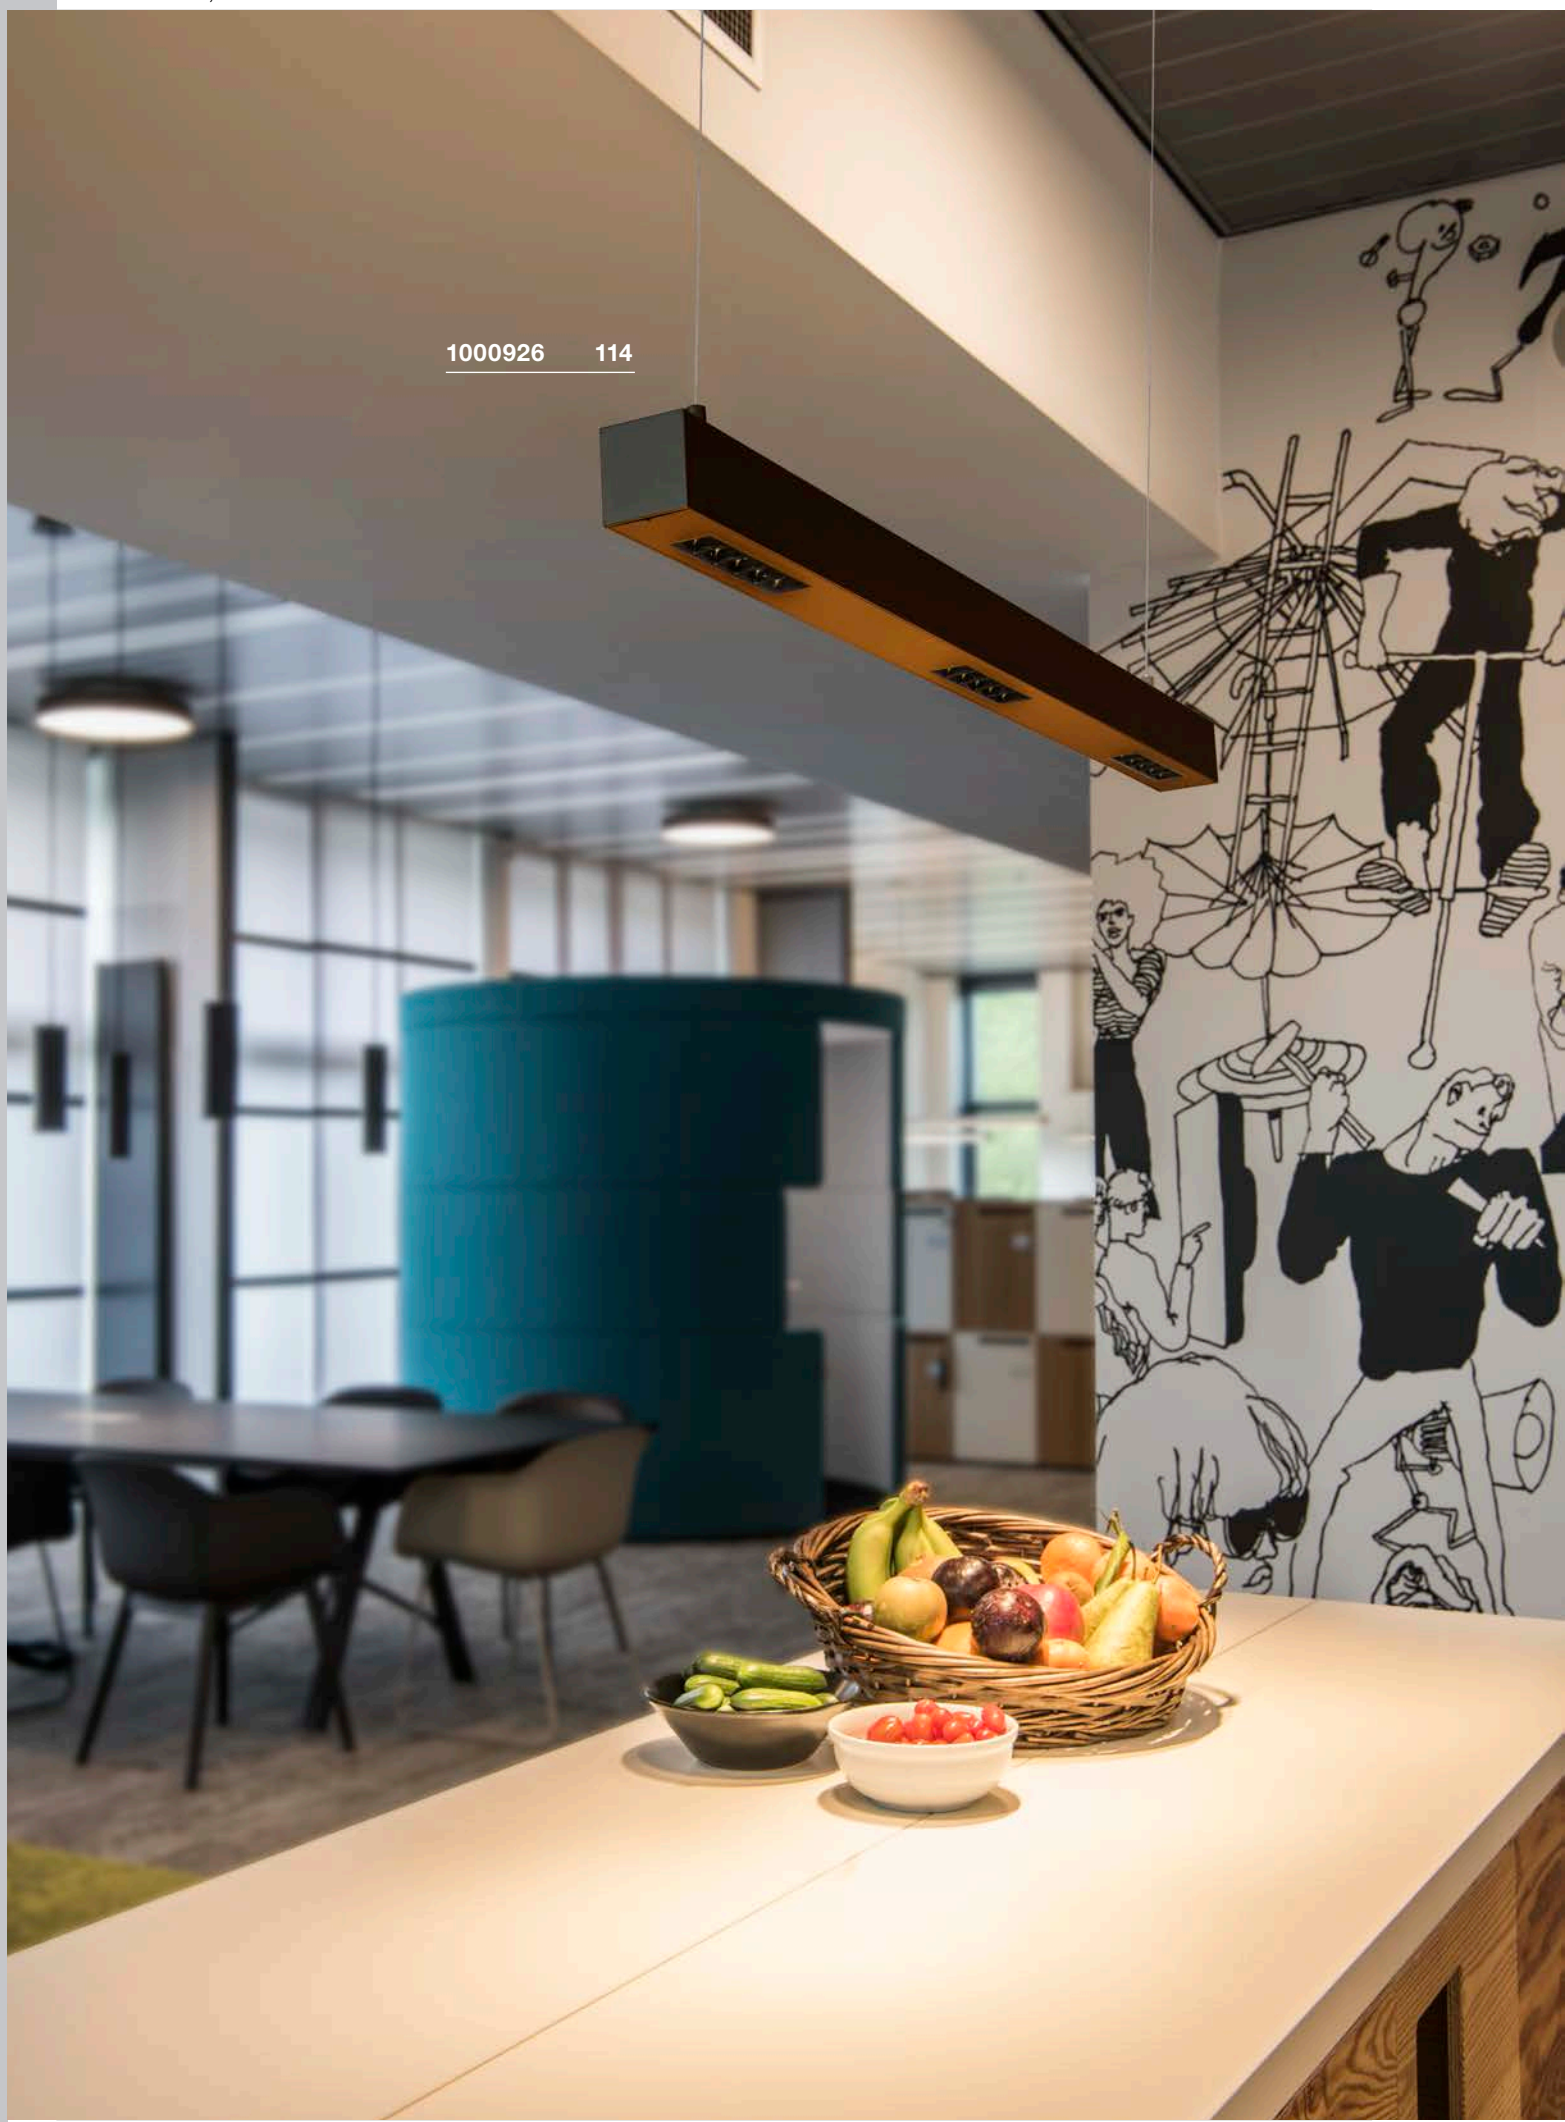
1000926 114

1-CIRCUIT

1-CIRCUIT SURFACE MOUNTED TRACK..... 404
1-CIRCUIT SURFACE MOUNTED TRACK accessories..... 405
1-CIRCUIT RECESSED TRACK..... 402
1-CIRCUIT RECESSED TRACK accessories.. 402

2-CIRCUIT

D-TRACK®

D-TRACK® 2-CIRCUIT TRACK..... 380
D-TRACK® 2-CIRCUIT TRACK accessories.... 381

3-CIRCUIT

3-CIRCUIT RECESSED TRACK..... 373
3-CIRCUIT RECESSED TRACK accessories.. 373

EUTRAC®

EUTRAC® 3-CIRCUIT SURFACE MOUNTED TRACK 369
EUTRAC® 3-CIRCUIT SURFACE MOUNTED TRACK accessories 370, 371

S-TRACK

S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK 365
S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK accessories 367
S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK DALI..... 339
S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK DALI accessories 341

A

ABRIDOR 60/100 Pole..... 574
ABRIDOR SENSOR WL..... 639
ABRIDOR WL 638
ACCANTO CL, E27 236
ACCANTO PD, E27..... 083
ACCANTO SPOT SQUARE WL, E27..... 194
ACCANTO WL, E27 195

ACCESSORIES

1-10V Dimmer 10W 849
4-way garden socket 862, 863
Cable..... 859
Cable clamp 858
Cable extension 860, 861
Ceiling hook..... 858
Ceiling plate..... 859
COMPENSATION MODULE..... 852
Connection box 864
Connection box 4-way 864
DALI Controller 24V DC..... 849
DALI Interface 0-10V + on/off 849
DALI Universal dimmer 3-25W..... 849
DALI Universal dimmer 10-300W..... 849
Double-sided adhesive tape 861
Energie-Pack 230V 864
GU10 Socket..... 860
GU10 Socket with connection box and quick terminal 860
LED Driver 320mA | 3W 856
LED Driver 350mA | 10W 852
LED Driver 350mA | 15W 852
LED Driver 350mA | 3W 856
LED Driver 350mA | 6W 852
LED Driver 350mA | 9W 856
LED Driver 350mA | incl. strain relief 856
LED Driver 500mA | 15W 852
LED Driver 500mA | 9W 856
LED Driver 700mA | 10W incl. strain relief..... 853
LED Driver 700mA | 11W incl. strain relief..... 857
LED Driver 700mA | 3W incl. strain relief..... 857
LED Driver 700mA | 40W incl. strain relief..... 853
LED Driver 700mA | 40W incl. strain relief..... 857
LED Driver 700mA | 6W 852
LED Driver 1000mA 853
LED Driver 1000mA | 40W incl. strain relief.... 857
LED Driver 1050mA | 40W incl. strain relief.... 853
LED Driver DALI 250-700mA | 20W..... 855
LED Driver DALI 250-700mA | 40W..... 855
LED Driver DALI 350-1050mA | 60W..... 855
LED Driver DALI 700-1500mA | 50W..... 855
LED Driver VALETO® 1050mA 857
LED power supply 12V/24V DC | 12W..... 850
LED power supply 12V/24V DC | 12W round. 850
LED power supply 12V/24V DC | 20W..... 850
LED power supply 24V | 100W..... 850, 851
LED power supply 24V | 50W..... 851
LED power supply 24V DC | 100W..... 850, 851
LED power supply 24V DC | 150W..... 851
LED power supply 24V DC | 20W..... 851
LED power supply 24V DC | 36W..... 850
LED power supply 24V DC | 60W..... 850
Motion sensor infra-red 865
Multiway connector 3 outputs 860, 861
Multiway connector 6 outputs 860, 861
Nepro Display tube kit..... 861
PWM Transformer 12V DC / 24V DC 849
SLV cable H05RN-F..... 865
SLV cable H07RN-F..... 865
SLV VALETO® 12/24V Strip control module | CCT..... 848
SLV VALETO® 12/24V Strip control module | RGBW 848
SLV VALETO® 15W, LED Driver 853
Stopper for wire cable..... 859
T-connector box..... 864, 865
Textile cable 3-pin, 3 x 0,75 mm², 10 m..... 859
Textile cable 3-pin, 3 x 0,75 mm², 5 m..... 859
Transformer 12V AC | 10VA IP44 846
Transformer 12V AC | 60VA..... 848
Transformer 12V AC | 60VA..... 848
Transformer 12V AC | 60VA IP44 846
Transformer 12V AC | 105VA..... 846
Transformer 12V AC | 150VA..... 848
Transformer 12V AC | 210VA..... 848
Transformer 12V AC | 300VA..... 846
Transformer TENSEO 12V AC | 50VA..... 847
Transformer TENSEO 12V AC | 105VA..... 847
Transformer TENSEO 12V AC | 210VA..... 847
TRIAC LED Driver 700mA | 39W incl. strain relief 853
Wire cable suspension 859

ADEGAN FL, E27..... 540
ADEGAN MANILA FL, E27 539
ADEGAN MANILA PD, E27..... 533
ADI EL 700
ADJUST 135 EL, square/round, QPAR51 721
ADJUST 190 EL, square/round, QR111..... 721
ADJUST 265 EL, round, HIT-CE 721
AINOS CW..... 680

AIXLIGHT®

AIXLIGHT® 150 PD, R2 Office, TRIAC..... 117
AIXLIGHT® PD, R2, double, QPAR111 118
AIXLIGHT® PD, R2, quad, QPAR111..... 118
AIXLIGHT® PRO 50 LED module 500
AIXLIGHT® PRO 50 QPAR51 module..... 500
AIXLIGHT® PRO EL, COB LED module.. 502, 503
AIXLIGHT® PRO EL, QPAR111 module..... 501
AIXLIGHT® PRO accessories..... 500, 501

AKALO D83 EL, TRIAC 464
ALAMEA EL..... 515
ALMINO PD, double, UGR<19 123
ALMINO PD, quad, UGR<19..... 123, 687
ALMINO WL, UGR<19 190
ALPA CONE 100 Pole, E27 548
ALPA MUSHROOM 45/75 Pole, E27 549
ALTRA DICE CL, QPAR51 267
ALTRA DICE CW, double, QPAR51..... 267, 284
ALTRA DICE TRACK 1-circ., QPAR51..... 395
ALTRA DICE TRACK 3-circ., QPAR51..... 343
ALTRA DICE WL, QPAR51 185
ANDREAS WL, QT-DE12..... 144
ANELA CL 265
ANELA Display..... 227
ANELA PD, TRIAC 074
ANGOLUX SENSOR WL 641
ANGOLUX SOLAR WL 641
ANGOLUX WL 641
ANILA EASYTEC® II, QPAR51 412
ANINDA 60 EL 517
ANINDA 120 EL 517
APONI 90/120 Pole, TRIAC..... 549
APONI WL, TRIAC 617
ARLINA 60 WL..... 169
ARLINA 60 WL, T16..... 169
ARLINA 130 WL..... 169
ARLINA 130 WL, T16..... 169
AROSA PD, 1,25 m, TRIAC..... 053
AROSA PD, 2m, TRIAC..... 053
ARROCK ARC Pole, QPAR51..... 562
ARROCK GRANITE 40/70 Pole, square, E27 .. 561
ARROCK SLOT Pole, QPAR51 570
ARROCK STONE 50/70 Pole..... 570
ASMARA LV, QR-C51 420
ASSO 70 WL 166
ASSO 300 WL 167
ASSO WL 167
ASTINA CL 264
ASTINA PD, QPAR51 069
ASTINA STEEL WL..... 655
ASTINA STEEL WL, QPAR51..... 655
ASTINA UP/DOWN WL, QPAR51 177
ASTINA WL, QPAR51..... 654
ASTO CW, single, QPAR51..... 301
ASTO CW, double, QPAR51..... 301
ASTO CW, triple, QPAR51..... 301
ASTO CW, quad, QPAR51..... 301
ASTO TUBE CW, single, QPAR51..... 295
ASTO TUBE CW, double, QPAR51..... 295
ASTO TUBE CW, triple, QPAR51 295
AVENTO 30 PD..... 055
AVENTO 110 PD..... 055
AVO CW, single, QPAR51..... 299
AVO CW, double, QPAR51..... 299
AVO CW, triple, QPAR51 299
AVO CW, quad, QPAR51..... 299
AVO TRACK 1-circ., QPAR51..... 387
AVO TRACK 3-circ., QPAR51..... 343

B

BASKET WL, E27 145
BATO 35 CW, E27..... 139
BATO 35 CW, TRIAC..... 139
BATO 35 PD, E27 058
BATO 35 PD, TRIAC..... 058
BATO 45 CW 238
BATO 45 CW, E27..... 238
BATO 45 PD, E27 059
BATO 45 PD, TRIAC..... 058

BATTEN LED

BATTEN LED 220-240V ~50/60Hz..... 815
BATTEN LED 220-240V ~50/60Hz accessories..... 815

BEDSIDE EL, left..... 446
BEDSIDE EL, right..... 446
BELA 40 PD 061
BELA 60 PD 061
BENA 120 CW..... 327
BENA 150 CW..... 327
BENDO 80/220 Pole, TRIAC 572
BENDO WL, TRIAC..... 636
BIBA PD, E14 077
BIG NAILS 50/80 Pole..... 552
BIG NAILS 50/80 Pole, E27..... 552
BIG NAILS PLUS 50/80 Pole, E27..... 551
BIG NAILS WL, E27 619
BIG NAUTILUS SP, round, QPAR51..... 588
BIG PLOT Cover, 2 slots 715
BIG PLOT Cover, 4 slots 715
BIG PLOT Modules 714, 715
BIG QUAD UP/DOWN WL..... 659
BIG QUAD WL 183, 646
BIG THEO CL 678
BIG THEO CL, QPAR111 678
BIG THEO BEAM UP/FLOOD DOWN WL 666
BIG THEO FLOOD UP/DOWN WL..... 666
BIG THEO UP/DOWN WL, QPAR111 665
BIG THEO WL..... 651
BIG THEO WL, QPAR111..... 650
BILAS CW, single, TRIAC 288
BILAS TRACK 1-circ., TRIAC 398
BILAS TRACK 3-circ., TRIAC 349
BIMA 1-circ., single, QPAR51..... 391
BIMA 3-circ., double, QPAR51 391
BIMA EASYTEC® II, single, QPAR51 411
BIMA 2 EASYTEC® II, double, QPAR51..... 411
BIMA 3-circ., single, QPAR51..... 351
BIMA 3-circ., double, QPAR51 351
BISHADE FL, E27 024
BISHADE PD, E27..... 082
BISHADE TL, E27 024

SLV BLUETOOTH® CONTROL

Dimmer wall installation, TRIAC 835

BOOKAT Pole, TRIAC..... 564
BOX UP/DOWN WL, QT-DE12 662
BOX-L WL 661
BOX-L WL, E27 661

BRENDA PD, TRIAC ... 080
BRENDA TL, Wireless charging ... 015
BRENDA WL ... 142
BRICK DOWNUNDER EL ... 698
BRICK DOWNUNDER EL, E14 ... 698
BRICK EL, asymmetrical ... 701
BRICK EL, symmetrical ... 701
BRICK MESH EL ... 701
BULAN CW, E14 ... 682
BULAN GRID CW, E27 ... 682

C

C-POL Pole, E27 ... 555
C-POL WL, E27 ... 618
CARISO WL ... 172
CHROMBO WL ... 162

SLV COLOR CONTROL
Bluetooth® Adapter ... 830
Remote control ... 829
FLEXLED ROLL MULTICOLOUR RGBW, 24V ... 830
FLEXLED ROLL MULTICOLOUR RGBW 24V accessories ... 830
Master controller with remote control ... 829
Signal amplifier ... 830
Slave controller ... 829
Wall control panel, recess-mounted/surface-mounted ... 829

COMET LED LV ... 425
COMET LV, QR-C51 ... 425
COMMO PD, TCR-TSE ... 077
CONE FL, E27 ... 543
CONTONE® EL, round/square, rigid, TRIAC ... 457
CONTONE® EL, round/square, adjustable, TRIAC ... 457

SLV CONTROL BY TRUST
Internet control station ICS 2000 ... 838
IP56 connection housing, 3-channel ... 840
Radio receiver module, 3-channel ... 840
Recessed radio multi-dimmer ... 840
Recessed radio switch ... 840
Remote control, 16-channel ... 838
Wall switch 1-way ... 838
Wireless socket switch BE/FR Indoor ... 839
Wireless socket switch BE/FR Outdoor ... 839
Wireless socket switch Indoor ... 839
Wireless socket switch IT ... 839
Wireless socket switch Outdoor ... 839
Wireless socket switch UK ... 839

COSMIC LV, QR-C51 ... 421
COUPA FLEX WL ... 196
COUPA WL, QT14 ... 197
CRYSTAL EL, TRIAC ... 449
CUBIX FL, QPAR51 ... 542
CV SPOT SP, short ... 593
CV SPOT SP, long ... 593

D

DASAR®
DASAR® 70 EL, square, QPAR51 ... 729
DASAR® 80 EL, square/round, QPAR51 ... 729
DASAR® 100 PREMIUM EL, round ... 727
DASAR® 100 PREMIUM EL, square ... 726
DASAR® 150 PREMIUM EL, round ... 727
DASAR® 150 PREMIUM EL, square ... 727
DASAR® 215 EL, round, E27 ... 730
DASAR® 215 EL, square/round, QPAR111 ... 730
DASAR® 218 EL, QR111 ... 730
DASAR® 255 EL ... 733
DASAR® 270 EL, asymmetrical ... 733
DASAR® 270 EL, symmetrical ... 733
DASAR® 370 EL, square/round ... 723
DASAR® 920 EL ... 725
DASAR® EL, T16 ... 734
DASAR® EXACT 116 EL, square/round, QPAR51 ... 729
DASAR® FLAT 80 EL ... 722
DASAR® PROJECTOR SP, 12-24V ... 598
DASAR® PROJECTOR SP, 230V ... 598

DEKLED EL ... 450

DELF D
DELF D, 24V ... 813
DELF D, 24V accessories ... 813

DELO WL ... 633
DELWA WL ... 183, 652
DENA 30 WL, E14 ... 145
DEVIN WL, double ... 212
DINGILO EL, round, adjustable, TRIAC ... 457
DIO FLEX PLATE WL ... 208
DIO FLEX PLATE WL QPAR51 ... 207
DISPLAY ... 229
DISPLAY ADL 50 QPAR51 ... 225
DL 126 EL ... 450
DOLIX OUT EL, round, QPAR51 ... 461, 707
DOLIX OUT EL, round, QR-C51 ... 460, 706
DOLIX OUT EL, square, QPAR51 ... 461, 707
DOLIX OUT EL, square, QR-C51 ... 460, 706
DORISA 20, square ... 216
DORISA 30 ... 215
DORISA 40, rectangular ... 216
DORISA 50 ... 215
DOWNUNDER OUT, round ... 632
DOWNUNDER OUT, square ... 632
DOWNUNDER OUT S EL ... 699
DOWNUNDER OUT M EL ... 699
DOWNUNDER OUT L EL ... 699
DOWNUNDER PUR 80 EL ... 441
DOWNUNDER PUR 120 EL ... 441
DOWNUNDER PUR 150 EL ... 441

E

EASYTEC® II
EASYTEC® II TRACK ... 415
EASYTEC® II TRACK accessories ... 415

ENOLA
ENOLA B CL, QPAR51 ... 265
ENOLA B CW, single, QPAR51 ... 289, 290
ENOLA B CW, double, QPAR51 ... 289, 290
ENOLA B PD, QPAR51 ... 070, 399
ENOLA B TRACK 1-circ., QPAR51 ... 390
ENOLA B WL, QPAR51 ... 177, 204
ENOLA C CL ... 266, 675
ENOLA C CL ... 675
ENOLA C CL, TRIAC ... 675
ENOLA C Pole ... 577
ENOLA C TRACK 1-circ. ... 397
ENOLA C TRACK 3-circ. ... 346
ENOLA C UP/DOWN WL ... 656
ENOLA C WL ... 628
ENOLA PD, E27 ... 071

ESKINA 30/80 Pole ... 577
ESKINA D Display ... 670
ESKINA SPOT/SPOT SENSOR CW ... 689
EURO CUBE 3-circ. ... 353
EURO SPOT TRACK 1-circ. ... 392
EURO SPOT TRACK 1-circ. QPAR111 ... 393
EURO SPOT TRACK 1-circ. QPAR51 ... 392
EURO SPOT TRACK 3-circ. ... 361
EURO SPOT TRACK 3-circ., DALI, 173 mm ... 335
EURO SPOT TRACK 3-circ., DALI, 235 mm ... 334
EURO SPOT TRACK 3-circ., DALI, 255 mm ... 334
EURO SPOT TRACK 3-circ., QPAR111 ... 360
EURO SPOT TRACK 3-circ., QPAR51 ... 360
EURO SPOT TRACK 3-circ., TRIAC ... 361

F

F-POL Pole, E27 ... 555
F-POL WL, E27 ... 618

FENDA
FENDA BOW BASIS FL, E27 ... 022
FENDA Ceiling plate, E27 ... 234
FENDA FL, E27 ... 018, 020
FENDA Glass shade ... 044
FENDA Half-shade ... 148
FENDA Ø 15 cm, round ... 018, 020, 046
FENDA Ø 20 cm, round ... 192
FENDA Ø 30 cm, round ... 019, 021, 047, 235
FENDA Ø 40 cm, round ... 022, 044
FENDA Ø 45 cm, round .019, 021, 022, 047, 235
FENDA Ø 70 cm, round ... 019, 021, 047, 235
FENDA PD, E27 ... 044
FENDA TL, E27 ... 018, 020
FENDA WL, basic, E27 ... 148, 192
FENDA WL, E27 ... 193

FERA 25 CL ... 241
FERA 25 CL, DALI ... 241
FILI Terminal WL, QPAR51 ... 224
FILI Canopy WL, QPAR51 ... 224
FITU CW, E27 ... 285
FITU FL, E27 ... 029
FITU PD, E27 ... 036, 037, 038, 039
FITU TL, E27 ... 010
FITU WL, E27 ... 146
FLAC BEAM® SP ... 605
FLAT FRAME BASIC EL, QT9 ... 444
FLAT FRAME CURVE EL, QT9 ... 443
FLATT 65/100 Pole ... 569
FLATT SENSOR WL ... 639
FLATT WL ... 639

FLEXLED ROLL
FLEXLED ROLL MULTICOLOUR RGBW, 24V ... 810, 830
FLEXLED ROLL MULTICOLOUR RGBW, 24V accessories ... 810, 830
FLEXLED ROLL RGB, 24V ... 811
FLEXLED ROLL SELECT, 24V ... 797
FLEXLED ROLL SELECT, 24V accessories ... 797
FLEXLED ROLL, 24V ... 799, 805, 812
FLEXLED ROLL, 24V accessories ... 799, 805
FLEXLED STRIP, 24V ... 800, 801
FLEXSTRIP LED HIGH LUMEN, 24V ... 803
FLEXSTRIP LED HIGH LUMEN 24V accessories ... 803
FLEXSTRIP LED RGB, 24V ... 809
FLEXSTRIP LED RGB 24V accessories ... 809

FLOOD LIGHT 25 SP ... 606
FLOOD LIGHT 32 SP ... 606
FORCHINI 40 PD, E27 ... 062
FORCHINI 50 PD, E27 ... 062
FORCHINI 70 PD, E27 ... 062
FORCHINI M 40 TRACK 1-circ., E27 ... 401
FORCHINI M 40 TRACK 3-circ., PD, E27 ... 363
FORCHINI M 40 PD, E27 ... 065
FORCHINI M 50 PD, E27 ... 065
FRAME BASIC EL ... 444
FRAME BASIC EL, HV ... 444
FRAME BASIC SET EL ... 451
FRAME CURVE EL ... 443
FRAME CURVE EL, HV ... 443

G

GALEN 100 SP ... 609
GALEN SP, TRIAC ... 609
GIMBLE IN 68 EL ... 508
GIMBLE IN 100 EL ... 508
GIMBLE IN 150 EL ... 508
GIMBLE IN 175 EL ... 509
GIMBLE OUT EL ... 720
GLASSA CW, round, E27 ... 317
GLASSA CW, square, E27 ... 317

GLENOS®
GLENOS® Corner profile 2720 ... 768
GLENOS® Corner profile 2720 accessories ... 769
GLENOS® Linear recessed profile 2508 ... 767
GLENOS® Linear recessed profile 2508 accessories ... 767
GLENOS® Linear profile 1107 ... 764
GLENOS® Linear profile 1107 accessories ... 765
GLENOS® PD, 1 m, 1-10V ... 112
GLENOS® PD, 2 m, 1-10V ... 112
GLENOS® Professional recessed profile 8832 ... 774
GLENOS® Professional recessed profile 8832 accessories ... 775
GLENOS® Professional profile 2020 ... 776
GLENOS® Professional profile 2020 accessories ... 777
GLENOS® Professional profile 3030 ... 770
GLENOS® Professional profile 3030 accessories ... 771
GLENOS® Professional profile 4970 ... 772
GLENOS® Professional profile 4970 accessories ... 773
GLENOS® 60 ... 219

GLOO PURE 27/44/70 Pole, E27 548
GLOO PURE WL, E27 614

GLU-TRAX®
GLU-TRAX® Track 433
GLU-TRAX® Track accessories 433

GRAFIT 30/60 Pole, E27 557
GRAFIT WL, E27 620

GRAZIA
GRAZIA 10 Accessories 750, 751
GRAZIA 10 Recess-mounted profile 749
GRAZIA 10 Surface-mounted profile, flat 749
GRAZIA 10 Surface-mounted profile, standard 749
GRAZIA 20 Accessories 755, 756, 757
GRAZIA 20 Recess-mounted profile 754
GRAZIA 20 Surface-mounted profile, flat 753
GRAZIA 20 Surface-mounted profile, standard 753

H

H-LIGHT EL, oval, TRIAC 458
H-LIGHT EL, round, TRIAC 458
H-LIGHT EL, TRIAC 459
H-POL 30/60 Pole 566
H-POL Twin 30/60 Pole 567

H-PROFIL
H-PROFIL 2 m 759
H-PROFIL 2 m accessories 760, 761

HANG UP 120 PD, TRIAC 108
HELIA 30 PD 072
HELIA 30 PD, TRIAC 073
HELIA 40 PD 072
HELIA 40 PD, TRIAC 073
HELIA 50 TRACK 1-circ. 397
HELIA 50 TRACK 3-circ. 346
HELIA 50 TRACK EASYTEC® II 410
HELIA CW, single, TRIAC 292, 691
HELIA CW, double, TRIAC 292, 691
HELIA EL 447
HELIA Pole, single, TRIAC 580, 583
HELIA Pole, double, TRIAC 581, 583
HELIA SENSOR Single 580
HELIA SPOT S SP, single, TRIAC 599
HELIA SPOT L SP, single, TRIAC 599
HELIA UP/DOWN WL, TRIAC 653
HELIA WL, TRIAC 629
HORN EL, QPAR51 473
HORN MAGNA EL 474
HORN MEDI EL 474
HORN MINI EL 474
HORN-A EL, QPAR51 471
HORN-O EL, QPAR51 471
HORN-T EL, QPAR11 472
HORN-T EL, QPAR51 471

I

I-PENDANT PRO PD, 1195x295 mm, UGR<19, 1-10V 107
I-PENDANT PRO PD, 1195x295 mm, UGR<22, 1-10V 106
I-PENDANT PRO PD, 1195x295 mm, 1-10V 107
I-PENDANT PRO PD, 1195x295 mm, DALI 107
IMPERVA 120 CW 687
IMPERVA 150 CW 687
INDA CW, QPAR51 283
INDI REC EL, QPAR51 451
IPERI 50 Pole 575
IPERI WL 642
IVED GOOSE WL, canopy 209

K

KADUX EL, single, 1-10V 499
KADUX EL, single, QPAR111 497
KADUX EL, single, QPAR51 496
KADUX EL, single, TRIAC 498
KADUX EL, double, 1-10V 499
KADUX EL, double, QPAR111 497
KADUX EL, double, QPAR111 496
KADUX EL, double, TRIAC 498
KADUX EL, triple, QPAR51 496
KADUX EL, triple, TRIAC 498
KAHOLO EL, E27 452
KALU CW, single, QPAR111 304
KALU CW, single, TRIAC 306
KALU CW, double, QPAR111 304
KALU CW, double, TRIAC 306
KALU CW, triple, QPAR111 304
KALU CW, triple, TRIAC 306
KALU CW, quad, long, TRIAC 307
KALU CW, quad, square, TRIAC 307
KALU CW, quad, wide, TRIAC 307
KALU FL, single, QPAR111 010
KALU TRACK 1-circ., QPAR111 395
KALU TRACK 1-circ., TRIAC 395
KALU TRACK 3-circ., QPAR111 358
KALU TRACK 3-circ., QR111 358
KALU TRACK 3-circ., TRIAC 359
KAMUELA ECO EL, round, TRIAC ... 463, 711, 745
KANO EASYTEC® II, QPAR51 412
KARDAMOD CL, round, single, QPAR111 276
KARDAMOD CL, round, double, QPAR111 276
KARDAMOD CL, square, single, QPAR111 274
KARDAMOD CL, square, single, QR111 275
KARDAMOD CL, square, double, QPAR111 274
KARDAMOD CL, square, double, QR111 275
KARPO 30 CW, single 205, 286
KARPO 30 CW, single, TRIAC 286
KARPO 30 EL 447
KARPO FL 025
KARPO TL 025
KARPO UP/DOWN WL 177
KARPO WL 205

KELVIN CONTROL
KELVIN CONTROL-STRIP, 24V 807, 834
KELVIN CONTROL-STRIP, 24V accessories 807, 834

SLV KELVIN CONTROL
Bluetooth® Adapter 833
KELVIN CONTROL-STRIP, 24V 834
KELVIN CONTROL-STRIP, 24V accessories 834
Master controller with remote control 833
Remote control 833
Signal amplifier 833
Slave controller 833
Wall control panel, recess-mounted/surface-mounted 833

KENAI
KENAI Surface-mounted profile 762
KENAI Surface-mounted profile accessories 763

KENGA 17 TL 537
KENGA 45 FL, E27 537
KENKUA SPOT WL, E27 194
KENKUA WL, E27 194
KERAS ELT WL, E27 622
KINI EL, TRIAC 705
KIROCONE TL, E27 534

L

LAMPS
LED A60 E27 ..... 876, 877, 878
LED A60 E27, CCT 820, 876
LED A60 E27, Mirrorhead, chrome 879
LED A60 E27, Mirrorhead, gold 879
LED A60 E27, RGBW 820, 876
LED C35 E14 875
LED Filament G9 868
LED FRISBEE E27 877
LED G125 E27 880
LED G125 E27, Mirrorhead, gold 880
LED G125 E27 880
LED G95/G125 E27 880
LED G95/G125 E27, smoked glass 880
LED PAR30 E27 881
LED PAR38 E27 881
LED QPAR111 GU10 ..... 872, 873, 874
LED QPAR111 GU10, CCT, SLV VALETO® 821, 872
LED QPAR111 GU10, RGBW, SLV VALETO® 821, 872
LED QPAR51 GU10 ..... 870, 871
LED QPAR51 GU10, CCT, SLV VALETO® 820, 870
LED QR111 G53 ..... 874, 875
LED QR51 GU5.3 869
LED QT-DE12 R7S 118 mm 868
LED QT-DE12 R7S 78 mm 868
LED QT14 G9 868
LED ST58 E27 879
LED ST64 E27 879
LED T32 E27 879
LED T32 FILAMENT GU10 870
LED T38 E27 877
LED T45 E27 ..... 876, 877
LED TCR-TSE GX53 881

LED PANEL 300x120 mm 525
LED PANEL 600x600 mm 524, 525
LED PANEL 620x620 mm 524, 525
LED SAIL WL 173
LED SPIKE SP 590

L-LINE 60 220
L-LINE 120 220
LASSON 10 PD, E27 084
LASSON 45 PD, E27 084
LASSON 80 PD, E27 085
LASSON WL, E27 149

LED-STRIP
LED-STRIP, 24V 798
LED-STRIP, 24V accessories 798

LENITO TRACK 3-circ. 345
LENITO WL 188, 227
LIGHT EYE® 90 TRACK EASYTEC® II, QPAR51 413
LIGHT EYE® 90 1-circ., QPAR51 388
LIGHT EYE® 90 CW, single, QPAR51 291
LIGHT EYE® 90 CW, double, QPAR51 291
LIGHT EYE® 90 PD, GU10 050
LIGHT EYE® 150 TRACK 3-circ., QPAR51 344
LIGHT EYE® 150 TRACK EASYTEC® II, PD, QPAR111 414
LIGHT EYE® 150 TRACK EASYTEC® II, QPAR111 413
LIGHT EYE® 150 3-circ., PD, QPAR111 363
LIGHT EYE® 150 PD, QPAR111 ..... 050, 399
LIGHT PIPE 60/90 PD, TRIAC 075
LIGHT PIPE 60/90/140 Pole, TRIAC 028, 550
LIGHTPOINT EL 448
LIPA CW, TRIAC 683
LIPSY® 30 CW, Dome 311
LIPSY® 30 CW, Drum 312
LIPSY® 30 CW, VALETO® 310, 825
LIPSY® 40 CW, Dome 311
LIPSY® 40 CW, Drum 312
LIPSY® 40 CW, Drum, DALI 313
LIPSY® 40 CW, VALETO® 310, 825
LIPSY® 50 CW, Dome 311
LIPSY® 50 CW, Drum 312
LIPSY® 50 CW, Drum, DALI 313
LIPSY® 50 CW, VALETO® 310, 825
LISENNE 40/70 Pole, E27 546
LISENNE CL, E27 673
LISENNE PD, E27 076
LISENNE TL, E27 541
LISENNE WL, E27 143
LOGS 40/70 Pole 558
LOGS IN L WL 157
LOGS IN L WL, TRIAC 157
LOGS IN WL 156
LOGS WL 664
LONG GRILL CW 329
LYNAH PD, quad 119
LYNAH WL 184

M

M-TRACK
M-TRACK Adjustable light 430
M-TRACK Spot 430
M-TRACK Track 431
M-TRACK Track accessories 431

MAGANDA TL 012
MAGANDA WL 210
MALANG CL, E27 260
MALANG CW, SLV VALETO® 067, 322, 824
MALO Display WL 228
MALU CL 679
MALU Pole 576
MALU WL 644
MANA OUT WL 660
MANA Shade 151, 153, 199
MANA WL, Basic 198
MANA WL, Basic, TRIAC 150, 152

MARONA CW, TRIAC ... 314
MARYLIN WL ... 212
MECANICA PLUS FL ... 027
MECANICA PLUS TL ... 027

MEDO
MEDO 30 CL, 1-10V ... 092, 248
MEDO 30 CL, TRIAC ... 090, 246
MEDO 30 CORONA CW, DALI ... 096, 252
MEDO 30 CORONA CW, TRIAC ... 094, 250, 321
MEDO 30 EL, Frame ... 520
MEDO 30 EL, Frameless ... 518
MEDO 40 CL, 1-10V ... 092, 248
MEDO 40 CL, TRIAC ... 091, 247
MEDO 40 CORONA CW, DALI ... 096, 252
MEDO 40 CORONA CW, TRIAC ... 095, 251, 321
MEDO 40 EL, Frame ... 520
MEDO 40 EL, Frameless ... 519
MEDO 60 CL, 1-10V ... 092, 248
MEDO 60 CL, Square ... 254
MEDO 60 CL, Square, 1-10V ... 098
MEDO 60 CL, Square, DALI ... 099, 255
MEDO 60 CORONA CW, DALI ... 096, 252
MEDO 60 CORONA CW, TRIAC ... 095, 251, 321
MEDO 60 EL, Frame ... 520
MEDO 60 EL, Frameless ... 519
MEDO 90 CL, 1-10V ... 093, 249
MEDO 90 CORONA CL, DALI ... 097, 253
MEDO 90 CORONA CL, TRIAC ... 095, 251
MEDO 90 EL, Frame ... 521
MEDO 90 EL, Frameless ... 519
MEDO RING 60 PD, DALI ... 101
MEDO RING 60 PD,1-10V ... 100
MEDO RING 90 PD,1-10V ... 100

MELAN CW, E27 ... 316
MERADO FLOOD TRACK 3-circ., TRIAC ... 345
MERADO FLOOD WL ... 189
MERIDIAN BOX WL, E27 ... 626, 627
MERIDIAN BOX WL, E27, MR ... 627
MERIDIAN WL, E27 ... 623
MERVALED SENSOR WL ... 637
MERVALED WL ... 637
MIBO UP/DOWN WL, QT14 ... 214
MILANDO 2 EL ... 479
MILANDO 5 EL ... 479
MILANDO 10 EL ... 479
MOBALA EL ... 445
MOLAT CL, E27 ... 672
MOLAT PD, E27 ... 532
MOLAT Pole, E27 ... 550
MOLAT WL, E27 ... 614
MOLDI 32 CW ... 315
MOLDI 46 CW ... 315
MOLDI 46 CW, Sensor ... 315
MYRA CW, single, QPAR51 ... 690
MYRA WL, double, QPAR51 ... 690
MYRA DISPLAY WL, curved, QPAR51 ... 671
MYRA DISPLAY WL, straight, QPAR51 ... 671
MYRA SPOT Double, GU10 ... 583
MYRA UP/DOWN WL, QPAR51 ... 653

N

NAGY 75 CL, QPAR51 ... 264
NAPIA TWIN WL ... 200
NAPIA WL ... 200
NAUTILUS 10 SP, round, QPAR51 ... 588, 589
NAUTILUS 10 SP, square ... 589
NAUTILUS 10 SPOT SP, QPAR51 ... 597
NAUTILUS 10 WL, square ... 689
NAUTILUS 25 CL ... 688
NAUTILUS SP ... 597
NAUTILUS SP, QR-C51 ... 595
NAUTILUS SPOT SP, PAR38, E27 ... 597
NAUTILUS WL, square ... 689
NEPRO DISPLAY QT-DE12 ... 228

NEW TRIA
NEW TRIA 45 Single, round, CS ... 488
NEW TRIA 45 Single, square, CS ... 488
NEW TRIA 68 Single, round, CS, TRIAC ... 490
NEW TRIA 68 Single, square, CS, TRIAC ... 490
NEW TRIA 68 Single, round, CS ... 489
NEW TRIA 68 Single, square, CS ... 489
NEW TRIA 68 Single, round, CS/LS, QPAR51 ... 482
NEW TRIA 68 Single, square, CS/LS, QPAR51 ... 482
NEW TRIA 68 Single, round, CS/LS, TRIAC ... 491
NEW TRIA 68 Single, square, CS/LS, TRIAC ... 491
NEW TRIA 77 Single, round, CS ... 492
NEW TRIA 77 Single, square, CS ... 492
NEW TRIA 78 Single, round, CS, QPAR51 ... 485
NEW TRIA 78 Single, square, CS, QPAR51 ... 485
NEW TRIA 78 Single, round, LS, QPAR51 ... 484
NEW TRIA 78 Single, square, LS, QPAR51 ... 484
NEW TRIA 110 Single, round, CS, TRIAC ... 494
NEW TRIA 110 Single, square, CS, TRIAC ... 495
NEW TRIA 150 Single, round, CS, 1-10V ... 495
NEW TRIA 150 Single, square, CS, 1-10V ... 495
NEW TRIA 150 Single, round, LS, QPAR111 ... 487
NEW TRIA 150 Single, square, LS, QPAR111 ... 487
NEW TRIA 155 Double, CS ... 493
NEW TRIA 155 Double, CS, QPAR51 ... 486
NEW TRIA 300 Double, CS, QPAR111 ... 487

LOW-VOLTAGE CABLE SYSTEM
LOW-VOLTAGE CABLE SYSTEM ... 428, 429
LOW-VOLTAGE CABLE SYSTEM accessories ... 429

NOBLO CW, single, TRIAC ... 297
NOBLO CW, double, TRIAC ... 297
NOBLO CW, triple, TRIAC ... 297
NOBLO SPOT 1-circ. ... 396
NOBLO SPOT 1-circ., Triple Track Set ... 386
NOBLO SPOT 3-circ. ... 346
NOBLO SPOT LV, Rope track ... 424
NOTAPO WL ... 440

O

OCCULDAS 13 DL, TRIAC ... 263
OCCULDAS 13 DL, indirect, TRIAC ... 262
OCCULDAS 13 MOVE DL, TRIAC ... 263
OCCULDAS 14 EL, indirect, TRIAC ... 469
OCCULDAS 14 MOVE EL, TRIAC ... 469
OCCULDAS 23 DL, indirect, TRIAC ... 263
OCCULDAS 23 EL, indirect, TRIAC ... 469
ONE 40 WL, DALI ... 140
ONE 60 PD, DALI ... 103
ONE 60 WL, DALI ... 140
ONE 80 PD, DALI ... 103
ONE TRIPLE PD, DALI ... 103
OPEN GRILL CW ... 329
OPEN GRILL PD, Single Twist ... 116
OPEN GRILL PD, Double Twist ... 116
ORDI SENSOR WL ... 640
ORDI WL ... 640
OSSA 180 WL, QT-DE12 ... 168
OSSA 300 WL, QT-DE12 ... 168
OTOS GLAS Pole, E27 ... 547
OUT 65 EL, round, TRIAC ... 708
OUT 65 EL, square, TRIAC ... 708
OUT-BEAM UP/FLOOD Down WL ... 669
OUT-BEAM UP/DOWN WL ... 668
OUT-BEAM UP/DOWN WL, QT-DE12 ... 668
OUTDOOR BEAM 11 SP ... 604
OUTDOOR BEAM 22 SP ... 604
OUTDOOR BEAM 28 SP ... 605

P

P-LIGHT CL ... 742
P-LIGHT CW ... 740, 741, 743
PANEL 60 CL, round, DALI ... 257
PANEL 60 CL, round, TRIAC ... 256
PANEL 60 EL, round ... 522
PANEL 60 PD, 1-10V ... 104
PANEL 60 PD, round, DALI ... 105
PANEL CL, 1200x300 mm, DALI ... 257
PANEL CL, 1200x300 mm, TRIAC ... 257
PANTILO 16 PD, E27 ... 079
PANTILO 20 PD, E27 ... 079
PANTILO 28 PD, E27 ... 079
PARA 380 PD, E27 ... 128
PARA CONE 14 1-circ., PD, QPAR51 ... 400
PARA CONE 14 1-circ., PD, QPAR51 ... 389
PARA CONE 14 3-circ., PD, QPAR51 ... 363
PARA CONE 14 3-circ., QPAR51 ... 344
PARA CONE 20 PD, E27 ... 066
PARA CONE 30 PD, E27 ... 066
PARA CONE 40 PD, E27 ... 066
PARA DOME E27 ... 127
PARA DOME PD, E27 ... 127, 129
PARA FLAC PD/CL ... 130
PARA FLAC PD/CL, DALI ... 131
PARA MULTI PD, DLMI ... 129
PATTA-F EL, round, TRIAC ... 465, 709
PATTA-F EL, square, TRIAC ... 465, 709
PATTA-I EL, round, TRIAC ... 466, 467, 710, 711
PATTA-I EL, square, TRIAC ... 466, 467, 710, 711
PAVANO 300x1200 mm ... 527
PAVANO 300x1200 mm ... 527
PAVANO 620x620 mm ... 527
PEMA® WL ... 184, 633, 643
PEMA® WL, E27 ... 643
PHELIA FL, E27 ... 026
PHELIA PD, E27 ... 056, 057
PHELIA TL, QPAR51 ... 026
PHELIA WL, QPAR51 ... 203
PHOTONIA CL, E27 ... 672
PHOTONIA PD, E27 ... 532
PHOTONIA Pole, E27 ... 547
PHOTONIA TL, E27 ... 541
PHOTONIA WL, E27 ... 614
Pictogram transparencies ... 740, 741, 743
PIKA EL, round, QPAR51 ... 455
PIKA EL, round, QPAR51, rigid ... 454
PIKA EL, square, QPAR51, tiltable ... 455
PIKA EL, square, QPAR51, tiltable ... 455
PIPOFLEX WL ... 206

PLASTRA
PLASTRA 101 WL, E14 ... 180
PLASTRA 104 CL, E27 ... 240
PLASTRA 104 WL, QT14 ... 174
PLASTRA 105 CL, E27 ... 240
PLASTRA 15 CL, single, QPAR51 ... 272
PLASTRA 25 CL, double, QPAR51 ... 273
PLASTRA 25 PD, cone, TCR-TSE ... 048
PLASTRA 25 PD, round, TCR-TSE ... 049
PLASTRA 25 PD, TCR-TSE ... 049
PLASTRA 35 CL, triple, QPAR51 ... 273
PLASTRA CL ... 240
PLASTRA CL, QPAR51 ... 272
PLASTRA EL, round, QPAR51 ... 453
PLASTRA EL, square, QPAR51 ... 453
PLASTRA PD, QPAR51 ... 070
PLASTRA UP/DOWN WL, curve ... 174
PLASTRA WL ... 137
PLASTRA WL, cone, TCR-TSE ... 180
PLASTRA WL, cube, QT14 ... 155
PLASTRA WL, curve ... 170
PLASTRA WL, curve, QT-DE12 ... 180
PLASTRA WL, QPAR51 ... 159, 175
PLASTRA WL, rectangular, QT-DE12 ... 154
PLASTRA WL, slot, E14 ... 159
PLASTRA WL, square ... 137

POLE PARC 90/150/200 Pole ... 556
POLE PARC CL ... 675
POLE PARC UP/DOWN WL ... 657
POLE PARC WL ... 631
POWER TRAIL-LITE® EL, round ... 717
POWER TRAIL-LITE® EL, square ... 717
POWER-LED SPOT, GLU-TRAX® ... 432

PROFILE STRIP
PROFILE STRIP GRAND, 24V ... 787
PROFILE STRIP GRAND, 24V accessories ... 787
PROFILE STRIP SELECT, 24V ... 795
PROFILE STRIP STANDARD, 24V ... 782
PROFILE STRIP STANDARD, 24V accessories ... 783
PROFILE STRIP X-SLIM, 24V ... 793

PURI CW, single, QPAR51 ... 303
PURI CW, double, QPAR51 ... 303
PURI CW, quad, QPAR51 ... 303
PURI CW, triple, QPAR51 ... 303
PURI TRACK 1-circ., QPAR51 ... 387, 388
PURI TRACK 1-circ., Triple Track Set ... 386
PURI TRACK 3-circ., QPAR51 ... 350, 351
PURIA TRACK 1-circ., QPAR51 ... 387
PURISA WL, E27 ... 145

Q

Q-LINE® CL, 1 m, BAP ... 259
Q-LINE® CL, 2 m, BAP ... 259

Q-LINE® PD, 1 m, BAP, TRIAC 114
Q-LINE® PD, 2 m, BAP, TRIAC 114
Q-LINE® PD, DALI, single 113
Q-LINE® PD, single 113
Q-LINE® WL 221
QRB LV, QR111 423
QUAD Pole 579
QUAD UP/DOWN 12 WL 158, 658
QUAD UP/DOWN 15 WL 158, 658
QUAD WL 183, 646
QUADRASYL 75 Pole, TCR-TSE 575
QUADRASYL CW, TCR-TSE 645
QUADRASYL WL, TCR-TSE 645
QUADRULO SENSOR WL, E27 624
QUADRULO WL, E27 625

R

RASCALI 45/65 Pole 565
RASCALI WL 634
RASTO 120 CL, double 258
RASTO 125 CL, double 258
RASTO 150 CL, double 258
RASTO 155 CL, double 258
RENISTO S EL, round, housing, TRIAC 477
RENISTO S EL, square, housing, TRIAC 476
RENISTO M EL, round, housing, TRIAC 477
RENISTO M EL, square, housing, TRIAC 476
RENISTO L EL, round, housing, TRIAC 477
RENISTO L EL, square, housing, TRIAC 476
RETRATO WL 223
REVILO D-TRACK® 378
REVILO TRACK D-TRACK® 378
RILO EL 514
ROCCI EL, round 719
ROCCI EL, square 719
ROTOBALL 25 CL, E27 260
ROTOBALL 25/40 PD, E27 533
ROTOBALL 25/40/50 FL, E27 538
ROTOBALL 25/40/50 PD, E27 080
ROTOBALL 40 CL, E27 260
ROX ACRYL 30/60/90 Pole, E27 553
ROX ACRYL 30/60/90 Pole, TRIAC 553
ROX ACRYL CL, E27 676
ROX CL, GX53 676
ROX CL, QPAR111 ..... 266, 676
ROX UP/DOWN WL, QPAR111 ..... 178, 656
ROX WL, QPAR111 ..... 178, 630
RUBA 10/16/20 CW 681
RUBA 10/16/20 CW, Sensor 681
RUSTY® 40/70 Pole 545, 560
RUSTY® 40/70 Pole, E27 ..... 545, 560
RUSTY® CONE 40/70 Pole, E27 544
RUSTY® CONE FL, E14 544
RUSTY® PATHLIGHT 40/70 Pole 573
RUSTY® PATHLIGHT Pole, TCR-TSE 573
RUSTY® SLOT 50/80 Pole 571
RUSTY® SLOT 50/80 Pole, E27 571

S

SAIL WL 647
SALUNA LV, QR-C51 422
SEDO 14 WL 164
SEDO 21 WL 164
SEDO 7 WL 164
SENSER 12 CW, round, TRIAC 325
SENSER 12 CW, square, TRIAC 324
SENSER 12 EL, round 510
SENSER 12 EL, square 511
SENSER 18 CW, round, TRIAC 325
SENSER 18 CW, square, TRIAC 324
SENSER 18 EL, round 510
SENSER 18 EL, square 511
SENSER 24 CW, round, TRIAC 325
SENSER 24 CW, square, TRIAC 324
SENSER 24 EL, round 510
SENSER 24 EL, square 511
SHELL 15 WL, TRIAC 186
SHELL 30 WL, TRIAC 186
SIGHT 60 CW 328
SIGHT 115 CW 328
SIGHT TRACK 3-circ 349
SIGHT TRACK 3-circ., DALI 337
SIGHT TRACK 3-circ., PD 362
SIMA CW, round, Sensor 319
SIMA CW, round, TRIAC 318
SIMA CW, square, Sensor 319
SIMA CW, square, TRIAC 319
SITRA 360 CW, TCR-TSE 690
SITRA 360 Pole, TCR-TSE 582
SITRA 360 SPIKE SP, single, TCR-TSE 591
SITRA 360 SPIKE SP, double, TCR-TSE 591
SITRA CL, TCR-TSE 674
SITRA CUBE WL 663
SITRA CUBE WL, TCR-TSE 663
SITRA UP/DOWN WL 654
SITRA UP/DOWN WL, TCR-TSE 654
SITRA WL 629
SITRA WL, TCR-TSE 629
SLOTBOX 40/70 Pole 568
SLOTS 45 Pole 563
SLOTS 65 Pole 563
SLOTS WL 616
SOLASTO EL, square/round 718
SOLID CUBE WL, QT14 155
SOLO 90° GLU-TRAX®, QR-C51 432
SOPRANA CL, E27 237
SOPRANA OVAL WL, E27 147
SOPRANA PD, E27 082
SOPRANA WL, E27 149
SPHERA 45 PD, TRIAC 068
SPHERA 75 PD, TRIAC 068
SPOODI 13 SP, SENSOR 603
SPOODI 15 SP 600
SPOODI 20 SP 601
SPOODI 20 SP, SENSOR 603
SPOODI 31 SP 603
SPOT 79 CW, QPAR51 283
SPOT CW, E27 282
SPOT DISPLAY E27 225
SPOT T 3-circ. 348
SPOT TRACK 1-circ., E27 388
SPOT TRACK 3-circ., E27 342
SQUARE C CL, E27 677
SQUARE CL, TRIAC 677
SQUARE Pole 30/60/90 Pole, TRIAC 559
SQUARE TURN WL, G9 657
SQUARE WL, E27 620
SQUARE WL, TRIAC 620
STIX WL 203
STRUCTEC 1-circ. 398
STRUCTEC 3-circ., R9 356
STRUCTEC 3-circ. 356
STRUCTEC 3-circ., DALI 336
STRUCTEC ZOOM 3-circ. 357
SUN / BIG SUN PD, E27 080
SUPROS 78 CL, TRIAC 277
SUPROS 78 EL, Move, TRIAC 505
SUPROS 78 EL, TRIAC 504
SUPROS 78 PD 124
SUPROS 78 TRACK 3-circ., TRIAC 354
SUPROS 78 Up/Down WL 179
SUPROS CL 277
SUPROS CL, Move 277
SUPROS EL 506
SUPROS EL, Move 507
SUPROS PD 125
SUPROS TRACK 3-circ 355
SYNA SP 590
SYROS LV, QR-C51 421

T

TANI WL, QT-DE12 162
TEC KALU CL, double, TRIAC 268
TEC KALU CL, quad, TRIAC 268
TEC KALU TRACK 3-circ., double, TRIAC 352
TEC KALU TRACK 3-circ., double, TRIAC 352
TELESKOP LV, QR-C51 420
TENORA CL, E27 237
TENORA WL, E27 191
TERANG 200 CW 684
TERANG 270 CW 684
TERANG 270 CW Sensor 684
THEO CL, QPAR51 678
THEO PATHLIGHT Pole, single 578
THEO PATHLIGHT Pole, double 578
THEO UP/DOWN WL, QPAR51 ..... 161, 665
THEO WL, QPAR51 650
TODAY Display 670
TODAY PRO Display 670
TONGA® 1-circ., PD, E14 400
TONGA® EASYTEC® II, PD, E14 414
TONGA® PD, E14 077
TONILA TL 011
TOTHEE CW, TRIAC 287
TOTHEE D-TRACK®, TRIAC 378
TRAIL-LITE® 60 EL 716
TRAPECCO DOWN WL 644
TRAPECCO Pole 576
TRIADEM PD, E27 083
TRILEDO CL, single, round 271
TRILEDO CL, single, round, QPAR51 269
TRILEDO CL, single, square 271
TRILEDO CL, single, square, QPAR51 269
TRILEDO CL, double, square 271
TRILEDO CL, double, square, QPAR51 270
TRUKKO 60/90 WL 211
TRUKKO WL 211
TRUST 30/60 Pole 551
TRUST WL 619

V

SLV VALETO®

12/24V Strip control module | CCT 823
12/24V Strip control module| RGBW 823
15W, LED driver 823
Gateway 820
LIPSY® 30 CW, VALETO® 825
LIPSY® 40 CW, VALETO® 825
LIPSY® 50 CW, VALETO® 825
MALANG CW, SLV VALETO® 824
Phase cut dimmer 822
Remote control 822
Remote control, CCT/RGBW 822


VALETO® LED PANEL 595x595 mm
UGR>19 523
VALETO® LED PANEL 620x620 mm,
UGR<19 523
VANO WING SP, 1-10V 608
VAP 40/70/100 Pole, E27 554
VAP SLIM 30/60/90 Pole, E27 554
VARU EL 462, 705
VARU EL, QPAR51 ..... 462, 705
VERLUX EL, square, TRIAC 512, 513
VILUA L WL 649
VILUA S WL 648
VILUA UP/DOWN, WL 649
VINCELLI D PD, TRIAC 053
VINCELLI D TL 012
VINCELLI D WL 223
VISSARDO WL 210

W

WALLYX WL, QPAR51 635
WAVE 25 WL 171
WAVE 45 WL 171
WETSY EL, square/round 719
WILRON L SP 607
WILRON S SP 607
WL 106 E14 213
WL 149 WL 163
WL 149 WL, QT-DE12 163
WORKLIGHT FL 030
WORKLIGHT PD, DALI 120
WORKLIGHT PLUS FL, DALI 031
WORKLIGHT PLUS PD, DALI 121
WORO EL 445

Y

YOKI EASYTEC® II, QPAR111 412

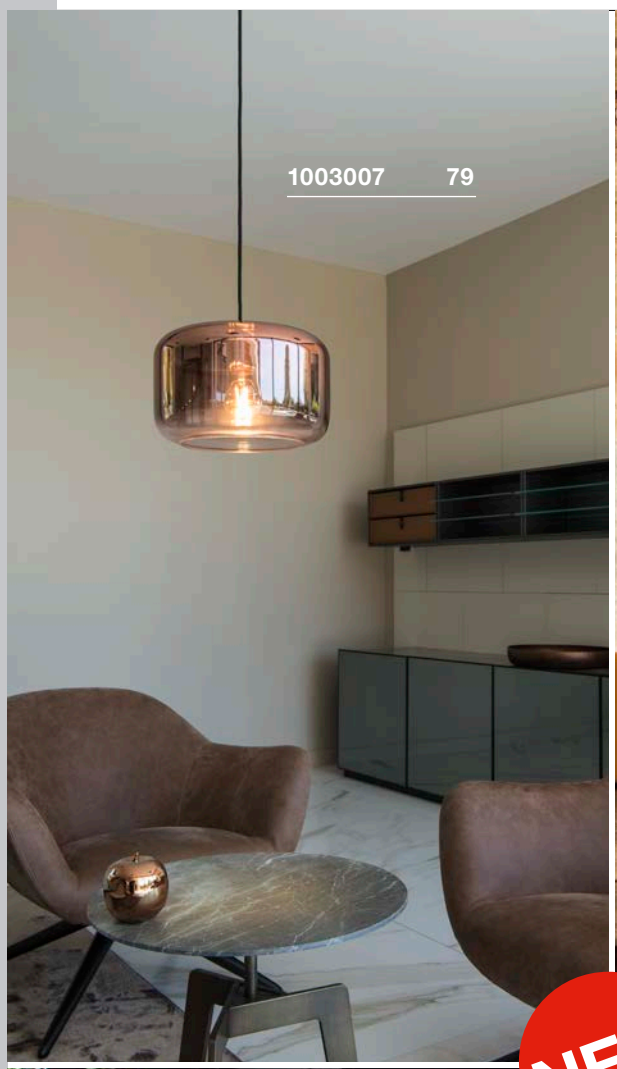






NEW
PANTILO




1002873 57
NEW VARIANT
PARA CONE

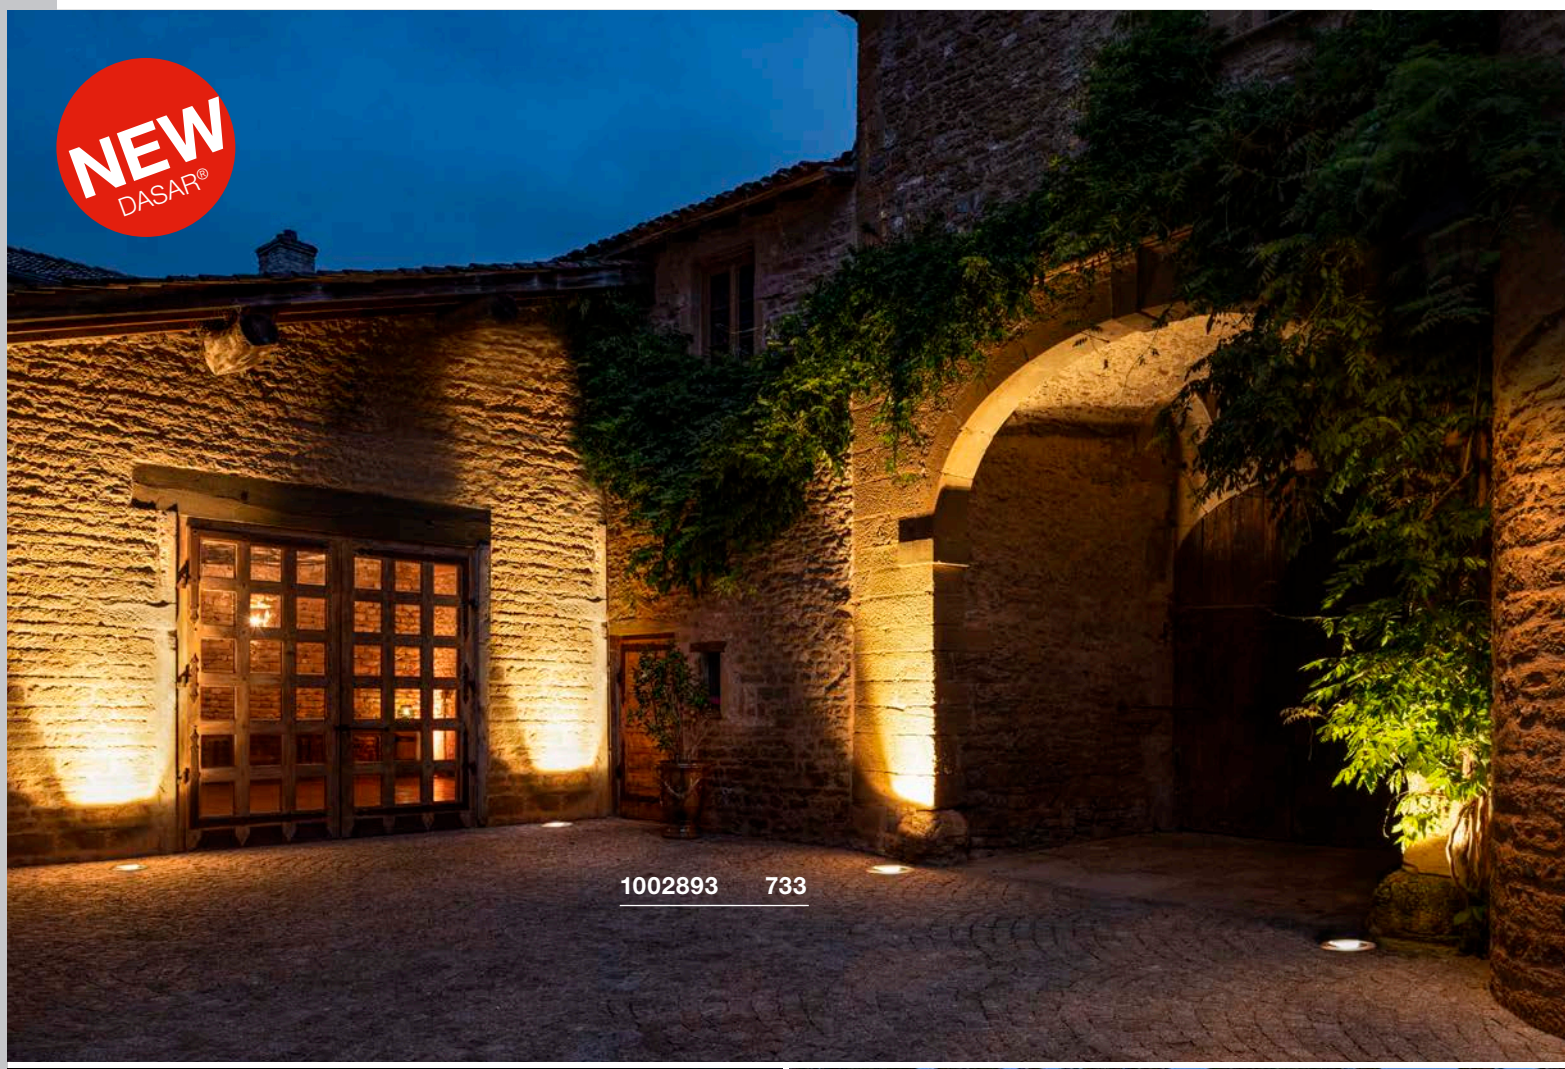
NEW
DASAR®
1002893 733

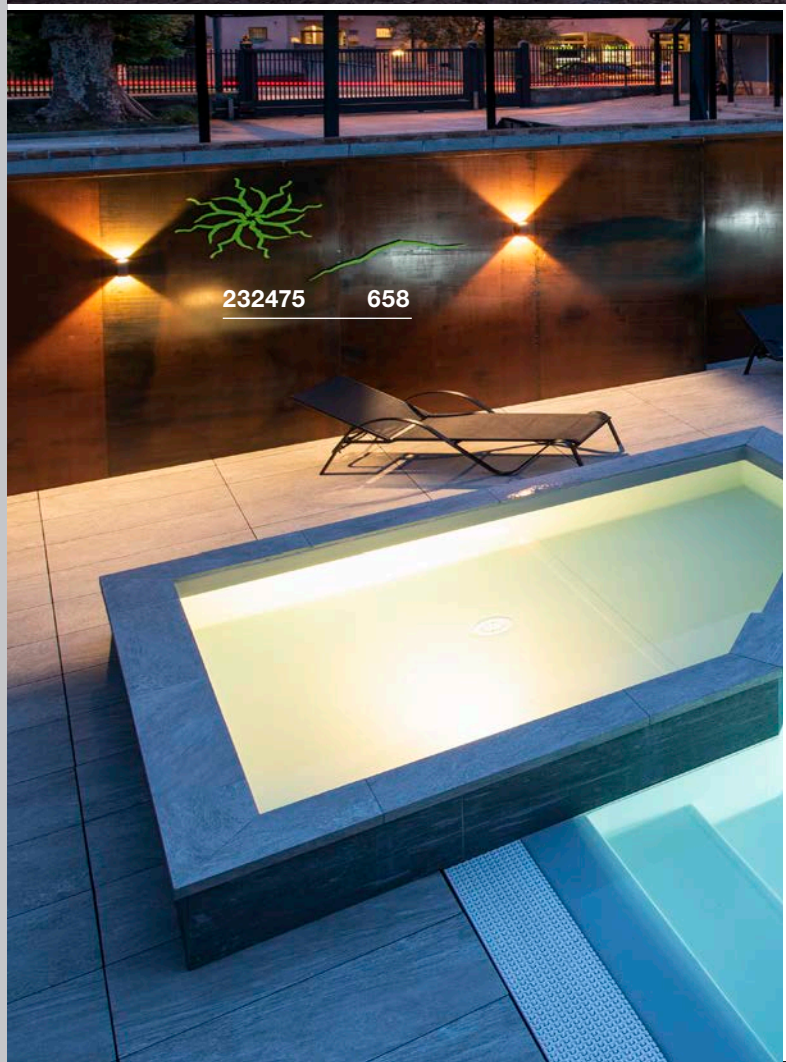
232475 658

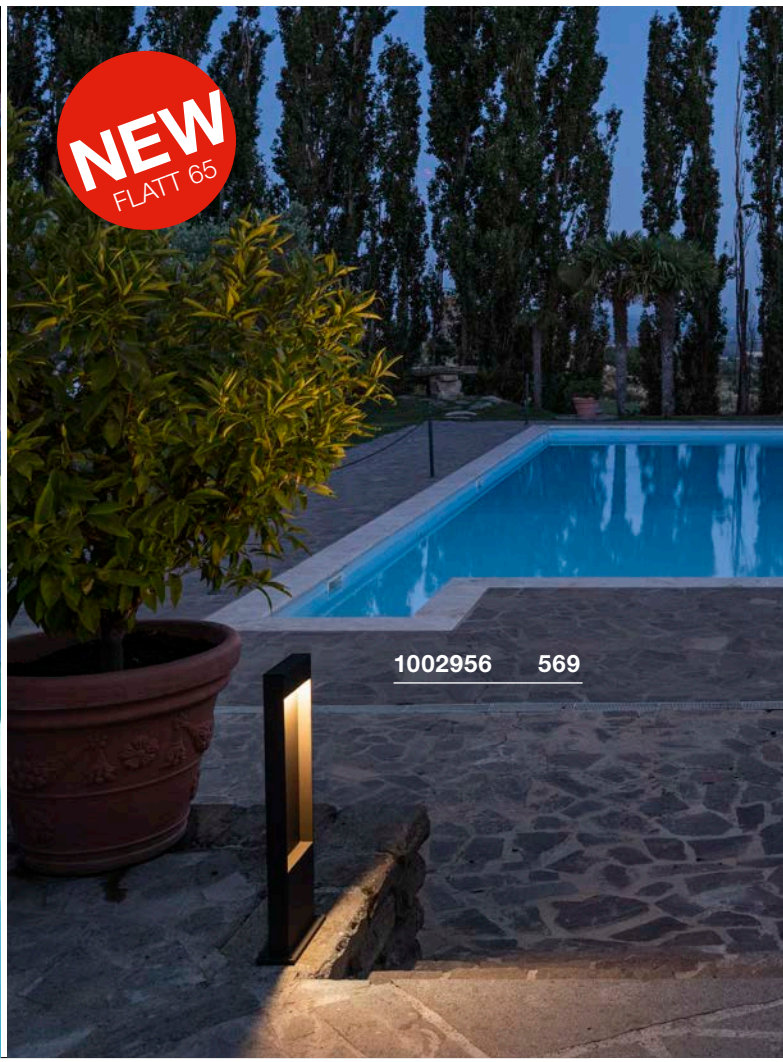
NEW
FLATT 65
1002956 569

PRODUCT CHARACTERISTICS

Energy efficiency index
"This luminaire is compatible with lamps of energy efficiency indexes ..."

Luminaires with built-in LEDs
"This luminaire contains built-in LED lamps. The lamps in the luminaire cannot be replaced." (see EU Regulation 874/2012)

"This luminaire contains built-in LED lamps. The lamps in the luminaire cannot be replaced." (see EU Regulation 874/2012)
Note for end users:
The light source of this luminaire may only be replaced by the manufacturer or a service technician authorised by them.

Energy efficiency index
of the ballast

Dimmable with ...
· T = trailing edge dimmer
· L = leading edge dimmer
· Uni = Universal dimmer
· Triac T = Triac trailing edge dimmer
· Triac L = Triac leading edge dimmer
· 1–10 V
· Dali = Dali bus system
· Switch = switch or button

Weight
of the product in kg

Rotatable and tiltable: Luminaire
· Rotation range
· Tilt range
Rotatable and tiltable: Lamp/lamp part
· Tilt range

The beam angle is measured at the angle where the light emitted diminishes to 50% intensity compared to the centre of the beam. The smaller the value, the greater the bundling.

Light outlet
· direct
· direct-indirect
· Beam
· Flood and Beam

Pendant length
In cm for pendants

Connection lead length in cm
Feed-in cable length in cm (with open cable end)

Maximum cable separation
for low-voltage cable systems in cm

Average life span of a lamp or a light source in hours

We would be happy to send you a light distribution graph for the product concerned on request.

Reflector lamps | direct mirror lamps (no cool beam):
Heat load in the light bundle, therefore almost no heat radiation on the rear side of the reflector

Products marked as being remotely controllable

SPECIFIC DETAILS – RECESSED FITTINGS

Shape of recess opening

Heat development
on the surface of the in-ground fitted spot

Weight bearing capacity of the product up to the specified value in tonnes. Measurements based on installations in concrete.

SAFETY INFORMATION

Protection class
One Two Three

Short circuit-resistant safety operating device

Impact resistance of the product to the specified value in joules

The IK impact resistance code is a measure of the protection provided for electrical operating materials (equipment) against external loads by a housing (IK codes).

APPLICATION AREA INSTALLATION

Installation area
· Wall
· Ceiling
· Ground / floor
· Wall / ceiling
· Wall / floor
· Ceiling / floor
· Wall / ceiling / floor

· Used **exclusively** indoors
· **Unsuitable** for use indoors
· IP protection class

Permits the device to be installed on materials whose flammability is not known.

Lamp suitable for use in luminaires ...
· **with** protection glass
· **without** protection glass

Cable diameter
in mm

Through-wiring ...
· possible
· possible to the number of luminaires indicated.

Independent converter
(Operating device also for use outside of luminaires)

SPECIAL SYMBOLS

Identifies products with built-in LEDs

Smart Home compatible
· SLV VALETO module integrated
· SLV VALETO capability with accessories

Indicates products which are appearing for the first time in this catalogue.

Marks new variants of existing products
· New colour variant
· New product variant
· Successor

Marks luminaires with a motion sensor (microwave system (MR) / infra-red / radio)

Dim to warm. The more the luminaire is dimmed, the warmer the light colour gets.

· **USB charging function**
· **Inductive (wireless) charging function** for Smartphones

Marks our High**LIGHTS** lamps

Indicates products which can be combined to suit individual taste and atmosphere.

Luminaires can be painted over as desired with wall paint, or even wallpapered after they have been primed.

Indicates products which can be provided in individual lengths and completely assembled according to the customer's wishes.

CUSTOMER INFORMATION

Information about heat development on luminaire housings
Halogen bulbs operate at a high temperature and can cause their respective luminaire housings to heat up. The latter may therefore only be touched when they have cooled down. Adjustable luminaires or lamp heads which do not have insulated adjusting handles fitted or which are used with lamps at the maximum wattage meaning that the permitted maximum housing temperature is exceeded at the obvious adjustment point, must be installed out of arms' reach. Our LED retrofit lamps are available as a low temperature alternative for most of our halogen luminaires.

Luminous flux
The total amount of light which is generated by a light source, given in Lumen (lm).

Luminous intensity
The luminous intensity is the luminous flux per room angle specified, it is given in Candela (cd).

Colour rendering index
The colour rendering index of a light source is described using the Ra Index (Colour Rendering Index). For light sources used indoors, a CRI of 80 or higher is prescribed. Light sources for outdoor use must have a CRI of at least 65.

Light colour
The light colour of a light source is given in Kelvin (K).

Standard LED
This is the classic version of an LED (3 mm or 5 mm LED). These were originally designed for indication purposes, e.g. in instrument panels.

Standard SMD LED
SMD stands for Surface Mounted Device. It is a compact LED without wire connectors, rather with direct soldering onto the PCB. SMDs are available in various sizes and are well suited for illumination purposes.

PowerLED
A PowerLED is a powerful LED with 1W or more power. It places increased demands on the current stability and therefore has to be used with constant current sources. If multiple LEDs are connected, they must therefore be connected in series. Connecting in parallel is not permitted. Please also pay attention to the installation sequence so that LEDs are not exposed to high currents for short periods of time, since they could be damaged. In general, the following applies: First completely connect the secondary circuit (LEDs to the driver), then connect the primary circuit (driver to the power source).

Chip On Board LED (COB LED); Flat LEDs
These are LEDs with an extremely flat design. The advantage of COB LEDs is that they have good heat dissipation for technical implementation with cool surfaces, providing the possibility of high luminous efficiency with long service life.

Stainless steel 304
(1.4301) Has good corrosion resistance suited to natural environmental media (water, urban and rural atmospheres) without the presence of significant concentrations of chlorine and salt. However, 1.4301 is not suitable for usage areas in which it comes into contact with sea water, salt water or salt-laden atmospheres, nor is it suitable for use in swimming pools or the like.

Stainless steel 316
(1.4404) Has excellent corrosion resistance suited to natural environmental media (water, urban and rural atmospheres) as well as in industrial areas with moderate concentrations of chlorine and salt, in the food and pharmaceutical industries and in the agricultural food sector. 1.4404 is not sea water resistant.

Please note:
A large proportion of the products presented in this catalogue are protected by trademarks, registered design, industrial design or patents. Violation of these protective rights or the use of text and layout design and copyrighted pictures without our permission will be prosecuted. The illustrations and specifications contained within this catalogue are for illustration purposes only and are not binding in terms of colour, shape, design and technical specifications. No liability is therefore accepted for errors or changes in any of the product descriptions/information.
All products in our range are subjected to stringent quality assurance measures and meet all of the generally applicable standards. This catalogue contains a general range and is not designed to be country-specific. Any deviations from country-specific regulations must be clarified before an order is placed. SLV is not liable for any other technical standards, where applicable.
All weight and length data specified are in kg or in cm, unless otherwise specified. We reserve the right to make technical changes!

The presentation of our luminaires with realistic and exemplary application photographs has been made possible by the friendly cooperation and agreement of the owner or designer of each property shown in the foreground of the pictures. Once again, we would like to take this opportunity to thank those who gave their permission for the photographs to be taken and used in this publication!

With the publication of this catalogue, the prices in other previously published lists and catalogues become invalid.

All prices specified are recommended retail prices (RRP) given in GBP and without VAT.

Publisher
SLV GmbH, Germany
Daimlerstraße 21-23
D-52531 Übach-Palenberg
T +49 (0) 2451 4833 - 355
slv.com

Copyright
© SLV GmbH, 2019

Photo credits
SLV GmbH
External photographers: Andreas Fein, Anja Lynen, Gerd Arnolds, Günther Preissler, Marc Derkum, Dirk Hoffmann

PEFC/04-31-1033

Innovative use of combined heat and power technology when printing this product reduced CO_2 emissions by up to 52% in comparison to conventional methods in Germany.

EcoVadis
EcoVadis is a well-known rating agency which evaluates corporate responsibility. A total of 150 purchasing categories and 21 CSR indicators are examined with the so-called CSR evaluation method (Corporate Social Responsibility). When doing this, the rating agency does not just examine environmental aspects but also adherence to employment law and human rights, as well as ethics and sustainable procurement. Since it was established in 2007, EcoVadis has become a valued and recognised partner for purchasing organisations in more than 300 of the world's leading multinational companies. SLV's result puts the company in the top 5 % of all companies participating in the assessment worldwide, and even in the top 2 % in its own industry.

INTALITE UK

148-154 Merton High St
Wimbledon
London
SW19 1AZ

T 020 8542 1471
T 0870 4211 763

sales@intalite.co.uk
intalite.co.uk