

# INTANOVA

Commercial Lighting Solutions



**INTALITE UK**

*Loving Light!*

**2020**

## NOTES



## CONTENTS

## PAGE

### Track and Accessories

2 - 9

### Track Fittings

10 - 33

### Emergency Track Fittings

34 - 35

### Recessed Fittings

36 - 59

### Surface Mounted Fittings

60 - 63

### Pendant Fittings

64 - 71

### Wattage Table

72

### Index

73

### Terms and Conditions

74



Basic lighting module available in CRI >80Ra and >90Ra in 2700K, 3000K and 4000K. Higher colour temperatures available on a per product basis.

**Standard £0**



Mains Leading and Trailing edge dimmable (available up to 3,000lm on track fittings).

**Mains £18**



Digital Addressable Lighting Interface (DALI) is a lighting control system which provides a unified interface for controlling fittings. As an open dali standard allows light fittings from various manufacturers to be used within a single control system.

#### Track

**1 Circuit Dali £66**

**3 Circuit Dali £72**

#### Recessed Fittings

**Under 3000lm £48**

**Above 3000lm £78**



Casambi is a bluetooth low energy lighting solution. All Casambi products automatically form a wireless mesh network to dim the lighting, adjust colour and group luminaires, they can be controlled by smartphones, tablets or smart watches.

**Casambi £215**



Dim-to-Warm is a technology that reduces a luminaire's colour temperature when being (Circuit) dimmed, from 3000K to 2200K. This makes our Dim-to-Warm fixtures ideal to use in domestic and hospitality projects.

**1100lm £30**

**2000lm £36**



Excellent quality of light and colour rendition, combined with high energy efficiency. Ideal for creating ambience, fresh whites and depth of colour in many retail environments. Premium White module available in CRI >80Ra and >90Ra in 3000K and 4000K. Premium Ambience module available in CRI >90Ra in 2200K.

**Premium £18**



2200K option only available with premium module CRI 90>

**Premium Ambience Module £18**



Maintained or Non-maintained operations available rated up to 3 hours.

**Emergency £120**



LED modules dedicated towards fresh food applications. Food WarmWhite Module: Enhances the appearance of fresh food, such as bread, fruit and vegetables. Food Premium Meat Module: Enhances the appearance of fresh meat. Fresh Fish Module: Enhances the appearance of fresh fish.

**Food Module £36**



The Honeycomb diffuser shade provides a less intense light.

**Honeycomb £11**



Additional glass cover over fitting

**Glass £11**



Tunable White allows you to control the colour temperature of a fixture between 2500K and 7000K. Our Tunable White fixtures can be controlled using the user friendly Casambi app.

**Tunable White £275**



RAL Colours are as follow for Track and Accessories

**Black RAL 9011**

**White RAL 9010**

**Silver RAL 7040**



Rotation Range



Tilt Range



5 Year Warranty on Philips Fittings


All Dimensions are in Millimeters (mm)

## TRACK

### Surface Mounted 3 Circuit Track

Rated Voltage: 240v ~ 50Hz  
Current Load Max: 16A per circuit  
Material: Copper & Aluminium  
Width: 3.52cm  
Height: 3.55cm

Powergear® 3-Circuit track is a high quality track system for the professional lighting market. The track is suitable for track lights with 3-Circuit adapters of all major brands. The track can easily be shortened by cutting with a metal saw.



| 1m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0410-B | 24.90 |
| ○ White  | PRO-0410-W | 24.90 |
| ● Silver | PRO-0410-S | 24.90 |

| 2m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0420-B | 44.90 |
| ○ White  | PRO-0420-W | 44.90 |
| ● Silver | PRO-0420-S | 44.90 |

| 3m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0430-B | 69.90 |
| ○ White  | PRO-0430-W | 69.90 |
| ● Silver | PRO-0430-S | 69.90 |

### Recessed Mounted 3 Circuit Track

Rated Voltage: 240v ~ 50Hz  
Current Load Max: 16A per circuit  
Material: Copper & Aluminium  
Width: 5.62cm  
Height: 3.26cm

Powergear® Recessed 3-Circuit track is a high quality track system for the professional lighting market. The track is suitable for track lights with 3-Circuit adapters of all major brands. The track can easily be shortened by cutting with a metal saw.



| 1m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-R410-B | 29.90 |
| ○ White  | PRO-R410-W | 29.90 |
| ● Silver | PRO-R410-S | 29.90 |

| 2m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-R420-B | 49.90 |
| ○ White  | PRO-R420-W | 49.90 |
| ● Silver | PRO-R420-S | 49.90 |

| 3m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-R430-B | 79.90 |
| ○ White  | PRO-R430-W | 79.90 |
| ● Silver | PRO-R430-S | 79.90 |



## TRACK ACCESSORIES

### 3C Feed-in Left

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel  
Left sided electrode  
1pc



| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-0431L-B | 10.00 |
| ○ White  | PRO-0431L-W | 10.00 |
| ● Silver | PRO-0431L-S | 10.00 |

### 3C Feed-in Right

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel  
Right sided electrode  
1pc



| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-0431R-B | 10.00 |
| ○ White  | PRO-0431R-W | 10.00 |
| ● Silver | PRO-0431R-S | 10.00 |

### Coupler

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel  
Track joiner  
1pc



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-0433-B | 6.00 |
| ○ White  | PRO-0433-W | 6.00 |
| ● Silver | PRO-0433-S | 6.00 |

### End Cap

Max:  
240V / 16A  
Materials:  
PC & Steel  
1pc



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-0432-B | 1.50 |
| ○ White  | PRO-0432-W | 1.50 |
| ● Silver | PRO-0432-S | 1.50 |

### 3C Twisted L-connector

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



Connect track at 90°  
angle (reversible) - 1pc

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-M438-B | 22.00 |
| ○ White  | PRO-M438-W | 22.00 |
| ● Silver | PRO-M438-S | 22.00 |

### 3C Centre Feed-in

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



Middle connector with  
feed-in capacity -1pc

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0434-B | 18.00 |
| ○ White  | PRO-0434-W | 18.00 |
| ● Silver | PRO-0434-S | 18.00 |

### 3C Twisted T-connector Left

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



Connect track into T  
configuration - 1pc

| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-M436L-B | 28.00 |
| ○ White  | PRO-M436L-W | 28.00 |
| ● Silver | PRO-M436L-S | 28.00 |

### 3C Twisted T-Connector Right

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



Connect track into T  
configuration - 1pc

| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-M436R-B | 28.00 |
| ○ White  | PRO-M436R-W | 28.00 |
| ● Silver | PRO-M436R-S | 28.00 |

### 3C X-connector

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



Connecting track in a  
cross configuration - 1pc

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0437-B | 32.00 |
| ○ White  | PRO-0437-W | 32.00 |
| ● Silver | PRO-0437-S | 32.00 |

### 3C Adjustable connector

Max: 240V / 16A  
Materials:  
PC & Copper & Steel



Track joiner at angles  
up to 90 - 1PC

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-M435-B | 25.00 |
| ○ White  | PRO-M435-W | 25.00 |
| ● Silver | PRO-M435-S | 25.00 |

### 3C Flexible connector

Max: 240V / 16A  
Materials:  
PC & Copper & Steel



Connect track at  
angles up to 90° - 1pc

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0439-B | 28.00 |
| ○ White  | PRO-0439-W | 28.00 |
| ● Silver | PRO-0439-S | 28.00 |

### 3C track adapter

Max: 240V / 10A  
5kg  
Materials:  
PC & Copper & Steel



Pendant track adapter  
1pc

| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-0222-B | 8.00 |
| ○ White  | PRO-0222-W | 8.00 |
| ● Silver | PRO-0222-S | 8.00 |

### Mounting clamp

Materials:  
Steel & Aluminium



Used for mounting  
track perpendicular  
along wall or ceiling  
- 1pc

| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-04SK-B | 3.00 |
| ○ White  | PRO-04SK-W | 3.00 |
| ● Silver | PRO-04SK-S | 3.00 |

### 3C Fixed monopoint

Max: 240V / 10A  
Materials:  
PC & Copper & Steel



Mounting plate for  
3 circuit track fitting  
- 1pc

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-C100-B | 26.00 |
| ○ White  | PRO-C100-W | 26.00 |
| ● Silver | PRO-C100-S | 26.00 |


### Suspension kit with 5m wire

Materials:  
PC & Steel  
Suspension kit with  
5m wire (can be cut  
to desired length)  
including  
mounting kit - 1pc



| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-EZ0449-B | 11.00 |
| ○ White  | PRO-EZ0449-W | 11.00 |
| ● Silver | PRO-EZ0449-S | 11.00 |



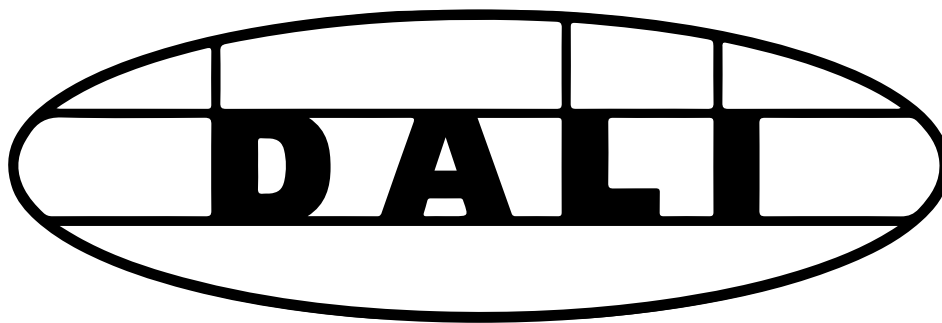


## TRACK

### Surface Mounted 1 Circuit Dali Track

Rated Voltage: 240v ~ 50Hz  
Current Load Max: 16A  
Material: Copper & Aluminium  
Width: 3.52cm  
Height: 3.55cm

Powergear® 1-Circuit DALI track is a high quality track system for the professional lighting market. The track is suitable for track lights with a Powergear® 1-Circuit DALI adapter. The track can easily be shortened by cutting with a metal saw.



| 1m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0410-B | 24.90 |
| ○ White  | PRO-0410-W | 24.90 |
| ● Silver | PRO-0410-S | 24.90 |


| 2m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0420-B | 44.90 |
| ○ White  | PRO-0420-W | 44.90 |
| ● Silver | PRO-0420-S | 44.90 |

| 3m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0430-B | 69.90 |
| ○ White  | PRO-0430-W | 69.90 |
| ● Silver | PRO-0430-S | 69.90 |

### Recessed Mounted 1 Circuit Dali Track

Rated Voltage: 240v ~ 50Hz  
Current Load Max: 16A  
Material: Copper & Aluminium  
Width: 5.62cm  
Height: 3.26cm

Powergear® recessed 1-Circuit DALI track is a high quality track system for the professional lighting market. The track is suitable for track lights with Powergear® 1-Circuit DALI adapters. The recessed DALI track can easily be shortened by cutting with a metal saw.



| 1m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-R410-B | 29.90 |
| ○ White  | PRO-R410-W | 29.90 |
| ● Silver | PRO-R410-S | 29.90 |

| 2m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-R420-B | 49.90 |
| ○ White  | PRO-R420-W | 49.90 |
| ● Silver | PRO-R420-S | 49.90 |

| 3m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-R430-B | 79.90 |
| ○ White  | PRO-R430-W | 79.90 |
| ● Silver | PRO-R430-S | 79.90 |



## TRACK ACCESSORIES

### 1C DALI Feed-in Left

Max: 240V / 16A  
Materials:  
PC & Copper & Steel

Dali Left sided  
electrode - 1pc



| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-D431L-B | 11.00 |
| ○ White  | PRO-D431L-W | 11.00 |
| ● Silver | PRO-D431L-S | 11.00 |

### 1C DALI Feed-in Right

Max: 240V / 16A  
Materials:  
PC & Copper & Steel

Dali Right sided  
electrode - 1pc



| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-D431R-B | 11.00 |
| ○ White  | PRO-D431R-W | 11.00 |
| ● Silver | PRO-D431R-S | 11.00 |

### Coupler

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel  
Track joiner  
1pc



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-0433-B | 6.00 |
| ○ White  | PRO-0433-W | 6.00 |
| ● Silver | PRO-0433-S | 6.00 |

### End Cap

Max:  
240V / 16A  
Materials:  
PC & Steel

1pc



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-0432-B | 1.50 |
| ○ White  | PRO-0432-W | 1.50 |
| ● Silver | PRO-0432-S | 1.50 |

### 1C DALI Centre Feed

Max: 240V / 16A  
Materials:  
PC & Copper & Steel

Dali Middle connector  
with feed-in  
capacity-1pc



| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-D434-B | 25.00 |
| ○ White  | PRO-D434-W | 25.00 |
| ● Silver | PRO-D434-S | 25.00 |

### 1C DALI L-connector Left

Max: 240V / 16A  
Materials:  
PC & Copper & Steel

Dali Connect track at  
90° angle (left feed)  
- 1pc



| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-D435L-B | 22.00 |
| ○ White  | PRO-D435L-W | 22.00 |
| ● Silver | PRO-D435L-S | 22.00 |

### 1C DALI L-connector Right

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel

Dali Connect track at 90°  
angle (right feed) - 1pc



| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-D435R-B | 22.00 |
| ○ White  | PRO-D435R-W | 22.00 |
| ● Silver | PRO-D435R-S | 22.00 |

### 1C DALI T-connector Left 1

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel

Dali Connect track in T  
configuration L1 - 1pc



| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-D436L1-B | 29.00 |
| ○ White  | PRO-D436L1-W | 29.00 |
| ● Silver | PRO-D436L1-S | 29.00 |

### 1C DALI T-connector Right 1

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel

Dali Connect track in T  
configuration R1 - 1pc



| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-D436R1-B | 29.00 |
| ○ White  | PRO-D436R1-W | 29.00 |
| ● Silver | PRO-D436R1-S | 29.00 |

### 1C DALI T-connector Left 2

Max: 240V / 16A  
Materials:  
PC & Copper & Steel

Dali Connect track  
in T configuration  
L2 - 1pc



| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-D436L2-B | 29.00 |
| ○ White  | PRO-D436L2-W | 29.00 |
| ● Silver | PRO-D436L2-S | 29.00 |

### 1C DALI T-connector Right 2

Max: 240V / 16A  
Materials:  
PC & Copper & Steel

Dali Connect track in T  
configuration R2 - 1pc



| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-D436R2-B | 29.00 |
| ○ White  | PRO-D436R2-W | 29.00 |
| ● Silver | PRO-D436R2-S | 29.00 |

### 1C DALI X-connector

Max: 240V / 16A  
Materials:  
PC & Copper & Steel

Dali Connecting track  
in a X configuration  
- 1pc



| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-D437-B | 40.00 |
| ○ White  | PRO-D437-W | 40.00 |
| ● Silver | PRO-D437-S | 40.00 |

### 1C DALI Flexible Connector

Max: 240V / 16A  
Materials:  
PC & Copper & Steel

Dali connect track at  
angles up to 90° - 1pc



| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-D439-B | 30.00 |
| ○ White  | PRO-D439-W | 30.00 |
| ● Silver | PRO-D439-S | 30.00 |

### 1C DALI Track adapter

Max: 240V / 10A  
5kg  
Materials:  
PC & Steel

1pc



| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-D480-B | 12.00 |
| ○ White  | PRO-D480-W | 12.00 |
| ● Silver | PRO-D480-S | 12.00 |


### Suspension kit with 5m wire

Materials:  
PC & Steel  
Suspension kit with  
5m wire (can be cut  
to desired length)  
including  
mounting kit - 1pc



| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-EZ0449-B | 11.00 |
| ○ White  | PRO-EZ0449-W | 11.00 |
| ● Silver | PRO-EZ0449-S | 11.00 |



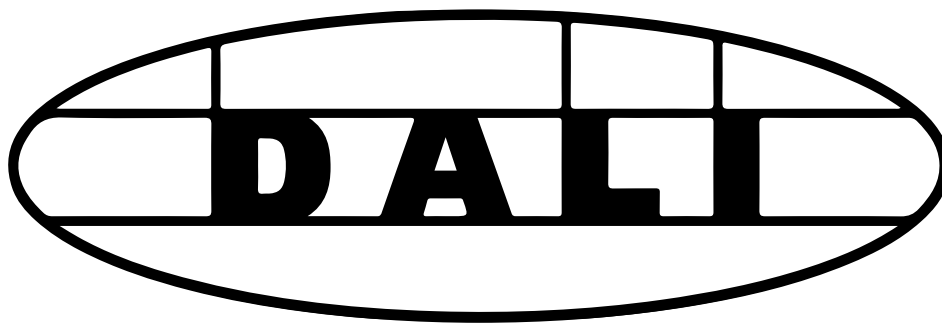

## TRACK

### Surface Mounted 3 Circuit Dali Track

Rated Voltage: 240v ~ 50Hz  
Current Load Max: 16A per circuit  
Material: Copper & Aluminium  
Width: 3.52cm  
Height: 3.55cm

Powergear® 3-Circuit DALI track is a high quality track system for the professional lighting market. The track is suitable for track lights with a Powergear® 3-Circuit DALI adapter. The track can easily be shortened by cutting with a metal saw.



| 1m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0610-B | 34.90 |
| ○ White  | PRO-0610-W | 34.90 |
| ● Silver | PRO-0610-S | 34.90 |

| 2m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0620-B | 64.90 |
| ○ White  | PRO-0620-W | 64.90 |
| ● Silver | PRO-0620-S | 64.90 |

| 3m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0630-B | 89.90 |
| ○ White  | PRO-0630-W | 89.90 |
| ● Silver | PRO-0630-S | 89.90 |

### Recessed Mounted 3 Circuit Dali Track

Rated Voltage: 240v ~ 50Hz  
Current Load Max: 16A per circuit  
Material: Copper & Aluminium  
Width: 5.62cm  
Height: 3.26cm

Powergear® recessed 3-Circuit DALI track is a high quality track system for the professional lighting market. The track is suitable for track lights with Powergear® 3-Circuit DALI adapters. The recessed DALI track can easily be shortened by cutting with a metal saw.



| 1m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-R610-B | 39.90 |
| ○ White  | PRO-R610-W | 39.90 |
| ● Silver | PRO-R610-S | 39.90 |

| 2m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-R620-B | 69.90 |
| ○ White  | PRO-R620-W | 69.90 |
| ● Silver | PRO-R620-S | 69.90 |

| 3m       | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-R630-B | 94.90 |
| ○ White  | PRO-R630-W | 94.90 |
| ● Silver | PRO-R630-S | 94.90 |



## TRACK ACCESSORIES

### 3C DALI Connector Left

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali Right sided  
electrode - 1pc

| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-D631L-B | 12.00 |
| ○ White  | PRO-D631L-W | 12.00 |
| ● Silver | PRO-D631L-S | 12.00 |

### 3C DALI Connector Right

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali Left sided  
electrode 1pc

| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-D631R-B | 12.00 |
| ○ White  | PRO-D631R-W | 12.00 |
| ● Silver | PRO-D631R-S | 12.00 |

### 3C DALI Coupler

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali Track joiner  
1pc

| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-D633-B | 8.00 |
| ○ White  | PRO-D633-W | 8.00 |
| ● Silver | PRO-D633-S | 8.00 |

### End Cap

Max:  
240V / 16A  
Materials:  
PC & Steel



1pc

| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-0432-B | 1.50 |
| ○ White  | PRO-0432-W | 1.50 |
| ● Silver | PRO-0432-S | 1.50 |

### 3C DALI Centre Feed

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali Middle connector  
with feed-in capacity-1pc

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-D634-B | 24.00 |
| ○ White  | PRO-D634-W | 24.00 |
| ● Silver | PRO-D634-S | 24.00 |

### 3C DALI L-connector Left

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali Connect track at  
90° angle (left feed) - 1pc

| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-D635L-B | 25.00 |
| ○ White  | PRO-D635L-W | 25.00 |
| ● Silver | PRO-D635L-S | 25.00 |

### 3C DALI L-connector Right

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali Connect track at 90°  
angle (right feed) - 1pc

| Variant  | Item no.    | £     |
|----------|-------------|-------|
| ● Black  | PRO-D635R-B | 25.00 |
| ○ White  | PRO-D635R-W | 25.00 |
| ● Silver | PRO-D635R-S | 25.00 |

### 3C DALI T-connector Left 1

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel




3C Dali Connect track in  
T configuration L1 - 1pc

| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-D636L1-B | 37.00 |
| ○ White  | PRO-D636L1-W | 37.00 |
| ● Silver | PRO-D636L1-S | 37.00 |

### 3C DALI T-connector Right 1

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali Connect track in  
T configuration R1 - 1pc

| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-D636R1-B | 37.00 |
| ○ White  | PRO-D636R1-W | 37.00 |
| ● Silver | PRO-D636R1-S | 37.00 |

### 3C DALI T-connector Left 2

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali Connect track in  
T configuration L2 - 1pc

| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-D636L2-B | 37.00 |
| ○ White  | PRO-D636L2-W | 37.00 |
| ● Silver | PRO-D636L2-S | 37.00 |

### 3C DALI T-connector Right 2

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel




3C Dali Connect track in  
T configuration R2 - 1pc

| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-D636R2-B | 37.00 |
| ○ White  | PRO-D636R2-W | 37.00 |
| ● Silver | PRO-D636R2-S | 37.00 |

### 3C DALI X-connector

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali Connecting track  
in a X configuration - 1pc

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-D637-B | 47.00 |
| ○ White  | PRO-D637-W | 47.00 |
| ● Silver | PRO-D637-S | 47.00 |

### 3C Dali Flexible Connector

Max:  
240V / 16A  
Materials:  
PC & Copper & Steel



3C Dali connect track at  
angles up to 90° - 1pc

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-D639-B | 35.00 |
| ○ White  | PRO-D639-W | 35.00 |
| ● Silver | PRO-D639-S | 35.00 |

### 3C DALI Track adapter

Max: 240V / 10A  
5kg  
Materials:  
PC & Copper & Steel



3C Dali Pendant track  
adapter - 1pc

| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-D680-B | 14.00 |
| ○ White  | PRO-D680-W | 14.00 |
| ● Silver | PRO-D680-S | 14.00 |

### Suspension kit with 5m wire

Materials:  
PC & Steel  
Suspension kit with  
5m wire (can be cut  
to desired length)  
including  
mounting kit - 1pc



| Variant  | Item no.     | £     |
|----------|--------------|-------|
| ● Black  | PRO-EZ0449-B | 11.00 |
| ○ White  | PRO-EZ0449-W | 11.00 |
| ● Silver | PRO-EZ0449-S | 11.00 |



## TRACK ACCESSORIES

### Mounting clamp

Materials:  
Steel & Aluminium

Used for mounting  
track perpendicular  
along wall or ceiling  
- 1pc



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-04SK-B | 3.00 |
| ○ White  | PRO-04SK-W | 3.00 |
| ● Silver | PRO-04SK-S | 3.00 |

### Suspension hook

Suspension hook for  
3-Circuit track.



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-M142-B | 3.00 |
| ○ White  | PRO-M142-W | 3.00 |
| ● Silver | PRO-M142-S | 3.00 |

### Mechanical Adapter


Mechanical  
adapter for  
3-Circuit track.



| Variant  | Item no.   | £     |
|----------|------------|-------|
| ● Black  | PRO-0449-B | 10.00 |
| ○ White  | PRO-0449-W | 10.00 |
| ● Silver | PRO-0449-S | 10.00 |

### Track Cover Strip 1M

PVC Strip to cover  
the Powergear  
track



| Variant | Item no.      | £    |
|---------|---------------|------|
| ● Black | PRO-CS04300-B | 4.00 |
| ○ White | PRO-CS04300-W | 4.00 |

### Middle Connector Cover

Cover for Middle  
connector, to  
combine with  
recessed track.



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-R434-B | 4.00 |
| ○ White  | PRO-R434-W | 4.00 |
| ● Silver | PRO-R434-S | 4.00 |

### L Connector Cover

Cover for  
L-Connector, to  
combine with  
recessed track.



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-R435-B | 4.00 |
| ○ White  | PRO-R435-W | 4.00 |
| ● Silver | PRO-R435-S | 4.00 |

### Connector Cover

Cover for feed-in  
connector, to  
combine with  
3 circuit track



| Variant                          | Item no.   | £    |
|----------------------------------|------------|------|
| <b>Standard 3C &amp; 1C Dali</b> |            |      |
| ● Black                          | PRO-R431-B | 3.00 |
| ○ White                          | PRO-R431-W | 3.00 |
| ● Silver                         | PRO-R431-S | 3.00 |
| <b>3C Dali</b>                   |            |      |
| ● Black                          | PRO-R631-B | 3.00 |
| ○ White                          | PRO-R631-W | 3.00 |
| ● Silver                         | PRO-R631-S | 3.00 |

### X Connector Cover

Cover for  
X-Connector, to  
combine with  
3 circuit track.



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-R437-B | 5.00 |
| ○ White  | PRO-R437-W | 5.00 |
| ● Silver | PRO-R437-S | 5.00 |

### T Connector Cover


Cover for  
T-Connector, to  
combine with  
3 circuit track.



| Variant  | Item no.   | £    |
|----------|------------|------|
| ● Black  | PRO-R436-B | 4.00 |
| ○ White  | PRO-R436-W | 4.00 |
| ● Silver | PRO-R436-S | 4.00 |



## EXAMPLE INSTALLATION OF TRACK SYSTEM

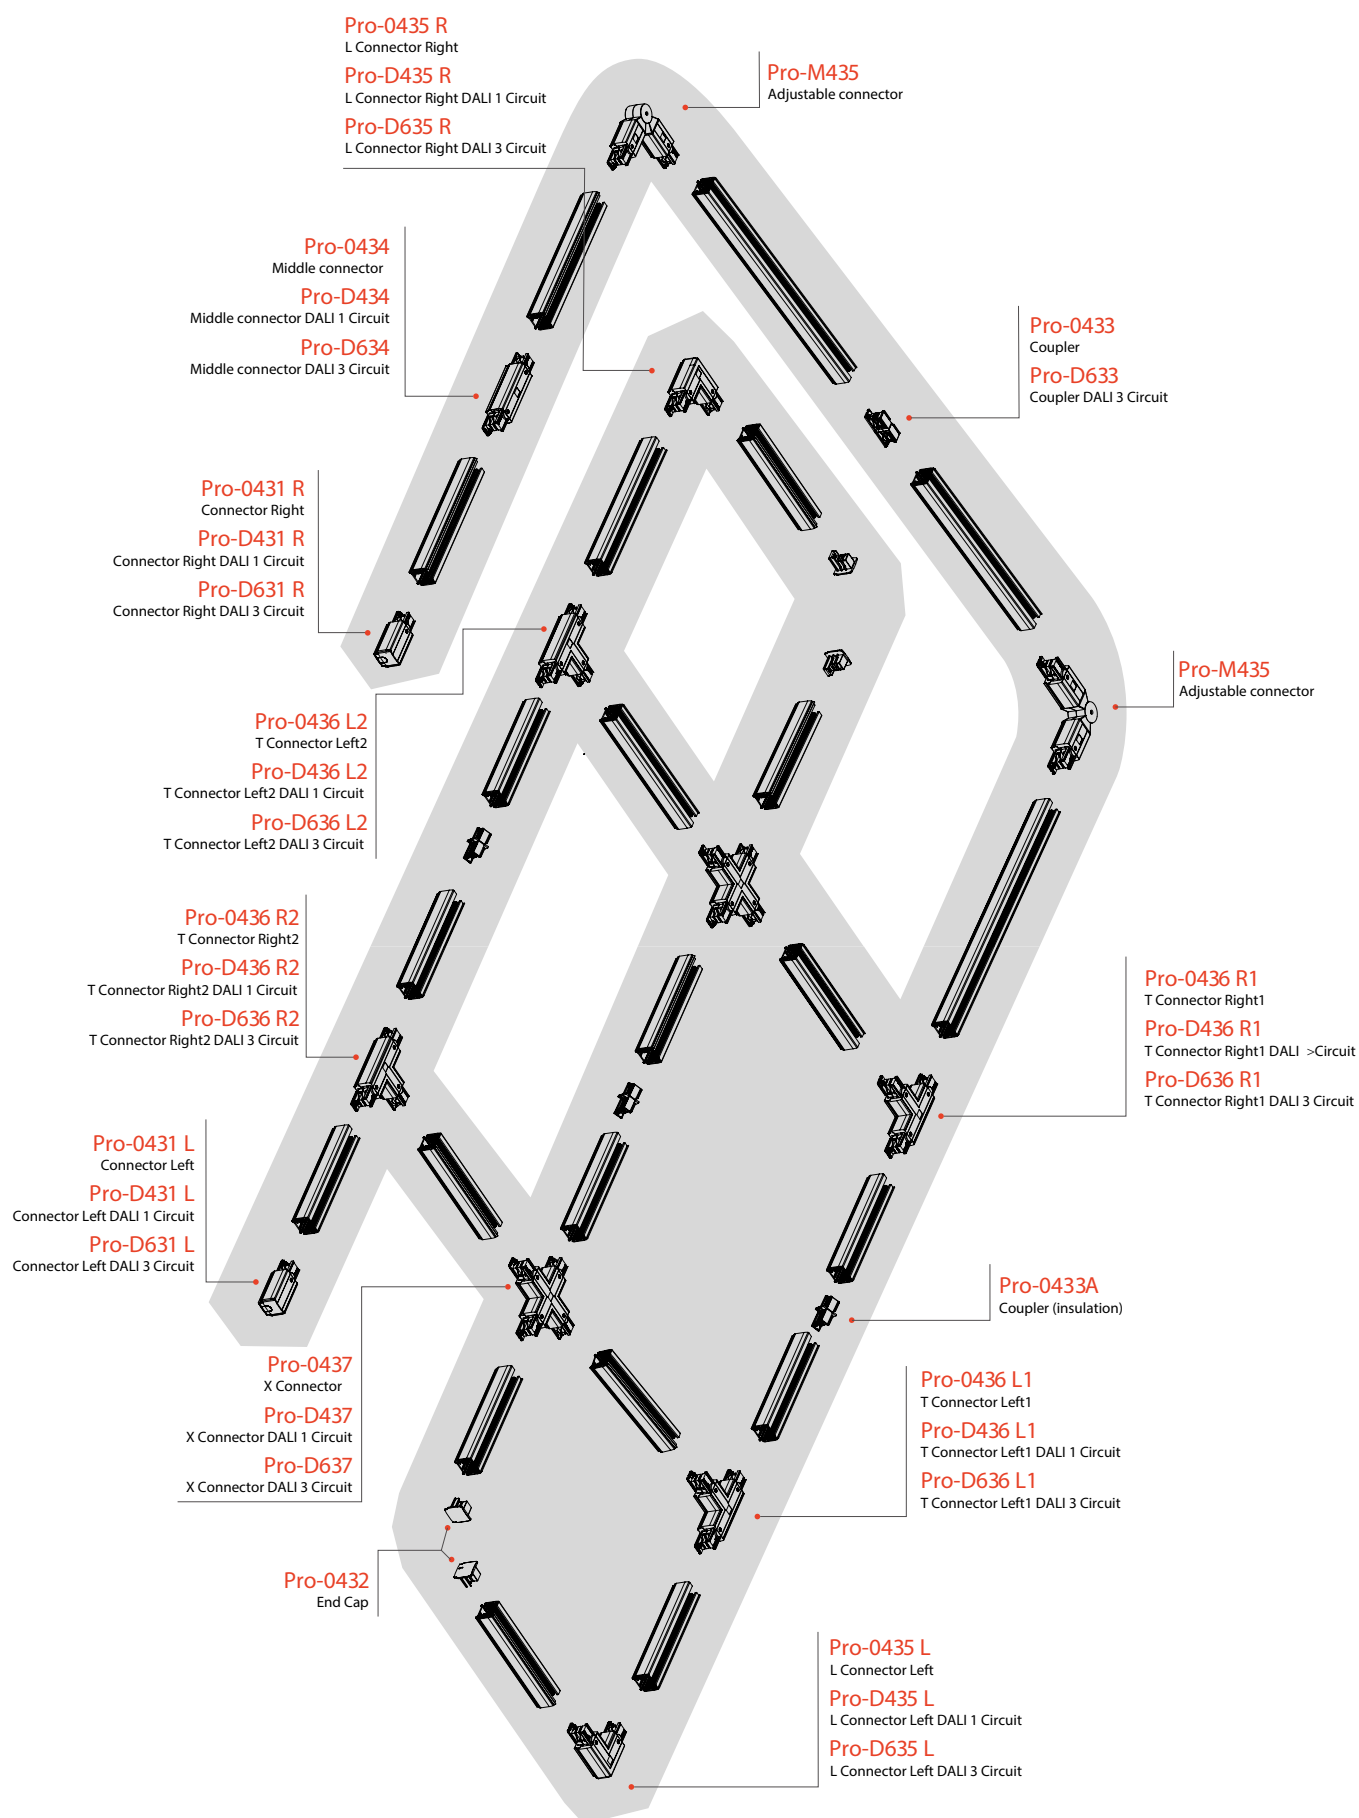



## TRACK FITTINGS

### METEORA




Compact aluminium 3-Circuit tracklight with powder coat finish. Available with decorative gold, black or white inner ring. **Standard Mains Dimmable**, ideal to be used in hospitality projects.



### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



2700K

### BEAM ANGLE



15°



24°



40°

| Variant           | Item no.  | £      |
|-------------------|-----------|--------|
| 1100lm            | IN6611    | 107.00 |
| <b>Inner Ring</b> |           |        |
| Black             | INR2324-B | 9.00   |
| White             | INR2324-W | 9.00   |
| Gold              | INR2324-G | 9.00   |

### LED MODULES



### SURCHARGE OPTIONS



Tel: 0208 542 1471





## TRACK FITTINGS

### VARIARE



Aluminium 3-Circuit tracklight in powder coat finish with adjustable beam angle (8-30°). Equipped with unique Powergear **Ultimate Adapter**® with built-in LED driver. Ideal for museum and exposition lighting.



### FINISHES




BLACK



WHITE

### COLOUR TEMPERATURE



3000K

### BEAM ANGLE



| Variant | Item no. | £      |
|---------|----------|--------|
| 900lm   | IN0600   | 143.00 |

### LED MODULES



### SURCHARGE OPTIONS




E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## TRACK FITTINGS

### LUNGO




3-Circuit track light with built-in LED driver and aluminium die-cast heatsink.  
Powder coat finish. Glass standard included.



### FINISHES



BLACK



WHITE



SILVER

### COLOUR TEMPERATURE



2200K



2700K



3000K



4000K



5700K

### BEAM ANGLE



15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN5011   | 162.00 |
| 2000lm  | IN5020   | 162.00 |
| 3000lm  | IN5030   | 167.00 |

### LED MODULES



STANDARD



PREMIUM



FOOD



DIM-TO-WARM

### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



1C DALI




3C DALI



Tel: 0208 542 1471

## TRACK FITTINGS

### BALENO




Aluminium 3-Circuit track light, standard equipped with a Bluetooth Casambi receiver. This track light is available in a RGBWW and a TW (Tunable white) version, CRI >90. With this track light it is also possible to create a Human Centric Lighting environment. 3000lm Max.

### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE




### BEAM ANGLE




15°



24°



40°



60°

| Variant | Item no.  | £      |
|---------|-----------|--------|
| Casambi | IN45RGBWW | 719.00 |
| Casambi | IN45TW    | 479.00 |
| Dali    | IN45RGBWW | 430.00 |

\*Casambi App available on



### SURCHARGE OPTIONS



CASAMBI



3C DALI




HONEYCOMB



GLASS



## INTERNO




3-Circuit track light with built-in LED driver and aluminium die-cast heatsink. Powder coat finish. Glass standard included.

## FINISHES



BLACK



WHITE




SILVER


## COLOUR TEMPERATURE




2200K



2700K



3000K



4000K



5700K

## BEAM ANGLE



15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN5411   | 150.00 |
| 2000lm  | IN5420   | 150.00 |
| 3000lm  | IN5430   | 155.00 |

## LED MODULES



STANDARD



PREMIUM



DIM-TO-WARM

## SURCHARGE OPTIONS



DIMMABLE



CASAMBI



TC DALI



3C DALI

BEAUTY BAR

Tel: 0208 542 1471




## PRESENTA






## FINISHES



## COLOUR TEMPERATURE



## BEAM ANGLE



| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN1011   | 162.00 |
| 2000lm  | IN1020   | 162.00 |
| 3000lm  | IN1030   | 167.00 |
| 4500lm  | IN1045   | 187.00 |

## LED MODULES



## SURCHARGE OPTIONS



E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)

## TRACK FITTINGS

### MERCATO




3-Circuit track light with aluminium die-cast heatsink and driverbox. Powder coat finish.

### FINISHES



BLACK




WHITE




SILVER


### COLOUR TEMPERATURE



2700K



3000K



4000K




5700K

### BEAM ANGLE



15°



40°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN1111   | 150.00 |
| 2000lm  | IN1120   | 150.00 |
| 3000lm  | IN1130   | 155.00 |

### LED MODULES



STANDARD



PREMIUM



DIM-TO-WARM

### SURCHARGE OPTIONS



£66




£72



Tel: 0208 542 1471



## GALLERIA




Compact 3-Circuit aluminium track light with passive cooling body and driverbox. Powder coat finish.

## FINISHES



BLACK



WHITE

## COLOUR TEMPERATURE



2700K



3000K



4000K



5700K

## BEAM ANGLE



15°



20°



30°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN4011   | 131.00 |
| 2000lm  | IN4020   | 143.00 |

## LED MODULES




## SURCHARGE OPTIONS



E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## FINESTRA




3-Circuit track light with aluminium die-cast heatsink and driverbox. Powder coat finish. Suitable for high lumen flux.

## FINISHES



BLACK




WHITE

## COLOUR TEMPERATURE




2200K



2700K



3000K



4000K



5700K

## BEAM ANGLE



15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN5111   | 162.00 |
| 2000lm  | IN5120   | 170.00 |
| 3000lm  | IN5130   | 174.00 |
| 4500lm  | IN5145   | 194.00 |
| 6000lm  | IN5160   | 210.00 |

## LED MODULES



STANDARD



PREMIUM



FOOD



DIM-TO-WARM

## SURCHARGE OPTIONS



DIMMABLE



CASAMBI



HONEYCOMB



GLASS



1C DALI




3C DALI



Tel: 0208 542 1471

## TRACK FITTINGS

### CONCENTRA




3-Circuit aluminium track light with passive cooling body and driverbox. Powder coat finish.

### FINISHES



BLACK



WHITE



SILVER

### COLOUR TEMPERATURE



2200K



2700K



3000K



4000K



5700K

### BEAM ANGLE



15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN3011   | 170.00 |
| 2000lm  | IN3020   | 170.00 |
| 3000lm  | IN3030   | 174.00 |
| 4500lm  | IN3045   | 194.00 |
| 6000lm  | IN3060   | 210.00 |

### LED MODULES



STANDARD



PREMIUM



FOOD



DIM-TO-WARM

### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



HONEYCOMB



GLASS



1C DALI



3C DALI

E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## TRACK FITTINGS

### IL PODIO



Theatre-look 3-Circuit track light with built-in LED driver and aluminium die-cast heatsink. Powder coat finish.



### FINISHES




BLACK


### COLOUR TEMPERATURE




2200K



2700K



3000K



4000K




5700K


### BEAM ANGLE



15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN2611   | 186.00 |
| 2000lm  | IN2620   | 186.00 |
| 3000lm  | IN2630   | 191.00 |

### LED MODULES



STANDARD



PREMIUM



FOOD

### SURCHARGE OPTIONS



DIMMABLE



HONEYCOMB



GLASS



1C DALI




3C DALI

Tel: 0208 542 1471



## TRACK FITTINGS

### COLIBRI




Compact aluminium 3-Circuit track light equipped with unique Powergear **Ultimate Adapter**® with built-in LED driver. Powder coat finish.

### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



2700K



3000K



4000K



5700K

### BEAM ANGLE



15°



24°



40°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN6711   | 119.00 |
| 2000lm  | IN6720   | 119.00 |

### LED MODULES



### SURCHARGE OPTIONS



CASAMBI




3C DALI



## TRACK FITTINGS

### NLO TRACK



**CREE** LEDs




Aluminium 3-Circuit wallwasher equipped with unique Powergear **Ultimate Adapter**® with built-in LED driver. Darklight reflectors with low glare.



### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



3000K



4000K

### BEAM ANGLE



40°

| Variant | Item no. | £      |
|---------|----------|--------|
| 2600lm  | IN4726   | 119.00 |

### LED MODULES



### SURCHARGE OPTIONS



Tel: 0208 542 1471





## TRACK FITTINGS

### VELOCE



Aluminium 3-Circuit track light equipped with unique Powergear **Ultimate Adapter®** with built-in LED driver. Powder coat finish.



### FINISHES




BLACK



WHITE


### COLOUR TEMPERATURE



2700K



3000K



4000K



5700K


### BEAM ANGLE



15°



24°



40°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN3410   | 119.00 |
| 2000lm  | IN3420   | 119.00 |
| 3000lm  | IN3430   | 126.00 |

### LED MODULES



STANDARD



PREMIUM

### SURCHARGE OPTIONS



£215

CASAMBI



£72

3C DALI

E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## TUBULO




Simple and sleek 3-Circuit track spot with GU10 lampholder. Suitable for GU10 LED. Powder coat finish.  
Supplied without lightsource.



## FINISHES



BLACK



WHITE



SILVER

| Variant | Item no. | £     |
|---------|----------|-------|
|         | IN63     | 71.00 |

## GU 10 LED LAMP



Philips Corepro LEDspot  
4.6w / CRI 80  
Non-Dimmable  
36 Degree



Philips MASTER LEDspot MV  
9w / CRI 90  
Dimmable  
36 Degree



### Philips Corepro LEDspot

| Variant       | Item no. | £    |
|---------------|----------|------|
| 2700k (255lm) | 75251700 | 4.90 |
| 3000k (265lm) | 72837600 | 4.90 |
| 4000k (275lm) | 72839000 | 4.90 |

### Philips MASTER LEDspot MV

| Variant       | Item no. | £    |
|---------------|----------|------|
| 2700k (355lm) | 70785200 | 9.70 |
| 3000k (365lm) | 70787600 | 9.70 |
| 4000k (380lm) | 70789000 | 9.70 |

\* More lamps available on request








## TRACK FITTINGS

### STRETTO 1500

**OSRAM**




3-Circuit aluminium track light with passive cooling body and driverbox. Powder coat finish.



### FINISHES



BLACK



WHITE



SILVER

### COLOUR TEMPERATURE



3000K

### BEAM ANGLE



40°

| Variant | Item no. | £     |
|---------|----------|-------|
| 1500lm  | IN1815   | 96.00 |

### LED MODULES





## BARISTA



Vintage style 3-Circuit track light with G53 lampholder. Suitable for AR111 LED spot. Supplied including 350mA Mains dimmable LED driver. *Supplied without lightsource. Fitting is only compatible with 350ma LED lamps*



## FINISHES



| Variant | Item no. | £     |
|---------|----------|-------|
|         | IN98     | 83.00 |

## SURCHARGE OPTIONS



## AR111 2700K LED DIMMABLE LAMP

Optiled  
12.5W  
CRI >90  
Dimmable  
Colour Temperature: 2700K




| Variant   | Item no. | £     |
|-----------|----------|-------|
| 800lm 20° | INQRB20  | 49.00 |
| 800lm 45° | INQRB45  | 49.00 |

## AR111 DIM TO WARM LAMP

Optiled • 12.5W • CRI >90 • Dim-to-Warm • Colour Temperature: 1800K - 3000K


| Variant   | Item no. | £     |
|-----------|----------|-------|
| 800lm 40° | INQRB40  | 66.00 |

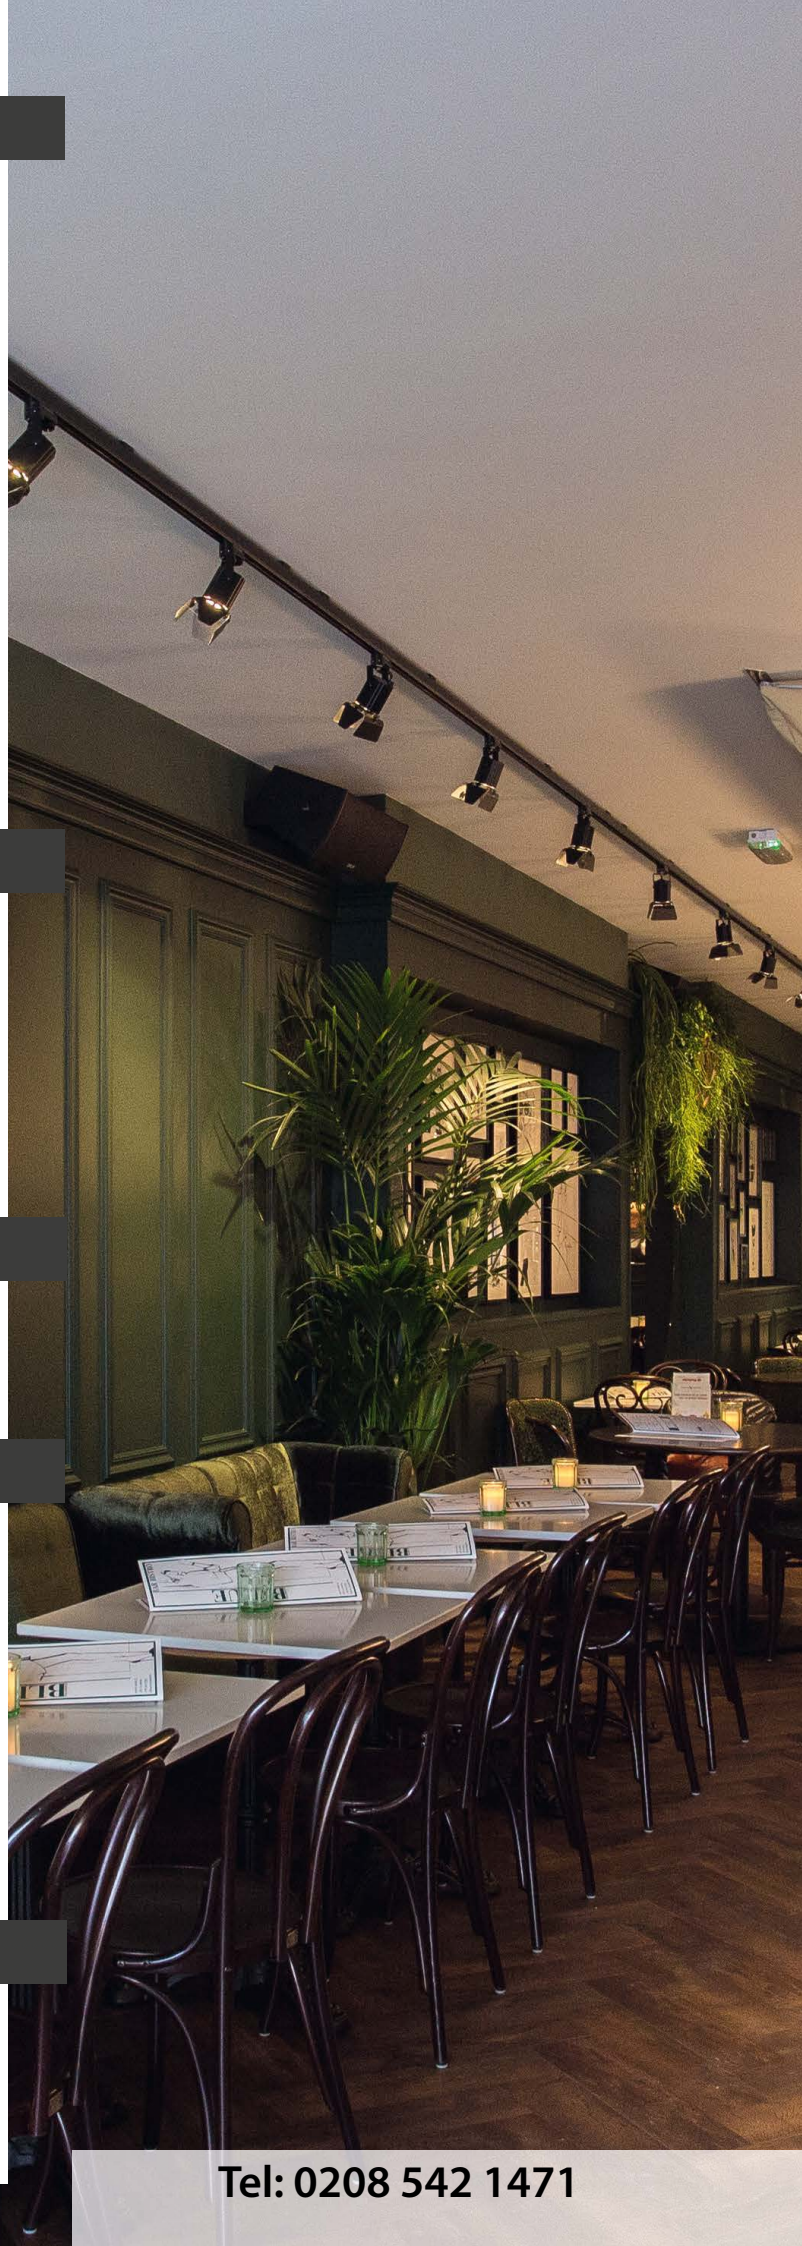

Tel: 0208 542 1471



## THEATRE



Theatre-look vintage style 3-Circuit tracklight with GU10 lampholder. Supplied including barndoors. Suitable for GU10 LED spot. *Supplied without lightsource.*



## FINISHES



| Variant | Item no. | £     |
|---------|----------|-------|
|         | IN61     | 71.00 |

## GU 10 LED LAMP



Philips Corepro LEDspot  
4.6w / CRI 80  
Non-Dimmable  
36 Degree



Philips MASTER LEDspot MV  
9w / CRI 90  
Dimmable  
36 Degree



### Philips Corepro LEDspot

| Variant       | Item no. | £    |
|---------------|----------|------|
| 2700k (255lm) | 75251700 | 4.90 |
| 3000k (265lm) | 72837600 | 4.90 |
| 4000k (275lm) | 72839000 | 4.90 |

### Philips MASTER LEDspot MV

| Variant       | Item no. | £    |
|---------------|----------|------|
| 2700k (355lm) | 70785200 | 9.70 |
| 3000k (365lm) | 70787600 | 9.70 |
| 4000k (380lm) | 70789000 | 9.70 |

\* More lamps available on request



## GUARDA



Theatre-look vintage 3-Circuit track light with GU10 lampholder. Supplied including barndoors. Suitable for GU10 LED spot. *Supplied without lightsource.*



## FINISHES



BLACK

| Variant | Item no. | £     |
|---------|----------|-------|
|         | INGRDGU  | 71.00 |

## GU 10 LED LAMP



Philips Corepro LEDspot  
4.6w / CRI 80  
Non-Dimmable  
36 Degree



Philips MASTER LEDspot MV  
9w / CRI 90  
Dimmable  
36 Degree



### Philips Corepro LEDspot

| Variant       | Item no. | £    |
|---------------|----------|------|
| 2700k (255lm) | 75251700 | 4.90 |
| 3000k (265lm) | 72837600 | 4.90 |
| 4000k (275lm) | 72839000 | 4.90 |

### Philips MASTER LEDspot MV

| Variant       | Item no. | £    |
|---------------|----------|------|
| 2700k (355lm) | 70785200 | 9.70 |
| 3000k (365lm) | 70787600 | 9.70 |
| 4000k (380lm) | 70789000 | 9.70 |


\* More lamps available on request



## LABARRA



**OSRAM**





Aluminium linear 3-circuit track light with high lumen output. Powder coat finish.



## FINISHES



## COLOUR TEMPERATURE



## BEAM ANGLE



| Variant | Item no. | £      |
|---------|----------|--------|
| 4500lm  | IN3745   | 290.00 |
| 6000lm  | IN3760   | 310.00 |


\* Other lumen outputs available on request

## LED MODULES





## LINEA 60 / 100



**CREE** LEDs


Linear LED fixture with a 3-circuit track connection. Ideally suited for general lighting.



### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



3000K



4000K

### BEAM ANGLE




120°

| 60     | Item no. | £      |
|--------|----------|--------|
| 1500lm | IN17     | 131.00 |
| 100    | Item no. | £      |
| 2500lm | IN11     | 155.00 |

### LED MODULES



## VELA




3-Circuit track Wallwasher with a very wide beam angle. Ideal for lighting wall presentations. Powder coat finish.



## FINISHES



BLACK



WHITE



SILVER

## COLOUR TEMPERATURE



2200K



2700K



3000K



4000K



5700K

## BEAM ANGLE



70°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN3811   | 158.00 |
| 2000lm  | IN3820   | 158.00 |
| 3000lm  | IN3830   | 162.00 |
| 4500lm  | IN3845   | 182.00 |

## LED MODULES



STANDARD



PREMIUM



FOOD


## SURCHARGE OPTIONS



£72  
JC DALI



## I.FORZA




3-Circuit track light with built-in LED driver and aluminium die-cast heatsink. Suitable for high lumen flux up to 4500lm. Powder coating finish. Glass standard included.

### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



2200K



2700K



3000K



4000K



5700K

### BEAM ANGLE



15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN6211   | 155.00 |
| 2000lm  | IN6220   | 155.00 |
| 3000lm  | IN6230   | 160.00 |
| 4500lm  | IN6245   | 179.00 |

### LED MODULES



STANDARD



PREMIUM



FOOD



DIM-TO-WARM

### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



TC DALI



3C DALI

Tel: 0208 542 1471

## ULTIMO



Compact and stylishly designed 3-Circuit track light. Equipped with unique Powergear Ultimate Adapter® with built-in LED driver. Glass standard included. Highly suitable for hospitality and museum lighting.




### FINISHES



### COLOUR TEMPERATURE



### BEAM ANGLE



| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN65     | 108.00 |

### LED MODULES




### SURCHARGE OPTIONS





## EMERGENCY TRACK SPOT

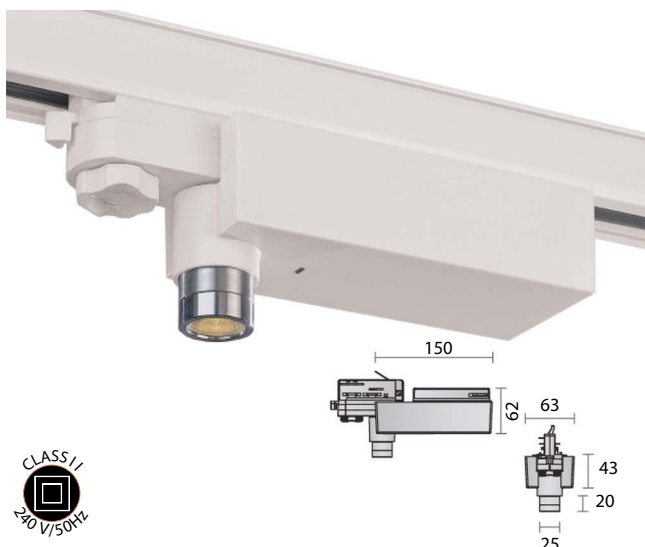


**Non-Maintained** compact linear 3-circuit emergency fitting with powder coat finish

## FINISHES



BLACK



WHITE

## COLOUR TEMPERATURE



4000K

## BEAM ANGLE



30°

## INFORMATION


|                          |                 |
|--------------------------|-----------------|
| Mounting method          | 3-Circuit track |
| Power (W)                | 3W              |
| Monitoring facility      | Test button     |
| Remote switch connection | No              |
| Power system             | Decentralized   |
| Battery feature          | NiCd            |
| Protection class         | II              |
| Protection category (IP) | IP20            |
| Autonomy                 | 3 hours         |
| Colour temperature       | 4000k           |
| Color rendering index    | 80-89           |

**Intensity (With 60 ° Optical Lens)**

88.5lx@2m, 22.12lx@4m, 14.16lx@5m, 9.83lx@6m

| Variant | Item no. | £      |
|---------|----------|--------|
| 146lm   | INEM1    | 155.00 |

## EMERGENCY TRACK FITTING




**Maintained** white polycarbonate housing with a status LED which is mounted in the reflector plate incl Test button. Clear or opal polycarbonate shielding **optional** is the plexi pictogram/LED Type SMD, Emergency unit.

## FINISHES




BLACK



WHITE

## COLOUR TEMPERATURE



4000K

## INFORMATION

|                                |                     |
|--------------------------------|---------------------|
| Mounting method                | 3-Circuit track     |
| Power (W)                      | 4W                  |
| Housing material luminaire     | Synthetic           |
| Cover material                 | Transparent plastic |
| Application indicator          | 1-/2-sided          |
| Suitable for marking type      | Acrylic glass plate |
| Monitoring facility            | Test button         |
| Remote switch connection       | No                  |
| Power system                   | Decentralized       |
| Battery feature                | NiCd                |
| Protection class               | II                  |
| Protection category (IP)       | IP65                |
| Autonomy                       | 3 hours             |
| Light output in emergency mode | 210lm               |
| Effective light flux           | 350lm               |
| Color rendering index          | 80-89               |

| Variant | Item no. | £      |
|---------|----------|--------|
|         | INEM2    | 160.00 |



## RECESSED FITTINGS

### MOON RETAIL

Gimbal recessed LED spot with a modern look. Powder coat finish.



### MOON I RETAIL

Single recessed gimbal LED spot.  
Cut-out size: L165 x W165 x H145mm

### MOON II RETAIL

Double recessed gimbal LED spot.  
Cut-out size: L325 x W165 x H145mm


### MOON III RETAIL

Treble recessed gimbal LED spot.  
Cut-out size: L470 x W165 x H145mm

## FINISHES



BLACK



WHITE



SILVER

## COLOUR TEMPERATURE



2200K



2700K



3000K



4000K



5700K

## BEAM ANGLE



15°



24°



40°



60°

## LED MODULES



STANDARD



PREMIUM



FOOD



TV



DIM-TO-WARM

## SURCHARGE OPTIONS



DIMMABLE



CASAMBI



EMERGENCY



HONEYCOMB



GLASS




3000mm



3000mm


## MOON I RETAIL

| Variant             | Item no. | £      |
|---------------------|----------|--------|
| 1100lm              | IN2111   | 146.00 |
| 2000lm              | IN2120   | 146.00 |
| 3000lm              | IN2130   | 150.00 |
| 4500lm              | IN2145   | 170.00 |
| 6000lm <sup>H</sup> | IN2160   | 186.00 |




## MOON II RETAIL

| Variant              | Item no. | £      |
|----------------------|----------|--------|
| 1100lm*              | IN2211   | 273.00 |
| 2000lm*              | IN2220   | 273.00 |
| 3000lm*              | IN2230   | 282.00 |
| 4500lm*              | IN2245   | 321.00 |
| 6000lm* <sup>H</sup> | IN2260   | 354.00 |



## MOON III RETAIL

| Variant              | Item no. | £      |
|----------------------|----------|--------|
| 1100lm*              | IN3311   | 383.00 |
| 2000lm*              | IN3320   | 383.00 |
| 3000lm*              | IN3330   | 398.00 |
| 4500lm*              | IN3345   | 455.00 |
| 6000lm* <sup>H</sup> | IN3360   | 506.00 |

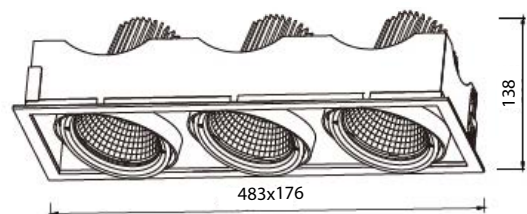

\* Per module

<sup>H</sup> Equivalent to 70W metal halide




## RECESSED FITTINGS



### CURVA







### FINISHES



### COLOUR TEMPERATURE



### BEAM ANGLE



| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN2011   | 150.00 |
| 2000lm  | IN2020   | 150.00 |
| 3000lm  | IN2030   | 155.00 |
| 4500lm  | IN2045   | 174.00 |
| 6000lm  | IN2060   | 189.00 |

### LED MODULES



### SURCHARGE OPTIONS



# Staal




Tel: 0208 542 1471



## RECESSED FITTINGS

### DOBLAR



Compact recessed scoop LED spot. Turnable and tiltable. Ideal for retail shops. Glass standard included. Powder coat finish. Cut out size: Ø130 x H140mm



### FINISHES



BLACK



WHITE



SILVER

### COLOUR TEMPERATURE



2200K



2700K



3000K



4000K



5700K


### BEAM ANGLE




15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN4911   | 138.00 |
| 2000lm  | IN4920   | 138.00 |
| 3000lm  | IN4930   | 174.00 |

### LED MODULES



STANDARD



PREMIUM



DIM-TO-WARM

### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



EMERGENCY



3000lm




>3000lm



## RECESSED FITTINGS

### CENTRO




Economic IP44 LED downlight with Philips Fortimo LED DLM flex Gen2. Glass standard included. Powder coat finish. Cut out size: Ø200 x H128mm

### FINISHES




BLACK




WHITE

### COLOUR TEMPERATURE



3000K



4000K

### BEAM ANGLE



50°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN3211   | 126.00 |
| 2000lm  | IN3220   | 131.00 |
| 3000lm  | IN3230   | 138.00 |
| 4500lm  | IN3245   | 162.00 |

### LED MODULES



### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



EMERGENCY



<3000lm




>3000lm

Tel: 0208 542 1471

## RECESSED FITTINGS

### TONDO




LED downlight with smooth reflector. Low glare. Powder coat finish. Cut out size: Ø193 x H161mm

### FINISHES



### COLOUR TEMPERATURE



### BEAM ANGLE



| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN7011   | 138.00 |
| 2000lm  | IN7020   | 138.00 |
| 3000lm  | IN7030   | 143.00 |
| 4500lm  | IN7045   | 162.00 |
| 6000lm  | IN7060   | 179.00 |

### LED MODULES



### SURCHARGE OPTIONS




E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## RECESSED FITTINGS

### GIREVOLE




Gimbal recessed LED spot. Ideal for retail shops. Powder coat finish.  
Cut out size: Ø170 x H110mm



### FINISHES



BLACK



WHITE



SILVER

### COLOUR TEMPERATURE



2200K



2700K



3000K



4000K



5700K

### BEAM ANGLE



15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN2411   | 150.00 |
| 2000lm  | IN2420   | 150.00 |
| 3000lm  | IN2430   | 155.00 |
| 4500lm  | IN2445   | 174.00 |
| 6000lm  | IN2460   | 184.00 |

### LED MODULES



STANDARD



PREMIUM



FOOD



DIM-TO-WARM



TW

### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



EMERGENCY



HONEYCOMB



GLASS



3000lm



3000lm


Tel: 0208 542 1471





## RECESSED FITTINGS

### OCCHIO




Recessed LED wallwasher with a very wide beam angle. Ideal for lighting wall presentations. Powder coat finish.  
Cut out size: L220 x W122 x H90mm


### FINISHES



BLACK



WHITE



SILVER

### COLOUR TEMPERATURE



2200K



2700K



3000K



4000K



5700K

### BEAM ANGLE



90°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN2311   | 150.00 |
| 2000lm  | IN2320   | 150.00 |
| 3000lm  | IN2330   | 155.00 |
| 4500lm  | IN2345   | 174.00 |
| 6000lm  | IN2360   | 190.00 |

### LED MODULES



STANDARD



PREMIUM



FOOD



DIM-TO-WARM



TW

### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



EMERGENCY



<3000lm




>3000lm

E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## RECESSED FITTINGS

### ETNA




Compact LED Downlight with a recessed reflector. Powder coat finish. Glass standard included  
Cut out size: Ø115 x H94mm

### FINISHES



BLACK




WHITE


### COLOUR TEMPERATURE




2200K



2700K



3000K




4000K




5700K


### BEAM ANGLE




15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN7311   | 107.00 |
| 2000lm  | IN7320   | 107.00 |
| 3000lm  | IN7330   | 117.00 |

### LED MODULES



STANDARD



PREMIUM



DIM-TO-WARM

### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



<3000lm



>3000lm



Tel: 0208 542 1471




## RECESSED FITTINGS

### RONDIO



CLASS I  
240 V/50Hz



Round turn and tiltable recessed LED spot.  
Glass standard included. Powder coat finish.  
Cut out size: Ø115 x H100mm


### FINISHES



### COLOUR TEMPERATURE



### BEAM ANGLE



| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN7111   | 114.00 |
| 2000lm  | IN7120   | 114.00 |
| 3000lm  | IN7130   | 124.00 |

### LED MODULES




### SURCHARGE OPTIONS





## RECESSED FITTINGS

### QUADRO




Square tilt and turn recessed LED spot.  
Glass standard included. Powder coat finish.  
Cut out size: Ø115 x H100mm

### FINISHES



BLACK



WHITE




SILVER


### COLOUR TEMPERATURE




2200K



2700K



3000K




4000K




5700K


### BEAM ANGLE




15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN7211   | 114.00 |
| 2000lm  | IN7220   | 114.00 |
| 3000lm  | IN7230   | 124.00 |

### LED MODULES



STANDARD



PREMIUM



DIM-TO-WARM

### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



3000lm



3000lm



Tel: 0208 542 1471





E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## RECESSED FITTINGS

### DOLINA FRAMELESS

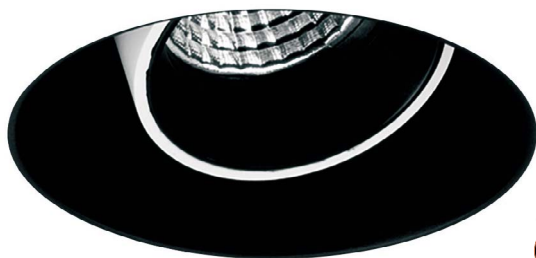

Tiltable recessed frameless fixture with deep reflector. 350° turnable and 30° tiltable.


**Standard Mains Dimmable.**

Cut out size: Ø100mm x H97mm

### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



2700K



3000K



4000K

### BEAM ANGLE



24°

| Variant | Item no. | £      |
|---------|----------|--------|
| 800lm   | IN7508   | 102.00 |
| 1400lm  | IN7514   | 110.00 |

### LED MODULES



### SURCHARGE OPTIONS



£48  
3000lm



£78  
3000lm




Tel: 0208 542 1471





## RECESSED FITTINGS

### DOLINA FRAME




Tiltable recessed fixture with deep reflector.  
350° turnable and 30° tiltable.  
**Standard Mains Dimmable.**  
Cut out size: Ø90mm x H97mm

### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



2700K



3000K



4000K

### BEAM ANGLE



24°

| Variant | Item no. | £      |
|---------|----------|--------|
| 800lm   | IN7608   | 95.00  |
| 1400lm  | IN7614   | 102.00 |

### LED MODULES



### SURCHARGE OPTIONS



<3000lm



>3000lm




## RECESSED FITTINGS

### PIAZZA



**CREE**  
LEDs



Fixed square recessed fixture with extra deep reflector and low glare.

**Standard Mains Dimmable.**


Cut out size: L86 x W86 x H118mm



### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



2700K



3000K



4000K

### BEAM ANGLE



24°

| Variant | Item no. | £     |
|---------|----------|-------|
| 800lm   | IN8908   | 90.00 |
| 1400lm  | IN8914   | 98.00 |

### LED MODULES



### SURCHARGE OPTIONS



£48  
3000lm



£78  
3000lm



Tel: 0208 542 1471






## RECESSED FITTINGS

### CERCHIO



**CREE** LEDs



Fixed round recessed fixture with extra deep reflector and low glare.

**Standard Mains Dimmable.**


Cut out size: Ø78 x H118mm



### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



2700K



3000K



4000K

### BEAM ANGLE



24°

| Variant | Item no. | £     |
|---------|----------|-------|
| 800lm   | IN8808   | 90.00 |
| 1400lm  | IN8814   | 98.00 |

### LED MODULES



### SURCHARGE OPTIONS



£48  
3000lm




£78  
3000lm



## RECESSED FITTINGS

### VISIONE 360




Compact gimbal recessed fixture.  
Equipped with a unique 360° turnable system  
and 30° tiltable. **Standard Mains Dimmable.**  
Cut out size: Ø76 x H45mm




### FINISHES



BLACK



WHITE



ALUMINIUM

### COLOUR TEMPERATURE



### BEAM ANGLE



40°

| Variant | Item no. | £     |
|---------|----------|-------|
| 520lm   | IN6480   | 60.00 |

### LED MODULES



### SURCHARGE OPTIONS




Tel: 0208 542 1471



## RECESSED FITTINGS

### GIRO




Economic LED downlight with high efficiency  
Philips Fortimo DLM Flex Gen2 module.  
Powder coating finish.  
Cut out size: Ø170 x H130mm

### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



3000K



4000K

### BEAM ANGLE



70°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN6811   | 119.00 |
| 2000lm  | IN6820   | 125.00 |
| 3000lm  | IN6830   | 129.00 |
| 4500lm  | IN6845   | 174.00 |

### LED MODULES



STANDARD

### SURCHARGE OPTIONS



£18  
DIMMABLE



£215  
CASAMBI



£120  
EMERGENCY



£48  
<3000lm




£78  
>3000lm

E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## RECESSED FITTINGS

### PICCOLO 3



**CREE** LEDs




Recessed fixture with dark-light reflector.  
Low glare. **Standard Mains Dimmable.**  
Powder coat finish.  
Cut out size: L99 x W38 x H45mm



### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



2700K



3000K

### BEAM ANGLE



40°

| Variant | Item no. | £     |
|---------|----------|-------|
| 555lm   | IN7855   | 89.00 |

### LED MODULES



### SURCHARGE OPTIONS



£48  
<3000lm



£78  
>3000lm






## RECESSED FITTINGS

### PICCOLO 5



**CREE**   
LEDs




Recessed fixture with dark-light reflector.  
Low glare. **Standard Mains Dimmable.**  
Powder coat finish.  
Cut out size: L141x W38 x H45mm

### FINISHES



BLACK



WHITE

### COLOUR TEMPERATURE



2700K



3000K

### BEAM ANGLE



40°

| Variant | Item no. | £      |
|---------|----------|--------|
| 900lm   | IN7992   | 119.00 |

### LED MODULES



### SURCHARGE OPTIONS



<3000lm



>3000lm



## RECESSED FITTINGS

### MOON FRAME

Gimbal recessed spot with modern look. Tilt- and swivel rings. Suitable for domestic and hospitality applications. For shop lighting we recommend the Moon Retail.



### MOON I FRAME

Single recessed spot.  
Cut-out size: L165 x W165 x H111mm


### MOON II FRAME

Double recessed spot.  
Cut-out size: L350 x W165 x H111mm

### FINISHES



BLACK





WHITE



SILVER

Lamp type AR111 LED.

*Supplied without power supply and lightsource.*



| Variant | Item no.   | £     |
|---------|------------|-------|
| Moon1   | INMOON1111 | 47.00 |
| Moon2   | INMOON2111 | 78.00 |



## RECESSED FITTINGS

### MOON FRAMELESS

Frameless gimbal recessed spot with modern look. Tilt- and swivel rings. Suitable for domestic and Hospitality applications. For shop lighting we recommend the Moon Retail.



### MOON I FRAMELESS

Single recessed spot.  
Cut-out size: L165 x W165 x H110mm


### MOON II FRAMELESS

Double recessed spot.  
Cut-out size: L315 x W165 x H110mm

### FINISHES





BLACK



WHITE

Lamp type AR111 LED.

*Supplied without power supply and lightsource.*



| Variant | Item no.   | £      |
|---------|------------|--------|
| Moon1   | INMOON1/FL | 83.00  |
| Moon2   | INMOON2/FL | 119.00 |



## RECESSED FITTINGS

### STAR FRAME

Gimbal recessed spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications.



### STAR I FRAME

Single recessed spot.  
Cut-out size: L115 x W115 x H125mm


### STAR II FRAME

Double recessed spot.  
Cut-out size: L210 x W115 x H125mm

### FINISHES



BLACK






WHITE



SILVER

Lamp type GU10 LED.  
*Supplied without lightsource.*

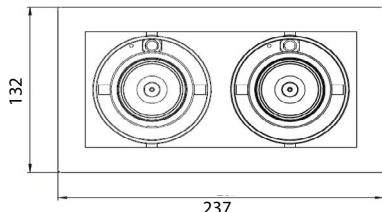

| Variant | Item no.   | £     |
|---------|------------|-------|
| Star1   | NWSTR1GU10 | 51.00 |
| Star2   | NWSTR2GU10 | 78.00 |

### GU 10 LED LAMP



Philips Corepro LEDspot  
4.6w / CRI 80  
Non-Dimmable  
36 Degree



Philips MASTER LEDspot MV  
9w / CRI 90  
Dimmable  
36 Degree



Tel: 0208 542 1471

## RECESSED FITTINGS

### STAR FRAMELESS

Frameless gimbal recessed spot.  
Tilt- and swivel rings. Suitable for  
domestic and hospitality applications.



### STAR I FRAMELESS

Single recessed spot.  
Cut-out size: L115 x W115 x H120mm



### STAR II FRAMELESS

Double recessed spot.  
Cut-out size: L215 x W115 x H120mm

### FINISHES



Lamp type GU10 LED.  
Supplied without lightsource.

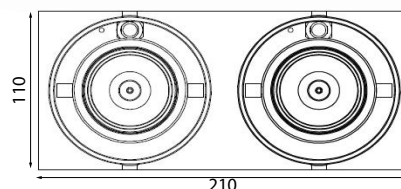

| Variant | Item no.      | £      |
|---------|---------------|--------|
| StarFL1 | INSTR1GU10/FL | 87.00  |
| StarFL2 | INSTR2GU10/FL | 131.00 |

### GU 10 LED LAMP

#### Philips Corepro LEDspot

| Variant       | Item no. | £    |
|---------------|----------|------|
| 2700k (255lm) | 75251700 | 4.90 |
| 3000k (265lm) | 72837600 | 4.90 |
| 4000k (275lm) | 72839000 | 4.90 |


#### Philips MASTER LEDspot MV

| Variant       | Item no. | £    |
|---------------|----------|------|
| 2700k (355lm) | 70785200 | 9.70 |
| 3000k (365lm) | 70787600 | 9.70 |
| 4000k (380lm) | 70789000 | 9.70 |

E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## SNELLO




Surface mounted tubular LED spot.  
Powder coat finish.

## FINISHES



BLACK




WHITE


## COLOUR TEMPERATURE




2200K



2700K



3000K




4000K




5700K


## BEAM ANGLE



15°



24°



44°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN2511   | 122.00 |
| 2000lm  | IN2520   | 122.00 |
| 3000lm  | IN2530   | 126.00 |

## LED MODULES



STANDARD



PREMIUM



DIM-TO-WARM

## SURCHARGE OPTIONS



DIMMABLE



CASAMBI



<3000lm



>3000lm

## ORIZZONTE




Economic surface mounted LED downlight with Philips Fortimo LED DLM flex Gen2. Powder coat finish.

## FINISHES




BLACK




WHITE

## COLOUR TEMPERATURE




3000K



4000K

## BEAM ANGLE



70°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN3911   | 162.00 |
| 2000lm  | IN3920   | 167.00 |
| 3000lm  | IN3930   | 174.00 |

## LED MODULES



STANDARD

## SURCHARGE OPTIONS



DIMMABLE



CASAMBI



EMERGENCY




&lt;3000lm



&gt;3000lm



## LIPARI




Surface mounted downlight with powder coat finish. Available in black (golden inner ring) and white (black inner ring). **Standard Mains Dimmable.**

## FINISHES



BLACK



WHITE

## COLOUR TEMPERATURE



2700K

## BEAM ANGLE



50°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1500lm  | IN0570   | 179.00 |

## LED MODULES



## SURCHARGE OPTIONS



## STAR SURFACE

Gimbal surface mounted spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications.




## STAR I SURFACE

Single surface mounted gimbal spot.



## STAR II SURFACE

Double surface mounted gimbal spot.

## FINISHES



Lamp type GU10 LED.  
Supplied without lightsource.



| Variant | Item no.    | £      |
|---------|-------------|--------|
| Star1   | INSTR1GU10B | 90.00  |
| Star2   | INSTR2GU10B | 131.00 |

\* For GU10 LED Lamps see page 59






**Tel: 0208 542 1471**

## PENDANT FITTINGS

### SALINA



Decorative pendant in powder coat finish. Available in black (golden inner ring) and white (black inner ring). Driver located in ceiling rose of fitting.

**Standard Mains Dimmable.**



### FINISHES



BLACK




WHITE

### COLOUR TEMPERATURE



2700K

### BEAM ANGLE



50°

| Variant | Item no. | £      |
|---------|----------|--------|
| 600lm   | IN0572   | 131.00 |


### LED MODULES





## PENDANT FITTINGS

### ROSWELL



Industrial crafted LED pendant in vintage black outside and matt white inside. Suspension length 2m.

### FINISHES



BLACK


### COLOUR TEMPERATURE




2200K



2700K



3000K




4000K



5700K

### BEAM ANGLE



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN8011   | 352.00 |
| 2000lm  | IN8020   | 352.00 |
| 3000lm  | IN8030   | 357.00 |

### LED MODULES



STANDARD



PREMIUM

£18

### SURCHARGE OPTIONS



DIMMABLE




3000lm

£48

Tel: 0208 542 1471

## PENDANT FITTINGS

### RIVA



Vintage crafted pendant in matt black and white inside. Equipped with an E27 socket and 3m black fabric wire. Supplied without lightsource.

### FINISHES



| Variant | Item no. | £     |
|---------|----------|-------|
|         | IN03     | 90.00 |

### E27 LED Lamp

Philips CorePro LED Bulb  
Cap base: E27  
Beam Angle: 200  
CRI 80  
Colour Temperature: 2,700




| Variant      | Item no. | £    |
|--------------|----------|------|
| 470lm (5.5W) | 57757800 | 3.50 |
| 806lm (8W)   | 57755400 | 4.30 |
| 1055lm (11W) | 49076100 | 5.00 |
| 1521lm (13W) | 49074700 | 6.70 |

\* More lamps available on request



## PENDANT FITTINGS

### DIAMANTE



Industrial-shaped pendant lamp with matt black finish and reflective white inside. Max suspension length 3m.




### FINISHES



BLACK

### COLOUR TEMPERATURE



3000K

### BEAM ANGLE



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 2000lm  | IN0420   | 178.00 |

### LED MODULES



### SURCHARGE OPTIONS



DIMMABLE




3000lm

Tel: 0208 542 1471

## PENDANT FITTINGS

### ALTA




LED Pendant in industrial look, produced in die-cast aluminium. Supplied with Ø400mm prismatic polycarbonate shade. Suspension length 3m.

### FINISHES



BLACK



WHITE



SILVER

### COLOUR TEMPERATURE



2200K



2700K



3000K



4000K



5700K

### BEAM ANGLE



15°



24°



40°



60°

| Variant | Item no. | £      |
|---------|----------|--------|
| 1100lm  | IN1411   | 344.00 |
| 2000lm  | IN1420   | 344.00 |
| 3000lm  | IN1430   | 348.00 |
| 4500lm  | IN1445   | 368.00 |
| 6000lm  | IN1460   | 384.00 |

### LED MODULES



STANDARD



PREMIUM



FOOD

### SURCHARGE OPTIONS



DIMMABLE



CASAMBI



3000lm



3000lm

E-mail: [sales@intalite.co.uk](mailto:sales@intalite.co.uk)



## PENDANT FITTINGS

### NUD CONCRETE & IRON



Concrete and Iron pendant from the NUD Collection with a rough design to get the ultimate industrial feeling. Lamp base E27. Comes with 3m textile cable and ceiling rose. *Supplied without light source.*

### NUD COPPER

Copper pendant from the NUD Collection. Combines warm glow with modern interior. Lamp base E27. Comes with 3m copper colour textile cable and ceiling rose. *Supplied without light source.*

| Variant  | Item no. | £      |
|----------|----------|--------|
| Concrete | ND/CON   | 102.00 |
| Copper   | ND/COP   | 114.00 |
| Iron     | ND/IRO   | 102.00 |

### E27 LED Lamp



Philips Classic LED Bulb  
CRI 80  
Non-Dimmable



Philips LED Bulb Gold  
CRI 80  
Non-Dimmable



#### Classic LED - GLS

| Variant    | Item no. | £    |
|------------|----------|------|
| 470lm (4W) | 57399000 | 4.90 |
| 806lm (7W) | 74273000 | 5.10 |

#### Philips LED - GLS Gold

| Variant      | Item no. | £    |
|--------------|----------|------|
| 470lm (5.5W) | 70940500 | 7.00 |
| 630lm (8W)   | 84154900 | 9.40 |

\* More lamps available on request



Tel: 0208 542 1471

## CAGE LAMP



Ø130

230



Industrial wire spot, lighting with a sturdy look. Ideal for decorative lighting purposes such as a counter, bar and table. Lamp base E27. Comes with a 3m twisted textile cable.

*Supplied without lightsource or base*

| Variant   | Item no. | £     |
|-----------|----------|-------|
| CAGE LAMP | PK55600  | 85.00 |

## E27 LED Lamp



Philips Classic LED Bulb  
CRI 80  
Non-Dimmable



Philips LED Bulb Gold  
CRI 80  
Non-Dimmable



### Classic LED - GLS

| Variant    | Item no. | £    |
|------------|----------|------|
| 470lm (4W) | 57399000 | 4.90 |
| 806lm (7W) | 74273000 | 5.10 |

### Philips LED - GLS Gold

| Variant      | Item no. | £    |
|--------------|----------|------|
| 470lm (5.5W) | 70940500 | 7.00 |
| 630lm (8W)   | 84154900 | 9.40 |

\* More lamps available on request



# Philips Fortimo SLM Gen 7

## 1100lm

| Description                   | Lumen  | Watt <sub>1</sub> | lm/W <sup>2</sup> | Colour Temp | CRI |
|-------------------------------|--------|-------------------|-------------------|-------------|-----|
| Philips Fortimo SLM G7        | 1100lm | 6W                | 183               | 827         | >80 |
| Philips Fortimo SLM G7        | 1100lm | 6W                | 183               | 830         | >80 |
| Philips Fortimo SLM G7        | 1100lm | 6W                | 183               | 840         | >80 |
| Philips Fortimo SLM G7        | 1100lm | 8W                | 138               | 927         | >90 |
| Philips Fortimo SLM G7        | 1100lm | 8W                | 138               | 930         | >90 |
| Philips Fortimo SLM G7        | 1100lm | 8W                | 138               | 930 PW      | >90 |
| Philips Fortimo SLM G7        | 1100lm | 7W                | 157               | 940 PW      | >90 |
| Philips Fortimo SLM G6        | 1100lm | 10W               | 110               | 930 CW      | >90 |
| Philips Fortimo SLM G6        | 1100lm | 11W               | 100               | 925 FWW     | >90 |
| Meat Premium Red <sup>3</sup> | 1100lm | 16W               | 69                | 920 MPR     | >90 |
| Fresh Fish <sup>3</sup>       | 1100lm | 13W               | 85                | 940 FF      | >90 |

## 3000lm

| Description                   | Lumen  | Watt <sub>1</sub> | lm/W <sup>2</sup> | Colour Temp | CRI |
|-------------------------------|--------|-------------------|-------------------|-------------|-----|
| Philips Fortimo SLM G7        | 3000lm | 19W               | 183               | 827         | >80 |
| Philips Fortimo SLM G7        | 3000lm | 18W               | 183               | 830         | >80 |
| Philips Fortimo SLM G7        | 3000lm | 17W               | 183               | 840         | >80 |
| Philips Fortimo SLM G7        | 3000lm | 23W               | 138               | 927         | >90 |
| Philips Fortimo SLM G7        | 3000lm | 22W               | 138               | 930         | >90 |
| Philips Fortimo SLM G7        | 3000lm | 22W               | 138               | 930 PW      | >90 |
| Philips Fortimo SLM G7        | 3000lm | 20W               | 157               | 940 PW      | >90 |
| Philips Fortimo SLM G6        | 3000lm | 31W               | 110               | 930 CW      | >90 |
| Philips Fortimo SLM G6        | 3000lm | 38W               | 100               | 925 FWW     | >90 |
| Meat Premium Red <sup>3</sup> | 3000lm | 36W               | 69                | 920 MPR     | >90 |
| Fresh Fish <sup>3</sup>       | 3000lm | 34W               | 85                | 940 FF      | >90 |

## 6000lm

| Description            | Lumen  | Watt <sub>1</sub> | lm/W <sup>2</sup> | Colour Temp | CRI |
|------------------------|--------|-------------------|-------------------|-------------|-----|
| Philips Fortimo SLM G7 | 6000lm | 37W               | 162               | 827         | >80 |
| Philips Fortimo SLM G7 | 6000lm | 36W               | 167               | 830         | >80 |
| Philips Fortimo SLM G7 | 6000lm | 34W               | 176               | 840         | >80 |

### Please note:

- 1) Mentioned power (Watt) applies to the COB only. The power consumption of the complete fixture will be 5-10% higher because of the power consumption of the driver\*  
\*Additional power consumption depends on the type of driver
- 2) Power and Lumen/Watt (lm/W) can vary approximately 5%
- 3) The Meat Premium Red and Fresh Fish LED modules are high performance modules (non-Philips) with excellent colour rendering especially for food

\* Dimming options may not be available depending on CCT on selective fittings.

## 2000lm

| Description                   | Lumen  | Watt <sub>1</sub> | lm/W <sup>2</sup> | Colour Temp | CRI |
|-------------------------------|--------|-------------------|-------------------|-------------|-----|
| Philips Fortimo SLM G7        | 2000lm | 12W               | 183               | 827         | >80 |
| Philips Fortimo SLM G7        | 2000lm | 12W               | 183               | 830         | >80 |
| Philips Fortimo SLM G7        | 2000lm | 11W               | 183               | 840         | >80 |
| Philips Fortimo SLM G7        | 2000lm | 16W               | 138               | 927         | >90 |
| Philips Fortimo SLM G7        | 2000lm | 15W               | 138               | 930         | >90 |
| Philips Fortimo SLM G7        | 2000lm | 15W               | 138               | 930 PW      | >90 |
| Philips Fortimo SLM G7        | 2000lm | 14W               | 157               | 940 PW      | >90 |
| Philips Fortimo SLM G6        | 2000lm | 20W               | 110               | 930 CW      | >90 |
| Philips Fortimo SLM G6        | 2000lm | 22W               | 100               | 925 FWW     | >90 |
| Meat Premium Red <sup>3</sup> | 2000lm | 30W               | 69                | 920 MPR     | >90 |
| Fresh Fish <sup>3</sup>       | 2000lm | 22W               | 85                | 940 FF      | >90 |

## 4500lm

| Description            | Lumen  | Watt <sub>1</sub> | lm/W <sup>2</sup> | Colour Temp | CRI |
|------------------------|--------|-------------------|-------------------|-------------|-----|
| Philips Fortimo SLM G7 | 4500lm | 28W               | 161               | 827         | >80 |
| Philips Fortimo SLM G7 | 4500lm | 27W               | 167               | 830         | >80 |
| Philips Fortimo SLM G7 | 4500lm | 25W               | 180               | 840         | >80 |
| Philips Fortimo SLM G7 | 4500lm | 35W               | 129               | 927         | >90 |
| Philips Fortimo SLM G7 | 4500lm | 33W               | 136               | 930         | >90 |
| Philips Fortimo SLM G7 | 4500lm | 33W               | 136               | 930 PW      | >90 |
| Philips Fortimo SLM G7 | 4500lm | 30W               | 150               | 940 PW      | >90 |
| Philips Fortimo SLM G6 | 4500lm | 46W               | 98                | 930 CW      | >90 |

## SLM GEN 7



Exceptional rendering of beautiful colors, perfect whites and rich blacks

Extensive Choice of color temperatures, CRI and spectra's

Ultimate flexibility for optimized luminaire performance

Easy configuration of light level through our SimpleSet technology

Small Light Emitting Surface (LES) sizes

Efficacies up to 180\* lm/W or higher

Extended Tc of up to 95 °C possible

Range covers 700 lm to 10,000 lm

# INDEX

|                         |    |                          |    |
|-------------------------|----|--------------------------|----|
| Alta                    | 69 | Moon Frame               | 56 |
| Baleno                  | 13 | Moon Frameless           | 57 |
| Barista                 | 26 | Moon Retail              | 36 |
| Cage Lamp               | 71 | NLO Track                | 22 |
| Centro                  | 40 | NUD Concrete/Iron/Copper | 70 |
| Cerchio                 | 51 | Occhio                   | 43 |
| Colibri                 | 21 | Orizzonte                | 61 |
| Concentra               | 19 | Piazza                   | 50 |
| Curva                   | 38 | Piccolo 3                | 54 |
| Diamante                | 68 | Piccolo 5                | 55 |
| Doblar                  | 39 | Presenta                 | 15 |
| Dolina Frame            | 49 | Quadro                   | 46 |
| Dolina Frameless        | 48 | Riva                     | 67 |
| Emergency Track Fitting | 35 | Rondio                   | 45 |
| Emergency Track Spot    | 34 | Roswell                  | 66 |
| Etna                    | 44 | Salina                   | 65 |
| Finestra                | 18 | Snello                   | 60 |
| Galleria                | 17 | Star Frame               | 58 |
| Girevole                | 42 | Star Frameless           | 59 |
| Giro                    | 53 | Star Surface             | 63 |
| Guarda                  | 28 | Stretto                  | 25 |
| I.Forza                 | 32 | Theatre                  | 27 |
| IL Podio                | 20 | Tondo                    | 41 |
| Interno                 | 14 | Tubulo                   | 24 |
| Labarra                 | 29 | Ultimo                   | 33 |
| Linea 60/100            | 30 | Variare                  | 11 |
| Lipari                  | 62 | Vela                     | 31 |
| Lungo                   | 12 | Veloce                   | 23 |
| Mercato                 | 16 | Visione 360              | 52 |
| Meteora                 | 10 |                          |    |



# Terms and Conditions

## **PRICING:**

The catalogue is fully priced at the RRP excluding VAT. All prices were correct at the time of print.

## **DELIVERIES:**

All items held in the UK are available on a next day service when received by 2pm. Stocked Items held in the central European warehouse are available on a 2 - 3 working day delivery service. However as the fittings are made to order please allow for a 7-10 working day lead time (depending on the complexity of the fitting) we will endeavour to ensure this is the shortest time possible. If your order is urgent we are able to offer an express next day service from Europe subject to a freight cost based on the weight of the order, please contact sales for pricing. All orders placed after 1pm will be treated as being received on the next working day. Delivery times are approximate and we accept no liability for late deliveries caused by events beyond our control.

## **MINIMUM ORDER VALUE:**

Our carriage paid order is £150 nett excl vat, orders below £150 will be subject to a small order charge of £12. Subject to customs changes relating to UK withdrawal from the single market.

## **CHARGEABLE SAMPLES:**

We are happy to supply chargeable sale or return samples. Carriage is applicable and refundable on placement of full order. If not required, then goods must be returned in A1 resellable condition & returned at your own cost within 30 days.

## **CANCELLATION OF ORDERS:**

Once an order is placed with us it is then placed with Internova in Netherlands almost immediately to ensure the quickest delivery time possible. This process only allows us a 30 minute window in which to cancel / amend an order. Beyond this time it is not possible to amend or cancel.

## **RETURNS:**

Returned goods will not be accepted without prior notification. A returns authorisation document is available upon request. Any goods returned without this authorisation document will be refused. Returns of unwanted items are accepted within three months after purchase, are subject to a 25% handling charge and need to be returned in A1 condition.

## **FAULTS:**

If a product appears to be faulty we will offer to collect the product for inspection. If the fault is repairable, this option will be offered. If the product is not repairable we will send it away for testing, which can take up to 6 weeks. If a replacement is required in the meantime, this will be supplied as a chargeable replacement. A credit will be issued once it has been confirmed that the product has a genuine fault and it has not been caused by poor installation.

## **GUARANTEE:**

All track & accessories and fittings which use Philips and RGBWW modules carry a 5 year electrical guarantee, all other fittings carry a 3 year warranty. All lamps have their own average life span. We recommend all products are installed by NICEIC / registered electrical contractors, failure to do so will result in any guarantee becoming void.

## **ACCOUNT FACILITIES:**

Accounts facilities can be applied for by returning our account application form (available upon request). We are contractually obliged to forward details to our insurers. Any account that is more than 60 days overdue this may result in credit facilities being removed and credit ratings being affected. Payment terms (Account customers): We require payment in full by the last day of the month following the invoice date for this we offer a 2.5% settlement discount.

## **RETENTION OF TITLE:**

All goods remain the property of INTALITE UK until such time that full payment is received for goods supplied. We are a supply company only, we offer replacement / repairs for faulty goods. We do not offer any form of compensation relating to installation / uninstallation.

## **ADDITIONAL INFORMATION:**

- All data for these products including Photometric data for our products can be found at [www.intanova.co.uk](http://www.intanova.co.uk)

Due to the cost to transporting 3 metre lengths of track, additional freight charges may apply

## **FULL TERMS & CONDITIONS:**

For our full terms and conditions please visit our website - [www.intalite.co.uk/terms-conditions/](http://www.intalite.co.uk/terms-conditions/)

This catalogue is copyright protected, the use of any artwork is strictly prohibited without Intalite UKs expressed permission

## NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.





**INTALITE UK**

*Loving Light!*

---

148-154 Merton High St  
Wimbledon  
London  
SW19 1AZ

Tel: +44 (0)20 8542 1471  
Fax: 0870 4211 763

[sales@intalite.co.uk](mailto:sales@intalite.co.uk)  
[www.intalite.co.uk](http://www.intalite.co.uk)