



APPLICATION GUIDE
Fused Connection Unit

CAT. NO.

E8230FSG

E8230FSGN

E8231DFSGN

Pieno

Thank you for choosing **Schneider Electric** Pieno's electronic accessories. To ensure proper application of our products, please read through the following information before installation and use.

This application guide applies to the following products.

Cat.no.	Description
E8230FSG	13A 250V 1 Gang Fused Connection Unit
	
E8230FSGN	13A 250V 1 Gang Fused Connection Unit with Neon
	
E8231DFSGN	13A 250V 1 Gang Fused Connection Unit with Double Pole Switch and Neon
	

SPECIFICATIONS


Rated Voltage	: 250V~
Rated Current	: 13A
Dimension	: 87mm x 87mm
Mounting Centre	: 60.3mm
Compliance	: BS 1363

IMPORTANT NOTE


1. The products must be installed by qualified electricians.
2. Please check your local wiring regulations before installation.
3. Safekeeping the faceplate to prevent damage during product installation.
4. Turn off the power supply when you clean the product. Use a soft, slightly-moistened cloth or tissue paper to wipe off the dust and dirt on the surface. Clean with much diluted detergent if necessary but avoid using corrosive chemicals.

WIRING DIAGRAMS

E8230FSG & E8230FSGN

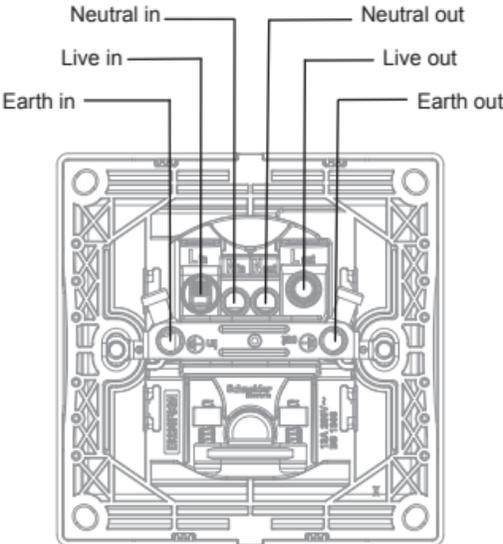


E8231DFSGN

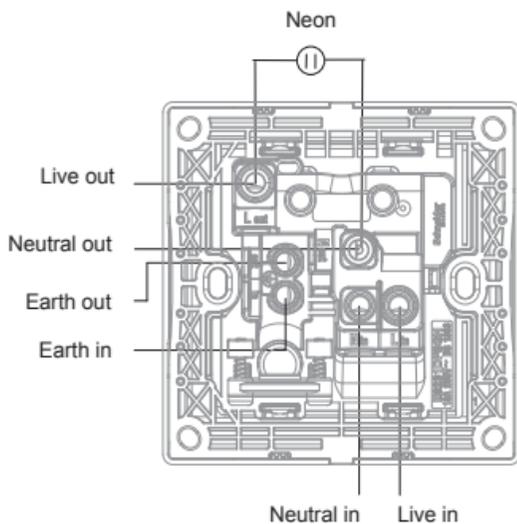

* Neon indicator should be connected between Live Output and Neutral Output terminal.

MOUNTING INSTRUCTION

1. Connect the wires to the terminals (recommend to leave 10-12mm bare metal wire) and tighten the terminal screws.
2. Screw the grid plate onto the wall box.
3. Snap the faceplate onto the grid plate.

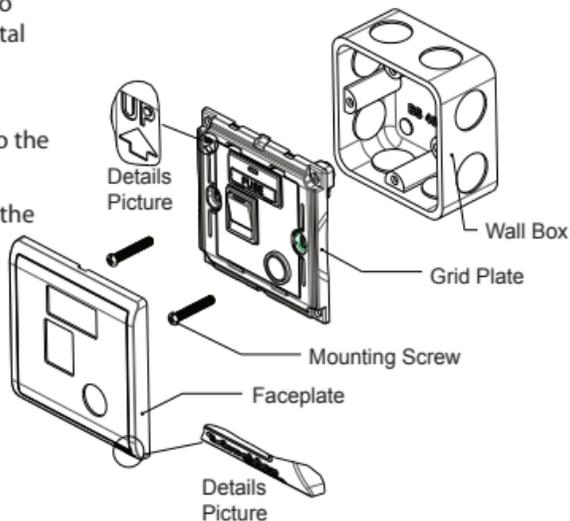

Insert a screwdriver into the clip lock, and twist the screwdriver to remove the faceplate.

