SLV

EXPERIENCE LIGHT



BIG WHITE® '21

SLV Lighting Catalogue

OUR PROMISE.



PRICE AND PERFORMANCE
IN PERFECT HARMONY



FAST AND
RELIABLE DELIVERY
24h (GERMANY), 48h (EUROPE)



WE ARE YOUR WAREHOUSE
98% AVAILABILITY



5 YEAR WARRANTY*

OFFICE

SLV LIGHTING UK LTD
Unit E Chiltern Park,
Boscombe Road
Dunstable
LU5 4LT

Telephone number:
+ 44 (0)203 968 11 00

Fax number:
+ 44 (0)203 968 11 09

sales@uk.slv.com
slv.com

*Please note the warranty conditions under slv.com → Service → Downloads → Warranty Conditions.

BIG WHITE®

Whether printed or digital – with us the choice is yours.

SLV.COM – EXPERIENCE LIGHT ONLINE

On our online platform you will find the complete SLV range with all product details, descriptions, availability, and much more. Our filter makes looking for the perfect product easy. Useful design files, 3D data, configurators and calculation tools such as FastCalc by DIAL are there to help you create your perfect lighting design. We always keep pace with the times, with news from the world of lighting, and received a Shop Usability Award in 2019. Visit **slv.com**



THE DIGITAL BIG WHITE® CATALOGUE – YOUR FLEXIBLE COMPANION



With our digital catalogue, you have a tool that will make your customer visits more efficient than ever: as well as having a digital copy of our main catalogue to hand, you can also gain quick insight into the exact SLV products you want to see through our additional services.

SLV EXPERIENCE LIGHT APP: NOW YOU CAN EXPERIENCE REAL INSPIRATION VIRTUALLY TOO.

Understand in advance what SLV lights can do for customers.
With our augmented reality app, SLV EXPERIENCE LIGHT, you can always find the perfect lighting – on the spot, indoors and outdoors. The app is extremely easy to use, making it an important consultation tool for electrical installers and lighting designers. Because where the customer's imagination ends, the possibilities of our app begin: give a virtual presentation of how our lights will work in their future location.

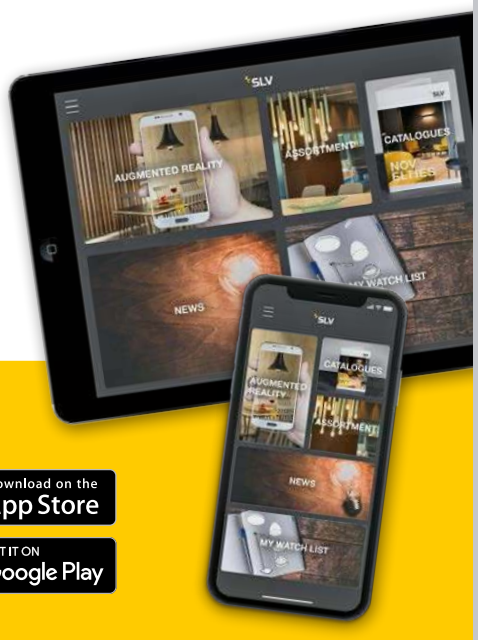

Download the SLV EXPERIENCE LIGHT app for free.
Download our free augmented reality app from the iTunes Apple Store or Google Play Store onto your smartphone or tablet.

Download on the App Store

GET IT ON Google Play

SLV – EXPERIENCE LIGHT!

SLV is a brand that has continued to shine ever more brightly since 1979. Like the symbolic **Polar Star** in our brand logo, we now shine far beyond the borders of our German origin.

3500+

MORE THAN 3,500 ITEMS IN THE BIG WHITE 2021 CATALOGUE

Light is extremely versatile and influences every area of our life. The possibilities offered by SLV for making light a unique experience are just as versatile.

What does Experience Light mean?

Experience Light means creating an all-round priceless experience. Through the perfect lighting solutions for a wide range of indoor and outdoor spaces, covering diverse contexts and purposes. Through excellent service, fast delivery, and easy installation. And through strong brand quality – which is available at a fair price.



Fast and reliable delivery



Great value for money



5 year guarantee*



German engineering



98 % product availability

Our own development in Germany, long-term thinking, and rigorous quality assurance form the basis of our exceptional quality standards. You can rely on the SLV brand – even in challenging times. With a constant product availability of 98 %, we offer fast and reliable delivery to all our customers from our own logistics centre in Germany.

* Please note the guarantee conditions available at slv.com → Service → Downloads → Guarantee conditions.

NEW

100+

Here at SLV, what drives us is constant development and finding new solutions. Whether it is a matter of adapting new technologies and standards or networking and controlling devices intelligently – future-proof lighting solutions are always our priority at SLV.

DALI ZIGBEE

MORE THAN 100 NEW PRODUCTS IN THE BIG WHITE 2021 CATALOGUE

Tried and tested quality.
The SLV test laboratories, located at SLV's German headquarters in Übach-Palenberg (North Rhine-Westphalia) and in Shanghai in Asia, contribute significantly to quality assurance and improvement.

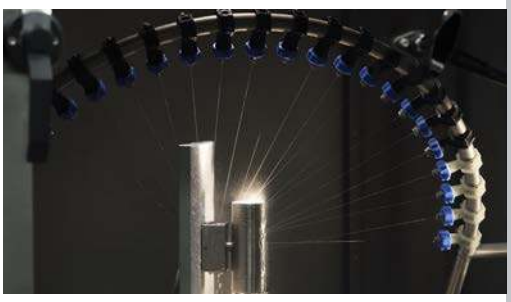

Distinguished design.
Industrial designers from all over the world develop lights for the SLV brand.
For designs that create special experiences and are recognised with prestigious awards.



BENDO



MALU



ESKINA

A strong partner.
Success is always the result of close collaboration. So it's great that SLV can rely on the partnerships it has developed – both within the lighting sector and outside of it.

GREEN LIGHT
FOR SUSTAINABILITY

Our understanding of sustainability is characterised by resource-saving actions and ecological innovations. Across all core processes.
With products that are better for the environment and our planet.

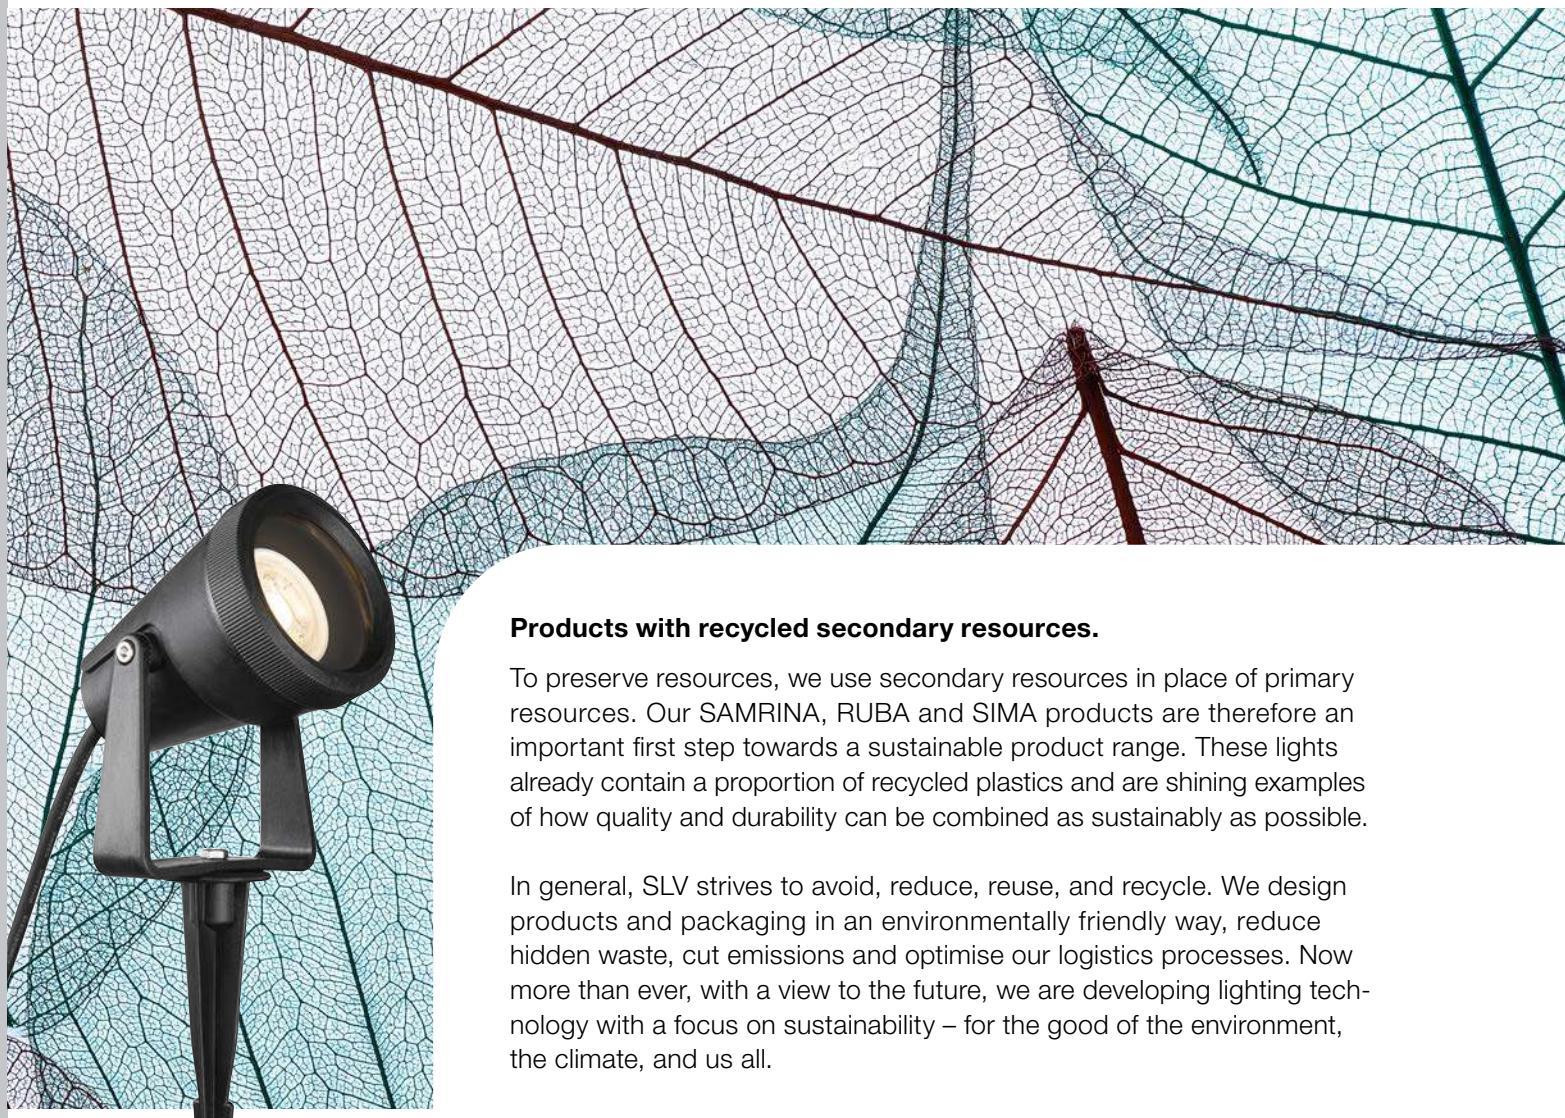

Products with recycled secondary resources.

To preserve resources, we use secondary resources in place of primary resources. Our SAMRINA, RUBA and SIMA products are therefore an important first step towards a sustainable product range. These lights already contain a proportion of recycled plastics and are shining examples of how quality and durability can be combined as sustainably as possible.

In general, SLV strives to avoid, reduce, reuse, and recycle. We design products and packaging in an environmentally friendly way, reduce hidden waste, cut emissions and optimise our logistics processes. Now more than ever, with a view to the future, we are developing lighting technology with a focus on sustainability – for the good of the environment, the climate, and us all.



LED INSIDE

Energy-efficient LED illumination.

High efficiency, long durability, and environmentally-friendly disposal: compared to traditional lightbulbs, LEDs save up to 90 % in energy. Of course, SLV uses energy-saving technology for its lights.



Less packaging.

Recycled paper instead of styro-foam, reduced total volumes, and cardboard instead of plastic: when it comes to packaging, we are working specifically towards an established closed-loop economy. We also want to further minimise the emissions indirectly caused by transportation and thus our CO_2 footprint.



Repair instead of disposal.

For us, sustainability also means that more than 80 % of our lights can be repaired by trained specialists. This saves raw materials, reduces waste, and makes our customers happier.

SAMRINA, RUBA and SIMA – shining examples of sustainable quality.



SAMRINA
Item No.
1004757



RUBA
Item No.
1005090

SIMA
Item No.
1005087



SIMA
Item No.
1005085

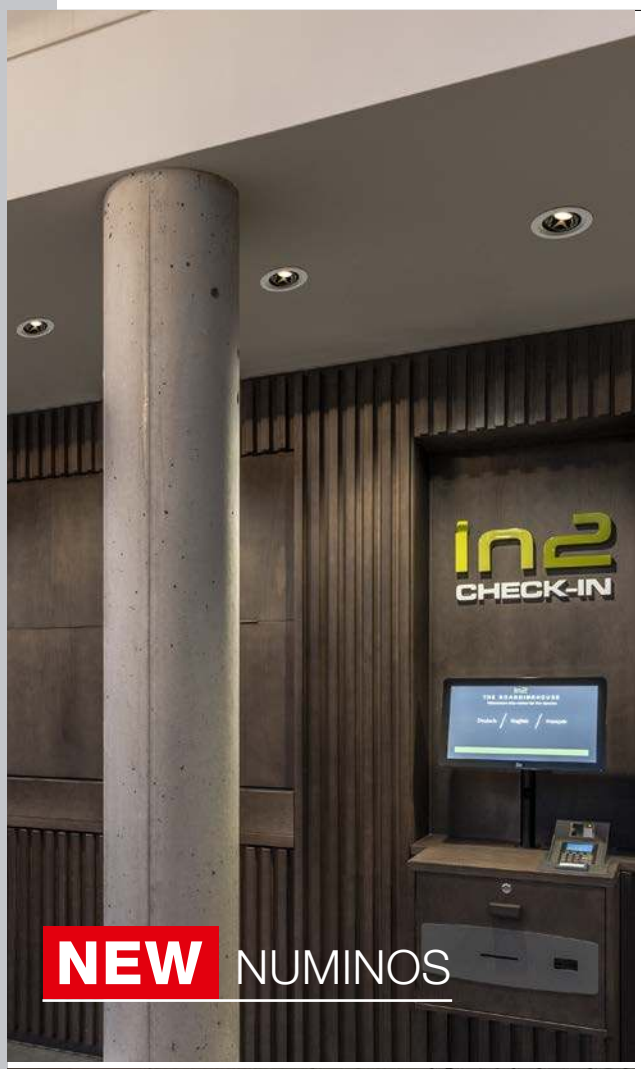

NEW NUMINOS



NEW OCULUS

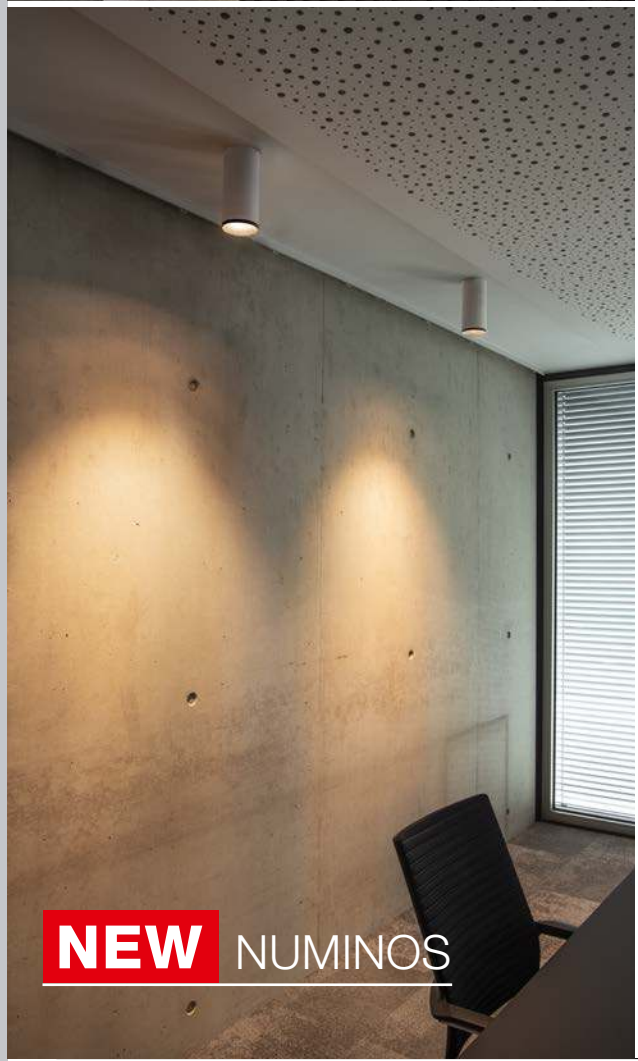

NEW NUMINOS



NEW OVALISK









NUMINOS 010 - 065

N

Lighting system ... 010 - 025
Downlights ... 026 - 041
Spotlights ... 042 - 065

INDOOR 066 - 557

Table and floor lamps ... 066 - 089
Pendant lights ... 090 - 185
Wall lights ... 186 - 277
Ceiling lights ... 278 - 325
Wall and ceiling lights ... 326 - 375

Recessed lights ... 376 - 463

High-voltage track 3-circuit ... 464 - 505
High-voltage track 1-circuit ... 506 - 529
High-voltage track Easytec® II 530 - 539
Low-voltage cable system and display case track ... 540 - 557

OUTDOOR 558 - 765

Mobile lights and floor lights ... 558 - 613
Spotlight ... 614 - 637
Wall and ceiling lights ... 638 - 723

Recessed wall lights ... 724 - 733
Recessed ceiling lights ... 734 - 743
Recessed floor lights ... 744 - 765

PROFILE SOLUTIONS 766 - 787

LED STRIPS AND LIGHT BARS 788 - 805

LED strips ... 788 - 803
Light bars ... 804 - 805

CONNECTED LIGHTING 806 - 823

DALI – Professionally connected lighting ... 806 - 813
ZIGBEE® 3.0 – The smart wireless system ... 814 - 821
SLV BLUETOOTH® CONTROL 822 - 823

ACCESSORIES 824 - 843

A+

Accessories ... 824 - 843

LIGHTBULB 844 - 857

Lightbulb ... 844 - 857

LIGHTING FAMILIES AND INDEX 858 - 898

0-9 A-Z

SLV's lighting families ... 858 - 875
Numerical ... 876 - 887
Alphabetical ... 888 - 893

You can find more lights and variants at www.slv.com

All prices are recommended retail prices (RRP) and indicated without VAT.

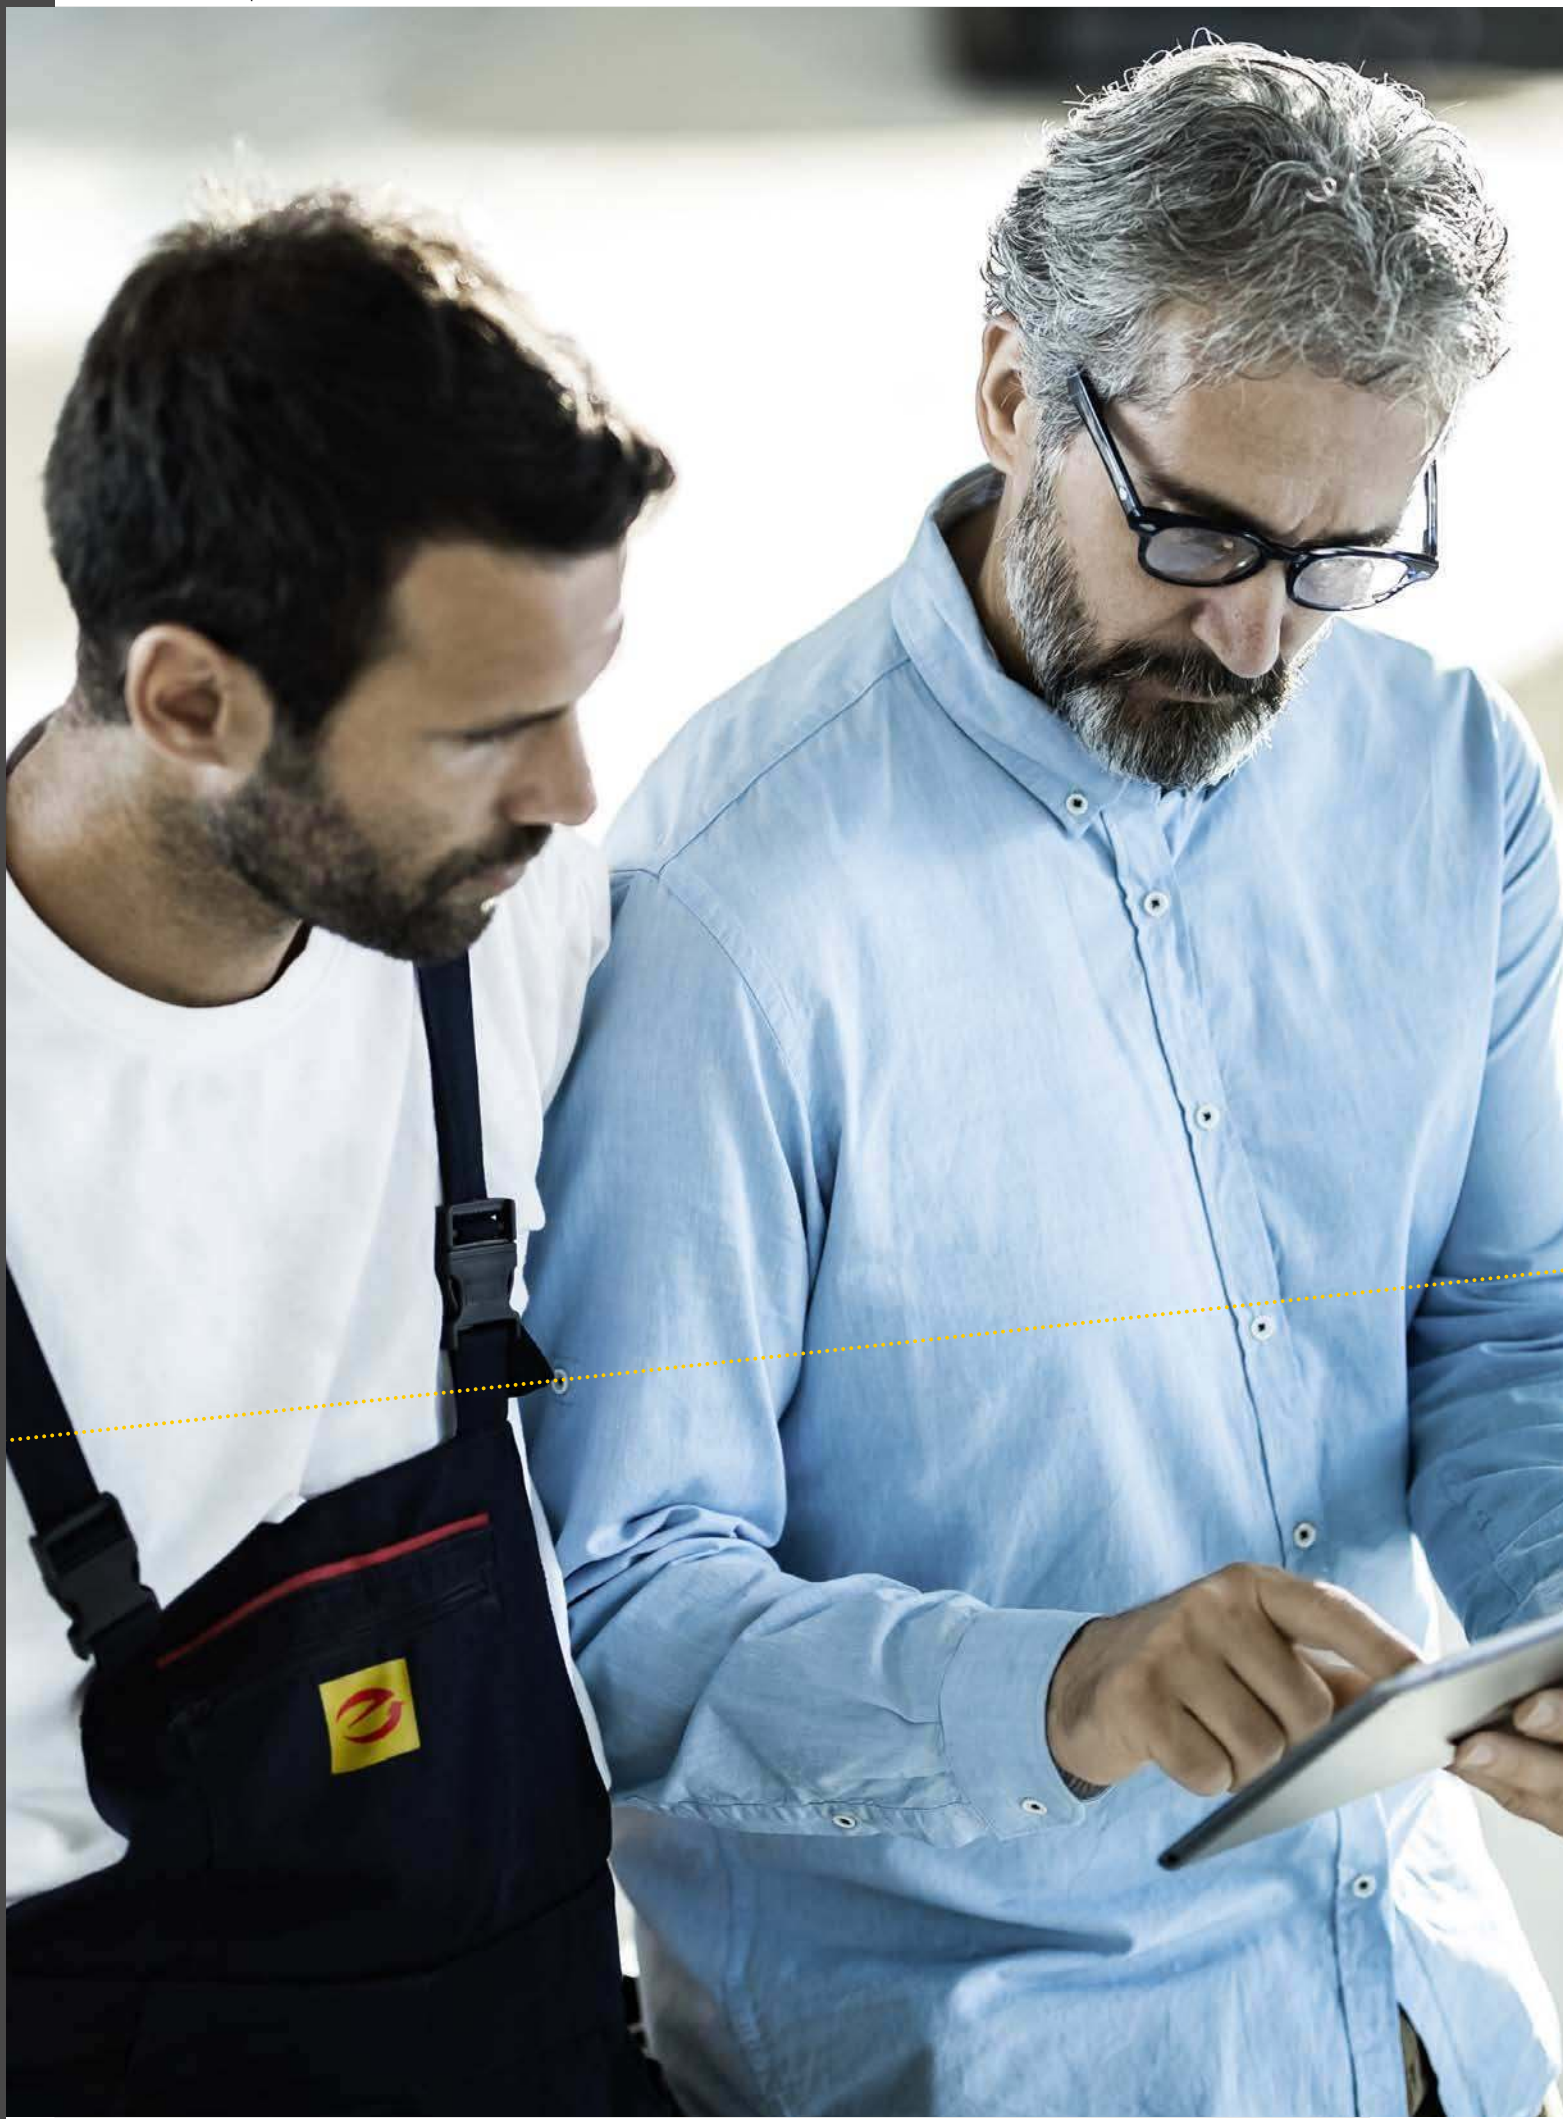





AVAILABLE
FROM NOVEMBER 2020 !

NUMINOS.

ONE LIGHTING SYSTEM – A THOUSAND POSSIBILITIES.

THE PERFECT LIGHTING SOLUTION FOR EVER Y CONTEXT.

THE FREELY CONFIGURABLE LIGHTING SYSTEM THAT CASTS A GOOD LIGHT ON EVERY SETTING.

No two projects are the same. But many projects demand a coherent lighting and design concept. NUMINOS is a perfectly coordinated lighting system that harmonises function, design and technology. For planners and doers. For every need. For maximum variety with minimum effort.

NUMINOS.



HIGH-PERFORMANCE LED MODULE WITH BRILLIANT COLOUR RENDERING



WIDE SELECTION OF DOWNLIGHTS AND SPOTS FOR A HARMONIOUS DESIGN CONCEPT.

MORE FREEDOM WITH SYSTEM.

WHATEVER YOU'RE PLANNING –
THE NUMINOS LIGHTING SYSTEM
CREATES SPACE FOR NEW IDEAS.



The NUMINOS lighting system offers constant lighting characteristics and modern design for all uses:

- **for office spaces**
- **shops & boutiques**
- **hotels & gastronomy**
- **museums**
- **at home**
- **and much more**

From hotels and offices to commercial or private rooms. From application to technology to design in detail: it's good that the modular downlights and spotlights can be configured exactly as required by the design or space in question. And the more multifaceted your project is, the more you benefit from the NUMINOS lighting system.

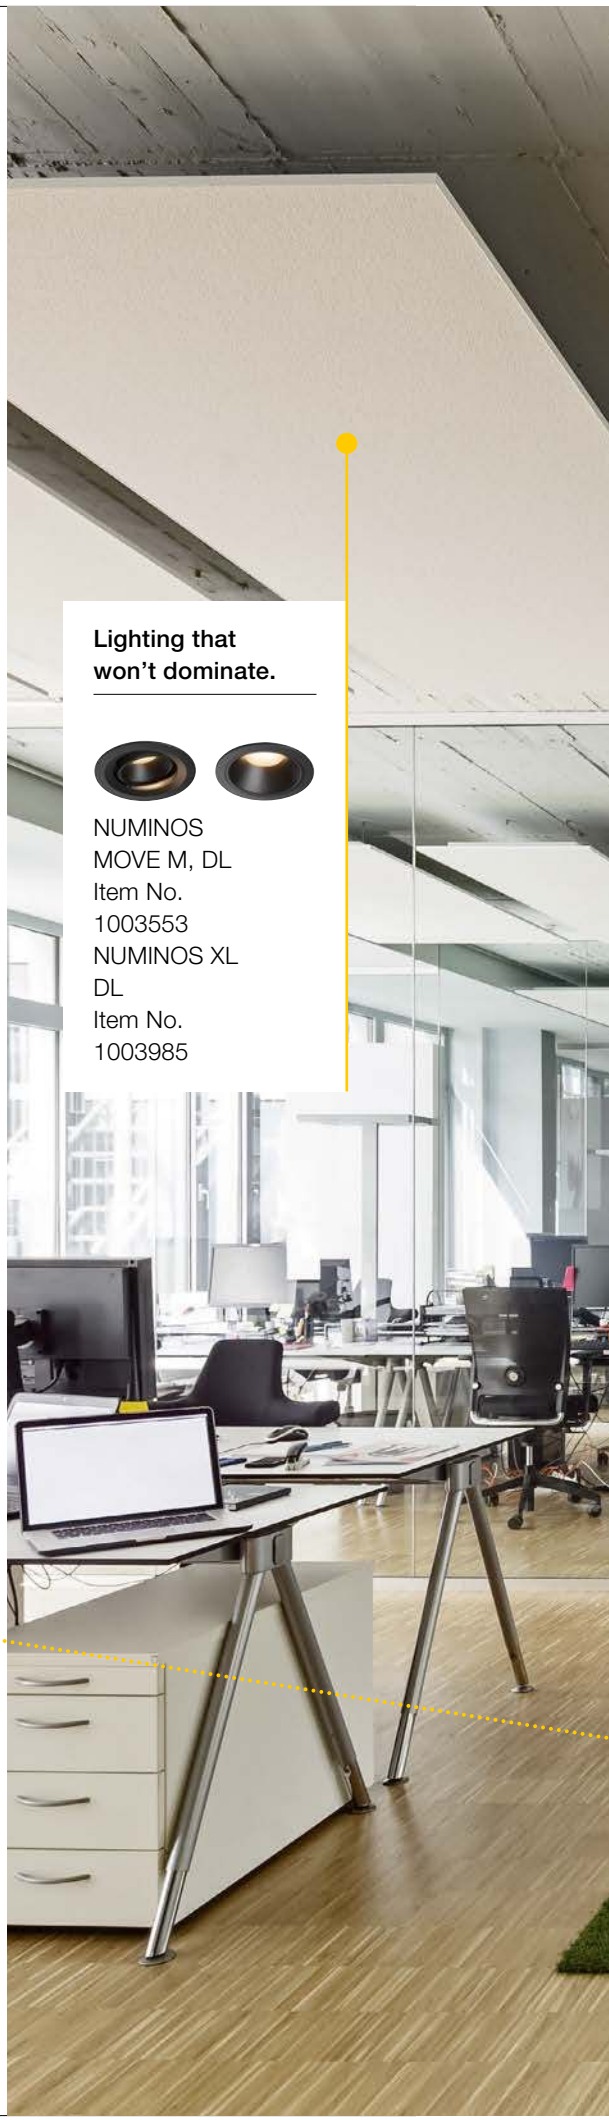

Lighting that won't dominate.

NUMINOS MOVE M, DL
Item No. 1003553
NUMINOS XL DL
Item No. 1003985

Highlights that shine down.



NUMINOS S, CL
Item No.
1004139

Free for all dimensions.



NUMINOS L,
3-circuit
Item No.
1004554

Perfect for suspending, and height-adjustable.



NUMINOS L, PD
Item No.
1004530

UNIQUE VARIETY, SHARED HIGHLIGHTS.

Choose between:

- Downlight or spotlight
- Various sizes and diameters
- Housing colours (black/white)
- Reflector variants
- Pivoting or rigid versions
- Performance classes

The different variants feature:

- High-performance LED module with the light colours 2700K/3000K/4000K
- Colour quality CRI>90
- Glare rating UGR min. <22



DOWNLIGHTS

Available in seven versions (68-75mm to 176-186mm) with high-performance LED module in three light colours (2700K, 3000K, 4000K) and glare ratings (UGR 16, 19, 22)

Selectable reflectors with half beam angles of 20°, 40° or 55°.

Various effect filters (frosted / prismatic / elliptical / honeycomb) available as accessories.

Decorative ring can be selected in white, black or chrome as a visible border.

NUMINOS downlights are available as rigid or swivelling versions (4x fixed and 3x rotated and pivoted).



S M L XL

Accessory with system:
You can easily add an optional driver (on/off, phase dimming, DALI) and suitable diffusers using the colour coding system.

You can find drivers and diffusers for the SLV NUMINOS Downlight system on pages 40-41.

ONE LIGHTING SYSTEM INTELLIGENTLY DESIGNED IN EVERY DETAIL

Thanks to the wide selection of modules, there is a suitable solution for every need. Fixed configuration. Fast and safe to install.



SPOTLIGHTS

Available in three housing sizes (65x155mm, 85x175mm, 100x203mm) with high-power LED module in three light colours (2700K, 3000K, 4000K)

Thanks to the built-in LED driver (phase dimming, DALI), all spot-lights are suitable for direct con-nection to 230V mains voltage.

Selectable lenses with half beam angles of 24°, 36° or 60°.

NUMINOS spotlights are available as swivelling or fixed ceiling spots, pendant lights and as spots for 3-circuit rail systems.



Easy to install.

Because efficiency always pays off, SLV lights are easy, quick and safe to install. Connection via mounting plate, rail system, quick-release coupling, spring clips and colour-coded drivers for downlights offers a key advantage: it saves you time and effort – and therefore costs.



ONE LIGHTING SYSTEM. FOR EVERY EVENTUALITY.

For success under all conditions, you need team players who shine with individual strengths. Discover the applications for which the individual NUMINOS lights are particularly well suited.

Downlights
Unobtrusive, modern and space-saving lighting that directs the gaze to particular objects or the room in general: the downlights in the NUMINOS lighting system can be used variably in commercial and private settings.



To help focus on what really matters in meeting rooms.



NUMINOS S
DL
Item No.
1003798

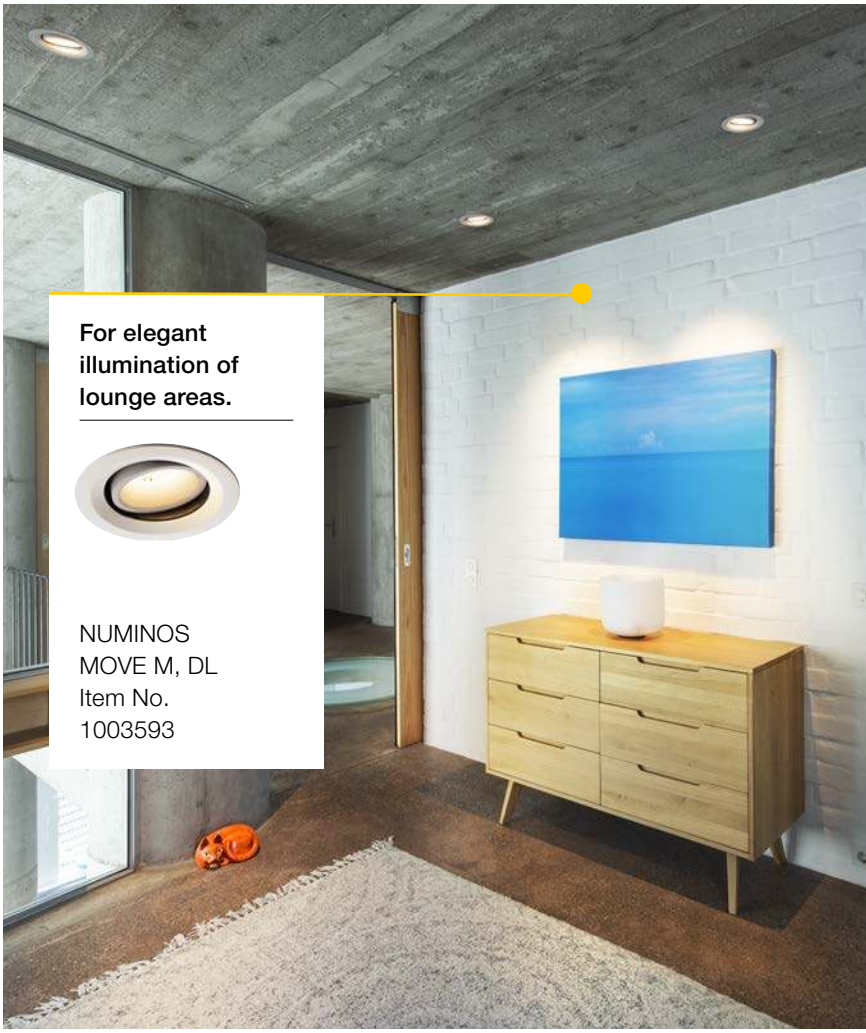

For elegant illumination of lounge areas.

NUMINOS
MOVE M, DL
Item No.
1003593

To give highlights an extra special touch.



NUMINOS M
DL
Item No.
1003809

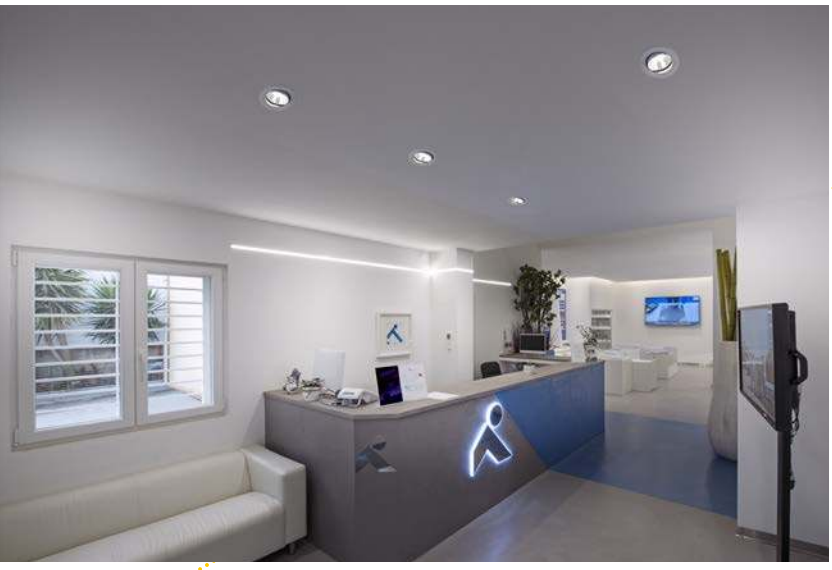

When you want your lighting to promote a sense of wellbeing.



NUMINOS
MOVE M, DL
Item No.
1003620

Individually designed illumination.
Thanks to the large selection of reflectors on offer, the NUMINOS lighting system is suitable for accent lighting as well as for uniform illumination of work areas, corridors and offices.

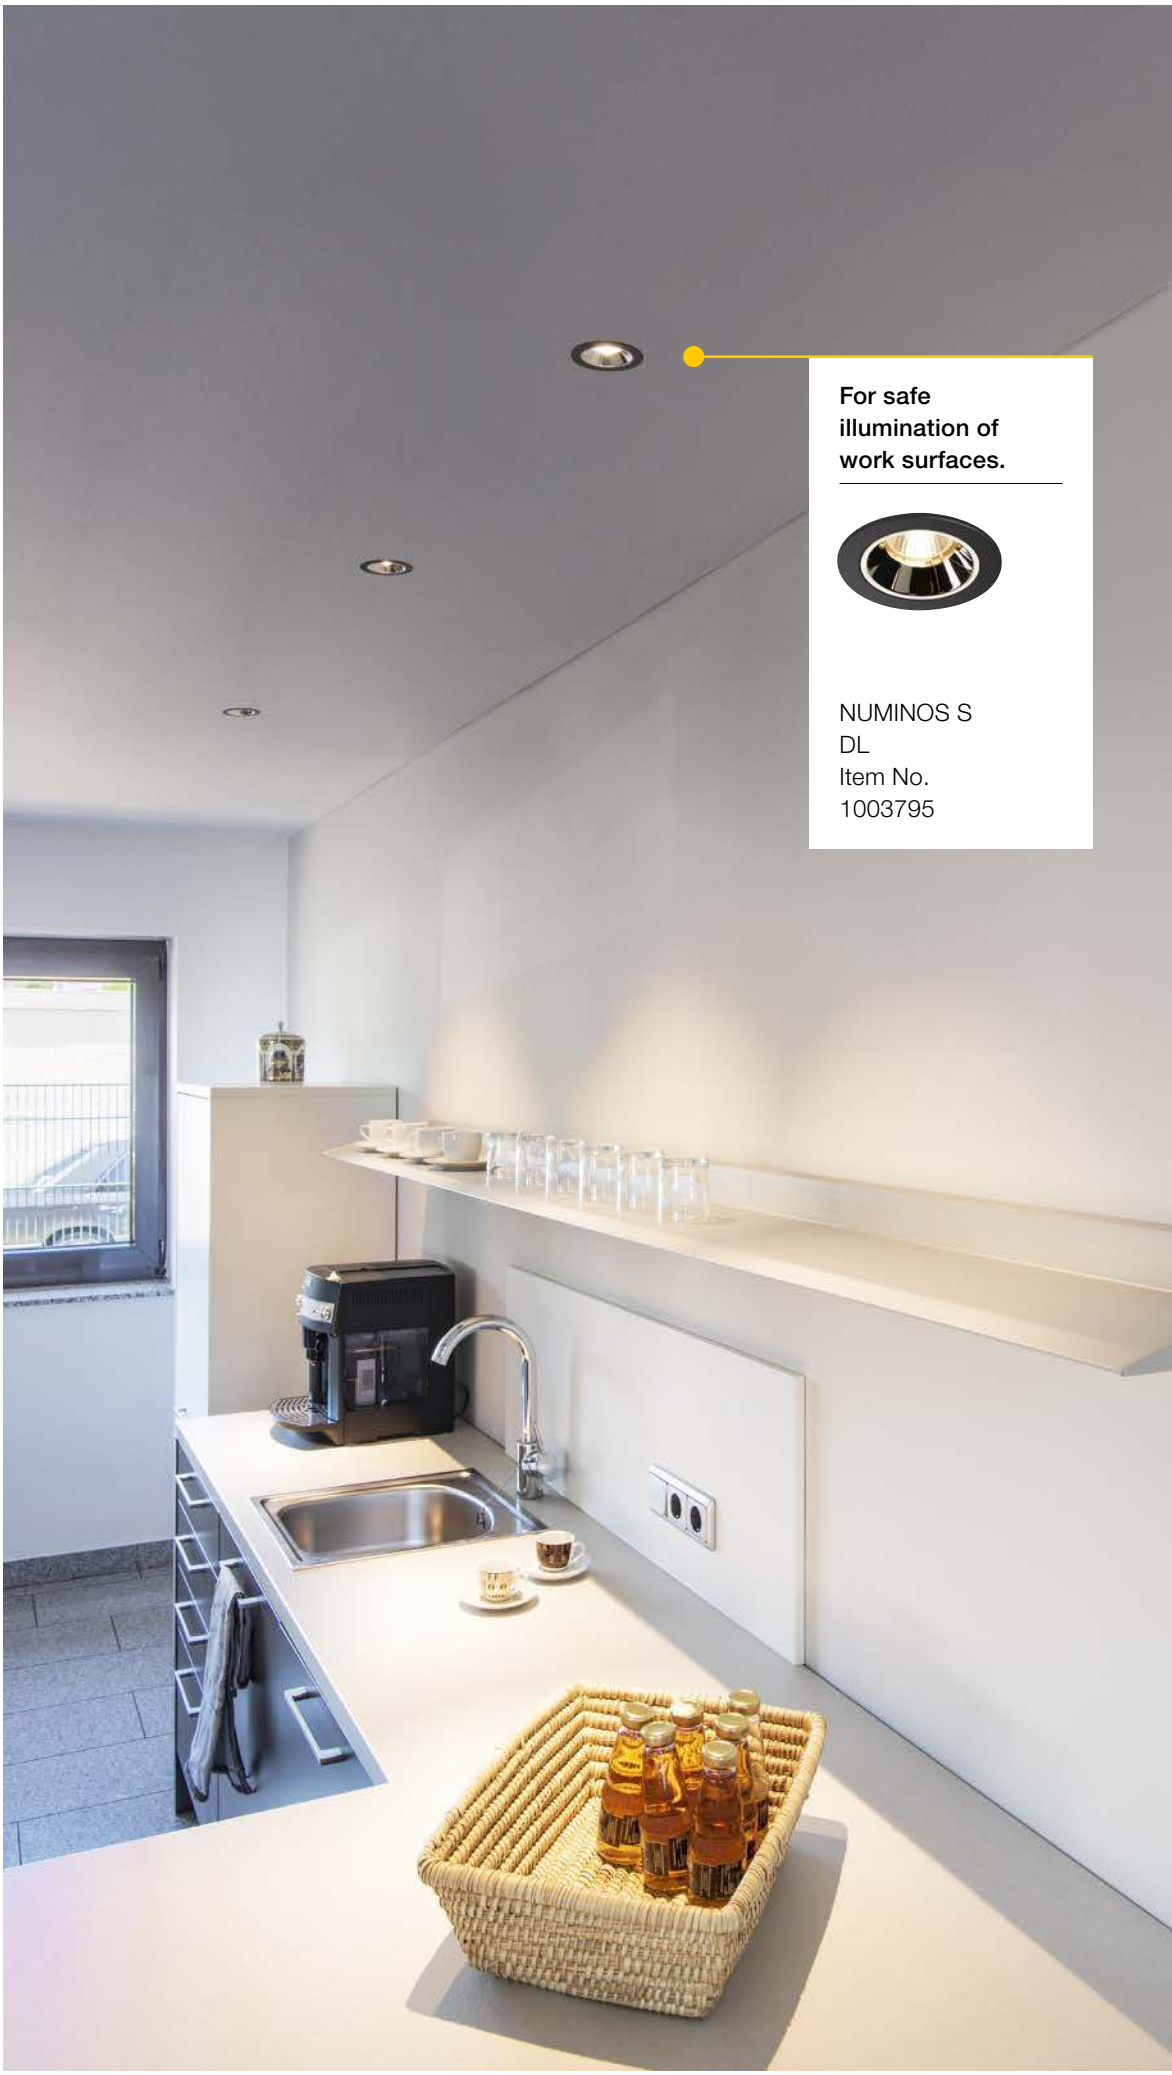

For safe illumination of work surfaces.

NUMINOS S
DL
Item No.
1003795

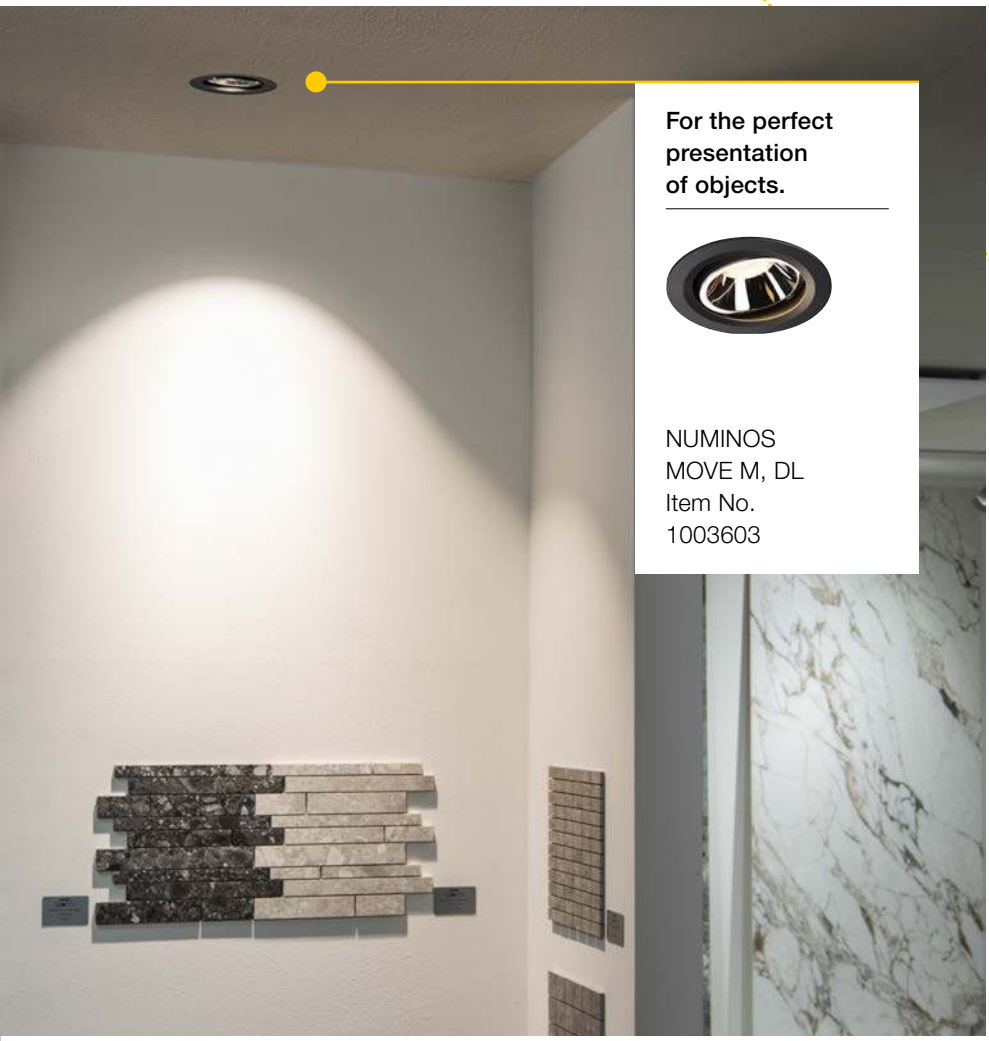

For the perfect presentation of objects.

NUMINOS
MOVE M, DL
Item No.
1003603

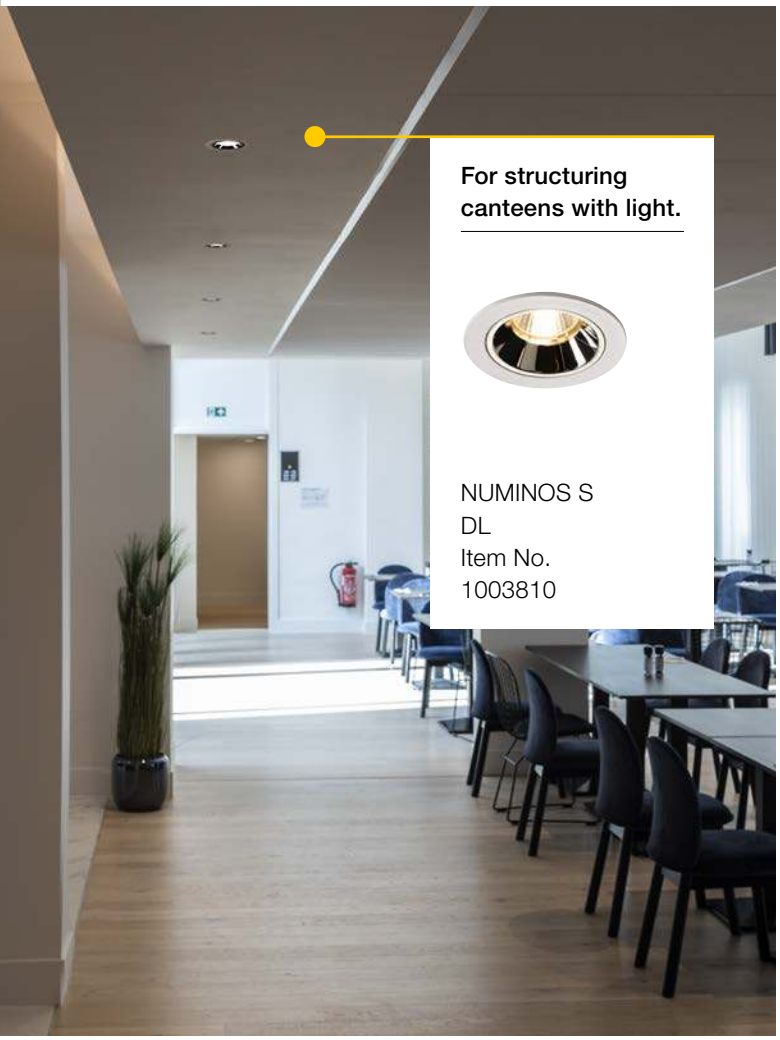

For structuring canteens with light.

NUMINOS S
DL
Item No.
1003810

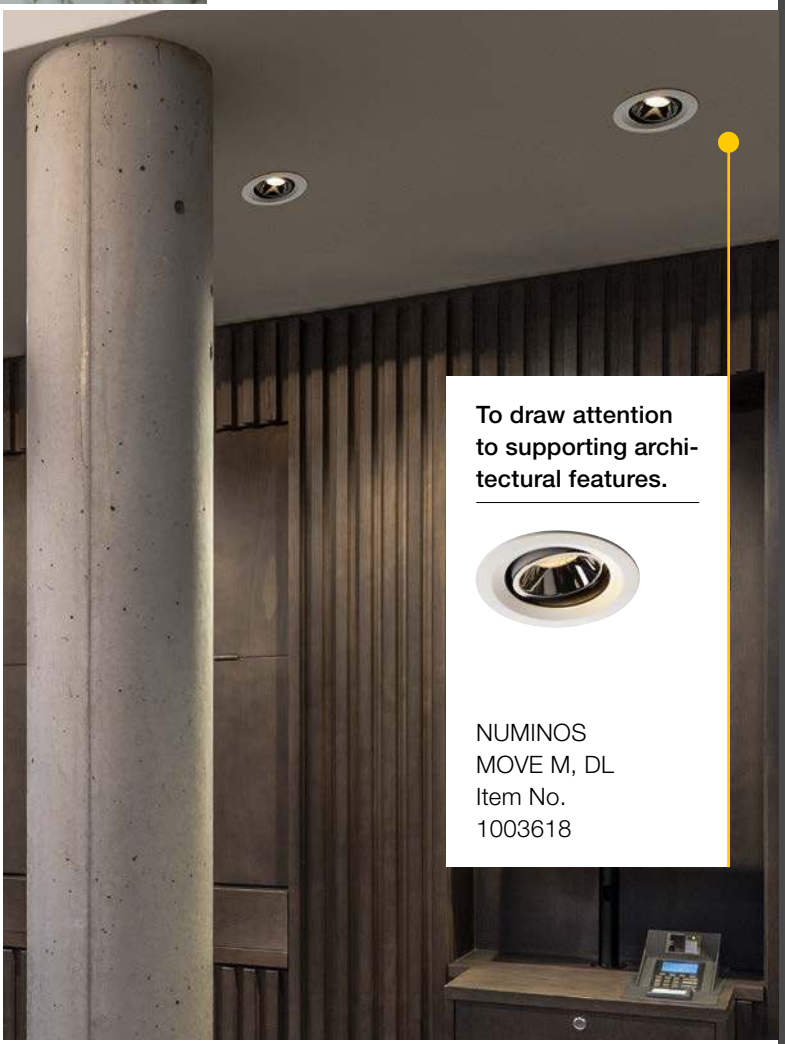

To draw attention to supporting architectural features.

NUMINOS
MOVE M, DL
Item No.
1003618



For flexible illumination of spaces of all dimensions.

NUMINOS S
3-circuit, PHASE
Item No.
1004083

When you want to illuminate furniture that gives structure.



NUMINOS S
CL, PHASE
Item No.
1004135

Spotlights.
Shops and boutiques as well as restaurants, bars, museums, studios, and surgeries – every space depends on expert accent lighting. Spotlights can be used to illuminate larger spaces as well as for targeted lighting.





To create an appetising atmosphere.

NUMINOS L
PD, DALI
Item No.
1004435



For a cosier home.



NUMINOS M
PD, PHASE
Item No.
1004154

For effective perception of characteristics.



NUMINOS L
3-circuit, PHASE
Item No.
1004287



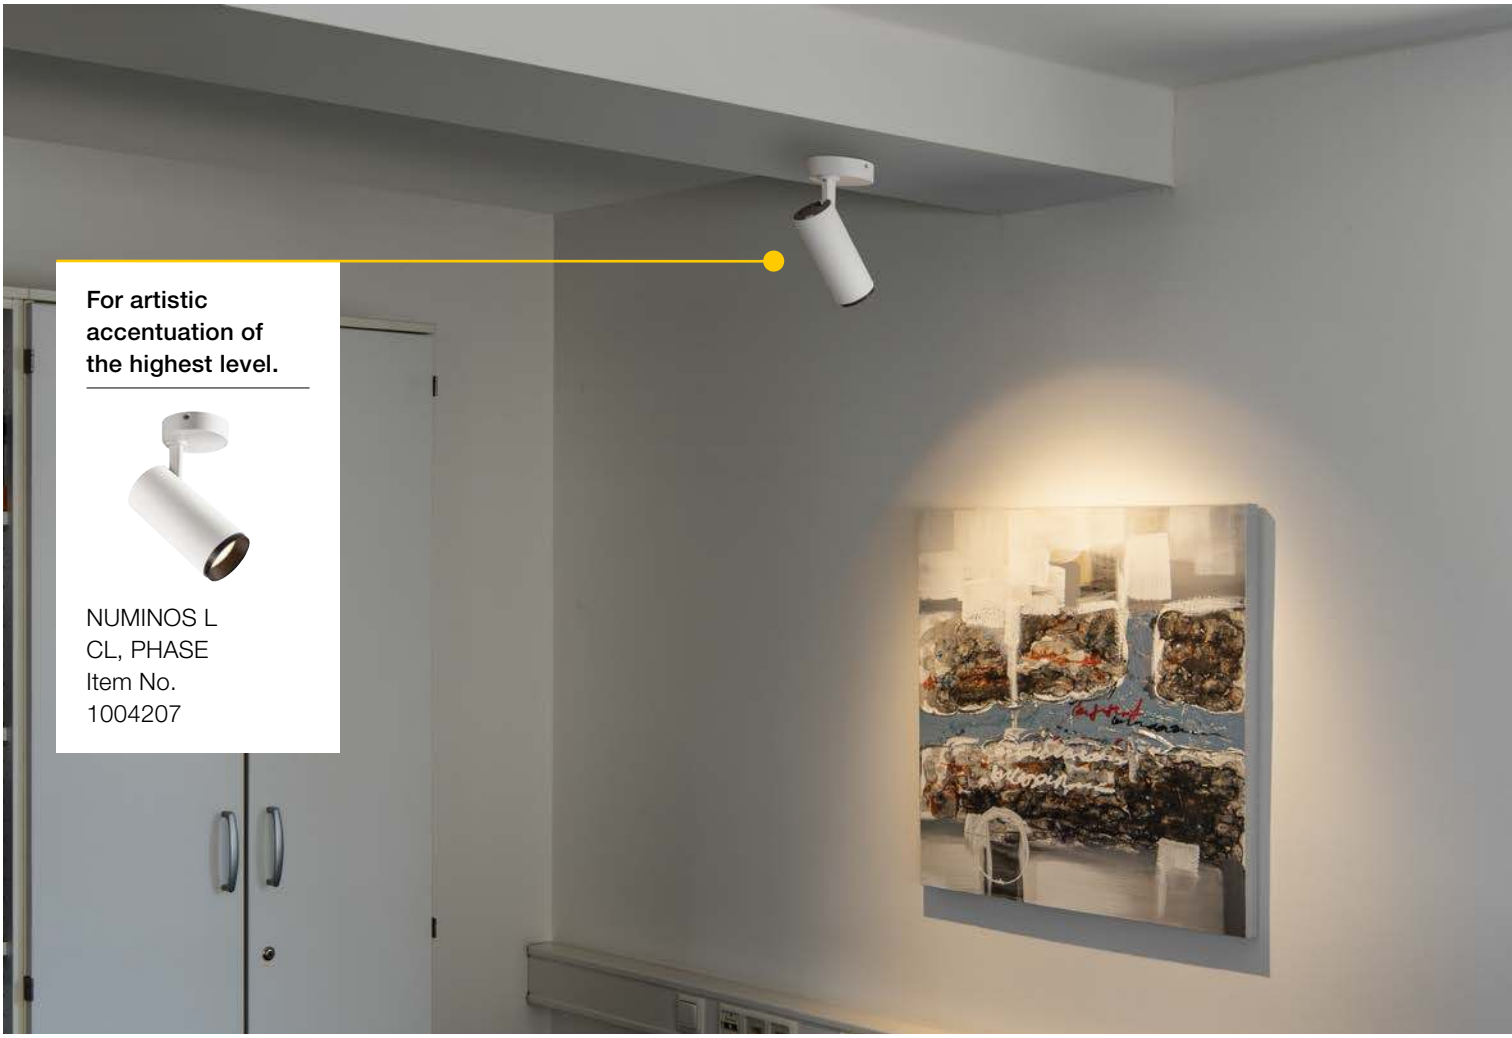

For artistic accentuation of the highest level.

NUMINOS L
CL, PHASE
Item No.
1004207

To give office spaces a striking structure.



NUMINOS M
CL, DALI
Item No.
1004519

Flexibility in all its facets.
Whether you're looking to create atmospheric room lighting or effective accent lighting – with the right spotlights, anything is possible. The rotating and pivoting versions in particular, as well as the rail spotlights of the NUMINOS lighting system, meet the highest demands in terms of flexibility.



REACH YOUR GOAL SYSTEMATICALLY.

With the NUMINOS Online Configurator.

With our configurator, it's that easy:
The first question to answer is: downlight or spotlight? You can then choose between preconfigured and additionally customisable application scenarios or free configuration.

If you are still unsure about the selection of attributes, don't worry: we offer suitable explanations for each selected configuration.

Here you can find the NUMINOS configurator:

www.numinos.SLV.com

Just three steps to reach your goal:

1. **TECHNICAL CONFIGURATION**
2. **OPTICAL CONFIGURATION**
3. **VISUAL REPRESENTATION & COMPLETION**

Reach your goal here and now – configure your lighting with the BIG WHITE® catalogue.

Put together your dream lighting over the next pages.
The following product overviews will help you reach your goal just as easily: scroll to your desired light type, follow the columns from left to right and make your individual selection. At the end, you will find the relevant item number for direct ordering.

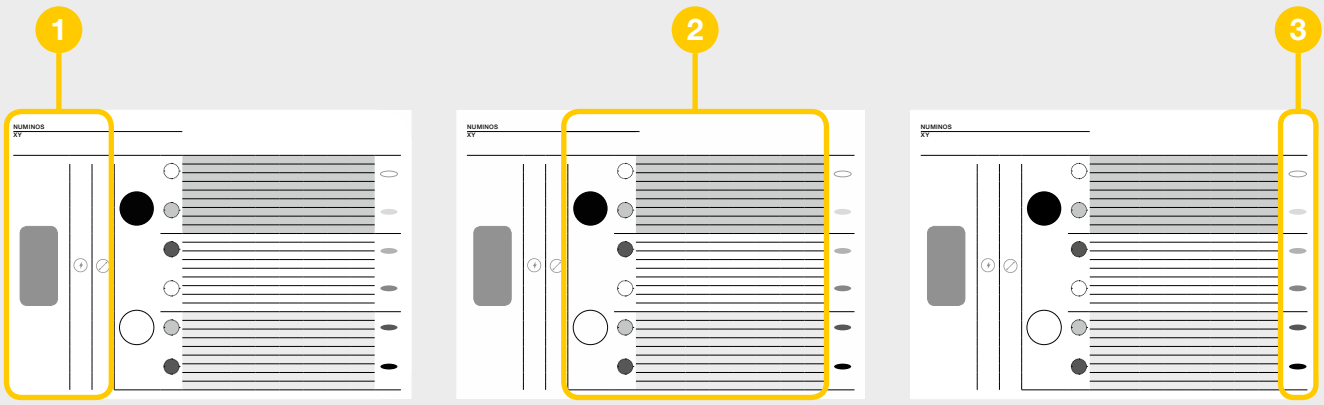

STEP 1
SPOTLIGHT OR DOWNLIGHT?

Choose the most suitable light type for your needs. The diameter (down-lights) or housing size (spotlights) are coupled with the total wattage.

STEP 2
TECHNICAL CONFIGURATION & SELECTION OF DETAILS

Column by column, you can select optical and technical attributes such as housing colour or decorative colours, the colour temperature, half beam angle and more.

STEP 3
PRODUCT

Get a visual impression of your fully configured light and order it right away using the relevant item number.

STILL UNSURE ABOUT SOMETHING?

Scan me to view a video that shows how to configure NUMINOS lights.

In addition to the familiar catalog icons, you will find the following icons in this chapter:

UGR	**Glare rating**
	Colour temperature
	Half beam angle
lm	**Lumen**
	Controller

NUMINOS S

DL

S



Product details:

250mA
Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)
Installation dimensions: Diameter: 6.8 cm D: 5.5 cm

10 50000 0,2

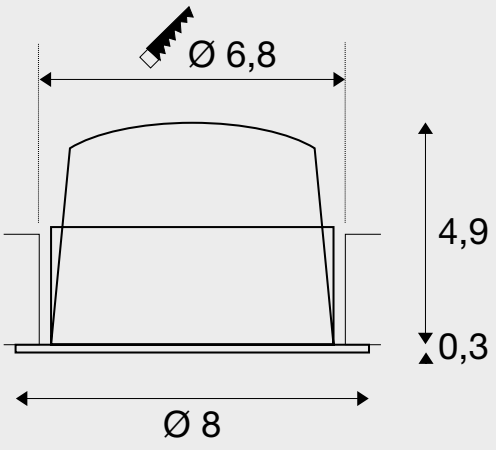

Tip:

Low-voltage plug
Driver not included
Leaf springs are included with the product and can be replaced.

You can find suitable drivers and diffusers on pages 40-41.





black



white



black



white



chrome



black



white



chrome

	lm		UGR	ITEM NO.	GBP	
	670lm	20°	18	**1003769**	**54.00**	
2700K	670lm	40°	19	**1003772**	**54.00**	
	670lm	55°	21	**1003775**	**54.00**	
	690lm	20°	18	**1003793**	**54.00**	
3000K	690lm	40°	18	**1003796**	**54.00**	
	690lm	55°	20	**1003799**	**54.00**	
	730lm	20°	18	**1003817**	**54.00**	
4000K	730lm	40°	19	**1003820**	**54.00**	
	730lm	55°	21	**1003823**	**54.00**	
	720lm	20°	19	**1003770**	**54.00**	
2700K	720lm	40°	18	**1003773**	**54.00**	
	720lm	55°	20	**1003776**	**54.00**	
	730lm	20°	18	**1003794**	**54.00**	
3000K	730lm	40°	18	**1003797**	**54.00**	
	730lm	55°	20	**1003800**	**54.00**	
	790lm	20°	19	**1003818**	**54.00**	
4000K	790lm	40°	18	**1003821**	**54.00**	
	790lm	55°	20	**1003824**	**54.00**	
	690lm	20°	16	**1003771**	**54.00**	
2700K	690lm	40°	16	**1003774**	**54.00**	
	690lm	55°	19	**1003777**	**54.00**	
	700lm	20°	16	**1003795**	**54.00**	
3000K	700lm	40°	16	**1003798**	**54.00**	
	700lm	55°	18	**1003801**	**54.00**	
	750lm	20°	16	**1003819**	**54.00**	
4000K	750lm	40°	16	**1003822**	**54.00**	
	750lm	55°	19	**1003825**	**54.00**	
	670lm	20°	18	**1003781**	**54.00**	
2700K	670lm	40°	19	**1003784**	**54.00**	
	670lm	55°	21	**1003787**	**54.00**	
	690lm	20°	18	**1003805**	**54.00**	
3000K	690lm	40°	18	**1003808**	**54.00**	
	690lm	55°	20	**1003811**	**54.00**	
	730lm	20°	18	**1003829**	**54.00**	
4000K	730lm	40°	19	**1003832**	**54.00**	
	730lm	55°	21	**1003835**	**54.00**	
	720lm	20°	19	**1003782**	**54.00**	
2700K	720lm	40°	18	**1003785**	**54.00**	
	720lm	55°	20	**1003788**	**54.00**	
	730lm	20°	18	**1003806**	**54.00**	
3000K	730lm	40°	18	**1003809**	**54.00**	
	730lm	55°	20	**1003812**	**54.00**	
	790lm	20°	19	**1003830**	**54.00**	
4000K	790lm	40°	18	**1003833**	**54.00**	
	790lm	55°	20	**1003836**	**54.00**	
	690lm	20°	16	**1003783**	**54.00**	
2700K	690lm	40°	16	**1003786**	**54.00**	
	690lm	55°	19	**1003789**	**54.00**	
	700lm	20°	16	**1003807**	**54.00**	
3000K	700lm	40°	16	**1003810**	**54.00**	
	700lm	55°	18	**1003813**	**54.00**	
	750lm	20°	16	**1003831**	**54.00**	
4000K	750lm	40°	16	**1003834**	**54.00**	
	750lm	55°	19	**1003837**	**54.00**	








NUMINOS M

DL

M



Product details:

500mA
Power consumption: 17.5W
Material: aluminium/polycarbonate (PC)
Installation dimensions: Diameter: 9 cm D: 7.5 cm

10 50000 0,2

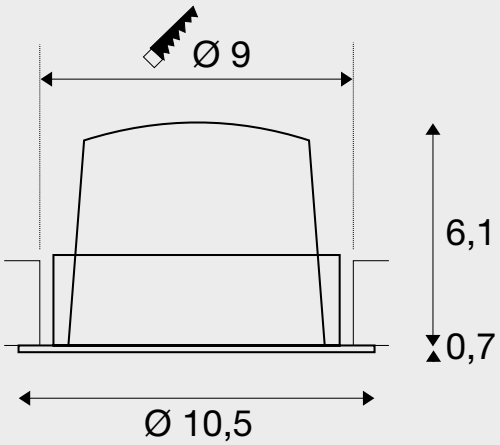

Tip:

Low-voltage plug
Driver not included
Leaf springs are included with the product and can be replaced.

You can find suitable drivers and diffusers on pages 40-41.





black



white



black



white



chrome



black



white



chrome

			UGR	ITEM NO.	GBP	
	1460lm	20°	19	**1003841**	**64.80**	
2700K	1460lm	40°	20	**1003844**	**64.80**	
	1460lm	55°	21	**1003847**	**64.80**	
	1500lm	20°	19	**1003865**	**64.80**	
3000K	1500lm	40°	20	**1003868**	**64.80**	
	1500lm	55°	21	**1003871**	**64.80**	
	1600lm	20°	19	**1003889**	**64.80**	
4000K	1600lm	40°	20	**1003892**	**64.80**	
	1600lm	55°	21	**1003895**	**64.80**	
	1600lm	20°	20	**1003842**	**64.80**	
2700K	1600lm	40°	19	**1003845**	**64.80**	
	1600lm	55°	20	**1003848**	**64.80**	
	1600lm	20°	20	**1003866**	**64.80**	
3000K	1600lm	40°	20	**1003869**	**64.80**	
	1600lm	55°	21	**1003872**	**64.80**	
	1750lm	20°	20	**1003890**	**64.80**	
4000K	1750lm	40°	20	**1003893**	**64.80**	
	1750lm	55°	21	**1003896**	**64.80**	
	1550lm	20°	17	**1003843**	**64.80**	
2700K	1550lm	40°	17	**1003846**	**64.80**	
	1550lm	55°	18	**1003849**	**64.80**	
	1550lm	20°	17	**1003867**	**64.80**	
3000K	1550lm	40°	17	**1003870**	**64.80**	
	1550lm	55°	19	**1003873**	**64.80**	
	1660lm	20°	17	**1003891**	**64.80**	
4000K	1660lm	40°	17	**1003894**	**64.80**	
	1660lm	55°	19	**1003897**	**64.80**	
	1460lm	20°	19	**1003853**	**64.80**	
2700K	1460lm	40°	20	**1003856**	**64.80**	
	1460lm	55°	21	**1003859**	**64.80**	
	1500lm	20°	19	**1003877**	**64.80**	
3000K	1500lm	40°	20	**1003880**	**64.80**	
	1500lm	55°	21	**1003883**	**64.80**	
	1600lm	20°	19	**1003901**	**64.80**	
4000K	1600lm	40°	20	**1003904**	**64.80**	
	1600lm	55°	21	**1003907**	**64.80**	
	1600lm	20°	20	**1003854**	**64.80**	
2700K	1600lm	40°	19	**1003857**	**64.80**	
	1600lm	55°	20	**1003860**	**64.80**	
	1600lm	20°	20	**1003878**	**64.80**	
3000K	1600lm	40°	20	**1003881**	**64.80**	
	1600lm	55°	21	**1003884**	**64.80**	
	1750lm	20°	20	**1003902**	**64.80**	
4000K	1750lm	40°	20	**1003905**	**64.80**	
	1750lm	55°	21	**1003908**	**64.80**	
	1550lm	20°	17	**1003855**	**64.80**	
2700K	1550lm	40°	17	**1003858**	**64.80**	
	1550lm	55°	18	**1003861**	**64.80**	
	1550lm	20°	17	**1003879**	**64.80**	
3000K	1550lm	40°	17	**1003882**	**64.80**	
	1550lm	55°	19	**1003885**	**64.80**	
	1660lm	20°	17	**1003903**	**64.80**	
4000K	1660lm	40°	17	**1003906**	**64.80**	
	1660lm	55°	19	**1003909**	**64.80**	













NUMINOS L

DL

L



Product details:

700mA
Power consumption: 25.4W
Material: aluminium/polycarbonate (PC)
Installation dimensions: Diameter: 11.7 cm D: 9 cm

10 50000 0,2

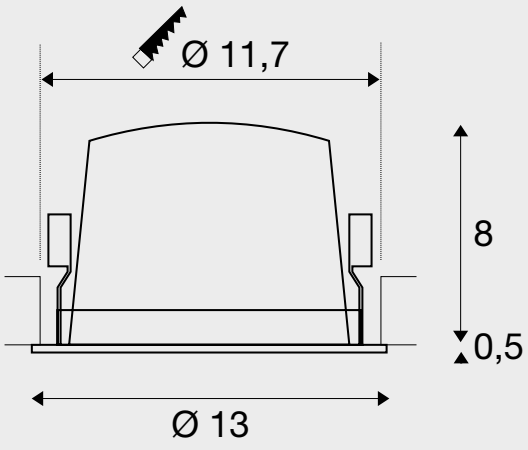

Tip:

Low-voltage plug
Driver not included

You can find suitable drivers and diffusers on pages 40-41.





black



black



white



chrome



white



black



white



chrome

			UGR	ITEM NO.	GBP	
	2150lm	20°	20	**1003913**	**79.20**	
2700K	2150lm	40°	20	**1003916**	**79.20**	
	2150lm	55°	22	**1003919**	**79.20**	
	2150lm	20°	20	**1003937**	**79.20**	
3000K	2150lm	40°	21	**1003940**	**79.20**	
	2150lm	55°	23	**1003943**	**79.20**	
	2350lm	20°	20	**1003961**	**79.20**	
4000K	2350lm	40°	21	**1003964**	**79.20**	
	2350lm	55°	23	**1003967**	**79.20**	
	2250lm	20°	18	**1003914**	**79.20**	
2700K	2250lm	40°	18	**1003917**	**79.20**	
	2250lm	55°	20	**1003920**	**79.20**	
	2300lm	20°	18	**1003938**	**79.20**	
3000K	2300lm	40°	19	**1003941**	**79.20**	
	2300lm	55°	20	**1003944**	**79.20**	
	2450lm	20°	18	**1003962**	**79.20**	
4000K	2450lm	40°	19	**1003965**	**79.20**	
	2450lm	55°	20	**1003968**	**79.20**	
	2150lm	20°	17	**1003915**	**79.20**	
2700K	2150lm	40°	17	**1003918**	**79.20**	
	2150lm	55°	19	**1003921**	**79.20**	
	2200lm	20°	17	**1003939**	**79.20**	
3000K	2200lm	40°	18	**1003942**	**79.20**	
	2200lm	55°	19	**1003945**	**79.20**	
	2350lm	20°	17	**1003963**	**79.20**	
4000K	2350lm	40°	18	**1003966**	**79.20**	
	2350lm	55°	19	**1003969**	**79.20**	
	2150lm	20°	20	**1003925**	**79.20**	
2700K	2150lm	40°	20	**1003928**	**79.20**	
	2150lm	55°	22	**1003931**	**79.20**	
	2150lm	20°	20	**1003949**	**79.20**	
3000K	2150lm	40°	21	**1003952**	**79.20**	
	2150lm	55°	23	**1003955**	**79.20**	
	2350lm	20°	20	**1003973**	**79.20**	
4000K	2350lm	40°	21	**1003976**	**79.20**	
	2350lm	55°	23	**1003979**	**79.20**	
	2250lm	20°	18	**1003926**	**79.20**	
2700K	2250lm	40°	18	**1003929**	**79.20**	
	2250lm	55°	20	**1003932**	**79.20**	
	2300lm	20°	18	**1003950**	**79.20**	
3000K	2300lm	40°	19	**1003953**	**79.20**	
	2300lm	55°	20	**1003956**	**79.20**	
	2450lm	20°	18	**1003974**	**79.20**	
4000K	2450lm	40°	19	**1003977**	**79.20**	
	2450lm	55°	20	**1003980**	**79.20**	
	2150lm	20°	17	**1003927**	**79.20**	
2700K	2150lm	40°	17	**1003930**	**79.20**	
	2150lm	55°	19	**1003933**	**79.20**	
	2200lm	20°	17	**1003951**	**79.20**	
3000K	2200lm	40°	18	**1003954**	**79.20**	
	2200lm	55°	19	**1003957**	**79.20**	
	2350lm	20°	17	**1003975**	**79.20**	
4000K	2350lm	40°	18	**1003978**	**79.20**	
	2350lm	55°	19	**1003981**	**79.20**	













NUMINOS XL

DL

XL



Product details:

1050mA
Power consumption: 37.4W
Material: aluminium/polycarbonate (PC)
Installation dimensions: Diameter: 14.5 cm D: 11.5 cm

10 50000 0,2

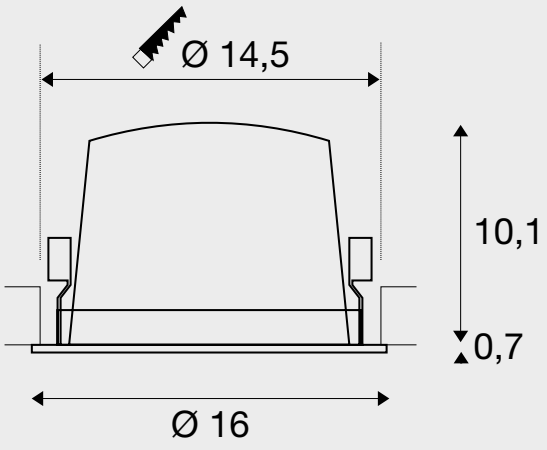

Tip:

Low-voltage plug
Driver not included

You can find suitable drivers and diffusers on pages 40-41.





black

white

chrome



black

white

chrome

			UGR	ITEM NO.	GBP	
	3300lm	20°	21	**1003985**	**99.00**	
2700K	3300lm	40°	21	**1003988**	**99.00**	
	3300lm	55°	22	**1003991**	**99.00**	
	3300lm	20°	21	**1004009**	**99.00**	
3000K	3300lm	40°	21	**1004012**	**99.00**	
	3300lm	55°	22	**1004015**	**99.00**	
	3600lm	20°	21	**1004033**	**99.00**	
4000K	3600lm	40°	21	**1004036**	**99.00**	
	3600lm	55°	23	**1004039**	**99.00**	
	3500lm	20°	18	**1003986**	**99.00**	
2700K	3500lm	40°	18	**1003989**	**99.00**	
	3500lm	55°	19	**1003992**	**99.00**	
	3550lm	20°	18	**1004010**	**99.00**	
3000K	3550lm	40°	18	**1004013**	**99.00**	
	3550lm	55°	19	**1004016**	**99.00**	
	3800lm	20°	18	**1004034**	**99.00**	
4000K	3800lm	40°	18	**1004037**	**99.00**	
	3800lm	55°	19	**1004040**	**99.00**	
	3400lm	20°	17	**1003987**	**99.00**	
2700K	3400lm	40°	18	**1003990**	**99.00**	
	3400lm	55°	19	**1003993**	**99.00**	
	3500lm	20°	17	**1004011**	**99.00**	
3000K	3500lm	40°	18	**1004014**	**99.00**	
	3500lm	55°	19	**1004017**	**99.00**	
	3750lm	20°	18	**1004035**	**99.00**	
4000K	3750lm	40°	18	**1004038**	**99.00**	
	3750lm	55°	19	**1004041**	**99.00**	
	3300lm	20°	21	**1003997**	**99.00**	
2700K	3300lm	40°	21	**1004000**	**99.00**	
	3300lm	55°	22	**1004003**	**99.00**	
	3300lm	20°	21	**1004021**	**99.00**	
3000K	3300lm	40°	21	**1004024**	**99.00**	
	3300lm	55°	22	**1004027**	**99.00**	
	3600lm	20°	21	**1004045**	**99.00**	
4000K	3600lm	40°	21	**1004048**	**99.00**	
	3600lm	55°	23	**1004051**	**99.00**	
	3500lm	20°	18	**1003998**	**99.00**	
2700K	3500lm	40°	18	**1004001**	**99.00**	
	3500lm	55°	19	**1004004**	**99.00**	
	3550lm	20°	18	**1004022**	**99.00**	
3000K	3550lm	40°	18	**1004025**	**99.00**	
	3550lm	55°	19	**1004028**	**99.00**	
	3800lm	20°	18	**1004046**	**99.00**	
4000K	3800lm	40°	18	**1004049**	**99.00**	
	3800lm	55°	19	**1004052**	**99.00**	
	3400lm	20°	17	**1003999**	**99.00**	
2700K	3400lm	40°	18	**1004002**	**99.00**	
	3400lm	55°	19	**1004005**	**99.00**	
	3500lm	20°	17	**1004023**	**99.00**	
3000K	3500lm	40°	18	**1004026**	**99.00**	
	3500lm	55°	19	**1004029**	**99.00**	
	3750lm	20°	18	**1004047**	**99.00**	
4000K	3750lm	40°	18	**1004050**	**99.00**	
	3750lm	55°	19	**1004053**	**99.00**	

NUMINOS MOVE M

DL

M



Product details:

500mA
Power consumption: 17.5W
Material: aluminium/polycarbonate (PC)
Installation dimensions: Diameter: 12 cm D: 10 cm



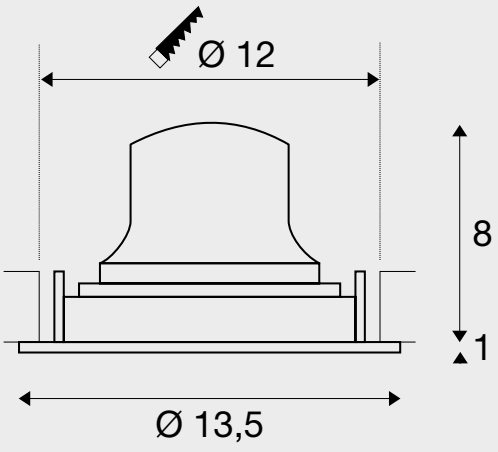

Tip:

Low-voltage plug
Driver not included

You can find suitable drivers and diffusers on pages 40-41.





black



black



white



chrome



white



black



white



chrome

			UGR	ITEM NO.	GBP	
	1460lm	20°	19	**1003553**	**75.60**	
2700K	1460lm	40°	20	**1003556**	**75.60**	
	1460lm	55°	21	**1003559**	**75.60**	
	1500lm	20°	19	**1003577**	**75.60**	
3000K	1500lm	40°	20	**1003580**	**75.60**	
	1500lm	55°	21	**1003583**	**75.60**	
	1600lm	20°	19	**1003601**	**75.60**	
4000K	1600lm	40°	20	**1003604**	**75.60**	
	1600lm	55°	21	**1003607**	**75.60**	
	1600lm	20°	20	**1003554**	**75.60**	
2700K	1600lm	40°	19	**1003557**	**75.60**	
	1600lm	55°	20	**1003560**	**75.60**	
	1600lm	20°	20	**1003578**	**75.60**	
3000K	1600lm	40°	20	**1003581**	**75.60**	
	1600lm	55°	21	**1003584**	**75.60**	
	1750lm	20°	20	**1003602**	**75.60**	
4000K	1750lm	40°	20	**1003605**	**75.60**	
	1750lm	55°	21	**1003608**	**75.60**	
	1550lm	20°	17	**1003555**	**75.60**	
2700K	1550lm	40°	17	**1003558**	**75.60**	
	1550lm	55°	18	**1003561**	**75.60**	
	1550lm	20°	17	**1003579**	**75.60**	
3000K	1550lm	40°	17	**1003582**	**75.60**	
	1550lm	55°	19	**1003585**	**75.60**	
	1660lm	20°	17	**1003603**	**75.60**	
4000K	1660lm	40°	17	**1003606**	**75.60**	
	1660lm	55°	19	**1003609**	**75.60**	
	1460lm	20°	19	**1003565**	**75.60**	
2700K	1460lm	40°	20	**1003568**	**75.60**	
	1460lm	55°	21	**1003571**	**75.60**	
	1500lm	20°	19	**1003589**	**75.60**	
3000K	1500lm	40°	20	**1003592**	**75.60**	
	1500lm	55°	21	**1003595**	**75.60**	
	1600lm	20°	19	**1003613**	**75.60**	
4000K	1600lm	40°	20	**1003616**	**75.60**	
	1600lm	55°	21	**1003619**	**75.60**	
	1600lm	20°	20	**1003566**	**75.60**	
2700K	1600lm	40°	19	**1003569**	**75.60**	
	1600lm	55°	20	**1003572**	**75.60**	
	1600lm	20°	20	**1003590**	**75.60**	
3000K	1600lm	40°	20	**1003593**	**75.60**	
	1600lm	55°	21	**1003596**	**75.60**	
	1750lm	20°	20	**1003614**	**75.60**	
4000K	1750lm	40°	20	**1003617**	**75.60**	
	1750lm	55°	21	**1003620**	**75.60**	
	1550lm	20°	17	**1003567**	**75.60**	
2700K	1550lm	40°	17	**1003570**	**75.60**	
	1550lm	55°	18	**1003573**	**75.60**	
	1550lm	20°	17	**1003591**	**75.60**	
3000K	1550lm	40°	17	**1003594**	**75.60**	
	1550lm	55°	19	**1003597**	**75.60**	
	1660lm	20°	17	**1003615**	**75.60**	
4000K	1660lm	40°	17	**1003618**	**75.60**	
	1660lm	55°	19	**1003621**	**75.60**	













NUMINOS MOVE L

DL

L



Product details:

750mA
Power consumption: 25.4W
Material: aluminium/polycarbonate (PC)
Installation dimensions: Diameter: 14.5 cm D: 10.5 cm

10 50000 355° 30° 0,2

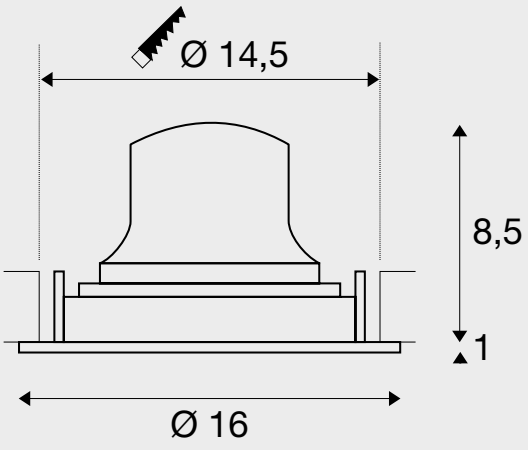

Tip:

Low-voltage plug
Driver not included

You can find suitable drivers and diffusers on pages 40-41.





black

white

chrome



black

white

chrome

			UGR	ITEM NO.	GBP	
	2150lm	20°	20	**1003625**	**88.20**	
2700K	2150lm	40°	20	**1003628**	**88.20**	
	2150lm	55°	22	**1003631**	**88.20**	
	2150lm	20°	20	**1003649**	**88.20**	
3000K	2150lm	40°	21	**1003652**	**88.20**	
	2150lm	55°	23	**1003655**	**88.20**	
	2350lm	20°	20	**1003673**	**88.20**	
4000K	2350lm	40°	21	**1003676**	**88.20**	
	2350lm	55°	23	**1003679**	**88.20**	
	2250lm	20°	18	**1003626**	**88.20**	
2700K	2250lm	40°	18	**1003629**	**88.20**	
	2250lm	55°	20	**1003632**	**88.20**	
	2300lm	20°	18	**1003650**	**88.20**	
3000K	2300lm	40°	19	**1003653**	**88.20**	
	2300lm	55°	20	**1003656**	**88.20**	
	2450lm	20°	18	**1003674**	**88.20**	
4000K	2450lm	40°	19	**1003677**	**88.20**	
	2450lm	55°	20	**1003680**	**88.20**	
	2150lm	20°	17	**1003627**	**88.20**	
2700K	2150lm	40°	17	**1003630**	**88.20**	
	2150lm	55°	19	**1003633**	**88.20**	
	2200lm	20°	17	**1003651**	**88.20**	
3000K	2200lm	40°	18	**1003654**	**88.20**	
	2200lm	55°	19	**1003657**	**88.20**	
	2350lm	20°	17	**1003675**	**88.20**	
4000K	2350lm	40°	18	**1003678**	**88.20**	
	2350lm	55°	19	**1003681**	**88.20**	
	2150lm	20°	20	**1003637**	**88.20**	
2700K	2150lm	40°	20	**1003640**	**88.20**	
	2150lm	55°	22	**1003643**	**88.20**	
	2150lm	20°	20	**1003661**	**88.20**	
3000K	2150lm	40°	21	**1003664**	**88.20**	
	2150lm	55°	23	**1003667**	**88.20**	
	2350lm	20°	20	**1003685**	**88.20**	
4000K	2350lm	40°	21	**1003688**	**88.20**	
	2350lm	55°	23	**1003691**	**88.20**	
	2250lm	20°	18	**1003638**	**88.20**	
2700K	2250lm	40°	18	**1003641**	**88.20**	
	2250lm	55°	20	**1003644**	**88.20**	
	2300lm	20°	18	**1003662**	**88.20**	
3000K	2300lm	40°	19	**1003665**	**88.20**	
	2300lm	55°	20	**1003668**	**88.20**	
	2450lm	20°	18	**1003686**	**88.20**	
4000K	2450lm	40°	19	**1003689**	**88.20**	
	2450lm	55°	20	**1003692**	**88.20**	
	2150lm	20°	17	**1003639**	**88.20**	
2700K	2150lm	40°	17	**1003642**	**88.20**	
	2150lm	55°	19	**1003645**	**88.20**	
	2200lm	20°	17	**1003663**	**88.20**	
3000K	2200lm	40°	18	**1003666**	**88.20**	
	2200lm	55°	19	**1003669**	**88.20**	
	2350lm	20°	17	**1003687**	**88.20**	
4000K	2350lm	40°	18	**1003690**	**88.20**	
	2350lm	55°	19	**1003693**	**88.20**	













NUMINOS MOVE XL

DL

XL



Product details:

1050mA
Power consumption: 37.4W
Material: aluminium/polycarbonate (PC)
Installation dimensions: Diameter: 17.5 cm D: 13 cm



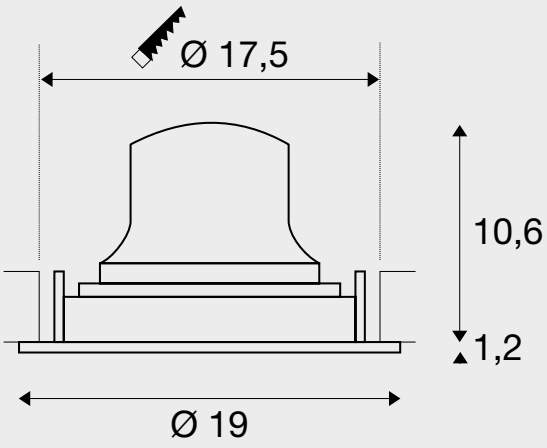

Tip:

Low-voltage plug
Driver not included

You can find suitable drivers and diffusers on pages 40-41.





black



black



white



chrome



white



black



white



chrome

			UGR	ITEM NO.	GBP	
	3300lm	20°	21	**1003697**	**115.20**	
2700K	3300lm	40°	21	**1003700**	**115.20**	
	3300lm	55°	22	**1003703**	**115.20**	
	3300lm	20°	21	**1003721**	**115.20**	
3000K	3300lm	40°	21	**1003724**	**115.20**	
	3300lm	55°	22	**1003727**	**115.20**	
	3600lm	20°	21	**1003745**	**115.20**	
4000K	3600lm	40°	21	**1003748**	**115.20**	
	3600lm	55°	23	**1003751**	**115.20**	
	3500lm	20°	18	**1003698**	**115.20**	
2700K	3500lm	40°	18	**1003701**	**115.20**	
	3500lm	55°	19	**1003704**	**115.20**	
	3550lm	20°	18	**1003722**	**115.20**	
3000K	3550lm	40°	18	**1003725**	**115.20**	
	3550lm	55°	19	**1003728**	**115.20**	
	3800lm	20°	18	**1003746**	**115.20**	
4000K	3800lm	40°	18	**1003749**	**115.20**	
	3800lm	55°	19	**1003752**	**115.20**	
	3400lm	20°	17	**1003699**	**115.20**	
2700K	3400lm	40°	18	**1003702**	**115.20**	
	3400lm	55°	19	**1003705**	**115.20**	
	3500lm	20°	17	**1003723**	**115.20**	
3000K	3500lm	40°	18	**1003726**	**115.20**	
	3500lm	55°	19	**1003729**	**115.20**	
	3750lm	20°	18	**1003747**	**115.20**	
4000K	3750lm	40°	18	**1003750**	**115.20**	
	3750lm	55°	19	**1003753**	**115.20**	
	3300lm	20°	21	**1003709**	**115.20**	
2700K	3300lm	40°	21	**1003712**	**115.20**	
	3300lm	55°	22	**1003715**	**115.20**	
	3300lm	20°	21	**1003733**	**115.20**	
3000K	3300lm	40°	21	**1003736**	**115.20**	
	3300lm	55°	22	**1003739**	**115.20**	
	3600lm	20°	21	**1003757**	**115.20**	
4000K	3600lm	40°	21	**1003760**	**115.20**	
	3600lm	55°	23	**1003763**	**115.20**	
	3500lm	20°	18	**1003710**	**115.20**	
2700K	3500lm	40°	18	**1003713**	**115.20**	
	3500lm	55°	19	**1003716**	**115.20**	
	3550lm	20°	18	**1003734**	**115.20**	
3000K	3550lm	40°	18	**1003737**	**115.20**	
	3550lm	55°	19	**1003740**	**115.20**	
	3800lm	20°	18	**1003758**	**115.20**	
4000K	3800lm	40°	18	**1003761**	**115.20**	
	3800lm	55°	19	**1003764**	**115.20**	
	3400lm	20°	17	**1003711**	**115.20**	
2700K	3400lm	40°	18	**1003714**	**115.20**	
	3400lm	55°	19	**1003717**	**115.20**	
	3500lm	20°	17	**1003735**	**115.20**	
3000K	3500lm	40°	18	**1003738**	**115.20**	
	3500lm	55°	19	**1003741**	**115.20**	
	3750lm	20°	18	**1003759**	**115.20**	
4000K	3750lm	40°	18	**1003762**	**115.20**	
	3750lm	55°	19	**1003765**	**115.20**	













Accessory

Perfect driver assignment

						
	LED driver 250mA, 10W	**LED driver 250mA, 10W, PHASE**	**LED driver 250mA, 20W, DALI**	**LED driver 700mA, 30W**	**LED driver 500mA, 30W, PHASE**	**LED driver 500mA, 40W, DALI**
	S	**S**	**S**	**M**	**M**	**M**
						
	250mA	**250mA**	**250/350/500/700mA**	**500/600/700mA**	**500mA**	**250/350/500/700mA**
Material	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)
Colour	white	white	white	white	white	white
Voltage prim.	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Voltage sec.	26-40V	30-42V	6-60V	30-42V	42-60V	6-58V
Output current	250mA	250mA	250/350/500/700mA	500/600/700mA	500mA	250/350/500/700mA
Number of outputs sec.	1	1	1	1	1	1
Output from	6.5W	7.5W	1.5W	15W	21W	1.5W
Output up to	10W	10W	15W	29.5W	30W	40.6W
Environmental temp. min.	-20°C	-20°C	-20°C	-20°C	-25°C	-25°C
Environmental temp. max.	45°C	50°C	50°C	50°C	50°C	50°C
Temperature protection	110°C	110°C	110°C	110°C	110°C	110°C
IP protection rating	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Dimmable	–	PHASE C	DALI	–	PHASE C	DALI
Length	6.5 cm	8.5 cm	15 cm	14.7 cm	13.8 cm	12.3 cm
Width	3.9 cm	3.9 cm	5.2 cm	4.3 cm	4.4 cm	7.9 cm
Height	2 cm	2.2 cm	2.8 cm	3 cm	3 cm	2.4 cm
Weight	0.05 kg	0.05 kg	0.142 kg	0.105 kg	0.13 kg	1.21 kg
Item No.	**1004058**	**1004055**	**1004067**	**1004064**	**1004054**	**1004069**
GBP	**20.70**	**32.40**	**64.80**	**24.30**	**46.80**	**64.80**

	S				**M**			
								
Voltage prim.	SL153 elliptical	SL154 prismatic	SL155 frosted	SL305 honeycomb	SL153A elliptical	SL154A prismatic	SL155A frosted	SL306 honeycomb
Item No.	**1004786**	**1004787**	**1004788**	**1004789**	**1004790**	**1004791**	**1004792**	**1004793**
GBP	**3.20**	**3.60**	**3.60**	**5.90**	**3.20**	**4.00**	**4.00**	**8.80**

						
	LED driver 1050mA, 40W	**LED driver 700mA, 30W, PHASE**	**LED driver 700mA, 40W, DALI**	**LED driver 1050mA, 40W**	**LED driver 1000mA, 40W, PHASE**	**LED driver 1050mA, 50W, DALI**
	L	**L**	**L**	**XL**	**XL**	**XL**
	500/600/700mA	**700mA**	**700mA**	**800/900/1050mA**	**1000mA**	**1050mA**
Material	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)
Colour	white	white	white	white	white	white
Voltage prim.	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Voltage sec.	30-42V	30-42V	6-58V	30-42V	28~40V	6-58V
Output current	500/600/700mA	700mA	250/350/500/700mA	800/900/1050mA	1000mA	700/800/900/1050/ 1200/1300/1400mA
Number of outputs sec.	1	1	1	1	1	1
Output from	15W	21W	1.5W	24W	28W	4.2W
Output up to	29.5W	29.4W	40.6W	44W	40W	50W
Environmental temp. min.	-20°C	-20°C	-25°C	-20°C	-20°C	-25°C
Environmental temp. max.	50°C	50°C	50°C	50°C	50°C	50°C
Temperature protection	110°C	110°C	110°C	110°C	110°C	110°C
IP protection rating	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Dimmable	–	PHASE C	DALI	–	PHASE C	DALI
Length	14.7 cm	11.5W	12.3 cm	9.7 cm	15.3 cm	12.3 cm
Width	4.3 cm	4.4 cm	7.9 cm	4.3 cm	6.7 cm	7.9 cm
Height	3 cm	3 cm	2.4 cm	3 cm	3 cm	2.4 cm
Weight	0.105 kg	0.072 kg	1.21 kg	0.072 kg	0.2 kg	0.215 kg
Item No.	**1004062**	**1004065**	**1004070**	**1004059**	**1004066**	**1004071**
GBP	**24.30**	**46.80**	**64.80**	**24.30**	**49.50**	**64.80**

	L				**XL**			
								
Voltage prim.	SL153B elliptical	SL154B prismatic	SL155B frosted	SL307 honeycomb	SL153C elliptical	SL154C prismatic	SL155C frosted	SL308 honeycomb
Item No.	**1004794**	**1004795**	**1004796**	**1004797**	**1004798**	**1004799**	**1004800**	**1004801**
GBP	**4.00**	**4.50**	**4.50**	**11.50**	**4.50**	**5.00**	**5.00**	**15.10**

TIMELESS CLASSIC

SUITABLE TABLE LAMPS AND FLOOR STANDS FOR ANY ROOM.

The classic among the luminaires: our table lamps and floor stands blend into any interior thanks to their simple, slim design and therefore always make a good impression in offices, living areas and stores.




1000763 + 1000764 79 + 81


1002146 85



TABLE AND FLOOR LAMPS


70 71 FOLLOWER 72 72 75 78 78 79
79 79 80 80 81 81 81 82
83 84 84 85 86 86 87 88
89

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

FITU
TL, E27

SOCKET INSIDE







• Switch located on the power cord



Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Euro plug and switch

Recommended lamp



LED E27 7W
2700K 440lm
7kWh/1000h
Item No. 1003092 | 11.70 GBP



LED E27 7W
2700K 640lm
7kWh/1000h
Item No. 1003085 | 8.10 GBP

Lamp details

max. 10W

Variant	Item No.	GBP
E27 ■ black	**1001676**	**49.50**
E27 □ white	**1001677**	**49.50**
E27 ▨ aluminium	**1001678**	**52.20**

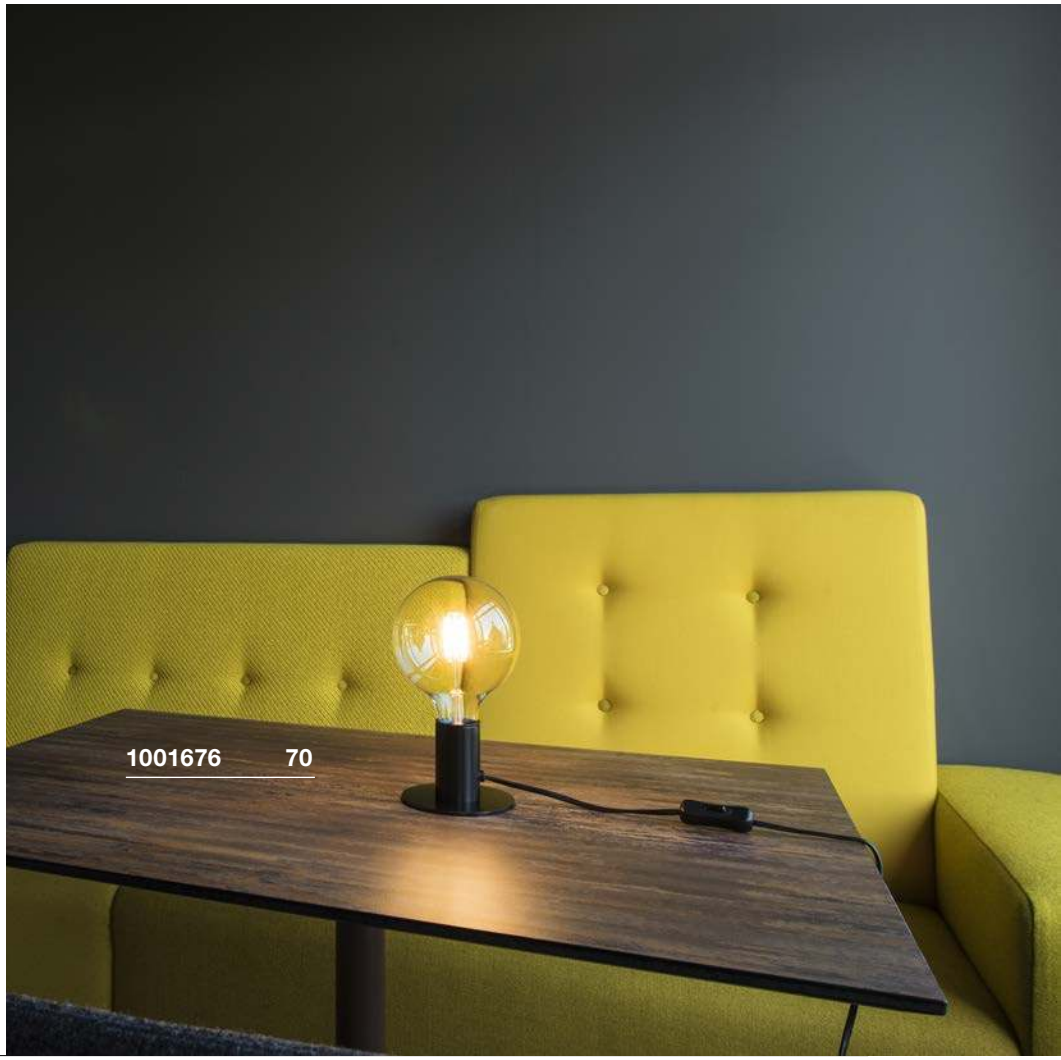







TONILA
TL

LED INSIDE







- Mobile, cordless light
- Can be dimmed to 3 different levels using the switch
- Convenient USB charging

Product details

Battery operation
Total wattage: 1.6W
Material: aluminium/plastic
Dimmable: switch



Dimensional drawing



Tip

Power adapter excl. USB charger 5V DC/1-2A required.
For MINI-USB charging cable

Variant	Item No.	GBP
90lm | 2700K | CRI>80 white/aluminium	**1002582**	**87.30**
90lm | 2700K | CRI>80 black/copper	**1002583**	**87.30**

MAGANDA
TL







- 3-times optical magnification
- Select from 3 light colours
- Touch sensitive switch

Product details

100-240V ~50/60Hz | 12V DC
Total wattage: 4.8W
Material: steel/glass

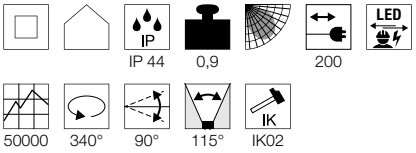

Dimensional drawing



Tip

IP Safety plug

Variant	Item No.	GBP
45/48/51lm | 2700/3000/4000K | CRI>90		
chrome	1004970	134.10

VINCELLI D
TL







- Slim design
- Light body made of real bamboo

Product details

220-240V ~50Hz | 500mA
Total wattage: 12W
Material: bamboo/steel

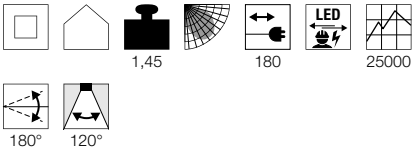

Dimensional drawing



Tip

Plug-in power supply

Variant	Item No.	GBP
500lm | 2700K | CRI>80		
anthracite/brown	1002068	176.40

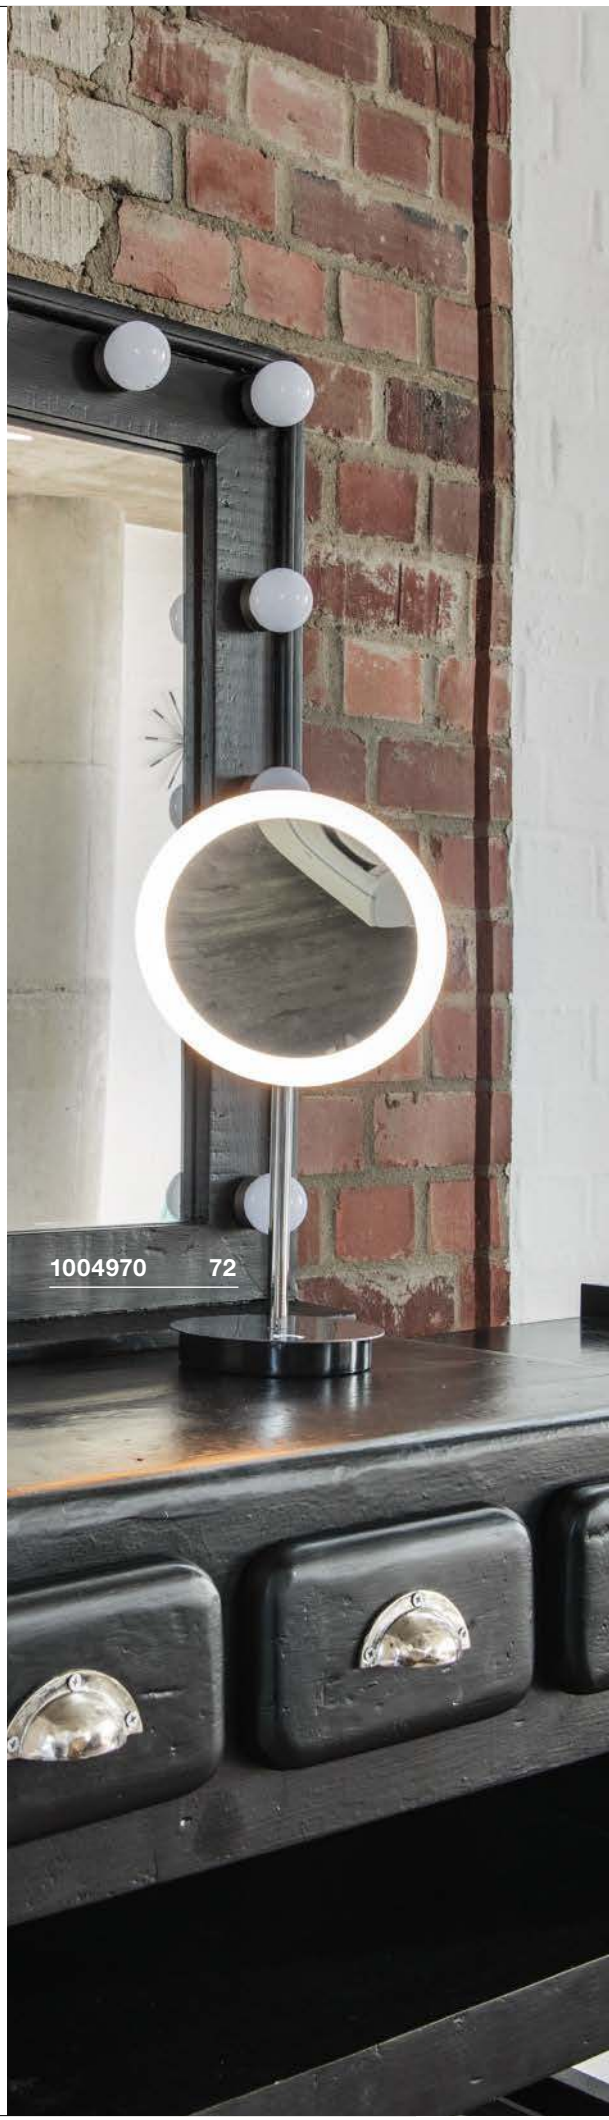



1004970 72



1002068 73

146111 75



DESIGNED BY
Johannes Tomm

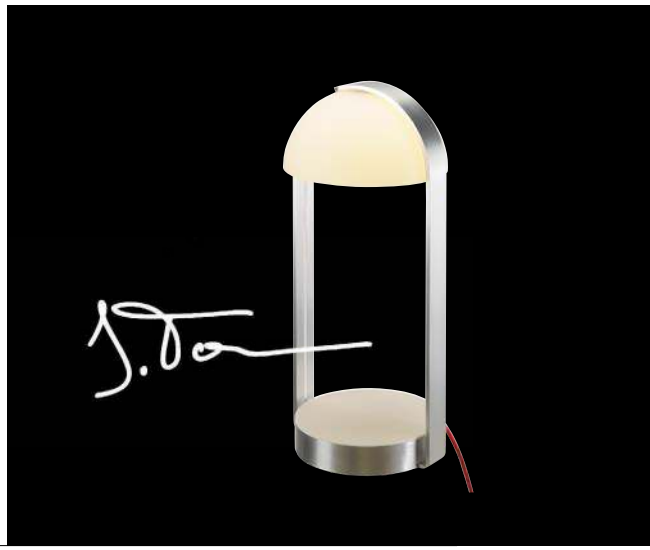





BRENDA

TL, Wireless charging

LED INSIDE

FR

reddot award 2018 winner



- Can be dimmed to 3 levels using the switch
- Charging surface for cordless smartphone charging
- USB connection

Product details

220-240V ~50/60Hz | 12V DC
Total wattage: 11W
Material: aluminium/glass
Dimmable: switch

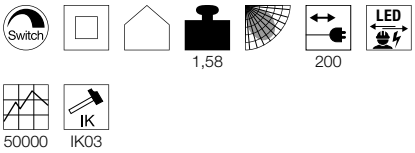

Dimensional drawing



Tip

Nightlight with a separate switch
Euro plug

Variant	Item No.	GBP
Indirect:: 460lm | 3000K | CRI>80 Night light: 50lm | 3000K | CRI>80		
white/aluminium	**146111**	**302.40**

SLV FENDA. MIX & MATCH.

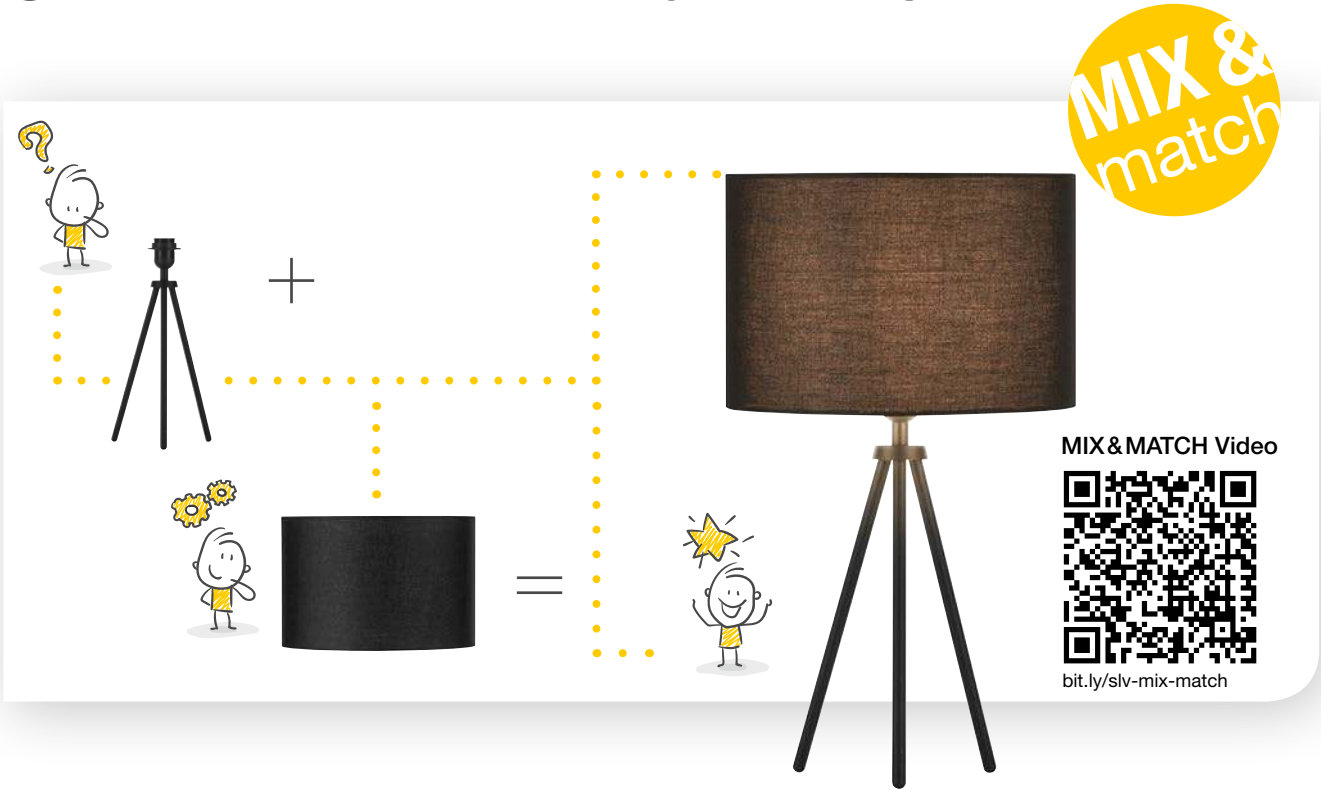



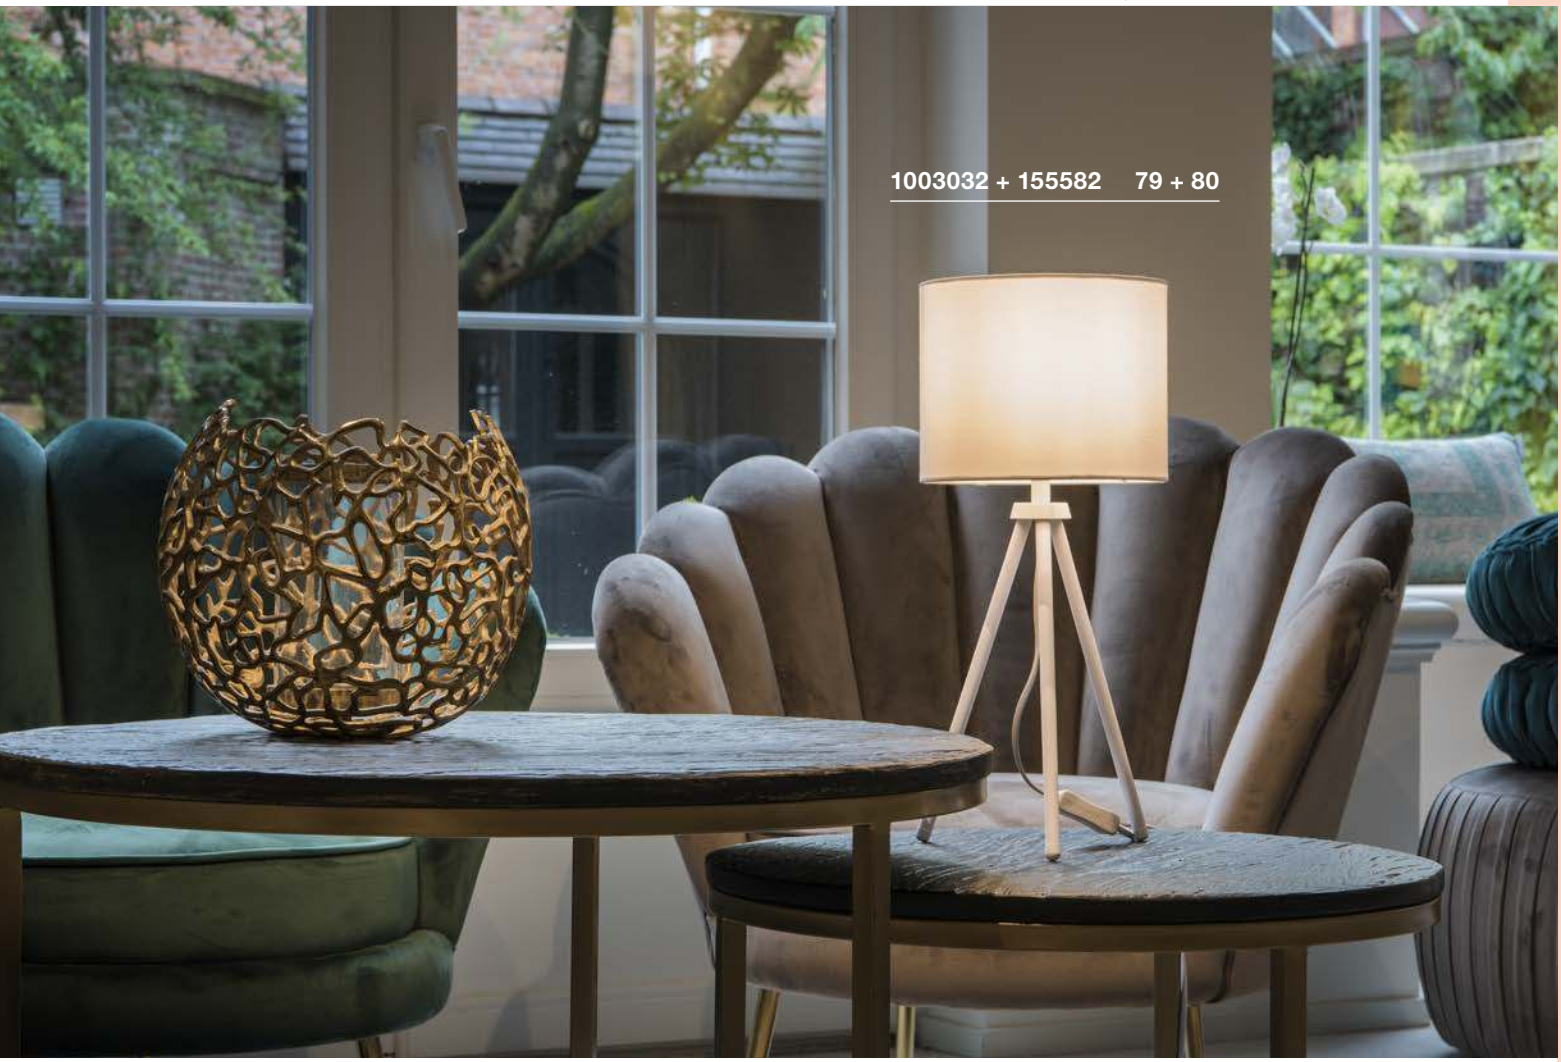

1003032 + 155582 79 + 80



1003029 + 156122 79 + 81



1003030 + 156141 78 + 80

FENDA
TL, E27

SOCKET INSIDE

MIX & match







- Can be individually altered through the selection of a suitable lampshade
- Switch located on the power cord

Product details
220-240V ~50/60Hz
Material: steel



Dimensional drawing



Tip
Euro plug and switch

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details
max. 60W

Variant	Item No.	GBP
E27		
matt white	1003030	58.50
E27		
matt black	155780	58.50
E27		
brushed nickel	155785	67.50

FENDA
FL, E27

SOCKET INSIDE

MIX & match







- Can be individually altered through the selection of a suitable lampshade
- Foot switch located on the power cord

Product details
220-240V ~50/60Hz
Material: steel



Dimensional drawing



Tip
Euro plug and switch

Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP

Lamp details
max. 60W

Variant	Item No.	GBP
E27		
matt white	1003031	108.00
E27		
matt black	155790	108.00
E27		
brushed nickel	155795	117.00



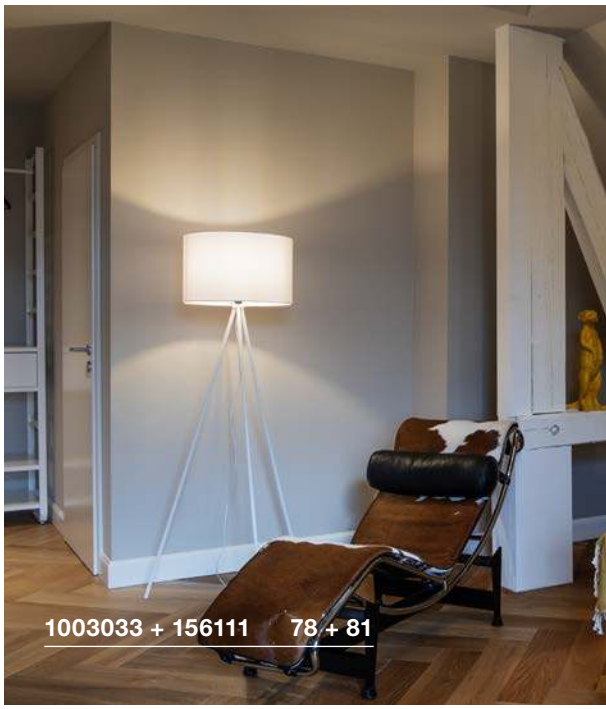

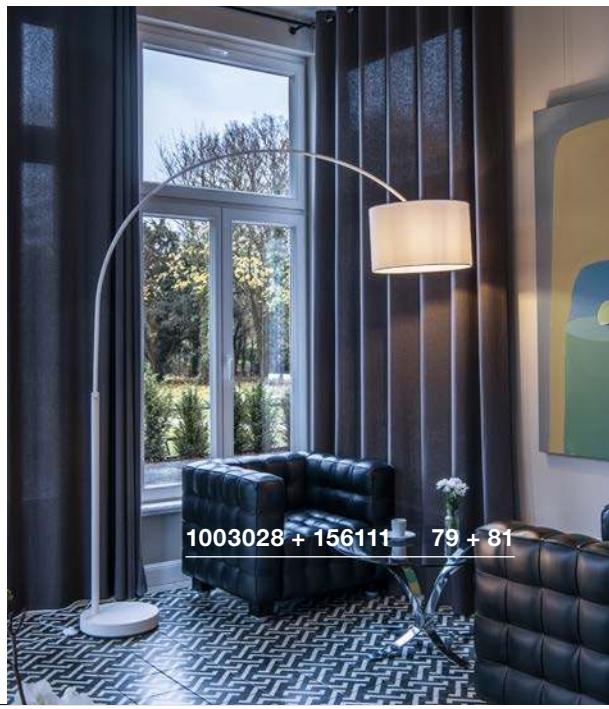

FENDA
TL, E27







- Can be individually altered through the selection of a suitable lampshade
- Switch located on the power cord

Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip
Euro plug

Recommended lamp
LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP



LED E27 7W 280°
2200-2700K 830lm
7kWh/1000h
Item No. 1002126 | 17.10 GBP



Lamp details
max. 40W

Variant	Item No.	GBP
E27		
matt white	1003032	58.50
E27		
matt black	155540	58.50

FENDA
FL, E27







- Can be individually altered through the selection of a suitable lampshade
- Switch on light body

Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip
Euro plug

Recommended lamp
LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details
max. 40W

Variant	Item No.	GBP
E27		
matt white	1003033	99.00
E27		
matt black	155490	99.00
E27		
chrome	155492	108.00

FENDA BOW BASE
FL, E27







- Can be individually altered through the selection of a suitable lampshade
- Foot switch located on the power cord

Product details
220-240V ~50/60Hz
Material: steel



Dimensional drawing



Tip
max. shade weight 900g
Euro plug and switch

Recommended lamp
LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



Lamp details
max. 25W
L: 17.5 cm max.

Variant	Item No.	GBP
E27		
matt white	1003028	188.10
E27		
matt black	1003029	188.10
E27		
chrome	1000763	197.10

FENDA
diameter 15 cm, round







- Can be individually altered through the selection of a suitable light base

Product details
Material: textile/steel



Dimensional drawing



Tip
max. 40W







Variant	Item No.	GBP
white	156141	34.60
beige	156143	34.60
black/copper	156152	40.50

FENDA
Diameter 30 cm, round





- Can be individually altered through the selection of a suitable light base

Product details
Material: textile/steel



Dimensional drawing



Tip
max. 60W







Variant	Item No.	GBP
white	155582	40.50
beige	155583	40.50
black/copper	155592	54.00

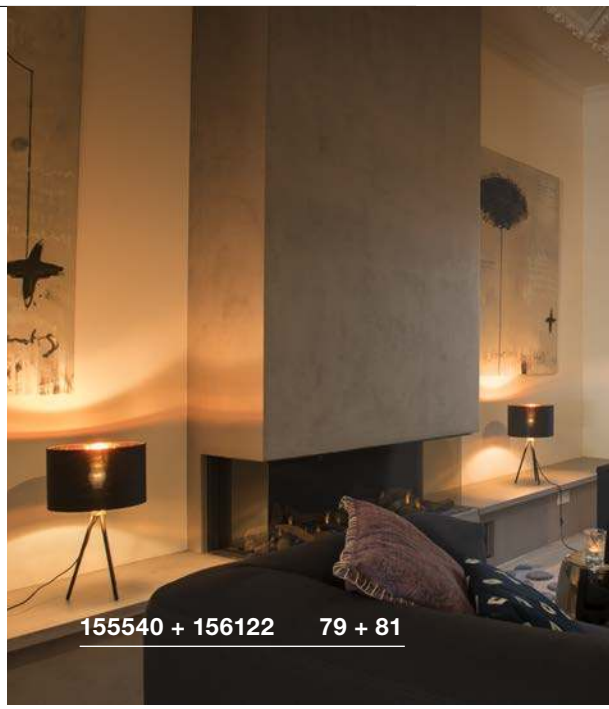

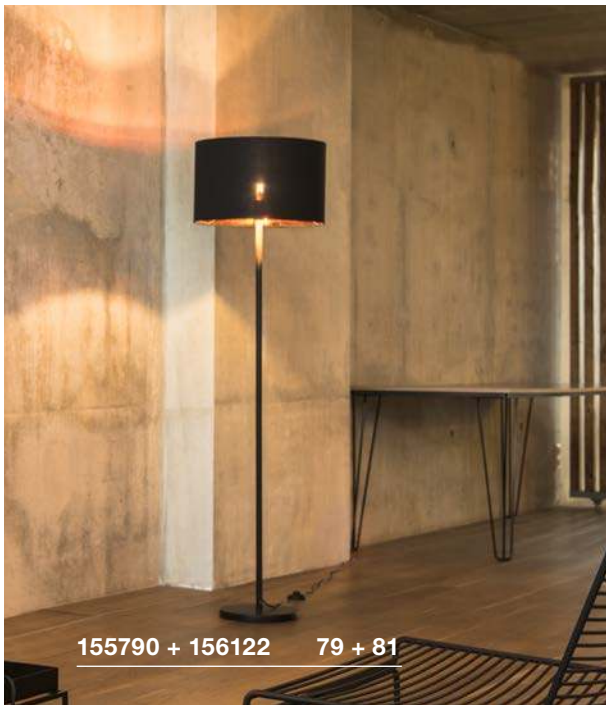



FENDA
diameter 45 cm, round







- Can be individually altered through the selection of a suitable light base

Product details
Material: textile/steel



Dimensional drawing



Tip
max. 60W







Accessory recommendation
Acrylic glass cover
Item No. 156100 | 34.20 GBP

Variant	Item No.	GBP
white	156111	63.00
beige	156113	63.00
black/copper	156122	67.50

FENDA
diameter 70 cm, round







- Can be individually altered through the selection of a suitable light base

Product details
Material: textile/steel



Dimensional drawing



Tip
max. 60W





Variant	Item No.	GBP
white	1000579	85.50
black/copper	1000580	99.00

FENDA
diameter 40 cm, round







- Can be individually altered through the selection of a suitable light base

Product details
Material: Polymethylacrylate (PMMA)



Dimensional drawing



Tip
max. 60W

Variant	Item No.	GBP
glossy white	1000764	76.50

KARPO
TL





- Premium LED with CRI>90
- Switch located on light head
- Can be dimmed to 3 different levels using the switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium
Dimmable: switch

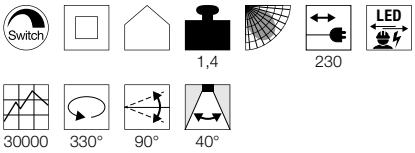

Dimensional drawing







Variant	Item No.	GBP
400lm | 3000K | CRI>90		
matt white	**1001460**	**144.00**
330lm | 3000K | CRI>90		
matt black	**1001461**	**144.00**



KARPO
FL

LED INSIDE

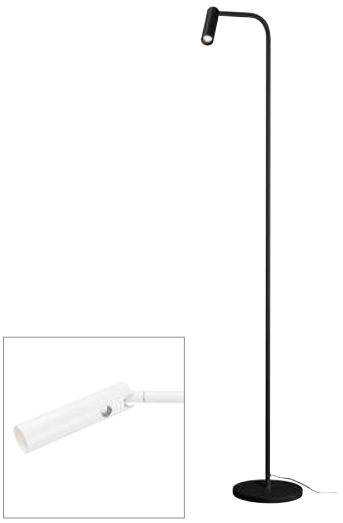

- Premium LED with CRI>90
- Switch located on light head
- Can be dimmed to 3 different levels using the switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium
Dimmable: switch





Dimensional drawing



Variant	Item No.	GBP
400lm | 3000K | CRI>90		
matt white	**1001462**	**188.10**
330lm | 3000K | CRI>90		
matt black	**1001463**	**188.10**

PHELIA
TL, QPAR51

SOCKET INSIDE





- Switch on light body
- Head can be rotated 90°
- Lampshade painted white on the inside

Product details

230V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip

Safety plug and switch

Recommended lamp



LED GU10 4W
2600K 260lm
4kWh/1000h
Item No. 1003101 | 39.60 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005076 | 6.10 GBP

Lamp details

max. 35W QPAR51
Diameter: 5 cm max. L: 10.5 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
matt black/chrome	**146000**	**148.50**

PHELIA
FL, E27

SOCKET INSIDE







- Switch on light body
- Head can be rotated 90°
- Lampshade painted white on the inside

Product details

230V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip

Safety plug and switch

Recommended lamp



LED E27 8W 350°
2200K 250lm
8kWh/1000h
Item No. 1003100 | 52.20 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP

Lamp details

max. 23 W
Diameter: 5.3 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27		
matt black/chrome	**146010**	**193.50**







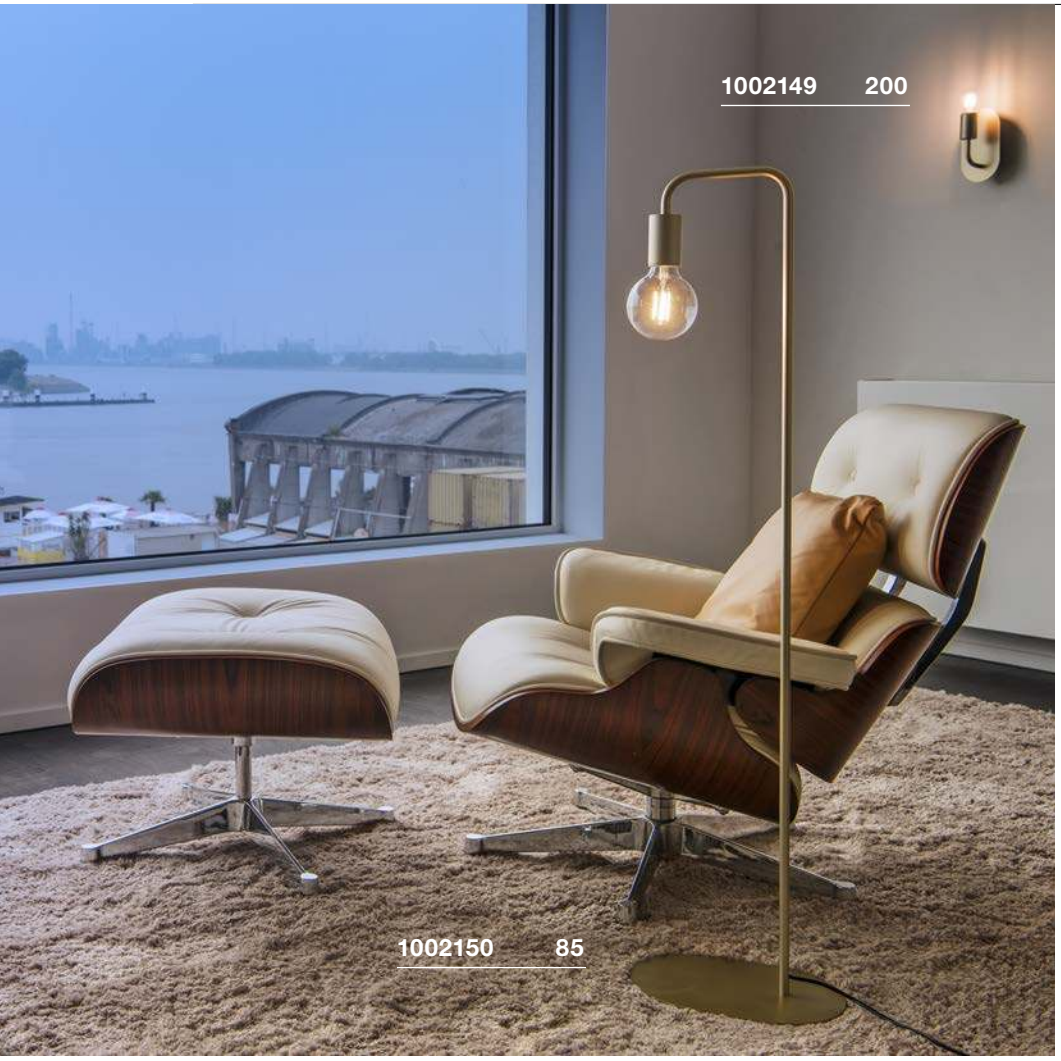

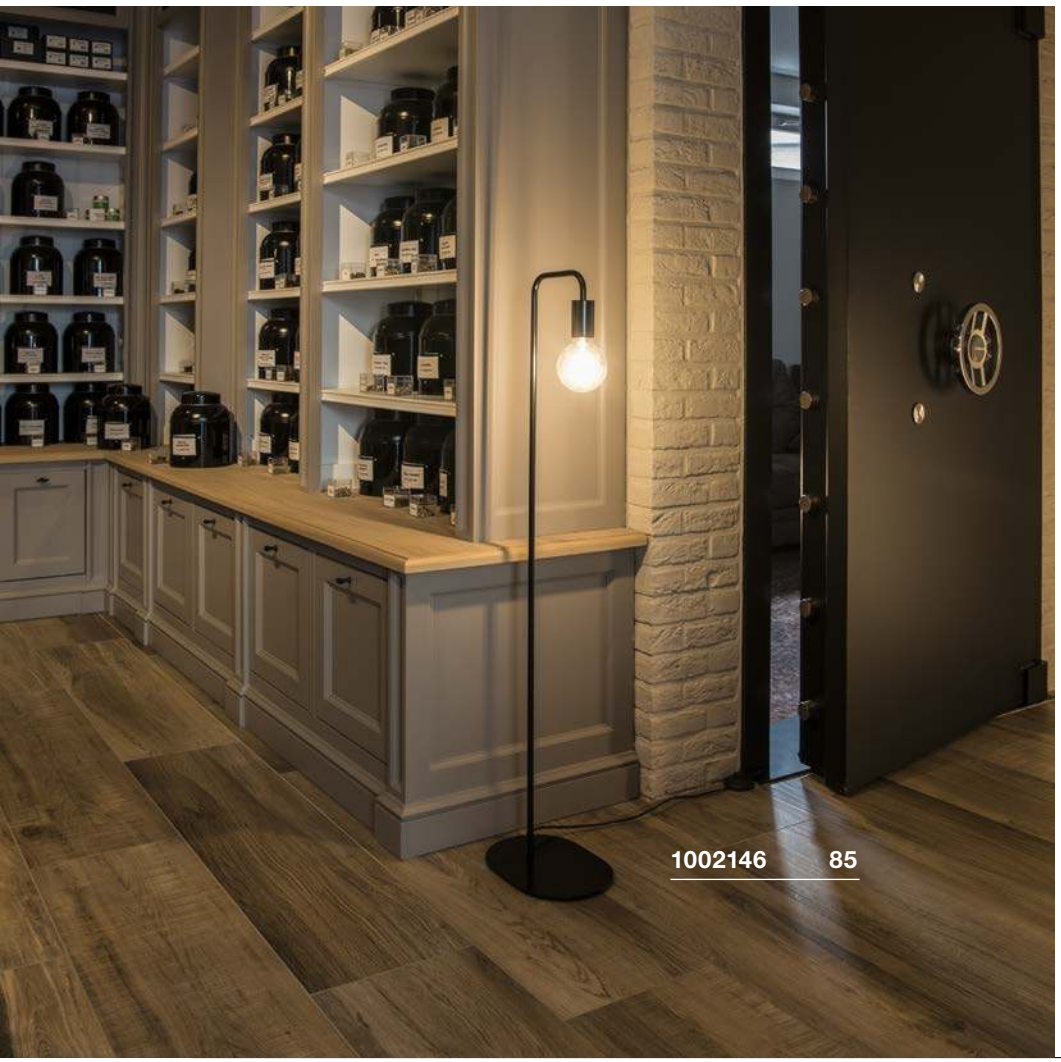

FITU
FL, E27

SOCKET INSIDE



• Foot switch located on the power cord

Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip

Euro plug and switch

Recommended lamp

LED E27 8W 350°
2200K 250lm
8kWh/1000h
Item No. 1003100 | 52.20 GBP



LED E27 7W
2700K 440lm
7kWh/1000h
Item No. 1003092 | 11.70 GBP



Lamp details

max. 24 W

Variant	Item No.	GBP
E27 matt white	1002145	185.40
E27 matt black	1002146	185.40
E27 matt gold	1002150	197.10

MECANICA PLUS
TL







- Dimming function and colour tuning

Product details

100-240V ~50/60Hz | 12V DC
Total wattage: 7W
Material: aluminium
Dimmable: switch

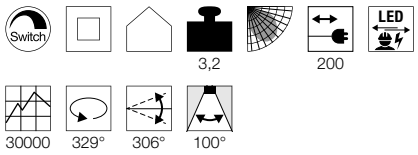

Dimensional drawing



Tip

Plug-in power supply

Variant	Item No.	GBP
450lm | 2700-6500K | CRI>80		
■ matt black	**1002404**	**152.10**

MECANICA PLUS
FL







- Dimming function and colour tuning

Product details

100-240V ~50/60Hz | 12V DC
Total wattage: 7W
Material: aluminium
Dimmable: switch

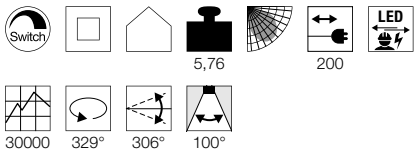

Dimensional drawing



Tip

Plug-in power supply

Variant	Item No.	GBP
450lm | 2700-6500K | CRI>80		
■ matt black	**1002405**	**233.10**

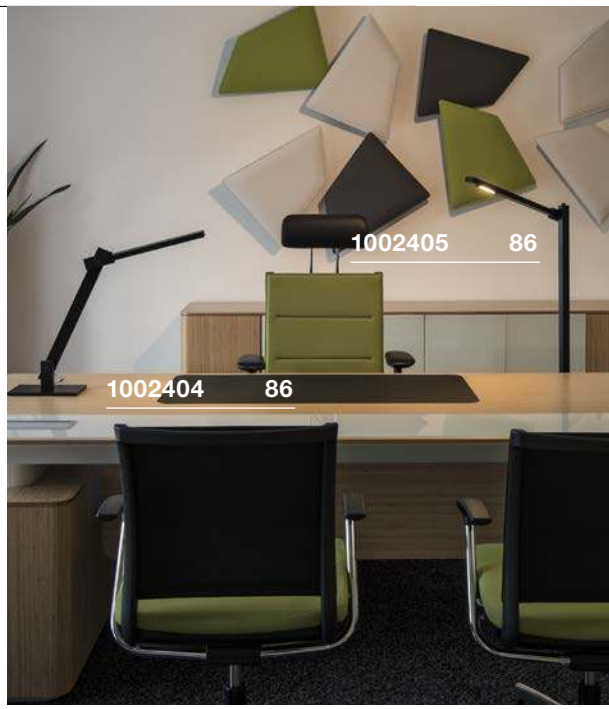









LIGHT PIPE 60/90/140

Pole, PHASE

LED INSIDE



- Suitable for indoor and outdoor use

Product details

220-240V ~50/60Hz
Total wattage: 11W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C, L

C,L | IP 55 | LED | 20000 | IK02

Dimensional drawing



Tip

The lights are delivered without a mounting plate
Indoor mounting plate with foot switch located on the power cord
Outdoor mounting plate without switch, with IP44 safety plug

Accessory recommendation

Earthspike
Item No. 234430 | 38.70 GBP

Mounting plate outdoor
Item No. 234431 | 43.20 GBP

Mounting plate indoor
Item No. 234441 | 43.20 GBP

Variant	Item No.	GBP
630lm | 2700K | CRI>80 | H: 60 cm | 1.5 kg		
white	**234401**	**161.10**
630lm | 2700K | CRI>80 | H: 90 cm | 1.71 kg		
white	**234411**	**194.40**
630lm | 2700K | CRI>80 | H: 140 cm | 2.06 kg		
white	**234421**	**242.10**

WORKLIGHT
FL







• Direct and indirect light



Product details

220-240V ~50/60Hz | 226mA
Total wattage: 35W
Material: aluminium/acrylic



IP 20 | 14,6 | 200



50000 | 340° | 110° | IK03

Dimensional drawing



Tip

Switch located on the light shaft
Safety plug

Variant	Item No.	GBP
Direct: 1850lm | 3000K | CRI>80 Indirect: 1850lm | 3000K | CRI>80 matt white	**157901**	**769.50**
Direct: 1850lm | 3000K | CRI>80 Indirect: 1850lm | 3000K | CRI>80 matt anthracite	**157905**	**769.50**
Direct: 1850lm | 4000K | CRI>80 Indirect: 1850lm | 4000K | CRI>80 matt white	**1003520**	**769.50**
Direct: 1850lm | 4000K | CRI>80 Indirect: 1850lm | 4000K | CRI>80 matt anthracite	**1003521**	**769.50**



WORKLIGHT PLUS
FL

LED INSIDE



- Intelligent presence control and brightness sensor technology
- Suitable for screen-based workstations in line with EN 12464-1
- Direct and indirect light

Product details

220-240V ~50/60Hz | 226mA
Total wattage: 48W
Material: aluminium/acrylic
Dimmable: switch

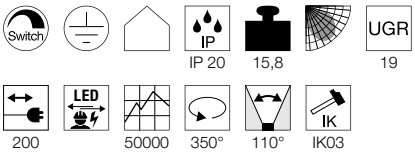

Dimensional drawing



Tip

Switch located on the light shaft
Safety plug

Variant	Item No.	GBP
Direct: 3600lm | 3000K | CRI>80 Indirect: 1800lm | 3000K | CRI>80 matt white	1002847	1,102.50
Direct: 3600lm | 3000K | CRI>80 Indirect: 1800lm | 3000K | CRI>80 matt anthracite	1002848	1,102.50
Direct: 3600lm | 4000K | CRI>80 Indirect: 1800lm | 4000K | CRI>80 matt white	1003523	1,102.50
Direct: 3600lm | 4000K | CRI>80 Indirect: 1800lm | 4000K | CRI>80 matt anthracite	1003524	1,102.50

HANGING AROUND.

PENDANTS CREATE EMPHASIS.

Give each room an individual feel: with pendants you immerse selected areas in atmospheric light and set visual highlights thanks to a wide range of style directions. Perfect for rest in restaurants, cafés, bars or at home – the luminaires create cosy locations and make a tasteful statement.




1004766 159

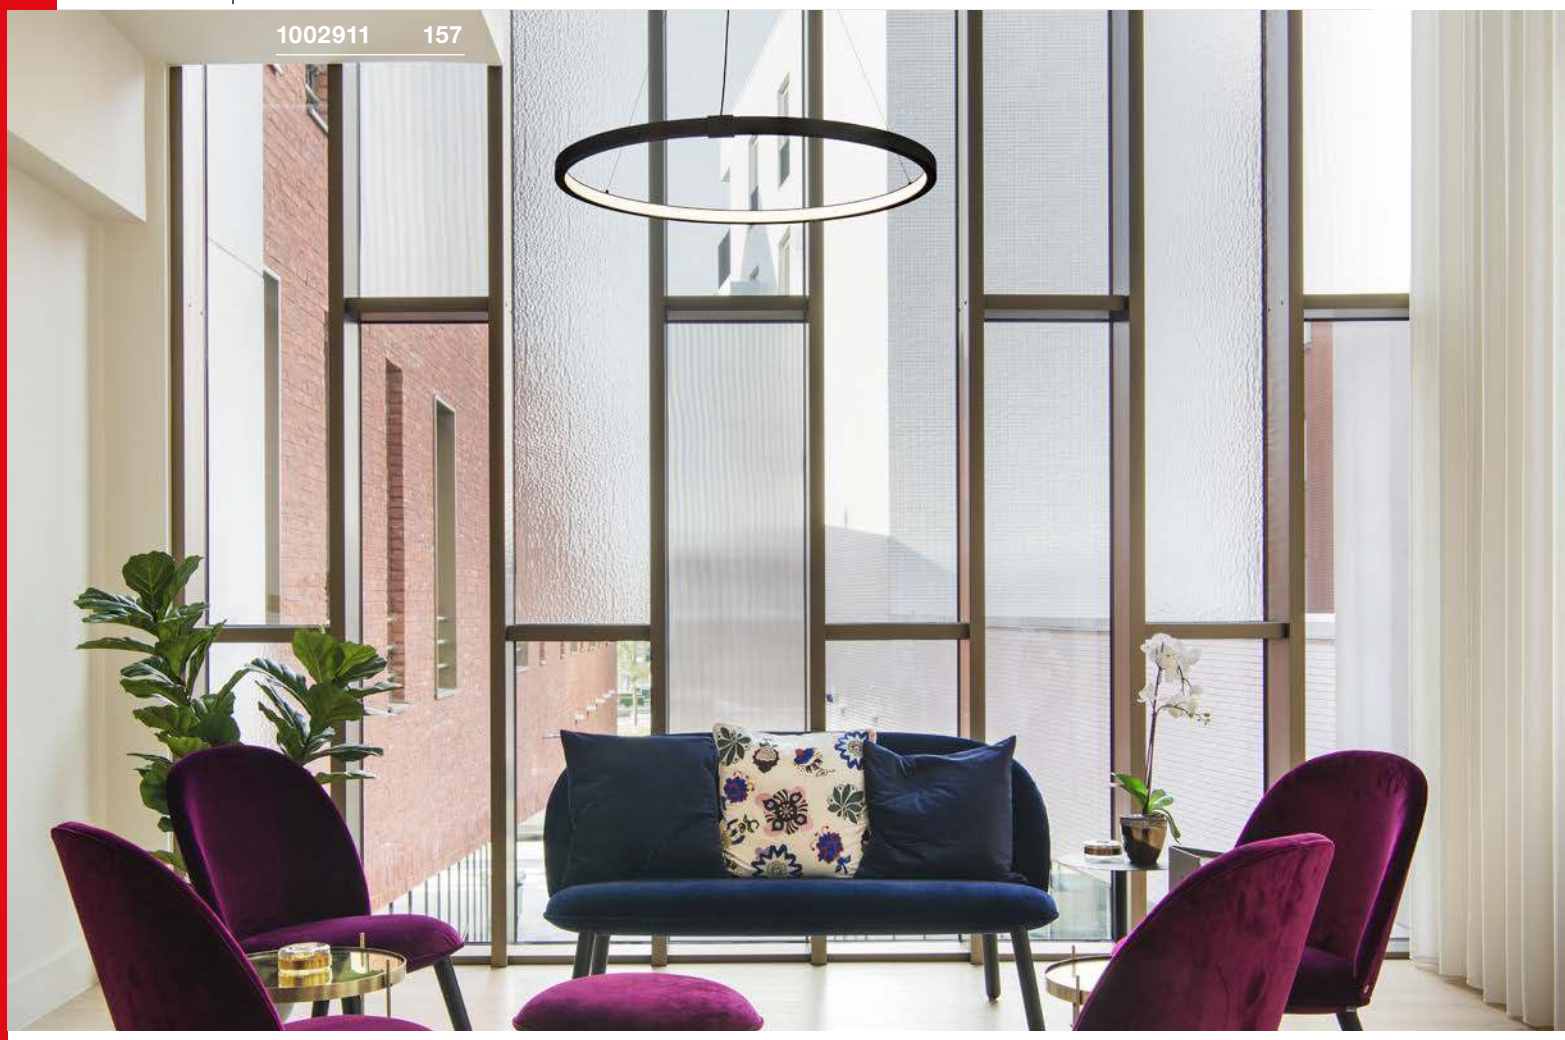

PENDANT LIGHTS


94


95

96

97


102


102


102


104

105


105


105


106

NEW


107


108


108


111


111


111


113


113


114


115


115


115


116


116


116


117


118


118


119


119


120


120


121

122


122


123

124

124

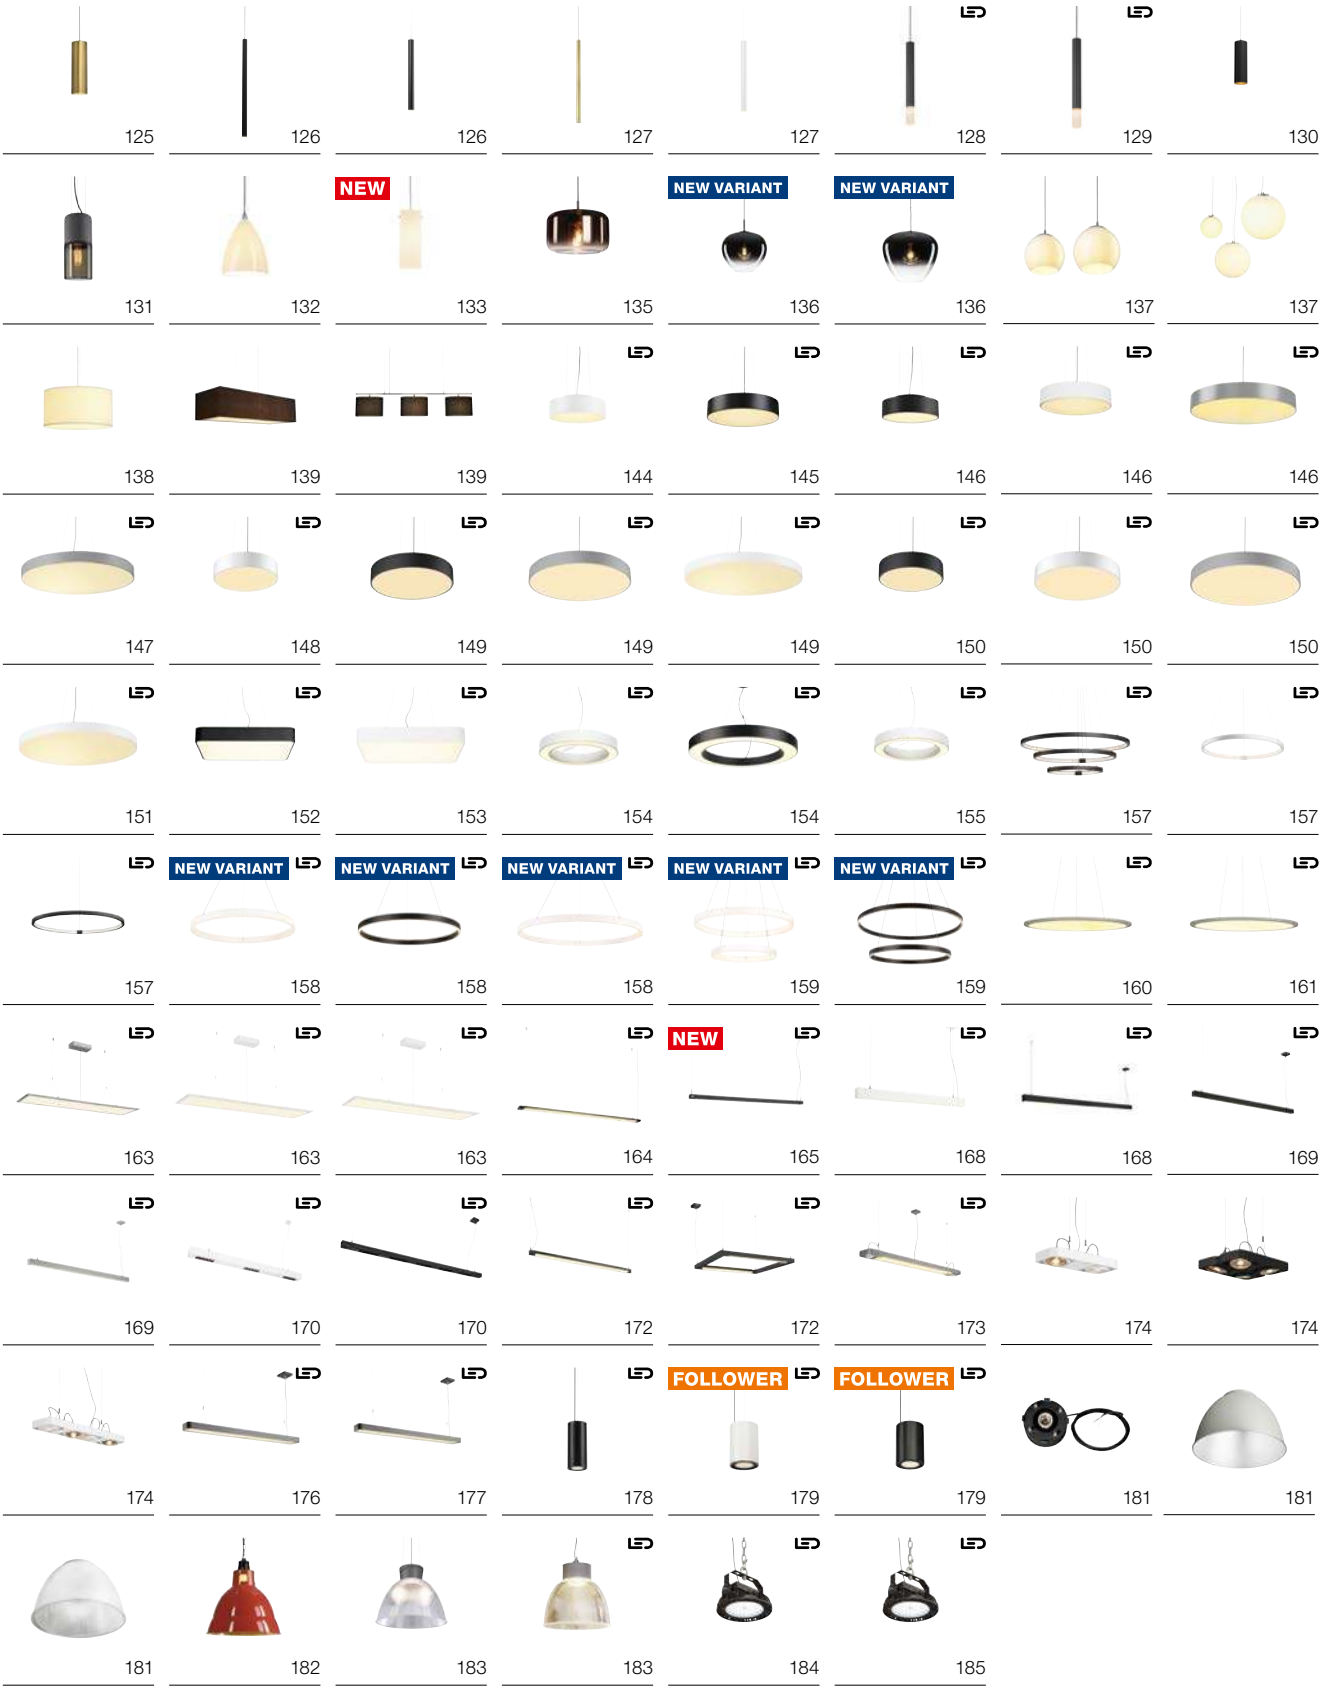

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

FITU
PD, E27

SOCKET INSIDE







- 2.5 m-long cable
- Can be freely combined with Fitu ceiling rose and our accessories

Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Textile cable
Open cable end

Recommended lamp

LED E27 8W
2000-2900K 300lm
8kWh/1000h
Item No. 1003096 | 67.50 GBP



LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP



Lamp details

max. 60W

Variant	Item No.	GBP
E27 ■ black	132650	40.50
E27 □ white	132651	40.50
E27 ■ gold	1002167	49.50





FITU
PD, E27

SOCKET INSIDE







- 5 m-long cable
- Can be freely combined with Fitu ceiling rose and our accessories

Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Textile cable
Open cable end

Recommended lamp

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



Lamp details

max. 60W

Variant	Item No.	GBP
E27		
black	**132690**	**45.00**
E27		
white	**132691**	**45.00**
E27		
gold	**1002168**	**58.50**

FITU
PD, E27

SOCKET INSIDE







- 2.5 m-long cable
- Can be freely combined with Fitu ceiling rose and our accessories
- Extra-long light body

Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Textile cable
Open cable end
Can be combined with Fitu Mix & Match accessories on page 98

Recommended lamp

LED E27 4W 180°
2000-2900K 200lm
4kWh/1000h
Item No. 1003098 | 47.70 GBP



LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP



Lamp details

max. 60W

Variant	Item No.	GBP
E27 black	1002159	85.50
E27 white	1002160	85.50
E27 brushed aluminium	1002161	94.50
E27 gold	1002162	94.50



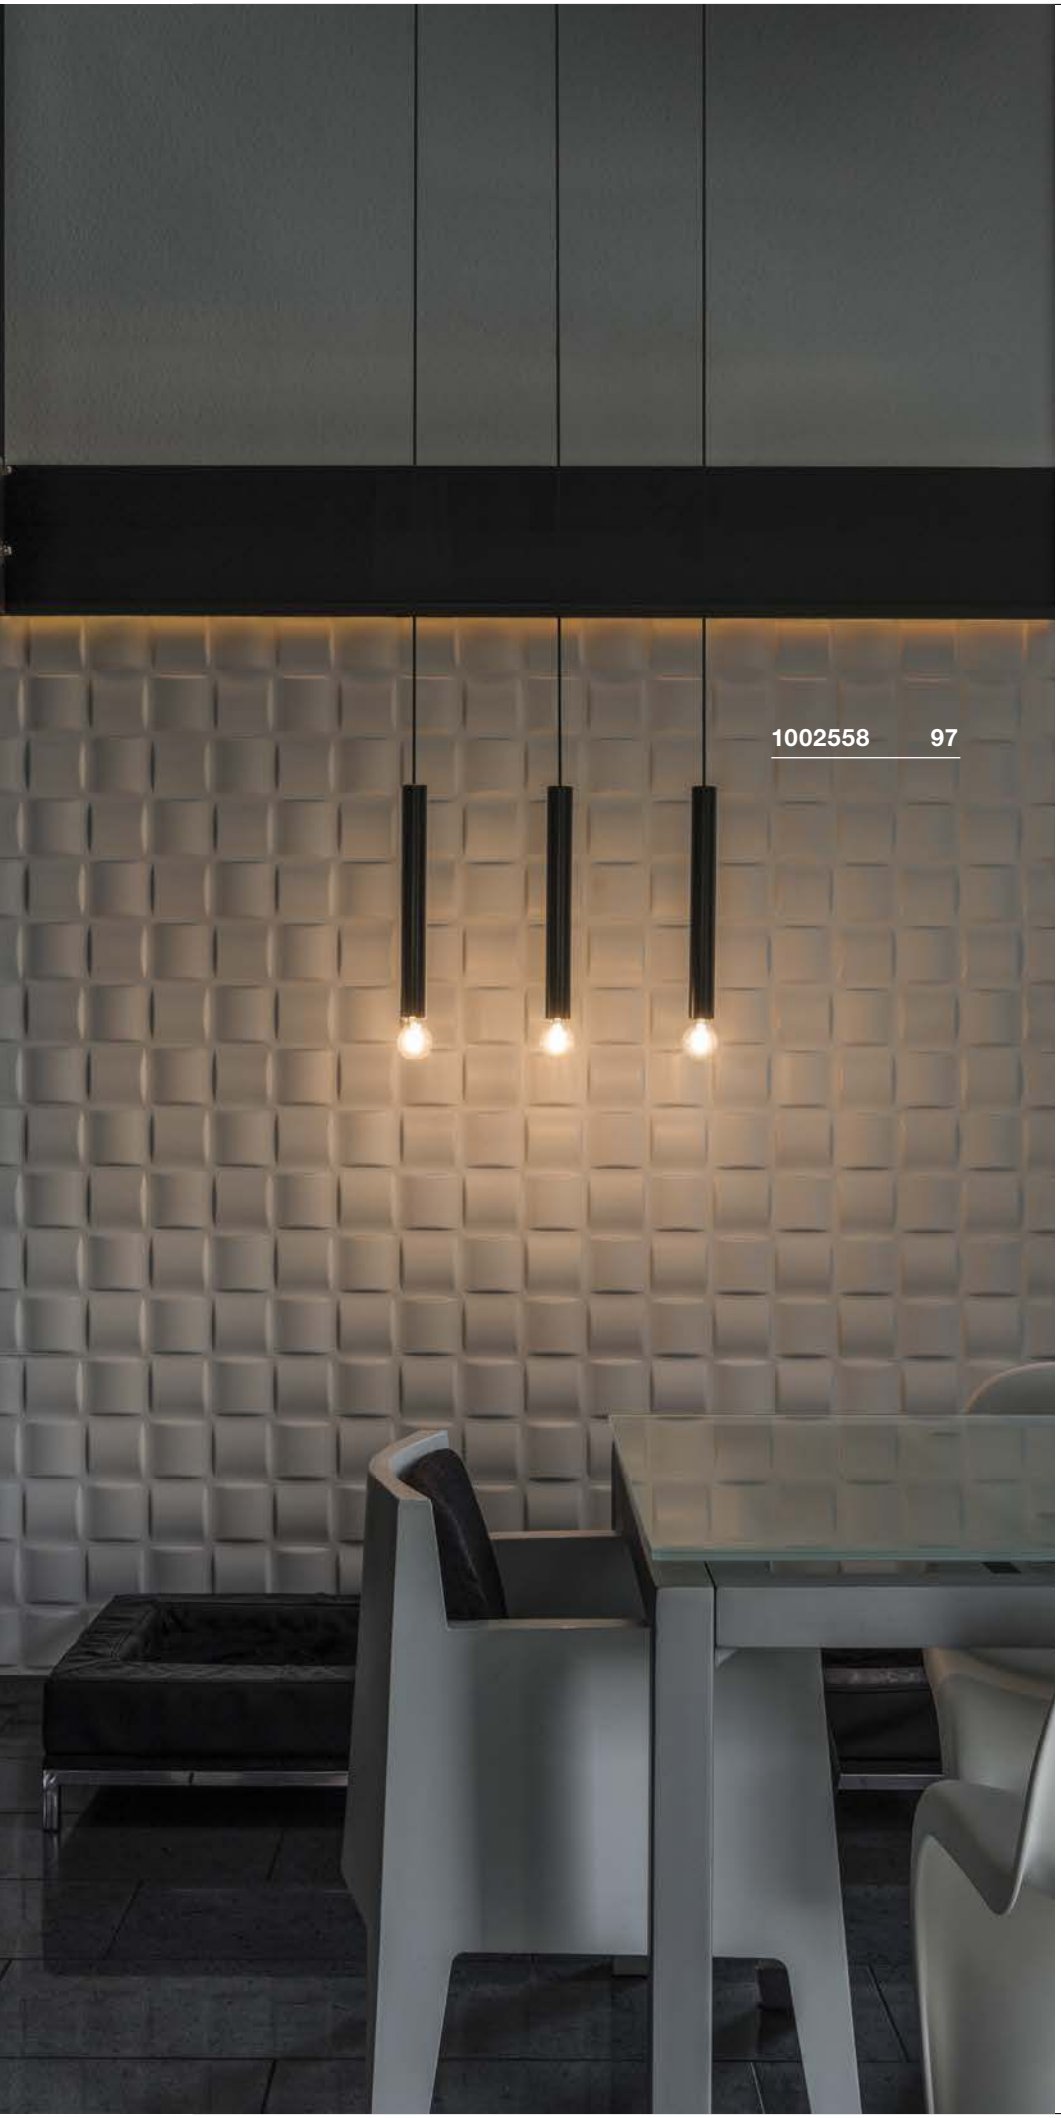

FITU
PD, E27

SOCKET INSIDE







- 5 m-long cable
- Can be freely combined with Fitu ceiling rose and our accessories

Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Textile cable
Open cable end
Can be combined with Fitu Mix & Match accessories on page 98

Recommended lamp

LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



Lamp details

max. 60W

Variant	Item No.	GBP
E27 black	1002558	94.50
E27 white	1002562	94.50
E27 brushed aluminium	1002563	103.50
E27 gold	1002564	103.50

FITU MIX & MATCH ACCESSORIES

Fitu single ceiling rose

16A max.
Steel
Diameter: 8.5cm H: 3.5cm
inc. strain relief
Weight: 0.14kg
1 piece



Variant	Item No.	GBP
black	132600	20.70
white	132601	20.70
chrome	132605	22.50
gold	1002163	22.50

Mounting rose with connection box

16A max.
Steel/polyamide 66 (PA 66)
Diameter: 8.5cm H: 3.3cm
inc. strain relief
Weight: 0.1kg
1 piece



Variant	Item No.	GBP
matt black	1004674	18.00
matt white	1004675	18.00
chrome	1004676	21.60

1-phase light adapter

230V ~50Hz, 6A max.
Plastic PC
Max. Mechanical load 2 kg
1 piece



Variant	Item No.	GBP
black	143120	10.80
white	143121	10.80
silver grey	143124	10.80

Fitu triple ceiling rose

16A max.
Steel
Diameter: 22 cm H: 5.4 cm
inc. strain relief
Weight: 0.5 kg
1 piece



Variant	Item No.	GBP
black	132610	49.50
white	132611	49.50
chrome	132615	54.00
gold	1002164	54.00

Fitu triple ceiling rose

Steel
Weight: 1.08 kg
L: 60 cm W: 8.5 cm H: 5 cm
inc. strain relief



Variant	Item No.	GBP
black	1001818	76.50
white	1001819	76.50
gold	1002264	90.00

3-circuit light adapter

230V ~50Hz, 10A max.
Plastic
Weight: 0.07 kg
Max. Mechanical load 5 kg
1 piece



Variant	Item No.	GBP
black	145990	14.90
white	1001542	14.90
silver grey	145994	14.90

Fitu quintuple ceiling rose

16A max.
Steel
Diameter: 33 cm H: 6 cm
inc. strain relief
Weight: 1.25 kg
1 piece



Variant	Item No.	GBP
black	132620	67.50
white	132621	67.50
chrome	132625	72.00
gold	1002165	72.00

Fitu quintuple ceiling rose

16A max.
Steel
Weight: 2.06kg
L: 120 cm W: 8.5 cm H: 5 cm
inc. strain relief



Variant	Item No.	GBP
black	1001820	99.00
white	1001821	99.00
gold	1002265	108.00

Cable clamp

16A max.
Steel
Weight: 0.01kg
1 piece

Variant	Item No.	GBP
black	132680	9.90
white	132681	9.90

Ceiling rose

16A max.
Steel
Diameter: 9 cm H: 2.6 cm
inc. strain relief
Weight: 0.15kg
1 piece

Variant	Item No.	GBP
matt black	1004744	27.00
matt white	1004745	27.00
matt chrome	1004746	29.70

Ceiling hook

Steel
Weight: 0.04kg
1 piece



Variant	Item No.	GBP
black	132670	15.30
white	132671	15.30





1002162 + 1002165 98 + 96

SLV FENDA. MIX & MATCH.





NUMINOS S

3-circuit

Product details:

220-240V ~50/60Hz | 250mA
Total wattage: 10.42W
Material: aluminium/plastic



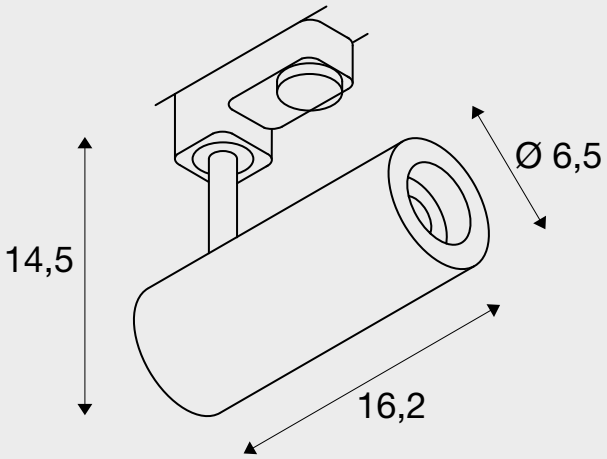

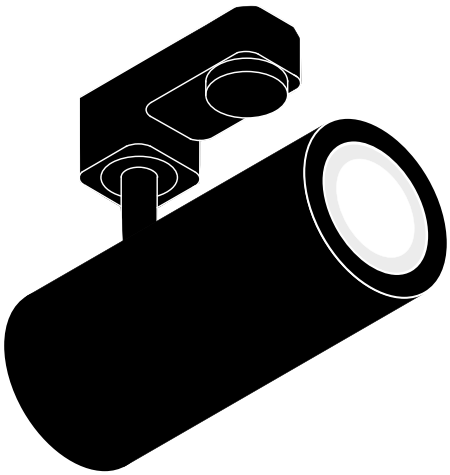

black

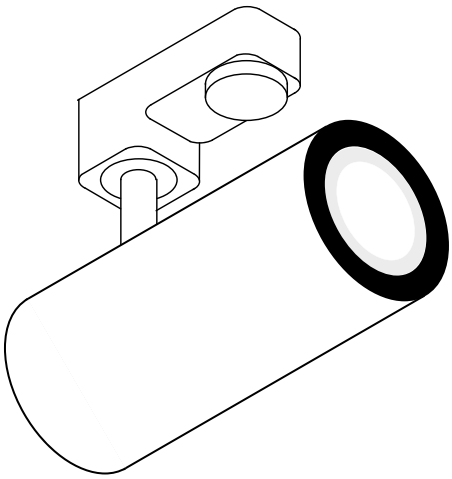

white

				ITEM NO.	GBP	
C	2700K	985lm	24°	**1004074**	**87.30**	
		985lm	36°	**1004075**	**87.30**	
		980lm	60°	**1004076**	**87.30**	
	3000K	1020lm	24°	**1004082**	**87.30**	
		1020lm	36°	**1004083**	**87.30**	
		1020lm	60°	**1004084**	**87.30**	
	4000K	1100lm	24°	**1004090**	**87.30**	
		1100lm	36°	**1004091**	**87.30**	
		1100lm	60°	**1004092**	**87.30**	
DALI	2700K	985lm	24°	**1004362**	**129.60**	
		985lm	36°	**1004363**	**129.60**	
		980lm	60°	**1004364**	**129.60**	
	3000K	1020lm	24°	**1004370**	**129.60**	
		1020lm	36°	**1004371**	**129.60**	
		1020lm	60°	**1004372**	**129.60**	
	4000K	1100lm	24°	**1004378**	**129.60**	
		1100lm	36°	**1004379**	**129.60**	
		1100lm	60°	**1004380**	**129.60**	
C	2700K	980lm	24°	**1004078**	**87.30**	
		985lm	36°	**1004079**	**87.30**	
		980lm	60°	**1004080**	**87.30**	
	3000K	1020lm	24°	**1004086**	**87.30**	
		1020lm	36°	**1004087**	**87.30**	
		1020lm	60°	**1004088**	**87.30**	
	4000K	1090lm	24°	**1004094**	**87.30**	
		1100lm	36°	**1004095**	**87.30**	
		1090lm	60°	**1004096**	**87.30**	
DALI	2700K	985lm	24°	**1004366**	**129.60**	
		985lm	36°	**1004367**	**129.60**	
		980lm	60°	**1004368**	**129.60**	
	3000K	1020lm	24°	**1004374**	**129.60**	
		1020lm	36°	**1004375**	**129.60**	
		1020lm	60°	**1004376**	**129.60**	
	4000K	1100lm	24°	**1004382**	**129.60**	
		1100lm	36°	**1004383**	**129.60**	
		1100lm	60°	**1004384**	**129.60**	

NUMINOS M

3-circuit

Product details:

220-240V ~50/60Hz | 500mA
Total wattage: 20.1W
Material: aluminium/plastic



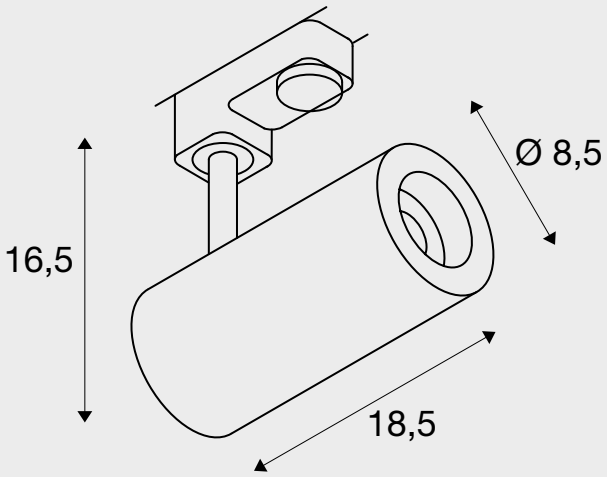

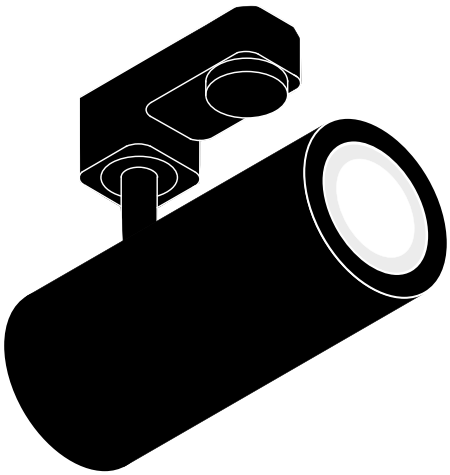

black

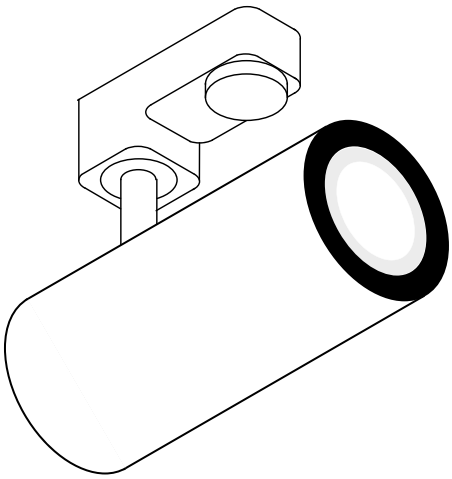

white

				ITEM NO.	GBP	
C	2700K	1925lm	24°	**1004170**	**108.00**	
		1935lm	36°	**1004171**	**108.00**	
		1885lm	60°	**1004172**	**108.00**	
	3000K	1955lm	24°	**1004178**	**108.00**	
		1970lm	36°	**1004179**	**108.00**	
		1880lm	60°	**1004180**	**108.00**	
	4000K	2125lm	24°	**1004186**	**108.00**	
		2120lm	36°	**1004187**	**108.00**	
		2060lm	60°	**1004188**	**108.00**	
DALI	2700K	1925lm	24°	**1004458**	**142.20**	
		1935lm	36°	**1004459**	**142.20**	
		1885lm	60°	**1004460**	**142.20**	
	3000K	1930lm	24°	**1004466**	**142.20**	
		1970lm	36°	**1004467**	**142.20**	
		1880lm	60°	**1004468**	**142.20**	
	4000K	2125lm	24°	**1004474**	**142.20**	
		2120lm	36°	**1004475**	**142.20**	
		2060lm	60°	**1004476**	**142.20**	
C	2700K	1925lm	24°	**1004174**	**108.00**	
		1935lm	36°	**1004175**	**108.00**	
		1870lm	60°	**1004176**	**108.00**	
	3000K	1955lm	24°	**1004182**	**108.00**	
		1970lm	36°	**1004183**	**108.00**	
		1870lm	60°	**1004184**	**108.00**	
	4000K	2125lm	24°	**1004190**	**108.00**	
		2120lm	36°	**1004191**	**108.00**	
		2060lm	60°	**1004192**	**108.00**	
DALI	2700K	1925lm	24°	**1004462**	**142.20**	
		1935lm	36°	**1004463**	**142.20**	
		1885lm	60°	**1004464**	**142.20**	
	3000K	1955lm	24°	**1004470**	**142.20**	
		1970lm	36°	**1004471**	**142.20**	
		1880lm	60°	**1004472**	**142.20**	
	4000K	2125lm	24°	**1004478**	**142.20**	
		2120lm	36°	**1004479**	**142.20**	
		2060lm	60°	**1004480**	**142.20**	

NUMINOS L

3-circuit

Product details:

220-240V ~50/60Hz | 700mA
System output: 28W
Material: aluminium/plastic



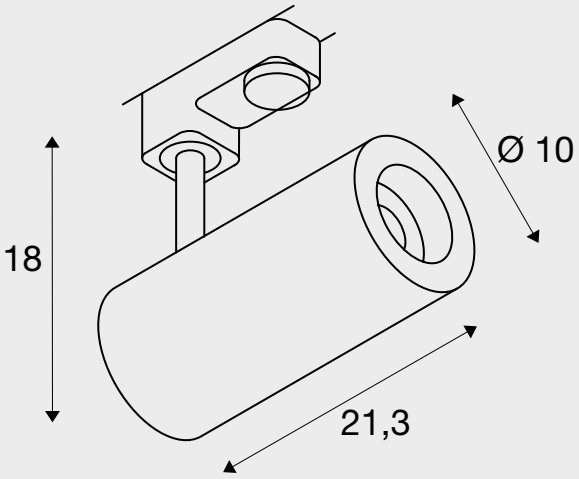

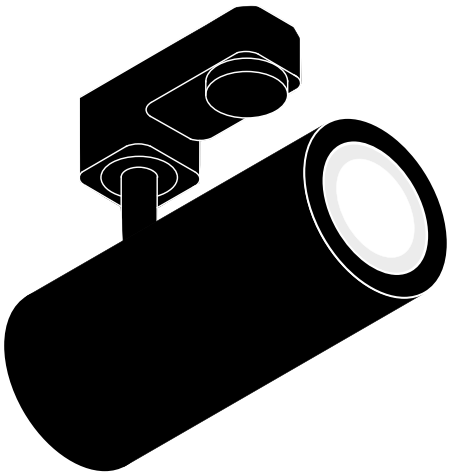

black

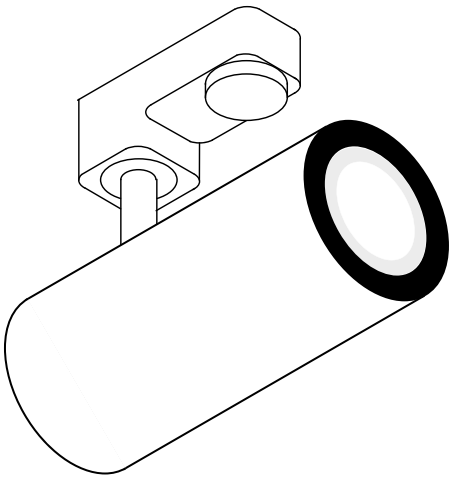

white

				ITEM NO.	GBP	
C	2700K	2440lm	24°	**1004266**	**119.70**	
		2400lm	36°	**1004267**	**119.70**	
		2475lm	60°	**1004268**	**119.70**	
	3000K	2430lm	24°	**1004274**	**119.70**	
		2340lm	36°	**1004275**	**119.70**	
		2400lm	60°	**1004276**	**119.70**	
	4000K	2675lm	24°	**1004282**	**119.70**	
		2620lm	36°	**1004283**	**119.70**	
		2715lm	60°	**1004284**	**119.70**	
DALI	2700K	2430lm	24°	**1004554**	**168.30**	
		2400lm	36°	**1004555**	**168.30**	
		2475lm	60°	**1004556**	**168.30**	
	3000K	2430lm	24°	**1004562**	**168.30**	
		2340lm	36°	**1004563**	**168.30**	
		2400lm	60°	**1004564**	**168.30**	
	4000K	2675lm	24°	**1004570**	**168.30**	
		2620lm	36°	**1004571**	**168.30**	
		2715lm	60°	**1004572**	**168.30**	
C	2700K	2430lm	24°	**1004270**	**119.70**	
		2400lm	36°	**1004271**	**119.70**	
		2475lm	60°	**1004272**	**119.70**	
	3000K	2430lm	24°	**1004278**	**119.70**	
		2340lm	36°	**1004279**	**119.70**	
		2400lm	60°	**1004280**	**119.70**	
	4000K	2675lm	24°	**1004286**	**119.70**	
		2620lm	36°	**1004287**	**119.70**	
		2715lm	60°	**1004288**	**119.70**	
DALI	2700K	2440lm	24°	**1004558**	**168.30**	
		2400lm	36°	**1004559**	**168.30**	
		2475lm	60°	**1004560**	**168.30**	
	3000K	2430lm	24°	**1004566**	**168.30**	
		2340lm	36°	**1004567**	**168.30**	
		2400lm	60°	**1004568**	**168.30**	
	4000K	2675lm	24°	**1004574**	**168.30**	
		2620lm	36°	**1004575**	**168.30**	
		2715lm	60°	**1004576**	**168.30**	

NUMINOS S

CW

Product details:

220-240V ~50/60Hz | 250mA
Total wattage: 10.42W
Material: aluminium/plastic



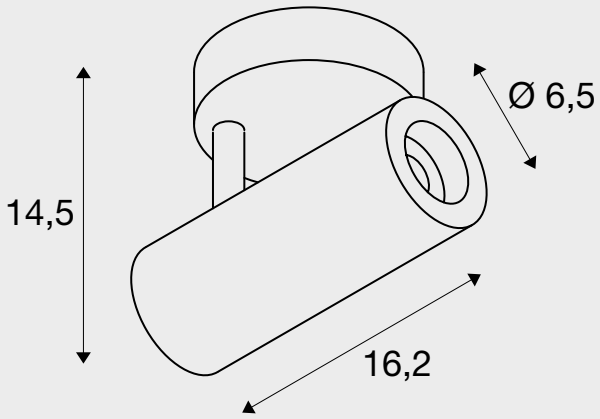

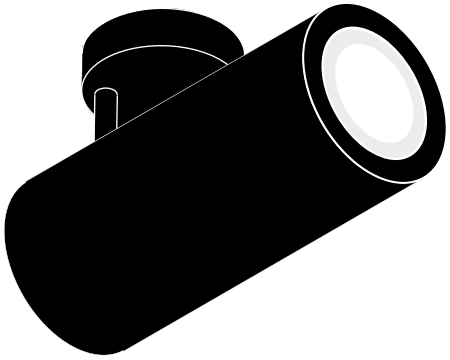

black

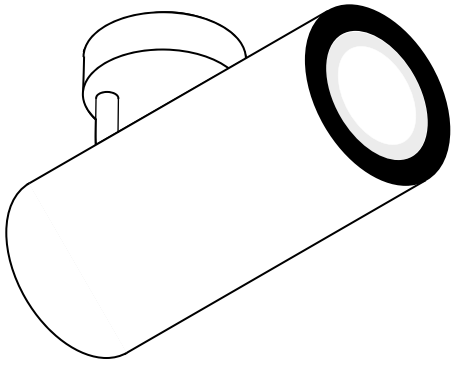

white

				ITEM NO.	GBP	
C	2700K	985lm	24°	**1004098**	**87.30**	
		985lm	36°	**1004099**	**87.30**	
		980lm	60°	**1004100**	**87.30**	
	3000K	1020lm	24°	**1004106**	**87.30**	
		1020lm	36°	**1004107**	**87.30**	
		1020lm	60°	**1004108**	**87.30**	
	4000K	1100lm	24°	**1004114**	**87.30**	
		1100lm	36°	**1004115**	**87.30**	
		1100lm	60°	**1004116**	**87.30**	
DALI	2700K	985lm	24°	**1004386**	**129.60**	
		980lm	36°	**1004387**	**129.60**	
		980lm	60°	**1004388**	**129.60**	
	3000K	1020lm	24°	**1004394**	**129.60**	
		1020lm	36°	**1004395**	**129.60**	
		1020lm	60°	**1004396**	**129.60**	
	4000K	1090lm	24°	**1004402**	**129.60**	
		1100lm	36°	**1004403**	**129.60**	
		1100lm	60°	**1004404**	**129.60**	
C	2700K	985lm	24°	**1004102**	**87.30**	
		985lm	36°	**1004103**	**87.30**	
		980lm	60°	**1004104**	**87.30**	
	3000K	1020lm	24°	**1004110**	**87.30**	
		1020lm	36°	**1004111**	**87.30**	
		1020lm	60°	**1004112**	**87.30**	
	4000K	1100lm	24°	**1004118**	**87.30**	
		1100lm	36°	**1004119**	**87.30**	
		1090lm	60°	**1004120**	**87.30**	
DALI	2700K	985lm	24°	**1004390**	**129.60**	
		985lm	36°	**1004391**	**129.60**	
		980lm	60°	**1004392**	**129.60**	
	3000K	1020lm	24°	**1004398**	**129.60**	
		1020lm	36°	**1004399**	**129.60**	
		1020lm	60°	**1004400**	**129.60**	
	4000K	1090lm	24°	**1004406**	**129.60**	
		1100lm	36°	**1004407**	**129.60**	
		1100lm	60°	**1004408**	**129.60**	

NUMINOS M

CL

Product details:

220-240V ~50/60Hz | 500mA
Total wattage: 20.1W
Material: aluminium/plastic



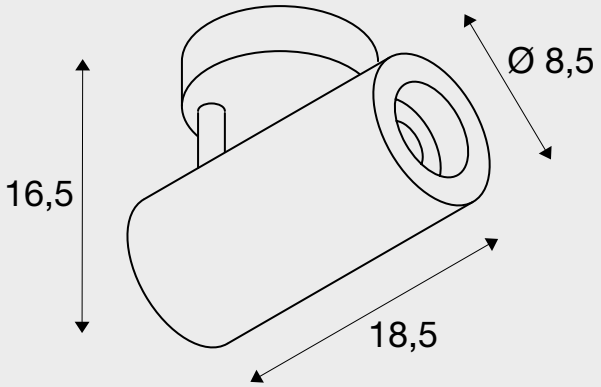

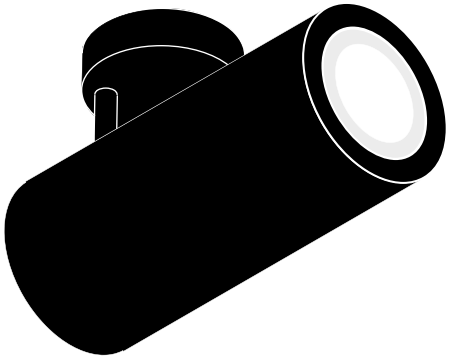

black

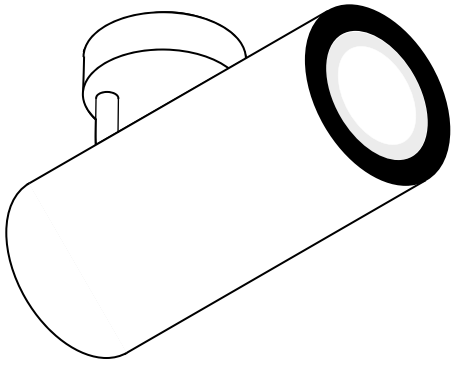

white

				ITEM NO.	GBP	
C	2700K	1925lm	24°	**1004194**	**108.00**	
		1935lm	36°	**1004195**	**108.00**	
		1870lm	60°	**1004196**	**108.00**	
	3000K	1955lm	24°	**1004202**	**108.00**	
		1950lm	36°	**1004203**	**108.00**	
		1870lm	60°	**1004204**	**108.00**	
	4000K	2125lm	24°	**1004210**	**108.00**	
		2120lm	36°	**1004211**	**108.00**	
		2060lm	60°	**1004212**	**108.00**	
DALI	2700K	1925lm	24°	**1004482**	**142.20**	
		1935lm	36°	**1004483**	**142.20**	
		1885lm	60°	**1004484**	**142.20**	
	3000K	1955lm	24°	**1004490**	**142.20**	
		1950lm	36°	**1004491**	**142.20**	
		1880lm	60°	**1004492**	**142.20**	
	4000K	2125lm	24°	**1004498**	**142.20**	
		2120lm	36°	**1004499**	**142.20**	
		2060lm	60°	**1004500**	**142.20**	
C	2700K	1930lm	24°	**1004198**	**108.00**	
		1930lm	36°	**1004199**	**108.00**	
		1885lm	60°	**1004200**	**108.00**	
	3000K	1955lm	24°	**1004206**	**108.00**	
		1970lm	36°	**1004207**	**108.00**	
		1880lm	60°	**1004208**	**108.00**	
	4000K	2125lm	24°	**1004214**	**108.00**	
		2120lm	36°	**1004215**	**108.00**	
		2060lm	60°	**1004216**	**108.00**	
DALI	2700K	1925lm	24°	**1004486**	**142.20**	
		1935lm	36°	**1004487**	**142.20**	
		1885lm	60°	**1004488**	**142.20**	
	3000K	1930lm	24°	**1004494**	**142.20**	
		1970lm	36°	**1004495**	**142.20**	
		1880lm	60°	**1004496**	**142.20**	
	4000K	2120lm	24°	**1004502**	**142.20**	
		2120lm	36°	**1004503**	**142.20**	
		2060lm	60°	**1004504**	**142.20**	

NUMINOS L

CL

Product details:
220-240V ~50/60Hz | 700mA
System output: 28W
Material: aluminium/plastic



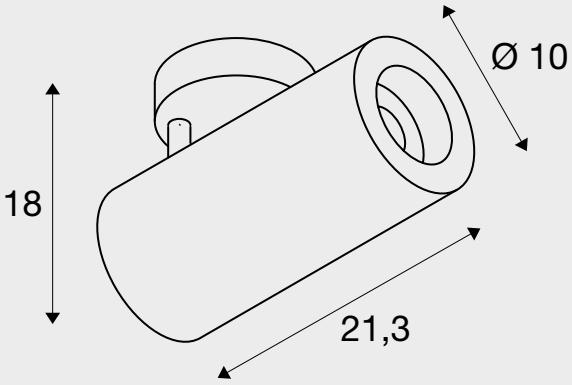

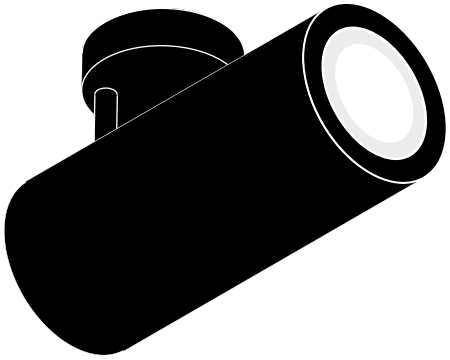

black

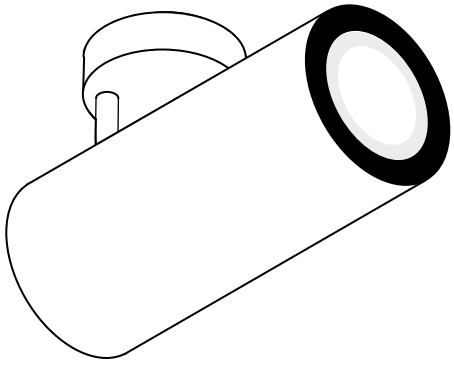

white

				ITEM NO.	GBP	
C	2700K	2440lm	24°	**1004290**	**119.70**	
		2400lm	36°	**1004291**	**119.70**	
		2475lm	60°	**1004292**	**119.70**	
	3000K	2430lm	24°	**1004298**	**119.70**	
		2340lm	36°	**1004299**	**119.70**	
		2400lm	60°	**1004300**	**119.70**	
	4000K	2675lm	24°	**1004306**	**119.70**	
		2620lm	36°	**1004307**	**119.70**	
		2715lm	60°	**1004308**	**119.70**	
DALI	2700K	2440lm	24°	**1004578**	**168.30**	
		2400lm	36°	**1004579**	**168.30**	
		2475lm	60°	**1004580**	**168.30**	
	3000K	2430lm	24°	**1004586**	**168.30**	
		2340lm	36°	**1004587**	**168.30**	
		2400lm	60°	**1004588**	**168.30**	
	4000K	2675lm	24°	**1004594**	**168.30**	
		2620lm	36°	**1004595**	**168.30**	
		2715lm	60°	**1004596**	**168.30**	
C	2700K	2430lm	24°	**1004294**	**119.70**	
		2400lm	36°	**1004295**	**119.70**	
		2475lm	60°	**1004296**	**119.70**	
	3000K	2430lm	24°	**1004302**	**119.70**	
		2340lm	36°	**1004303**	**119.70**	
		2400lm	60°	**1004304**	**119.70**	
	4000K	2675lm	24°	**1004310**	**119.70**	
		2620lm	36°	**1004311**	**119.70**	
		2720lm	60°	**1004312**	**119.70**	
DALI	2700K	2440lm	24°	**1004582**	**168.30**	
		2400lm	36°	**1004583**	**168.30**	
		2475lm	60°	**1004584**	**168.30**	
	3000K	2430lm	24°	**1004590**	**168.30**	
		2340lm	36°	**1004591**	**168.30**	
		2400lm	60°	**1004592**	**168.30**	
	4000K	2675lm	24°	**1004598**	**168.30**	
		2620lm	36°	**1004599**	**168.30**	
		2715lm	60°	**1004600**	**168.30**	

NUMINOS S

CL

Product details:

220-240V ~50/60Hz | 250mA
Total wattage: 10.42W
Material: aluminium/plastic

50000

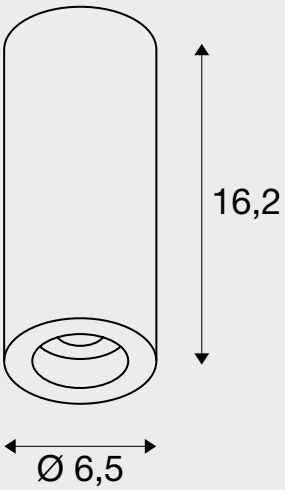

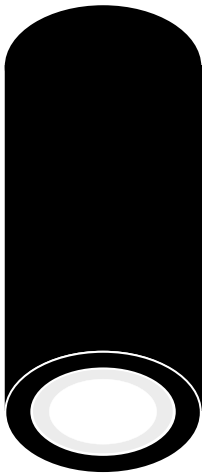

black



white

				ITEM NO.	GBP	
C	2700K	985lm	24°	**1004122**	**76.50**	
		985lm	36°	**1004123**	**76.50**	
		980lm	60°	**1004124**	**76.50**	
	3000K	1020lm	24°	**1004130**	**76.50**	
		1020lm	36°	**1004131**	**76.50**	
		1020lm	60°	**1004132**	**76.50**	
	4000K	1100lm	24°	**1004138**	**76.50**	
		1100lm	36°	**1004139**	**76.50**	
		1100lm	60°	**1004140**	**76.50**	
DALI	2700K	985lm	24°	**1004410**	**112.50**	
		985lm	36°	**1004411**	**112.50**	
		980lm	60°	**1004412**	**112.50**	
	3000K	1020lm	24°	**1004418**	**112.50**	
		1020lm	36°	**1004419**	**112.50**	
		1010lm	60°	**1004420**	**112.50**	
	4000K	1100lm	24°	**1004426**	**112.50**	
		1100lm	36°	**1004427**	**112.50**	
		1100lm	60°	**1004428**	**112.50**	
C	2700K	980lm	24°	**1004126**	**76.50**	
		985lm	36°	**1004127**	**76.50**	
		980lm	60°	**1004128**	**76.50**	
	3000K	1010lm	24°	**1004134**	**76.50**	
		1020lm	36°	**1004135**	**76.50**	
		2620lm	60°	**1004136**	**76.50**	
	4000K	1100lm	24°	**1004142**	**76.50**	
		1100lm	36°	**1004143**	**76.50**	
		1090lm	60°	**1004144**	**76.50**	
DALI	2700K	985lm	24°	**1004414**	**112.50**	
		980lm	36°	**1004415**	**112.50**	
		980lm	60°	**1004416**	**112.50**	
	3000K	1010lm	24°	**1004422**	**112.50**	
		1020lm	36°	**1004423**	**112.50**	
		1020lm	60°	**1004424**	**112.50**	
	4000K	1100lm	24°	**1004430**	**112.50**	
		1100lm	36°	**1004431**	**112.50**	
		1100lm	60°	**1004432**	**112.50**	

NUMINOS M

CL

Product details:

220-240V ~50/60Hz | 500mA
Total wattage: 20.1W
Material: aluminium/plastic



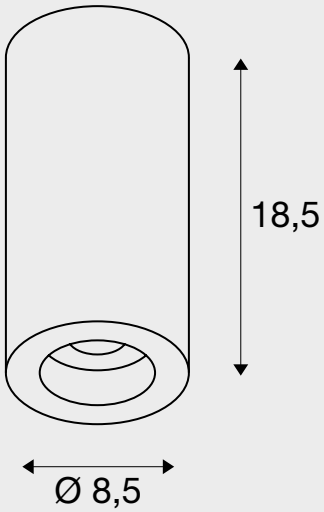

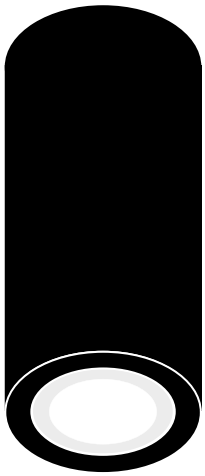

black



white

				ITEM NO.	GBP	
C	2700K	1925lm	24°	**1004218**	**94.50**	
		1930lm	36°	**1004219**	**94.50**	
		1870lm	60°	**1004220**	**94.50**	
	3000K	1950lm	24°	**1004226**	**94.50**	
		1970lm	36°	**1004227**	**94.50**	
		1880lm	60°	**1004228**	**94.50**	
	4000K	2125lm	24°	**1004234**	**94.50**	
		2120lm	36°	**1004235**	**94.50**	
		2060lm	60°	**1004236**	**94.50**	
DALI	2700K	1925lm	24°	**1004506**	**120.60**	
		1935lm	36°	**1004507**	**120.60**	
		1885lm	60°	**1004508**	**120.60**	
	3000K	1930lm	24°	**1004514**	**120.60**	
		1970lm	36°	**1004515**	**120.60**	
		1870lm	60°	**1004516**	**120.60**	
	4000K	2125lm	24°	**1004522**	**120.60**	
		2120lm	36°	**1004523**	**120.60**	
		2060lm	60°	**1004524**	**120.60**	
C	2700K	1925lm	24°	**1004222**	**94.50**	
		1935lm	36°	**1004223**	**94.50**	
		1885lm	60°	**1004224**	**94.50**	
	3000K	1955lm	24°	**1004230**	**94.50**	
		1950lm	36°	**1004231**	**94.50**	
		1870lm	60°	**1004232**	**94.50**	
	4000K	2125lm	24°	**1004238**	**94.50**	
		2120lm	36°	**1004239**	**94.50**	
		2060lm	60°	**1004240**	**94.50**	
DALI	2700K	1925lm	24°	**1004510**	**120.60**	
		1935lm	36°	**1004511**	**120.60**	
		1885lm	60°	**1004512**	**120.60**	
	3000K	1950lm	24°	**1004518**	**120.60**	
		1950lm	36°	**1004519**	**120.60**	
		1880lm	60°	**1004520**	**120.60**	
	4000K	2125lm	24°	**1004526**	**120.60**	
		2120lm	36°	**1004527**	**120.60**	
		2060lm	60°	**1004528**	**120.60**	

NUMINOS L

CL

Product details:
220-240V ~50/60Hz | 700mA
System output: 28W
Material: aluminium/plastic

50000

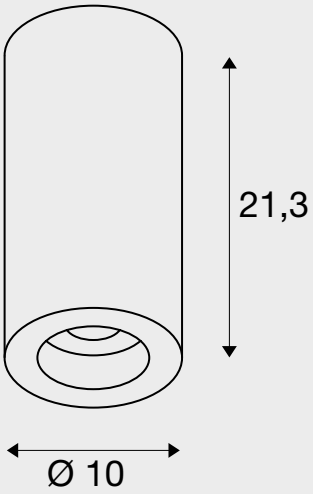

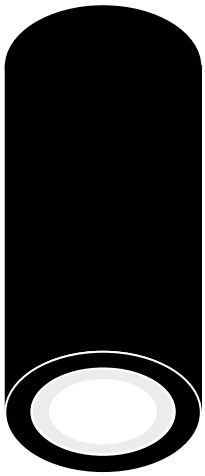

black



white

				ITEM NO.	GBP	
C	2700K	2440lm	24°	**1004314**	**109.80**	
		2400lm	36°	**1004315**	**109.80**	
		2475lm	60°	**1004316**	**109.80**	
	3000K	2430lm	24°	**1004322**	**109.80**	
		2340lm	36°	**1004323**	**109.80**	
		2400lm	60°	**1004324**	**109.80**	
	4000K	2675lm	24°	**1004330**	**109.80**	
		2620lm	36°	**1004331**	**109.80**	
		2715lm	60°	**1004332**	**109.80**	
DALI	2700K	2440lm	24°	**1004602**	**148.50**	
		2400lm	36°	**1004603**	**148.50**	
		2475lm	60°	**1004604**	**148.50**	
	3000K	2430lm	24°	**1004610**	**148.50**	
		2340lm	36°	**1004611**	**148.50**	
		2400lm	60°	**1004612**	**148.50**	
	4000K	2675lm	24°	**1004618**	**148.50**	
		2620lm	36°	**1004619**	**148.50**	
		2715lm	60°	**1004620**	**148.50**	
C	2700K	2440lm	24°	**1004318**	**109.80**	
		2400lm	36°	**1004319**	**109.80**	
		2475lm	60°	**1004320**	**109.80**	
	3000K	2430lm	24°	**1004326**	**109.80**	
		2340lm	36°	**1004327**	**109.80**	
		2400lm	60°	**1004328**	**109.80**	
	4000K	2670lm	24°	**1004334**	**109.80**	
		2620lm	36°	**1004335**	**109.80**	
		2715lm	60°	**1004336**	**109.80**	
DALI	2700K	2440lm	24°	**1004606**	**148.50**	
		2400lm	36°	**1004607**	**148.50**	
		2475lm	60°	**1004608**	**148.50**	
	3000K	2430lm	24°	**1004614**	**148.50**	
		2340lm	36°	**1004615**	**148.50**	
		2400lm	60°	**1004616**	**148.50**	
	4000K	2675lm	24°	**1004622**	**148.50**	
		2620lm	36°	**1004623**	**148.50**	
		2715lm	60°	**1004624**	**148.50**	

NUMINOS S

PD

Product details:
220-240V ~50/60Hz | 250mA
Total wattage: 10.42W
Material: aluminium/plastic

50000

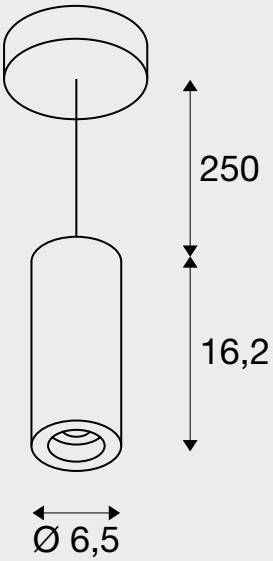

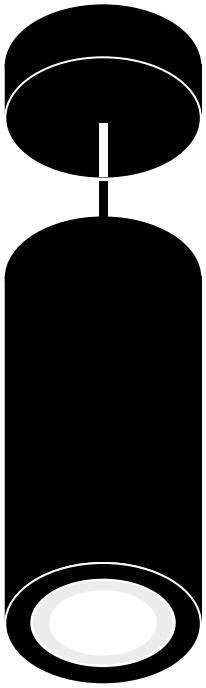

black

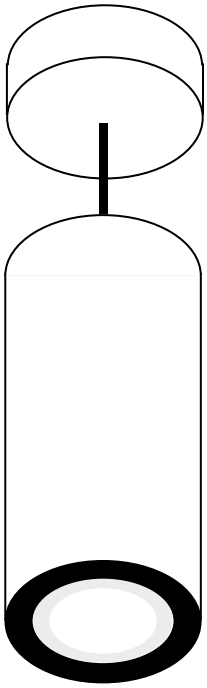

white

				ITEM NO.	GBP	
C	2700K	980lm	24°	**1004146**	**103.50**	
		985lm	36°	**1004147**	**103.50**	
		980lm	60°	**1004148**	**103.50**	
	3000K	1020lm	24°	**1004154**	**103.50**	
		1020lm	36°	**1004155**	**103.50**	
		1020lm	60°	**1004156**	**103.50**	
	4000K	1100lm	24°	**1004162**	**103.50**	
		1100lm	36°	**1004163**	**103.50**	
		1100lm	60°	**1004164**	**103.50**	
DALI	2700K	985lm	24°	**1004434**	**147.60**	
		985lm	36°	**1004435**	**147.60**	
		980lm	60°	**1004436**	**147.60**	
	3000K	1020lm	24°	**1004442**	**147.60**	
		1020lm	36°	**1004443**	**147.60**	
		1020lm	60°	**1004444**	**147.60**	
	4000K	1100lm	24°	**1004450**	**147.60**	
		1100lm	36°	**1004451**	**147.60**	
		1100lm	60°	**1004452**	**147.60**	
C	2700K	985lm	24°	**1004150**	**103.50**	
		985lm	36°	**1004151**	**103.50**	
		980lm	60°	**1004152**	**103.50**	
	3000K	1020lm	24°	**1004158**	**103.50**	
		1020lm	36°	**1004159**	**103.50**	
		1020lm	60°	**1004160**	**103.50**	
	4000K	1100lm	24°	**1004166**	**103.50**	
		1100lm	36°	**1004167**	**103.50**	
		1100lm	60°	**1004168**	**103.50**	
DALI	2700K	985lm	24°	**1004438**	**147.60**	
		985lm	36°	**1004439**	**147.60**	
		980lm	60°	**1004440**	**147.60**	
	3000K	1020lm	24°	**1004446**	**147.60**	
		1020lm	36°	**1004447**	**147.60**	
		1020lm	60°	**1004448**	**147.60**	
	4000K	1100lm	24°	**1004454**	**147.60**	
		1100lm	36°	**1004455**	**147.60**	
		1100lm	60°	**1004456**	**147.60**	

NUMINOS M

PD

Product details:
220-240V ~50/60Hz | 500mA
Total wattage: 20.1W
Material: aluminium/plastic

50000

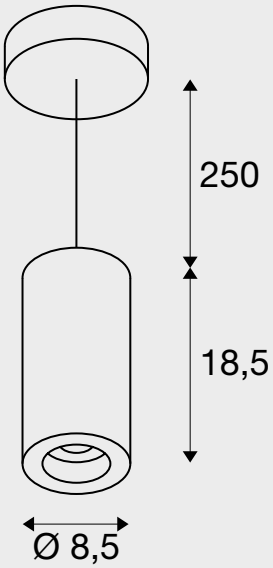

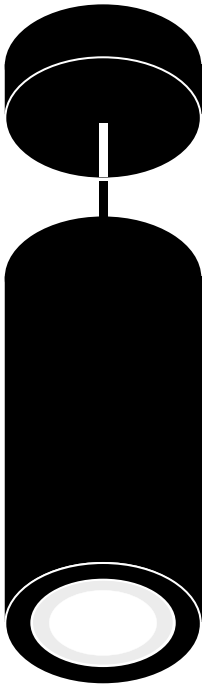

black

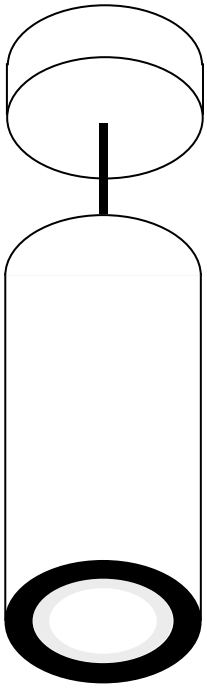

white

				ITEM NO.	GBP	
C	2700K	1925lm	24°	**1004242**	**122.40**	
		1935lm	36°	**1004243**	**122.40**	
		1885lm	60°	**1004244**	**122.40**	
	3000K	1955lm	24°	**1004250**	**122.40**	
		1970lm	36°	**1004251**	**122.40**	
		1870lm	60°	**1004252**	**122.40**	
	4000K	2125lm	24°	**1004258**	**122.40**	
		2120lm	36°	**1004259**	**122.40**	
		2060lm	60°	**1004260**	**122.40**	
DALI	2700K	1925lm	24°	**1004530**	**156.60**	
		1935lm	36°	**1004531**	**156.60**	
		1885lm	60°	**1004532**	**156.60**	
	3000K	1955lm	24°	**1004538**	**156.60**	
		1970lm	36°	**1004539**	**156.60**	
		1880lm	60°	**1004540**	**156.60**	
	4000K	2125lm	24°	**1004546**	**156.60**	
		2120lm	36°	**1004547**	**156.60**	
		2060lm	60°	**1004548**	**156.60**	
C	2700K	1925lm	24°	**1004246**	**122.40**	
		1935lm	36°	**1004247**	**122.40**	
		1885lm	60°	**1004248**	**122.40**	
	3000K	1955lm	24°	**1004254**	**122.40**	
		1950lm	36°	**1004255**	**122.40**	
		1880lm	60°	**1004256**	**122.40**	
	4000K	2125lm	24°	**1004262**	**122.40**	
		2120lm	36°	**1004263**	**122.40**	
		2060lm	60°	**1004264**	**122.40**	
DALI	2700K	1930lm	24°	**1004534**	**156.60**	
		1935lm	36°	**1004535**	**156.60**	
		1885lm	60°	**1004536**	**156.60**	
	3000K	1955lm	24°	**1004542**	**156.60**	
		1970lm	36°	**1004543**	**156.60**	
		1870lm	60°	**1004544**	**156.60**	
	4000K	2125lm	24°	**1004550**	**156.60**	
		2120lm	36°	**1004551**	**156.60**	
		2060lm	60°	**1004552**	**156.60**	

NUMINOS L

PD

Product details:
220-240V ~50/60Hz| 700mA
System output: 28W
Material: aluminium/plastic

50000

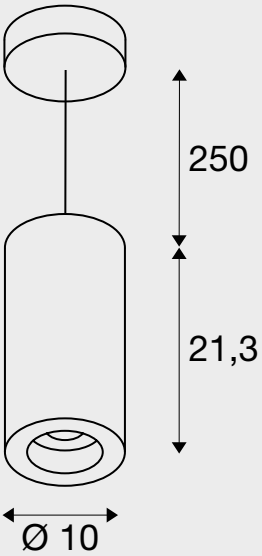

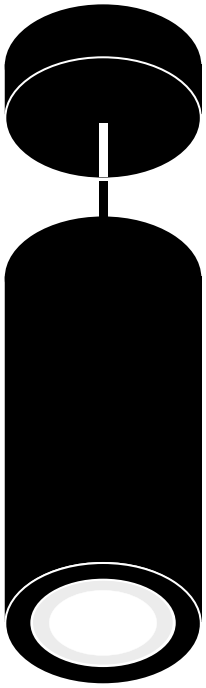

black

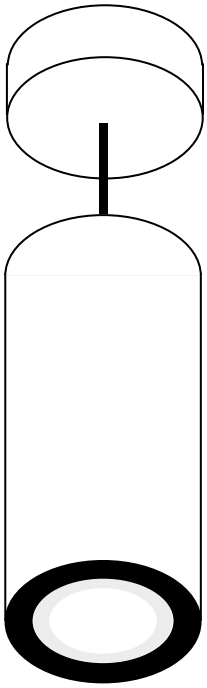

white

				ITEM NO.	GBP	
C	2700K	2440lm	24°	**1004338**	**137.70**	
		2400lm	36°	**1004339**	**137.70**	
		2475lm	60°	**1004340**	**137.70**	
	3000K	2430lm	24°	**1004346**	**137.70**	
		2340lm	36°	**1004347**	**137.70**	
		2400lm	60°	**1004348**	**137.70**	
	4000K	2670lm	24°	**1004354**	**137.70**	
		2620lm	36°	**1004355**	**137.70**	
		2715lm	60°	**1004356**	**137.70**	
DALI	2700K	2430lm	24°	**1004626**	**180.00**	
		2400lm	36°	**1004627**	**180.00**	
		2475lm	60°	**1004628**	**180.00**	
	3000K	2430lm	24°	**1004634**	**180.00**	
		2340lm	36°	**1004635**	**180.00**	
		2400lm	60°	**1004636**	**180.00**	
	4000K	2675lm	24°	**1004642**	**180.00**	
		2620lm	36°	**1004643**	**180.00**	
		2715lm	60°	**1004644**	**180.00**	
C	2700K	2440lm	24°	**1004342**	**137.70**	
		2400lm	36°	**1004343**	**137.70**	
		2475lm	60°	**1004344**	**137.70**	
	3000K	2430lm	24°	**1004350**	**137.70**	
		2340lm	36°	**1004351**	**137.70**	
		2400lm	60°	**1004352**	**137.70**	
	4000K	2670lm	24°	**1004358**	**137.70**	
		2620lm	36°	**1004359**	**137.70**	
		2720lm	60°	**1004360**	**137.70**	
DALI	2700K	2440lm	24°	**1004630**	**180.00**	
		2400lm	36°	**1004631**	**180.00**	
		2475lm	60°	**1004632**	**180.00**	
	3000K	2430lm	24°	**1004638**	**180.00**	
		2340lm	36°	**1004639**	**180.00**	
		2400lm	60°	**1004640**	**180.00**	
	4000K	2675lm	24°	**1004646**	**180.00**	
		2620lm	36°	**1004647**	**180.00**	
		2715lm	60°	**1004648**	**180.00**	


132660 + 1000580 102 + 105


132661 + 1000773 102


132660 + 1000580 102 + 105

FENDA
PD, E27

SOCKET INSIDE

MIX & match







- Can be individually altered through the selection of lampshade

Product details
230V -50Hz
Material: steel/plastic



Dimensional drawing



Tip
Open cable end
Can be combined with Fitu Mix & Match accessories on page 98

Recommended lamp

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details
max. 60W

Variant	Item No.	GBP
E27		
black	132660	22.50
E27		
white	132661	22.50
E27		
chrome	132662	25.20

FENDA
Glass shade

MIX & match







- Can be individually altered through the selection of light base

Product details
Material: glass



Dimensional drawing



Tip
max. 40W
Can be combined with Fitu Mix & Match accessories on page 98

Variant	Item No.	GBP
brown clear	1000773	49.50
white	1002217	24.80

FENDA
diameter 40 cm, round

MIX & match







- Can be individually altered through the selection of light base

Product details
Material: Polymethylacrylate (PMMA)



Dimensional drawing



Tip
max. 60W

Variant	Item No.	GBP
glossy white	1000764	76.50

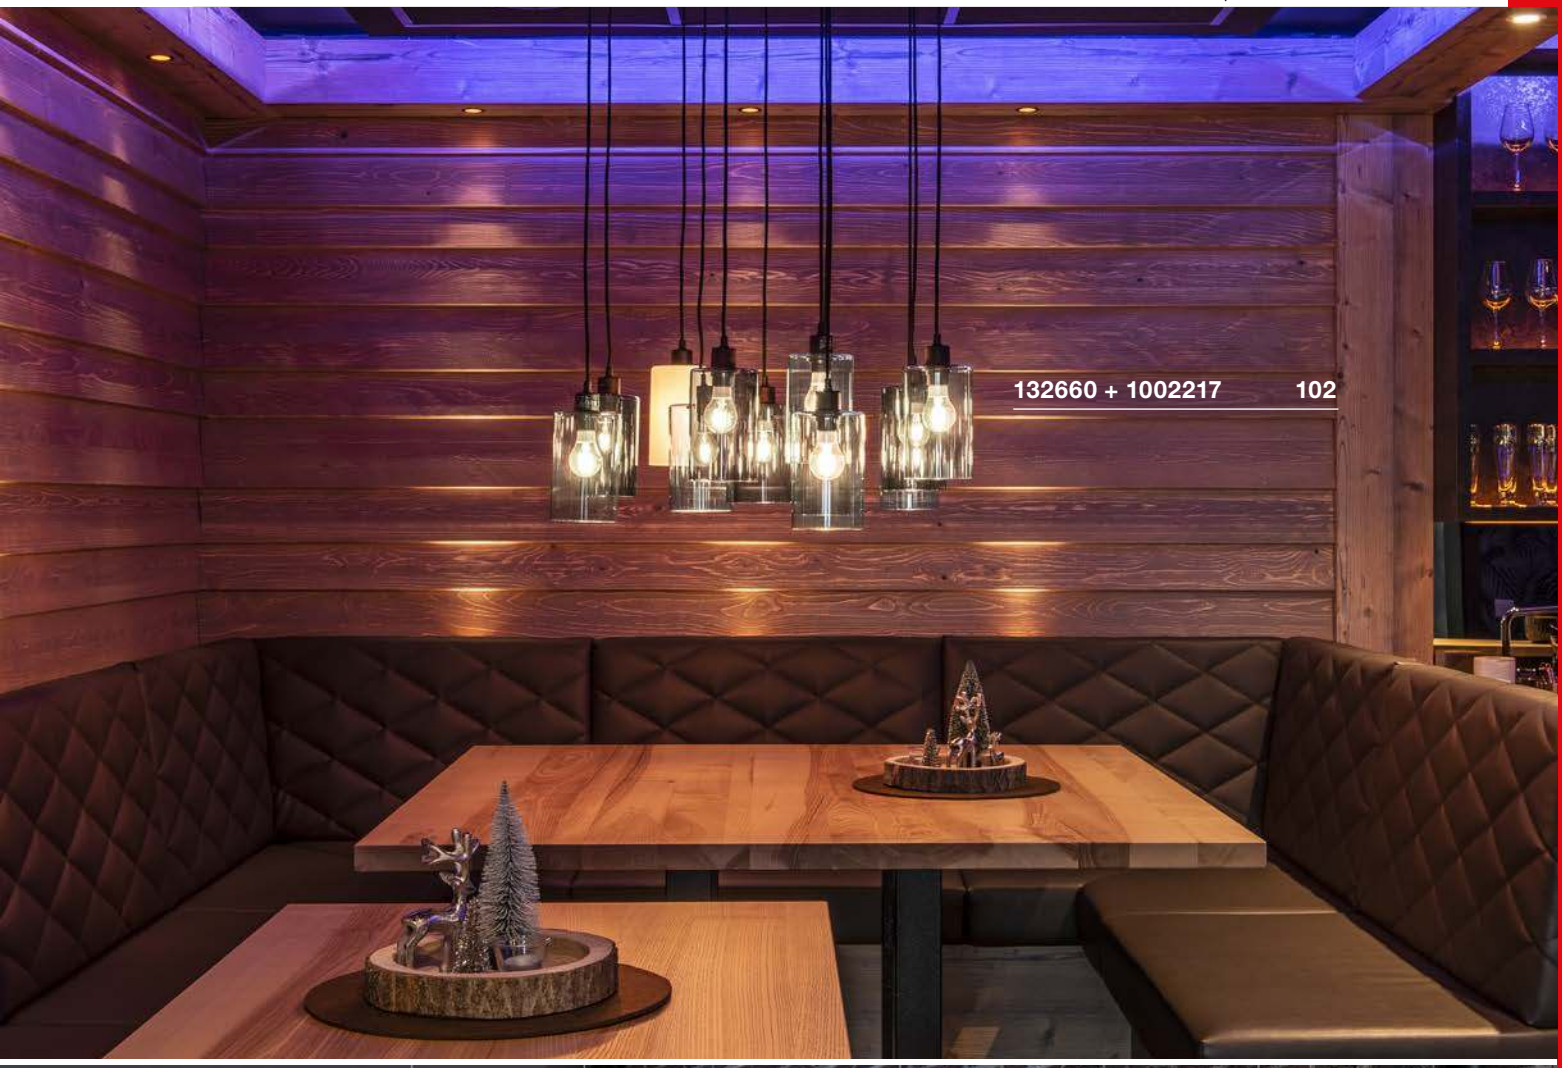

132660 + 1002217 102

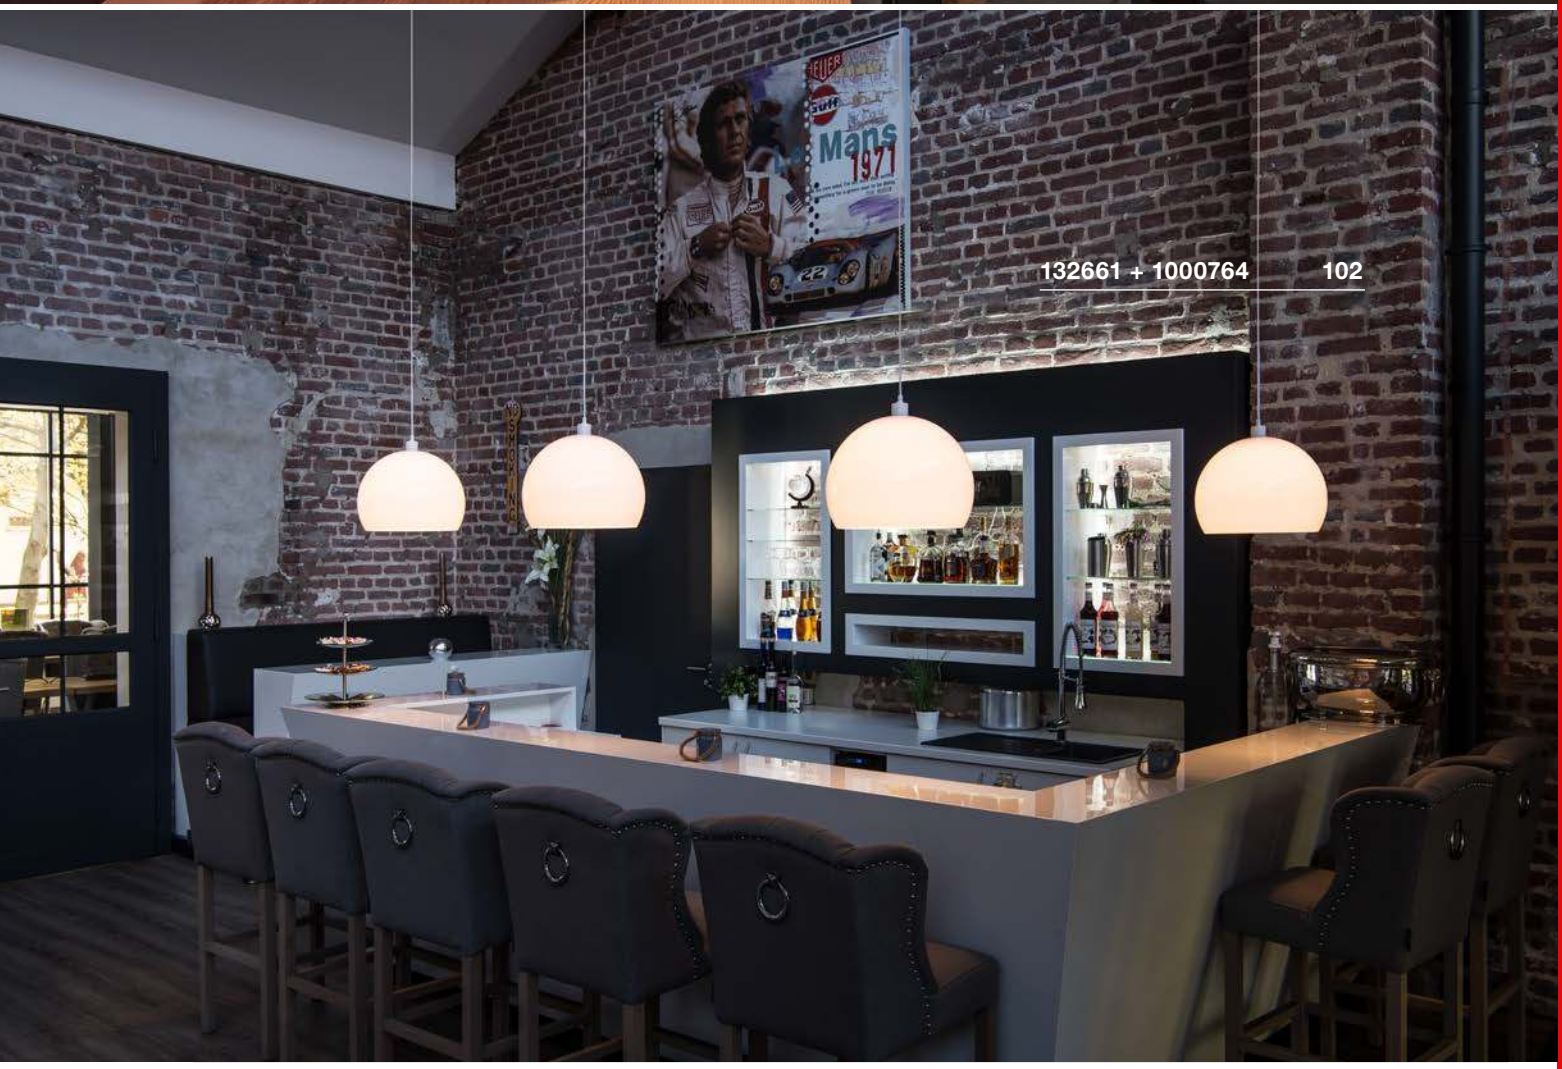

132661 + 1000764 102

FENDA
diameter 15 cm, round







- Can be individually altered through the selection of light base

Product details

Material: textile/steel



Dimensional drawing



Tip

max. 40W







Variant	Item No.	GBP
white	156141	34.60
beige	156143	34.60
black/copper	156152	40.50

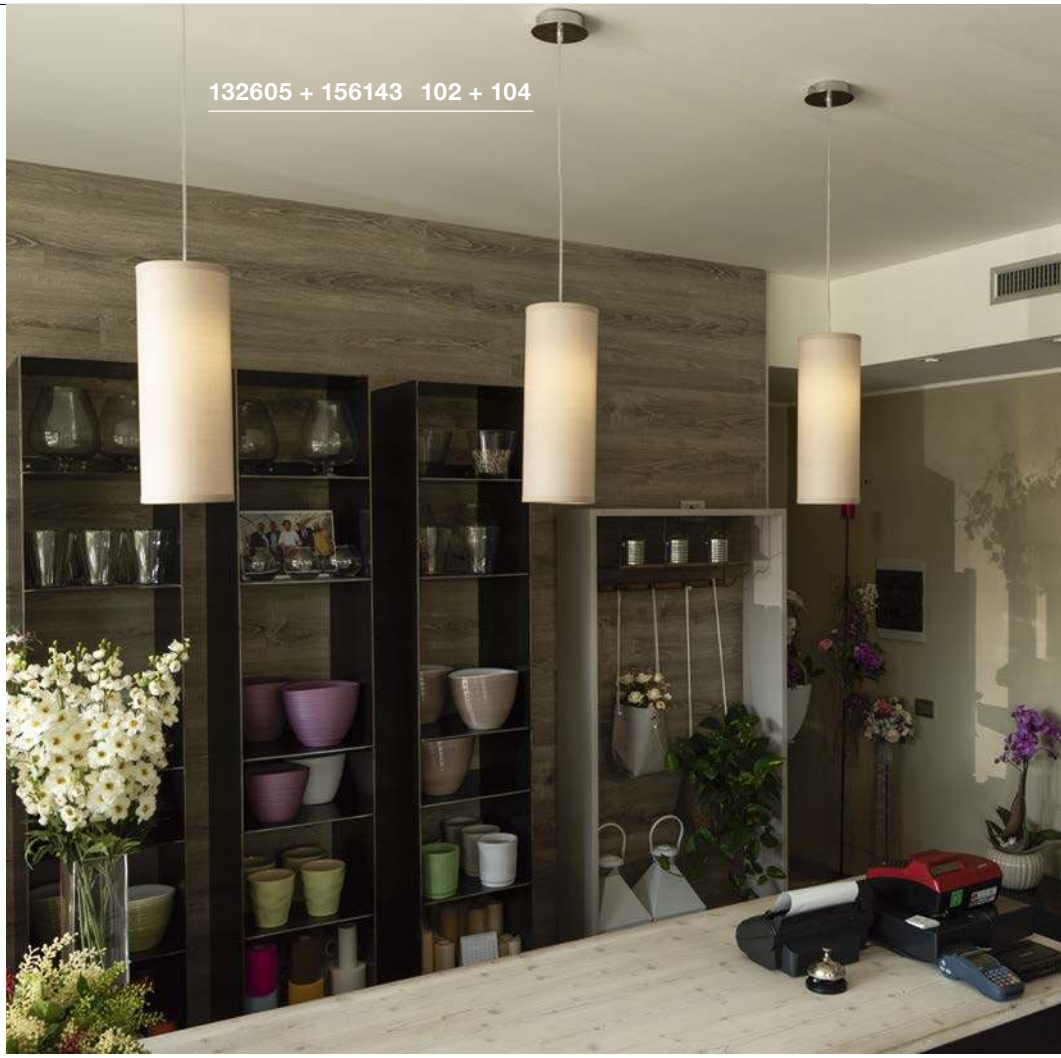



FENDA
diameter 30 cm, round





- Can be individually altered through the selection of light base

Product details

Material: textile/steel



Dimensional drawing



Tip

max. 60W
Acrylic glass cover (155570) to close the shade on one side available as accessory.







Accessory recommendation

Acrylic glass cover
Item No. 155570 | 22.50 GBP

Variant	Item No.	GBP
white	155582	40.50
beige	155583	40.50
black/copper	155592	54.00

FENDA
diameter 45 cm, round







- Can be individually altered through the selection of light base

Product details

Material: textile/steel



Dimensional drawing



Tip

max. 60W
Acrylic glass cover (156100) to close the shade on one side available as accessory.







Accessory recommendation

Acrylic glass cover
Item No. 156100 | 34.20 GBP

Variant	Item No.	GBP
white	156111	63.00
beige	156113	63.00
black/copper	156122	67.50

FENDA
diameter 70 cm, round







- Can be individually altered through the selection of light base

Product details

Material: textile/steel



Dimensional drawing



Tip

max. 60W
Acrylic glass cover (1000957) to close the shade on one side available as accessory.





Accessory recommendation

Acrylic glass cover
Item No. 1000957 | 72.00 GBP

Variant	Item No.	GBP
white	1000579	85.50
black/copper	1000580	99.00

PLASTRA 25
PD, round, TCR-TSE

SOCKET INSIDE







- Can be individually designed with colours, stickers & more



Product details

230V -50Hz
Material: gypsum/steel



Dimensional drawing



Recommended lamp

LED GX53 8,2W 120°
3000K 600lm
9kWh/1000h
Item No. 550073 | 20.70 GBP

LED GX53 8,2W 120°
4000K 620lm
9kWh/1000h
Item No. 550074 | 20.70 GBP

Lamp details

max. 11W TCR-TSE

Variant	Item No.	GBP
GX53 | TCR-TSE		
matt white	**1002047**	**101.70**

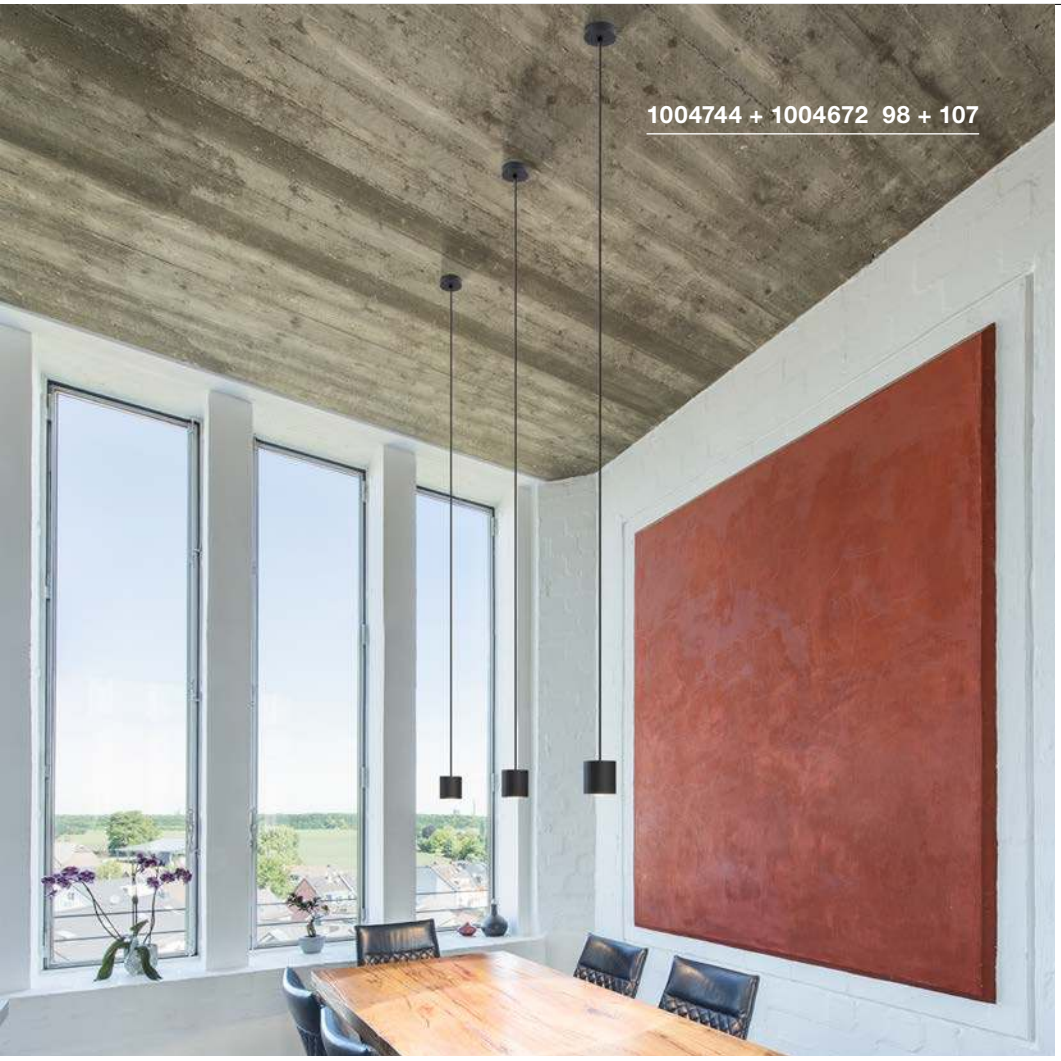

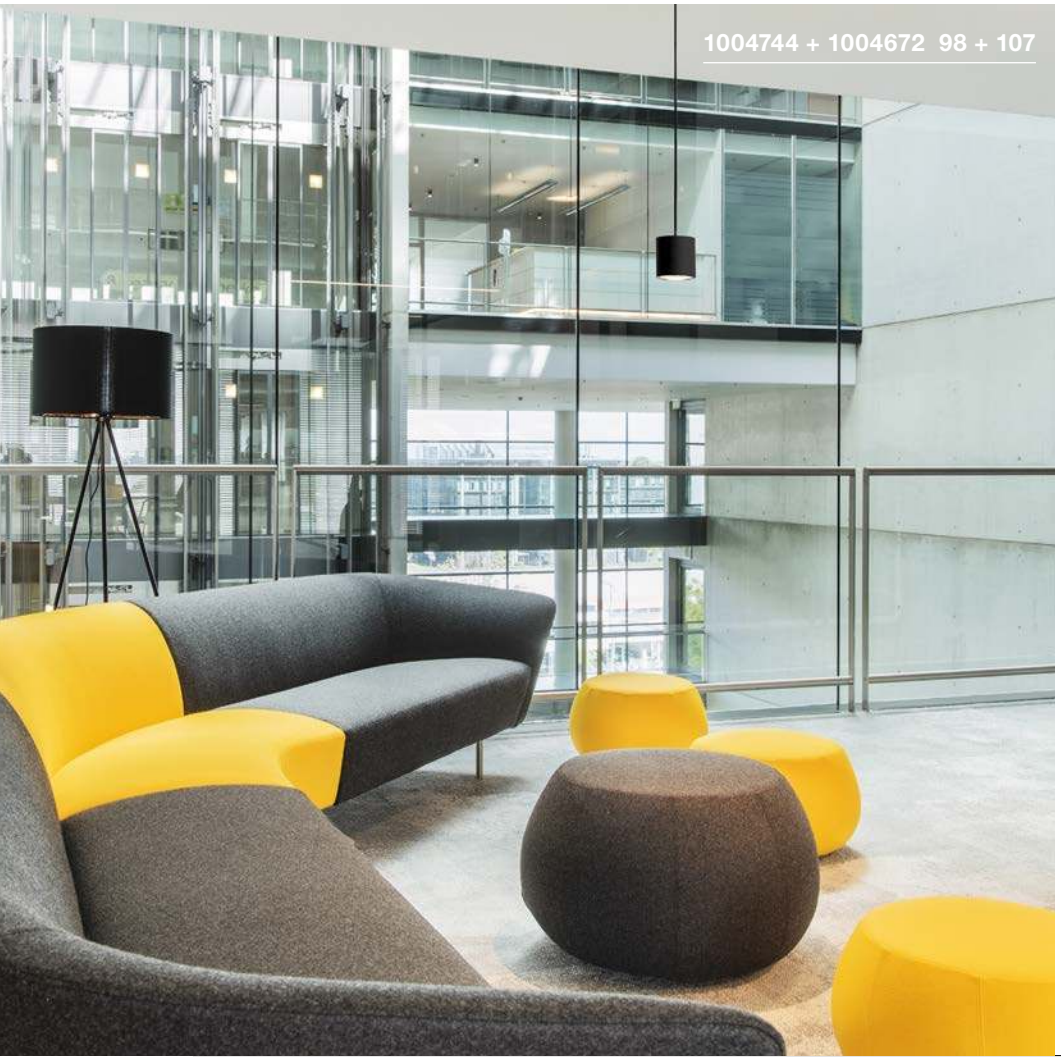

OCULUS
PD, single, PHASE







Product details

220-240V ~50/60Hz | 250mA
Total wattage: 10.5W
Material: aluminium/glass
Dimmable: C

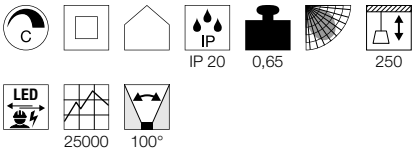

Dimensional drawing



Tip

Open cable end

Variant	Item No.	GBP
36-780lm | 2000-3000K | CRI>90		
■ matt black	1004672	184.50
36-780lm | 2000-3000K | CRI>90		
□ matt white	1004673	184.50

LIGHT EYE® 90
PD, GU10

SOCKET INSIDE







- The optional decorative ring for the lightbulb in the matching colour reduces the distance between the housing and the lightbulb

Product details
220-240V ~50/60Hz
Material: steel



Dimensional drawing



Tip
Textile cable

Accessory recommendation

Lamp decorative ring diameter 5.7cm
Item No. 151040 | 4.00 GBP

Lamp decorative ring diameter 5.7cm
Item No. 151041 | 4.00 GBP

Lamp decorative ring diameter 5.7cm
Item No. 151049 | 5.90 GBP

Recommended lamp

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details
max. 6W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 black/chrome	133490	63.00
GU10 | QPAR51 white/chrome	133491	63.00

LIGHT EYE® 150
PD, QPAR111

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: steel



Dimensional drawing



Tip
Textile cable

Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP

LED GU10 6,5W 38°
2700K 390lm
7kWh/1000h
Item No. 551882 | 40.50 GBP

Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 white/chrome	133481	90.00
GU10 | QPAR111 chrome	133482	94.50
GU10 | QPAR111 copper	133489	117.00






133481 108

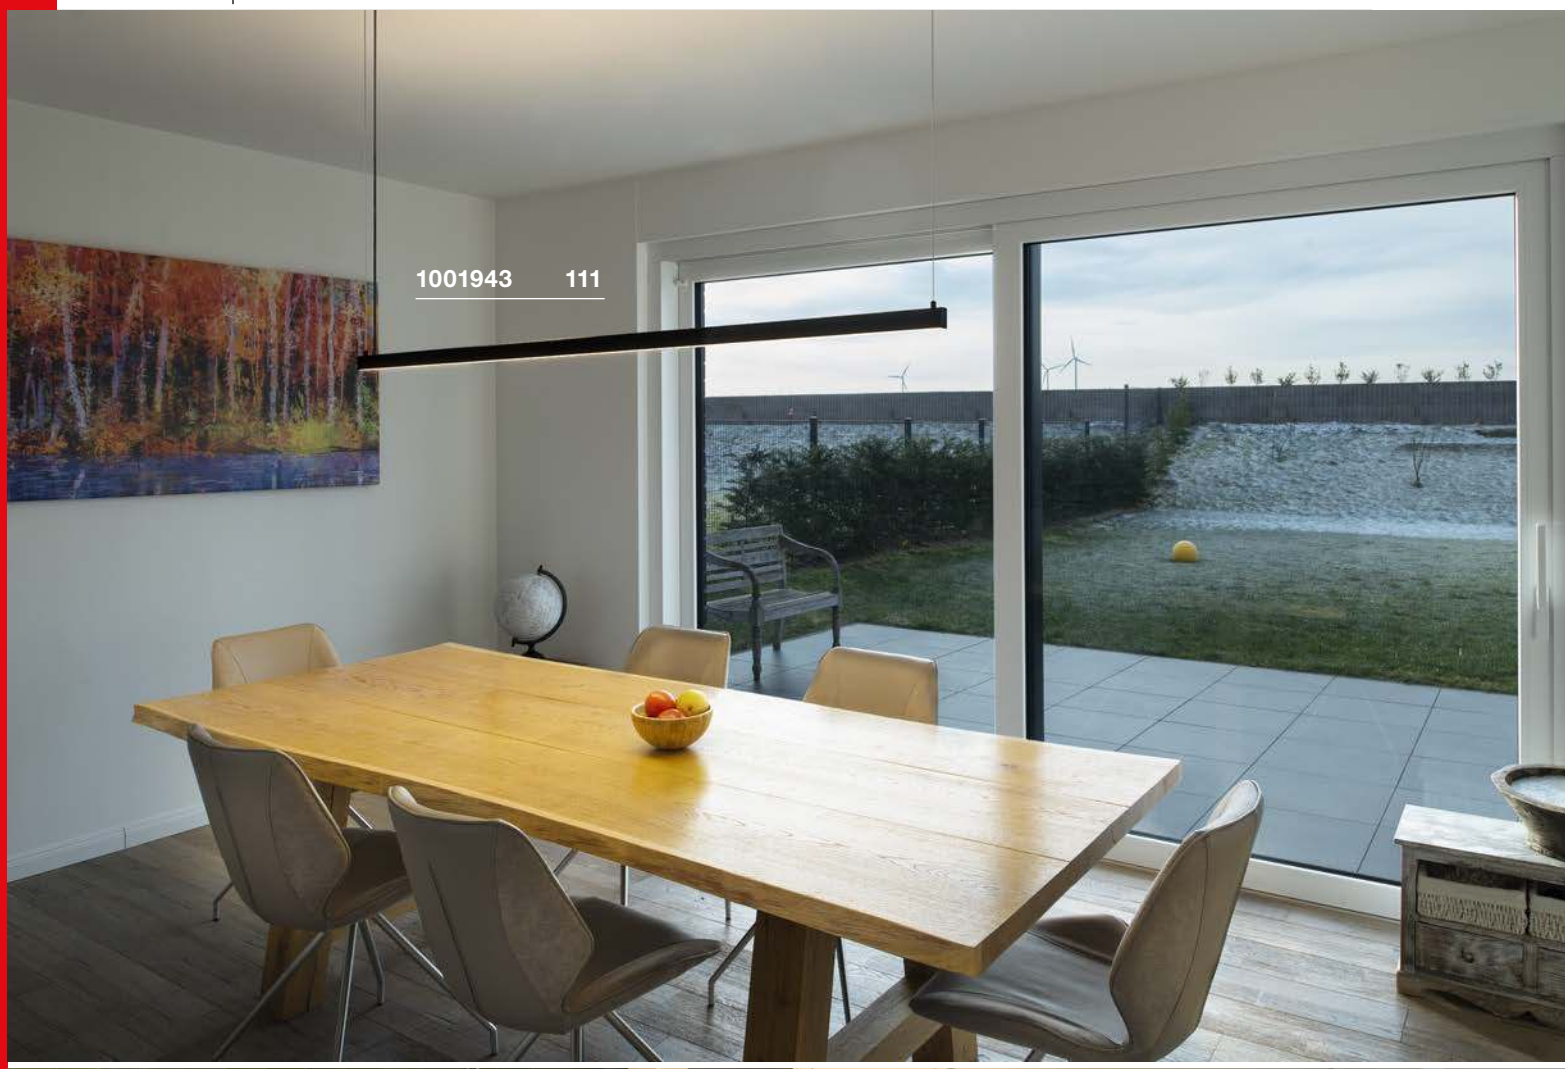
1001943 111


1001941 111

VINCELLI D
PD, PHASE

LED INSIDE



- Slim design
- Light body made of real bamboo

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: bamboo/steel
Dimmable: C, L

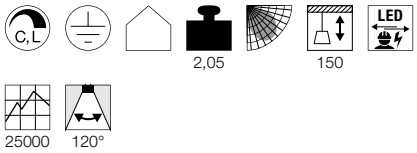

Dimensional drawing



Variant	Item No.	GBP
1400lm | 2700K | CRI>80		
anthracite / brown	156268 ▼	359.10

AROSA
PD, 1,25m, PHASE

LED INSIDE



- Linear design
- Direct and indirect light

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 32W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C

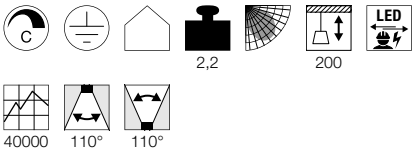

Dimensional drawing



Variant	Item No.	GBP
Up: 750lm | 3000K | CRI>80 Down: 950lm | 3000K | CRI>80		
matt black	1001940	404.10
Up: 750lm | 3000K | CRI>80 Down: 950lm | 3000K | CRI>80		
matt white	1001941	404.10
Up: 750lm | 3000K | CRI>80 Down: 950lm | 3000K | CRI>80		
aluminium	1001942	404.10

AROSA
PD, 2m, PHASE

LED INSIDE

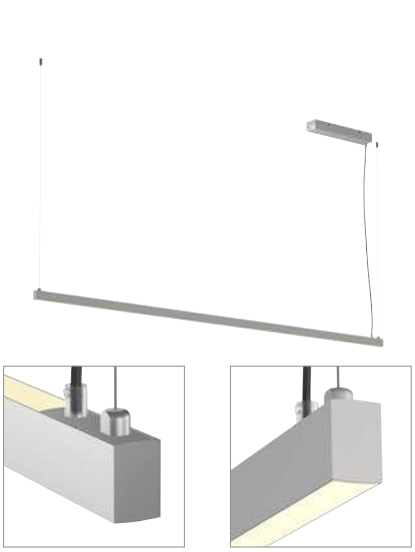

- Linear design
- Direct and indirect light

Product details

220-240V ~50/60Hz | 600mA
Total wattage: 65W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C

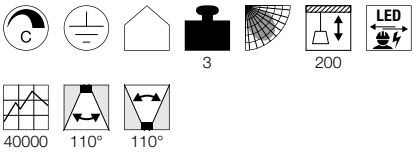

Dimensional drawing



Variant	Item No.	GBP
Up: 1800lm | 3000K | CRI>80 Down: 1800lm | 3000K | CRI>80		
matt black	1001943	449.10
Up: 1800lm | 3000K | CRI>80 Down: 1800lm | 3000K | CRI>80		
matt white	1001944	449.10
Up: 1800lm | 3000K | CRI>80 Down: 1800lm | 3000K | CRI>80		
aluminium	1001945	449.10

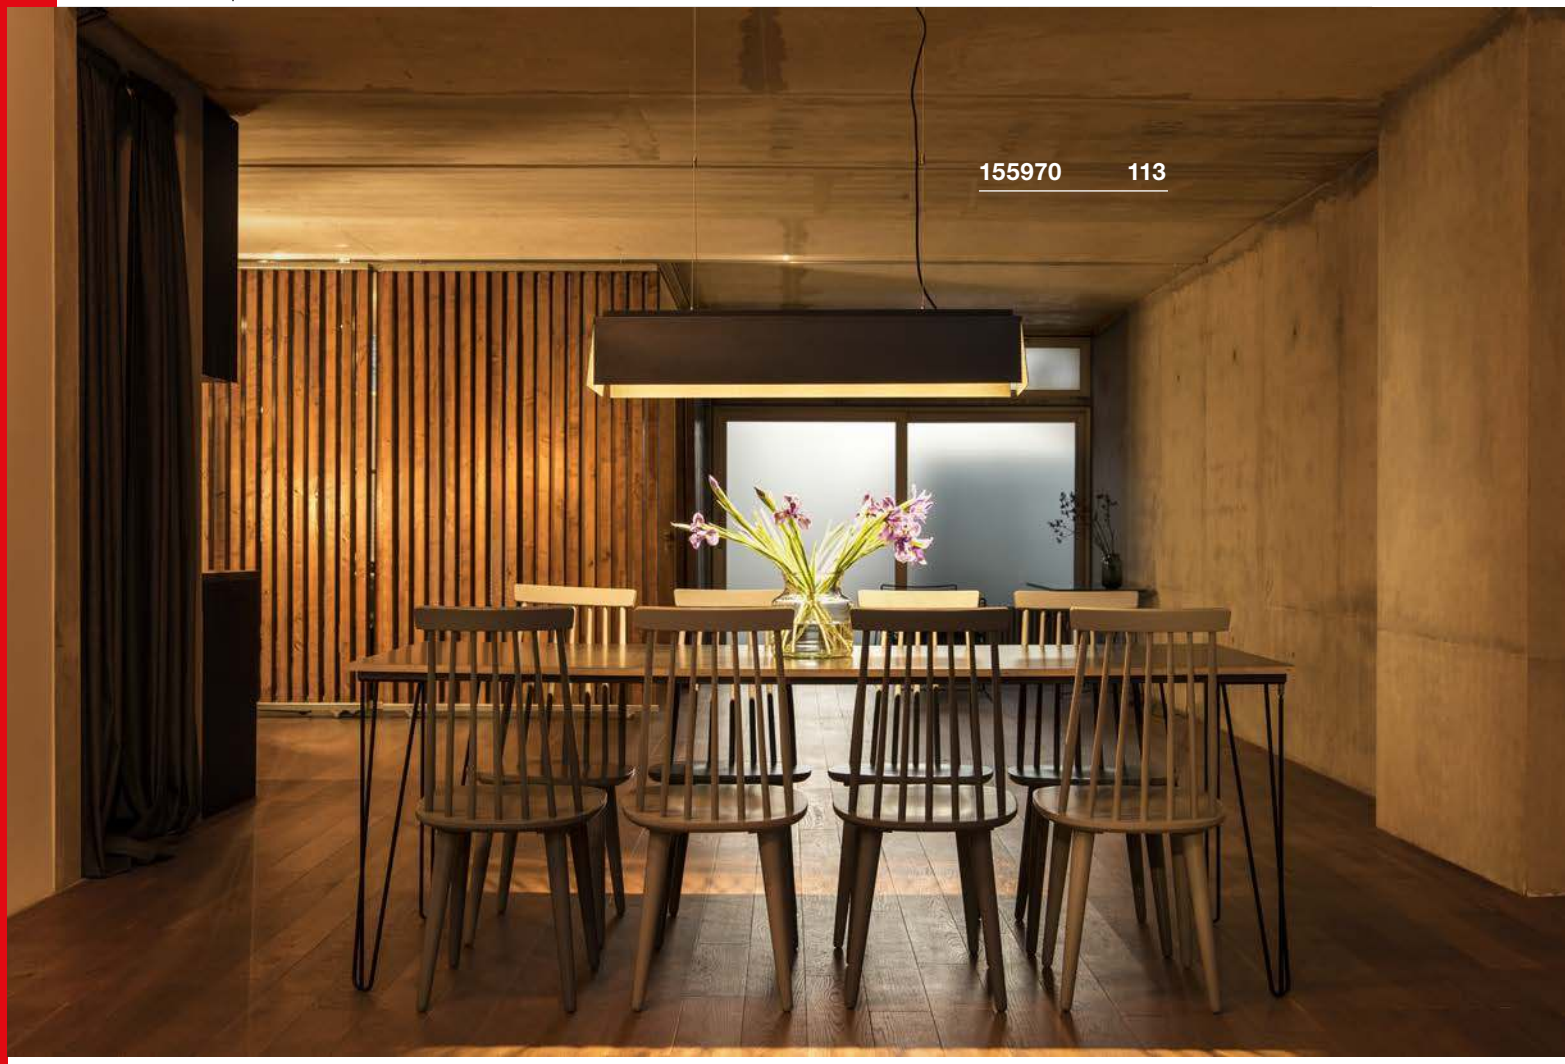
155970 113

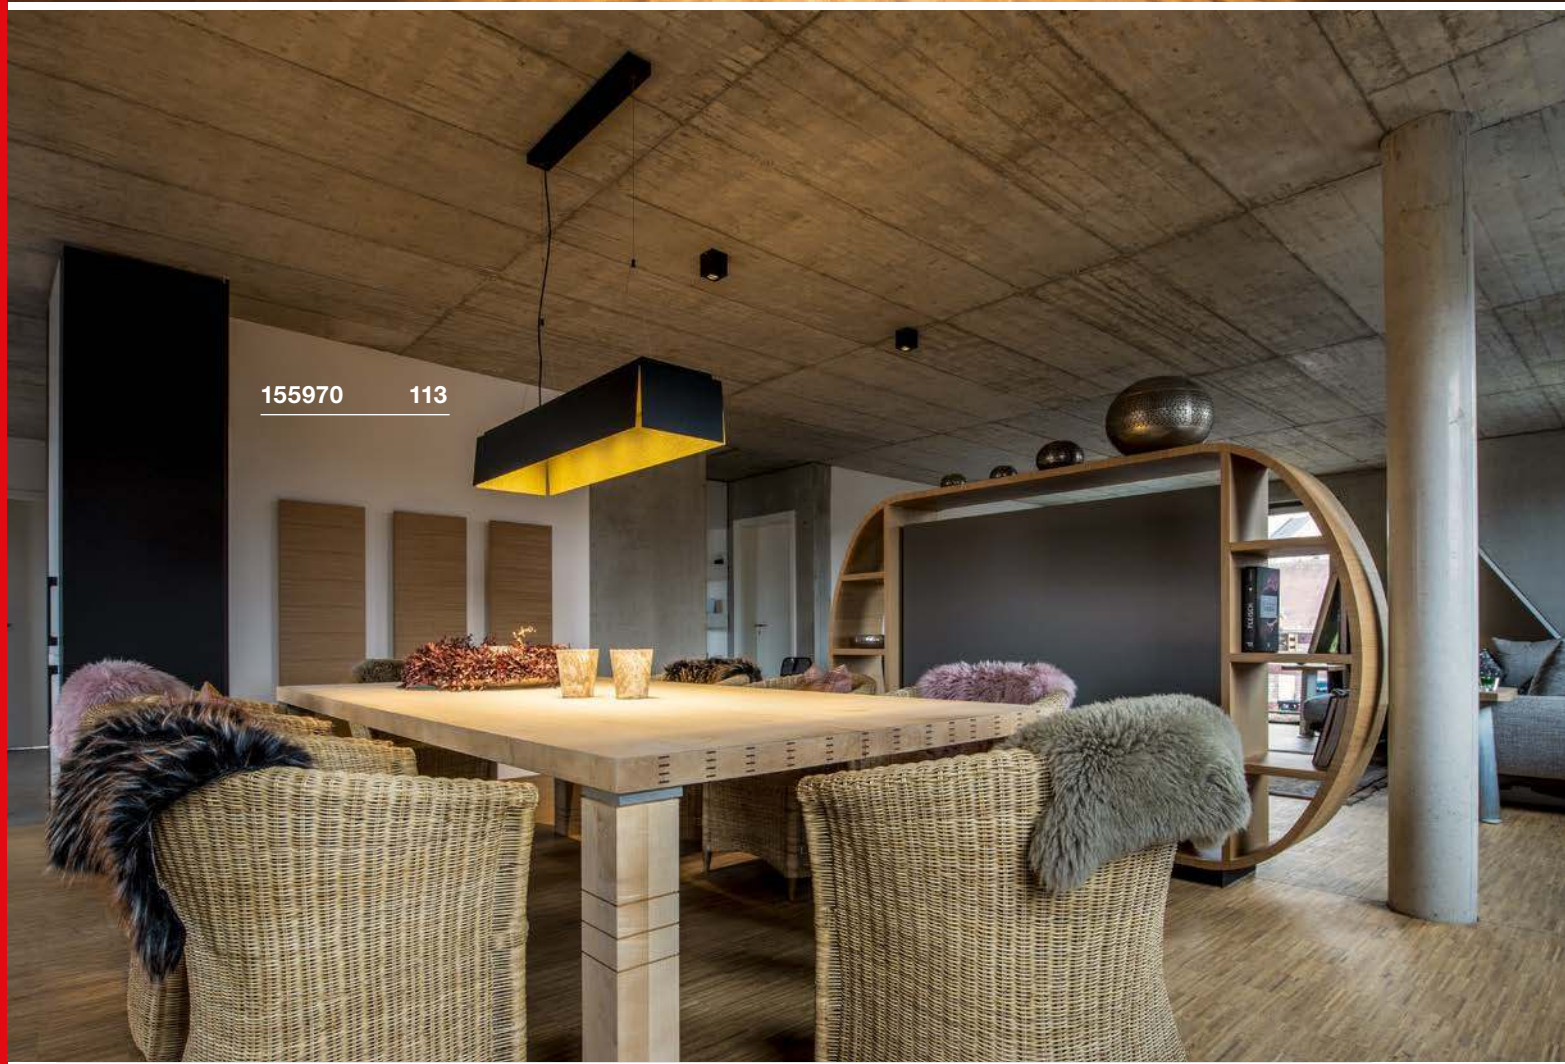
155970 113





AVENTO 30
PD

LED INSIDE







- Textured and gold-coloured interior coating

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium
Dimmable: C





Dimensional drawing



Tip

Textile cable

Variant	Item No.	GBP
660lm | 3000K | CRI>80 matt black/gold	**155960**	**293.40**

AVENTO 110
PD

LED INSIDE







- Textured and gold-coloured interior coating

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium
Dimmable: C





Dimensional drawing



Tip

Textile cable

Variant	Item No.	GBP
250lm · 3000K · CRI>80 matt black/gold	**155970**	**568.80**

PHELIA 10
PD, E27

SOCKET INSIDE







- Individual light body shape
- Can be combined to form a cloud of lighting through individual composition

Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Textile cable

Recommended lamp

LED E27 7W
2700K 640lm
7kWh/1000h
Item No. 1003085 | 8.10 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 23 W

Variant	Item No.	GBP
E27 black/gold	1002951	103.50
E27 black/gold	133330	108.00
E27 white	1002139	108.00



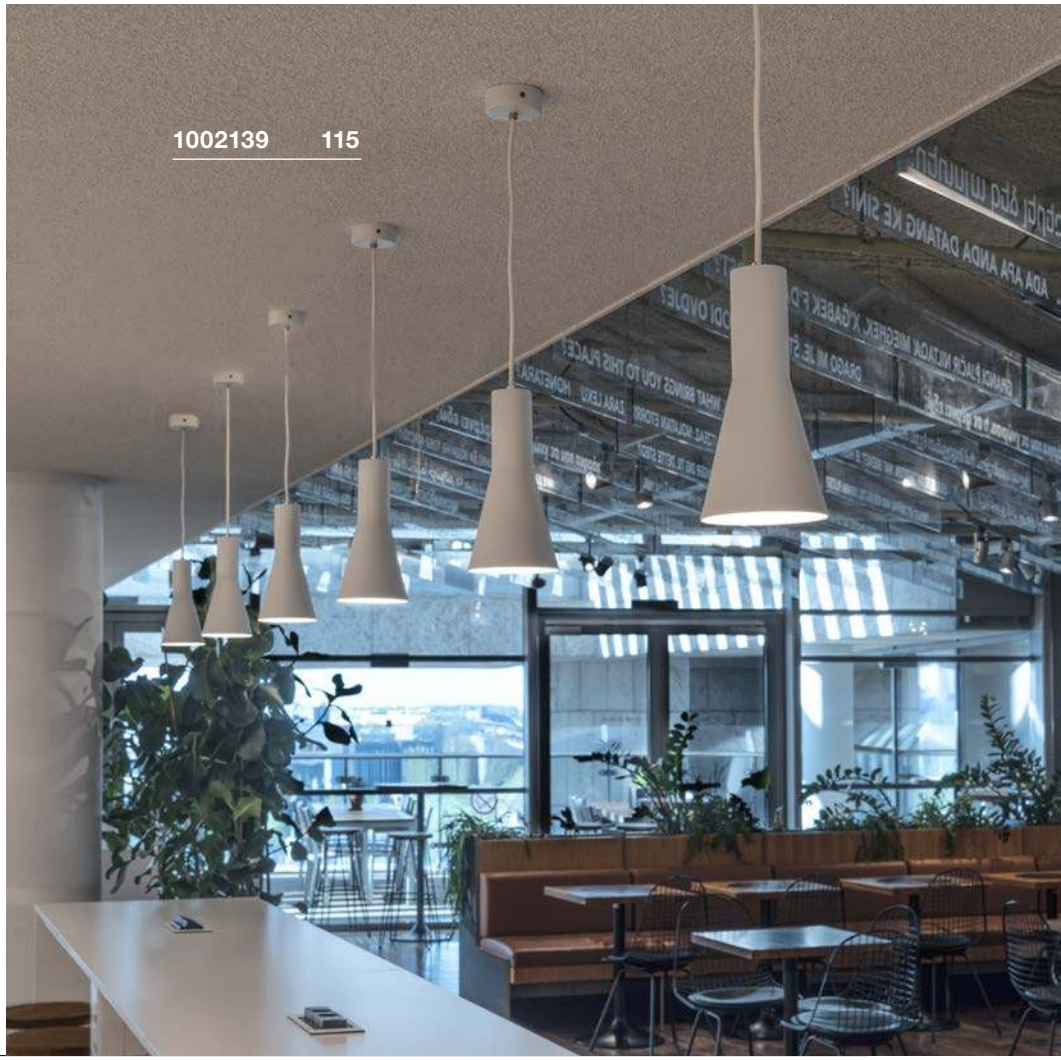

PHELIA 20
PD, E27

SOCKET INSIDE







- Individual light body shape
- Can be combined to form a cloud of lighting through individual composition

Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip
Textile cable

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details
max. 23 W

Variant	Item No.	GBP
E27		
black/gold	**1002948**	**112.50**
E27		
black/gold	**133300**	**108.00**
E27		
white	**1002136**	**108.00**

PHELIA 25
PD, E27

SOCKET INSIDE







- Individual light body shape
- Can be combined to form a cloud of lighting through individual composition

Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip
Textile cable

Recommended lamp

LED E27 4W 180°
2000-2900K 200lm
4kWh/1000h
Item No. 1003098 | 47.70 GBP



LED E27 7W 280°
2200-2700K 830lm
7kWh/1000h
Item No. 1002126 | 17.10 GBP



Lamp details
max. 23 W

Variant	Item No.	GBP
E27		
black/gold	**1002949**	**126.00**
E27		
black/gold	**133310**	**117.00**
E27		
white	**1002137**	**117.00**

PHELIA 30
PD, E27

SOCKET INSIDE







- Individual light body shape
- Can be combined to form a cloud of lighting through individual composition

Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip
Textile cable

Recommended lamp

LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP



LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP



Lamp details
max. 23 W

Variant	Item No.	GBP
E27		
black/gold	**1002950**	**148.50**
E27		
black/gold	**133320**	**148.50**
E27		
white	**1002138**	**148.50**

BATO 35
PD, PHASE

LED INSIDE







- Can be combined to form a cloud of lighting through individual composition

Product details
220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C

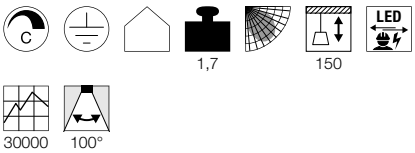

Dimensional drawing



Tip
Textile cable

BATO 35
PD, E27

SOCKET INSIDE







- Can be combined to form a cloud of lighting through individual composition

Product details
220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip
Textile cable

Recommended lamp

LED E27 4W 180°
2000-2900K 200lm
4kWh/1000h
Item No. 1003098 | 47.70 GBP



LED E27 7W
2700K 640lm
7kWh/1000h
Item No. 1003085 | 8.10 GBP



Lamp details
max. 60W

BATO 45
PD, PHASE

LED INSIDE







- Can be combined to form a cloud of lighting through individual composition

Product details
220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C

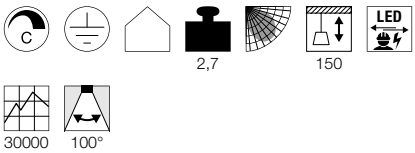

Dimensional drawing



Tip
Textile cable

Variant	Item No.	GBP
1300lm | 2700K | CRI>80		
matt black/ matt brass	**1001351**	**269.10**
1300lm | 2700K | CRI>80		
matt black	**1000436**	**260.10**
1500lm | 2500K | CRI>80		
matt brass	**1000441**	**269.10**

Variant	Item No.	GBP
E27		
matt black/ matt brass	**1001266**	**224.10**
E27		
matt black	**1000434**	**206.10**
E27		
matt brass	**1000439**	**224.10**

Variant	Item No.	GBP
1450lm | 2700K | CRI>80		
matt black/ matt brass	**1001350**	**342.90**
1450lm | 2700K | CRI>80		
matt black	**1000435**	**324.00**
1900lm | 2500K | CRI>80		
matt brass	**1000440**	**342.90**

BATO 45
PD, E27

SOCKET INSIDE







- Can be combined to form a cloud of lighting through individual composition

Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip

Textile cable

Recommended lamp

LED E27 8W
2000-2900K 300lm
8kWh/1000h
Item No. 1003096 | 67.50 GBP



LED E27 8W 180°
2000-2900K 400lm
8kWh/1000h
Item No. 1003099 | 67.50 GBP



Lamp details

max. 60W

Variant	Item No.	GBP
E27 matt black/ matt brass	1001265	287.10
E27 matt black	1000433	269.10
E27 matt brass	1000438	287.10

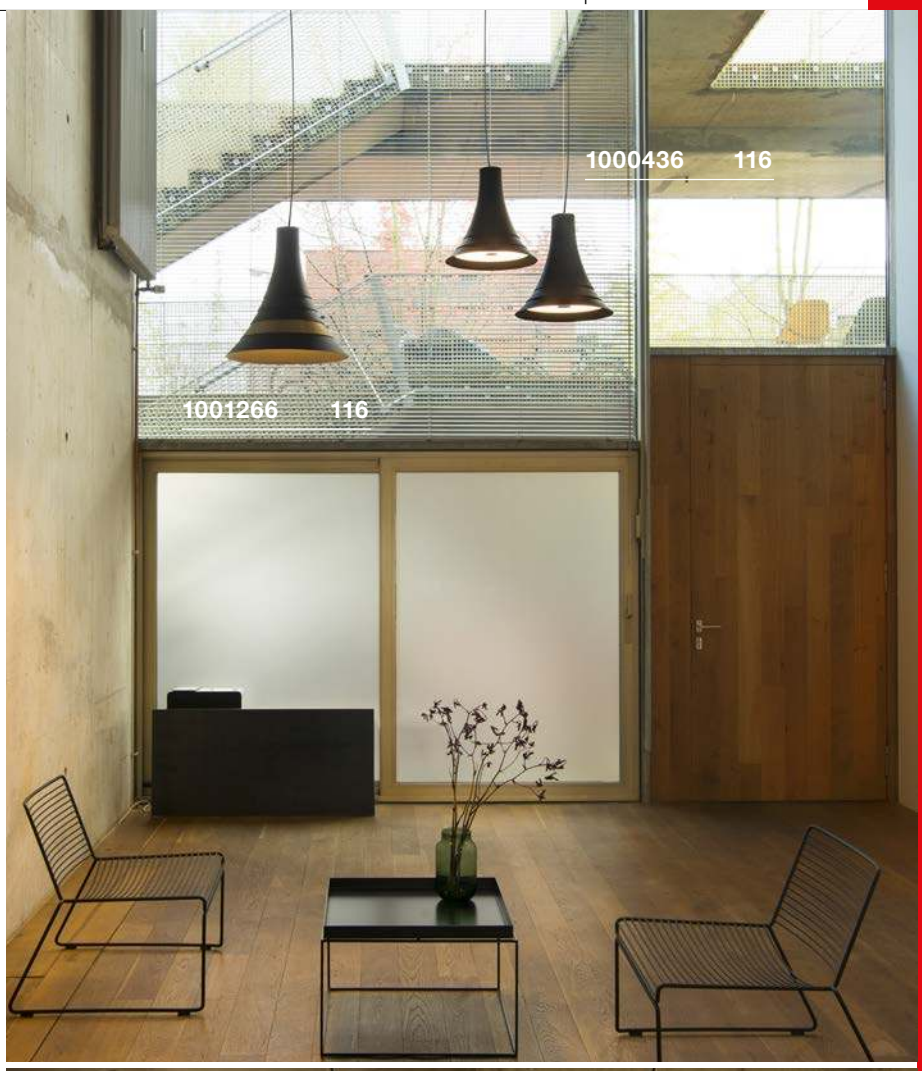



FORCHINI 50
PD, E27

SOCKET INSIDE







- Every light is a unique one-off
- Textile cable in housing colour

Product details
230V -50Hz
Material: GFK



Dimensional drawing



Recommended lamp

LED E27 7W 280°
2200-2700K 830lm
7kWh/1000h
Item No. 1002126 | 17.10 GBP



LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



Lamp details
max. 40W
L: 20 cm max.

Variant	Item No.	GBP
E27 black/silver	155520	171.00
E27 black/gold	155530	175.50
E27 white/gold	155531	175.50

FORCHINI 70
PD, E27

SOCKET INSIDE







- Every light is a unique one-off
- Textile cable in housing colour

Product details
220-240V ~50/60Hz
Material: GFK



Dimensional drawing



Recommended lamp

LED E27 8W 180°
2000-2900K 400lm
8kWh/1000h
Item No. 1003099 | 67.50 GBP



LED E27 7W 330°
2700K 806lm
8kWh/1000h
Item No. 1001038 | 20.70 GBP



Lamp details
max. 40W
L: 20 cm max.

Variant	Item No.	GBP
E27 black/gold	1001701	314.10









FORCHINI M 40
PD, E27

SOCKET INSIDE







- Double-walled construction with interior reflector
- Textile cable in housing colour

Product details
230V -50Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED E27 4W 180°
2000-2900K 200lm
4kWh/1000h
Item No. 1003098 | 47.70 GBP



LED E27 7W
2700K 640lm
7kWh/1000h
Item No. 1003085 | 8.10 GBP



Lamp details
max. 40W
L: 15.2 cm max.

Variant	Item No.	GBP
E27		
black/gold	**155910**	**175.50**
E27		
white/gold	**155911**	**175.50**

FORCHINI M 50
PD, E27

SOCKET INSIDE







- Double-walled construction with interior reflector
- Textile cable in housing colour

Product details
230V -50Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED E27 8W 180°
2000-2900K 400lm
8kWh/1000h
Item No. 1003099 | 67.50 GBP



LED E27 7W 180°
2700K 630lm
8kWh/1000h
Item No. 1001357 | 29.70 GBP



Lamp details
max. 40W
L: 18 cm max.

Variant	Item No.	GBP
E27		
black/gold	**155930**	**193.50**
E27		
white/gold	**155931**	**193.50**

PARA CONE 20
PD, E27

SOCKET INSIDE



- Can be combined to form a cloud of lighting through individual composition
- Wide range of colours and sizes

Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip

Textile cable
black/gold version with golden reflector

Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W 280°
2200-2700K 830lm
7kWh/1000h
Item No. 1002126 | 17.10 GBP



Lamp details

max. 60W

Variant	Item No.	GBP
E27		
glossy white	133001	85.50
E27		
matt aluminium	133005	90.00
E27		
matt copper	133009	126.00
E27		
glossy black/gold	133050	90.00

PARA CONE 30
PD, E27

SOCKET INSIDE



- Can be combined to form a cloud of lighting through individual composition
- Wide range of colours and sizes

Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip

Textile cable
black/gold version with golden reflector

Recommended lamp

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details

max. 60W

Variant	Item No.	GBP
E27		
glossy white	133011	139.50
E27		
matt aluminium	133015	153.00
E27		
matt copper	133019	171.00
E27		
glossy black/gold	133060	153.00









MALANG
CW





- Can be integrated with the SLV VALETO® system and other ZigBee® systems
- Panel dimmable and can be controlled separately from warm to cold white
- Ring separately controllable in RGBW colours and dimmable

Product details

100-240V ~50/60Hz | 24V DC
Systemleistung: 39W
Material: aluminium/polycarbonate (PC)

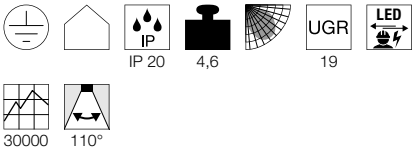

Dimensional drawing



Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411] Ring (RGBW) and panel (2700-6500K) are controlled separately. Zingbee 3.0

Accessory recommendation

- Suspension kit 1.5m
  Item No. 135250 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 | 34.20 GBP
- Suspension kit 5m
  Item No. 1001950 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001951 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001952 | 76.50 GBP
- CCT/RGBW remote control
  Item No. 1002994 | 43.20 GBP

Variant	Item No.	GBP
Ring: 350lm | RGB+W (3000K) | CRI>80 Panel: 2100-2400lm | 2700-6500K | CRI>80		
white	**1002858**	**629.10**

SPHERA 45
PD, PHASE



- Slim light body
- Surface features a high-gloss varnish

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 13W
Material: aluminium/acrylic
Dimmable: C

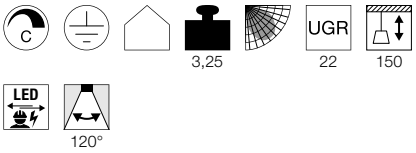

Dimensional drawing



Variant	Item No.	GBP
800lm | 2700K | CRI>80 glossy white	**133341**	**274.50**

SPHERA 75
PD, PHASE



- Slim light body
- Surface features a high-gloss varnish

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 15W
Material: aluminium/acrylic
Dimmable: C

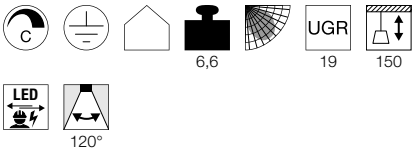

Dimensional drawing



Variant	Item No.	GBP
1200lm | 2700K | CRI>80 glossy white	**133351**	**339.30**







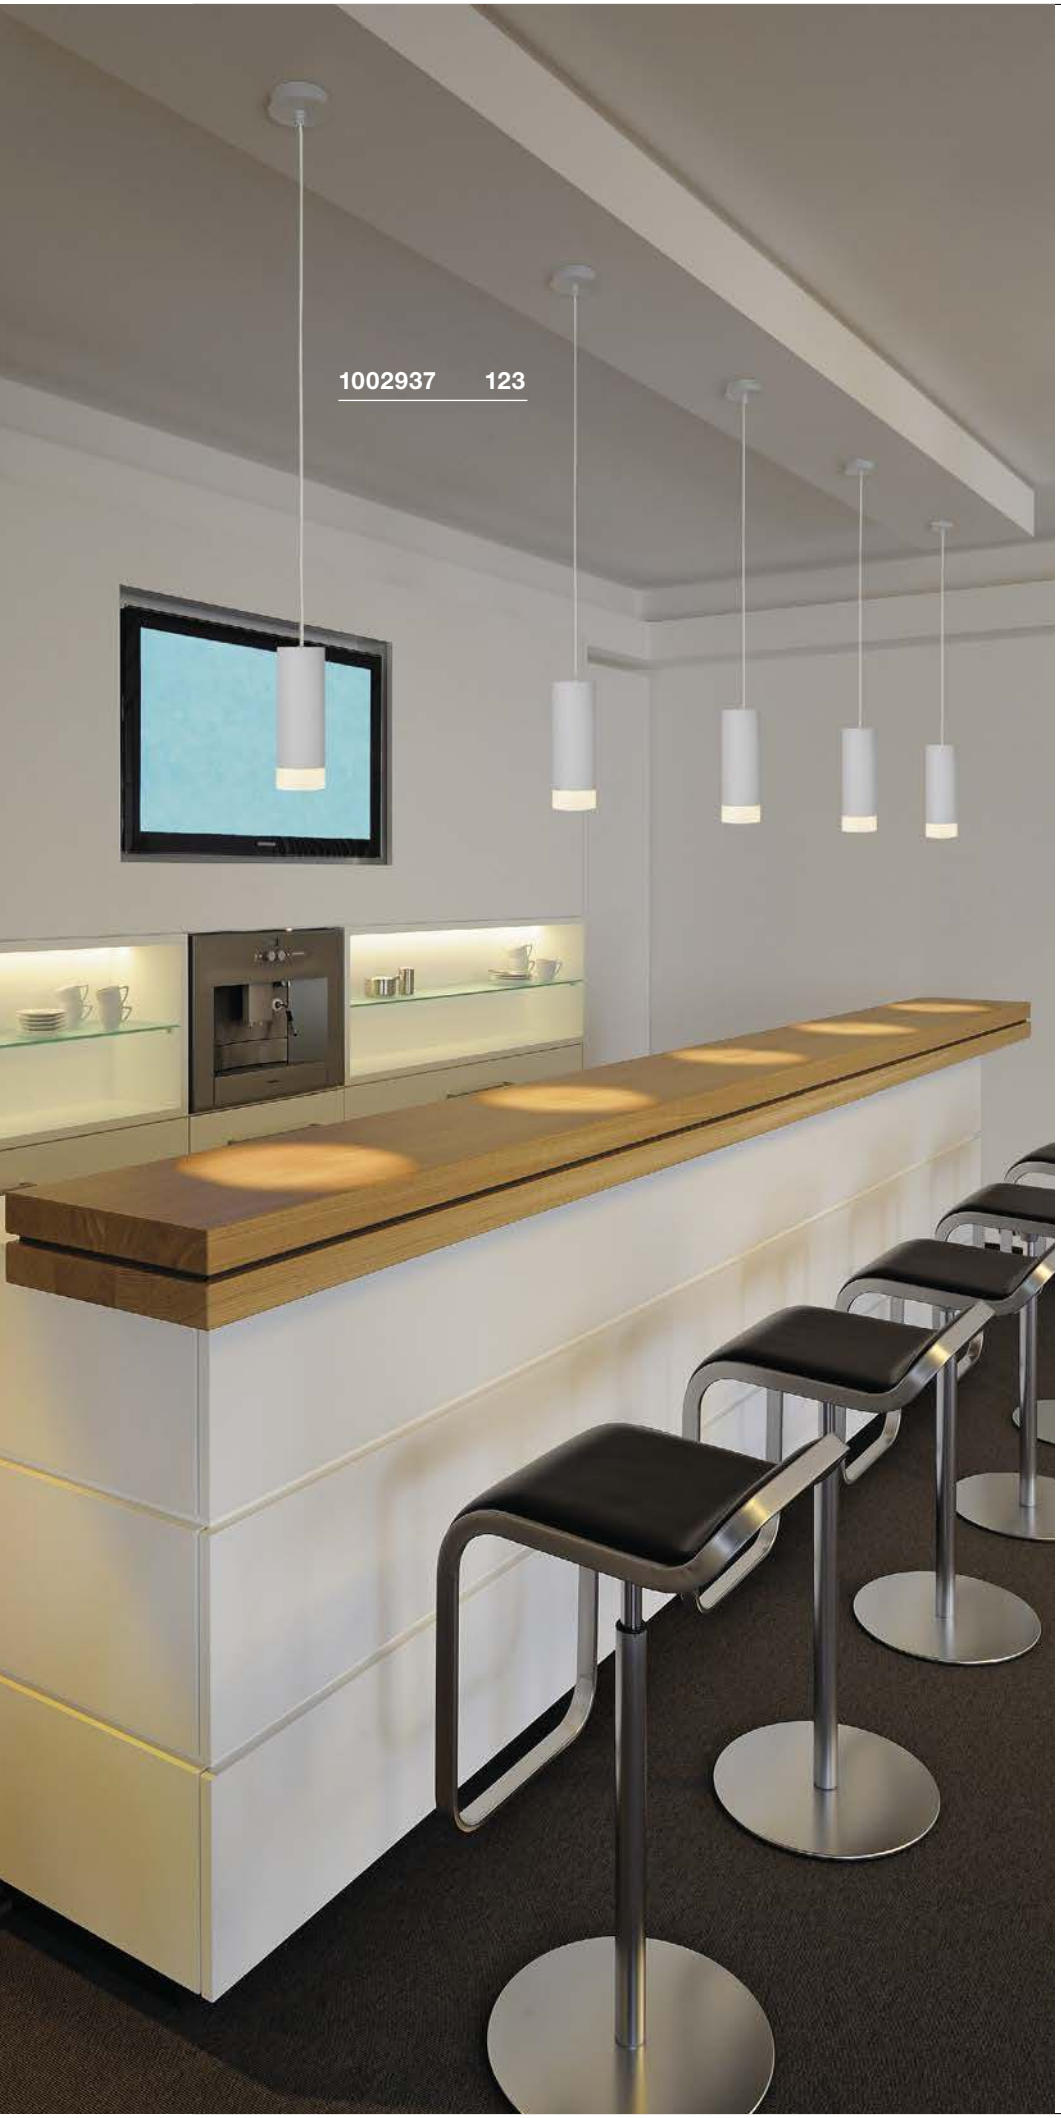

ASTINA
PD, QPAR51

SOCKET INSIDE







- High-quality, satin-finish glass
- 2.5 m-long cable

Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Open cable end
Can be combined with Fitu Mix & Match accessories on page 98

Recommended lamp

LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005076 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

GU10 QPAR51 max. 10W

Variant	Item No.	GBP
GU10 | QPAR51 matt black	1002939	90.00
GU10 | QPAR51 matt white	1002937	90.00
GU10 | QPAR51 matt grey	1002938	90.00

PLASTRA
PD, QPAR51

SOCKET INSIDE







• Can be individually modified

Product details
230V -50Hz
Material: gypsum/steel

1 150

Dimensional drawing



Recommended lamp

LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005076 | 6.10 GBP

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details
max. 7W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
matt white	148042	70.20

ENOLA B
PD, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium/steel

0,75 150

Dimensional drawing



Recommended lamp

LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005083 | 6.10 GBP

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
black	151850	99.00
GU10 | QPAR51		
white	151851	99.00
GU10 | QPAR51		
matt gold	151853	103.50
GU10 | QPAR51		
silver grey	151854	99.00





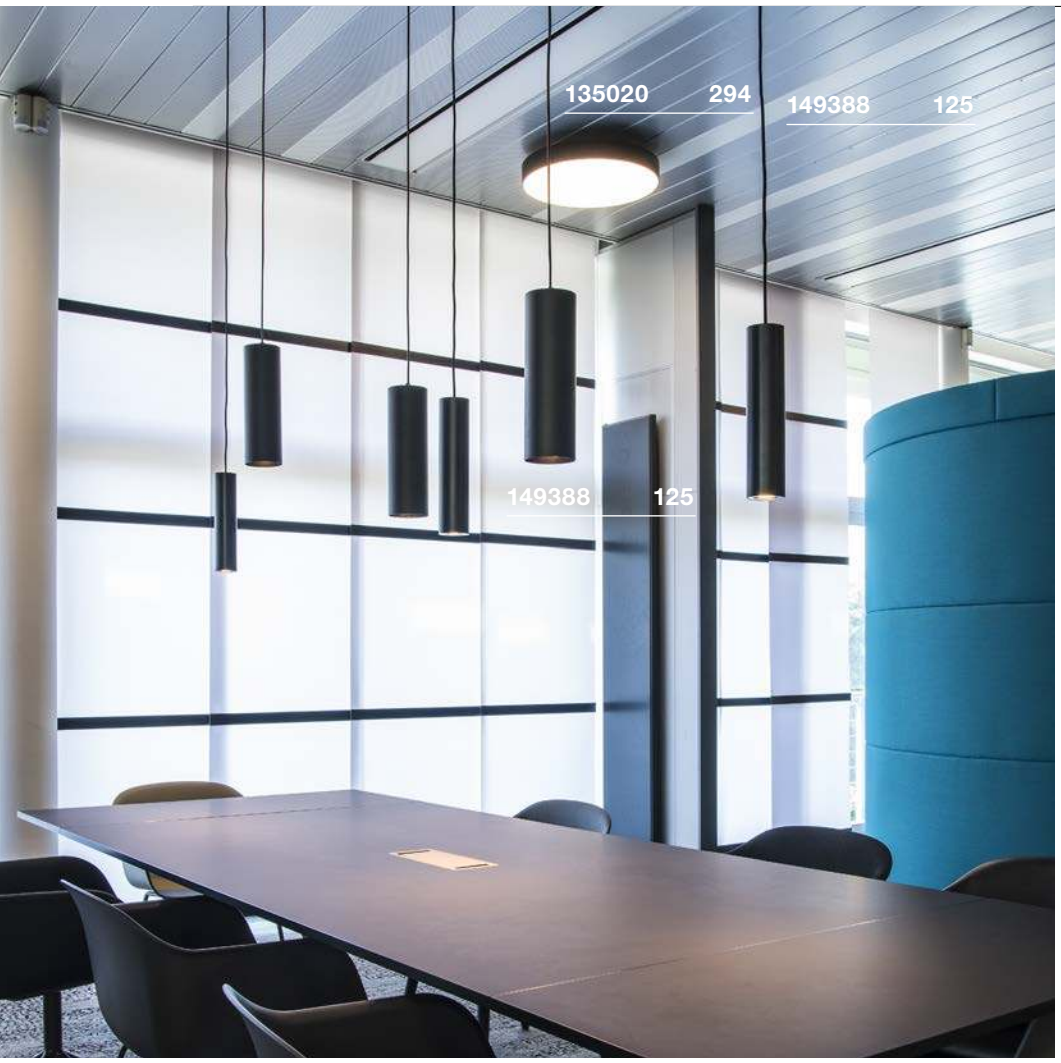



ENOLA
PD, E27

SOCKET INSIDE



Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 60W
Diameter: 9 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27 black	149388	69.30
E27 white	149381	69.30
E27 matt gold	149387	81.00
E27 silver grey	149385	81.00

HELIA 30
PD



- Premium LED with CRI>90
- Slim, extra-long light body
- Rose for ceiling mounting

Product details

500mA
Total wattage: 7.5W
Material: aluminium
Installation dimensions:
Assembly-diameter: 6.8 cm T: 3 cm

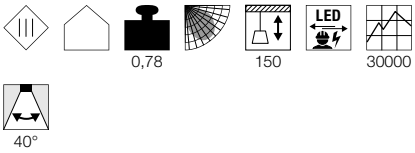

Dimensional drawing



Tip

LED driver not included
Material thickness of mounting surface:
max. 12 mm

Accessory recommendation

LED driver 500mA | 9W
Item No. 464091 | 20.70 GBP



LED Driver 500mA | 15W dimmable
Item No. 464144 | 29.70 GBP



Variant	Item No.	GBP
500lm | 3000K | CRI>90		
black	**158400**	**153.00**
550lm | 3000K | CRI>90		
white	**158401**	**153.00**
550lm | 3000K | CRI>90		
matt gold	**1002170**	**157.50**

HELIA 40
PD



- Premium LED with CRI>90
- Long light body
- Rose for ceiling mounting

Product details

500mA
Total wattage: 9W
Material: aluminium
Installation dimensions:
Assembly-diameter: 6.8 cm T: 3 cm

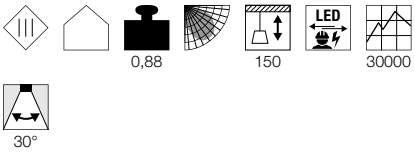

Dimensional drawing



Tip

LED driver not included
Material thickness of mounting surface:
max. 12 mm

Accessory recommendation

LED driver 500mA | 9W
Item No. 464091 | 20.70 GBP



LED Driver 500mA | 15W dimmable
Item No. 464144 | 29.70 GBP



Variant	Item No.	GBP
700lm | 3000K | CRI>90		
black	**158410**	**171.00**
720lm | 3000K | CRI>90		
white	**158411**	**171.00**
720lm | 3000K | CRI>90		
matt gold	**1002169**	**175.50**





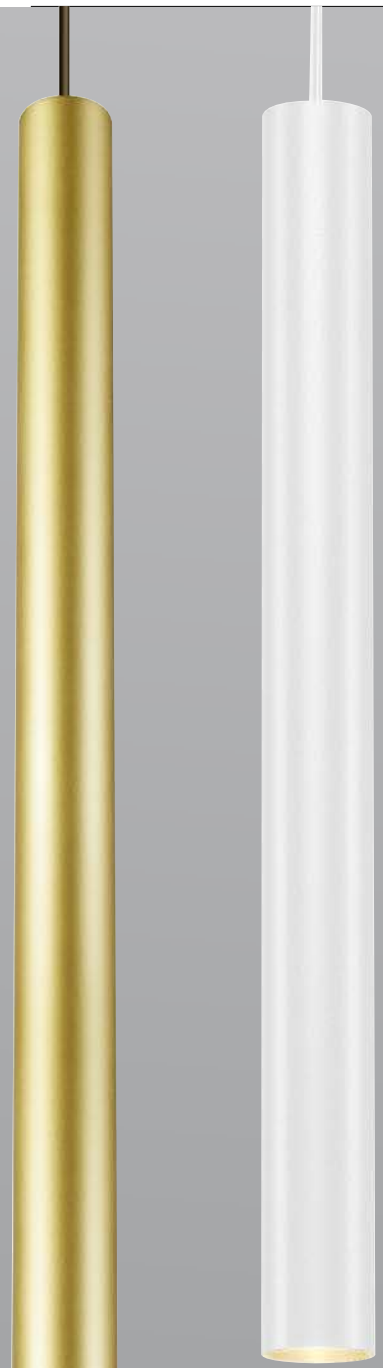

HELIA 40

Ø: 4 cm | L: 45 cm

HELIA 30

Ø: 3 cm | L: 60 cm

HELIA 30
PD, PHASE

LED INSIDE







- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium
Dimmable: C, L

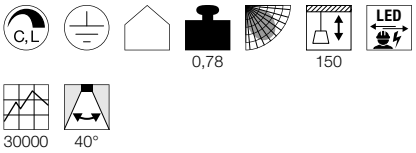

Dimensional drawing



Variant	Item No.	GBP
500lm | 3000K | CRI>90		
■ black	**152360**	**188.10**
550lm | 3000K | CRI>90		
□ white	**152361**	**188.10**
550lm | 3000K | CRI>90		
▨ matt gold	**1002172**	**193.50**

HELIA 40
PD, PHASE

LED INSIDE





- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium
Dimmable: C, L

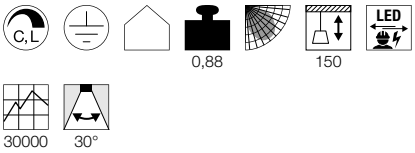

Dimensional drawing



Variant	Item No.	GBP
700lm | 3000K | CRI>90		
■ black	**152370**	**207.00**
720lm | 3000K | CRI>90		
□ white	**152371**	**207.00**
720lm | 3000K | CRI>90		
▨ matt gold	**1002171**	**224.10**

HELIA AMBIENT 35 PD









Product details

500mA
Total wattage: 7.5W
Material: aluminium/acrylic
Installation dimensions:
Assembly-diameter: 6.8 cm T: 3 cm



Dimensional drawing



Tip

Recessed ceiling rose with open cable end.
Driver not included
Material thickness of mounting surface:
max. 12 mm

Accessory recommendation

LED driver 500mA | 9W
Item No. 464091 | 20.70 GBP



LED Driver 500mA | 15W dimmable
Item No. 464144 | 29.70 GBP



Variant	Item No.	GBP
425lm | 3000K | CRI>90		
matt black	**1003435**	**148.50**



HELIA AMBIENT 35
PD, PHASE

NEW VARIANT

LED INSIDE







Product details

220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/acrylic
Dimmable: C, L

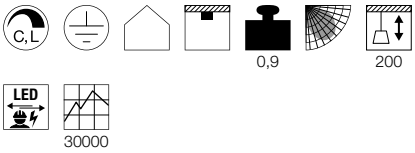

Dimensional drawing



Variant	Item No.	GBP
425lm | 3000K | CRI>90		
■ matt black	1003436	184.50

ANELA
PD, PHASE

LED INSIDE







- Premium LED with CRI>90
- Glare reduction
- Colourful reflectors available as accessories

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium
Dimmable: C





Dimensional drawing



Tip

Reflector not included
Luminous flux with reflector 1000809 = 500lm
Luminous flux with reflector 1000810 = 620lm
Luminous flux with reflector 1000811 = 200lm
Luminous flux with reflector 1000812 = 620lm

Accessory recommendation

Reflector 28°
Item No. 1000809 |14.40 GBP

Reflector 28°
Item No. 1000810 |14.40 GBP

Reflector 28°
Item No. 1000811 |14.40 GBP

Reflector 28°
Item No. 1000812 |14.40 GBP

Variant	Item No.	GBP
200-620lm | 3000K | CRI>90		
black	**1000813**	**162.00**
200-620lm | 3000K | CRI>90		
white	**1000814**	**162.00**







Reflector 28° - replace the reflector of this light and enjoy a new lighting effect thanks to the different colours (gold, grey, black and white).



LISENNE
PD, E27

SOCKET INSIDE







- Basalt stone & smoked glass
- Height adjustable

Product details

220-240V ~50/60Hz
Material: basalt/glass



Dimensional drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP



LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP



Lamp details

max. 23 W
Diamter: 5.9 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27		
grey/mirrored brown	**155714**	**188.10**

TONGA®
PD, E14

SOCKET INSIDE









Product details

220-240V ~50/60Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED E14 4,5W 280°
2700K 470lm
5kWh/1000h
Item No. 1002128 | 7.20 GBP



LED E14 6,5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP



Lamp details

max. 60W C35
Diameter: 5cm max. L: 13cm max.

Variant	Item No.	GBP
E14 | C35		
white/silver	**133444**	**99.00**



QUADRASS
PD, E27

NEW

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: steel/glass



Dimensional drawing



Tip

Open cable end
Can be combined with Fitu Mix & Match accessories on page 98

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



Lamp details

max. 40W
Diameter: 6.5 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27		
white/chrome	**1003432**	**76.50**



1003006 135



PANTILO 28

PD, E27

SOCKET INSIDE







- High-quality chrome-plated glass shade
- Can be combined to form a cloud of lighting through individual composition

Product details

200-240V ~50/60Hz
Material: glass



Dimensional drawing



Tip

Open cable end
Can be combined with Fitu Mix & Match accessories on page 98

Recommended lamp



LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP





LED E27 7W 330°
2700K 806lm
8kWh/1000h
Item No. 1001038 | 20.70 GBP

Lamp details

max. 15W

Variant	Item No.	GBP
E27		
chrome	**1003006**	**161.10**
E27		
copper	**1003007**	**161.10**

PANTILO CONVEX 29
PD, E27

NEW VARIANT

SOCKET INSIDE







- High-quality chrome-plated glass shade
- Can be combined to form a cloud of lighting through individual composition

Product details

220-240V ~50/60Hz
Material: glass/steel



Dimensional drawing



Tip

Open cable end
Can be combined with Fitu Mix & Match accessories on page 98

Recommended lamp

LED E27 8W 350°
2200K 250lm
8kWh/1000h
Item No. 1003100 | 52.20 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



Variant	Item No.	GBP
E27		
chrome	1003443	189.00

PANTILO CONVEX 40
PD, E27

NEW VARIANT

SOCKET INSIDE







- High-quality chrome-plated glass shade
- Can be combined to form a cloud of lighting through individual composition

Product details

220-240V ~50/60Hz
Material: glass/steel



Dimensional drawing



Recommended lamp

LED E27 7W 330°
2700K 806lm
8kWh/1000h
Item No. 1001038 | 20.70 GBP



LED E27 7W 330°
2700K 806lm
8kWh/1000h
Item No. 1001035 | 15.30 GBP



Variant	Item No.	GBP
E27		
chrome	1003444	270.00









SUN / BIG SUN
PD, E27

SOCKET INSIDE







Product details
230V -50Hz
Material: steel/glass



Dimensional drawing



Tip
Open cable end
Can be combined with Fitu Mix & Match accessories on page 98

Recommended lamp
LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP

Lamp details
max. 60W
Diamter: 7 cm max. L: 17 cm max.

Variant	Item No.	GBP
E27 | Diameter: 19.5 cm | 0.73 kg		
white/chrome	**1002045**	**69.30**
E27 | Diameter: 30 cm | 1.83 kg		
white/chrome	**1002046**	**128.70**

ROTOBALL 25/40/50
PD, E27

SOCKET INSIDE







• Height adjustable

Product details
230V -50Hz
Material: steel/polyethylene (PE)



Dimensional drawing



Recommended lamp
LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details
max. 24W
Diameter Item No. 165390 7 cm max.
Diameter Item No. 165410 9,5 cm max.
Diameter Item No. 165400 9.5 cm max.

Variant	Item No.	GBP
E27 | Diameter: 25 cm | 1.25 kg		
white/silver grey	**165390**	**126.00**
E27 | Diameter: 40 cm | 2.4 kg		
white/silver grey	**165410**	**144.00**
E27 | Diameter: 50 cm | 3.6 kg		
white/silver grey	**165400**	**171.00**

SOPRANA
PD, E27

SOCKET INSIDE







- Height adjustable
- Acrylic glass cover at the bottom of the shade

Product details

230V -50Hz
Material: textile/acrylic



Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

3x max. 60W
L: 16.5 cm max.

Variant	Item No.	GBP
E27 white	155462	175.50
E27 beige	155463	175.50







ACCANTO
PD, E27

SOCKET INSIDE







- Acrylic cover at the bottom of the shade
- Height adjustable

Product details

220-240V ~50/60Hz
Material: steel/textile
Product dimensions: L: 80 cm W: 30 cm H: 20 cm



Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



Lamp details

3x max. 40W
L: 13cm max.

Variant	Item No.	GBP
E27		
black/chrome	**1002946**	**224.10**
E27		
white/chrome	**1002947**	**224.10**

TRIADEM
PD, E27

SOCKET INSIDE







- Height adjustable

Product details

230V -50Hz
Material: textile/steel



Dimensional drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP



Lamp details

3x max. 60W
L: 14 cm max.

Variant	Item No.	GBP
E27		
black/chrome	**155870**	**357.30**
E27		
white/chrome	**155871**	**357.30**

MEDO LIGHTING SERIES.
PENDANT AND CEILING LIGHTS.

	MEDO 30 CL, 1-10V	MEDO 40 CL, 1-10V	MEDO 60 CL, 1-10V	MEDO 90 CL, 1-10V
Example				
Lightbulb	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Diameter: 30cm	Diameter: 40cm	Diameter: 60cm	Diameter: 90cm
Light strength	1000lm	2000lm	3500lm	11000lm
UGR	25	25	22	25
Dimmable	1-10V	1-10V	1-10V	1-10V
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 CL, PHASE	MEDO 40 CL, PHASE
Example		
Lightbulb	LED INSIDE	LED INSIDE
Size-diameter	Diameter: 30cm	Diameter: 40cm
Light strength	1200lm	2125lm
UGR	25	25
Dimmable	C, L	C, L
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m



	MEDO 60 CL, square, 1-10V	MEDO 60 CL, square, DALI
Example		
Lightbulb	LED INSIDE	LED INSIDE
Size	W | L: 60cm	W | L: 60cm
Light strength	3300 lm	3300 lm
UGR	22	22
Dimmable	1-10V	DALI
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m

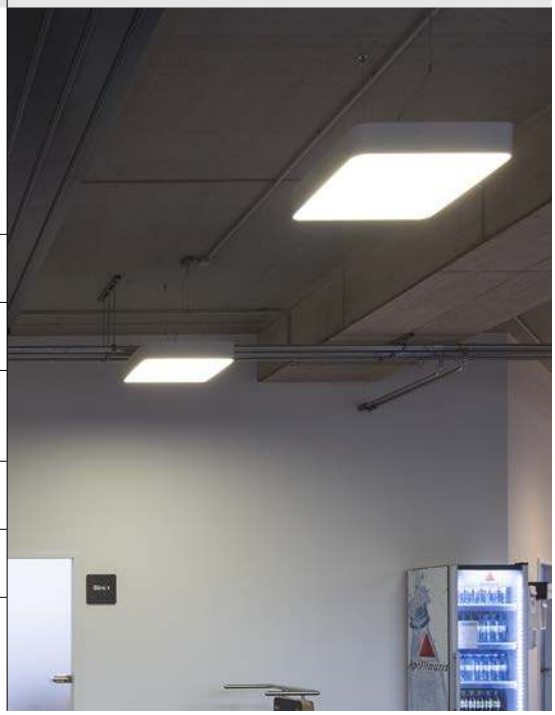

	MEDO RING 60 PD, 1-10V	MEDO RING 90 PD, 1-10V	MEDO RING 60 PD, DALI
Example			
Lightbulb	LED INSIDE	LED INSIDE	LED INSIDE
Size	Diameter: 60cm	Diameter: 90cm	Diameter: 60cm
Light strength	2000lm	3945lm	2000lm
UGR	–	–	22
Dimmable	1-10V	1-10V	DALI
Suspension kit	not necessary, (inc.) - pure pendant light	not necessary, (inc.) - pure pendant light	not necessary, (inc.) - pure pendant light

MEDO LIGHTING SERIES.
PENDANT AND CEILING LIGHTS.

	MEDO 30 AMBIENT CW, PHASE	MEDO 40 AMBIENT CW, PHASE	MEDO 60 AMBIENT CW, PHASE	MEDO 90 AMBIENT CL, PHASE
Example				
Lightbulb	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT
Size	Diameter: 30cm	Diameter: 40cm	Diameter: 60cm	Diameter: 90cm
Light strength	Down: 1230/1280lm Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	C	C	C	C
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 AMBIENT CW, DALI	MEDO 40 AMBIENT CW, DALI	MEDO 60 AMBIENT CW, DALI	MEDO 90 AMBIENT CL, DALI
Example				
Lightbulb	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT
Size	Diameter: 30cm	Diameter: 40cm	Diameter: 60cm	Diameter: 90cm
Light strength	Down: 1230/1280lM Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	DALI	DALI	DALI	DALI
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m







Ambient effect – These MEDO variants produce even and indirect light in an upwards direction.

Colour temperature – With this MEDO variant, you can select the colour temperature yourself. The switch on the reverse can be used to choose between 3000k and 4000k.

MEDO 30
CL, PHASE







- Can be converted to a pendant light using accessories that are separately available



Product details

220-240V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C, L

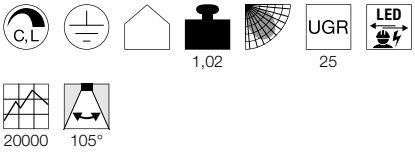

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
1200lm | 3000K | CRI>80 ■ black	135020	206.10
1200lm | 3000K | CRI>80 □ white	135021	206.10
1200lm | 3000K | CRI>80 ■ grey	135024	206.10



MEDO 40
CL, PHASE

LED INSIDE







- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 31W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C, L

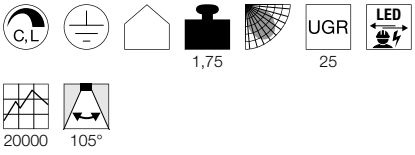

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
2125lm | 3000K | CRI>80 ■ black	**135070**	**242.10**
2125lm | 3000K | CRI>80 □ white	**135071**	**242.10**
2125lm | 3000K | CRI>80 ■ grey	**135074**	**242.10**

MEDO 30
CL, 1-10V







- Can be converted to a pendant light using accessories that are separately available

Product details
220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

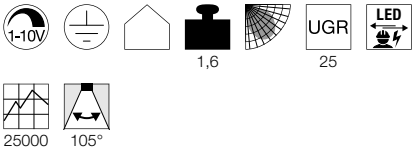

Dimensional drawing



Tip
Suspension set not included

Accessory recommendation
- Suspension kit 1.5m
  Item No. 135250 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 |34.20 GBP
- 1-10V dimming
  Item No. 470505 |9.90 GBP
- Suspension kit 5m
  Item No. 1001950 |76.50 GBP
- Suspension kit 5m
  Item No. 1001951 |76.50 GBP
- Suspension kit 5m
  Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
1000lm | 3000K | CRI>80 black	1000855	206.10
1000lm | 3000K | CRI>80 white	1000856	206.10
1000lm | 3000K | CRI>80 grey	1000857	206.10

MEDO 40
CL, 1-10V







- Can be converted to a pendant light using accessories that are separately available

Product details
120-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

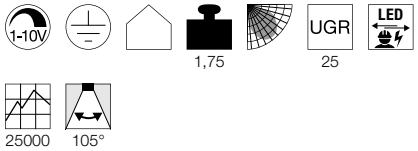

Dimensional drawing



Tip
Suspension set not included

Accessory recommendation
- Suspension kit 1.5m
  Item No. 135250 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 |34.20 GBP
- 1-10V dimming
  Item No. 470505 |9.90 GBP
- Suspension kit 5m
  Item No. 1001950 |76.50 GBP
- Suspension kit 5m
  Item No. 1001951 |76.50 GBP
- Suspension kit 5m
  Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
2000lm | 3000K | CRI>80 black	1000864	242.10
2000lm | 3000K | CRI>80 white	1000865	242.10
2000lm | 3000K | CRI>80 grey	1000866	242.10

MEDO 60
CL, 1-10V







- Can be converted to a pendant light using accessories that are separately available

Product details
100-240V ~50/60Hz | 1000mA
Total wattage: 40W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

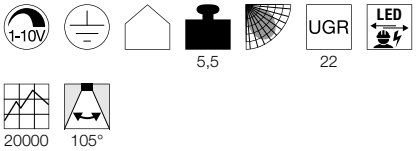

Dimensional drawing



Tip
Suspension set not included

Accessory recommendation
- Suspension kit 1.5m
  Item No. 135250 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 |34.20 GBP
- 1-10V dimming
  Item No. 470505 |9.90 GBP
- Suspension kit 5m
  Item No. 1001950 |76.50 GBP
- Suspension kit 5m
  Item No. 1001951 |76.50 GBP
- Suspension kit 5m
  Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
3500lm | 3000K | CRI>80 black	135120	431.10
3500lm | 3000K | CRI>80 white	135121	431.10
3500lm | 3000K | CRI>80 grey	135124	431.10



MEDO 90
CL, 1-10V

LED INSIDE







- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 2900mA
Total wattage: 119W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

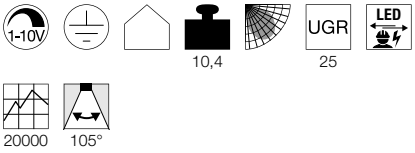

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 | 34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 | 34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 | 34.20 GBP

□ 1-10V dimming
Item No. 470505 | 9.90 GBP

□ Suspension kit 5m
Item No. 1001950 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001951 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
11000lm | 3000K | CRI>80 ■ black	**135170**	**899.10**
11000lm | 3000K | CRI>80 □ white	**135171**	**899.10**
11000lm | 3000K | CRI>80 ■ grey	**135174**	**899.10**

MEDO 30 AMBIENT
CW, PHASE







- With ambient effect
- Colour temperature (3000K/4000K) can be adjusted using the switch
- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)
Dimmable: C

1,46 UGR 25

25000 105°

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

Suspension kit 1.5m
Item No. 135250 |34.20 GBP

Suspension kit 1.5m
Item No. 135251 |34.20 GBP

Suspension kit 1.5m
Item No. 135254 |34.20 GBP

Suspension kit 5m
Item No. 1001950 |76.50 GBP

Suspension kit 5m
Item No. 1001951 |76.50 GBP

Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 black	1001877	224.10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 white	1001881	224.10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 grey	1001882	224.10



MEDO 40 AMBIENT
CW, PHASE





- With ambient effect
- Colour temperature (3000K/4000K) can be adjusted using the switch
- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polycarbonate (PC)
Dimmable: C

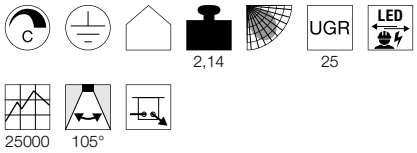

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

- Suspension kit 1.5m
  Item No. 135250 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 | 34.20 GBP
- Suspension kit 5m
  Item No. 1001950 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001951 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 black	**1001883**	**251.10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 white	**1001884**	**251.10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 grey	**1001885**	**251.10**

MEDO 60 AMBIENT
CW, PHASE





- With ambient effect
- Colour temperature (3000K/4000K) can be adjusted using the switch
- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 1050mA
Total wattage: 40W
Material: aluminium/polycarbonate (PC)
Dimmable: C

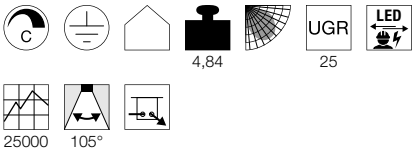

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

- Suspension kit 1.5m
  Item No. 135250 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 | 34.20 GBP
- Suspension kit 5m
  Item No. 1001950 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001951 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 black	**1001886**	**477.90**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 white	**1001887**	**477.90**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 grey	**1001888**	**477.90**

MEDO 90 AMBIENT
CL, PHASE





- With ambient effect
- Colour temperature (3000K/4000K) can be adjusted using the switch
- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 1050mA
Total wattage: 78W
Material: aluminium/polycarbonate (PC)
Dimmable: C

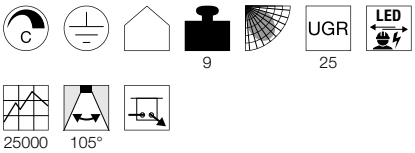

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

- Suspension kit 1.5m
  Item No. 135250 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 | 34.20 GBP
- Suspension kit 5m
  Item No. 1001950 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001951 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 black	**1001878**	**944.10**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 white	**1001879**	**944.10**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 grey	**1001880**	**944.10**

MEDO 30 AMBIENT
CW, DALI



- With ambient effect
- Colour temperature (3000K/4000K) can be adjusted using the switch
- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali

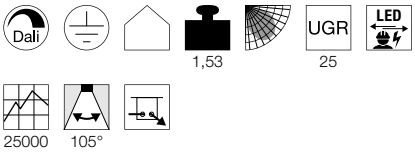

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

- Suspension kit 1.5m **Item No. 135250 |34.20 GBP**
- Suspension kit 1.5m **Item No. 135251 |34.20 GBP**
- Suspension kit 1.5m **Item No. 135254 |34.20 GBP**
- Suspension kit 5m **Item No. 1001950 |76.50 GBP**
- Suspension kit 5m **Item No. 1001951 |76.50 GBP**
- Suspension kit 5m **Item No. 1001952 |76.50 GBP**

Variant	Item No.	GBP
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 black	1001889	251.10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 white	1001893	251.10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 grey	1001894	251.10

MEDO 40 AMBIENT
CW, DALI



- With ambient effect
- Colour temperature (3000K/4000K) can be adjusted using the switch
- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali

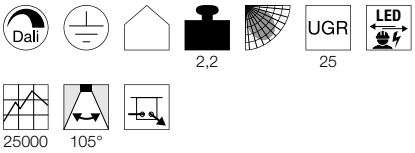

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

- Suspension kit 1.5m **Item No. 135250 |34.20 GBP**
- Suspension kit 1.5m **Item No. 135251 |34.20 GBP**
- Suspension kit 1.5m **Item No. 135254 |34.20 GBP**
- Suspension kit 5m **Item No. 1001950 |76.50 GBP**
- Suspension kit 5m **Item No. 1001951 |76.50 GBP**
- Suspension kit 5m **Item No. 1001952 |76.50 GBP**

Variant	Item No.	GBP
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 black	1001895	333.00
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 white	1001896	333.00
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 grey	1001897	333.00

MEDO 60 AMBIENT
CW, DALI



- With ambient effect
- Colour temperature (3000K/4000K) can be adjusted using the switch
- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 1000mA
Total wattage: 40W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali

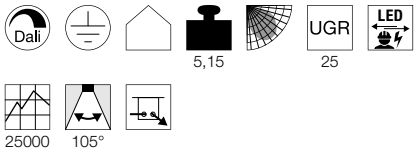

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

- Suspension kit 1.5m **Item No. 135250 |34.20 GBP**
- Suspension kit 1.5m **Item No. 135251 |34.20 GBP**
- Suspension kit 1.5m **Item No. 135254 |34.20 GBP**
- Suspension kit 5m **Item No. 1001950 |76.50 GBP**
- Suspension kit 5m **Item No. 1001951 |76.50 GBP**
- Suspension kit 5m **Item No. 1001952 |76.50 GBP**

Variant	Item No.	GBP
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 black	1001898	512.10
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 white	1001900	512.10
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 grey	1001899	512.10



MEDO 90 AMBIENT
CL, DALI







- With ambient effect
- Colour temperature (3000K/4000K) can be adjusted using the switch
- Can be converted to a pendant light using accessories that are separately available

Product details

220-240V ~50/60Hz | 1000mA
Total wattage: 78W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali

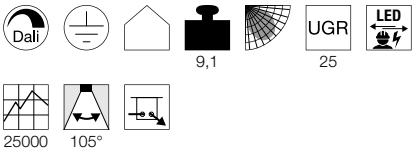

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 | 34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 | 34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 | 34.20 GBP

□ Suspension kit 5m
Item No. 1001950 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001951 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 ■ black	**1001890**	**1,161.00**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 □ white	**1001891**	**1,161.00**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 ■ grey	**1001892**	**1,161.00**

MEDO 60
CL, square, 1-10V

LED INSIDE







- Can be converted to a pendant light using accessories that are separately available

Product details

100-240V ~50/60Hz | 1000mA
Systemleistung: 39W
Material: aluminium/acrylic
Dimmable: 1-10V

1-10V | | | 5,8 | | UGR 22 | LED

25000 | 105°

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ 1-10V dimming
Item No. 470505 |9.90 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
3300lm | 3000K | CRI>80 ■ black	**1000725**	**431.10**
3300lm | 3000K | CRI>80 □ white	**1000726**	**431.10**
3300lm | 3000K | CRI>80 ■ grey	**1000727**	**431.10**

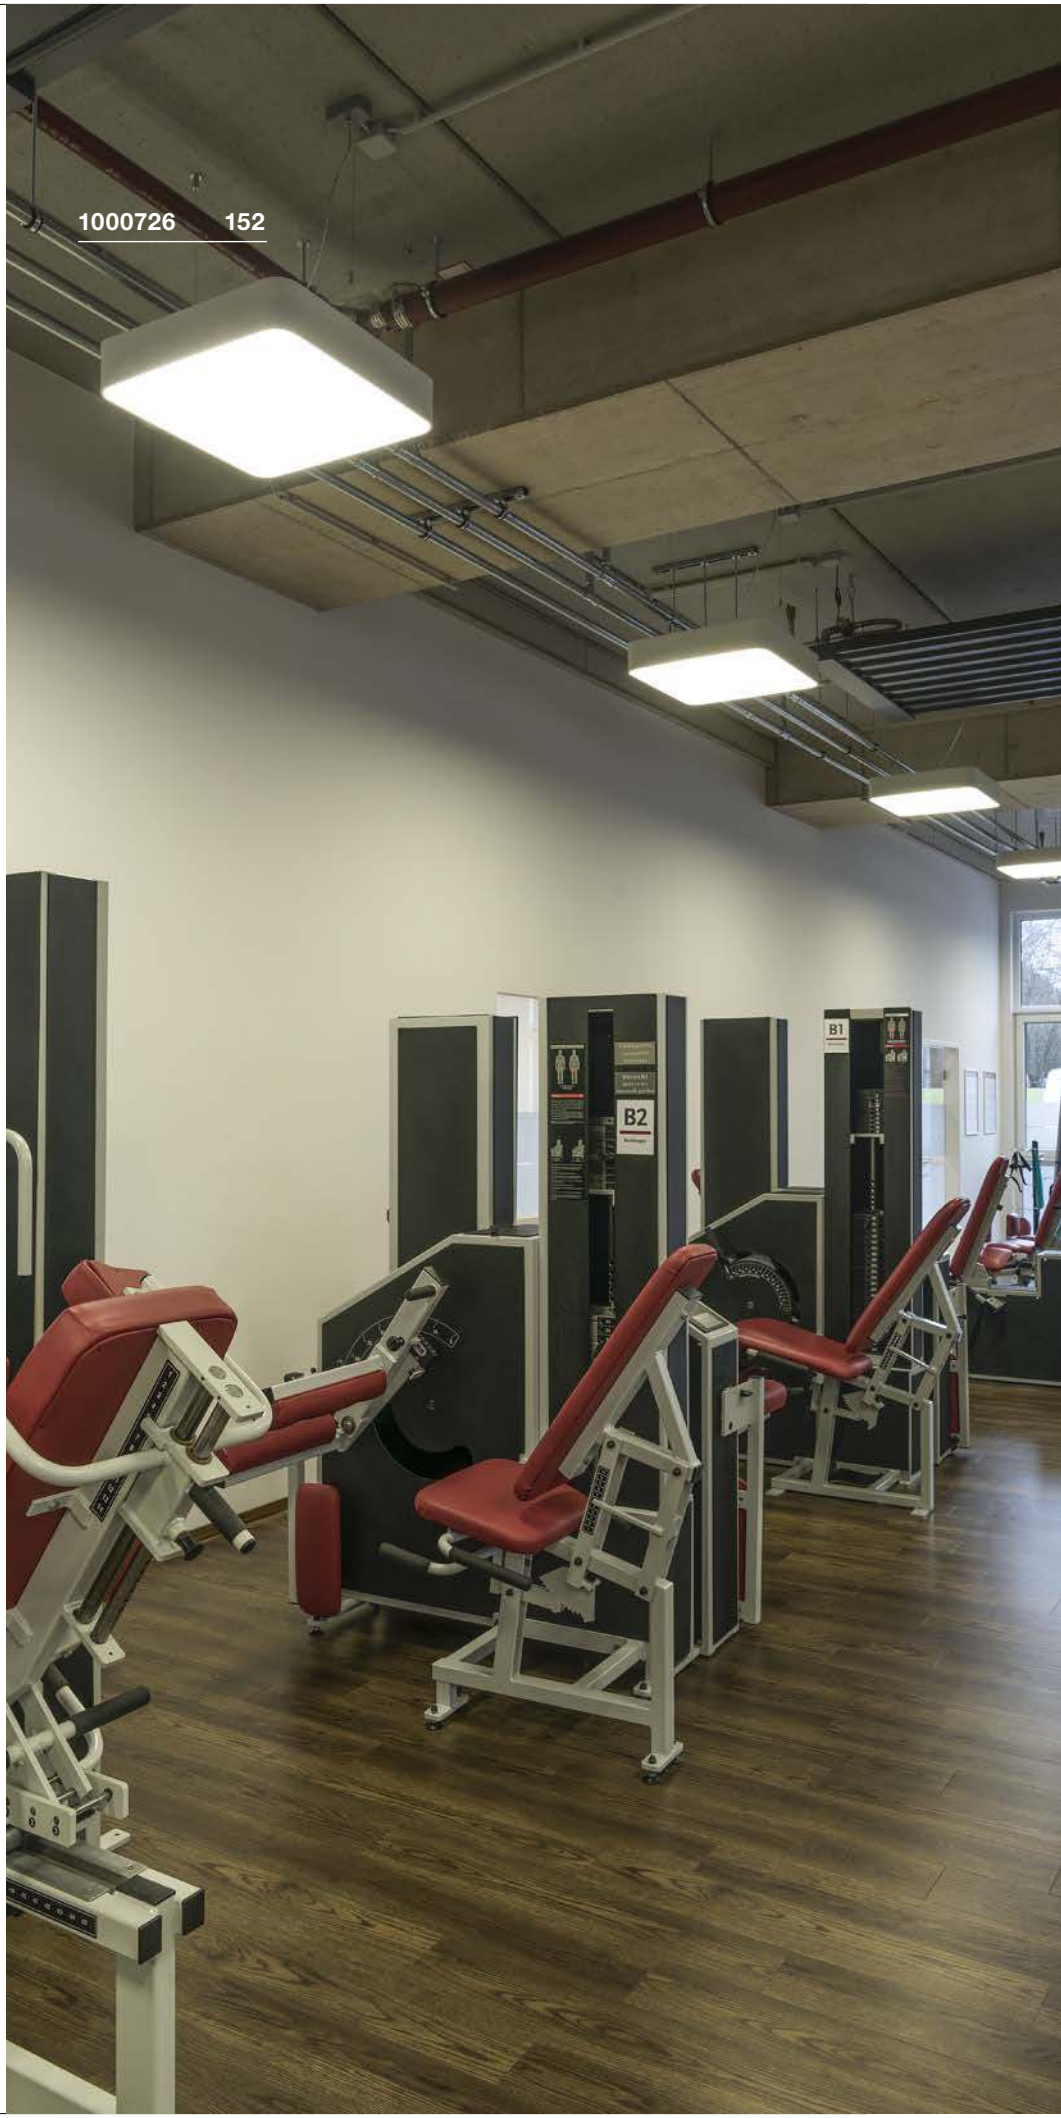

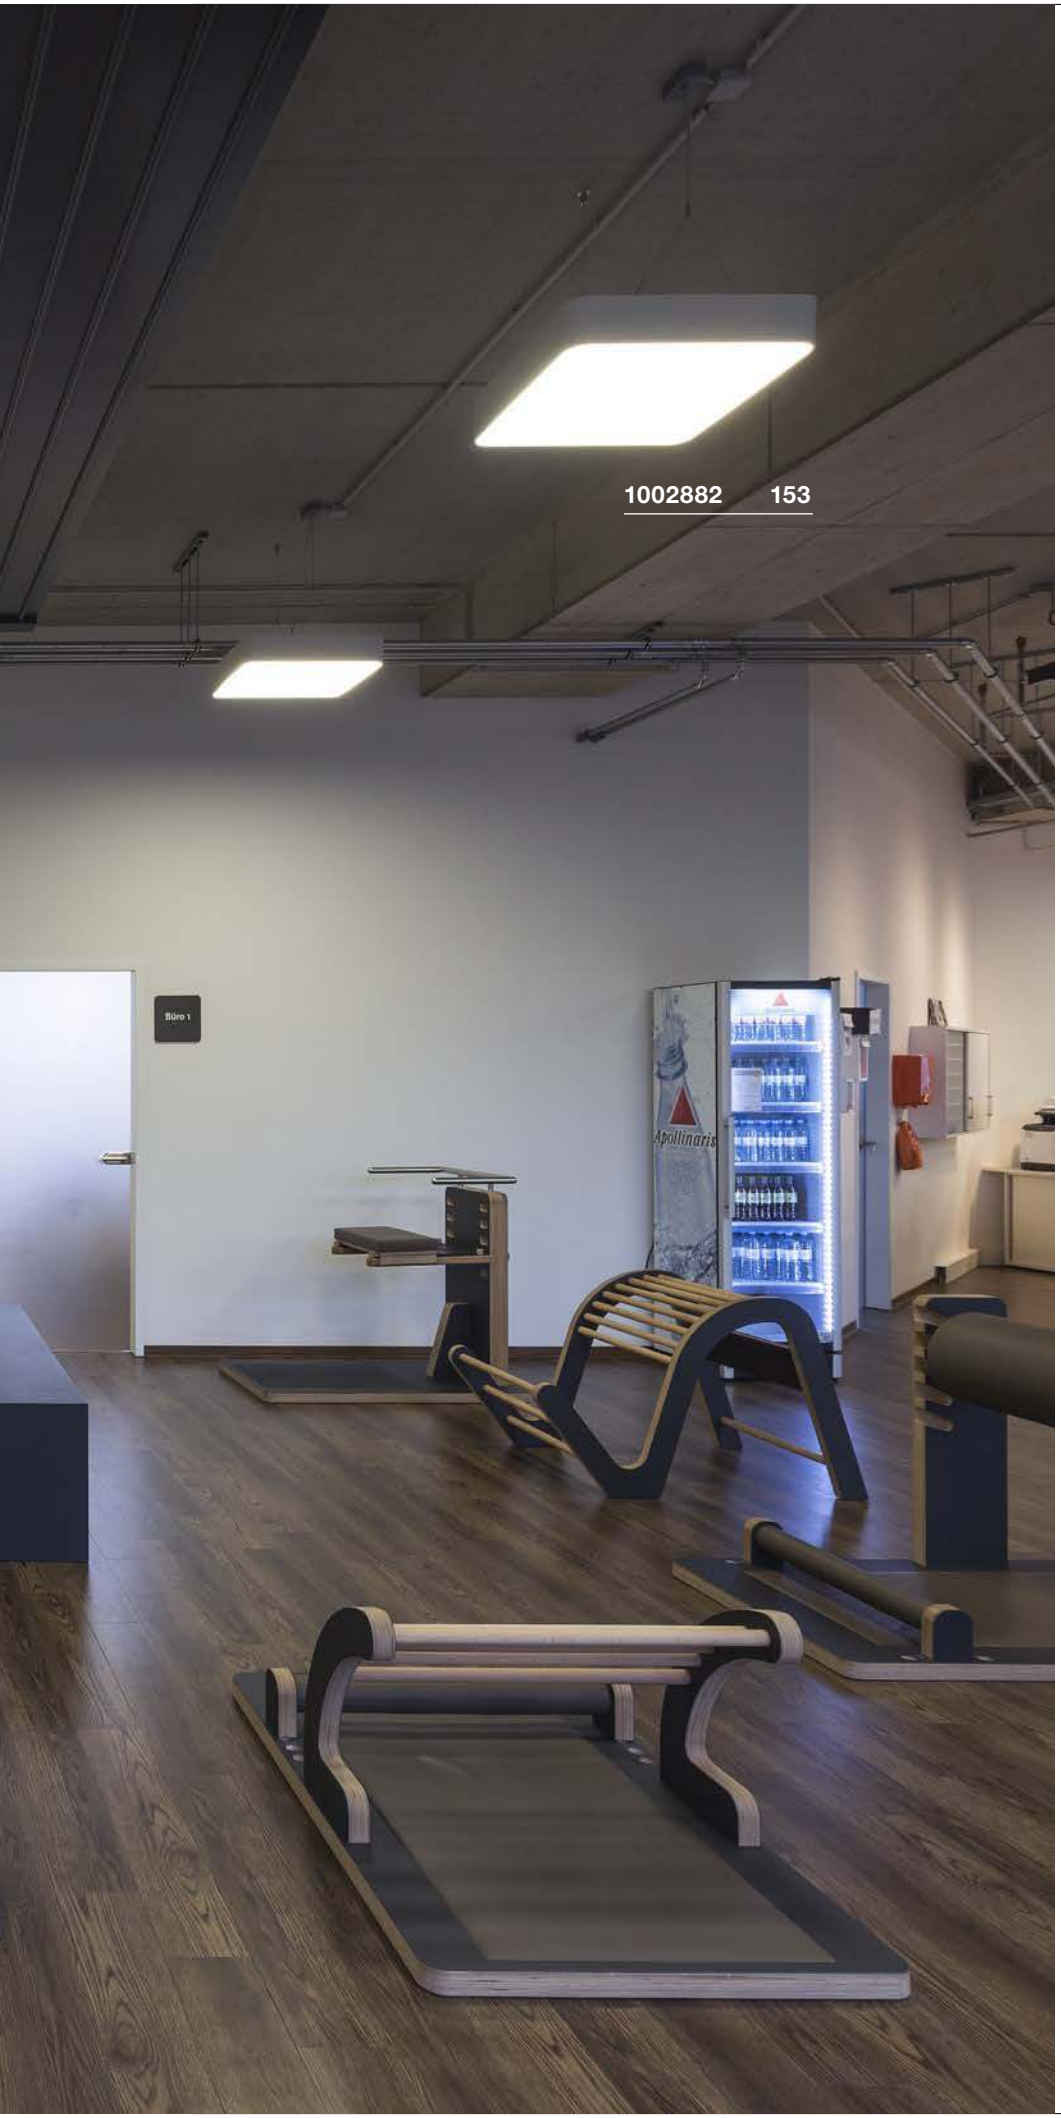

MEDO 60
CL, square, DALI







- Can be converted to a pendant light using accessories that are separately available

Product details

100-277V ~50/60Hz | 1000mA
Systemleistung: 39W
Material: aluminium/acrylic
Dimmable: Dali

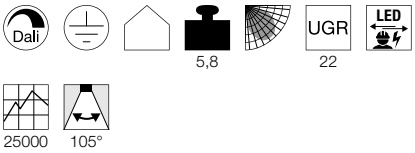

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 | 34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 | 34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 | 34.20 GBP

□ Suspension kit 5m
Item No. 1001950 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001951 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
3300lm | 3000K | CRI>80		
□ white	**1002882**	**459.00**

MEDO RING 60
PD,1-10V



- Height adjustable

Product details

120-240V ~50/60Hz | 700mA
Total wattage: 35W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

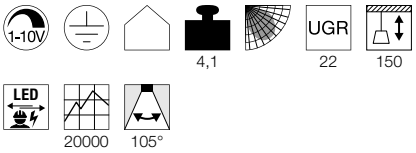

Dimensional drawing



Accessory recommendation

1-10V dimming
Item No. 470505 |9.90 GBP

Variant	Item No.	GBP
2000lm | 3000K | CRI>80		
■ black	**133840**	**539.10**
2095lm | 3000K | CRI>80		
□ white	**133841**	**539.10**

MEDO RING 90
PD,1-10V



- Height adjustable

Product details

100-240V ~50/60Hz | 1200mA
Total wattage: 58W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

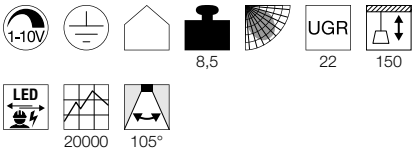

Dimensional drawing



Accessory recommendation

1-10V dimming
Item No. 470505 |9.90 GBP

Variant	Item No.	GBP
3945lm | 3000K | CRI>80		
■ black	**133850**	**674.10**
4185lm | 3000K | CRI>80		
□ white	**133851**	**674.10**









MEDO RING 60
PD, DALI







- Height adjustable

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 34W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: Dali

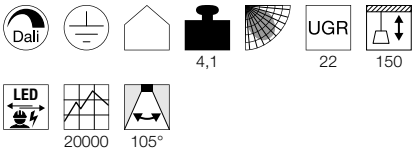

Dimensional drawing



Variant	Item No.	GBP
2000lm | 3000K | CRI>80		
■ black	**1002890**	**566.10**
2095lm | 3000K | CRI>80		
□ white	**1002891**	**566.10**

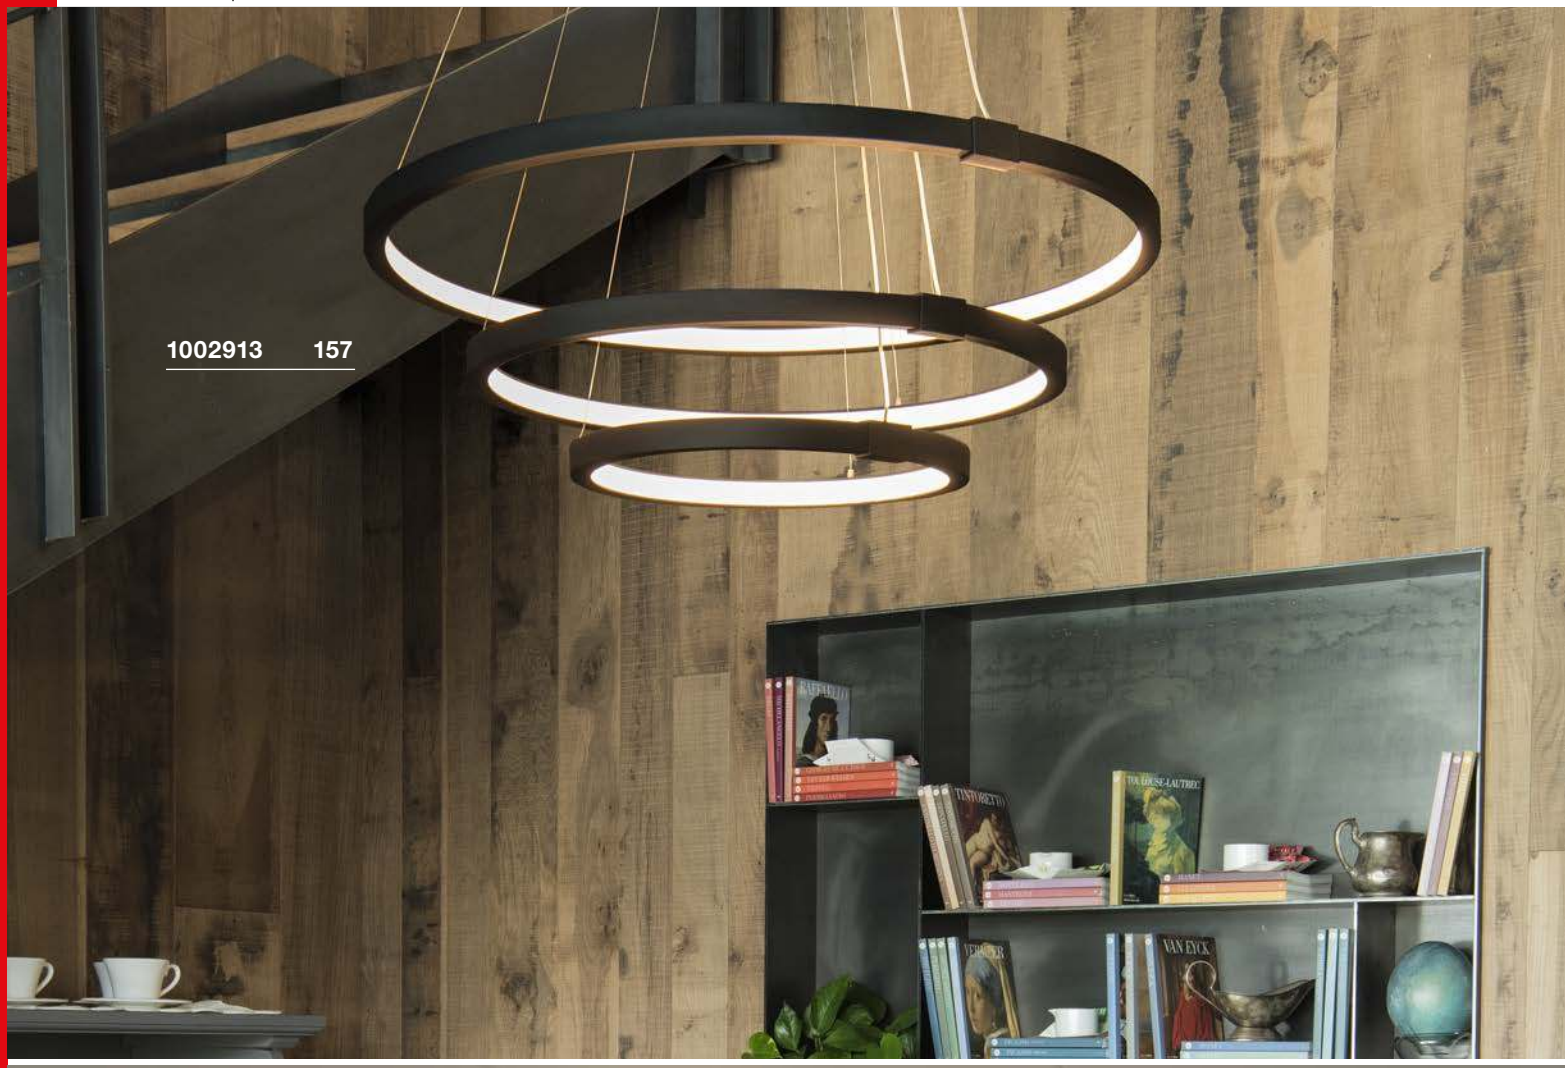
1002913 157


1002912 157

ONE TRIPLE
PD, DALI







- Height adjustable
- The light colour can be selected during installation using a switch

Product details

220-240V 0/~50/60Hz | 1700mA
Total wattage: 65W
Material: aluminium/steel
Dimmable: Dali

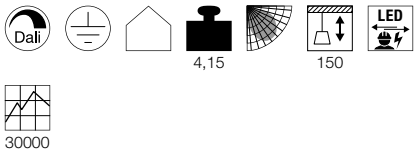

Dimensional drawing



Variant	Item No.	GBP
3900/4200lm | 3000/4000K | CRI>80		
■ matt black	**1002913**	**944.10**
3900/4200lm | 3000/4000K | CRI>80		
□ matt white	**1002914**	**944.10**

ONE 60
PD, DALI







- Height adjustable
- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 600mA
Total wattage: 25W
Material: aluminium/steel
Dimmable: Dali

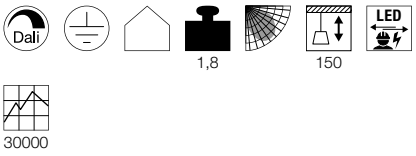

Dimensional drawing



Variant	Item No.	GBP
3900/4200lm | 3000/4000K | CRI>80		
■ matt black	**1002909**	**323.10**
3900/4200lm | 3000/4000K | CRI>80		
□ matt white	**1002910**	**323.10**

ONE 80
PD, DALI







- Height adjustable
- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 800mA
Total wattage: 35W
Material: aluminium/steel
Dimmable: Dali

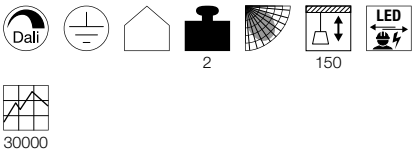

Dimensional drawing



Variant	Item No.	GBP
2000/2200lm | 3000/4000K | CRI>80		
■ matt black	**1002911**	**368.10**
2000/2200lm | 3000/4000K | CRI>80		
□ matt white	**1002912**	**368.10**

ONE 60
PD, PHASE, up/down







- The light colour can be selected during installation using a switch
- Height adjustable

Product details
220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel
Dimmable: C

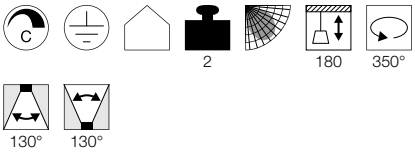

Dimensional drawing



Variant	Item No.	GBP
Up: 410/415lm | 2700/3000K | CRI90 Down: 410/415lm | 2700/3000K | CRI90		
■ matt black	1004759	378.00
Up: 410/415lm | 2700/3000K | CRI90 Down: 410/415lm | 2700/3000K | CRI90		
□ matt white	1004760	378.00

ONE 60
PD, DALI, up/down







- The light colour can be selected during installation using a switch
- Height adjustable

Product details
220-240V ~50/60Hz | 600mA
Total wattage: 25W
Material: aluminium/steel
Dimmable: Dali

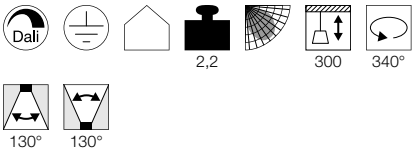

Dimensional drawing



Variant	Item No.	GBP
Up: 400/410lm | 3000/4000K | CRI90 Down: 400/410lm | 3000/4000K | CRI90		
■ matt black	1004761	418.50
Up: 400/410lm | 3000/4000K | CRI90 Down: 400/410lm | 3000/4000K | CRI90		
□ matt white	1004762	418.50

ONE 80
PD, DALI, up/down







- The light colour can be selected during installation using a switch
- Height adjustable

Product details
220-240V ~50/60Hz | 800mA
Total wattage: 34W
Material: aluminium/steel
Dimmable: Dali

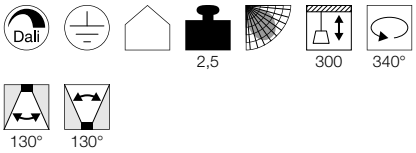

Dimensional drawing



Variant	Item No.	GBP
Up: 615/635lm | 3000/4000K | CRI90 Down: 615/635lm | 3000/4000K | CRI90		
■ matt black	1004763	495.00
Up: 615/635lm | 3000/4000K | CRI90 Down: 615/635lm | 3000/4000K | CRI90		
□ matt white	1004764	495.00



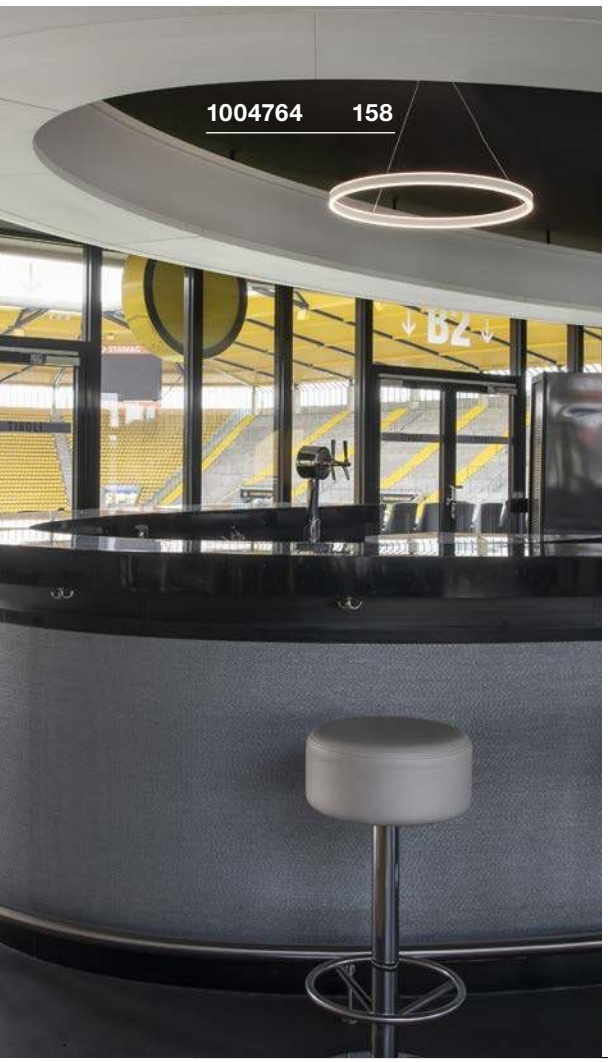

ONE DOUBLE
PD, PHASE, up/down

NEW VARIANT

LED INSIDE

CCT







- The light colour can be selected during installation using a switch
- Height adjustable

Product details

220-240V ~50/60Hz | 900mA
Total wattage: 35W
Material: aluminium/steel
Dimmable: C





Dimensional drawing



Variant	Item No.	GBP
Up: 615/635lm | 2700/3000K | CRI90 Down: 615/635lm | 2700/3000K | CRI90		
■ matt black	1004765	639.00
Up: 615/635lm | 2700/3000K | CRI90 Down: 615/635lm | 2700/3000K | CRI90		
□ matt white	1004766	639.00

ONE DOUBLE
PD, DALI, up/down

NEW VARIANT

LED INSIDE

CCT

DALI







- The light colour can be selected during installation using a switch
- Height adjustable

Product details

220-240V ~50/60Hz | 1400mA
Total wattage: 55W
Material: aluminium/steel
Dimmable: Dali





Dimensional drawing



Variant	Item No.	GBP
Up: 1050/1060lm | 3000/4000K | CRI90 Down: 1050/1060lm | 3000/4000K | CRI90		
■ matt black	1004767	926.10
Up: 1050/1060lm | 3000/4000K | CRI90 Down: 1050/1060lm | 3000/4000K | CRI90		
□ matt white	1004768	926.10

PANEL 60
PD, 1-10V







• Height adjustable



Product details

100-240V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

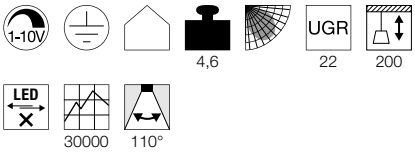

Dimensional drawing



Accessory recommendation

1-10V dimming
Item No. 470505 | 9.90 GBP

Variant	Item No.	GBP
3150lm | 3000K | CRI>80 white	**1001344**	**251.10**
3350lm | 4000K | CRI>80 white	**1001345**	**251.10**
3150lm | 3000K | CRI>80 grey	**1001347**	**251.10**
3350lm | 4000K | CRI>80 grey	**1001348**	**251.10**



PANEL 60
PD, round, DALI







- Height adjustable

Product details

100-277V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: Dali

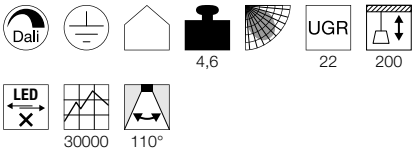

Dimensional drawing



Variant	Item No.	GBP
3150lm | 3000K | CRI>80 white	**1003044**	**260.10**
3350lm | 4000K | CRI>80 white	**1003045**	**260.10**
3150lm | 3000K | CRI>80 grey	**1003046**	**260.10**
3350lm | 4000K | CRI>80 grey	**1003047**	**260.10**


1003051 163

I-PENDANT PRO
PD, 1195x295mm, 1-10V

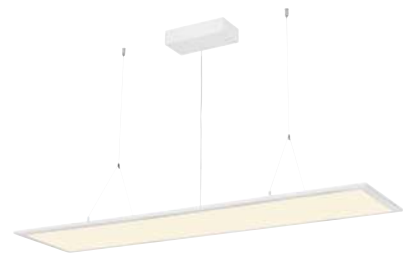





- Height adjustable

Product details

100-240V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/acrylic
Dimmable: 1-10V

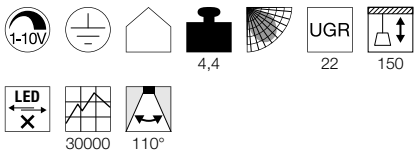

Dimensional drawing



Accessory recommendation

☐ 1-10V dimming
Item No. 470505 | 9.90 GBP



Variant	Item No.	GBP
3100lm | 3000K | CRI>80		
☐ white	**158723**	**179.10**
3550lm | 4000K | CRI>80		
☐ white	**158724**	**179.10**
3100lm | 3000K | CRI>80		
■ grey	**158733**	**179.10**
3550lm | 4000K | CRI>80		
■ grey	**158734**	**179.10**

I-PENDANT PRO
PD, 1195x295mm, UGR<19, 1-10V

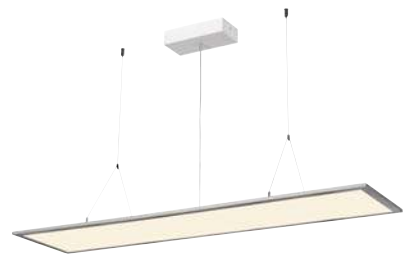





- Height adjustable
- UGR <19
- Suitable for screen-based workstations

Product details

100-240V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

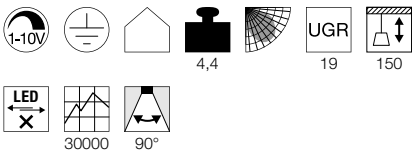

Dimensional drawing



Accessory recommendation

☐ 1-10V dimming
Item No. 470505 | 9.90 GBP



Variant	Item No.	GBP
3750lm | 3000K | CRI>80		
☐ white	**1001447**	**269.10**
3800lm | 4000K | CRI>80		
☐ white	**1001448**	**269.10**
3750lm | 3000K | CRI>80		
■ grey	**1001647**	**269.10**
3800lm | 4000K | CRI>80		
■ grey	**1001648**	**269.10**

I-PENDANT PRO
PD, 1195x295mm, DALI

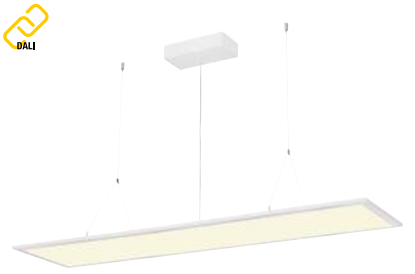





- Height adjustable
- UGR<19
- Suitable for screen-based workstations in line with EN 12464-1

Product details

100-277V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: Dali

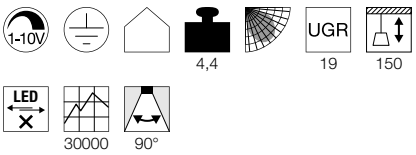

Dimensional drawing



Variant	Item No.	GBP
3750lm | 3000K | CRI>80		
☐ white	**1003048**	**296.10**
3800lm | 4000K | CRI>80		
☐ white	**1003049**	**296.10**
3750lm | 3000K | CRI>80		
■ grey	**1003050**	**296.10**
3800lm | 4000K | CRI>80		
■ grey	**1003051**	**296.10**

HANG UP 120
PD, PHASE

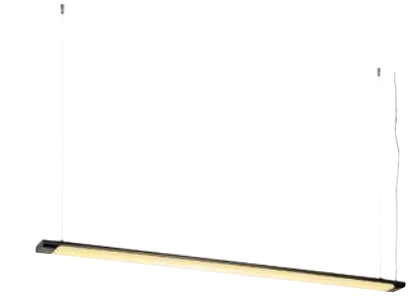





• Height adjustable





Product details

220-240V ~50/60Hz | 250mA
Total wattage: 41W
Material: aluminium/plastic
Dimmable: C

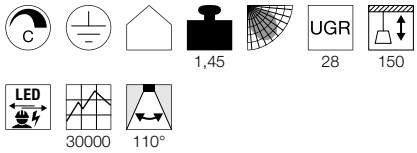

Dimensional drawing



Tip

Rose not included
Open cable end

Accessory recommendation

■ Ceiling rose
Item No. 210060 | 25.20 GBP

□ Ceiling rose
Item No. 210061 | 25.20 GBP

■ Ceiling rose
Item No. 210064 | 25.20 GBP

Variant	Item No.	GBP
4000lm | 3000K | CRI>80 ■ black	**160900**	**167.40**
4000lm | 3000K | CRI>80 □ white	**160901**	**167.40**
4000lm | 3000K | CRI>80 ■ grey	**160904**	**167.40**

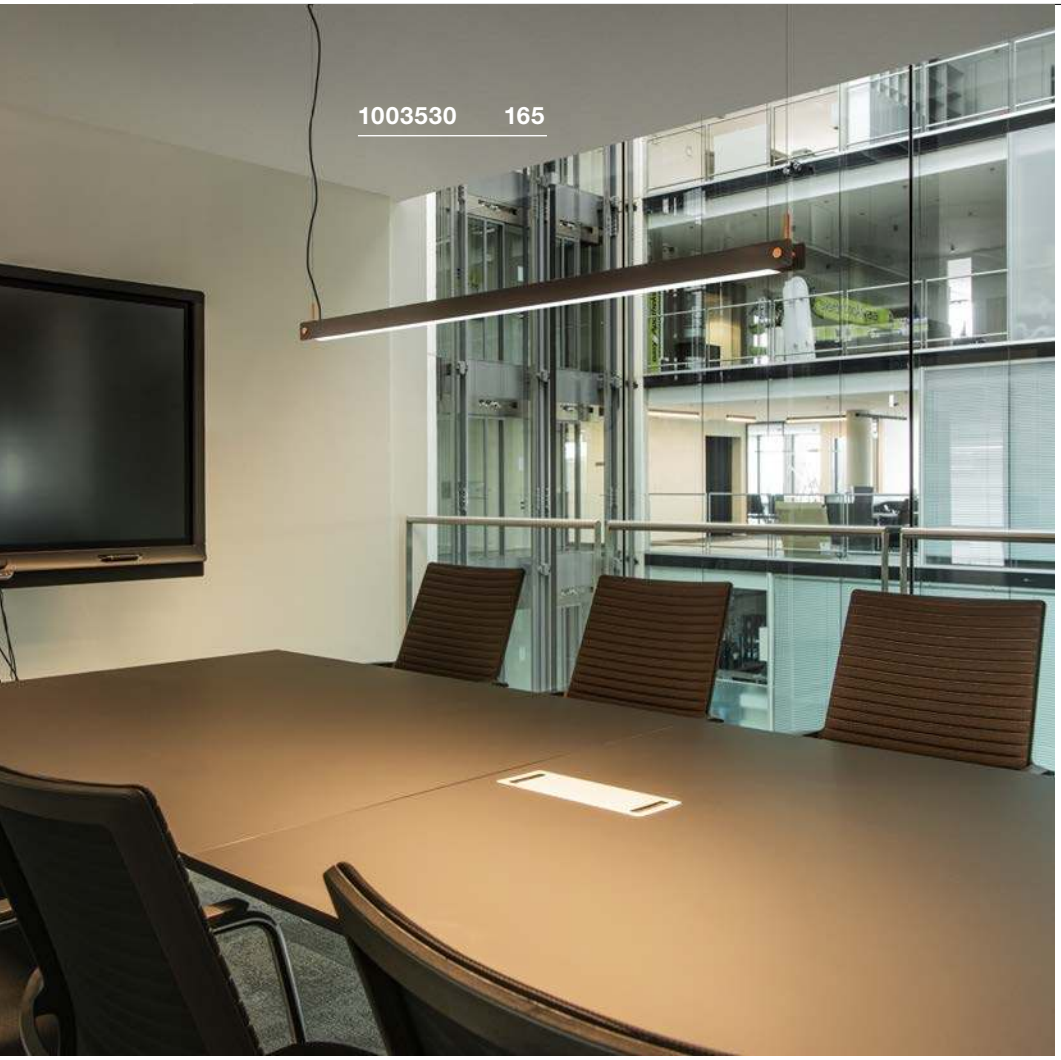



NOYA
PD, PHASE

NEW

LED INSIDE

CCT







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 32W
Material: aluminium/polycarbonate (PC)
Dimmable: C

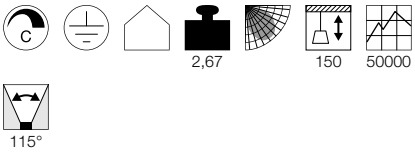

Dimensional drawing



Variant	Item No.	GBP
1861/2025lm | 2700/3000K | CRI>90		
■ matt black	**1003530**	**358.20**
1861/2025lm | 2700/3000K | CRI>90		
□ matt white	**1003532**	**358.20**

LIGHTING HIGHLIGHTS.
OUR PERFECT LIGHTING FOR YOUR WORKSTATION.

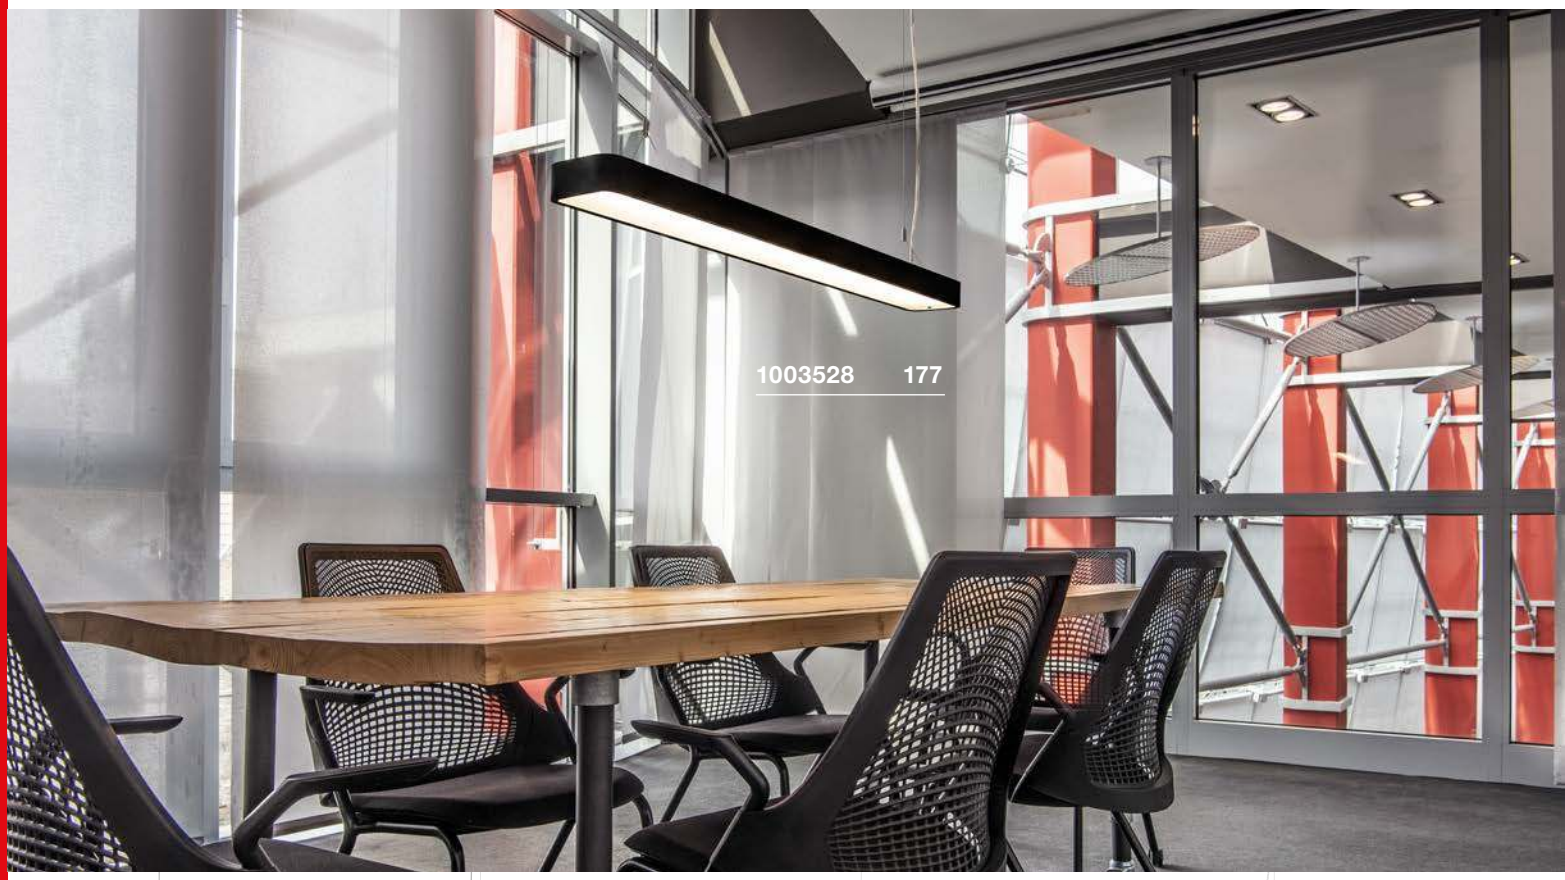



GLENOS® 1m | 2m | 168



Q-LINE® PD, single | 169



Q-LINE® PD, DALI single | 169


1001403 168

GLENOS
PD, 1m, 1-10V

LED INSIDE







- Height adjustable

Product details

220-240V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/plastic
Dimmable: 1-10V

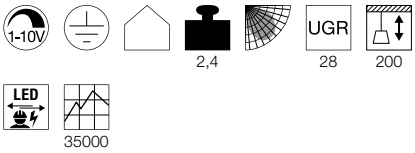

Dimensional drawing



Accessory recommendation

☐ 1-10V dimming
Item No. 470505 |9.90 GBP



Variant	Item No.	GBP
2850lm | 3000K | CRI>80		
■ matt black	**1001400**	**314.10**
2850lm | 3000K | CRI>80		
☐ matt white	**1001401**	**314.10**
3300lm | 4000K | CRI>80		
■ matt black	**1001403**	**314.10**
3300lm | 4000K | CRI>80		
☐ matt white	**1001404**	**314.10**

GLENOS
PD, 2m, 1-10V

LED INSIDE







- Height adjustable

Product details

220-240V ~50/60Hz | 1000mA
Total wattage: 85W
Material: aluminium/plastic
Dimmable: 1-10V

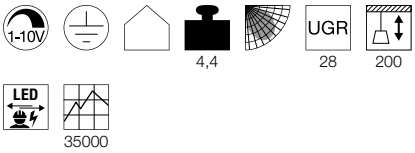

Dimensional drawing



Accessory recommendation

☐ 1-10V dimming
Item No. 470505 |9.90 GBP



Variant	Item No.	GBP
5700lm | 3000K | CRI>80		
■ matt black	**1001406**	**431.10**
5700lm | 3000K | CRI>80		
☐ matt white	**1001407**	**431.10**
6600lm | 4000K | CRI>80		
■ matt black	**1001409**	**431.10**
6600lm | 4000K | CRI>80		
☐ matt white	**1001410**	**431.10**



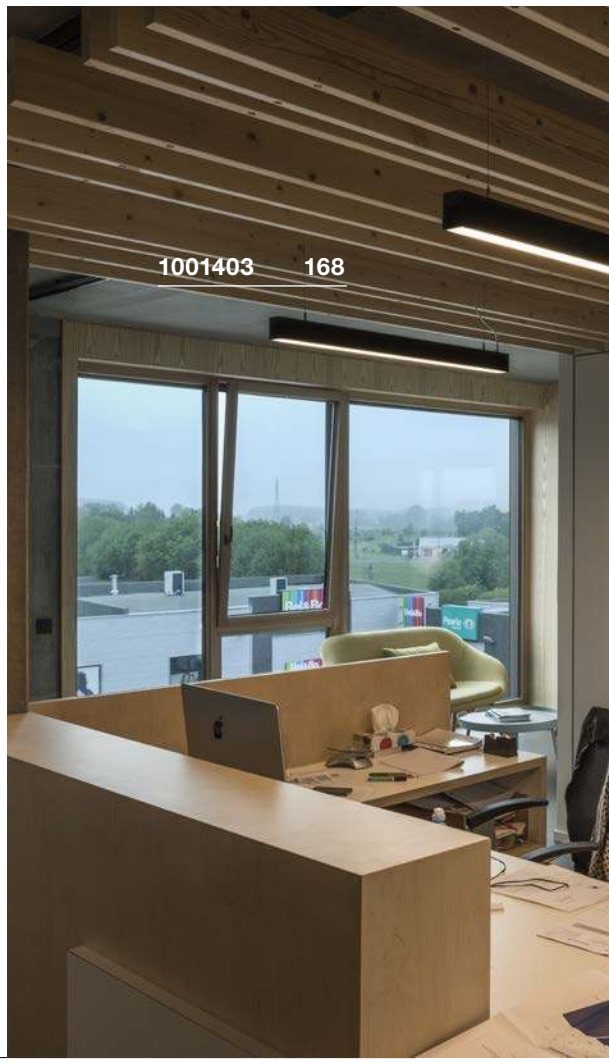

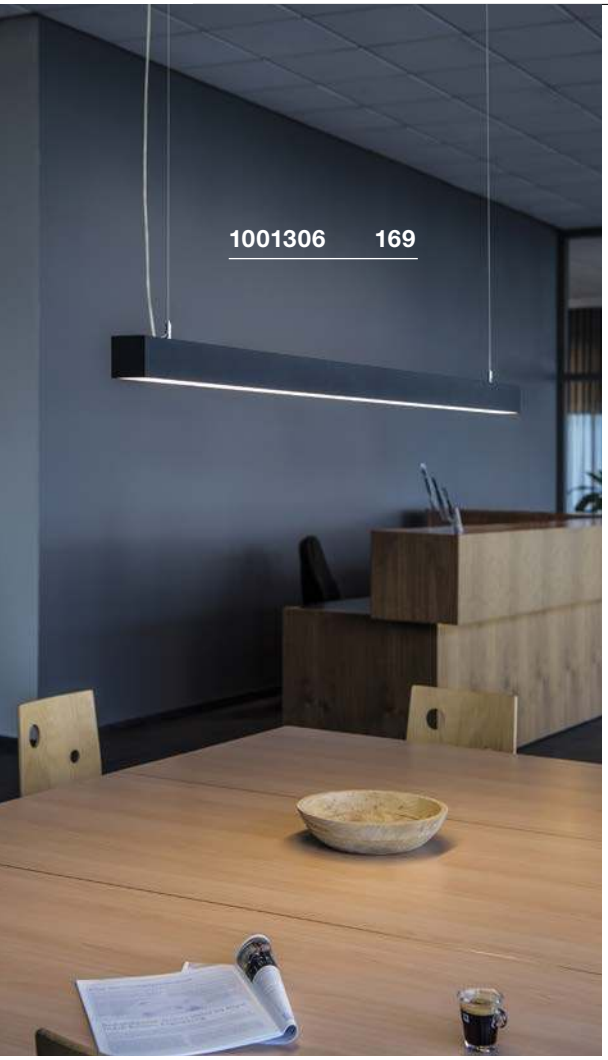



Q-LINE®
PD, single







- Height adjustable

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 45.8W
Material: aluminium/acrylic

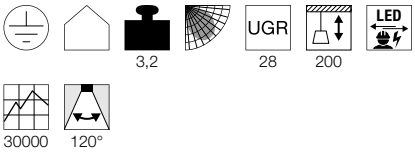

Dimensional drawing



Variant	Item No.	GBP
3700lm | 3000K | CRI>80		
■ black	**1001306**	**388.80**
3700lm | 3000K | CRI>80		
□ white	**1001307**	**388.80**
3700lm | 3000K | CRI>80		
■ grey	**1001308▼**	**388.80**

Q-LINE®
PD, DALI, single

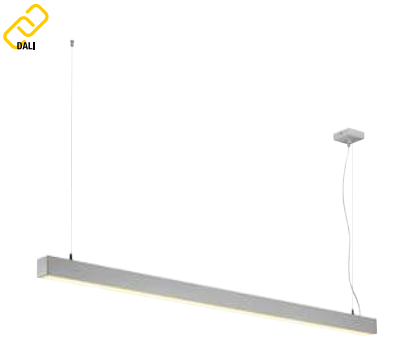





- Height adjustable

Product details

220-240V ~50/60Hz | 350mA-1050mA
Total wattage: 47W
Material: aluminium/acrylic
Dimmable: Dali, switch

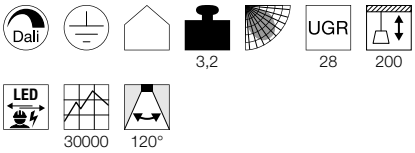

Dimensional drawing



Variant	Item No.	GBP
3700lm | 3000K | CRI>80		
■ black	**1001309**	**462.60**
3700lm | 3000K | CRI>80		
□ white	**1001310**	**462.60**
3700lm | 3000K | CRI>80		
■ grey	**1001312▼**	**462.60**

Q-LINE®
PD, 1m, BAP, PHASE



- Premium LED with CRI>90
- Height adjustable

Product details

220-240V ~50/60Hz | 900mA
Total wattage: 45W
Material: aluminium/plastic
Dimmable: L

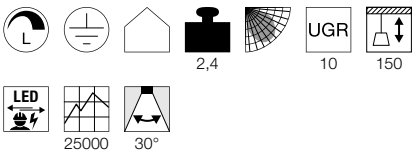

Dimensional drawing



Variant	Item No.	GBP
2100lm | 3000K | CRI>90		
■ black	1000927	388.80
2100lm | 3000K | CRI>90		
□ white	1000926	388.80
2100lm | 3000K | CRI>90		
■ grey	1000928▼	388.80
2300lm | 4000K | CRI>90		
■ black	1000933	388.80
2300lm | 4000K | CRI>90		
□ white	1000932	388.80
2300lm | 4000K | CRI>90		
■ grey	1000934▼	388.80

Q-LINE®
PD, 2m, BAP, PHASE







- Premium LED with CRI>90
- Height adjustable

Product details

220-240V ~50/60Hz | 900mA
Total wattage: 85W
Material: aluminium/plastic
Dimmable: L

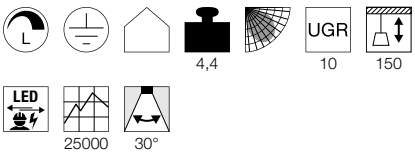

Dimensional drawing



Variant	Item No.	GBP
4200lm | 3000K | CRI>90		
■ black	1000930	583.20
4200lm | 3000K | CRI>90		
□ white	1000929	583.20
4200lm | 3000K | CRI>90		
■ grey	1000931▼	583.20
4600lm | 4000K | CRI>90		
■ black	1000936	583.20
4600lm | 4000K | CRI>90		
□ white	1000935	583.20
4600lm | 4000K | CRI>90		
■ grey	1000937▼	583.20





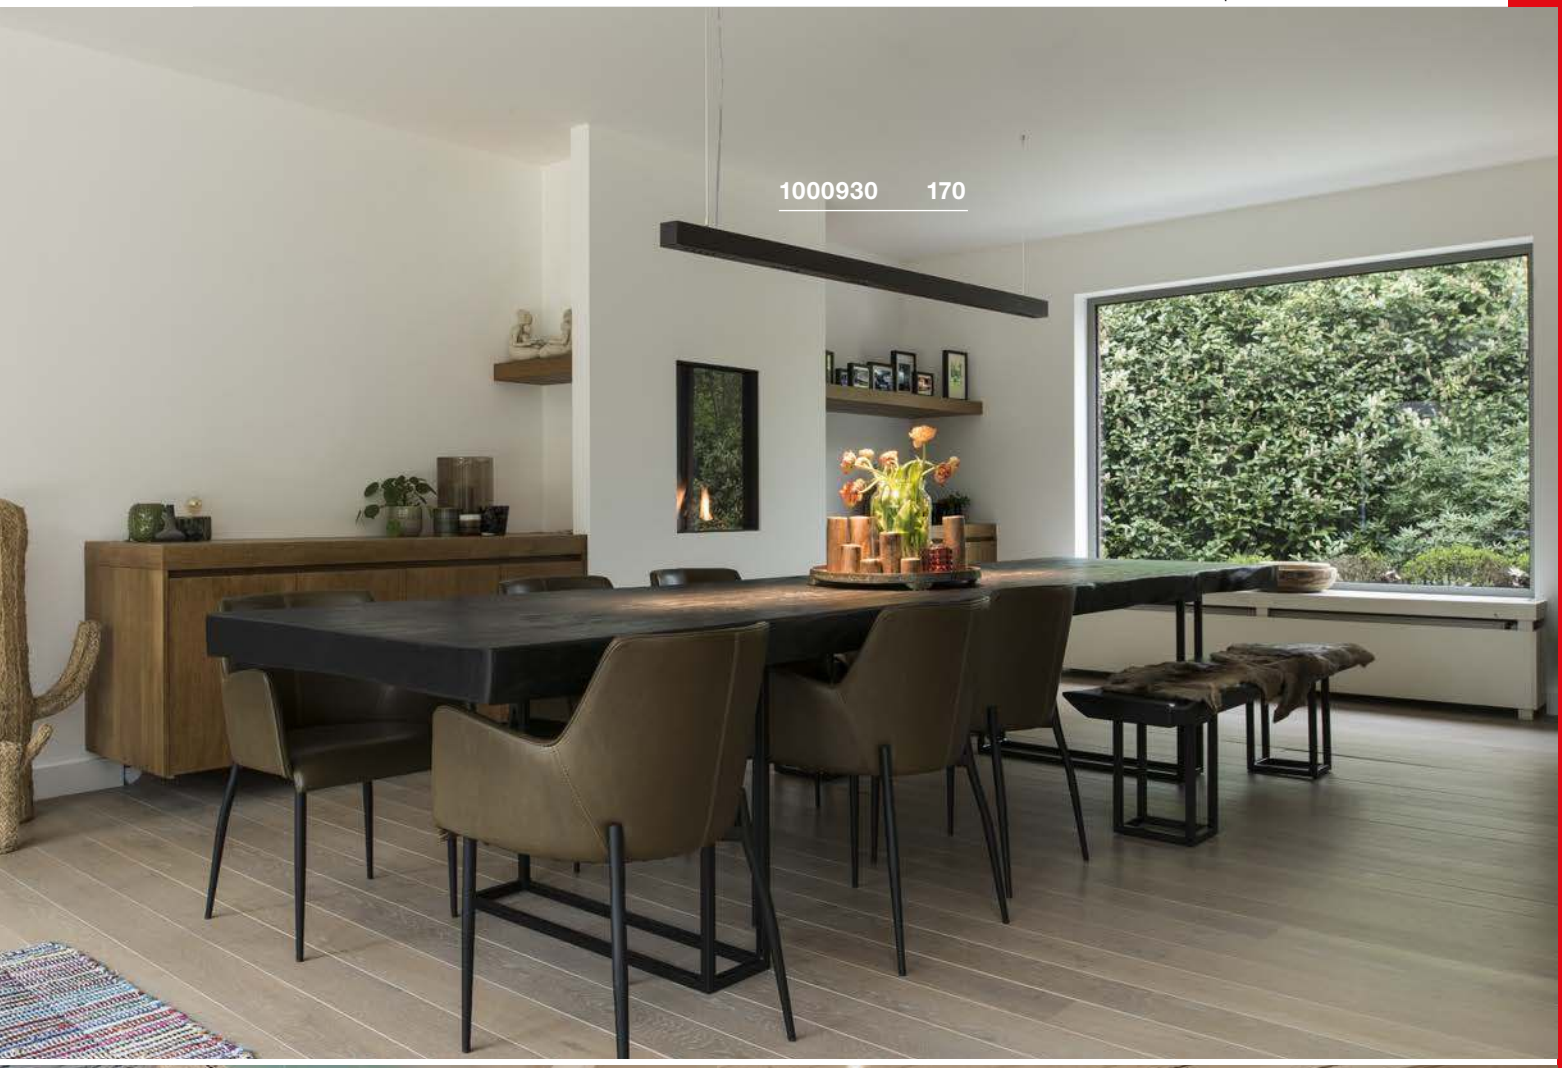
1000930 170

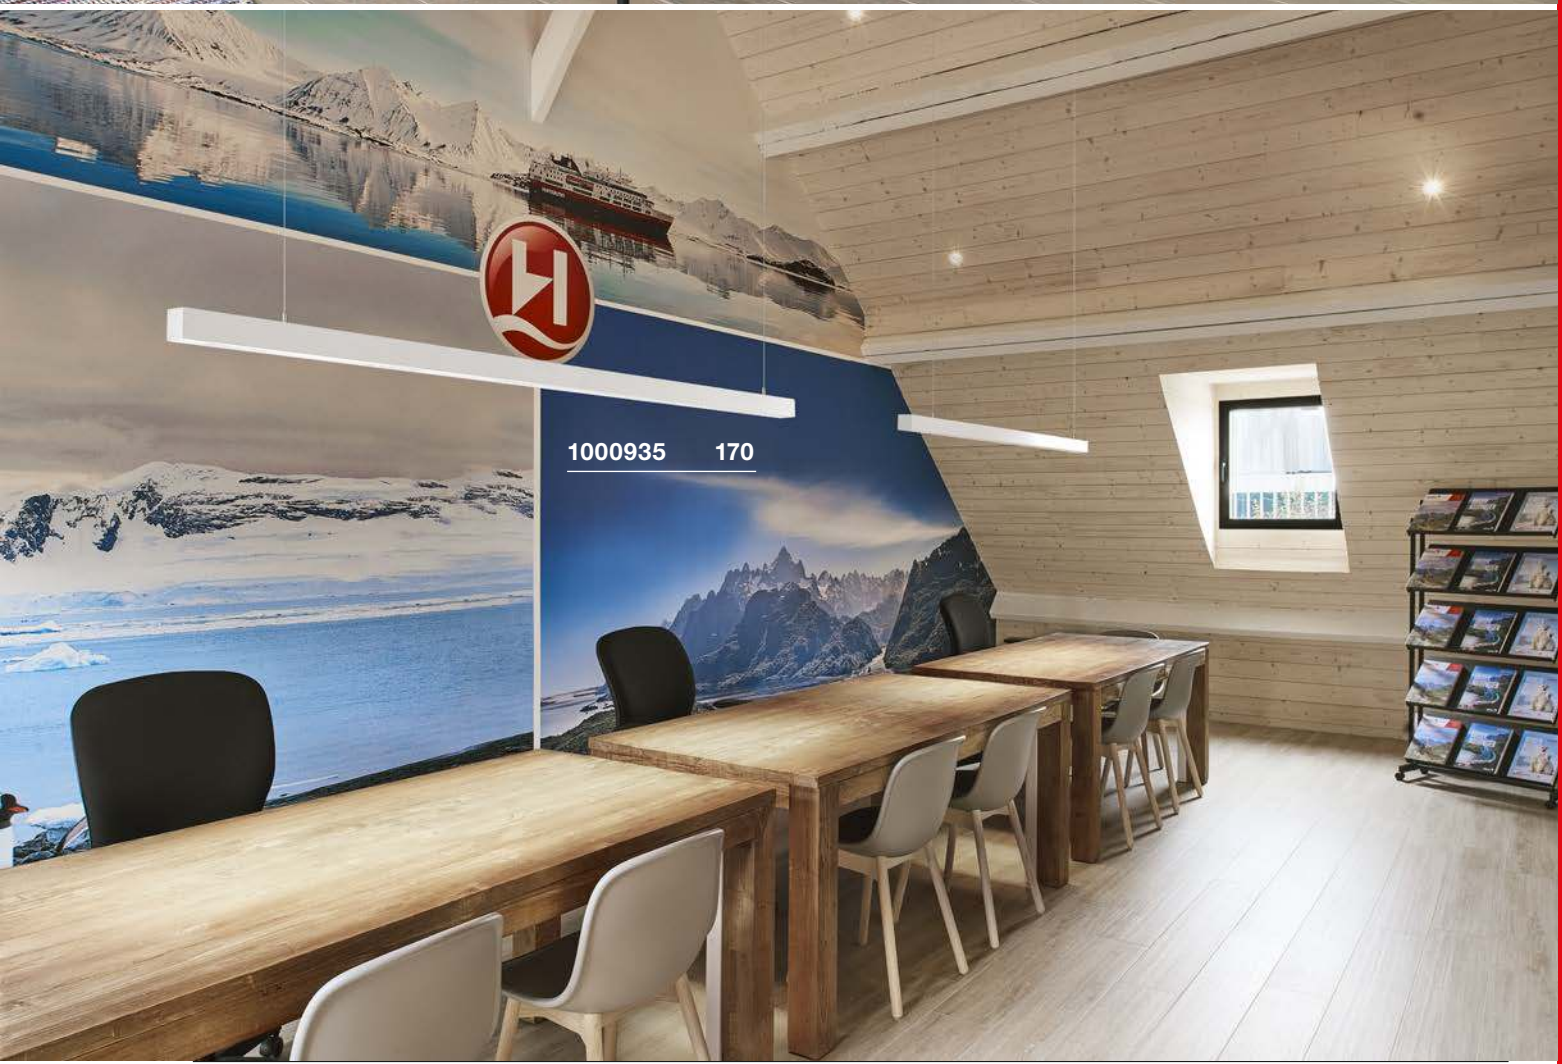
1000935 170

OPEN GRILL
PD, Single, rotatable

LED INSIDE







- Height adjustable

Product details
220-240V ~50/60Hz | 700mA
Total wattage: 38W
Material: aluminium/acrylic

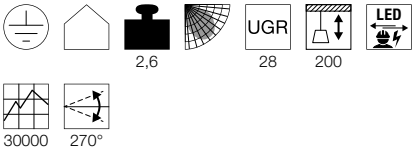

Dimensional drawing



Variant	Item No.	GBP
3160lm | 3000K | CRI>80		
■ black	**1001297**	**305.10**
250lm · 3000K · CRI>80		
□ white	**157671**	**305.10**

OPEN GRILL
PD, Double, rotatable

LED INSIDE







- Height adjustable

Product details
220-240V ~50/60Hz | 1050mA
Total wattage: 54W
Material: aluminium/acrylic

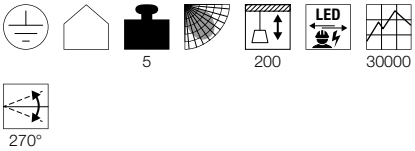

Dimensional drawing



Variant	Item No.	GBP
4500lm | 3000K | CRI>80		
■ black	**1001295**	**416.70**
4500lm | 3000K | CRI>80		
□ white	**1001296**	**416.70**



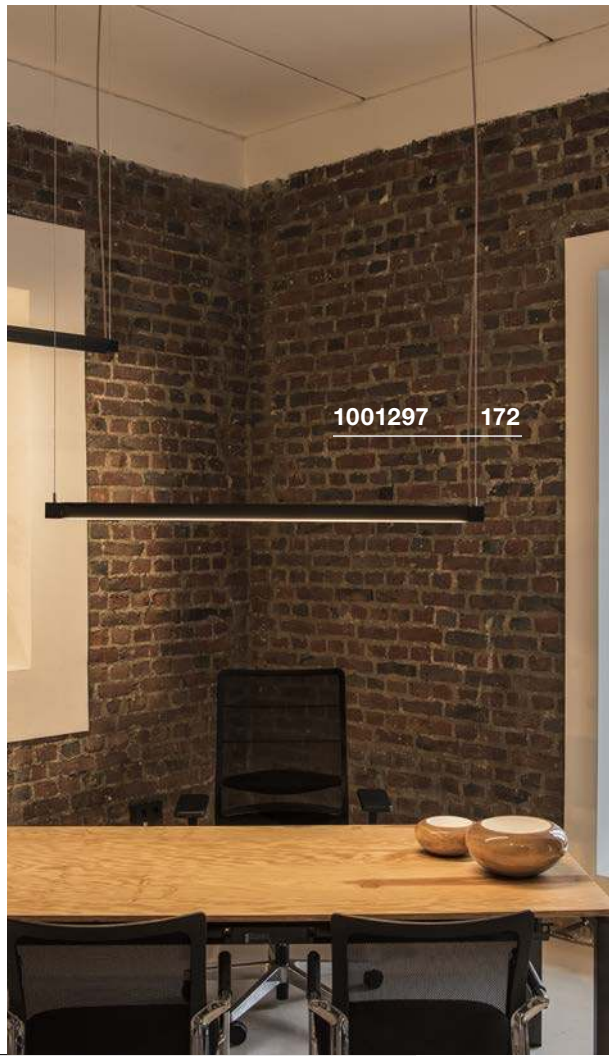

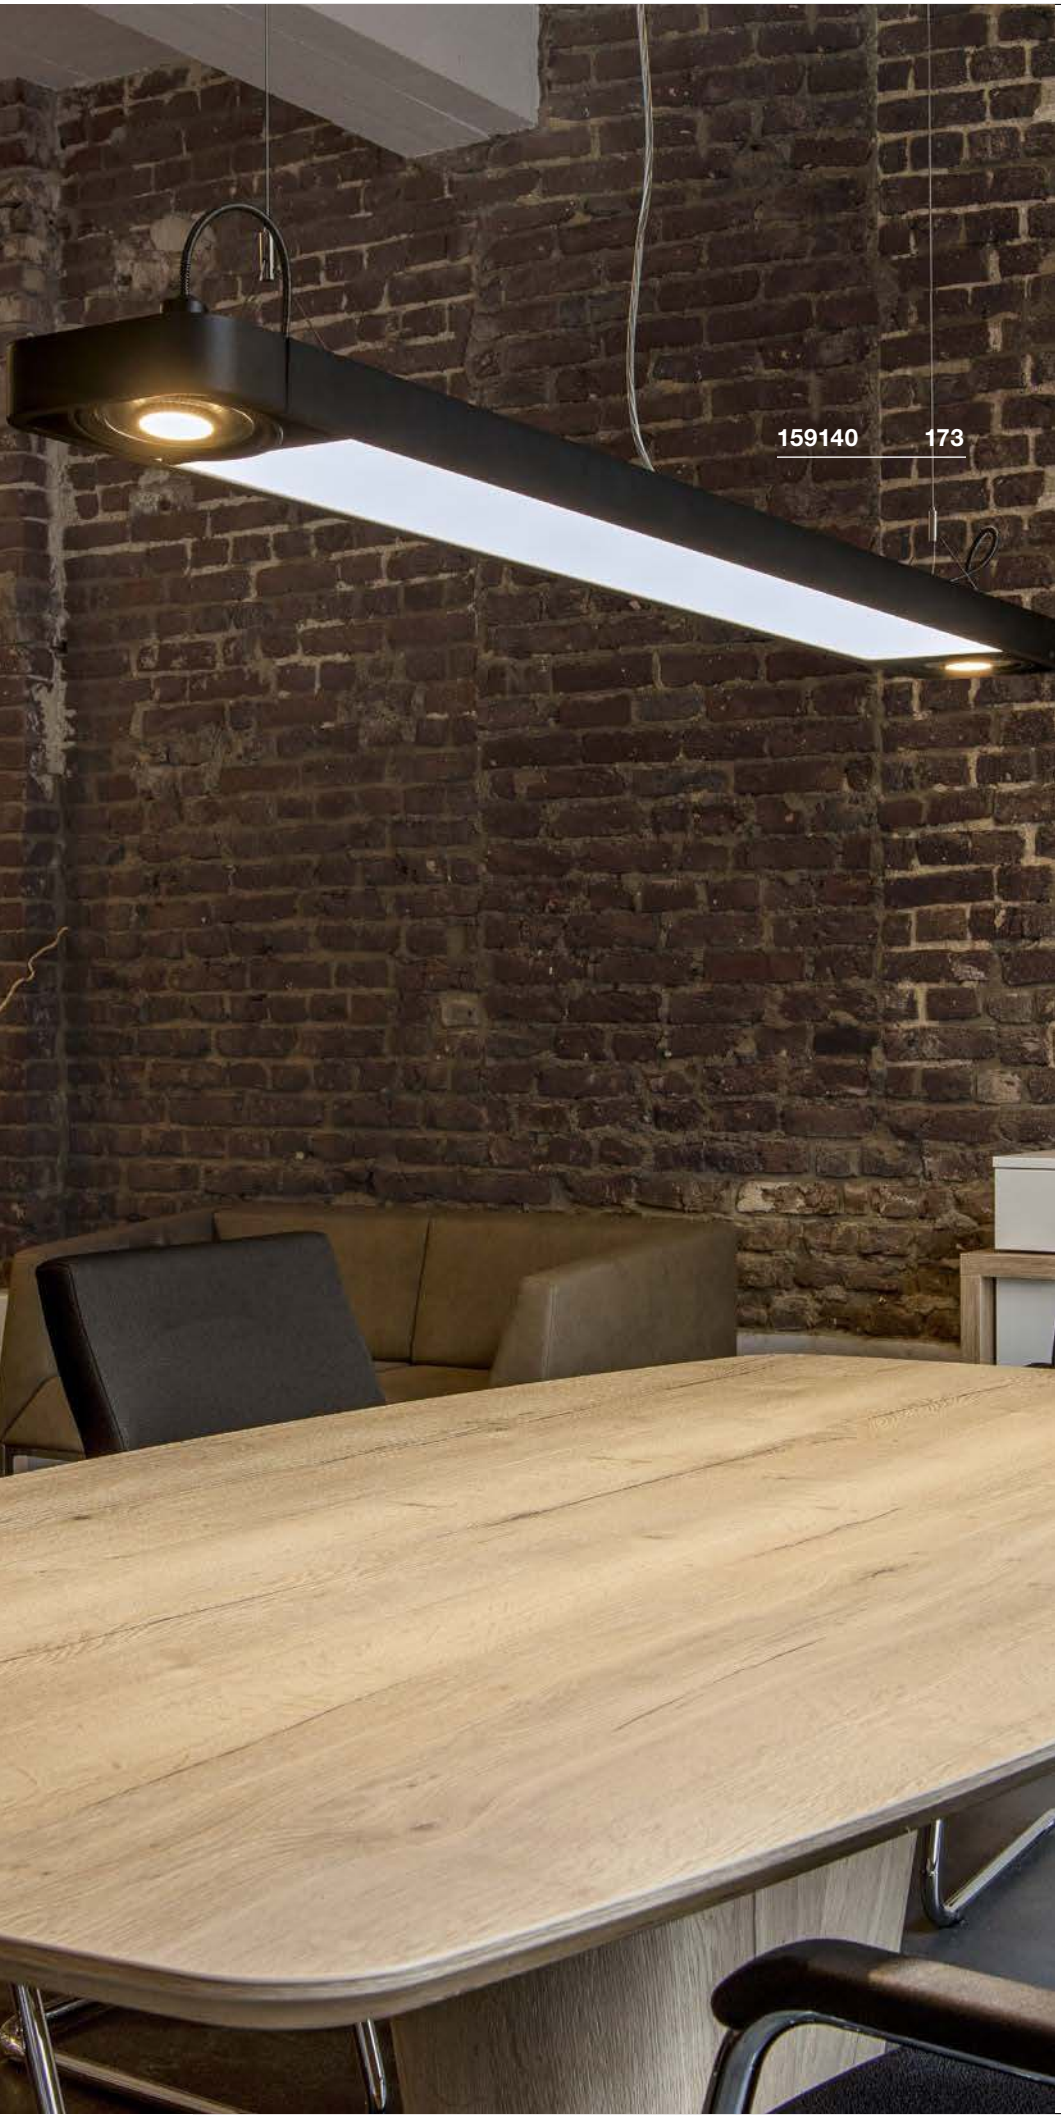

AIXLIGHT® 150
PD, R2 Office, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 35W
Material: aluminium/steel
Dimmable: C, L

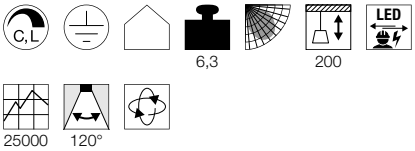

Dimensional drawing



Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP



LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP



Lamp details

2x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 4100lm | 4000K | CRI>80 ■ black	**159140**	**477.00**
GU10 | QPAR111 4100lm | 4000K | CRI>80 □ white	**159141**	**477.00**
GU10 | QPAR111 4100lm | 4000K | CRI>80 ◪ grey/transparent	**159144**	**477.00**

AIXLIGHT®
PD, R2, double, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP



LED GU10 9W 40°
2700-6500K 765lm
9kWh/1000h
Item No. 1001921 | 49.50 GBP



Lamp details
2x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**159210**	**206.10**
GU10 | QPAR111		
□ white	**159211**	**206.10**

AIXLIGHT®
PD, R2, quad, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP



LED GU10 6,5W 38°
2700K 390lm
7kWh/1000h
Item No. 551882 | 40.50 GBP



Lamp details
4x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**159230**	**341.10**
GU10 | QPAR111		
□ white	**159231**	**341.10**

AIXLIGHT®
PD, R2, quad, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 13W 55°
4000K 950lm
13kWh/1000h
Item No. 1003095 | 80.10 GBP



LED GU10 9W 25°
2700-6500K 765lm
9kWh/1000h
Item No. 1001920 | 49.50 GBP



Lamp details
4x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**159220**	**341.10**
GU10 | QPAR111		
□ white	**159221**	**341.10**

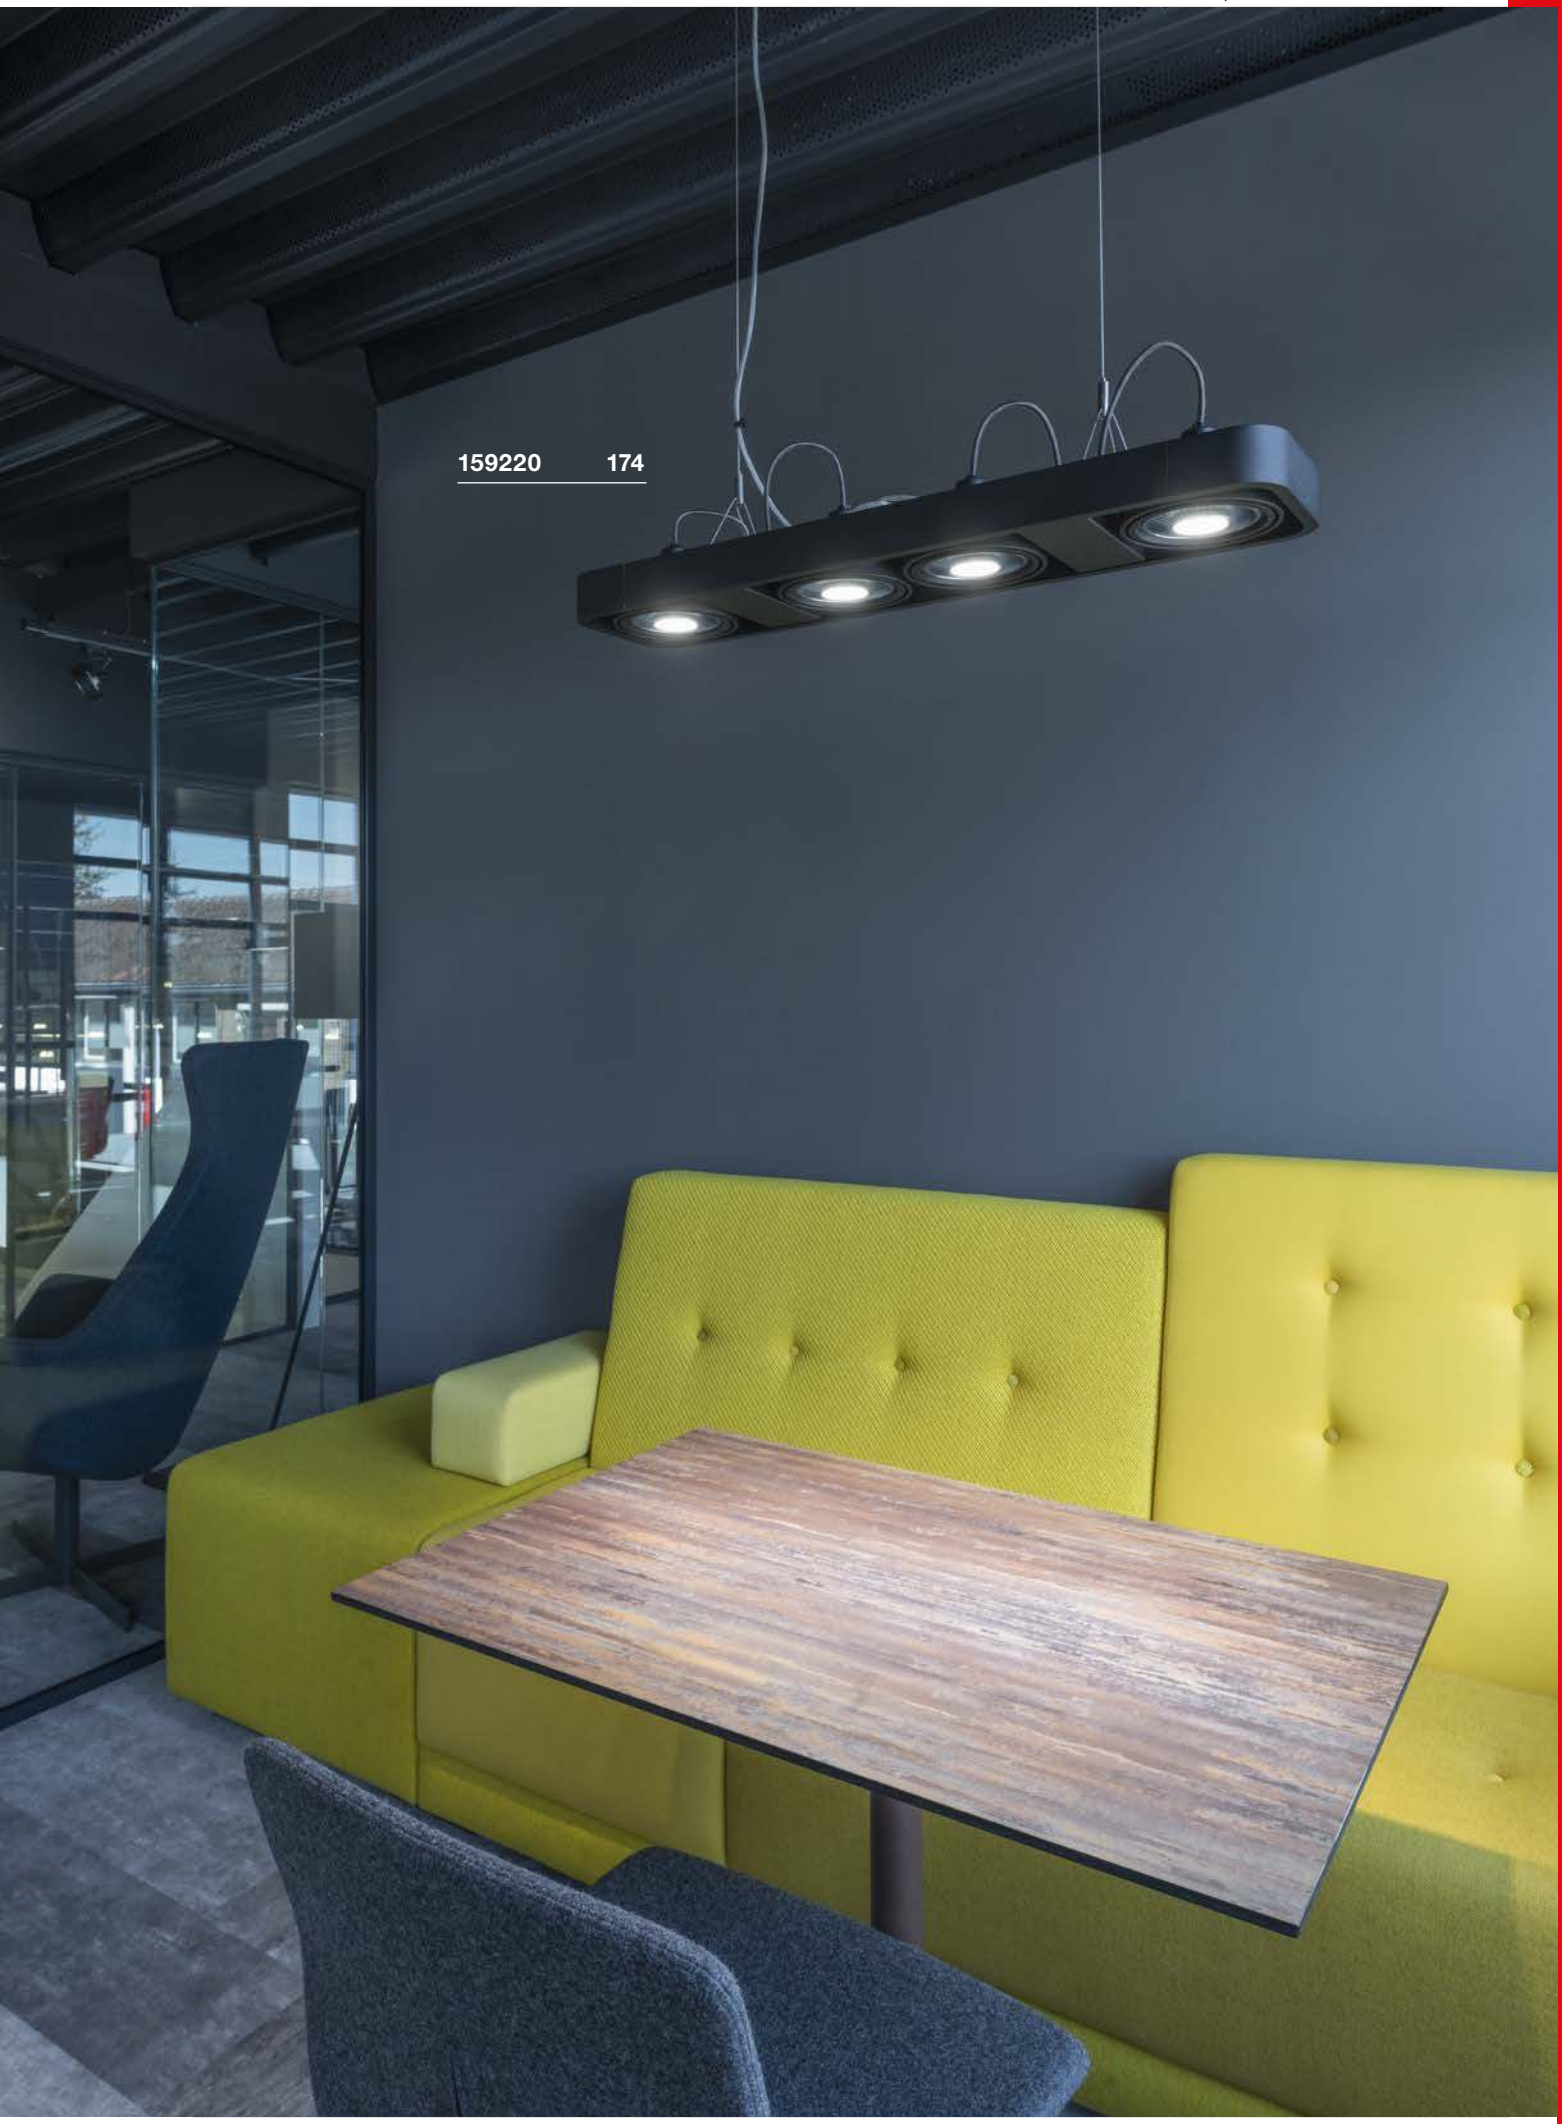
159220 174

WORKLIGHT
PD, DALI

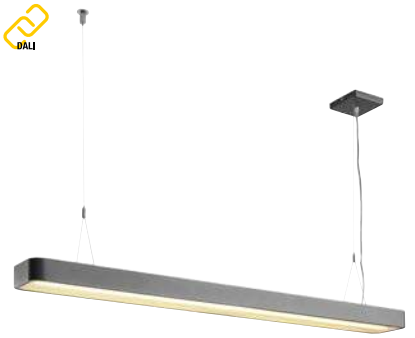





- Height adjustable
- Direct and indirect light

Product details

220-240V ~50/60Hz | 226mA
Total wattage: 49W
Material: aluminium/acrylic
Dimmable: Dali

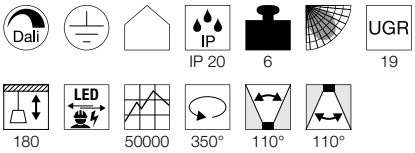

Dimensional drawing



Variant	Item No.	GBP
Direct: 3700lm | 3000K | CRI>80 Indirect: 1800lm | 3000K | CRI>80 white	1002838	598.50
Direct: 3700lm | 3000K | CRI>80 Indirect: 1800lm | 3000K | CRI>80 anthracite	1002839	598.50
Direct: 3700lm | 4000K | CRI>80 Indirect: 1800lm | 4000K | CRI>80 white	1003525	598.50
Direct: 3700lm | 4000K | CRI>80 Indirect: 1800lm | 4000K | CRI>80 anthracite	1003526	598.50

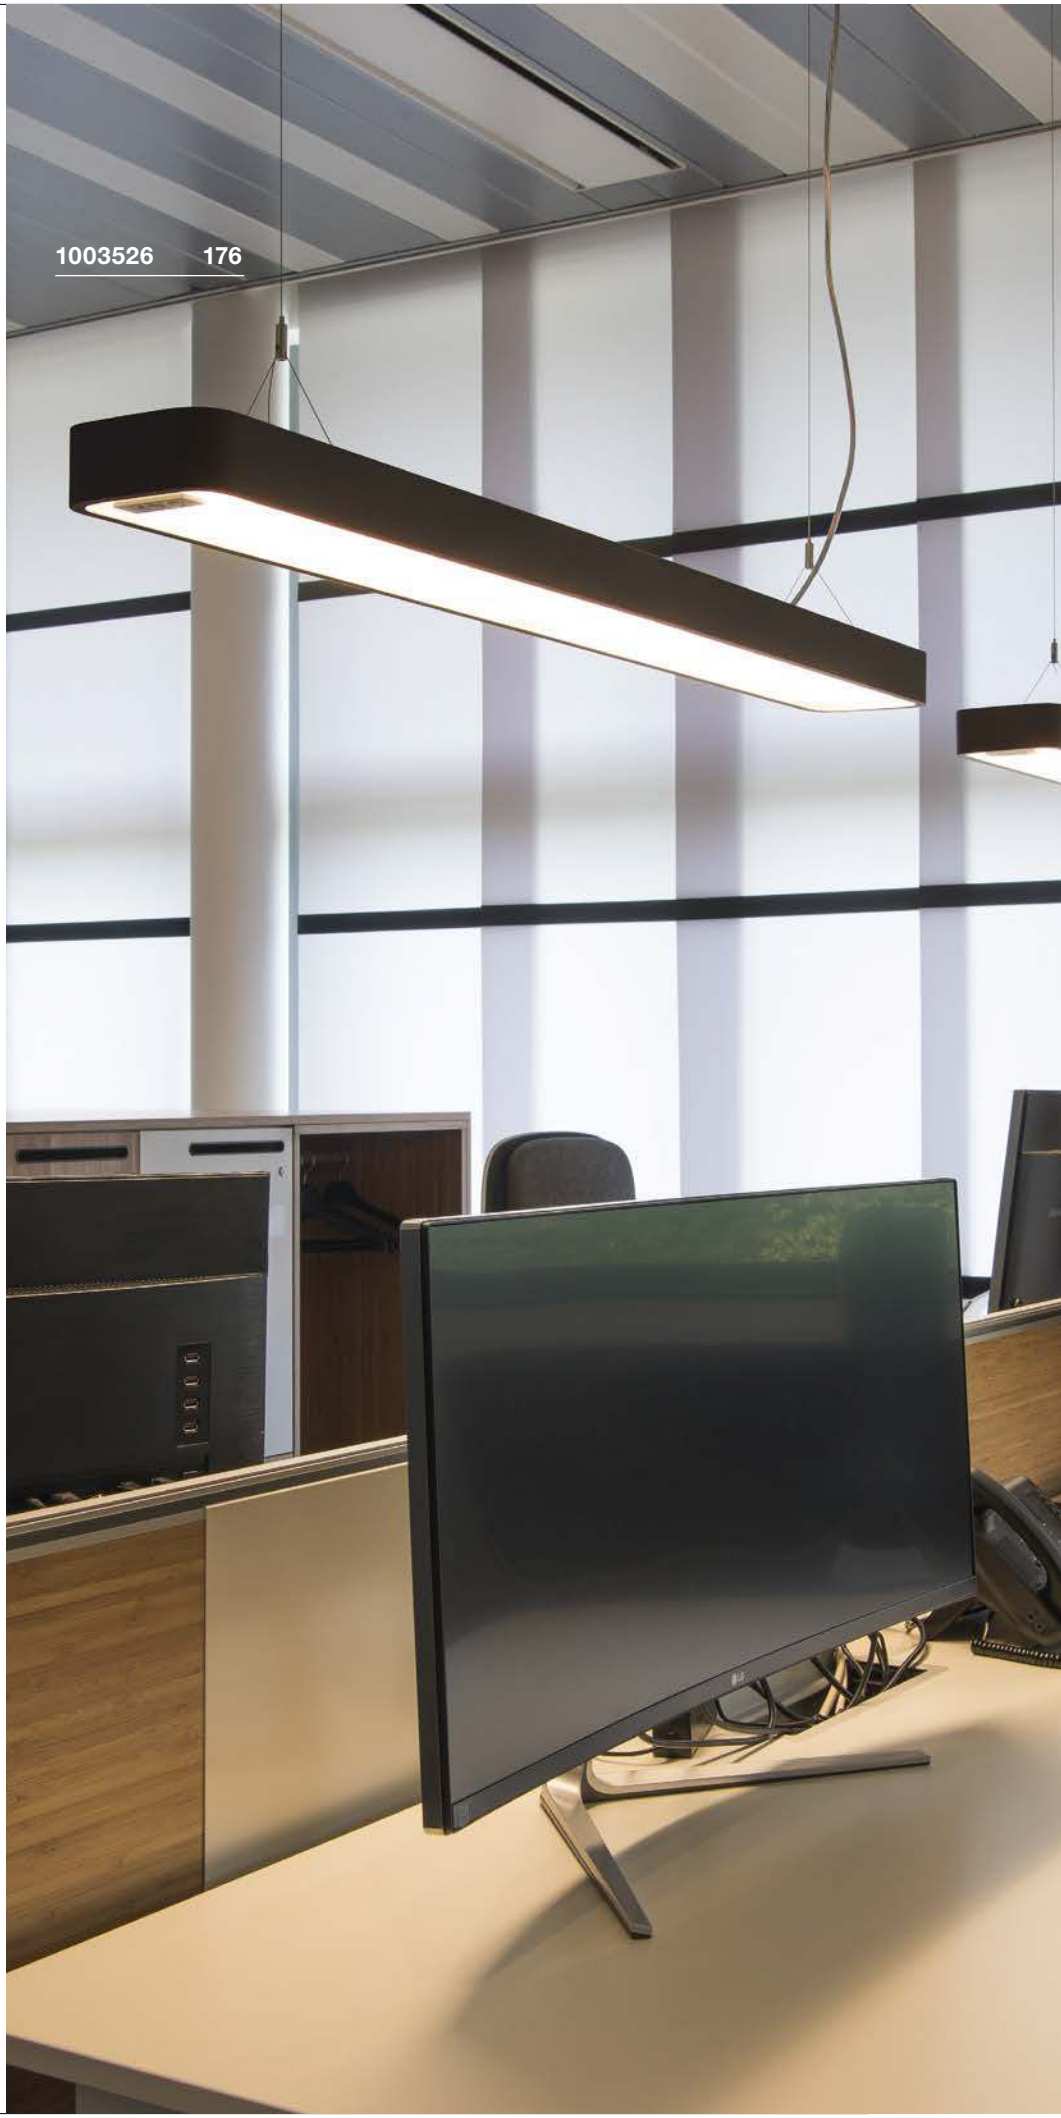



WORKLIGHT PLUS
PD, Switch

LED INSIDE







- Intelligent presence control and brightness sensor technology
- Direct and indirect light

Product details

220-240V ~50/60Hz | 226mA
Total wattage: 48W
Material: aluminium/acrylic
Dimmable: switch

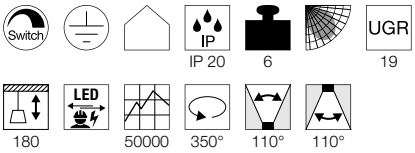

Dimensional drawing



Variant	Item No.	GBP
Direct: 3600lm | 3000K | CRI>80 Indirect: 1920lm | 3000K | CRI>80 white	1002849	855.00
Direct: 3600lm | 3000K | CRI>80 Indirect: 1920lm | 3000K | CRI>80 anthracite	1002850	855.00
Direct: 3600lm | 4000K | CRI>80 Indirect: 1920lm | 4000K | CRI>80 white	1003527	855.00
Direct: 3600lm | 4000K | CRI>80 Indirect: 1920lm | 4000K | CRI>80 anthracite	1003528	855.00

SUPROS 78
PD







Product details

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium
Dimmable: C, L

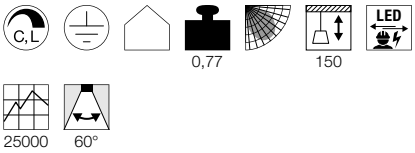

Dimensional drawing



Accessory recommendation

Lens 20°
Item No. 116302 |3.00 GBP

Lens 40°
Item No. 116304 |3.00 GBP

Variant	Item No.	GBP
700lm | 3000K | CRI>80 | 60°		
■ black	**133120**	**135.00**
700lm | 3000K | CRI>80 | 60°		
□ white	**133121**	**135.00**

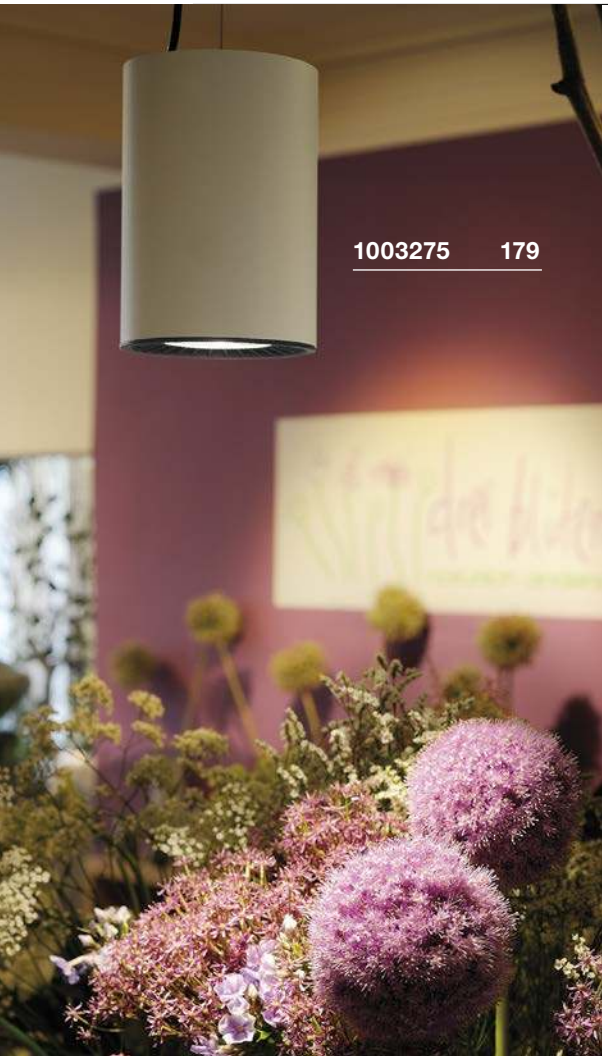



SUPROS PD

FOLLOWER

LED INSIDE







Product details

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: aluminium





Dimensional drawing



Accessory recommendation

Reflector 20°
Item No. 114102 | 9.50 GBP



Reflector 40°
Item No. 114104 | 9.50 GBP



Variant	Item No.	GBP
2600lm | 3000K | CRI>90 | 60°		
■ black	**1003275**	**224.10**
2600lm | 3000K | CRI>90 | 60°		
□ white	**1003276**	**224.10**
2850lm | 4000K | CRI>90 | 60°		
■ black	**1003277**	**224.10**
2850lm | 4000K | CRI>90 | 60°		
□ white	**1003278**	**224.10**

SUPROS PD

FOLLOWER

LED INSIDE







Product details

220-240V ~50/60Hz | 950mA
Total wattage: 36W
Material: aluminium





Dimensional drawing



Accessory recommendation

Reflector 20°
Item No. 114102 | 9.50 GBP



Reflector 40°
Item No. 114104 | 9.50 GBP



Variant	Item No.	GBP
3380lm | 3000K | CRI>90 | 60°		
■ black	**1003279**	**229.50**
3380lm | 3000K | CRI>90 | 60°		
□ white	**1003280**	**229.50**
3520lm | 4000K | CRI>90 | 60°		
■ black	**1003281**	**229.50**
3520lm | 4000K | CRI>90 | 60°		
□ white	**1003282**	**229.50**


1002059 181


1002057 181

PARA DOME
PD, E27

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium



Dimensional drawing



Tip

Open cable end

Recommended lamp

LED E27 15W 350°
2700K 1300lm
15kWh/1000h
Item No. 1003097 | 85.50 GBP



LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



Lamp details

max. 150W

Variant	Item No.	GBP
E27		
black	**1002053**	**60.30**
E27		
white	**1002054**	**60.30**
E27		
grey	**1002055**	**60.30**

PARA DOME
Shade







Product details

Material: aluminium
Product dimensions:
Diameter: 30.8 cm H: 20.6 cm



Variant	Item No.	GBP
black	**1002056**	**76.50**
white	**1002057**	**76.50**
grey	**1002058**	**76.50**

PARA DOME
Shade







Product details

Material: Polycarbonate (PC)
Product dimensions:
Diameter: 31.5 cm H: 20.5 cm



Variant	Item No.	GBP
transparent	**1002059**	**76.50**

PARA 380
PD, E27

SOCKET INSIDE









Product details

230V -50Hz
Material: aluminium



Dimensional drawing





Recommended lamp

LED E27 7W
2700K 640lm
7kWh/1000h
Item No. 1003085 | 8.10 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 160W HME-SB

Variant	Item No.	GBP
E27 | HME-SB black	**165359**	**126.00**
E27 | HME-SB grey	**165350**	**126.00**
E27 | HME-SB glossy red	**165356**	**126.00**
E27 | HME-SB aluminium	**165358**	**128.70**

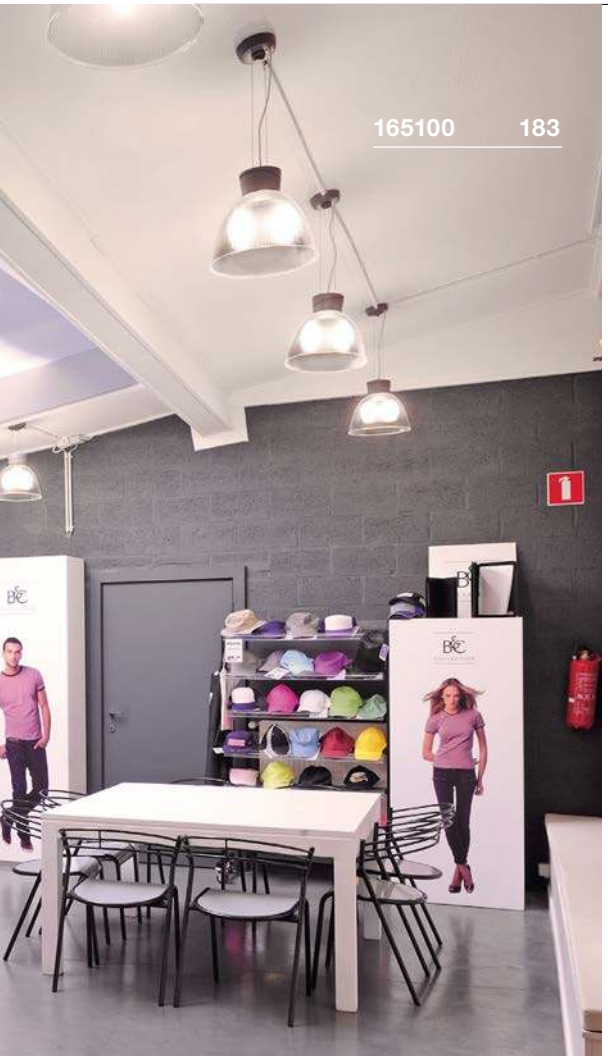



PARA DOME
PD, E27

SOCKET INSIDE







• Wide open lampshade

Product details

230V -50Hz
Material: aluminium/polycarbonate (PC)



Dimensional drawing



Recommended lamp

LED E27 15W 350°
2700K 1300lm
15kWh/1000h
Item No. 1003097 | 85.50 GBP



LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



Lamp details

max. 150W

Variant	Item No.	GBP
E27		
anthracite	**165100**	**144.00**

PARA MULTI
PD, DLMI

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 18W
Material: Steel/acrylic

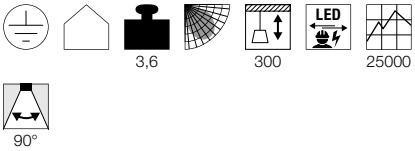

Dimensional drawing



Variant	Item No.	GBP
2040lm | 4000K | CRI>80		
grey	**165221**	**314.10**
1940lm | 3000K | CRI>80		
grey	**165222**	**314.10**

PARA FLAC
PD/CL

LED INSIDE







• High light output: >100lm/W

Product details

220-240V ~50/60Hz | 2400mA
Material: aluminium/polycarbonate (PC)

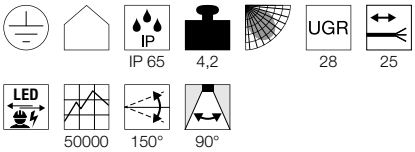

Dimensional drawing



Tip

This product is supplied without a chain
and can be hung with standard chains
Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



■ Reflector
Item No. 1000918 | 38.70 GBP



□ Refractor
Item No. 1001691 | 49.50 GBP



□ Refractor cover
Item No. 1001692 | 24.80 GBP



Variant	Item No.	GBP
12800lm | 4000K | CRI>80 | 104W		
■ matt black	**1000827**	**332.10**
19200lm | 4000K | CRI>80 | 150W		
■ matt black	**1000828**	**431.10**





PARA FLAC
PD/CL, DALI







Product details

220-240V ~50/60Hz | 1600mA
Total wattage: 104W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali

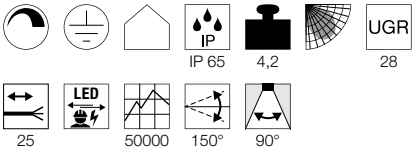

Dimensional drawing



Tip

This product is supplied without a chain
and can be hung with standard chains
Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



◪ Reflector
Item No. 1000918 | 38.70 GBP



□ Refractor
Item No. 1001691 | 49.50 GBP



□ Refractor cover
Item No. 1001692 | 24.80 GBP



Variant	Item No.	GBP
12800lm | 4000K | CRI>80		
■ matt black	**1003107**	**359.10**

SURPRISINGLY VERSATILE.

WALL LIGHTS PRODUCE INDIVIDUAL SPOTS OF LIGHT.

An eye-catcher for the wall – a real highlight for the room: Wall lights are an ideal way of setting light spots in a space-saving way. With the wide range of designs and colours, there is something for every taste.




1004733 211



WALL LIGHTS


190


190


191


191

NEW


192

NEW


192

NEW


193

NEW


193


194


194

NEW


196


197


198


199


199

199


200

NEW


200

NEW


201

NEW

201


202


202


204


205

205


206


206


207

207

NEW


208


209


210


210

NEW


211


212


212


213


213


214

214

215

215

216

NEW

217

NEW

217

2018

218

219

219

220

220

220

222

223

223

223

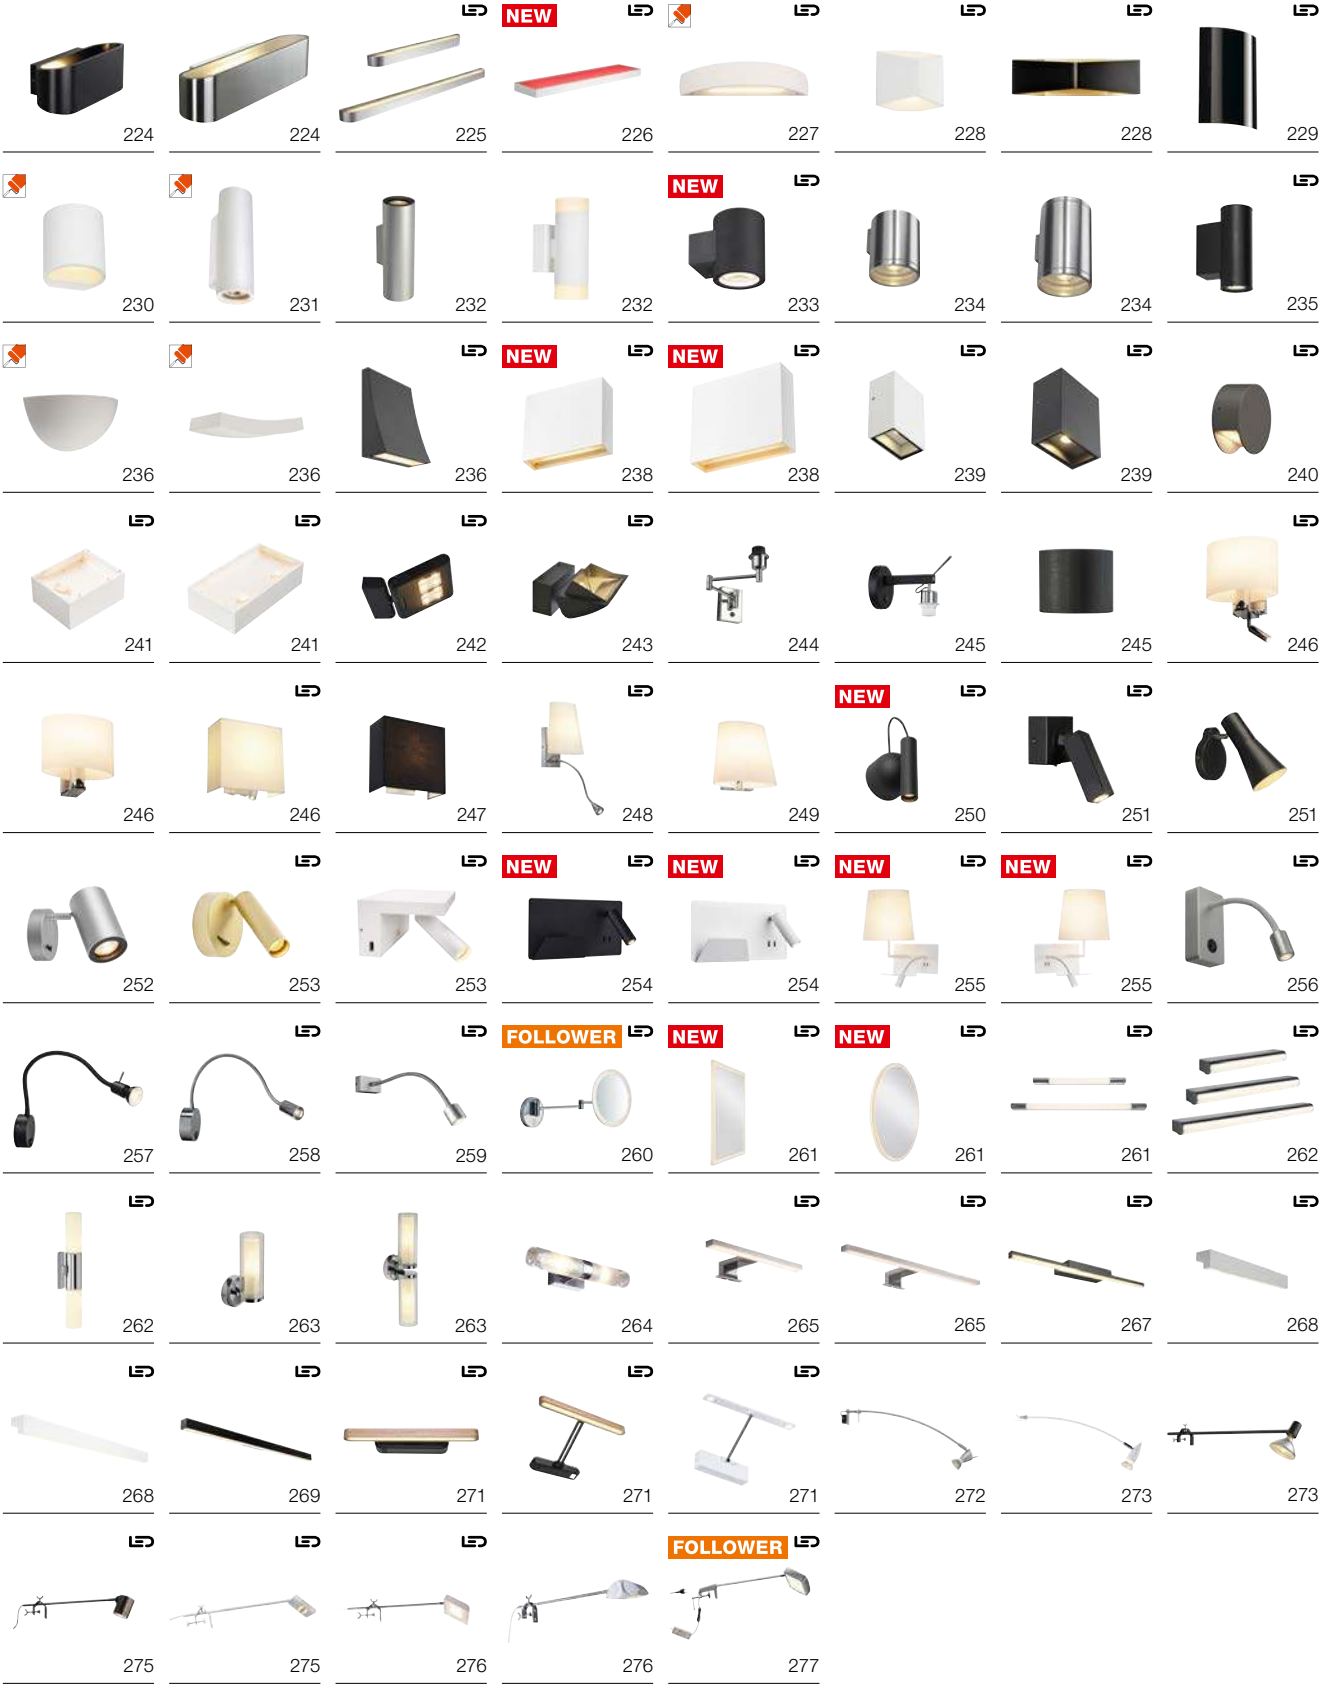

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

PLASTRA
WL, round

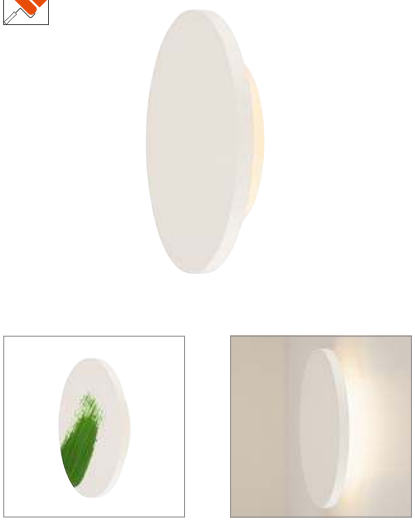

- Can be individually designed with colours, stickers & more

Product details

100-240V ~50/60Hz | 12V DC
Total wattage: 7.4W
Material: gypsum/steel



Dimensional drawing



Variant	Item No.	GBP
400lm | 3000K | CRI>80		
matt white	**148091**	**128.70**

PLASTRA
WL, square



- Can be individually designed with colours, stickers & more

Product details

100-240V ~50/60Hz | 12V DC
Total wattage: 11W
Material: gypsum/steel



Dimensional drawing



Variant	Item No.	GBP
400lm | 3000K | CRI>80		
matt white	**148019**	**166.50**

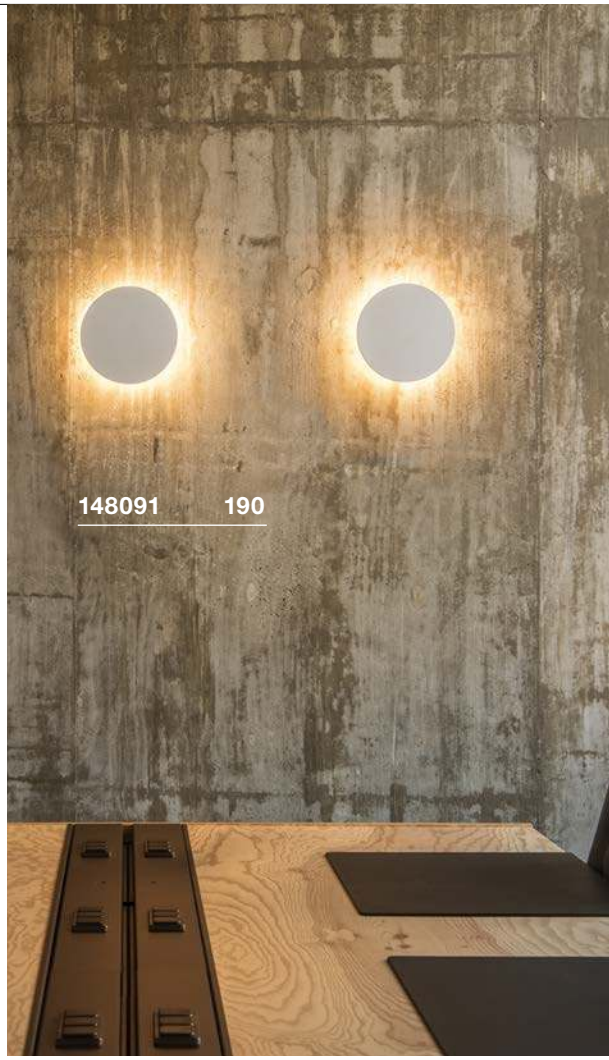







BATO 35
CW, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 15W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C

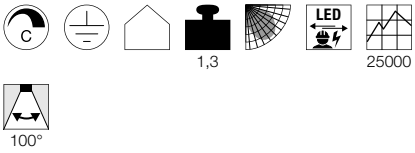

Dimensional drawing



Variant	Item No.	GBP
850lm | 2700K | CRI>80		
■ matt black	**1000743**	**180.00**
1050lm | 2500K | CRI>80		
■ matt copper	**1000745**	**188.10**

BATO 35
CW, E27

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED E27 4W 180°
2000-2900K 200lm
4kWh/1000h
Item No. 1003098 | 47.70 GBP



LED E27 7W
2700K 640lm
7kWh/1000h
Item No. 1003085 | 8.10 GBP



Lamp details

max. 60W

Variant	Item No.	GBP
E27		
■ matt black	**1000746**	**135.00**
E27		
■ matt copper	**1000748**	**144.00**

MANA BASE
WL, round, PHASE

NEW

LED INSIDE

CCT







- Illuminated base for round shades in the MANA series
- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)
Dimmable: C

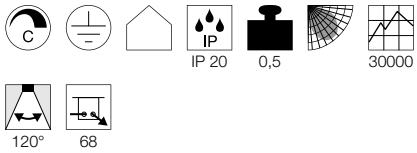

Dimensional drawing



Variant	Item No.	GBP
800/820lm | 2700/3000K | CRI>90		
anthracite	1004657 NEW	147.60

MANA BASE
Round

NEW







- Non-illuminated base for round shades in the MANA series

Product details

Material: aluminium/polycarbonate (PC)



Dimensional drawing



Variant	Item No.	GBP
anthracite	1004969 NEW	20.30





1004657 + 1004663 192 + 193

MANA 40
Shade, round

NEW







- A felt cover can contribute to acoustic attenuation

Product details

Material: felt/aluminium

IP 20 0,45

Dimensional drawing



Variant	Item No.	GBP
matt beige	1004660	75.60
matt grey	1004661	75.60

MANA 60
Shade, round

NEW







- A felt cover can contribute to acoustic attenuation

Product details

Material: felt/aluminium

IP 20 1,1

Dimensional drawing



Variant	Item No.	GBP
matt beige	1004662	108.00
matt grey	1004663	108.00

ONE 40
WL, DALI

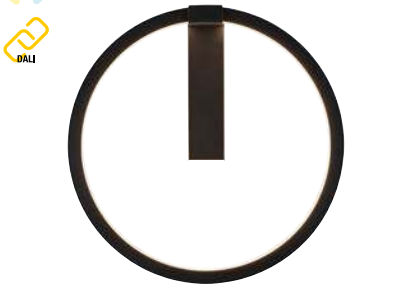





- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/steel
Dimmable: Dali



Dimensional drawing



Variant	Item No.	GBP
720/770lm | 3000/4000K | CRI>80		
■ matt black	**1002915**	**278.10**
720/770lm | 3000/4000K | CRI>80		
□ matt white	**1002917**	**278.10**

ONE 60
WL, DALI







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60H | 600mA
Total wattage: 25W
Material: aluminium/steel
Dimmable: Dali



Dimensional drawing



Variant	Item No.	GBP
1400/1500lm | 3000/4000K | CRI>80		
■ matt black	**1002918**	**323.10**
1400/1500lm | 3000/4000K | CRI>80		
□ matt white	**1002919**	**323.10**





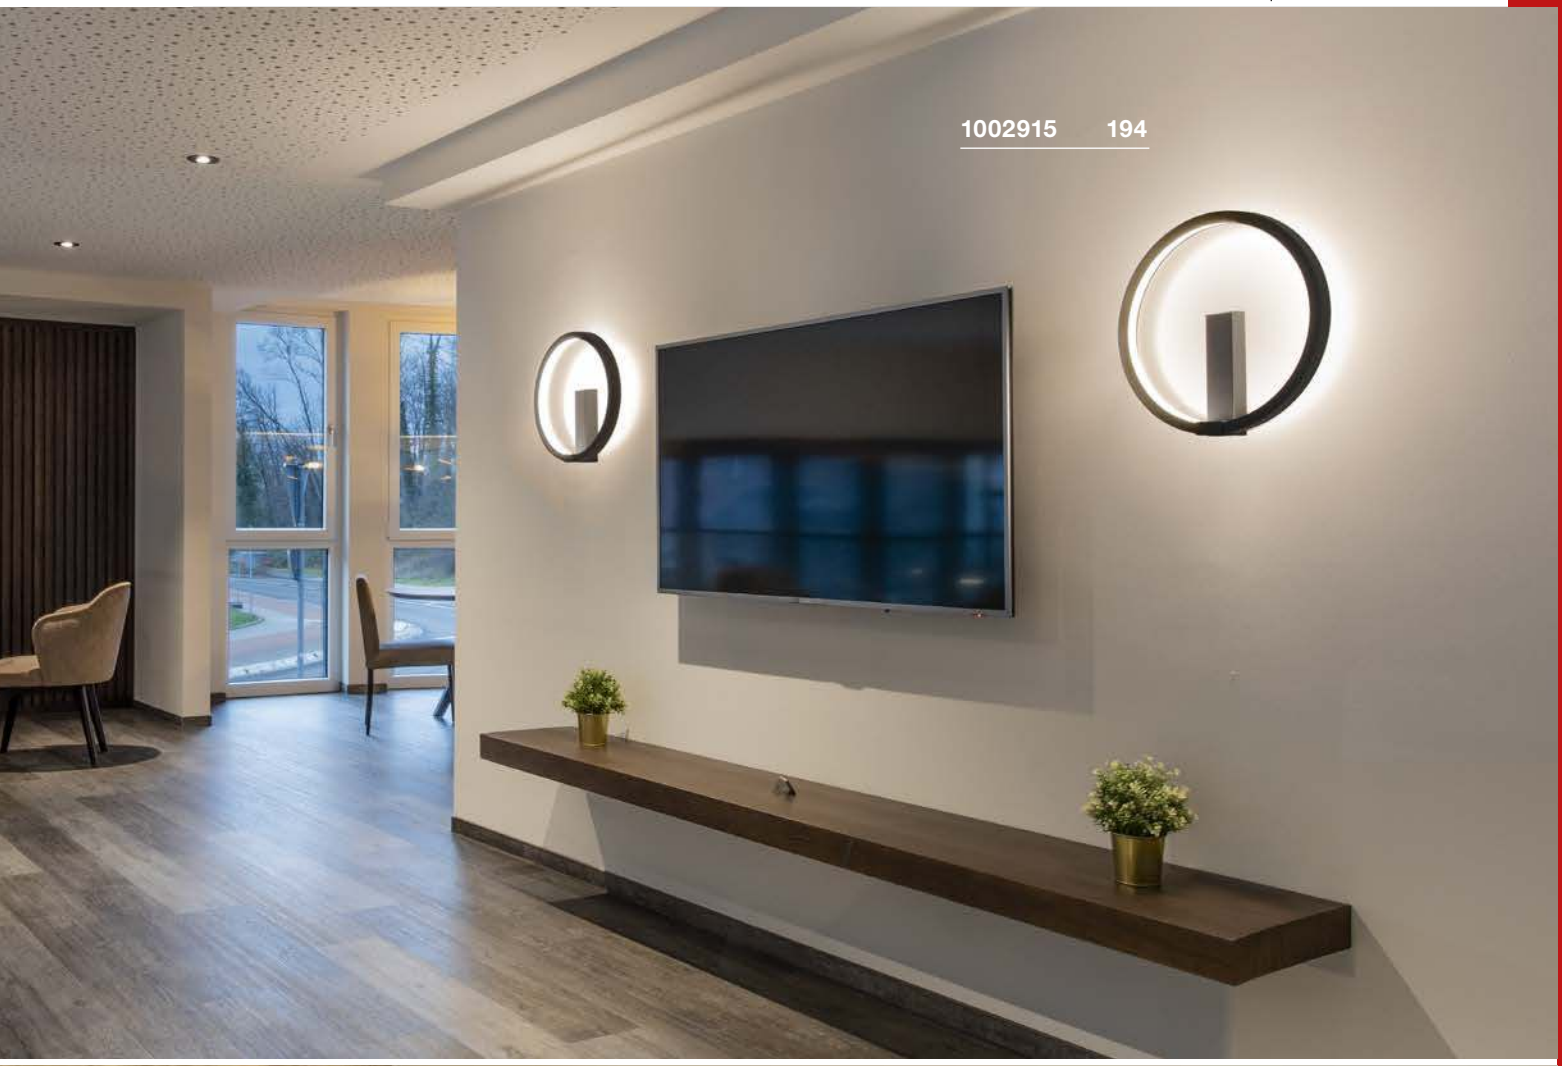
1002915 194

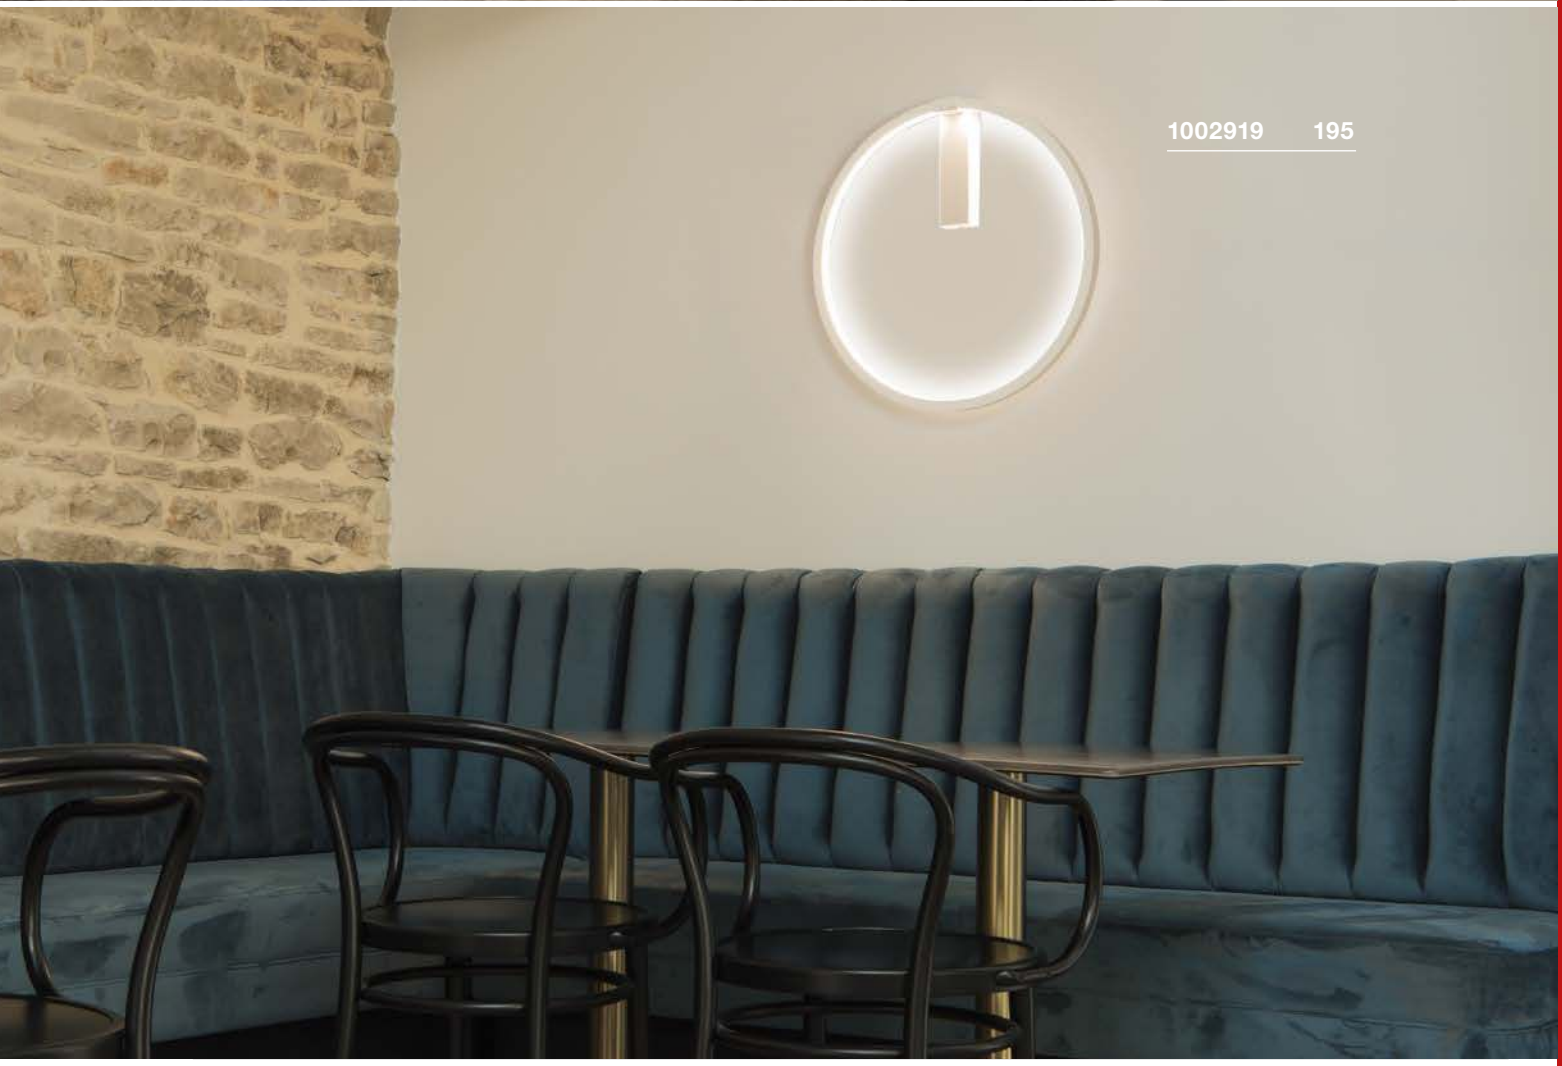
1002919 195

FITU CUBE
WL, E27

NEW

SOCKET INSIDE









1004739 196

Product details

220-240V ~50/60Hz
Material: steel

IP 20 0,51

Dimensional drawing



Tip

Lights may only be mounted with the lightbulb pointing upwards.

Recommended lamp

LED E27 8W
2000-2900K 300lm
8kWh/1000h
Item No. 1003096 | 67.50 GBP



LED E27 8W 350°
2200K 250lm
8kWh/1000h
Item No. 1003100 | 52.20 GBP



Lamp details

max. 20W LED E27
Diameter: 12.5cm max.

Variant	Item No.	GBP
E27 ■ matt black	1004738	63.00
E27 □ matt white	1004739	63.00





LISENNE
WL, E27

SOCKET INSIDE







- Basalt stone & smoked glass

Product details

220-240V ~50/60Hz
Material: basalt/glass



Dimensional drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

Lamp details

max. 23 W
Diamter: 5.9 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27		
grey/mirrored brown	**155752**	**188.10**

ANDREAS
WL, QT-DE12

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED R7s 118mm 14W
3000K 2000lm
14kWh/1000h
Item No. 1002135 | 60.30 GBP

Lamp details

max. 80W

Variant	Item No.	GBP
R7s 118mm ■ black	1002927	80.10
R7s 118mm □ white	1002925	80.10
R7s 118mm ■ grey	1002926	80.10

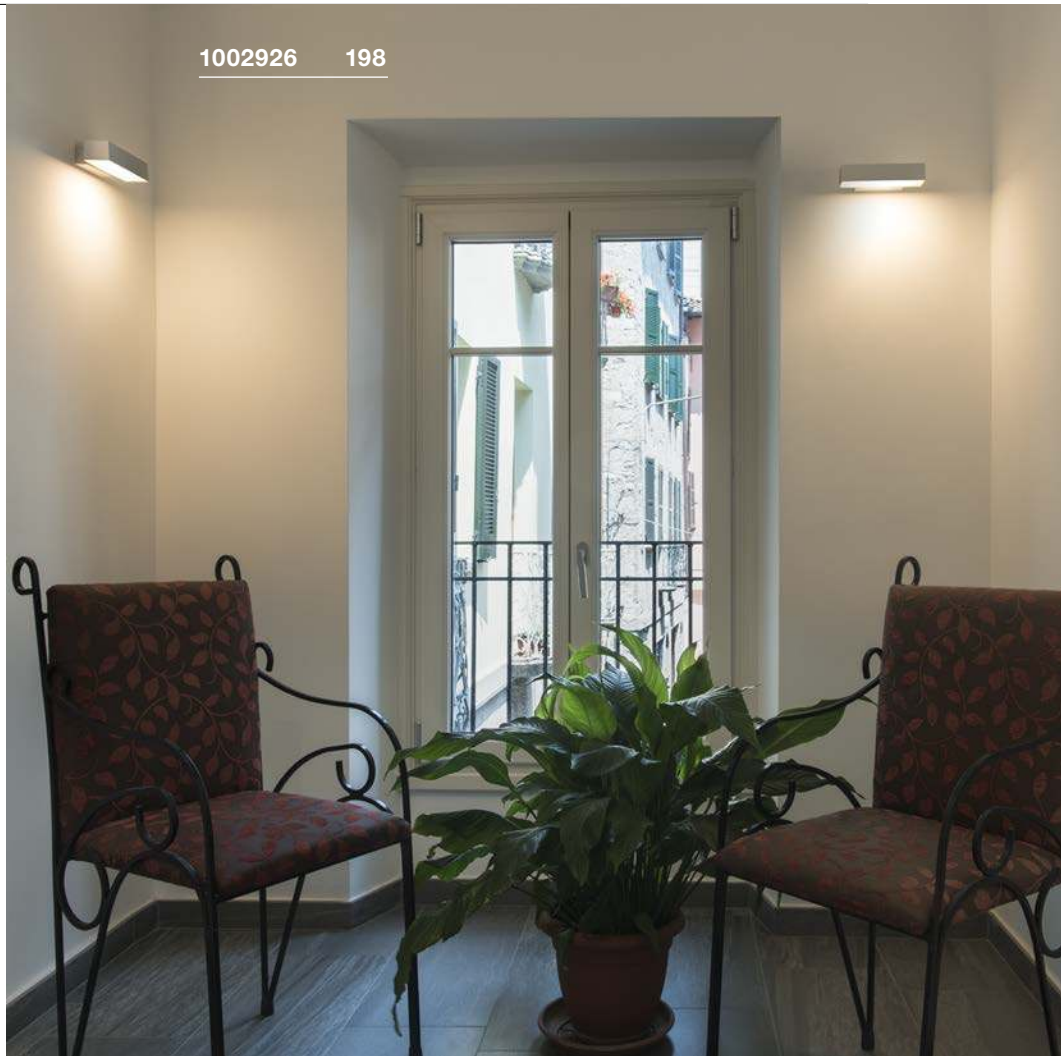



DENA 30
WL, E14

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED E14 4,5W 280°
2700K 470lm
5kWh/1000h
Item No. 1002128 | 7.20 GBP



LED E14 6,5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP



Lamp details
2x max. 40W C35
Diameter: 5 cm max. L: 9.6 cm max.

Variant	Item No.	GBP
E14 | C35		
white/aluminium	**147529**	**78.30**

PURISA
WL, E27

SOCKET INSIDE







• High-quality, satin-finish glass

Product details
220-240V ~50/60Hz
Material: steel/glass



Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details
max. 40W
Diamter: 8 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27		
white	**1002993**	**87.30**

BASKET
WL, E27

SOCKET INSIDE





Product details
230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details
max. 60W
Diameter: 5.2 cm max. L: 15.2 cm max

Variant	Item No.	GBP
E27		
white	**151591**	**72.00**

FITU
WL, E27

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/steel

0,81

Dimensional drawing



Recommended lamp

LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP



LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP



Lamp details

max. 24 W

Variant	Item No.	GBP
E27 white	1002147	76.50
E27 black	1002148	76.50
E27 gold	1002149	81.00

FITU
Wall bracket

NEW







• Wall bracket for FITU pendant lights

Product details

Material: steel

IP 20 0,47

Dimensional drawing



Tip

You can find pendant lights in the current BIG WHITE catalogue from page 94

Variant	Item No.	GBP
matt black	1004682	50.40
matt white	1004683	50.40





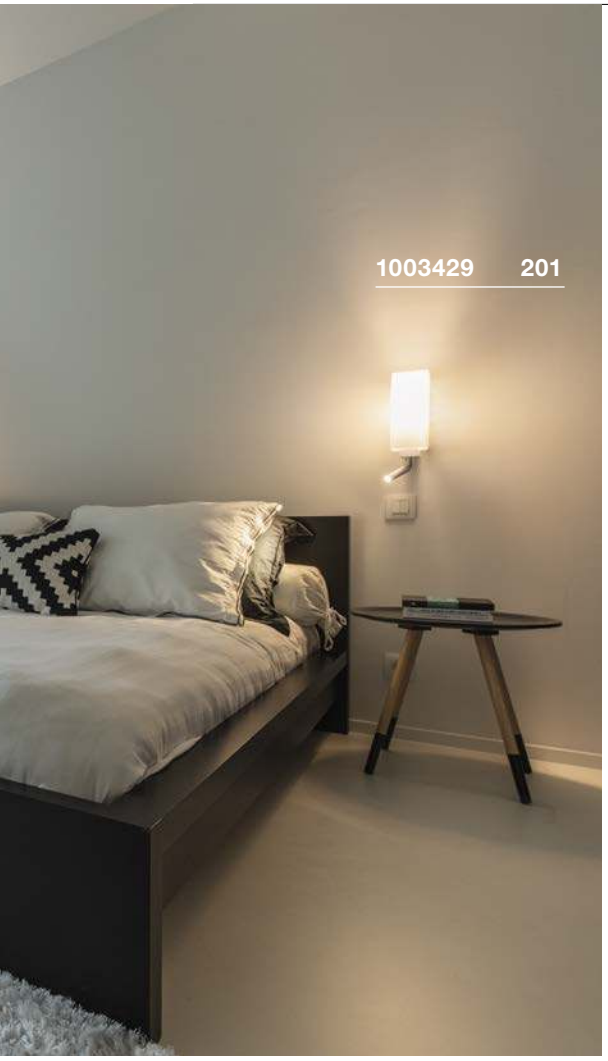



QUADRASS SPOT
WL, E27

NEW

SOCKET INSIDE

LED INSIDE







- Lightbulbs available separately

Product details

220-240V ~50/60Hz | 700mA
Material: steel/glass

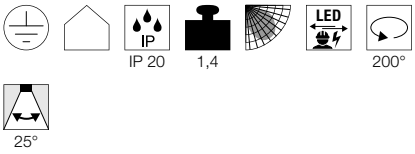

Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 40W
Diameter: 6.5 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27 | Spot: 200lm | 3000K | CRI>80		
matt black/white	**1003428** NEW	**157.50**
E27 | Spot: 200lm | 3000K | CRI>80		
matt white/white	**1003429** NEW	**157.50**

QUADRASS
WL, E27

NEW

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: steel/glass



Dimensional drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 40W
Diameter: 6.5 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27		
matt black/white	**1003430** NEW	**103.50**
E27		
matt white/white	**1003431** NEW	**103.50**

FENDA
WL, Base, E27

SOCKET INSIDE







Product details
230V ~50/60Hz
Material: steel/plastic



Dimensional drawing



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP



LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details
max. 40W
Diameter: 5 cm max. L: 20 cm max.

Variant	Item No.	GBP
E27		
white	1001272	38.70

FENDA
Half shade









Product details
Material: textile/steel



Dimensional drawing



Tip
max. 40W

Variant	Item No.	GBP
black	1001273	29.70
black/copper	1001274	34.60
white	1001275	29.70
beige	1001276	29.70







1001272 + 1001273 202

MANA
WL, Base, PHASE





- Premium LED with CRI>90
- Dim to Warm

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium/steel
Dimmable: C



Dimensional drawing





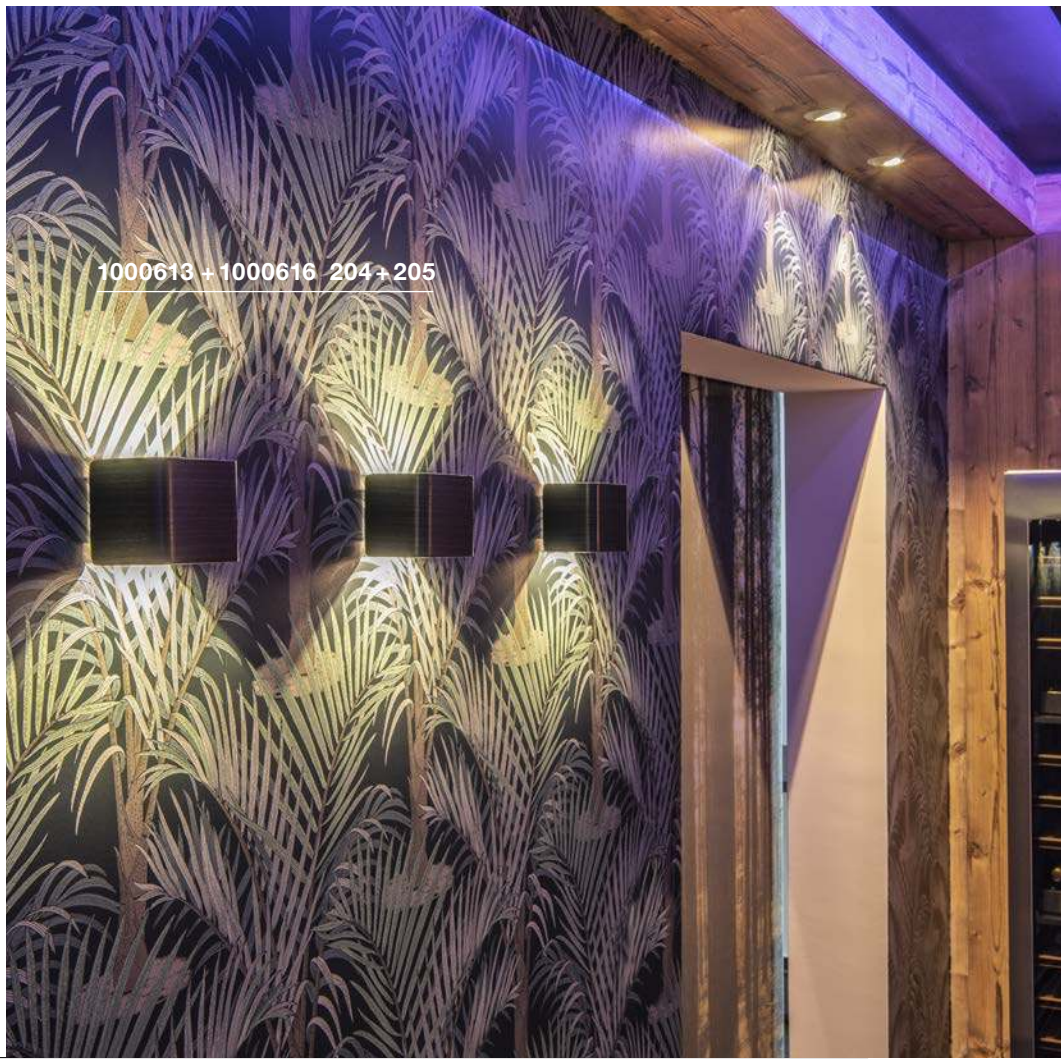

Variant	Item No.	GBP
320lm | 2000-3000K | CRI>90		
white	1000613	111.60





MANA
Shade













Tip

suitable only with 1000613

Variant	Item No.	GBP
Wood | 0.11 kg grey/brown	**1000616**	**37.80**
Aluminium | 0.29 kg white	**1000618**	**37.80**
Aluminium | 0.29 kg aluminium	**1000619**	**45.00**

MANA
Shade



- Can be individually designed with colours, stickers & more

Product details

Material: gypsum/steel



0,65

Dimensional drawing



Tip

suitable only with 1000613

Variant	Item No.	GBP
matt white	**1000824**	**27.00**

MANA
WL, Base, PHASE





- Premium LED with CRI>90
- Dim to Warm

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/steel
Dimmable: C



Dimensional drawing



Variant	Item No.	GBP
700lm | 2000-3000K | CRI>90		
white	**1000614**	**130.50**

MANA
WL, Base







- Premium LED with CRI>90
- With adjustable reading light; lightbulb with separate switch

Product details

100-240V ~50/60Hz | 320mA/500mA
Total wattage: 11W
Material: aluminium/steel



Dimensional drawing



Variant	Item No.	GBP
Indirect: 490lm | 3000K | CRI>90 Spot: 80lm | 3000K | CRI>90		
white/chrome	**1000615**	**167.40**



1000614 + 1000621 206 + 207

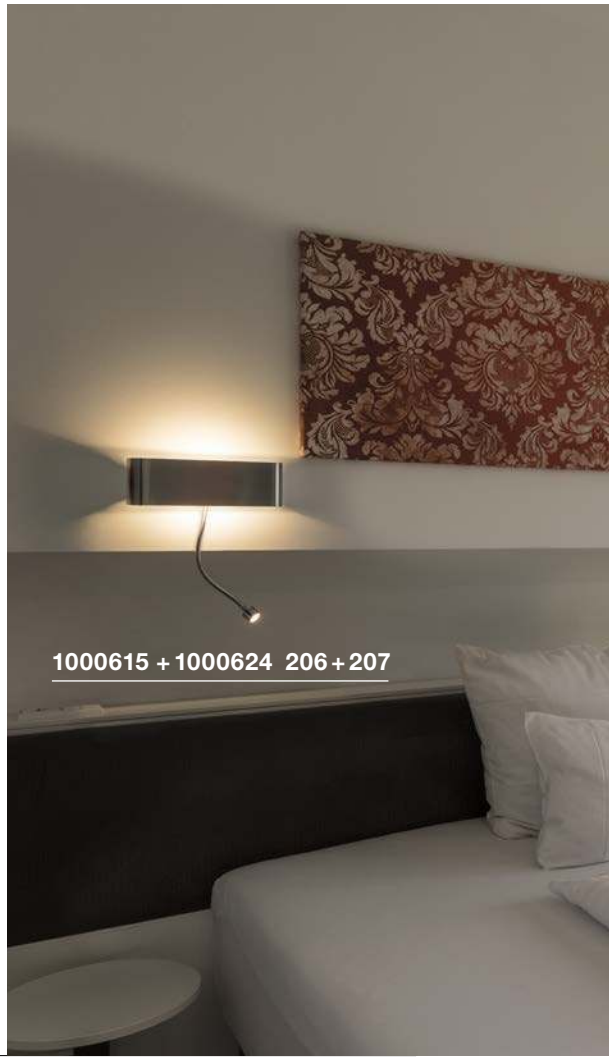

1000615 + 1000624 206 + 207





MANA
Shade









MANA
Shade







- Can be individually designed with colours, stickers & more

Product details

Material: gypsum/steel





Dimensional drawing



Tip

suitable only with 1000614/1000615

Dimensional drawing



Tip

suitable only with 1000614/1000615

Variant	Item No.	GBP
Wood | 0.16 kg		
grey/brown	1000621	45.00
Aluminium | 0.39 kg		
white	1000623	45.00
Aluminium | 0.39 kg		
aluminium	1000624	54.00

Variant	Item No.	GBP
matt white	1000825	25.20

PLASTRA
WL, hemisphere

NEW

SOCKET INSIDE









Product details

220-240V ~50/60Hz
Material: gypsum/steel

IP 20 1,5

Dimensional drawing



Recommended lamp

LED R7s 118mm 14W
3000K 2000lm
14kWh/1000h
Item No. 1002135 | 60.30 GBP

Variant	Item No.	GBP
R7s 118mm | QT-DE12		
matt white	**1004732**	**55.80**



PLASTRA
WL, rectangular, QT-DE12

SOCKET INSIDE







- Can be individually designed with colours, stickers & more

Product details

220-240V ~50/60Hz
Material: gypsum/steel



Dimensional drawing



Recommended lamp

LED R7s 118mm 14W
3000K 2000lm
14kWh/1000h
Item No. 1002135 | 60.30 GBP



Lamp details

max. 20W

Variant	Item No.	GBP
R7s 118mm		
matt white	**1002238**	**60.30**

SOLID CUBE
WL, QT14

SOCKET INSIDE







Product details
230V -50Hz
Material: concrete



Dimensional drawing



Recommended lamp
G9 2.5W
2700K 180lm
3kWh/1000h
Item No. 560302 | 10.80 GBP



Lamp details
max. 25W QT14

Variant	Item No.	GBP
G9 | QT14		
grey	**1000910**	**72.00**
G9 | QT14		
black	**1000911**	**72.00**

PLASTRA
WL, Cube, QT14

SOCKET INSIDE







- Can be individually designed with colours, stickers & more

Product details
230V -50Hz
Material: gypsum/steel



Dimensional drawing



Recommended lamp
G9 2.5W
2700K 180lm
3kWh/1000h
Item No. 560302 | 10.80 GBP



Lamp details
max. 42W QT14

Variant	Item No.	GBP
G9 | QT14		
matt white	**148018**	**41.40**







1004733 211

PLASTRA
WL, cubes

NEW

SOCKET INSIDE







- Can be individually designed with colours, stickers & more

Product details

220-240V ~50/60Hz
Material: gypsum/steel

IP 20 1,36

Dimensional drawing



Recommended lamp

G9 2.5W
2700K 180lm
3kWh/1000h
Item No. 560302 | 10.80 GBP

Lamp details

2x 15W QT14
optional: LED G9

Variant	Item No.	GBP
G9 | QT14		
matt white	**1004733**	**45.00**

LOGS IN
WL, PHASE

INSIDE

DIM TO WARM






- Premium LED with CRI>90
- Dim to Warm

Product details

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium
Dimmable: C, L

C,L 0,51 LED 30000

Dimensional drawing



Variant	Item No.	GBP
290lm | 2000-3000K | CRI>90		
black/gold	1000638	144.00
490lm | 2000-3000K | CRI>90		
white	1000639	139.50
490lm | 2000-3000K | CRI>90		
aluminium/white	1000640	144.00

LOGS IN
WL

INSIDE






Product details

100-240V ~50/60Hz | 500mA
Total wattage: 6.9W
Material: aluminium

0,47 LED 30000

Dimensional drawing



Variant	Item No.	GBP
390lm | 3000K | CRI>90		
black/gold	151320	108.00
440lm | 3000K | CRI>90		
white	151321	99.00
440lm | 3000K | CRI>90		
aluminium/white	151325	108.00







LOGS IN L
WL, PHASE

INSIDE

DIM TO WARM







- Premium LED with CRI>90
- Dim to Warm

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 19W
Material: aluminium
Dimmable: C, L



Dimensional drawing



Variant	Item No.	GBP
1100lm | 2000-3000K | CRI>90		
black/gold	1002928	242.10
1500lm | 2000-3000K | CRI>90		
white	1002929	233.10
1500lm | 2000-3000K | CRI>90		
aluminium/white	1002930	242.10

LOGS IN L
WL, PHASE

INSIDE





- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 17W
Material: aluminium
Dimmable: C, L



Dimensional drawing



Variant	Item No.	GBP
1100lm | 3000K | CRI>90		
black/gold	1002842	188.10
1400lm | 3000K | CRI>90		
white	1002844	180.00
1400lm | 3000K | CRI>90		
aluminium/white	1002843	188.10



QUAD UP/DOWN 12
WL

LED INSIDE







Product details

200-240V ~50/60Hz | 700mA
Total wattage: 6.8W
Material: aluminium/glass



Dimensional drawing



Variant	Item No.	GBP
175lm | 3000K | CRI>80		
white	232471	99.00
140lm | 3000K | CRI>80		
anthracite	232475	99.00

QUAD UP/DOWN 15
WL

LED INSIDE







Product details

100-277V ~50/60Hz | 350mA
Total wattage: 8.6W
Material: aluminium/glass

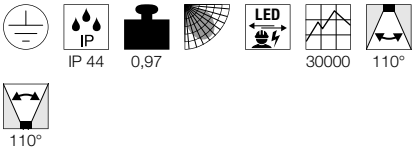

Dimensional drawing



Variant	Item No.	GBP
Up: 290lm | 3000K | CRI>80 Down: 290lm | 3000K | CRI>80		
white	232441	117.00
Up: 260lm | 3000K | CRI>80 Down: 260lm | 3000K | CRI>80		
anthracite	232445	117.00



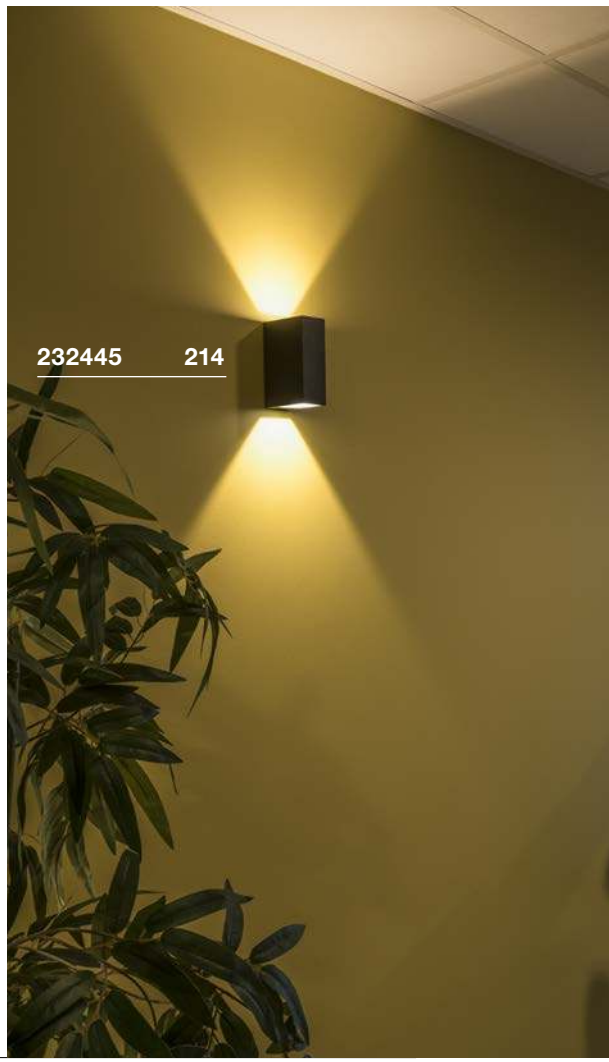



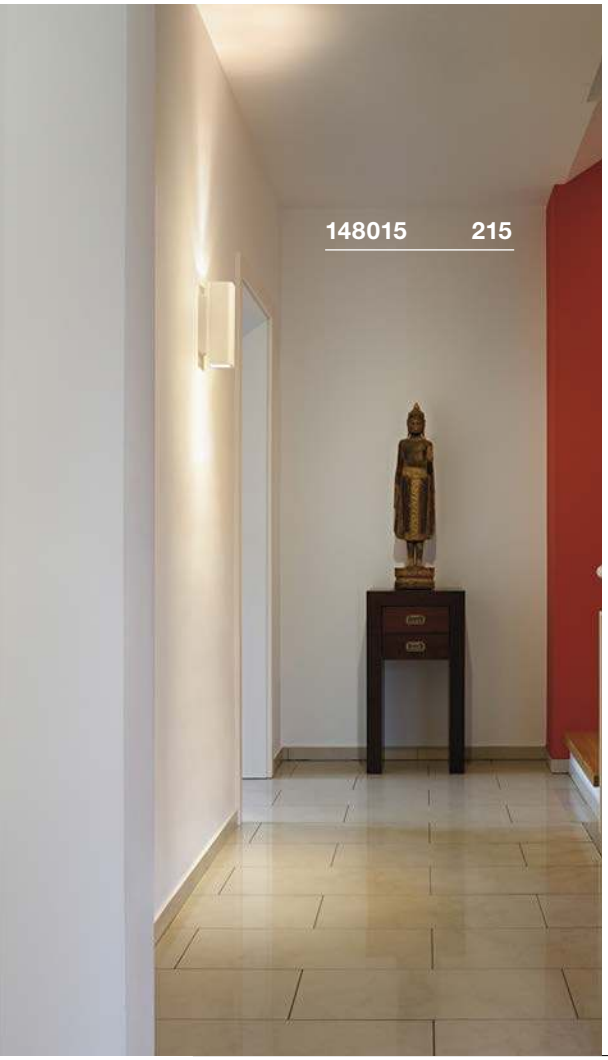

PLASTRA SLOT
WL, E14

SOCKET INSIDE







- Can be individually designed with colours, stickers & more

Product details
230V -50Hz
Material: gypsum/steel

0,81

Dimensional drawing



Recommended lamp
LED E14 6,5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP

Lamp details
max. 40W C35

Variant	Item No.	GBP
E14 | C35		
matt white	**148010**	**39.60**

PLASTRA
WL, QPAR51

SOCKET INSIDE







- Can be individually designed with colours, stickers & more

Product details
220-240V ~50/60Hz
Material: gypsum/steel

1,49

Dimensional drawing



Recommended lamp
LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

Lamp details
2x max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
matt white	**148015**	**62.10**

THEO UP/DOWN
WL, QPAR51

SOCKET INSIDE









1000330 + 1000327 216

Product details

230V -50Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details

2x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	1000327	90.00
GU10 | QPAR51 grey	1000328	90.00
GU10 | QPAR51 matt aluminium	1000329	94.50
GU10 | QPAR51 anthracite	1000330	90.00

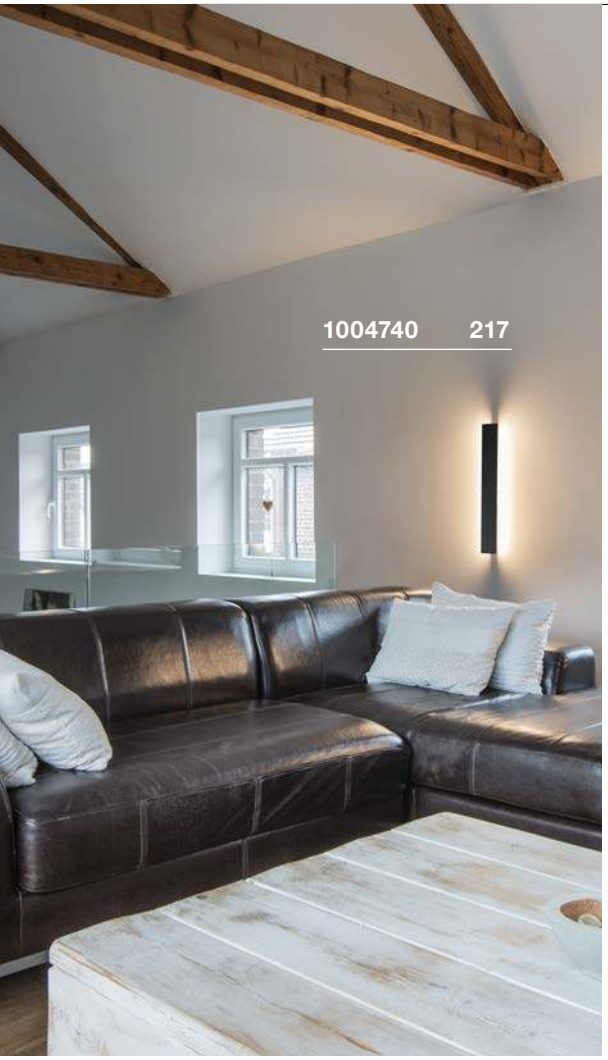

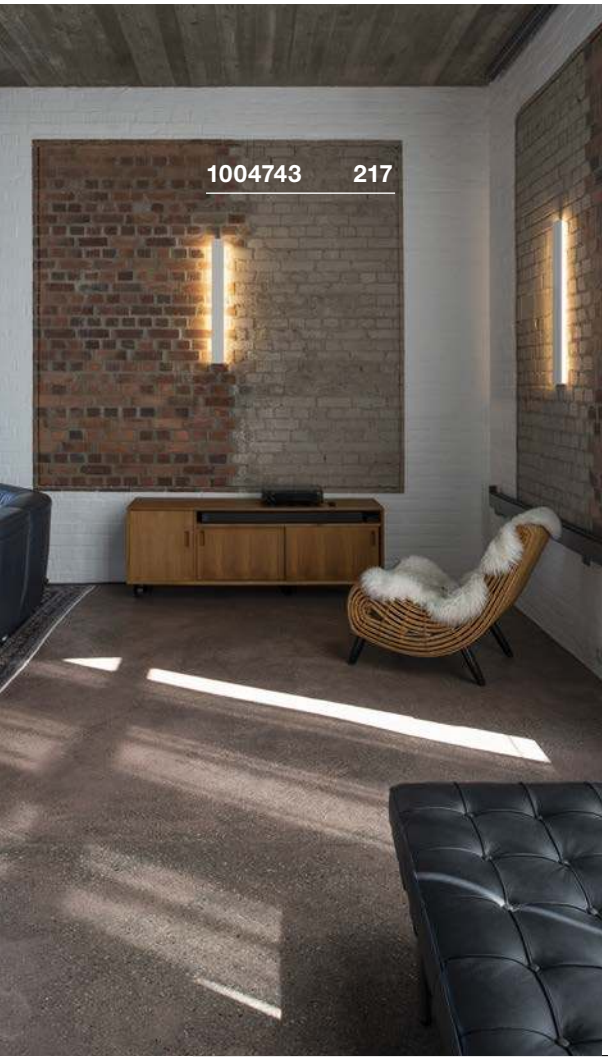

DIRETO 60
WL, PHASE

NEW

LED INSIDE

CCT





- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 14W
Material: aluminium
Dimmable: C

C | IP 20 | 0,77 | 30000 | 180° | 180°

Dimensional drawing



Variant	Item No.	GBP
Up: 590/625lm | 2700/3000K | CRI>90		
Down: 590/625lm | 2700/3000K | CRI>90		
■ matt black	1004740	166.50
Up: 590/625lm | 2700/3000K | CRI>90		
Down: 590/625lm | 2700/3000K | CRI>90		
□ matt white	1004741	166.50

DIRETO 90
WL, PHASE

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium
Dimmable: C

C | IP 20 | 1 | 30000 | 180° | 180°

Dimensional drawing



Variant	Item No.	GBP
Up: 840/880lm | 2700/3000K | CRI>90		
Down: 840/880lm | 2700/3000K | CRI>90		
■ matt black	1004742	202.50
Up: 840/880lm | 2700/3000K | CRI>90		
Down: 840/880lm | 2700/3000K | CRI>90		
□ matt white	1004743	202.50

CHROMBO
WL, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 9.7W
Material: steel/glass
Dimmable: C, L



Dimensional drawing



Variant	Item No.	GBP
480lm | 3000K | CRI>80		
white	**1003316**	**128.70**
480lm | 3000K | CRI>80		
matt grey	**1003317**	**128.70**

TANI
WL, QT-DE12

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED R7s 118mm 14W
3000K 2000lm
14kWh/1000h
Item No. 1002135 |60.30 GBP



Lamp details

max. 200W QT-DE12

Variant	Item No.	GBP
R7s 118mm | QT-DE12		
matt aluminium	**147566**	**73.80**





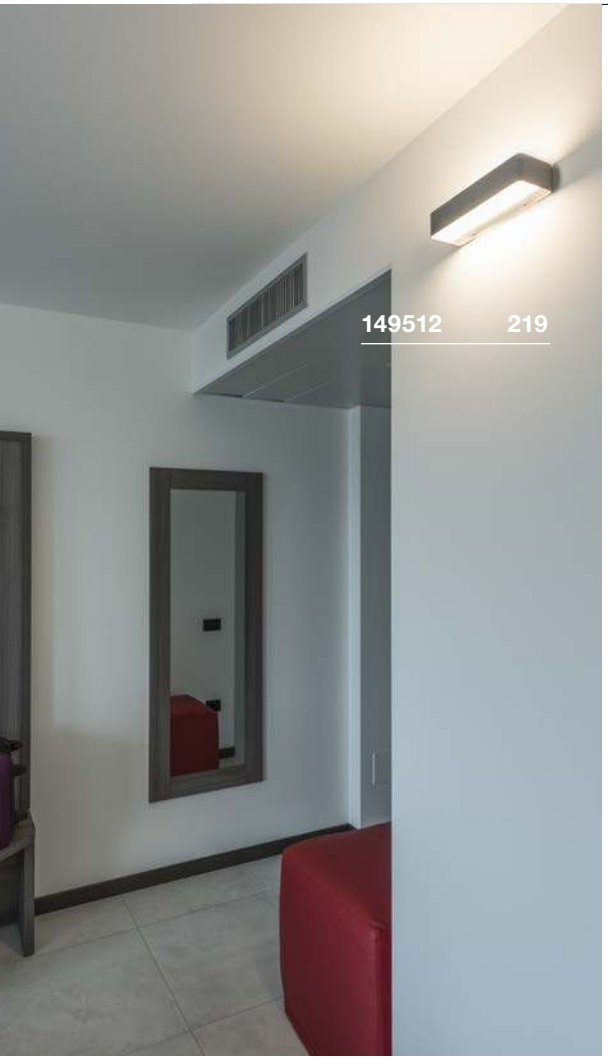



WL 149
WL, QT-DE12

SOCKET INSIDE







Product details

230V -50Hz
Material: steel/glass



Dimensional drawing



Recommended lamp

R7s 78mm 55W 330°
3000K 530lm
6kWh/1000h
Item No. 560332 | 9.90 GBP

Lamp details

max. 60W QT-DE12

Variant	Item No.	GBP
R7s 78mm | QT-DE12		
white	**149471**	**58.50**
R7s 78mm | QT-DE12		
chrome	**149472**	**69.30**

WL 149
WL

LED INSIDE





Product details

220-240V ~50/60Hz | 500mA
Total wattage: 16W
Material: steel/glass



Dimensional drawing



Variant	Item No.	GBP
1060lm | 3000K | CRI>80		
white	**149511**	**117.00**
1060lm | 3000K | CRI>80		
chrome	**149512**	**126.00**

SEDO 7
WL







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 11.5W
Material: aluminium/glass

IP 20 | 0,77 | LED | 30000

Dimensional drawing



Variant	Item No.	GBP
1020lm | 3000K | CRI>80		
white	**1002962**	**141.30**
1020lm | 3000K | CRI>80		
aluminium	**1002964**	**159.30**

SEDO 14
WL







Product details

220-240V ~50/60Hz | 500mA
Total wattage: 16W
Material: aluminium/glass

IP 20 | 1,6 | LED | 30000

Dimensional drawing



Variant	Item No.	GBP
1300lm | 3000K | CRI>80		
white	**151781**	**188.10**
1300lm | 3000K | CRI>80		
aluminium	**151786**	**197.10**

SEDO 21
WL







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/glass

IP 20 | 2,4 | LED | 30000

Dimensional drawing



Variant	Item No.	GBP
250lm · 3000K · CRI>80		
white	**151791**	**233.10**
250lm · 3000K · CRI>80		
aluminium	**151796**	**242.10**

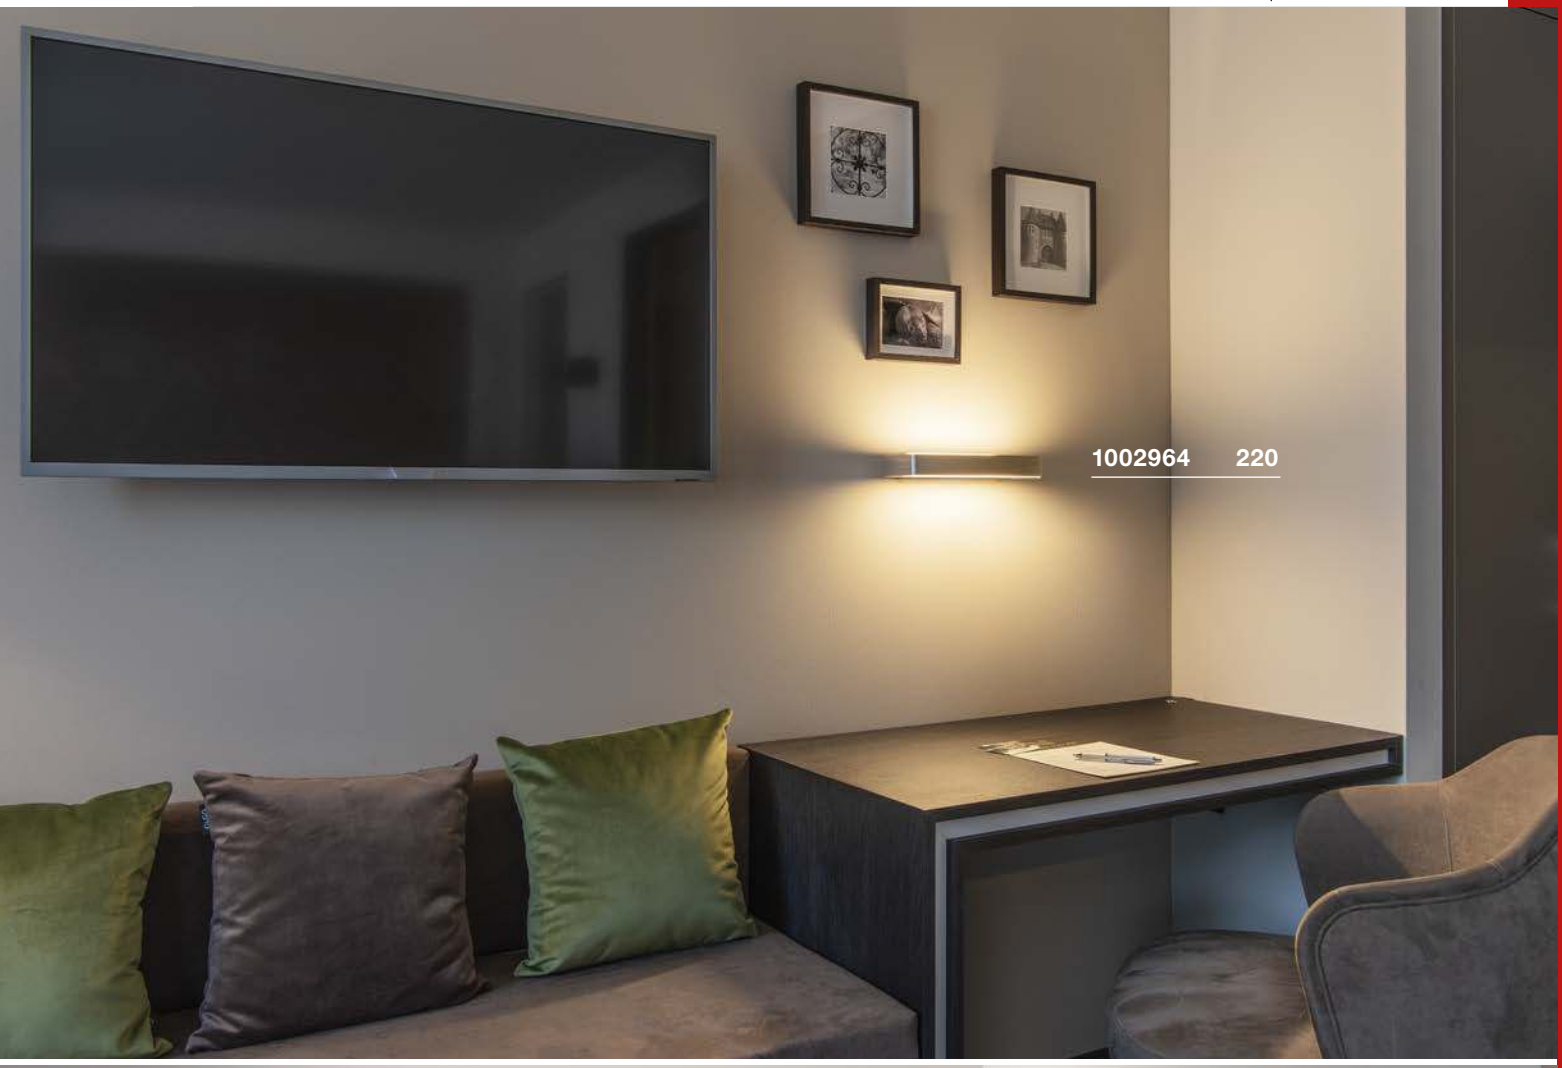
1002964 220


151796 220

ASSO 70
WL







Product details

100-240V ~50/60Hz | 500mA
Total wattage: 7.6W
Material: aluminium/steel



Dimensional drawing



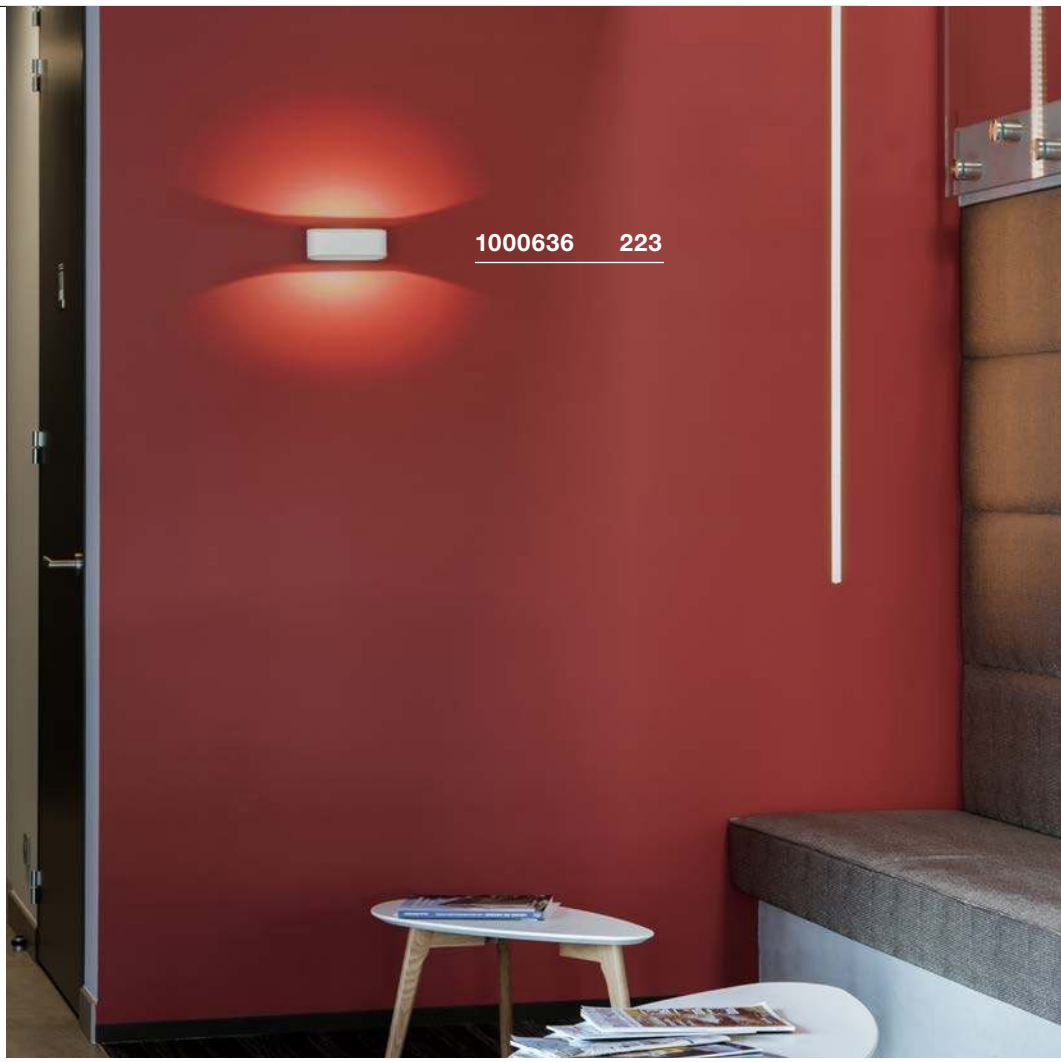



Variant	Item No.	GBP
350lm | 3000K | CRI>80		
white	151311	128.70
350lm | 3000K | CRI>80		
aluminium/white	151315	137.70

ASSO 300
WL







ASSO 300
WL, PHASE





- Premium LED with CRI>90
- Dim to Warm
- The light colour alters when dimmed

ASSO
WL, PHASE





- Premium LED with CRI>90
- Dim to Warm
- The light colour alters when dimmed

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/steel

0,91 30000

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 22W
Material: aluminium/steel
Dimmable: C, L

1,05 30000

Product details

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium/steel
Dimmable: C

0,67 30000

Dimensional drawing



Dimensional drawing



Dimensional drawing



Variant	Item No.	GBP
700lm · 3000K · CRI>80		
white	**151271**	**165.60**
700lm · 3000K · CRI>80		
aluminium/white	**151275**	**174.60**

Variant	Item No.	GBP
1040lm | 2000-3000K | CRI>90		
white	**1000634**	**192.60**
1040lm | 2000-3000K | CRI>90		
aluminium/white	**1000635**	**201.60**

Variant	Item No.	GBP
530lm | 2000-3000K | CRI>90		
white	**1000636**	**165.60**
530lm | 2000-3000K | CRI>90		
aluminium/white	**1000637**	**174.60**

OSSA 180
WL, QT-DE12

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp
R7s 78mm 55W 330°
3000K 530lm
6kWh/1000h
Item No. 560332 | 9.90 GBP

Lamp details
max. 100W QT-DE12

Variant	Item No.	GBP
R7s 78mm | QT-DE12 ■ black	**151450**	**72.00**
R7s 78mm | QT-DE12 □ white	**151451**	**72.00**
R7s 78mm | QT-DE12 ▨ aluminium	**151456**	**76.50**

OSSA 300
WL, QT-DE12

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp
LED R7s 118mm 14W
3000K 2000lm
14kWh/1000h
Item No. 1002135 | 60.30 GBP

Lamp details
max. 120W QT-DE12

Variant	Item No.	GBP
R7s 118mm | QT-DE12 ■ black	**151410**	**90.00**
R7s 118mm | QT-DE12 □ white	**151411**	**90.00**
R7s 118mm | QT-DE12 ▨ aluminium	**151416**	**99.00**







ARLINA 60/130
WL

LED INSIDE







Product details

220-240V ~50/60Hz | 500mA
Material: aluminium/glass
Product dimensions: W: 6.8 cm H: 6 cm



Dimensional drawing





Variant	Item No.	GBP
1400lm | 3000K | CRI>80 20W | L: 67 cm | 2.2 kg aluminium	**1002239**	**188.10**
2400lm | 3000K | CRI>80 28W | L: 128 cm | 3.9 kg aluminium	**1002240**	**242.10**

NEW FLAT
WL, RGB-W

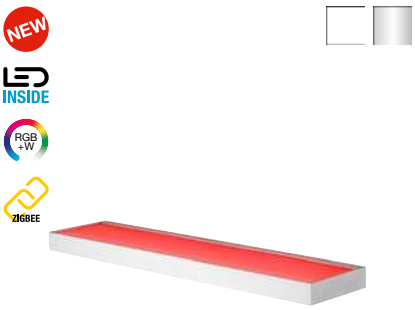







Product details

220-240V ~50/60Hz | 24V
Total wattage: 11.3W
Material: aluminium/acrylic

IP 20 | 3,5 | 25000 | 110°

Dimensional drawing





Variant	Item No.	GBP
Up: RGB-W (300lm | 3000K | CRI>80) Down: RGB-W (280lm | 3000K | CRI>80) matt white	1003022	441.00
Up: RGB-W (300lm | 3000K | CRI>80) Down: RGB-W (280lm | 3000K | CRI>80) matt aluminium	1003023	448.20



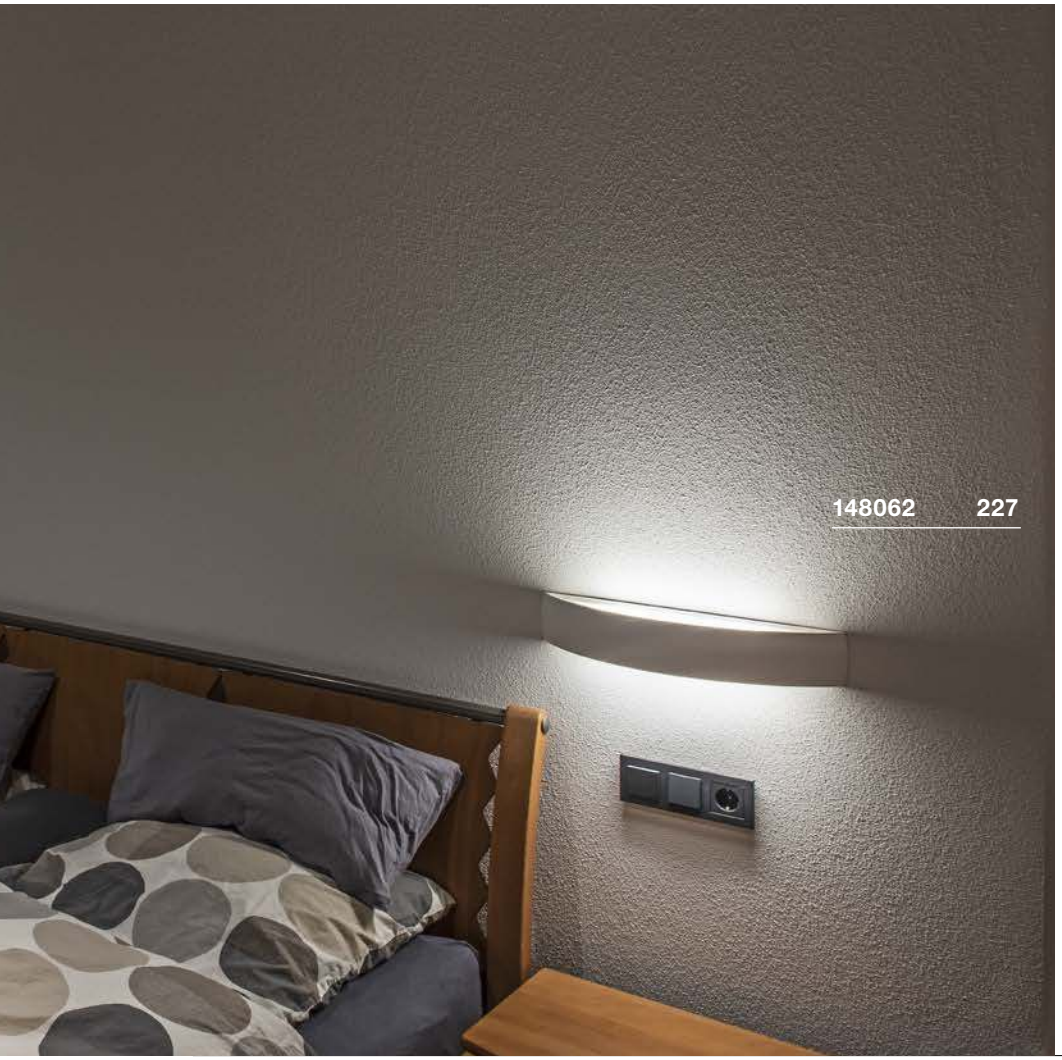

PLASTRA
WL, curve, PHASE

LED INSIDE







- High-voltage LED
- Can be individually designed with colours, stickers & more

Product details

230V -50Hz
Total wattage: 19W
Material: gypsum/glass
Dimmable: C, L





Dimensional drawing



Variant	Item No.	GBP
Up: 520lm | 3000K | CRI>80 Down: 520lm | 3000K | CRI>80		
matt white	148062	185.40

CARISO
WL, PHASE





- The various different inner illumination colours lead to different light colours

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/steel
Dimmable: C, L



Dimensional drawing



Variant	Item No.	GBP
200lm | 2700K | CRI>80		
black/gold	**151710**	**148.50**
390lm | 3000K | CRI>80		
white	**151711**	**144.00**

CARISO
WL, PHASE







- Premium LED with CRI>90
- The various different inner illumination colours lead to different light colours

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 22W
Material: aluminium/steel
Dimmable: C, L



Dimensional drawing



Variant	Item No.	GBP
500lm | 1700-2700K | CRI>90		
black/gold	**151740**	**247.50**
900lm | 2000-3000K | CRI>90		
white	**151741**	**242.10**







LED SAIL
WL

LED INSIDE





Product details

100-240V ~50/60Hz | 700mA
Total wattage: 6W
Material: aluminium/steel





Dimensional drawing



Variant	Item No.	GBP
Up: 85lm | 3000K | CRI>80 Down: 85lm | 3000K | CRI>80		
■ glossy black	**151610**	**156.60**
Up: 520lm | 3000K | CRI>80 Down: 120lm | 3000K | CRI>80		
□ glossy white	**151611**	**156.60**

PLASTRA 104
WL, QT14

SOCKET INSIDE





- Can be individually designed with colours, stickers & more

Product details

230V -50Hz
Material: gypsum/steel



Dimensional drawing



Recommended lamp

G9 2.5W
2700K 180lm
3kWh/1000h
Item No. 560302 | 10.80 GBP



Lamp details

max. 42W QT14

Variant	Item No.	GBP
G9 | QT14		
matt white	**148016**	**41.40**



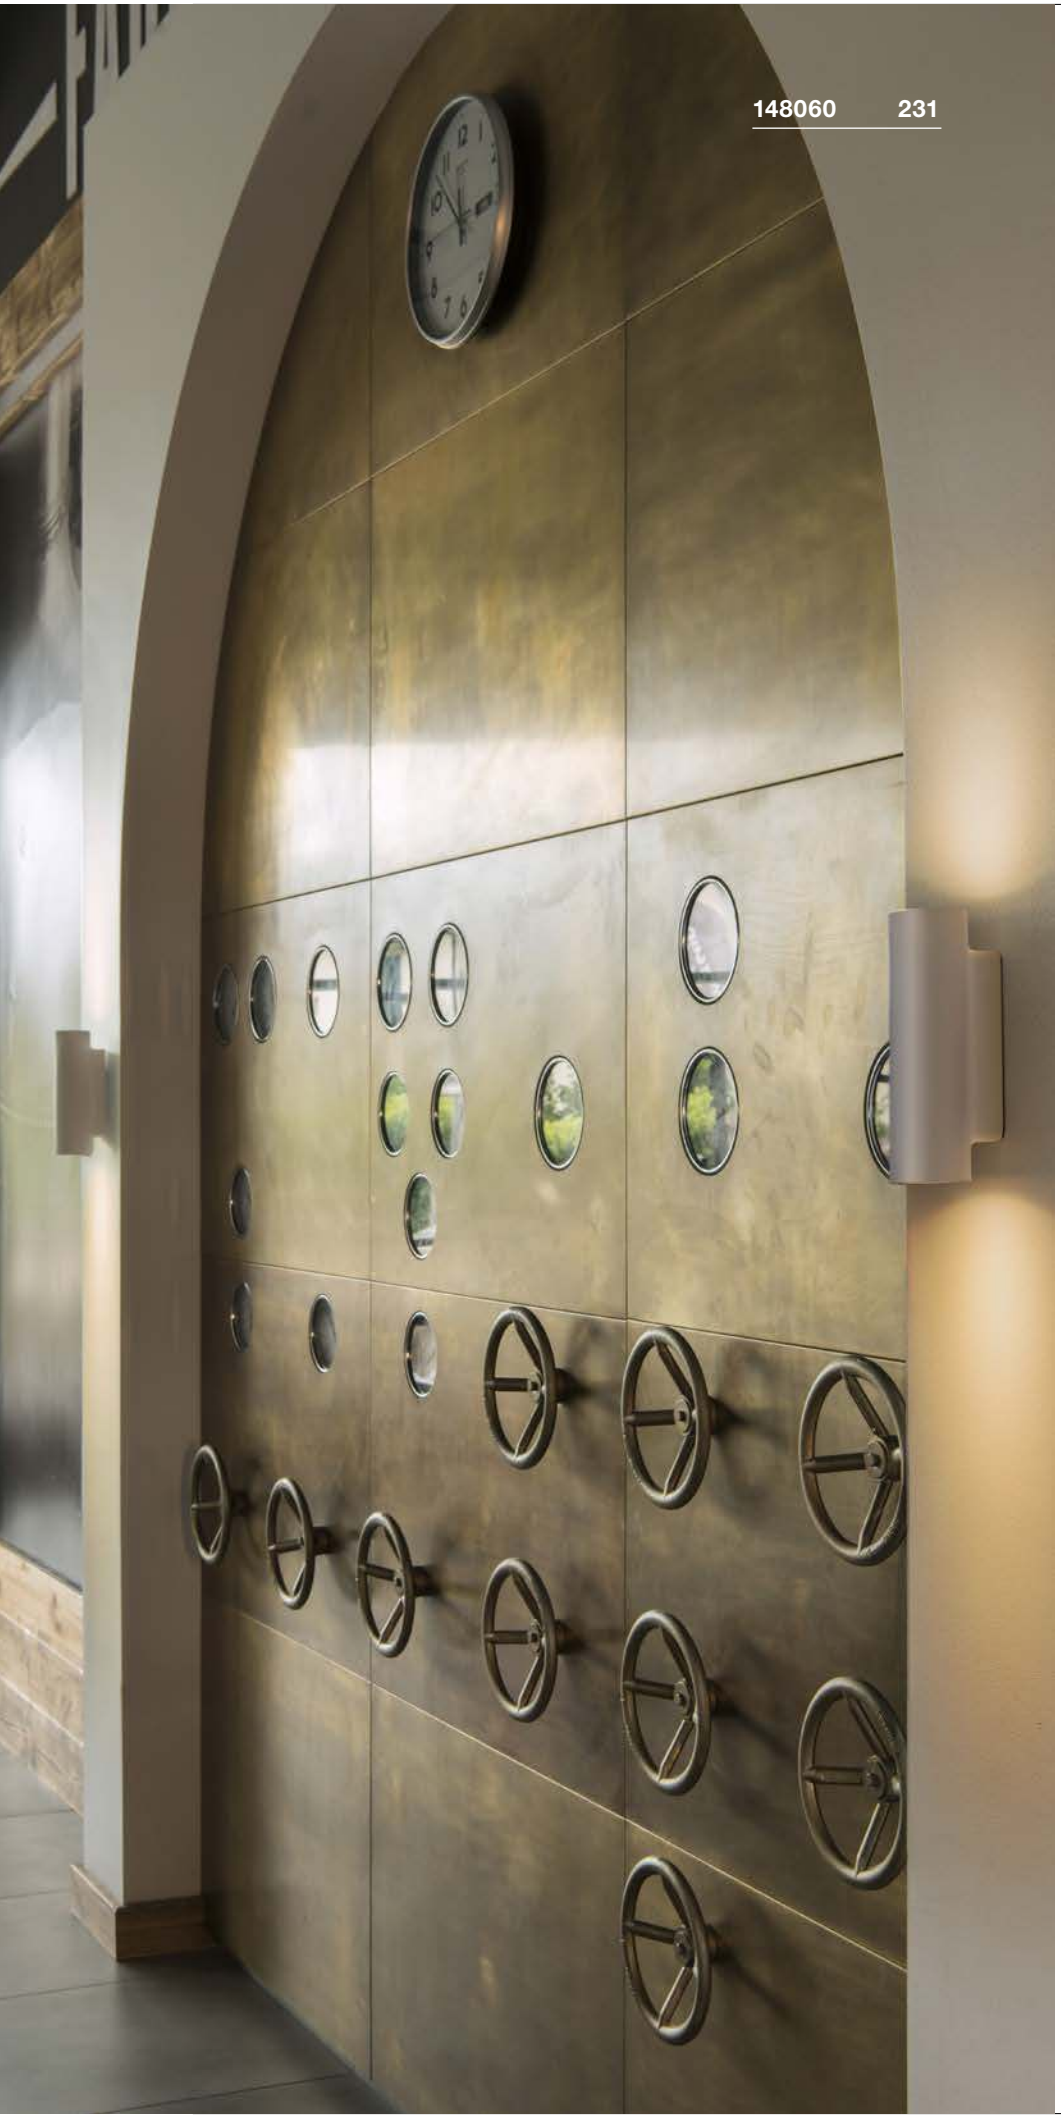

PLASTRA
WL, QPAR51

SOCKET INSIDE







- Can be individually designed with colours, stickers & more

Product details

220-240V ~50/60Hz
Material: gypsum/steel



Dimensional drawing



Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

2x max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 matt white	**148060**	**51.30**

ENOLA B
WL, QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/steel



Dimensional drawing



Accessory recommendation

■ Decorative ring
Item No. 151840 | 6.80 GBP



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details

2x max. 50W QPAR51
L: 8.5 cm max.

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	151800	81.00
GU10 | QPAR51 □ white	151801	81.00
GU10 | QPAR51 ■ gold	151803	90.00
GU10 | QPAR51 ■ silver grey	151804	81.00

ASTINA UP/DOWN
WL, QPAR51

SOCKET INSIDE







- High-quality, satin-finish glass

Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED GU10 7.2W 36°
4000K 540lm
8kWh/1000h
Item No. 1005083 | 6.10 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP



Lamp details

2x max. 10W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	1002933	85.50
GU10 | QPAR51 □ white	1002931	85.50
GU10 | QPAR51 ■ grey	1002932	85.50





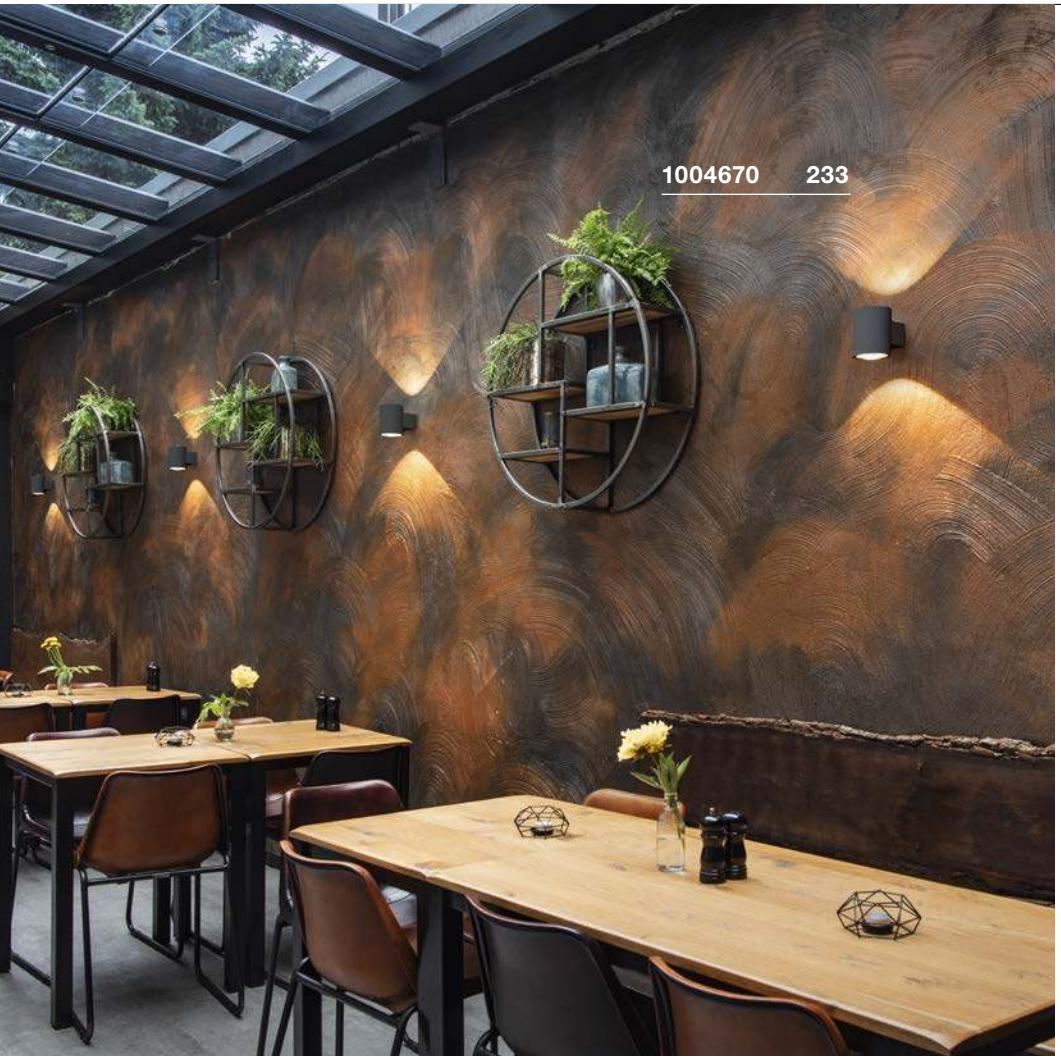

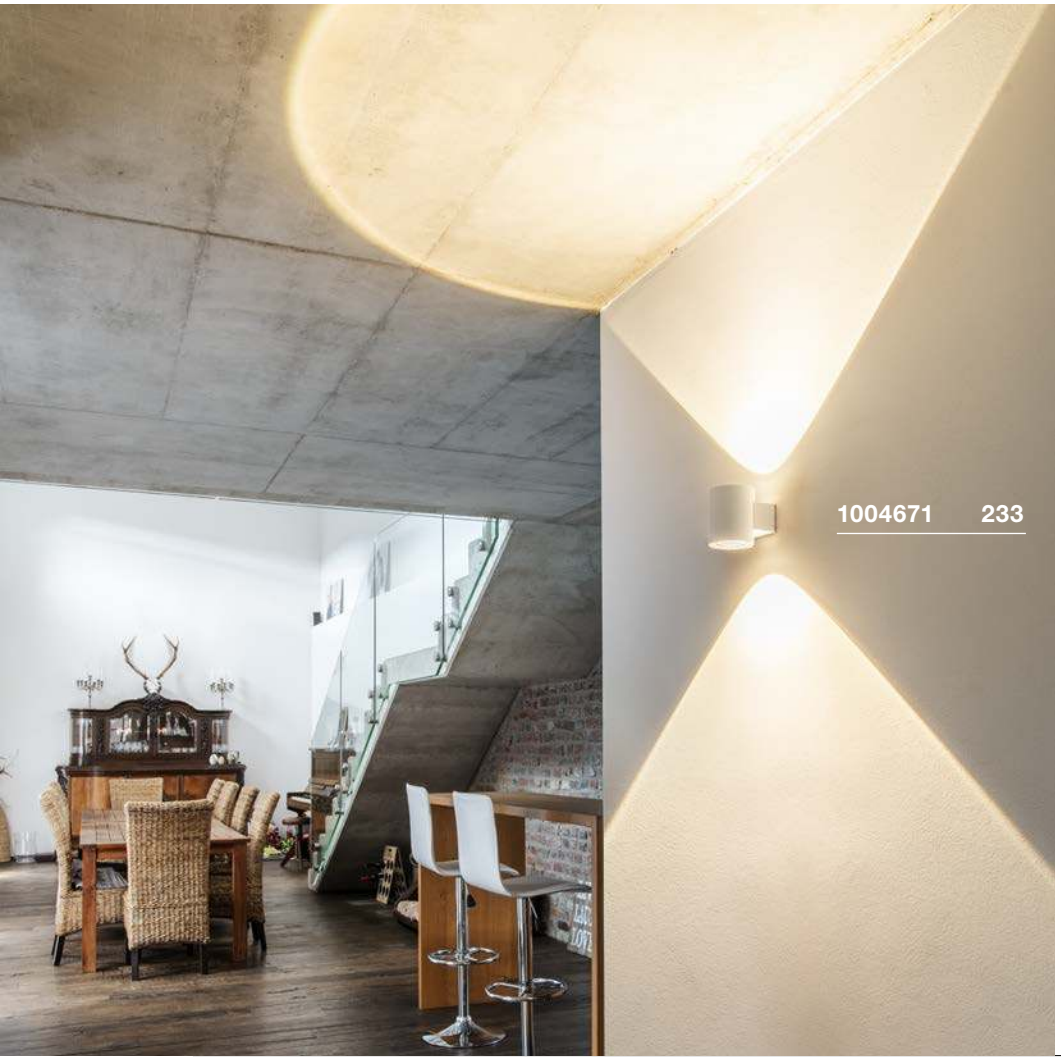

OCULUS UP/DOWN
WL, PHASE

NEW

LED INSIDE

DIM TO WARM





Product details

220-240V ~50/60Hz | 700mA
Total wattage: 15W
Material: aluminium/glass
Dimmable: C

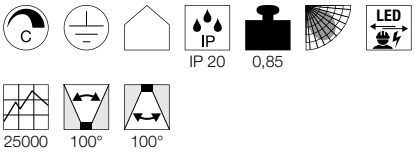

Dimensional drawing



Variant	Item No.	GBP
Up: 22-555lm | 2000-3000K | CRI>90 Down: 22-555lm | 2000-3000K | CRI>90		
■ matt black	1004670	220.50
Up: 22-555lm | 2000-3000K | CRI>90 Down: 22-555lm | 2000-3000K | CRI>90		
□ matt white	1004671	220.50

ROX
WL, QPAR111

SOCKET INSIDE







- High-quality brushed surface

Product details
230V -50Hz
Material: aluminium/glass

IP 44 0,9

Dimensional drawing



Recommended lamp

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP

LED GU10 7,3W 13°
2700K 660lm
8kWh/1000h
Item No. 1000939 | 20.70 GBP

Lamp details
max. 50W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
brushed aluminium	**1000333**	**117.00**

ROX UP/DOWN
WL, QPAR111

SOCKET INSIDE







- High-quality brushed surface

Product details
230V -50Hz
Material: aluminium/glass

IP 44 1,2

Dimensional drawing



Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP

Lamp details
2x max. 50W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
brushed aluminium	**1000334**	**144.00**





SUPROS 78 UP/DOWN
WL, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 250mA
Total wattage: 24W
Material: aluminium
Dimmable: C, L



Dimensional drawing



Accessory recommendation

Lens 20°
Item No. 116302 | 3.00 GBP

Lens 40°
Item No. 116304 | 3.00 GBP

Variant	Item No.	GBP
Up: 700lm | 3000K | CRI>80 | 60° Down: 700lm | 3000K | CRI>80 | 60° ■ black	**116340**	**180.00**
Up: 700lm | 3000K | CRI>80 | 60° Down: 700lm | 3000K | CRI>80 | 60° □ white	**116341**	**180.00**

PLASTRA 101
WL, E14





- Can be individually designed with colours, stickers & more

Product details
230V -50Hz
Material: gypsum/steel

1,25

Dimensional drawing


Recommended lamp
LED E14 6,5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP

LED E14 4,5W 280°
2700K 470lm
5kWh/1000h
Item No. 1002128 | 7.20 GBP

Lamp details
max. 40W C35
Diameter: 4.5 cm max. L: 11 cm max.

Variant	Item No.	GBP
E14 | C35		
matt white	**148013**	**41.40**

PLASTRA
WL, Curve, QT-DE12





- Can be individually designed with colours, stickers & more

Product details
230V -50Hz
Material: gypsum/steel

1,58

Dimensional drawing


Recommended lamp
R7s 78mm 55W 330°
3000K 530lm
6kWh/1000h
Item No. 560332 | 9.90 GBP

Lamp details
max. 100W QT-DE12

Variant	Item No.	GBP
R7s 78mm | QT-DE12		
matt white	**148012**	**55.80**

DELWA
WL





Product details
100-240V ~50/60Hz | 700mA
Total wattage: 10W
Material: aluminium/glass

IP 44 30000 100°

Dimensional drawing


Variant	Item No.	GBP
910lm | 3000K | CRI>80		
white	**1000340**	**166.50**
910lm | 3000K | CRI>80		
anthracite	**1000342**	**166.50**



148013 236



1000340 236



148012 236

QUAD FRAME 14
WL

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

100-277V ~50/60Hz | 350mA
Total wattage: 4W
Material: aluminium

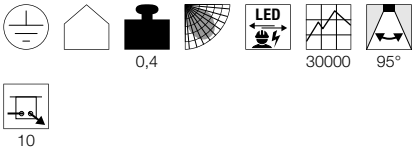

Dimensional drawing



Variant	Item No.	GBP
130/165lm | 2700/3000K | CRI>90		
matt white	1003467	76.50

QUAD FRAME 19
WL

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

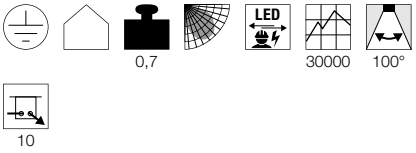

Dimensional drawing



Variant	Item No.	GBP
540/640lm | 2700/3000K | CRI>90		
matt white	1003468	94.50

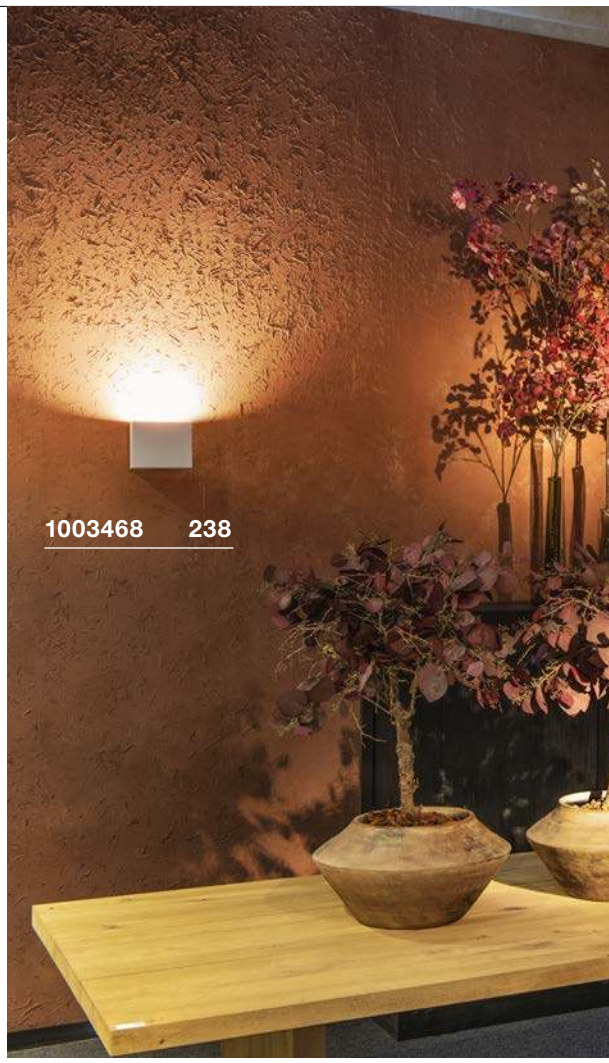

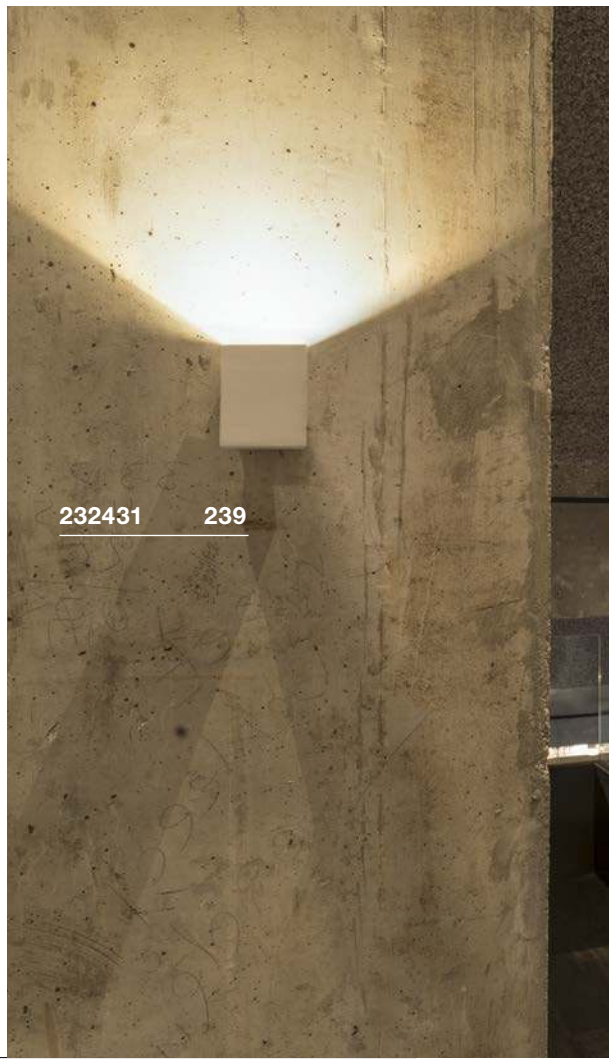





QUAD
WL

INSIDE







Product details

200-240V ~50/60Hz | 700mA
Total wattage: 4.6W
Material: aluminium/glass



IP 44 | 0,25 | 30000 | 90°

Dimensional drawing



Variant	Item No.	GBP
100lm | 3000K | CRI>80		
matt white	**232461**	**72.00**
80lm | 3000K | CRI>80		
matt anthracite	**232465**	**72.00**

BIG QUAD
WL

INSIDE







Product details

100-277V ~50/60Hz | 350mA
Total wattage: 4.5W
Material: aluminium/glass



IP 44 | 0,63 | 30000 | 110°

Dimensional drawing



Variant	Item No.	GBP
290lm | 3000K | CRI>80		
matt white	**232431**	**103.50**
260lm | 3000K | CRI>80		
matt anthracite	**232435**	**103.50**

PEMA®
WL









Product details

230V -50Hz
Total wattage: 4.7W
Material: aluminium/glass

IP 44 0,3 30000

Dimensional drawing



Tip

Protection rating IP44 only when mounted with light emission downwards.



Variant	Item No.	GBP
125lm | 3000K | CRI>80 white	231010	90.00
125lm | 3000K | CRI>80 grey	231012	90.00
125lm | 3000K | CRI>80 anthracite	231015	90.00





SHELL 15
WL, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/acrylic
Dimmable: C, L





Dimensional drawing



Variant	Item No.	GBP
1400lm | 3000K | CRI>80 white	**1000422**	**197.10**

SHELL 30
WL, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 54W
Material: aluminium/acrylic
Dimmable: C





Dimensional drawing



Variant	Item No.	GBP
5600lm | 3000K | CRI>80 white	**1000423**	**296.10**

LENITO
WL









Product details

220-240V ~50/60Hz | 160mA
Total wattage: 24W
Material: aluminium/polycarbonate (PC)

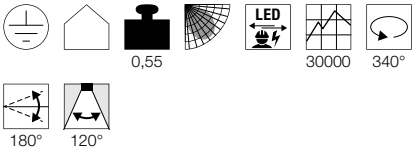

Dimensional drawing



Variant	Item No.	GBP
2450lm | 3000K | CRI>80		
■ black	**1002920**	**137.70**
2540lm | 3000K | CRI>80		
□ white	**1002921**	**137.70**



MERADO FLOOD
WL, PHASE

LED INSIDE







- Asymmetrical light distribution

Product details

220-240V ~50/60Hz | 1000mA
Total wattage: 40W
Material: aluminium
Dimmable: C, L

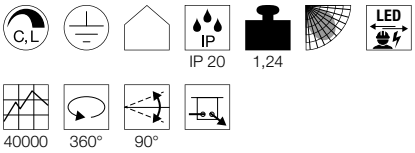

Dimensional drawing



Variant	Item No.	GBP
3000lm | 3000K | CRI>80 ■ black	1001469	185.40
3000lm | 3000K | CRI>80 □ white	1001468	185.40
3200lm | 4000K | CRI>80 ■ black	1001473	185.40
3200lm | 4000K | CRI>80 □ white	1001472	185.40

FENDA
WL, Base, E27

SOCKET INSIDE







- Can be individually altered through the selection of a suitable lampshade



1001450 + 156113 244 + 105

Product details

230V -50Hz
Material: steel

0,53

Dimensional drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 40W
L: 12 cm max.

Variant	Item No.	GBP
E27		
black	1001450	63.00
E27		
chrome	1001449	67.50

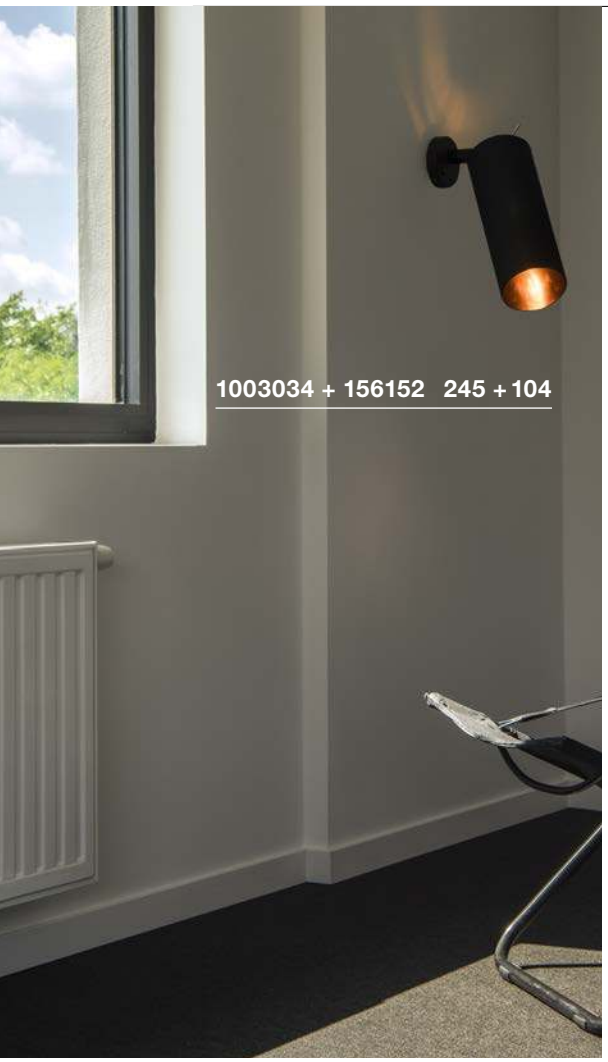



FENDA
WL, E27

SOCKET INSIDE









- Can be individually altered through the selection of a suitable lampshade
- Rotating and pivoting wall light
- Switch on the rose

Product details

220-240V ~50/60Hz
Material: steel/aluminium



Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP



Lamp details

max. 40W

Variant	Item No.	GBP
E27		
matt black	1003034	79.20
E27		
matt white	1003035	79.20

FENDA
Diameter 20cm, round









- Can be individually altered through the selection of a suitable light base

Product details

Material: textile/steel



Dimensional drawing



Tip

max. 60W

Variant	Item No.	GBP
black	1001451	29.70
black/copper	1001452	34.60
white	1001453	29.70
beige	1001454	29.70

KENKUA SPOT
WL, E27

SOCKET INSIDE
LED INSIDE







- High-quality, satin-finish glass
- Adjustable reading light
- Lightbulbs on the rose available separately

Product details
100-277V ~50/60Hz | 700mA
Material: steel/glass

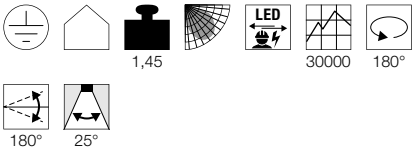

Dimensional drawing



Recommended lamp
LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP

Lamp details
max. 40W

Variant	Item No.	GBP
E27		
Spot: 200lm | 3000K | CRI>80		
chrome/white	**1002855**	**147.60**

KENKUA
WL, E27

SOCKET INSIDE







- High-quality, satin-finish glass

Product details
220-240V ~50/60Hz
Material: steel/glass



Dimensional drawing



Recommended lamp
LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

Lamp details
max. 40W

Variant	Item No.	GBP
E27		
chrome/white	**1002856**	**101.70**

ACCANTO SPOT SQUARE
WL, E27

SOCKET INSIDE
LED INSIDE







Product details
230V -50Hz
Material: steel/textile

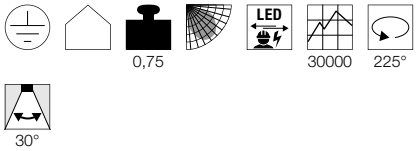

Dimensional drawing



Recommended lamp
LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details
max. 24 W
L: 17.3 cm max.

Variant	Item No.	GBP
E27		
Spot: 100lm | 3000K | CRI>80		
black	**155670**	**144.00**
E27		
Spot: 100lm | 3000K | CRI>80		
white	**155673**	**144.00**



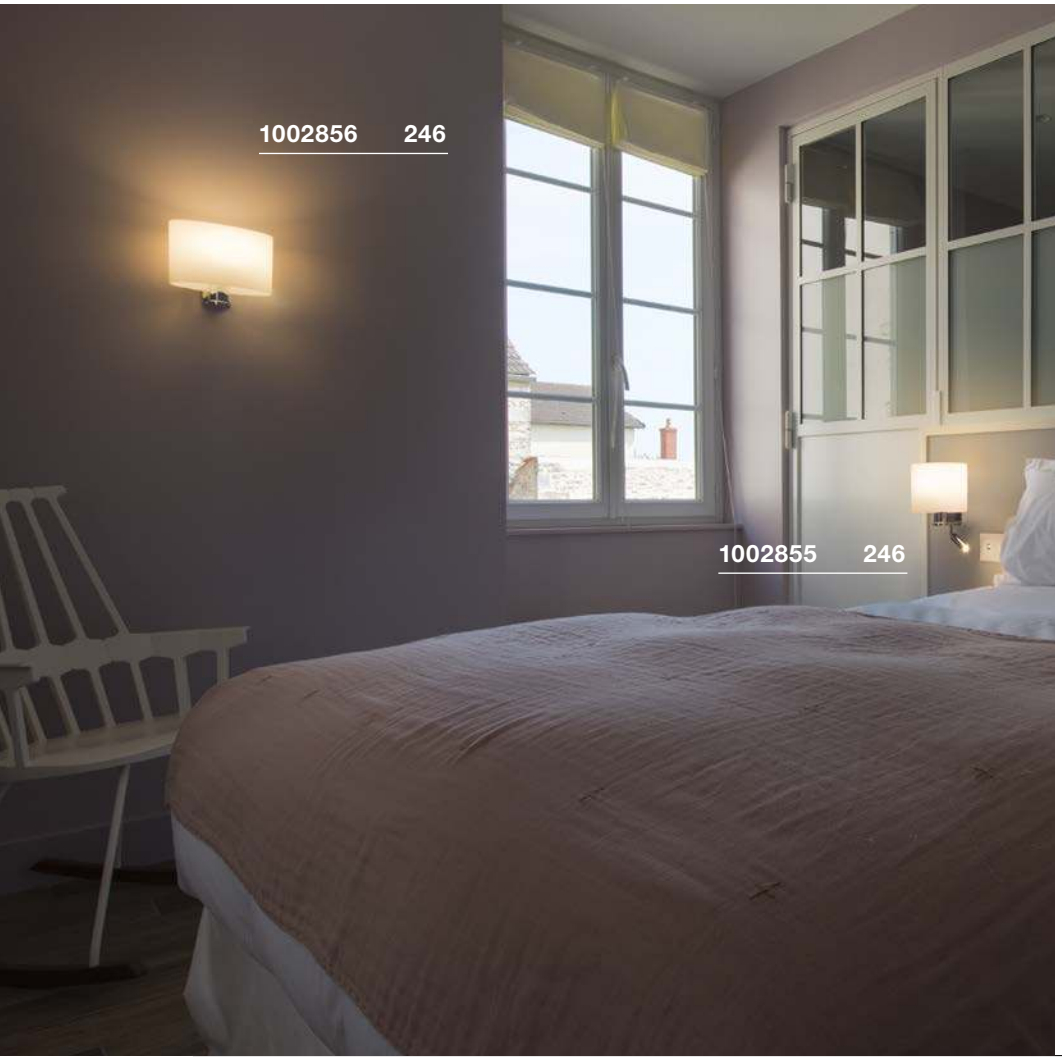

ACCANTO
WL, E27

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: steel/textile

0,68

Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 40W

Variant	Item No.	GBP
E27 ■ black	1002942	67.50
E27 □ white	1002943	67.50

COUPA FLEX
WL

SOCKET INSIDE
LED INSIDE







- Lightbulbs available separately
- Switch on the rose

Product details

230V -50Hz
Total wattage: 4.8W
Material: steel/glass



Dimensional drawing



Recommended lamp

LED G9 2.7W
2600K 250lm
3kWh/1000h
Item No. 1003102 | 29.70 GBP



LED G9 2.5W
2700K 180lm
3kWh/1000h
Item No. 560302 | 10.80 GBP



Lamp details

max. 40W QT14
L: 9cm max.

Variant	Item No.	GBP
G9 | QT14 Spot: 125lm | 3000K | CRI>80 chrome/white	**149452**	**176.40**



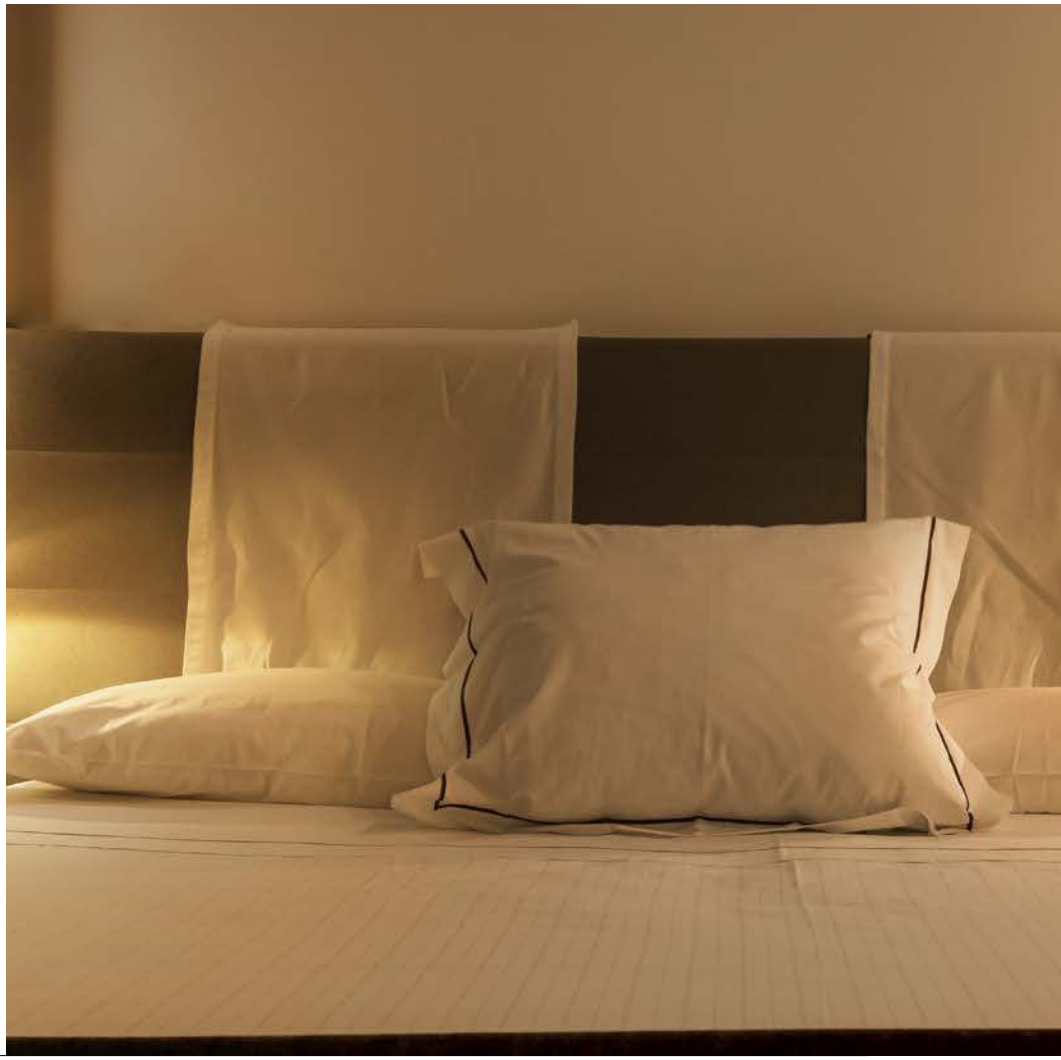



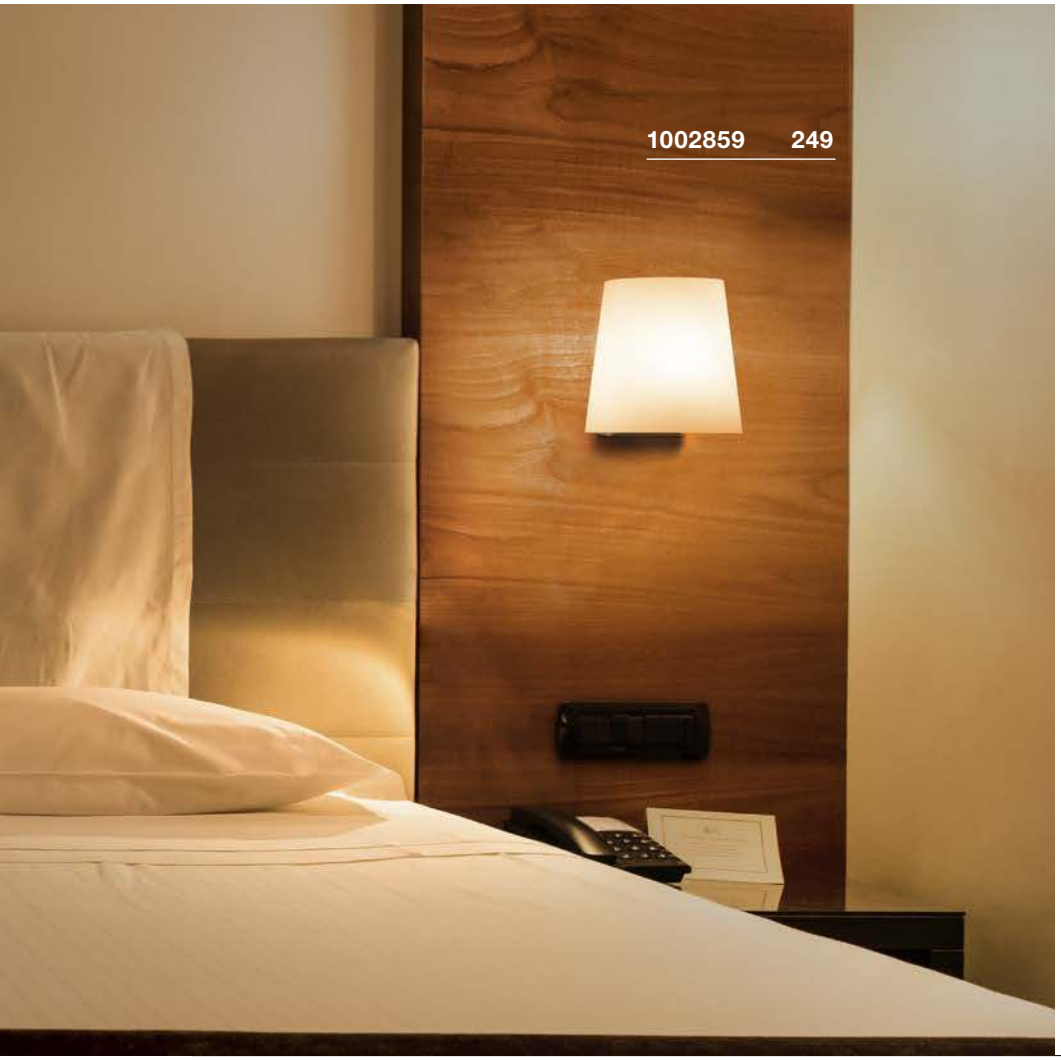

COUPA
WL, QT14

SOCKET INSIDE







- High-quality, satin-finish glass

Product details

220-240V ~50/60Hz
Material: steel/glass



Dimensional drawing



Recommended lamp

LED G9 2.7W
2600K 250lm
3kWh/1000h
Item No. 1003102 | 29.70 GBP



LED G9 2.5W
2700K 180lm
3kWh/1000h
Item No. 560302 | 10.80 GBP



Lamp details

max. 42W QT14
L: 9cm max.

Variant	Item No.	GBP
G9 | QT14		
chrome/white	**1002859**	**98.10**

KARPO MAGN
CW, single, PHASE

NEW

LED INSIDE







- The light head adheres magnetically to the light base

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: steel/aluminium
Dimmable: C

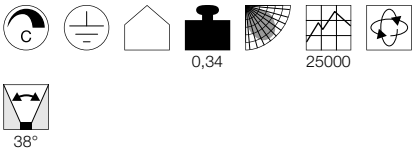

Dimensional drawing



Variant	Item No.	GBP
350lm | 3000K | CRI>90		
■ matt black	1004706	162.00
430lm | 3000K | CRI>90		
□ matt white	1004707	162.00

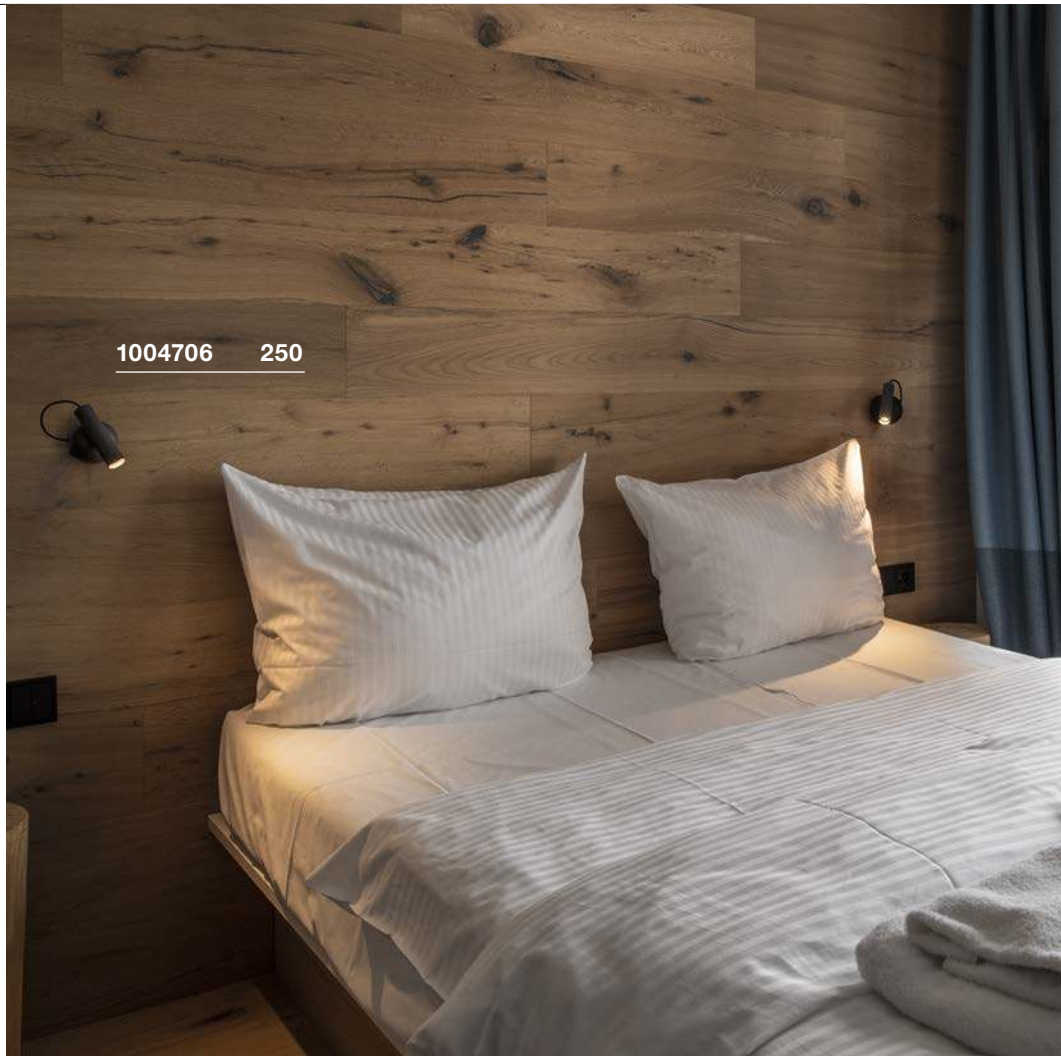

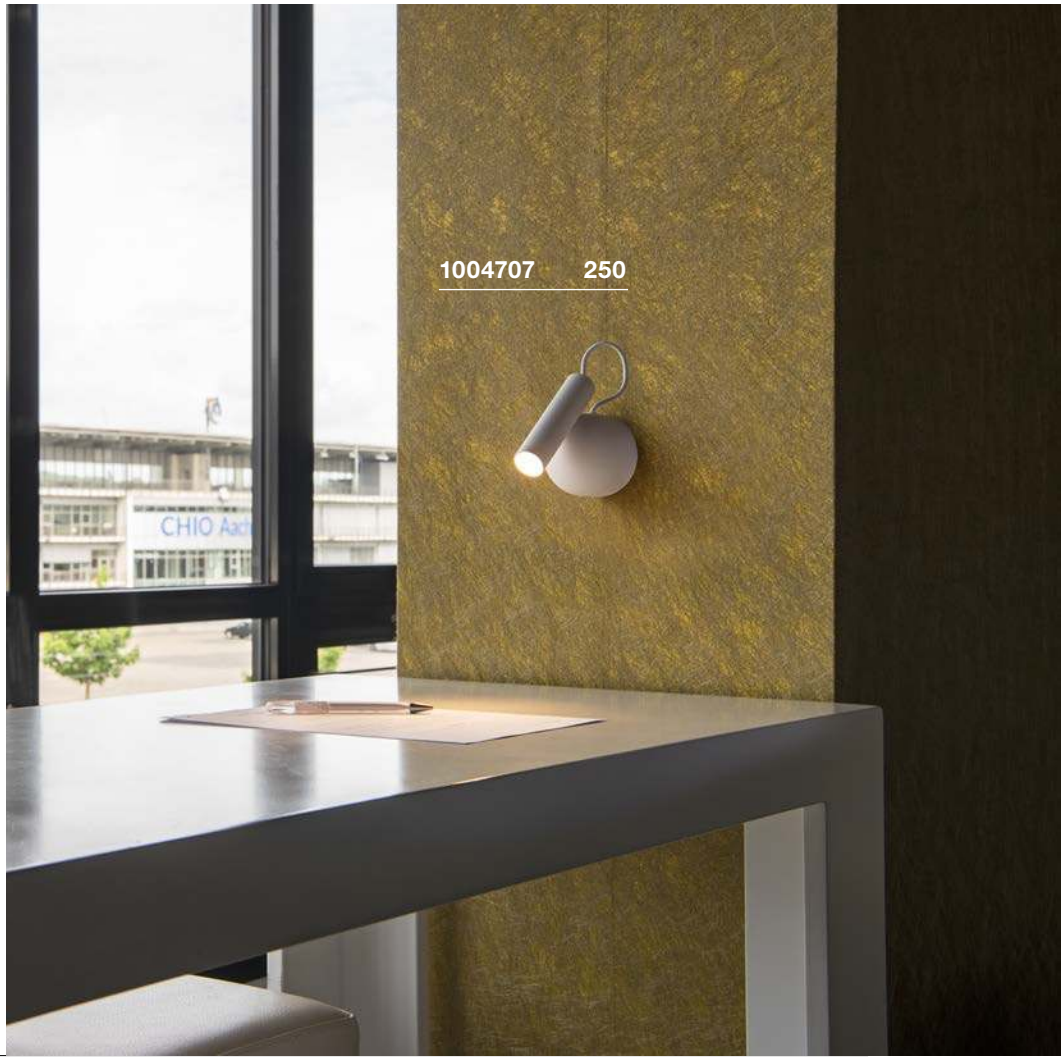

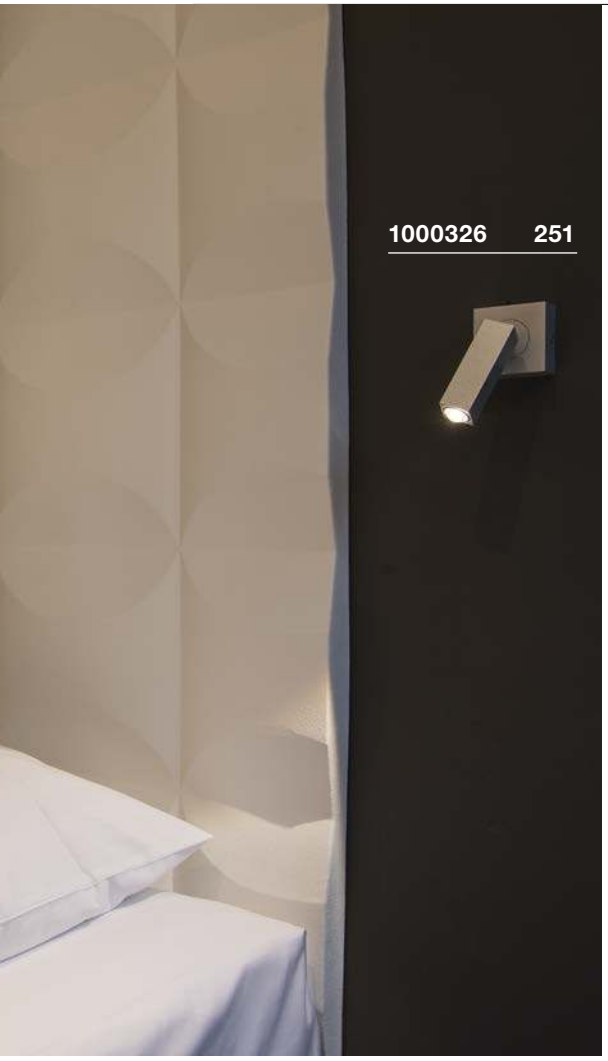



STIX
WL

LED INSIDE







- Rotating and pivoting light head
- Switch on the rose

Product details

100-240V ~50/60Hz | 700mA
Total wattage: 4.5W
Material: aluminium

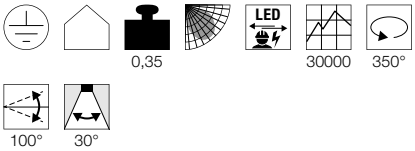

Dimensional drawing



Variant	Item No.	GBP
185lm | 3000K | CRI80 ■ black	1000324▼	108.00
185lm | 3000K | CRI80 ■ grey	1000326▼	108.00

PHELIA
WL, QPAR51

SOCKET INSIDE







- Switch on light body
- Lampshade painted white on the inside

Product details

230V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005077 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

max. 35W QPAR51
Diameter: 5 cm max. L: 10.5 cm max.

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	148540	103.50

ENOLA B
WL, QPAR51

SOCKET INSIDE







- Switch on the rose



Product details

230V -50Hz
Material: aluminium/steel



Dimensional drawing



Accessory recommendation

■ Decorative ring
Item No. 151840 | 6.80 GBP



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

max. 50W QPAR51
L: 6 cm max.

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	1000729	69.30
GU10 | QPAR51 □ white	1000730	69.30
GU10 | QPAR51 ■ gold	1000731	74.70
GU10 | QPAR51 ■ grey	1000732	69.30



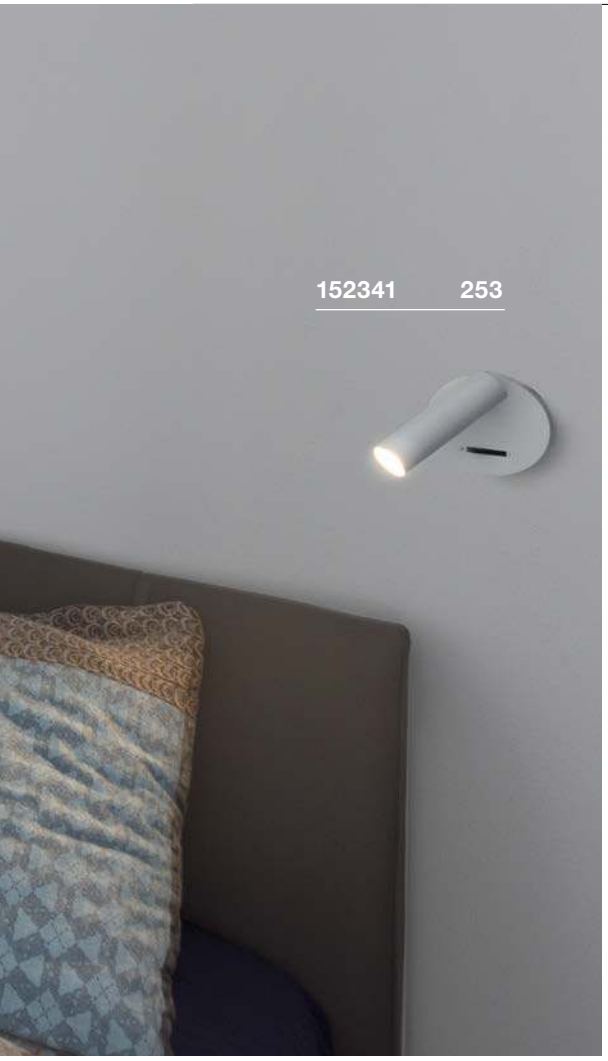

KARPO 30
CW, single

LED INSIDE







- Premium LED with CRI>90
- Switch on the rose

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/steel

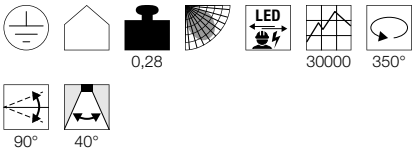

Dimensional drawing



Variant	Item No.	GBP
330lm | 3000K | CRI>90		
black	152340	99.00
380lm | 3000K | CRI>90		
white	152341	99.00
360lm | 3000K | CRI>90		
gold	1002173	108.00

KARPO
WL

LED INSIDE







- Premium LED with CRI>90
- 3-Step touch dimmer on the base
- Two USB ports (1.5A max)

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 6.6W
Material: aluminium
Dimmable: switch

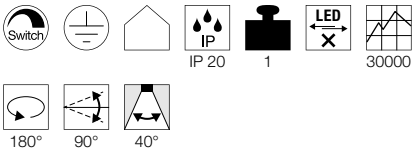

Dimensional drawing



Variant	Item No.	GBP
390lm | 3000K | CRI>90		
white	1002140	188.10



SOMNILA SPOT
WL, left

NEW

LED INSIDE







- Practical storage for smartphones
- USB charging function
- Lightbulbs can be switched on/off separately
- Direct and indirect light

Product details

100-240V ~50/60Hz | 12V
Total wattage: 13W
Material: aluminium/steel

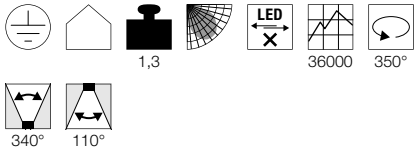

Dimensional drawing



Variant	Item No.	GBP
Spot: 65lm | 3000K | CRI>90 Indirect:: 370lm | 3000K | CRI>90		
matt black	1003455	180.00
Spot: 65lm | 3000K | CRI>90 Indirect:: 646lm | 3000K | CRI>90		
matt white	1003457	180.00

SOMNILA SPOT
WL, right

NEW

LED INSIDE







- Practical storage for smartphones
- USB charging function
- Lightbulbs can be switched on/off separately
- Direct and indirect light

Product details

100-240V ~50/60Hz | 12V
Total wattage: 13W
Material: aluminium/steel

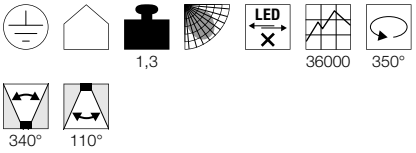

Dimensional drawing



Variant	Item No.	GBP
Spot: 65lm | 3000K | CRI>90 Indirect:: 370lm | 3000K | CRI>90		
matt black	1003456	180.00
Spot: 65lm | 3000K | CRI>90 Indirect:: 646lm | 3000K | CRI>90		
matt white	1003458	180.00



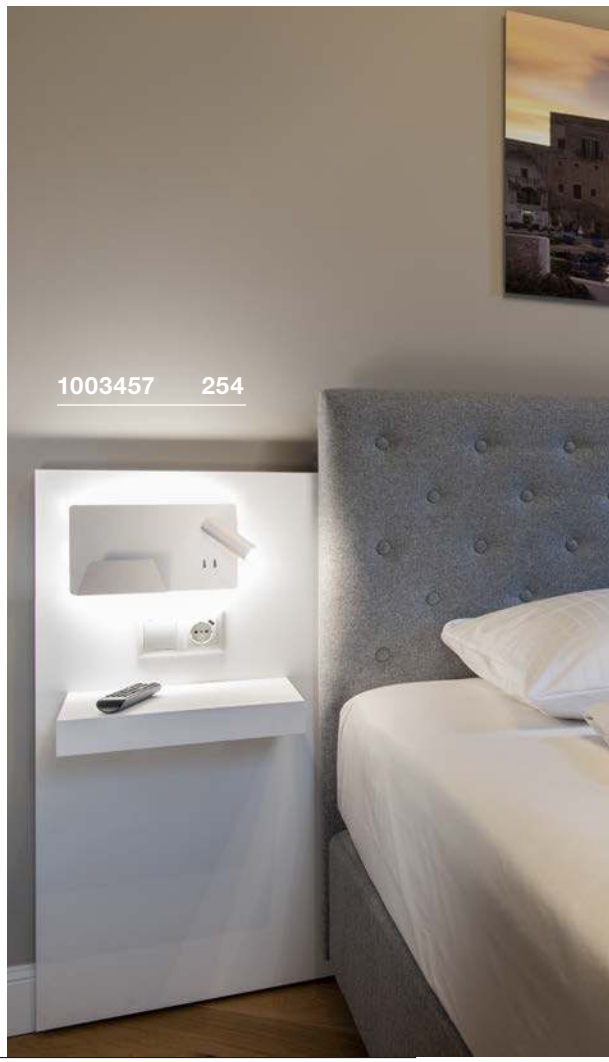

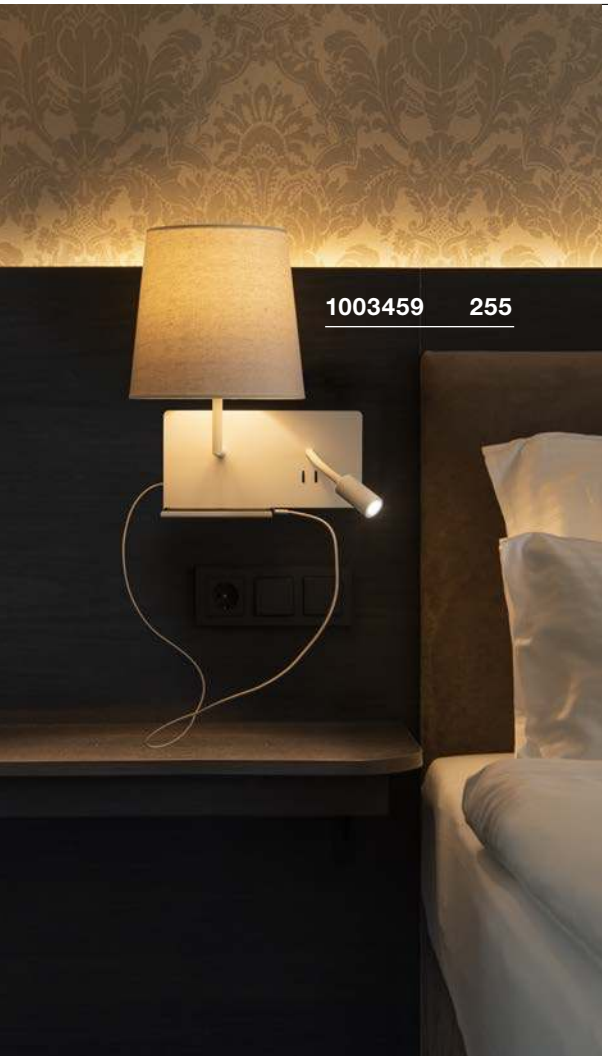

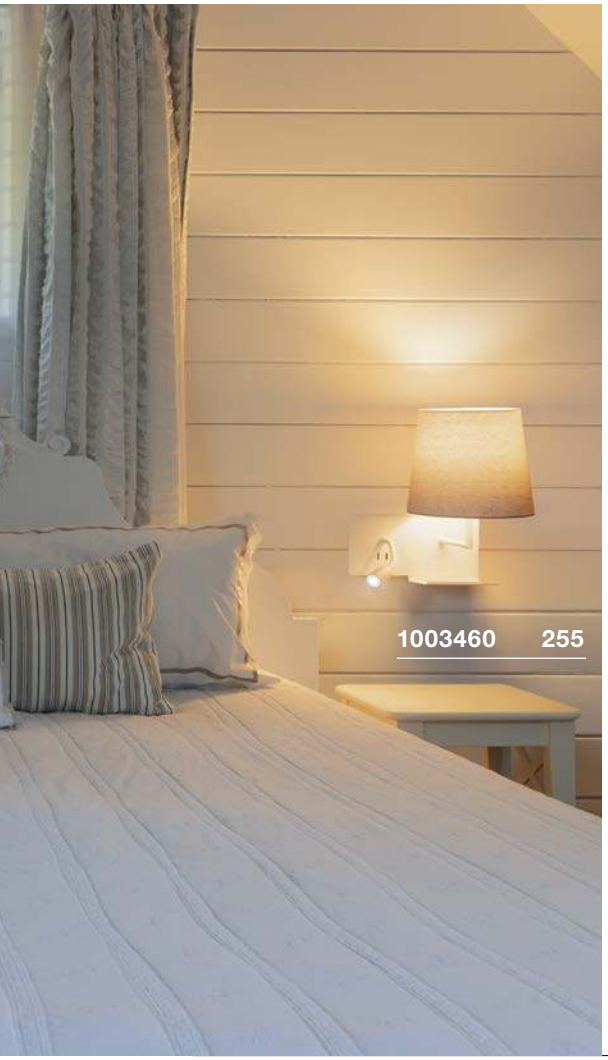

SOMNILA FLEX
WL, left

NEW

SOCKET INSIDE

LED INSIDE







- Practical storage for smartphones
- USB charging function
- Lightbulbs can be switched on/off separately

Product details

100-240V ~50/60Hz | 12V
Material: aluminium/textile



Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details

40W
L: 18 cm max.

Variant	Item No.	GBP
E27 Spot: 65lm | 3000K | CRI>90 matt white	1003459	189.00

SOMNILA FLEX
WL, right

NEW

SOCKET INSIDE

LED INSIDE







- Practical storage for smartphones
- USB charging function
- Lightbulbs can be switched on/off separately

Product details

100-240V ~50/60Hz | 12V
Material: aluminium/textile



Dimensional drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



Lamp details

40W
L: 18 cm max.

Variant	Item No.	GBP
E27 Spot: 65lm | 3000K | CRI>90 matt white	1003460	189.00

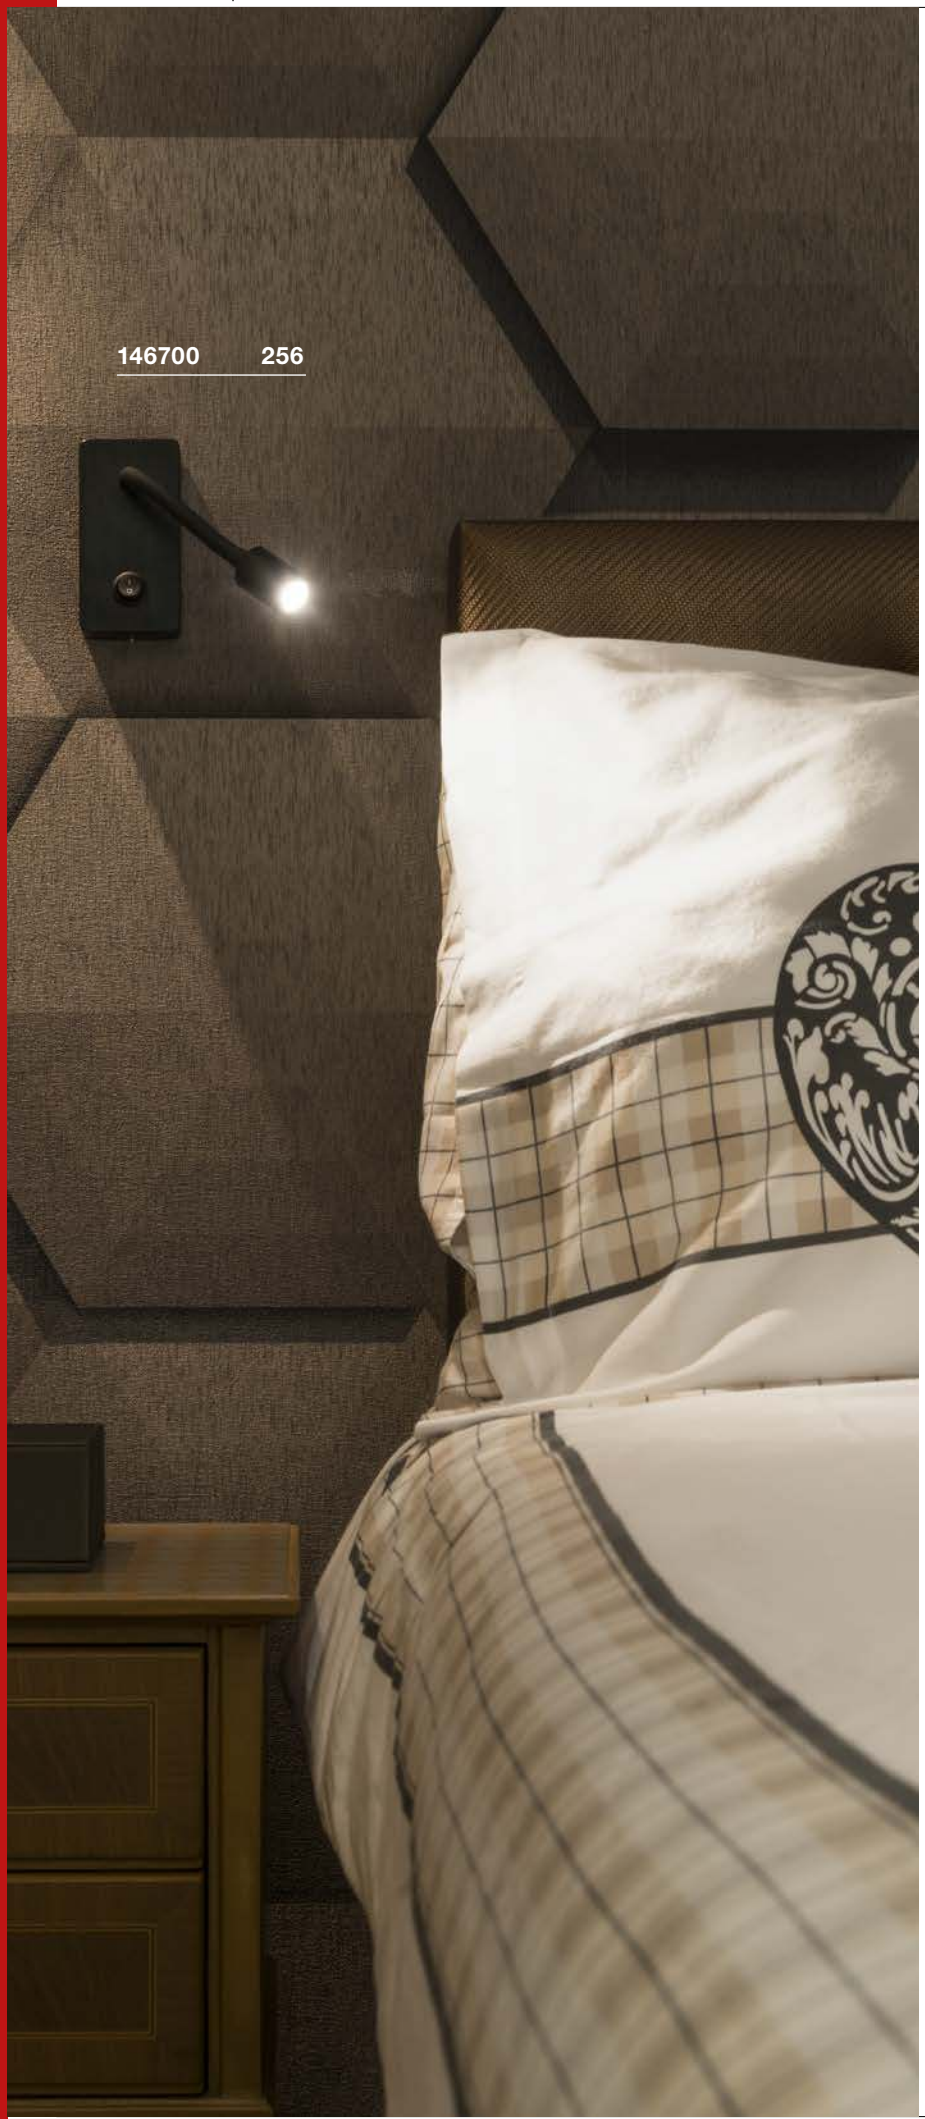

PIPOFLEX
WL

LED INSIDE







- Switch on the rose

Product details

220-240V ~50/60Hz | 266mA
Total wattage: 4.6W
Material: aluminium



Dimensional drawing



Variant	Item No.	GBP
200lm | 3000K | CRI>80 ■ black	**146700**	**70.20**
200lm | 3000K | CRI>80 □ white	**146701**	**70.20**
200lm | 3000K | CRI>80 ■ grey	**146704**	**70.20**



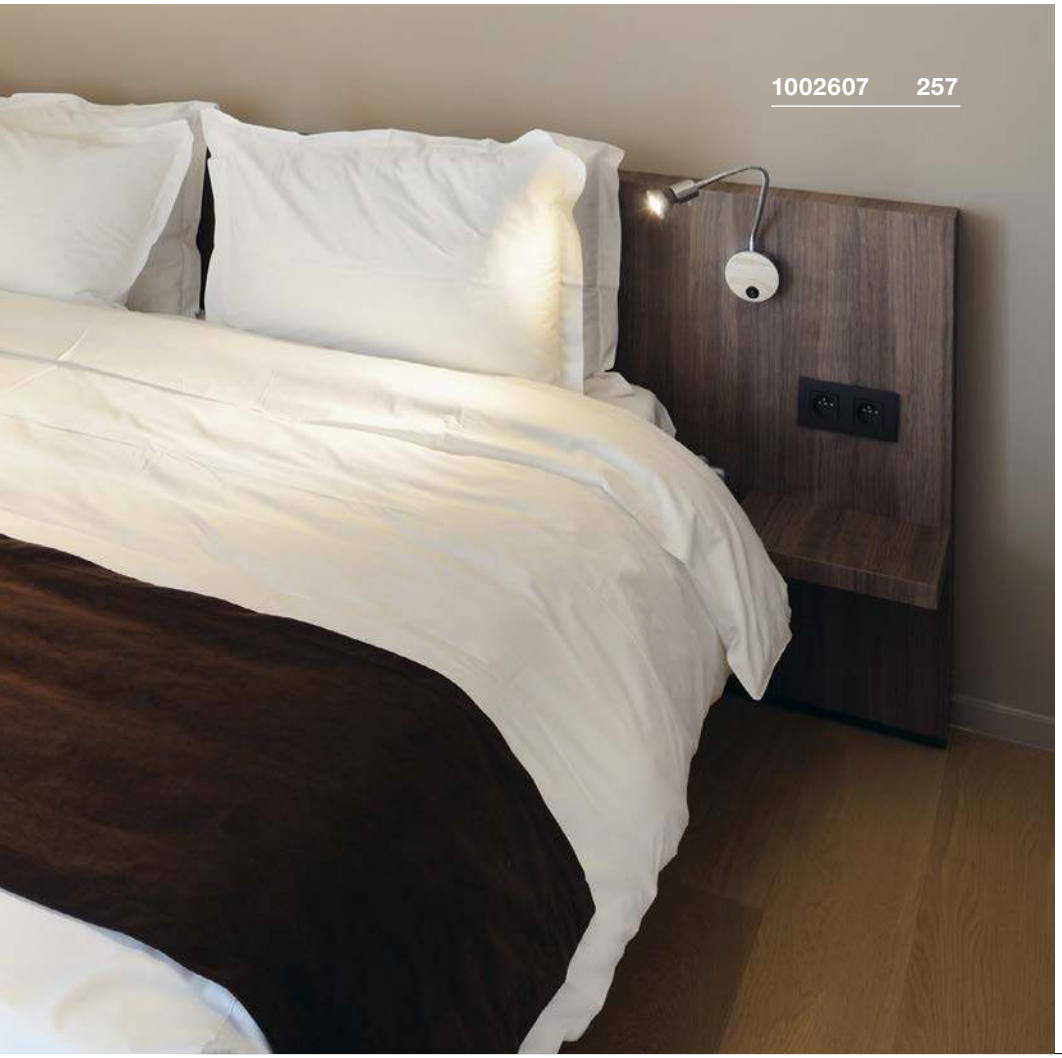

DIO FLEX PLATE
WL QPAR51

SOCKET INSIDE







- Switch on the rose

Product details

230V -50Hz
Material: aluminium

0,42

Dimensional drawing



Accessory recommendation

Lamp decorative ring diameter 5.7cm
Item No. 151040 | 4.00 GBP

Lamp decorative ring diameter 5.7cm
Item No. 151041 | 4.00 GBP

Lamp decorative ring diameter 5.7cm
Item No. 151049 | 5.90 GBP

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 black	1002608	43.20
GU10 | QPAR51 white	1002607	43.20
GU10 | QPAR51 chrome	146692	49.50

DIO FLEX PLATE
WL







• Switch on the rose

Product details

100-240V ~50/60Hz | 320mA
Total wattage: 1.9W
Material: aluminium



IP 20 | 0,54 | 30000 | 45°

Dimensional drawing



Variant	Item No.	GBP
82lm | 2700K | CRI>80 white	1002117	76.50
82lm | 2700K | CRI>80 chrome	1002116	81.00
82lm | 2700K | CRI>80 black	1002430	76.50
82lm | 3000K | CRI>80 white	1002118	76.50
82lm | 3000K | CRI>80 chrome	146682	81.00
82lm | 3000K | CRI>80 black	1002431	76.50
82lm | 4000K | CRI>80 white	1002119	76.50
82lm | 4000K | CRI>80 chrome	146680	81.00
82lm | 4000K | CRI>80 black	1002432	76.50



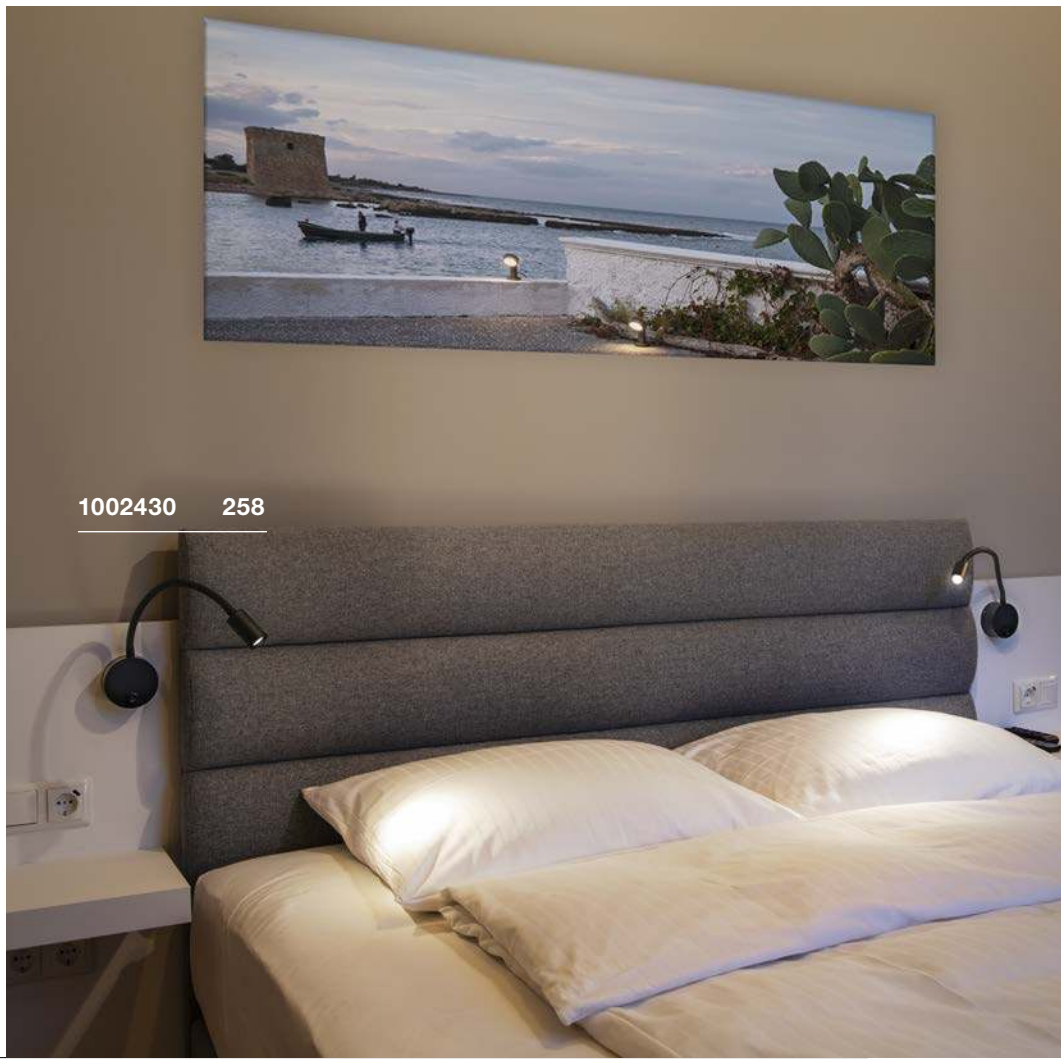



IVED GOOSE
WL, Rose

LED INSIDE





Product details

100-240V ~50/60Hz | 350mA
Total wattage: 2.2W
Material: aluminium



Dimensional drawing



Variant	Item No.	GBP
80lm | 3000K | CRI>80 grey	146512	101.70

MAGANDA
WL







- 3-times optical magnification
- Select from 3 light colours
- Touch sensitive switch

Product details

100-240V ~50/60Hz | 12V
Total wattage: 4.8W
Material: steel/glass

IP 44 | 1,1 | 50000 | 90° | 115° | IK02

Dimensional drawing



Variant	Item No.	GBP
45/48/51lm | 2700/3000/4000K | CRI>90		
chrome/white	1004971	151.20





TRUKKO
WL, rectangular





- A unique surface coating prevents the mirror from steaming
- Touch control

Product details

220-240V ~50/60Hz | 24V
Total wattage: 25W
Material: glass/plastic
Dimmable: switch



Dimensional drawing



Variant	Item No.	GBP
1080/1290/1250lm | 3000/4000/6500K | CRI>90		
silver	1004730	301.50

TRUKKO
WL, round





- A unique surface coating prevents the mirror from steaming
- Touch control

Product details

220-240V ~50/60Hz | 24V
Total wattage: 25W
Material: glass/plastic
Dimmable: switch



Dimensional drawing



Variant	Item No.	GBP
1270/1260/1260lm | 3000/4000/6500K | CRI>90		
silver	1004731	287.10

TRUKKO 60/90
WL





Product details

100-240V ~50/60Hz | 500mA
Material: steel/plastic



Dimensional drawing



Variant	Item No.	GBP
450lm | 8,8W | 3000K | CRI>80		
H: 60 cm | 0.75 kg		
chrome/white	149762	126.00
710lm | 11,4W | 3000K | CRI>80		
H: 90 cm | 0.8 kg		
chrome/white	149772	148.50

MARYLIN 40/60/90
WL

LED INSIDE







Product details

220-240V ~50/60Hz | 600mA
Material: aluminium/polycarbonate (PC)



Dimensional drawing



Variant	Item No.	GBP
800lm | 10W | 3000K | CRI>80 L: 40 cm | 0.85 kg chrome/white	1002190	170.10
1200lm | 15W | 3000K | CRI>80 L: 60 cm | 1.12 kg chrome/white	1002191	215.10
1700lm | 21W | 3000K | CRI>80 L: 90 cm | 1.64 kg chrome/white	1002192	260.10

DEVIN
WL, Double, PHASE

LED INSIDE







- Elegant aluminium/glass combination

Product details

220-240V ~50/60Hz
Total wattage: 16W
Material: steel/glass
Dimmable: C, L



Dimensional drawing



Variant	Item No.	GBP
890lm | 3000K | CRI>80 chrome/white	151553	201.60





WL 106
E14

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 44 0,66

Dimensional drawing



Recommended lamp

LED E14 4,5W 280°
2700K 470lm
5kWh/1000h
Item No. 1002128 | 7.20 GBP

LED E14 6,5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP

Lamp details

max. 40W
Diameter: 3.6 cm max. L: 11 cm max.

Variant	Item No.	GBP
E14		
chrome	**1002228**	**72.00**

WL 106
E14

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 44 1,12

Dimensional drawing



Recommended lamp

LED E14 4,5W 280°
2700K 470lm
5kWh/1000h
Item No. 1002128 | 7.20 GBP

LED E14 6,5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP

Lamp details

2x max. 40W
Diameter: 3.6 cm max. L: 11 cm max.

Variant	Item No.	GBP
E14		
chrome	**1002229**	**135.00**



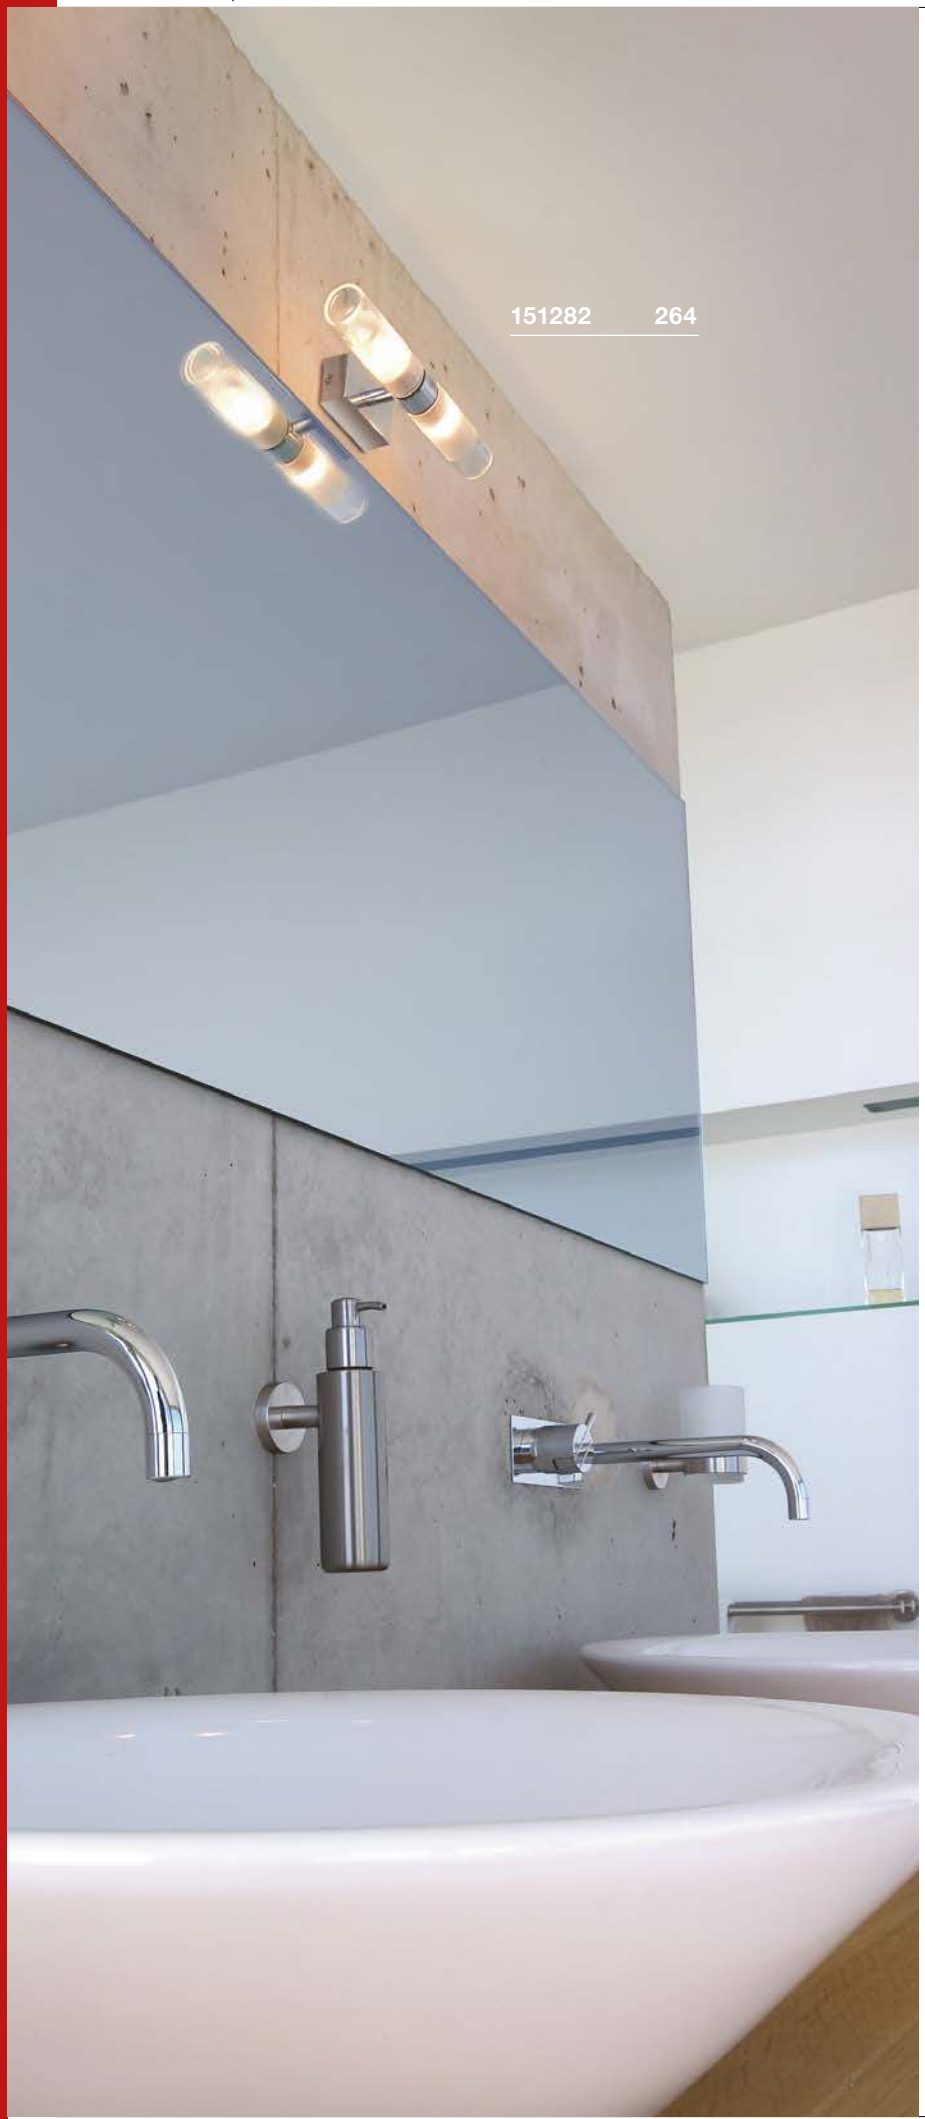

MIBO UP/DOWN
WL, QT14

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 21 0,4

Dimensional drawing



Recommended lamp

LED G9 2.7W
2600K 250lm
3kWh/1000h
Item No. 1003102 | 29.70 GBP



LED G9 2.5W
2700K 180lm
3kWh/1000h
Item No. 560302 | 10.80 GBP



Lamp details

2x max. 25W QT14

Variant	Item No.	GBP
G9 | QT14		
chrome	**151282**	**73.80**

DORISA 30

LED INSIDE







- Can be converted to a mirror light by removing the bracket

Product details

220-240V ~50/60Hz | 340mA
Total wattage: 5.2W
Material: aluminium/plastic

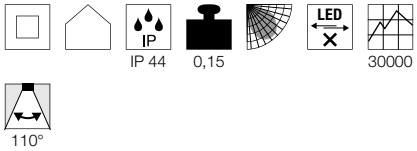

Dimensional drawing



Tip

Clamping range: 0-6 mm

Variant	Item No.	GBP
280lm | 4000K | CRI>80 chrome	**1000777**	**85.50**
280lm | 4000K | CRI>80 matt grey	**1000778**	**81.00**

DORISA 50

LED INSIDE







- Can be converted to a mirror light by removing the bracket

Product details

220-240V ~50/60Hz | 340mA
Total wattage: 6.6W
Material: aluminium/plastic

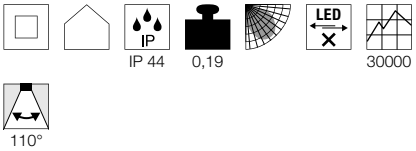

Dimensional drawing



Tip

Clamping range: 0-6 mm

Variant	Item No.	GBP
370lm | 4000K | CRI>80 chrome	**1000780**	**94.50**
370lm | 4000K | CRI>80 matt grey	**1000781**	**90.00**





BATHROOM LIGHTING HIGHLIGHTS.

OUR PERFECT LIGHTING FOR YOUR BATHROOM.





GLENOS® 60 | 219

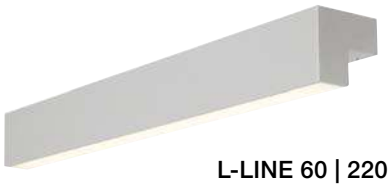

L-LINE 60 | 220



L-LINE 120 | 220



Q-LINE® | 221

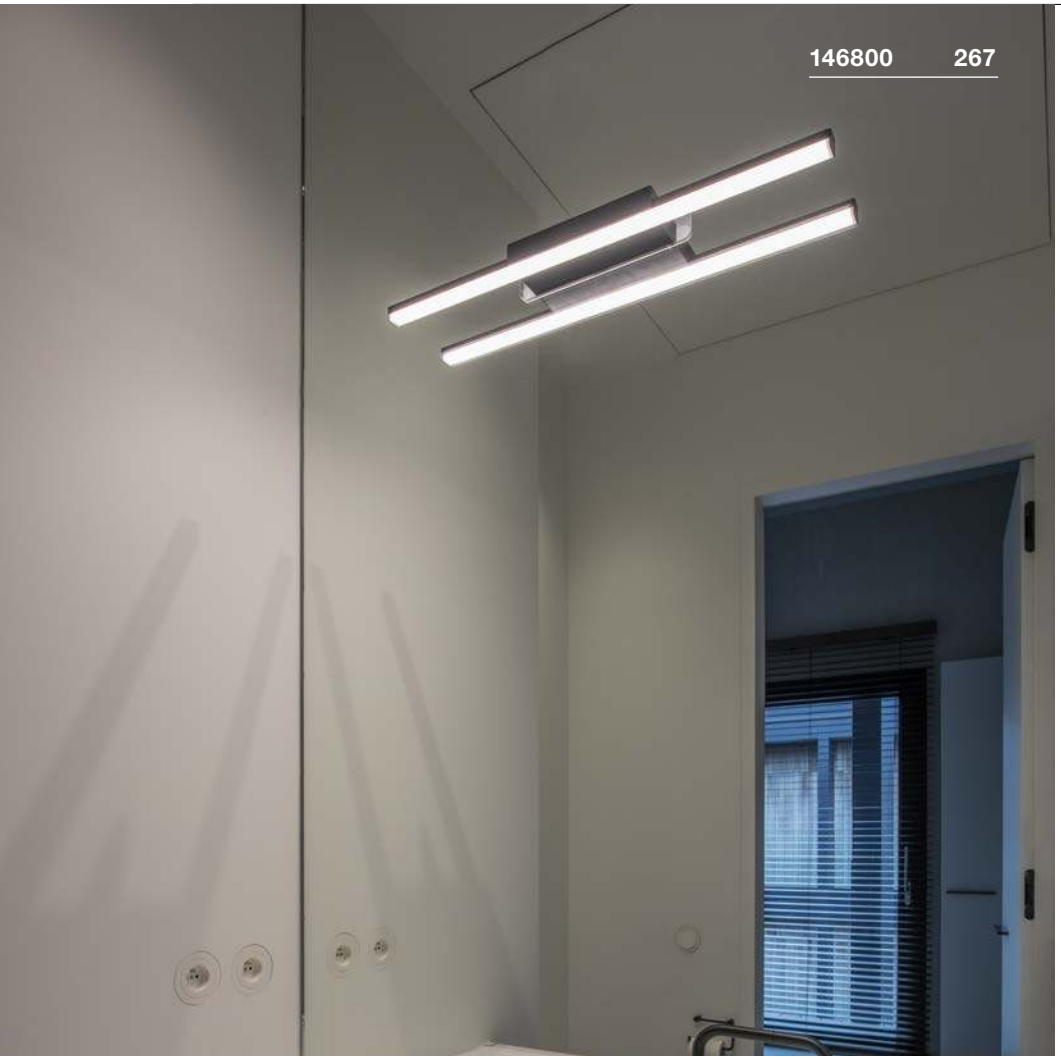



GLENOS® 60

LED INSIDE







Product details

100-240V ~50/60Hz | 24V DC
Total wattage: 17W
Material: aluminium/acrylic

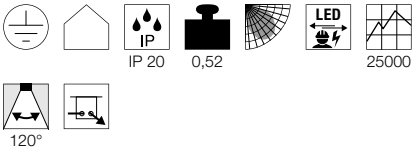

Dimensional drawing



Variant	Item No.	GBP
1000lm | 3000K | CRI>80 black	146800	144.00
1000lm | 3000K | CRI>80 white	146801	144.00
1000lm | 3000K | CRI>80 grey	146804	144.00

L-LINE 60

LED INSIDE



Product details

220-240V ~50/60Hz | 350mA
Total wattage: 10W
Material: aluminium/polycarbonate (PC)

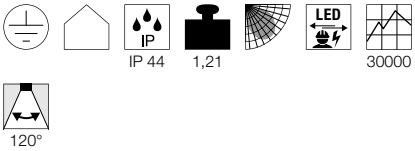

Dimensional drawing



Variant	Item No.	GBP
820lm | 3000K | CRI>80		
white	**1001299**	**188.10**
820lm | 3000K | CRI>80		
matt silver	**1001300**	**188.10**
820lm | 3000K | CRI>80		
grey	**1001301**	**188.10**

L-LINE 120

LED INSIDE



Product details

220-240V ~50/60Hz | 350mA
Total wattage: 18.5W
Material: aluminium/polycarbonate (PC)

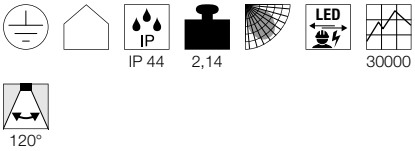

Dimensional drawing



Variant	Item No.	GBP
1650lm | 3000K | CRI>80		
white	**1001303**	**260.10**
1650lm | 3000K | CRI>80		
matt silver	**1001304**	**260.10**
1650lm | 3000K | CRI>80		
grey	**1001305**	**260.10**

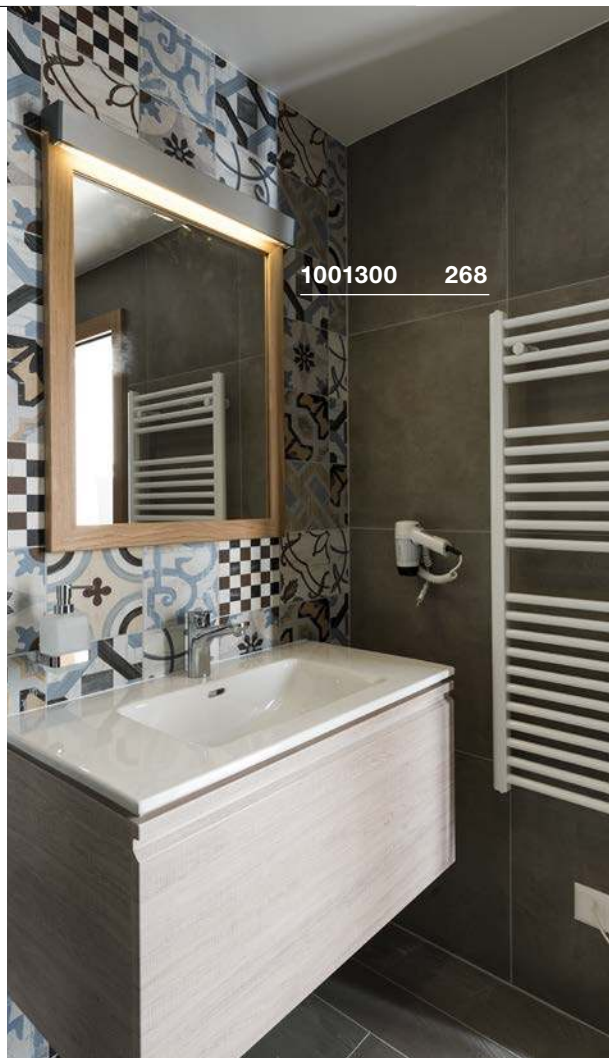







Q-LINE®
WL

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 45W
Material: aluminium/acrylic





Dimensional drawing



Variant	Item No.	GBP
3800lm | 3000K | CRI>80 white	**1000668**	**369.90**
3800lm | 3000K | CRI>80 black	**1000669**	**369.90**
3800lm | 3000K | CRI>80 grey	**1000670**	**369.90**



1002066 271

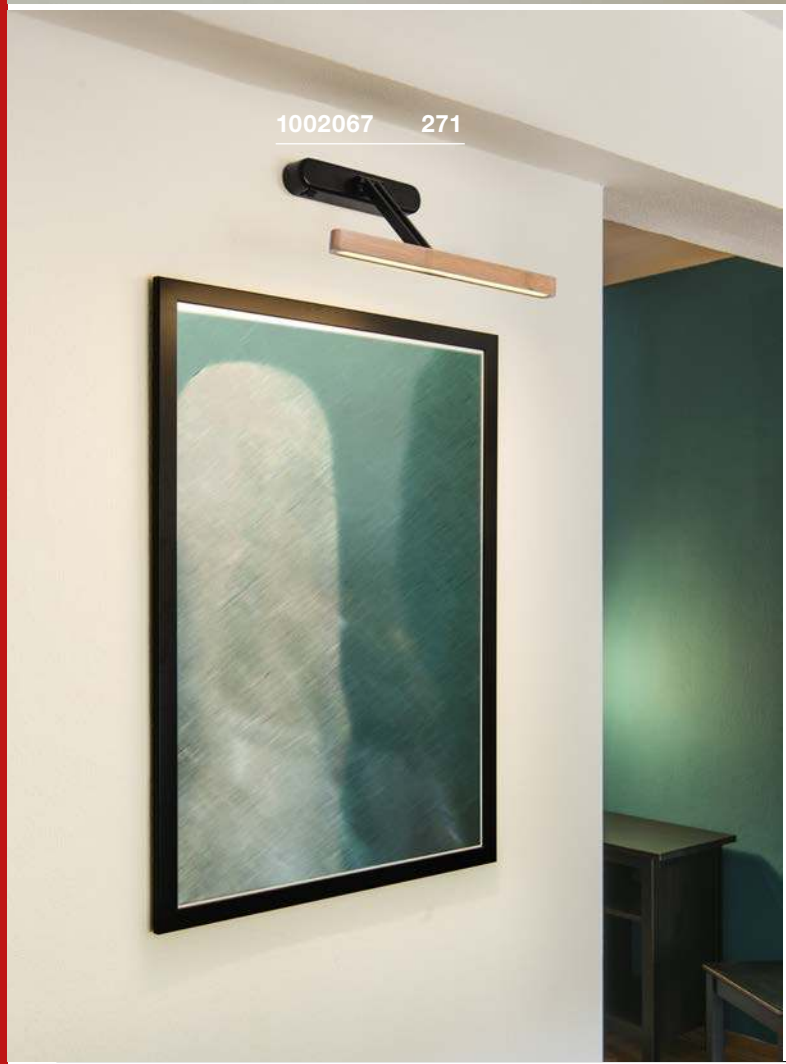

1002067 271



1002961 271

VINCELLI D
WL, PHASE







- Slim design
- Light body made of real bamboo

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 11W
Material: bamboo/steel
Dimmable: C, L

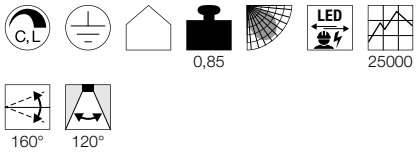

Dimensional drawing



Variant	Item No.	GBP
500lm | 2700K | CRI>80		
anthracite/brown	**1002066**	**167.40**

VINCELLI D
WL, PHASE







- Slim design
- Light body made of real bamboo

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 11W
Material: bamboo/steel
Dimmable: C, L

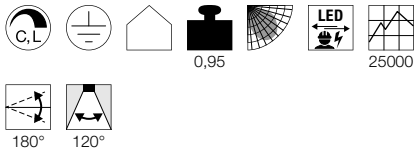

Dimensional drawing



Variant	Item No.	GBP
500lm | 2700K | CRI>80		
anthracite/brown	**1002067**	**176.40**

RETRATO
WL, PHASE







- Rotating and pivoting light head

Product details

220-240V ~50/60Hz
Total wattage: 12W
Material: aluminium/steel
Dimmable: C, L

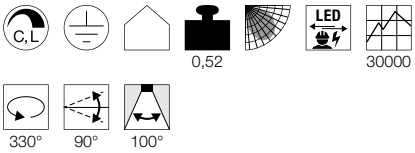

Dimensional drawing



Variant	Item No.	GBP
730lm | 3000K | CRI>90		
white/chrome	**1002960**	**192.60**
730lm | 3000K | CRI>90		
chrome	**1002961**	**219.60**

FILI, CLAMP
WL, QPAR51

SOCKET INSIDE







- Rotating and pivoting light head

Product details

230V -50Hz
Material: aluminium/brass



Dimensional drawing



Tip

Clamping range max. 8 cm.

Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
grey	**146452**	**73.80**









DISPLAY ADL 50
QPAR51

SOCKET INSIDE









- Rotating and pivoting light head

Product details

220-240V ~50/60Hz
Material: aluminium/brass



Dimensional drawing



Accessory recommendation

Lamp decorative ring diameter 5.7cm
Item No. 151041 | 4.00 GBP

Lamp decorative ring diameter 5.7cm
Item No. 151049 | 5.90 GBP



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	1002860	36.00
GU10 | QPAR51 chrome	146332	45.00

SPOT DISPLAY
E27

SOCKET INSIDE









- Switch located on the power cord
- Robust

Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip

Safety plug
Clamping range: 10-60 mm

Recommended lamp

LED E27 17W 45°
3000K 1430lm
17kWh/1000h
Item No. 560473 | 60.30 GBP



LED E27 8W 350°
2200K 250lm
8kWh/1000h
Item No. 1003100 | 52.20 GBP



Lamp details

max. 18.5W

Variant	Item No.	GBP
E27 black	1002985	60.30
E27 white	1002986	60.30
E27 grey	1002987	60.30


1000734 275
1000746 + 1000748 191





ANELA
Display

LED INSIDE







- Switch located on the power cord

Product details

220-240V ~50/60Hz
Total wattage: 10W
Material: aluminium
Dimmable: C, L

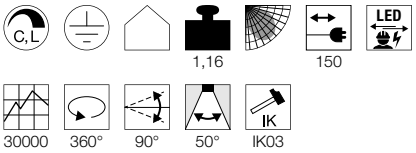

Dimensional drawing



Tip

Euro plug
Clamping range: 7-50 mm

Variant	Item No.	GBP
750lm | 3000K | CRI>80		
■ black	**1000733**	**126.00**
750lm | 3000K | CRI>80		
□ white	**1000734**	**126.00**
750lm | 4000K | CRI>80		
■ black	**1001009**	**126.00**
750lm | 4000K | CRI>80		
□ white	**1001010**	**126.00**

LENITO
WL

LED INSIDE







- Easy installation thanks to the screw clamp with wing nut

Product details

220-240V ~50/60Hz | 160mA
Total wattage: 23W
Material: aluminium/polycarbonate (PC)

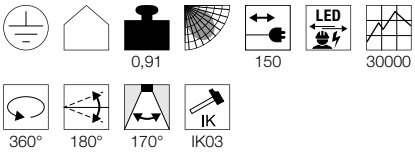

Dimensional drawing



Tip

Safety plug and switch
Clamping range: 10-45 mm

Variant	Item No.	GBP
250lm · 3000K · CRI>80		
□ white	**1001464**	**135.00**
2350lm | 3000K | CRI>80		
■ black	**1001465**	**135.00**

MALO DISPLAY
WL

LED INSIDE







- Easy installation thanks to the screw clamp with wing nut

Product details

230V -50Hz
Total wattage: 23W
Material: aluminium

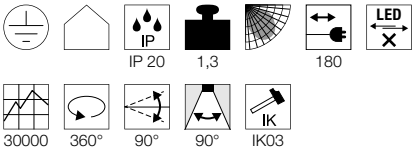

Dimensional drawing



Tip

Euro plug and switch
Clamping range: 15-55 mm

Variant	Item No.	GBP
1600lm | 4000K | CRI>80		
grey	**1001857**	**156.60**
1600lm | 4000K | CRI>80		
white/chrome	**1001858**	**159.30**

NEPRO DISPLAY
QT-DE12

SOCKET INSIDE







- Rotating and pivoting light head
- Easy installation thanks to the screw clamp with wing nut

Product details

230V -50Hz
Material: aluminium



Dimensional drawing



Tip

Safety plug and switch
Clamping range: 15-55 mm

Recommended lamp

LED R7s 118mm 14W
3000K 2000lm
14kWh/1000h
Item No. 1002135 | 60.30 GBP



Lamp details

max. 300W QT-DE12

Variant	Item No.	GBP
R7s 118mm | QT-DE12		
grey/chrome	**146472**	**101.70**







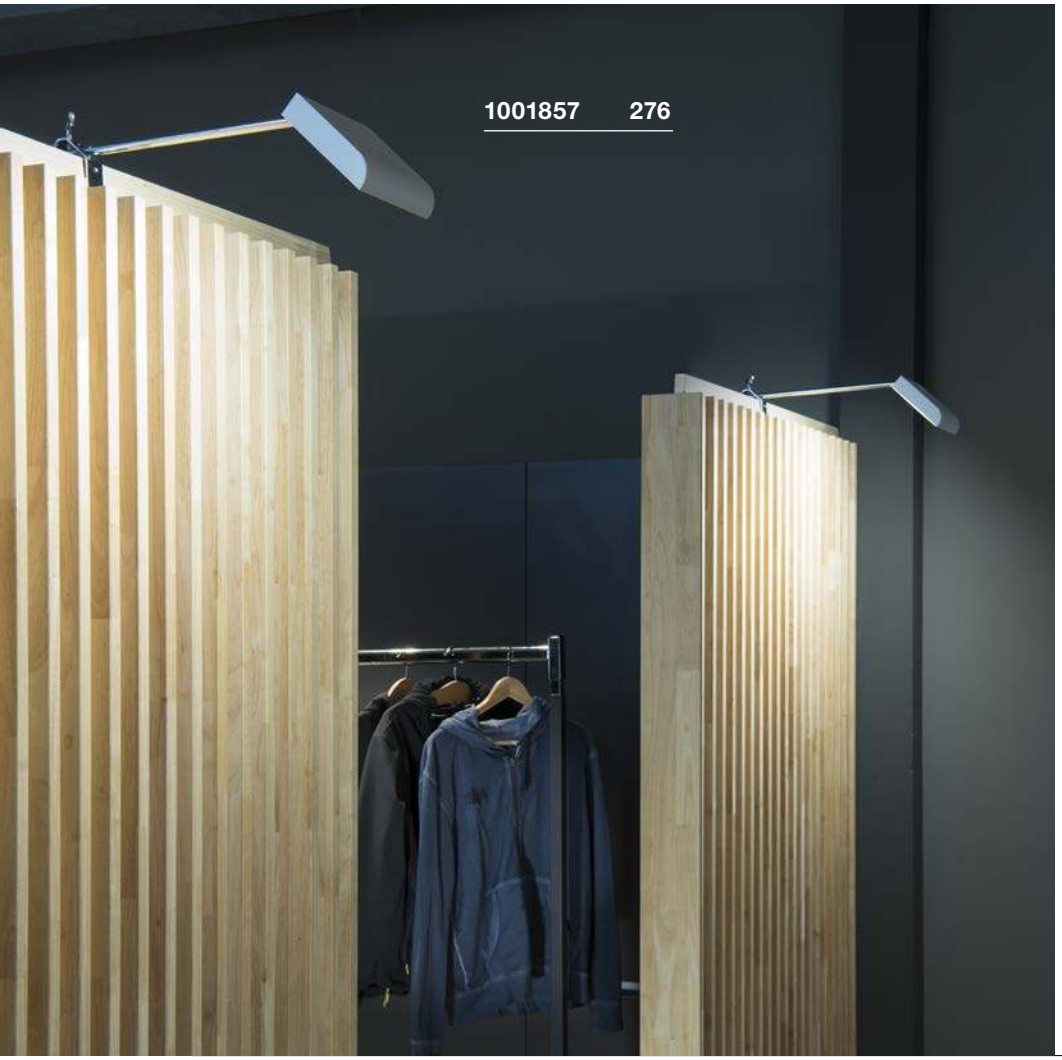

DISPLAY

FOLLOWER

LED INSIDE







Product details

200-240V ~50/60Hz | 350mA
Total wattage: 13W
Material: aluminium/ABS

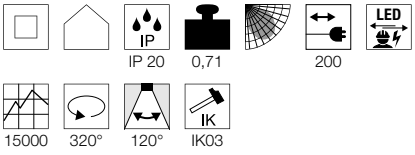

Dimensional drawing



Tip

Euro plug
Clamping range: 5-55 mm

Variant	Item No.	GBP
1350lm | 4000K | CRI>80		
silver grey	1003492	117.00
1150lm | 3000K | CRI>80		
silver grey	1003493	117.00

THE BEST THINGS COME FROM ABOVE.

CEILING LIGHTS FOR FLEXIBLE LIGHTING.

Ceiling lights are the centrepiece of any room. They bring a warm ambience into each space with their radiant power. Adapted to the room concept, you can align the luminaires in an optimum way and set impressive emphasis of light from above.




1001896 300
1001900 300
1001891 301
1001893 300


148004 322

CEILING LIGHTS


282


283


283


283


284

285


285


286


286


288


288

288

289


289

294


295


296


296


296

297


298


299


299


299


300


300

300


301


302

303

304


305


305

305


306


307

308

308

308


311

311

312

312

313

313

314

315

315

315

316

316

317

317

319

319

319

321

321

321

322

323

323

324

324

325

FOLLOWER

325

FOLLOWER

325

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

SLV FENDA.
MIX & MATCH.

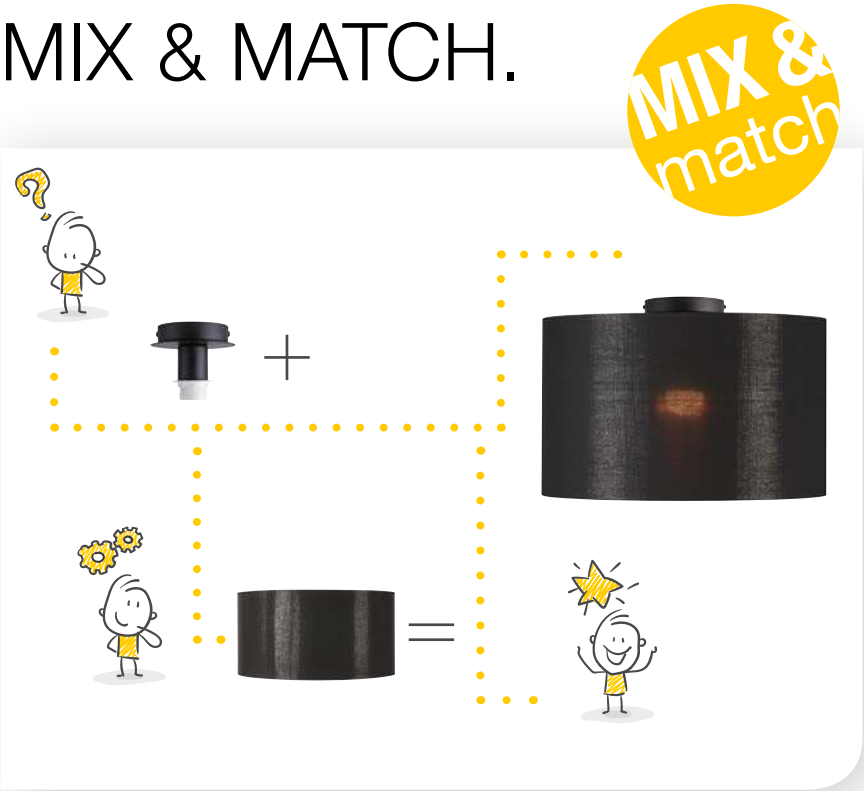



FENDA
Ceiling rose, E27

SOCKET INSIDE







- Can be individually altered through the selection of a suitable lampshade

Product details

230V -50Hz
Material: steel

0,3

Dimensional drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W 330°
2700K 806lm
8kWh/1000h
Item No. 1001038 | 20.70 GBP

Lamp details

max. 60W

Variant	Item No.	GBP
E27		
black	**155550**	**36.00**
E27		
white	**155551**	**36.00**
E27		
chrome	**155552**	**40.50**

FENDA
Diameter 30 cm, round



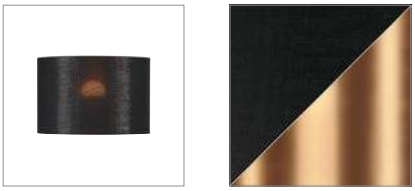

- Can be individually altered through the selection of a suitable light base

Product details

Material: textile/steel



Dimensional drawing



Tip

max. 60W
Acrylic glass cover (155570) to close the shade on one side available as accessory.

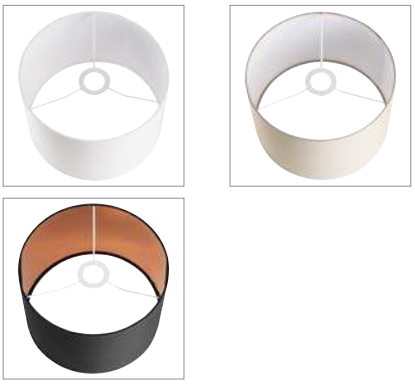

Accessory recommendation

Acrylic glass cover
Item No. 155570 | 22.50 GBP

Variant	Item No.	GBP
white	155582	40.50
beige	155583	40.50
black/copper	155592	54.00

FENDA
Diameter 45 cm, round





- Can be individually altered through the selection of a suitable light base

Product details

Material: textile/steel



Dimensional drawing



Tip

max. 60W
Acrylic glass cover (156100) to close the shade on one side available as accessory.



Accessory recommendation

Acrylic glass cover
Item No. 156100 | 34.20 GBP

Variant	Item No.	GBP
white	156111	63.00
beige	156113	63.00
black/copper	156122	67.50

FENDA
Diameter 70 cm, round



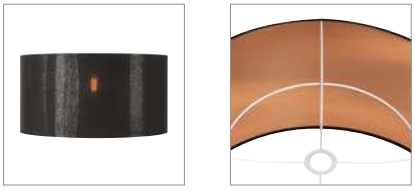

- Can be individually altered through the selection of a suitable light base

Product details

Material: textile/steel



Dimensional drawing



Tip

max. 60W
Acrylic glass cover (1000957) to close the shade on one side available as accessory.

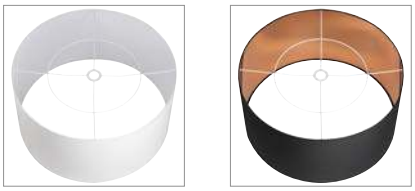

Accessory recommendation

Acrylic glass cover
Item No. 1000957 | 72.00 GBP

Variant	Item No.	GBP
white	1000579	85.50
black/copper	1000580	99.00

ACCANTO
CL, E27

SOCKET INSIDE







• Acrylic cover at the bottom of the shade

Product details

220-240V ~50/60Hz
Material: steel/textile



Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details

2x max. 40W

Variant	Item No.	GBP
E27		
■ black	**1002944**	**117.00**
E27		
□ white	**1002945**	**117.00**







TENORA
CL, E27

SOCKET INSIDE







Product details
230V -50Hz
Material: steel/textile



Dimensional drawing



Tip
Rose: diameter 12cm

Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details
3x max. 23W
L: 14.8 cm max.

Variant	Item No.	GBP
E27		
■ black	**156050**	**139.50**
E27		
□ white	**156051**	**139.50**

SOPRANA
CL, E27

SOCKET INSIDE







Product details
230V -50Hz
Material: steel/textile



Dimensional drawing



Tip
Rose: diameter 15cm

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



LED E27 7W 280°
2200-2700K 830lm
7kWh/1000h
Item No. 1002126 | 17.10 GBP



Lamp details
3x max. 60W
L: 20 cm max.

Variant	Item No.	GBP
E27		
□ white	**155372**	**153.00**
E27		
■ beige	**155373**	**153.00**

BATO 45
CW, E27

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/steel

1,65

Dimensional drawing



Recommended lamp

LED E27 4W 180°
2000-2900K 200lm
4kWh/1000h
Item No. 1003098 | 47.70 GBP

LED E27 7W
2700K 640lm
7kWh/1000h
Item No. 1003085 | 8.10 GBP

Lamp details

max. 60W

Variant	Item No.	GBP
E27		
■ matt black	**1000443**	**144.00**
E27		
■ matt copper	**1000445**	**162.00**

BATO 45
CW, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C

1,8

30000

100°

Dimensional drawing



Variant	Item No.	GBP
1450lm | 2700K | CRI>80		
■ matt black	**1000437**	**188.10**
1900lm | 2500K | CRI>80		
■ matt copper	**1000442**	**206.10**






1000442 286

PLASTRA
CL, PHASE

LED INSIDE







- Can be individually designed with colours, stickers & more

Product details
220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: gypsum/steel
Dimmable: C, L

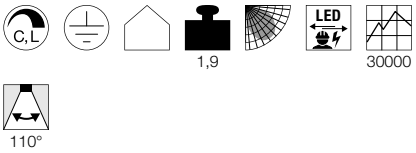

Dimensional drawing



Variant	Item No.	GBP
990lm | 3000K | CRI>80		
matt white	148005	101.70

PLASTRA 105
CL, E27

SOCKET INSIDE







- Can be individually designed with colours, stickers & more

Product details
220-240V ~50/60Hz
Material: gypsum/glass



Dimensional drawing



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 |15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 |15.30 GBP

Lamp details
2x max. 25W
Diameter: 5 cm max. L: 14 cm max.

Variant	Item No.	GBP
E27		
matt white	148001	69.30

PLASTRA 104
CL, E27

SOCKET INSIDE







- Can be individually designed with colours, stickers & more

Product details
220-240V ~50/60Hz
Material: gypsum/glass



Dimensional drawing



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 |15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 |15.30 GBP

Lamp details
2x max. 25W
Diameter: 5 cm max. L: 14 cm max.

Variant	Item No.	GBP
E27		
matt white	148002	64.80



1002968 289

FERA 25
CL, DALI









- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 19.5W
Material: polycarbonate (PC)/polymethacrylate
Dimmable: Dali





Dimensional drawing



Variant	Item No.	GBP
1580/1650lm | 3000/4000K | CRI>80		
■ matt black	**1002968**	**215.10**
1580/1650lm | 3000/4000K | CRI>80		
□ matt white	**1002967**	**215.10**

FERA 25
CL









Product details

100-240V ~50/60Hz | 550mA
Total wattage: 21W
Material: aluminium/polystyrene (PS)



Dimensional drawing



Variant	Item No.	GBP
2000lm | 3000K | CRI>80		
■ black	**1001939**	**158.40**
2000lm | 3000K | CRI>80		
□ white	**161461**	**158.40**
2000lm | 3000K | CRI>80		
■ grey	**161464**	**158.40**



1001939 289

MEDO LIGHTING SERIES.
CEILING OR PENDANT LIGHTS.

	MEDO 30 CL, 1-10V	MEDO 40 CL, 1-10V	MEDO 60 CL, 1-10V	MEDO 90 CL, 1-10V
Example				
Lightbulb	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Light strength	1000lm	2000lm	3500lm	11000lm
UGR	25	25	22	25
Dimmable	1-10V	1-10V	1-10V	1-10V
Suspension kit	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 CL, PHASE	MEDO 40 CL, PHASE
Example		
Lightbulb	LED INSIDE	LED INSIDE
Size-diameter	Diameter: 30 cm	Diameter: 40 cm
Light strength	1200lm	2125lm
UGR	25	25
Dimmable	C, L	C, L
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m



	MEDO 60 CL, square, 1-10V	MEDO 60 CL, square, DALI
Example		
Lightbulb	LED INSIDE	LED INSIDE
Size	W | L: 60 cm	W | L: 60 cm
Light strength	3300 lm	3300 lm
UGR	22	22
Dimmable	1-10V	DALI
Suspension kit	1.5 m | 5 m	1.5 m | 5 m



MEDO LIGHTING SERIES.
CEILING OR PENDANT LIGHTS.

	MEDO 30 AMBIENT CW, PHASE	MEDO 40 AMBIENT CW, PHASE	MEDO 60 AMBIENT CW, PHASE	MEDO 90 AMBIENT CL, PHASE
Example				
Lightbulb	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Light strength	Down: 1230/1280lM Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	C	C	C	C
Suspension kit	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 AMBIENT CW, DALI	MEDO 40 AMBIENT CW, DALI	MEDO 60 AMBIENT CW, DALI	MEDO 90 AMBIENT CL, DALI
Example				
Lightbulb	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Light strength	Down: 1230/1280lM Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	DALI	DALI	DALI	DALI
Suspension kit	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

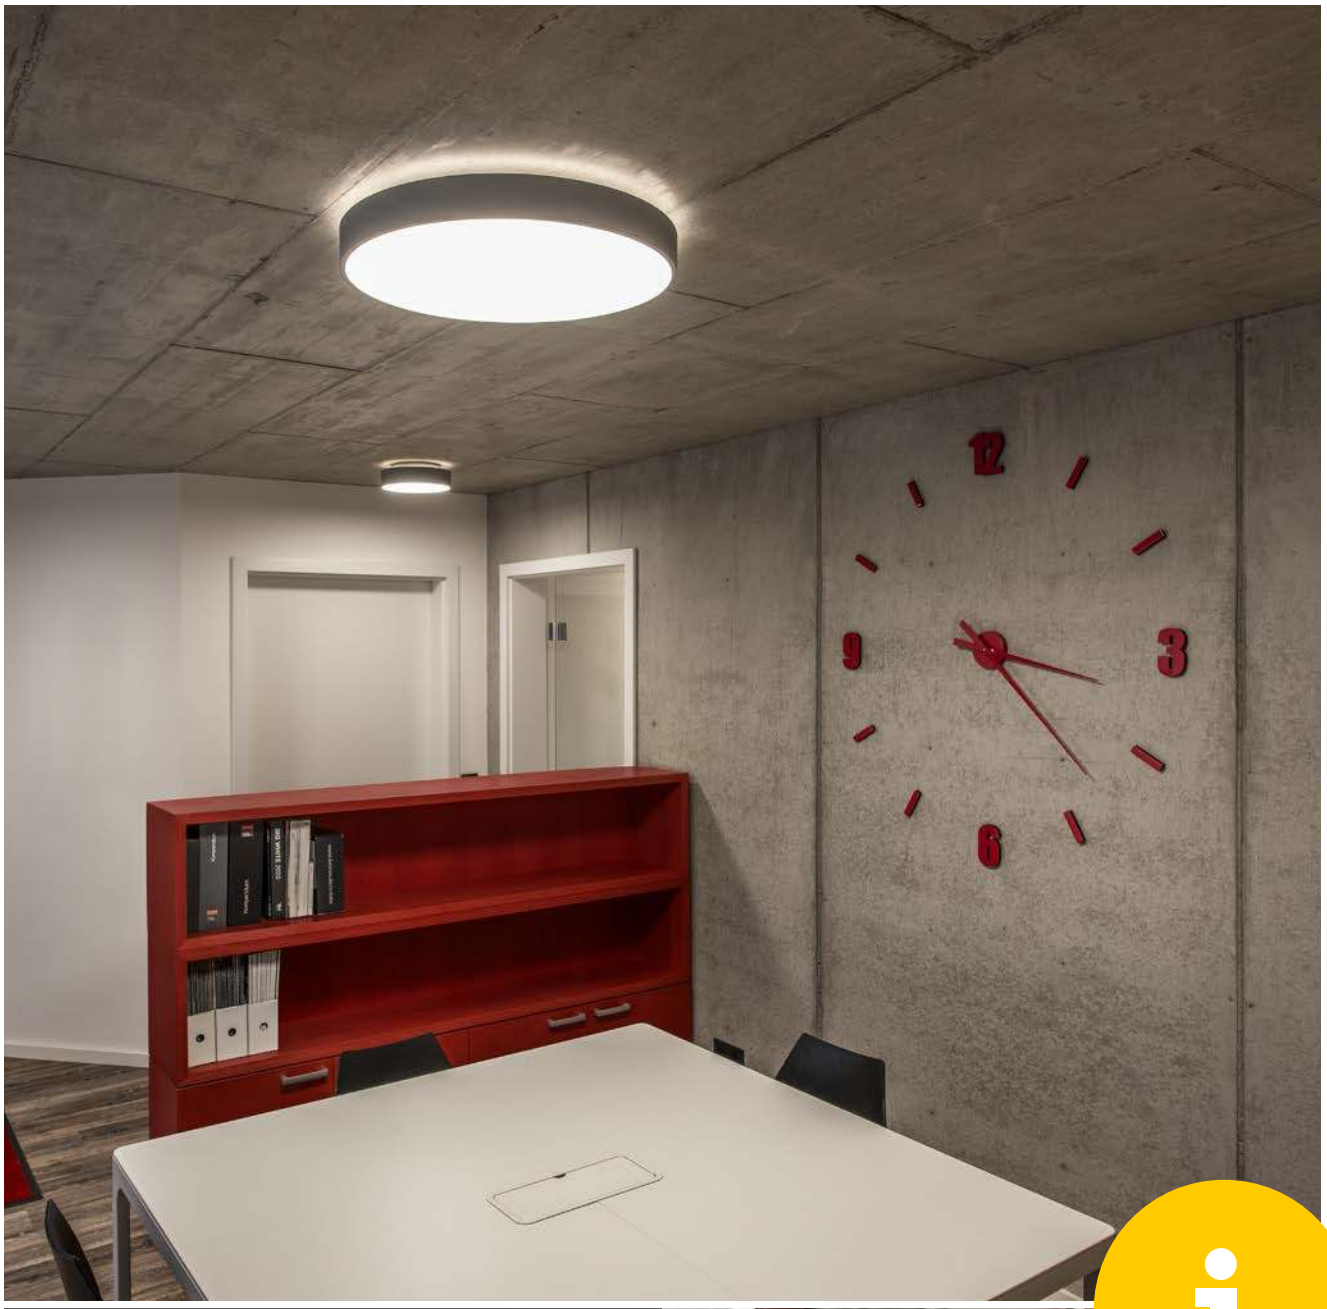





Ambient effect - These MEDO variants produce even and indirect light in an upwards direction.

Colour temperature - With this MEDO variant, you can select the colour temperature yourself. The switch on the reverse can be used to choose between 3000k and 4000k.

MEDO 30
CL, PHASE





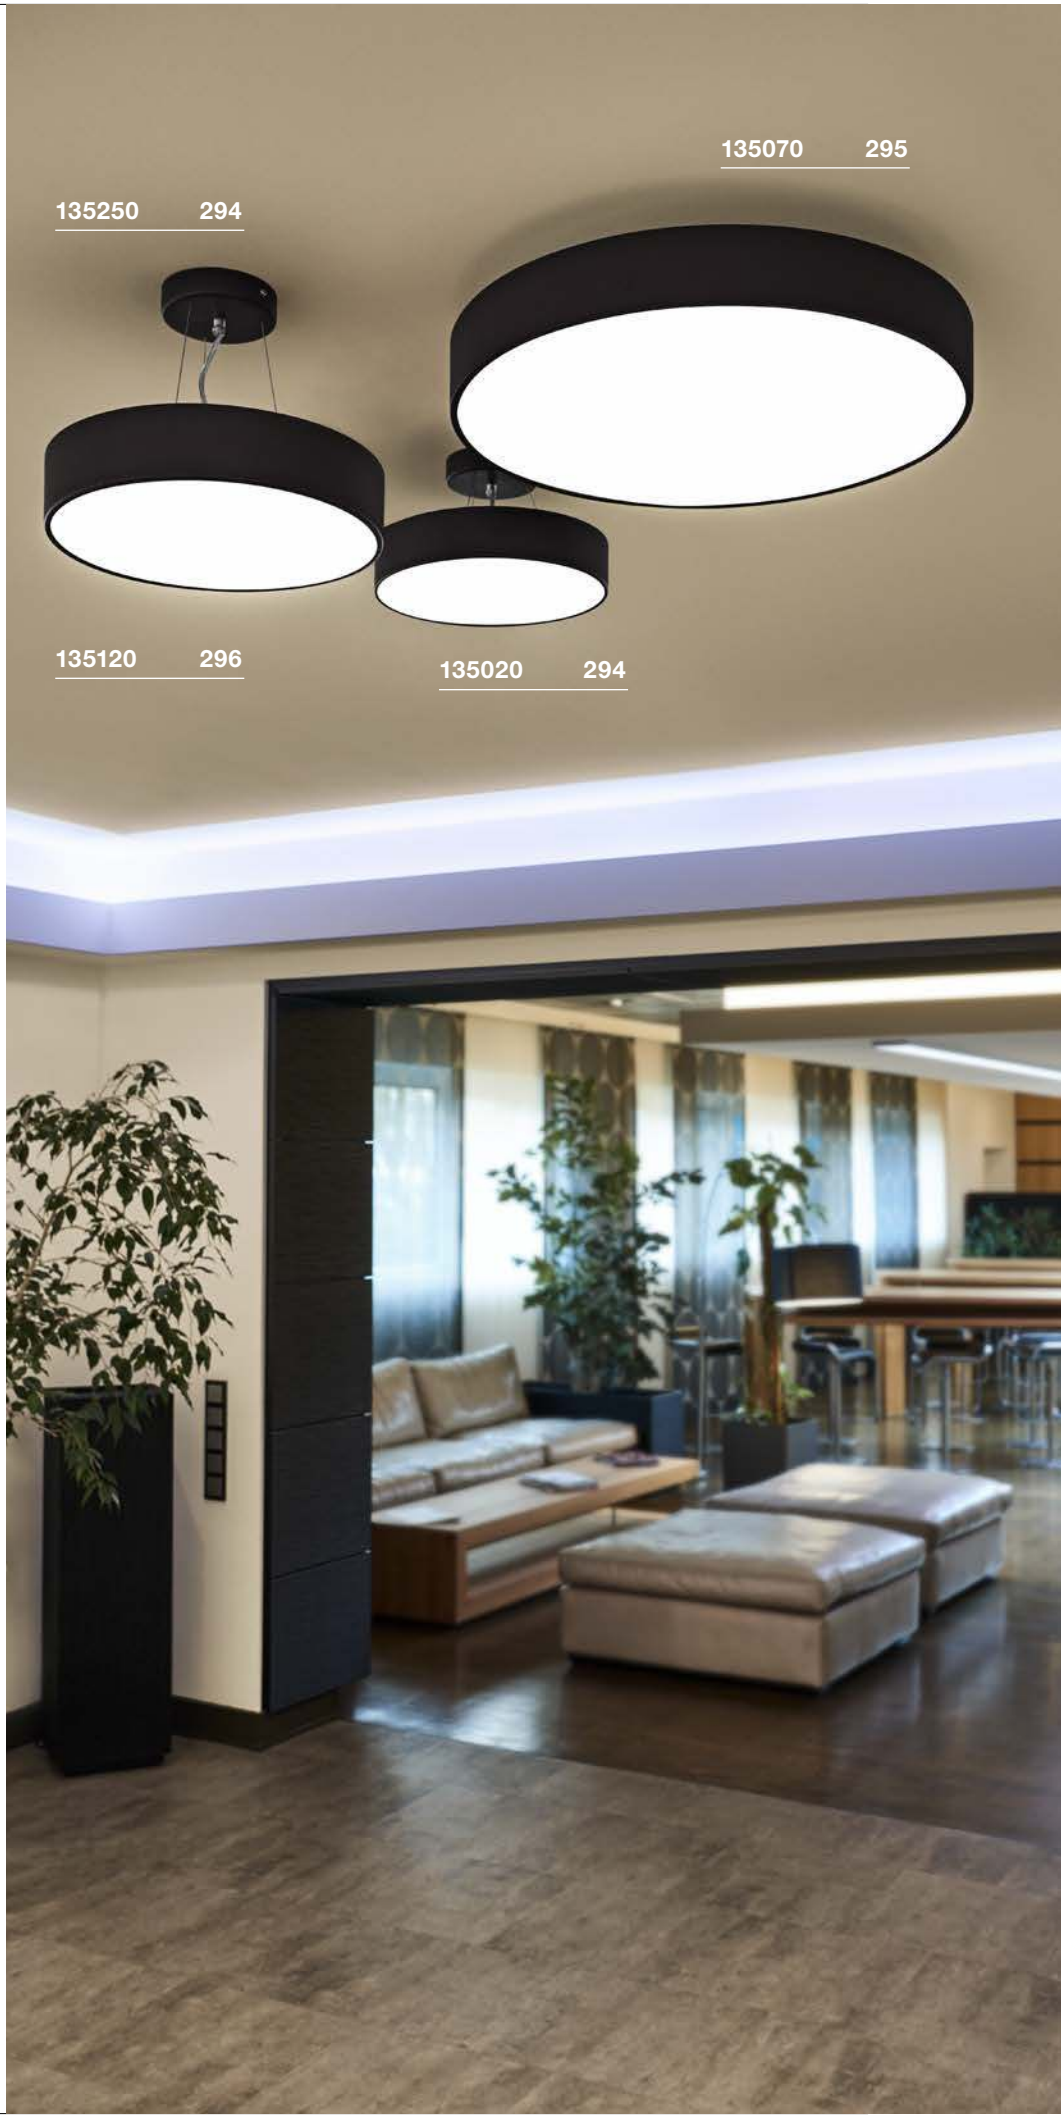

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C, L

C,L | 1,02 | UGR 25 | LED | 20000 | 105°

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

Suspension kit 1.5m
Item No. 135250 | 34.20 GBP

Suspension kit 1.5m
Item No. 135251 | 34.20 GBP

Suspension kit 1.5m
Item No. 135254 | 34.20 GBP

Suspension kit 5m
Item No. 1001950 | 76.50 GBP

Suspension kit 5m
Item No. 1001951 | 76.50 GBP

Suspension kit 5m
Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
1200lm | 3000K | CRI>80 black	135020	206.10
1200lm | 3000K | CRI>80 white	135021	206.10
1200lm | 3000K | CRI>80 grey	135024	206.10



MEDO 40
CL, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 31W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C, L

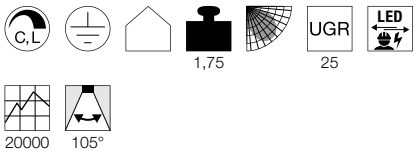

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 | 34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 | 34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 | 34.20 GBP

□ Suspension kit 5m
Item No. 1001950 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001951 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
2125lm | 3000K | CRI>80 ■ black	**135070**	**242.10**
2125lm | 3000K | CRI>80 □ white	**135071**	**242.10**
2125lm | 3000K | CRI>80 ■ grey	**135074**	**242.10**

MEDO 30
CL, 1-10V







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

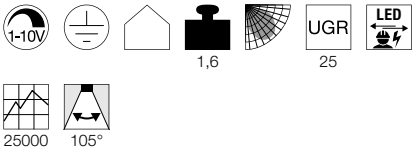

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

- Suspension kit 1.5m
  Item No. 135250 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 |34.20 GBP
- 1-10V dimming
  Item No. 470505 |9.90 GBP
- Suspension kit 5m
  Item No. 1001950 |76.50 GBP
- Suspension kit 5m
  Item No. 1001951 |76.50 GBP
- Suspension kit 5m
  Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
1000lm | 3000K | CRI>80 black	1000855	206.10
1000lm | 3000K | CRI>80 white	1000856	206.10
1000lm | 3000K | CRI>80 grey	1000857	206.10

MEDO 40
CL, 1-10V







Product details

120-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V



Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

- Suspension kit 1.5m
  Item No. 135250 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 |34.20 GBP
- 1-10V dimming
  Item No. 470505 |9.90 GBP
- Suspension kit 5m
  Item No. 1001950 |76.50 GBP
- Suspension kit 5m
  Item No. 1001951 |76.50 GBP
- Suspension kit 5m
  Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
2000lm | 3000K | CRI>80 black	1000864	242.10
2000lm | 3000K | CRI>80 white	1000865	242.10
2000lm | 3000K | CRI>80 grey	1000866	242.10

MEDO 60
CL, 1-10V







Product details

100-240V ~50/60Hz | 1000mA
Total wattage: 40W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

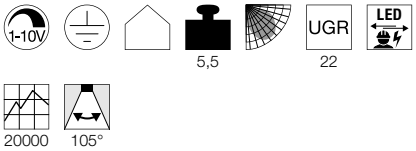

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

- Suspension kit 1.5m
  Item No. 135250 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 |34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 |34.20 GBP
- 1-10V dimming
  Item No. 470505 |9.90 GBP
- Suspension kit 5m
  Item No. 1001950 |76.50 GBP
- Suspension kit 5m
  Item No. 1001951 |76.50 GBP
- Suspension kit 5m
  Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
3500lm | 3000K | CRI>80 black	135120	431.10
3500lm | 3000K | CRI>80 white	135121	431.10
3500lm | 3000K | CRI>80 grey	135124	431.10

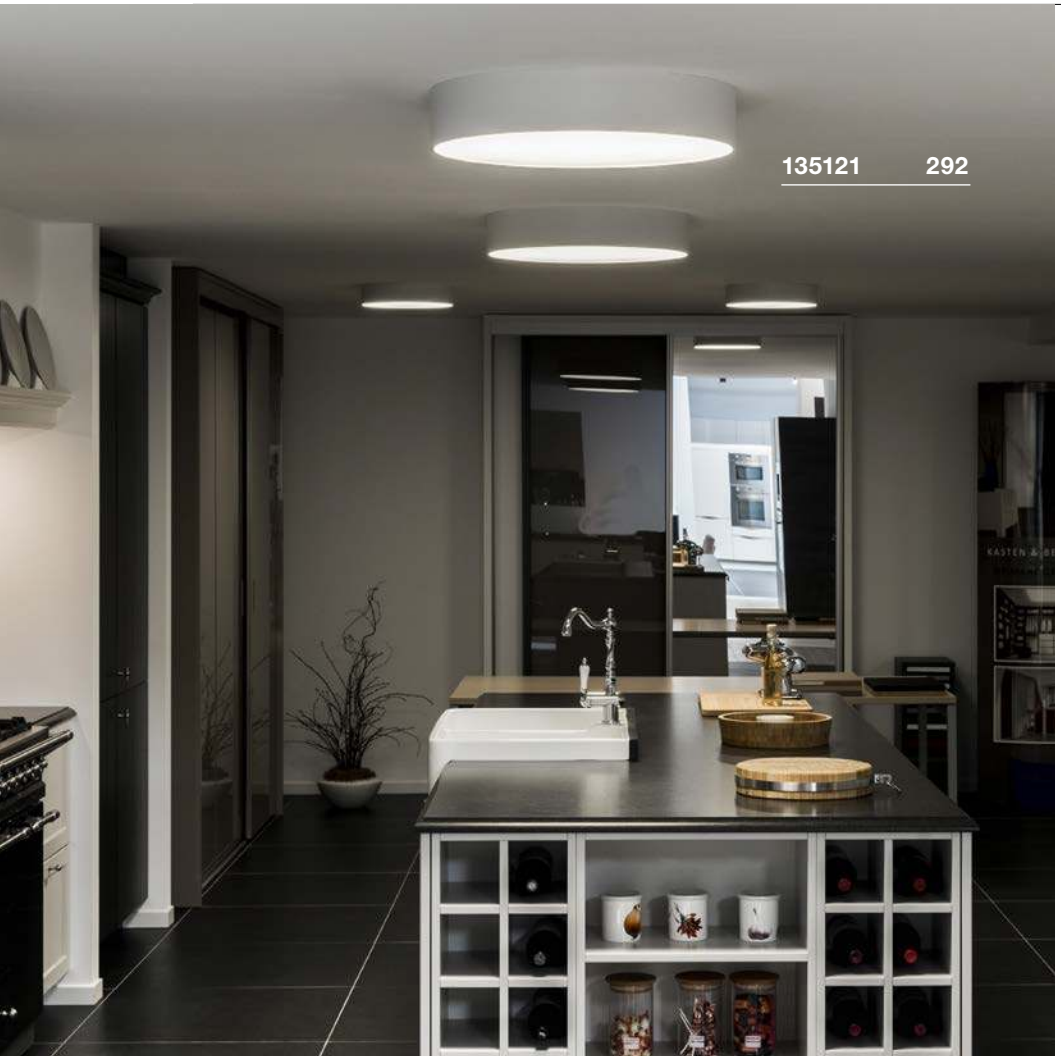



MEDO 90
CL, 1-10V

LED INSIDE





Product details

220-240V ~50/60Hz | 2900mA
Total wattage: 119W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: 1-10V

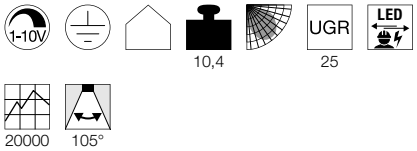

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 | 34.20 GBP

Suspension kit 1.5m
Item No. 135251 | 34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 | 34.20 GBP

1-10V dimming
Item No. 470505 | 9.90 GBP

Suspension kit 5m
Item No. 1001950 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001951 | 76.50 GBP

■ Suspension kit 5m
Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
11000lm | 3000K | CRI>80 ■ black	**135170**	**899.10**
11000lm | 3000K | CRI>80 white	**135171**	**899.10**
11000lm | 3000K | CRI>80 ■ grey	**135174**	**899.10**

MEDO 30 AMBIENT
CW, PHASE







- Colour temperature (3000K/4000K) can be adjusted using the switch



Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)
Dimmable: C





Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 ■ black	1001877	224.10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 □ white	1001881	224.10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 ■ grey	1001882	224.10

MEDO 40 AMBIENT
CW, PHASE







- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polycarbonate (PC)
Dimmable: C

2,14 25

25000 105°

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 ■ black	**1001883**	**251.10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 □ white	**1001884**	**251.10**
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 ■ grey	**1001885**	**251.10**

MEDO 60 AMBIENT
CW, PHASE







- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

220-240V ~50/60Hz | 1050mA
Total wattage: 40W
Material: aluminium/polycarbonate (PC)
Dimmable: C

4,84 25

25000 105°

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 ■ black	**1001886**	**477.90**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 □ white	**1001887**	**477.90**
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 ■ grey	**1001888**	**477.90**

MEDO 90 AMBIENT
CL, PHASE







- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

220-240V ~50/60Hz | 1050mA
Total wattage: 78W
Material: aluminium/polycarbonate (PC)
Dimmable: C

9 25

25000 105°

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 ■ black	**1001878**	**944.10**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 □ white	**1001879**	**944.10**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 ■ grey	**1001880**	**944.10**

MEDO 30 AMBIENT
CW, DALI



- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details
220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali



Dimensional drawing



Tip
Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 ■ black	1001889	251.10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 □ white	1001893	251.10
Down: 1230/1280lm | 3000/4000K | CRI>80 Up: 20lm | 3000/4000K | CRI>80 ■ grey	1001894	251.10

MEDO 40 AMBIENT
CW, DALI







- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details
220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali

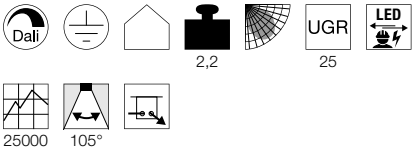

Dimensional drawing



Tip
Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 ■ black	1001895	333.00
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 □ white	1001896	333.00
Down: 2750/2900lm | 3000/4000K | CRI>80 Up: 50lm | 3000/4000K | CRI>80 ■ grey	1001897	333.00

MEDO 60 AMBIENT
CW, DALI







- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details
220-240V ~50/60Hz | 1000mA
Total wattage: 40W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali

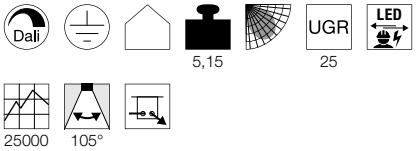

Dimensional drawing



Tip
Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 ■ black	1001898	512.10
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 □ white	1001900	512.10
Down: 4350/4750lm | 3000/4000K | CRI>80 Up: 120lm | 3000/4000K | CRI>80 ■ grey	1001899	512.10

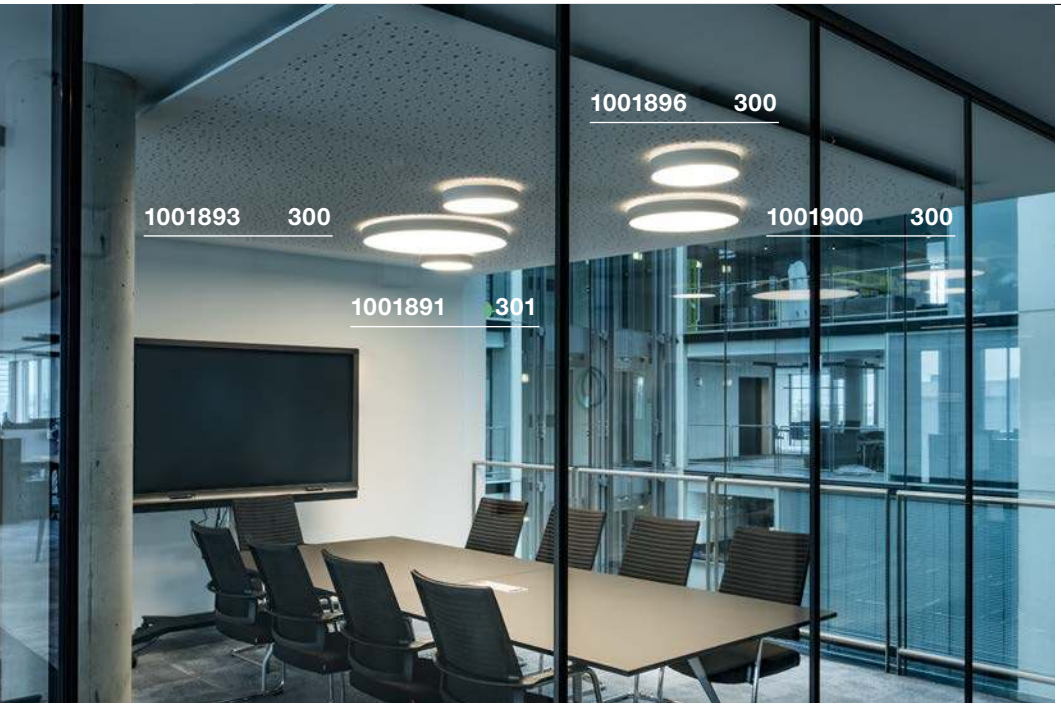

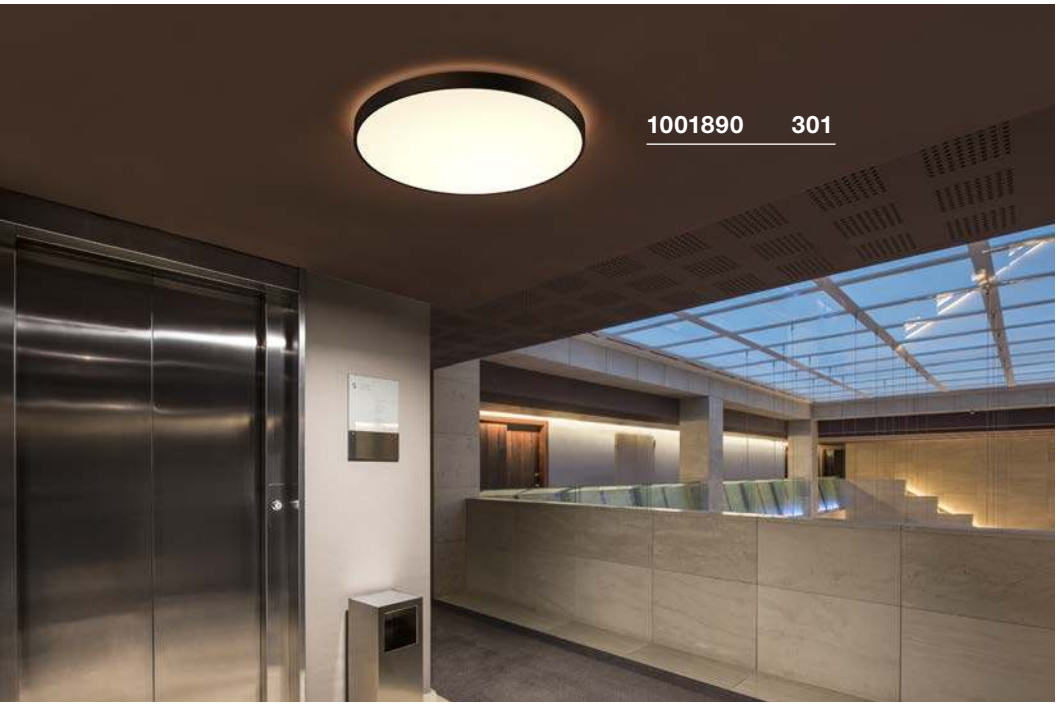

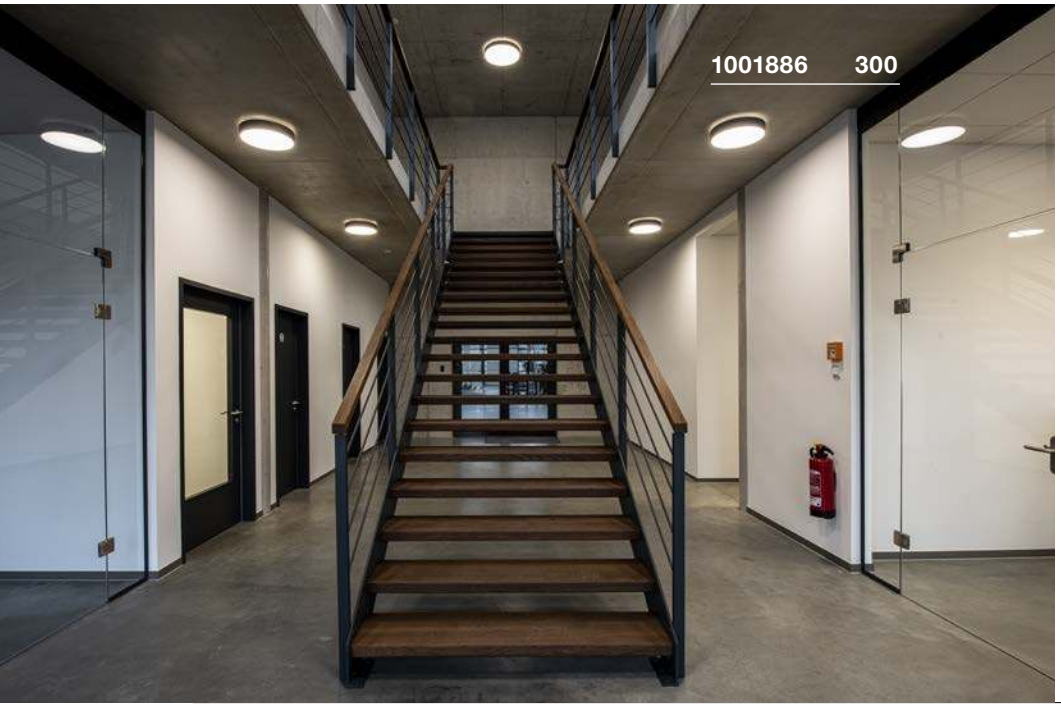

MEDO 90 AMBIENT
CL, DALI







- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

220-240V ~50/60Hz | 1000mA
Total wattage: 78W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali

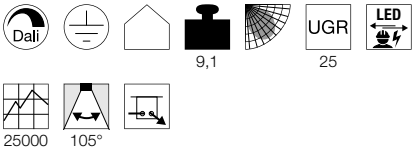

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 ■ black	**1001890**	**1,161.00**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 □ white	**1001891**	**1,161.00**
Down: 9500/10100lm | 3000/4000K | CRI>80 Up: 125lm | 3000/4000K | CRI>80 ■ grey	**1001892**	**1,161.00**

MEDO 60
CL, square









Product details

100-240V ~50/60Hz | 1000mA
Systemleistung: 39W
Material: aluminium/acrylic
Dimmable: 1-10V

1-10V | 5,8 | UGR 22 | LED | 25000 | 105°

Dimensional drawing



Tip

Suspension set not included

Accessory recommendation

■ Suspension kit 1.5m
Item No. 135250 |34.20 GBP

□ Suspension kit 1.5m
Item No. 135251 |34.20 GBP

■ Suspension kit 1.5m
Item No. 135254 |34.20 GBP

□ 1-10V dimming
Item No. 470505 |9.90 GBP

□ Suspension kit 5m
Item No. 1001950 |76.50 GBP

■ Suspension kit 5m
Item No. 1001951 |76.50 GBP

■ Suspension kit 5m
Item No. 1001952 |76.50 GBP

Variant	Item No.	GBP
3300lm | 3000K | CRI>80 ■ black	**1000725**	**431.10**
3300lm | 3000K | CRI>80 □ white	**1000726**	**431.10**
3300lm | 3000K | CRI>80 ■ grey	**1000727**	**431.10**



MEDO 60
CL, square, DALI



Product details

100-277V ~50/60Hz | 1000mA
Systemleistung: 39W
Material: aluminium/acrylic
Dimmable: Dali





Dimensional drawing



Accessory recommendation

- Suspension kit 1.5m
  Item No. 135250 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135251 | 34.20 GBP
- Suspension kit 1.5m
  Item No. 135254 | 34.20 GBP
- Suspension kit 5m
  Item No. 1001950 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001951 | 76.50 GBP
- Suspension kit 5m
  Item No. 1001952 | 76.50 GBP

Variant	Item No.	GBP
3300lm | 3000K | CRI>80		
white	**1002882**	**459.00**

PANEL 60
CL, round, PHASE

LED INSIDE







- Assembly or partial installation of the panel possible

Product details

220-240V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions:
Assembly diameter: 20 cm T: 7 cm
Dimmable: C





Dimensional drawing



Variant	Item No.	GBP
3150lm | 3000K | CRI>80 white	1000783	224.10
3350lm | 4000K | CRI>80 white	1000784	224.10
3150lm | 3000K | CRI>80 grey	1000785	224.10
3350lm | 4000K | CRI>80 grey	1000786	224.10

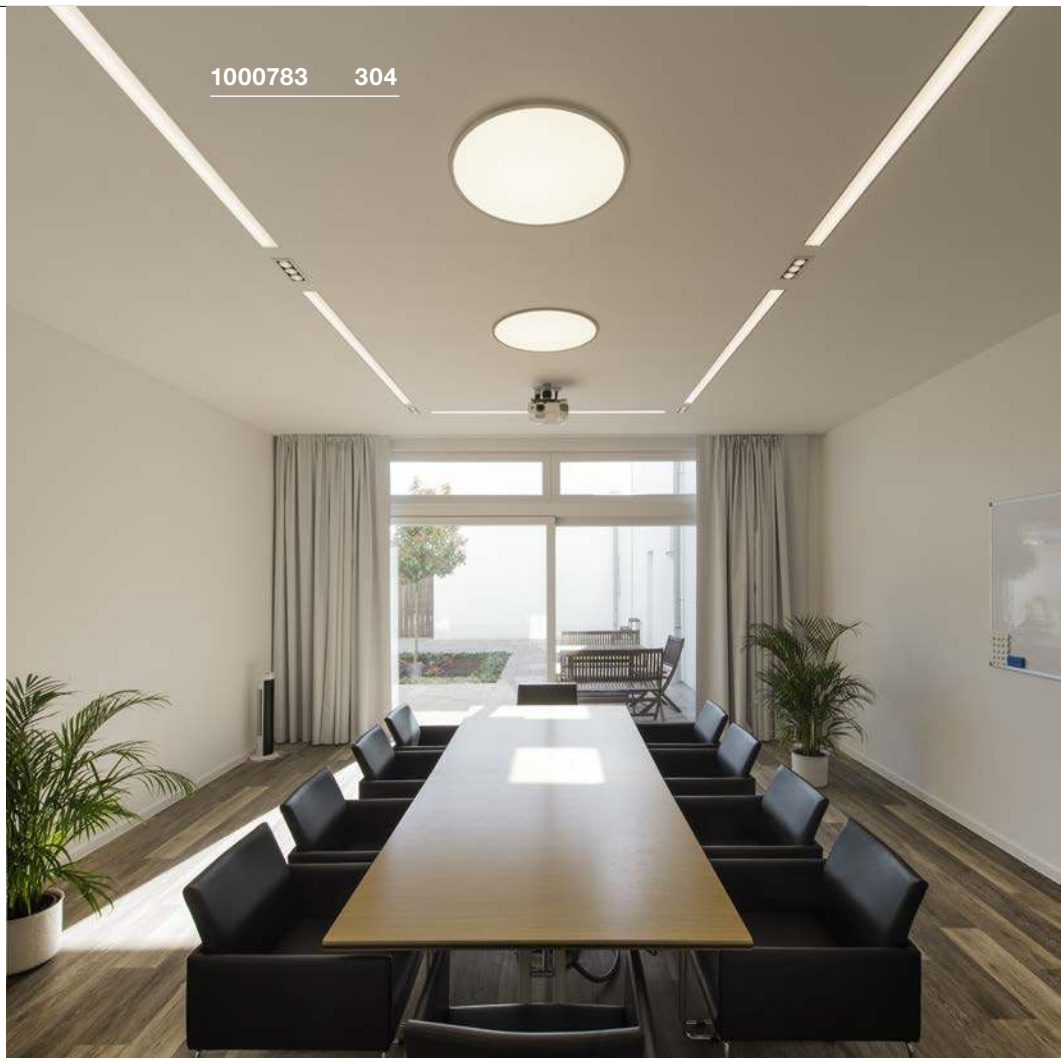



PANEL 60
CL, round, DALI





- Assembly or partial installation of the panel possible

Product details

100-277V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions:
Assembly diameter: 20 cm T: 7 cm
Dimmable: Dali

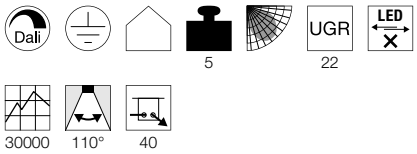

Dimensional drawing



Variant	Item No.	GBP
3150lm | 3000K | CRI>80		
white	**1003040**	**233.10**
3350lm | 4000K | CRI>80		
white	**1003041**	**233.10**
3150lm | 3000K | CRI>80		
grey	**1003042**	**233.10**
3350lm | 4000K | CRI>80		
grey	**1003043**	**233.10**

PANEL
CL, 1200x300mm, PHASE





- UGR<19
- Suitable for screen-based workstations in line with EN 12464-1

Product details

220-240V ~50/60Hz | 1000mA
Total wattage: 45W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C

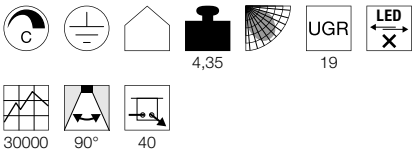

Dimensional drawing



Variant	Item No.	GBP
3100lm | 3000K | CRI>80		
white	**1001505**	**224.10**
3400lm | 4000K | CRI>80		
white	**1001506**	**224.10**
3100lm | 3000K | CRI>80		
grey	**1001508**	**224.10**
3400lm | 4000K | CRI>80		
grey	**1001509**	**224.10**

PANEL
CL, 1200x300mm, DALI



- UGR<19
- Suitable for screen-based workstations in line with EN 12464-1

Product details

100-277V ~50/60Hz | 1000mA
Total wattage: 45W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: Dali

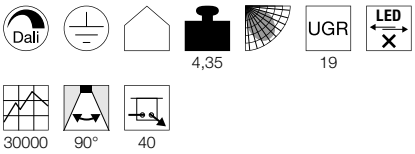

Dimensional drawing



Variant	Item No.	GBP
3100lm | 3000K | CRI>80		
white	**1003052**	**233.10**
3400lm | 4000K | CRI>80		
white	**1003053**	**233.10**
3100lm | 3000K | CRI>80		
grey	**1003054**	**233.10**
3400lm | 4000K | CRI>80		
grey	**1003055**	**233.10**

Q-LINE®
CL, 1m, BAP, PHASE

LED INSIDE







- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 900mA
Total wattage: 45W
Material: aluminium/plastic
Dimmable: L

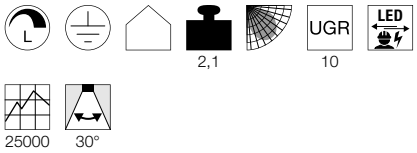

Dimensional drawing





Variant	Item No.	GBP
2100lm | 3000K | CRI>90 white	1000685	369.90
2100lm | 3000K | CRI>90 black	1000686	369.90
2100lm | 3000K | CRI>90 grey	1000687▼	369.90
2300lm | 4000K | CRI>90 white	1000688	369.90
2300lm | 4000K | CRI>90 black	1000689	369.90
2300lm | 4000K | CRI>90 grey	1000690▼	369.90



Q-LINE®
CL, 2m, BAP, PHASE

LED INSIDE







- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 900mA
Total wattage: 85W
Material: aluminium/plastic
Dimmable: L

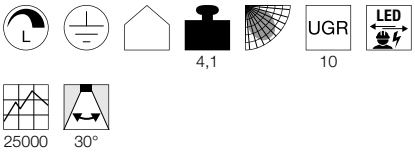

Dimensional drawing



Variant	Item No.	GBP
4200lm | 3000K | CRI>90 white	**1000691**	**555.30**
4200lm | 3000K | CRI>90 black	**1000692**	**555.30**
4200lm | 3000K | CRI>90 grey	**1000693▼**	**555.30**
4600lm | 4000K | CRI>90 white	**1000694**	**555.30**
4600lm | 4000K | CRI>90 black	**1000695**	**555.30**
4600lm | 4000K | CRI>90 grey	**1000696▼**	**555.30**

ROTOBALL 25
CL, E27

SOCKET INSIDE





Product details
230V -50Hz
Material: steel/polyethylene (PE)



Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details
max. 24 W
Diameter: 9.5 cm max.

Variant	Item No.	GBP
E27		
white	**1002051**	**99.00**

ROTOBALL 40
CL, E27

SOCKET INSIDE



Product details
230V -50Hz
Material: steel/polyethylene (PE)



Dimensional drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



LED E27 15W 240°
4000K 1600lm
15kWh/1000h
Item No. 1002828 | 25.20 GBP

Lamp details
max. 24 W
Diameter: 9.5 cm max.

Variant	Item No.	GBP
E27		
white	**1002052**	**126.00**

MALANG
CL, E27

SOCKET INSIDE





Product details
230V -50Hz
Material: steel/glass



Dimensional drawing



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details
2x max. 60W
Diameter: 5.5 cm max. L: 13.5 cm max.

Variant	Item No.	GBP
E27		
white	**146942**	**147.60**



1002051 308

1002052 308

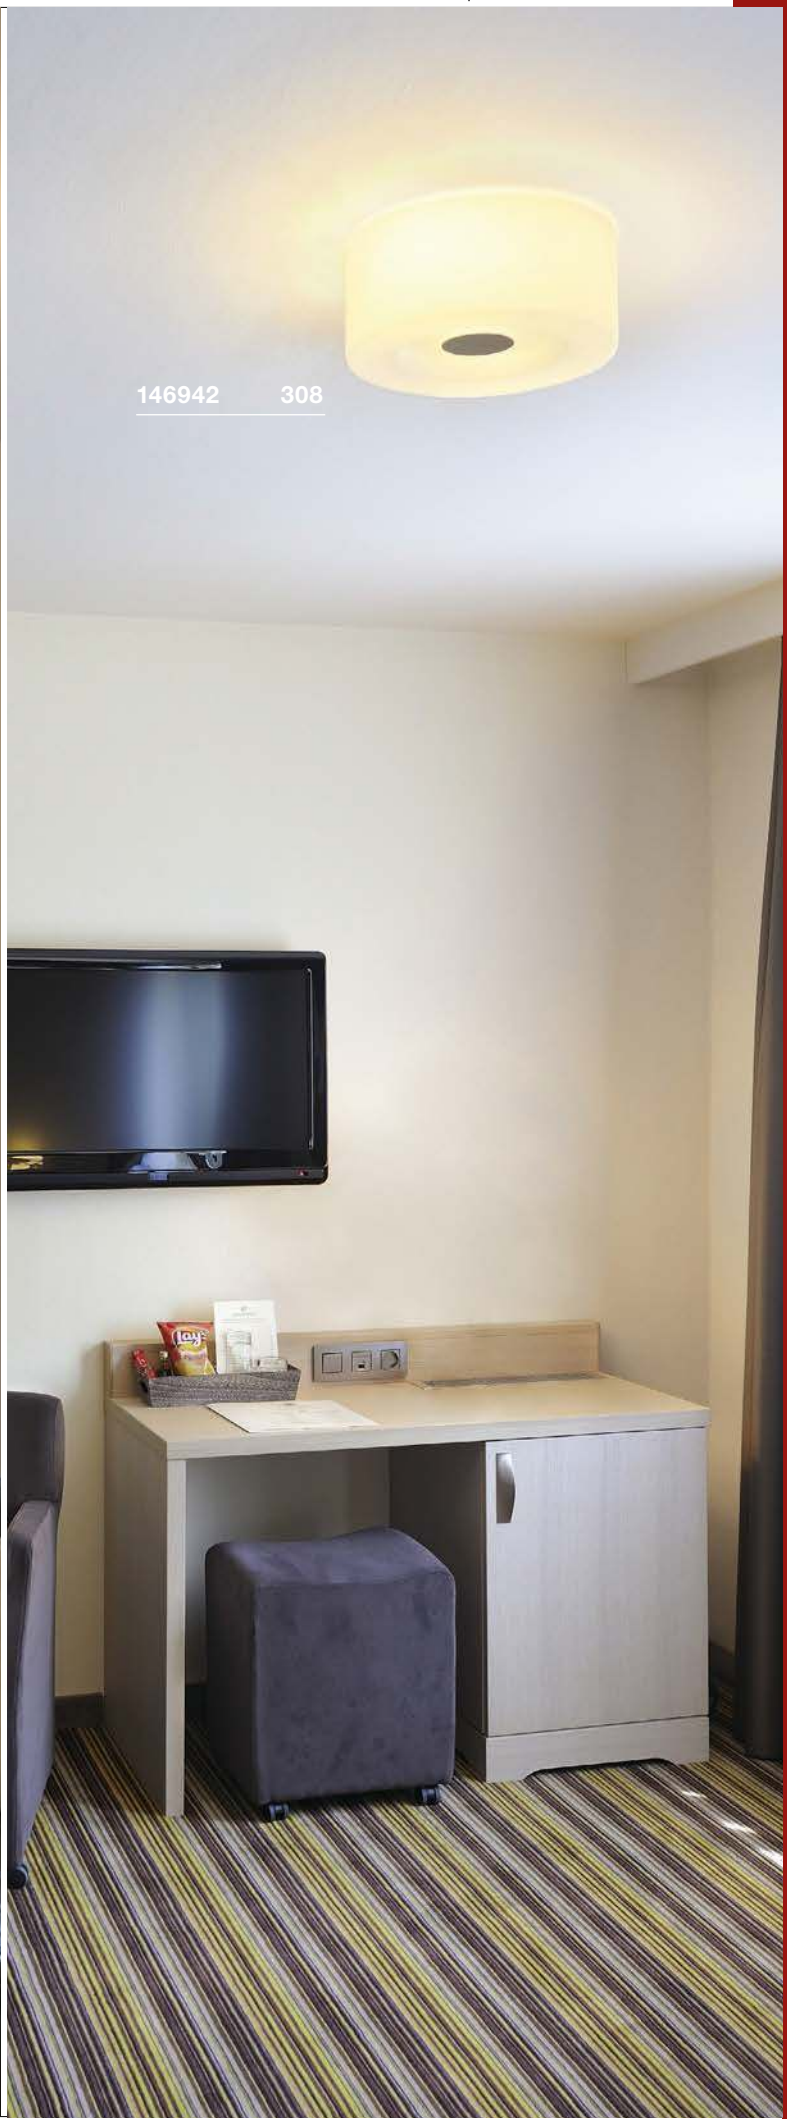

146942 308

117321 311

DESIGNED BY
David Morgan





"Excellent light quality from innovative, distinctive and attractive luminaire designs."



OCCULDAS 13
DL, Indirect, PHASE

LED INSIDE





- Indirect, glare-free lighting

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium
Dimmable: C

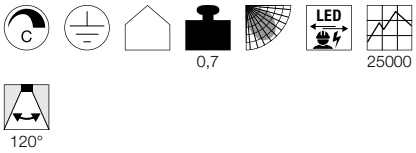

Dimensional drawing



Variant	Item No.	GBP
810lm | 3000K | CRI>80 matt white	**117351**	**153.00**

OCCULDAS 23
DL, Indirect, PHASE

LED INSIDE





- Indirect, glare-free lighting

Product details

200-240V ~50/60Hz | 700mA
Total wattage: 26W
Material: aluminium/steel
Dimmable: C, L

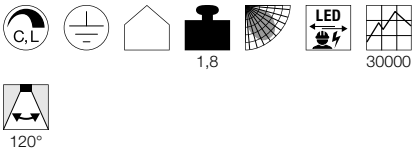

Dimensional drawing



Variant	Item No.	GBP
1500lm | 3000K | CRI>80 matt white	**117321**	**260.10**

ASTINA
CL, QPAR51

SOCKET INSIDE







- High-quality, satin-finish glass

Product details
220-240V ~50/60Hz
Material: aluminium

0,39

Dimensional drawing



Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP

Lamp details
max. 10W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 matt white	1002934	67.50
GU10 | QPAR51 matt grey	1002935	67.50
GU10 | QPAR51 matt black	1002936	67.50

NAGY 75
CL, QPAR51

SOCKET INSIDE





- Can be individually designed with colours, stickers & more

Product details
220-240V ~50/60Hz
Material: gypsum

0,7

Dimensional drawing



Recommended lamp

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details
max. 10W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 matt white	1002965	40.50



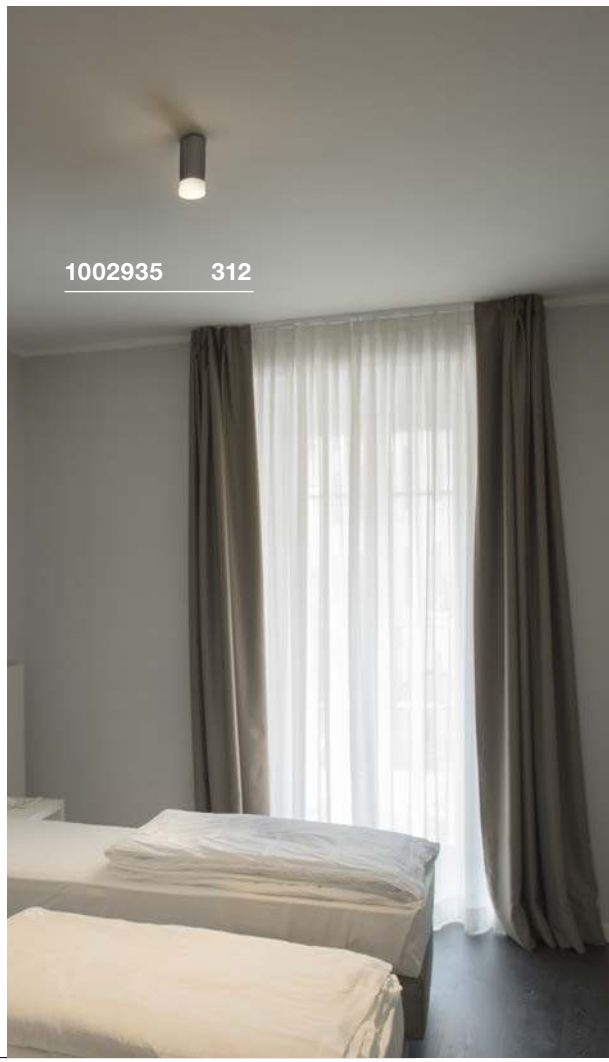







Reflector 28° - replace the reflector of this light to enjoy a different light effect thanks to the different colours (gold, grey, black and white).

ENOLA B
CL, QPAR51

SOCKET INSIDE









Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Accessory recommendation

Decorative ring
Item No. 151840 | 6.80 GBP



Recommended lamp

LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005082 | 6.10 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP



Lamp details

max. 35W QPAR51
L: 8.5 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
black	**151810**	**49.50**
GU10 | QPAR51		
white	**151811**	**49.50**
GU10 | QPAR51		
gold	**151813**	**58.50**
GU10 | QPAR51		
grey/black	**151814**	**49.50**

ANELA
CL, PHASE

LED INSIDE









- Premium LED with CRI>90
- Reduced glare
- Colourful reflectors available as accessories

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium
Dimmable: C





Dimensional drawing



Tip

Luminous flux with reflector 1000809 = 500lm
Luminous flux with reflector 1000810 = 620lm
Luminous flux with reflector 1000811 = 200lm
Luminous flux with reflector 1000812 = 620lm

Accessory recommendation

Reflector 28°
Item No. 1000809 | 14.40 GBP



Reflector 28°
Item No. 1000810 | 14.40 GBP



Reflector 28°
Item No. 1000811 | 14.40 GBP



Reflector 28°
Item No. 1000812 | 14.40 GBP



Variant	Item No.	GBP
200-620lm | 3000K | CRI>90		
black	**1000807**	**135.00**
200-620lm | 3000K | CRI>90		
white	**1000808**	**135.00**

ROX
CL, QPAR111

SOCKET INSIDE





- High-quality brushed surface

Product details

230V -50Hz
Material: aluminium/glass

IP 44 0,8

Dimensional drawing



Recommended lamp

LED GU10 7,9W 25°
2700K 730lm
8kWh/1000h
Item No. 560702 | 20.70 GBP



LED GU10 7W 25°
3000K 730lm
8kWh/1000h
Item No. 1001570 | 20.70 GBP



Lamp details

max. 50W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
brushed aluminium	**1000332**	**99.00**

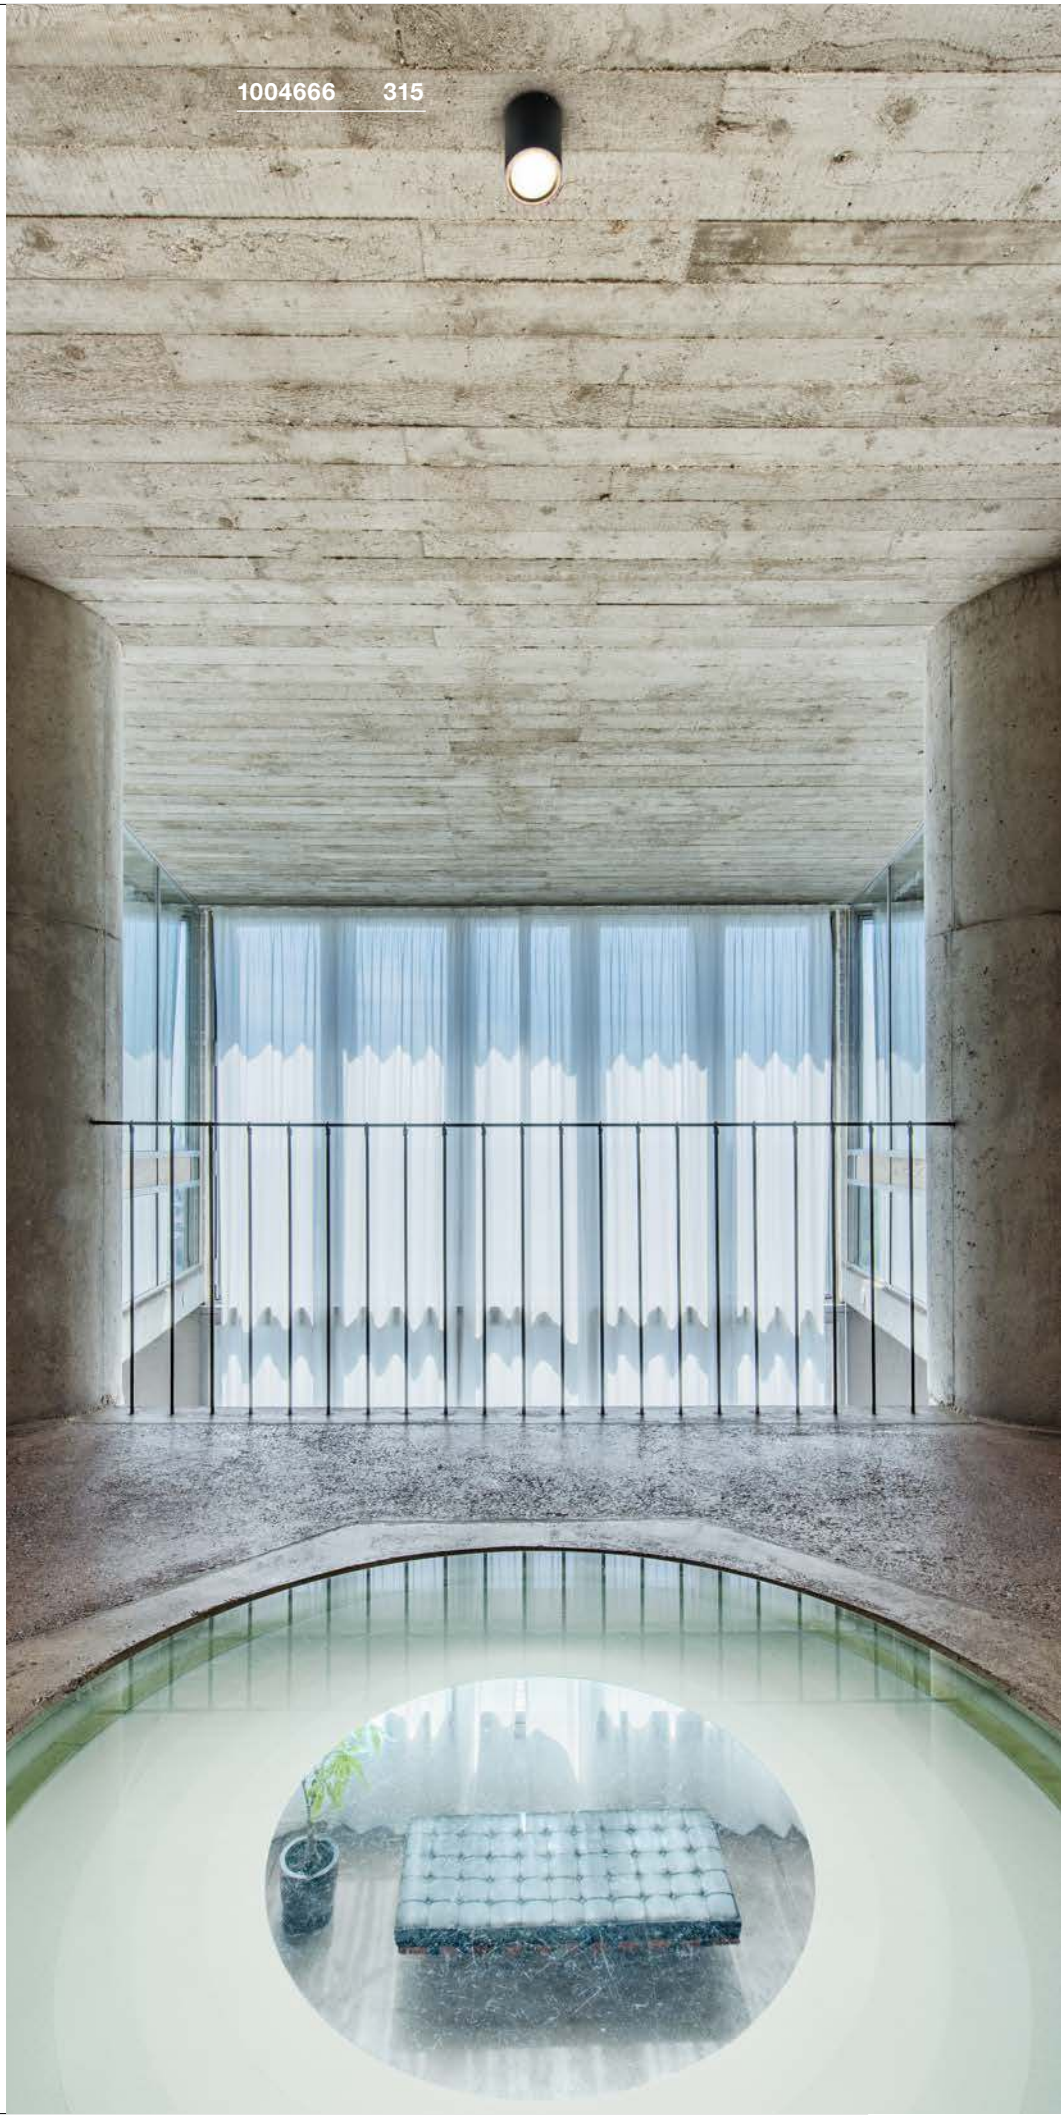

OCULUS
CL, PHASE







ENOLA C
CL, PHASE





- Premium LED with CRI>90
- Dim to Warm
- The light colour alters when dimmed

ENOLA C
CL





Product details

220-240V ~50/60Hz | 250mA
Total wattage: 10.5W
Material: aluminium/glass
Dimmable: C

IP 20 | 0,57 | 25000 | 100°

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/glass
Dimmable: C

0,63 | 30000 | 35°

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/glass

0,5 | 40000 | 35°

Dimensional drawing



Dimensional drawing



Dimensional drawing



Variant	Item No.	GBP
36-780lm | 2000-3000K | CRI>90		
matt black	1004666	180.00
36-780lm | 2000-3000K | CRI>90		
matt white	1004667	180.00

Variant	Item No.	GBP
900lm | 2000-3000K | CRI>90		
white	1000631	194.40

Variant	Item No.	GBP
850lm | 3000K | CRI>80		
white	152101	171.00

ALTRA DICE
CL, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



Lamp details
max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	151511	54.00
GU10 | QPAR51 grey/black	151514	54.00
GU10 | QPAR51 black	1002216	54.00

ALTRA DICE
CW, double, QPAR51

SOCKET INSIDE







- Light completely pivotable

Product details
220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details
2x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	151531	99.00
GU10 | QPAR51 grey/black	151534	99.00
GU10 | QPAR51 black	1002215	99.00

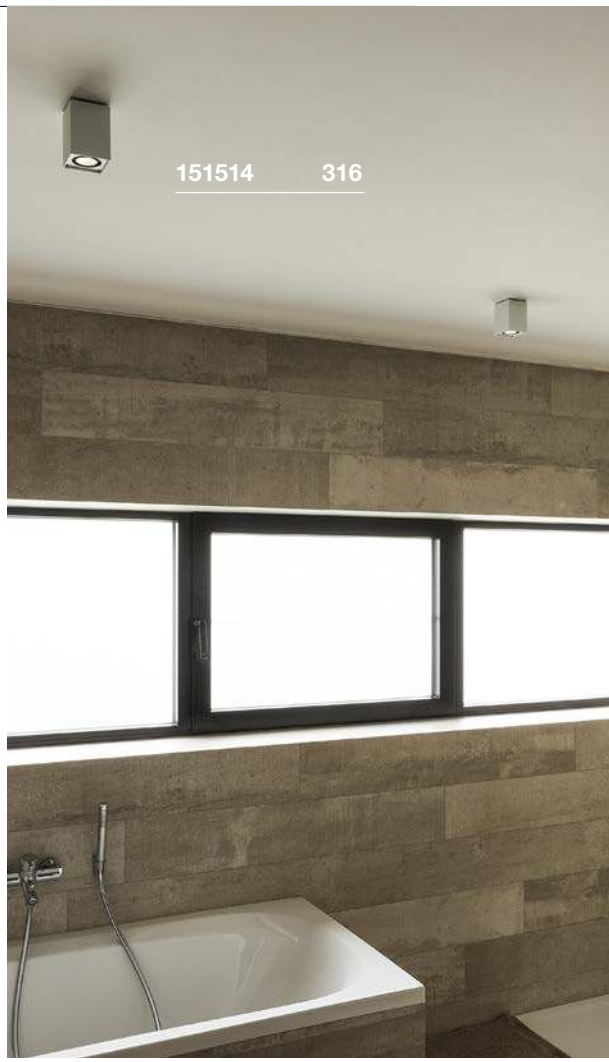





1001426 317



1001424 + 1001436 317

TEC KALU
CL, double, PHASE

LED INSIDE







- Can be converted into a pendant light using the optional suspension set
- The spots can be rotated 360° and pivoted 120°
- The entire light can be rotated through 360°

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 31W
Material: aluminium/polycarbonate (PC)
Dimmable: C

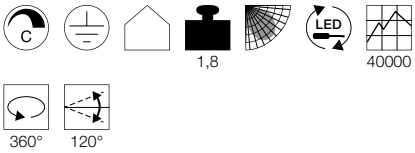

Dimensional drawing



Accessory recommendation

■ Suspension kit 1.5m
Item No. 1001435 |49.50 GBP

□ Suspension kit 1.5m
Item No. 1001436 |49.50 GBP

Variant	Item No.	GBP
1900lm | 3000K | CRI>80 | 24°		
■ black	**1001431**	**206.10**
1900lm | 3000K | CRI>80 | 24°		
◪ white/black	**1001432**	**206.10**
1900lm | 3000K | CRI>80 | 60°		
■ black	**1001423**	**206.10**
1900lm | 3000K | CRI>80 | 60°		
◪ white/black	**1001424**	**206.10**

TEC KALU
CL, quad, PHASE

LED INSIDE







- Can be converted into a pendant light using the optional suspension set
- The spots can be rotated 360° and pivoted 120°
- The entire light can be rotated through 360°

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 60W
Material: aluminium/polycarbonate (PC)
Dimmable: C

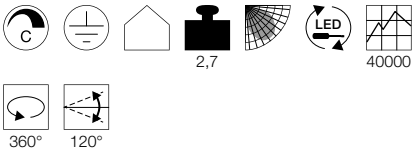

Dimensional drawing



Accessory recommendation

■ Suspension kit 1.5m
Item No. 1001435 |49.50 GBP

□ Suspension kit 1.5m
Item No. 1001436 |49.50 GBP

Variant	Item No.	GBP
3800lm | 3000K | CRI>80 | 24°		
■ black	**1001433**	**341.10**
3800lm | 3000K | CRI>80 | 24°		
◪ white/black	**1001434**	**341.10**
3800lm | 3000K | CRI>80 | 60°		
■ black	**1001425**	**341.10**
3800lm | 3000K | CRI>80 | 60°		
◪ white/black	**1001426**	**341.10**

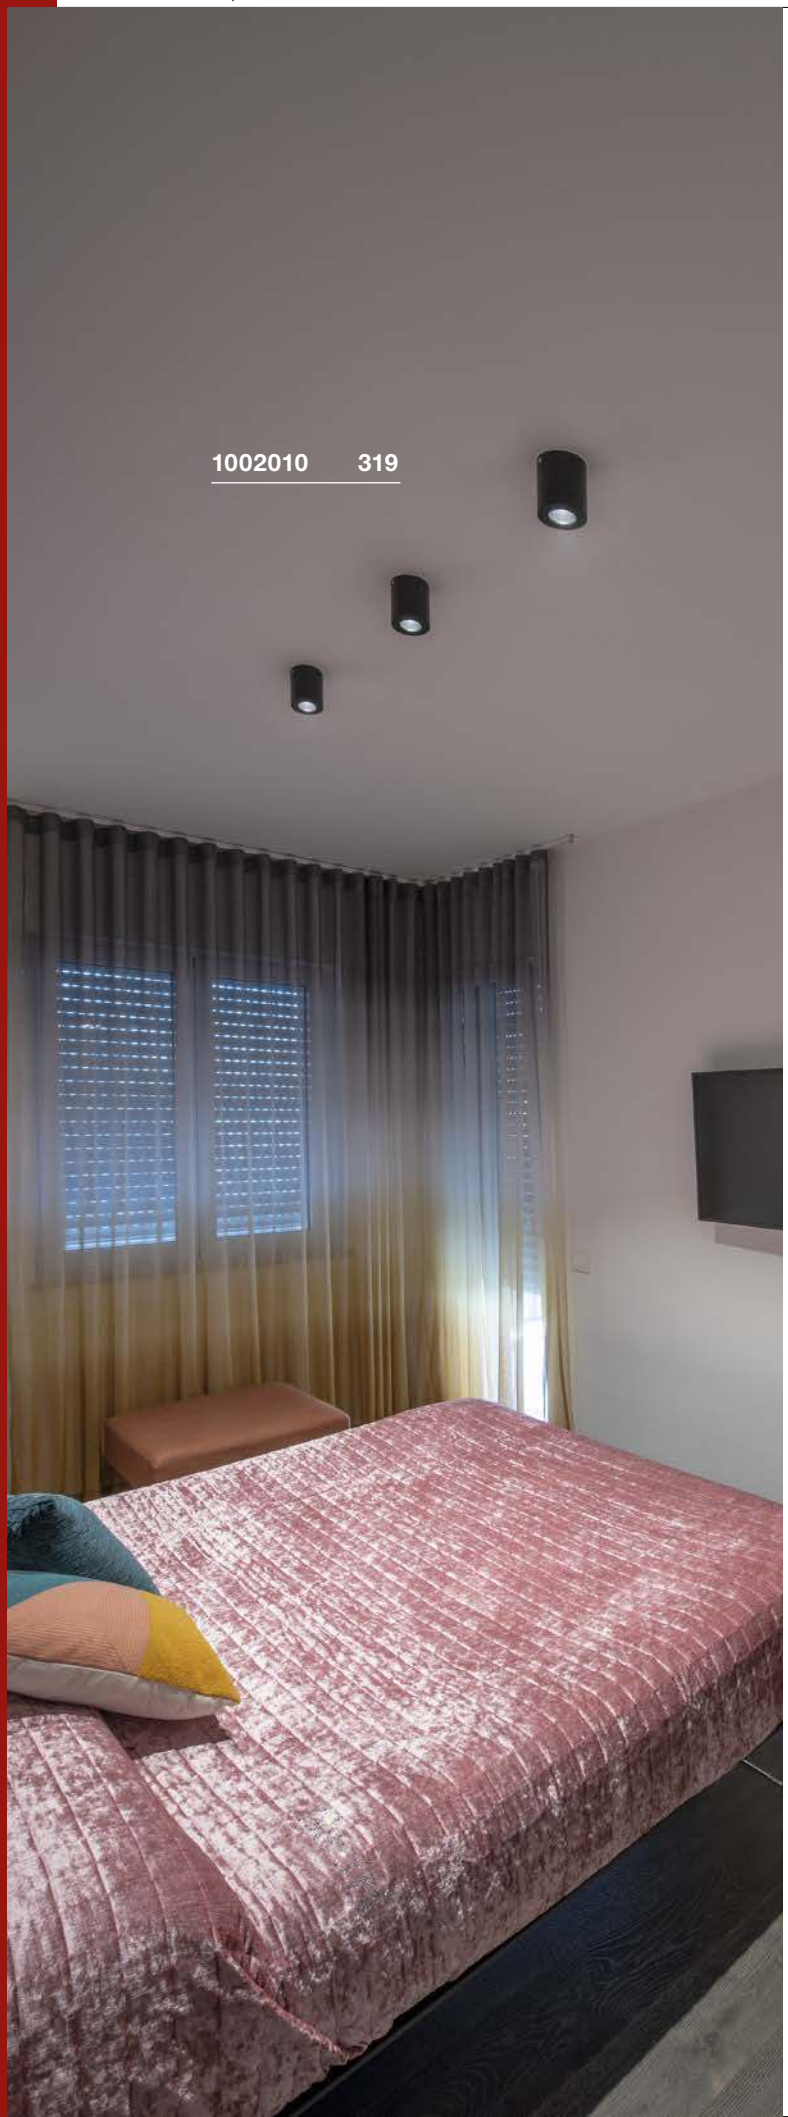
1002010 319

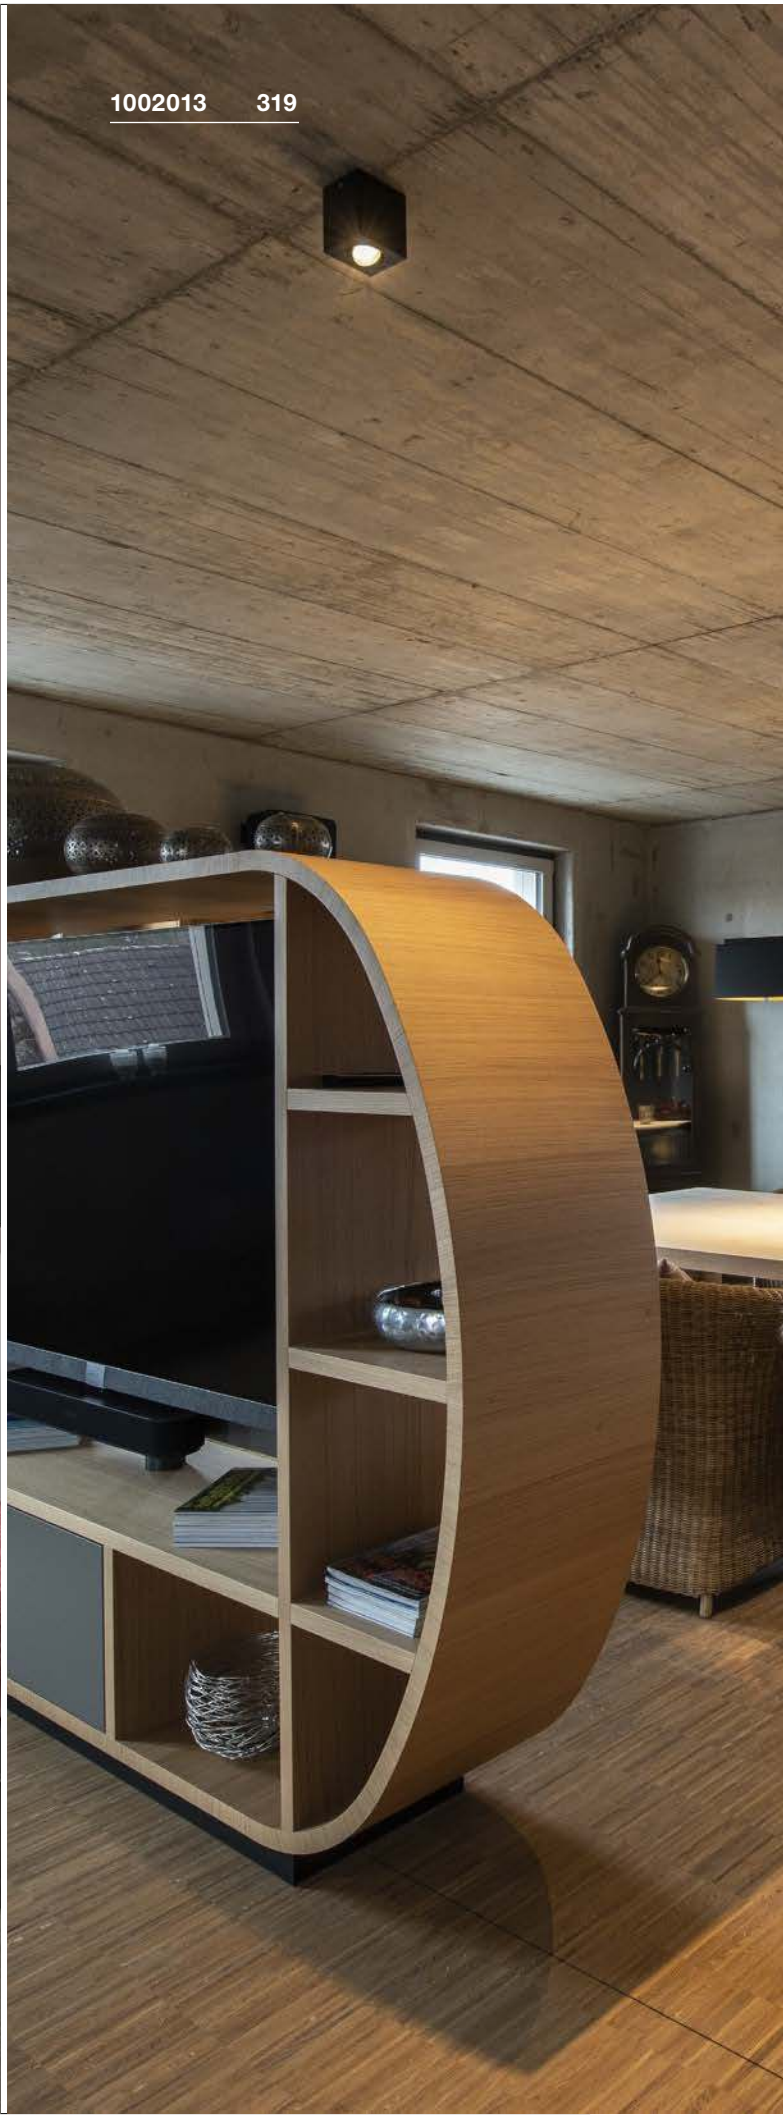
1002013 319

TRILEDO
CL, single, round, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005076 | 6.10 GBP



Lamp details
max. 10W LED GU10 51mm
Diameter: 5 cm max. L: 5.5 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**1002010**	**67.50**
GU10 | QPAR51		
□ white	**1002011**	**67.50**
GU10 | QPAR51		
▒ brushed aluminium	**1002012**	**72.00**

TRILEDO
CL, single, square, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details
max. 10W LED GU10 51mm
Diameter: 5 cm max. L: 5.5 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**1002013**	**67.50**
GU10 | QPAR51		
□ white	**1002015**	**67.50**
GU10 | QPAR51		
▒ brushed aluminium	**1004004**	**72.00**

TRILEDO
CL, double, square, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details
2x max. 10W LED GU10 51mm
Diameter: 5 cm max. L: 5.5 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**1002005**	**99.00**
GU10 | QPAR51		
□ white	**1002006**	**99.00**



113931 321



1002008 321

TRILEDO
CL, single, round

LED INSIDE







Product details

100-240V ~50/60Hz | 350mA
Total wattage: 8.1W
Material: aluminium

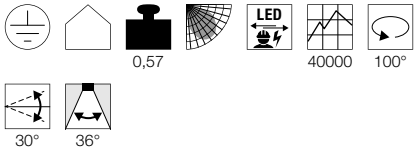

Dimensional drawing



Variant	Item No.	GBP
670lm | 3000K | CRI>80		
white	**113931**	**90.00**
670lm | 3000K | CRI>80		
matt black	**113930**	**90.00**

TRILEDO
CL, single, square

LED INSIDE







Product details

100-240V ~50/60Hz | 350mA
Total wattage: 8.1W
Material: aluminium

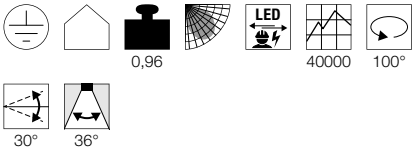

Dimensional drawing



Variant	Item No.	GBP
670lm | 3000K | CRI>80		
white	**113941**	**90.00**
670lm | 3000K | CRI>80		
matt black	**113940**	**90.00**

TRILEDO
CL, double, square

LED INSIDE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

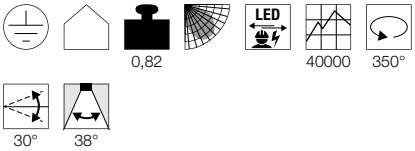

Dimensional drawing



Variant	Item No.	GBP
1100lm | 3000K | CRI>80		
white	**1002008**	**126.00**
1100lm | 3000K | CRI>80		
black	**1002003**	**126.00**

PLASTRA
CL, QPAR51

SOCKET INSIDE







- Can be individually designed with colours, stickers & more

Product details

220-240V ~50/60Hz
Material: gypsum/steel

1

Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details

max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
matt white	**148004**	**51.30**







KARDAMOD
CL, square, single, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP



LED GU10 6,5W 38°
2700K 390lm
7kWh/1000h
Item No. 551882 | 40.50 GBP



Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**117100**	**108.00**
GU10 | QPAR111		
□ white	**117101**	**108.00**

KARDAMOD
CL, square, double, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP



LED GU10 13W 55°
4000K 950lm
13kWh/1000h
Item No. 1003095 | 80.10 GBP



Lamp details
2x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**117110**	**197.10**
GU10 | QPAR111		
□ white	**117111**	**197.10**

KARDAMOD
CL, round, single, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 9W 25°
2700-6500K 765lm
9kWh/1000h
Item No. 1001920 | 49.50 GBP



LED GU10 9W 40°
2700-6500K 765lm
9kWh/1000h
Item No. 1001921 | 49.50 GBP



Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**117160**	**108.00**
GU10 | QPAR111		
□ white	**117161**	**108.00**

KARDAMOD
CL, round, double, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP



LED GU10 13W 140°
4000K 1000lm
13kWh/1000h
Item No. 1003088 | 80.10 GBP



Lamp details
2x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**117180**	**215.10**
GU10 | QPAR111		
□ white	**117181**	**215.10**





SUPROS 78
CL, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium
Dimmable: C, L

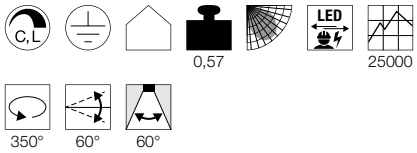

Dimensional drawing



Accessory recommendation

Lens 20°
Item No. 116302 |3.00 GBP

Lens 40°
Item No. 116304 |3.00 GBP

Variant	Item No.	GBP
700lm | 3000K | CRI>80 | 60°		
■ black	**116330**	**135.00**
700lm | 3000K | CRI>80 | 60°		
□ white	**116331**	**135.00**

SUPROS
CL, Move

FOLLOWER
LED INSIDE







Product details

220-240V ~50/60Hz| 750mA
Total wattage: 31W
Material: aluminium

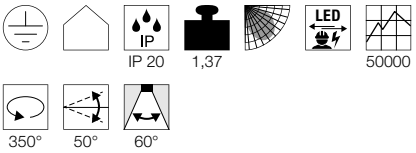

Dimensional drawing



Accessory recommendation

Reflector 20°
Item No. 114102 |9.50 GBP



Reflector 40°
Item No. 114104 |9.50 GBP



Variant	Item No.	GBP
2600lm | 3000K | CRI>90		
■ black	**1003289**	**206.10**
2600lm | 3000K | CRI>90		
□ white	**1003290**	**206.10**
2700lm | 4000K | CRI>90		
■ black	**1003287**	**206.10**
2700lm | 4000K | CRI>90		
□ white	**1003288**	**206.10**

SUPROS
CL, Move

FOLLOWER
LED INSIDE







Product details

220-240V ~50/60Hz| 950mA
Total wattage: 36W
Material: aluminium

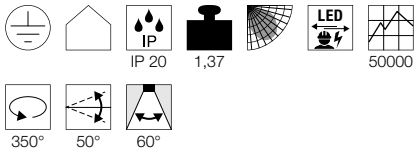

Dimensional drawing



Accessory recommendation

Reflector 20°
Item No. 114102 |9.50 GBP



Reflector 40°
Item No. 114104 |9.50 GBP



Variant	Item No.	GBP
3380lm | 3000K | CRI>90		
■ black	**1003283**	**224.10**
3380lm | 3000K | CRI>90		
□ white	**1003284**	**224.10**
3520lm | 4000K | CRI>90		
■ black	**1003285**	**224.10**
3520lm | 4000K | CRI>90		
□ white	**1003286**	**224.10**

FOR THAT RADIANT LOOK.

COMBINATION OF WALL AND CEILING LIGHTS.

Whereas ceiling lights call the tune with regard to general lighting, wall luminaires create individual impressions. A combination of the two is therefore ideal for an integrated light solution – providing many varying options; there are no limits to your creativity.




1005085 362


240000 372

WALL AND CEILING LIGHTS


330


330

NEW


331


332


333


334


334


335


336


337


337


338


339


339


341


341


341


343


343


343


345


345


345


345


347


347


347


347


349


349


349


349


350


350


350


350


352


352


352


353

356

356

356

357

357

357

358

358

358

359

359

360

360

361

FOLLOWER

362

FOLLOWER

362

FOLLOWER

363

FOLLOWER

363

365

365

366

366

366

367

367

367

369

369

370

370

371

372

373

375

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

SPOT 79
CW, QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

max. 50W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	132020	26.10
GU10 | QPAR51 □ white	132021	26.10
GU10 | QPAR51 ■ grey	132024	26.10

INDA
CW, QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP



LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005083 | 6.10 GBP



Lamp details

max. 50W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	147550	58.50
GU10 | QPAR51 □ white	147551	58.50
GU10 | QPAR51 ▨ aluminium	147559	63.90

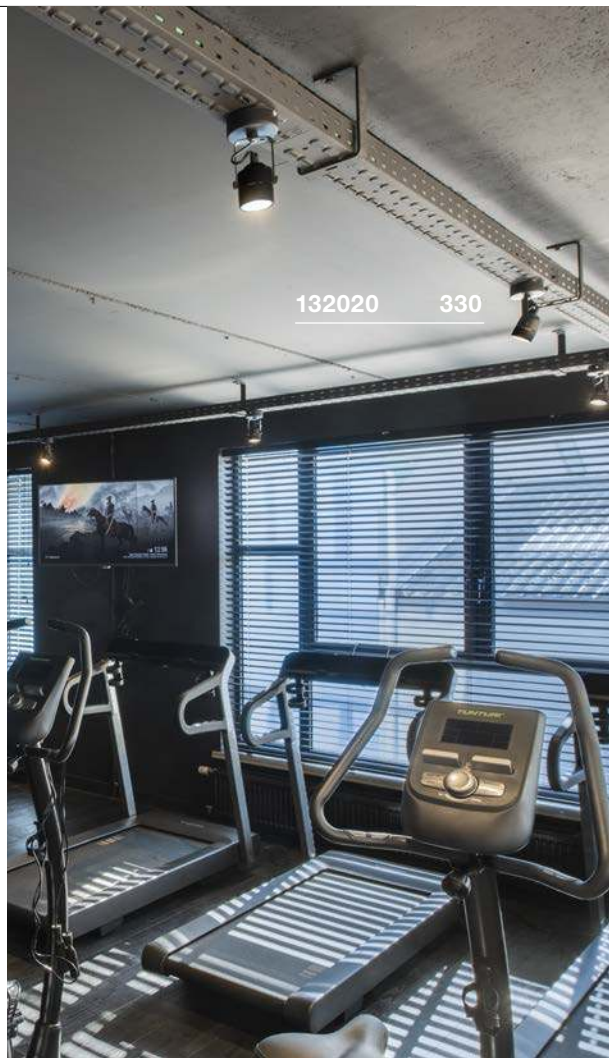





OCULUS
CW, PHASE

NEW

LED INSIDE

DIM TO WARM







Product details

220-240V ~50/60Hz | 250mA
Total wattage: 10.5W
Material: aluminium/glass
Dimmable: C





Dimensional drawing



Variant	Item No.	GBP
36-780lm | 2000-3000K | CRI>90		
■ matt black	1004664	225.00
36-780lm | 2000-3000K | CRI>90		
□ matt white	1004665	225.00

ALTRA DICE
CW, double, QPAR51

SOCKET INSIDE







• Light completely pivotable

Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

2x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	**151531**	**99.00**
GU10 | QPAR51 grey/black	**151534**	**99.00**
GU10 | QPAR51 black	**1002215**	**99.00**





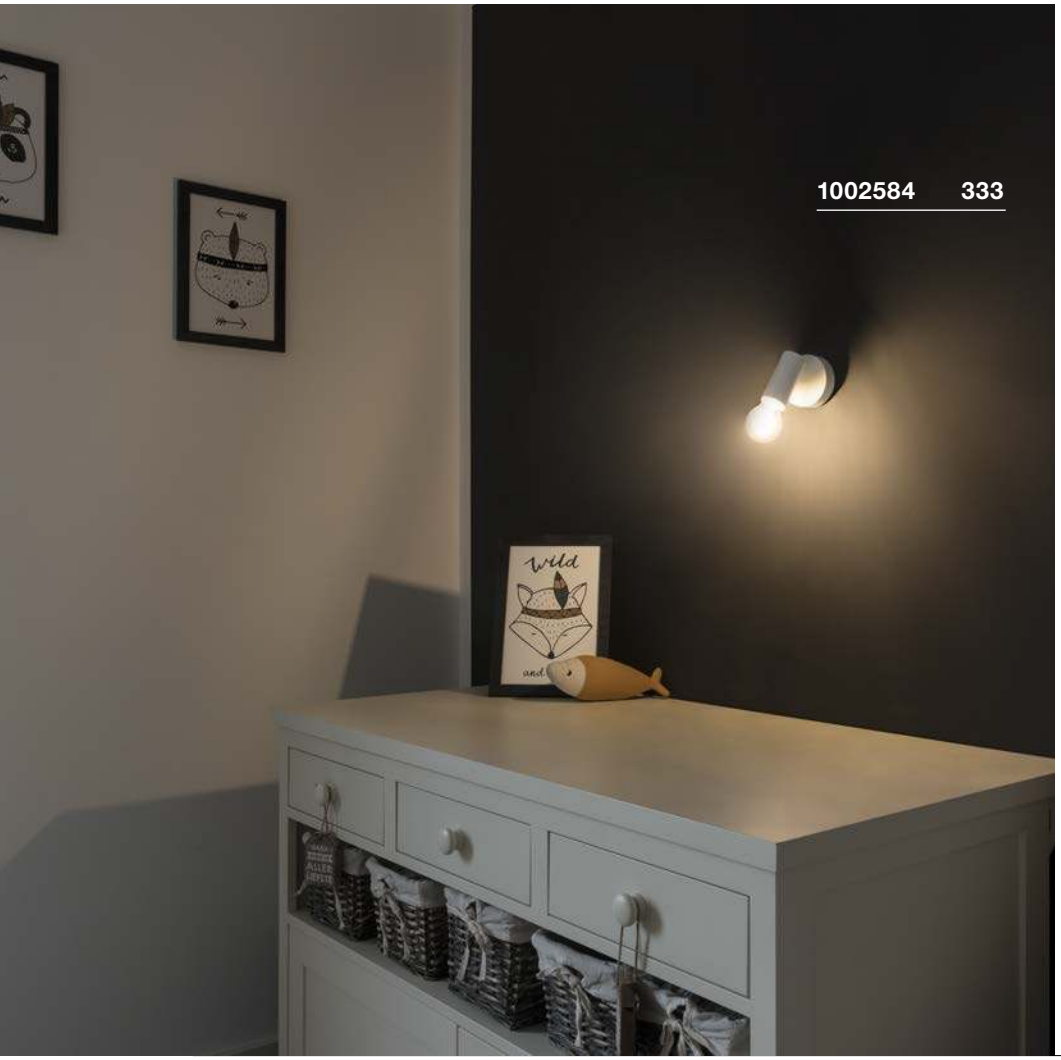

FITU
CW, E27

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



LED E27 10,5W 360°
2700K 1000lm
10,5kWh/1000h
Item No. 1003093 | 24.30 GBP



Lamp details

max. 60W

Variant	Item No.	GBP
E27		
white	**1002584**	**58.50**
E27		
black	**1002585**	**58.50**

KARPO 30
CW, single

LED INSIDE







- Premium LED with CRI>90

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 9.5W
Material: aluminium/steel

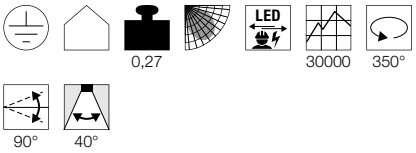

Dimensional drawing



Variant	Item No.	GBP
480lm | 3000K | CRI>90		
■ black	**152330**	**99.00**
530lm | 3000K | CRI>90		
□ white	**152331**	**99.00**

KARPO 30
CW, single, PHASE

LED INSIDE







- Premium LED with CRI>90
- Dimmable

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/steel
Dimmable: C

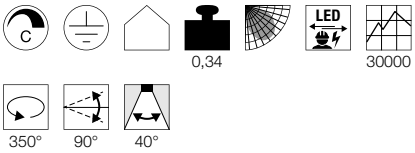

Dimensional drawing



Variant	Item No.	GBP
580lm | 3000K | CRI>90		
■ black	**1001495**	**117.00**
600lm | 3000K | CRI>90		
□ white	**1001496**	**117.00**

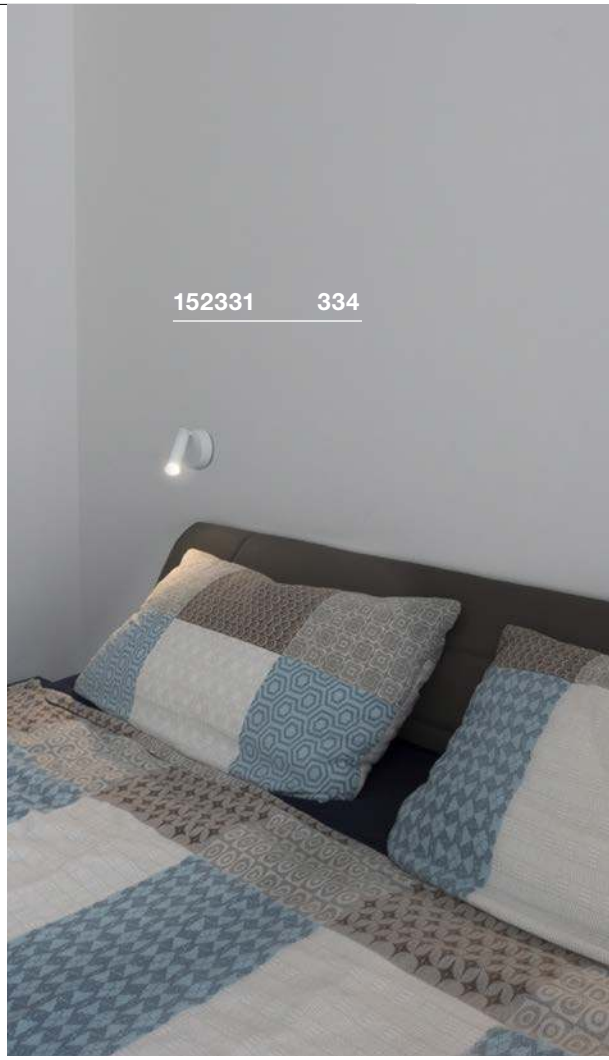





TOTHEE
CW, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 17W
Material: aluminium
Dimmable: C, L

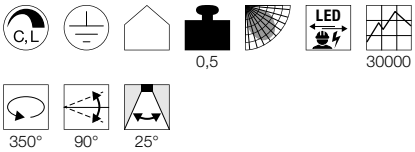

Dimensional drawing



Variant	Item No.	GBP
1250lm | 3000K | CRI>80		
■ black	**1000426**	**201.60**
1250lm | 3000K | CRI>80		
◪ white/black	**1000427**	**201.60**

BILAS
CW, single, PHASE

LED INSIDE







• High-voltage LED

Product details

230V ~50/60Hz
Total wattage: 16W
Material: aluminium/glass
Dimmable: C, L





Dimensional drawing



Variant	Item No.	GBP
1000lm | 2700K | CRI>80		
■ matt black	156420	228.60
1000lm | 2700K | CRI>80		
□ matt white	156421	228.60

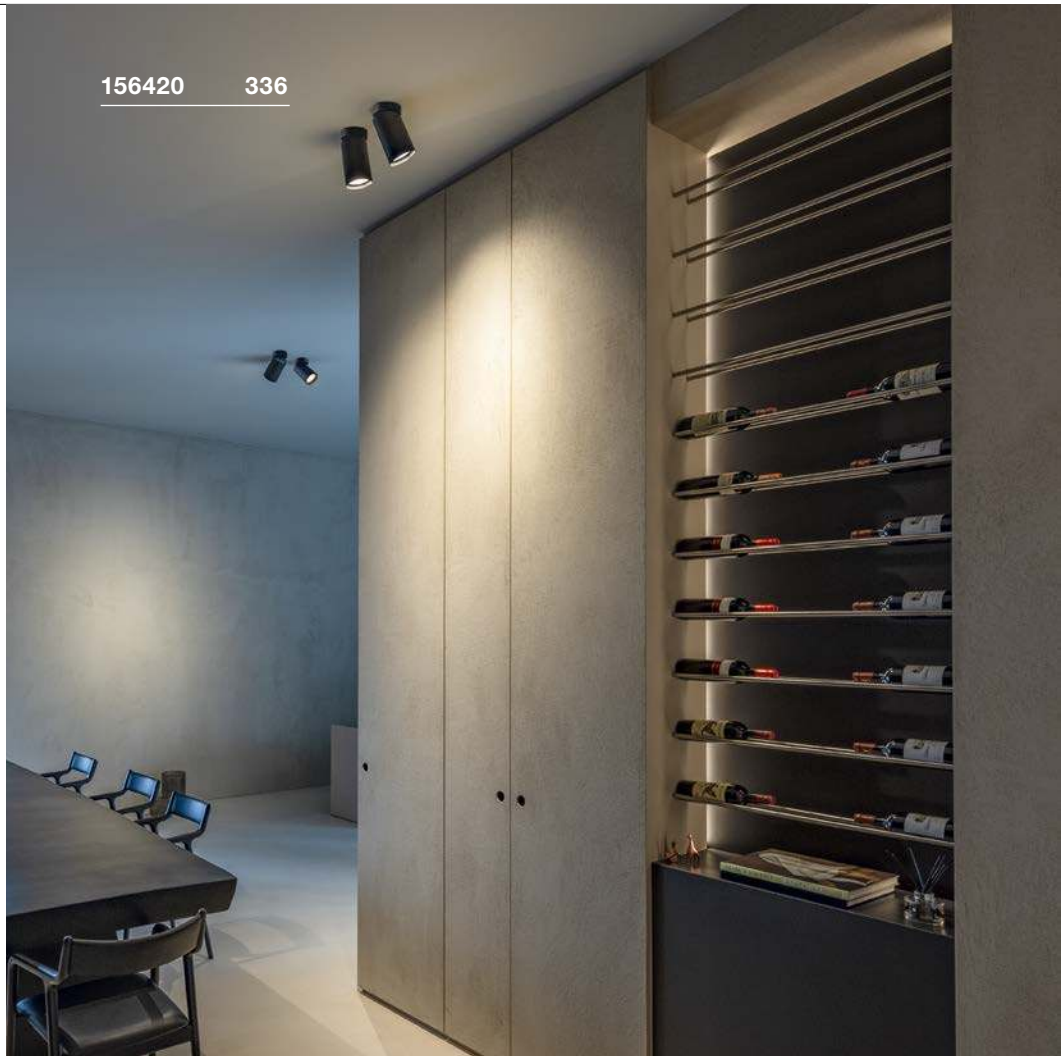

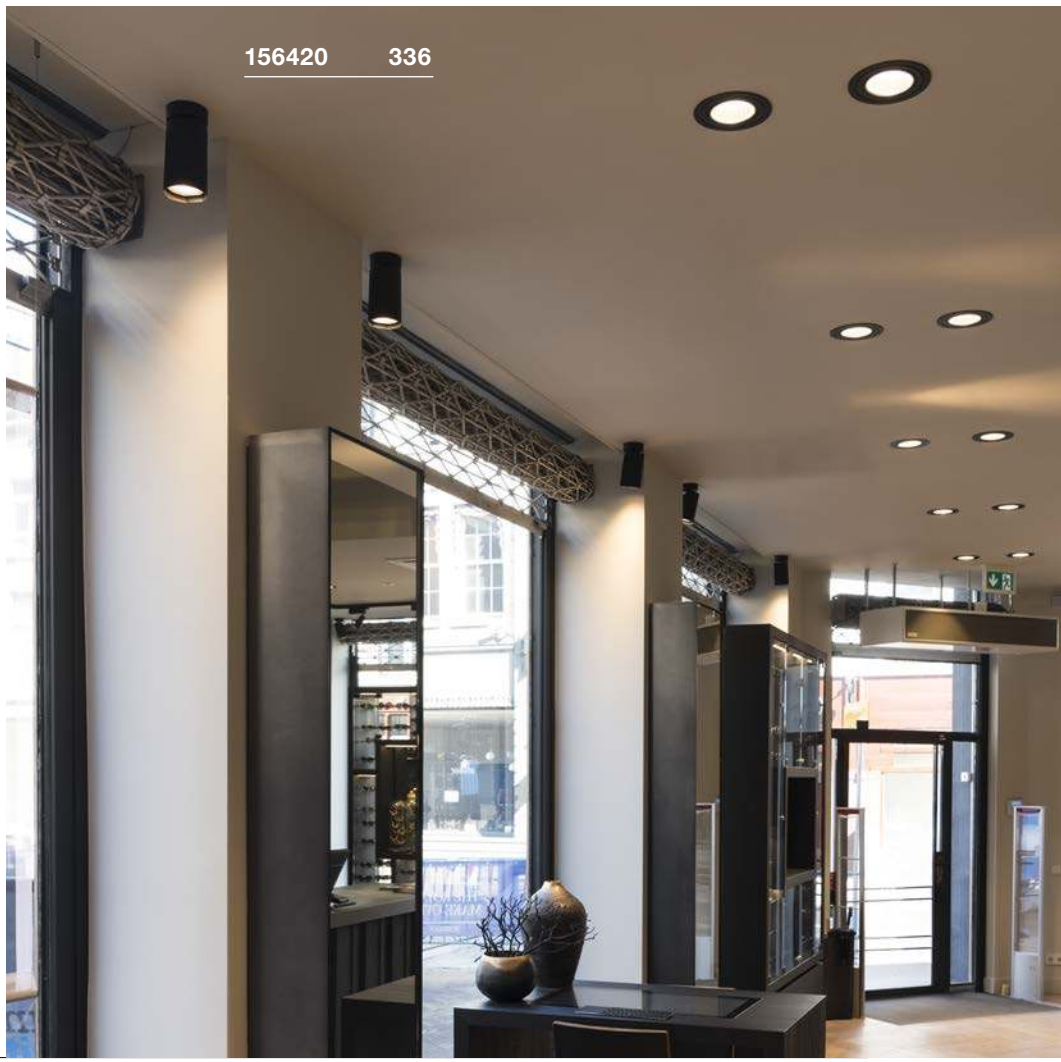





ENOLA B
CW, single, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip
Decorative ring in light colour included.
Optional black decorative ring available as an accessory.

Accessory recommendation
■ Decorative ring
Item No. 151840 | 6.80 GBP



Recommended lamp



LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005081 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details
max. 50W QPAR51
L: 6.7 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**152010**	**63.00**
GU10 | QPAR51		
□ white	**152011**	**63.00**
GU10 | QPAR51		
■ gold	**152013**	**67.50**

ENOLA B
CW, double, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip
Decorative ring in light colour included.
Optional black decorative ring available as an accessory.

Accessory recommendation
■ Decorative ring
Item No. 151840 | 6.80 GBP



Recommended lamp



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005077 | 6.10 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP

Lamp details
2x max. 50W QPAR51
L: 6.7 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**152020**	**108.00**
GU10 | QPAR51		
□ white	**152021**	**108.00**
GU10 | QPAR51		
■ gold	**152023**	**117.00**

ENOLA B
CW, double, QPAR51

SOCKET INSIDE









Product details

220-240V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Tip

Decorative ring in light colour included.
Optional black decorative ring available as an accessory.

Accessory recommendation

■ Decorative ring
Item No. 151840 | 6.80 GBP



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP





LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP





Lamp details

2x max. 50W QPAR51
L: 8 cm max.

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	151830	135.00
GU10 | QPAR51 □ white	151831	135.00





HELIA
CW, single, PHASE

LED INSIDE







- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium
Dimmable: C

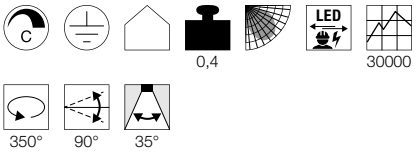

Dimensional drawing



Variant	Item No.	GBP
620lm | 3000K | CRI>90		
■ black	**156500**	**108.00**
620lm | 3000K | CRI>90		
□ white	**156501**	**108.00**

HELIA
CW, double, PHASE

LED INSIDE







- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium
Dimmable: C, L

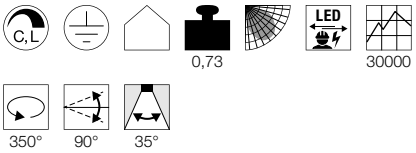

Dimensional drawing



Variant	Item No.	GBP
1200lm | 3000K | CRI>90		
■ black	**156510**	**153.00**
1200lm | 3000K | CRI>90		
□ white	**156511**	**153.00**


147414 341

ASTO TUBE
CW, QPAR51





Product details

230V -50Hz
Total wattage: 50W
Material: aluminium



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



ASTO TUBE
CW, single, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

max. 50W QPAR51
Diameter: 6.4cm max. L. 8.1cm max.

Variant	Item No.	GBP
GU10 | QPAR51 | 0.34 kg		
white	**147411**	**49.50**

ASTO TUBE
CW, double, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

2x max. 50W QPAR51
Diameter: 6.4cm max. L. 8.1cm max.

Variant	Item No.	GBP
GU10 | QPAR51 | 0.7 kg		
white	**147412**	**108.00**

ASTO TUBE
CW, triple, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

3x max. 50W QPAR51
Diameter: 6.4cm max. L. 8.1cm max.

Variant	Item No.	GBP
GU10 | QPAR51 | 1.15 kg		
white	**147414**	**153.00**


1002974 343

NOBLO
CW, PHASE

• Rotating and pivoting light head

Product details

220-240V ~50/60Hz | 350mA
Material: aluminium
Dimmable: C, L

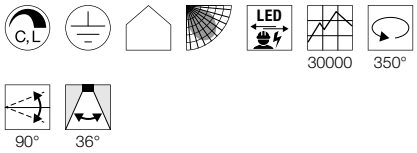

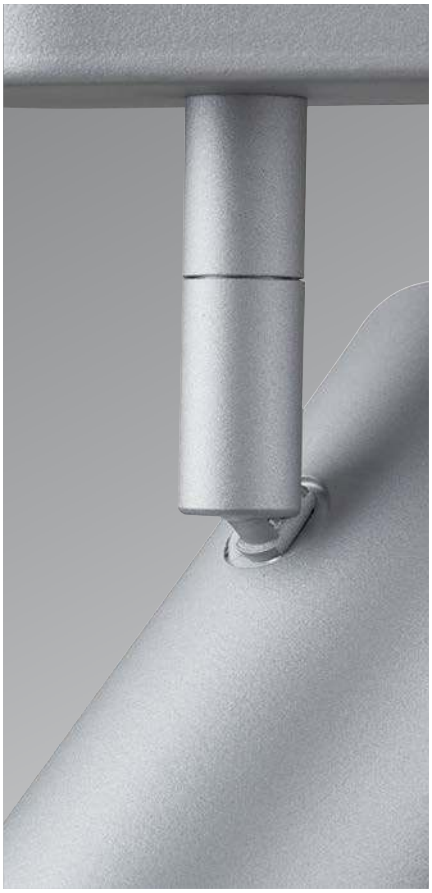



NOBLO
CW, single, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
600lm | 2700K | CRI>80 | 8W | 0.31 kg		
black	**1002969**	**90.00**
600lm | 2700K | CRI>80 | 8W | 0.31 kg		
white	**1002970**	**90.00**
600lm | 2700K | CRI>80 | 8W | 0.31 kg		
silver grey	**1002971**	**90.00**

NOBLO
CW, double, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
1200lm | 2700K | CRI>80 | 16W | 0.67 kg		
black	**1002973**	**144.00**
1200lm | 2700K | CRI>80 | 16W | 0.67 kg		
white	**1002974**	**144.00**
1200lm | 2700K | CRI>80 | 16W | 0.67 kg		
silver grey	**1002975**	**144.00**

NOBLO
CW, triple, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
1800lm | 2700K | CRI>80 | 24W | 1 kg		
black	**1002976**	**215.10**
1800lm | 2700K | CRI>80 | 24W | 1 kg		
white	**1002977**	**215.10**
1800lm | 2700K | CRI>80 | 24W | 1 kg		
silver grey	**1002978**	**215.10**



1000892 345



1000887 345

AVO
CW, QPAR51

Product details

230V -50Hz
Material: steel

320° 90°

Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



AVO
CW, single, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.22 kg ■ black	1000886	35.10
GU10 | QPAR51 | 0.22 kg □ white	1000887	35.10
GU10 | QPAR51 | 0.22 kg ■ silver grey	1000888	35.10

AVO
CW, double, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

2x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.47 kg ■ black	1000889	72.00
GU10 | QPAR51 | 0.47 kg □ white	1000890	72.00
GU10 | QPAR51 | 0.47 kg ■ silver grey	1000891	72.00

AVO
CW, triple, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

3x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.71 kg ■ black	1000892	90.00
GU10 | QPAR51 | 0.71 kg □ white	1000893	90.00
GU10 | QPAR51 | 0.71 kg ■ silver grey	1000894	90.00

AVO
CW, quad, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

4x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 1 kg ■ black	1000895	108.00
GU10 | QPAR51 | 1 kg □ white	1000896	108.00
GU10 | QPAR51 | 1 kg ■ silver grey	1000897	108.00


147443 347
147316 304

ASTO
QPAR51

Product details

230V -50Hz
Material: aluminium



Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP





ASTO
CW, single, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.25 kg aluminium	**147441**	**27.00**

ASTO
CW, double, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

max. 75W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.35 kg aluminium	**147442**	**54.00**

ASTO
CW, triple, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

max. 75W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.55 kg aluminium	**147443**	**72.00**

ASTO
CW, quad, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

max. 75W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.8 kg aluminium	**147444**	**90.00**


1002030 349

PURI
CW, QPAR51

Product details

230V -50Hz
Material: aluminium/steel



Recommended lamp

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP






PURI
CW, single, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.27 kg ■ black	**147360**	**31.50**
GU10 | QPAR51 | 0.27 kg □ white	**147361**	**31.50**

PURI
CW, double, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

2x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.62 kg ■ black	**147370**	**63.00**
GU10 | QPAR51 | 0.62 kg □ white	**147371**	**63.00**

PURI
CW, triple, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

3x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 0.98 kg ■ black	**147380**	**85.50**
GU10 | QPAR51 098 kg □ white	**147381**	**85.50**

PURI
CW, quad, QPAR51

SOCKET INSIDE



Dimensional drawing



Lamp details

4x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 | 1.25 kg ■ black	**1002029**	**126.00**
GU10 | QPAR51 | 1.25 kg □ matt white	**1002030**	**126.00**

KALU
CW, QPAR111



Product details

220-240V ~50/60Hz
Material: aluminium



Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP



LED GU10 6.5W 38°
2700K 390lm
7kWh/1000h
Item No. 551882 | 40.50 GBP



KALU
CW, single, QPAR111

SOCKET INSIDE



Dimensional drawing



Lamp details

max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 | 0.44 kg ■ black	**1000702**	**81.00**
GU10 | QPAR111 | 0.44 kg □ white	**147301**	**81.00**
GU10 | QPAR111 | 0.44 kg □ aluminium	**147306**	**85.50**

KALU
CW, double, QPAR111

SOCKET INSIDE



Dimensional drawing



Lamp details

2x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 | 0.8 kg ■ black	**1000703**	**135.00**
GU10 | QPAR111 | 0.8 kg □ white	**147311**	**135.00**
GU10 | QPAR111 | 0.8 kg □ aluminium	**147316**	**144.00**

KALU
CW, triple, QPAR111

SOCKET INSIDE



Dimensional drawing



Lamp details

3x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 | 1.23 kg ■ black	**1000704**	**180.00**
GU10 | QPAR111 | 1.23 kg □ white	**147321**	**180.00**
GU10 | QPAR111 | 1.23 kg □ aluminium	**147326**	**189.00**

KALU
CW, quad, QPAR111

SOCKET INSIDE



Dimensional drawing



Lamp details

4x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 | 1.7 kg ■ black	**1002023**	**242.10**
GU10 | QPAR111 | 1.7 kg □ white	**1002024**	**242.10**
GU10 | QPAR111 | 1.7 kg □ aluminium	**1002025**	**251.10**

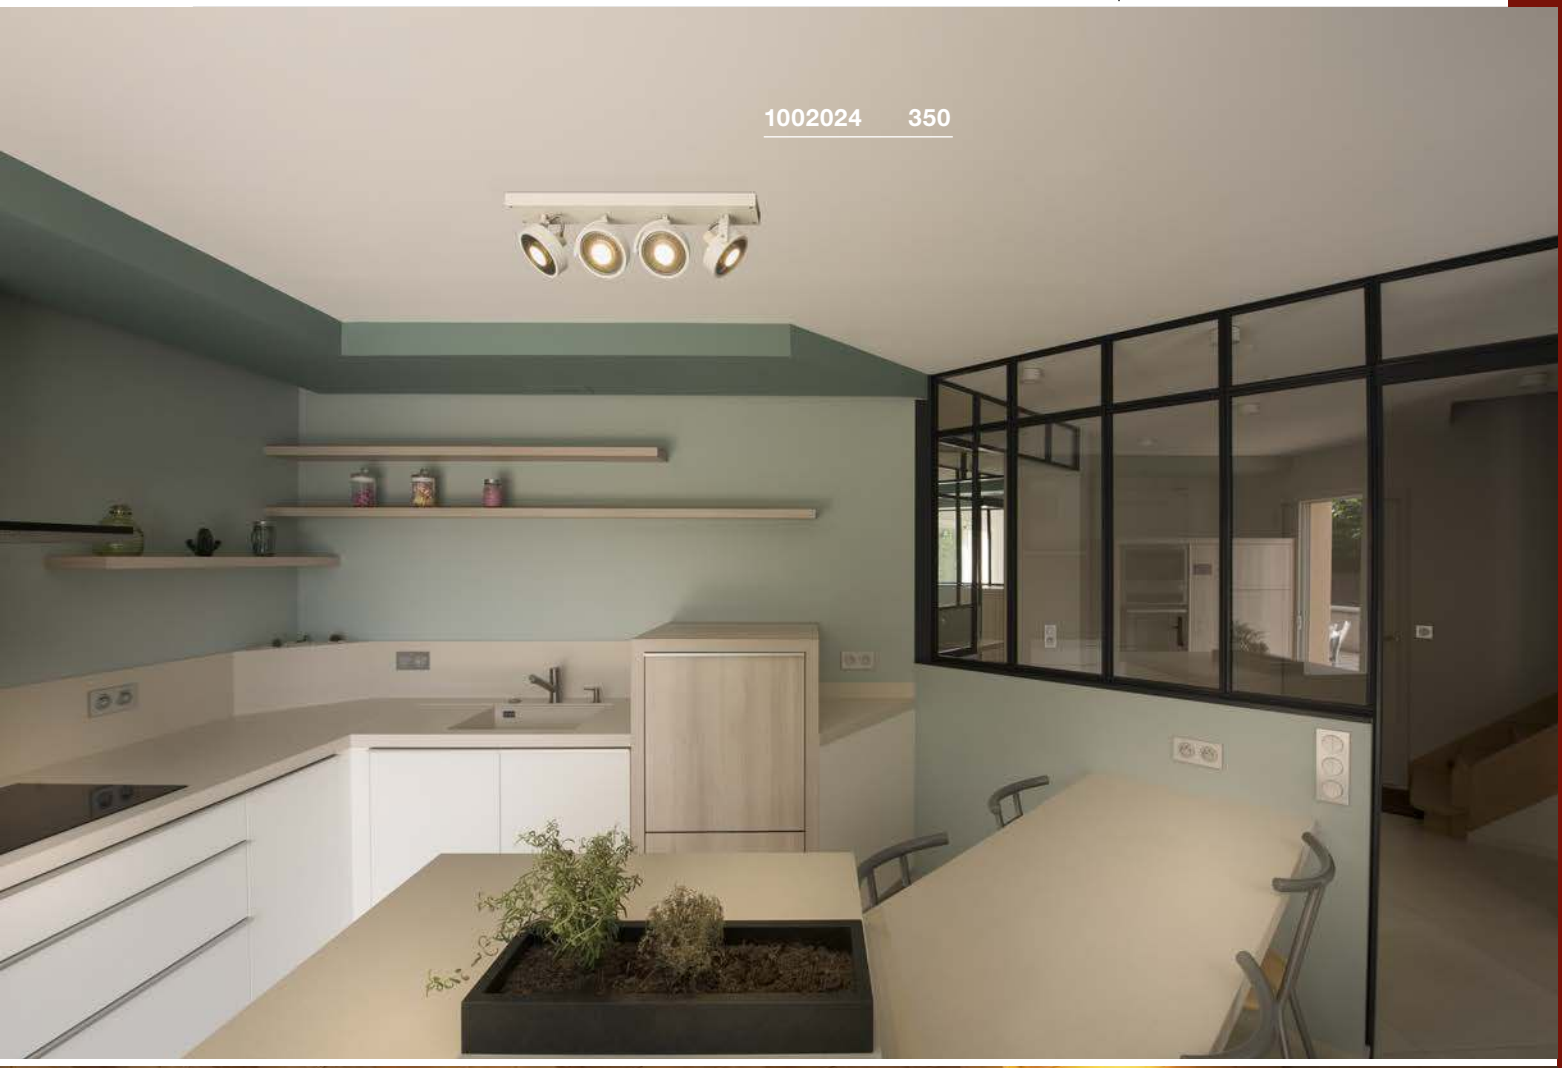

1002024 350



1000702 350

KALU
CW, PHASE

- Lighting unit can be rotated and swivelled through 340°

Product details

220-240V ~50/60Hz | 350mA
Material: aluminium/polycarbonate (PC)
Dimmable: C

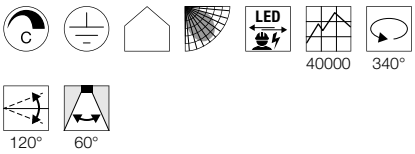



KALU
CW, single, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
1000lm | 3000K | CRI>80 | 17W | 0.77 kg		
■ black	**1000127**	**135.00**
1000lm | 3000K | CRI>80 | 17W | 0.77 kg		
◪ white/black	**1000128**	**135.00**

KALU
CW, double, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
2000lm | 3000K | CRI>80 | 31W | 1.6 kg		
■ black	**1000129**	**228.60**
2000lm | 3000K | CRI>80 | 31W | 1.6 kg		
◪ white/black	**1000130**	**228.60**

KALU
CW, triple, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
3000lm | 3000K | CRI>80 | 47W | 2.2 kg		
■ black	**1000131**	**341.10**
3000lm | 3000K | CRI>80 | 47W | 2.2 kg		
◪ white/black	**1000132**	**341.10**



KALU
CW, quad, PHASE

LED INSIDE







- Lighting unit can be rotated and swivelled through 340°
- Premium LED

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 60W
Material: aluminium/polycarbonate (PC)
Dimmable: C

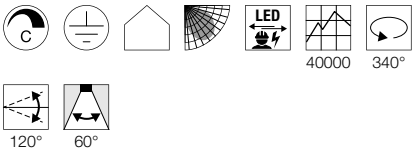

Dimensional drawing



Variant	Item No.	GBP
4000lm | 3000K | CRI>80 | 3.75 kg		
■ black	**1000135**	**431.10**
4000lm | 3000K | CRI>80 | 3.75 kg		
◪ white/black	**1000136**	**431.10**

LIPSY® LIGHTING SERIES.
THE COLOURS YOU WANT.

	LIPSY® 30 Connected	LIPSY® 40 Connected	LIPSY® 50 Connected
Example			
Lamp	LED INSIDE	LED INSIDE	LED INSIDE
Sensor	–	–	–
Size	Diameter: 28 cm	Diameter: 39 cm	Diameter: 49.6 cm
Colour temperature	3000K	3000K	3000K
Light colour	1400lm	1700lm	2800lm
Control/dimmable	Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]	Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]	Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

	LIPSY® 30 Dome	LIPSY® 40 Dome	LIPSY® 50 Dome	
Example				
Lamp	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	
Sensor	–	–	–	
Size	Diameter: 30 cm	Diameter: 35 cm	Diameter: 40 cm	
Colour temperature	3000K | 4000K	3000K | 4000K	3000K | 4000K	**With this LIPSY® variant** you can select/change the colour temperature yourself!
Light colour	1400/1600lm	1800/2000lm	2200/2400lm	
Control/dimmable	–	–	–	

	LIPSY® 30 Drum	LIPSY® 40 Drum	LIPSY® 50 Drum	
Example				
Lamp	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	
Sensor	–	–	–	
Size	Diameter: 30 cm	Diameter: 35 cm	Diameter: 40 cm	
Colour temperature	3000K | 4000K	3000K | 4000K	3000K | 4000K	
Light colour	1400/1600lm	1800/2000lm	2200/2400lm	
Control/dimmable	–	–	–	**With this LIPSY® variant** you can select/change the colour temperature yourself!

	LIPSY® 40 CW, Drum, DALI	LIPSY® 50 CW, Drum, DALI	
Example			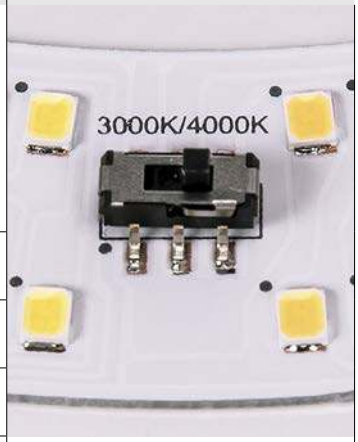
Lamp	LED INSIDE CCT	LED INSIDE CCT	
Sensor	–	–	
Size	Diameter: 35 cm	Diameter: 40 cm	
Colour temperature	3000K | 4000K	3000K | 4000K	
Light colour	1800/2000lm	2200/2400lm	
Control/dimmable	DALI	DALI	**With this LIPSY® variant** you can select the colour temperature yourself!

LIPSY®
CW, Connected

• Can be integrated with the Connected System





Product details

230V ~50/60Hz
Total wattage: 14.5W/17W/31.5W
Material: Polymethylacrylate (PMMA)/steel



Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

LIPSY® 30
CW, Connected

LED INSIDE

ZIGBEE

Dimensional drawing



Variant	Item No.	GBP
1400lm | 3000K | CRI>80 | 0.4 kg		
white	**1002132**	**94.50**

LIPSY® 40
CW, Connected

LED INSIDE

ZIGBEE

Dimensional drawing



Variant	Item No.	GBP
1700lm | 3000K | CRI>80 | 0.77 kg		
white	**1002133**	**121.50**

LIPSY® 50
CW, Connected

LED INSIDE

ZIGBEE

Dimensional drawing



Variant	Item No.	GBP
2800lm | 3000K | CRI>80 | 1.36 kg		
white	**1002134**	**157.50**

LIPSY®
CW, Dome

- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 15W/18W/21W
Material: aluminium/polycarbonate (PC)

IP 44 | 30000 | 110°

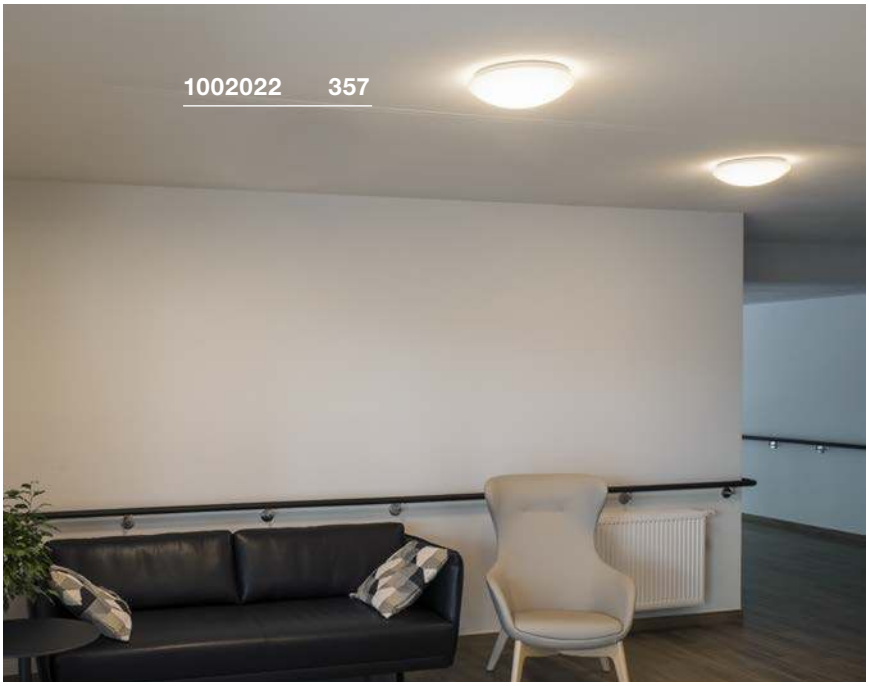



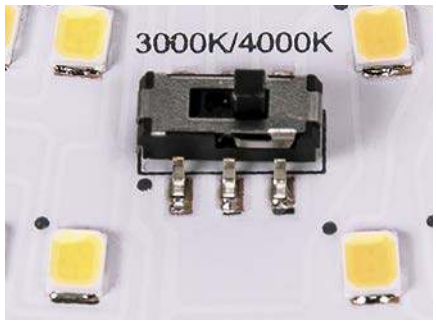

LIPSY® 30
CW, Dome

LED INSIDE | CCT



Dimensional drawing



Variant	Item No.	GBP
1400/1600lm | 3000/4000K | CRI>80 | 0.6 kg		
white	**1002020**	**67.50**

LIPSY® 40
CW, Dome

LED INSIDE | CCT

Dimensional drawing



Variant	Item No.	GBP
1800/2000lm | 3000/4000K | CRI>80 | 0.77 kg		
white	**1002021**	**85.50**

LIPSY® 50
CW, Dome

LED INSIDE | CCT



Dimensional drawing



Variant	Item No.	GBP
2200/2400lm | 3000/4000K | CRI>80 | 0.96 kg		
white	**1002022**	**94.50**

LIPSY®
CW, Drum

- Colour temperature (3000K/4000K) can be adjusted using the switch

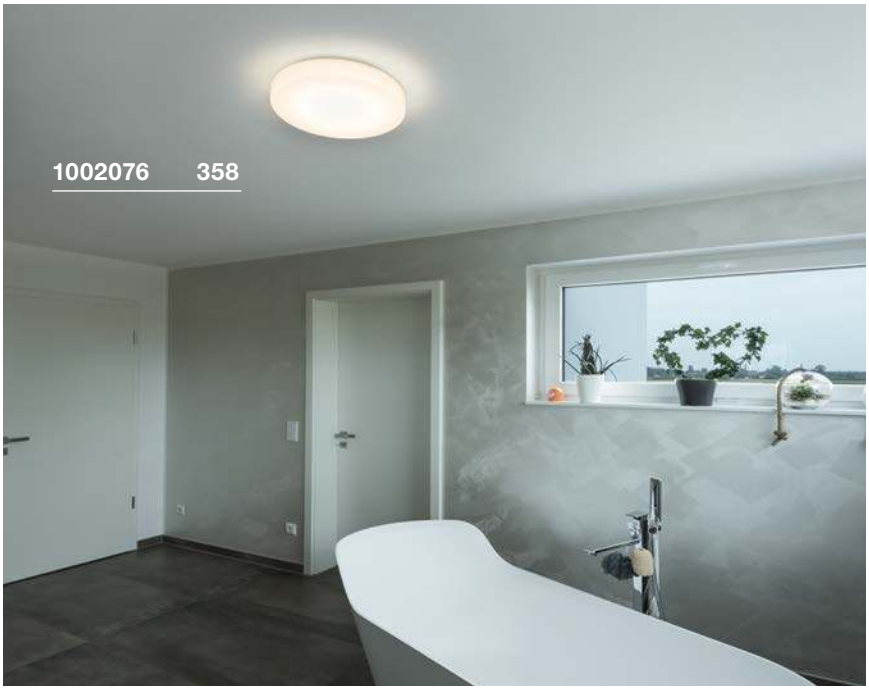

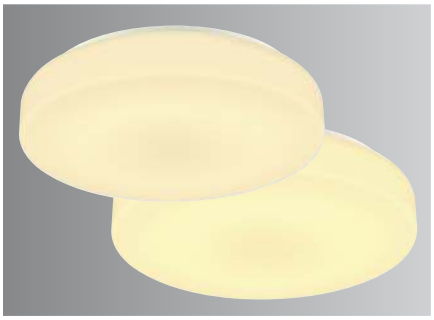



Product details

220-240V ~50/60Hz | 500mA
Total wattage: 15W/18W/21W
Material: aluminium/polycarbonate (PC)

IP 44 | 30000 | 120°

LIPSY® 30
CW, Drum

LED INSIDE | CCT

Dimensional drawing



Variant	Item No.	GBP
1400/1600lm | 3000/4000K | CRI>80 | 0.6 kg		
white	1002075	76.50

LIPSY® 40
CW, Drum

LED INSIDE | CCT

Dimensional drawing



Variant	Item No.	GBP
1800/2000lm | 3000/4000K | CRI>80 | 0.77 kg		
white	1002076	85.50

LIPSY® 50
CW, Drum

LED INSIDE | CCT

Dimensional drawing



Variant	Item No.	GBP
2200/2400lm | 3000/4000K | CRI>80 | 0.96 kg		
white	1002077	94.50

LIPSY®
CW, Drum, DALI

- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 8W/21W
Material: aluminium/polycarbonate (PC)
Dimmable: Dali



IP 44 30000



120°

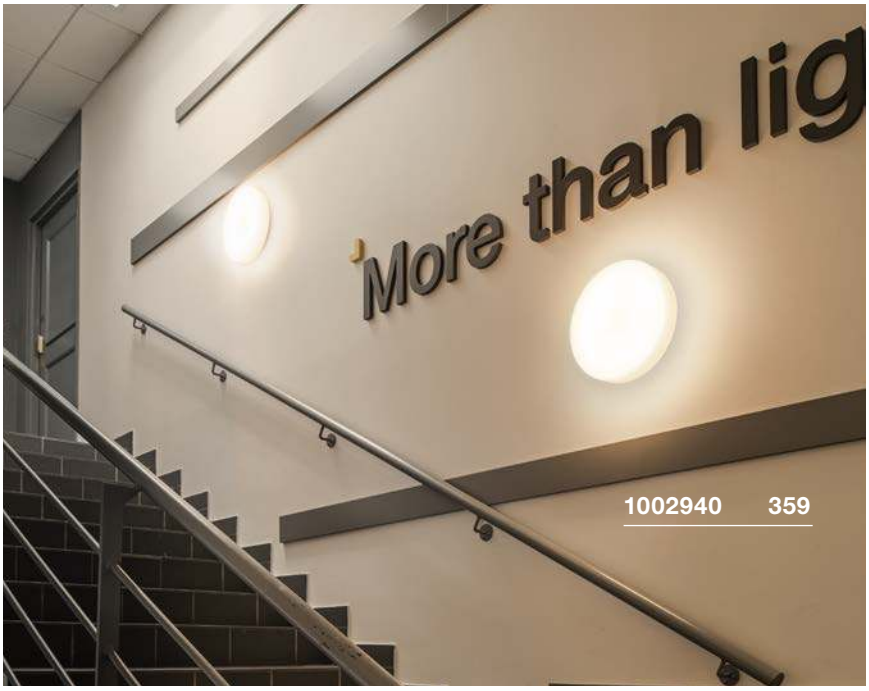



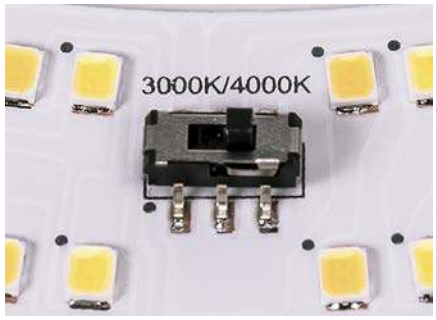



LIPSY® 40
CW, Drum, DALI

INSIDE CCT DALI

Dimensional drawing



Variant	Item No.	GBP
1800/2000lm | 3000/4000K | CRI>80 | 0.77 kg		
white	**1002940**	**157.50**

LIPSY® 50
CW, Drum, DALI

INSIDE CCT DALI

Dimensional drawing



Variant	Item No.	GBP
2200/2400lm | 3000/4000K | CRI>80 | 0.96 kg		
white	**1002941**	**166.50**

MARONA
CW, PHASE

LED INSIDE





Product details

200-240V ~50/60Hz | 430mA
Total wattage: 15W
Material: Polymethylacrylate (PMMA)/steel
Dimmable: C, L





Dimensional drawing



Variant	Item No.	GBP
1200lm | 3000K | CRI>80		
chrome	155152	121.50
1200lm | 3000K | CRI>80		
grey	155156	117.00

MELAN
CW, E27

SOCKET INSIDE





Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



Lamp details

max. 60W
Diameter: 7 cm max. L: 16 cm max.

Variant	Item No.	GBP
E27		
aluminium	155236	78.30



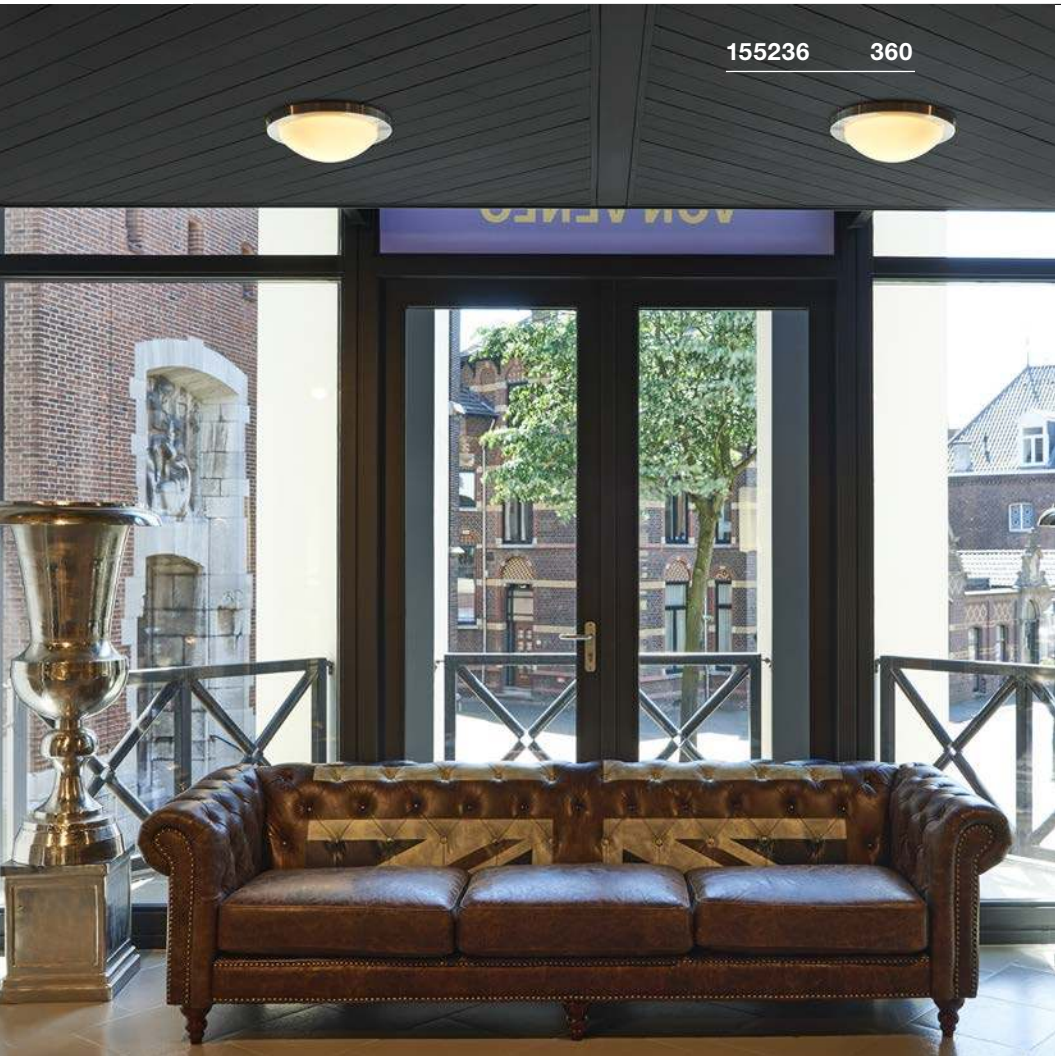



GLASSA

CW, square, E27

SOCKET INSIDE





Product details

230V -50Hz
Material: satin-finish glass/steel



Dimensional drawing



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details

2x max. 60W
Diameter: 4.8 cm max. L: 1.48 cm max.

Variant	Item No.	GBP
E27		
chrome	**155180**	**101.70**

SIMA
CW, round, PHASE

FOLLOWER

LED INSIDE







- Flat, robust construction
- With spacer for cable surface mounting
- Contains recycled material

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 24W
Material: Polycarbonate (PC)
Dimmable: C, L





Dimensional drawing



Variant	Item No.	GBP
2150lm | 3000K | CRI>90		
white	1005085	112.50

SIMA
CW, round, Sensor

FOLLOWER

LED INSIDE

MR







- Flat, robust construction
- With spacer for cable surface mounting
- Motion detector with MR (microwave) technology integrated in light housing
- Contains recycled material

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 24W
Material: Polycarbonate (PC)





Dimensional drawing



Variant	Item No.	GBP
2150lm | 3000K | CRI>90		
white	1005086	130.50





1005088 363

SIMA
CW, square, PHASE

FOLLOWER

LED INSIDE





- Flat, robust construction
- With spacer for cable surface mounting
- Contains recycled material

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 24W
Material: Polycarbonate (PC)
Dimmable: C, L

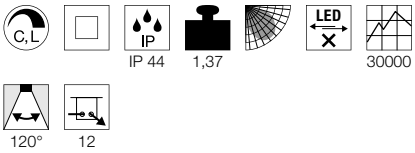

Dimensional drawing



Variant	Item No.	GBP
2150lm | 3000K | CRI>90		
white	1005087	112.50

SIMA
CW, square, Sensor

FOLLOWER

LED INSIDE

MR





- Flat, robust construction
- With spacer for cable surface mounting
- Motion detector with MR (microwave) technology integrated in light housing
- Contains recycled material

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 24W
Material: Polycarbonate (PC)

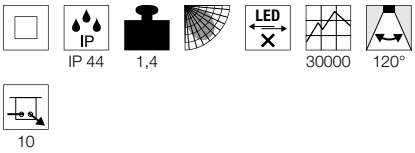

Dimensional drawing



Variant	Item No.	GBP
2150lm | 3000K | CRI>90		
white	1005088	130.50


1001316 365



IMPERVA 120
CW

LED INSIDE







- High IR protection rating
- Exceptionally resilient light housing

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 40W
Material: Polycarbonate (PC)



Dimensional drawing



Tip

Chain and cable not included

Variant	Item No.	GBP
4200lm | 3000K | CRI>80		
grey	**1001314**	**90.00**
400lm · 4000K · CRI>80		
grey	**1001315**	**90.00**

IMPERVA 150
CW

LED INSIDE







- High IR protection rating
- Exceptionally resilient light housing

Product details

220-240V ~50/60Hz | 1050mA
Total wattage: 55W
Material: Polycarbonate (PC)



Dimensional drawing



Tip

Chain and cable not included

Variant	Item No.	GBP
6600lm | 3000K | CRI>80		
grey	**1001316**	**135.00**
7100lm | 4000K | CRI>80		
grey	**1001317**	**135.00**

SENSER
CW, square, PHASE



Product details

220-240V ~50/60Hz
Material: aluminium
Dimmable: C

IP 20

50000

110°

SENSER 12
CW, square, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
480lm | 3000K | CRI>80 | 8.2W | 0.27 kg		
white	1003017	58.50
440lm | 4000K | CRI90 | 8.5W | 0.27 kg		
white	1004703	58.50

SENSER 18
CW, square, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
880lm | 3000K | CRI>80 | 12W | 0.39 kg		
white	1003018	63.00
880lm | 4000K | CRI90 | 13W | 0.39 kg		
white	1004704	63.00

SENSER 24
CW, square, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
1200lm | 3000K | CRI>80 | 15W | 0.5 kg		
white	1003019	67.50
1200lm | 4000K | CRI90 | 15W | 0.5 kg		
white	1004705	67.50

SENSER
CW, round, PHASE



Product details

220-240V ~50/60Hz
Material: aluminium
Dimmable: C

IP 20

50000

110°

SENSER 12
CW, round, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
480lm | 3000K | CRI>80 | 8.2W | 0.23 kg		
white	1003014	58.50
470lm | 4000K | CRI90 | 8.5W | 0.23 kg		
white	1004700	58.50

SENSER 18
CW, round, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
880lm | 3000K | CRI>80 | 12W | 0.34 kg		
white	1003015	63.00
990lm | 4000K | CRI90 | 13W | 0.34 kg		
white	1004701	63.00

SENSER 24
CW, round, PHASE

LED INSIDE



Dimensional drawing



Variant	Item No.	GBP
1200lm | 3000K | CRI>80 | 15W | 0.47 kg		
white	1003016	67.50
1300lm | 4000K | CRI90 | 15W | 0.47 kg		
white	1004702	67.50

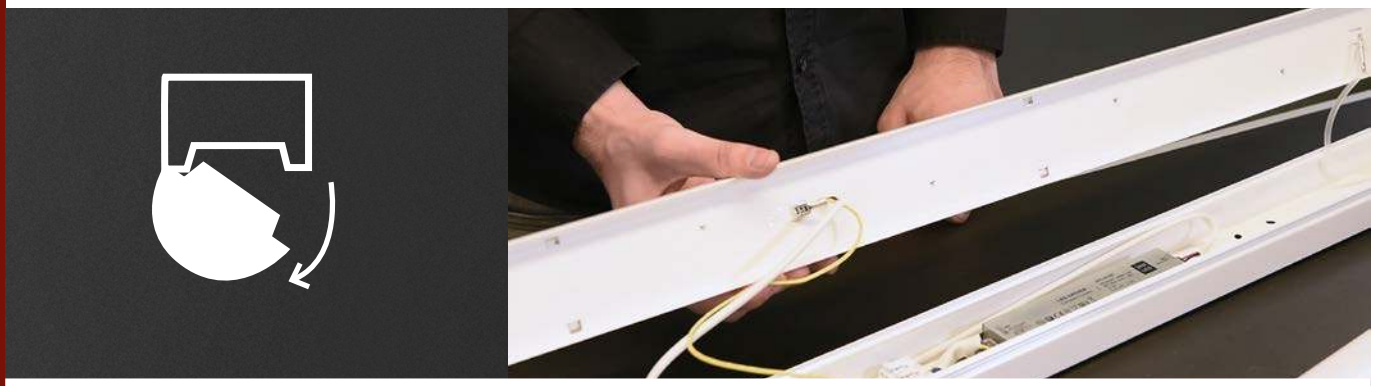





BENA Video

bit.ly/slv-bena

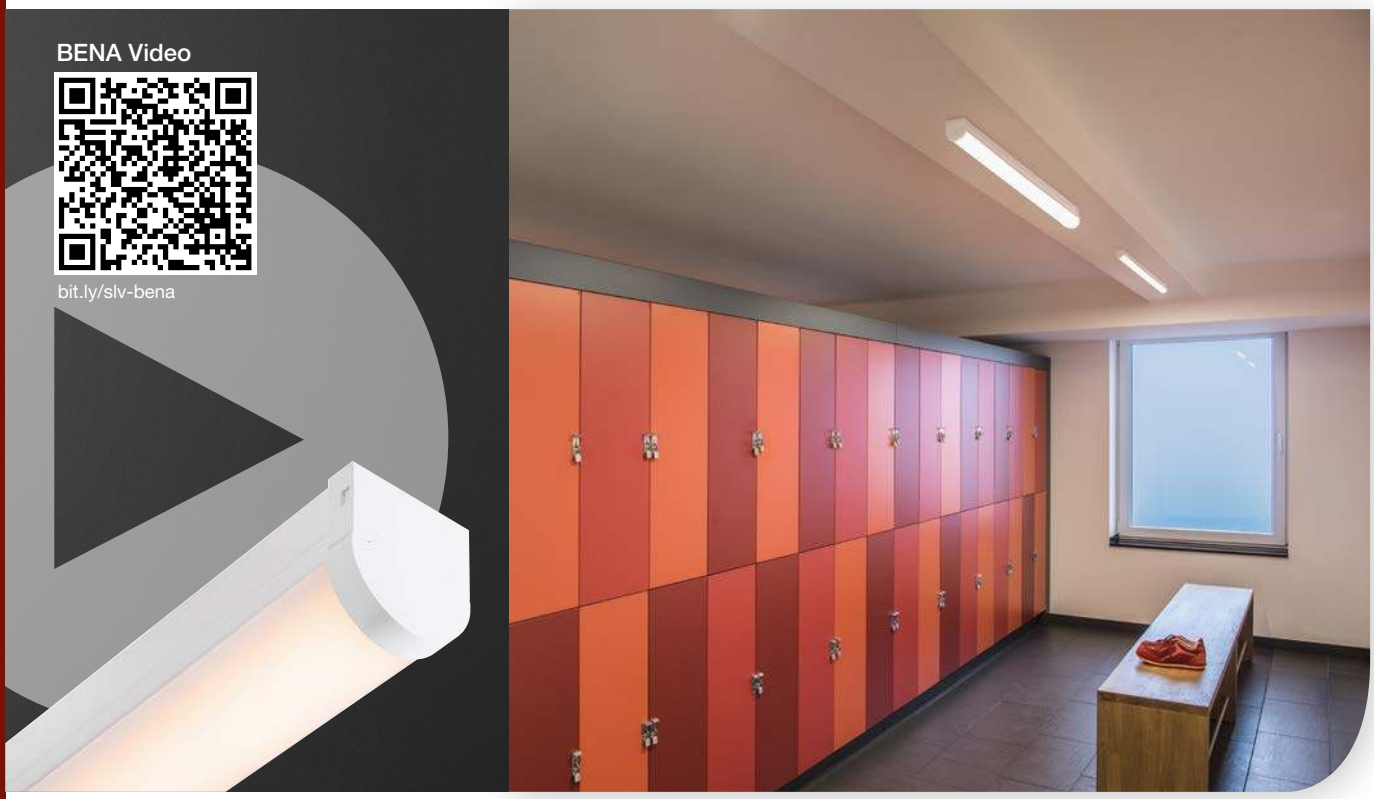





BENA 120
CW

LED INSIDE





- Easy installation

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: Polymethylacrylate (PMMA)/steel



Dimensional drawing



Variant	Item No.	GBP
3200lm | 3000K | CRI>80		
white	631337	130.50
3400lm | 4000K | CRI>80		
white	631347	130.50

BENA 150
CW

LED INSIDE





- Easy installation

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 38W
Material: Polymethylacrylate (PMMA)/steel



Dimensional drawing



Variant	Item No.	GBP
4400lm | 3000K | CRI>80		
white	631339	158.40
400lm · 4000K · CRI>80		
white	631349	158.40

SIGHT 60
CW

LED INSIDE







- Switch on light housing

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 20W
Material: aluminium/acrylic

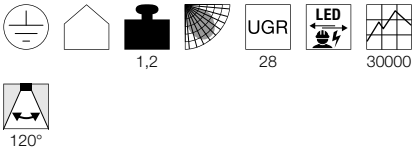

Dimensional drawing



Variant	Item No.	GBP
1490lm | 3000K | CRI>80 ■ black	**1001283**	**180.00**
1490lm | 3000K | CRI>80 □ white	**1001284**	**180.00**
1490lm | 3000K | CRI>80 ■ grey	**1001285**	**180.00**

SIGHT 115
CW

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 37.3W
Material: aluminium/acrylic

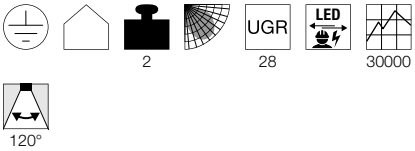

Dimensional drawing



Variant	Item No.	GBP
3100lm | 3000K | CRI>80 ■ black	**1001286**	**251.10**
3100lm | 3000K | CRI>80 □ white	**1001287**	**251.10**
3100lm | 3000K | CRI>80 ■ grey	**1001288**	**251.10**



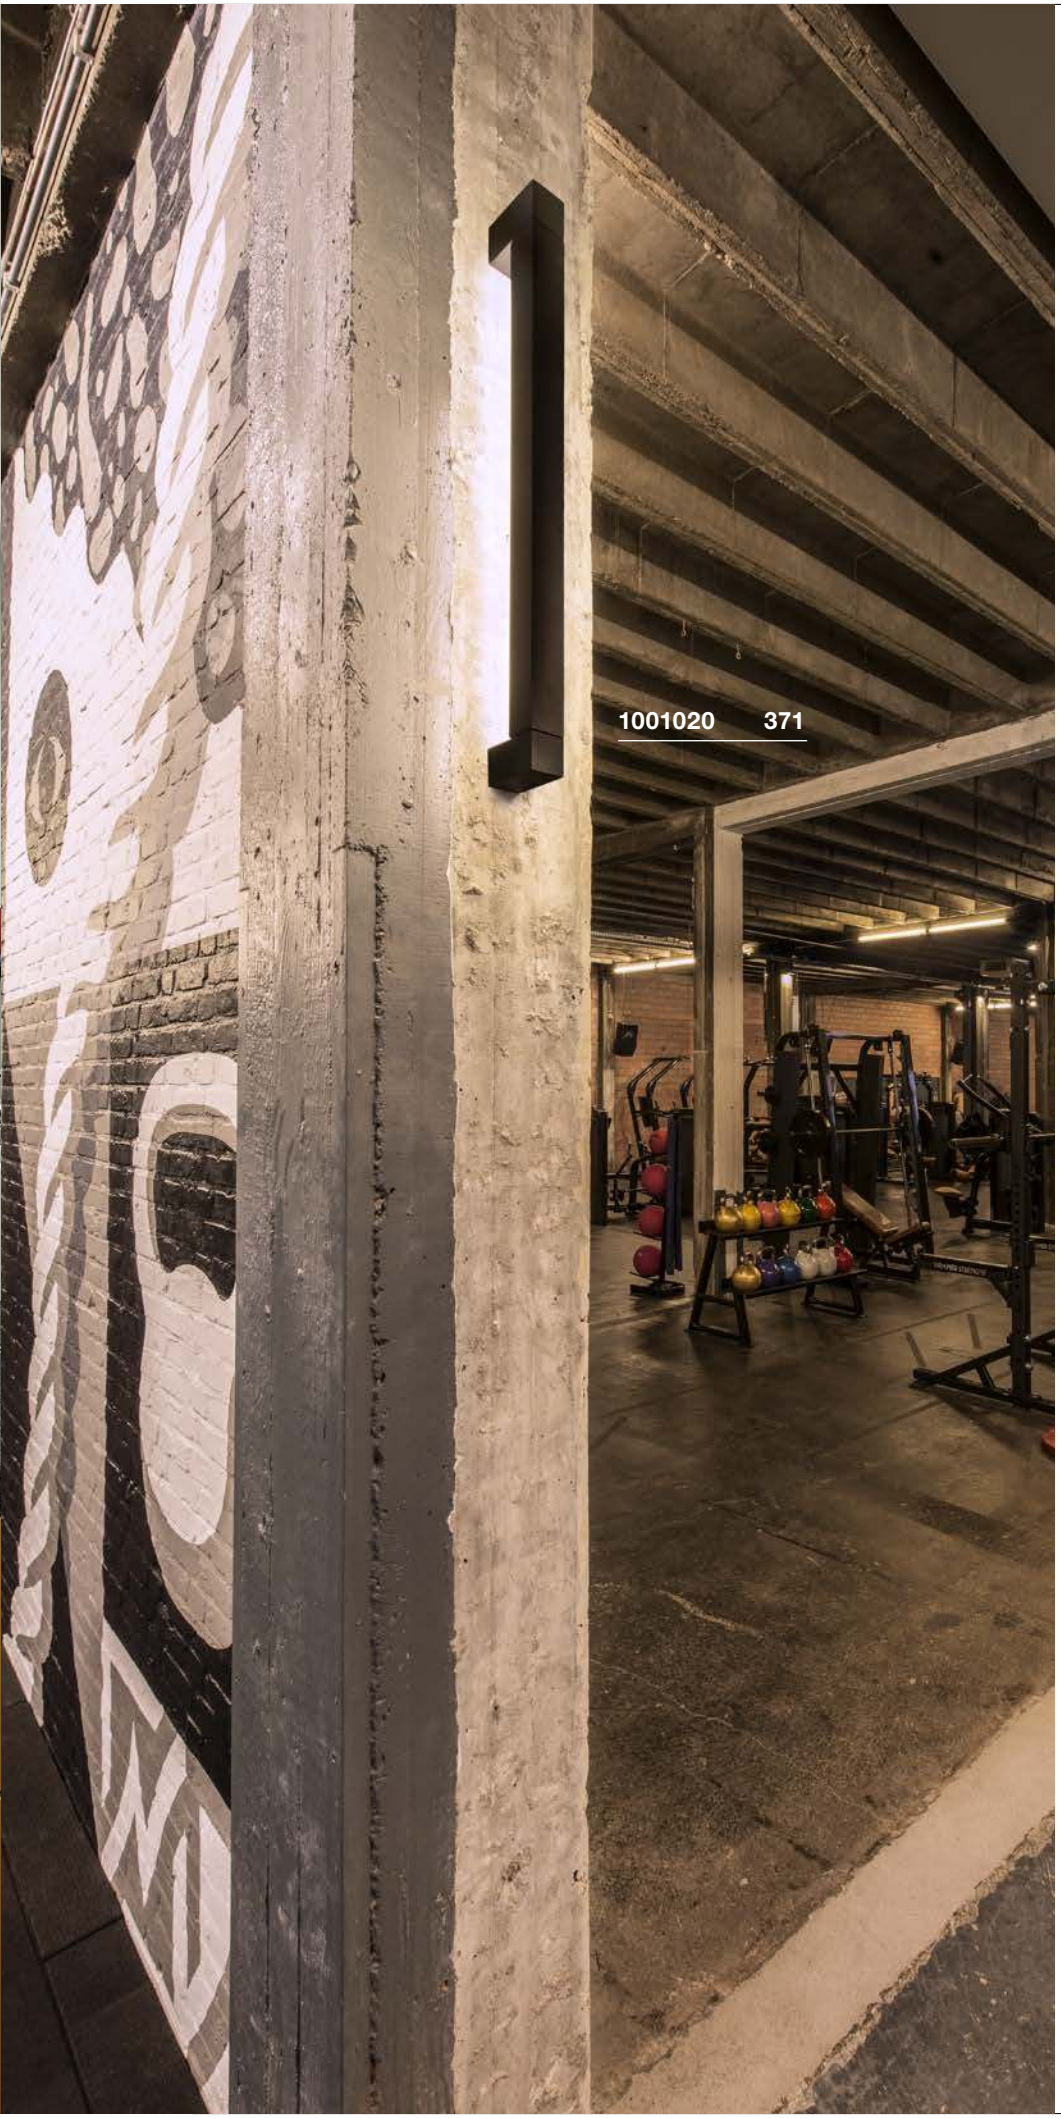

LONG GRILL
CW

LED INSIDE







• Lighting unit can be pivoted through 270°

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 20W
Material: aluminium/acrylic

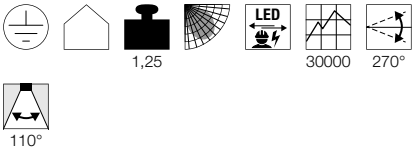

Dimensional drawing



Variant	Item No.	GBP
1600lm | 3000K | CRI>80 ■ black	**1001020**	**247.50**
1600lm | 3000K | CRI>80 □ white	**1001019**	**247.50**

P-LIGHT
CW

LED INSIDE







- 24 m perception distance
- Easy assembly
- Can be used flexibly - as ceiling-mounted or wall-mounted variant
- Flat emergency lighting with efficient LED technology
- 4-piece pictogram set included for insertion

Product details

220-240V ~50Hz
Total wattage: 3.5W
Material: ABS / Polycarbonate (PC)



Dimensional drawing



Tip

Perception distance 24 m. 3 escape route signs (right/left/down) and 1 white foil included. Emergency lighting with built-in Ni-Mh battery, with automatic self-test.
Emergency operating time 3 hours. Luminance >15cd/m². Operating mode: Continuous operation/standby

Accessory recommendation

Accumulator 3,6V | 900mA
Item No. 240020 | 14.40 GBP



Pictogram foil, set
Item No. 240007 | 27.00 GBP



Variant	Item No.	GBP
32lm | 6000K | CRI>70		
white	240000	99.00

Pictogram foil

Polypropylen (PP)
B: 24 cm H: 13.1 cm



5-part pictogram set for insertion (left diagonal up/ left diagonal down/ right diagonal up/ right diagonal down/ up).
1 piece

Variant	Item No.	GBP
green	240007	27.00

















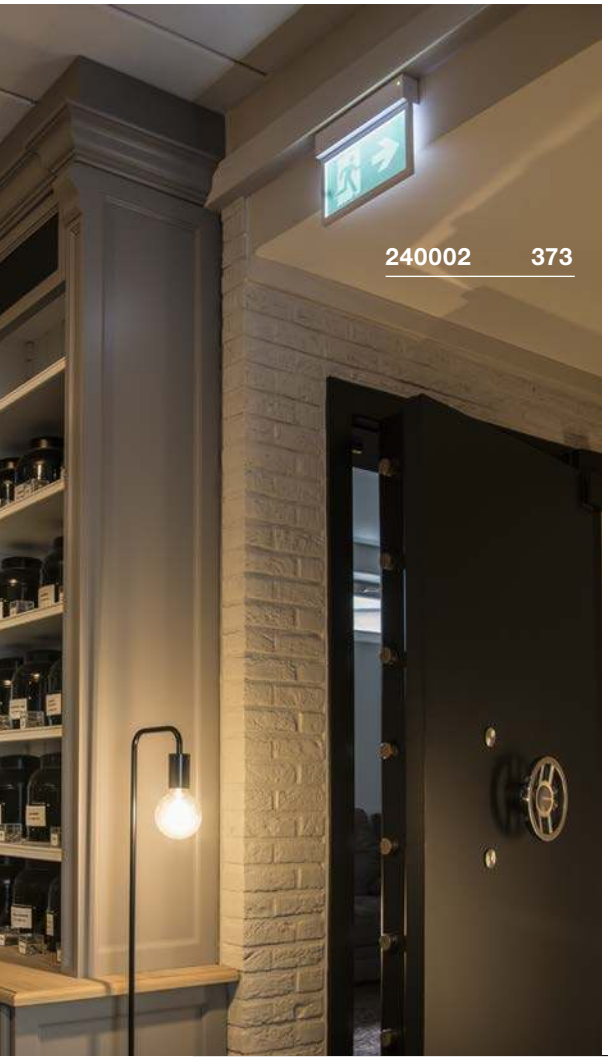

Pictogram foil

Polypropylen (PP)
B: 30 cm H: 16.1 cm



5-part pictogram set for insertion (left diagonal up/ left diagonal down/ right diagonal up/ right diagonal down/ up).
1 piece

Variant	Item No.	GBP
green	240008	29.70











P-LIGHT
CW

LED INSIDE







- 30 m perception distance
- Tested in line with DIN EN 60598-2-22
- Can be used flexibly - as ceiling-mounted or wall-mounted variant
- Very low maintenance costs thanks to efficient LED technology
- 4-piece pictogram set included for insertion
- Easy assembly

Product details

220-240V ~50/60Hz
Total wattage: 4W
Material: ABS / Polycarbonate (PC)



Dimensional drawing



Tip

Perception distance 30 m. 3 escape route signs (right/left/down) and 1 white foil included. Emergency lighting with built-in Ni-Mh battery, with automatic self-test.
Emergency operating time 3 hours. Luminance >15cd/m². Operating mode: Continuous operation/standby

Accessory recommendation

Accumulator 3,6V | 1000mA
Item No. 240021 | 16.20 GBP



Pictogram foil, set
Item No. 240008 | 29.70 GBP



Variant	Item No.	GBP
32lm | 6000K | CRI>70		
white	240002	126.00


240000 372
EXIT



P-LIGHT
CW

LED INSIDE





- 30 m perception distance
- IP 65 light with efficient LED technology
- Tested in line with DIN EN 60598-2-22
- Can be used flexibly - as ceiling-mounted or wall-mounted variant
- Easy assembly

Product details

220-240V ~50Hz
Total wattage: 6.5W
Material: Polycarbonate (PC)



Pictogram foil

Polypropylen (PP)
W: 35.3 cm H: 16.5 cm



2-part pictogram set for inserting
(right diagonal up/ right diagonal down)
1 piece

Variant	Item No.	GBP
green	240010	17.10



Pictogram foil

Polypropylen (PP)
W: 35.3 cm H: 16.5 cm



3-part pictogram set for inserting
(above, below, right)
1 piece

Variant	Item No.	GBP
green	240009	20.70



Dimensional drawing



Tip

Perception distance 30 m. For use as emergency lighting. Auto-test function, Ni-Mh battery 2 x 3.6V 1.0Ah included Emergency operation via battery 2 hours. Escape route signs optionally available and can be used as emergency lights.

Accessory recommendation

Accumulator 3,6V | 1000mA, 2 units
Item No. 240022 | 28.80 GBP



Pictogram foil, set
Item No. 240009 | 20.70GBP



Pictogram foil, set
Item No. 240010 | 17.10 GBP



Variant	Item No.	GBP
100lm | 6000K | CRI>70		
white	240004	135.00

DEEP ROOTED.

RECESSED FITTINGS RADIATE AN IMPRESSION.

Be it broad-beamed, flooded, static or swivelling: Recessed fittings are the core element of many lighting concepts, and provide a good alternative to freely suspended luminaires. You can adapt to any ambience and give yourself a great deal of furnishing freedom.



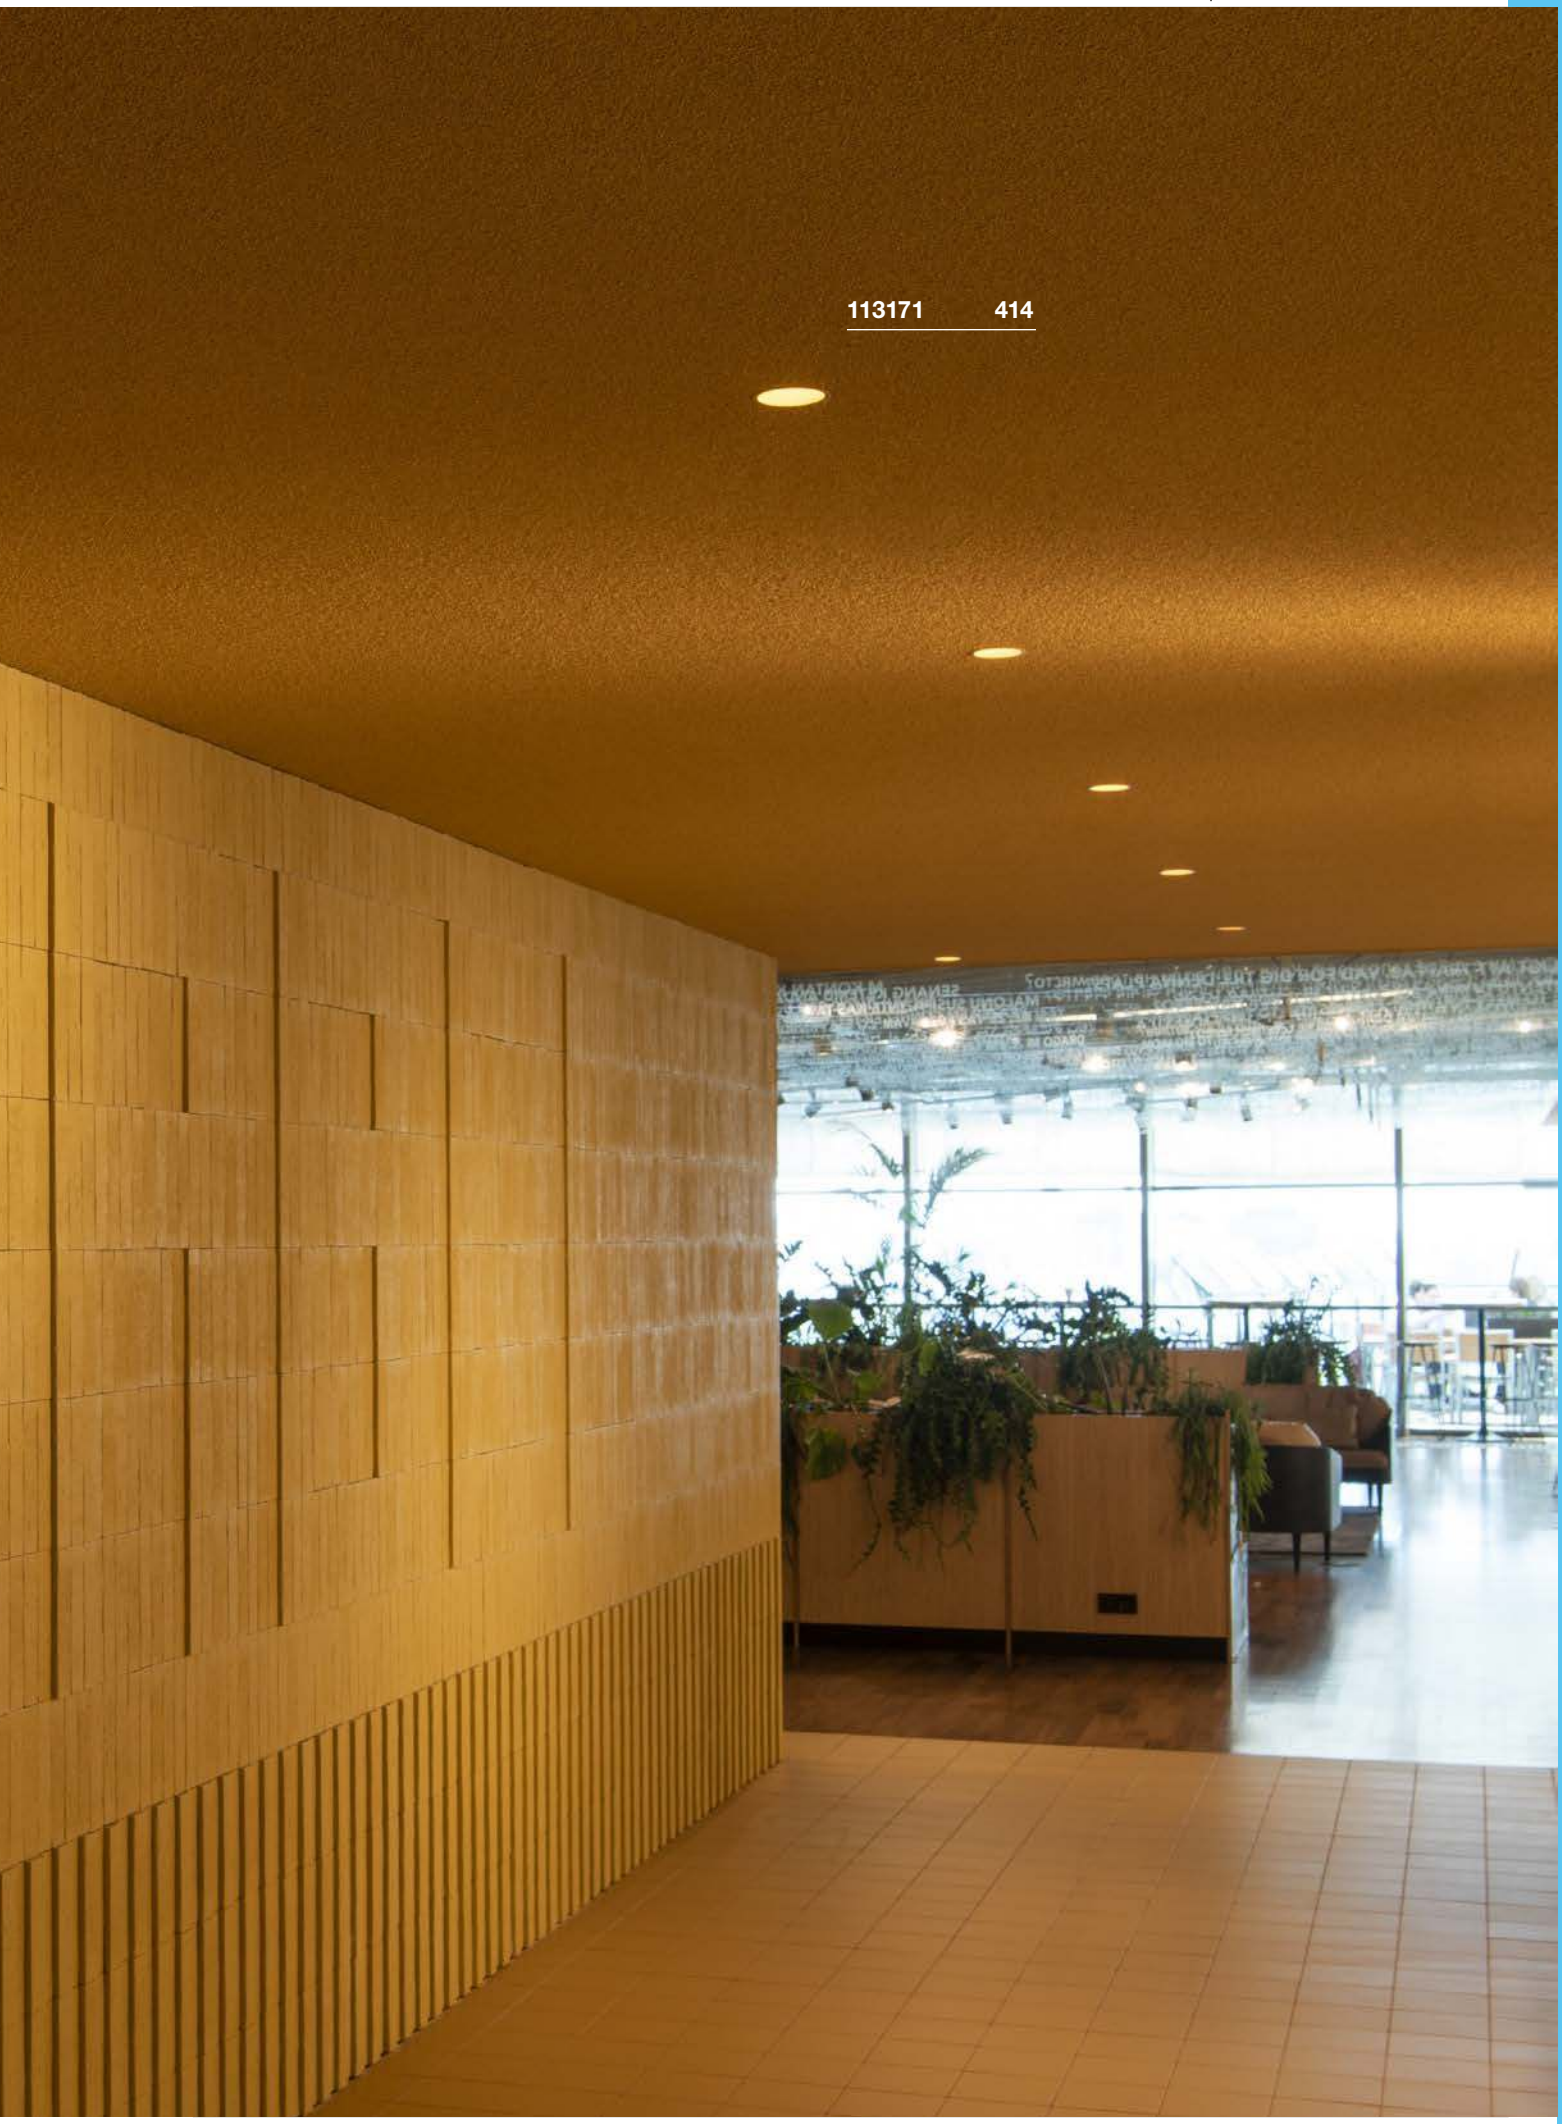

113171 **414**

OUR QUALITY PROMISE

INNOVATION AND DEVELOPMENT

German engineering

Client and product feedback

High innovative power

The latest trends in design and technology





MANUFACTURE

Qualified suppliers

Strict compliance with regulations

Long-term collaboration





QUALITY ASSURANCE

2

Extremely modern laboratory

Extensive safety and performance tests

Multi-level product release standards





Would you like to know more about our quality? View our view now: bit.ly/slv-quality

RECESSED LIGHTS


382

383

383

383

385

385

385

386

386

386

388

388

389

390

390

391

391

392

393

393

394

395

396

397

397

397

399

399

399

400

400

401

402

402

403

403

404

405

406

407

407

408

408

409

409

411

411

413

413

413

414

415

415

416

416

416

420

420

421

421

422

422

423

423

424

425

425

425

426

426

427

427

428

428

429

429

430

430

431

432

433

433

433

434

434

434

435

435

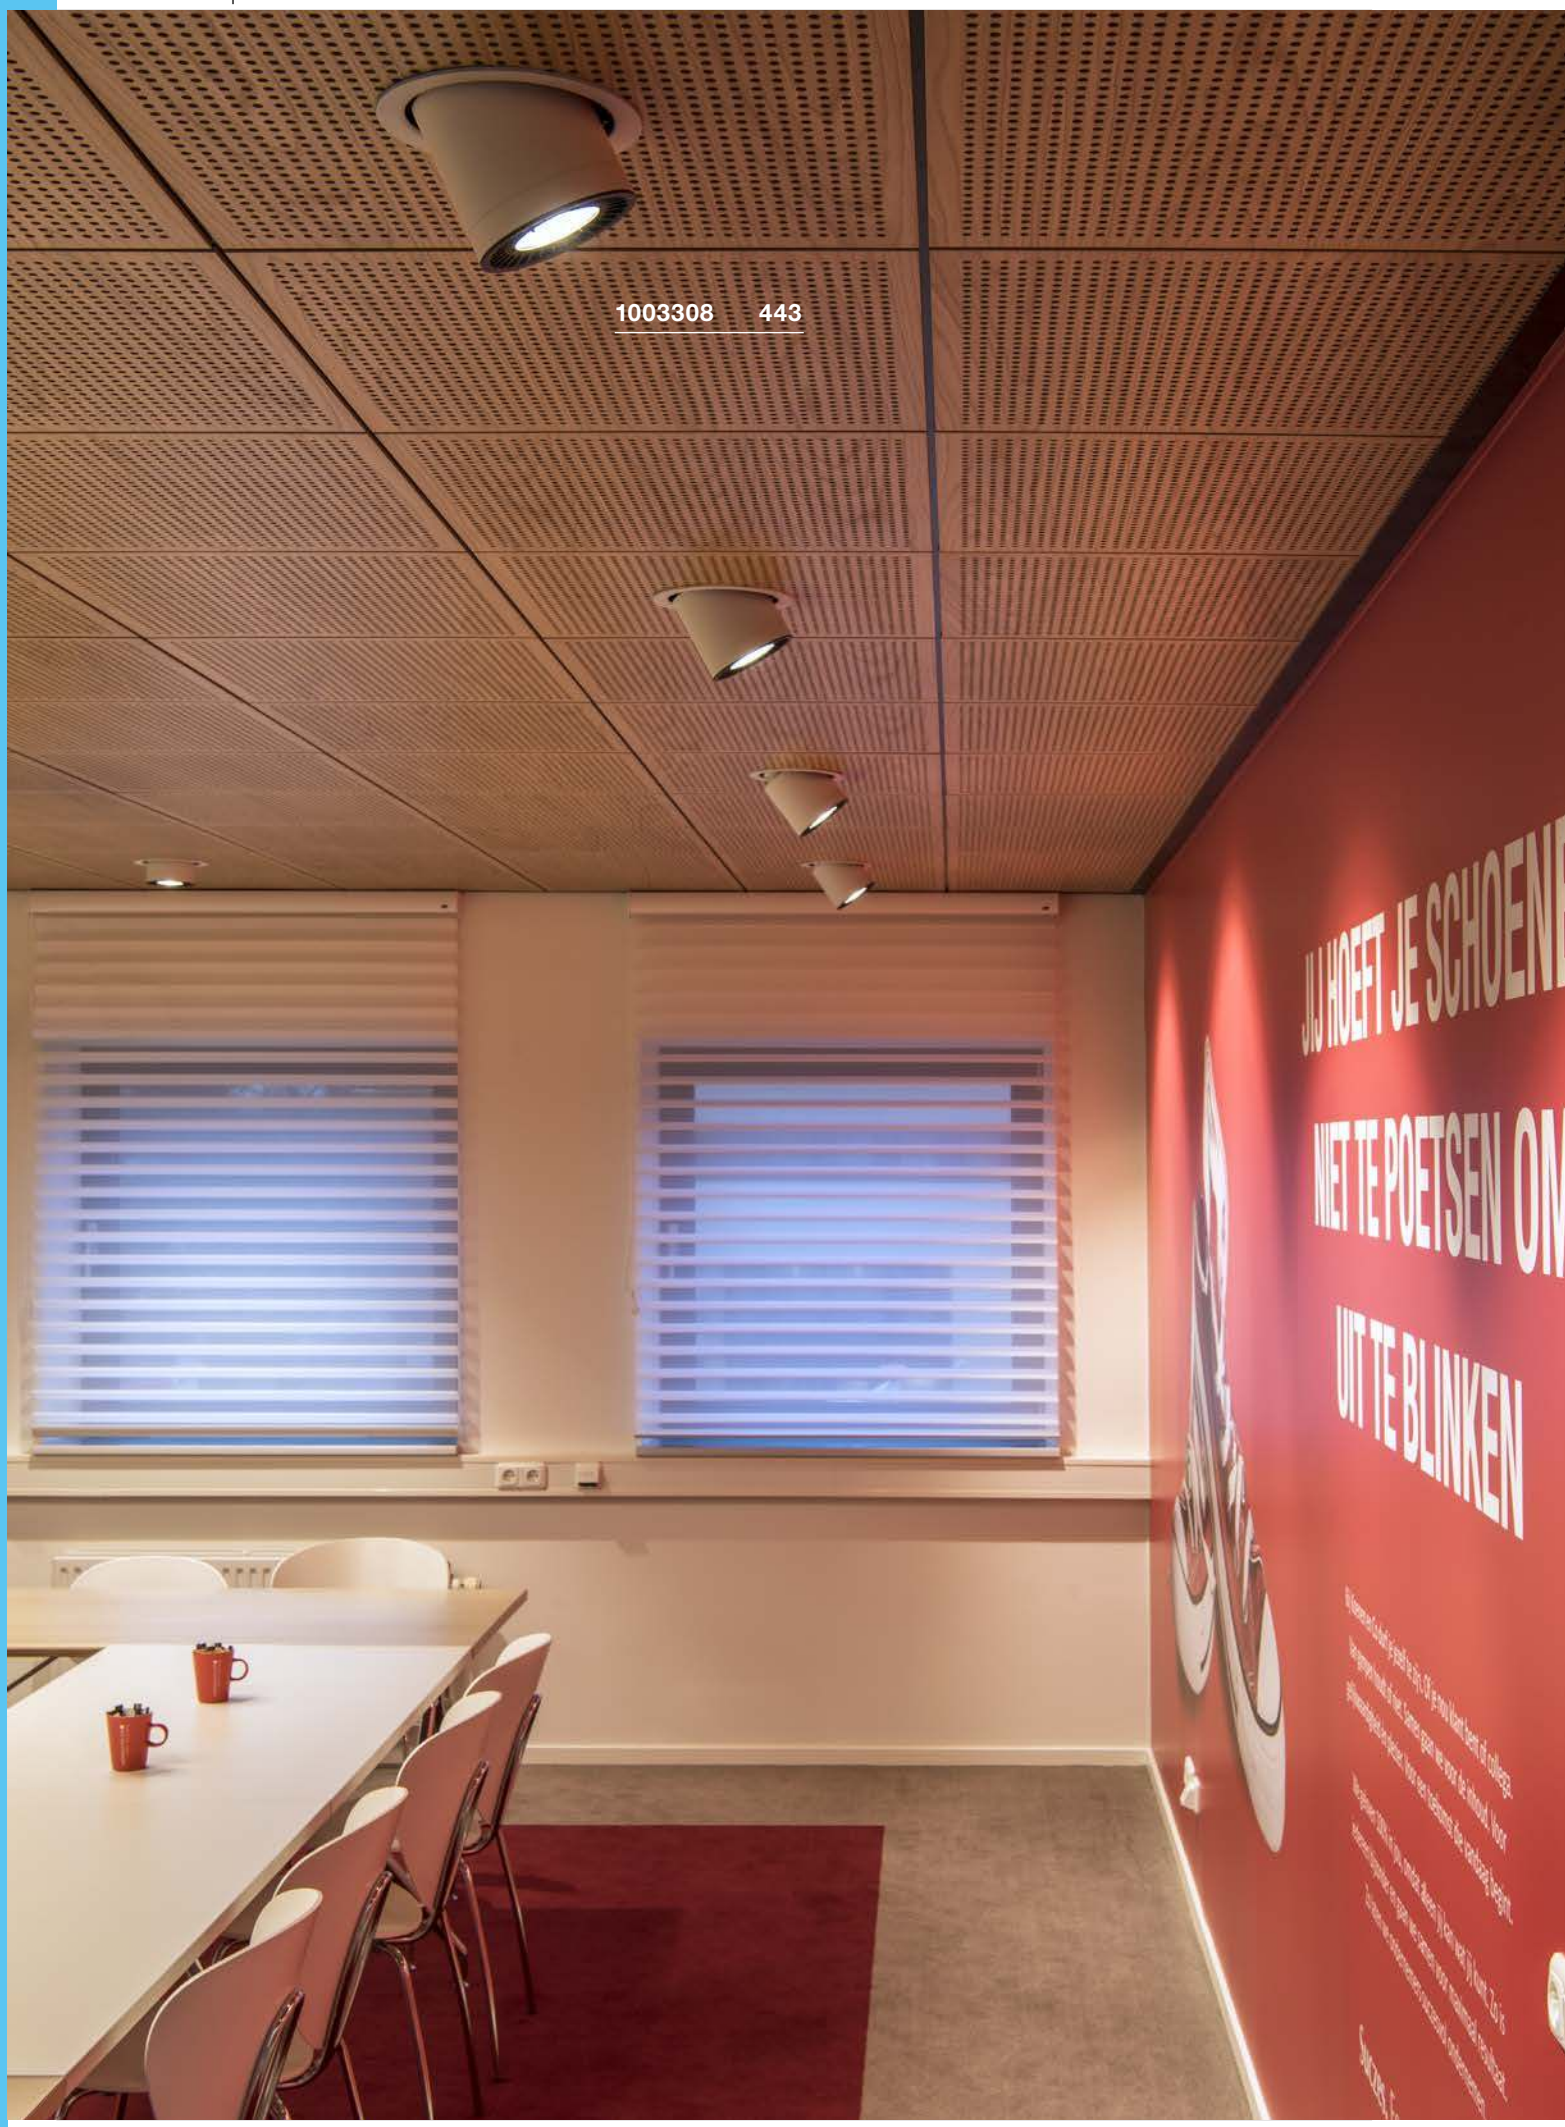
1003308 443
JIJ HOEFT JE SCHOEN
NIET TE POETSEN OM
UIT TE BLINKEN


436 436 436 437 437 438 438 439
440 441 FOLLOWER 442 FOLLOWER 443 NEW 445 446 446 446
447 448 448 448 449 449 449 451
451 451 452 453 453 454 455 455
455 456 456 456 457 458 459 460
461 461 461 463 463 463

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

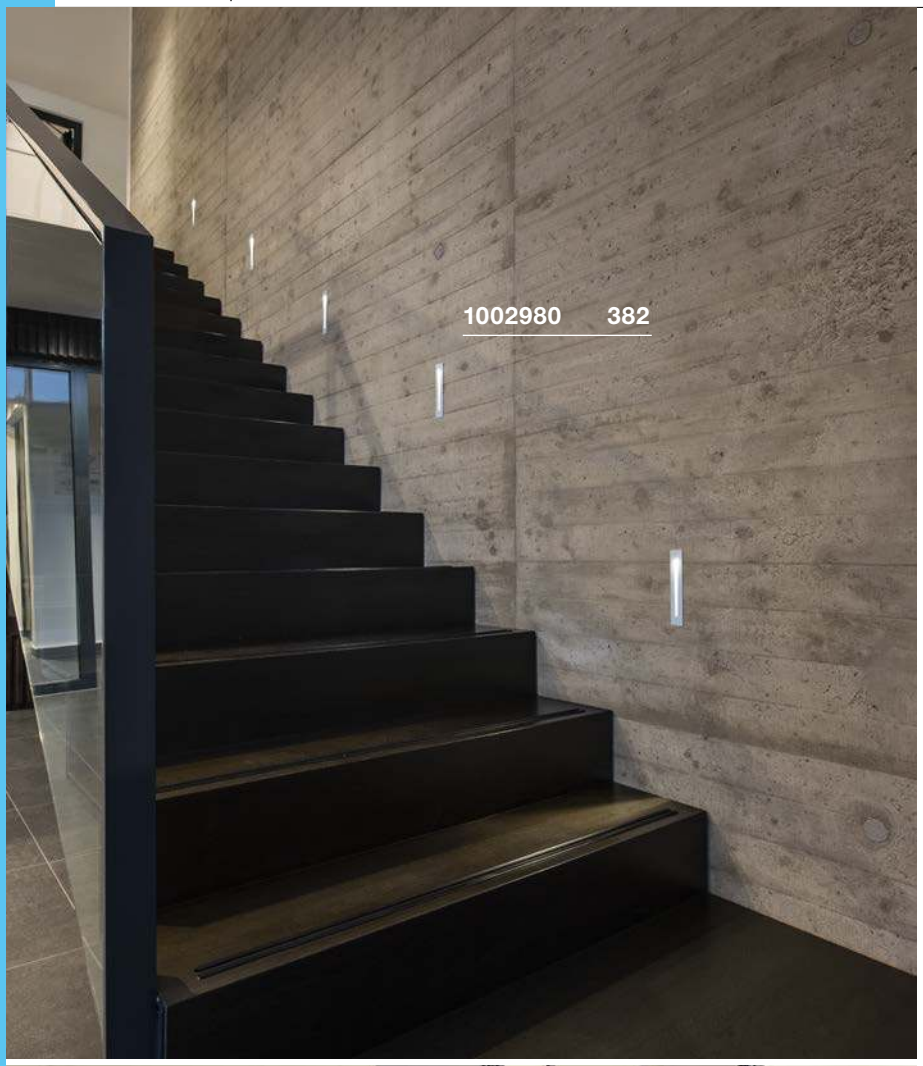



NOTAPO
WL

LED INSIDE







Product details

700mA | 2.2W
Material: aluminium



Dimensional drawing

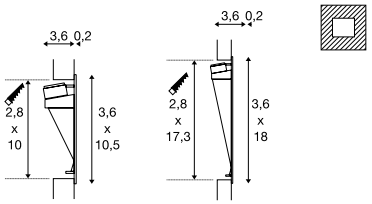

Tip

When connecting several lights, make sure they are connected in series!
Open cable end
Driver not included

Accessory recommendation

LED driver 700mA | 3W incl. strain relief
Item No. 464200 | 20.70 GBP



Installation frame
Item No. 1002981 | 18.00 GBP



Variant	Item No.	GBP
6lm | 3000K | CRI>90 | H:10.5 cm | 0.07 kg		
white	**1002979**	**44.10**
6lm | 3000K | CRI>90 | H:18 cm | 0.1 kg		
white	**1002980**	**60.30**

DOWNUNDER PUR 80
EL





Product details

350mA | 3.6W
Material: aluminium/steel



Dimensional drawing



Tip

When connecting several lights, make sure they are connected in series!
Material thickness of mounting surface: max. 15 mm
MP connector incl./driver excl.

Accessory recommendation

LED driver 320mA | 10W
Item No. 464140 | 29.70 GBP



LED driver 350mA | 15W
Item No. 1002803 | 30.60 GBP



Installation frame
Item No. 151960 | 6.80 GBP



Variant	Item No.	GBP
180lm | 3000K | CRI>80		
white	**151950**	**45.00**

DOWNUNDER PUR 120
EL





Product details

350mA | 3.6W
Material: aluminium/steel



Dimensional drawing



Tip

When connecting several lights, make sure they are connected in series!
Material thickness of mounting surface: max. 15 mm
AMP connector incl./driver excl.

Accessory recommendation

LED driver 350mA | 15W
Item No. 1002803 | 30.60 GBP



LED driver 350mA | 9W
Item No. 464109 | 25.20 GBP



Installation frame
Item No. 151961 | 8.60 GBP



Variant	Item No.	GBP
160lm | 3000K | CRI>80		
white	**151951**	**55.80**

DOWNUNDER PUR 150
EL





Product details

500mA | 5.2W
Material: aluminium/steel



Dimensional drawing



Tip

When connecting several lights, make sure they are connected in series!
Material thickness of mounting surface: max. 15 mm
AMP connector incl./driver excl.

Accessory recommendation

LED driver 500mA | 15W dimmable
Item No. 464144 | 29.70 GBP



LED driver 500mA | 9W
Item No. 464091 | 20.70 GBP



Installation frame
Item No. 151962 | 9.50 GBP



Variant	Item No.	GBP
230lm | 3000K | CRI>80		
white	**151952**	**64.80**

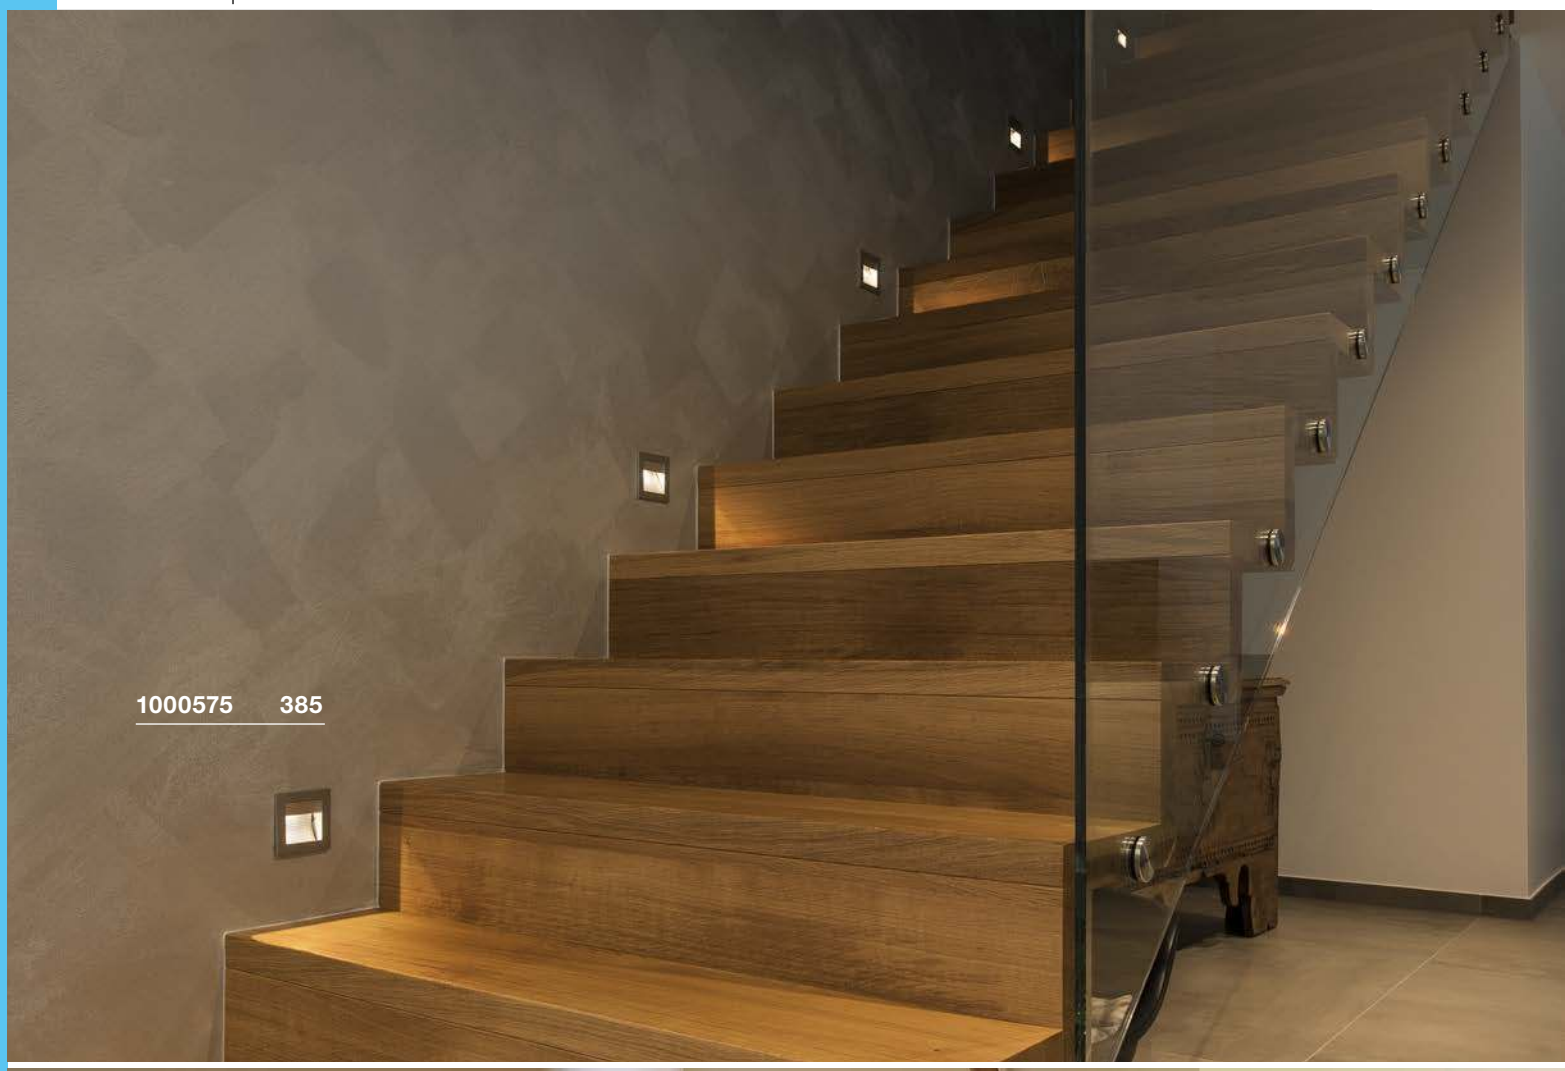

1000575 385

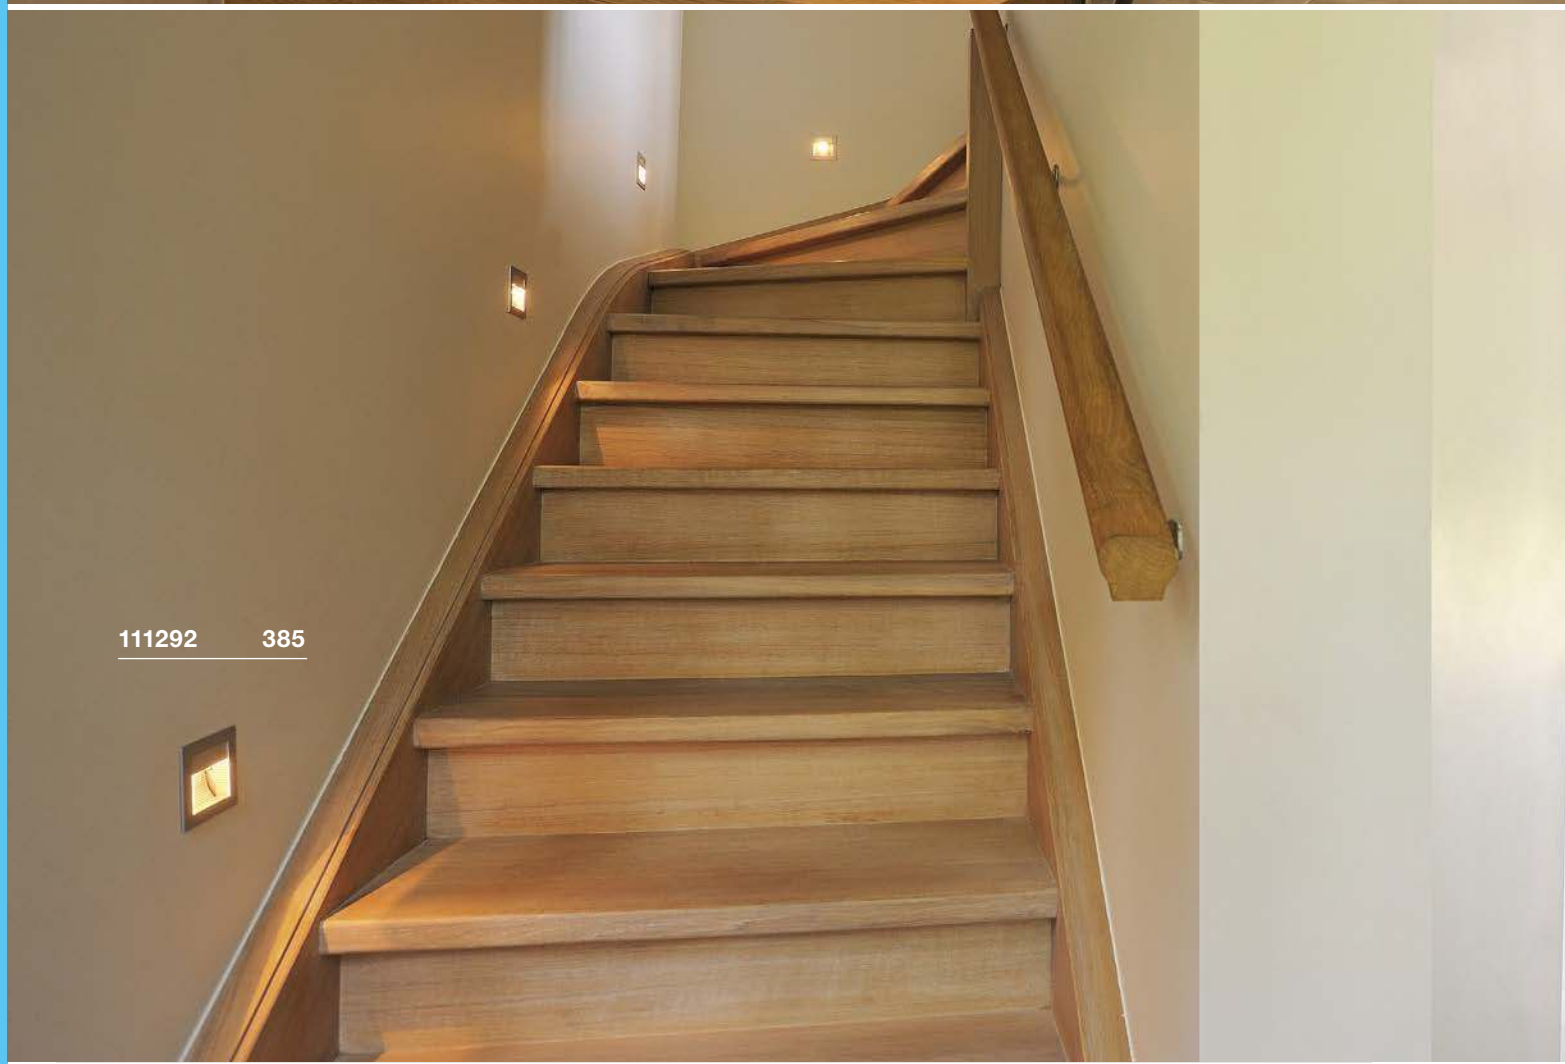

111292 385

FLAT FRAME CURVE
EL, QT9

SOCKET INSIDE







Product details

12V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Material thickness of mounting surface:
max. 10-25 mm
Dimension drawing left with mounting box

Accessory recommendation

Transformer 12V AC | 60VA
Item No. 461060 | 15.30 GBP



Panel connection
Item No. 112781 | 7.70 GBP



Flush frame
Item No. 112780 | 4.50 GBP



Lamp details

max. 20W QT9

Variant	Item No.	GBP
G4 | QT9		
white	**112771**	**24.80**
G4 | QT9		
grey	**112772**	**24.80**

FRAME CURVE
EL, HV

LED INSIDE







Product details

100-277V ~50/60Hz | 350mA
Total wattage: 3.1W
Material: aluminium



Dimensional drawing



Tip

Material thickness of mounting surface:
10-30 mm

Accessory recommendation

Panel connection
Item No. 112781 | 7.70 GBP



Flush frame
Item No. 112780 | 4.50 GBP



Variant	Item No.	GBP
100lm | 2700K | CRI>80		
white	**1000574**	**58.50**
100lm | 2700K | CRI>80		
grey	**1000575**	**58.50**

FRAME CURVE
EL

LED INSIDE







Product details

350mA | 1W
Material: aluminium



Dimensional drawing



Tip

Material thickness of mounting surface:
max. 10-30 mm. When connecting several lights, make sure that they are connected in series!
AMP connector incl./driver excl.

Accessory recommendation

LED driver 350mA | 3W
Item No. 464107 | 17.10 GBP



Panel connection
Item No. 112781 | 7.70 GBP



Flush frame
Item No. 112780 | 4.50 GBP



Connector strip 3 outlets
Item No. 111850 | 9.90 GBP



Variant	Item No.	GBP
60lm | 4000K | CRI>80		
grey	**111290**	**40.50**
60lm | 3000K | CRI>80		
grey	**111292**	**40.50**
60lm | 4000K | CRI>80		
white	**113290**	**40.50**
60lm | 3000K | CRI>80		
white	**113292**	**40.50**

FLAT FRAME BASIC
EL, QT9

SOCKET INSIDE







Product details
12V ~50/60Hz
Material: aluminium/glass



Dimensional drawing



Tip
Material thickness of mounting surface:
max. 10-25 mm
Transformer not included

Accessory recommendation

Transformer 12V AC | 60VA
Item No. 461060 | 15.30 GBP



Flush frame
Item No. 112780 | 4.50 GBP



■ Panel connection
Item No. 112781 | 7.70 GBP



Lamp details
max. 20W QT9

Variant	Item No.	GBP
G4 | QT9		
white	**112731**	**22.50**
G4 | QT9		
grey	**112732**	**22.50**

FRAME BASIC
EL, HV

LED INSIDE







Product details
100-277V ~50/60Hz | 350mA
Total wattage: 3.1W
Material: aluminium



Dimensional drawing



Tip
Material thickness of mounting surface:
10-30 mm

Accessory recommendation

Flush frame
Item No. 112780 | 4.50 GBP



■ Panel connection
Item No. 112781 | 7.70 GBP



Variant	Item No.	GBP
140lm | 2700K | CRI>80		
white	**1000576**	**54.00**
140lm | 2700K | CRI>80		
grey	**1000577**	**54.00**

FRAME BASIC
EL

LED INSIDE







• Use of slides and foils possible

Product details
350mA | 1W
Material: aluminium/glass



Dimensional drawing



Tip
Material thickness of mounting surface:
max. 10-30 mm
When connecting several lights, make sure they are connected in series!
AMP connector incl./driver excl.

Accessory recommendation

LED driver 350mA | 3W
Item No. 464107 | 17.10 GBP



Flush frame
Item No. 112780 | 4.50 GBP



■ Panel connection
Item No. 112781 | 7.70 GBP



■ Connector strip 3 outlets
Item No. 111850 | 9.90 GBP



Variant	Item No.	GBP
45lm | 4000K | CRI>80		
grey	**111260**	**31.50**
40lm | 3000K | CRI>80		
grey	**111262**	**31.50**
45lm | 4000K | CRI>80		
white	**113260**	**31.50**
40lm | 3000K | CRI>80		
white	**113262**	**31.50**

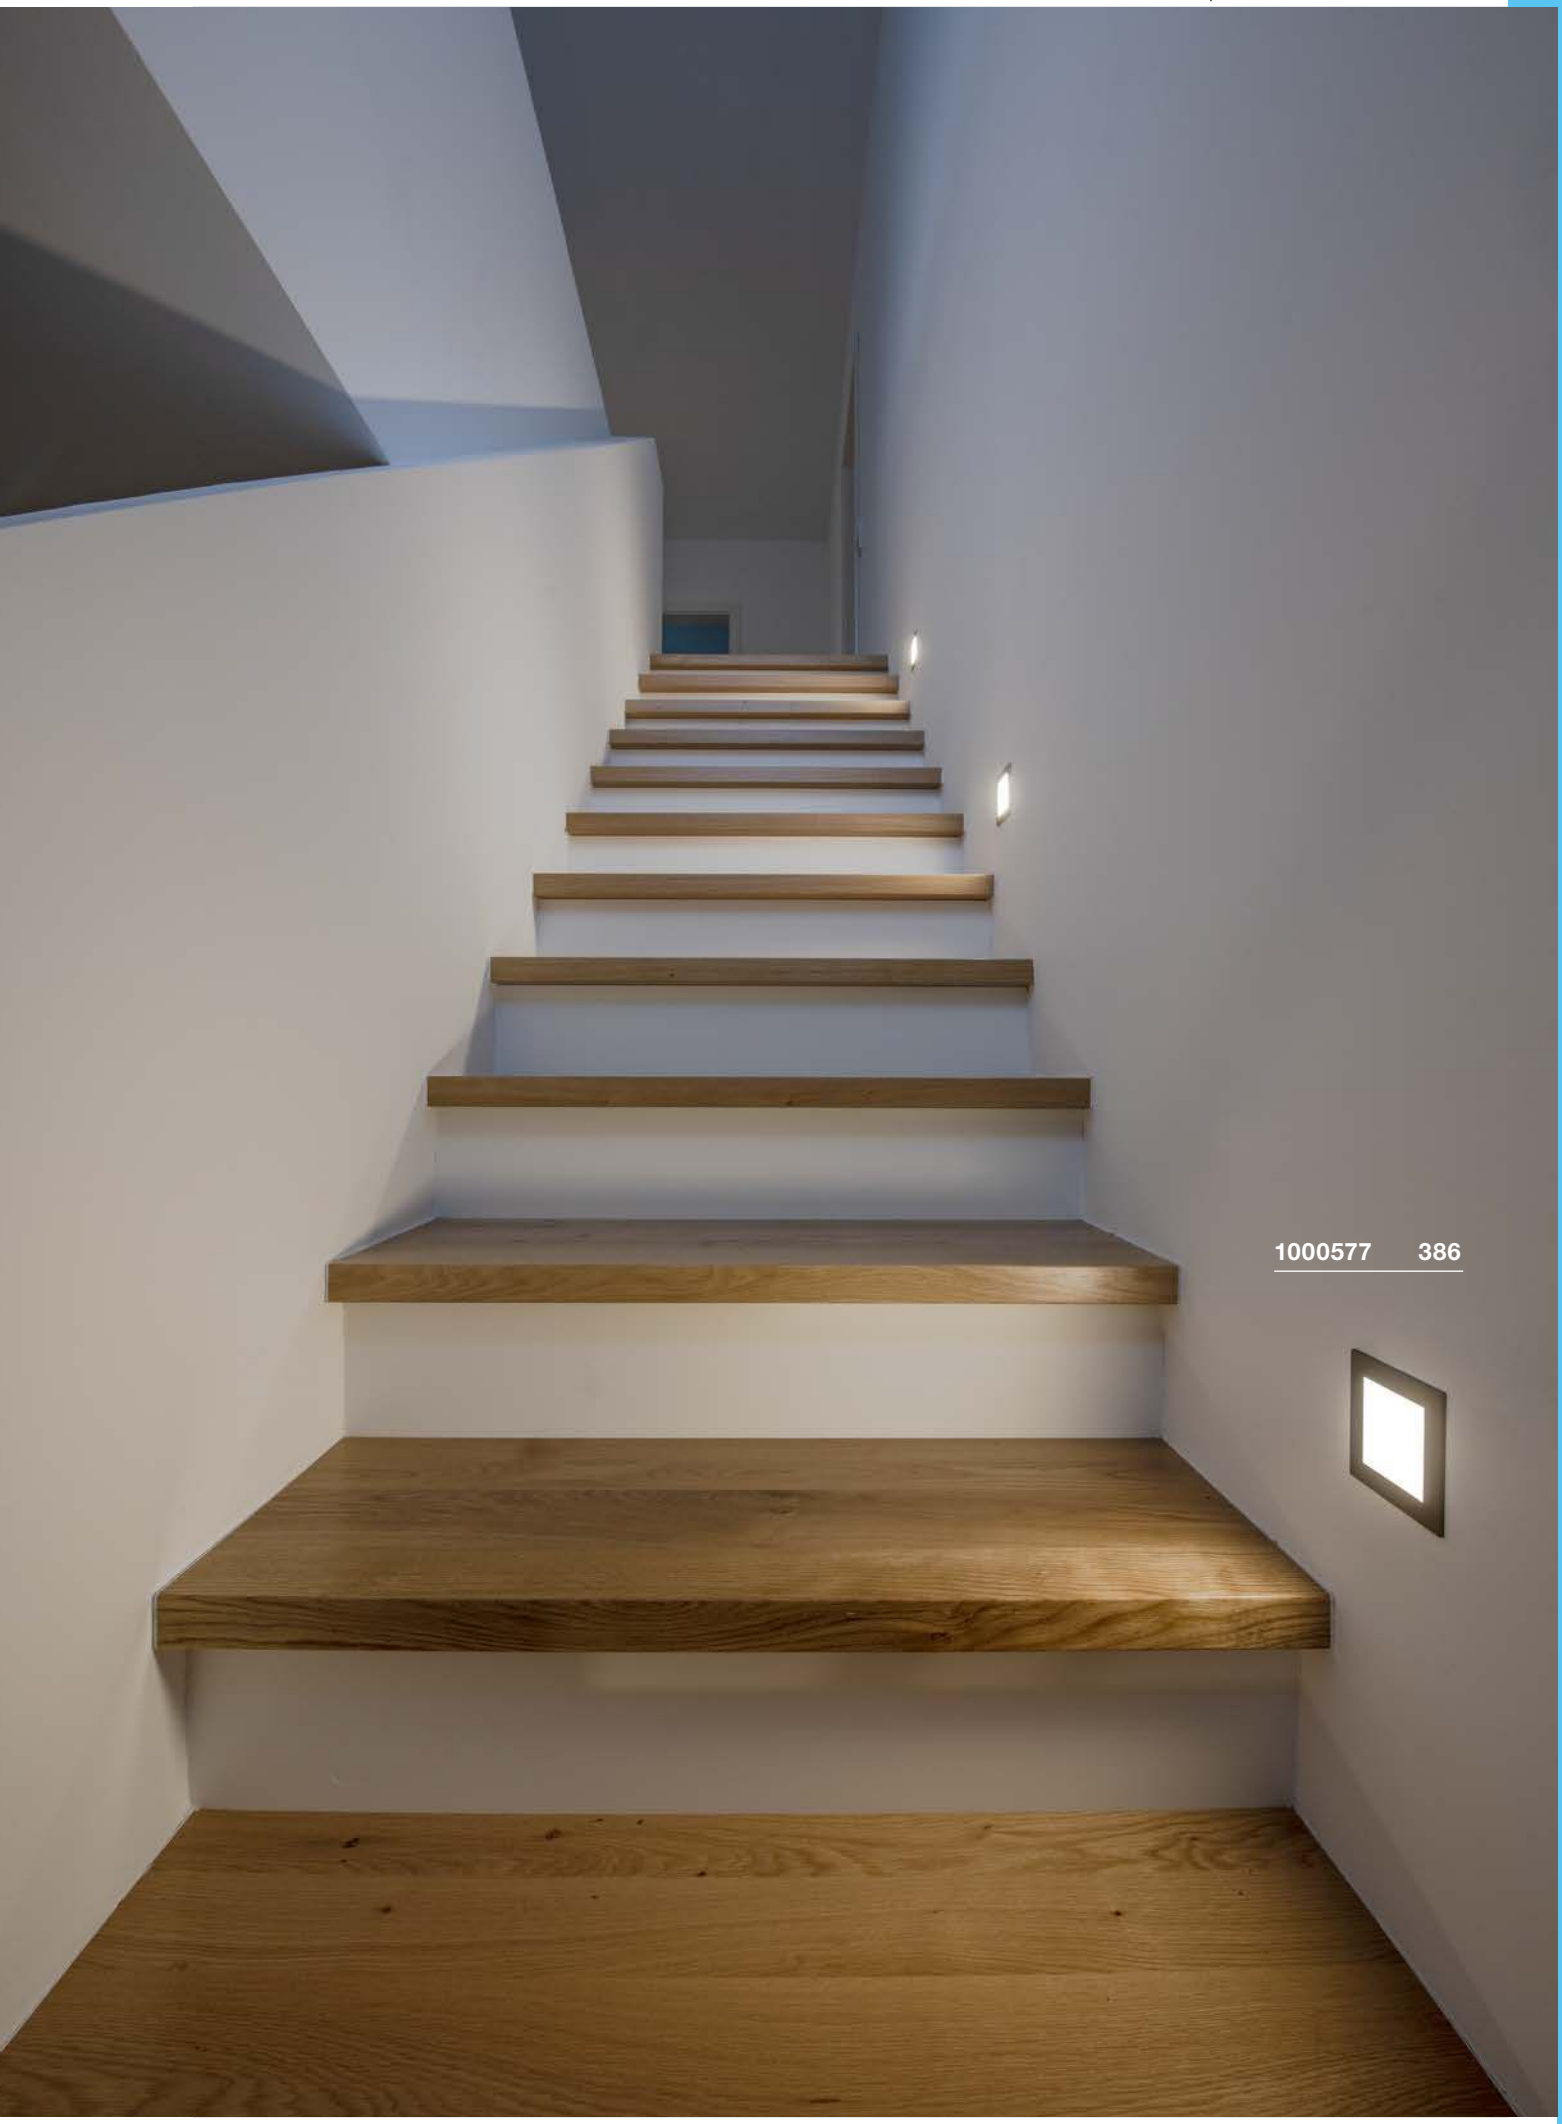

1000577 386

MOBALA
EL

LED INSIDE





Product details

100-240V ~50/60Hz | 24V DC
Total wattage: 1.3W
Material: aluminium



Dimensional drawing



Accessory recommendation

■ Panel connection
Item No. 1002983 | 9.90 GBP



■ Installation frame
Item No. 1002984 | 9.90 GBP



Variant	Item No.	GBP
14lm | 3000K | CRI>80 □ white	**1002982**	**54.00**

WORO
EL

LED INSIDE







- Installation in standard switch box possible

Product details

350mA | 1.1W
Material: steel



Dimensional drawing



Tip

When connecting several lights, make sure they are connected in series!
This article is suitable for installation in cavity walls and flush-mounted sockets for switches/ sockets.
Open cable end
Driver not included

Accessory recommendation

□ LED driver 350mA | 9W
Item No. 464109 | 25.20 GBP



Variant	Item No.	GBP
50lm | 3000K | CRI>80 □ white	**1002922**	**51.30**





QUAD FRAME 9
WL

NEW

LED INSIDE







Product details

100-277V ~50/60Hz | 350mA
Total wattage: 3W
Material: aluminium/aluminium
Installation dimensions:
B: 8 cm L: 7.2 cm T: 6.5 cm



Dimensional drawing



Tip

Material thickness of mounting surface:
10-30 mm

Accessory recommendation

■ Panel connection
Item No. 112781 | 7.70 GBP



Flush frame
Item No. 112780 | 4.50 GBP



Variant	Item No.	GBP
65lm | 3000K | CRI>90		
white	1003466	72.00

BEDSIDE
EL, left

LED INSIDE







- “Dip-it” – Switch by swivelling
- With blue orientation light when off
- Implementation left

Product details
700mA | 3W
Material: aluminium

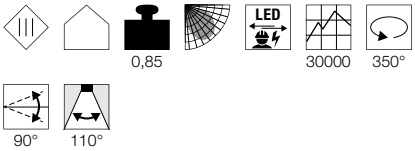

Dimensional drawing



Tip
Not suitable for connection in series.
Operate only with 3W driver (464200).
Material thickness of mounting surface:
max. 20 mm
Driver not included

Accessory recommendation

LED driver 700mA |
3W incl. strain relief
Item No. 464200 | 20.70 GBP



Panel connection
Item No. 146260 | 34.20 GBP



Variant	Item No.	GBP
110lm | 3000K | CRI>80 silver grey	146242 ▼	192.60

BEDSIDE
EL, right

LED INSIDE







- “Dip-it” – Switch by swivelling
- With blue orientation light when off
- Implementation right

Product details
700mA | 3W
Material: aluminium

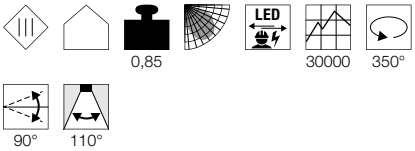

Dimensional drawing



Tip
Not suitable for connection in series.
Operate only with 3W driver (464200).
Material thickness of mounting surface:
max. 20 mm
Driver not included

Accessory recommendation

LED driver 700mA |
3W incl. strain relief
Item No. 464200 | 20.70 GBP



Panel connection
Item No. 146260 | 34.20 GBP



Variant	Item No.	GBP
110lm | 3000K | CRI>80 silver grey	146252 ▼	192.60

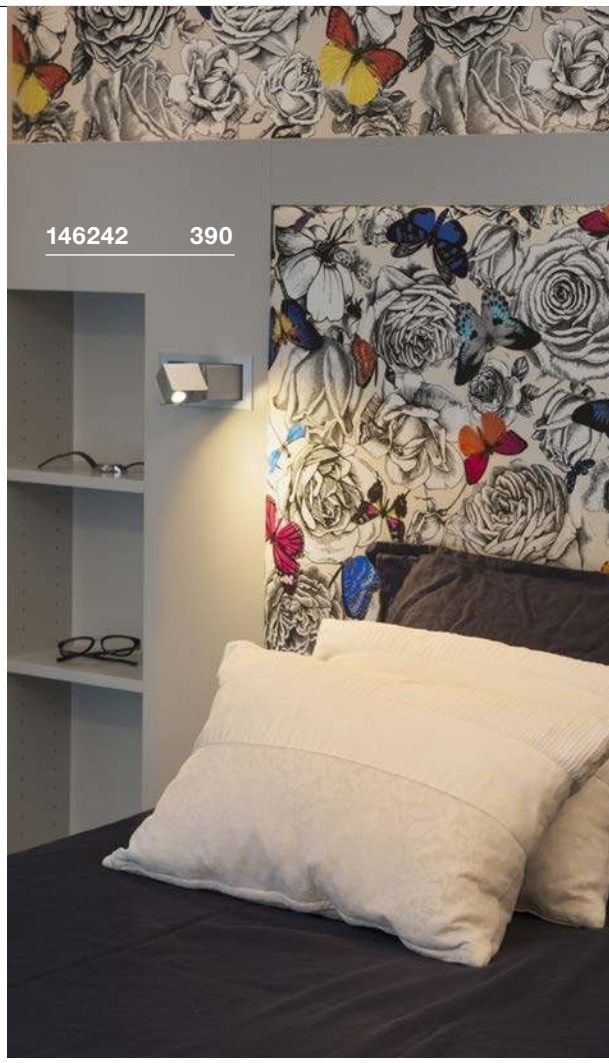

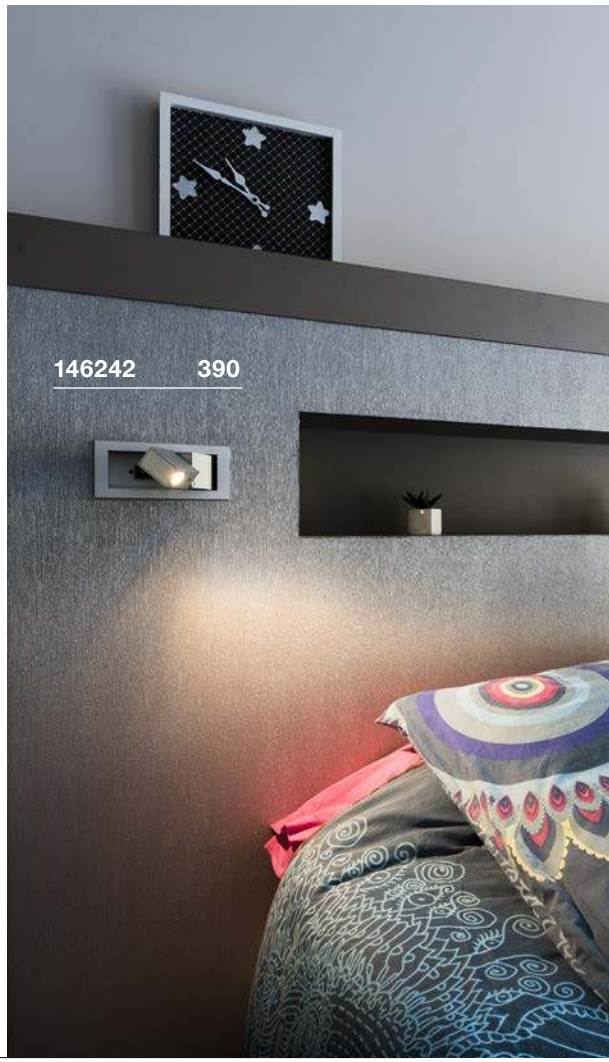

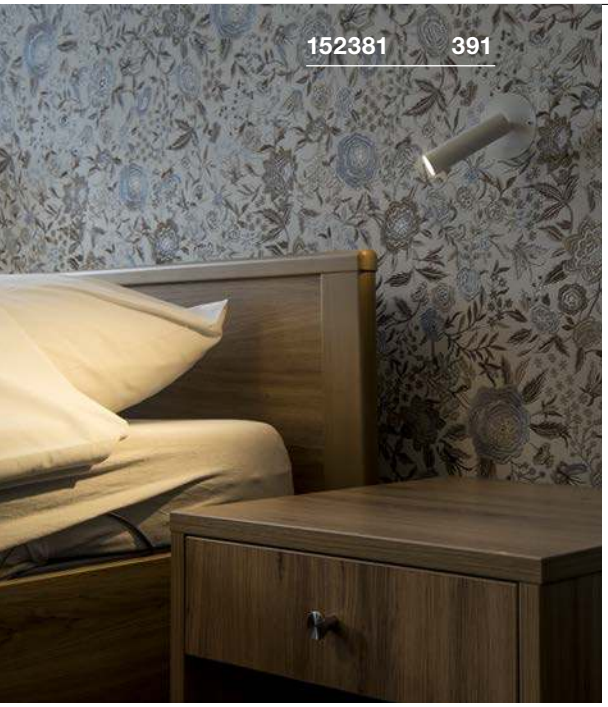

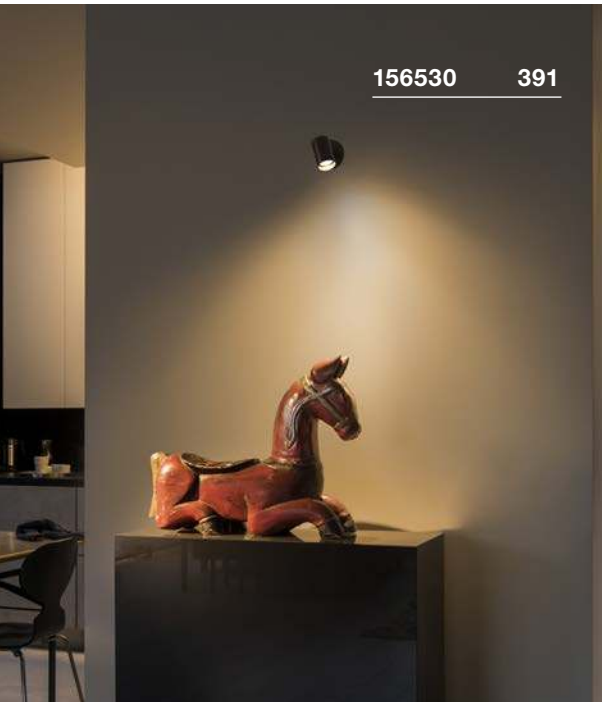

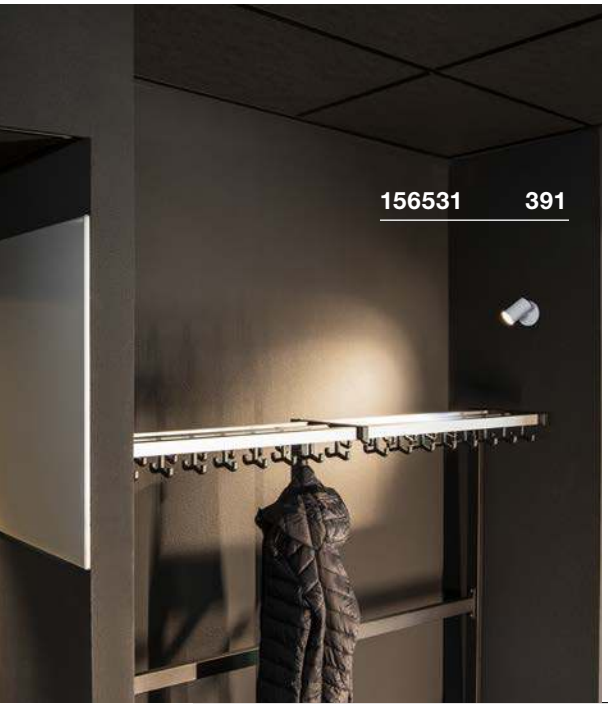

KARPO 30
EL

INSIDE







- Premium LED with CRI>90

Product details

500mA | 7.5W
Material: aluminium/steel



Dimensional drawing



Tip

Material thickness of mounting surface:
max. 12 mm
When connecting several lights, make sure they are connected in series!
Driver not included

Accessory recommendation

LED driver 500mA | 9W
Item No. 464091 | 20.70 GBP

Variant	Item No.	GBP
450lm | 3000K | CRI>90		
■ black	**152380**	**99.00**
470lm | 3000K | CRI>90		
□ white	**152381**	**99.00**

HELIA
EL

INSIDE







- Premium LED with CRI>90
- Low installation depth

Product details

500mA | 9W
Material: aluminium

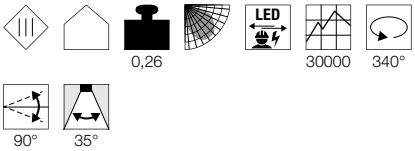

Dimensional drawing



Tip

Material thickness of mounting surface:
15 mm

Accessory recommendation

LED driver 500mA | 9W
Item No. 464091 | 20.70 GBP

Variant	Item No.	GBP
700lm | 3000K | CRI>90		
■ black	**156530**	**99.00**
800lm | 3000K | CRI>90		
□ white	**156531**	**99.00**

LIGHTPOINT
EL

SOCKET INSIDE









Product details

350mA | 1W
Material: aluminium/polymethylacrylate (PMMA)



Dimensional drawing



Tip

When connecting several lights, make sure they are connected in series!
Driver not included

Accessory recommendation

■ Connector strip 3 outlets
Item No. 111850 | 9.90 GBP



□ LED driver 350mA | 3W
Item No. 464107 | 17.10 GBP



Variant	Item No.	GBP
100lm | 3000K | CRI>80		
□ white	**1001156**	**22.50**
100lm | 3000K | CRI>80		
▨ chrome	**1001155**	**27.00**

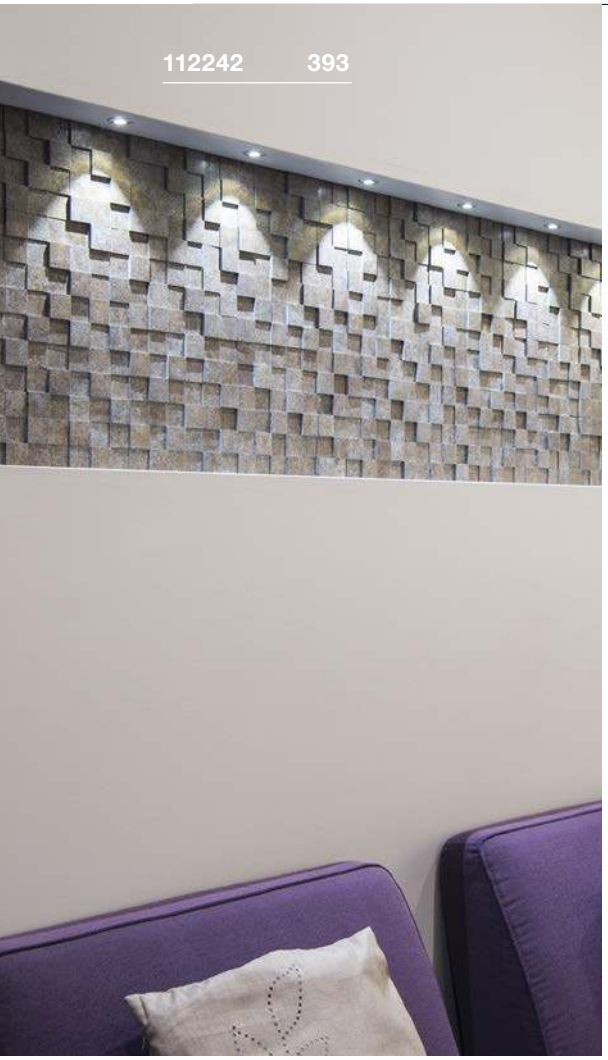



DEKLED
EL

LED INSIDE







Product details

350mA | 1W
Material: aluminium/polycarbonate (PC)



Dimensional drawing



Tip

When connecting several lights, make sure they are connected in series!
Driver not included

Accessory recommendation

LED driver 320mA | 3W incl. strain relief
Item No. 464108 | 20.70 GBP



Variant	Item No.	GBP
60lm | 4000K | CRI>80 silver grey	**112240**	**22.90**
60lm | 3000K | CRI>80 silver grey	**112242**	**22.90**

DL 126
EL

LED INSIDE







Product details

12V DC | 2.8W
Material: aluminium/plastic



Dimensional drawing



Accessory recommendation

LED power supply 12V DC | 12W
Item No. 470507 | 20.70GBP



Variant	Item No.	GBP
160lm | 3000K | CRI>80 white	**112221**	**27.00**
160lm | 3000K | CRI>80 chrome	**112222**	**31.50**
160lm | 3000K | CRI>80 silver grey	**112225**	**27.00**
160lm | 2700K | CRI>80 white	**112161**	**27.00**
160lm | 2700K | CRI>80 chrome	**112162**	**31.50**
160lm | 2700K | CRI>80 silver grey	**112165**	**27.00**

PLASTRA
EL, round, QPAR51

SOCKET INSIDE







- Flush installation against ceiling possible
- Can be individually designed with colours, stickers & more

Product details

220-240V ~50/60Hz
Material: gypsum/steel

0,5

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details

max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
matt white	**148070**	**32.60**



148071 395



PLASTRA
EL, square, QPAR51

SOCKET INSIDE







- Flush installation against ceiling possible
- Can be individually designed with colours, stickers & more

Product details

220-240V ~50/60Hz
Material: gypsum/steel



Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Recommended lamp

LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005076 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
matt white	**148071**	**32.60**

PIKA
EL, round, QPAR51, rigid

SOCKET INSIDE







• 3-pole loop-in/loop-out (for through wiring)

Product details

230V -50Hz
Material: aluminium



Dimensional drawing



Tip

Material thickness of mounting surface:
max. 13 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	1000714	9.50
GU10 | QPAR51 chrome	1000715	13.50
GU10 | QPAR51 brass	1000716	13.50
GU10 | QPAR51 silver grey	1000717	9.50



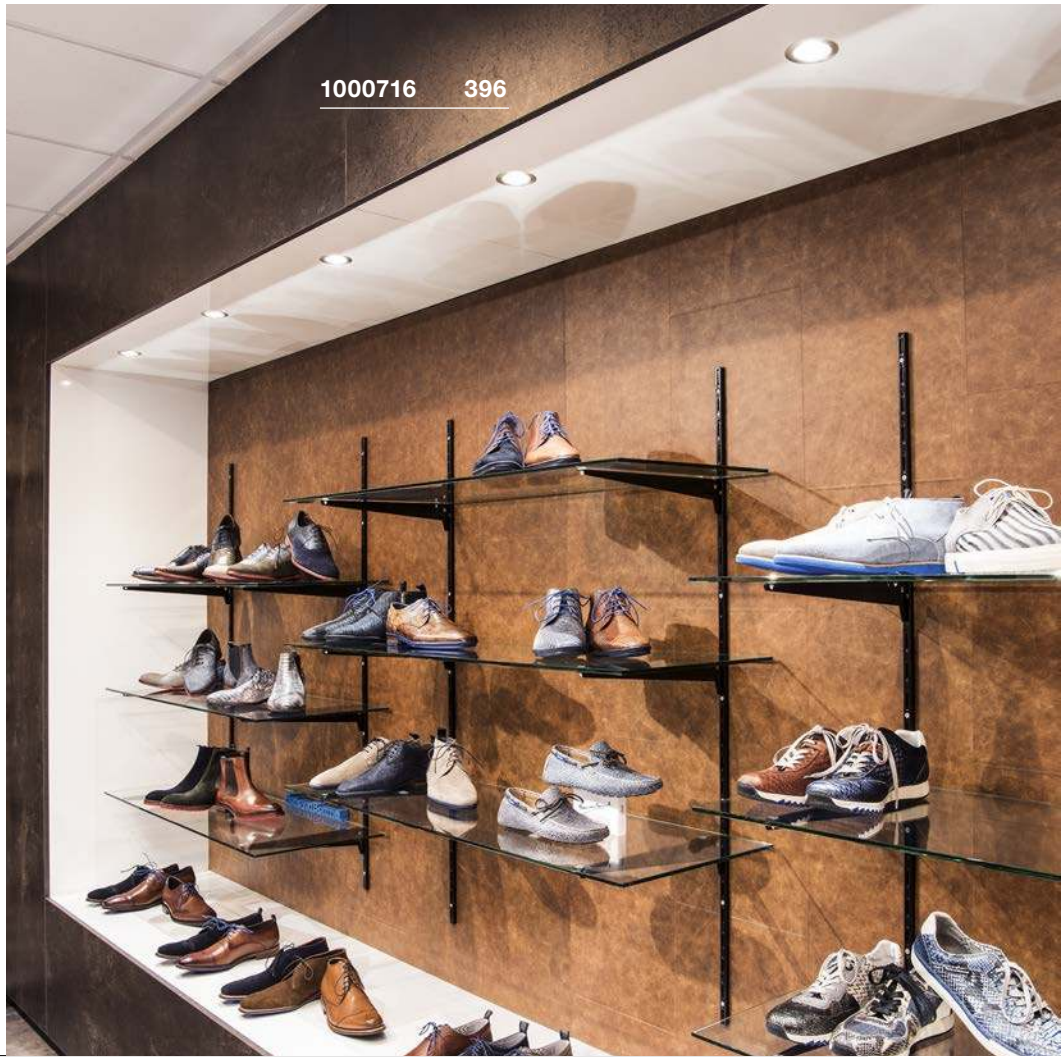

PIKA
EL, round, QPAR51

SOCKET INSIDE







- 3-pole loop-in/loop-out (for through wiring)
- Lighting unit can be pivoted through 30°

Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Tip
Material thickness of mounting surface:
max. 15 mm

Recommended lamp
LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	**1000718**	**13.50**
GU10 | QPAR51 chrome	**1000719**	**15.30**
GU10 | QPAR51 brass	**1000720**	**15.30**
GU10 | QPAR51 silver grey	**1000721**	**13.50**

PIKA
EL, square, QPAR51, rigid

SOCKET INSIDE







- 3-pole loop-in/loop-out (for through wiring)

Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Tip
Material thickness of mounting surface:
max. 13 mm

Recommended lamp
LED GU10 3,7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	**1002204**	**9.90**
GU10 | QPAR51 chrome	**1002205**	**13.50**
GU10 | QPAR51 brass	**1002206**	**13.50**
GU10 | QPAR51 silver grey	**1002207**	**9.90**

PIKA
EL, square, QPAR51, swivelling

SOCKET INSIDE







- 3-pole loop-in/loop-out (for through wiring)
- Lighting unit can be pivoted through 30°

Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Tip
Material thickness of mounting surface:
max. 15 mm

Recommended lamp
LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	**1002208**	**13.50**
GU10 | QPAR51 chrome	**1002209**	**15.30**
GU10 | QPAR51 brass	**1002210**	**15.30**
GU10 | QPAR51 silver grey	**1002211**	**13.50**

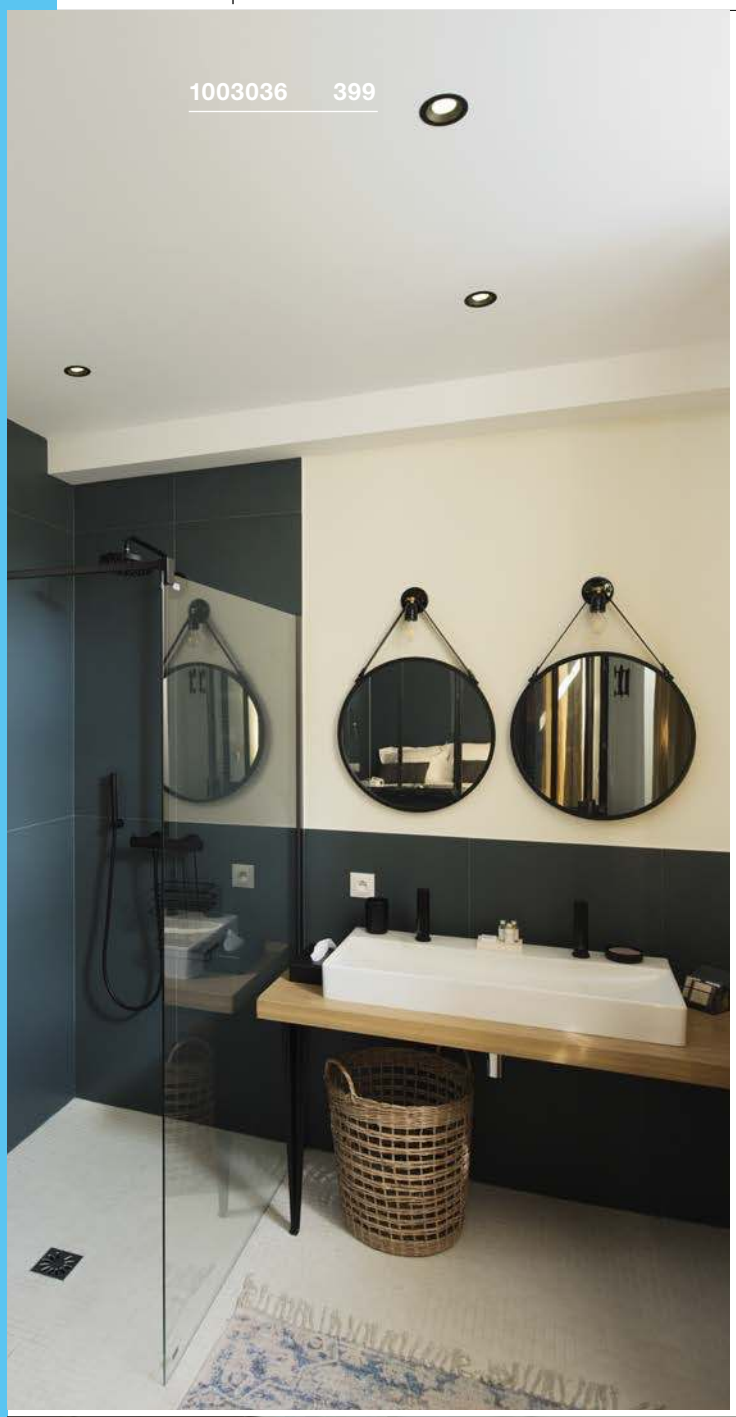
1003036 399


161301 399


1003039 399

CONTONE®
EL, round/square, adjustable, PHASE



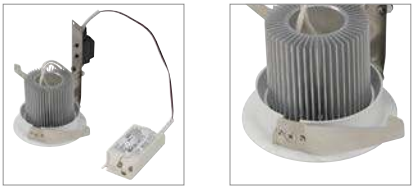

- Premium LED with CRI>90
- The light colour alters when dimmed

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium
Dimmable: C, L

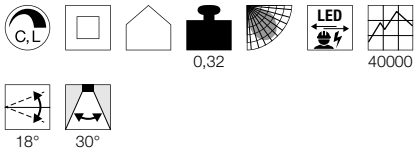

Dimensional drawing

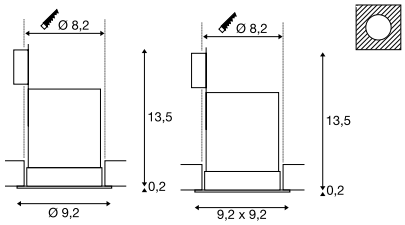

Tip

Material thickness of mounting surface:
max. 25 mm

Variant	Item No.	GBP
890lm | 2000K-3000K | CRI>90		
white	**161271**	**92.70**
890lm | 2000K-3000K | CRI>90		
white	**161281**	**92.70**

CONTONE®
EL, round/square, rigid, PHASE





- Premium LED with CRI>90
- The light colour alters when dimmed

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium
Dimmable: C, L

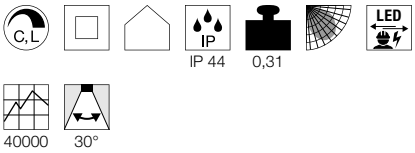

Dimensional drawing

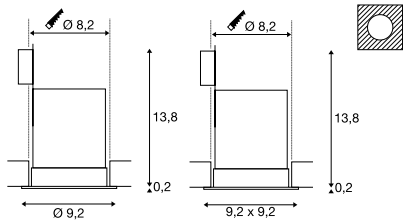

Tip

Material thickness of mounting surface:
max. 25 mm

Variant	Item No.	GBP
890lm | 2000K-3000K | CRI>90		
white	**161291**	**92.70**
890lm | 2000K-3000K | CRI>90		
white	**161301**	**92.70**

DINGILO
EL, round, adjustable





- Premium LED with CRI>90

Product details

100-277V ~50/60Hz | 200mA
Total wattage: 4.4W
Material: aluminium/plastic

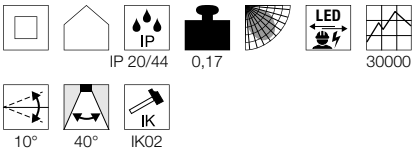

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Variant	Item No.	GBP
330lm | 2700K | CRI>90		
black	**1003036**	**78.30**
330lm | 2700K | CRI>90		
white	**1003037**	**78.30**
330lm | 3000K | CRI>90		
black	**1003038**	**78.30**
330lm | 3000K | CRI>90		
white	**1003039**	**78.30**

H-LIGHT
EL, round, PHASE

LED INSIDE







- Narrow rotationally symmetrical light distribution for accentuated illumination
- Generation of contoured light cones on vertical surfaces

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium
Dimmable: C, L

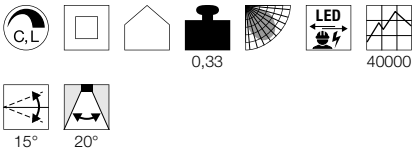

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm



Variant	Item No.	GBP
265lm | 2700K | CRI>80		
■ black	**114480**	**72.00**
265lm | 2700K | CRI>80		
□ white	**114481**	**72.00**

H-LIGHT
EL, oval, PHASE

LED INSIDE







- Narrow asymmetrical light distribution for accentuated illumination
- Generation of contoured light cones on vertical surfaces

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium
Dimmable: C, L

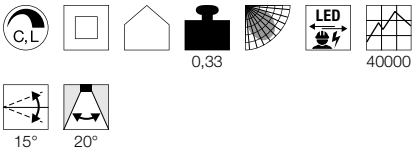

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm



Variant	Item No.	GBP
395lm | 2700K | CRI>80		
■ black	**114490**	**72.00**
395lm | 2700K | CRI>80		
□ white	**114491**	**72.00**

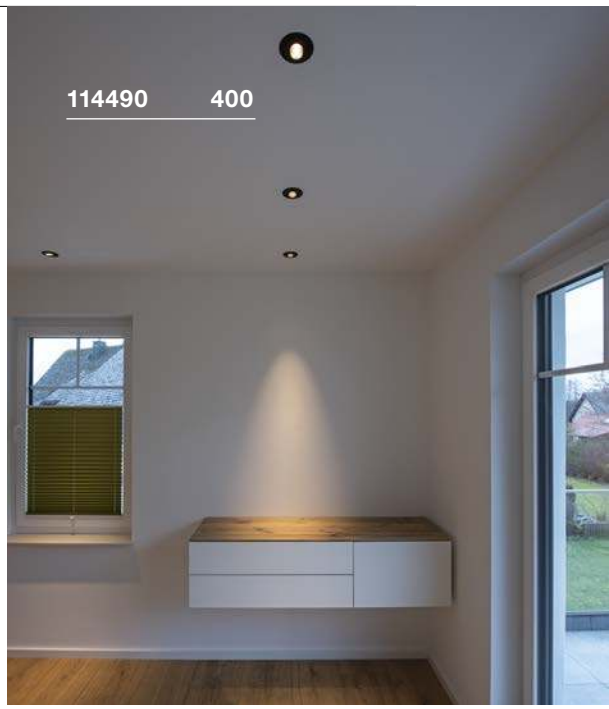

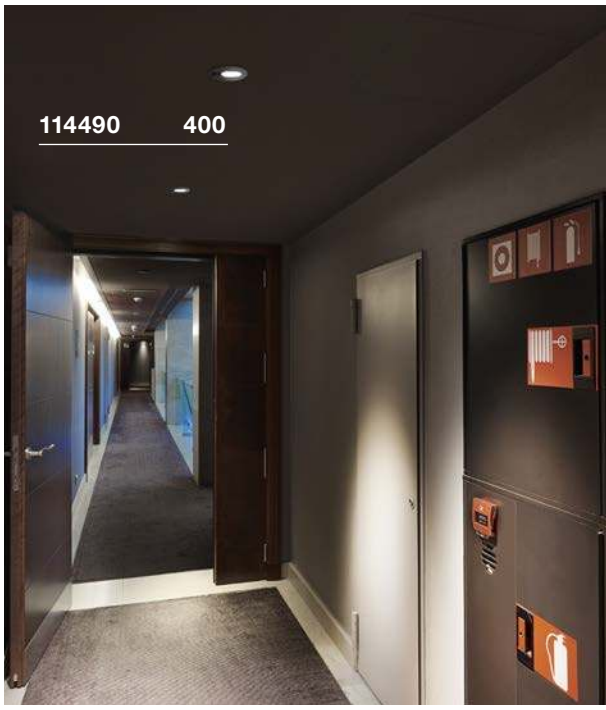



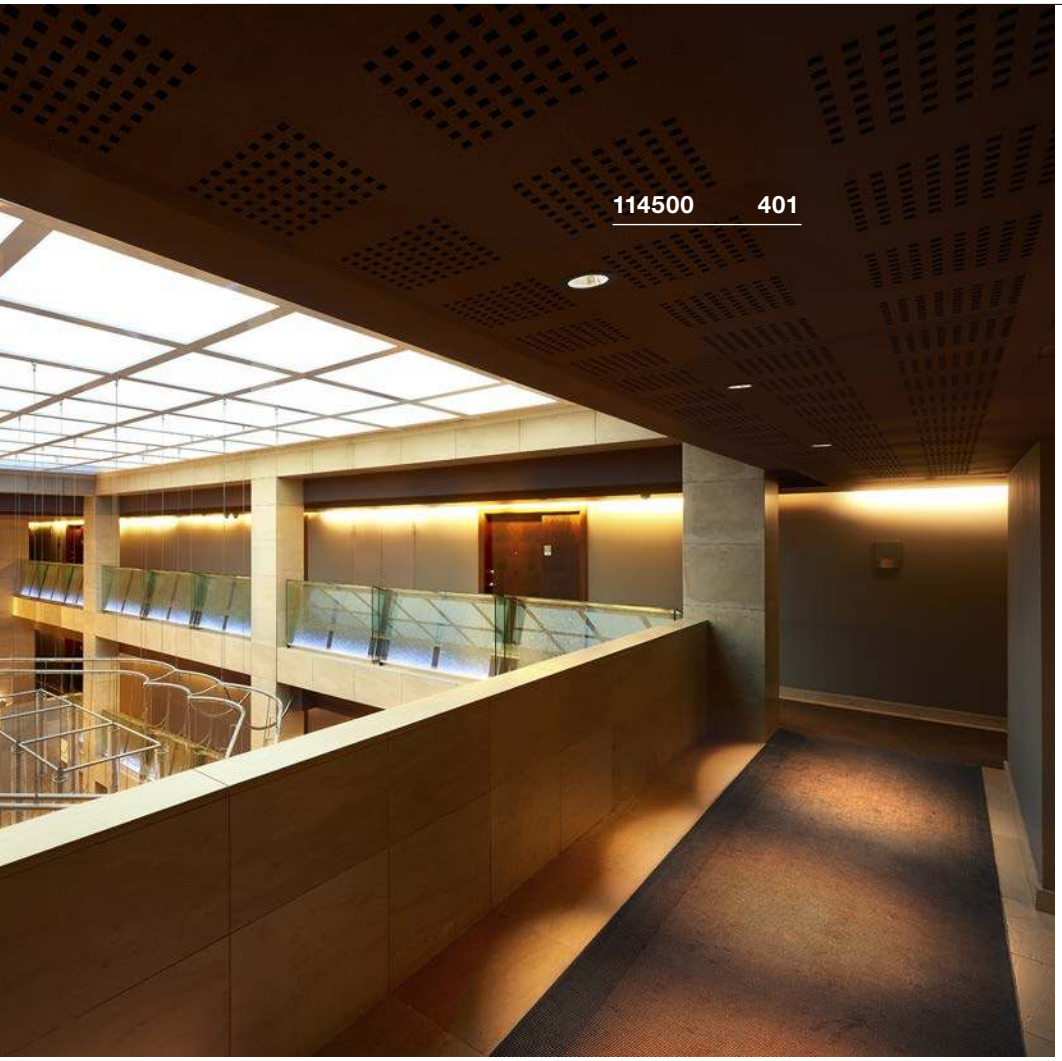

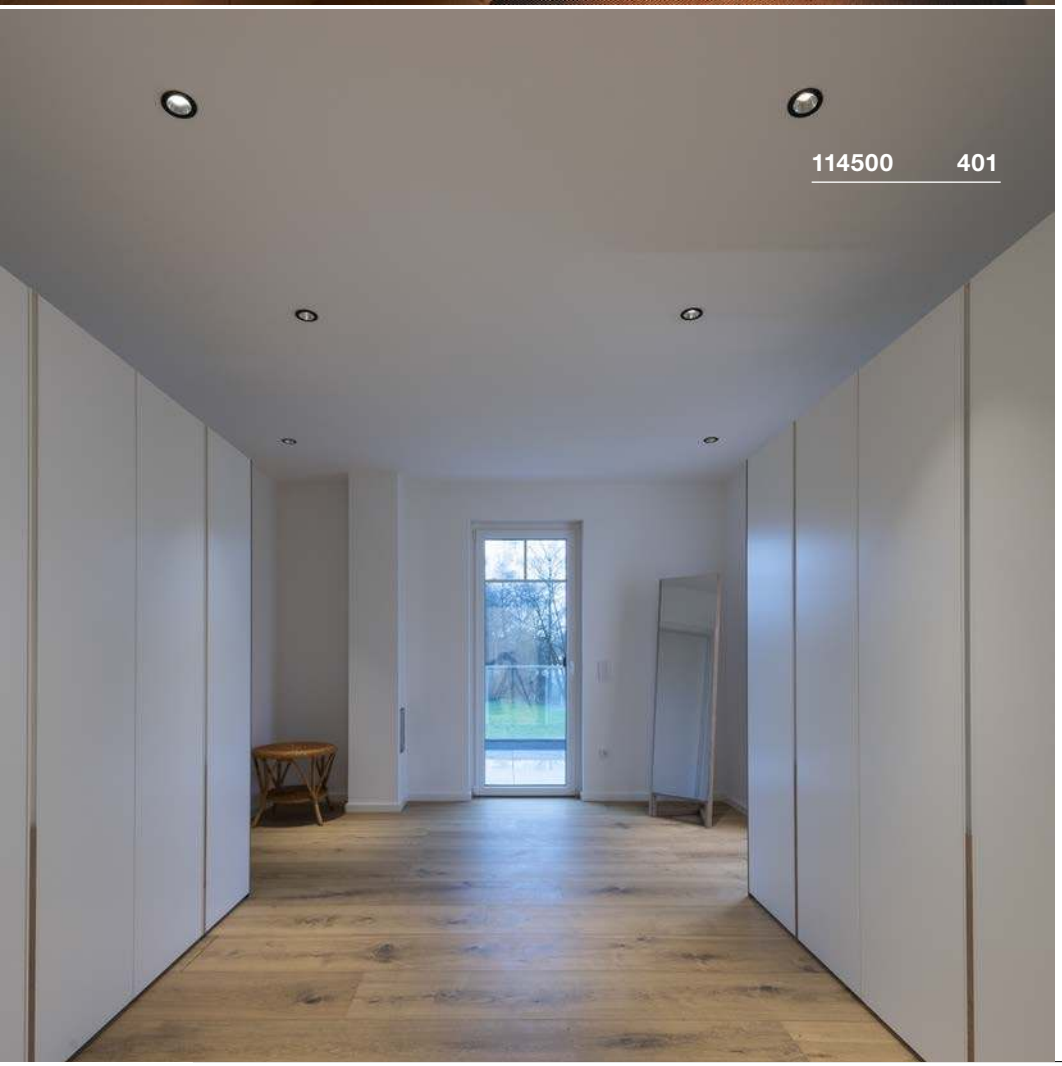

H-LIGHT
EL, PHASE

LED INSIDE







- Narrow rotationally symmetrical light distribution for accentuated illumination
- Generation of contoured light cones on vertical surfaces

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium
Dimmable: C, L

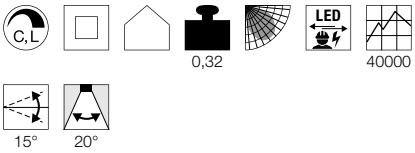

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm



Variant	Item No.	GBP
540lm | 2700K | CRI>80 ■ black	**114500**	**76.50**
540lm | 2700K | CRI>80 □ white	**114501**	**76.50**

DOLIX OUT
EL, round, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 65 | 0,17 | IK02

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 20 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP

Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	1001165	27.90
GU10 | QPAR51 chrome	1001166	30.60
GU10 | QPAR51 silver grey	1001167	27.90
GU10 | QPAR51 brushed chrome	1001168	30.60

DOLIX OUT
EL, square, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 65 | 0,19 | IK02

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 20 mm

Recommended lamp

LED GU10 3,7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	1001169	27.90
GU10 | QPAR51 chrome	1001170	30.60
GU10 | QPAR51 silver grey	1001171	27.90
GU10 | QPAR51 brushed chrome	1001172	30.60









VARU
EL, QPAR51

SOCKET INSIDE







- High IP rating
- Resilient housing

Product details

230V~50Hz
Material: aluminium/glass

IP 20/65 | 0,2 | IK02

Dimensional drawing



Tip

Material thickness of mounting surface:
15 mm

Recommended lamp

LED GU10 3,7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

max. 5W LED GU10 51mm
Diameter: 5 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**1001930**	**30.60**
GU10 | QPAR51		
□ white	**1001931**	**30.60**

VARU
EL

LED INSIDE







- High IP rating
- Resilient housing
- Glare reduction thanks to recessed LED

Product details

350mA | 5W
Material: aluminium/glass

IP 20/65 | 0,18 | LED | 36000 | IK02

Dimensional drawing



Tip

Material thickness of mounting surface:
15 mm

Accessory recommendation

□ LED driver 350mA | 9W
Item No. 464109 | 25.20 GBP



Variant	Item No.	GBP
400lm | 2700K | CRI>80		
■ black	**1001932**	**49.50**
400lm | 2700K | CRI>80		
□ white	**1001933**	**49.50**

KAMUELA ECO
EL, round, PHASE

LED INSIDE







- Fire resistant for at least 90 minutes compliant with BS 476-21
- IP 65 light with efficient LED technology

Product details

220-240V ~50Hz
Total wattage: 6.5W
Material: aluminium/plastic
Dimmable: C, L

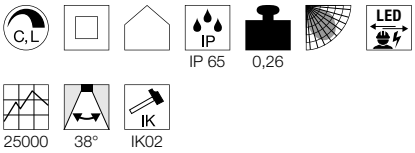

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 40 mm

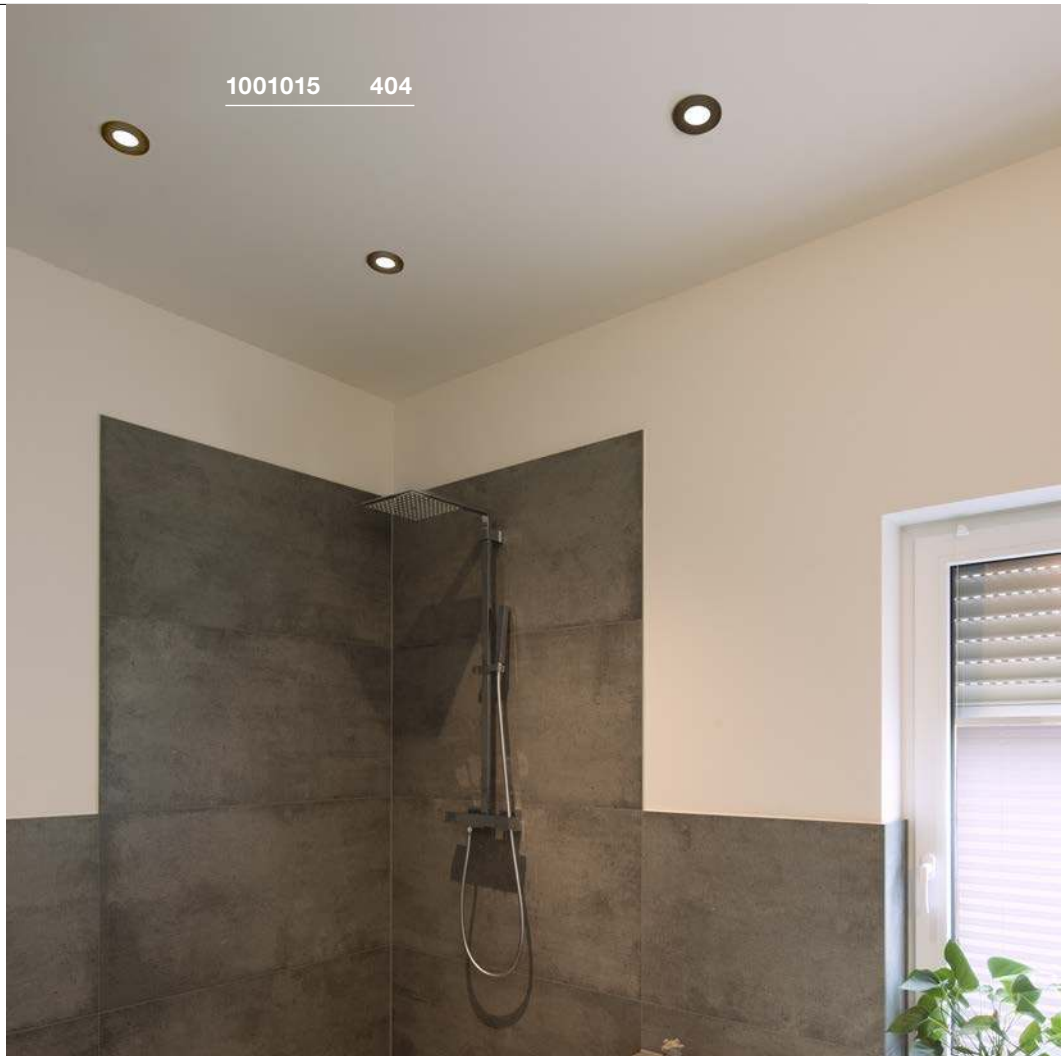

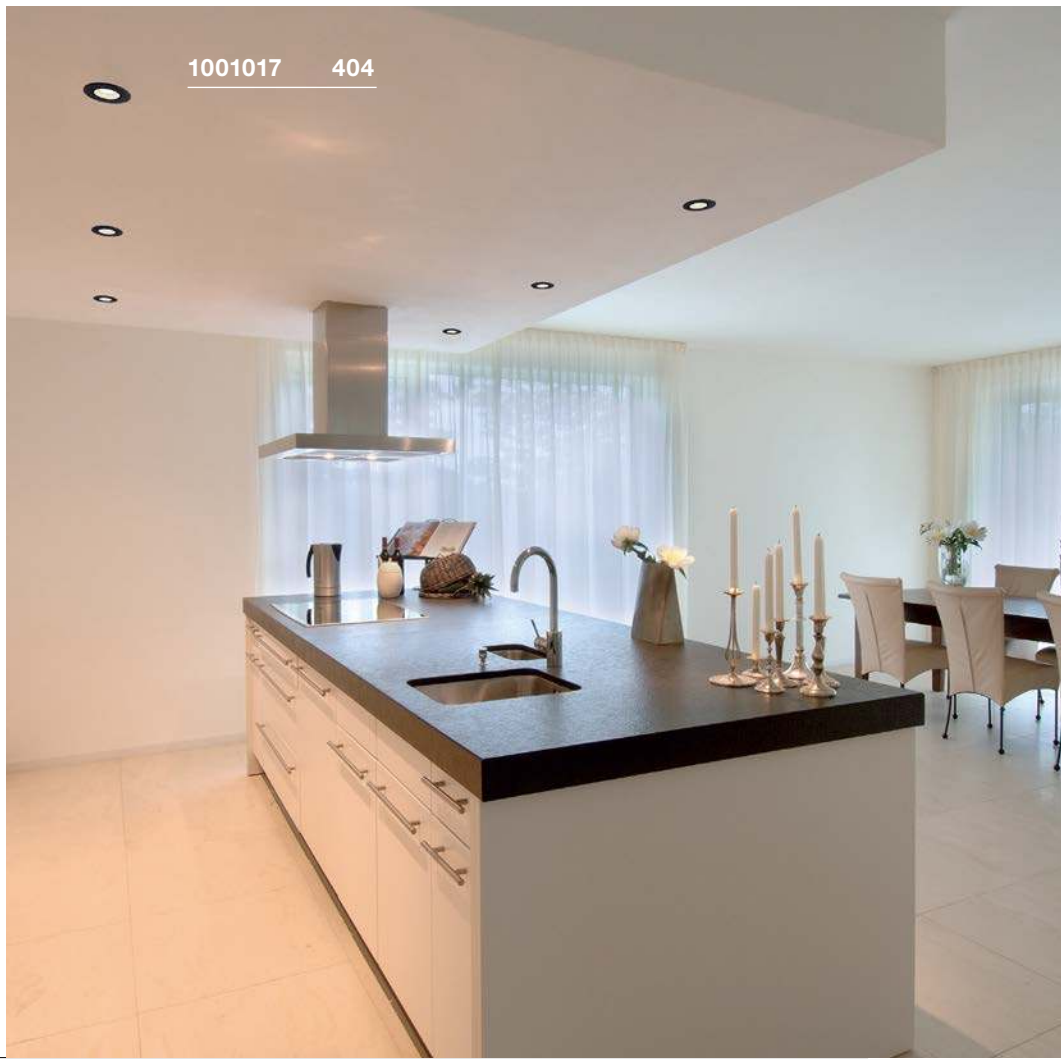

Variant	Item No.	GBP
400lm | 3000K | CRI>80 ■ black	**1001015**	**27.00**
400lm | 3000K | CRI>80 □ white	**1001016**	**27.00**
400lm | 4000K | CRI>80 ■ black	**1001017**	**27.00**
400lm | 4000K | CRI>80 □ white	**1001018**	**27.00**



P-LIGHT
EL

LED INSIDE







- Tested in line with DIN EN 60598-2-22
- Recessed ceiling version with efficient LED technology

Product details

220-240V ~50Hz
Total wattage: 5W
Material: ABS / Polycarbonate (PC)



Dimensional drawing



Tip

Can be used as emergency lighting. Auto test function, Ni-Mh battery 2x 3,6V 1.5Ah included. Emergency operation via battery 3 hours. Half beam angle 90°, material thickness Installation surface: 25 mm max.

Accessory recommendation

Akkumulator 7.2V | 1000mA
Item No. 240024 | 34.20 GBP



Variant	Item No.	GBP
120lm | 6000K | CRI>70		
white	**240006**	**126.00**

AKALO D83
EL, PHASE







- The light colour can be adjusted with the rear switch.



Product details

220-240V ~50/60Hz | 120mA
Total wattage: 9W
Material: aluminium/polycarbonate (PC)
Dimmable: C

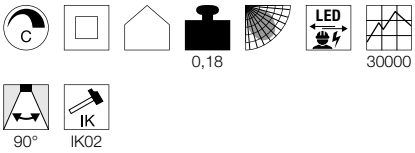

Dimensional drawing



Tip

Material thickness of mounting surface:
20 mm

Variant	Item No.	GBP
800/880/850lm | 3000/4200/5700K | CRI>80		
white	1001264	31.50





PATTA-F
EL, round, PHASE

LED INSIDE







- High IP rating (full protection glass)

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass
Dimmable: C, L

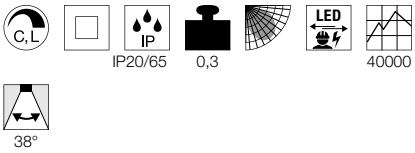

Dimensional drawing



Tip

Material thickness of mounting surface:
20 mm

Variant	Item No.	GBP
745lm | 3000K | CRI>80		
■ black	**114440**	**76.50**
860lm | 3000K | CRI>80		
□ white	**114441**	**76.50**

PATTA-F
EL, square, PHASE

LED INSIDE







- High IP rating (full protection glass)

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass
Dimmable: C, L

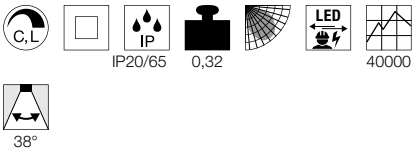

Dimensional drawing



Tip

Material thickness of mounting surface:
20 mm

Variant	Item No.	GBP
745lm | 3000K | CRI>80		
■ black	**114450**	**76.50**
860lm | 3000K | CRI>80		
□ white	**114451**	**76.50**

PATTA-I
EL, round, PHASE







- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- High IR protection rating

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass
Dimmable: C, L

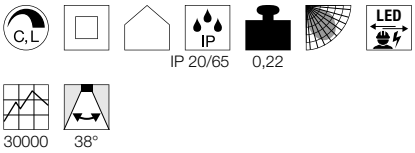

Dimensional drawing



Tip

Products are delivered with spring clips.
Leaf springs are included with the product and can be replaced.
Material thickness of mounting surface: 20 mm

Variant	Item No.	GBP
440lm | 1800-3000K | CRI>95		
■ black	**1002098**	**67.50**
440lm | 1800-3000K | CRI>95		
□ white	**1002099**	**67.50**
440lm | 1800-3000K | CRI>95		
▨ aluminium	**1002100**	**70.20**

PATTA-I
EL, square, PHASE







- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- High IR protection rating

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass
Dimmable: C, L

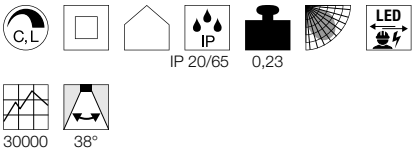

Dimensional drawing



Tip

Products are delivered with spring clips.
Leaf springs are included with the product and can be replaced.
Material thickness of mounting surface: 20 mm

Variant	Item No.	GBP
440lm | 1800-3000K | CRI95		
■ black	**1002101**	**67.50**
440lm | 1800-3000K | CRI95		
□ white	**1002102**	**67.50**
440lm | 1800-3000K | CRI95		
▨ aluminium	**1002103**	**70.20**



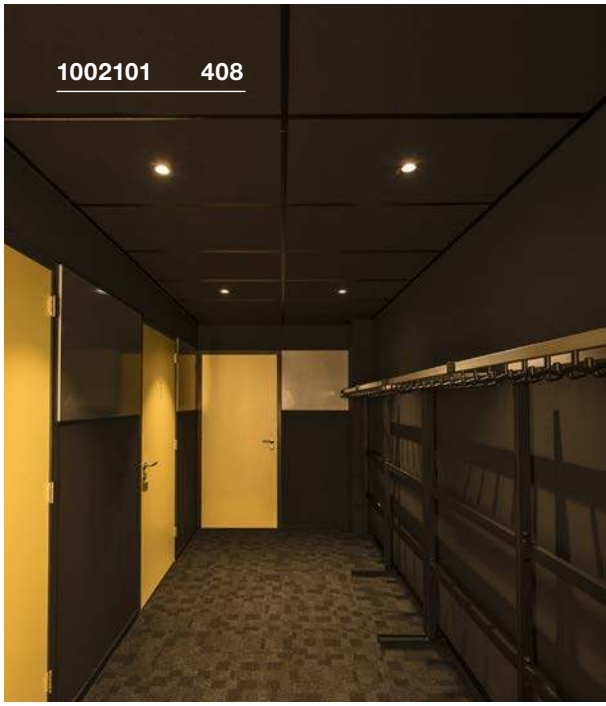

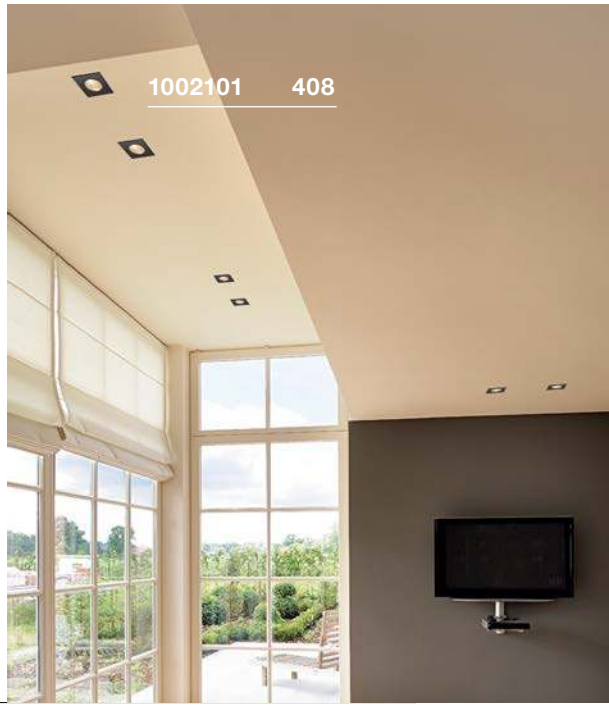



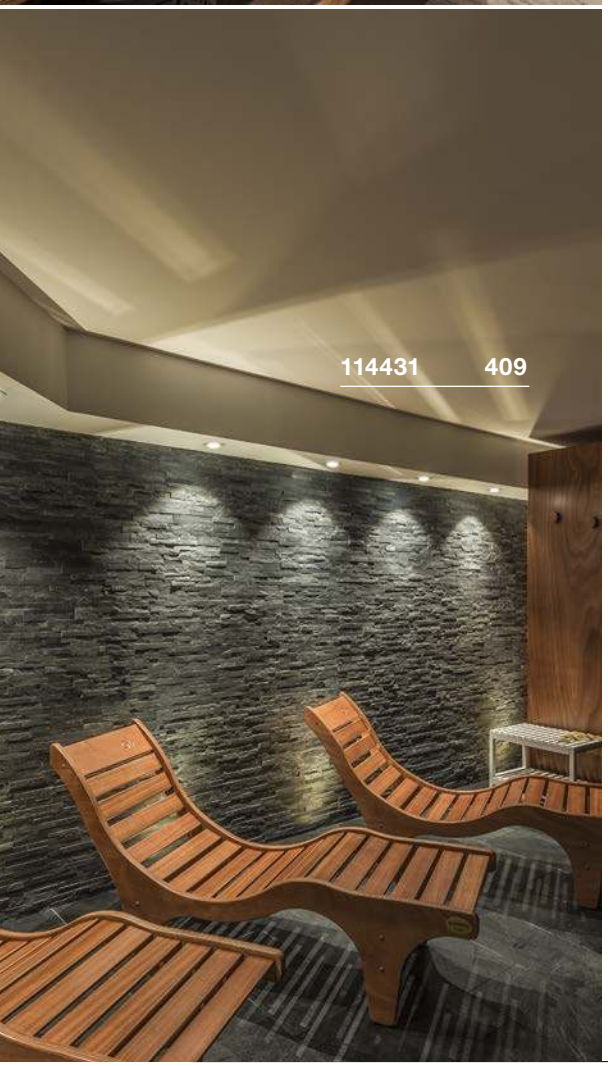

PATTA-I
EL, round, PHASE

LED INSIDE







- High IR protection rating

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass
Dimmable: C, L

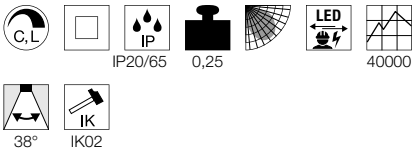

Dimensional drawing



Tip

Material thickness of mounting surface:
25 mm

Variant	Item No.	GBP
910lm | 3000K | CRI>80		
■ black	**114420**	**76.50**
910lm | 3000K | CRI>80		
□ white	**114421**	**76.50**
910lm | 3000K | CRI>80		
▨ aluminium	**114426**	**81.00**

PATTA-I
EL, square, PHASE

LED INSIDE







- High IR protection rating

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass
Dimmable: C, L

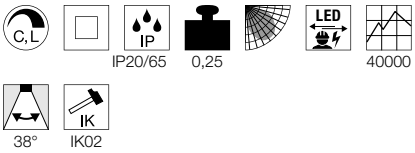

Dimensional drawing



Tip

Material thickness of mounting surface:
25 mm

Variant	Item No.	GBP
910lm | 3000K | CRI>80		
■ black	**114430**	**76.50**
910lm | 3000K | CRI>80		
□ white	**114431**	**76.50**
910lm | 3000K | CRI>80		
▨ aluminium	**114436**	**81.00**

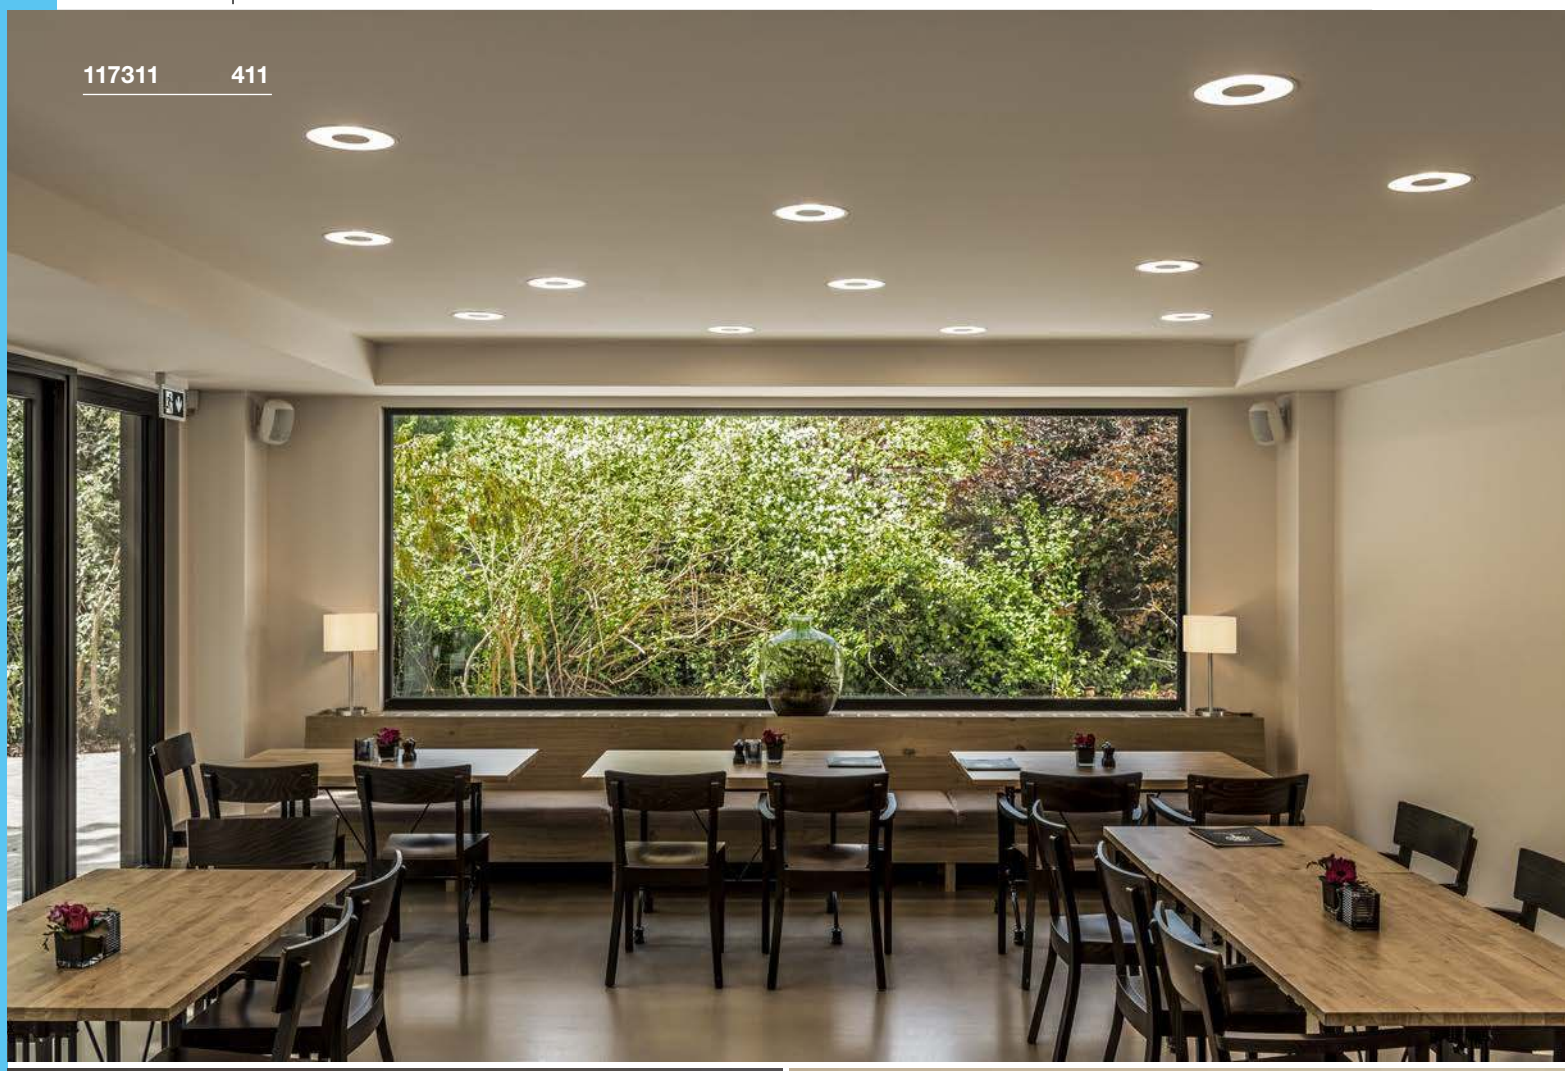
117311 411

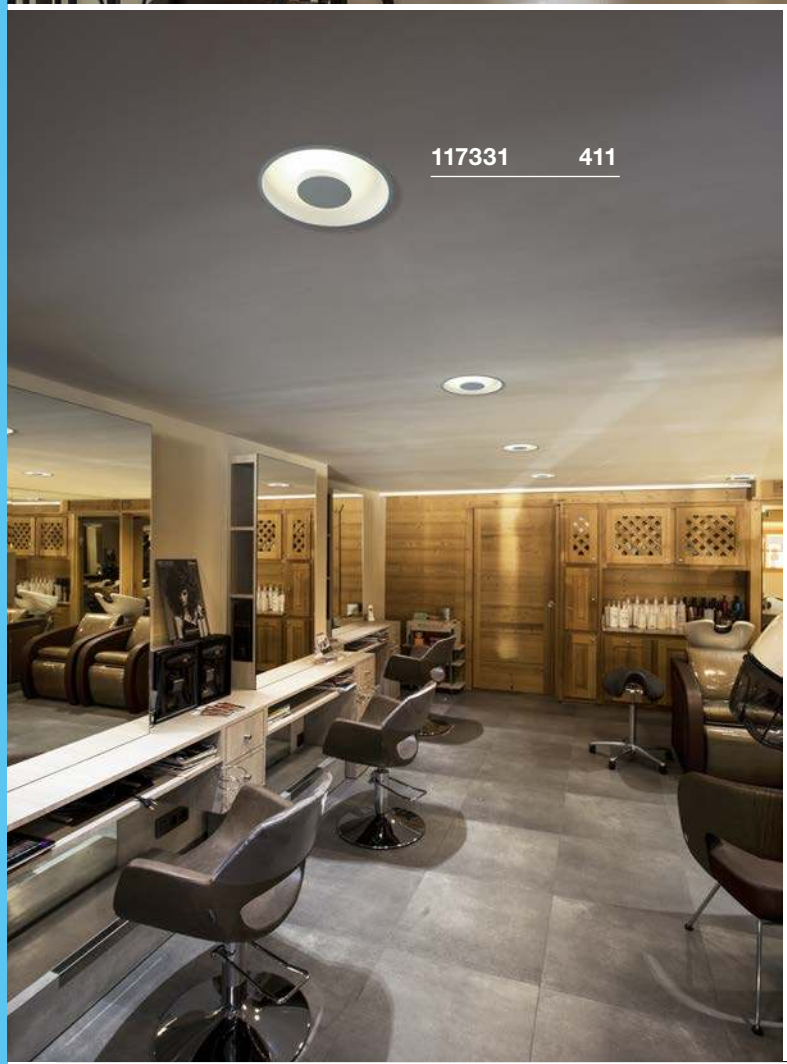
117331 411


117331 411

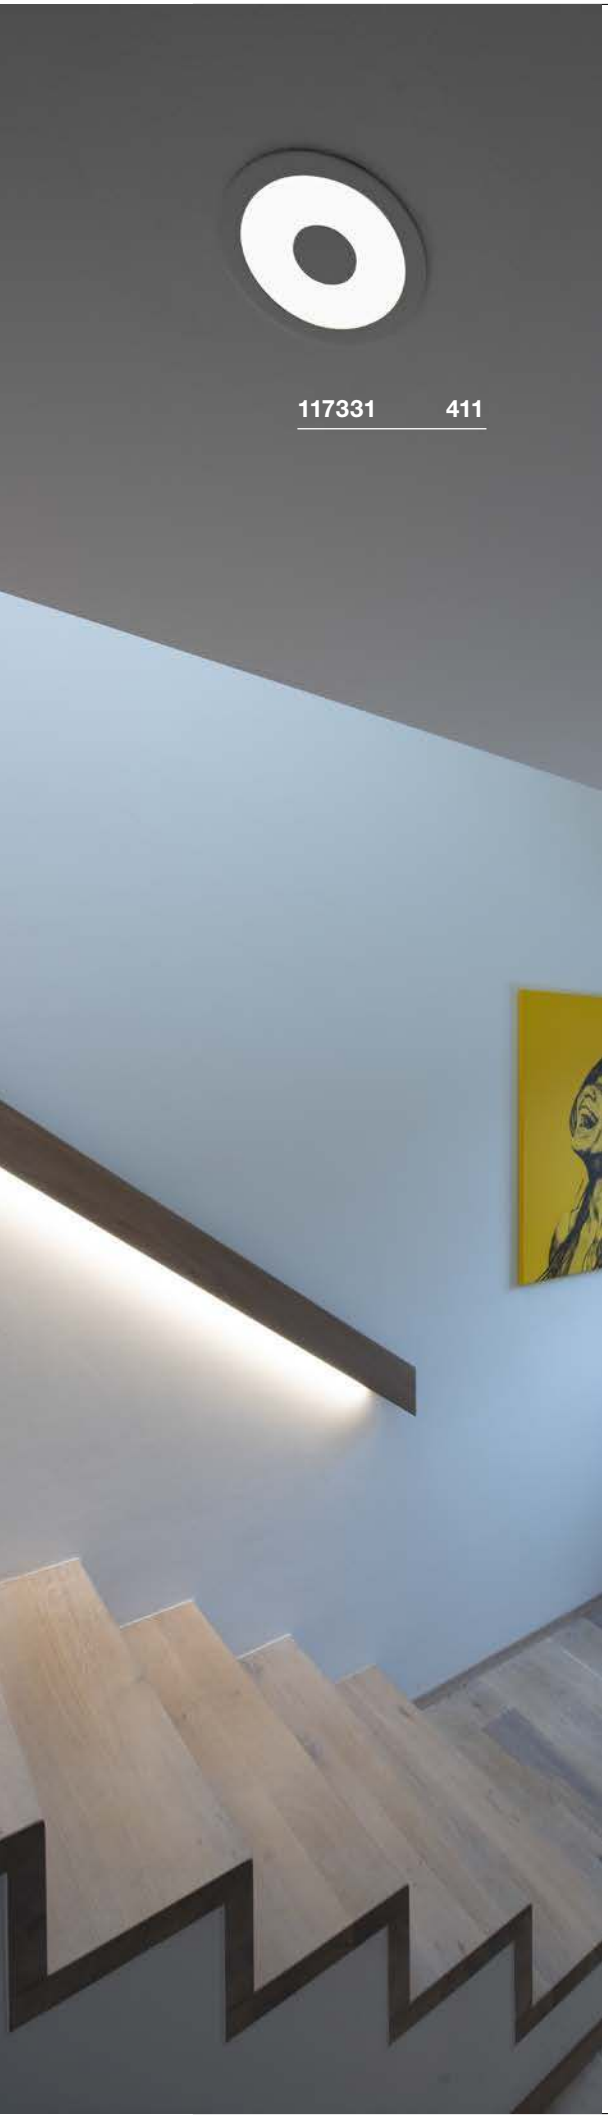

OCCULDAS 23
EL, indirect, PHASE

LED INSIDE





- Indirect, glare-free lighting
- Especially flat frames and low installation depth

Product details

200-240V ~50/60Hz | 700mA
Total wattage: 26W
Material: aluminium/steel
Dimmable: C, L

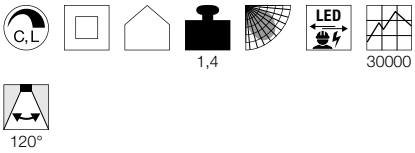

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 10-30 mm

Variant	Item No.	GBP
1500lm | 3000K | CRI>80 matt white	**117311**	**233.10**

OCCULDAS 14
EL, Indirect, PHASE

LED INSIDE





- Indirect, glare-free lighting
- Especially flat frames and low installation depth

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/steel
Dimmable: C, L

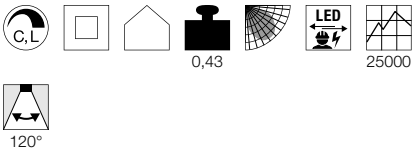

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 1-20 mm

Variant	Item No.	GBP
810lm | 3000K | CRI>80 matt white	**117331**	**126.00**

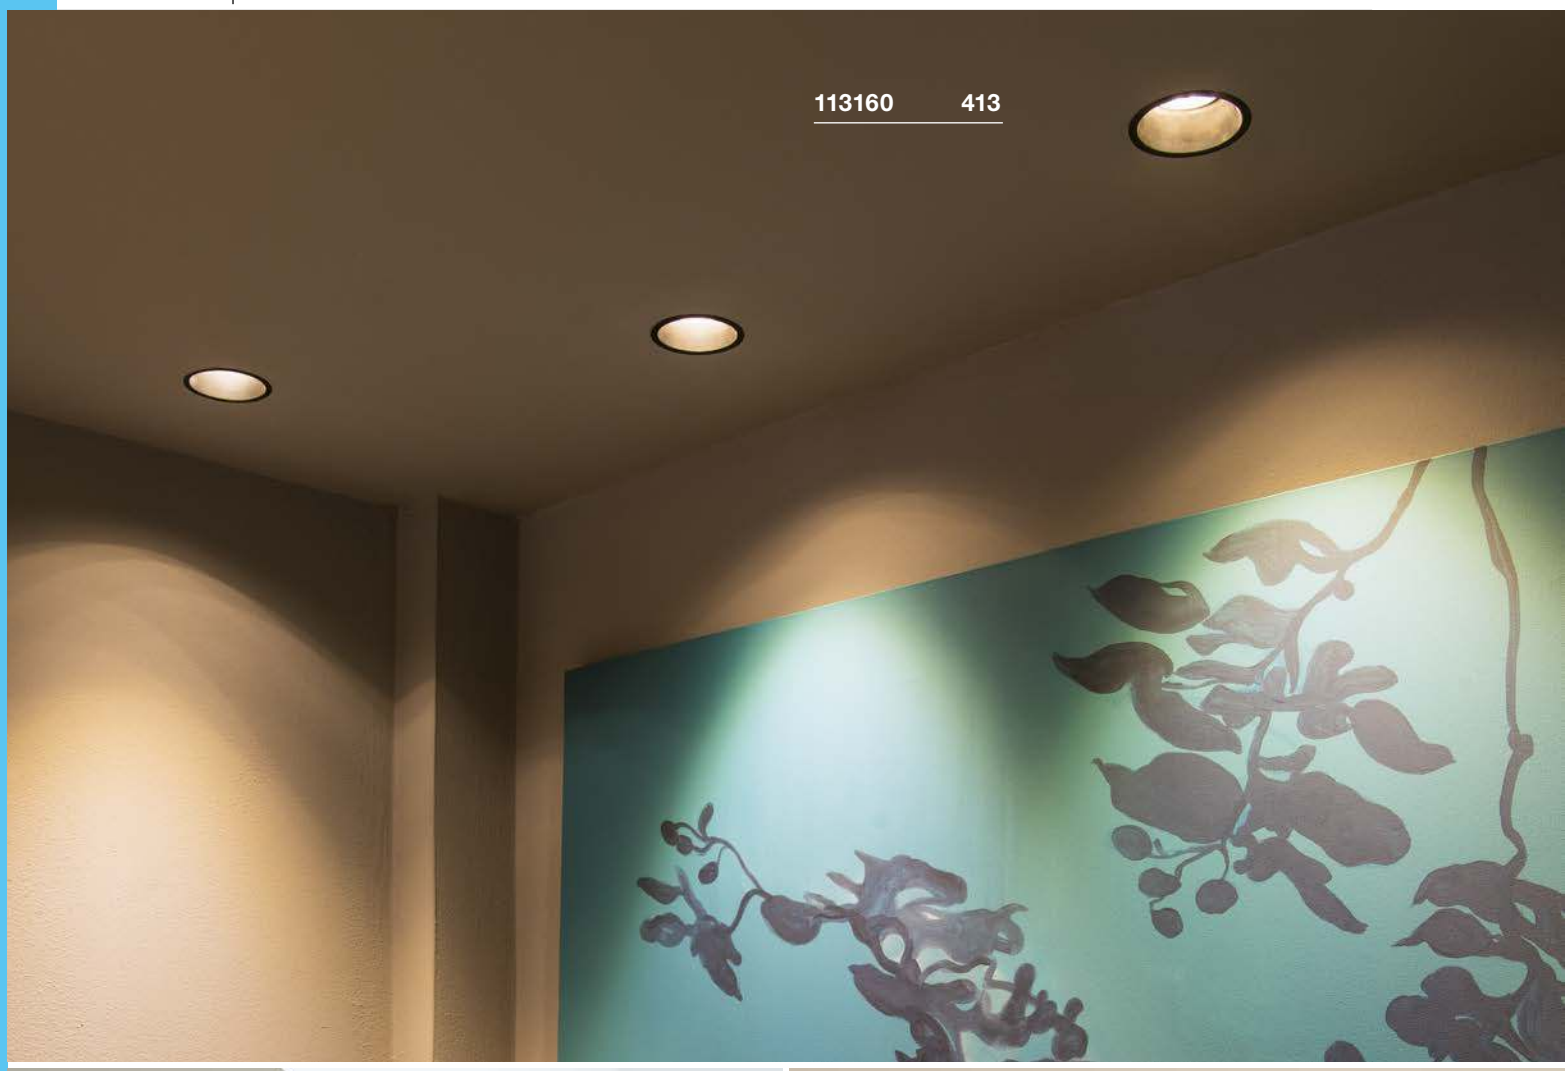
113160 413

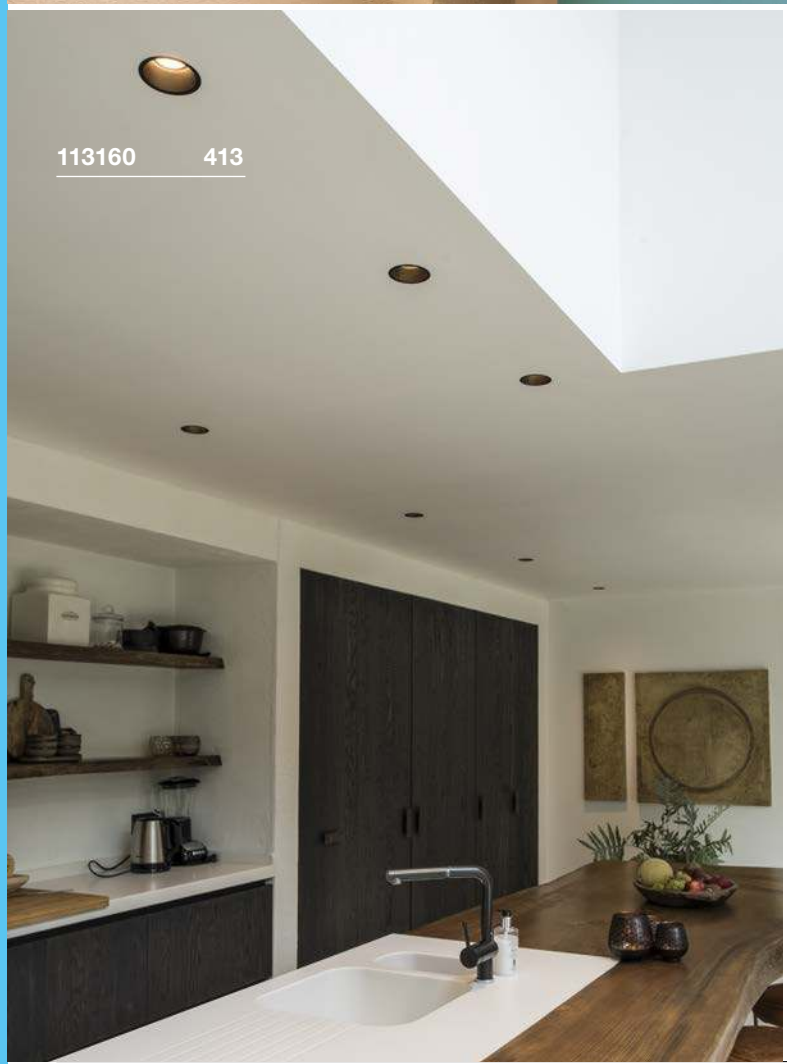
113160 413


113151 413

HORN-O
EL, QPAR51

SOCKET INSIDE





- Narrow installation collar
- Protective glass for IP 21-use

Product details

230V -50Hz
Material: steel

IP 21 0,2

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005076 | 6.10 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**113160**	**40.50**
GU10 | QPAR51		
□ white	**113161**	**40.50**

HORN-T
EL, QPAR51

SOCKET INSIDE





- Narrow installation collar

Product details

220-240V ~50/60Hz
Material: steel

0,2

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Recommended lamp

LED GU10 3,7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**113140**	**40.50**
GU10 | QPAR51		
□ white	**113141**	**40.50**

HORN-A
EL, QPAR51

SOCKET INSIDE





- Asymmetrical light emission
- Protective glass for IP 21-use

Product details

230V -50Hz
Material: steel

IP 21 0,24

Dimensional drawing



Tip

Material thickness of mounting surface:
25 mm

Recommended lamp

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**113150**	**44.10**
GU10 | QPAR51		
□ white	**113151**	**44.10**

HORN-T
EL, QPAR111

SOCKET INSIDE







• Narrow installation collar

Product details

230V -50Hz
Material: steel

0,5

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP

LED GU10 6.5W 38°
2700K 390lm
7kWh/1000h
Item No. 551882 | 40.50 GBP

Lamp details

max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**113170**	**54.00**
GU10 | QPAR111		
□ white	**113171**	**54.00**



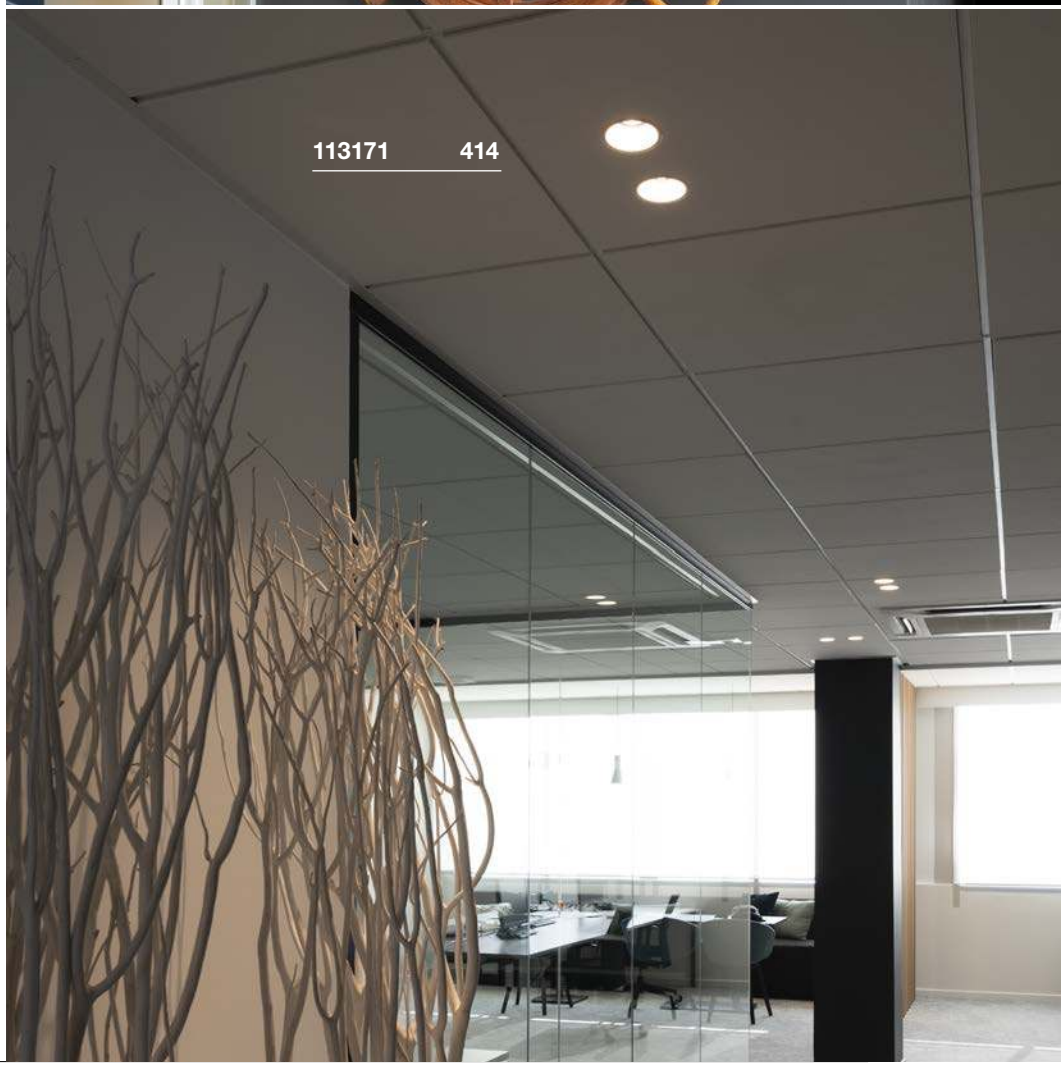

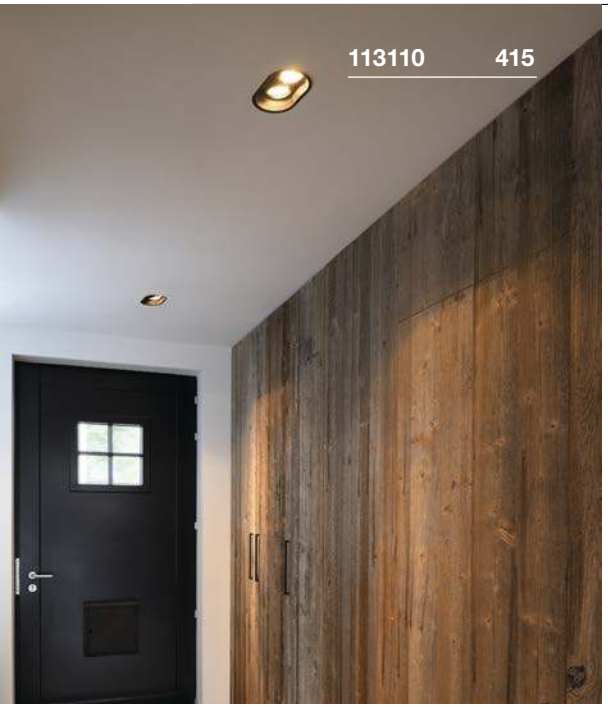

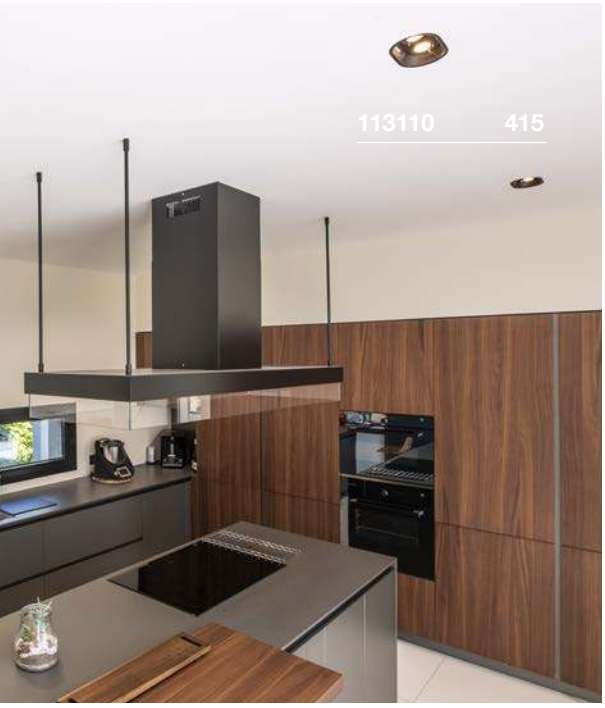



HORN
EL, QPAR51

SOCKET INSIDE







- Narrow installation collar

Product details
230V -50Hz
Material: steel



Dimensional drawing



Tip
Material thickness of mounting surface:
max. 45 mm

Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**112910**	**22.50**
GU10 | QPAR51		
□ white	**112911**	**22.50**

HORN
EL, QPAR51

SOCKET INSIDE







- Narrow installation collar

Product details
230V -50Hz
Material: aluminium/steel



Dimensional drawing



Tip
Material thickness of mounting surface:
max. 45 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



Lamp details
2x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**113110**	**67.50**
GU10 | QPAR51		
□ white	**113111**	**67.50**

HORN MINI
EL







- Premium LED with CRI>90

Product details
350mA | 1.2W
Material: aluminium/polycarbonate (PC)

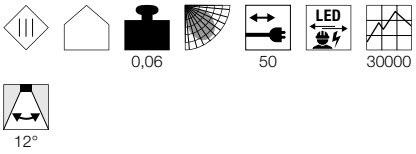

Dimensional drawing



Tip
Driver not included
AMP plug included
Different light colour with golden reflector

Accessory recommendation

LED driver 350mA | 15W
Item No. 464031 | 36.00 GBP



Connector strip 3 outlets
Item No. 111850 | 9.90 GBP



Variant	Item No.	GBP
70lm | 3000K | CRI>90		
white	**1000914**	**31.50**
70lm | 3000K | CRI>90		
black	**1000915**	**31.50**
70lm | 3000K | CRI>90		
black/gold	**1000917**	**34.20**

HORN MEDI
EL







Product details
350mA | 5W
Material: aluminium/polycarbonate (PC)

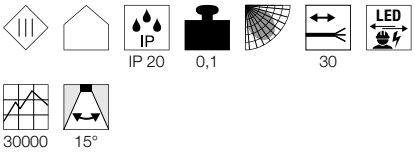

Dimensional drawing



Tip
Different light colour with golden reflector
Open cable end

Accessory recommendation

LED driver 320mA | 10W
Item No. 464140 | 29.70 GBP



Variant	Item No.	GBP
350lm | 3000K | CRI>80		
white	**1001924**	**49.50**
230lm | 3000K | CRI>80		
black	**1001925**	**49.50**
275lm | 3000K | CRI>80		
black/gold	**1001927**	**52.20**

HORN MAGNA
EL







Product details
500mA | 7.7W
Material: aluminium/polycarbonate (PC)

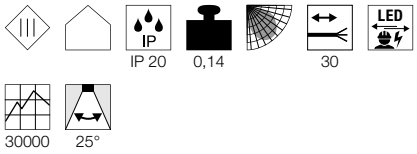

Dimensional drawing



Tip
Driver not included
Different light colour with golden reflector
Open cable end

Accessory recommendation

Glare protection
Item No. 1002596 | 3.00 GBP



LED driver 500mA | 9W
Item No. 464091 | 20.70 GBP



Variant	Item No.	GBP
470lm | 3000K | CRI>80		
white	**1002591**	**58.50**
415lm | 3000K | CRI>80		
black	**1002592**	**58.50**
400lm | 3000K | CRI>80		
black/gold	**1002594**	**60.30**



1001924 416

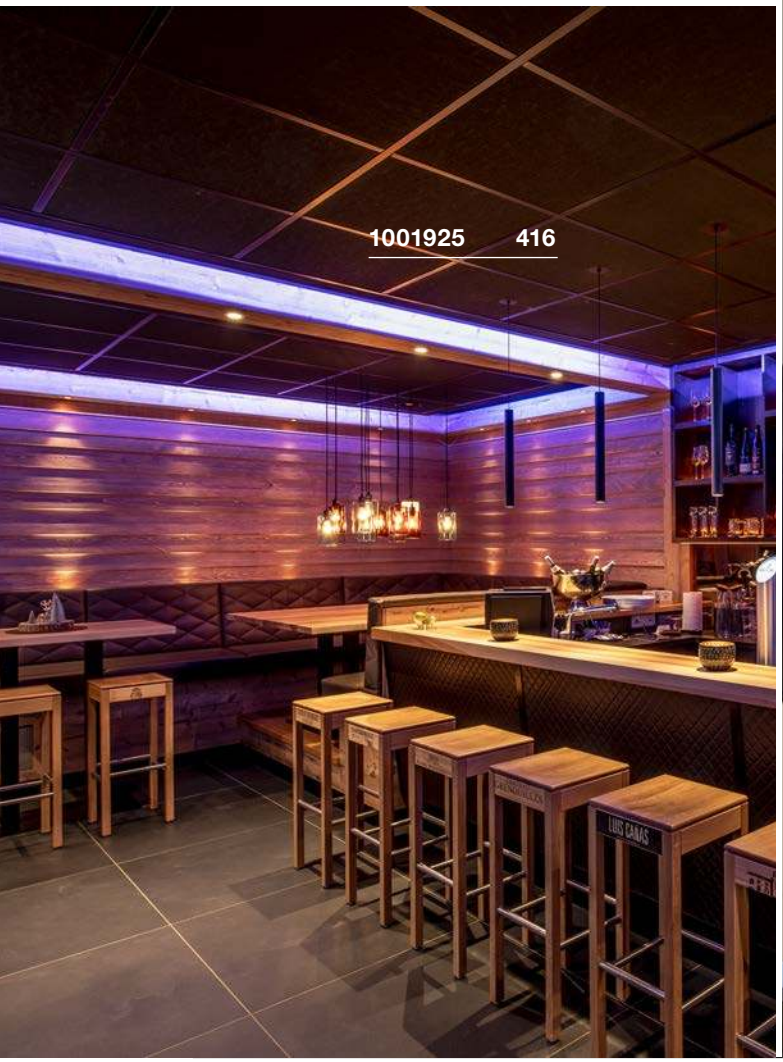

1001925 416

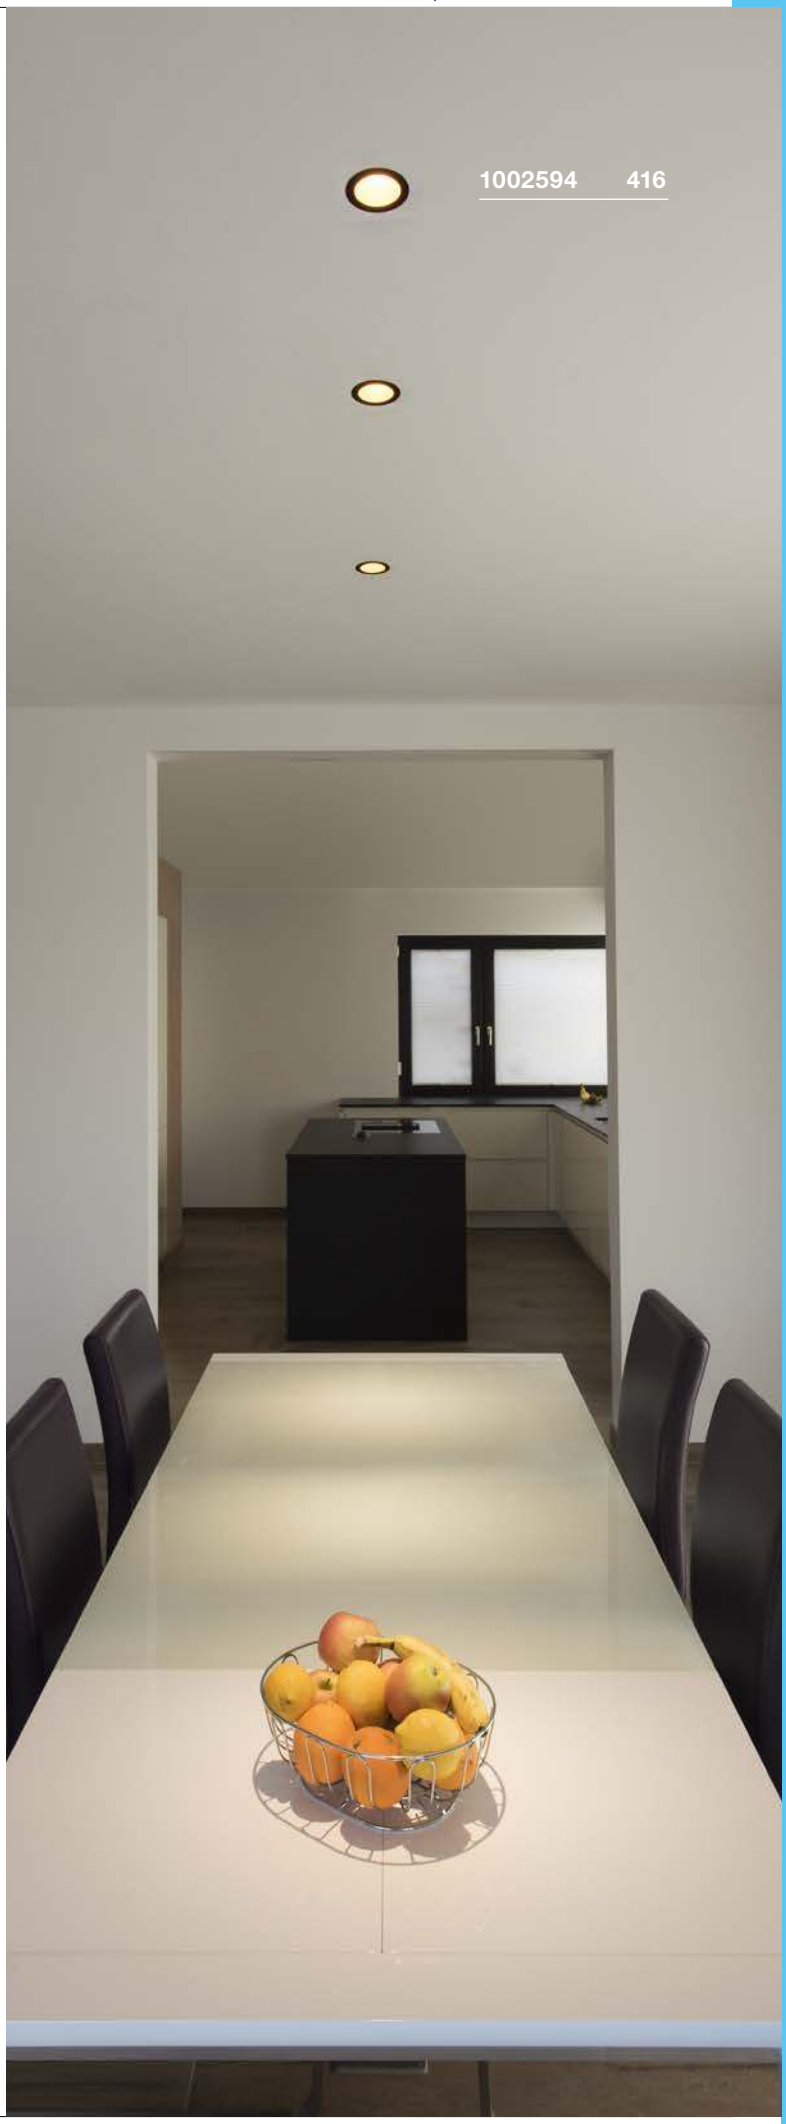

1002594 416

NEW TRIA LIGHTING SERIES.
RECESSED LIGHTS.

Conventional NEW TRIA	NEW TRIA 68	NEW TRIA 78 SL	NEW TRIA 78	NEW TRIA 78
Example				
Shape	○ □	○ □	○ □	○ □
Lamp	SOCKET INSIDE QPAR51	SOCKET INSIDE QPAR51	SOCKET INSIDE QPAR51	SOCKET INSIDE QPAR51
Lumen	–	–	–	–
Colour	–	–	–	–
Dimmable	–	–	–	–
Variant	Spring clips/leaf springs	Spring clips	Leaf springs	Spring clips
IP	–	–	–	–

LED NEW TRIA	NEW TRIA 45	NEW TRIA 68	NEW TRIA 68	NEW TRIA 68
Example				
Shape	○ □	○ □	○ □	○ □
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE DIM TO WARM
Lumen	143lm	300lm	800lm-890lm	440lm
Colour	3000K	2700K/3000K	2700K/3000K	1800K-3000K
Dimmable	–	–	C, L	C, L
Variant	Spring clips	Spring clips	Spring clips	Spring clips/leaf springs
IP	IP 44	–	–	–

	NEW TRIA 155	NEW TRIA 150	NEW TRIA 300
			
	SOCKET INSIDE QPAR51	SOCKET INSIDE QPAR111	SOCKET INSIDE QPAR111
	–	–	–
	–	–	–
	–	–	–
	Spring clips	Leaf springs	Spring clips
	–	–	–

	NEW TRIA 77	NEW TRIA 155	NEW TRIA 110	NEW TRIA 150
				
	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
	645lm-700lm	1160lm-1250lm	1010lm-1120lm	2210lm-2500lm
	2700K/3000K	2700K/3000K	2700K/3000K	2700K/3000K
	–	–	C, L	1-10V
	Spring clips	Spring clips	Spring clips	Spring clips
	–	–	–	–

NEW TRIA 68
Single, round, CS/LS, QPAR51

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Tip
Products are delivered with spring clips.
Leaf springs are included with the product and can be replaced.
Material thickness of mounting surface: 20 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 3,7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	**1001980**	**22.50**
GU10 | QPAR51 □ white	**1001981**	**22.50**
GU10 | QPAR51 ▨ aluminium	**1001982**	**25.20**

NEW TRIA 68
Single, square, CS/LS, QPAR51

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Tip
Products are delivered with spring clips.
Leaf springs are included with the product and can be replaced.
Material thickness of mounting surface: 20 mm

Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	**1001994**	**22.50**
GU10 | QPAR51 □ white	**1001995**	**22.50**
GU10 | QPAR51 ▨ aluminium	**1001996**	**25.20**



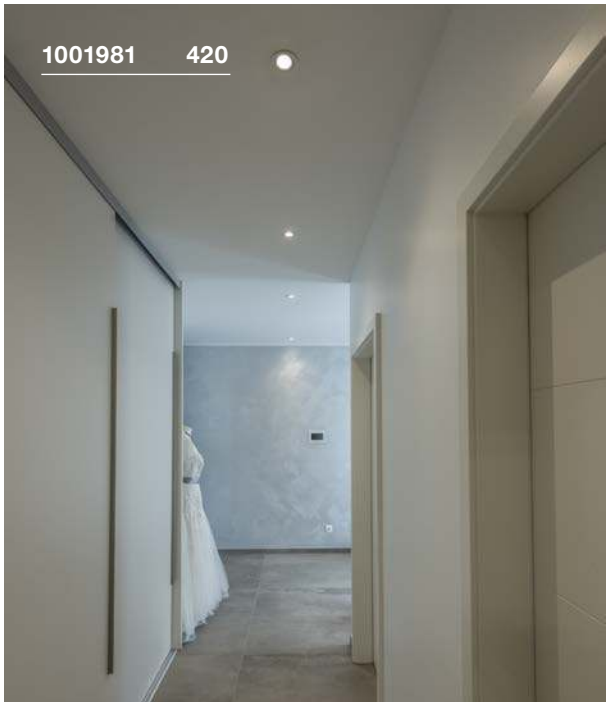

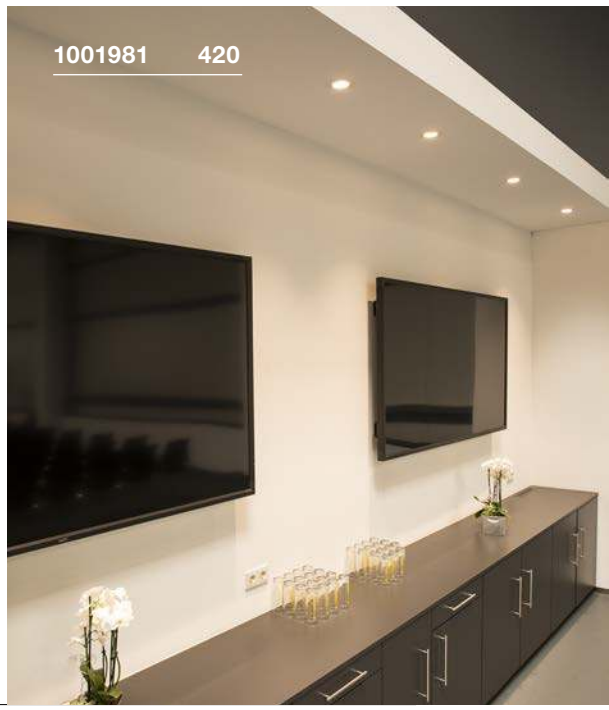





NEW TRIA 78 XL
Single, round, CS, QPAR51

SOCKET INSIDE







- Wide edge

Product details

230V -50Hz
Material: aluminium



Dimensional drawing



Tip

Material thickness of mounting surface:
18 mm

Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005077 | 6.10 GBP



LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**113440**	**27.00**
GU10 | QPAR51		
□ white	**113441**	**27.00**
GU10 | QPAR51		
▨ aluminium	**113446**	**29.70**

NEW TRIA 78 XL
Single, square, CS, QPAR51

SOCKET INSIDE







- Wide edge

Product details

230V -50Hz
Material: aluminium



Dimensional drawing



Tip

Material thickness of mounting surface:
18 mm

Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**113450**	**27.00**
GU10 | QPAR51		
□ white	**113451**	**27.00**
GU10 | QPAR51		
▨ aluminium	**113456**	**29.70**

NEW TRIA 78
Single, round, LS, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip
Leaf springs
Material thickness of mounting surface:
max. 20 mm

Recommended lamp
LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 3,7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**111710**	**25.20**
GU10 | QPAR51		
□ white	**111711**	**25.20**
GU10 | QPAR51		
▨ aluminium	**111716**	**27.00**

NEW TRIA 78
Single, square, LS, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip
Leaf springs
Material thickness of mounting surface:
max. 20 mm

Recommended lamp
LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**111720**	**25.20**
GU10 | QPAR51		
□ white	**111721**	**25.20**
GU10 | QPAR51		
▨ aluminium	**111726**	**27.00**

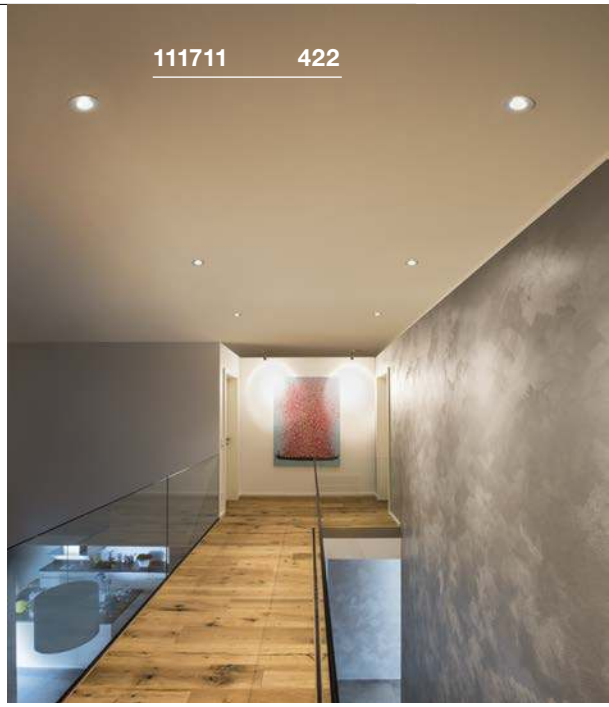



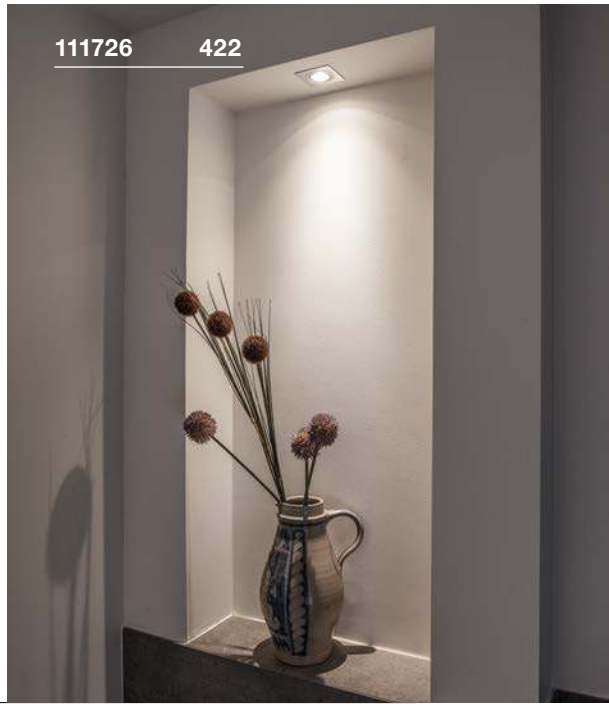







NEW TRIA 78
Single, round, CS, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 18 mm

Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005077 | 6.10 GBP



LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**113490**	**22.50**
GU10 | QPAR51		
□ white	**113510**	**22.50**
GU10 | QPAR51		
▨ aluminium	**111360**	**25.20**

NEW TRIA 78
Single, square, CS, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 18 mm

Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**113491**	**22.50**
GU10 | QPAR51		
□ white	**113511**	**22.50**
GU10 | QPAR51		
▨ aluminium	**111361**	**25.20**

NEW TRIA 155
Double, CS, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 30 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005076 | 6.10 GBP



Lamp details

2x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	113492	40.50
GU10 | QPAR51 □ white	113512	40.50
GU10 | QPAR51 ▫ aluminium	111362	43.20

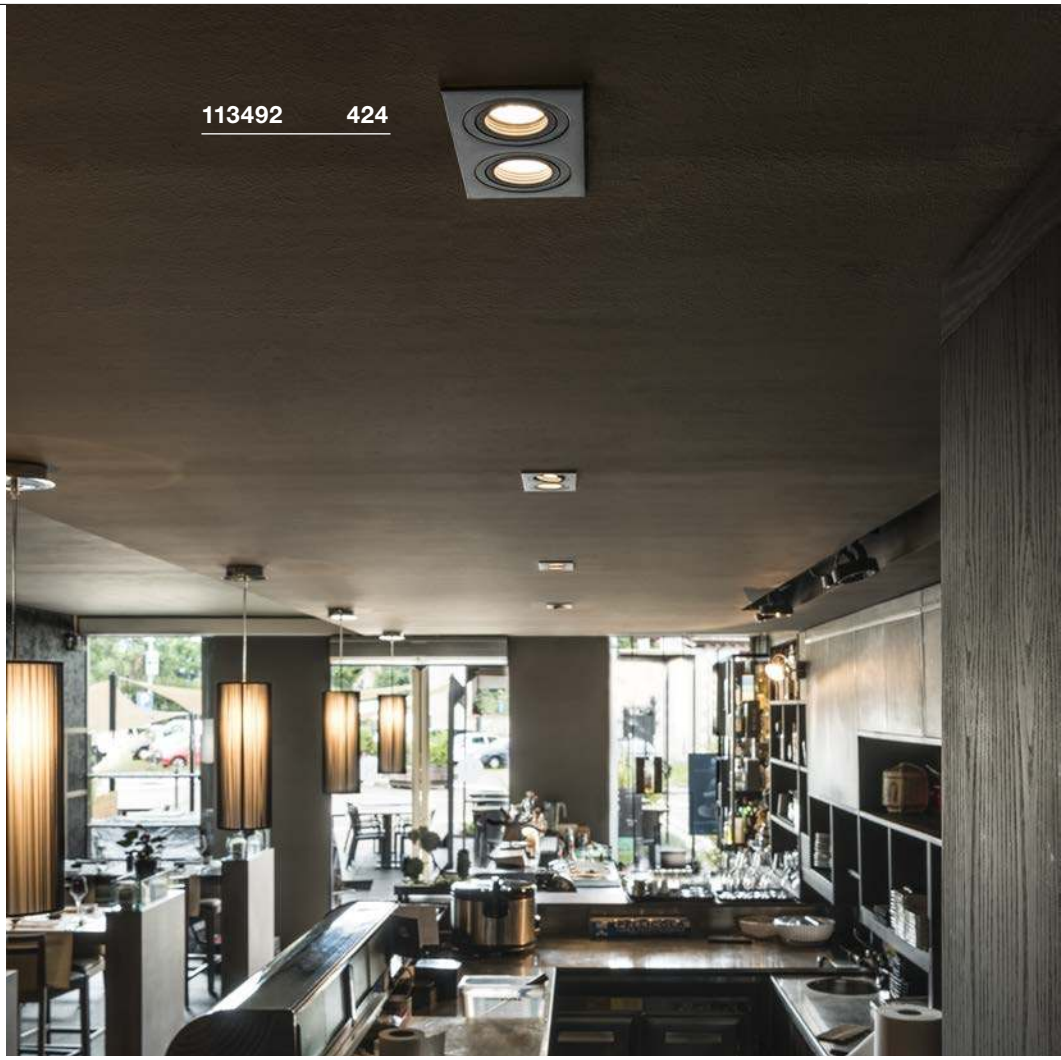

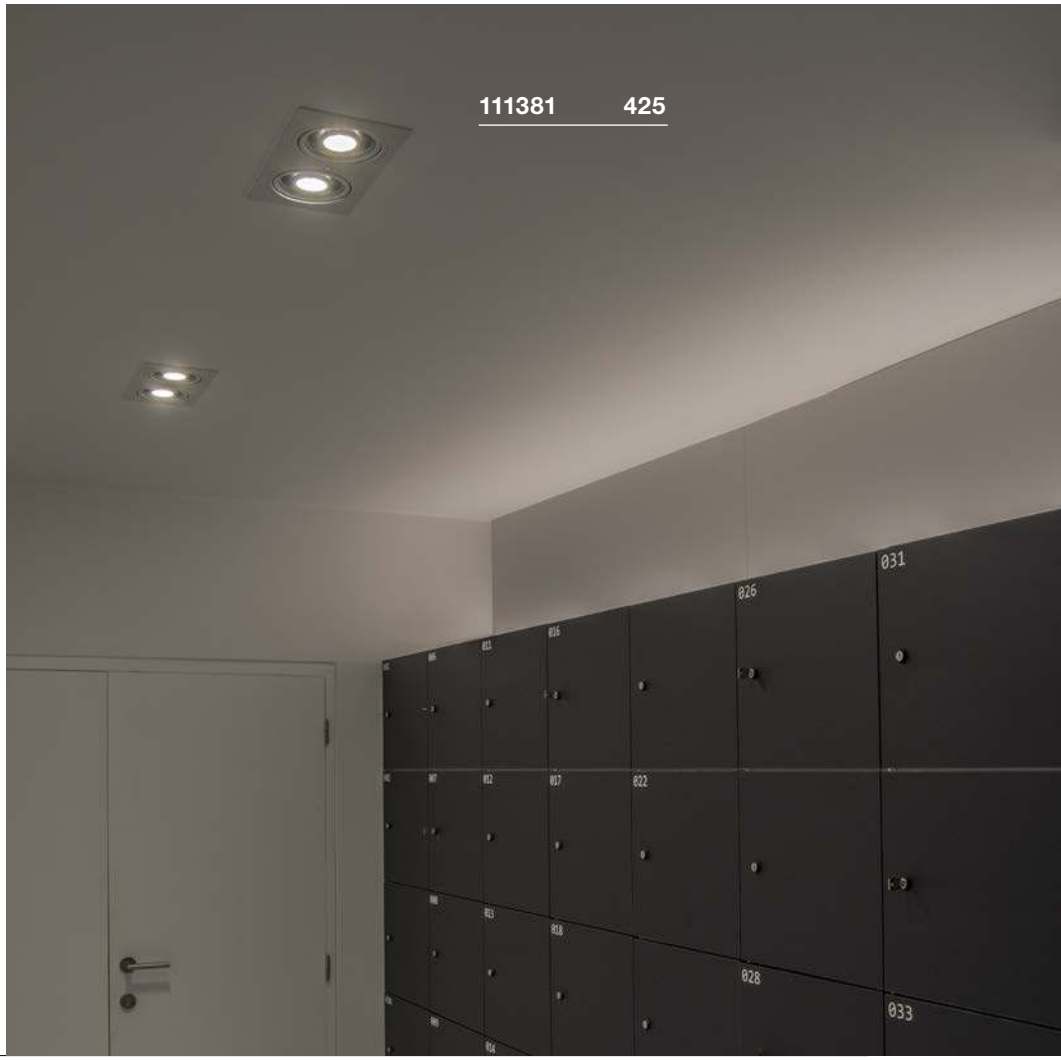

NEW TRIA 150
Single, round, LS, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Tip
Leaf springs
Material thickness of mounting surface:
max. 30 mm

Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP



LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP



Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**113550**	**45.00**
GU10 | QPAR111		
□ white	**113540**	**45.00**
GU10 | QPAR111		
▨ aluminium	**111380**	**49.50**

NEW TRIA 150
Single, square, LS, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Tip
Leaf springs
Material thickness of mounting surface:
max. 30 mm

Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP



LED GU10 6.5W 38°
2700K 390lm
7kWh/1000h
Item No. 551882 | 40.50 GBP



Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**113830**	**45.00**
GU10 | QPAR111		
□ white	**113541**	**45.00**
GU10 | QPAR111		
▨ aluminium	**111381**	**49.50**

NEW TRIA 300
Double, CS, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Tip
Spring clips
Material thickness of mounting surface:
max. 30 mm

Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP



LED GU10 9.5W 40°
2200-6700K 800lm
10kWh/1000h
Item No. 1001923 | 49.50 GBP



Lamp details
2x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**113840**	**90.00**
GU10 | QPAR111		
□ white	**113841**	**90.00**
GU10 | QPAR111		
▨ aluminium	**111382**	**99.00**

NEW TRIA 45
Single, round, CS







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 4.4W
Material: aluminium

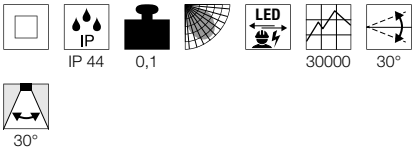

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 20 mm

Variant	Item No.	GBP
143lm | 3000K | CRI>80		
■ black	**113970**	**43.20**
143lm | 3000K | CRI>80		
□ white	**113971**	**43.20**
143lm | 3000K | CRI>80		
▨ aluminium	**113976**	**49.50**

NEW TRIA 45
Single, square, CS







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 4.4W
Material: aluminium

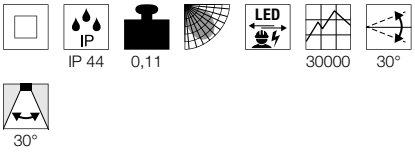

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 20 mm

Variant	Item No.	GBP
143lm | 3000K | CRI>80		
■ black	**114400**	**43.20**
143lm | 3000K | CRI>80		
□ white	**114401**	**43.20**
143lm | 3000K | CRI>80		
▨ aluminium	**114406**	**49.50**

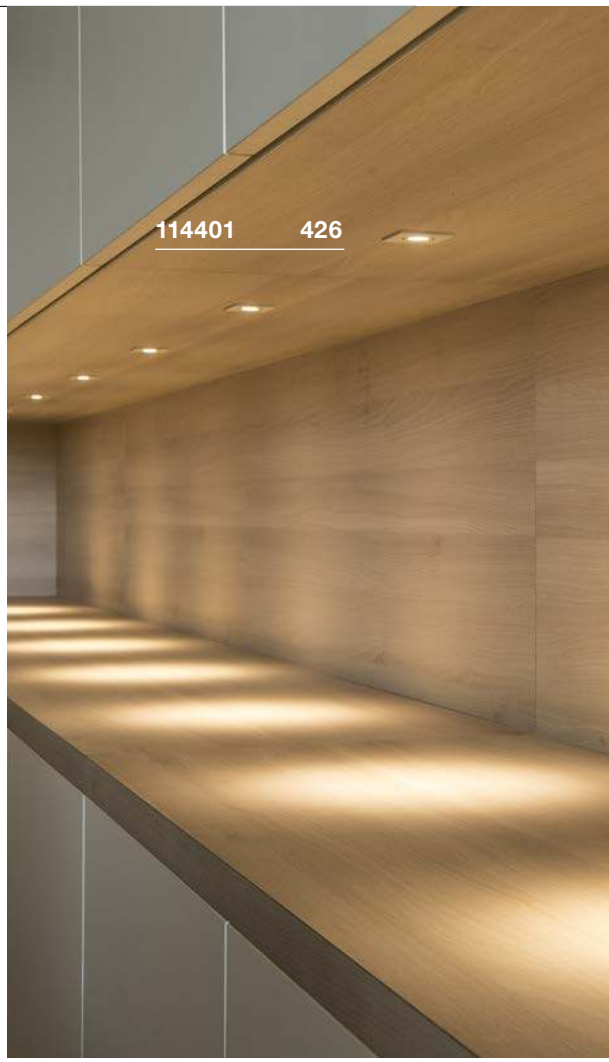



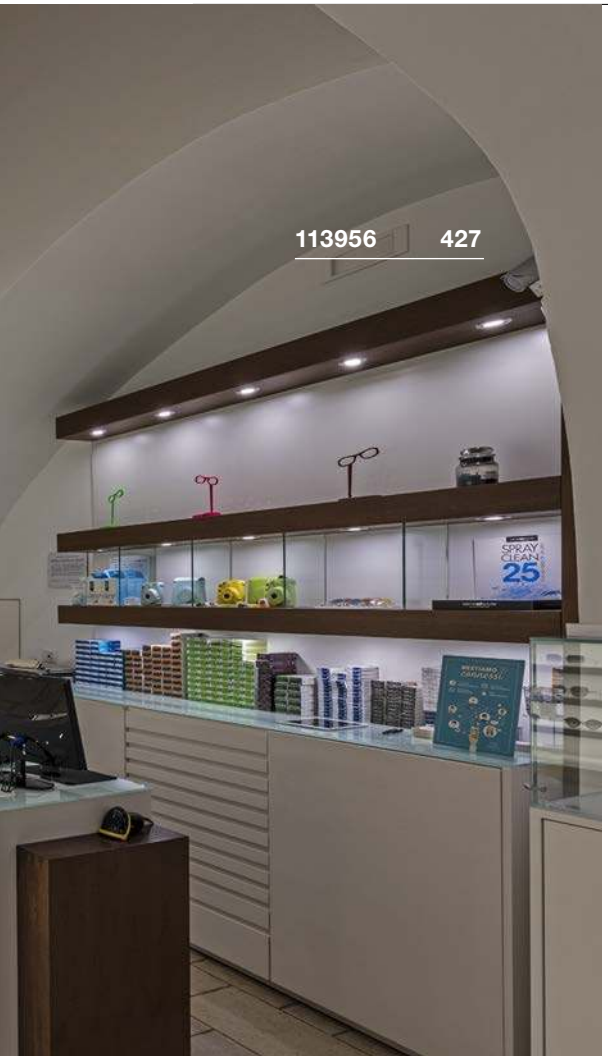

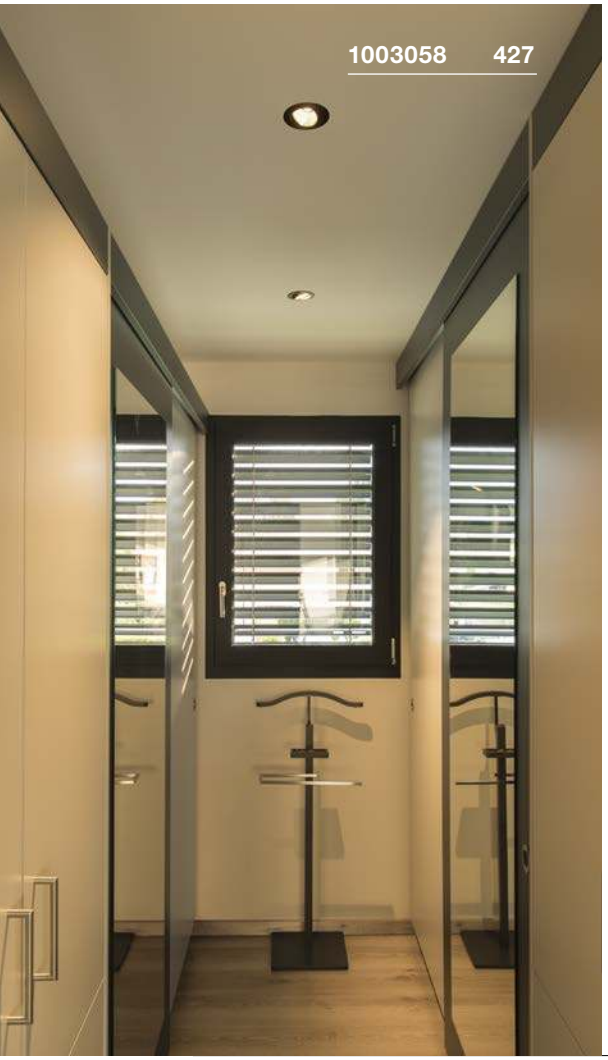

NEW TRIA 68
Single, round, CS

LED INSIDE







- Premium LED
- Installation depth <40 mm
- Convenient ceiling cut-out for standard drill bit

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 5.3W
Material: aluminium

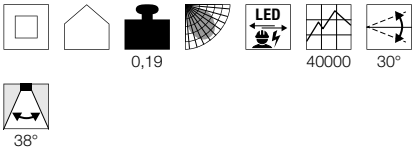

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
20 mm

Variant	Item No.	GBP
300lm | 2700K | CRI80		
matt black	**1003058**	**40.50**
300lm | 2700K | CRI80		
matt white	**1003059**	**40.50**
300lm | 2700K | CRI80		
brushed aluminium	**1003060**	**43.20**
300lm | 3000K | CRI80		
matt black	**1003057**	**40.50**
300lm | 3000K | CRI80		
matt white	**113951**	**40.50**
300lm | 3000K | CRI80		
brushed aluminium	**113956**	**43.20**

NEW TRIA 68
Single, square, CS

LED INSIDE







- Premium LED
- Installation depth <40 mm
- Convenient ceiling cut-out for standard drill bit

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 5.3W
Material: aluminium

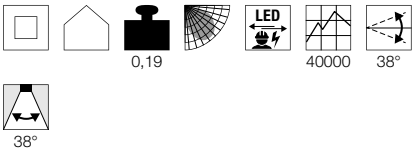

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
20 mm

Variant	Item No.	GBP
300lm | 2700K | CRI80		
matt black	**1003062**	**40.50**
300lm | 2700K | CRI80		
matt white	**1003063**	**40.50**
300lm | 2700K | CRI80		
brushed aluminium	**1003064**	**43.20**
300lm | 3000K | CRI80		
matt black	**1003061**	**40.50**
300lm | 3000K | CRI80		
matt white	**113961**	**40.50**
300lm | 3000K | CRI80		
brushed aluminium	**113966**	**43.20**

NEW TRIA 68
EL, single, round, CS, PHASE







Product details

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium
Dimmable: C, L

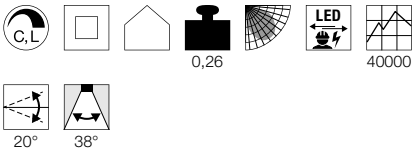

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
20 mm

Variant	Item No.	GBP
800lm | 2700K | CRI>80		
black	1003065	67.50
800lm | 2700K | CRI>80		
white	1003066	67.50
800lm | 2700K | CRI>80		
aluminium	1003067	72.00
890lm | 3000K | CRI>80		
black	114380	67.50
890lm | 3000K | CRI>80		
white	114381	67.50
890lm | 3000K | CRI>80		
brushed aluminium	114386	72.00

NEW TRIA 68
Single, square, CS, PHASE







Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium
Dimmable: C, L

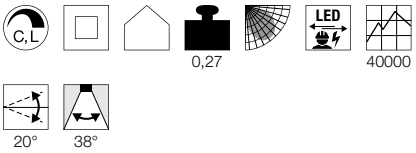

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
20 mm

Variant	Item No.	GBP
800lm | 2700K | CRI>80		
black	1003068	67.50
800lm | 2700K | CRI>80		
white	1003069	67.50
800lm | 2700K | CRI>80		
aluminium	1003070	72.00
890lm | 3000K | CRI>80		
black	114390	67.50
890lm | 3000K | CRI>80		
white	114391	67.50
890lm | 3000K | CRI>80		
brushed aluminium	114396	72.00









NEW TRIA 68
Single, round, CS/LS, PHASE

LED INSIDE

DIM TO WARM







- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- Installation height <40mm

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium
Dimmable: C, L

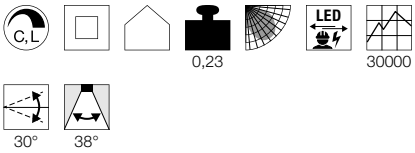

Dimensional drawing



Tip

Material thickness of mounting surface:
20 mm

Variant	Item No.	GBP
440lm | 1800-3000K | CRI>95		
black	1001978	67.50
440lm | 1800-3000K | CRI>95		
white	1001989	67.50
440lm | 1800-3000K | CRI>95		
brushed aluminium	1001990	72.00

NEW TRIA 68
Single, square, CS/LS, PHASE

LED INSIDE

DIM TO WARM







- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- Installation height <40mm

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium
Dimmable: C, L

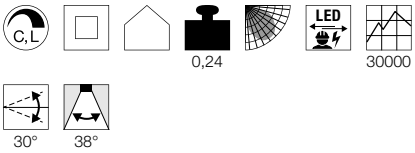

Dimensional drawing



Tip

Material thickness of mounting surface:
20 mm

Variant	Item No.	GBP
440lm | 1800-3000K | CRI>95		
black	1001991	67.50
440lm | 1800-3000K | CRI>95		
white	1001992	67.50
440lm | 1800-3000K | CRI>95		
brushed aluminium	1001993	72.00

NEW TRIA 77
Single, round, CS







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium

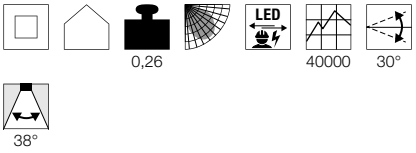

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 20 mm

Variant	Item No.	GBP
645lm | 2700K | CRI>80		
black	113870	49.50
645lm | 2700K | CRI>80		
white	113871	49.50
645lm | 2700K | CRI>80		
aluminium	113876	54.00
700lm · 3000K · CRI>80		
black	113900	49.50
700lm · 3000K · CRI>80		
white	113901	49.50
700lm · 3000K · CRI>80		
aluminium	113906	54.00

NEW TRIA 77
Single, square, CS







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium

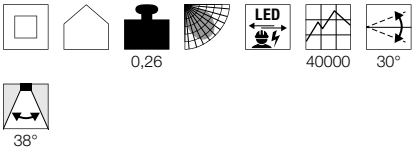

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 20 mm

Variant	Item No.	GBP
645lm | 2700K | CRI>80		
black	113880	49.50
645lm | 2700K | CRI>80		
white	113881	49.50
645lm | 2700K | CRI>80		
aluminium	113886	54.00
700lm · 3000K · CRI>80		
black	113910	49.50
700lm · 3000K · CRI>80		
white	113911	49.50
700lm · 3000K · CRI>80		
aluminium	113916	54.00



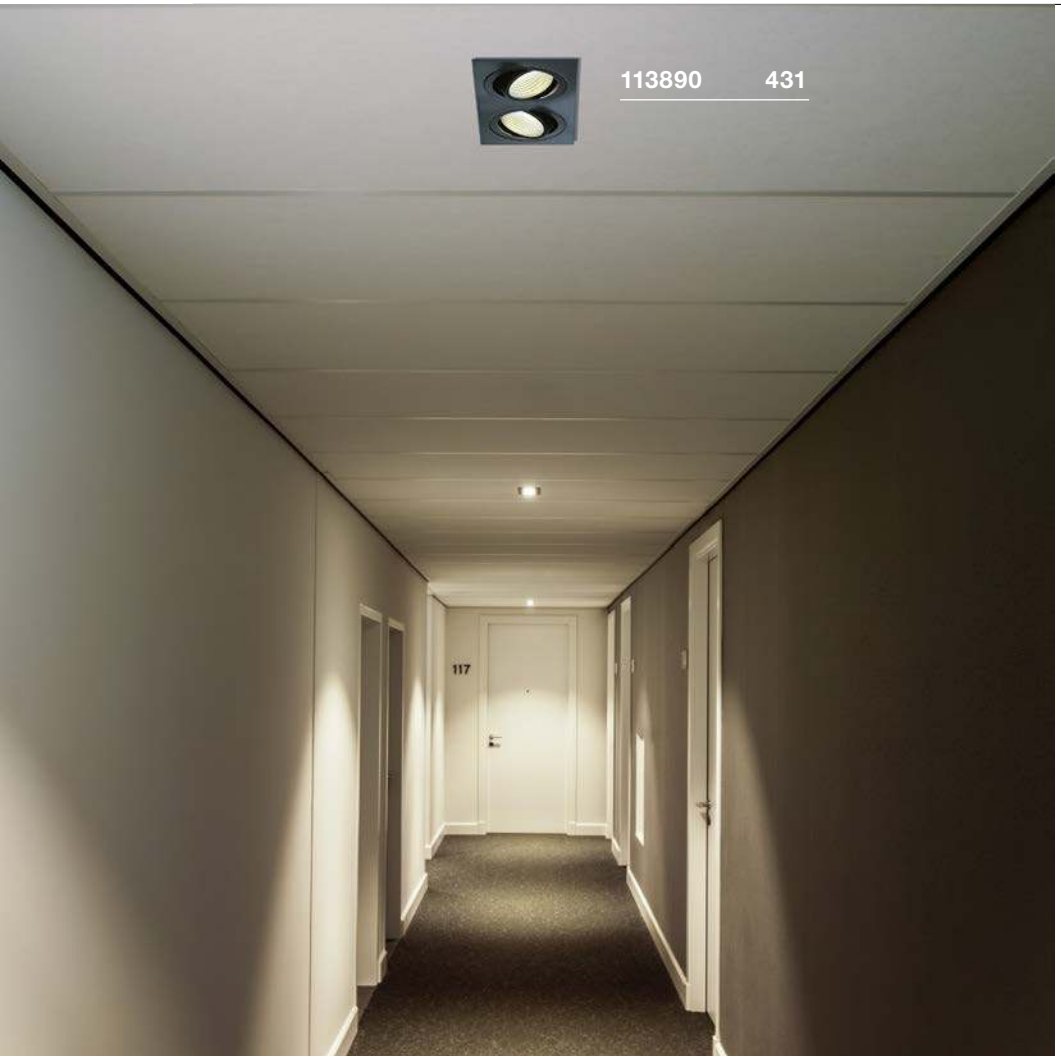

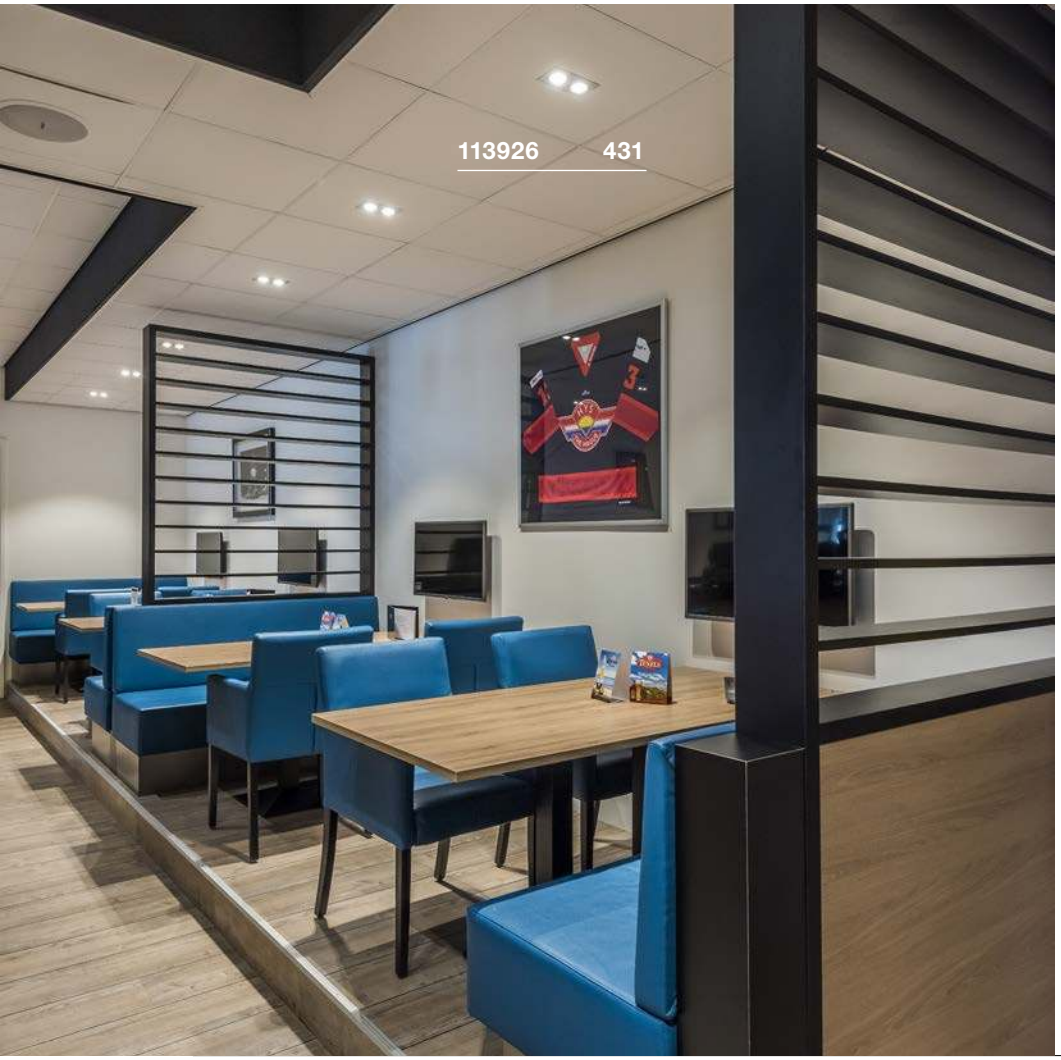

NEW TRIA 155
Double, CS

LED INSIDE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

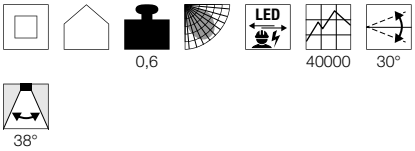

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 30 mm

Variant	Item No.	GBP
1160lm | 2700K | CRI>80 black	**113890**	**99.00**
1160lm | 2700K | CRI>80 white	**113891**	**99.00**
1160lm | 2700K | CRI>80 aluminium	**113896**	**103.50**
1250lm | 3000K | CRI>80 black	**113920**	**99.00**
1250lm | 3000K | CRI>80 white	**113921**	**99.00**
1250lm | 3000K | CRI>80 aluminium	**113926**	**103.50**

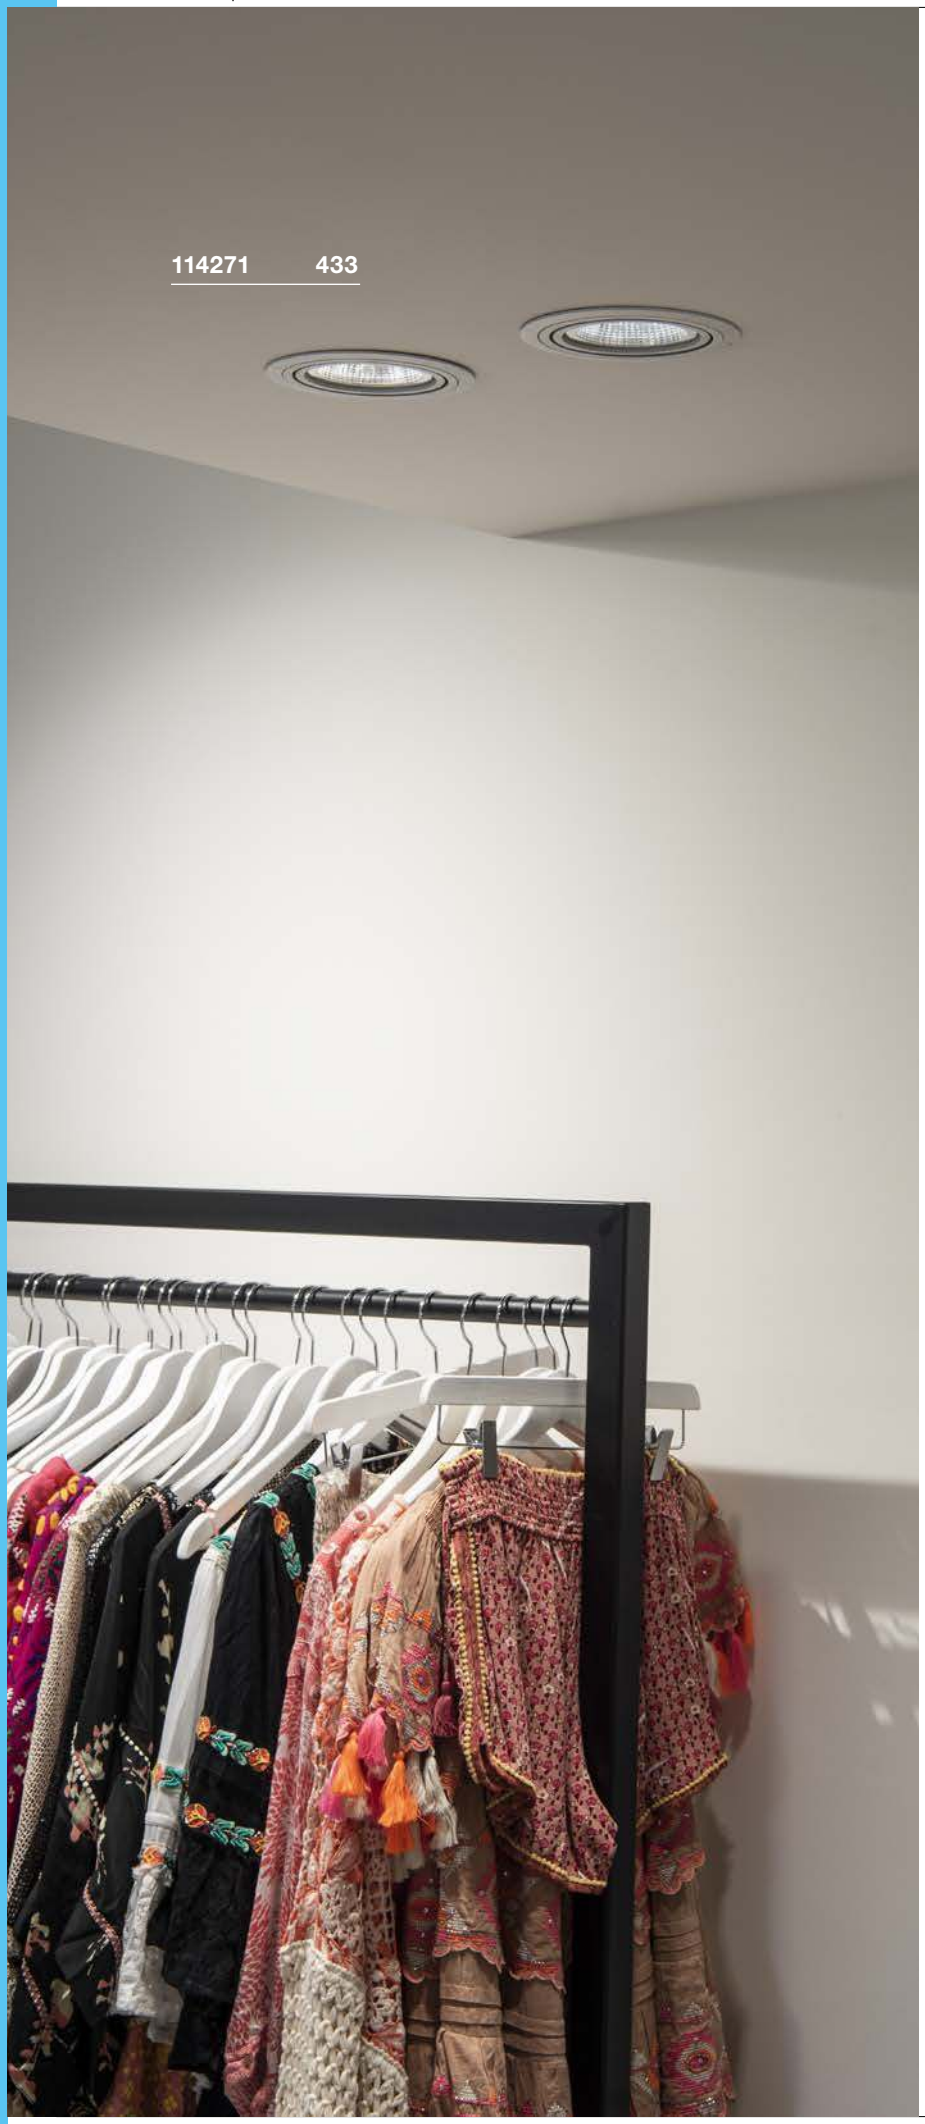

NEW TRIA 110
Single, round, CS, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium
Dimmable: C, L

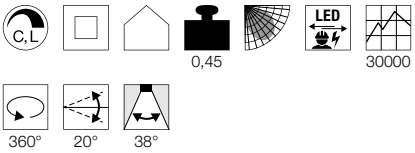

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 20 mm

Variant	Item No.	GBP
1010lm | 2700K | CRI>80		
■ black	**114220**	**153.00**
1030lm | 2700K | CRI>80		
□ white	**114221**	**153.00**
1100lm | 3000K | CRI>80		
■ black	**114230**	**153.00**
1120lm | 3000K | CRI>80		
□ white	**114231**	**153.00**

NEW TRIA 110
Single, square, CS, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium
Dimmable: C, L

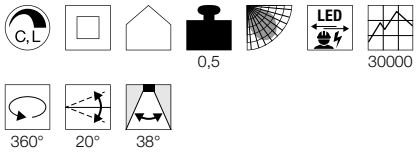

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 20 mm

Variant	Item No.	GBP
1010lm | 2700K | CRI>80		
■ black	**114240**	**153.00**
1030lm | 2700K | CRI>80		
□ white	**114241**	**153.00**
1100lm | 3000K | CRI>80		
■ black	**114250**	**153.00**
1120lm | 3000K | CRI>80		
□ white	**114251**	**153.00**

NEW TRIA 150
Single, round, CS, 1-10V

LED INSIDE







Product details

100-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium
Dimmable: 1-10V

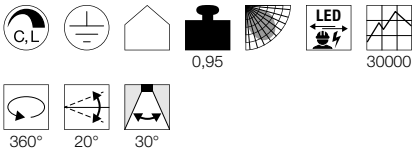

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 20 mm

Variant	Item No.	GBP
2210lm | 2700K | CRI>80		
■ black	**114260**	**206.10**
2275lm | 2700K | CRI>80		
□ white	**114261**	**206.10**
2425lm | 3000K | CRI>80		
■ black	**114270**	**206.10**
250lm · 3000K · CRI>80		
□ white	**114271**	**206.10**

NEW TRIA 150
Single, square, CS, 1-10V

LED INSIDE







Product details

100-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium
Dimmable: 1-10V

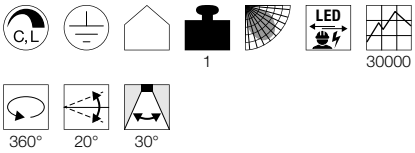

Dimensional drawing



Tip

Spring clips
Material thickness of mounting surface:
max. 20 mm

Variant	Item No.	GBP
2210lm | 2700K | CRI>80		
■ black	**114280**	**206.10**
2275lm | 2700K | CRI>80		
□ white	**114281**	**206.10**
2425lm | 3000K | CRI>80		
■ black	**114290**	**206.10**
250lm · 3000K · CRI>80		
□ white	**114291**	**206.10**

KADUX
EL, single, QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/steel

0,35

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP

Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**115510**	**25.20**
GU10 | QPAR51		
□ white	**115511**	**25.20**
GU10 | QPAR51		
▨ aluminium	**115516**	**27.00**

KADUX
EL, double, QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/steel

0,55

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP

LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005081 | 6.10 GBP

Lamp details

2x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**115520**	**45.90**
GU10 | QPAR51		
□ white	**115521**	**45.90**
GU10 | QPAR51		
▨ aluminium	**115526**	**49.50**

KADUX
EL, triple, QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/steel

0,75

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Recommended lamp

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details

3x max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**115530**	**63.00**
GU10 | QPAR51		
□ white	**115531**	**63.00**
GU10 | QPAR51		
▨ aluminium	**115536**	**67.50**





KADUX
EL, single, QPAR111

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/steel

1,1

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP

LED GU10 6.5W 38°
2700K 390lm
7kWh/1000h
Item No. 551882 | 40.50 GBP

Lamp details

max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
black	**115540**	**81.00**
GU10 | QPAR111		
white	**115541**	**81.00**
GU10 | QPAR111		
aluminium	**115546**	**85.50**

KADUX
EL, double, QPAR111

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/steel

1,9

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP

LED GU10 7W 25°
3000K 730lm
8kWh/1000h
Item No. 1001570 | 20.70 GBP

Lamp details

2x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
black	**115550**	**126.00**
GU10 | QPAR111		
white	**115551**	**126.00**
GU10 | QPAR111		
aluminium	**115556**	**135.00**

KADUX
EL, single, PHASE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7.5W
Material: aluminium/steel
Dimmable: C, L

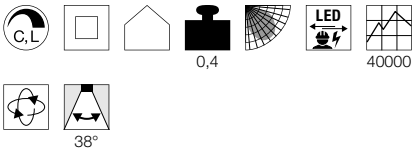

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Variant	Item No.	GBP
650lm | 3000K | CRI>80 ■ black	**115700**	**72.00**
650lm | 3000K | CRI>80 □ white	**115701**	**72.00**
650lm | 3000K | CRI>80 ▨ aluminium	**115706**	**76.50**

KADUX
EL, double, PHASE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/steel
Dimmable: C, L

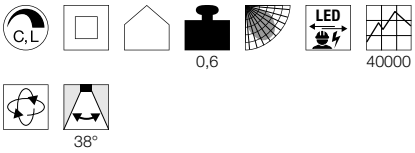

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Variant	Item No.	GBP
1290lm | 3000K | CRI>80 ■ black	**115710**	**135.00**
1290lm | 3000K | CRI>80 □ white	**115711**	**135.00**
1290lm | 3000K | CRI>80 ▨ aluminium	**115716**	**153.00**

KADUX
EL, triple, PHASE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 20W
Material: aluminium/steel
Dimmable: C, L

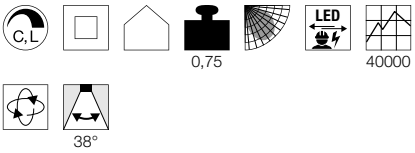

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Variant	Item No.	GBP
1920lm | 3000K | CRI>80 ■ black	**115720**	**180.00**
1920lm | 3000K | CRI>80 □ white	**115721**	**180.00**
1920lm | 3000K | CRI>80 ▨ aluminium	**115726**	**190.80**





KADUX
EL, single, 1-10V

LED INSIDE







Product details

100-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium/steel
Dimmable: 1-10V





Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Accessory recommendation

1-10V dimming
Item No. 470505 | 9.90 GBP



Variant	Item No.	GBP
2425lm | 3000K | CRI>80		
black	**115730**	**199.80**
250lm · 3000K · CRI>80		
white	**115731**	**199.80**
250lm · 3000K · CRI>80		
aluminium	**115736**	**215.10**

KADUX
EL, double, 1-10V

LED INSIDE







Product details

100-240V ~50/60Hz | 1400mA
Total wattage: 54W
Material: aluminium/steel
Dimmable: 1-10V





Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Accessory recommendation

1-10V dimming
Item No. 470505 | 9.90 GBP



Variant	Item No.	GBP
5200lm | 3000K | CRI>80		
black	**115740**	**341.10**
5300lm | 3000K | CRI>80		
white	**115741**	**341.10**
5300lm | 3000K | CRI>80		
aluminium	**115746**	**350.10**

AIXLIGHT® PRO 50
LED Module

LED INSIDE





Product details

350mA | 13.3W
Material: aluminium/glass

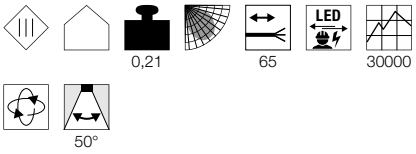

Dimensional drawing



Tip

Driver not included
Open cable end

Accessory recommendation

LED driver 350mA | 15W
Item No. 1002803 | 30.60 GBP



Variant	Item No.	GBP
1150lm | 3000K | CRI>80 white/black	**1002598**	**49.50**
1150lm | 3000K | CRI>80 grey/black	**1002599**	**49.50**
1185lm | 4000K | CRI>80 white/black	**1002600**	**49.50**
1185lm | 4000K | CRI>80 grey/black	**1002601**	**49.50**

AIXLIGHT® PRO 50
QPAR51 Module

SOCKET INSIDE



Product details

230V -50Hz
Material: aluminium/plastic



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005083 | 6.10 GBP



Lamp details

max. 50W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51 grey/black	**115414**	**20.70**



AIXLIGHT® PRO 50 1 FRAMELESS

Steel
L: 10.2 cm W: 10.2 cm T: 10.5 cm
Weight: 0.77 kg
1 piece



Variant	Item No.	GBP
black	**115351**	**72.00**

AIXLIGHT® PRO 50 2 FRAMELESS

Steel
L: 18.8 cm W: 10.2 cm T: 10.5 cm
Weight: 1.09 kg
1 piece



Variant	Item No.	GBP
black	**115352**	**90.00**






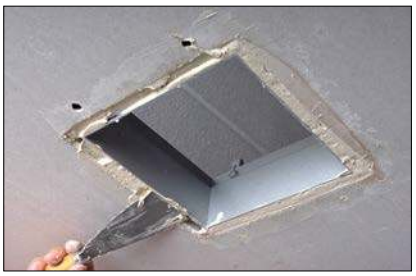







AIXLIGHT® PRO
EL, QPAR111 Module

SOCKET INSIDE






Product details

230V -50Hz
Material: aluminium/plastic



Dimensional drawing



Recommended lamp

LED GU10 13W 55°
4000K 950lm
13kWh/1000h
Item No. 1003095 | 80.10 GBP



LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP



Lamp details

max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
matt white	115011	31.50
GU10 | QPAR111		
grey/black	115014	31.50

AIXLIGHT® PRO 1 FRAMELESS

Steel
L: 15.5 cm W: 15.5 cm T: 18.5 cm
Weight: 2.15kg
1 piece



Variant	Item No.	GBP
black	115151	81.00

AIXLIGHT® PRO 2 FRAMELESS

Steel
L: 31.5 cm W: 15.5 cm T: 18.5 cm
Weight: 3.5 kg
1 piece



Variant	Item No.	GBP
black	115152	108.00

SUPROS 78
EL, PHASE

LED INSIDE









Product details

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium
Dimmable: C, L

C,L | 0,34 | LED | 25000 | 30° | 60°

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Accessory recommendation

Lens 20°
Item No. 116302 | 3.00 GBP

Lens 40°
Item No. 116304 | 3.00 GBP

Variant	Item No.	GBP
700lm | 3000K | CRI>80 | 60°		
■ black	**116310**	**90.00**
700lm | 3000K | CRI>80 | 60°		
□ white	**116311**	**90.00**

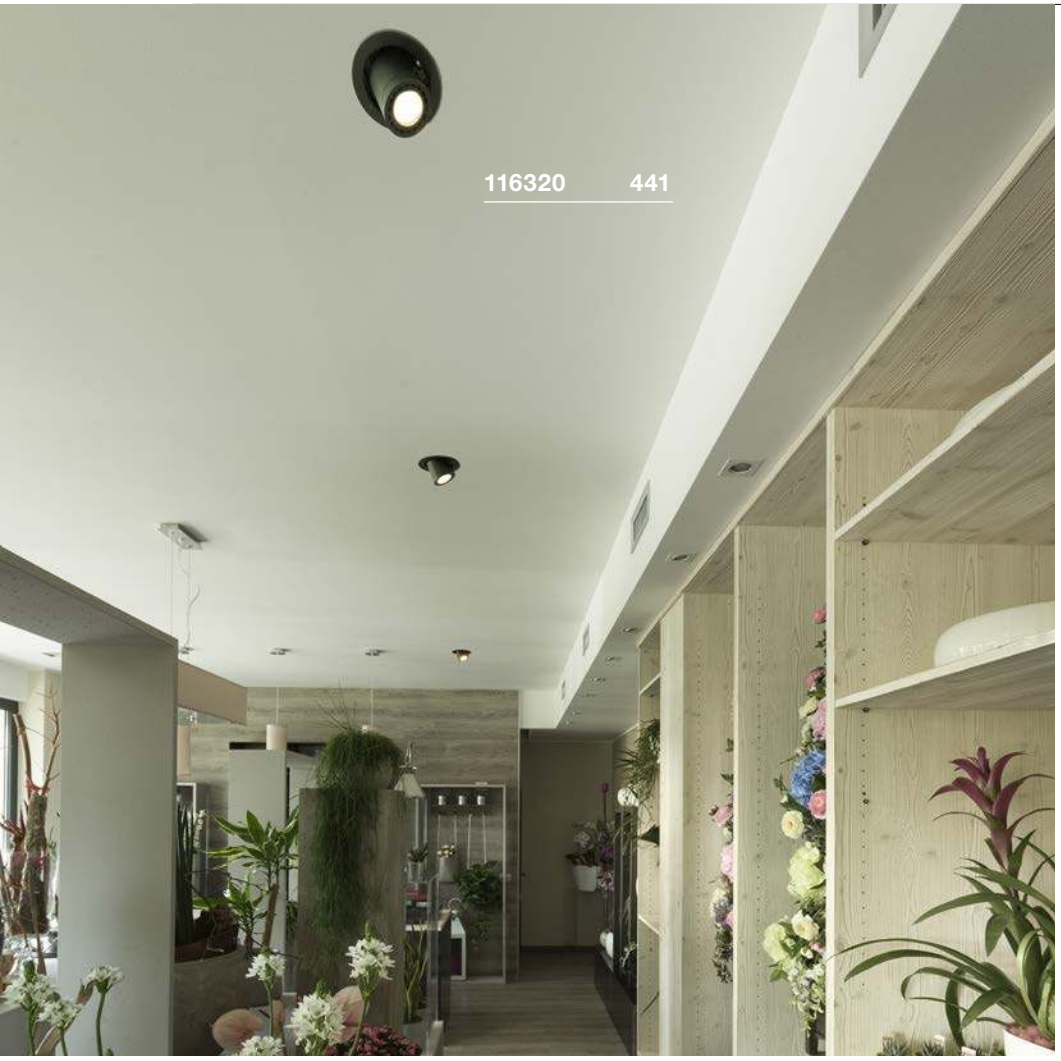

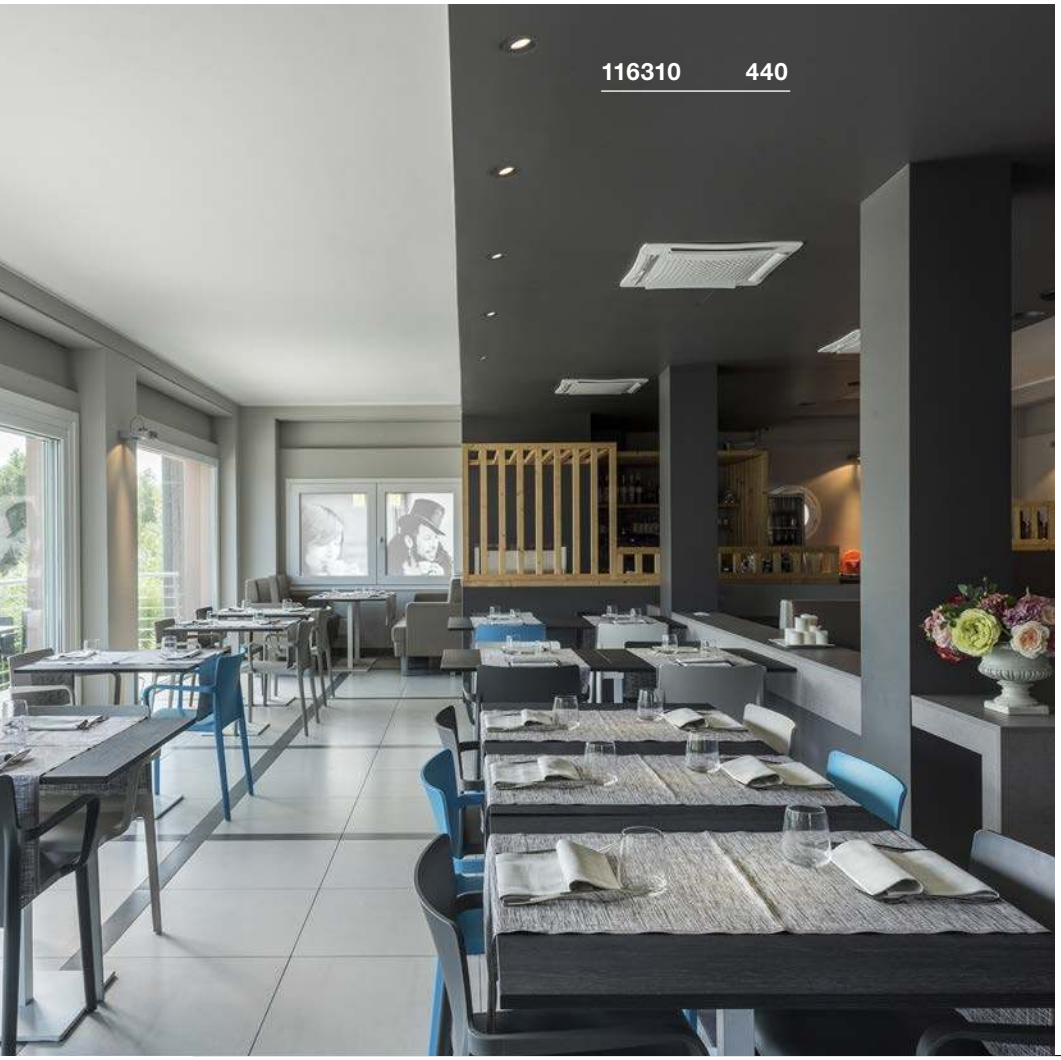

SUPROS 78
EL, Move, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium
Dimmable: C, L

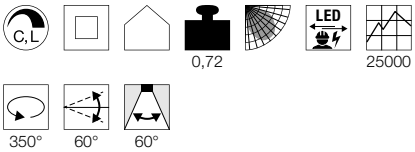

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Accessory recommendation

Lens 20°
Item No. 116302 | 3.00 GBP

Lens 40°
Item No. 116304 | 3.00 GBP

Variant	Item No.	GBP
700lm | 3000K | CRI>80 | 60°		
■ black	**116320**	**117.00**
700lm | 3000K | CRI>80 | 60°		
□ white	**116321**	**117.00**

SUPROS
DL

FOLLOWER

LED INSIDE









Product details

220-240V ~50/60Hz | 750mA
Material: aluminium

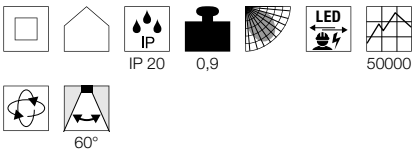

IP 20 | 0,9 | 50000

60°

Dimensional drawing



Tip

Material thickness of mounting surface:
max. 25 mm

Accessory recommendation

Reflector 20°
Item No. 114102 | 9.50 GBP

Reflector 40°
Item No. 114104 | 9.50 GBP

Variant	Item No.	GBP
2600lm | 3000K | CRI>90 | 31W		
black	**1003299**	**184.50**
2600lm | 3000K | CRI>90 | 31W		
white	**1003300**	**184.50**
2700lm | 4000K | CRI>90 | 31W		
black	**1003303**	**184.50**
2700lm | 4000K | CRI>90 | 31W		
white	**1003304**	**184.50**
3380lm | 3000K | CRI>90 | 36W		
black	**1003301**	**193.50**
3380lm | 3000K | CRI>90 | 36W		
white	**1003302**	**193.50**
3520lm | 4000K | CRI>90 | 36W		
black	**1003305**	**193.50**
3520lm | 4000K | CRI>90 | 36W		
white	**1003306**	**193.50**



SUPROS
DL, Move

FOLLOWER

LED INSIDE







Product details

220-240V ~50/60Hz | 750mA
Material: aluminium

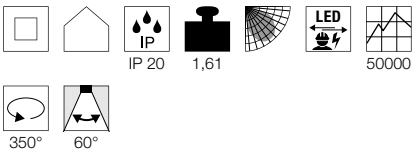

Dimensional drawing



Tip

Material thickness of mounting surface:
25 mm

Accessory recommendation

Reflector 20°
Item No. 114102 | 9.50 GBP



Reflector 40°
Item No. 114104 | 9.50 GBP



Variant	Item No.	GBP
2600lm | 3000K | CRI>90 | 31W		
■ black	**1003307**	**224.10**
2600lm | 3000K | CRI>90 | 31W		
□ white	**1003308**	**224.10**
2700lm | 4000K | CRI>90 | 31W		
■ black	**1003311**	**224.10**
2700lm | 4000K | CRI>90 | 31W		
□ white	**1003312**	**224.10**
3380lm | 3000K | CRI>90 | 36W		
■ black	**1003309**	**229.50**
3380lm | 3000K | CRI>90 | 36W		
□ white	**1003310**	**229.50**
3520lm | 4000K | CRI>90 | 36W		
■ black	**1003313**	**229.50**
3520lm | 4000K | CRI>90 | 36W		
□ white	**1003314**	**229.50**


1004668 445
HIËRE | VAN VENLO



OCULUS
CL, Move, PHASE

NEW

LED INSIDE

DIM TO WARM







Product details

220-240V ~50/60Hz | 250mA
Total wattage: 10.5W
Material: aluminium/glass
Dimmable: C

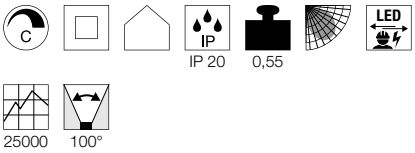

Dimensional drawing



Tip

Material thickness of mounting surface:
7-20 mm

Variant	Item No.	GBP
36-780lm | 2000-3000K | CRI>90		
■ matt black	**1004668**	**166.50**
36-780lm | 2000-3000K | CRI>90		
□ matt white	**1004669**	**166.50**

GIMBLE IN 68
EL

LED INSIDE







- Premium LED with CRI>90
- Light emission can be rotated and pivoted

Product details
350mA | 6W
Material: aluminium

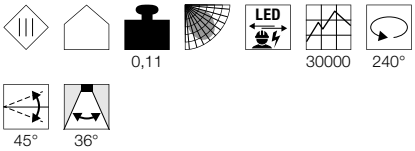

Dimensional drawing



Tip
Material thickness of mounting surface:
20 mm

Accessory recommendation
LED driver 320mA | 10W
Item No. 464140 | 29.70 GBP



Variant	Item No.	GBP
520lm | 3000K | CRI>90		
white	**1002879**	**46.80**
560lm | 4000K | CRI>90		
white	**1002885**	**46.80**

GIMBLE IN 100
EL

LED INSIDE







- Premium LED with CRI>90
- Light emission can be rotated and pivoted

Product details
350mA | 13W
Material: aluminium

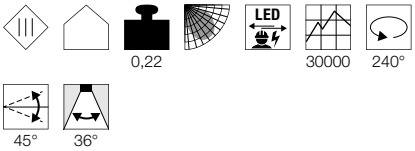

Dimensional drawing



Tip
Material thickness of mounting surface:
25 mm

Accessory recommendation
LED driver 350mA | 15W
Item No. 464031 | 36.00 GBP



Variant	Item No.	GBP
990lm | 3000K | CRI>90		
white	**1002880**	**63.00**
1140lm | 4000K | CRI>90		
white	**1002886**	**63.00**

GIMBLE IN 150
EL

LED INSIDE







- Premium LED with CRI>90
- Light emission can be rotated and pivoted

Product details
700mA | 25.5W
Material: aluminium

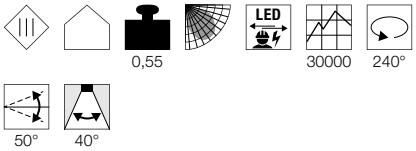

Dimensional drawing



Tip
Material thickness of mounting surface:
30 mm

Accessory recommendation
LED driver 40W | 700mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002424 | 72.00 GBP



Variant	Item No.	GBP
2300lm | 3000K | CRI>90		
white	**1002888**	**120.60**
2490lm | 4000K | CRI>90		
white	**1002889**	**120.60**

GIMBLE IN 175
EL







- Premium LED with CRI>90
- Light emission can be rotated and pivoted

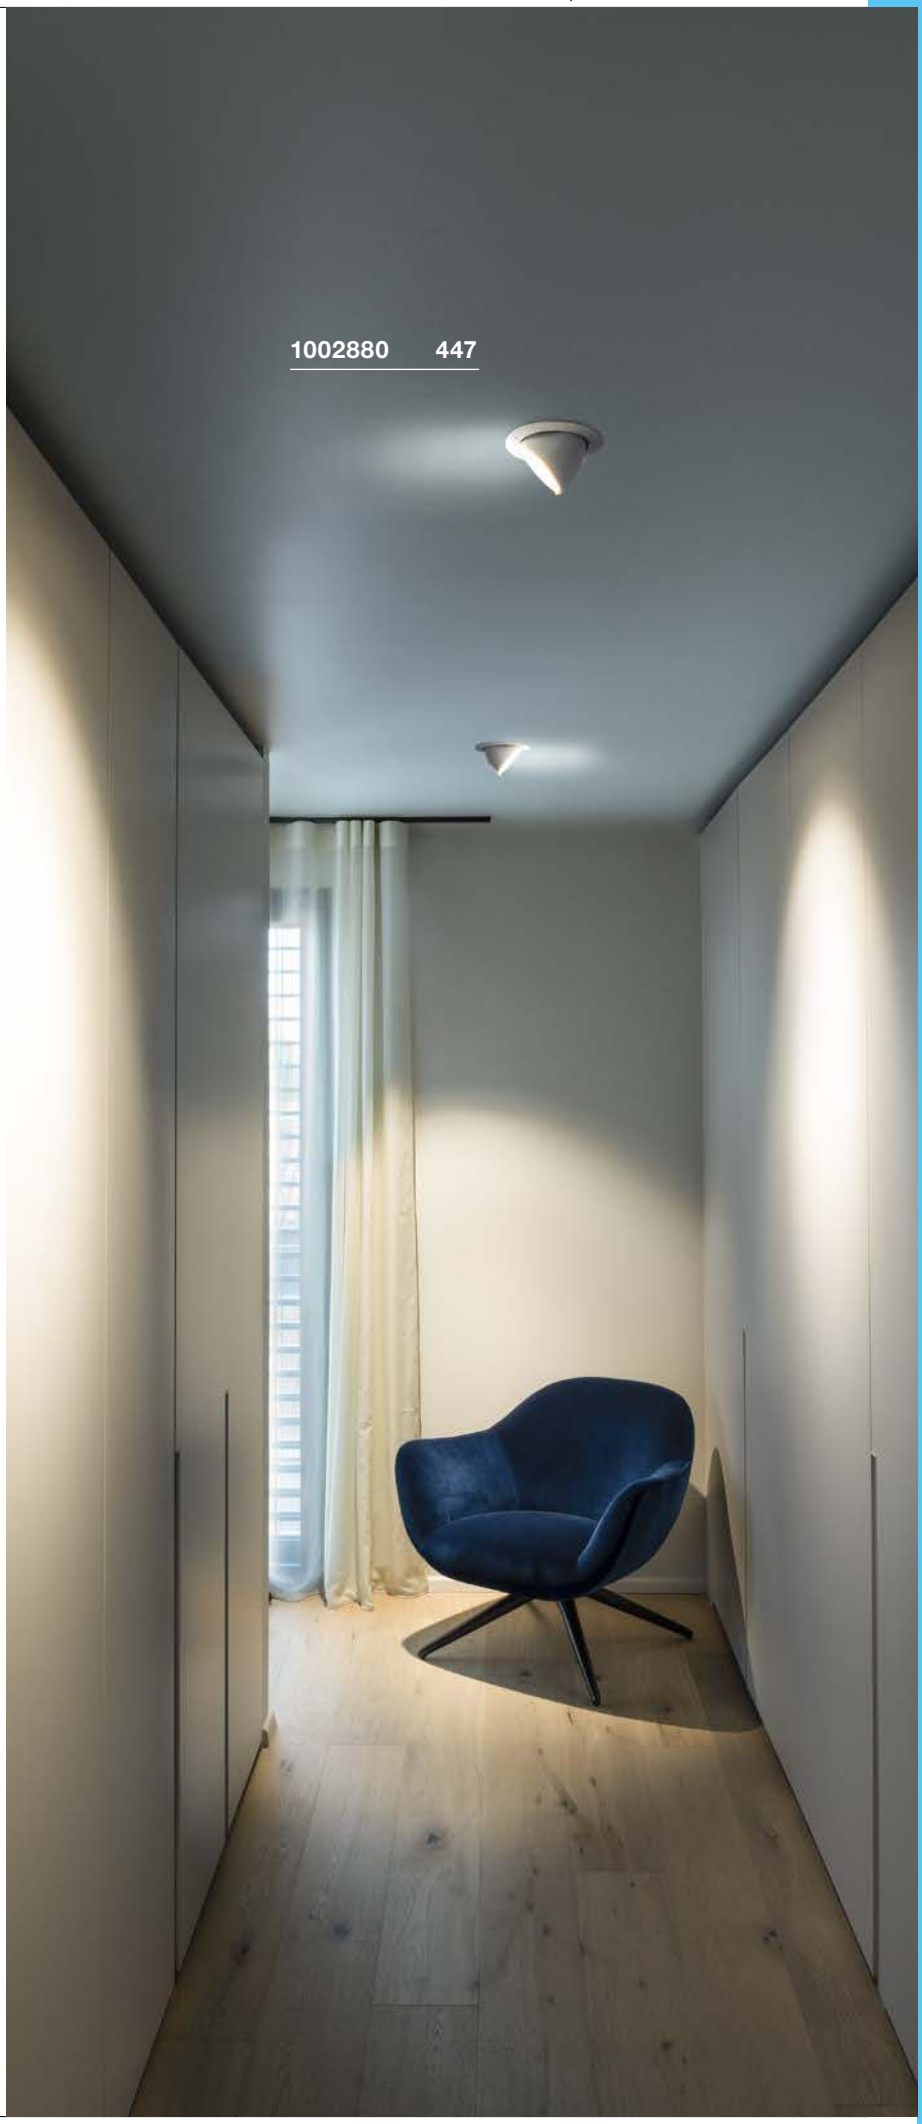

Product details

1000mA/1050mA | 38W
Material: aluminium

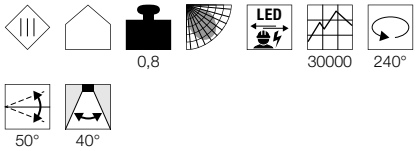

Dimensional drawing



Tip

Material thickness of mounting surface:
30 mm

Accessory recommendation



LED driver 1000mA | 40W | dimmable | inc. strain relief
Item No. 1001115 | 67.50 GBP



LED driver 50W | 1050mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002425 | 76.50 GBP

Variant	Item No.	GBP
3340lm | 3000K | CRI>90 white	**1002881**	**139.50**
3550lm | 4000K | CRI>90 white	**1002887**	**139.50**

SENSER
EL, round

• Low installation depth

Product details

Material: aluminium

IP 20 48000 IK02

Tip

Driver not included





SENSER 12
EL, round

LED INSIDE

Dimensional drawing



Accessory recommendation

LED driver 200mA | 5 - 8.4W
Item No. 1003254 | 28.40 GBP



Variant	Item No.	GBP
470lm | 3000K | CRI>80 200mA | 6W | 0.1 kg white	1003008	22.50
470lm | 4000K | CRI>90 200mA | 6W | 0.1 kg white	1004694	22.50

SENSER 18
EL, round

LED INSIDE

Dimensional drawing



Accessory recommendation

LED driver 320mA | 10W
Item No. 464140 | 29.70 GBP



Variant	Item No.	GBP
950lm | 3000K | CRI>80 350mA | 9.7W | 0.18 kg white	1003009	27.00
950lm | 4000K | CRI>90 350mA | 9.7W | 0.18 kg white	1004695	27.00

SENSER 24
EL, round

LED INSIDE

Dimensional drawing



Accessory recommendation

LED Driver 500mA | 15W dimmable
Item No. 464144 | 29.70 GBP



Variant	Item No.	GBP
1200lm | 3000K | CRI>80 500mA | 12.5W | 0.29 kg white	1003010	36.00
1200lm | 4000K | CRI>90 500mA | 12.5W | 0.29 kg white	1004696	36.00

SENSER
EL, square

- Low installation depth



Product details

Material: aluminium

IP 20 | 48000 | IK02

Tip

Driver not included



SENSER 12
EL, square

LED INSIDE

Dimensional drawing



Accessory recommendation

LED driver 200mA | 5 - 8.4W
Item No. 1003254 | 28.40 GBP



Variant	Item No.	GBP
440lm | 3000K | CRI>80 200mA | 6W | 0.12 kg		
white	1003011	22.50
440lm | 4000K | CRI>90 200mA | 6W | 0.12 kg		
white	1004697	22.50

SENSER 18
EL, square

LED INSIDE

Dimensional drawing



Accessory recommendation

LED driver 320mA | 10W
Item No. 464140 | 29.70 GBP



Variant	Item No.	GBP
820lm | 3000K | CRI>80 350mA | 9.7W | 0.22 kg		
white	1003012	27.00
820lm | 4000K | CRI>90 350mA | 9.7W | 0.22 kg		
white	1004698	27.00

SENSER 24
EL, square

LED INSIDE

Dimensional drawing



Accessory recommendation

LED Driver 500mA | 15W dimmable
Item No. 464144 | 29.70 GBP



Variant	Item No.	GBP
1200lm | 3000K | CRI>80 500mA | 12.5W | 0.36 kg		
white	1003013	36.00
1200lm | 4000K | CRI>90 500mA | 12.5W | 0.36 kg		
white	1004699	36.00


112682 451


112702 451

VERLUX
EL, square, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/plastic
Dimmable: C, L





Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Variant	Item No.	GBP
880lm | 3000K | CRI>80		
white	**112682**	**67.50**

VERLUX
EL, square, PHASE

LED INSIDE





Product details

220-240V ~50/60Hz | 500mA
Total wattage: 22W
Material: aluminium/plastic
Dimmable: C, L





Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Variant	Item No.	GBP
1800lm · 3000K · CRI>80		
white	**112692**	**99.00**

VERLUX
EL, square, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 31W
Material: aluminium/plastic
Dimmable: C, L





Dimensional drawing



Tip

Material thickness of mounting surface:
max. 30 mm

Variant	Item No.	GBP
2360lm | 3000K | CRI>80		
white	**112702**	**126.00**

ALAMEA
EL







- Premium LED with CRI>90
- Large pivot range

Product details

1000mA | 36W
Material: aluminium/glass



Dimensional drawing



Tip

Material thickness of mounting surface:
max. 40 mm

Accessory recommendation

■ LED driver 1000mA | 40W inc. strain relief
Item No. 464170 | 40.50 GBP



☐ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item No. 464032 | 117.00 GBP



☐ LED driver 1000mA | 40W | dimmable | inc. strain relief
Item No. 1001115 | 67.50 GBP



Variant	Item No.	GBP
3600lm | 3000K | CRI>90		
☐ white	**1000792**	**137.70**
3800lm | 4000K | CRI>90		
☐ white	**1000794**	**137.70**



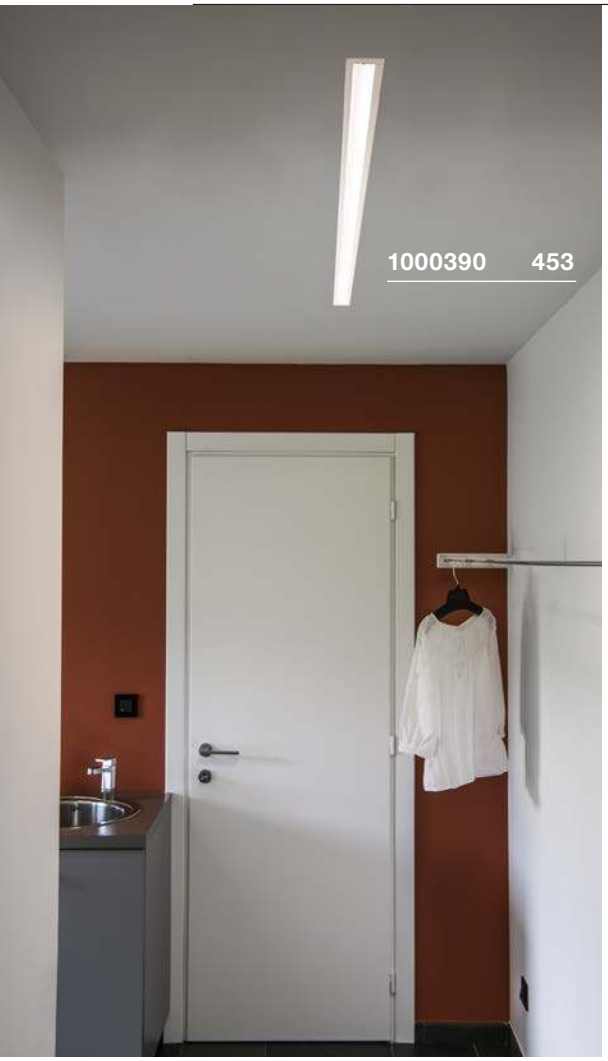



ANINDA 60
EL

LED INSIDE





Product details

700mA | 16W
Material: aluminium/acrylic



Dimensional drawing



Tip

Material thickness of mounting surface:
max. 15 mm

Accessory recommendation

☐ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item No. 464032 |117.00 GBP



☐ LED driver 25W | 700mA | dimmable | inc. strain relief
Item No. 1001133 |45.00 GBP



☐ LED driver 20W | 700mA
Item No. 1001136 |34.60 GBP



Variant	Item No.	GBP
1040lm | 3000K | CRI>80 ☐ white	**1000387**	**152.10**

ANINDA 120
EL

LED INSIDE





Product details

700mA | 16W
Material: aluminium/acrylic



Dimensional drawing



Tip

Material thickness of mounting surface:
max. 15 mm

Accessory recommendation

☐ LED driver 350-1050mA | 50W | Dali 1-10V dimmable
Item No. 464032 |117.00 GBP



☐ LED driver 25W | 700mA | dimmable | inc. strain relief
Item No. 1001132 |63.00 GBP



■ LED driver 700mA | 40W inc. strain relief
Item No. 464168 |40.50 GBP



Variant	Item No.	GBP
2230lm | 3000K | CRI>80 ☐ white	**1000390**	**192.60**

MEDO 30
EL, FRAMELESS







- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

350mA | 14W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions: T: 13 cm

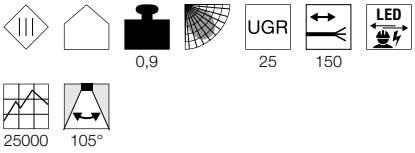

Dimensional drawing



Tip

Open cable end
Material thickness of mounting surface: 45 mm
Driver not included

Accessory recommendation

LED driver 20W | 350mA | inc. strain relief
Item No. 1002420 | 37.80 GBP



LED driver 20W | 350mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002423 | 67.50 GBP



LED driver 20W | 350mA | dimmable | inc. strain relief
Item No. 1002232 | 40.50 GBP



Variant	Item No.	GBP
1500/1600lm | 3000/4000K | CRI>80		
white	**1001901**	**162.90**



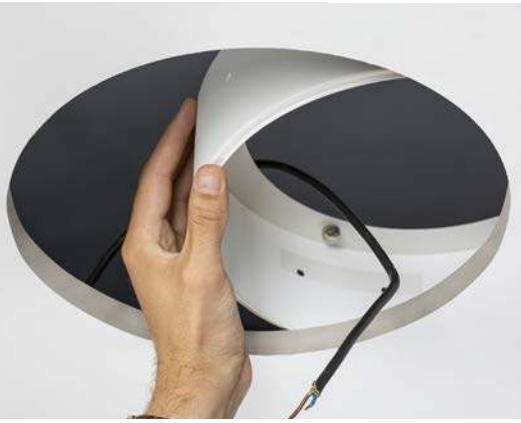

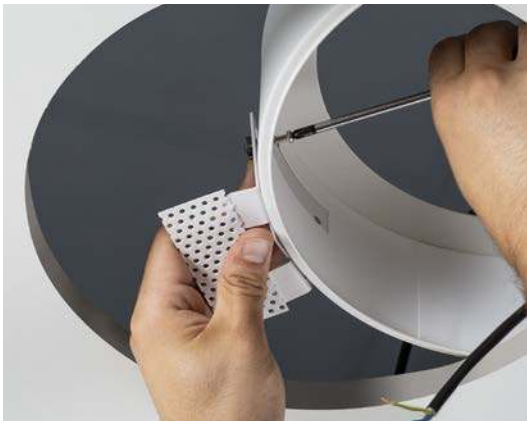













MEDO 40
EL, FRAMELESS

LED INSIDE

CCT





- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details
700mA | 28W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions: T: 13 cm

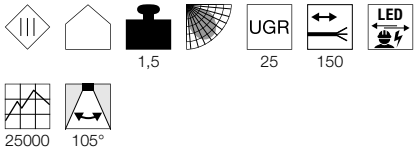

Dimensional drawing



Tip
Open cable end
Material thickness of mounting surface:
45 mm
Driver not included

Accessory recommendation

■ LED driver 700mA | 40W inc. strain relief
Item No. 464168 |40.50 GBP



☐ LED driver 40W | 700mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002424 |72.00 GBP



Variant	Item No.	GBP
3100/3300lm | 3000/4000K | CRI>80		
☐ white	**1001902**	**180.90**

MEDO 60
EL, FRAMELESS

LED INSIDE

CCT







- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details
1000mA/1050mA | 36W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions: T: 16 cm

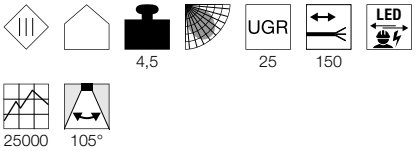

Dimensional drawing



Tip
Open cable end
Material thickness of mounting surface:
45 mm
Driver not included

Accessory recommendation

■ LED driver 60W | 1000mA | inc. strain relief
Item No. 1002422 |67.50 GBP



☐ LED driver 50W | 1050mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002425 |76.50 GBP



☐ LED driver 1000mA | 40W | dimmable | inc. strain relief
Item No. 1001115 |67.50 GBP



Variant	Item No.	GBP
4700/5000lm | 3000/4000K | CRI>80		
☐ white	**1001903**	**386.10**

MEDO 90
EL, FRAMELESS

LED INSIDE

CCT

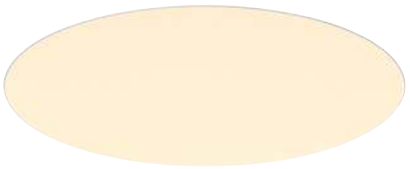





- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details
1000mA/1050mA | 2x36W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions: T: 21 cm

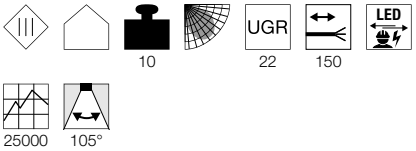

Dimensional drawing



Tip
Open cable end
Material thickness of mounting surface:
45 mm
2 LED drivers are required.
Driver not included

Accessory recommendation

■ LED driver 60W | 1000mA | inc. strain relief
Item No. 1002422 |67.50 GBP



☐ LED driver 50W | 1050mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002425 |76.50 GBP



☐ LED driver 1000mA | 40W | dimmable | inc. strain relief
Item No. 1001115 |67.50 GBP



Variant	Item No.	GBP
9550/10150lm | 3000/4000K | CRI>80		
☐ white	**1001904**	**854.10**

MEDO 30
EL, FRAME





- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

350mA | 14W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions: T: 13 cm

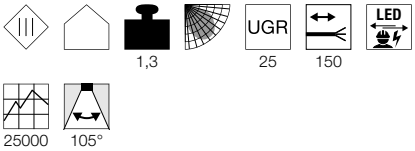

Dimensional drawing



Tip

Open cable end
Material thickness of mounting surface:
10-35 mm
Driver not included

Accessory recommendation

LED driver 20W | 350mA | inc. strain relief
Item No. 1002420 | 37.80 GBP



LED driver 20W | 350mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002423 | 67.50 GBP



LED driver 20W | 350mA | dimmable | inc. strain relief
Item No. 1002232 | 40.50 GBP



Variant	Item No.	GBP
1500/1600lm | 3000/4000K | CRI>80		
white	**1001905**	**171.90**

MEDO 40
EL, FRAME



- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

700mA | 28W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions: T: 13 cm

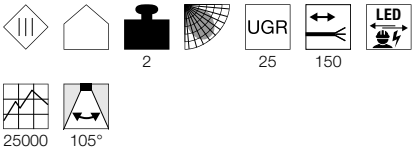

Dimensional drawing



Tip

Open cable end
Material thickness of mounting surface:
10-35 mm
Driver not included

Accessory recommendation

LED driver 700mA | 40W inc. strain relief
Item No. 464168 | 40.50 GBP



LED driver 40W | 700mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002424 | 72.00 GBP



Variant	Item No.	GBP
3100/3300lm | 3000/4000K | CRI>80		
white	**1001906**	**190.80**

MEDO 60
EL, FRAME





- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

1000mA/1050mA | 36W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions: T: 16 cm

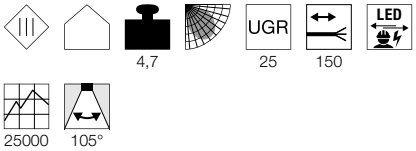

Dimensional drawing



Tip

Open cable end
Material thickness of mounting surface:
10-35 mm
Driver not included

Accessory recommendation

LED driver 60W | 1000mA | inc. strain relief
Item No. 1002422 | 67.50 GBP



LED driver 50W | 1050mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002425 | 76.50 GBP



LED driver 1000mA | 40W | dimmable | inc. strain relief
Item No. 1001115 | 67.50 GBP



Variant	Item No.	GBP
4700/5000lm | 3000/4000K | CRI>80		
white	**1001907**	**425.70**












MEDO 90
EL, FRAME

LED INSIDE

CCT

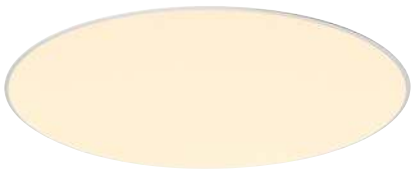




- Colour temperature (3000K/4000K) can be adjusted using the switch

Product details

1000mA/1050mA | 2x36W
Material: aluminium/polymethylacrylate (PMMA)
Installation dimensions:T: 21 cm

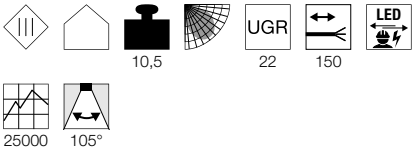

Dimensional drawing



Tip

Open cable end
Material thickness of mounting surface: 10-35 mm
2 LED drivers are required.
Driver not included

Accessory recommendation

☐ LED driver 60W | 1000mA | inc. strain relief
Item No. 1002422 | 67.50 GBP



☐ LED driver 50W | 1050mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002425 | 76.50 GBP



☐ LED driver 1000mA | 40W | dimmable | inc. strain relief
Item No. 1001115 | 67.50 GBP



Variant	Item No.	GBP
9550/10150lm | 3000/4000K | CRI>80		
☐ white	**1001908**	**854.10**

CONNECTED LED PANEL
595x595mm, UGR<19



- Can be integrated into the VALETO® System

Product details

100-240V ~50/60Hz | 1050mA
Total wattage: 43W
Material: aluminium/acrylic

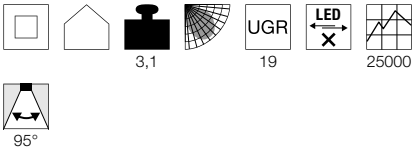

Dimensional drawing



Tip

Remote control and dimming with Remote Control CCT/DIM [1002994] or Gateway [1002411]



Variant	Item No.	GBP
3200-3600lm | 2700-6500K | CRI>80		
white	**1001250**	**162.00**



CONNECTED LED PANEL
620x620mm, UGR<19



- Can be integrated into the VALETO® System

Product details

100-240V ~50/60Hz | 1050mA
Total wattage: 43W
Material: aluminium/acrylic

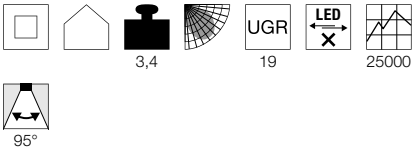

Dimensional drawing



Tip

Remote control and dimming with Remote Control CCT/DIM [1002994] or Gateway [1002411]

Variant	Item No.	GBP
3200-3600lm | 2700-6500K | CRI>80		
white	**1001251**	**180.00**

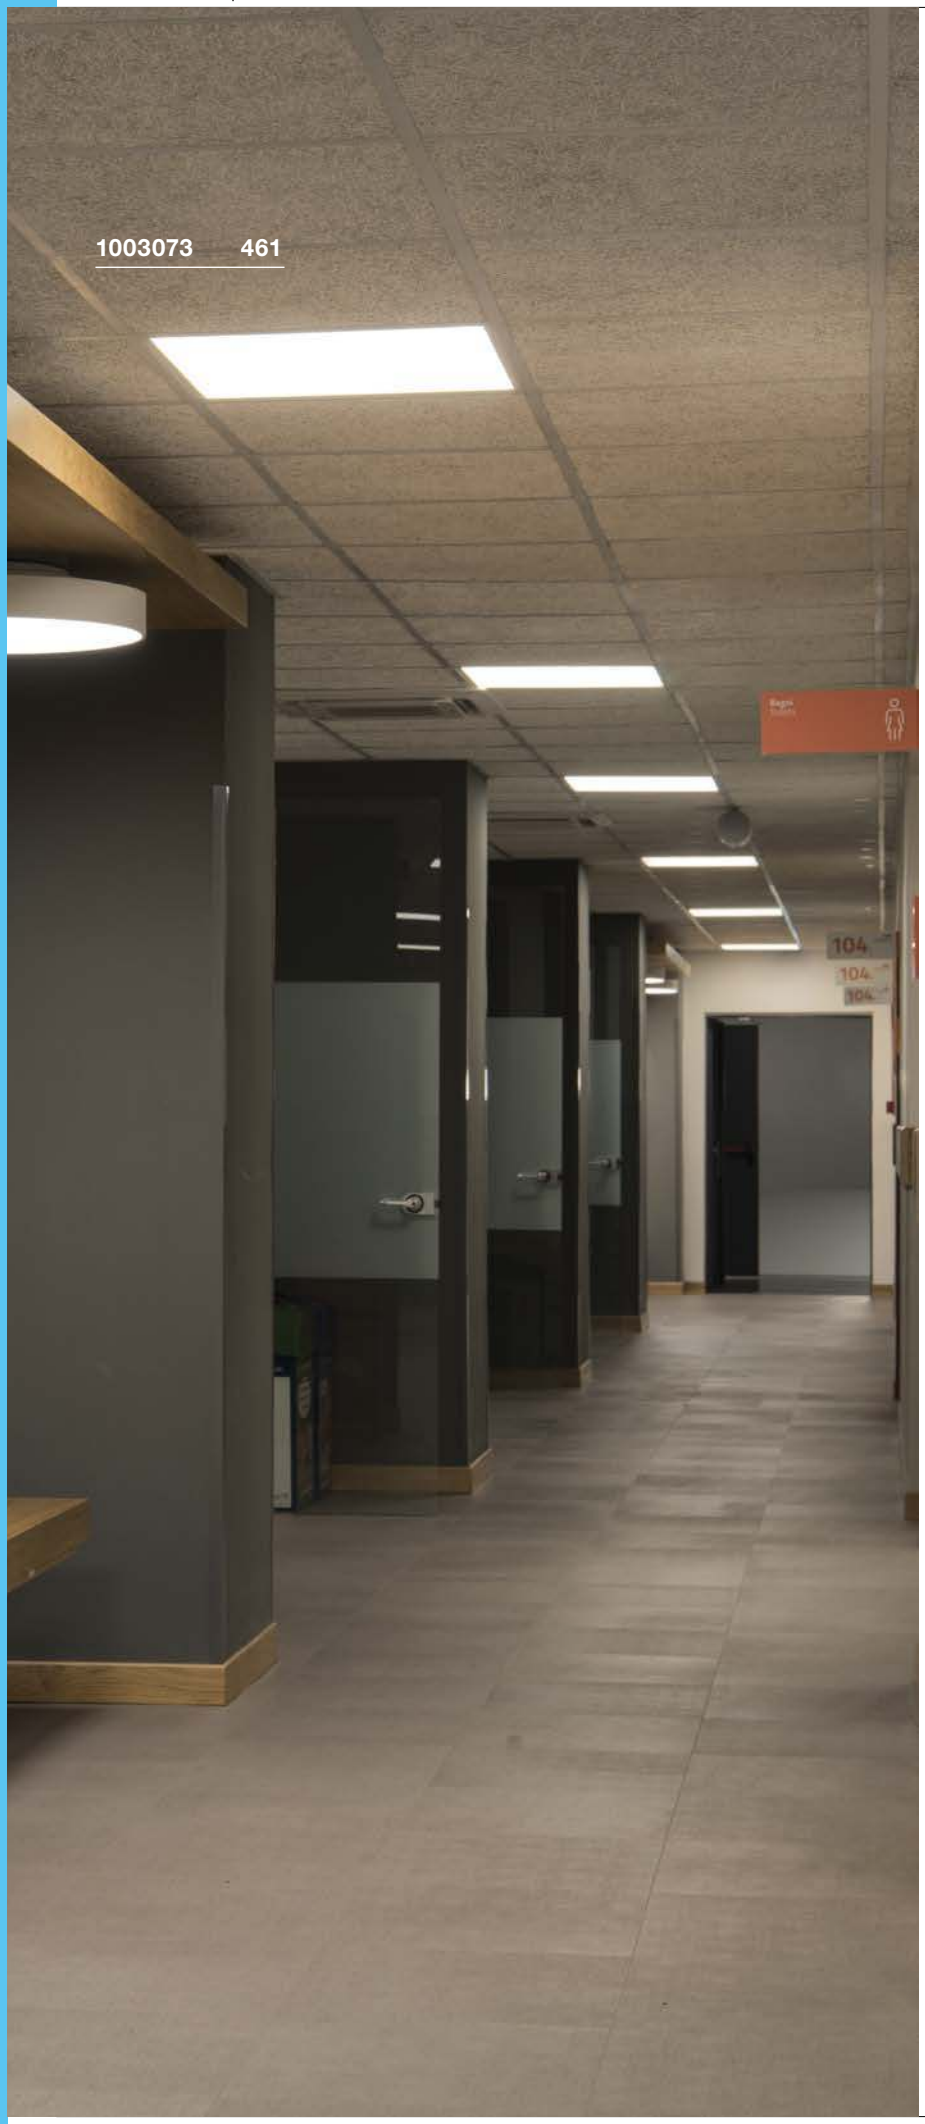

LED PANEL
620x620mm

LED INSIDE





- Premium LED with CRI>90
- Suitable for screen-based workstations in line with EN 12464-1
- UGR<19

Product details

1050mA | 35W
Material: aluminium/polystyrene (PS)
Installation dimensions: T: 5 cm

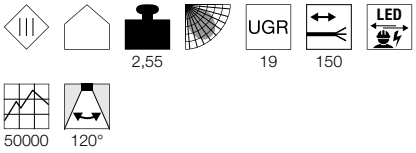

Dimensional drawing



Tip

Open cable end
Driver not included

Accessory recommendation

LED driver 1050mA | 40W phase-control dimmable
Item No. 464804 | 45.00 GBP



LED driver 50W | 1050mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002425 | 76.50 GBP



Variant	Item No.	GBP
4000lm | 4000K | CRI>90		
white	**1003074**	**162.00**

LED PANEL
620x620mm



- Premium LED with CRI>90
- Suitable for screen-based workstations in line with EN 12464-1
- UGR<19

Product details

1050mA | 35W
Material: aluminium/polystyrene (PS)
Installation dimensions: T: 5 cm

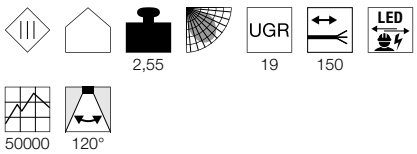

Dimensional drawing



Tip

Open cable end
Driver not included

Accessory recommendation

☐ LED driver 1050mA | 40W phase-control dimmable
Item No. 464804 |45.00 GBP



☐ LED driver 50W | 1050mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002425 |76.50 GBP



Variant	Item No.	GBP
4000lm | 3000K | CRI>90		
☐ white	**1003073**	**162.00**

LED PANEL
600x600mm



- Premium LED with CRI>90
- Suitable for screen-based workstations in line with EN 12464-1
- UGR<19

Product details

1050mA | 35W
Material: aluminium/polystyrene (PS)
Installation dimensions: T: 5 cm

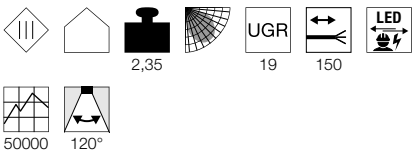

Dimensional drawing



Tip

Open cable end
Driver not included

Accessory recommendation

☐ LED driver 1050mA | 40W phase-control dimmable
Item No. 464804 |45.00 GBP



☐ LED driver 50W | 1050mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002425 |76.50 GBP



Variant	Item No.	GBP
4000lm | 3000K | CRI>90		
☐ white	**1003083**	**162.00**
4000lm | 4000K | CRI>90		
☐ white	**1003084**	**162.00**

LED PANEL
300x120mm



- Premium LED with CRI>90
- Suitable for screen-based workstations in line with EN 12464-1
- UGR<19
- The light colour can be selected during installation using a switch

Product details

900mA | 31W
Material: aluminium/polystyrene (PS)
Installation dimensions: T: 5 cm

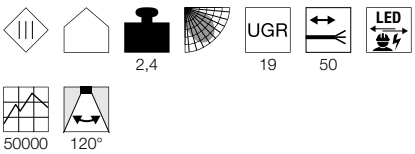

Dimensional drawing



Tip

Open cable end
Driver not included

Accessory recommendation

☐ LED driver 50W | 1050mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002425 |76.50 GBP



Variant	Item No.	GBP
3600lm | 3000/4000K | CRI>90		
☐ white	**1003075**	**162.00**


1003076 463

PAVANO
300x1200mm

LED INSIDE







- Premium LED with CRI>90
- Suitable for screen-based workstations in line with EN 12464-1
- UGR<19

Product details

700mA | 25W
Material: steel/polycarbonate (PC)
Installation dimensions: T: 5 cm

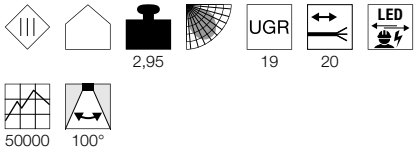

Dimensional drawing



Tip

Open cable end
Driver not included

Accessory recommendation

☐ LED driver 40W | 700mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002424 |72.00 GBP



Variant	Item No.	GBP
3300lm | 3000K | CRI>90 ☐ white	**1003080**	**192.60**
3550lm | 4000K | CRI>90 ☐ white	**1003081**	**192.60**

PAVANO
600x600mm

LED INSIDE







- Premium LED with CRI>90
- Suitable for screen-based workstations in line with EN 12464-1
- UGR<19

Product details

700mA | 25W
Material: steel/polycarbonate (PC)
Installation dimensions: T: 5 cm

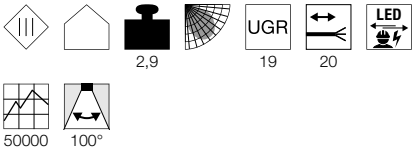

Dimensional drawing



Tip

Open cable end
Driver not included

Accessory recommendation

☐ LED driver 40W | 700mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002424 |72.00 GBP



Variant	Item No.	GBP
3300lm | 3000K | CRI>90 ☐ white	**1003076**	**192.60**
3550lm | 4000K | CRI>90 ☐ white	**1003077**	**192.60**

PAVANO
620x620mm

LED INSIDE







- Premium LED with CRI>90
- Suitable for screen-based workstations in line with EN 12464-1
- UGR<19

Product details

700mA | 25W
Material: steel/polycarbonate (PC)
Installation dimensions: T: 5 cm

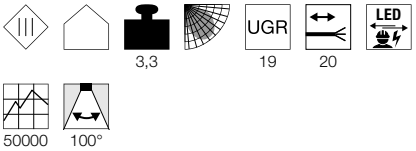

Dimensional drawing



Tip

Open cable end
Driver not included

Accessory recommendation

☐ LED driver 40W | 700mA | 1-10V/ DALI dimmable | inc. strain relief
Item No. 1002424 |72.00 GBP



Variant	Item No.	GBP
3300lm | 3000K | CRI>90 ☐ white	**1003078**	**192.60**
3550lm | 4000K | CRI>90 ☐ white	**1003079**	**192.60**

PROFESSIONAL IMPRESSION.

3-CIRCUIT HIGH-VOLTAGE TRACKS FOR NEW LIGHT EMPHASIS.

Well thought-out lighting is essential, particularly in locations where there is a lot to see. 3-circuit high-voltage tracks are ideal for shops and trade fair stands. They provide perfect lighting and put products and exhibits in the right light.




1004772 473



1004690 471

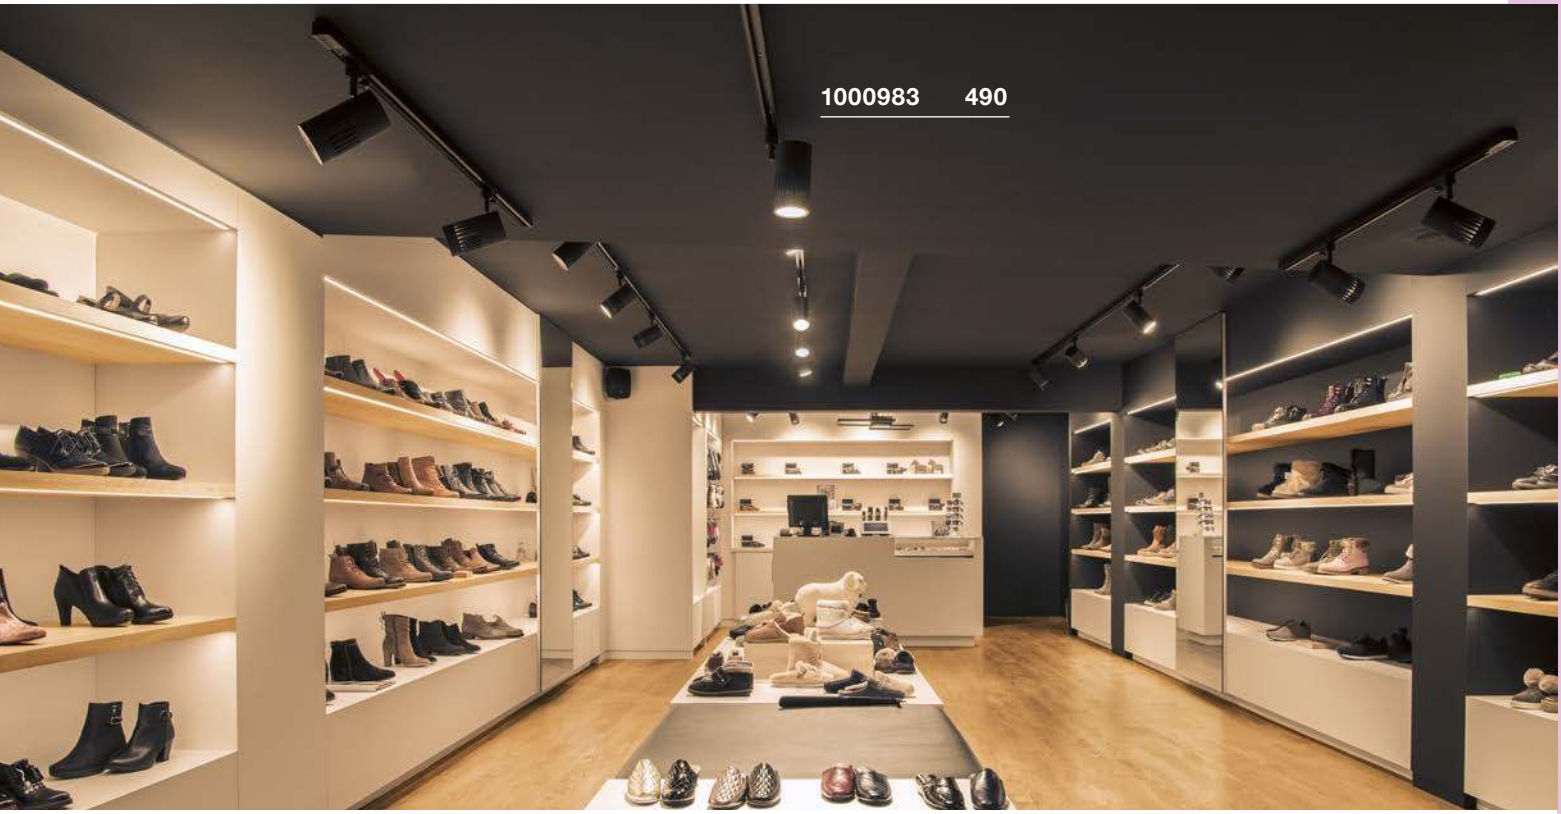

HIGH-VOLTAGE 3-PHASE TRACK



Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

3-CIRCUIT TRACK COMPATIBILITY

Compatible with fittings/adapters from:

SLV **Tracks and track components**	Use	SLV	Global/Nordic	Eutrac®
			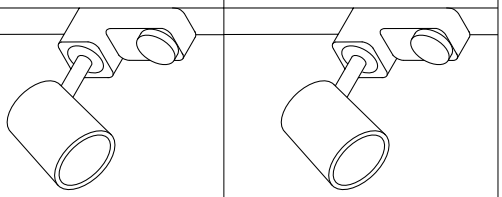	
	without DALI	✓	✓	★
	with DALI	✓	✓	✗

Compatible with tracks and track components from:

SLV **Fittings and adapters**	Use	SLV S-Track	Global/Nordic	Eutrac®
				
	without DALI	✓	✓	✓
	with DALI	✓	✓	✓ ★★

★ Subject to prior testing using samples of the lamp and track
★★ But without DALI functionality

Details not guaranteed.
Technical data and dimensions are subject to change without notice.
During the planning phase of the project, check the project using samples to ensure functionality.
Compatibility refers only to tracks/fittings. Tracks and track components from different manufacturers should not be combined.

	Staff/Zumtobel	Neuco	Lytespan 3	Mela	Norlux
	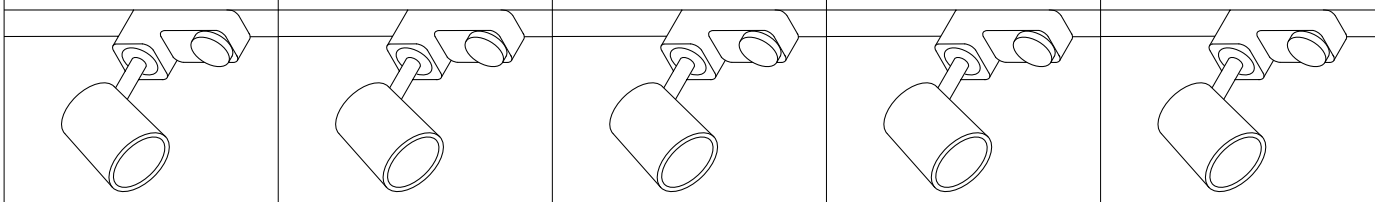				
	★	★	★	★	★
	✗	✗	✗	✗	✗

	Staff/Zumtobel	Neuco	Lytespan 3	Mela	Norlux
	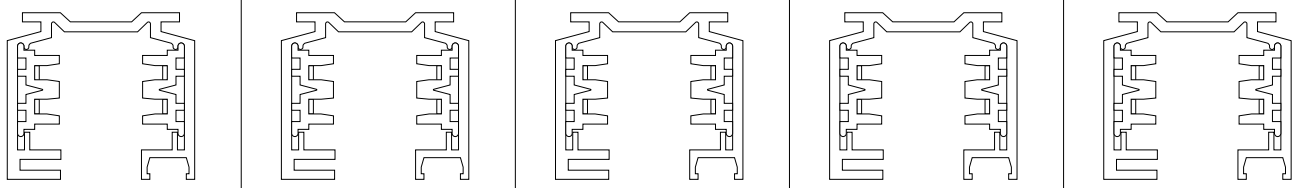				
	✗	✗	✗	✗	✗
	✗	✗	✗	✗	✗

STRUCTEC
3-circuit, DALI







- Premium LED with CRI>90

Product details

200-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium
Dimmable: Dali

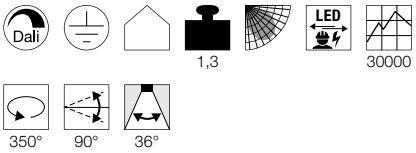

Dimensional drawing



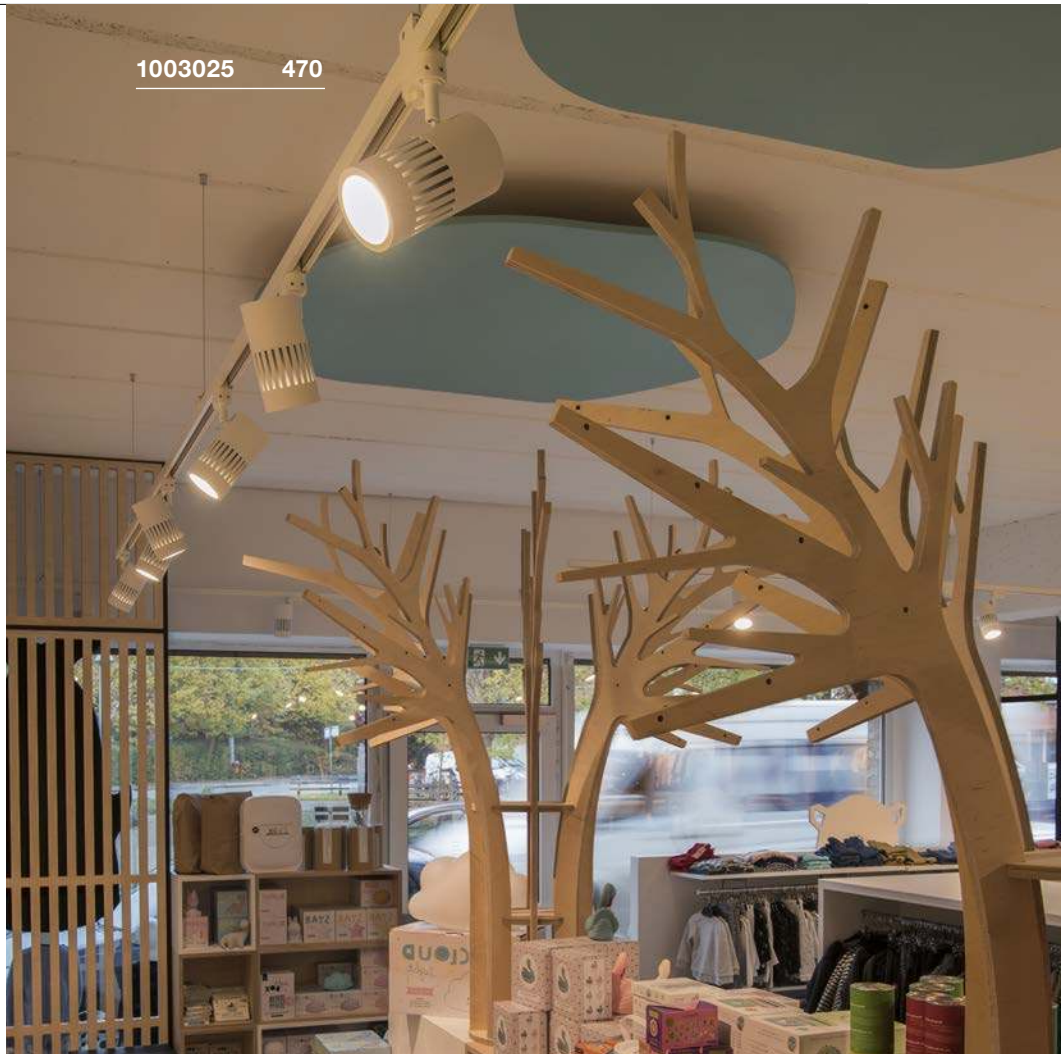



Variant	Item No.	GBP
2500lm | 3000K | CRI97		
■ matt black	**1003024**	**256.50**
2500lm | 3000K | CRI97		
□ matt white	**1003025**	**256.50**
2600lm | 4000K | CRI97		
■ matt black	**1003026**	**256.50**
2600lm | 4000K | CRI97		
□ matt white	**1003027**	**256.50**



SIGHT MOVE
3-circuit, DALI







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material: aluminium/PMMA
Dimmable: Dali

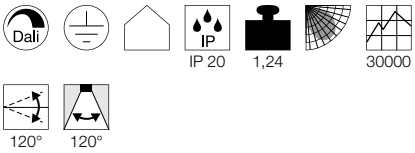

Dimensional drawing



Variant	Item No.	GBP
2700lm | 3000K | CRI>90		
■ matt black	1004690	211.50
2700lm | 3000K | CRI>90		
□ matt white	1004691	211.50
3100lm | 4000K | CRI>90		
■ matt black	1004692	211.50
3100lm | 4000K | CRI>90		
□ matt white	1004693	211.50

SIGHT TRACK
3-circuit, DALI









Product details

220-240V ~50/60Hz | 700mA
Total wattage: 40W
Material: aluminium/acrylic
Dimmable: Dali





Dimensional drawing



Variant	Item No.	GBP
3100lm | 3000K | CRI>80		
■ black	**1002661**	**332.10**
3100lm | 3000K | CRI>80		
□ white	**1002662**	**332.10**



ONE 40 TRACK
3-circuit, DALI

NEW VARIANT

LED INSIDE

DALI







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15.2W
Material: aluminium
Dimmable: Dali

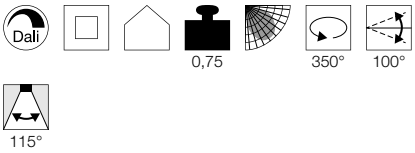

Dimensional drawing



Variant	Item No.	GBP
650lm | 3000K | CRI90 ■ matt black	1004769	256.50
650lm | 3000K | CRI90 □ matt white	1004770	256.50
670lm | 4000K | CRI90 ■ matt black	1004771	256.50
670lm | 4000K | CRI90 □ matt white	1004772	256.50

PLANNING AID FOR S-TRACK 3-CIRUIT SURFACE MOUNTED TRACK, DALI

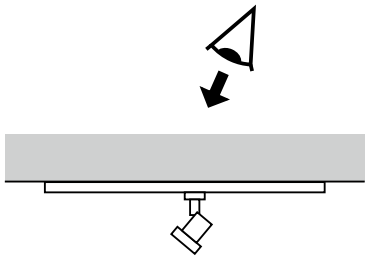

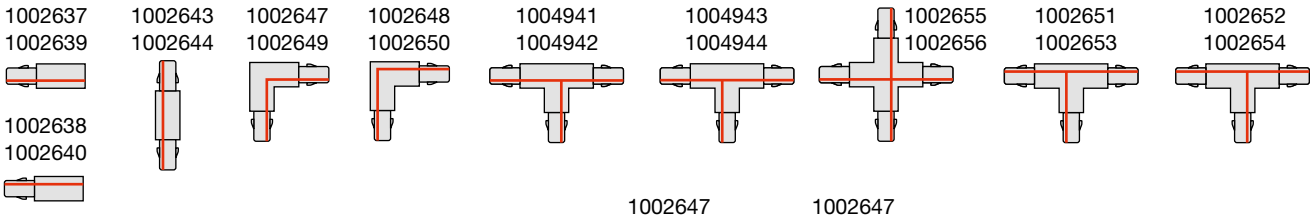

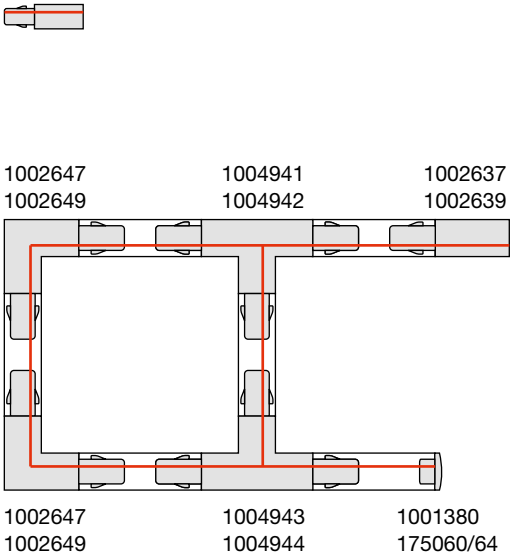

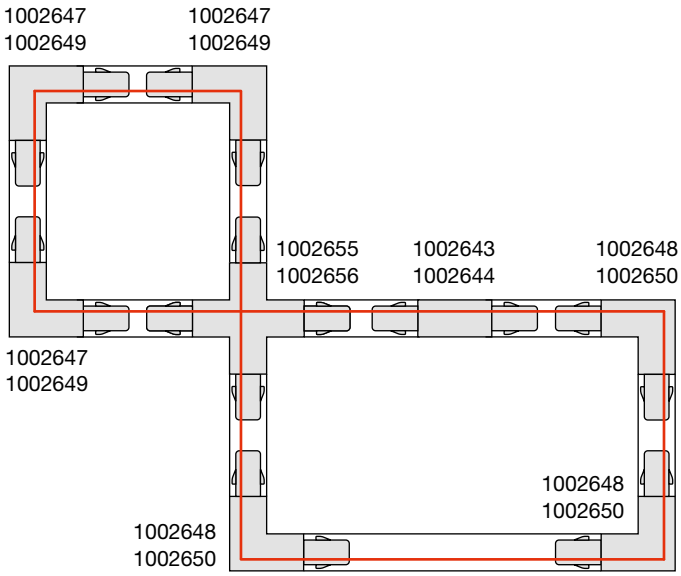

S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK, DALI







	S-TRACK 3-circuit surface mounted track, DALI, 1m	S-TRACK 3-circuit surface mounted track, DALI, 1m
	NEW VARIANT	NEW VARIANT
Rated voltage	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. perm. current	16A	16A
Mech max. load	300N	300N
Mech max. load	30kg	30kg
Material	aluminium	aluminium
Colour	black	white
Length	100cm	100cm
Width	3.6cm	3.6cm
Height	3.6cm	3.6cm
Weight	0.9kg	0.9kg
Item No.	**1004937**	**1004938**
GBP	**31.50**	**31.50**

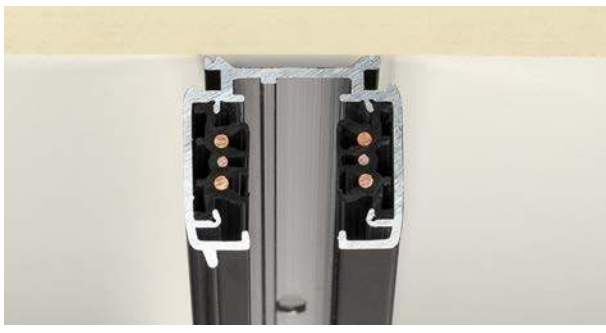

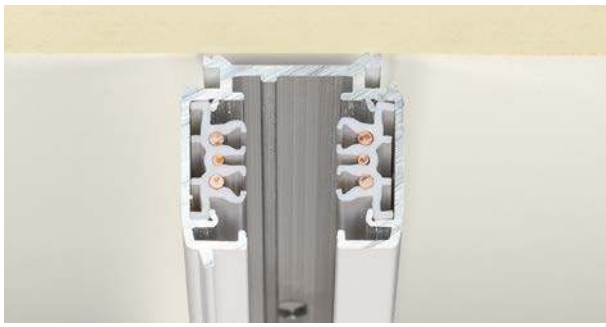

S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK, DALI

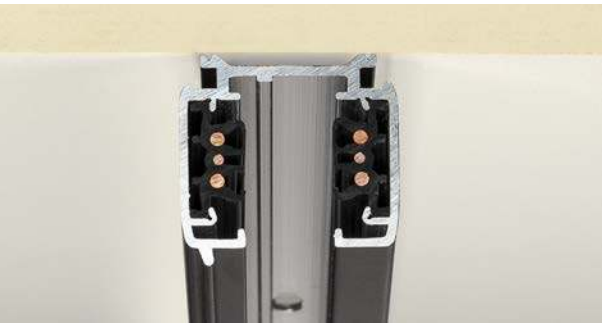

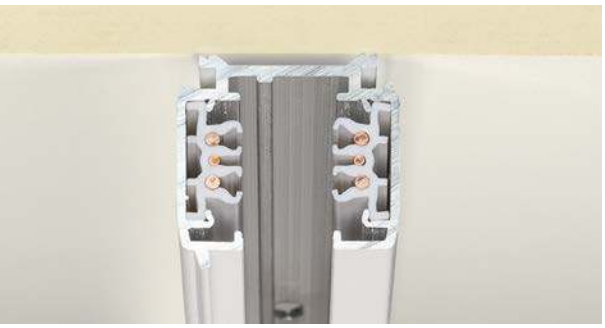



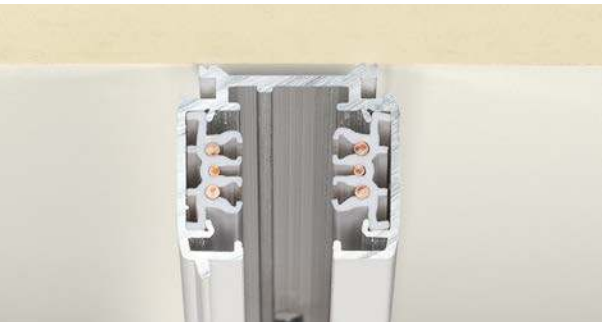

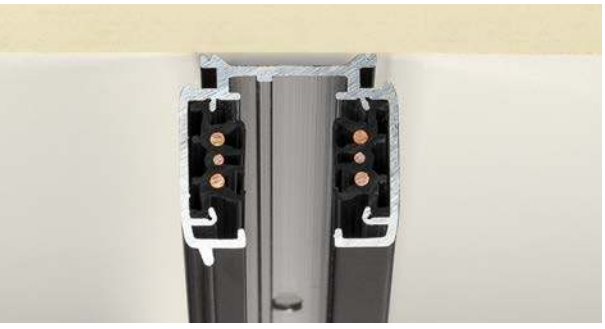

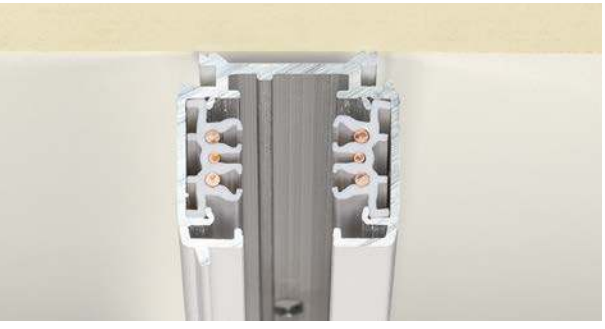





	S-TRACK 3-circuit surface mounted track, DALI, 2m	S-TRACK 3-circuit surface mounted track, DALI, 2m
Rated voltage	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. perm. current	16A	16A
Mech max. load	300N	300N
Mech max. load	30kg	30kg
Material	aluminium	aluminium
Colour	black	white
Length	200cm	200cm
Width	3.6cm	3.6cm
Height	3.6cm	3.6cm
Weight	1.84kg	1.84kg
Item No.	**1002631**	**1002632**
GBP	**63.00**	**63.00**





	S-TRACK 3-circuit surface mounted track, DALI, 3m	S-TRACK 3-circuit surface mounted track, DALI, 3m
Rated voltage	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. perm. current	16A	16A
Mech max. load	300N	300N
Mech max. load	30kg	30kg
Material	aluminium	aluminium
Colour	black	white
Length	300cm	300cm
Width	3.6cm	3.6cm
Height	3.6cm	3.6cm
Weight	2.76kg	2.76kg
Item No.	**1002633**	**1002634**
GBP	**90.00**	**90.00**





	S-TRACK 3-circuit surface mounted track, DALI, 4m	S-TRACK 3-circuit surface mounted track, DALI, 4m
Rated voltage	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. perm. current	16A	16A
Mech max. load	300N	300N
Mech max. load	30kg	30kg
Material	aluminium	aluminium
Colour	black	white
Length	400cm	400cm
Width	3.6cm	3.6cm
Height	3.6cm	3.6cm
Weight	3.61kg	3.61kg
Item No.	**1002635**	**1002636**
GBP	**117.00**	**117.00**



ACCESSORIES FOR S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK DALI

Feed-in, DALI, earth on right side

16A max.
Polycarbonate (PC)
L: 13.9cm W: 3.5cm H: 3.3cm
Weight: 0.06kg
1 piece



Variant	Item No.	GBP
■ black	1002638	14.40
□ white	1002640	14.40

Feed-in, DALI, earth on left side

10A max.
Polycarbonate (PC)
L: 13.9cm W: 3.5cm H: 3.3cm
Weight: 0.06kg
1 piece



Variant	Item No.	GBP
■ black	1002637	14.40
□ white	1002639	14.40

Mini-connector, DALI

16A max.
Polycarbonate (PC)
L: 10.6cm W: 2.5cm H: 2.8cm
Weight: 0.04kg
1 piece



Variant	Item No.	GBP
■ black	1002641	7.70
□ white	1002642	7.70

Long connector, DALI

10A max.
Polycarbonate (PC)
L: 20.3cm W: 3.5cm H: 3.3cm
Weight: 0.13kg
1 piece



Variant	Item No.	GBP
■ black	1002643	25.20
□ white	1002644	25.20

Flex connector, DALI

16A max.
Polycarbonate (PC)
L: 28.5cm W: 3.5cm H: 3.3cm
Weight: 0.18kg
1 piece



Variant	Item No.	GBP
■ black	1002645	40.50
□ white	1002646	40.50

L-connector: DALI, earth on inside

16A max.
Polycarbonate (PC)
L: 11.9cm W: 11.9cm H: 3.3cm
Weight: 0.13kg
1 piece



Variant	Item No.	GBP
■ black	1002647	25.20
□ white	1002649	25.20

ACCESSORIES FOR S-TRACK 3-CIRCUIT SURFACE MOUNTED TRACK DALI

L-connector, DALI, earth outside

16A max.
Polycarbonate (PC)
L: 11.9cm W: 11.9cm H: 3.3cm
Weight: 0.13kg
1 piece



Variant	Item No.	GBP
black	1002648	25.20
white	1002650	25.20

Mounting clip, DALI

Steel
L: 4cm W: 3.4cm H: 1.25cm
Weight: 0.02kg
1 piece



Variant	Item No.	GBP
black	1002657	5.90
white	1002658	5.90

Light adaptor, mechanical

Aluminium/plastic
L: 6.6cm W: 6.6cm H: 3.1cm
Weight: 0.14kg
1 piece



Variant	Item No.	GBP
black	175210	11.70
white	1001395	11.70

T-connector, DALI, earth on outside, left

16A max.
Polycarbonate (PC)
L: 20.3cm W: 11.9cm H: 3.3cm
Weight: 0.2kg
1 piece



Variant	Item No.	GBP
black	1002651	29.70
white	1002653	29.70

Adapter, DALI

10A max.
Polycarbonate (PC)
L: 11.3cm W: 5.5cm H: 3.3cm
Weight: 0.062kg
max. 5kg
1 piece



Variant	Item No.	GBP
black	1002660	14.20
white	1002659	14.20

Mini Connector, mechanical

Plastic
L: 6.8cm W: 3.1cm H: 2.6cm
Weight: 0.02kg
1 piece



Variant	Item No.	GBP
black	175080	5.90
white	1001382	5.90

T-connector, DALI, earth on outside, right

16A max.
Polycarbonate (PC)
L: 20.3cm W: 11.9cm H: 3.3cm
Weight: 0.2kg
1 piece



Variant	Item No.	GBP
black	1002652	29.70
white	1002654	29.70

Ceiling suspension

Stainless steel/brass
L: 500cm
Weight: 0.2kg
max. 10kg
2 piece



Variant	Item No.	GBP
Nickel	1002845	31.50

Coupling joint connector

Aluminium
L: 18.2cm W: 3.3cm H: 2.1cm
Weight: 0.08kg
1 piece



Variant	Item No.	GBP
black	175180	8.90
white	1001392	8.90

T-connector II, DALI, earth on inside, left

16A max.
Polycarbonate (PC)
L: 20.3cm W: 11.9cm H: 3.3cm
Weight: 0.2kg



Variant	Item No.	GBP
matt black	1004943	29.70
matt white	1004944	29.70

Adaptor with hook

Plastic/steel
Diameter: 2.6cm H: 5.2cm
Weight: 0.01kg
Max. 10kg.
1 piece



Variant	Item No.	GBP
black	175190	2.00
white	1001393	2.00

Cover, DALI, 2m

Polycarbonate (PC)
L: 200cm W: 2.2cm H: 0.75cm
Weight: 0.08kg



Variant	Item No.	GBP
matt black	1004939	5.60
matt white	1004940	5.60

T-connector II, DALI, earth on inside, right

16A max.
Polycarbonate (PC)
L: 20.3cm W: 11.9cm H: 3.3cm
Weight: 0.2kg



Variant	Item No.	GBP
matt black	1004941	29.70
matt white	1004942	29.70

Pendant suspension

Aluminium/plastic
L: 100cm W: 6cm H: 4cm
Weight: 0.2kg
max. 10kg
1 piece

Variant	Item No.	GBP
black	175160	24.80
white	1001390	24.80

Ceiling plate, DALI

16A max.
Polycarbonate (PC)
Diameter: 14.32cm H: 3.56cm
Weight: 0.174kg
Ceiling plate for lfittings with integrated 3-circuit high-voltage track adapter
1 piece



Variant	Item No.	GBP
black	1004684	28.80
white	1004685	28.80

X-connector, DALI

16A max.
Polycarbonate (PC)
L: 20.3cm W: 20.3cm H: 3.3cm
Weight: 0.27kg
1 piece



Variant	Item No.	GBP
black	1002655	47.70
white	1002656	47.70

End cap

Plastic
L: 3.5cm W: 3.3cm H: 3.2cm
Weight: 0.01kg
1 piece



Variant	Item No.	GBP
black	175060	1.50
white	1001380	1.50

SPOT TRACK
3-circuit, E27

SOCKET INSIDE







• stable joint

Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED E27 7W 180°
2700K 630lm
8kWh/1000h
Item No. 1001357 | 29.70 GBP



LED E27 17W 45°
3000K 1430lm
17kWh/1000h
Item No. 560473 | 60.30 GBP



Lamp details
max. 75W QPAR20
optional: QPAR30

Variant	Item No.	GBP
E27 | QPAR20		
■ black	**152200**	**40.50**
E27 | QPAR20		
□ white	**152201**	**40.50**

AVO TRACK
3-circuit, QPAR51

SOCKET INSIDE







Product details
230V ~50/60Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP



LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005081 | 6.10 GBP



Lamp details
max. 50W QPAR51
Diameter: 5cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**152640**	**34.20**
GU10 | QPAR51		
□ white	**152641**	**34.20**







152320 479

ALTRA DICE TRACK
3-circuit, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005083 | 6.10 GBP



Lamp details

max. 50W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**152320**	**81.00**
GU10 | QPAR51		
□ white	**152321**	**81.00**

LIGHT EYE® 150 TRACK
3-circuit, QPAR111

SOCKET INSIDE



Product details
230V -50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP



LED GU10 13W 55°
4000K 950lm
13kWh/1000h
Item No. 1003095 | 80.10 GBP



Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black/chrome	**1000707**	**99.00**
GU10 | QPAR111		
▨ white/chrome	**1000708**	**99.00**

PARA CONE 14
3-circuit, QPAR111

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 5,1W 48°
2700-6500K 350lm
6kWh/1000h
Item No. 1001918 | 49.50 GBP



LED GU10 4W
2600K 260lm
4kWh/1000h
Item No. 1003101 | 39.60 GBP



Lamp details
max. 25W QPAR51

Variant	Item No.	GBP
GU10 | QPAR111		
■ glossy black	**1002876**	**67.50**
GU10 | QPAR111		
▨ glossy white	**1002877**	**65.70**
GU10 | QPAR111		
■ copper	**1002878**	**68.40**

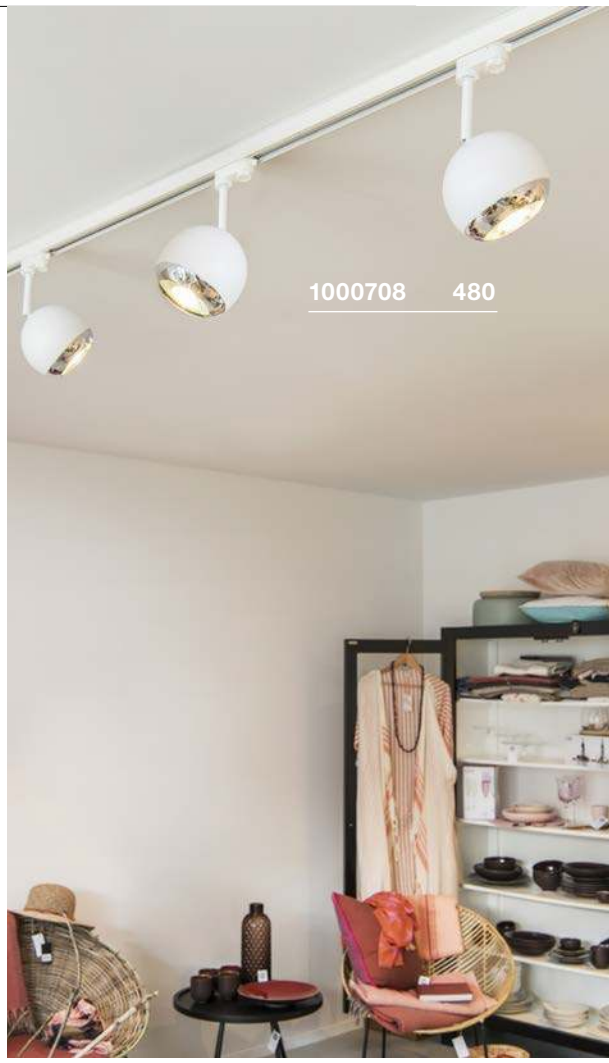







LENITO TRACK
3-circuit

LED INSIDE







- High efficiency
- Wide, homogeneous lighting

Product details

220-240V ~50/60Hz | 160mA
Total wattage: 23W
Material: aluminium/polycarbonate (PC)

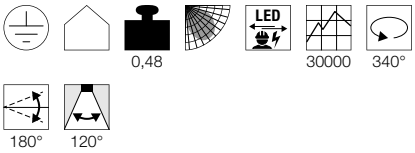

Dimensional drawing



Variant	Item No.	GBP
2450lm | 3000K | CRI>80		
■ black	**1001467**	**144.00**
250lm · 3000K · CRI>80		
□ white	**1001466**	**144.00**

MERADO FLOOD TRACK
3-circuit, PHASE

LED INSIDE







- Asymmetrical light distribution
- For homogeneous lighting

Product details

220-240V ~50/60Hz | 1000mA
Total wattage: 40W
Material: aluminium/plastic
Dimmable: C, L

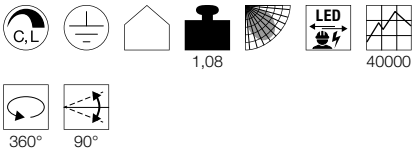

Dimensional drawing



Variant	Item No.	GBP
3000lm | 3000K | CRI>80		
■ black	**1001471**	**176.40**
3000lm | 3000K | CRI>80		
□ white	**1001470**	**176.40**
3200lm | 4000K | CRI>80		
■ black	**1001475**	**176.40**
3200lm | 4000K | CRI>80		
□ white	**1001474**	**176.40**

HELIA 50 TRACK
3-circuit

LED INSIDE



• Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

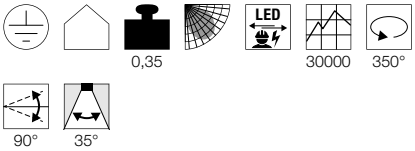

Dimensional drawing



Variant	Item No.	GBP
750lm | 3000K | CRI>90		
■ black	**152960**	**99.00**
750lm | 3000K | CRI>90		
□ white	**152961**	**99.00**

NOBLO SPOT
3-circuit

LED INSIDE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7.5W
Material: aluminium

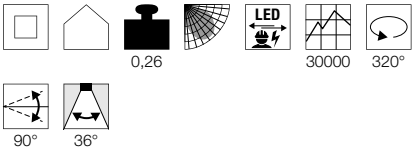

Dimensional drawing



Variant	Item No.	GBP
620lm | 2700K | CRI>80		
■ black	**1001865**	**51.30**
620lm | 2700K | CRI>80		
□ white	**1001866**	**51.30**
620lm | 2700K | CRI>80		
■ grey	**1001867**	**51.30**







ENOLA C TRACK
3-circuit

LED INSIDE







Product details

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium

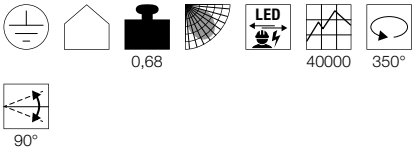

Dimensional drawing



Variant	Item No.	GBP
900lm | 3000K | CRI>80 | 35°		
■ black	**152420**	**153.00**
900lm | 3000K | CRI>80 | 35°		
□ white	**152421**	**153.00**
900lm | 3000K | CRI>80 | 55°		
■ black	**152430**	**153.00**
900lm | 3000K | CRI>80 | 55°		
□ white	**152431**	**153.00**

SIGHT TRACK
3-circuit

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 37W
Material: aluminium/acrylic

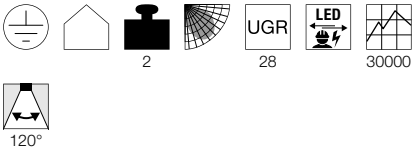

Dimensional drawing



Variant	Item No.	GBP
3100lm | 3000K | CRI>80		
■ black	**1001289**	**278.10**
3100lm | 3000K | CRI>80		
□ white	**1001290**	**278.10**
3100lm | 3000K | CRI>80		
■ grey	**1001292**	**278.10**

PURI
3-circuit, QPAR51

SOCKET INSIDE







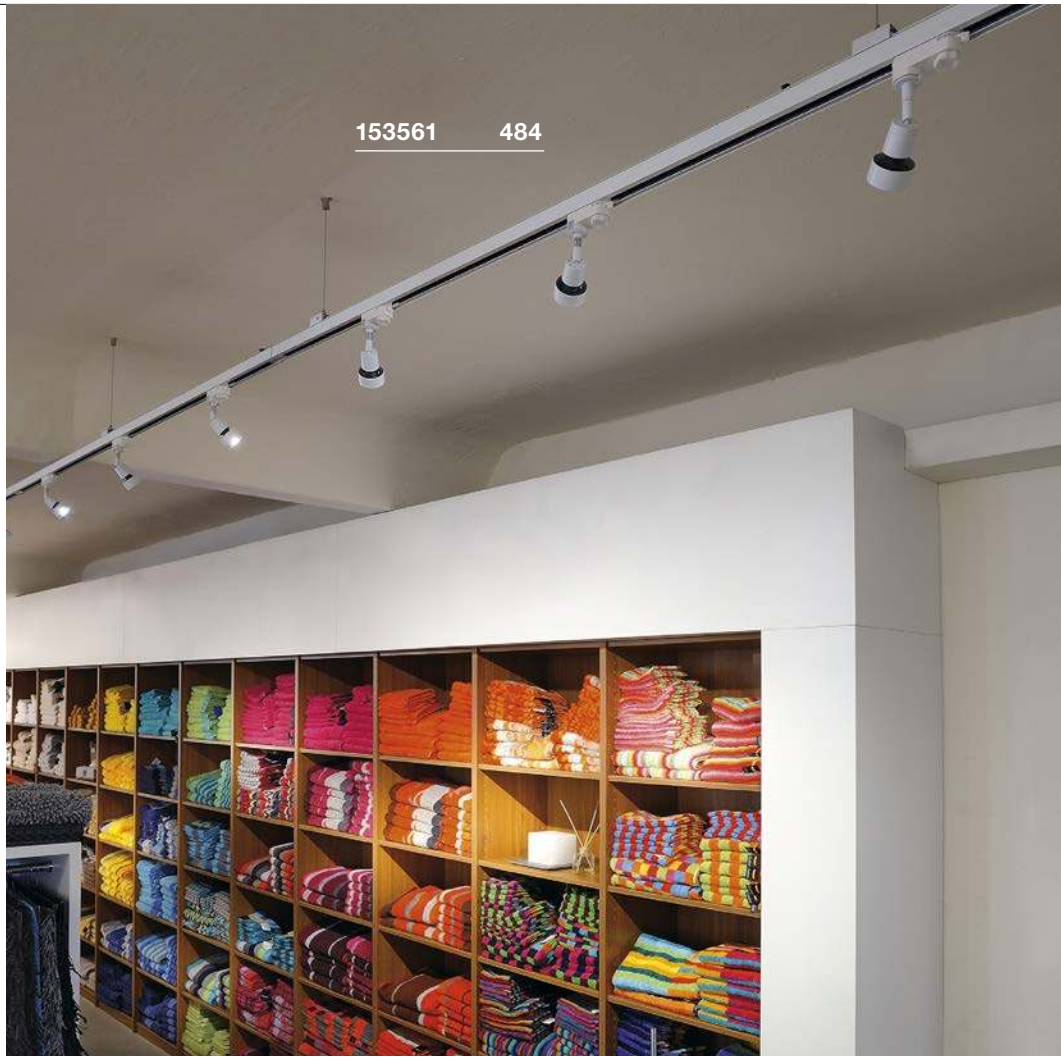

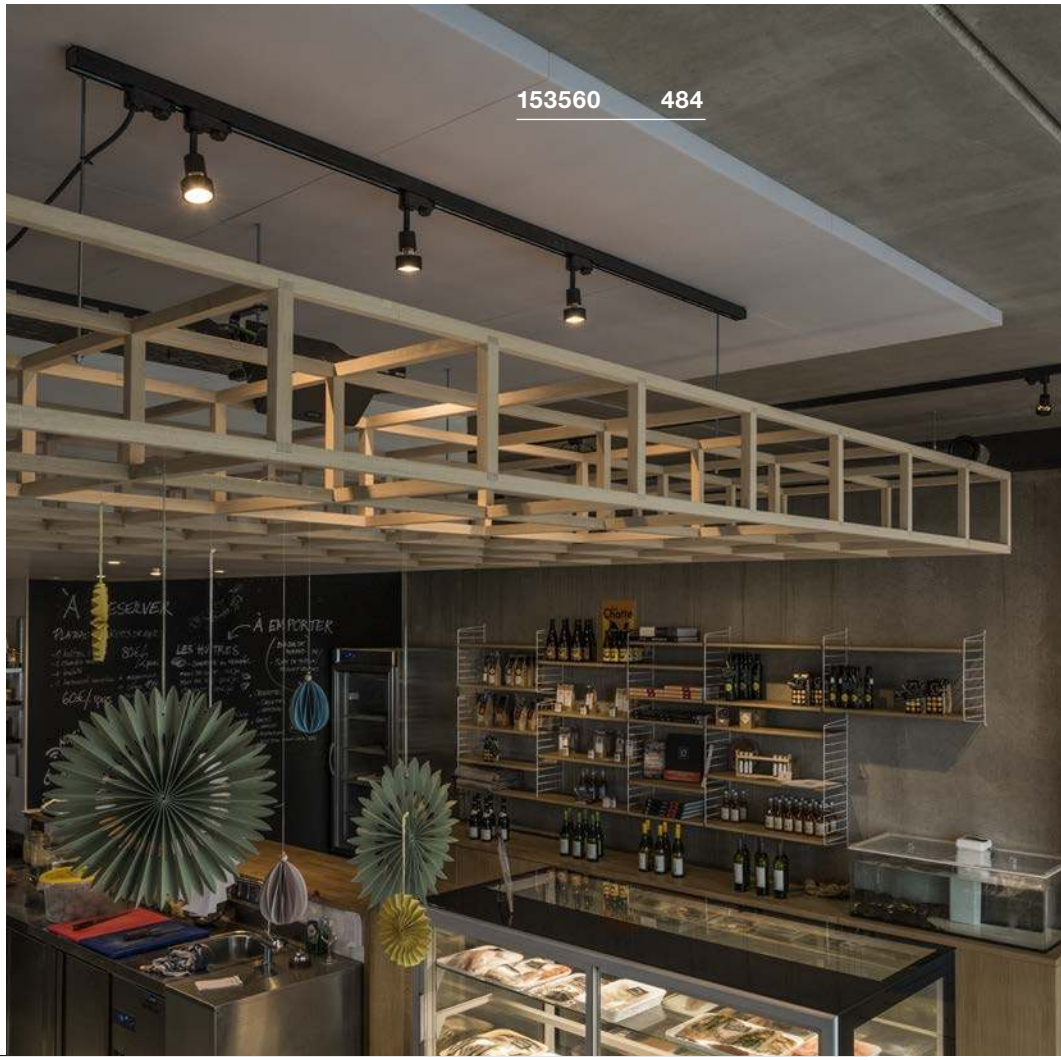

Product details

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)



Dimensional drawing



Note

Decorative ring for QPAR51 inc.

Recommended lamp

LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005081 | 6.10 GBP



Lamp details

max. 50W QPAR51
Diameter: 11cm max. L: 7.8cm max.
optional: QPAR111

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	**153560**	**30.20**
GU10 | QPAR51 □ white	**153561**	**30.20**
GU10 | QPAR51 ■ grey	**153564**	**30.20**

PURI TRACK
3-circuit, QPAR51

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/plastic



Dimensional drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



Lamp details
max. 10W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**1001871**	**34.60**
GU10 | QPAR51		
□ white	**1001872**	**34.60**

BIMA
3-circuit, single, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



Lamp details
max. 50W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**152240**	**49.50**
GU10 | QPAR51		
□ white	**152241**	**49.50**
GU10 | QPAR51		
■ grey	**152242**	**49.50**

BIMA
3-circuit, double, QPAR51

SOCKET INSIDE







- The lamp heads can be swivelled in opposite directions

Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005081 | 6.10 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005077 | 6.10 GBP



Lamp details
2x max. 50W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**152230**	**72.00**
GU10 | QPAR51		
□ white	**152231**	**72.00**
GU10 | QPAR51		
■ grey	**152232**	**72.00**

TEC KALU TRACK
3-circuit, double, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 31W
Material: aluminium/polycarbonate (PC)
Dimmable: C

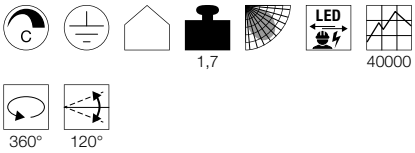

Dimensional drawing



Variant	Item No.	GBP
1900lm | 3000K | CRI>80 | 24°		
■ black	**1001427**	**206.10**
1900lm | 3000K | CRI>80 | 24°		
◪ white/black	**1001428**	**206.10**
1900lm | 3000K | CRI>80 | 60°		
■ black	**1001419**	**206.10**
1900lm | 3000K | CRI>80 | 60°		
◪ white/black	**1001420**	**206.10**

TEC KALU TRACK
3-circuit, quad, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 60W
Material: aluminium/polycarbonate (PC)
Dimmable: C

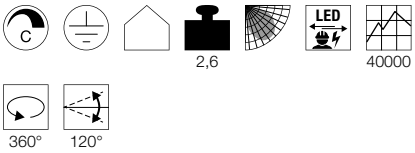

Dimensional drawing



Variant	Item No.	GBP
3800lm | 3000K | CRI>80 | 24°		
■ black	**1001429**	**341.10**
3800lm | 3000K | CRI>80 | 24°		
◪ white/black	**1001430**	**341.10**
3800lm | 3000K | CRI>80 | 60°		
■ black	**1001421**	**341.10**
3800lm | 3000K | CRI>80 | 60°		
◪ white/black	**1001422**	**341.10**









EURO CUBE
3-circuit

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 28.5W
Material: aluminium

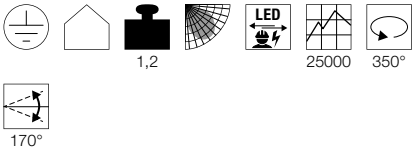

Dimensional drawing



Variant	Item No.	GBP
2100lm | 3000K | CRI>90 | 60°		
■ black	**152750**	**212.40**
2100lm | 3000K | CRI>90 | 60°		
□ white	**152751**	**212.40**
2100lm | 3000K | CRI>90 | 60°		
■ grey	**152754**	**212.40**
1950lm | 3000K | CRI>90 | 90°		
■ black	**152760**	**212.40**
1950lm | 3000K | CRI>90 | 90°		
□ white	**152761**	**212.40**
1950lm | 3000K | CRI>90 | 90°		
■ grey	**152764**	**212.40**

EURO CUBE
3-circuit

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 28.5W
Material: aluminium

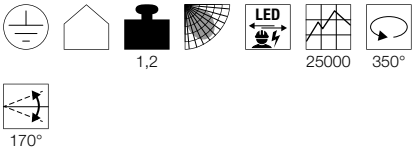

Dimensional drawing



Variant	Item No.	GBP
2150lm | 4000K | CRI>90 | 60°		
■ black	**152780**	**212.40**
2150lm | 4000K | CRI>90 | 60°		
□ white	**152781**	**212.40**
2150lm | 4000K | CRI>90 | 60°		
■ grey	**152784**	**212.40**
2050lm | 4000K | CRI>90 | 90°		
■ black	**152790**	**212.40**
2050lm | 4000K | CRI>90 | 90°		
□ white	**152791**	**212.40**
2050lm | 4000K | CRI>90 | 90°		
■ grey	**152794**	**212.40**

SUPROS 78 TRACK
3-circuit, PHASE

LED INSIDE









Product details

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium
Dimmable: C, L

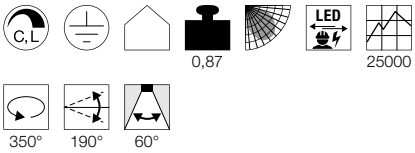

Dimensional drawing



Recommended accessories

Lens 20°
Item No. 116302 |3.00 GBP

Lens 40°
Item No. 116304 |3.00 GBP

■ Diffusor
Item No. 1000677 |19.80 GBP

□ Diffusor
Item No. 1000678 |19.80 GBP

Variant	Item No.	GBP
700lm | 3000K | CRI>80 | 60°		
■ black	**152660**	**112.50**
700lm | 3000K | CRI>80 | 60°		
□ white	**152661**	**112.50**





SUPROS TRACK
3-circuit

LED INSIDE

FOLLOWER







Product details

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: aluminium

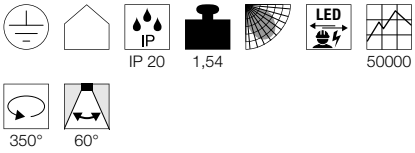

Dimensional drawing



Note

Other colour temperatures available upon request

Recommended accessories

Reflector 20°
Item No. 114102 | 9.50 GBP



Reflector 40°
Item No. 114104 | 9.50 GBP



Variant	Item No.	GBP
2600lm | 3000K | CRI>90 | 60°		
■ black	**1003291**	**206.10**
2600lm | 3000K | CRI>90 | 60°		
□ white	**1003292**	**206.10**
2700lm | 4000K | CRI>90 | 60°		
■ black	**1003293**	**206.10**
2700lm | 4000K | CRI>90 | 60°		
□ white	**1003294**	**206.10**

SUPROS TRACK
3-circuit

LED INSIDE

FOLLOWER







Product details

220-240V ~50/60Hz | 950mA
Total wattage: 36W
Material: aluminium/glass

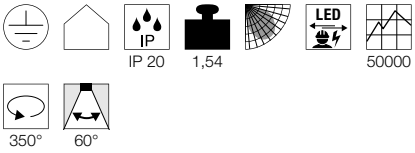

Dimensional drawing



Note

Other colour temperatures available upon request

Recommended accessories

Reflector 20°
Item No. 114102 | 9.50 GBP



Reflector 40°
Item No. 114104 | 9.50 GBP



Variant	Item No.	GBP
3380lm | 3000K | CRI>90 | 60°		
■ black	**1003295**	**224.10**
3380lm | 3000K | CRI>90 | 60°		
□ white	**1003296**	**224.10**
3520lm | 4000K | CRI>90 | 60°		
■ black	**1003297**	**224.10**
3520lm | 4000K | CRI>90 | 60°		
□ white	**1003298**	**224.10**

STRUCTEC
3-circuit

LED INSIDE







STRUCTEC
3-circuit

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 28W
Material: aluminium

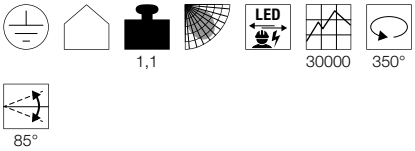

Dimensional drawing



Variant	Item No.	GBP
2700lm | 3000K | CRI>90 | 36°		
■ matt black	**1000980**	**157.50**
2700lm | 3000K | CRI>90 | 36°		
□ matt white	**1000981**	**157.50**
2650lm | 3000K | CRI>90 | 60°		
■ matt black	**1000983**	**157.50**
2650lm | 3000K | CRI>90 | 60°		
□ matt white	**1000984**	**157.50**

Product details

220-240V ~50/60Hz
Total wattage: 28W
Material: aluminium

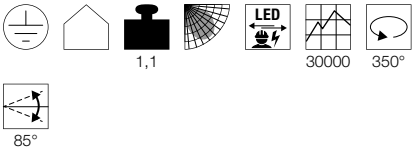

Dimensional drawing



Variant	Item No.	GBP
2800lm | 4000K | CRI>90 | 36°		
■ matt black	**1000986**	**157.50**
2800lm | 4000K | CRI>90 | 36°		
□ matt white	**1000987**	**157.50**
2750lm | 4000K | CRI>90 | 60°		
■ matt black	**1000989**	**157.50**
2750lm | 4000K | CRI>90 | 60°		
□ matt white	**1000990**	**157.50**





STRUCTEC
3-circuit

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 35W
Material: aluminium

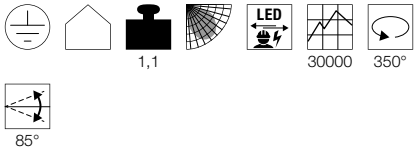

Dimensional drawing



Variant	Item No.	GBP
3200lm | 3000K | CRI>90 | 36°		
■ matt black	**1000992**	**197.10**
3200lm | 3000K | CRI>90 | 36°		
□ matt white	**1000993**	**197.10**
3150lm | 3000K | CRI>90 | 60°		
■ matt black	**1000995**	**197.10**
3150lm | 3000K | CRI>90 | 60°		
□ matt white	**1000996**	**197.10**

STRUCTEC
3-circuit

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 35W
Material: aluminium

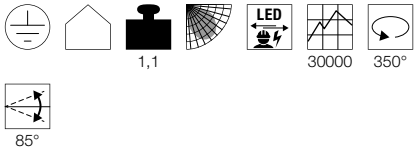

Dimensional drawing



Variant	Item No.	GBP
3450lm | 4000K | CRI>90 | 36°		
■ matt black	**1000998**	**197.10**
3450lm | 4000K | CRI>90 | 36°		
□ matt white	**1000999**	**197.10**
3400lm | 4000K | CRI>90 | 60°		
■ matt black	**1001001**	**197.10**
3400lm | 4000K | CRI>90 | 60°		
□ matt white	**1001002**	**197.10**

STRUCTEC ZOOM
3-circuit

LED INSIDE







- Adjustable from 25° to 60°
- Modern lighting solution for various lighting concepts

Product details

220-240V ~50/60Hz
Total wattage: 35W
Material: aluminium

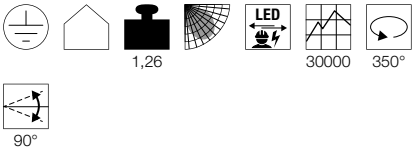

Dimensional drawing



Variant	Item No.	GBP
3000lm | 3000K | CRI>90		
■ matt black	**1000656**	**206.10**
3000lm | 3000K | CRI>90		
□ matt white	**1000657**	**206.10**
3000lm | 3000K | CRI>90		
■ matt grey	**1000658**	**206.10**

KALU TRACK
3-circuit, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/plastic



Dimensional drawing



Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP

Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**152610**	**87.30**
GU10 | QPAR111		
□ white	**152611**	**87.30**
GU10 | QPAR111		
■ grey	**152614**	**87.30**

KALU TRACK
3-circuit, QR111

SOCKET INSIDE







Product details
230V ~50Hz | 12V AC
Material: aluminium/plastic



Dimensional drawing



Recommended lamp

LED G53 15W 40°
2700K 750lm
17kWh/1000h
Item No. 560232 | 85.50 GBP

LED G53 15W 40°
3000K 760lm
17kWh/1000h
Item No. 560234 | 85.50 GBP

Lamp details
max. 50W QR111

Variant	Item No.	GBP
G53 | QR111		
■ black	**153580**	**117.00**
G53 | QR111		
□ white	**153581**	**117.00**
G53 | QR111		
■ grey	**153584**	**117.00**









KALU TRACK
3-circuit, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 13W
Material: aluminium
Dimmable: C

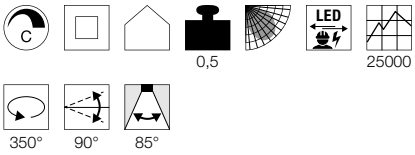

Dimensional drawing



Variant	Item No.	GBP
860lm | 3000K | CRI>80		
■ black	**152600**	**197.10**
860lm | 3000K | CRI>80		
□ white	**152601**	**197.10**

KALU TRACK
3-circuit, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 17W
Material: aluminium/polycarbonate (PC)
Dimmable: C

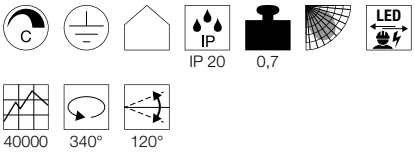

Dimensional drawing



Variant	Item No.	GBP
1000lm | 3000K | CRI>80 | 24°		
■ black	**153600**	**192.60**
1000lm | 3000K | CRI>80 | 60°		
■ black	**1000769**	**192.60**

EURO SPOT TRACK
3-circuit, QPAR51

SOCKET INSIDE



Product details

230V -50Hz
Material: aluminium/glass

0,48 350° 90°

Dimensional drawing



Recommended lamp

LED GU10 3,7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



Lamp details

max. 25W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	**153850**	**63.00**
GU10 | QPAR51 □ white	**153851**	**63.00**
GU10 | QPAR51 ■ grey	**153854**	**63.00**

EURO SPOT TRACK
3-circuit, QPAR111

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium

0,87 350° 90°

Dimensional drawing



Recommended lamp

LED GU10 13W 55°
4000K 950lm
13kWh/1000h
Item No. 1003095 | 80.10 GBP



LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP



Lamp details

max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 ■ black	**153420**	**81.00**
GU10 | QPAR111 □ white	**153421**	**81.00**
GU10 | QPAR111 ■ grey	**153424**	**81.00**





EURO SPOT TRACK
3-circuit

LED INSIDE



Product details

220-240V ~50/60Hz
Total wattage: 11W
Material: aluminium

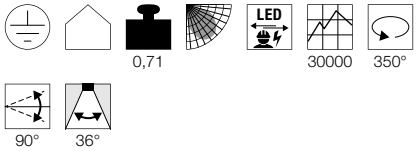

Dimensional drawing



Variant	Item No.	GBP
650lm | 3000K | CRI>80		
black	**1001367**	**126.00**
650lm | 3000K | CRI>80		
white	**1001368**	**126.00**
650lm | 3000K | CRI>80		
grey	**1001369**	**126.00**

EURO SPOT TRACK
3-circuit

NEW VARIANT

LED INSIDE







Product details

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium

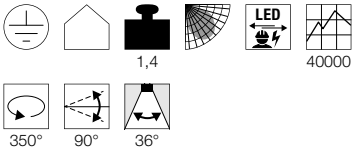

Dimensional drawing



Variant	Item No.	GBP
1800lm | 3000K | CRI>80		
black	**1002681**	**153.00**
1900lm | 3000K | CRI>80		
white	**1002682**	**153.00**
1900lm | 3000K | CRI>80		
grey	**1002683**	**153.00**

EURO SPOT TRACK
3-circuit

LED INSIDE







Product details

220-240V ~50/60Hz | 1500mA
Total wattage: 61W
Material: aluminium/glass

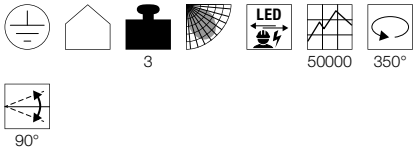

Dimensional drawing



Variant	Item No.	GBP
5500lm | 3000K | CRI>80 | 12°		
black	**1001476**	**296.10**
5500lm | 3000K | CRI>80 | 12°		
white	**1001477**	**296.10**
5500lm | 3000K | CRI>80 | 12°		
grey	**1001478**	**296.10**
5500lm | 3000K | CRI>80 | 38°		
black	**1001484**	**296.10**
5500lm | 3000K | CRI>80 | 38°		
white	**1001480**	**296.10**
5500lm | 3000K | CRI>80 | 38°		
grey	**1001479**	**296.10**
5500lm | 3000K | CRI>80 | 60°		
black	**1001481**	**296.10**
5500lm | 3000K | CRI>80 | 60°		
white	**1001482**	**296.10**
5500lm | 3000K | CRI>80 | 60°		
grey	**1001483**	**296.10**

SIGHT MOVE
3-circuit

NEW

LED INSIDE









Product details

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material: aluminium/PMMA





Dimensional drawing



Variant	Item No.	GBP
2700lm | 3000K | CRI>90		
■ matt black	1004686	142.20
2700lm | 3000K | CRI>90		
□ matt white	1004687	142.20
3100lm | 4000K | CRI>90		
■ matt black	1004688	142.20
3100lm | 4000K | CRI>90		
□ matt white	1004689	142.20



SIGHT TRACK
3-circuit, PD

LED INSIDE







Product details

220-240V ~50/60Hz | 700mA
Total wattage: 40W
Material: aluminium/acrylic

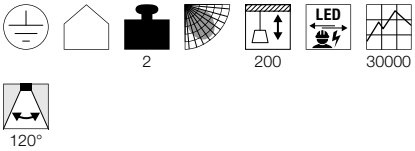

Dimensional drawing



Variant	Item No.	GBP
3100lm | 3000K | CRI>80 ■ black	**1002048**	**278.10**
3100lm | 3000K | CRI>80 □ white	**1002049**	**278.10**
3100lm | 3000K | CRI>80 ■ grey	**1002050**	**278.10**

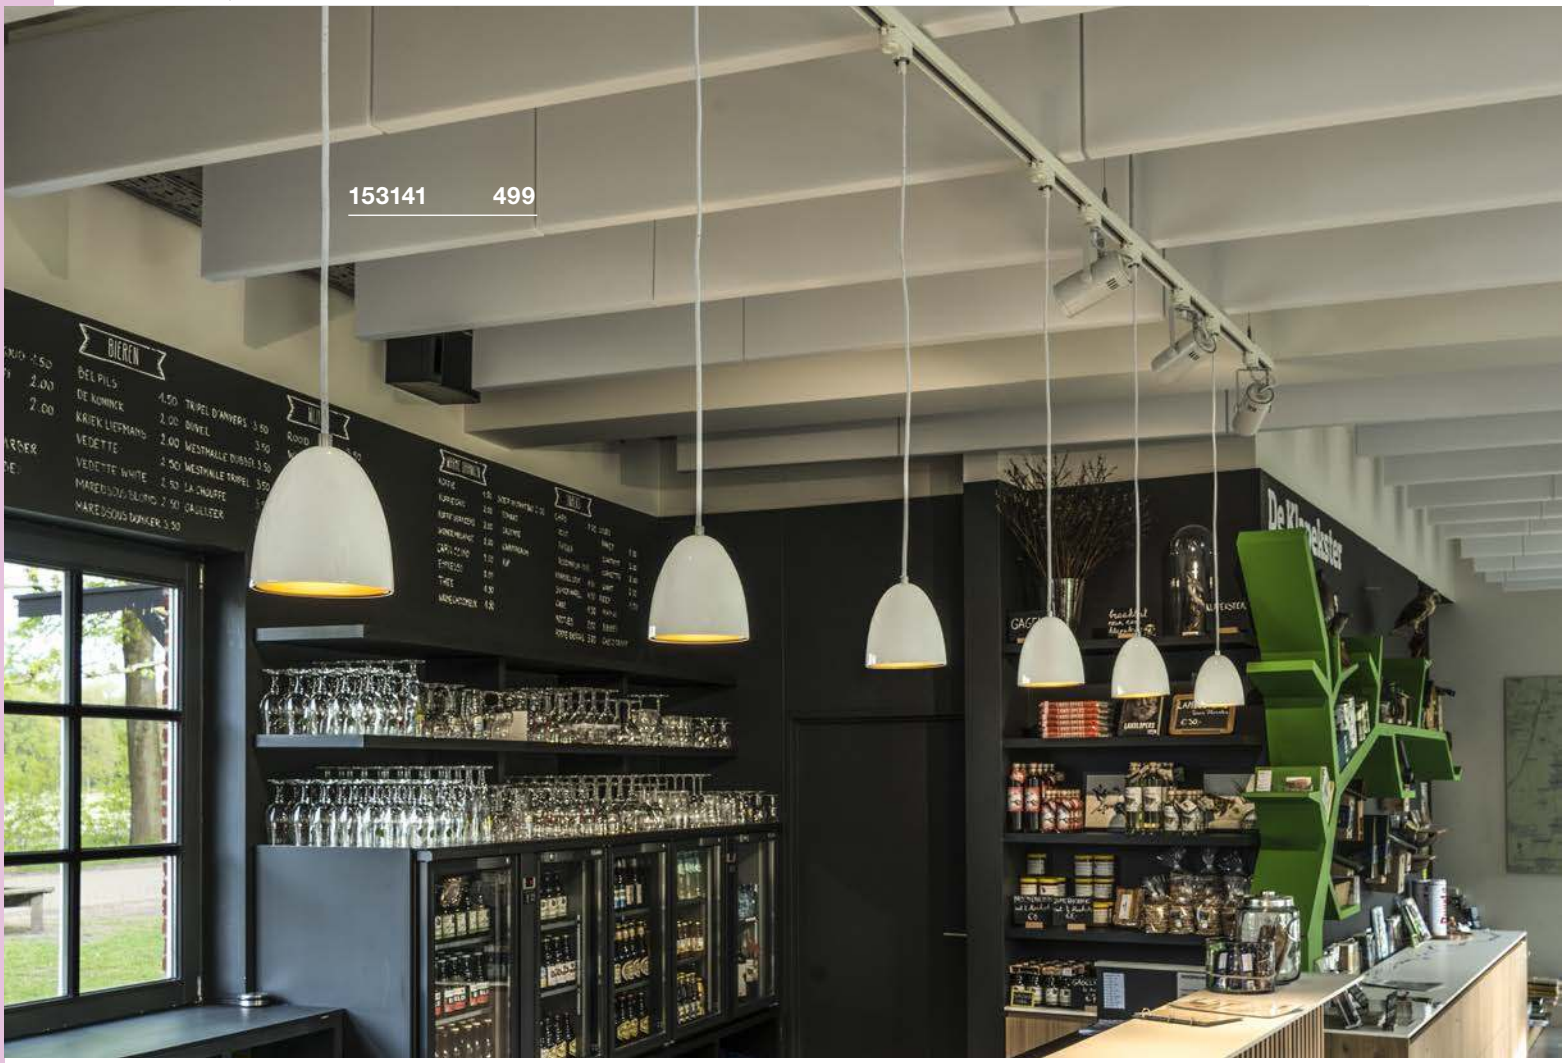
153141 499
BIEREN

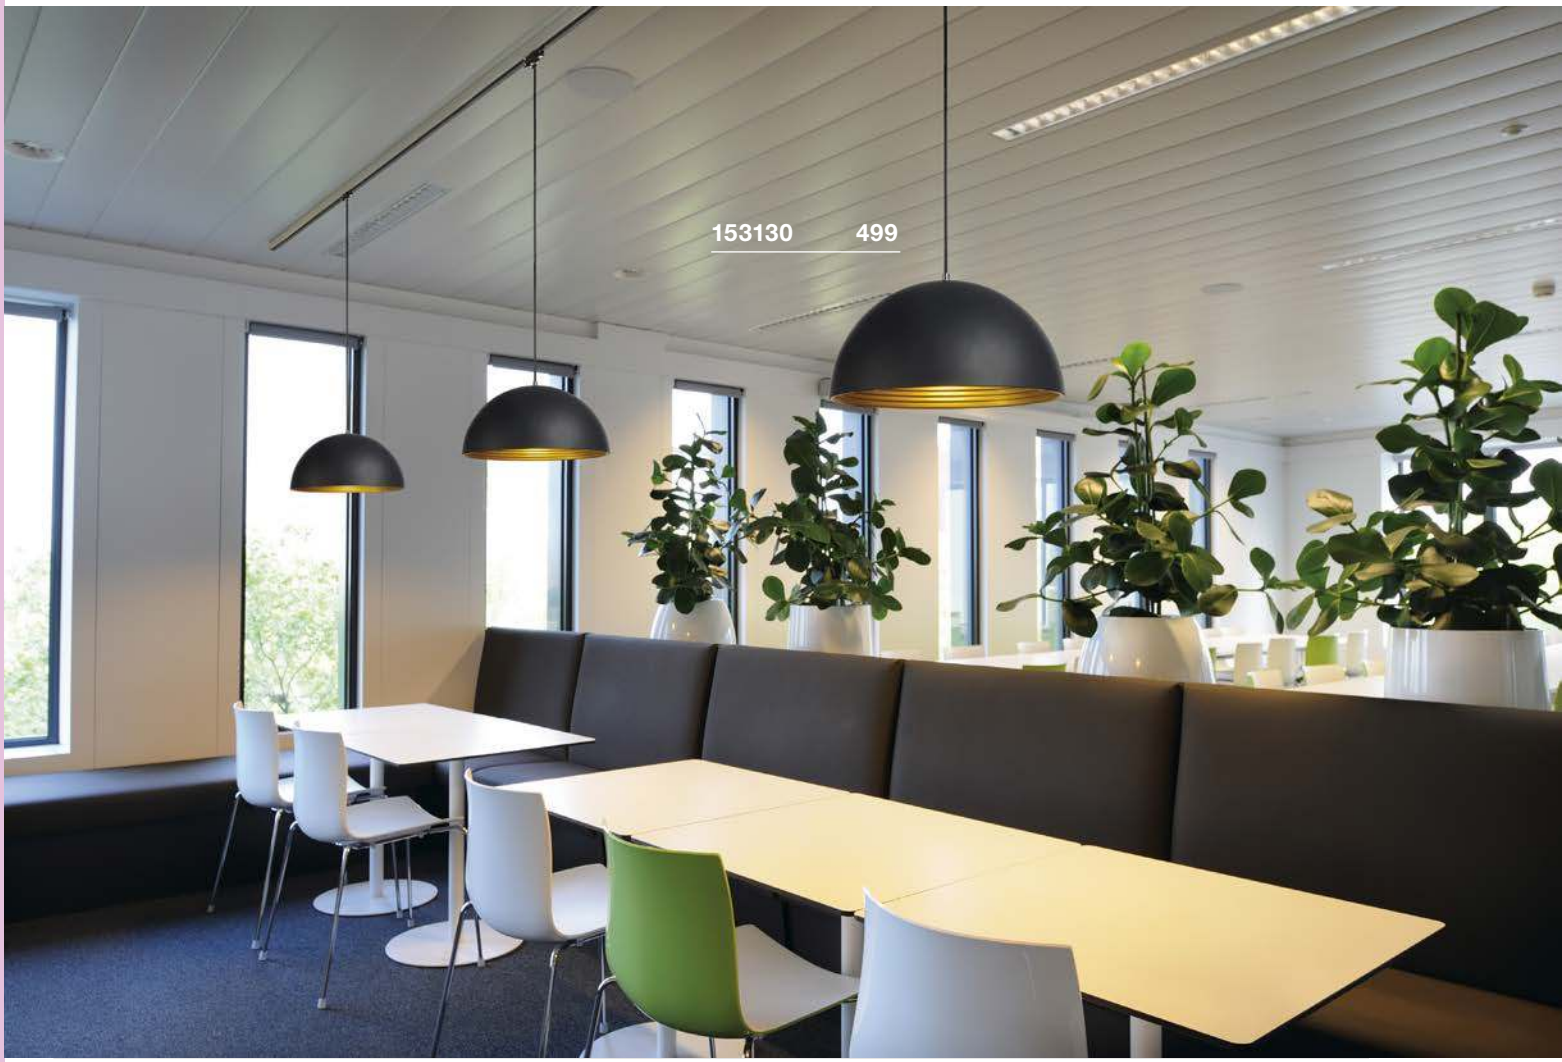
153130 499

LIGHT EYE® 150
3-circuit, PD, QPAR111

SOCKET INSIDE



Product details
230V -50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP



LED GU10 9,5W 25°
2200-6700K 800lm
10kWh/1000h
Item No. 1001922 | 49.50 GBP



Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 black/chrome	1000709	99.00
GU10 | QPAR111 white/chrome	1000710	99.00
GU10 | QPAR111 chrome	153112	108.00

PARA CONE 14
3-circuit, PD, QPAR51

SOCKET INSIDE



Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 5,1W 48°
2700-6500K 350lm
6kWh/1000h
Item No. 1001918 | 49.50 GBP



LED GU10 4W
2600K 260lm
4kWh/1000h
Item No. 1003101 | 39.60 GBP



Lamp details
max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 glossy black	153140	90.00
GU10 | QPAR51 glossy white	153141	90.00
GU10 | QPAR51 copper	1002686	94.50

FORCHINI M 40 TRACK
3-circuit, PD, E27

SOCKET INSIDE



- Double-walled design with interior reflector
- Textile cable in housing colour

Product details
230V -50Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED E27 10,5W 360°
2700K 1000lm
10,5kWh/1000h
Item No. 1003093 | 24.30 GBP



LED E27 4W 180°
2000-2900K 200lm
4kWh/1000h
Item No. 1003098 | 47.70 GBP



Lamp details
max. 40W
L: 15.2 cm max.

Variant	Item No.	GBP
E27 black/gold	153130	180.00
E27 white/gold	153131	180.00

PLANNING AID FOR EUTRAC® 3-CIRCUIT SURFACE MOUNTED TRACKS

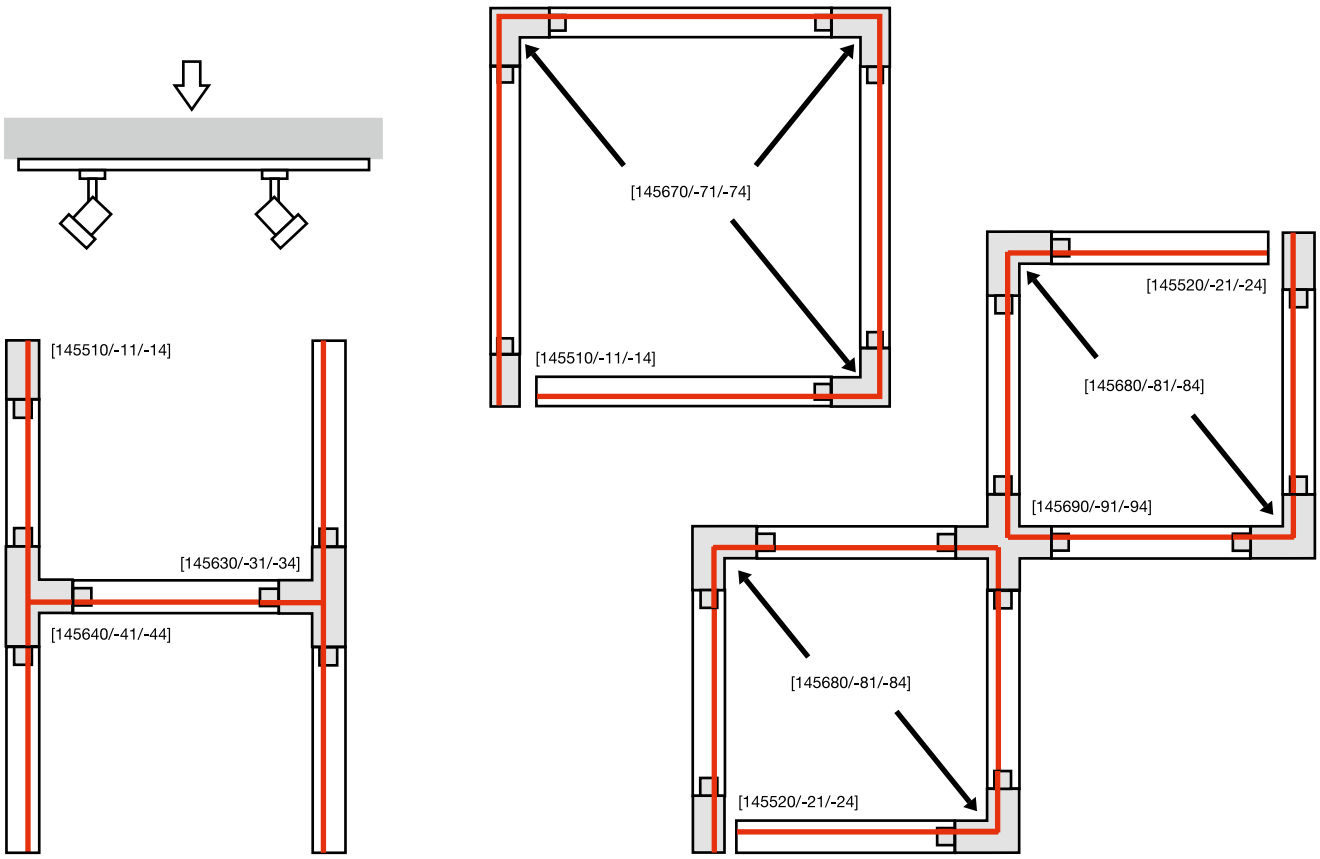



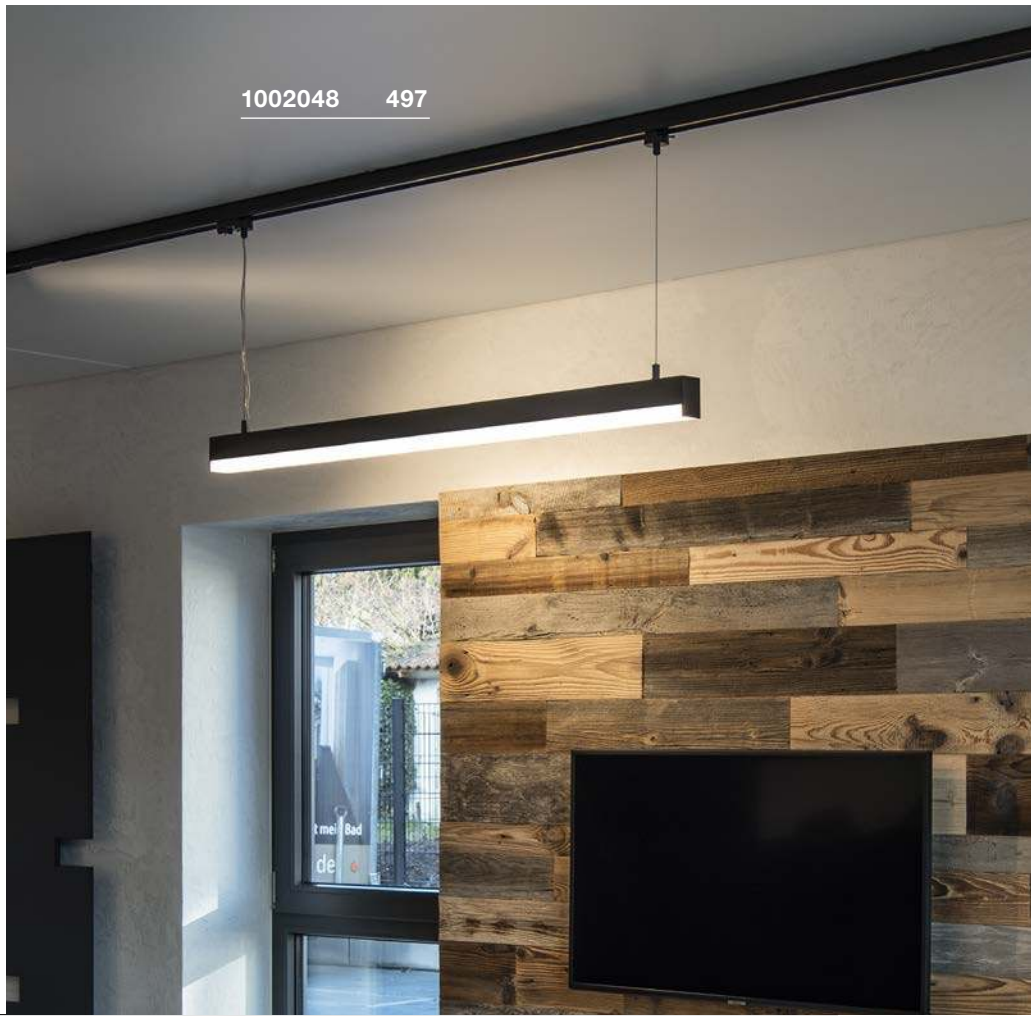

SURFACE MOUNTED TRACK 1M





1-CIRCUIT SURFACE MOUNTED TRACK



1-CIRCUIT SURFACE MOUNTED TRACK



1-CIRCUIT SURFACE MOUNTED TRACK

Rated voltage	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50Hz
Max. perm. current	16A	16A	16
Material	aluminium	aluminium	aluminium
Colour	black	white	grey
Length	100cm	100cm	100cm
Width	3.5cm	3.5cm	3.5cm
Height	1.8cm	1.8cm	1.8cm
Weight	0.67kg	0.67kg	0.67kg
Item No.	**143010**	**143011**	**143012**
GBP	**25.20**	**25.20**	**25.20**

SURFACE MOUNTED TRACK 2M





1-CIRCUIT SURFACE MOUNTED TRACK



1-CIRCUIT SURFACE MOUNTED TRACK



1-CIRCUIT SURFACE MOUNTED TRACK

Rated voltage	220-240V ~50/60Hz	220-240V ~50Hz	220-240V ~50/60Hz
Max. perm. current	16A	16A	16A
Material	aluminium	aluminium	aluminium
Colour	black	white	grey
Length	200cm	200cm	200cm
Width	3,5	3.5cm	3.5cm
Height	1.8cm	1.8cm	1.8cm
Weight	1.34kg	1.34kg	1.34kg
Item No.	**143020**	**143021**	**143022**
GBP	**49.50**	**49.50**	**49.50**

SURFACE MOUNTED TRACK 3M





1-CIRCUIT SURFACE MOUNTED TRACK



1-CIRCUIT SURFACE MOUNTED TRACK



1-CIRCUIT SURFACE MOUNTED TRACK

Rated voltage	230V ~50Hz/60Hz	230V ~50Hz/60Hz	230V ~50Hz/60Hz
Max. perm. current	16A	16A	16A
Material	aluminium	aluminium	aluminium
Colour	black	white	grey
Length	300cm	300cm	300cm
Width	3.5cm	3.5cm	3.5cm
Height	1.8cm	1.8cm	1.8cm
Weight	1.6kg	1.6kg	1.6kg
Item No.	**1002151**	**1002152**	**1002153**
GBP	**78.30**	**78.30**	**78.30**

EUTRAC® 3-CIRCUIT SURFACE MOUNTED TRACK





EUTRAC®
3-circuit surface mounted track, 1m



EUTRAC®
3-circuit surface mounted track, 1m



EUTRAC®
3-circuit surface mounted track, 1m

Rated voltage	230V -50Hz	230V -50Hz	230V -50Hz
Max. perm. current	16A	16A	16A
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
Colour	black	white RAL 9016	grey
Length	100cm	100cm	100cm
Width	3.6cm	3.6cm	3.6cm
Height	3.2cm	3.2cm	3.2cm
Weight	1kg	1kg	1kg
Item No.	**145100**	**1001510**	**145102**
GBP	**36.00**	**36.00**	**36.00**

Manufacturer: Eutrac Stromschienen GmbH





EUTRAC®
3-circuit surface mounted track, 2m



EUTRAC®
3-circuit surface mounted track, 2m



EUTRAC®
3-circuit surface mounted track, 2m

Rated voltage	230V -50Hz	230V -50Hz	230V -50Hz
Max. perm. current	16A	16A	16A
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
Colour	black	white RAL 9016	grey
Length	200cm	200cm	200cm
Width	3.6cm	3.6cm	3.6cm
Height	3.2cm	3.2cm	3.2cm
Weight	2kg	2kg	2kg
Item No.	**145200**	**1001511**	**145202**
GBP	**72.00**	**72.00**	**72.00**

Manufacturer: Eutrac Stromschienen GmbH





EUTRAC®
3-circuit surface mounted track, 3m



EUTRAC®
3-circuit surface mounted track, 3m



EUTRAC®
3-circuit surface mounted track, 3m

Rated voltage	230V -50Hz	230V -50Hz	230V -50Hz
Max. perm. current	16A	16A	16A
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
Colour	black	white RAL 9016	grey
Length	300cm	300cm	300cm
Width	3.6cm	3.6cm	3.6cm
Height	3.2cm	3.2cm	3.2cm
Weight	3kg	3kg	3kg
Item No.	**145300**	**1001512**	**145302**
GBP	**117.00**	**117.00**	**117.00**

Manufacturer: Eutrac Stromschienen GmbH

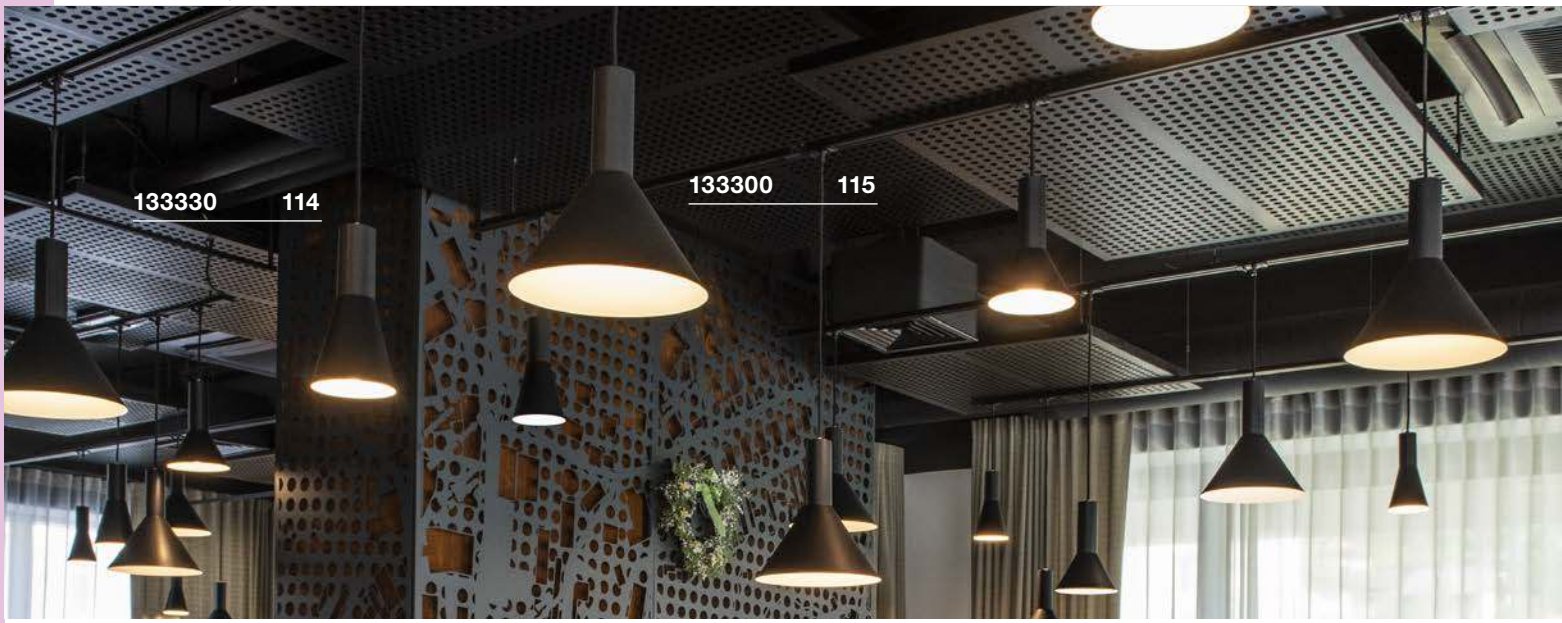

ACCESSORIES FOR EUTRAC® 3-CIRCUIT SURFACE MOUNTED TRACK

Manufacturer: Eutrac Stromschienen GmbH

Feed-in, left

16A max.
Plastic
L: 11.2cm W: 3.6cm H: 3.2cm
Weight: 0.08kg
Earth on left-hand side.
1 piece



Variant	Item No.	GBP
black	145510	14.90
white	1001513	14.90
grey	145514	14.90

Longitudinal connector with feed-in capability

16A max.
Plastic/steel
L: 26cm W: 3.6cm H: 3.2cm
Weight: 0.15kg
1 piece



Variant	Item No.	GBP
black	145660	58.50
white	1001517	58.50
grey	145664	58.50

Feed-in, right

16A max.
Plastic
L: 11.2cm W: 3.6cm H: 3.2cm
Weight: 0.08kg
Earth on right-hand side.
1 piece



Variant	Item No.	GBP
black	145520	14.90
white	1001514	14.90
grey	145524	14.90

T-connector, earth on left

16A max.
Plastic/steel
L: 26cm W: 18.5cm H: 3.2cm
Weight: 0.35kg
1 piece



Variant	Item No.	GBP
black	145630	67.50
white	1001518	67.50
grey	145634	67.50

Centre feed-in

16A max.
Plastic
L: 13cm W: 3.6cm H: 3.6cm
Weight: 0.08kg
1 piece



Variant	Item No.	GBP
black	145530	34.20
white	1001515	34.20
grey	145534	34.20

T-connector, earth on right

16A max.
Plastic/steel
L: 26cm W: 18.5cm H: 3.2cm
Weight: 0.35kg
1 piece



Variant	Item No.	GBP
black	145640	67.50
white	1001519	67.50
grey	145644	67.50

Longitudinal connector

16A max.
Plastic
L: 5.8cm W: 1.5cm H: 2.6cm
Weight: 0.03kg
1 piece



Variant	Item No.	GBP
black	145560	14.90
white	1001516	14.90
grey	145564	14.90

L-connector, earth outside

16A max.
Plastic/steel
L: 15cm W: 15cm H: 3.2cm
Weight: 0.24kg
1 piece



Variant	Item No.	GBP
black	145670	49.50
white	1001520	49.50
grey	145674	49.50

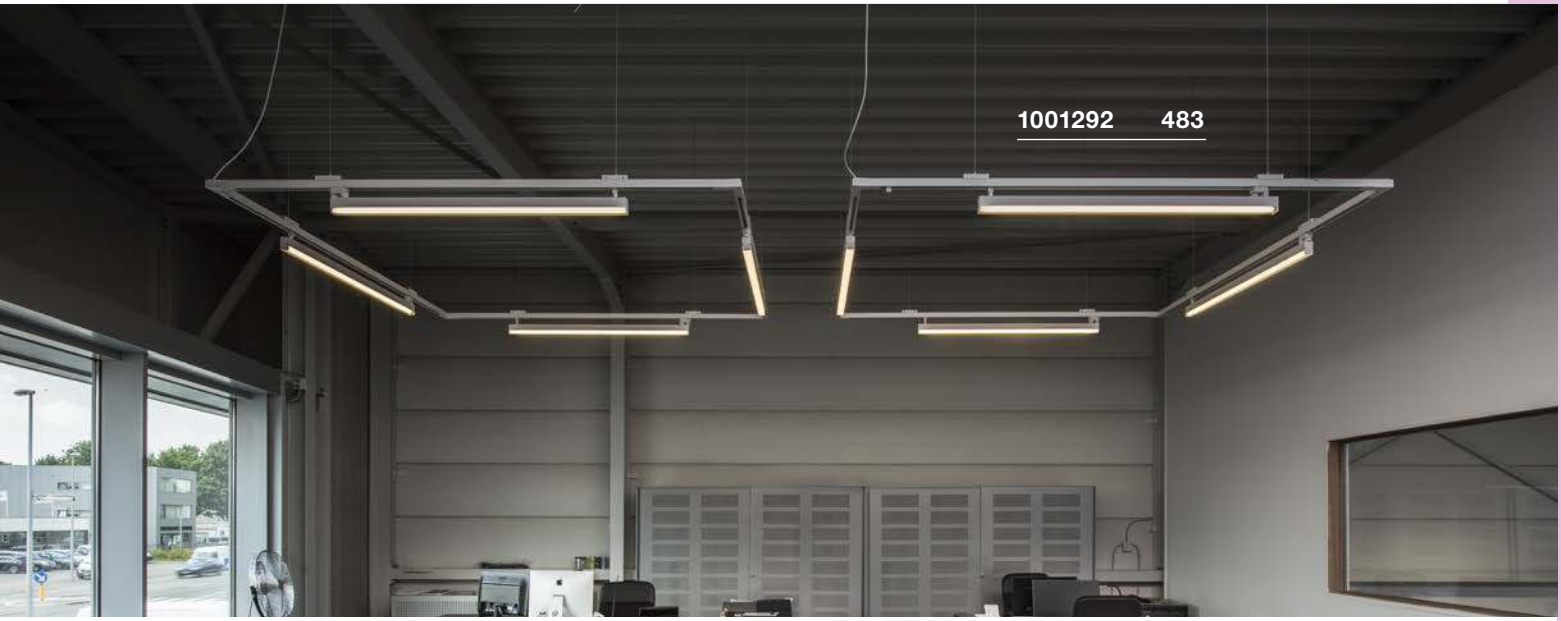

ACCESSORIES FOR EUTRAC® 3-CIRCUIT SURFCE MOUNTED TRACK

Manufacturer: Eutrac Stromschienen GmbH

L-connector, earth inside

16A max.
Plastic/steel
L: 15cm W: 15cm H: 3.2cm
Weight: 0.24kg
1 piece



Variant	Item No.	GBP
black	145680	49.50
white	1001521	49.50
grey	145684	49.50

Socket

6.3A max.
Plastic
L: 9.6cm W: 6.5cm H: 9cm
Weight: 0.17kg
1 piece



Variant	Item No.	GBP
black	145700	72.00
white	1001525	72.00

Pendant suspension, rigid

Plastic/steel
Diameter: 7cm L: 120cm H: 122cm
Weight: 0.49kg
1 piece

Variant	Item No.	GBP
black	145710	34.20
white	1001528	34.20
grey	145714	34.20

X-connector

16A max.
Plastic/steel
L: 26cm W: 26cm H: 3.2cm
Weight: 0.27kg
2 separate power circuits
1 piece



Variant	Item No.	GBP
black	145690	99.00
white	1001522	99.00
grey	145694	99.00

Universal point outlet

16A max.
Plastic
Diameter: 11.9cm H: 3.1cm
1 piece



Variant	Item No.	GBP
black	145830	79.20
white	1001526	79.20
grey	145834	79.20

Pendant suspension, rigid

Plastic/steel
Diameter: : 7cm L: 60cm H: 63.5cm
Weight: 0.28kg
1 piece

Variant	Item No.	GBP
black	145720	29.70
white	1001529	29.70
grey	145724	29.70

Joint connector

Plastic
L: 10cm W: 3.6cm H: 1.9cm
Weight: 0.06kg
1 piece



Variant	Item No.	GBP
black	145600	16.70
white	1001523	16.70
grey	145604	16.70

End cap

Plastic
L: 3.6cm W: 1.7cm H: 3.2cm
Weight: 0.01kg
1 piece



Variant	Item No.	GBP
black	145590	3.00
white	1001527	3.00
grey	145594	3.00

Pendant clip

aluminium
L: 5cm W: 3.6cm H: 1.9cm
Weight: 0.04kg
1 piece



Variant	Item No.	GBP
black	145730	8.60
white	1001530	8.60
grey	145734	8.60

Flex connector

16A max.
Plastic/steel
L: 22cm W: 3.6cm H: 3.2cm
Weight: 0.23kg
1 piece



Variant	Item No.	GBP
black	145580	67.50
white	1001524	67.50
grey	145584	67.50

Ceiling suspension

Stainless steel/brass
L: 500cm
Weight: 0.2kg
2 piece



Variant	Item No.	GBP
Nickel	1002845	31.50

3-circuit pendant adapter

10A max.
Plastic
1 piece



Variant	Item No.	GBP
black	145990	14.90
white	1001542	14.90
grey	145994	14.90

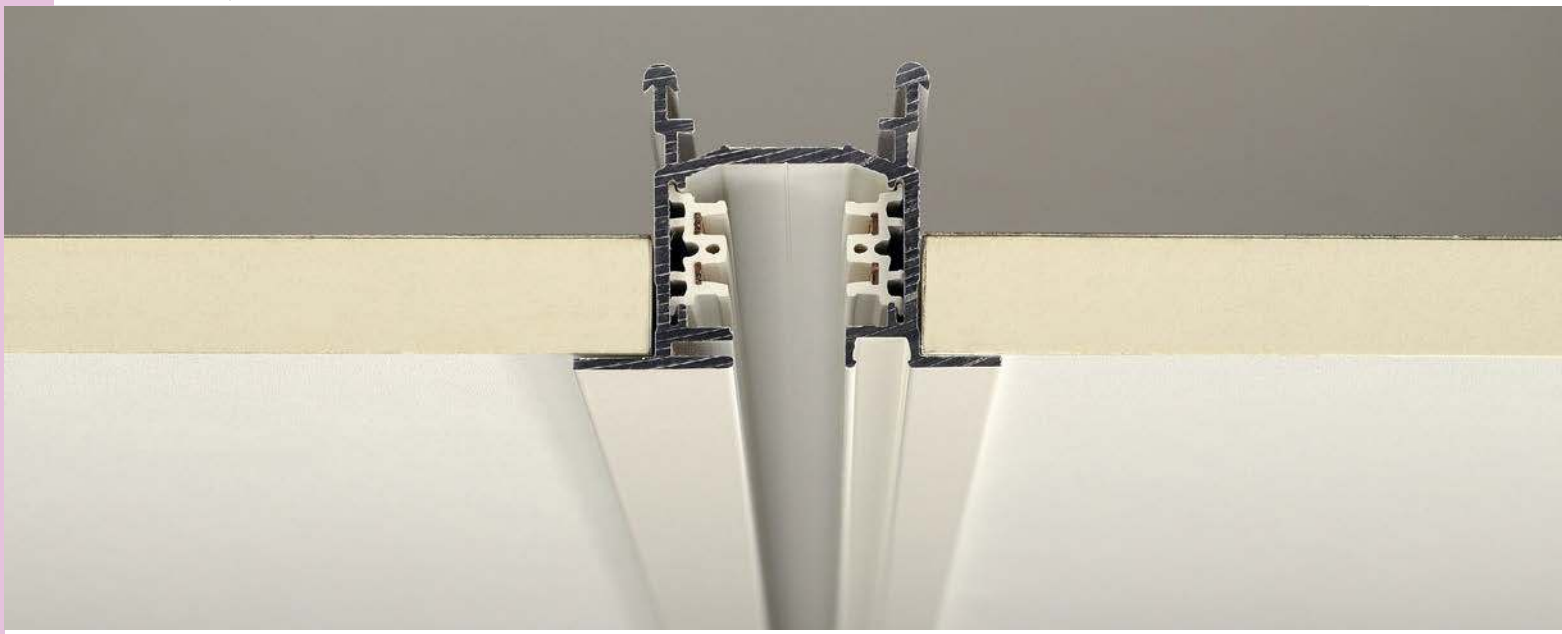

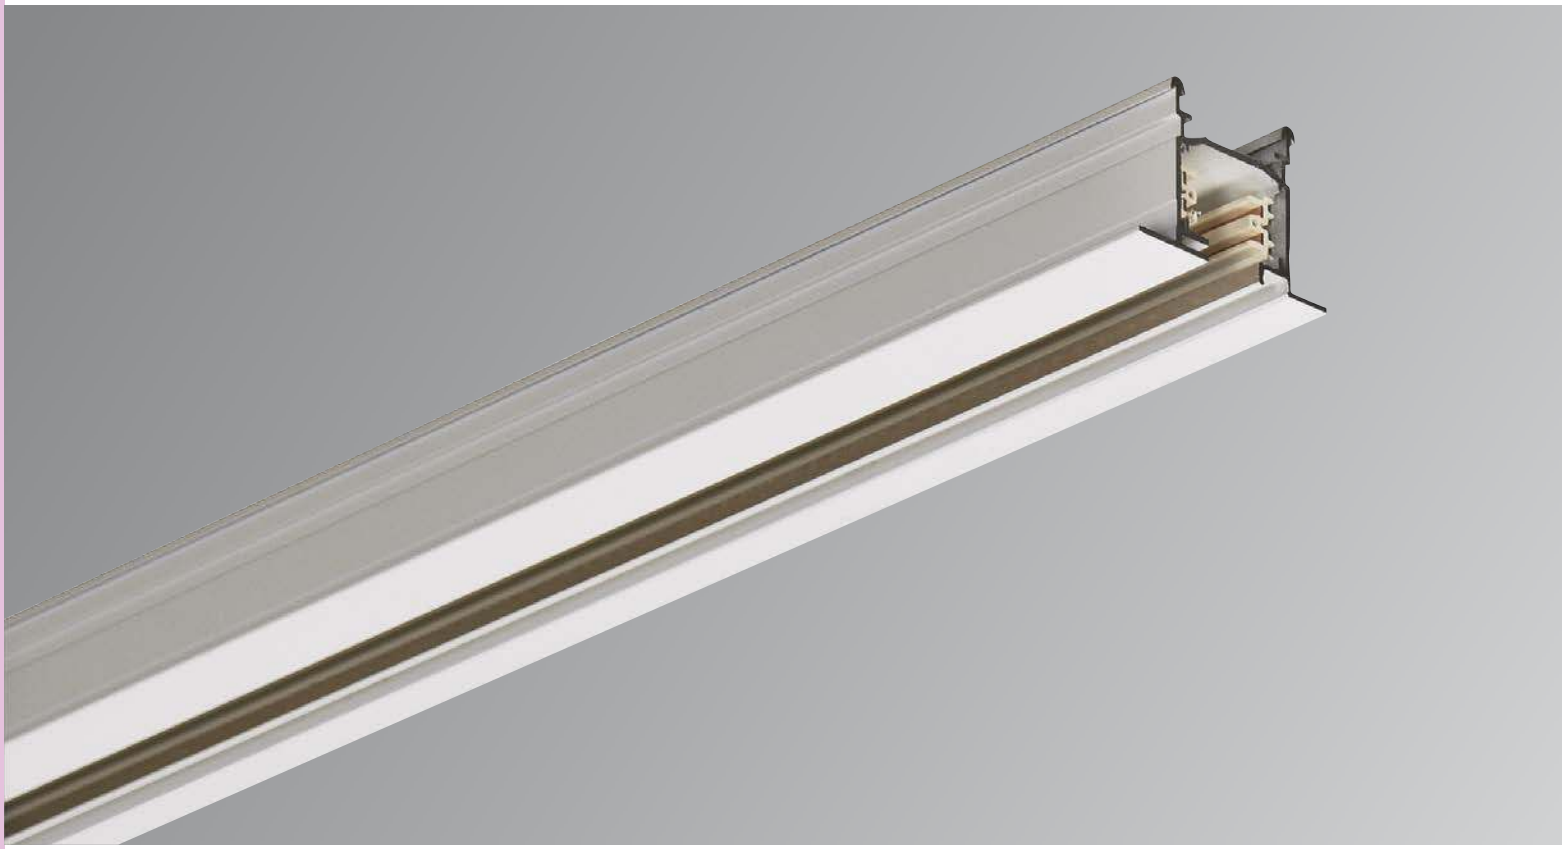

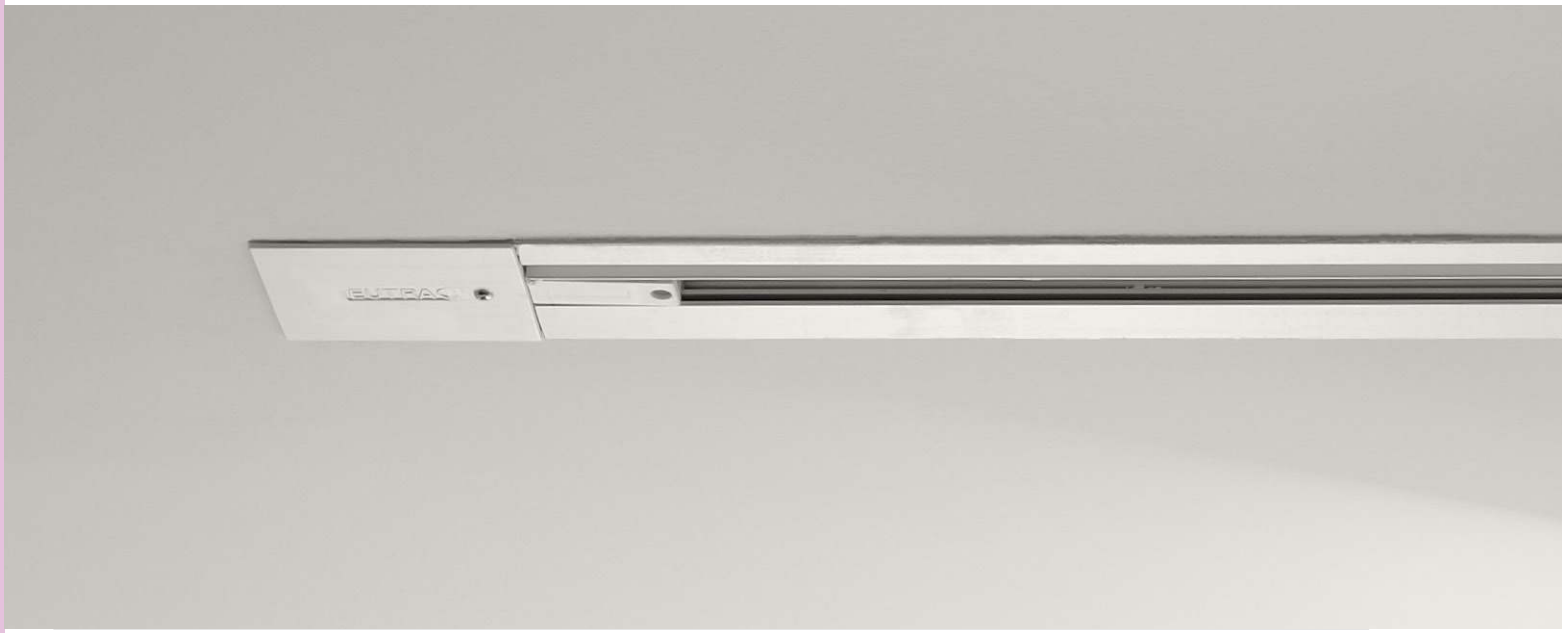
EUTRAC

3-CIRCUIT RECESSED TRACK

Recessed track



EUTRAC®
3-circuit recessed track, 2m



EUTRAC®
3-circuit recessed track, 3m

Rated voltage	230V -50Hz	230V -50Hz
Max. perm. current	16A	16A
Material	Aluminium/plastic	Aluminium/plastic
Colour	white RAL 9016	white RAL 9016
Length	200cm	300cm
Width	5.9cm	5.9cm
Height	4.1cm	4.1cm
Inst. Width	4cm	4cm
Weight	2.6kg	3.9kg
Item No.	**1001531**	**1001532**
GBP	**90.00**	**162.00**

Manufacturer: Eutrac Stromschienen GmbH

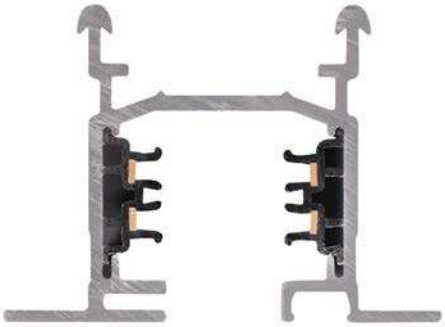

ACCESSORIES FOR EUTRAC® 3-CIRCUIT RECESSED TRACK

Manufacturer: Eutrac Stromschienen GmbH

Feed-in, protective conductor, left

16A max.
Plastic/steel
L: 12.2cm W: 6cm H: 3.4cm
Weight: 0.1kg
1 piece



Variant	Item No.	GBP
white	**1001533**	**24.80**

End cap

Plastic
L: 2.7cm W: 6cm H: 3.2cm
Weight: 0.02kg
1 piece



Variant	Item No.	GBP
white	**1001538**	**5.90**

Longitudinal connector

16A max.
Plastic/steel
L: 6.2cm W: 2.5cm H: 2.7cm
Weight: 0.09kg
1 piece



Variant	Item No.	GBP
white	**1001539**	**20.70**

Feed-in, protective conductor, right

16A max.
Plastic/steel
L: 12.2cm W: 6cm H: 3.4cm
Weight: 0.1kg
1 piece



Variant	Item No.	GBP
white	**1001534**	**24.80**

L-connector

16A max.
Plastic/steel
L: 16cm W: 16cm H: 3.2cm
Weight: 0.24kg
Earth inside, with feed capability
1 piece



Variant	Item No.	GBP
white	**1001537**	**58.50**

Mounting spring clip

Steel
L: 2cm W: 1cm H: 2,.5cm
Weight: 0.03kg
6 pieces



Variant	Item No.	GBP
grey	**145551**	**9.90**

L-connector

16A max.
Plastic/steel
L: 16cm W: 16cm H: 3.2cm
Weight: 0.24kg
Earth outside, with feed-in capabiliy
1 piece



Variant	Item No.	GBP
white	**1001536**	**58.50**

STAYING ON TRACK.

SIMPLY WELL ILLUMINATED WITH 1-CIRCUIT 240V TRACKS.

Thanks to the holes in the profile, the flat aluminium track can be attached to the wall or ceiling in a quick and easy way. When doing this you have the choice between a recessed version and a surface-mounted version, available in several colours.




1002873 513


1001862 520



HIGH VOLTAGE 1-CIRCUIT TRACK


510


510


511


511


511


512


512


512


513


514


515


515


516


516


517


519


519


520


521


521


522


523


523


524

524


525

Suitable recessed and surface mounted track systems as well as accessories can be found on pages 526-529

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

NOBLO SPOT
1-circuit, Triple Track Set

LED INSIDE



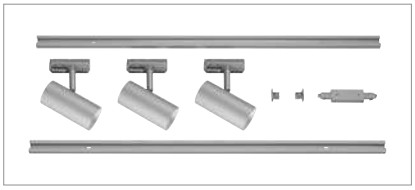

Product details
220-240V ~50/60Hz | 350mA
Total wattage: 22.5W
Material: aluminium

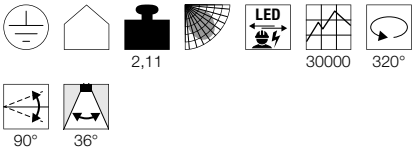

Note
The set consists of:
2 x 1m high-voltage track
1 x long connectro with feed-in capability
1 x 2 end caps
3 x NOBLO spots

Variant	Item No.	GBP
1860lm | 2700K | CRI>80		
■ black	**1002610**	**188.10**
1860lm | 2700K | CRI>80		
□ white	**1002611**	**188.10**
1860lm | 2700K | CRI>80		
■ grey	**1002612**	**188.10**

PURI TRACK
1-circuit, Triple Track Set

SOCKET INSIDE



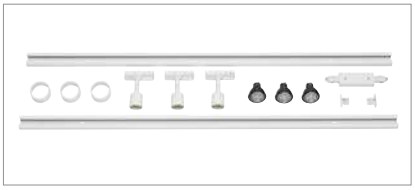

Product details
230V -50Hz
Total wattage: 12.9W
Material: aluminium



Note
The set consists of:
2 x 1m high-voltage track
1 x longitudinal connector
1 x 2 end caps
3 x PURI spots
3 x GU10 lamps
3 x deco rings for GU10

Lamp details
3x 4.3W LED GU10 51mm

Variant	Item No.	GBP
GU10 | LED GU10 51mm		
■ black	**143190**	**162.00**
GU10 | LED GU10 51mm		
□ white	**143191**	**162.00**
GU10 | LED GU10 51mm		
■ grey	**143194**	**162.00**



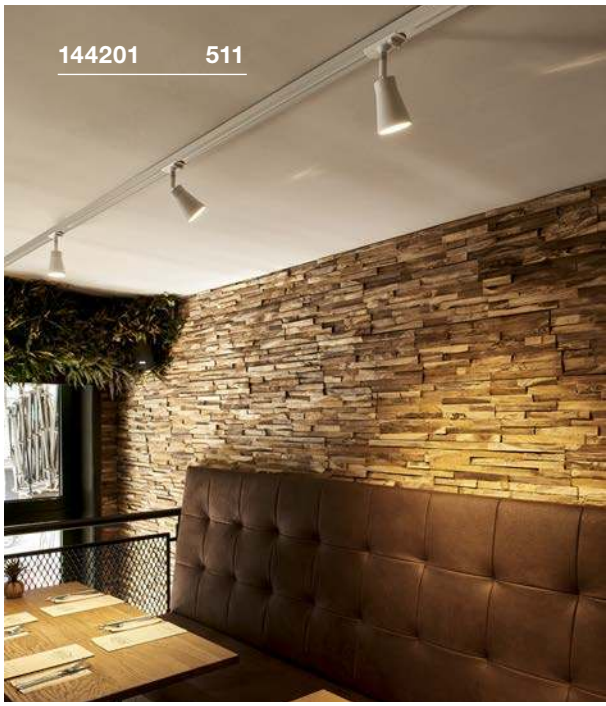

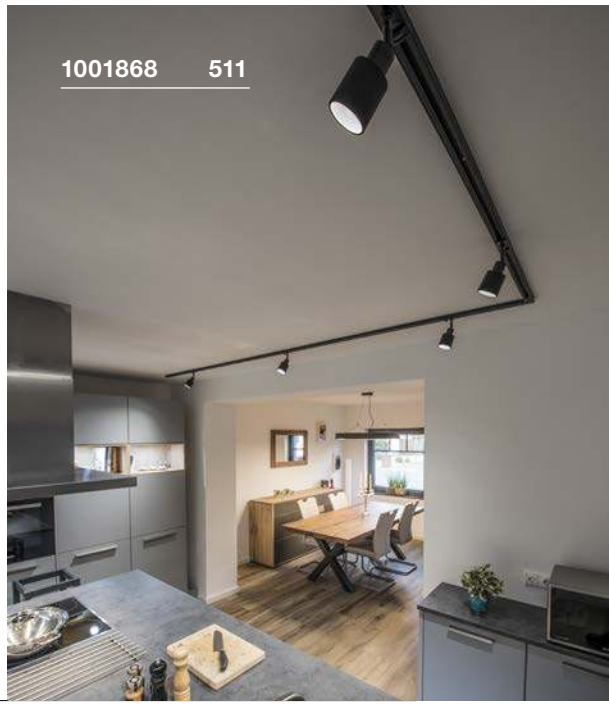

PURIA TRACK
1-circuit, QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

GU10 5.1W 48°
2700-6500K 350lm
6kWh/1000h
Item No. 1001918 | 49.50 GBP



LED GU10 5.6W 60°
2200-6700K 350lm
6kWh/1000h
Item No. 1001919 | 49.50 GBP



Lamp details

max. 10W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
black	**143450**	**31.70**
GU10 | QPAR51		
white	**143451**	**31.70**
GU10 | QPAR51		
grey	**143454**	**31.70**

AVO TRACK
1-circuit, QPAR51

SOCKET INSIDE







Product details

230V ~50/60Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005076 | 6.10 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



Lamp details

max. 50W QPAR51
Diameter: 5cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
black	**144200**	**29.70**
GU10 | QPAR51		
white	**144201**	**29.70**
GU10 | QPAR51		
grey	**144204**	**29.70**

PURI TRACK
1-circuit, QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/plastic



Dimensional drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



Lamp details

max. 10W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
black	**1001868**	**34.60**
GU10 | QPAR51		
white	**1001869**	**34.60**
GU10 | QPAR51		
grey	**1001870**	**34.60**

PURI TRACK
1-circuit, QPAR51

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/polycarbonate (PC)



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005082 | 6.10 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005077 | 6.10 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	143390	27.20
GU10 | QPAR51 □ white	143391	27.20
GU10 | QPAR51 ■ grey	143392	27.20

SPOT TRACK
1-circuit, E27

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED E27 17W 45°
3000K 1430lm
17kWh/1000h
Item No. 560473 | 60.30 GBP



LED E27 8W
2000-2900K 300lm
8kWh/1000h
Item No. 1003096 | 67.50 GBP



Lamp details
max. 75W QPAR20
optional: QPAR30

Variant	Item No.	GBP
E27 | QPAR20 ■ black	1001874	31.50
E27 | QPAR20 □ white	1001875	31.50
E27 | QPAR20 ■ grey	1001876	31.50

LIGHT EYE® 90
1-circuit, QPAR51

SOCKET INSIDE







- The optional deco ring for the lamp in the appropiate colour reduces the distance between the housing and the lamp

Product details
230V ~50/60Hz
Material: steel



Dimensional drawing



Recommended accessories

■ Lamp deco ring diameter 5.7cm
Item No. 151040 | 4.00 GBP



□ Lamp deco ring diameter 5.7cm
Item No. 151041 | 4.00 GBP

■ Lamp deco ring diameter 5.7cm
Item No. 151049 | 5.90 GBP



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005077 | 6.10 GBP



Lamp details
max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 ■ black/chrome	144010	63.00
GU10 | QPAR51 ■ white/chrome	144011	63.00
GU10 | QPAR51 ■ gold	144013	72.00
GU10 | QPAR51 ■ copper	144019	72.00

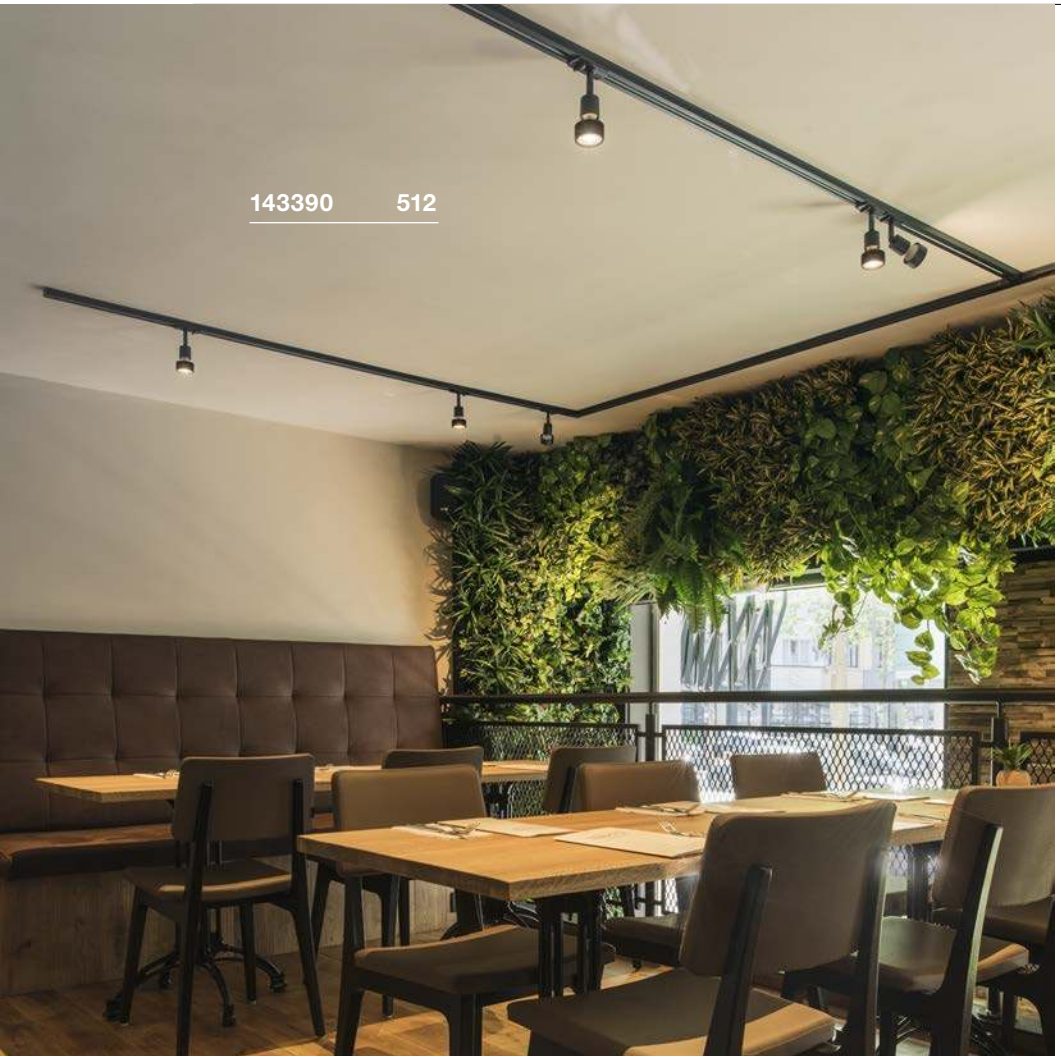

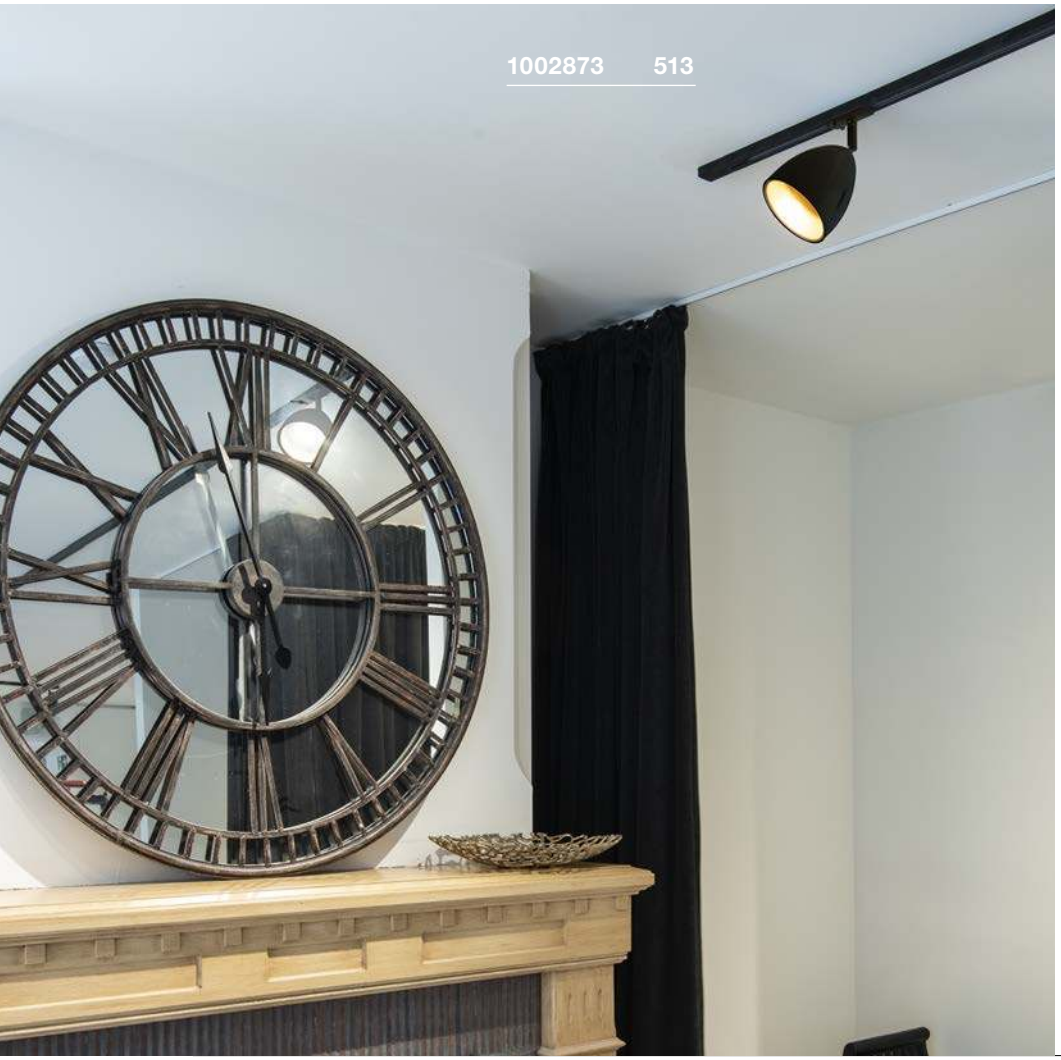

PARA CONE 14

1-circuit, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: steel



Dimensional drawing



Recommended lamp

GU10 5.1W 48°
2700-6500K 350lm
6kWh/1000h
Item No. 1001918 | 49.50 GBP



LED GU10 4W
2600K 260lm
4kWh/1000h
Item No. 1003101 | 39.60 GBP



Lamp details

max. 25W QPAR51

Variant	Item No.	GBP
GU10 glossy black	**1002873**	**65.70**
GU10 glossy white	**1002874**	**65.70**
GU10 copper	**1002875**	**68.40**

ENOLA B TRACK
1-circuit, QPAR51

SOCKET INSIDE









Product details

230V ~50/60Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



Lamp details

max. 50W QPAR51
Diameter: 5cm max. L. 6.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	**1002110**	**60.30**
GU10 | QPAR51 □ white	**1002111**	**60.30**
GU10 | QPAR51 ■ grey	**1002113**	**60.30**



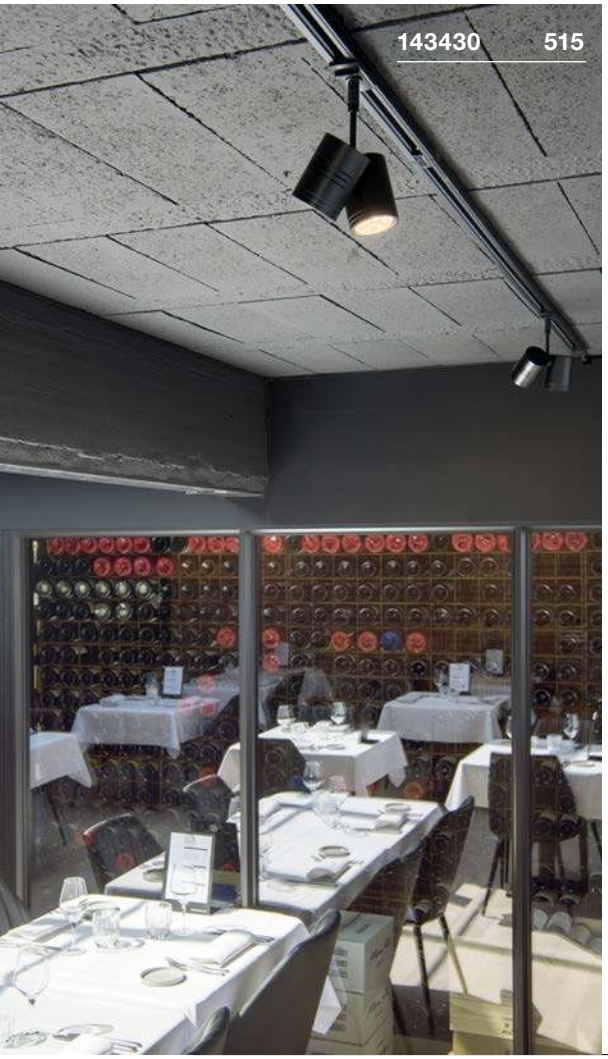

BIMA
1-circuit, single, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



Lamp details
max. 50W QPAR51
Diameter: 5 cm max. L: 5.7 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**143440**	**40.50**
GU10 | QPAR51		
□ white	**143441**	**40.50**
GU10 | QPAR51		
■ grey	**143442**	**40.50**

BIMA
1-circuit, double, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005083 | 6.10 GBP



Lamp details
2x max. 50W QPAR51
Diameter: 5 cm max. L: 5.7 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**143430**	**60.30**
GU10 | QPAR51		
□ white	**143431**	**60.30**
GU10 | QPAR51		
■ grey	**143432**	**60.30**

EURO SPOT TRACK
1-circuit. QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 5,1W 48°
2700-6500K 350lm
6kWh/1000h
Item No. 1001918 | 49.50 GBP



Lamp details

max. 25W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**1001861**	**58.50**
GU10 | QPAR51		
□ white	**143811**	**58.50**

EURO SPOT TRACK
1-circuit.

LED INSIDE





Product details

230V -50Hz
Total wattage: 11W
Material: aluminium

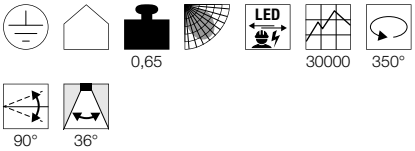

Dimensional drawing



Variant	Item No.	GBP
650lm | 3000K | CRI>80		
■ black	**1001485**	**99.00**
650lm | 3000K | CRI>80		
□ white	**1001486**	**99.00**







ALTRA DICE TRACK
1-circuit, QPAR51

SOCKET INSIDE







Product details

230V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 ■ black	**143350**	**76.50**
GU10 | QPAR51 □ white	**143351**	**76.50**
GU10 | QPAR51 ■ grey	**143354**	**76.50**

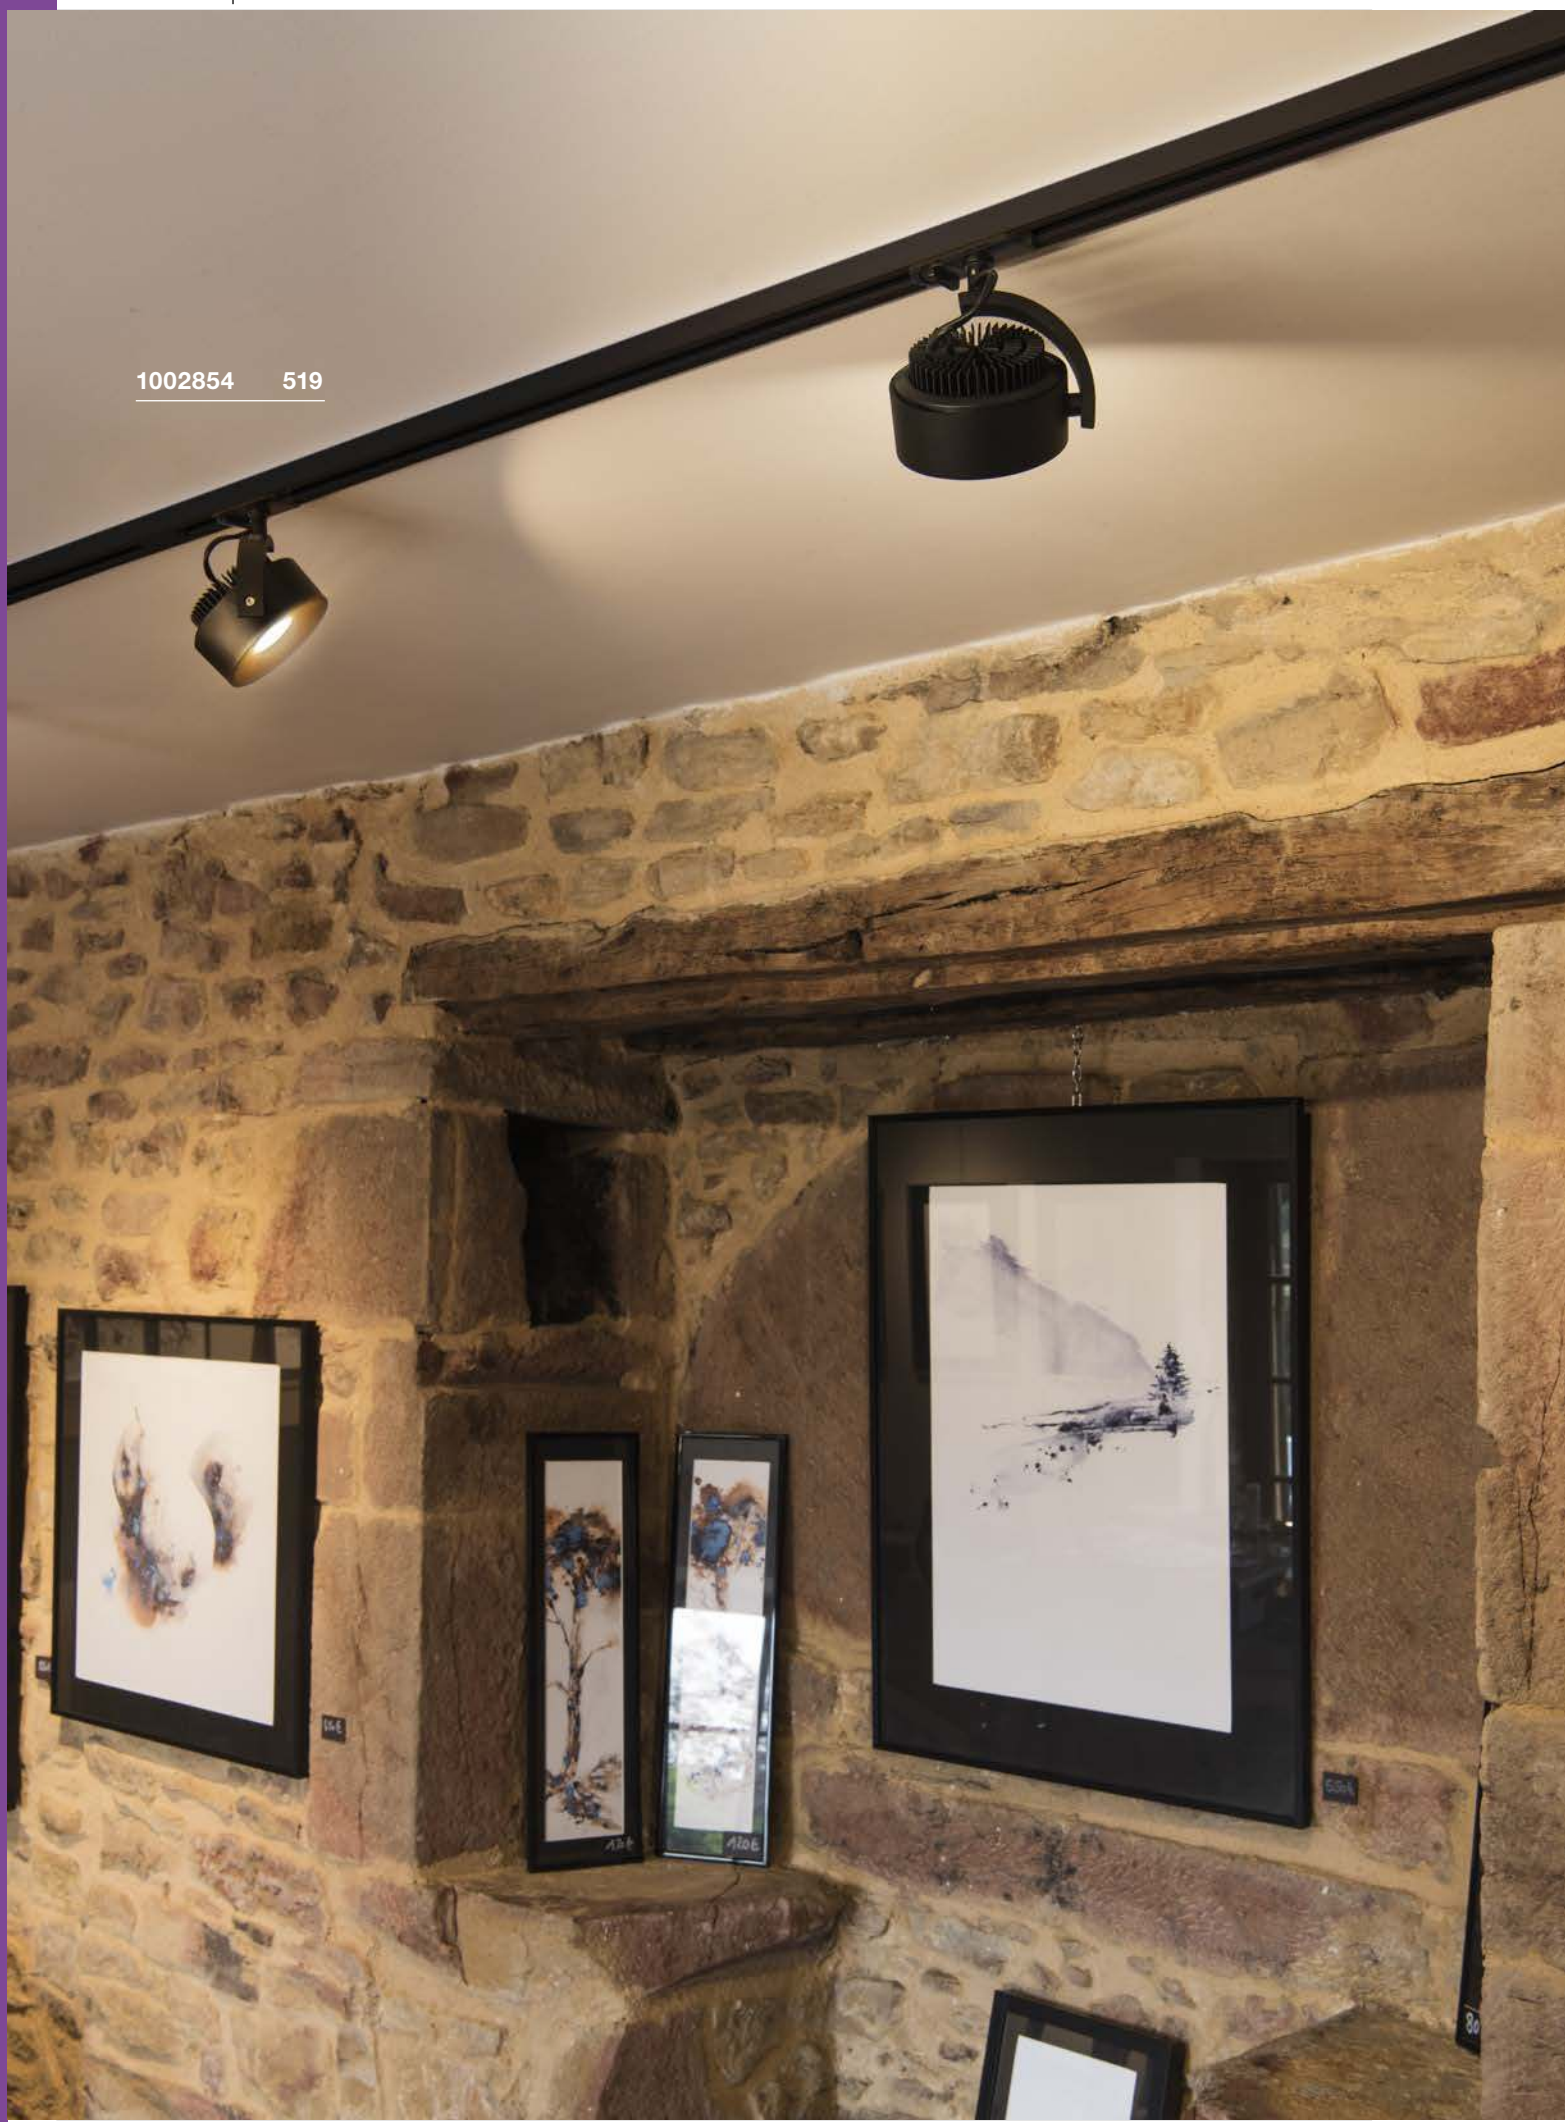
1002854 519



KALU TRACK
1-circuit, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 13W
Material: aluminium
Dimmable: C

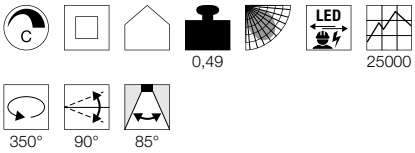

Dimensional drawing



Variant	Item No.	GBP
860lm | 3000K | CRI>80		
■ black	**1002854**	**180.00**
860lm | 3000K | CRI>80		
□ white	**143731**	**180.00**

KALU TRACK
1-circuit, QPAR111

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/plastic



Dimensional drawing



Recommended lamp

LED GU10 13W 55°
2700K 840lm
13kWh/1000h
Item No. 1003094 | 80.10 GBP



LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP



Lamp details

max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
■ black	**143540**	**72.00**
GU10 | QPAR111		
□ white	**143541**	**72.00**
GU10 | QPAR111		
■ grey	**143544**	**72.00**

NOBLO SPOT
1-circuit.









Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7.5W
Material: aluminium

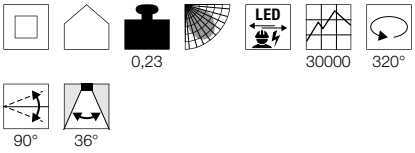

Dimensional drawing



Variant	Item No.	GBP
620lm | 2700K | CRI>80 ■ black	1001862	49.50
620lm | 2700K | CRI>80 □ white	1001863	49.50
620lm | 2700K | CRI>80 ■ grey	1001864	49.50





HELIA 50 TRACK
1-circuit

LED INSIDE







- Premium LED with CRI>90

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

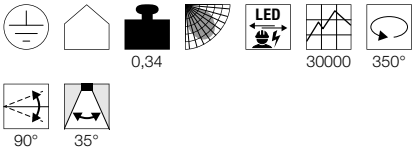

Dimensional drawing



Variant	Item No.	GBP
750lm | 3000K | CRI>90		
■ black	**143580**	**99.00**
750lm | 3000K | CRI>90		
□ white	**143581**	**99.00**

ENOLA C TRACK
1-circuit

LED INSIDE







Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

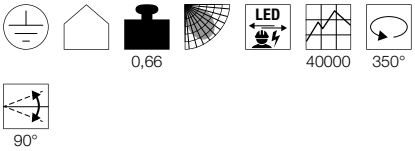

Dimensional drawing



Variant	Item No.	GBP
900lm | 3000K | CRI>80 | 35°		
■ black	**1000711**	**153.00**
900lm | 3000K | CRI>80 | 35°		
□ white	**143941**	**153.00**
900lm | 3000K | CRI>80 | 55°		
■ black	**1000712**	**153.00**
900lm | 3000K | CRI>80 | 55°		
□ white	**143951**	**153.00**

STRUCTEC
1-circuit

LED INSIDE







• Premium LED with CRI>90

Product details

230V ~50/60Hz
Total wattage: 28W
Material: aluminium

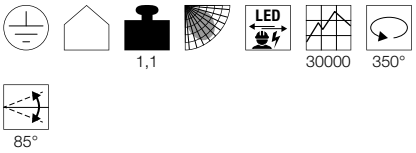

Dimensional drawing





Variant	Item No.	GBP
2700lm | 3000K | CRI>90 | 36°		
■ matt black	**1000974**	**157.50**
2700lm | 3000K | CRI>90 | 36°		
□ matt white	**1000975**	**157.50**
2650lm | 3000K | CRI>90 | 60°		
■ matt black	**1000977**	**157.50**
2650lm | 3000K | CRI>90 | 60°		
□ matt white	**1000978**	**157.50**

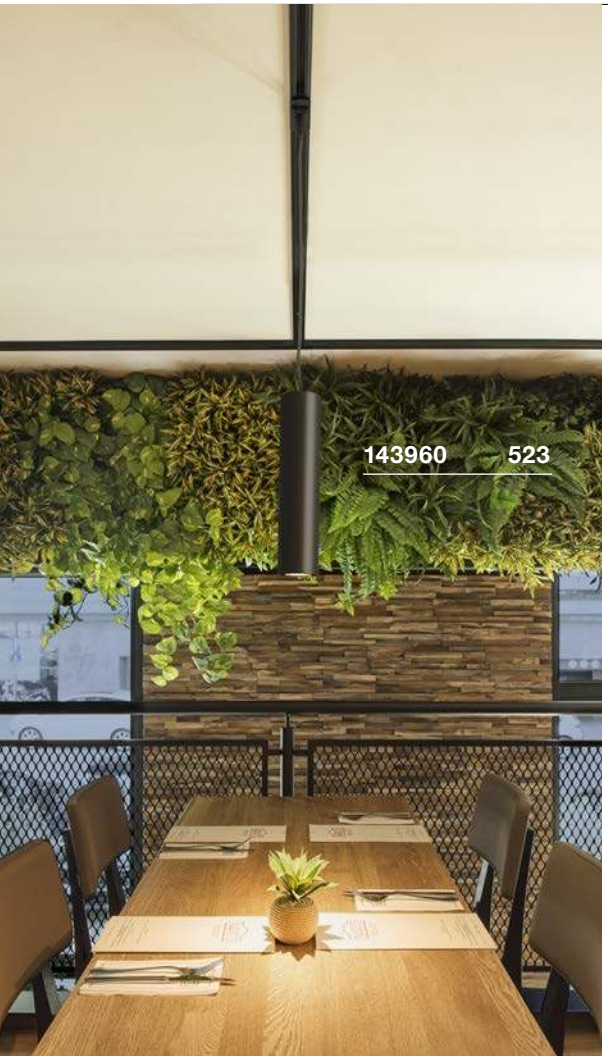



ENOLA B
PD, QPAR51

SOCKET INSIDE



Product details

230V -50Hz
Material: aluminium/steel



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
black	**143960**	**108.00**
GU10 | QPAR51		
white	**143961**	**108.00**
GU10 | QPAR51		
grey	**143964**	**108.00**

LIGHT EYE® 150
PD, QPAR111

SOCKET INSIDE







Product details

230V -50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP



LED GU10 13W 140°
2700K 1000lm
13kWh/1000h
Item No. 1001244 | 71.10 GBP



Lamp details

max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
black/chrome	**1000713**	**99.00**
GU10 | QPAR111		
white/chrome	**143621**	**99.00**
GU10 | QPAR111		
chrome	**143620**	**108.00**

PARA CONE 14
1-circuit, PD, QPAR51

SOCKET INSIDE







- Can be combined into a 'lighting group' by means of individual configuration.

Product details
230V -50Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 4W
2600K 260lm
4kWh/1000h
Item No. 1003101 | 39.60 GBP

LED GU10 3,7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP

Lamp details
max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
glossy black	**143990**	**90.00**
GU10 | QPAR51		
glossy white	**143991**	**90.00**
GU10 | QPAR51		
copper	**1001968**	**94.50**

TONGA®
1-circuit, PD, E14

SOCKET INSIDE





- Ceramic shade

Product details
220-240V ~50/60Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED E14 4,5W 280°
2700K 470lm
5kWh/1000h
Item No. 1002128 | 7.20 GBP

LED E14 6,5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP

Lamp details
max. 60W C35
Diameter: 5cm max. L: 13cm max.

Variant	Item No.	GBP
E14 | C35		
grey/glossy white	**143594**	**99.00**







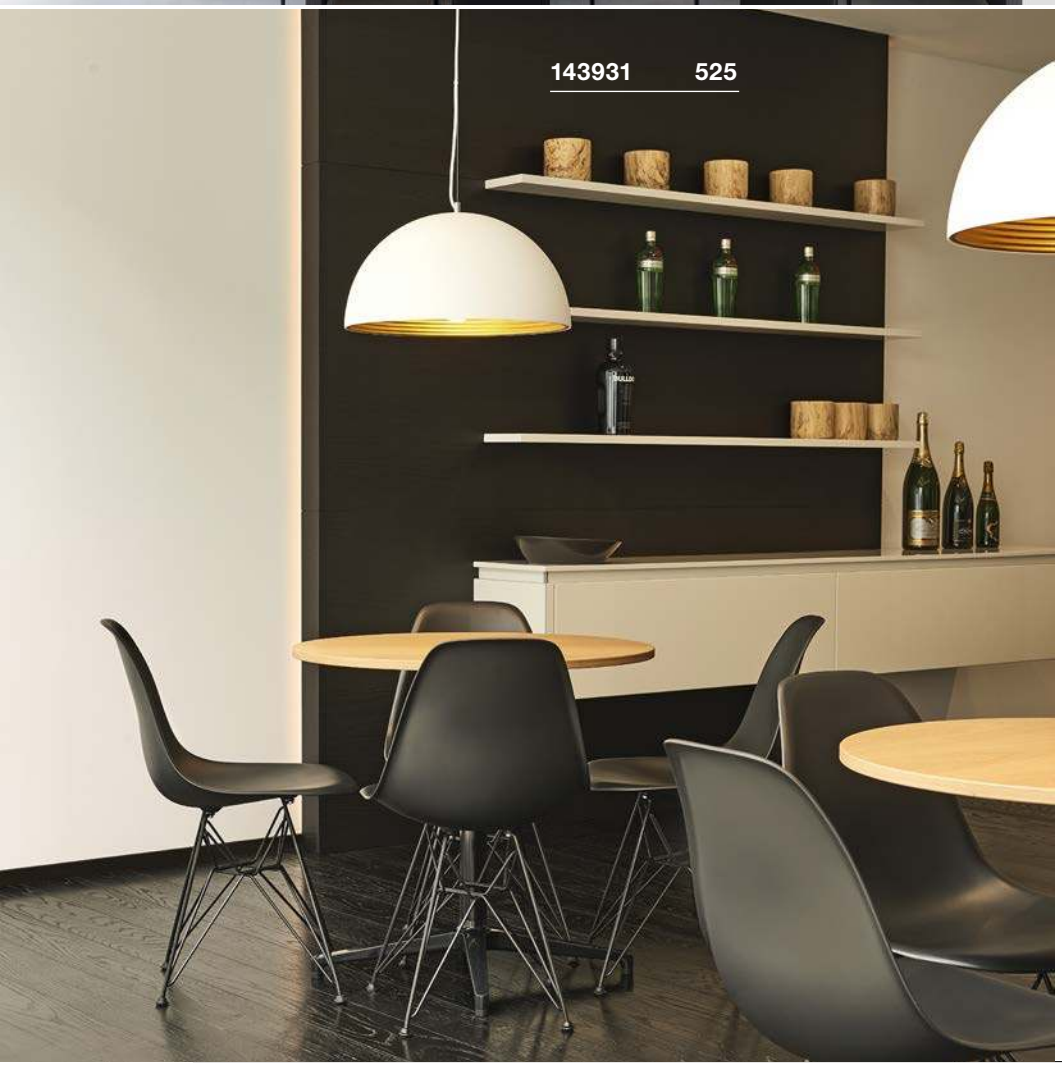

FORCHINI M 40 TRACK
1-circuit, E27

SOCKET INSIDE







- Double-walled construction with internal reflector
- Textile cable in housing colour

Product details

230V -50Hz
Material: aluminium/steel



Dimensional drawing



Note

Pendant light adaptor colour
silver-grey [143930]
white [143931]
black [143932]

Recommended lamp

LED E27 7W 330°
2700K 806lm
8kWh/1000h
Item No. 1001035 | 15.30 GBP

LED E27 7W 280°
2200-2700K 830lm
7kWh/1000h
Item No. 1002126 | 17.10 GBP

Lamp details

max. 40W A60
Diameter: 6.8 cm max. L: 15.2 cm max

Variant	Item No.	GBP
E27 | A60 black/gold Silver-grey adaptor	**143930**	**180.00**
E27 | A60 white/gold White adaptor	**143931**	**180.00**
E27 | A60 black/gold Black adaptor	**143932**	**180.00**

RECESSED TRACK 2M





1-CIRCUIT RECESSED TRACK



Rated voltage	230V ~50Hz/60Hz
Max. perm. current	16A
Material	aluminium
Colour	white
Length	200cm
Width	5.5cm
Height	1.8cm
Installation width	4cm
Weight	1.16kg
Item No.	**143221**
GBP	**55.80**



Ceiling suspension

Stainless-steel/brass
L: 500cm
Weight: 0.2kg
2 pieces



Variant	Item No.	GBP
nickel	**1002845**	**31.50**

Corner connector, earth on outside

16A max.
Plastic
L: 11.2cm W: 11.2cm H: 2cm
Weight: 0.07kg
earth on outside
1 piece



Variant	Item No.	GBP
white	**143251**	**14.90**

Stabiliser, long corner connector

Steel
L: 11.5cm W: 11.5cm H: 0.5cm
Weight: 0.06kg
For reinforcement when mounting several rails with ceiling suspension (143140/-1/-2)
1 piece



Variant	Item No.	GBP
matt nickel	**143152**	**5.90**

Retainer bracket

Steel
L: 7.5cm W: 1.5cm H: 4cm
Weight: 0.03kg
Mounting bracket for the installation of the 1-circuit mounting rail on false ceilings.
1 piece



Variant	Item No.	GBP
matt nickel	**143230**	**2.70**

Corner connector, earth on outside

16A max.
Plastic
L: 11.2cm W: 11.2cm H: 2cm
Weight: 0.07kg
earth on inside
1 piece



Variant	Item No.	GBP
white	**143261**	**14.90**

1-circuit adapter with hool

6A max.
Polycarbonate (PC)
L: 8.2cm W: 3.5cm H: 7.4cm
Weight: 0.05kg
For pendants with an additional mechanical suspension.
Max. mechanical load 20N.
1 piece



Variant	Item No.	GBP
black	**143170**	**10.80**
white	**143171**	**10.80**
grey	**143172**	**10.80**

Feed-in, earth on left

16A max.
Plastic
L: 10.8cm W: 5.5cm H: 2cm
Weight: 0.41kg
earth left
1 piece



Variant	Item No.	GBP
white	**143231**	**9.90**

Long connector inc. longitudinal stiffener

Plastic/steel
L: 6.5cm W: 1.8cm H: 1.7cm
Weight: 0.09kg
The connector is installed in the track, and the stabiliser on the rear side of the track.
1 piece



Variant	Item No.	GBP
white	**143271**	**9.90**

Pendant adapter

6A max.
Polycarbonate (PC)
L: 8.2cm W: 3.5cm H: 4.2cm
Weight: 0.04kg. inc. strain relief
Max. mechanical load 20N.
1 piece



Variant	Item No.	GBP
black	**143120**	**10.80**
white	**143121**	**10.80**
grey	**143124**	**10.80**

Feed-in, earth on right

16A max.
Plastic
L: 10.8cm W: 5.5cm H: 2cm
Weight: 0.41kg
earth right
1 piece



Variant	Item No.	GBP
white	**143241**	**9.90**

End caps, 2 pieces

Plastic
L: 2.7cm W: 5.5cm H: 1.8cm
Weight: 0.01kg
2 pieces



Variant	Item No.	GBP
white	**143281**	**5.00**

PLANNING AID1-CIRCUIT SURFACE MOUNTED TRACK

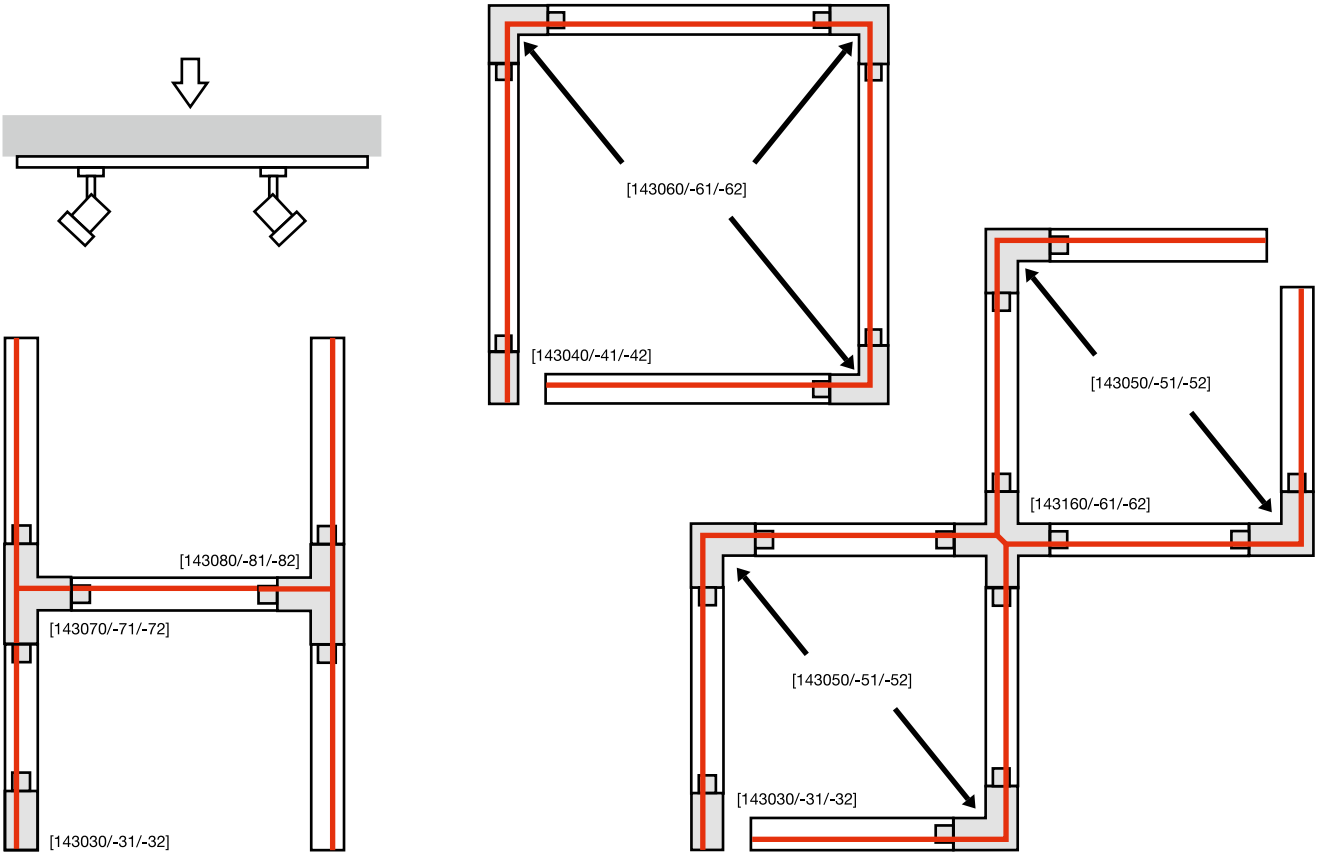

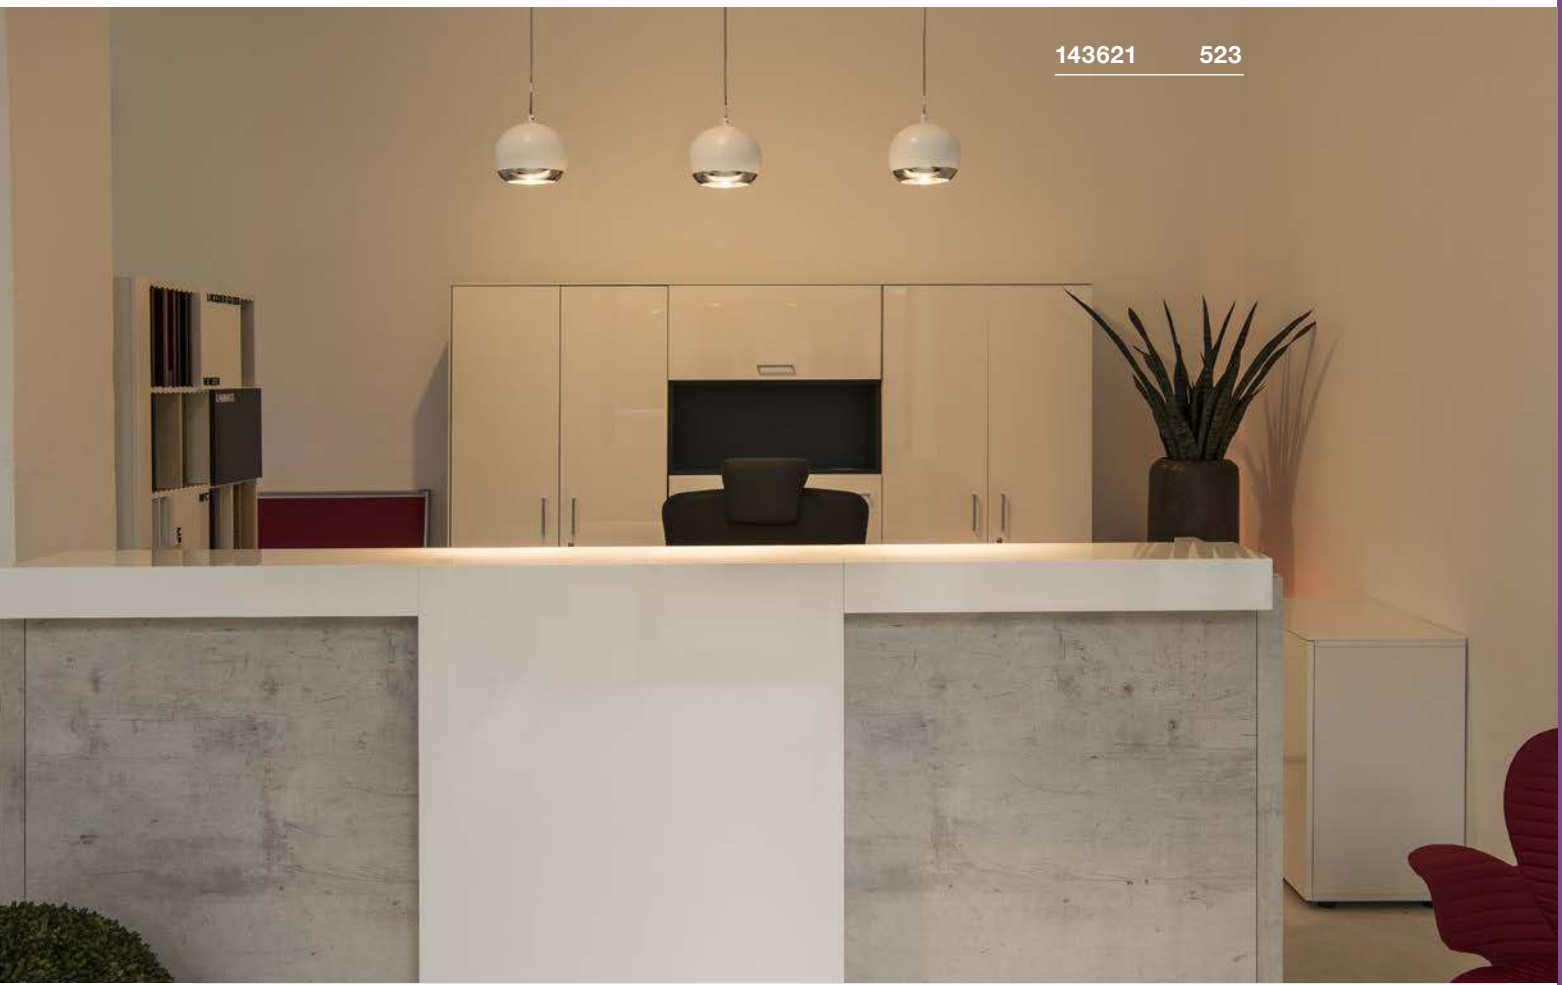

ACCESSORIES FOR 1-CIRCUIT SURFACE MOUNTED TRACK

Cover, 2m

Polycarbonate (PC)
L: 200cm W: 1.8cm H: 0.75cm
Weight: 0.08kg
2 pieces



Variant	Item No.	GBP
black	1004783 NEW	15.80
white	1004785 NEW	15.80
grey	1004784 NEW	15.80

X-connector

16A max.
Polycarbonate (PC)
L: 9.5cm W: 17.2cm H: 1.8cm
Weight: 0.13kg
1 piece



Variant	Item No.	GBP
black	143160	22.50
white	143161	22.50
grey	143162	22.50

Flex connector

16A max.
Polycarbonate (PC)
L: 16.4cm W: 3.5cm H: 1.8cm
Weight: 0.1kg
1 piece



Variant	Item No.	GBP
black	143110	12.60
white	143111	12.60
grey	143112	12.60

Ceiling suspension

Stainless-steel/brass
L: 500cm
Weight: 0.2kg
2 pieces



Variant	Item No.	GBP
Nickel	1002845	31.50

1-circuit pendant adapter

6A max.
Plastic PC
L: 8.2cm W: 3.5cm H: 4.2cm
Max. mechanical load 20N.
1 piece



Variant	Item No.	GBP
black	143120	10.80
white	143121	10.80
grey	143124	10.80

End caps, 2 pieces

Polycarbonate (PC)
L: 0.4cm W: 3.5cm H: 1.8cm
Weight: 0.01kg
2 pieces



Variant	Item No.	GBP
black	143130	3.20
white	143131	3.20
grey	143132	3.20

Feed-in, earth on left

16A max.
Polycarbonate (PC)
L: 10.4cm W: 3.5cm H: 1.8cm
Weight: 0.04kg
earth on left
1 piece



Variant	Item No.	GBP
black	143030	6.80
white	143031	6.80
grey	143032	6.80

Longitudinal connector, electrical

16A max.
Polycarbonate (PC)
L: 6.4cm W: 3.5cm H: 1.8cm
Weight: 0.02kg
1 piece



Variant	Item No.	GBP
black	143090	5.00
white	143091	5.00
grey	143092	5.00

Stabiliser, X-connector

Steel
L: 19.7cm W: 19.7cm H: 0.5cm
Weight: 0.11kg
For reinforcement when mounting several tracks with ceiling suspension (143140/-1/-2).
1 piece



Variant	Item No.	GBP
grey	143169	9.00

Feed-in, earth on right

16A max.
Polycarbonate (PC)
L: 10.4cm W: 3.5cm H: 1.8cm
Weight: 0.04kg
earth on right
1 piece



Variant	Item No.	GBP
black	143040	6.80
white	143041	6.80
grey	143042	6.80

Longitudinal connector with feed-in capability

16A max.
Polycarbonate (PC)
L: 17.2cm W: 3.5cm H: 1.8cm
Weight: 0.07kg
1 piece



Variant	Item No.	GBP
black	143100	12.60
white	143101	12.60
grey	143102	12.60

Stabiliser, longitudinal connector

Steel
L: 19.7cm W: 3.2 cm H: 1.3 cm
Weight: 0.08kg
For reinforcement when mounting several tracks with ceiling suspension (143141/-2)
1 piece



Variant	Item No.	GBP
matt nickel	143151	5.00

Corner connector, earth on outside

16A max.
Polycarbonate (PC)
L: 10.4cm W: 10.4cm H: 1.8cm
Weight: 0.07kg
earth on outside
1 piece



Variant	Item No.	GBP
black	143050	11.70
white	143051	11.70
grey	143052	11.70

T-connector, earth on left

16A max.
Polycarbonate (PC)
L: 17.2cm W: 10.4cm H: 1.8cm
Weight: 0.1kg
earth on left
1 piece



Variant	Item No.	GBP
black	143070	14.90
white	143071	14.90
grey	143072	14.90

Ceiling plate

6A max.
Polycarbonate (PC)
Diameter: 12.1cm H: 2.5cm
Weight: 0.1kg
1 piece



Variant	Item No.	GBP
black	143380	14.90
white	143381	14.90
grey	143382	14.90

Corner connector, earth on outside

16A max.
Polycarbonate (PC)
L: 10.4cm W: 10.4cm H: 1.8cm
Weight: 0.07kg
earth on outside
1 piece



Variant	Item No.	GBP
black	143060	11.70
white	143061	11.70
grey	143062	11.70

T-connector, earth on right

16A max.
Polycarbonate (PC)
L: 17.2cm W: 10.4cm H: 1.8cm
Weight: 0.1kg
earth on right
1 piece



Variant	Item No.	GBP
black	143080	14.90
white	143081	14.90
grey	143082	14.90



SNAPPY AND CHIC.

THE DECORATIVE EASYTECH® II HIGH-VOLTAGE TRACK SYSTEM.

You can create an individual light atmosphere in just a few steps with the decorative track system. The aluminium carrier tracks are available in different colours, and can therefore be ideally attuned to your room environment.





184450 535

184440 535

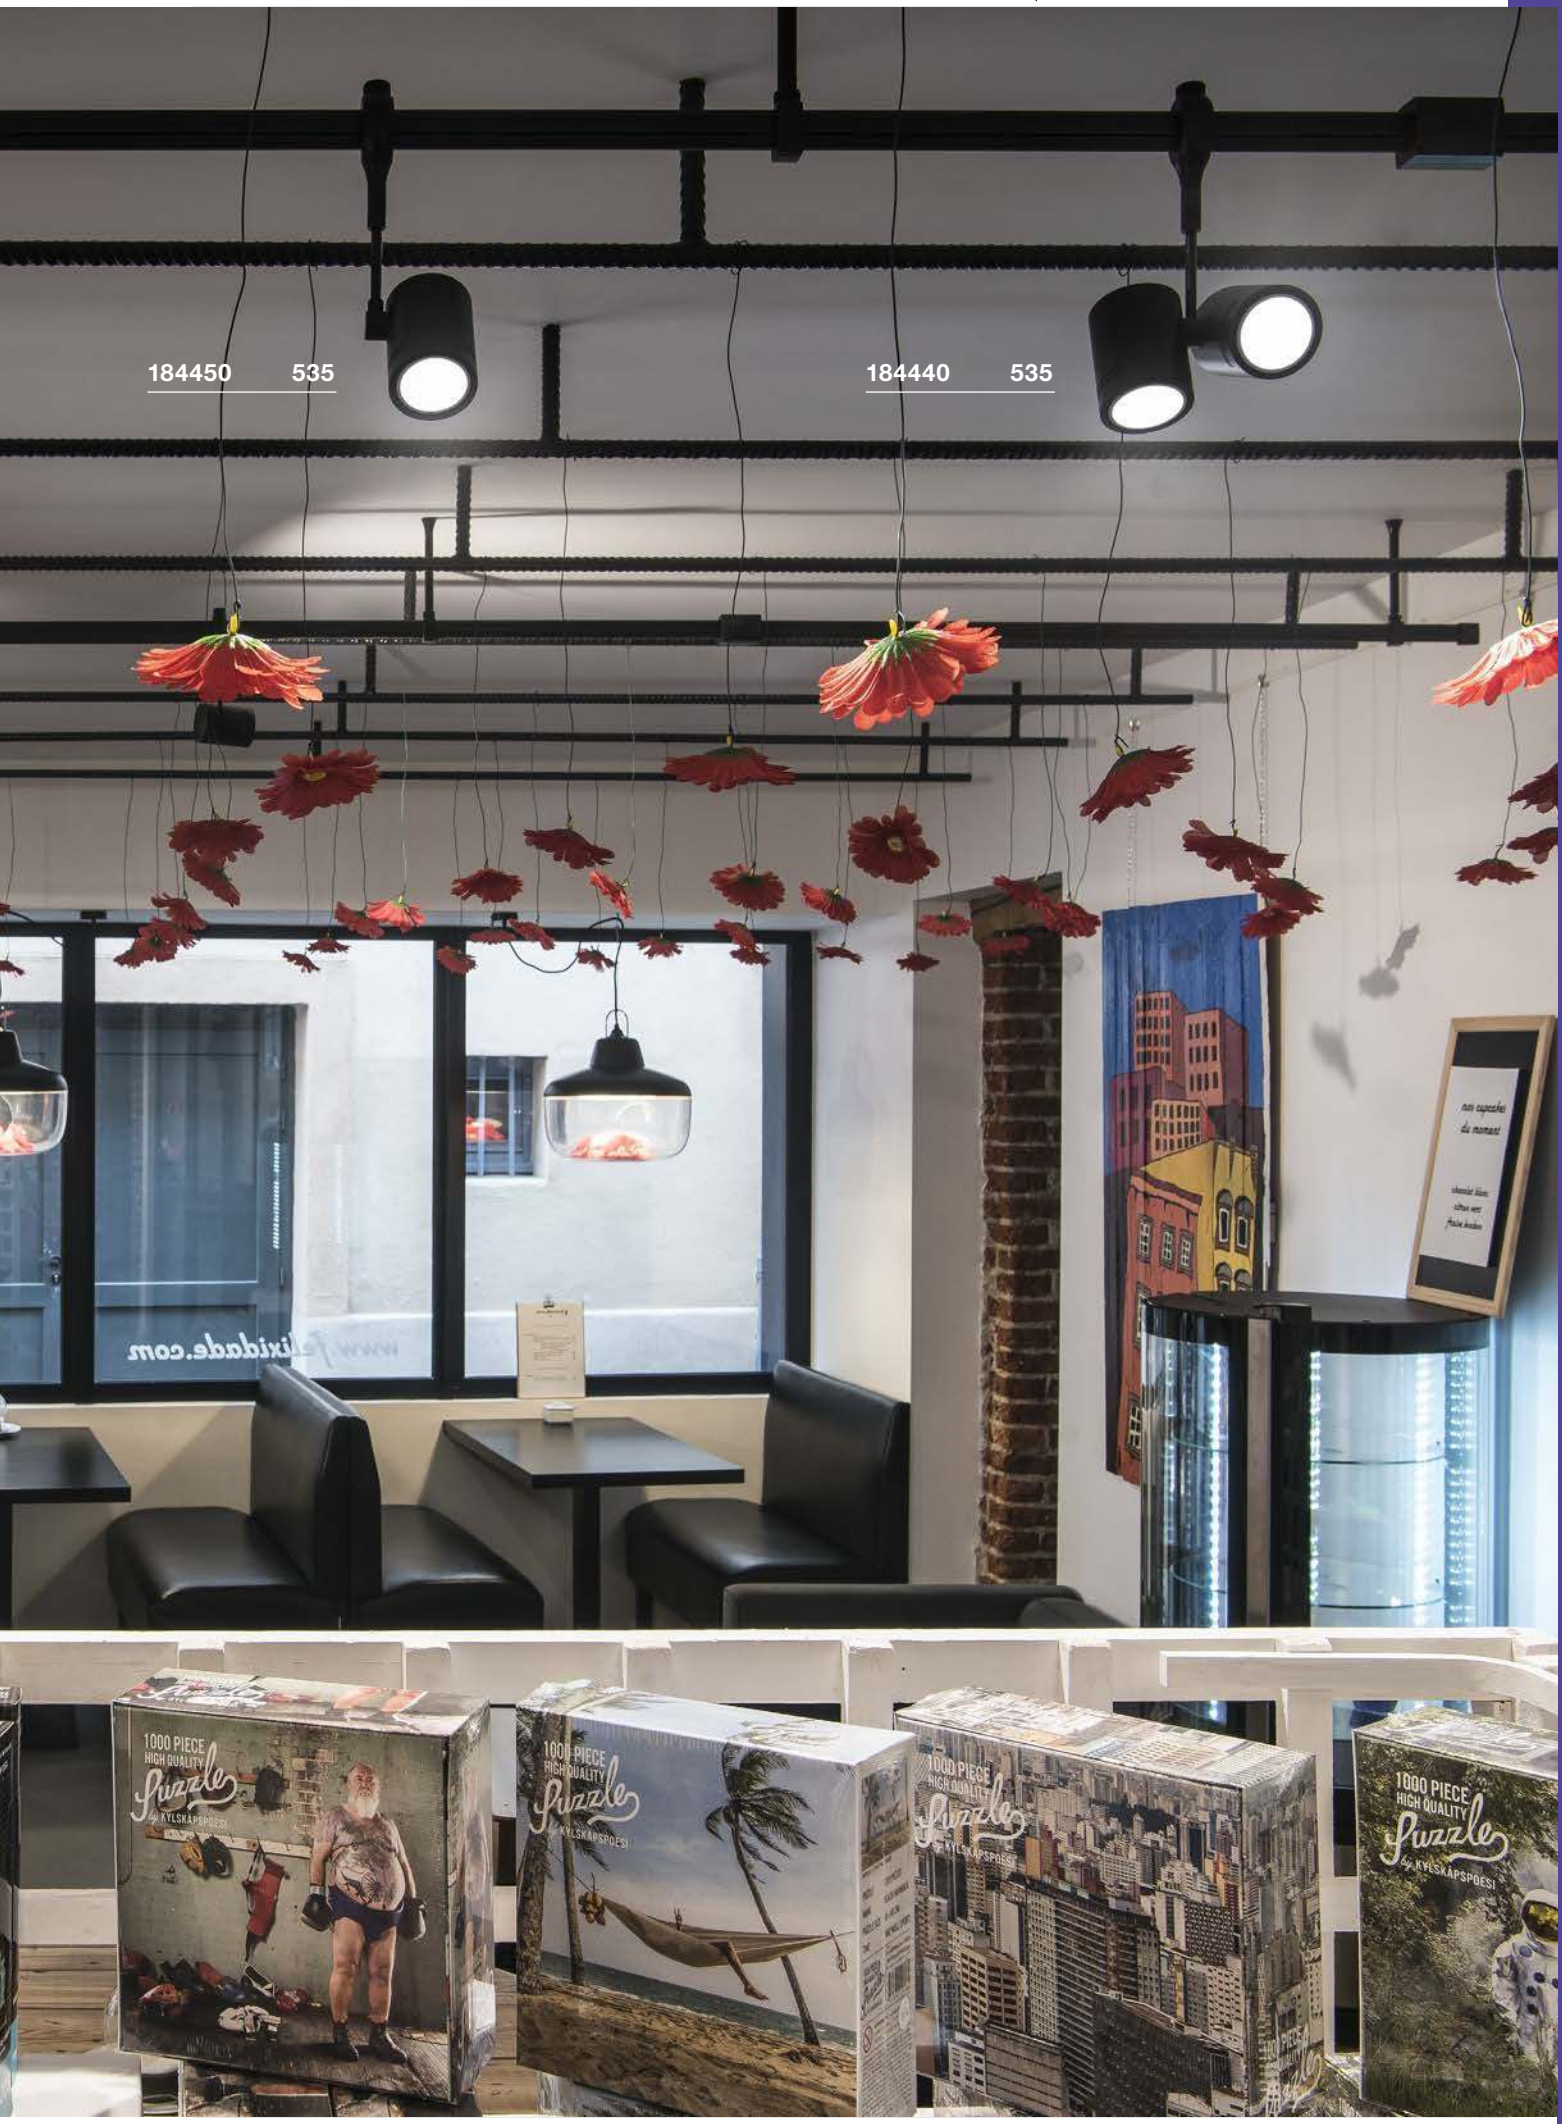

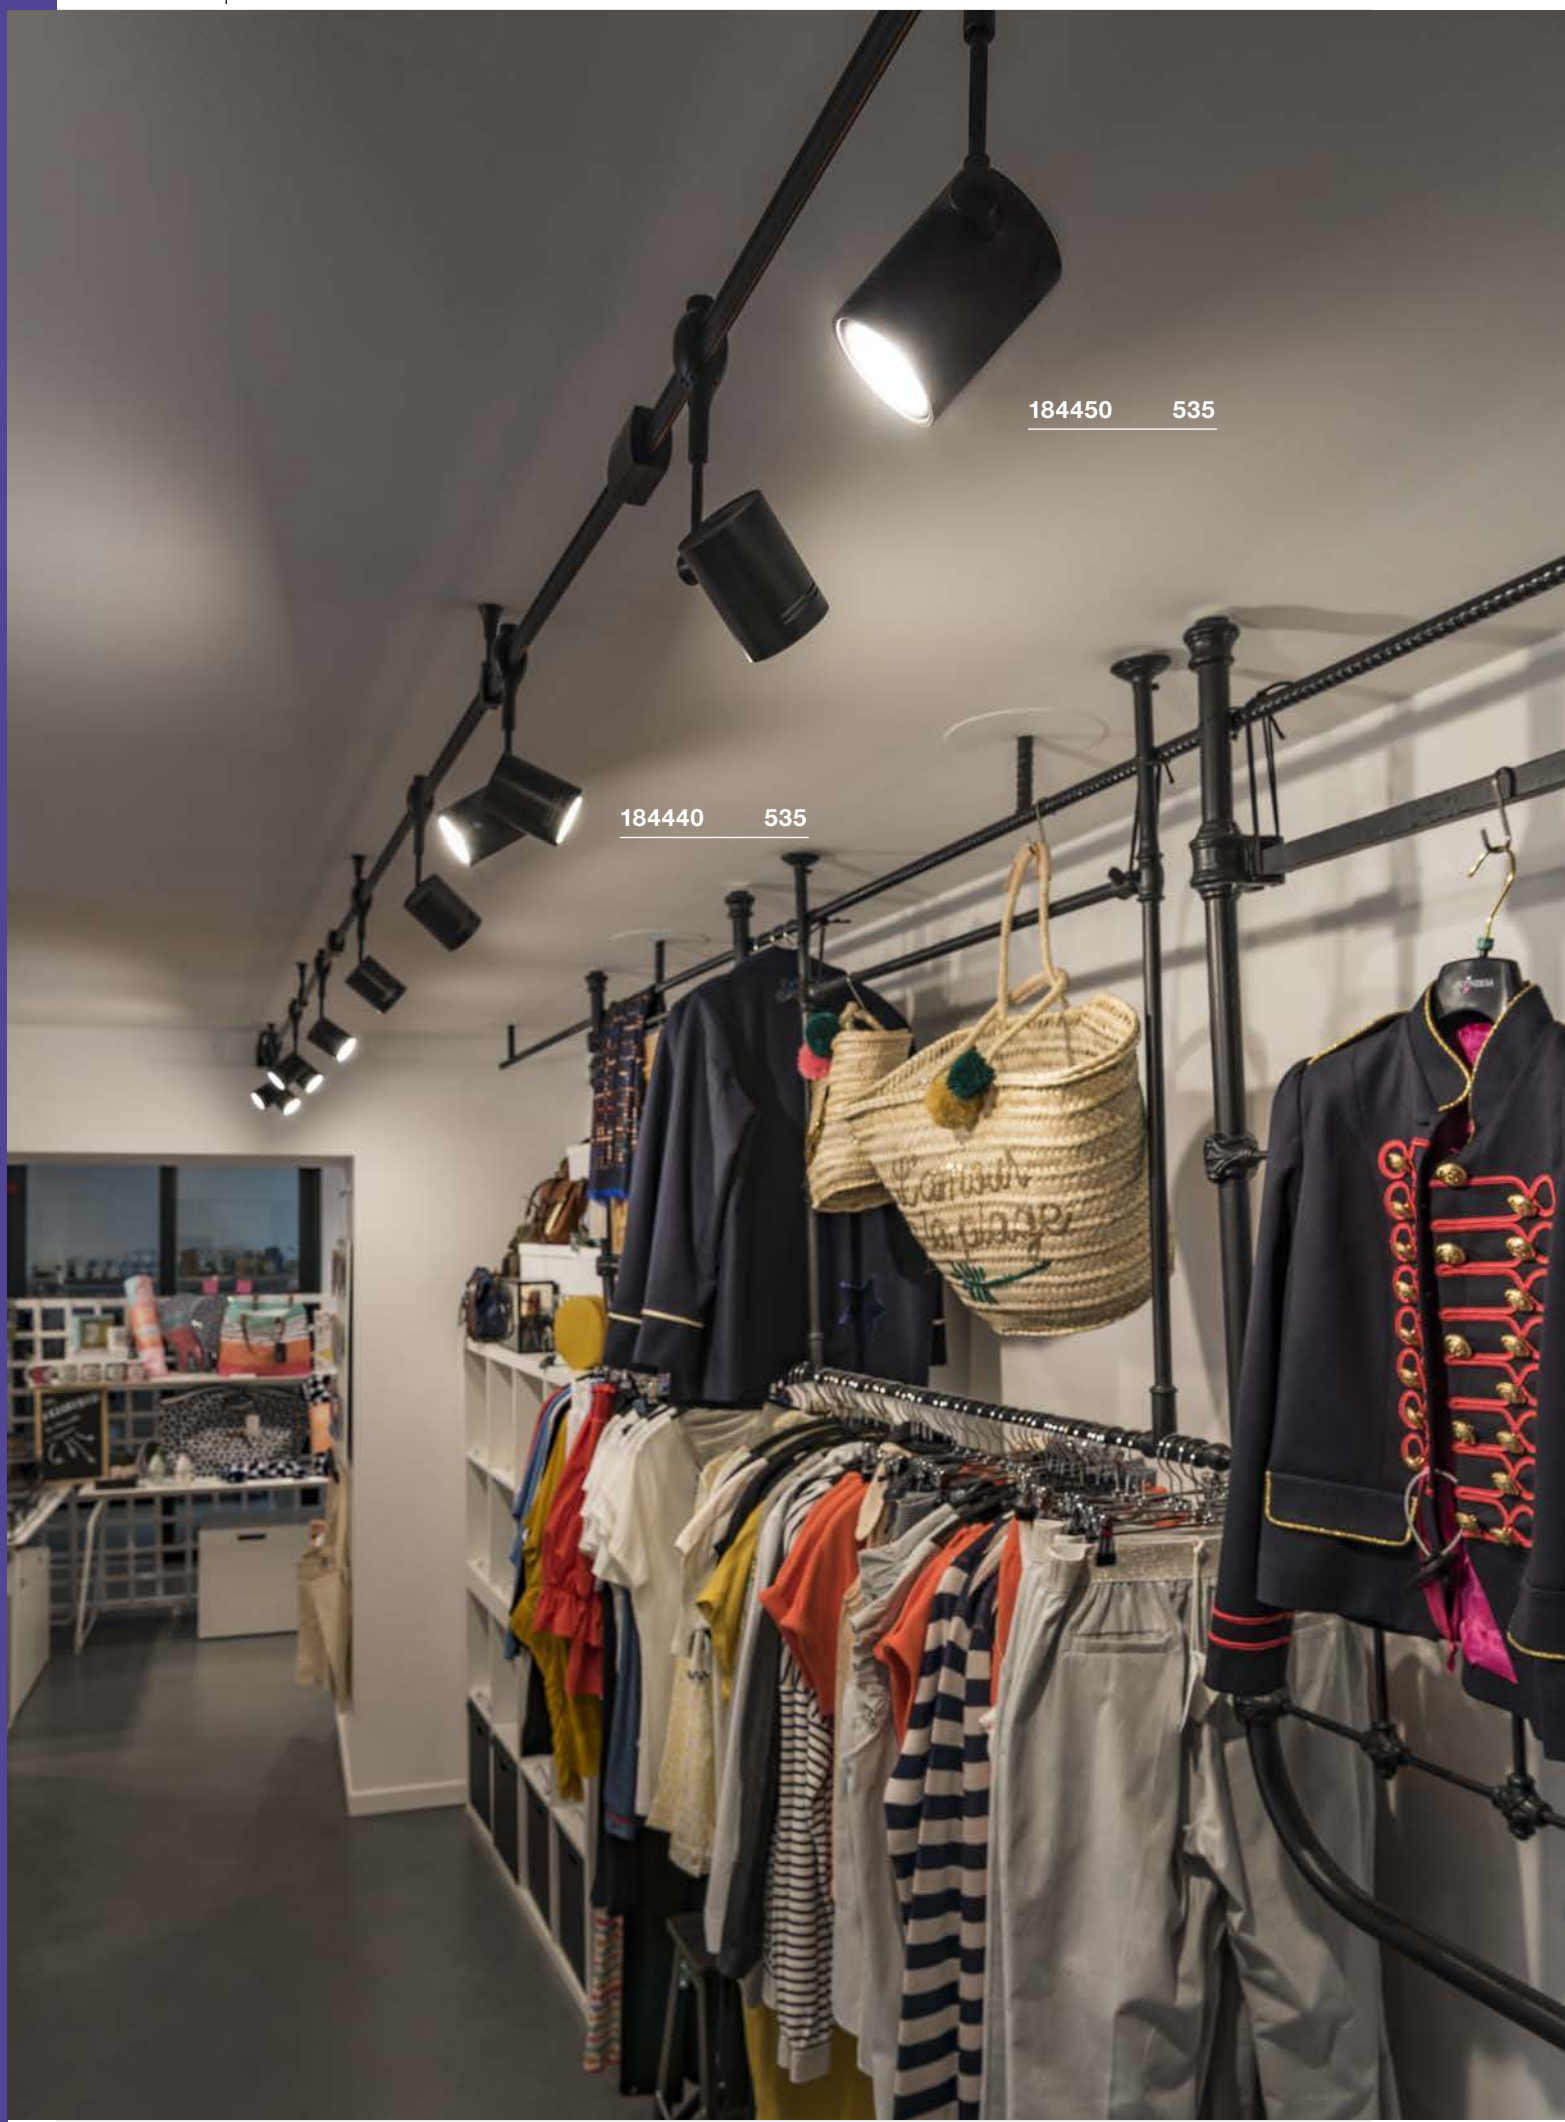
184450 535
184440 535



HIGH-VOLTAGE EASYTEC® II


535


535


536


536


537


537

538

Suitable tracks and accessories can be found on page 539

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

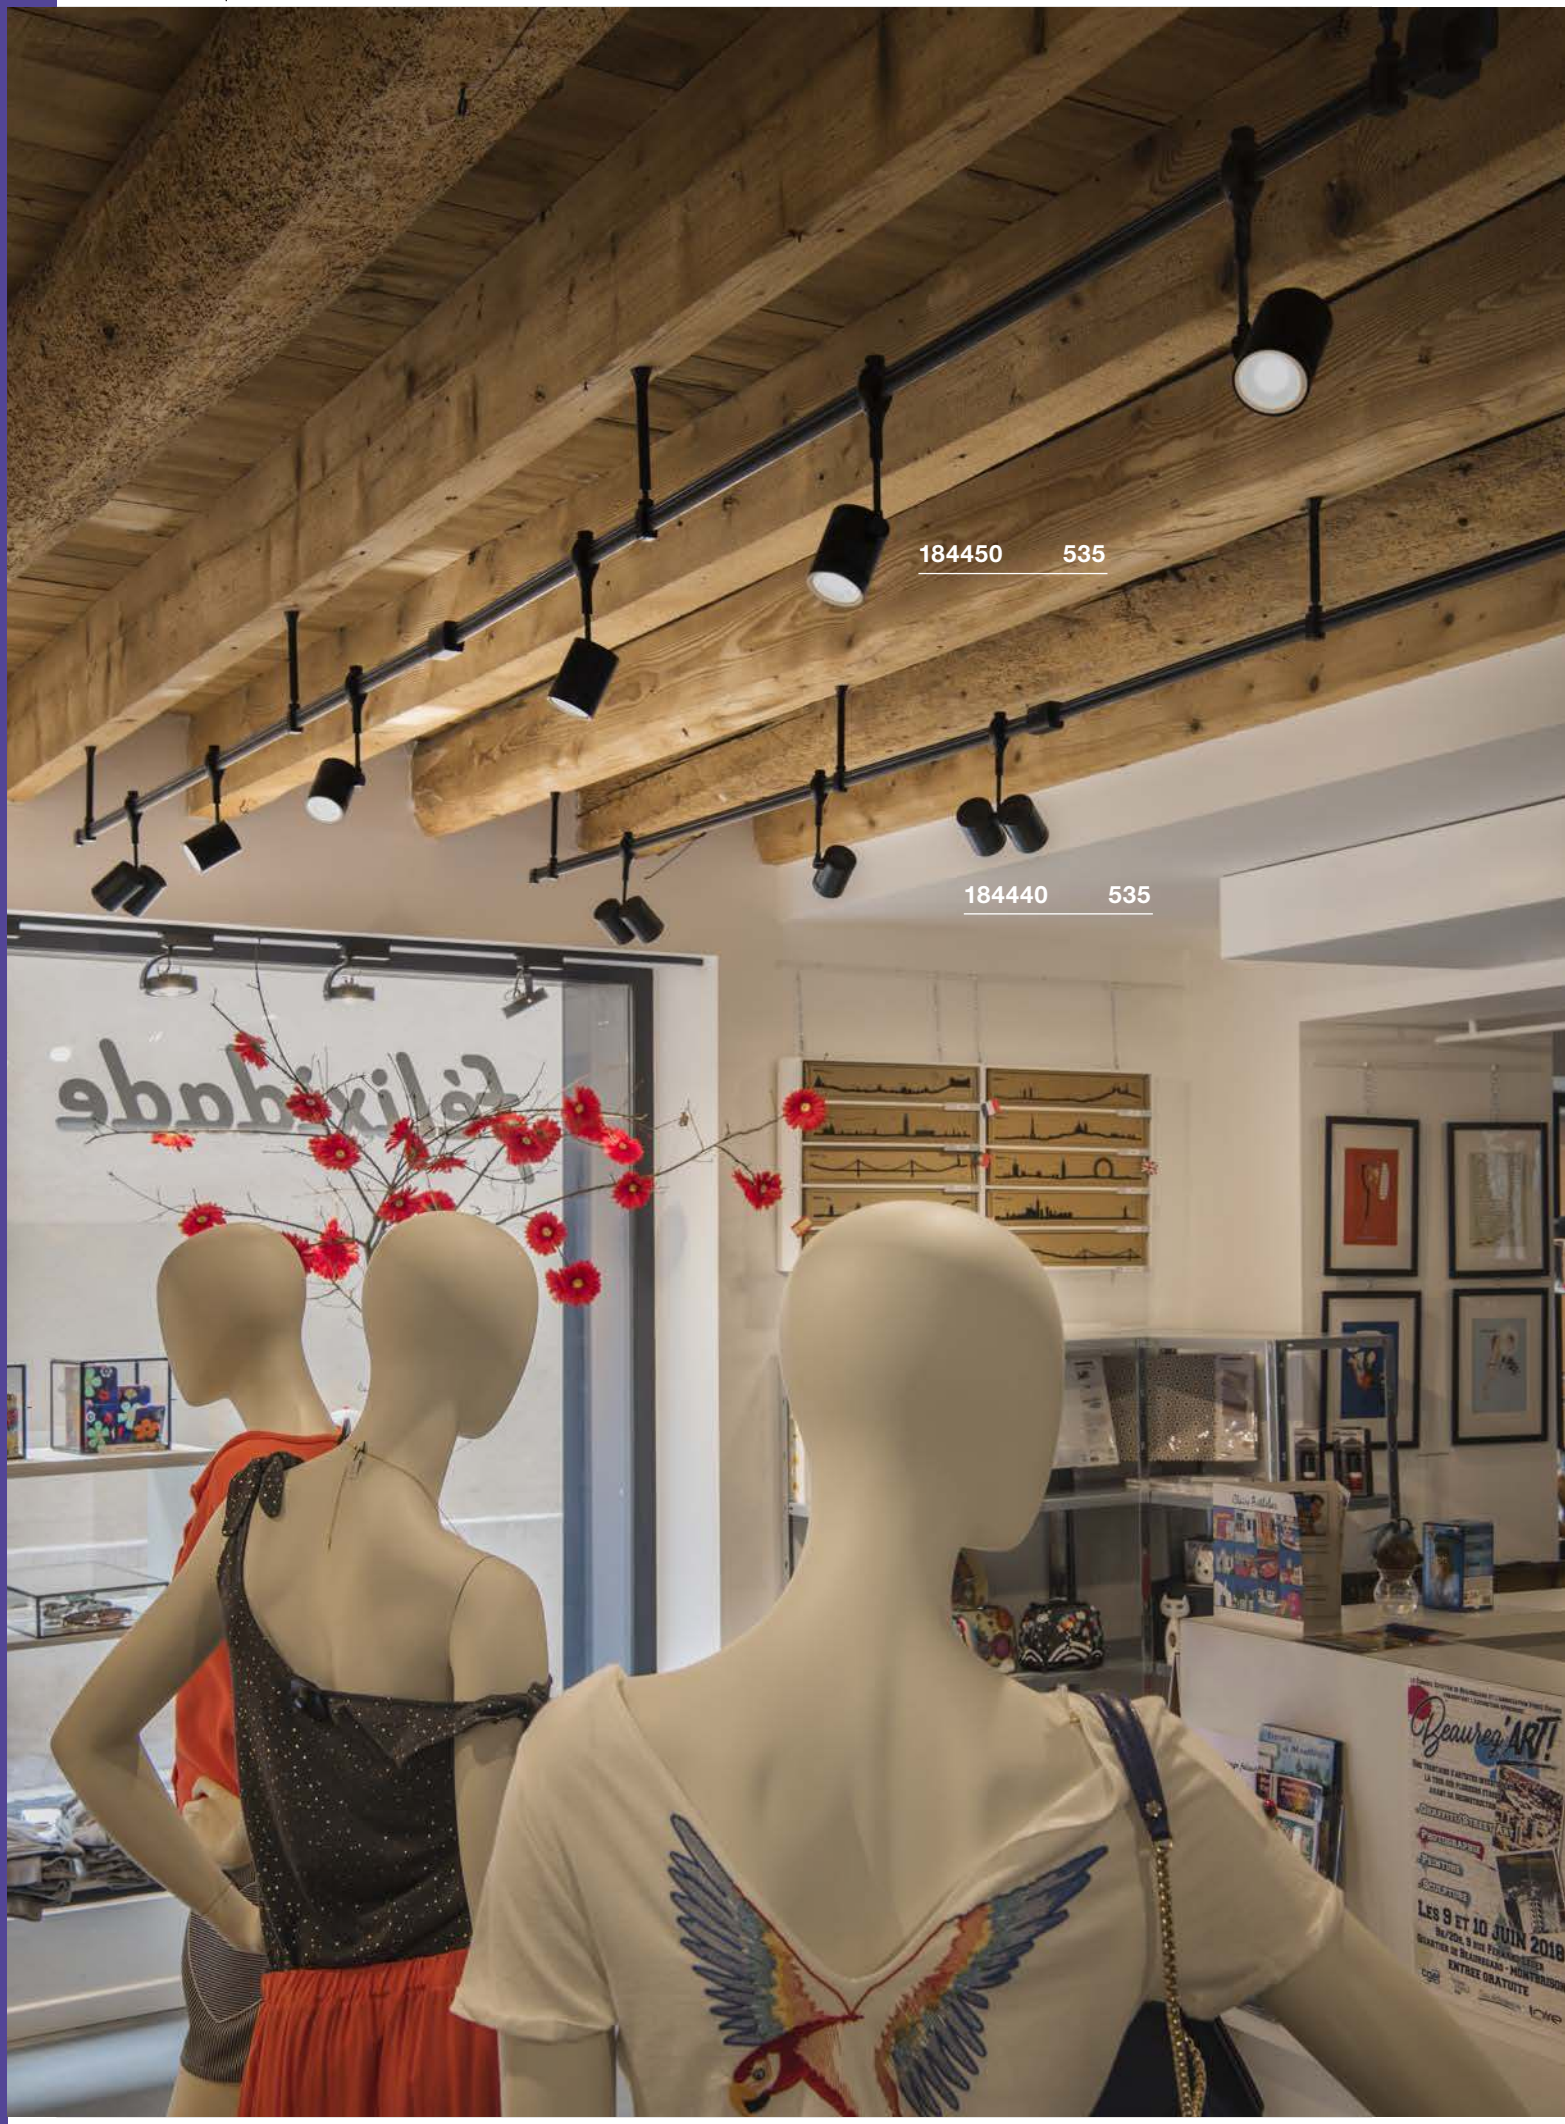
184450 535
184440 535



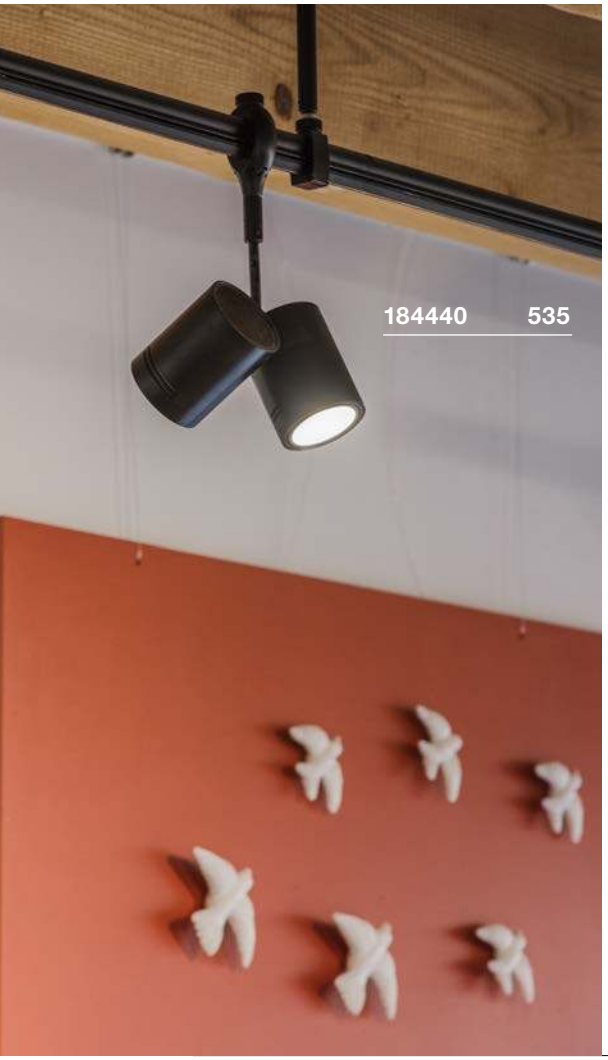

BIMA
EASYTEC® II, single, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



Lamp details
max. 50W QPAR51
Diameter: 5.1cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**184450**	**67.50**
GU10 | QPAR51		
■ grey	**184452**	**67.50**

BIMA 2
EASYTEC® II, double, QPAR51

SOCKET INSIDE





Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP



LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005081 | 6.10 GBP



Lamp details
2x max. 50W QPAR51
Diameter: 5.1cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**184440**	**99.00**

KANO
EASYTEC® II, QPAR51

SOCKET INSIDE





Product details
220-240V ~50/60Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



Lamp details
max. 50W QPAR51
Diameter: 5.1cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
frosted glass	**184071**	**64.80**

ANILA
EASYTEC® II, QPAR51

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005081 | 6.10 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005077 | 6.10 GBP



Lamp details
max. 50W QPAR51
Diameter: 5.1cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
black/clear	**184630**	**60.30**
GU10 | QPAR51		
transparent	**184634**	**60.30**







LIGHT EYE® 150 TRACK
EASYTEC® II, QPAR111

SOCKET INSIDE





Product details
230V -50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP

Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
black/chrome	**185580**	**108.00**

LIGHT EYE® 150 TRACK
EASYTEC® II, PD, QPAR111

SOCKET INSIDE







Product details
230V -50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP

Lamp details
max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
black	**184590**	**99.00**
GU10 | QPAR111		
black/chrome	**185590**	**108.00**

TONGA®
EASYTEC® II, PD, E14

SOCKET INSIDE







• Ceramic shade

Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED E14 4,5W 280°
2700K 470lm
5kWh/1000h
Item No. 1002128 | 7.20 GBP

LED E14 6,5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP

Lamp details

max. 60W C35
Diameter: 5cm max. L: 13cm max.

Variant	Item No.	GBP
E14 | C35		
glossy white/black	**184530**	**99.00**
E14 | C35		
glossy white/grey	**184534**	**99.00**









	EASYTEC® II Tracks 2m, inc. end caps	EASYTEC® II Tracks 2m, inc. end caps
Rated voltage	230V -50Hz	230V -50Hz
Max. current load	16A	16A
Material	aluminium	aluminium
Colour	black	grey
Length	200cm	200cm
Width	1cm	1cm
Height	3cm	3cm
Weight	1kg	1kg
Item No.	**184020**	**184022**
GBP	**63.00**	**63.00**

Feed-in

16A max.
aluminium
L: 7.5cm W: 7.5cm H: 6cm
Weight: 0.23kg
Cable length 40cm
1 piece



Variant	Item No.	GBP
black	184004	49.50
grey	184002	49.50

End caps

Plastic
Weight: 0.03kg
2 pieces



Variant	Item No.	GBP
black	184140	5.00
grey	184142	5.00

Flex connector

16A max.
Plastic
L: 21.5cm W: 3cm H: 4cm
Weight: 0.3kg
1 piece



Variant	Item No.	GBP
black	184300	59.40
grey	184302	59.40

Shortbox

16A max.
Aluminium/steel
W: 22cm H: 10.5cm T: 6cm
Weight: 0.57kg
Simple installation of the tracks is possible with the Shortbox.
1 piece



Variant	Item No.	GBP
black	184010	81.00
grey	184012	81.00

Insulating connector

aluminium
Weight: 0.08kg
1 piece



Variant	Item No.	GBP
black	184170	24.80
grey	184172	24.80

Flexible ceiling bracket

aluminium
Weight: 0.1kg
Adjustable from 23 to 31cm.
1 piece



Variant	Item No.	GBP
black	184330	29.70
grey	184332	29.70

Longitudinal connector

16A max.
aluminium
Weight: 0.08kg
1 piece



Variant	Item No.	GBP
black	184030	24.80
grey	184032	24.80

Pendant adapter

3A max.
Aluminium/plastic
L: 13cm
Weight: 0.1kg
1 piece



Variant	Item No.	GBP
black	184290	31.50
grey	184292	31.50

Bending machine

Steel/plastic
Weight: 2.76kg
1 piece



Variant	Item No.	GBP
grey	184000	242.10

Ceiling suspension, flexible

aluminium
Weight: 0.11kg
Adjustable from 18cm to 26cm.
1 piece

Variant	Item No.	GBP
black	184060	24.80
grey	184062	24.80

LOVE OF DETAIL.

LOW-VOLTAGE CABLE SYSTEM AND AND CABINET TRACKS CREATE EMPHASIS.

Light helps to give rooms atmosphere. Anywhere where it needs to be cosy and professional at the same time, low voltage cable systems are the right solution – because they provide room for individual lighting concepts and create cosiness. Our low-voltage our low voltage cabinet tracks are the ideal solution for accentuating product display cases.




1002862 548

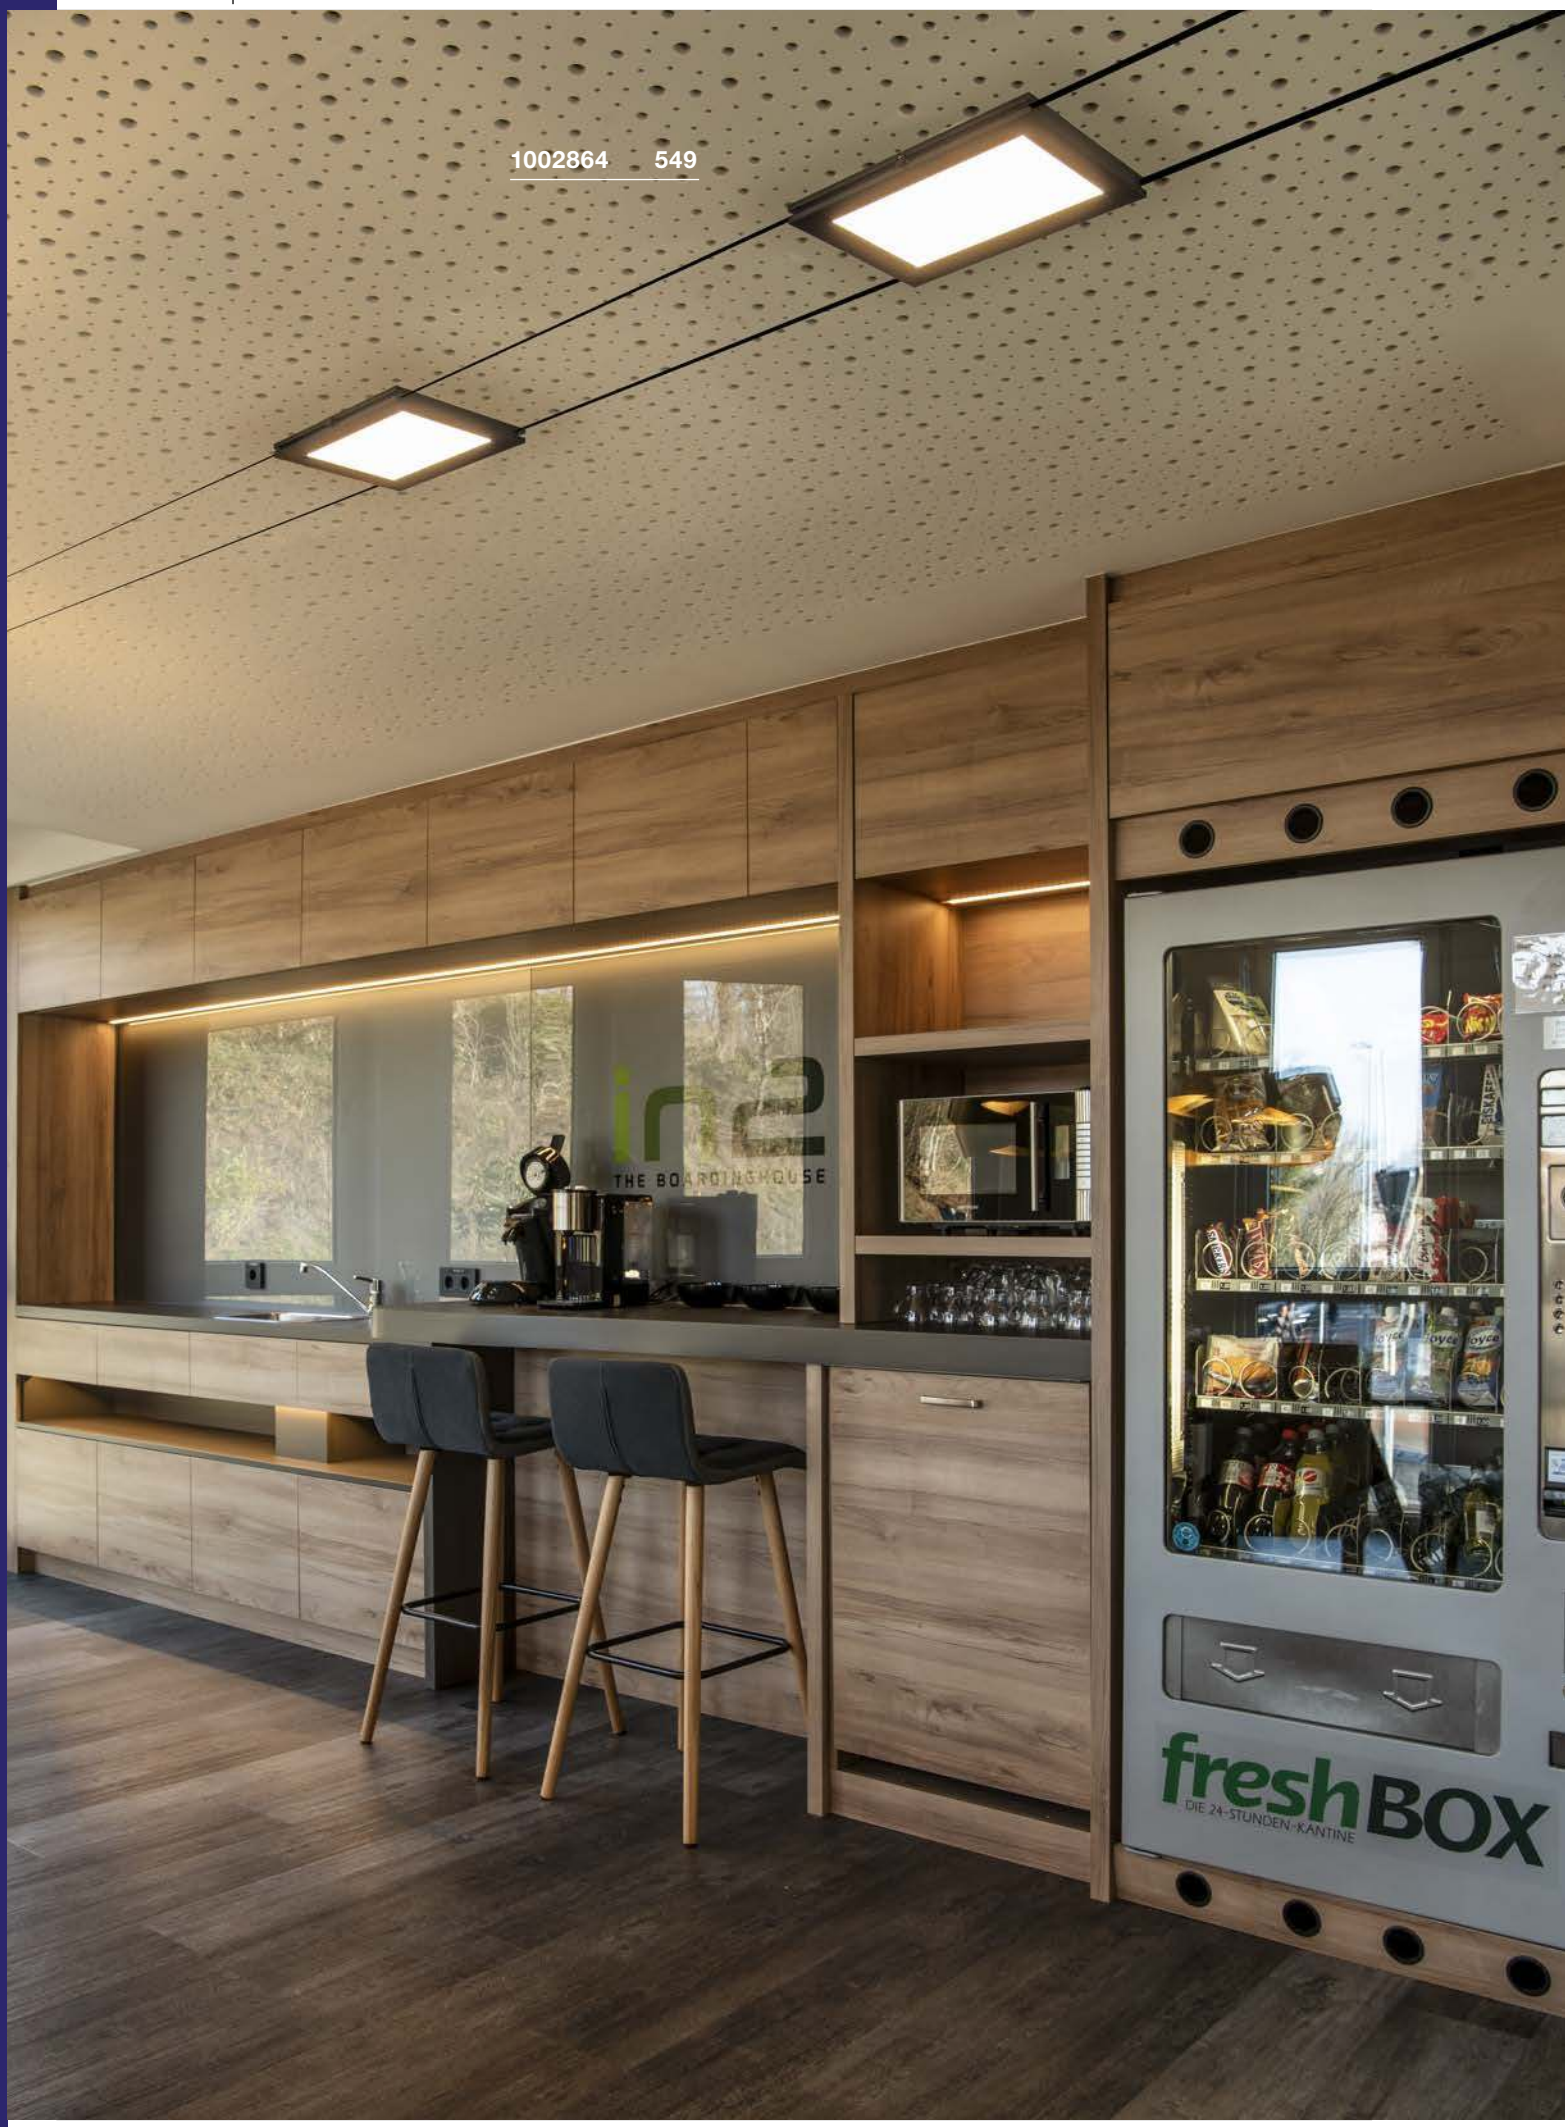
1002864 549
THE BOARDINGHOUSE
freshBOX
DIE 24-STUNDEN-KANTINE

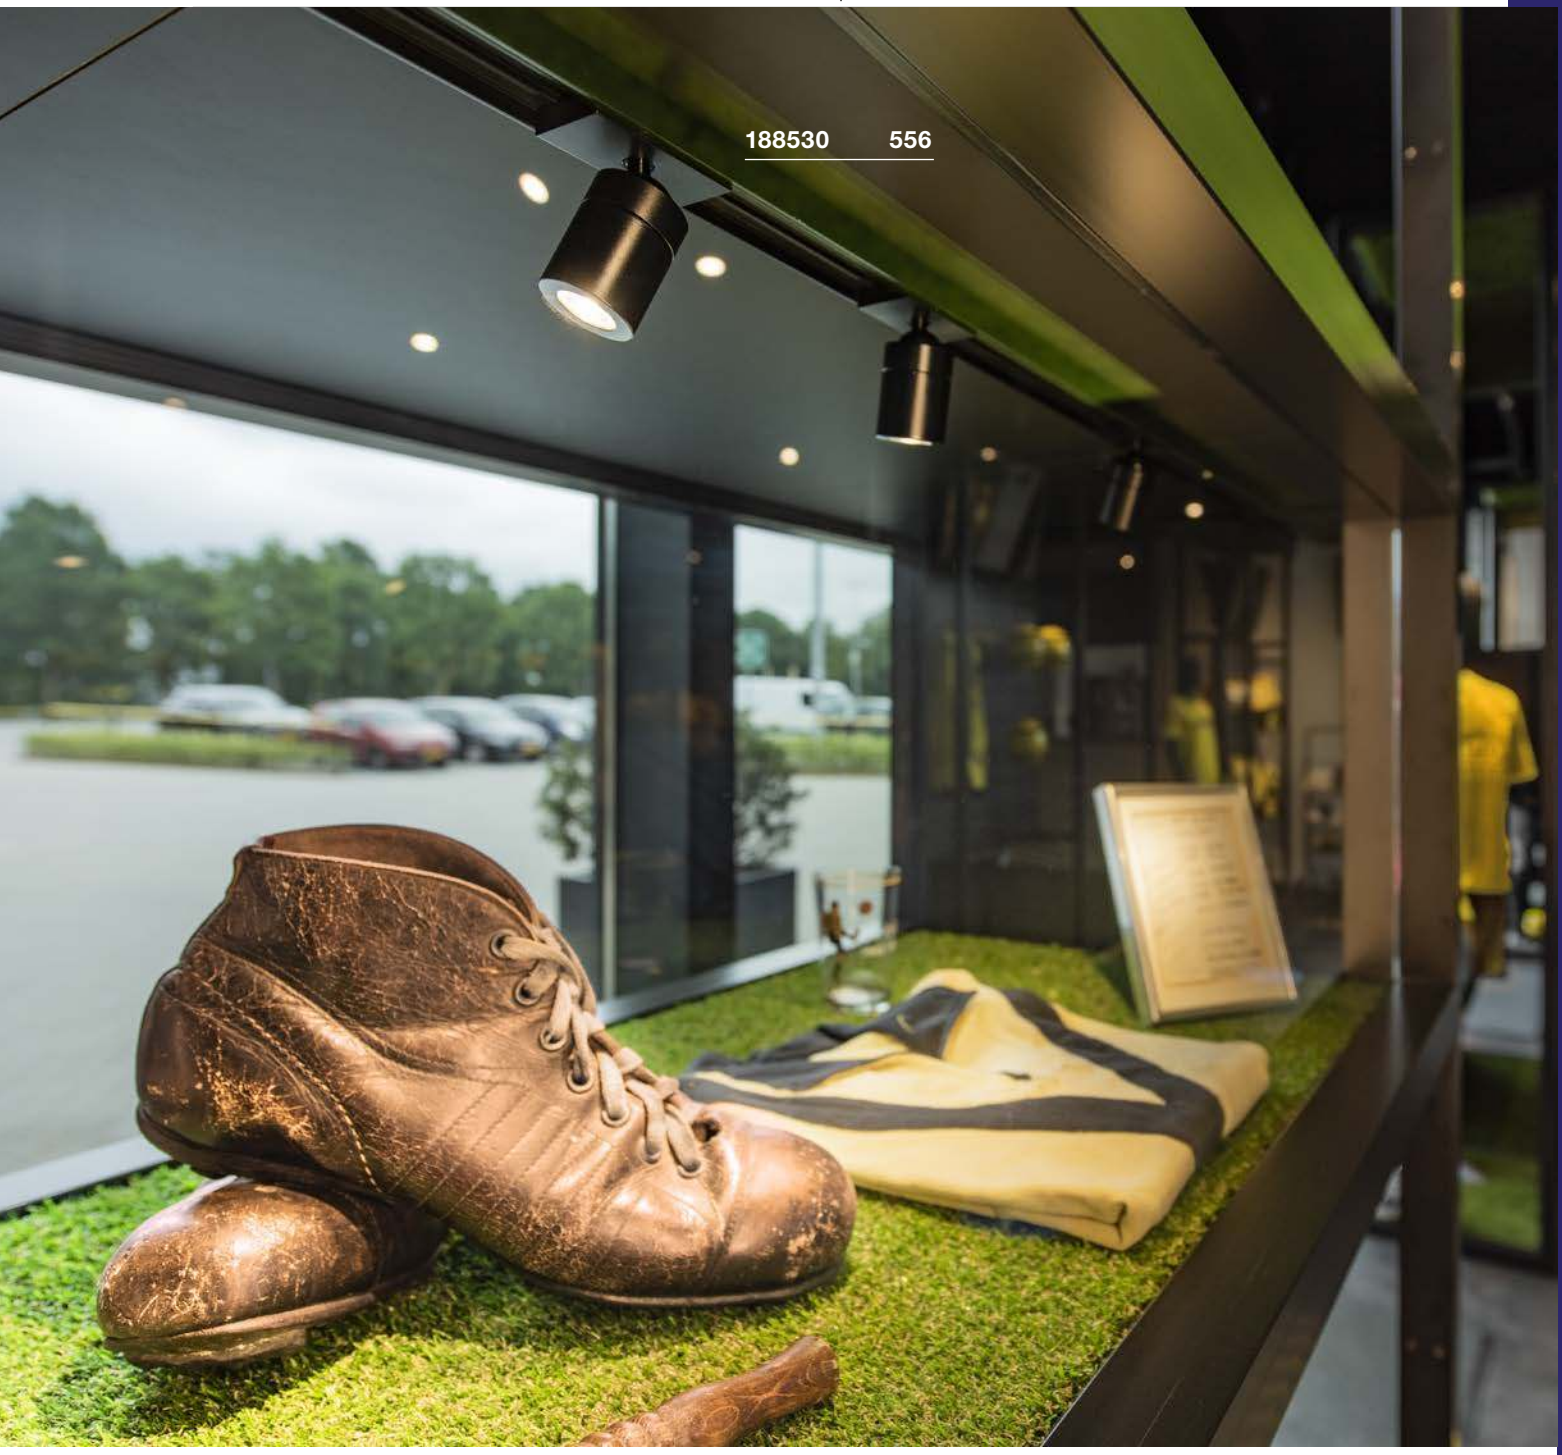

LOW-VOLTAGE CABLE SYSTEM AND CABINET TRACK


544


544


545


545


546


547

NEW


548

NEW


549


550


551


551


556


556

Suitable accessories can be found on pages 554-555 and 557

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

ASMARA
LV, QR-C51

SOCKET INSIDE







Product details

12V ~50Hz
Material: stainless steel



Dimensional drawing



Recommended lamp

LED GU5.3 5,5W 36°
2700K 450lm
7kWh/1000h
Item No. 1001574 | 29.70 GBP



LED GU5.3 5,5W 36°
3000K 460lm
7kWh/1000h
Item No. 1001575 | 29.70 GBP



Lamp details

max. 35W QR-C51

Variant	Item No.	GBP
GX5.3 | QR-C51		
glossy black	**139070**	**21.20**
GX5.3 | QR-C51		
glossy white	**139071**	**21.20**
GX5.3 | QR-C51		
glossy chrome	**139072**	**22.90**

TELESKOP
LV, QR-C51

SOCKET INSIDE







Product details

12V ~50Hz
Material: brass/steel



Dimensional drawing



Note

Telescopic from 21-51cm

Recommended lamp

LED GU5.3 5,5W 36°
2700K 450lm
7kWh/1000h
Item No. 1001574 | 29.70 GBP



LED GU5.3 5,5W 36°
3000K 460lm
7kWh/1000h
Item No. 1001575 | 29.70 GBP



Lamp details

max. 20W QR-C51

Variant	Item No.	GBP
GX5.3 | QR-C51		
glossy black	**139080**	**25.40**
GX5.3 | QR-C51		
glossy white	**139081**	**25.40**
GX5.3 | QR-C51		
glossy chrome	**139082**	**27.70**





© Birgit König, Malerei, koenigb.ac@gmail.com,
www.birgitkoenig.de





COSMIC
LV, QR-C51

SOCKET INSIDE







Product details
12V ~50Hz
Material: steel/brass



Dimensional drawing



Recommended lamp

LED GU5.3 5,5W 36°
2700K 450lm
7kWh/1000h
Item No. 1001574 | 29.70 GBP



LED GU5.3 5,5W 36°
3000K 460lm
7kWh/1000h
Item No. 1001575 | 29.70 GBP



Lamp details
max. 35W QR-C51

Variant	Item No.	GBP
GX5.3 | QR-C51		
■ glossy black	**139090**	**30.40**
GX5.3 | QR-C51		
□ glossy white	**139091**	**30.40**
GX5.3 | QR-C51		
▨ glossy chrome	**139092**	**32.20**

SYROS
LV, QR-C51

SOCKET INSIDE







Product details
12V ~50Hz
Material: steel/brass



Dimensional drawing



Recommended lamp

LED GU5.3 5,5W 36°
2700K 450lm
7kWh/1000h
Item No. 1001574 | 29.70 GBP



LED GU5.3 5,5W 36°
3000K 460lm
7kWh/1000h
Item No. 1001575 | 29.70 GBP



Lamp details
max. 50W QR-C51

Variant	Item No.	GBP
GX5.3 | QR-C51		
■ glossy black	**139100**	**41.40**
GX5.3 | QR-C51		
□ glossy white	**139101**	**41.40**
GX5.3 | QR-C51		
▨ glossy chrome	**139102**	**45.90**

SALUNA
LV, QR-C51

SOCKET INSIDE









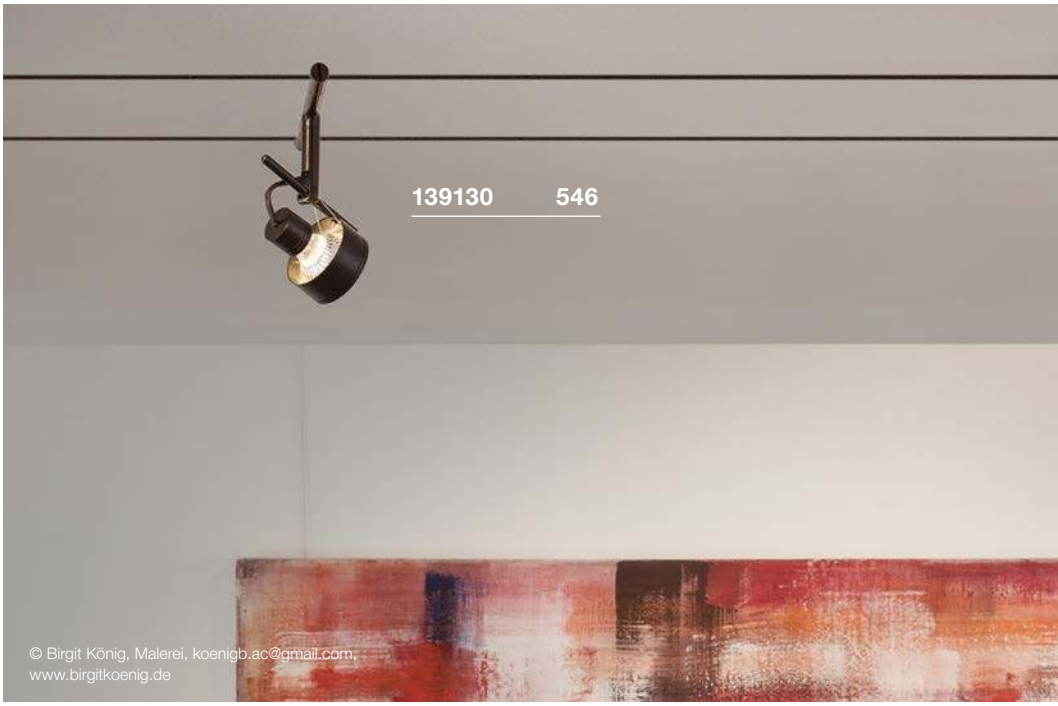

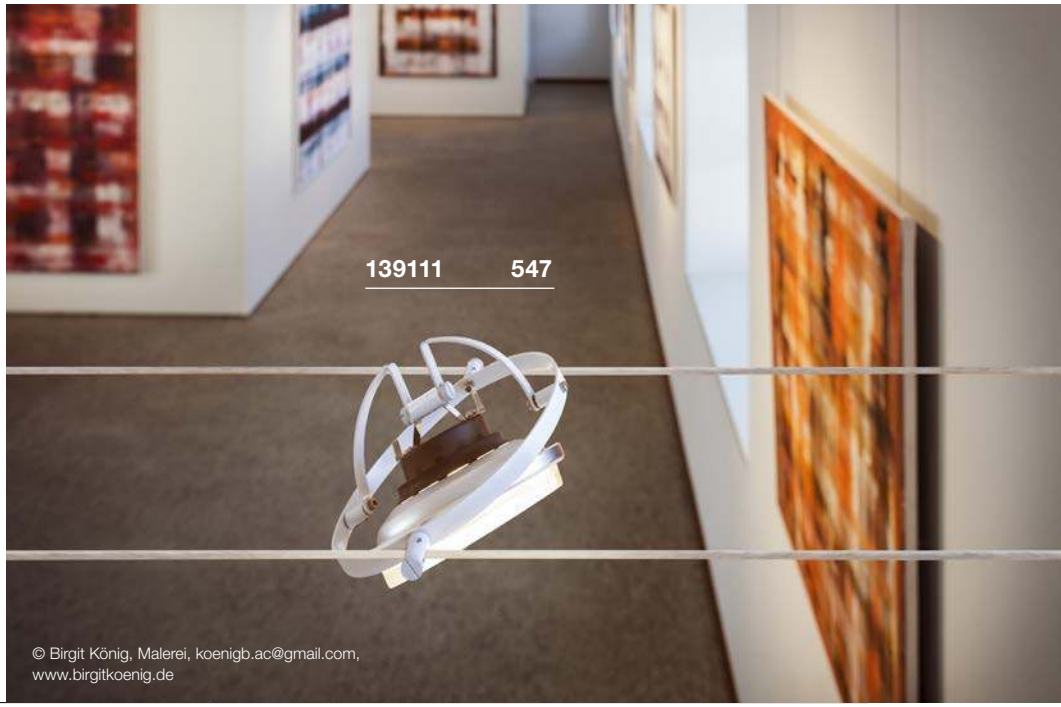

Product details

12V ~50Hz
Material: steel/brass



Dimensional drawing



Recommended lamp

LED GU5.3 5,5W 36°
2700K 450lm
7kWh/1000h
Item No. 1001574 | 29.70 GBP



LED GU5.3 5,5W 36°
3000K 460lm
7kWh/1000h
Item No. 1001575 | 29.70 GBP



Lamp details

max. 35W QR-C51

Variant	Item No.	GBP
GX5.3 | QR-C51		
■ glossy black	**139130**	**54.00**
GX5.3 | QR-C51		
□ glossy white	**139131**	**54.00**
GX5.3 | QR-C51		
▩ glossy chrome	**139132**	**58.50**

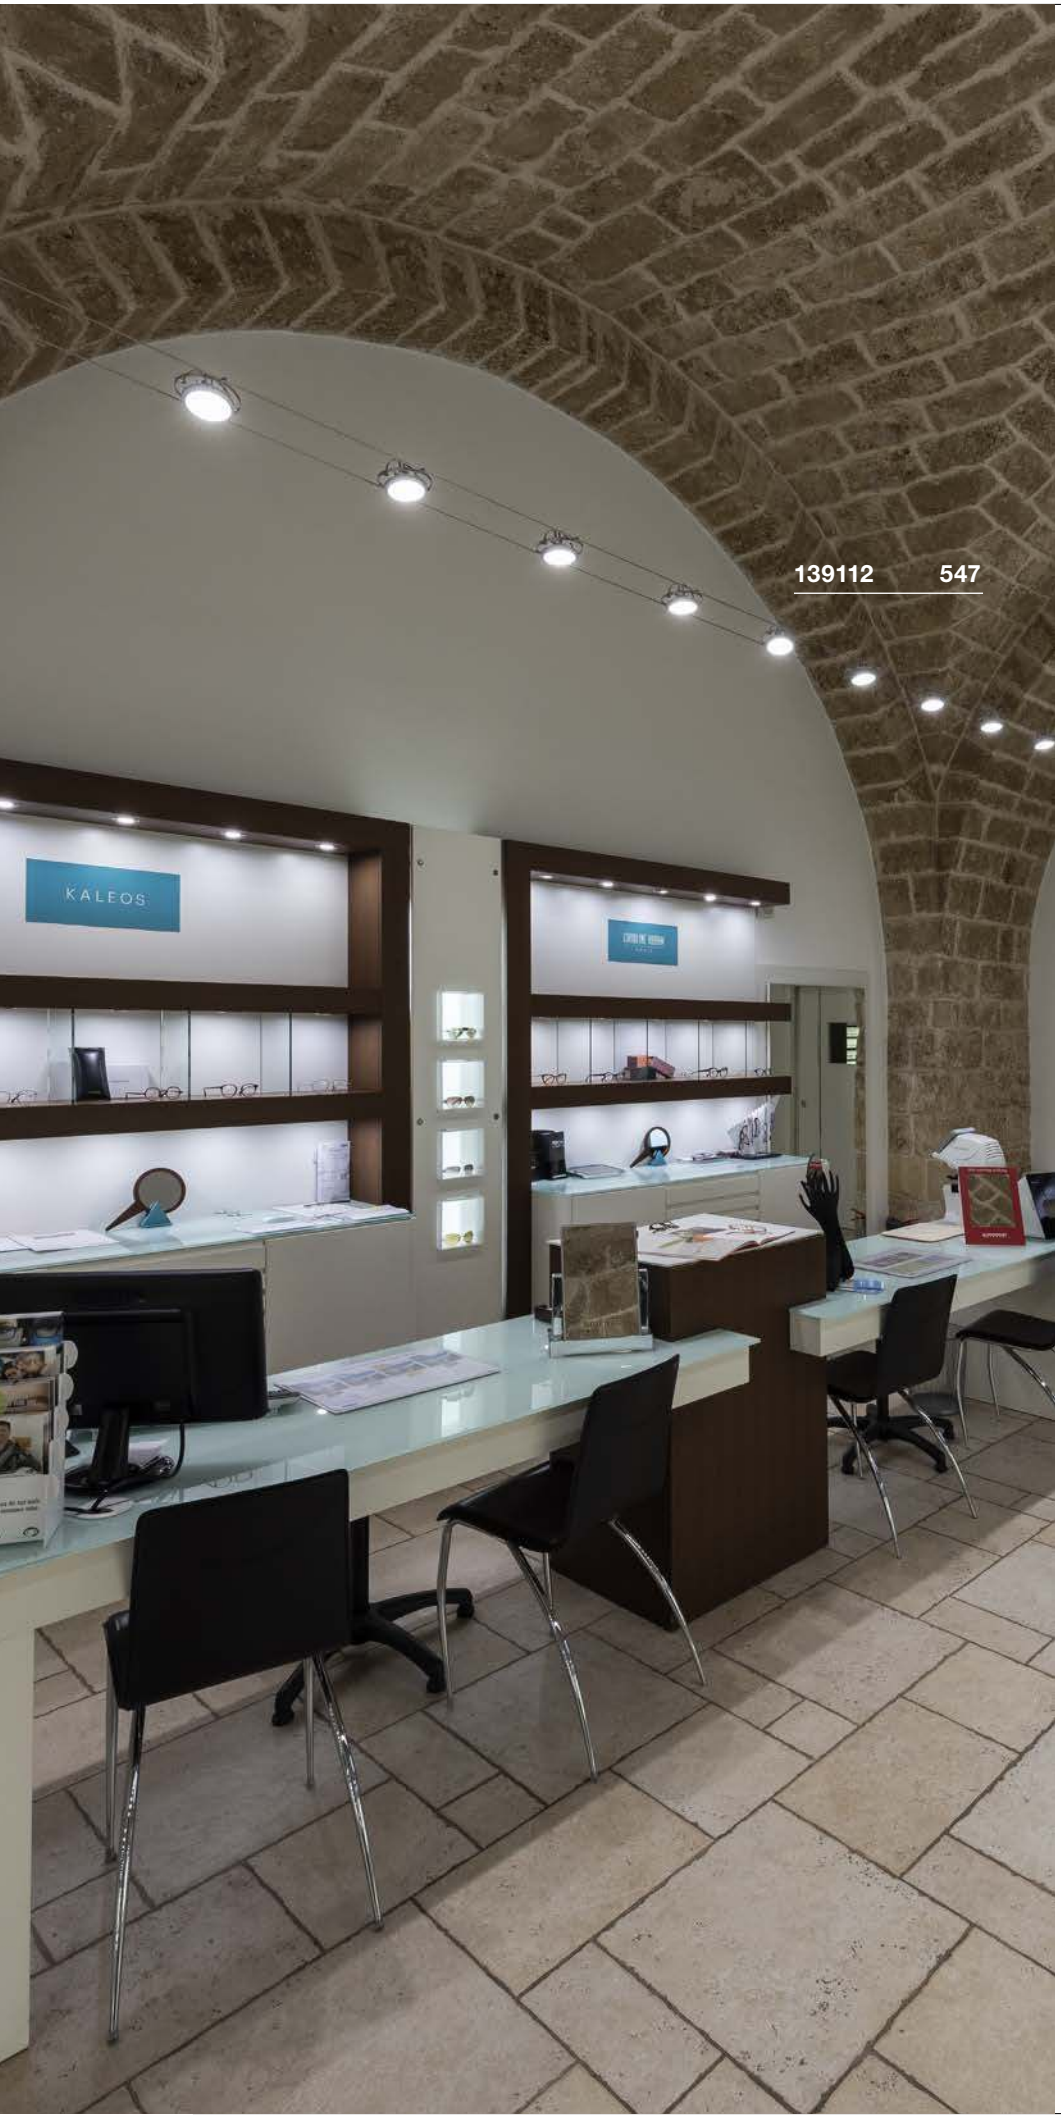

139112 547

ORBIT
LV, QR111

SOCKET INSIDE







Product details

12V ~50Hz
Material: steel



Dimensional drawing



Recommended lamp

LED G53 15W 40°
2700K 750lm
17kWh/1000h
Item No. 560232 | 85.50 GBP



LED G53 15W 40°
3000K 760lm
17kWh/1000h
Item No. 560234 | 85.50 GBP



Lamp details

max. 50W QR111

Variant	Item No.	GBP
G53 | QR111 ■ glossy black	**139110**	**41.40**
G53 | QR111 □ glossy white	**139111**	**41.40**
G53 | QR111 ▨ glossy chrome	**139112**	**44.10**

DURNO

NEW

LED INSIDE







• Pivoting light head, individually alignable

Product details

12V ~50Hz
Total wattage: 6W
Material: aluminium/stainless steel





Dimensional drawing





Variant	Item No.	GBP
360lm | 2700K | CRI>80		
matt black	1002861	61.20
360lm | 2700K | CRI>80		
matt white	1002862	61.20
360lm | 2700K | CRI>80		
chrome	1002863	64.80



PLYTTA

NEW

LED INSIDE







- Homogeneous light output

Product details

12V ~50Hz
Total wattage: 9W
Material: plastic/aluminium

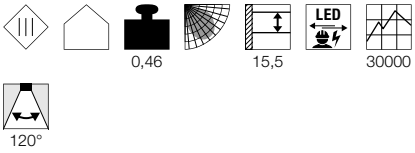

Dimensional drawing



Variant	Item No.	GBP
580lm | 2700K | CRI>80 ■ matt black	1002864	48.60
580lm | 2700K | CRI>80 □ matt white	1002865	48.60
580lm | 2700K | CRI>80 ▨ chrome	1002866	52.20

NOBLO SPOT
LV, Rope Track









Product details

12V ~50Hz
Total wattage: 8.5W
Material: aluminium/PMMA





Dimensional drawing



Variant	Item No.	GBP
420lm | 2700K | CRI>80		
■ glossy black	**1002694**	**67.50**
450lm | 2700K | CRI>80		
□ glossy white	**1002695**	**67.50**
450lm | 2700K | CRI>80		
▨ glossy chrome	**1002696**	**72.00**





© Birgit König, Malerei, koenigb.ac@gmail.com, www.birgitkoenig.de

COMET
LV, QR-C51

SOCKET INSIDE







Product details

12V ~50Hz
Material: brass/brass



Dimensional drawing



Recommended lamp

LED GU5.3 5,5W 36°
2700K 450lm
7kWh/1000h
Item No. 1001574 | 29.70 GBP



LED GU5.3 5,5W 36°
3000K 460lm
7kWh/1000h
Item No. 1001575 | 29.70 GBP



Lamp details

max. 50W QR-C51

Variant	Item No.	GBP
GU5.3 | QR-C51 glossy black/ frosted	**139120**	**41.40**
GU5.3 | QR-C51 glossy white/ frosted	**139121**	**41.40**
GU5.3 | QR-C51 chrome	**139122**	**45.90**

COMET LED
LV

LED INSIDE







- Frosted glass body

Product details

12V ~50Hz
Total wattage: 6.3W
Material: aluminium/glass



Dimensional drawing



Variant	Item No.	GBP
410lm | 2700K | CRI>80 glossy black/ frosted	**1002688**	**60.30**
410lm | 2700K | CRI>80 glossy white/ frosted	**1002689**	**60.30**
410lm | 2700K | CRI>80 chrome/frosted	**1002690**	**62.10**

COMPOSITION SCHEME

Cable system, wall-to-wall installation scheme (perpendicular to wall)

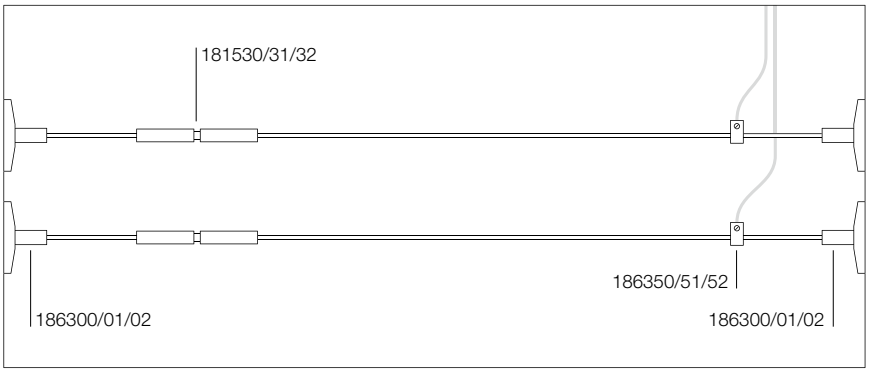

Items needed for this composition

Wall bracket	**186300/01/02**	x 2
Feed-in	**186350/51/52**	x 1
Wire tensioner	**181530/31/32**	x 1

Cable system wall-to-wall installation scheme, no cable tensioner (perpendicular to wall)



Items needed for this composition

Wall bracket	**186300/01/02**	x 1
Wall/ceiling bracket, flexible	**186310/11/12**	x 1
Feed-in	**186350/51/52**	x 1

Cable system wall-to-wall installation scheme, with changing in direction

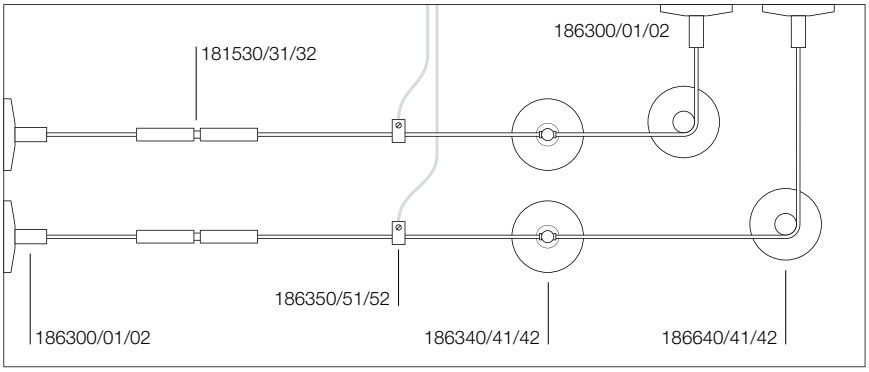

Items needed for this composition

Wall bracket	**186300/01/02**	x 2
Ceiling Deflector*	**186640/41/42**	x 1
Ceiling bracket	**186340/41/42**	x 1
Wire tensioner	**181530/31/32**	x 1
Feed-in	**186350/51/52**	x 1

***Attention: deflectors don't work as support. Please select a suitable ceiling bracket to anchor the system to the ceiling.**

Cable system wall-to-wall installation scheme (walls NOT perpendicular to the cable system)

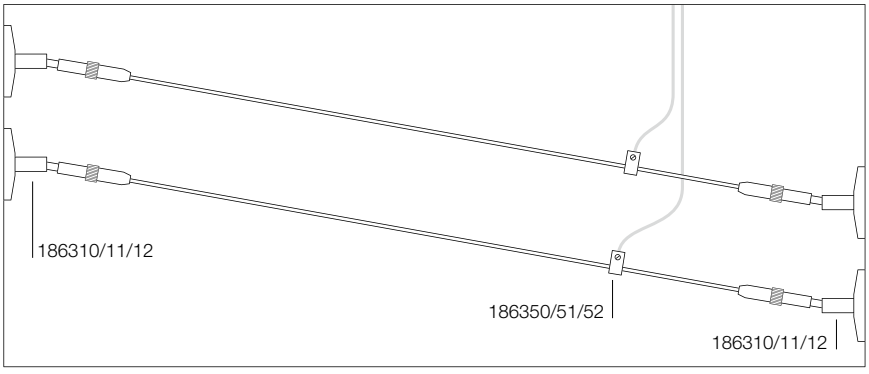

Items needed for this composition

Wall/ceiling bracket, flexible	**186310/11/12**	x 2
Feed-in	**186350/51/52**	x 1

COMPOSITION SCHEME

Cable system wall-to-wall installation scheme, double switch

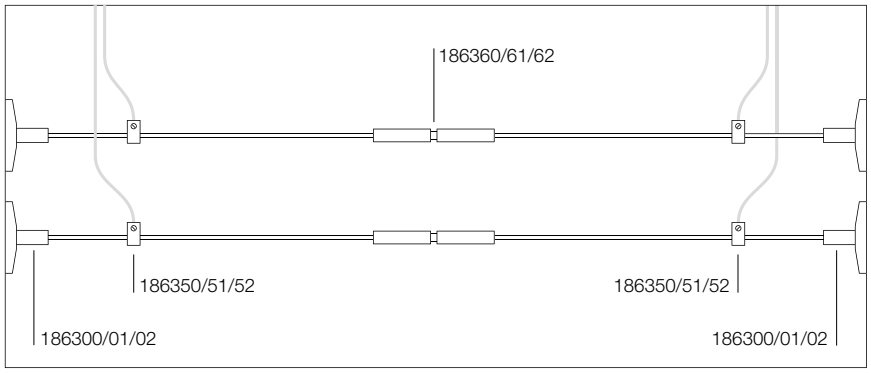

Items needed for this composition

Wall bracket	**186300/01/02**	x 2
Insulating connector	**186360/61/62**	x 1
Wire tensioner	**181530/31/32**	x 1
Feed-in	**186350/51/52**	x 2

Cable system wall-to-ceiling installation scheme

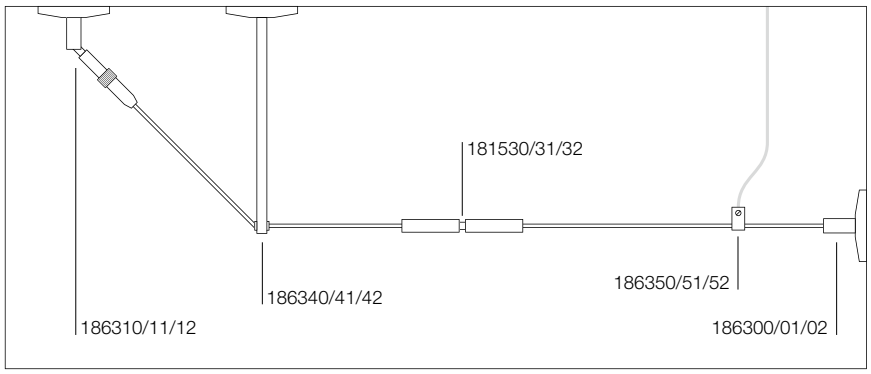

Items needed for this composition

Wall bracket	**186300/01/02**	x 1
Wall/ceiling bracket, flexible	**186310/11/12**	x 1
Wire tensioner	**181530/31/32**	x 1
Ceiling bracket, 16cm	**186340/41/42**	x 1
Feed-in	**186350/51/52**	x 1

Cable system ceiling-to-ceiling installation scheme

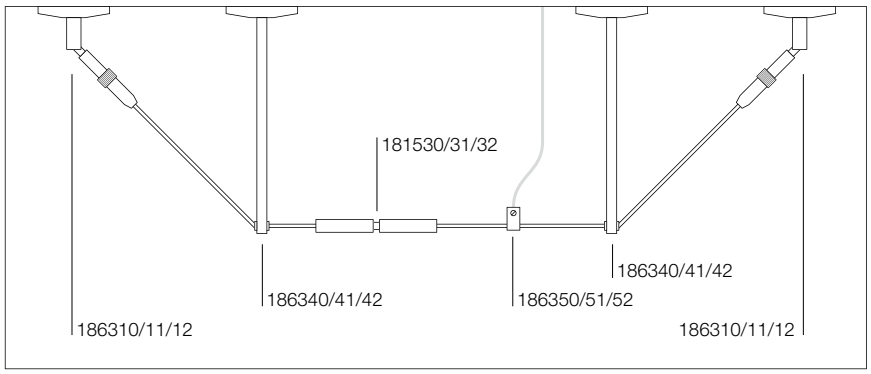

Items needed for this composition

Wall/ceiling bracket, flexible	**186310/11/12**	x 2
Wire tensioner	**181530/31/32**	x 1
Ceiling bracket, 16cm	**186340/41/42**	x 2
Feed-in	**186350/51/52**	x 1

Note

All accessories are sold in 2 pieces per item number.
The price is refered toa two pieces package.

The low-voltage cable is covered with insulating sheath.

Please use only our 12V transformers.

Low-voltage cable 4mm², 10m





	TENSEO 4mm², 10m	TENSEO 4mm², 10m	TENSEO 4mm², 10m
Max. voltage	48V	48V	48V
Max perm. current	25A	25A	25A
Material	Copper/plastic	Copper/plastic	Copper/plastic
Colour	black	white	transparent
Diameter	0.4cm	0.4cm	0.4cm
Length	1,000cm	1,000cm	1,000cm
Weight	0.48kg	0.48kg	0.48kg
Item No.	**1002602**	**1002603**	**1002604**
GBP	**18.00**	**18.00**	**18.00**

Low-voltage cable 4mm², 20m





	TENSEO 4mm², 20m	TENSEO 4mm², 20m	TENSEO 4mm², 20m
Max. voltage	48V	48V	48V
Max perm. current	25A	25A	25A
Material	Copper/plastic	Copper/plastic	Copper/plastic
Colour	black	white	transparent
Diameter	0.4cm	0.4cm	0.4cm
Length	2,000cm	2,000cm	2,000cm
Weight	0.88kg	0.88kg	0.85kg
Item No.	**139030**	**139031**	**139024**
GBP	**37.80**	**37.80**	**37.80**

Low-voltage cable 4mm², 100m





	TENSEO 4mm², 100m	TENSEO 4mm², 100m	TENSEO 4mm², 100m
Max. voltage	48V	48V	48V
Max perm. current	25A	25A	25A
Material	Copper/plastic	Copper/plastic	Copper/plastic
Colour	black	white	transparent
Diameter	0.4cm	0.4cm	0.4cm
Length	10,000cm	10,000cm	10,000cm
Weight	4.4kg	4.4kg	4.26kg
Item No.	**139040**	**139041**	**139004**
GBP	**189.00**	**189.00**	**189.00**

Low-voltage cable 6mm², 20m





	TENSEO 6mm², 20m	TENSEO 6mm², 20m	TENSEO 6mm², 20m
Max. voltage	48V	48V	48V
Max perm. current	25A	25A	25A
Material	Copper/plastic	Copper/plastic	Copper/plastic
Colour	black	white	transparent
Diameter	0.4cm	0.4cm	0.4cm
Length	2,000cm	2,000cm	2,000cm
Weight	1.23kg	1.23kg	1.21kg
Item No.	**139050**	**139051**	**139026**
GBP	**52.20**	**52.20**	**52.20**







Low-voltage cable
6mm², 100m





	TENSEO 6mm², 100m	TENSEO 6mm², 100m	TENSEO 6mm², 100m
Max. voltage	48V	48V	48V
Max perm. current	25A	25A	25A
Material	Copper/plastic	Copper/plastic	Copper/plastic
Colour	black	white	transparent
Diameter	0.4cm	0.4cm	0.4cm
Length	10,000cm	10,000cm	10,000cm
Weight	6.1kg	6.1kg	6kg
Item No.	**139060**	**139061**	**139006**
GBP	**216.90**	**216.90**	**216.90**

ACCESSORIES FOR LOW-VOLTAGE CABLE SYSTEM TENSEO

TRANSFORMER 12V AC | 50VA conventional

Steel/brass
Diameter: 11.1cm H: 11cm
Weight: 1.88kg
1 piece



Variant	Item No.	GBP
glossy black	1002691	81.00
glossy white	1002692	81.00
chrome	1002693	83.70

Wall bracket

Steel/brass
Diameter: 5 cm H: 11.5 cm
Weight: 0.08kg
2 pieces



Variant	Item No.	GBP
glossy black	186310	29.70
glossy white	186311	29.70
chrome	186312	31.50

Ceiling deflector

Steel/brass
Diameter: 5cm H: 16cm
Weight: 0.39kg
2 pieces



Variant	Item No.	GBP
glossy black	186640	67.50
glossy white	186641	67.50
chrome	186642	72.00

Transformer 12V | 105VA conventional

Steel/brass
Diamter: 11cm H: 11cm
Weight: 1.6kg
1 piece



Variant	Item No.	GBP
glossy black	138980	99.00
glossy white	138981	99.00
chrome	138982	108.00

Ceiling bracket 6cm

Steel/brass
Diameter: 5cm H: 6cm
Weight: 0.05kg
2 pieces



Variant	Item No.	GBP
glossy black	186330	18.00
glossy white	186331	18.00
chrome	186332	20.70

Suspension kit 2m

Steel/aluminium
Diameter: 1.25cm W:18.6cm
Weight: 0.162kg
1 piece



Variant	Item No.	GBP
glossy black	1002697	29.70
glossy white	1002698	29.70
chrome	1002699	31.50

Transformer 12V | 21VA conventional

Steel/brass
Diameter: 13.5cm H: 11cm
Weight: 3.05kg
1 piece



Variant	Item No.	GBP
glossy black	138990	151.20
glossy white	138991	151.20
chrome	138992	156.60

Ceiling bracket

Steel/brass
Diameter: 5cm H: 16cm
Weight: 0.12kg
2 pieces



Variant	Item No.	GBP
glossy black	186340	20.70
glossy white	186341	20.70
chrome	186342	22.50

Spacer

aluminium
Diameter: 1.25cm W: 9cm
Weight: 0.35kg
2 pieces



Variant	Item No.	GBP
glossy black	1002700	34.20
glossy white	1002701	34.20
chrome	1002702	40.50

Wire tensioner

25A max.
Brass
Diameter: 1cm H: 11cm
Weight: 0.04kg
2 pieces



Variant	Item No.	GBP
glossy black	181530	20.70
glossy white	181531	20.70
chrome	181532	22.50

Feed-in

25A max.
Brass
Diameter: 1cm H: 1.8cm
Weight: 0.04kg
2 pieces



Variant	Item No.	GBP
glossy black	186350	9.00
glossy white	186351	9.00
chrome	186352	9.90

Spacer with connector

25A max.
Brass
Diameter: 1.25cm W: 9cm
Weight: 0.82kg
2 pieces



Variant	Item No.	GBP
glossy black	1002703	40.50
glossy white	1002704	40.50
chrome	1002705	45.00

Wall bracket

Steel/brass
Diameter: 5cm L: 3cm
Weight: 0.05kg
2 pieces



Variant	Item No.	GBP
glossy black	186300	20.70
glossy white	186301	20.70
chrome	186302	22.50

Insulating connector

25A max.
Aluminium/plastic
Diameter: 1cm L: 6.4cm
Weight: 0.04kg
2 pieces



Variant	Item No.	GBP
glossy black	186360	16.70
glossy white	186361	16.70
chrome	186362	18.00

M-TRACK
adjustable

LED INSIDE







- Easily to moved due to magnetic holder

Product details

12V DC
Total wattage: 4.8W
Material: aluminium/polycarbonate (PC)

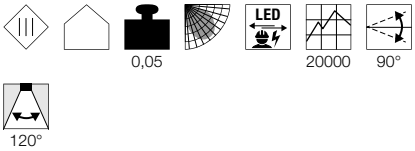

Dimensional drawing



Variant	Item No.	GBP
260lm | 3000K | CRI>80		
■ glossy black	**188550**	**60.30**

M-TRACK
Spot

LED INSIDE







- Easily to moved due to magnetic holder

Product details

12V DC
Total wattage: 7W
Material: aluminium/polycarbonate (PC)

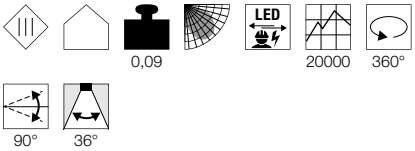

Dimensional drawing



Variant	Item No.	GBP
400lm | 3000K | CRI>80		
■ glossy black	**188530**	**55.80**













M-TRACK
Track

Rated voltage	12V DC
Max. voltage	12V DC
Max perm. current	9A
Material	aluminium
Colour	glossy black
Length	200cm
Width	3cm
Height	1.4cm
Weight	1.05kg
Item No.	**188500**
GBP	**65.70**

Feed-in

ABS/Polycarbonate (PC)
L: 3.6cm W: 3cm H: 1.6cm
Weight: 0.01kg
1 piece



Variant	Item No.	GBP
■ black	**188510**	**11.70**

End cap

ABS/Polycarbonate (PC)
L: 3cm W: 1.4cm H: 0.5cm
Weight: 0.01kg
1 piece



Variant	Item No.	GBP
■ black	**188520**	**4.00**

Recommended accessories

☐ LED power supply 12V DC | 12W
Item No. 470507 | 20.70GBP







SHOWING THE WAY.

MOBILE LUMINAIRES AND FLOOR STANDS.

Nobody has to flounder in the dark any more: Mobile luminaires and floor stands are a popular design element for outdoor systems, and provide orientation and safety. The special appearance of the outdoor luminaires is due to their high-quality materials, modern designs and innovative technologies.




233437 559

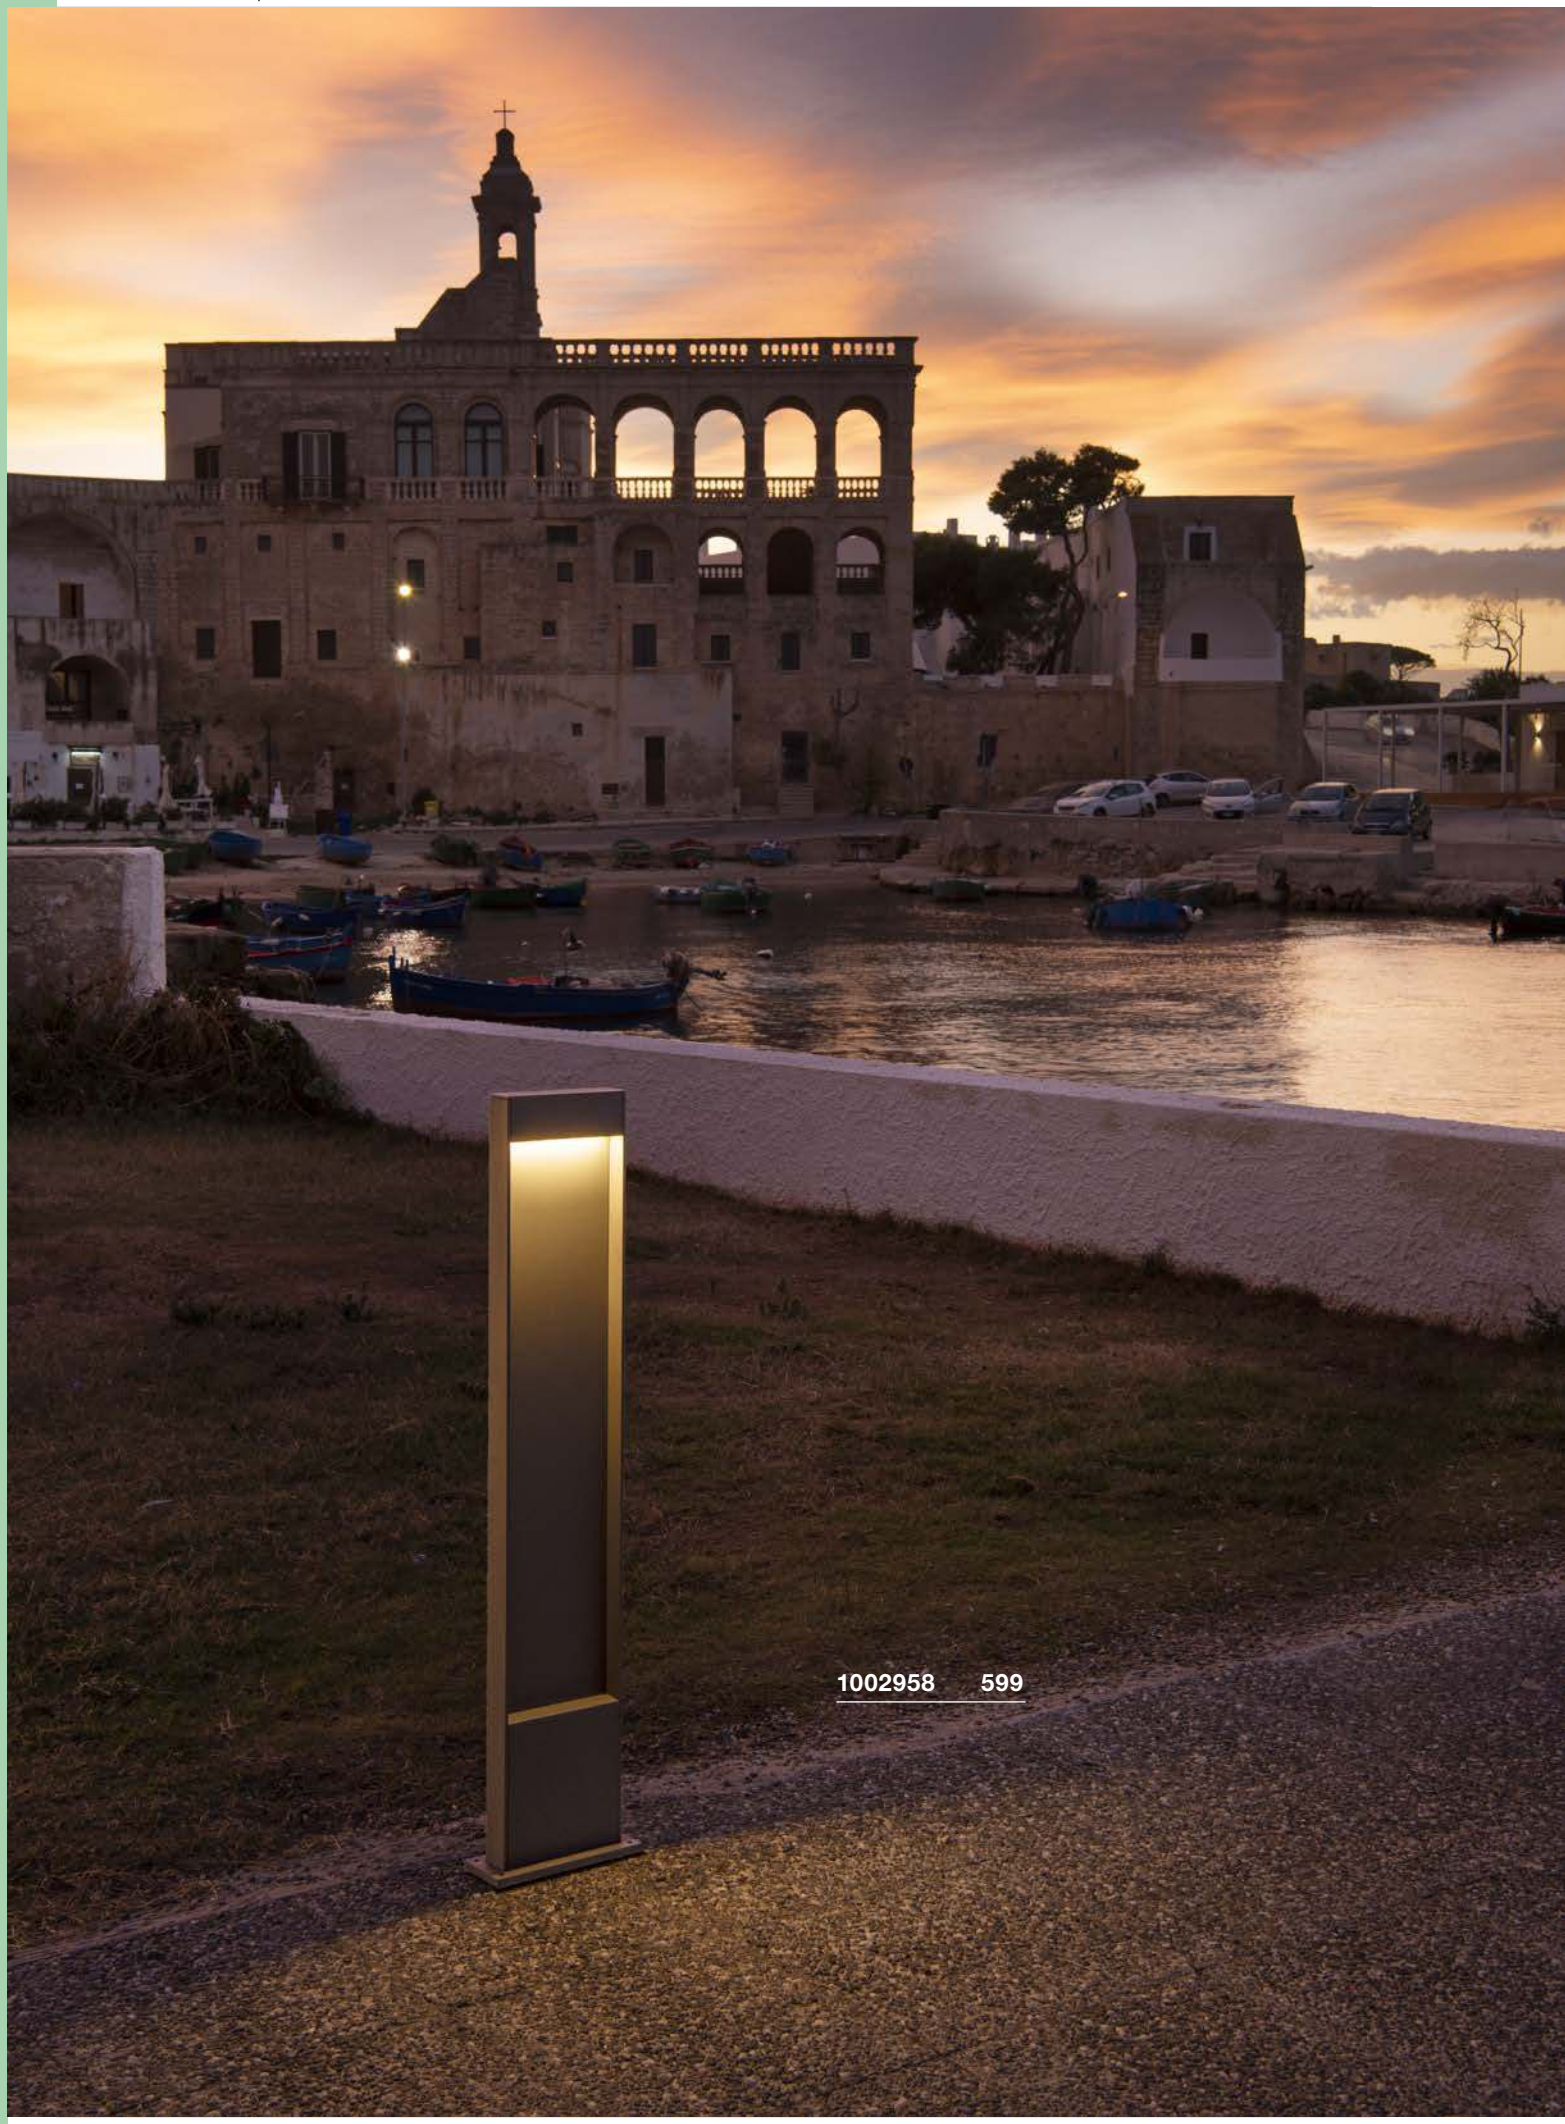
1002958 599

MOBILE LIGHTS AND FLOOR LIGHTS



Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

PHOTONIA
PD, E27

SOCKET INSIDE







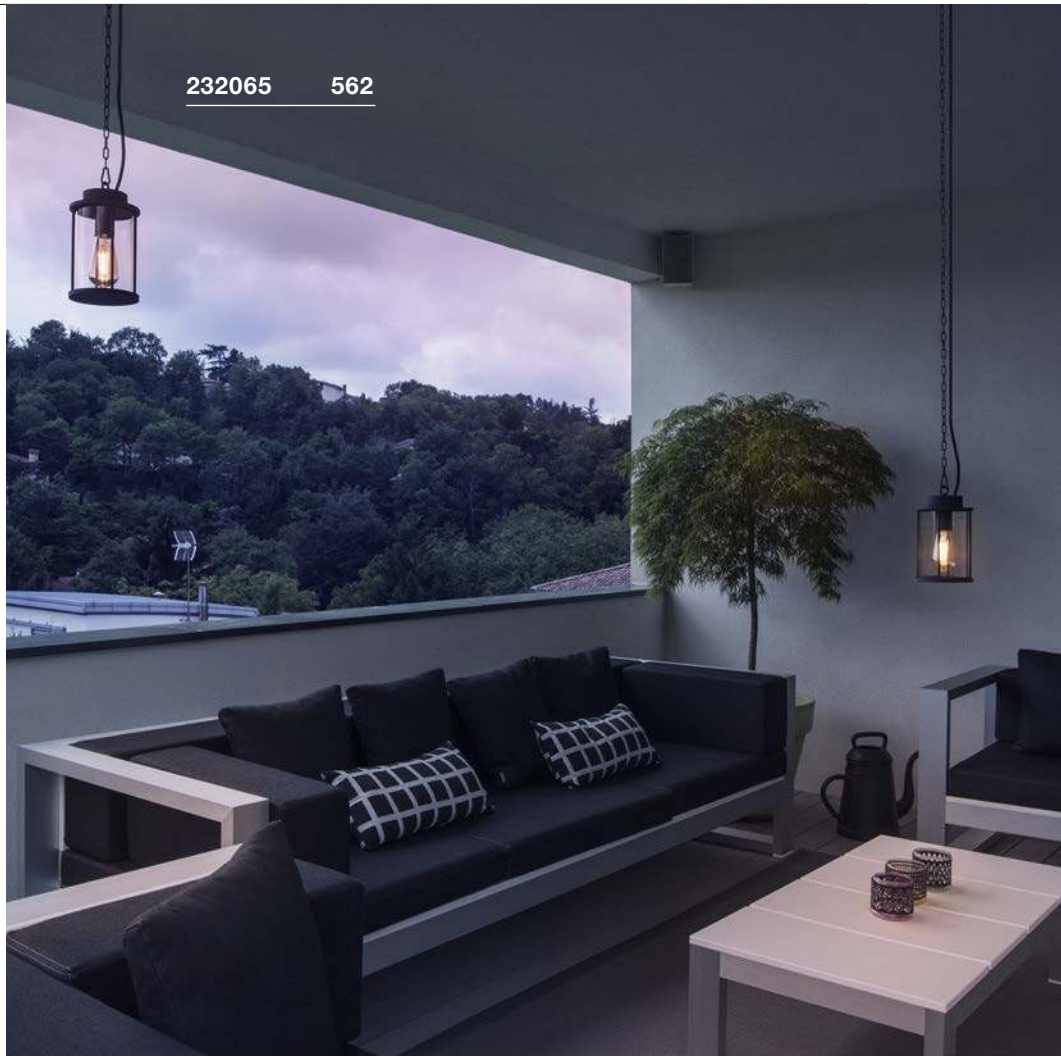

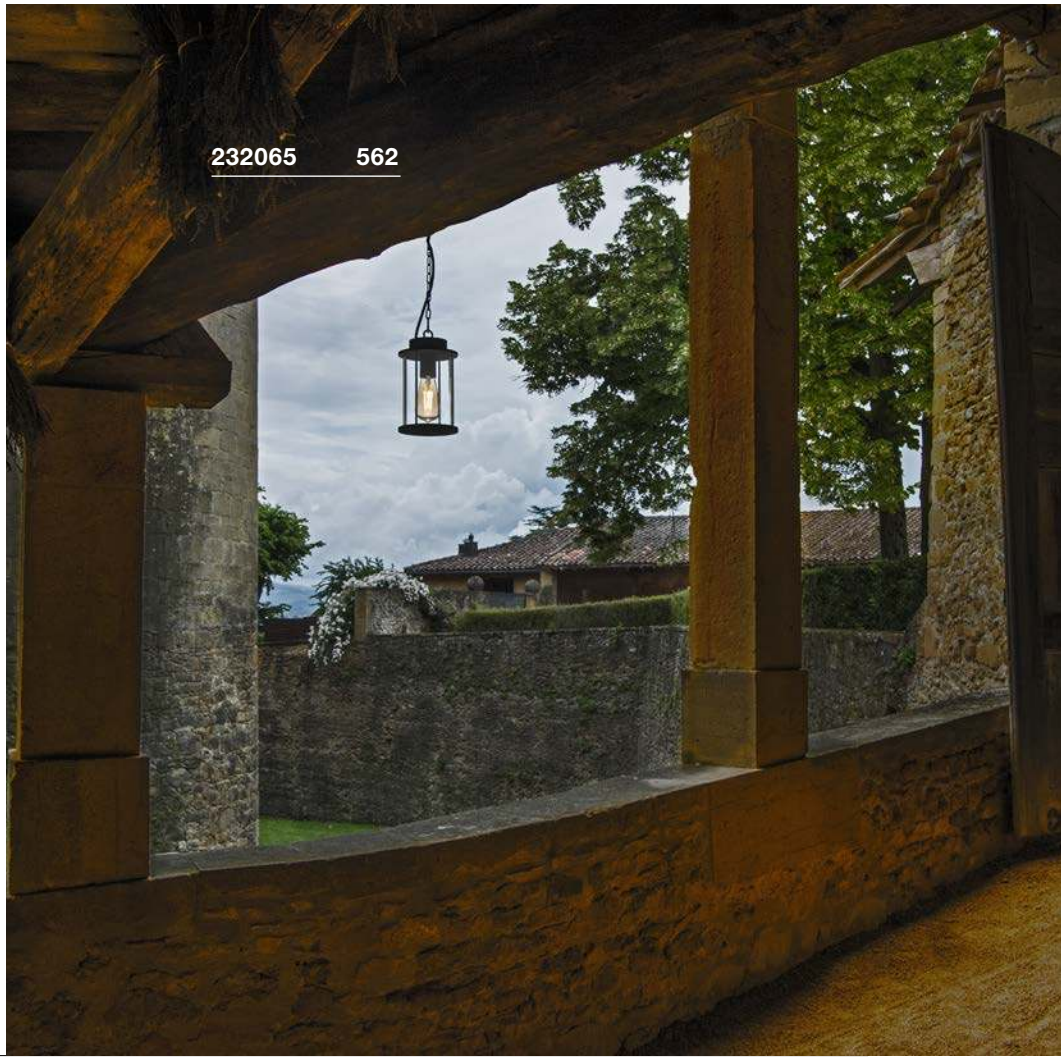

Product details

220-240V ~50/60Hz
Material: aluminium/glass



IP 44 | 1,86 | 250 | 500 | IK04

Dimensional drawing



Tip

Suspension chain included

Accessory recommendation

Ceiling rose
Item No. 1000398 | 56.70 GBP



Recommended lamp

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP





LED E27 7W 280°
2200-2700K 830lm
7kWh/1000h
Item No. 1002126 | 17.10 GBP



Lamp details

max. 60W
Diamter: 9 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27		
anthracite	**232065**	**184.50**

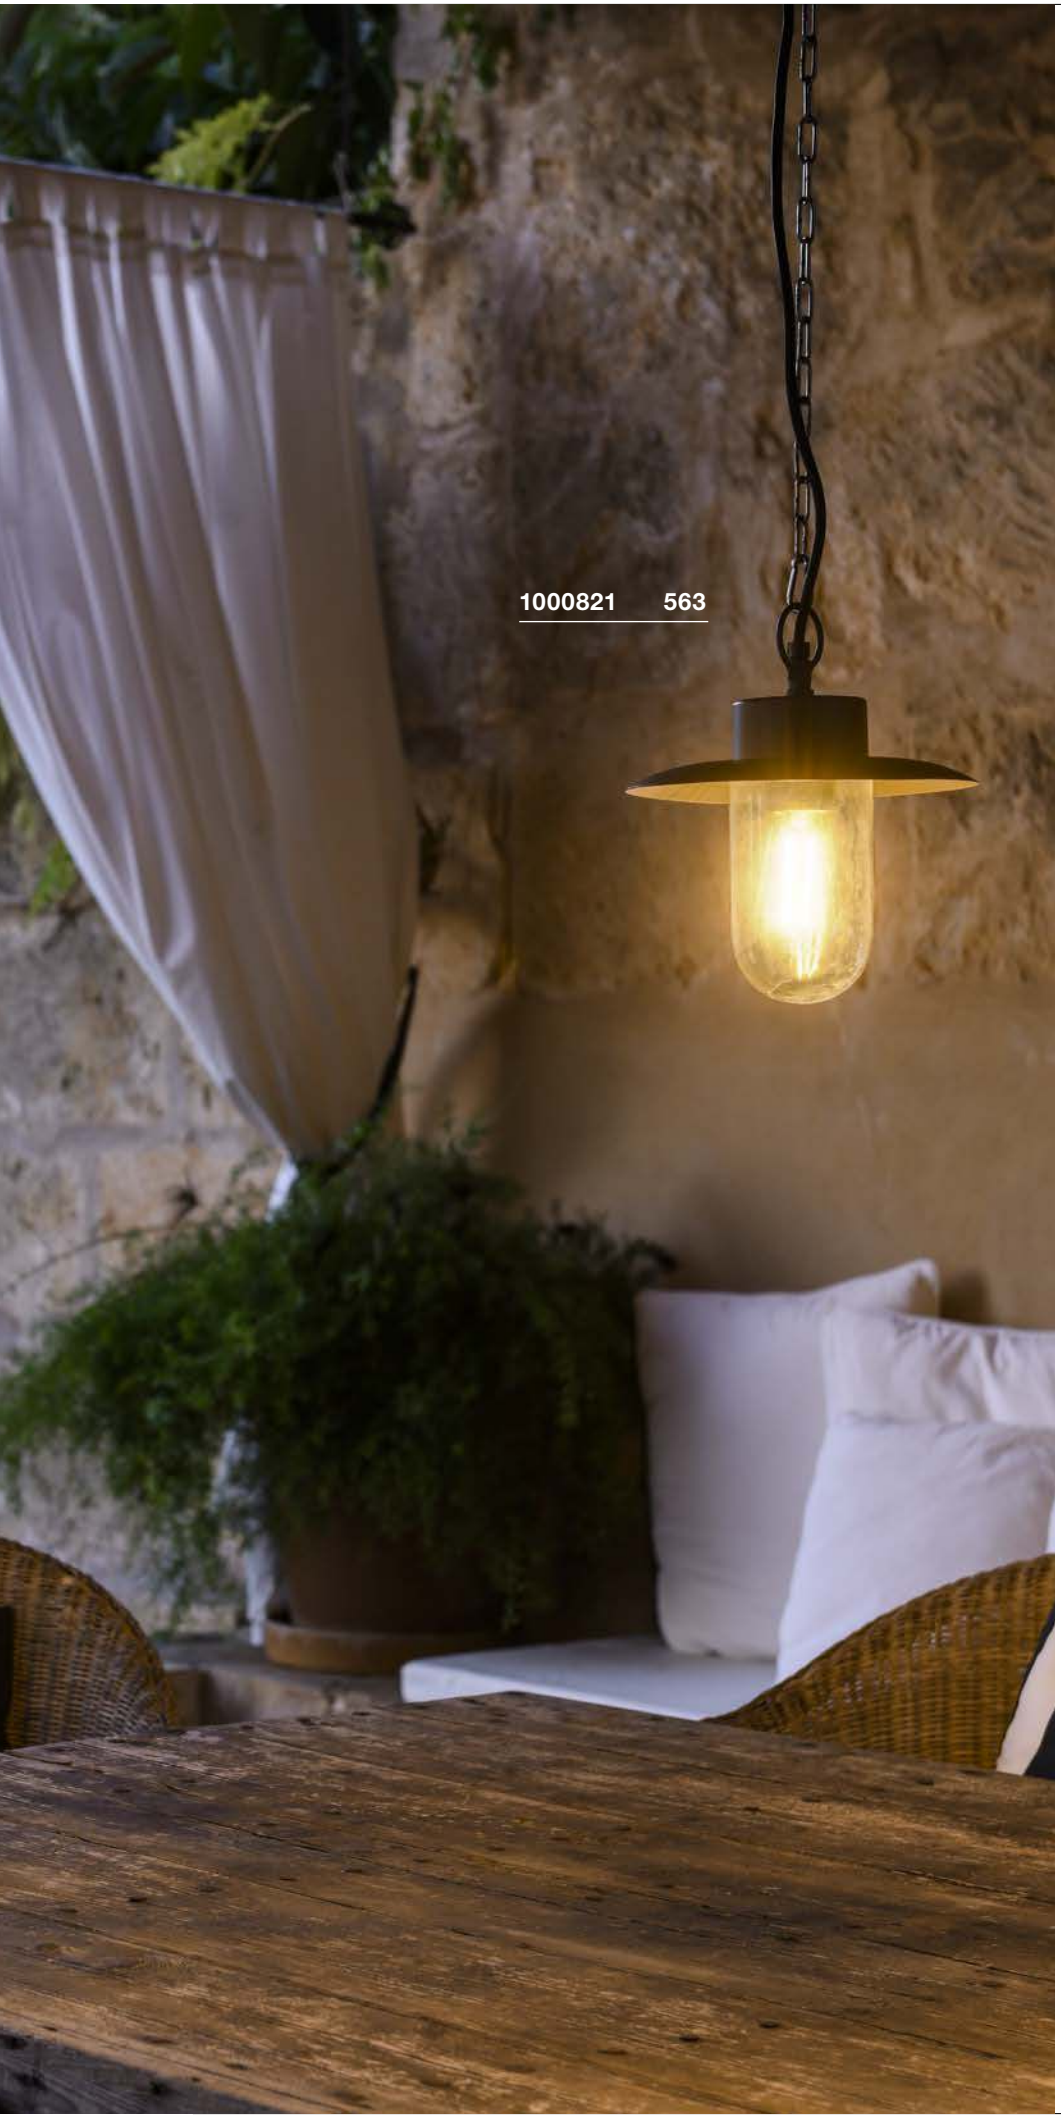

MOLAT
PD, E27

SOCKET INSIDE







Product details

230V ~50/60Hz
Material: aluminium/glass



Dimensional drawing



Tip

Suspension chain included

Accessory recommendation

Ceiling rose
Item No. 1000398 | 56.70 GBP



Recommended lamp

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 560741 | 25.20 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP





Lamp details

max. 60W
Diameter: 6.5 cm max. L: 14.5 cm max.

Variant	Item No.	GBP
E27		
anthracite	**1000821**	**111.60**

KIROCONE
TL, E27

SOCKET INSIDE





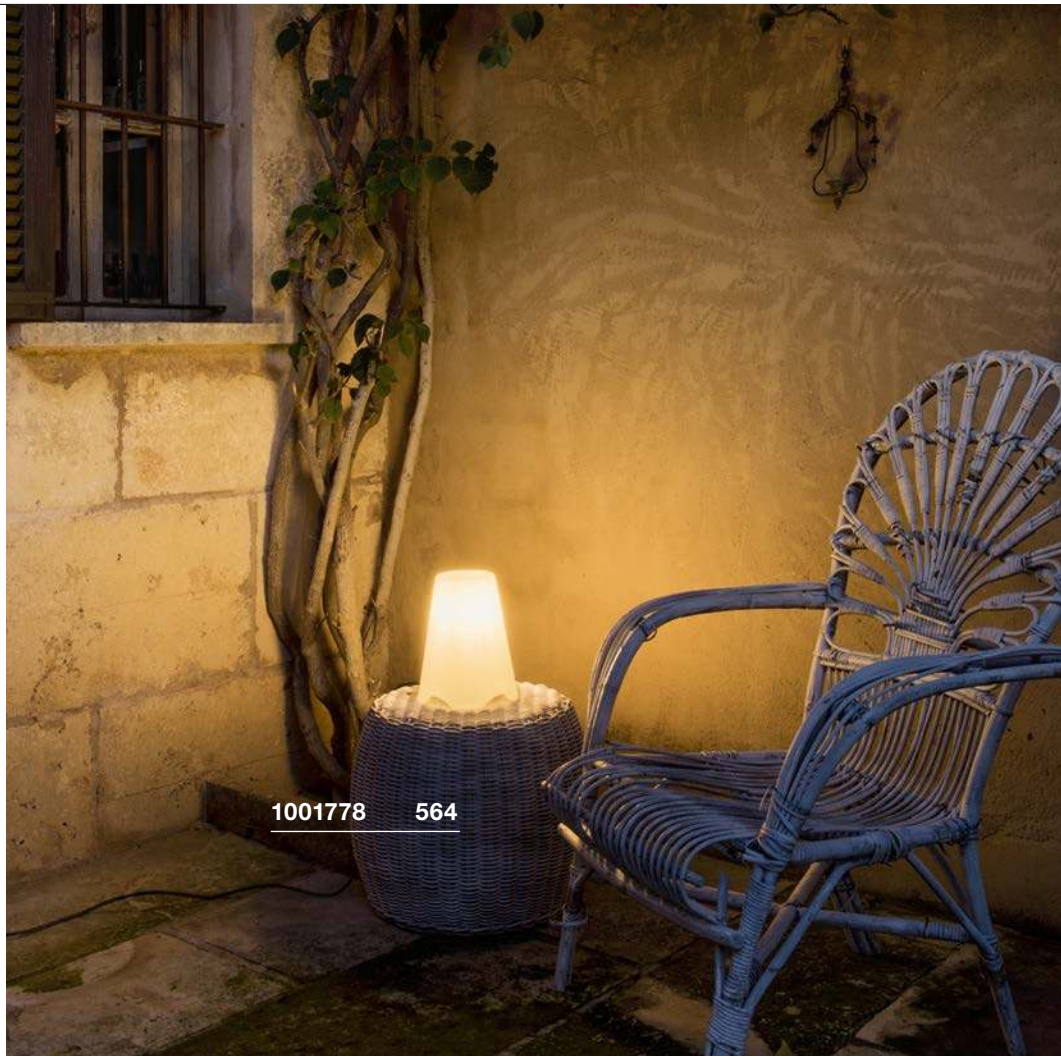

Product details

230V -50Hz
Material: steel/polycarbonate (PC)



IP 44 | 0,9 | 300 | IK04

Dimensional drawing



Tip

IP safety plug



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 60W
Diameter: 9.5 cm max. L: 14.5 cm max.

Variant	Item No.	GBP
E27		
white	**1001778**	**87.30**





ROTOBALL 25/40/50
FL, E27

SOCKET INSIDE



- Harmonious design
- Even light distribution
- For the decorative illumination and aesthetic accentuation of indoor and outdoor areas

Product details

230V -50Hz
Material: steel/polyethylene (PE)



Dimensional drawing

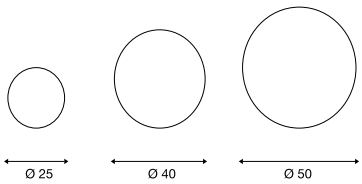

Tip

IP safety plug

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP

Lamp details

max. 24 W
Diameter: 9.5 cm max.

Variant	Item No.	GBP
E27 | Diameter: 25 cm | 1.05 kg		
white	**227219**	**126.00**
E27 | Diameter: 40 cm | 2.2 kg		
white	**227220**	**144.00**
E27 | Diameter: 50 cm | 3.12 kg		
white	**227221**	**188.10**

ADEGAN MANILA
FL, E27

SOCKET INSIDE









Product details

230V -50Hz
Material: granite/stainless steel



Dimensional drawing



Tip

IP safety plug

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details

max. 15W
Diameter: 4.8 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27		
stainless steel/anthracite	**1002494**	**314.10**



ADEGAN
FL, E27

SOCKET INSIDE





- Mobile light
- Lightshade: extremely UV-resistant polycarbonate
- Feel-good lighting for every design style

Product details

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)



Dimensional drawing



Tip

IP contour plug

Accessory recommendation

Spike
Item No. 228960 | 27.00 GBP



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details

max. 24 W
Diameter: 5.2cm max.

Variant	Item No.	GBP
E27		
anthracite/white	**228965**	**269.10**

PHOTONIA
TL, E27

SOCKET INSIDE







• Ultra-long power cable with IP safety plug

Product details

220-240V ~50/60Hz
Material: aluminium/glass



IP 44 | 1,81 | 500 | IK04

Dimensional drawing



Tip

IP safety plug

Recommended lamp

LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP





Lamp details

max. 60W
Diamter: 9 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27		
anthracite	**232095**	**175.50**







CUBIX
FL, QPAR51

SOCKET INSIDE





• Mobile light

Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Tip

IP safety plug

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details

max. 25W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51		
grey	132832	94.50
GU10 | QPAR51		
anthracite	132835	94.50

CONE
FL, E27

SOCKET INSIDE





Product details

220-240V ~50/60Hz
Material: aluminium/glass



Dimensional drawing



Tip

Material thickness of mounting surface: 20 mm

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



Lamp details

max. 100W
L: 15 cm max.

Variant	Item No.	GBP
E27		
anthracite	230435	76.50

RUSTY® CONE 24
FL, E14

SOCKET INSIDE





- Rusted steel
- Every light is a unique one-off
- Small path lights for driveways and gardens

Product details

230V -50Hz
Material: FeCSi steel/polycarbonte (PC)

IP 54 7,2

Dimensional drawing



Recommended lamp

LED E14 4,5W 280°
2700K 470lm
5kWh/1000h
Item No. 1002128 | 7.20 GBP

LED E14 6,5W 280°
3000K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP

Lamp details

max. 40W C35
Diameter: 4.8 cm max. L: 13.9 cm max.

Variant	Item No.	GBP
E14 | C35		
rust	229430	208.80

RUSTY® CONE 40/70
Pole, E27

SOCKET INSIDE







- Rusted steel
- Every light is a unique one-off

Product details

230V -50Hz
Material: FeCSi steel/polycarbonte (PC)

IP 54

Dimensional drawing



Accessory recommendation

Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

Spike
Item No. 229423 | 38.70 GBP

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

Lamp details

max. 11W
Diameter: 4.8 cm max. L: 13.9 cm max.

Variant	Item No.	GBP
E27 | H: 40 cm | 12.2 kg		
rust	229431	362.70
E27 | H: 70 cm | 18.8 kg		
rust	229432	435.60

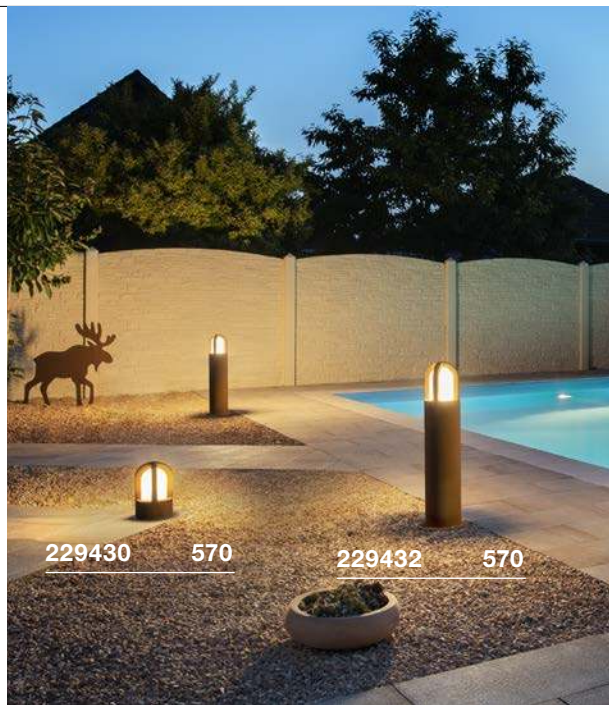

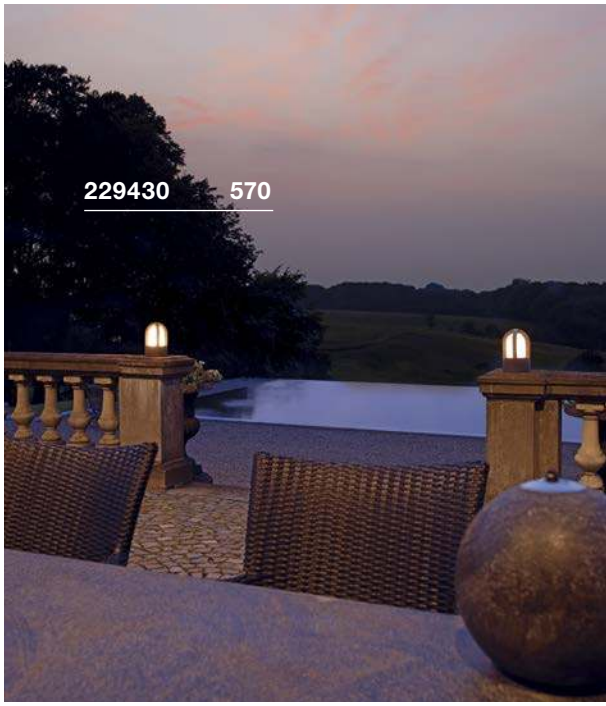







RUSTY® 40/70
Pole, E27

SOCKET INSIDE



- Rusted steel
- Every light is a unique one-off

Product details

230V -50Hz
Material: FeCSi steel/polycarbonte (PC)

IP 55

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

▒ Spike
Item No. 229022 | 38.70 GBP

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details

max. 11W
Diameter: 4.8 cm max. L: 13.9 cm max.

Variant	Item No.	GBP
E27 | H: 40 cm | 11 kg		
■ rust	**229020**	**244.80**
E27 | H: 70 cm | 17.5 kg		
■ rust	**229021**	**299.70**

RUSTY® 40/70
Pole

LED INSIDE



- Rusted steel
- Every light is a unique one-off
- High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 8.6W
Material: FeCSi steel/polycarbonte (PC)

IP 55 | LED | 35000

Dimensional drawing



Tip

Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

▒ Spike
Item No. 229022 | 38.70 GBP

Variant	Item No.	GBP
70lm | 3000K | CRI>80 | H: 40 cm | 11 kg		
■ rust	**233407**	**299.70**
70lm | 3000K | CRI>80 | H: 70 cm | 17.5 kg		
■ rust	**233417**	**362.70**

LISENNE 40/70
Pole, E27

SOCKET INSIDE







- Basalt stone & smoked glass
- Smoked glass has a mirrored appearance when switched off

Product details

230V ~50/60Hz
Material: basalt/glass

IP 54

Dimensional drawing



Accessory recommendation

Spike
Item No. 229422 | 34.20 GBP

Recommended lamp

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP

Lamp details

max. 23 W
Diameter: 5.9 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27 | H: 40 cm | 5,65 kg grey/brown	**1000665**	**314.10**
E27 | H: 70 cm | 12.4 kg grey/brown	**1000666**	**359.10**



1000665 572





PHOTONIA
Pole, E27

SOCKET INSIDE





Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 55 | 2,3 | 20 | IK03

Dimensional drawing



Tip

Open cable end

Accessory recommendation

Concrete anchor
Item No. 232085 | 38.70 GBP

Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

Recommended lamp

LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP

Lamp details

max. 60W
Diamter: 9 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27		
anthracite	**232075**	**229.50**

OTOS GLAS
Pole, E27

SOCKET INSIDE





Product details

230V -50Hz
Material: aluminium/glass

IP 43 | 2,6

Dimensional drawing



Accessory recommendation

Screw set
Item No. 228753 | 6.80 GBP

Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP

Lamp details

max. 15W
Diameter: 6.5 cm max. L: 14.5 cm max.

Variant	Item No.	GBP
E27		
anthracite	**230465**	**108.00**

GLOO PURE 27/44/70
Pole, E27

SOCKET INSIDE



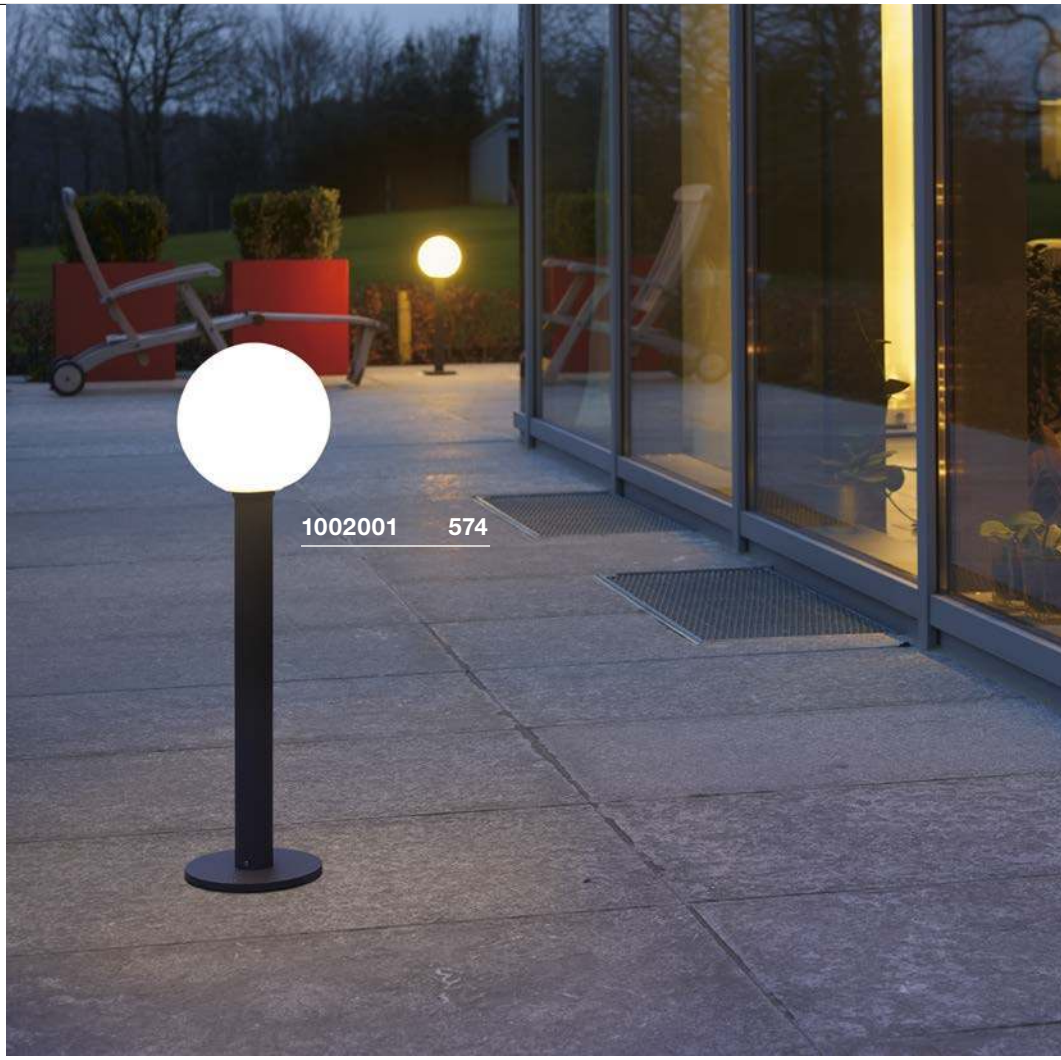

Product details

230V -50Hz
Material: aluminium/glass

IP 44 20 IK02

Dimensional drawing



Tip

Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

■ Spike
Item No. 231234 | 38.70 GBP

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details

max. 23 W
Diameter: 4.8 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27 | H: 27 cm | 1.5 kg anthracite/white	1001999	69.30
E27 | H: 44 cm | 1.7 kg anthracite/white	1002000	91.80
E27 | H: 70 cm | 1.9 kg anthracite/white	1002001	101.70



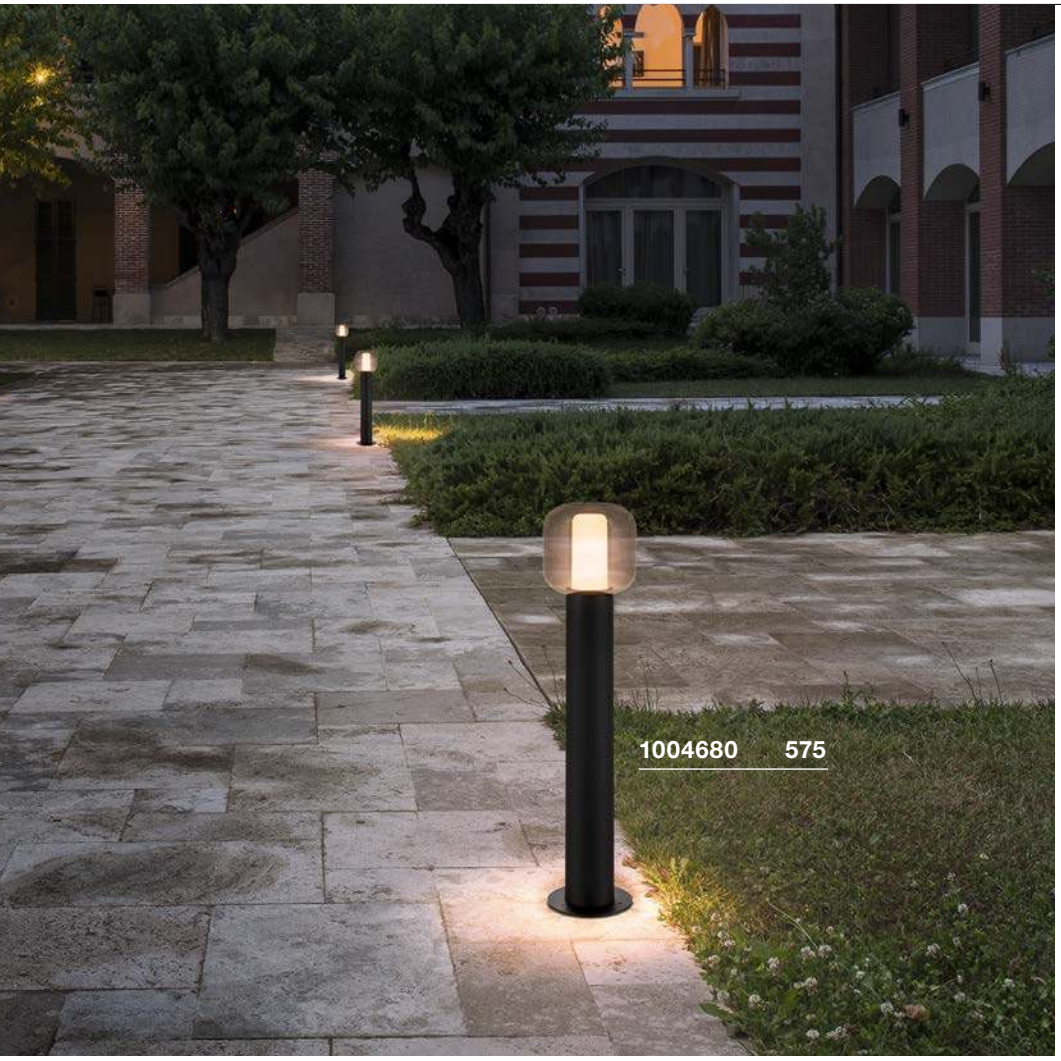



OVALISK 75/100
Pole







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
System output: 9W
Material: aluminium/glass

IP 65 IK02

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



■ Spike
Item No. 228722 | 45.00 GBP



Concrete anchor
Item No. 228712 | 47.70 GBP



Variant	Item No.	GBP
560/600lm | 3000/4000K | CRI>80 H: 75 cm | 3.0 kg		
■ matt anthracite	1004680	247.50
560/600lm | 3000/4000K | CRI>80 H: 100 cm | 3.5 kg		
■ matt anthracite	1004681	270.00

ALPA CONE 100
Pole, E27

SOCKET INSIDE



Product details
220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

IP 55 1,45

Dimensional drawing


Tip
Open cable end

Accessory recommendation
■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

■ Spike
Item No. 228722 | 45.00 GBP

Concrete anchor
Item No. 228712 | 47.70 GBP

Recommended lamp
LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

LED E27 15W 240°
4000K 1600lm
15kWh/1000h
Item No. 1002828 | 25.20 GBP

Lamp details
max. 24 W
Diameter: 5.2 cm max. L: 17.5 cm max.

Variant	Item No.	GBP
E27		
■ grey	**228922**	**153.00**
E27		
■ anthracite	**228925**	**153.00**

ALPA MUSHROOM 45/75
Pole, E27

SOCKET INSIDE



Product details
220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

IP 55

Dimensional drawing


Tip
Open cable end

Accessory recommendation
■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

■ Spike
Item No. 228722 | 45.00 GBP

Concrete anchor
Item No. 228712 | 47.70 GBP

Recommended lamp
LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details
max. 24 W
Diameter: 5.2 cm max. L: 16 cm max.

Variant	Item No.	GBP
E27 | H: 45 cm | 0.9 kg		
■ anthracite	**228935**	**103.50**
E27 | H: 75 cm | 2 kg		
■ anthracite	**228945**	**130.50**



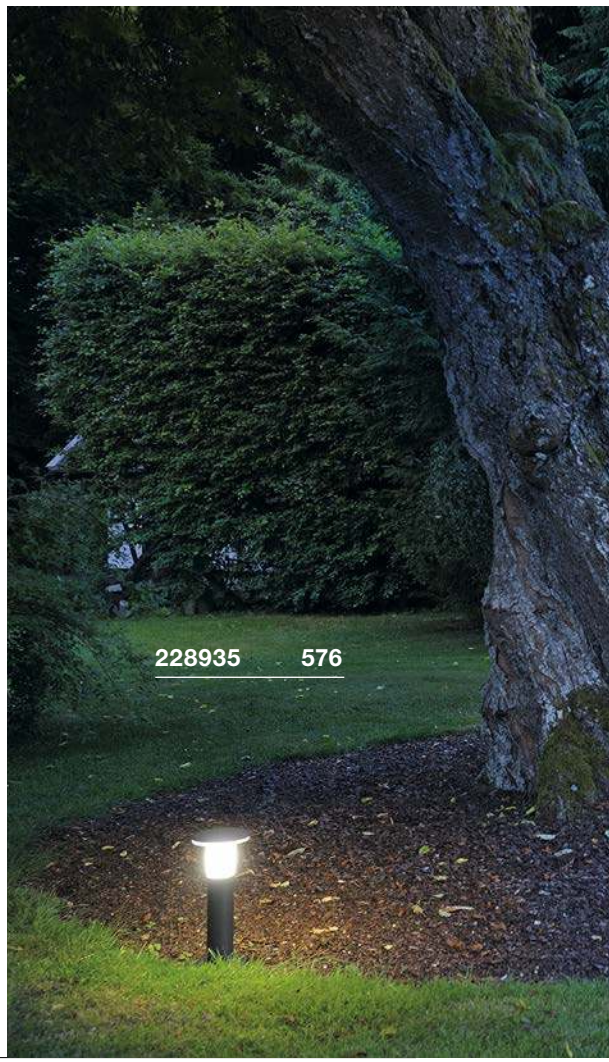

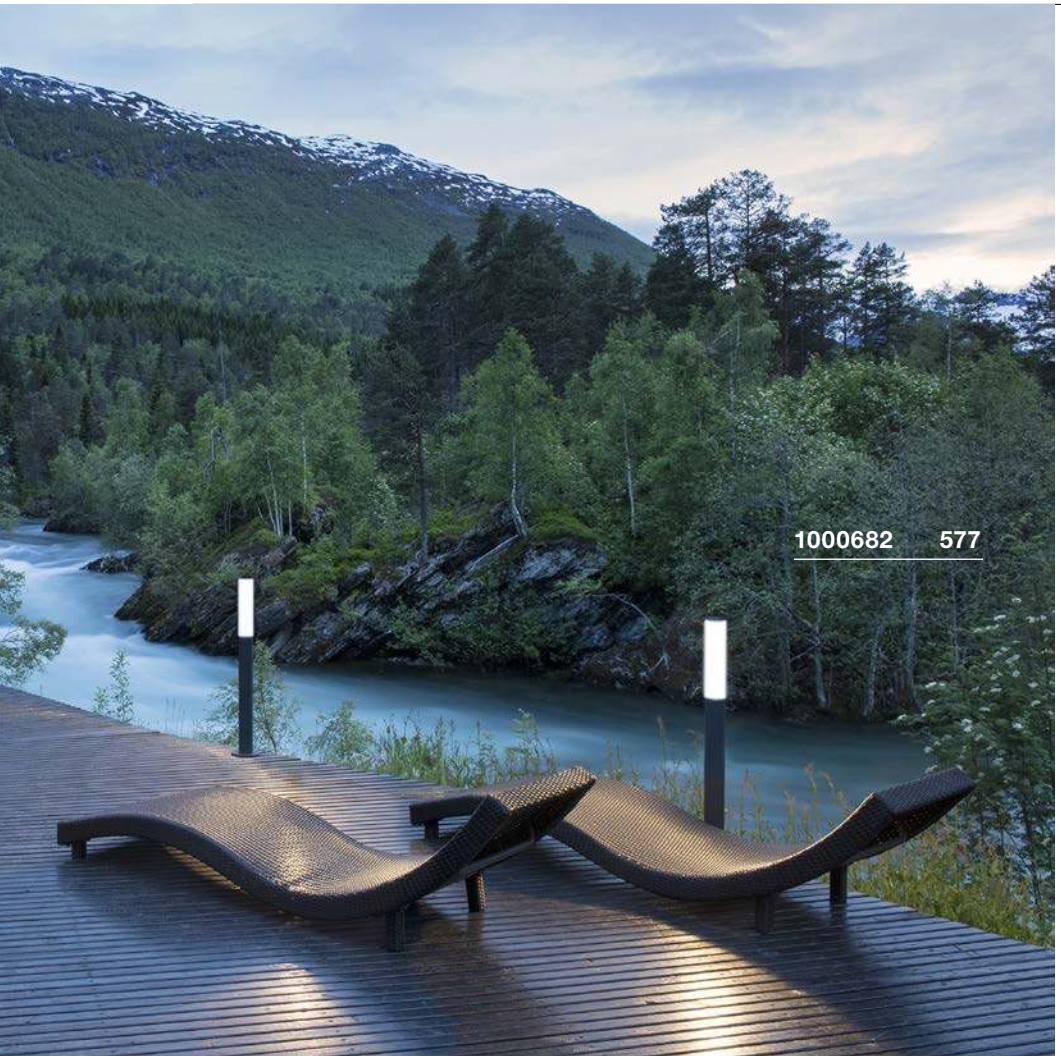

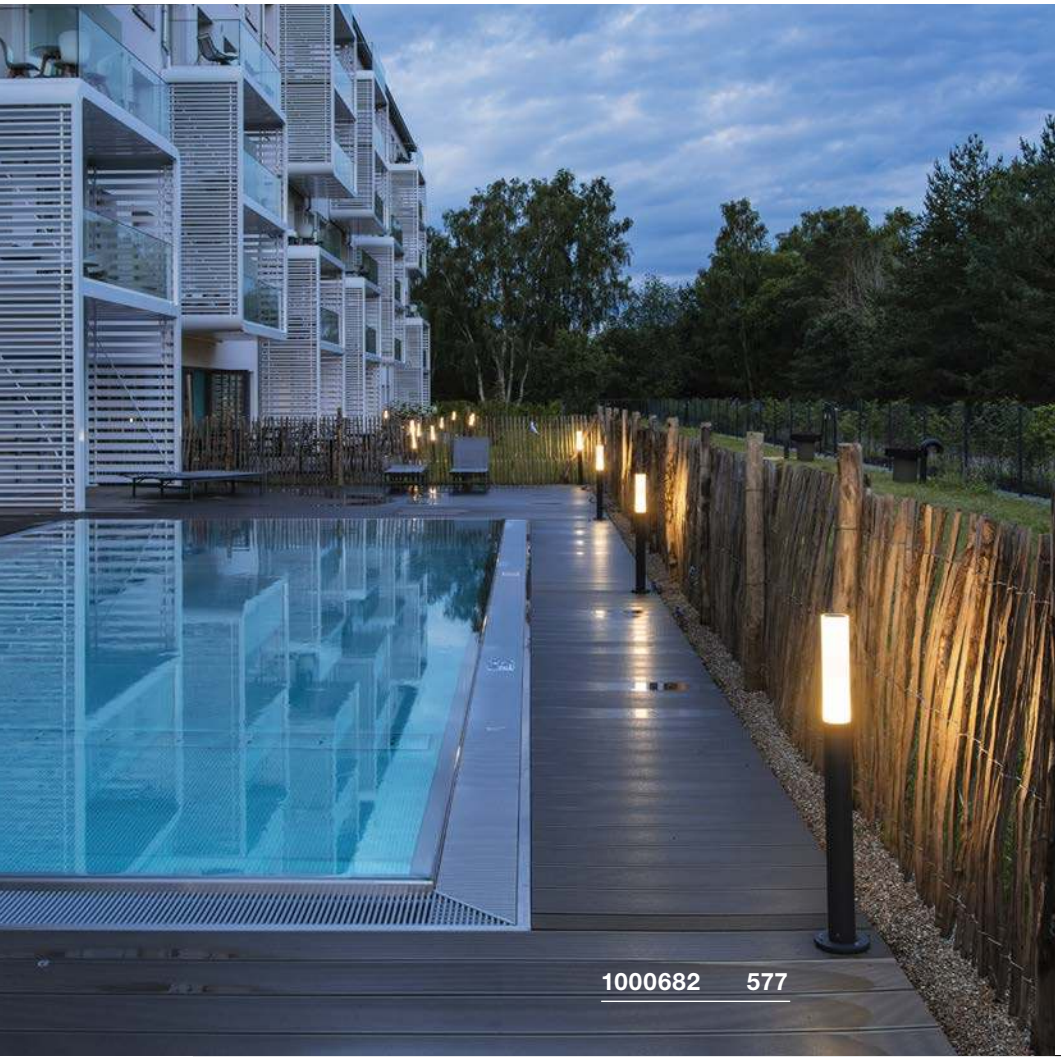

APONI 90/120
Pole, PHASE

LED INSIDE

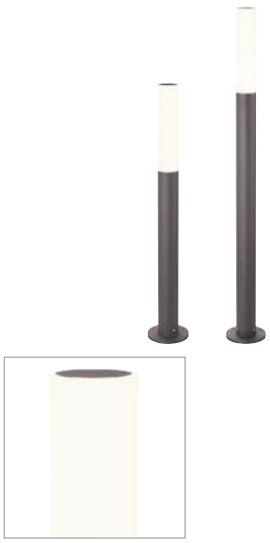

• High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium
Dimmable: L



Dimensional drawing



Tip

Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Variant	Item No.	GBP
440lm | 3000K | CRI>80 | H: 90 cm | 1.4 kg		
■ anthracite	**1000682**	**192.60**
440lm | 3000K | CRI>80 | H: 120 cm | 1.75 kg		
■ anthracite	**1000683**	**238.50**

LIGHT PIPE 60/90/140
Pole, PHASE

LED INSIDE



- Suitable for indoor and outdoor use

Product details

220-240V ~50/60Hz
Total wattage: 11W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: C, L

C,L | IP 55 | LED | 20000 | IK02

Dimensional drawing



Tip

The lights are delivered without a mounting plate
Indoor mounting plate with foot switch located on the power cord
Outdoor mounting plate without switch
IP 44 safety plug

Accessory recommendation

Spike
Item No. 234430 | 38.70 GBP

Mounting plate outdoor
Item No. 234431 | 43.20 GBP

Mounting plate indoor
Item No. 234441 | 43.20 GBP

Variant	Item No.	GBP
630lm | 2700K | CRI>80 | H: 60 cm | 1.5 kg		
white	234401	161.10
630lm | 2700K | CRI>80 | H: 90 cm | 1.71 kg		
white	234411	194.40
630lm | 2700K | CRI>80 | H: 140 cm | 2.06 kg		
white	234421	242.10

MOLAT
Pole, E27

SOCKET INSIDE



Product details

230V ~50/60Hz
Material: aluminium/glass

IP 44 | 2,2 | IK02

Dimensional drawing



Accessory recommendation

Spike
Item No. 230060 | 38.70 GBP

Recommended lamp

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 560741 | 25.20 GBP

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP

Lamp details

max. 60W
Diameter: 6.5 cm max. L: 14.5 cm max.

Variant	Item No.	GBP
E27		
anthracite	1000822	144.00









TRUST 30/60
Pole

LED INSIDE







- Stainless steel 316
- High-voltage LED
- Slim path lights for versatile outdoor designs

Product details

220-240V ~50/60Hz
Total wattage: 8.6W
Material: stainless steel 316



Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



■ Spike
Item No. 227922 | 38.70 GBP



■ Grid spiral-shaped
Item No. 1000449 | 52.20 GBP



■ Ring-shaped grid
Item No. 228130 | 72.00 GBP



Variant	Item No.	GBP
400lm | 3000K | CRI>80 | H: 30 cm | 1.4 kg		
stainless steel	228100	192.60
400lm | 3000K | CRI>80 | H: 60,5 cm | 2.25 kg		
stainless steel	228110	247.50

BIG NAILS PLUS 50/80
Pole, E27

SOCKET INSIDE







- Stainless steel 304

Product details

230V -50Hz
Material: stainless steel 304/acrylic



Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



■ Spike
Item No. 227922 | 38.70 GBP



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
4000K 1600lm
15kWh/1000h
Item No. 1002828 | 25.20 GBP

Lamp details

max. 23 W
Diameter: 4.8 cm max. L: 1.48 cm max.

Variant	Item No.	GBP
E27 | H: 50 cm | 1.13 kg		
stainless steel	231602	148.50
E27 | H: 80 cm | 1.54 kg		
stainless steel	231612	175.50

BIG NAILS 50/80
Pole

LED INSIDE





BIG NAILS 50/80
Pole, E27

SOCKET INSIDE





- Stainless steel 304
- Slim path lights for versatile outdoor designs

Product details

230V -50Hz
Total wattage: 8.5W
Material: stainless steel 316

IP 44 | 30000 | IK05

Dimensional drawing



Accessory recommendation

Spike
Item No. 227922 | 38.70 GBP



Variant	Item No.	GBP
480lm | 3000K | CRI>80 | H: 50 cm | 0.9 kg		
stainless steel	**1001997**	**130.50**
480lm | 3000K | CRI>80 | H: 80 cm | 1.235 kg		
stainless steel	**1001998**	**148.50**

Product details

230V -50Hz
Material: stainless steel 304/polycarbonate (PC)

IP 44

Dimensional drawing



Accessory recommendation

Spike
Item No. 227922 | 38.70 GBP



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details

max. 15W
Diameter: 4.5 cm max. L: 17 cm max.

Variant	Item No.	GBP
E27 | H: 51 cm | 1.1 kg		
stainless steel	**229162**	**121.50**
E27 | H: 81 cm | 1.6 kg		
stainless steel	**229172**	**139.50**



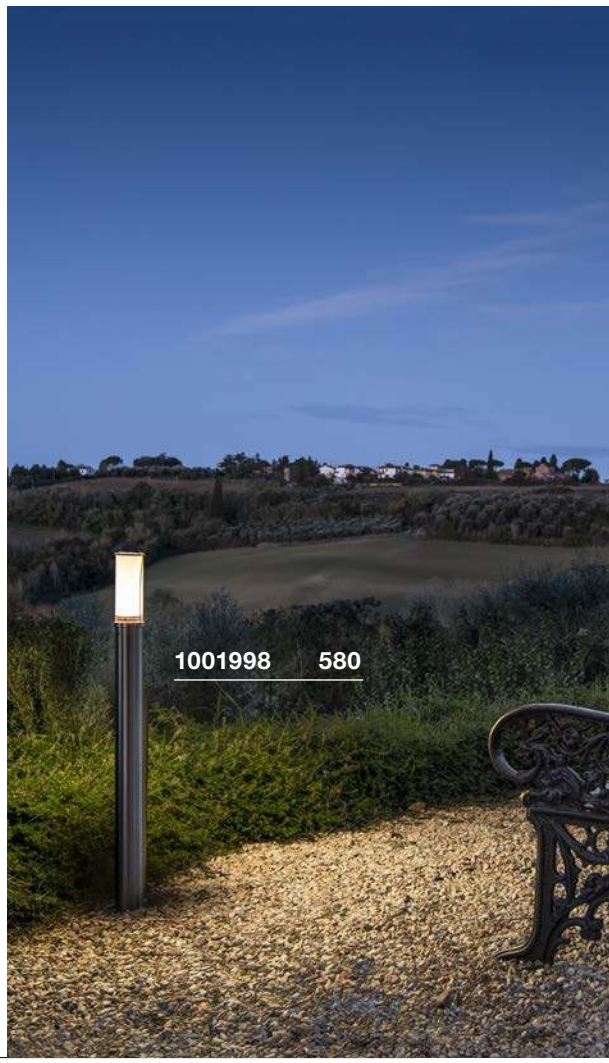





ROX ACRYL 30/60/90
Pole, PHASE

LED INSIDE



Product details

220-240V ~50/60Hz
Total wattage: 12W
Material: stainless steel 316
Dimmable: C, L

C, L | IP 44 | LED | 30000 | IK02

Dimensional drawing



Accessory recommendation

■ T-connector box
Item No. 228726 | 20.70 GBP

■ Concrete anchor
Item No. 1001494 | 20.70 GBP

■ Spike
Item No. 231234 | 38.70 GBP

Variant	Item No.	GBP
690lm | 3000K | CRI>80 | H: 30 cm | 1.55 kg		
■ stainless steel	**1001491**	**162.00**
690lm | 3000K | CRI>80 | H: 60 cm | 2.55 kg		
■ stainless steel	**1001492**	**188.10**
690lm | 3000K | CRI>80 | H: 90 cm | 3.45 kg		
■ stainless steel	**1001493**	**233.10**

ROX ACRYL 30/60/90
Pole, E27

SOCKET INSIDE



• High-quality brushed surface

Product details

220-240V ~50/60Hz
Material: stainless steel 304

IP 44 | IK02

Dimensional drawing



Accessory recommendation

■ T-connector box
Item No. 228726 | 20.70 GBP

■ Concrete anchor
Item No. 1001494 | 20.70 GBP

■ Spike
Item No. 231234 | 38.70 GBP

Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 20W
Diamter: 6 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27 | H: 30 cm | 1.1 kg		
■ stainless steel	**1001488**	**126.00**
E27 | H: 60 cm | 2.1 kg		
■ stainless steel	**1001489**	**144.00**
E27 | H: 90 cm | 3 kg		
■ stainless steel	**1001490**	**162.00**

VAP SLIM 30/60/90
Pole, E27

SOCKET INSIDE



- Stainless steel 304
- Slim path lights for versatile outdoor designs

Product details
230V -50Hz
Material: stainless steel 304

IP 44

Dimensional drawing



Accessory recommendation

Spike
Item No. 230060 | 38.70 GBP

Concrete anchor
Item No. 230061 | 19.80 GBP

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details
max. 20W
Diameter: 5 cm max. L: 12.6 cm max.

Variant	Item No.	GBP
E27 | H: 30 cm | 1.5 kg stainless steel	230063	126.00
E27 | H: 60 cm | 2.5 kg stainless steel	230066	144.00
E27 | H: 90 cm | 3.4 kg stainless steel	230069	171.00

VAP 40/70/100
Pole, E27

SOCKET INSIDE



- Stainless steel 304

Product details
230V -50Hz
Material: stainless steel 304

IP 44

Dimensional drawing



Accessory recommendation

Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

Concrete anchor
Item No. 229059 | 28.80 GBP

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details
max. 23 W
Diameter: 5.2 cm max. L: 12.1 cm max.

Variant	Item No.	GBP
E27 | H: 40 cm | 4.4 kg stainless steel	229054	269.10
E27 | H: 70 cm | 6 kg stainless steel	229057	359.10
E27 | H: 100 cm | 7.6 kg stainless steel	229050	449.10









F-POL
Pole, E27

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 54 2,85

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details

max. 20W
Diameter: 5 cm max. L: 14.8 cm max.

Variant	Item No.	GBP
E27		
■ anthracite	**231595**	**148.50**

C-POL
Pole, E27

SOCKET INSIDE





Product details

230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 54 2,9

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details

max. 24 W
Diameter: 5.2 cm max. L: 17.3 cm max.

Variant	Item No.	GBP
E27		
■ anthracite	**231475**	**153.00**

POLE PARC 90/150/200
Pole

LED INSIDE







- Technical lighting system for targeted floor illumination
- Even, rotationally-symmetrical light distribution
- Modern design for subtle, glare-free lighting

Product details

100-240V ~50/60Hz | 1450mA
Material: aluminium/plastic



IP 44 35000 IK06

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
1000lm | 3000K | CRI>80 90 cm | 5.2 kg | 145mA | 21W		
■ anthracite	**1000760**	**341.10**
1800lm · 3000K · CRI>80 150 cm | 8.3 kg | 840mA | 33W		
■ anthracite	**1000761**	**557.10**
2600lm | 3000K | CRI>80 200 cm | 11.5 kg | 1430mA | 50W		
■ anthracite	**1000762**	**647.10**

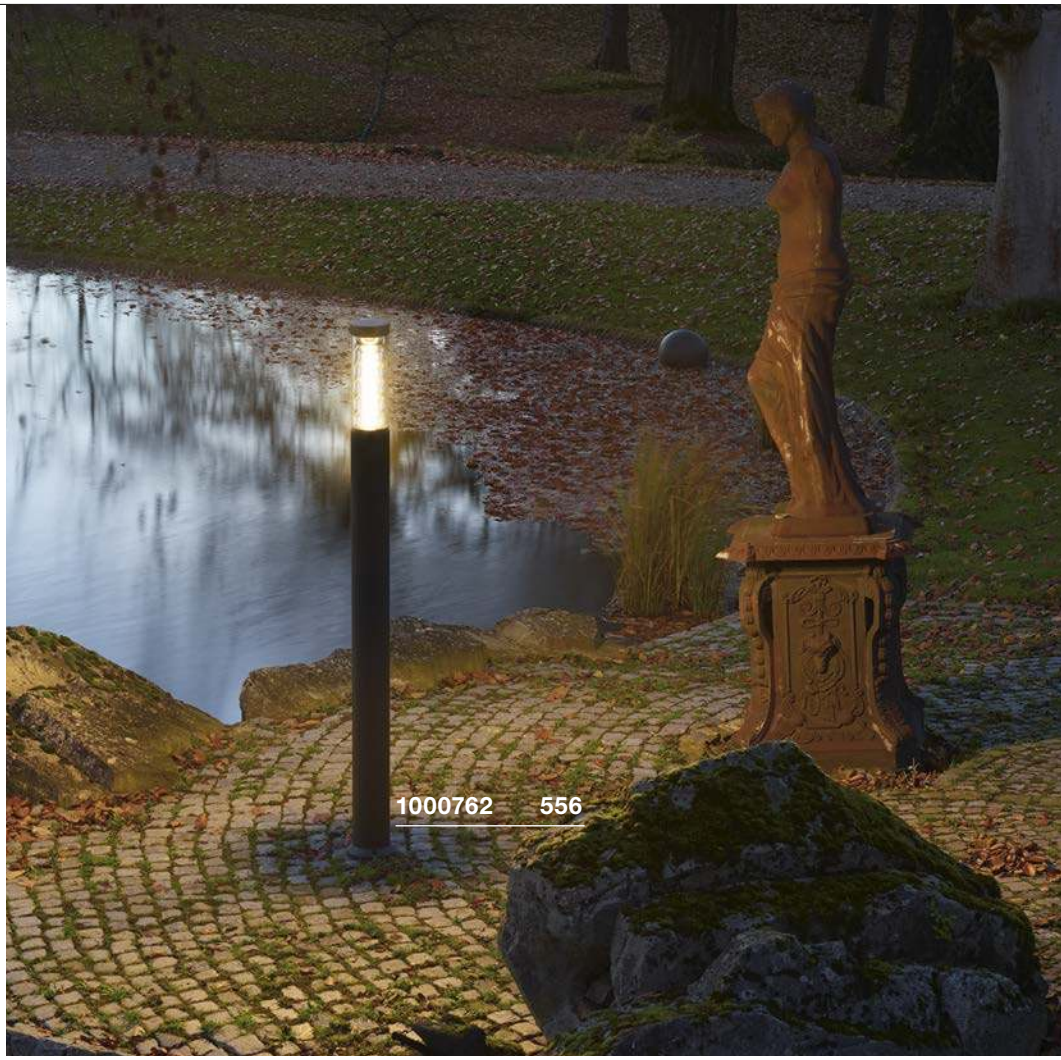

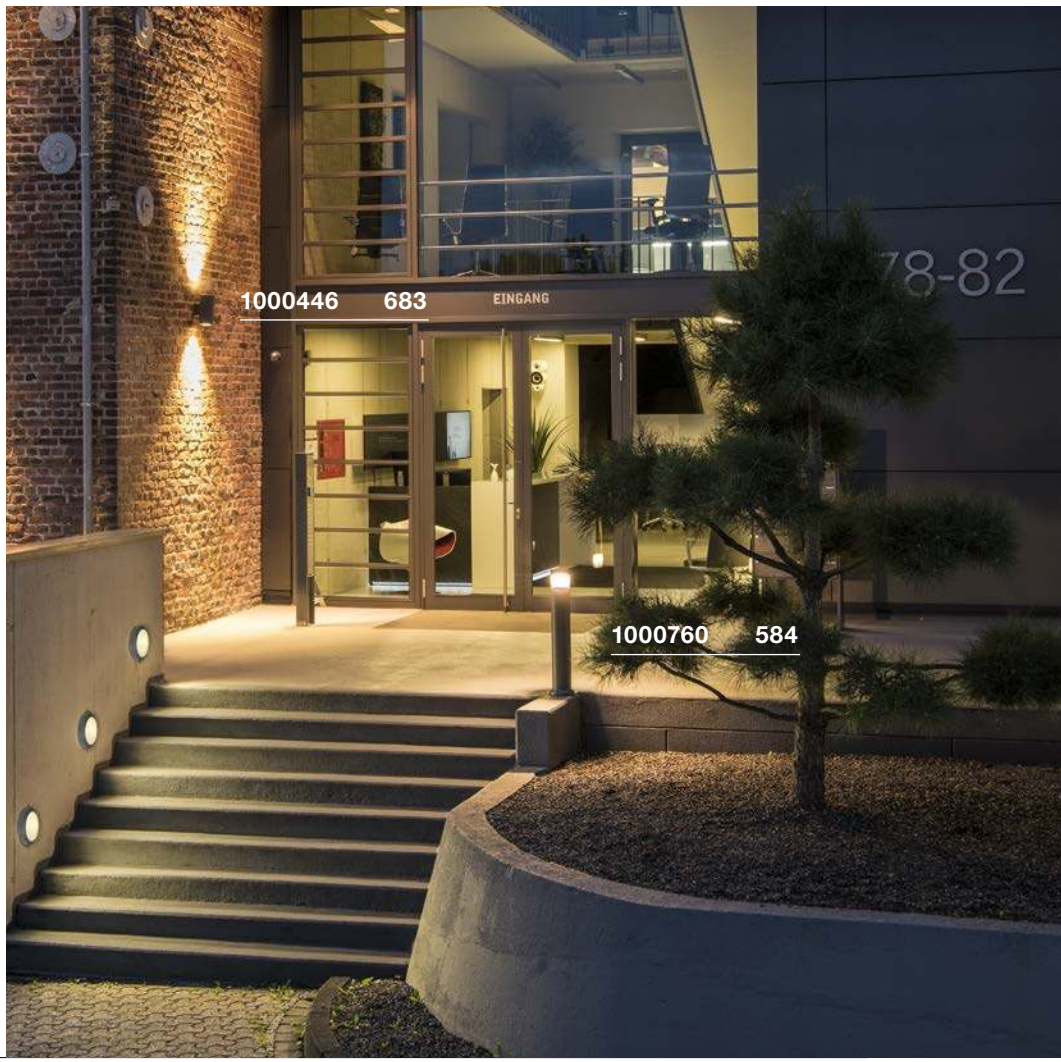



ESKINA FRAME 45/75
Pole, single

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
System output: 15W
Material: aluminium



Dimensional drawing



Variant	Item No.	GBP
1100/1200lm | 3000/4000K | CRI>80 H: 45cm | 2.3kg		
matt anthracite	1004749	216.00
1100/1200lm | 3000/4000K CRI>80 H: 75cm | 3.1kg		
matt anthracite	1004750	234.00

ESKINA FRAME 75
Pole, double

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium



Dimensional drawing



Variant	Item No.	GBP
Spot 1: 1100/1200lm | 3000/4000K | CRI>80 Spot 2: 1100/1200lm | 3000/4000K | CRI>80		
matt anthracite	1004751	265.50

GRAFIT 30/60
Pole, E27

SOCKET INSIDE



Product details
230V -50Hz
Material: aluminium/plastic

IP 44

Dimensional drawing


Accessory recommendation
Screw set
Item No. 228752 | 255.00 GBP

Spike
Item No. 231230 | 34.20 GBP

Recommended lamp
LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details
max. 11W
Diameter: 6 cm max. L: 11.5 cm max.

Variant	Item No.	GBP
E27 | H: 30 cm | 0.8 kg anthracite	231215	63.00
E27 | H: 60 cm | 1.4 kg anthracite	231225	81.00

LOGS 40/70
Pole

INSIDE



Product details
100-240V ~50/60Hz | 500mA
Total wattage: 8W
Material: aluminium

IP 44 LED 40000

Dimensional drawing


Accessory recommendation
Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

Spike
Item No. 231230 | 34.20 GBP

Screw set
Item No. 228754 | 3.00 GBP

Concrete anchor
Item No. 232119 | 47.70 GBP

Variant	Item No.	GBP
420lm | 3000K | CRI>80 | H: 39.5 cm | 2 kg anthracite	232115	224.10
420lm | 3000K | CRI>80 | H: 69.5 cm | 2.8 kg anthracite	232125	269.10





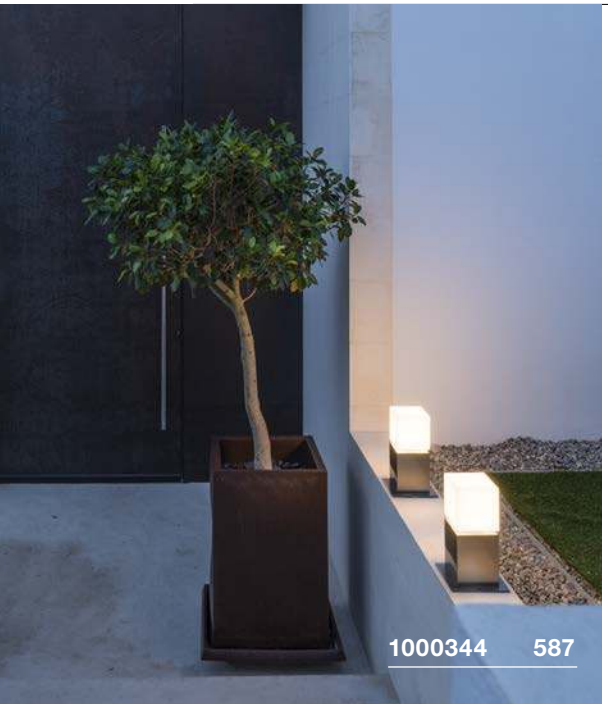

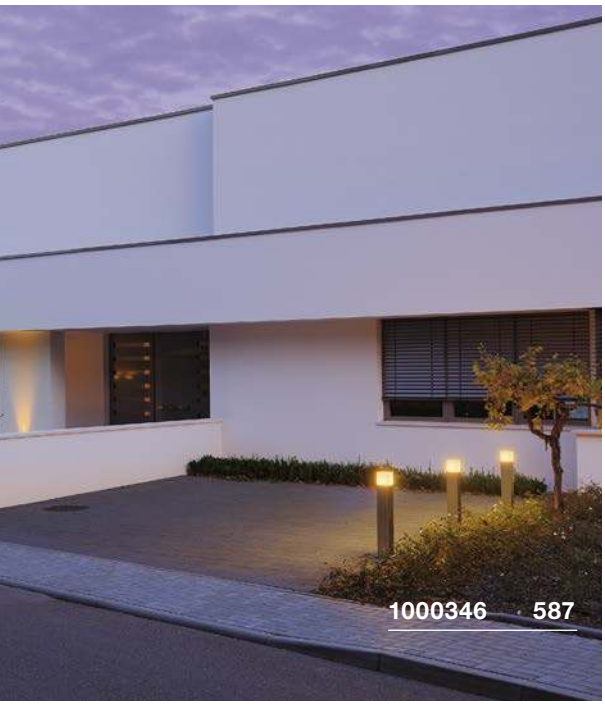



SQUARE POLE 30/60/90
Pole, E27

SOCKET INSIDE

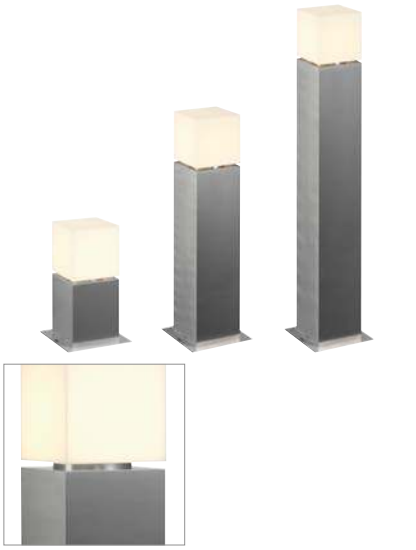

- Lights made from stainless steel 304
- Modern design for path lights
- Diffuse light distribution to illuminate your surroundings

Product details

220-240V ~50/60Hz
Material: stainless steel 304

IP 44 IK02

Dimensional drawing

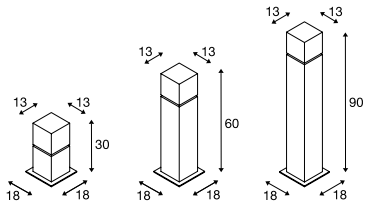

Accessory recommendation

Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

Concrete anchor
Item No. 1000343 | 40.50 GBP

Spike
Item No. 231234 | 38.70 GBP

Recommended lamp

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP

Lamp details

max. 20W
Diamter: 6 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27 | H: 30 cm | 1.2 kg		
stainless steel	1000344	188.10
E27 | H: 60 cm | 2.5 kg		
stainless steel	1000345	233.10
E27 | H: 90 cm | 3.9 kg		
stainless steel	1000346	278.10

SQUARE POLE 30/60/90
Pole, PHASE

LED INSIDE

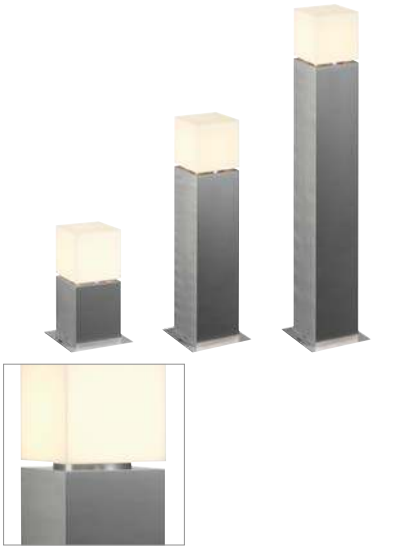

- Lights made from high-quality 316 stainless steel
- Modern design for path lights
- Diffuse light distribution to illuminate your surroundings

Product details

220-240V ~50/60Hz
Total wattage: 12W
Material: stainless steel 316
Dimmable: C, L

C,L IP 44 LED 30000 IK02

Dimensional drawing

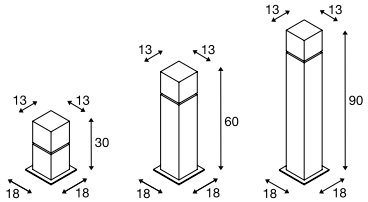

Accessory recommendation

Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

Concrete anchor
Item No. 1000343 | 40.50 GBP

Spike
Item No. 231234 | 38.70 GBP

Variant	Item No.	GBP
760lm | 3000K | CRI>80 | H: 30 cm | 2 kg		
stainless steel	1000416	243.00
760lm | 3000K | CRI>80 | H: 60 cm | 3.4 kg		
stainless steel	1000417	288.00
760lm | 3000K | CRI>80 | H: 90 cm | 4.7 kg		
stainless steel	1000418	333.00

RUSTY® 40/70
Pole, E27

SOCKET INSIDE



- Rusted steel
- Every light is a unique one-off

Product details

230V -50Hz
Material: FeCSi steel/polycarbonte (PC)

IP 55

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP

■ Spike
Item No. 229422 |34.20 GBP

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 |15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 |15.30 GBP

Lamp details

max. 11W
Diameter: 4.8 cm max. L: 13.9 cm max.

Variant	Item No.	GBP
E27 | H: 40 cm | 11 kg ■ rust	229420	244.80
E27 | H: 70 cm | 22 kg ■ rust	229421	299.70

RUSTY® 40/70
Pole

LED INSIDE



- Rusted steel
- Every light is a unique one-off
- High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 8.6W
Material: FeCSi steel/polycarbonte (PC)

IP 55 LED 35000

Dimensional drawing



Tip

Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP

■ Spike
Item No. 229422 |34.20 GBP

Variant	Item No.	GBP
90lm | 3000K | CRI>80 | H: 40 cm | 11 kg ■ rust	233427	299.70
90lm | 3000K | CRI>80 | H: 70 cm | 22 kg ■ rust	233437	362.70





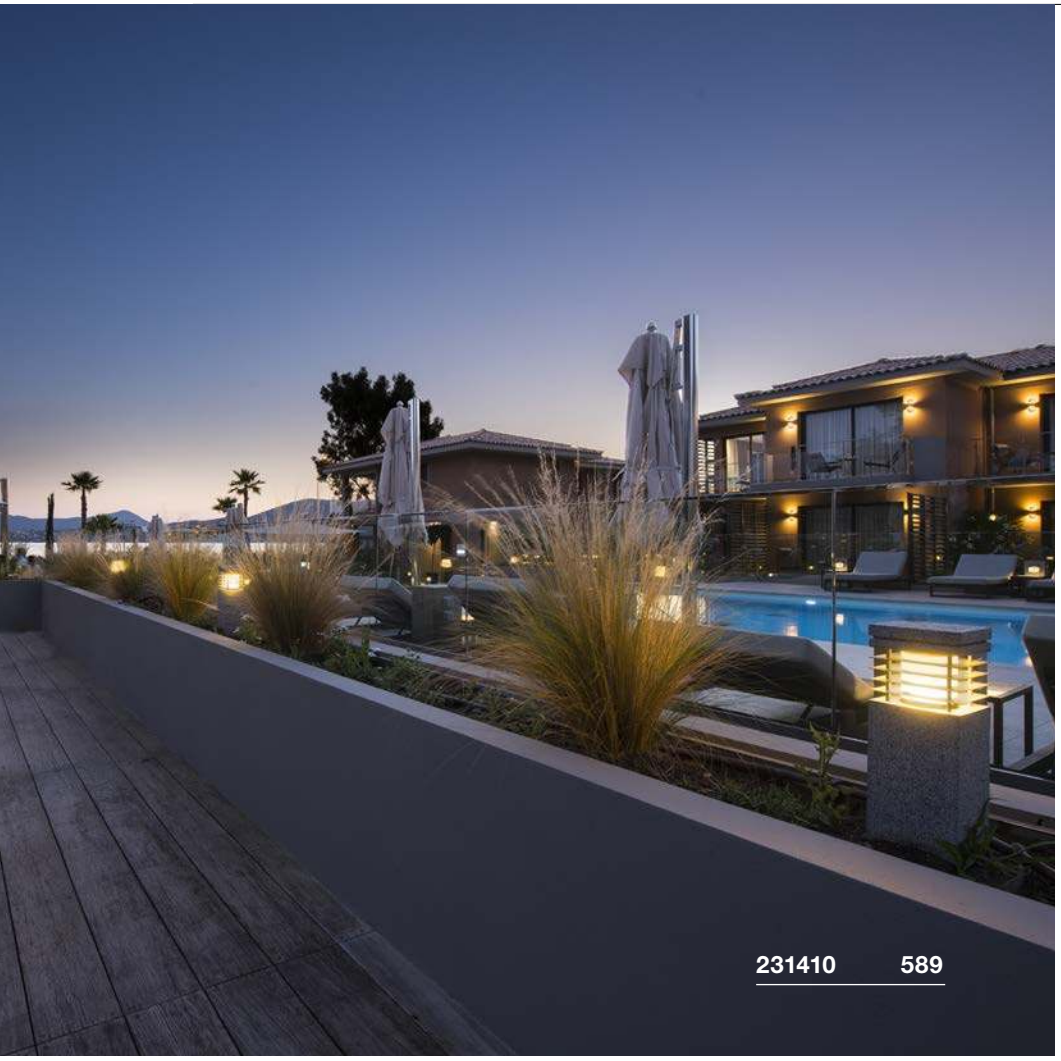



ARROCK GRANITE 40/70
Pole, square, E27

SOCKET INSIDE





- Natural stone, granite, stainless steel
- Natural look with a glare-free lighting effect

Product details

230V -50Hz
Material: granite/stainless steel 304

IP 44

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



■ Spike
Item No. 229422 | 34.20 GBP



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details

max. 15W
Diameter: 5.2 cm max. L: 11.5 cm max.

Variant	Item No.	GBP
E27 | H: 40 cm | 11 kg		
grey/chrome	**231410**	**287.10**
E27 | H: 70 cm | 22.5 kg		
grey/chrome	**231411**	**350.10**

ARROCK ARC
Pole, QPAR51

SOCKET INSIDE





- Natural stone, granite, stainless steel
- Flat design with an unusual lighting effect

Product details

230V -50Hz
Material: granite/stainless steel 304

IP 44 12,3

Dimensional drawing



Accessory recommendation

Spike
Item No. 231233 | 38.70 GBP

Recommended lamp

GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP

Lamp details

max. 35W QPAR51
Diameter: 5 cm max. L: 7.6 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
grey/chrome	**231420**	**287.10**



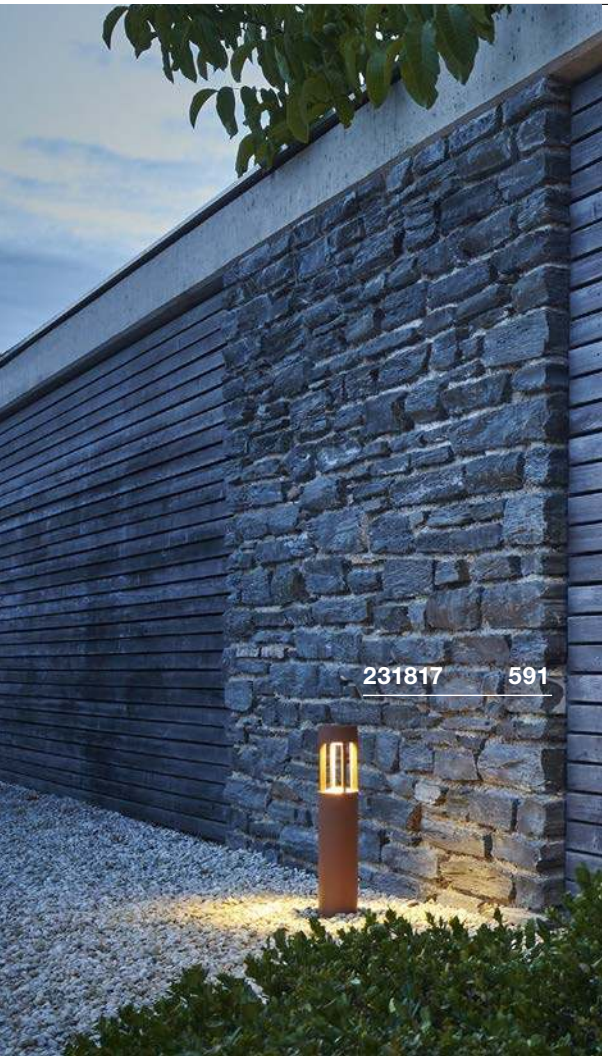



SLOTS 45
Pole

LED INSIDE







- Indirect light emission
- Unusual lighting effect to light the way safely

Product details

220-240V ~50/60Hz
Total wattage: 6.3W
Material: aluminium



IP 44 1,13 25000

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



■ Screw set
Item No. 228753 | 6.80 GBP



Variant	Item No.	GBP
200lm | 3000K | CRI>80		
■ anthracite	**231815**	**135.00**
200lm | 3000K | CRI>80		
■ rust	**231817**	**135.00**

SLOTS 65
Pole

LED INSIDE







- Indirect light emission
- Unusual lighting effect to light the way safely

Product details

220-240V ~50/60Hz
Total wattage: 6.3W
Material: aluminium



IP 44 1,37 25000

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



■ Screw set
Item No. 228753 | 6.80 GBP



Variant	Item No.	GBP
200lm | 3000K | CRI>80		
■ anthracite	**231455**	**144.00**
200lm | 3000K | CRI>80		
■ rust	**231457**	**144.00**

BOOKAT
Pole, PHASE

LED INSIDE





• High-voltage LED





Product details

230V -50Hz
Total wattage: 13W
Material: aluminium
Dimmable: C, L



IP 44 2,5 50000

Dimensional drawing



Tip

Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
370lm | 3000K | CRI>80		
■ anthracite	**231855**	**323.10**

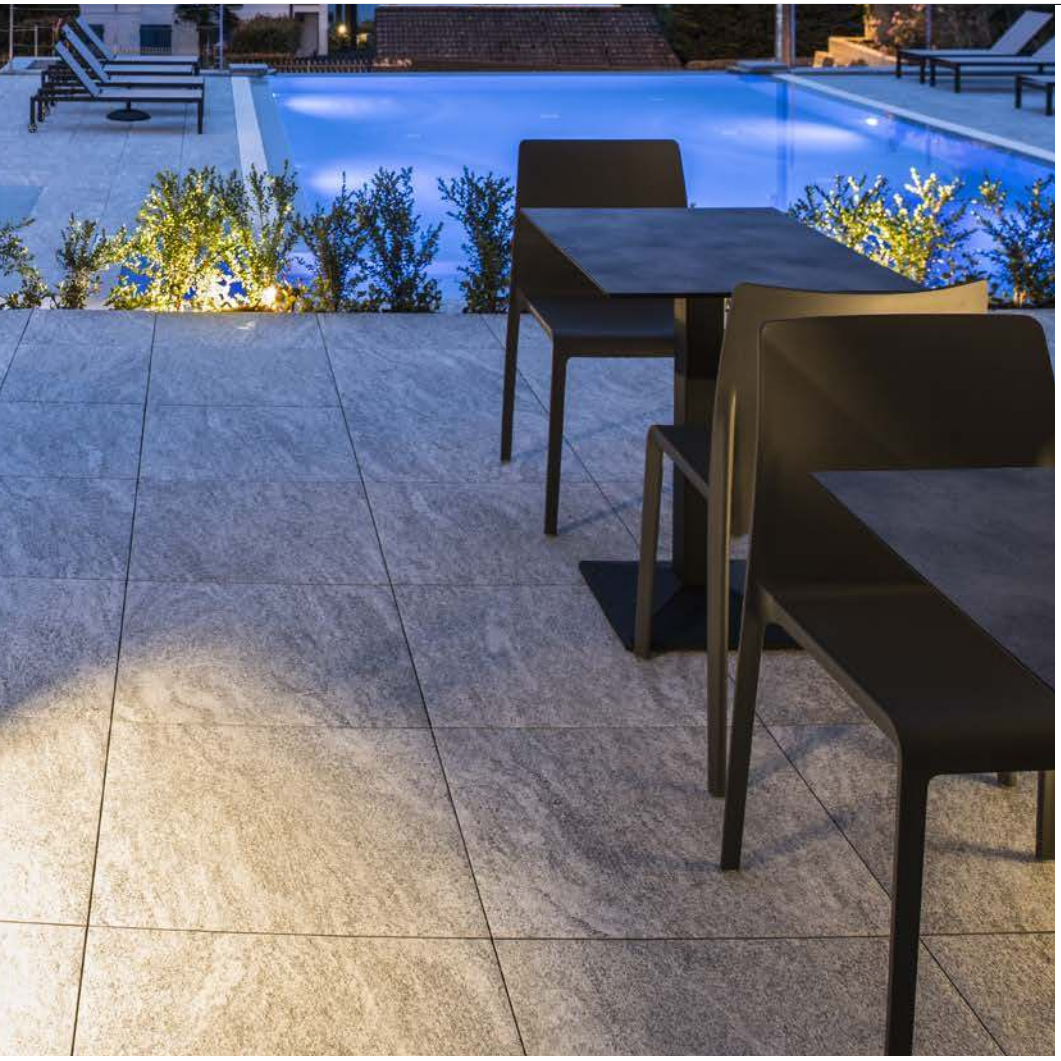



RASCALI 45/65
Pole

LED INSIDE







- Unusual design
- Asymmetrical light distribution for accentuated illumination of paths and areas

Product details

220-240V ~50Hz
Total wattage: 8W
Material: aluminium



Dimensional drawing



Variant	Item No.	GBP
360lm | 3000K | CRI>80 | H: 45 cm | 2.25 kg		
anthracite	**1000799**	**137.70**
360lm | 3000K | CRI>80 | H: 65 cm | 2.8 kg		
anthracite	**1000801**	**156.60**

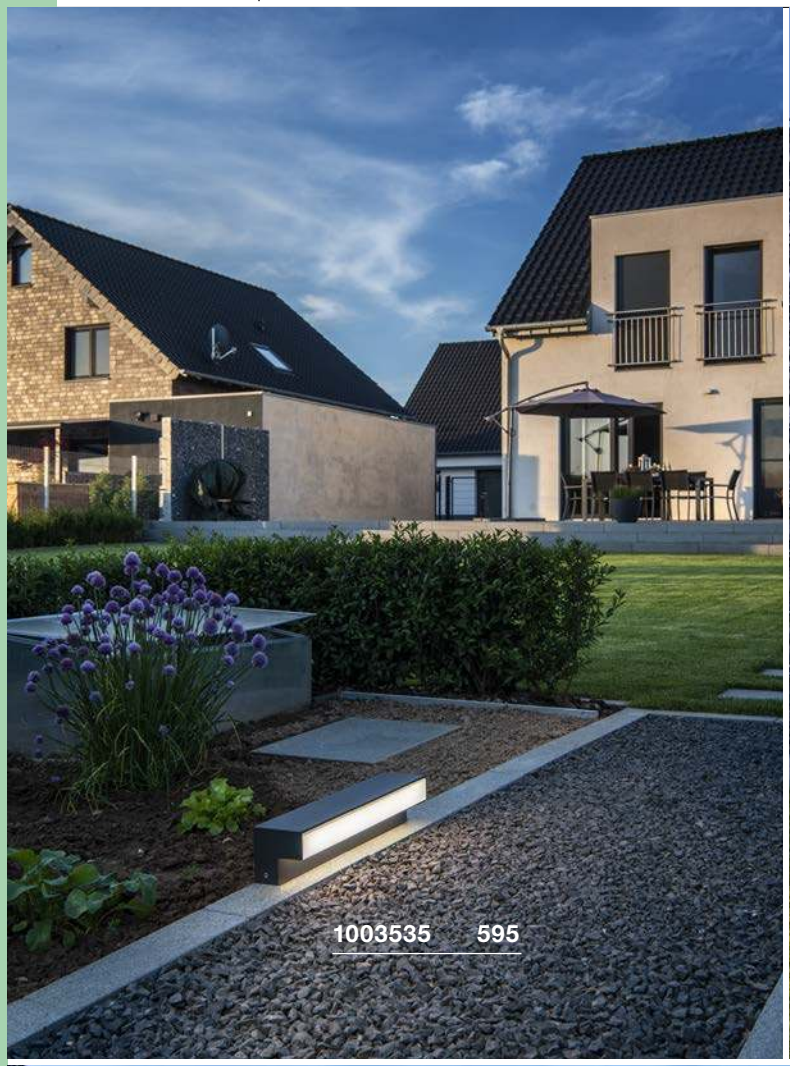
1003535 595


1003536 595


1003537 595

L-LINE OUT 60
FL, vertical







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 500mA
System output: 11.5W
Material: aluminium/polycarbonate (PC)

IP 65 | 1,64 | 30000 | IK02

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
780/800lm | 3000/4000K | CRI>80		
■ matt anthracite	**1003535**	**184.50**

L-LINE OUT 30
FL, vertical







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 500mA
System output: 11.5W
Material: aluminium/polycarbonate (PC)

IP 65 | 2,2 | 30000 | IK02

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
800/810lm | 3000/4000K | CRI>80		
■ matt anthracite	**1003536**	**175.50**

L-LINE OUT 50/80
Pole, horizontal







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)

IP 65 | 20 | 30000 | IK02

Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
490/530lm | 3000/4000K | CRI>80		
H: 50cm | 1.95kg		
■ matt anthracite	**1003537**	**144.00**
490/530lm | 3000/4000K | CRI>80		
H: 80cm | 2.6kg		
■ matt anthracite	**1003538**	**166.50**

H-POL 30/60
Pole

LED INSIDE



- One-sided light emission

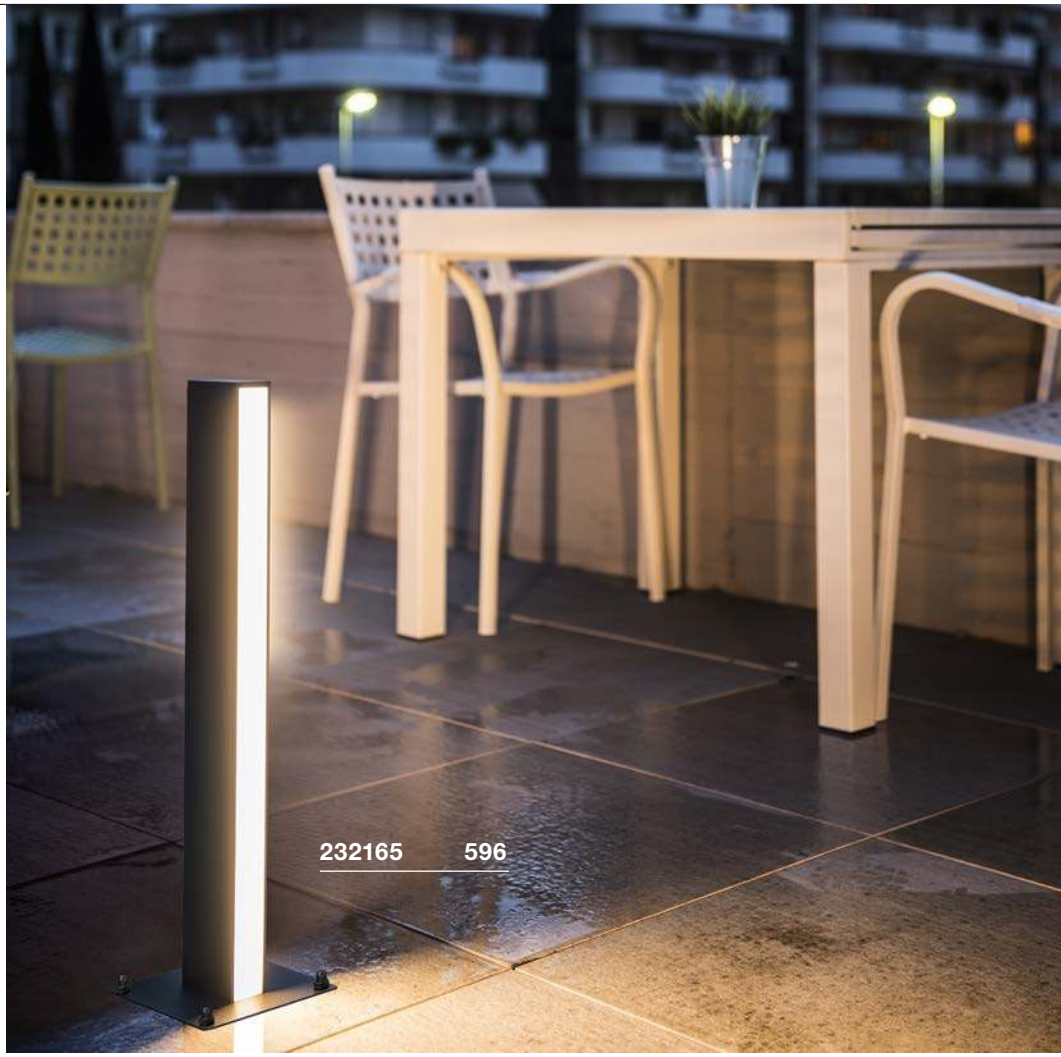

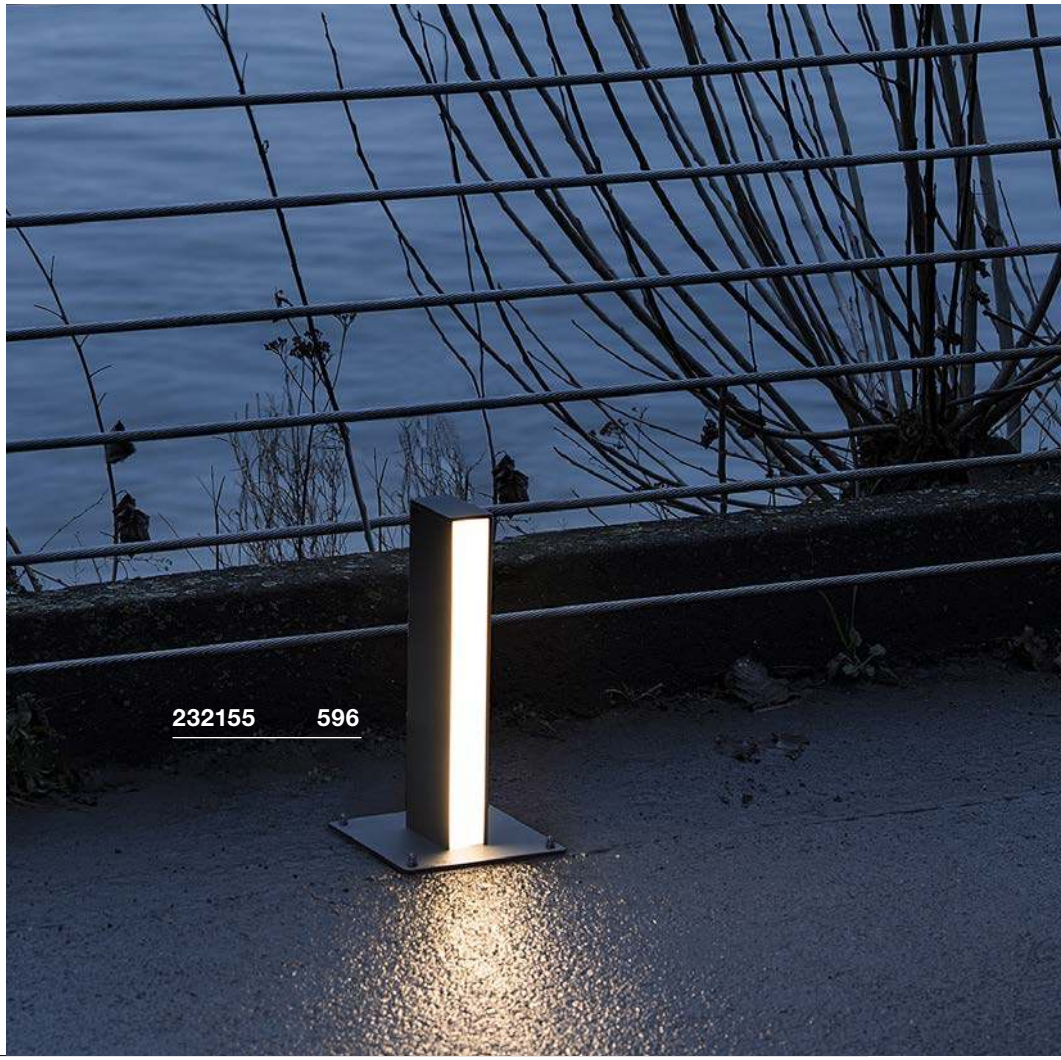

Product details

100-277V ~50/60Hz | 500mA
Material: aluminium/plastic
Installation dimensions:
W: 11.8 cm L: 11.8 cm D: 10 cm

IP 55 | 30000 | 18/36

Dimensional drawing



Tip

This product is intended for in-floor installation.
A larger recessed fixing kit is available for optional installation in the ground.
Installation dimensions of the optional recessed fixing kit:
L: 14 cm W: 14 cm D:16 cm.

Accessory recommendation

■ Recessed fixing kit
Item No. 232195 | 38.70 GBP

Variant	Item No.	GBP
350lm | 3000K | CRI>80 | 9W | H: 36 cm | 1.4 kg		
■ anthracite	**232155**	**202.50**
700lm | 3000K | CRI>80 | 18W | H: 66 cm | 2.3 kg		
■ anthracite	**232165**	**292.50**



H-POL TWIN 30/60
Pole

LED INSIDE



- Double-sided light emission

Product details

220-240V ~50/60Hz | 1000mA
Material: aluminium/plastic
Installation dimensions:
W: 11.8 cm L: 11.8 cm D: 10 cm

IP 55 | 30000 | 9/18

Dimensional drawing



Tip

This product is intended for in-floor installation.
A larger recessed fixing kit is available for optional installation in the ground.
Installation dimensions of the optional recessed fixing kit:
L: 14 cm W: 14 cm D:16 cm.

Accessory recommendation

Recessed fixing kit
Item No. 232195 | 38.70 GBP

Variant	Item No.	GBP
Direkt: 350lm | 3000K | CRI>80 Indirekt: 350lm | 3000K | CRI>80 18W | H: 36 cm | 1.6 kg		
anthracite	232175	274.50
Direkt: 700lm | 3000K | CRI>80 Indirekt: 700lm | 3000K | CRI>80 35W | H: 66 cm | 2.5 kg		
anthracite	232185	387.00

SLOTBOX 40/70
Pole

LED INSIDE





Product details

200-240V ~50/60Hz | 700mA
Total wattage: 8W
Material: aluminium

IP 44 | LED | 35000 | IK04

Dimensional drawing



Tip

Open cable end

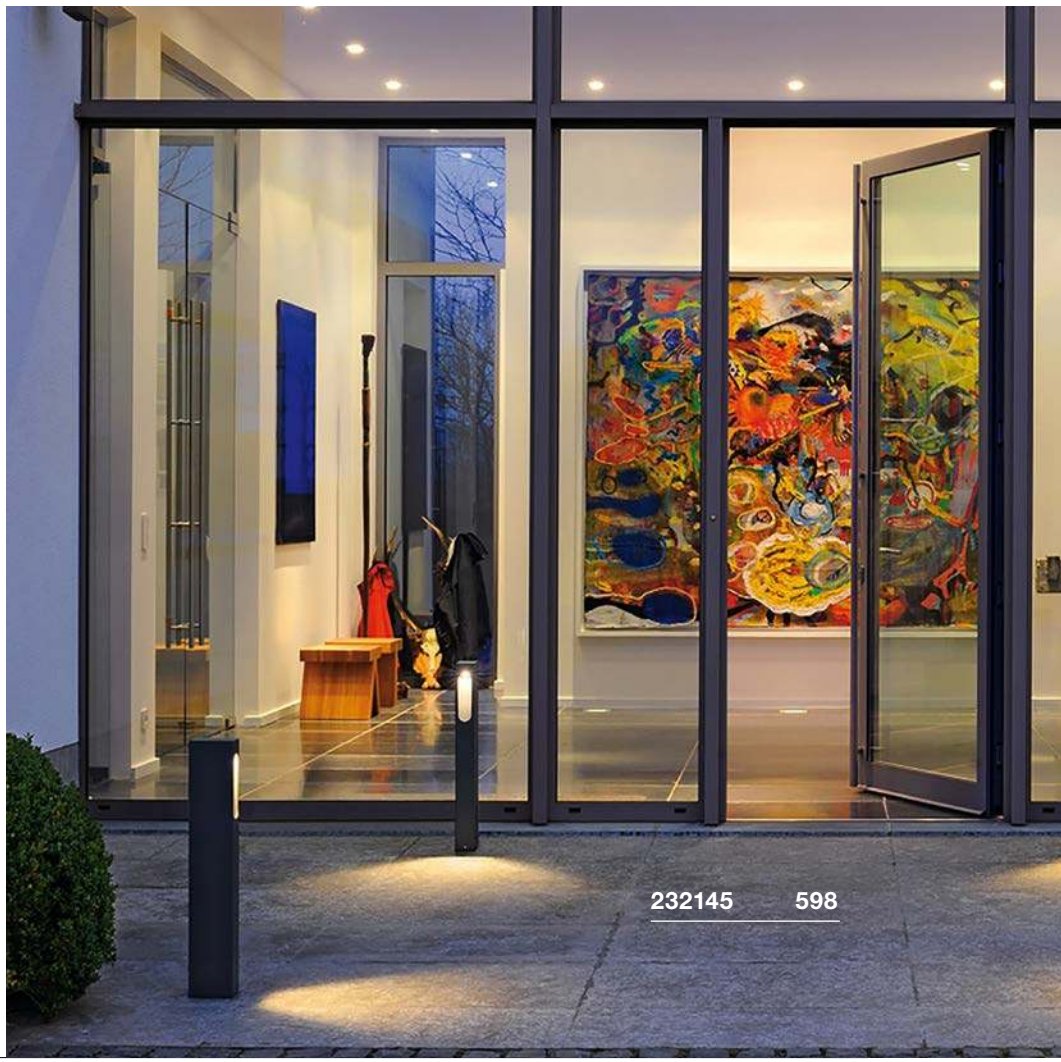

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
160lm | 3000K | CRI>80 | H: 40 cm | 1.45 kg		
■ anthracite	**232135**	**158.40**
160lm | 3000K | CRI>80 | H: 70 cm | 2.1 kg		
■ anthracite	**232145**	**185.40**



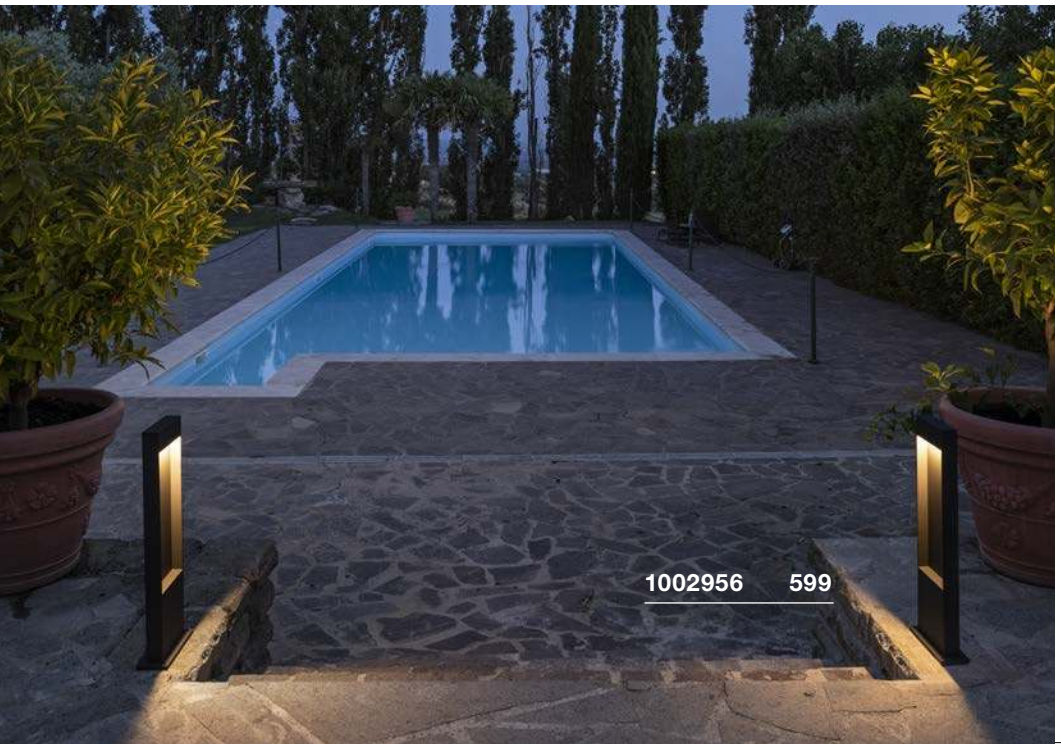

FLATT 65/100
Pole



- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 350mA
Total wattage: 9.7W
Material: aluminium/aluminium



IP 65 IK03

Dimensional drawing



Variant	Item No.	GBP
400lm | 3000/4000K | CRI80 | H: 65 cm | 3.2 kg		
anthracite/anthracite	**1002956**	**185.40**
400lm | 3000/4000K | CRI80 | H: 65 cm | 3.2 kg		
anthracite/brown	**1002957**	**185.40**
400lm | 3000/4000K | CRI80 | H: 100 cm | 4.47 kg		
anthracite/anthracite	**1002958**	**232.20**
400lm | 3000/4000K | CRI80 | H: 100 cm | 4.47 kg		
anthracite/brown	**1002959**	**232.20**

ARROCK STONE 50/75
Pole

LED INSIDE



- Basalt/stainless steel
- Unusual lighting effect

Product details

100-240V ~50/60Hz | 700mA
System output: 9W
Material: basalt/stainless steel 304

IP 55 30000

Dimensional drawing



Accessory recommendation

Spike
Item No. 231235 |38.70 GBP

Variant	Item No.	GBP
330lm | 3000K | CRI>80 | H: 50 cm | 15.5 kg		
grey	**231370**	**332.10**
330lm | 3000K | CRI>80 | H: 75 cm | 22.2 kg		
grey	**231371**	**377.10**

ARROCK SLOT
Pole, QPAR51

SOCKET INSIDE



- Natural stone, granite, stainless steel
- Unusual lighting effect, natural look

Product details

230V -50Hz
Material: granite/stainless steel 304

IP 44 23,5

Dimensional drawing



Tip

Open cable end

Accessory recommendation

Spike
Item No. 231235 |38.70 GBP

Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP

Recommended lamp

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 |5.40 GBP

LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 |5.40 GBP

Lamp details

max. 4W LED GU10 51mm

Variant	Item No.	GBP
GU10 | LED GU10 51mm		
grey/chrome	**231440**	**332.10**

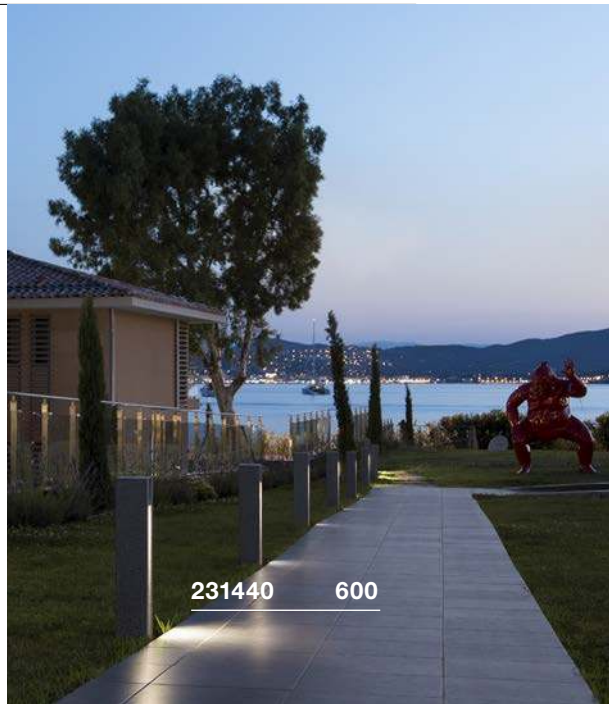











RUSTY® SLOT 50/80
Pole, E27

SOCKET INSIDE





- Rusted steel
- Every light is a unique one-off
- Unusual lighting effect

Product details

230V -50Hz
Material: FeCSi steel/polycarbonte (PC)

IP 44

Dimensional drawing



Accessory recommendation

Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Spike
Item No. 231230 | 34.20 GBP



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details

max. 11W
Diameter: 4.8 cm max. L: 13.9 cm max.

Variant	Item No.	GBP
E27 | H: 50 cm | 12.5 kg		
rust	**229410**	**244.80**
E27 | H: 80 cm | 18.5 kg		
rust	**229411**	**299.70**

RUSTY® SLOT 50/80
Pole

LED INSIDE





- Rusted steel
- Every light is a unique one-off
- Unusual lighting effect

Product details

220-240V ~50/60Hz
Total wattage: 8.6W
Material: FeCSi steel/polycarbonte (PC)

IP 55 | LED | 35000

Dimensional drawing



Tip

Open cable end

Accessory recommendation

Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Spike
Item No. 231230 | 34.20 GBP



Variant	Item No.	GBP
30lm | 3000K | CRI>80 | H: 50 cm | 12.5 kg		
rust	**233447**	**299.70**
30lm | 3000K | CRI>80 | H: 80 cm | 18.5 kg		
rust	**233457**	**390.60**

BENDO 80/220
Pole, PHASE

LED INSIDE

reddot award 2018 winner







- High-voltage LED
- Exclusive design for an unusual outdoor area

Product details

220-240V ~50/60Hz
Material: aluminium/glass
Dimmable: C, L

C, L | IP 55 | LED | 35000 | 80°

IK
IK06

Dimensional drawing



Accessory recommendation

Concrete anchor
Item No. 231849 | 47.70 GBP



Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



T-connector box
Item No. 228726 | 20.70 GBP



Variant	Item No.	GBP
700lm | 3000K | CRI>80 | H: 80 cm | 11W | 2.7 kg		
anthracite	**231835**	**395.10**
1800lm | 3000K | CRI>80 | H: 225 cm | 31W | 7.3 kg		
anthracite	**231845**	**575.10**







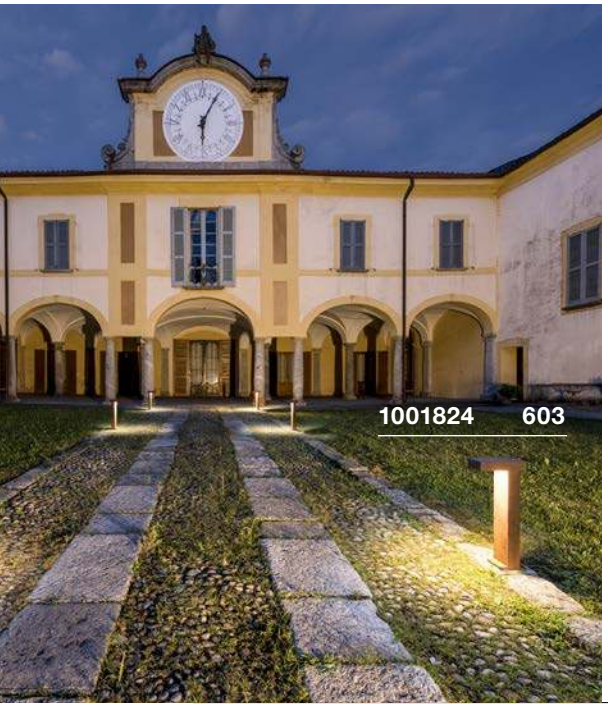

RUSTY® PATHLIGHT
Pole, TCR-TSE

SOCKET INSIDE







- Rusted steel
- Every light is a unique one-off
- Linear, natural look

Product details

230V -50Hz
Material: FeCSi steel/polycarbonte (PC)



Dimensional drawing



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



■ Spike
Item No. 229422 | 34.20 GBP



Recommended lamp

LED GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP



Lamp details

max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 2.7 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
■ rust	**230090**	**235.80**

RUSTY® PATHLIGHT 40/70
Pole

LED INSIDE







- Rusted steel
- Every light is a unique one-off

Product details

220-240V ~50/60Hz
Total wattage: 8.9W
Material: FeCSi steel/polycarbonte (PC)

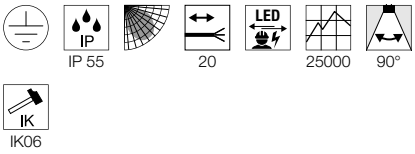

Dimensional drawing



Tip

Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



■ Spike
Item No. 229422 | 34.20 GBP



Variant	Item No.	GBP
400lm | 3000K | CRI>80 | H: 40 cm | 12.5 kg		
■ rust	**1001823**	**262.80**
400lm | 3000K | CRI>80 | H: 70 cm | 18.9 kg		
■ rust	**1001824**	**317.70**

ABRIDOR 60/100
Pole



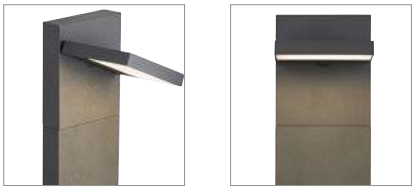

- The light colour can be selected during installation using a switch
- Pivoting light head

Product details

100-277V ~50/60Hz | 300mA
Total wattage: 14W
Material: aluminium



IP 55 45° IK03

Dimensional drawing



Tip

Open cable end



Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Variant	Item No.	GBP
750lm | 3000/4000K | CRI80 | H: 60 cm | 2.3 kg		
■ matt anthracite	**1002991**	**179.10**
750lm | 3000/4000K | CRI80 | H: 100 cm | 3.4 kg		
■ matt anthracite	**1002992**	**224.10**

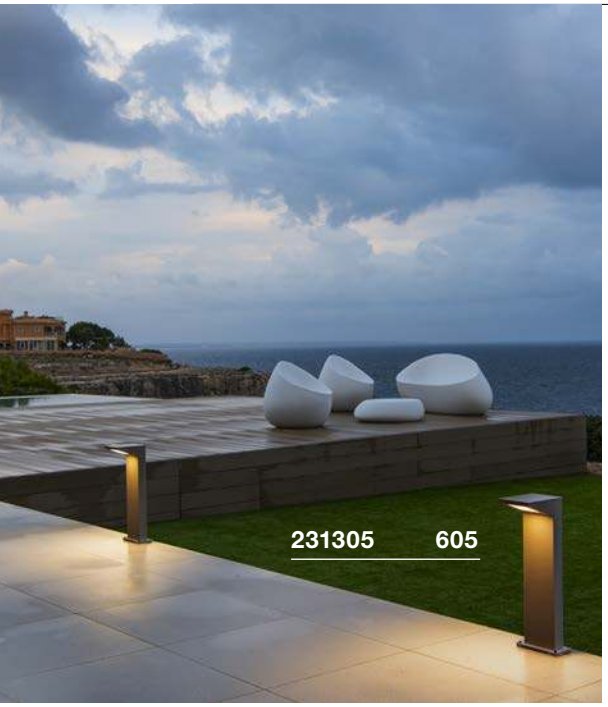



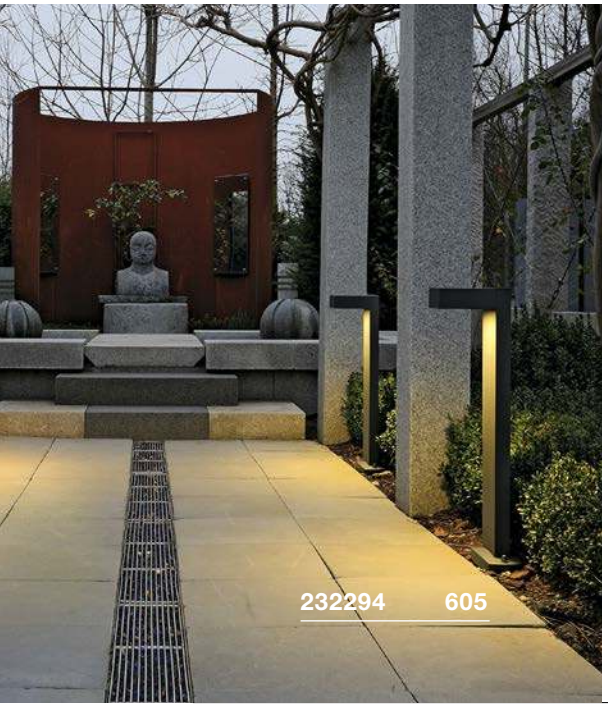

IPERI 50
Pole

LED INSIDE







• Pth lights for driveways and gardens

Product details
230V -50Hz
Total wattage: 5W
Material: aluminium/plastic



Dimensional drawing



Accessory recommendation
Spike
Item No. 231231 | 38.70 GBP



Variant	Item No.	GBP
320lm | 4000K | CRI>70		
anthracite	**231305**	**112.50**

QUADRASYL 75
Pole, TCR-TSE

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Accessory recommendation
T-connector box
Item No. 228726 | 20.70 GBP



Recommended lamp
GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP



Lamp details
max. 11W TCR-TSE
Diameter: 7.5 cm max. L: 2.7 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
grey	**232294**	**130.50**
GX53 | TCR-TSE		
anthracite	**232295**	**130.50**

TRAPECCO
Pole

LED INSIDE







Product details

230V -50Hz
Total wattage: 10W
Material: aluminium

IP 44 | 3,8 | LED | 20000 | 100°

Dimensional drawing



Tip

Open cable end

MALU
Pole

LED INSIDE

reddot award 2019 winner







- Unusual design
- For even illumination of paths and areas
- Especially wide light distribution

Product details

220-240V ~50/60Hz
Total wattage: 9.2W
Material: aluminium/glass

IP 55 | 1,65 | LED | 35000 | 100°

IK03 | 100

Dimensional drawing



Tip

Integrated connection box

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
850lm | 3000K | CRI>80 ■ anthracite	**231765** ▼	**157.50**

Variant	Item No.	GBP
360lm | 3000K | CRI>80 ■ anthracite	**1002158**	**257.40**

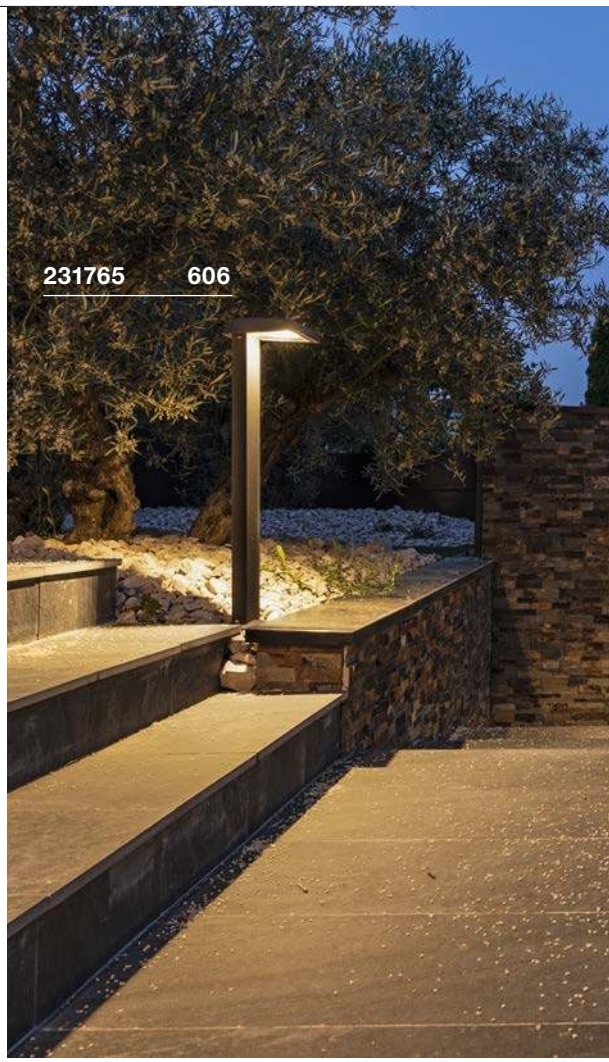







ENOLA C
Pole

LED INSIDE





ESKINA 30/80
Pole, PHASE

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/glass

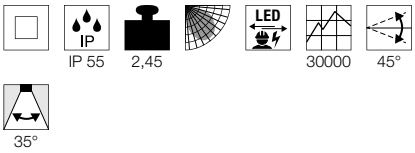

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium
Dimmable: C



Dimensional drawing



Dimensional drawing



Tip

Open cable end

Tip

1002906 – Safety plug
1002907 – Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Accessory recommendation

■ Spike
Item No. 230060 | 38.70 GBP



Variant	Item No.	GBP
800lm | 3000K | CRI>80 ■ anthracite	**228545**	**259.20**

Variant	Item No.	GBP
1000lm | 3000/4000K | CRI>80 H: 31.5 cm | 1.3 kg ■ matt anthracite	**1002906**	**216.00**
1000lm | 3000/4000K | CRI>80 H: 80 cm | 1.89 kg ■ matt anthracite	**1002907**	**234.00**

THEO BRACKET 50/70
Pole

NEW

SOCKET INSIDE



Product details
220-240V ~50/60Hz
Material: aluminium/glass

IP 65 | 70°

Dimensional drawing


Recommended lamp
LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



Lamp details
max. 7W LED GU10 51mm
Diameter: 5.1cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | H:50cm | 1.5kg		
matt anthracite	1004654	92.70
GU10 | H:70cm | 1.7kg		
matt anthracite	1004655	103.50

THEO PATHLIGHT
Pole, single

SOCKET INSIDE



Product details
200-240V ~50/60Hz
Material: aluminium

IP 44 | 2,8 | 20 | 90° | IK02

Dimensional drawing


Tip
Open cable end

Recommended lamp
GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 3.7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



Lamp details
max. 7W

Variant	Item No.	GBP
GU10		
matt anthracite	1002870	144.00

THEO PATHLIGHT
Pole, double

SOCKET INSIDE



Product details
200-240V ~50/60Hz
Material: aluminium

IP 44 | 3,3 | 20 | 90° | IK02

Dimensional drawing


Tip
Open cable end

Recommended lamp
GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



Lamp details
2x max. 7W

Variant	Item No.	GBP
GU10		
matt anthracite	1002871	190.80

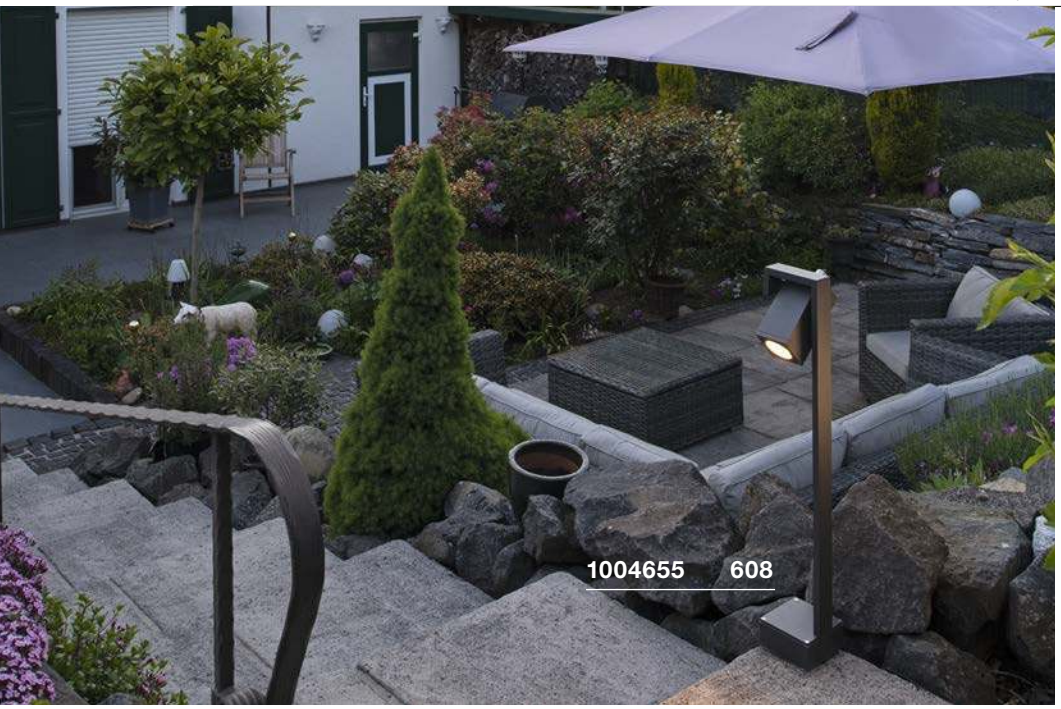





QUAD POLE

LED INSIDE







- Pivoting light head

Product details

100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/glass

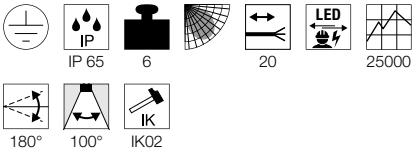

Dimensional drawing



Tip

Open cable end

Accessory recommendation

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Variant	Item No.	GBP
1550lm | 3000K | CRI>80		
■ matt anthracite	**1003001**	**323.10**

HELIA
Pole, single, PHASE







- High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium/glass
Dimmable: C, L

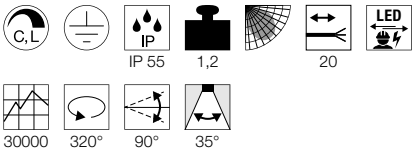

Dimensional drawing



Tip

Open cable end

Accessory recommendation

Spike
Item No. 1000736 |16.20 GBP



Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
450lm | 3000K | CRI>80 anthracite	**1002198**	**189.00**

HELIA SENSOR
Single







- Integrated infrared sensor
- High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium

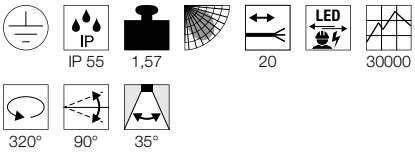

Dimensional drawing



Tip

Open cable end

Accessory recommendation

Spike
Item No. 1000736 |16.20 GBP



Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
450lm | 3000K | CRI>80 anthracite	**1002199**	**233.10**



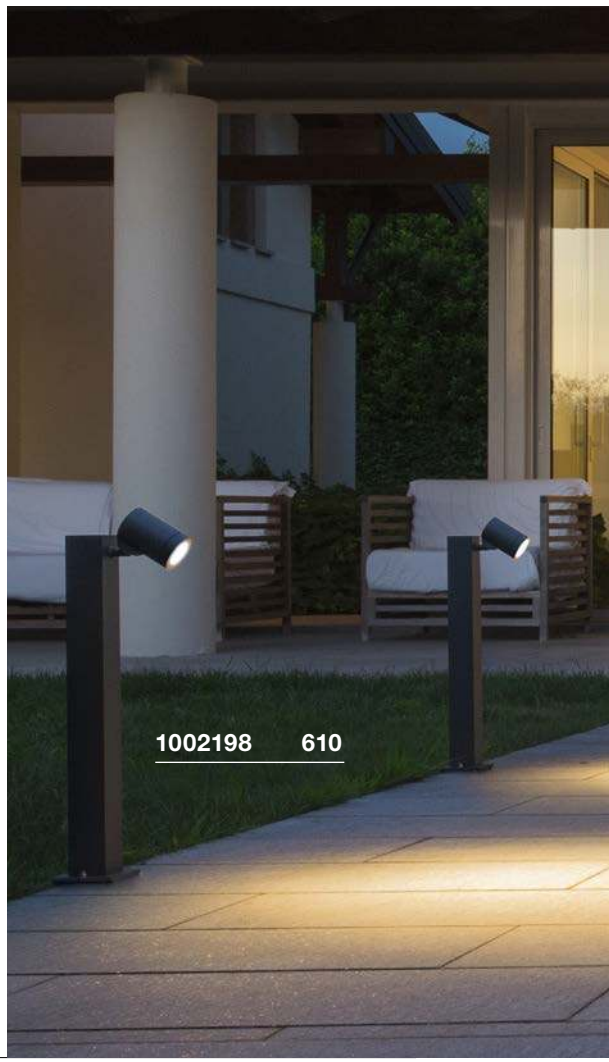

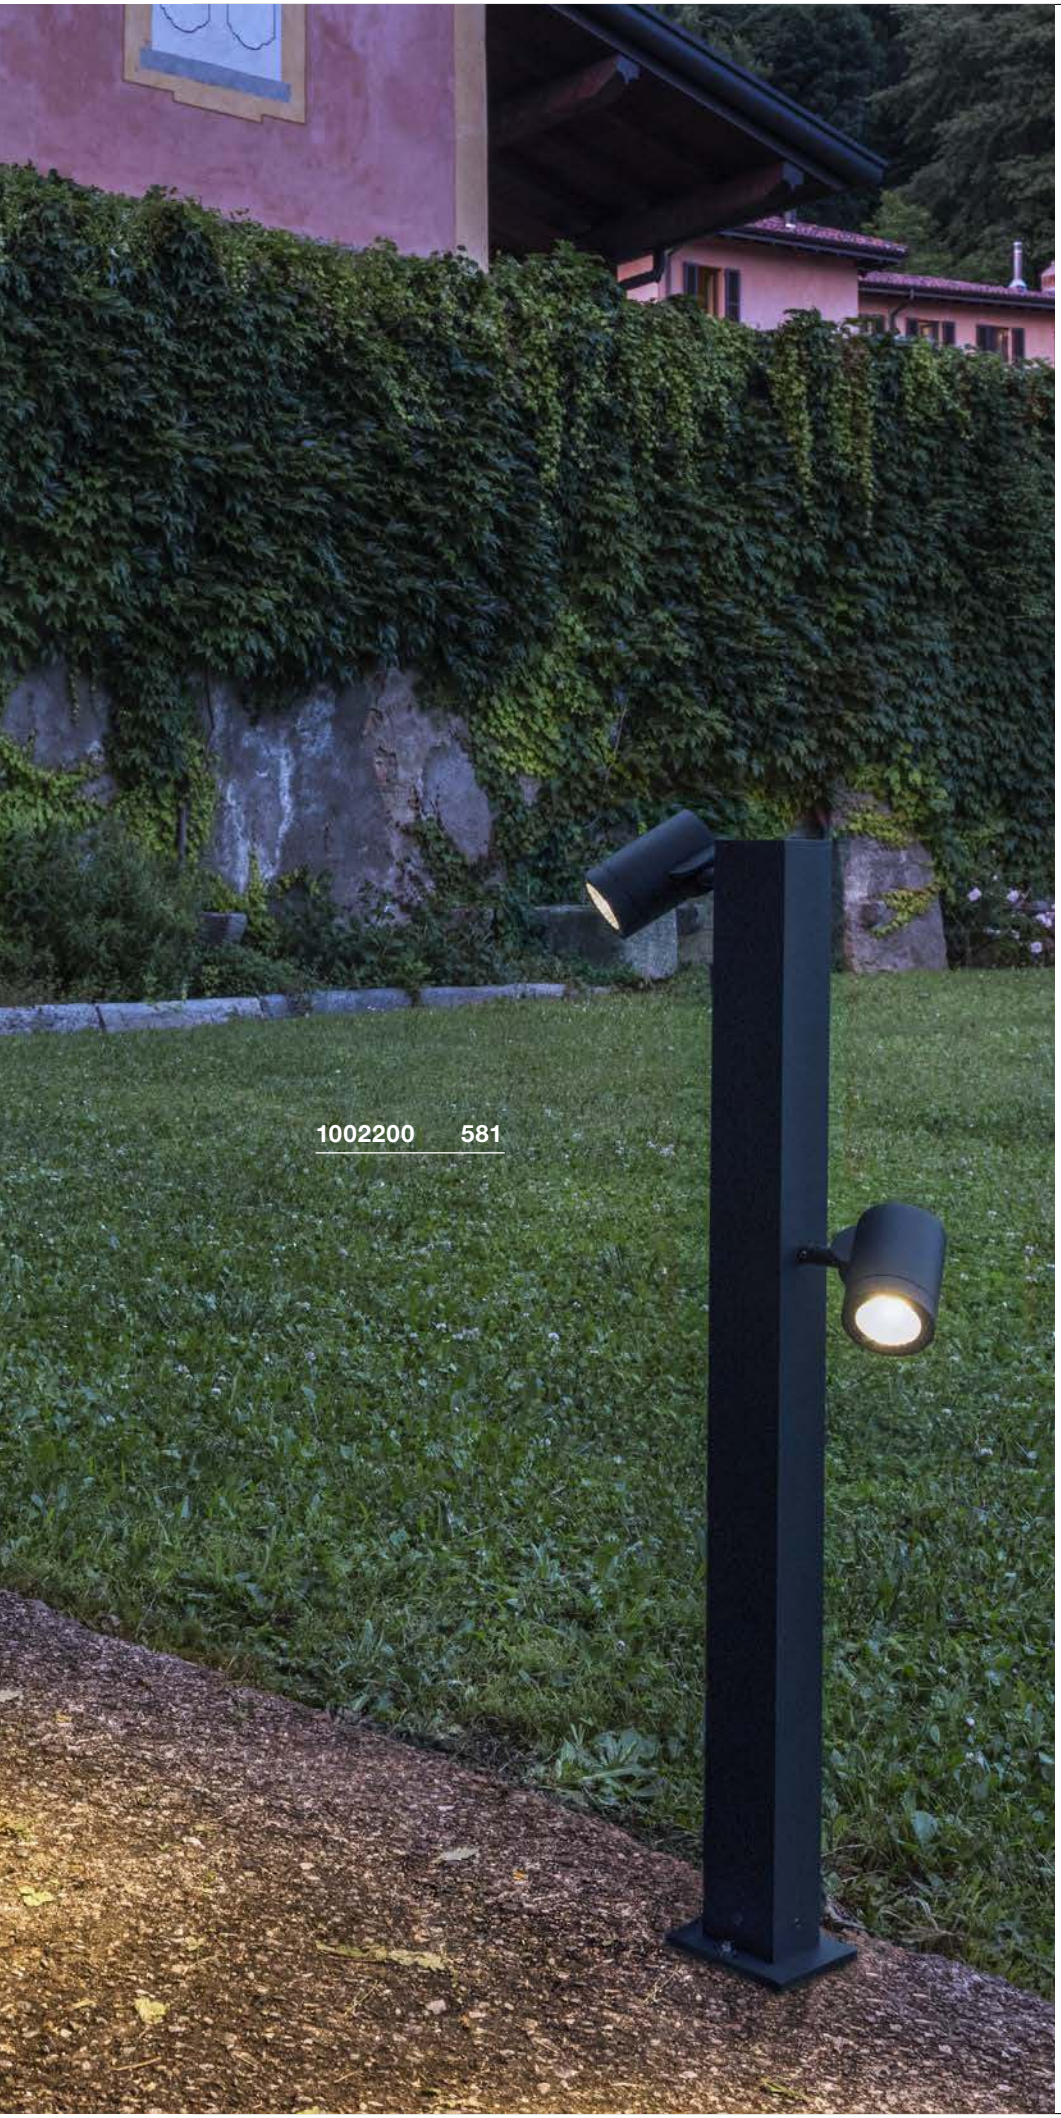

HELIA
Pole, double, PHASE

LED INSIDE







- High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 16W
Material: aluminium/glass
Dimmable: C, L

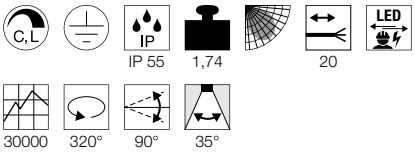

Dimensional drawing



Tip

Open cable end

Accessory recommendation

Spike
Item No. 1000736 | 16.20 GBP



Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Variant	Item No.	GBP
900lm | 3000K | CRI>80 anthracite	**1002200**	**296.10**

SITRA 360
Pole, TCR-TSE

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Accessory recommendation

Spike
Item No. 230060 | 38.70 GBP



Recommended lamp

GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP



LED GX53 8.2W 120°
4000K 620lm
9kWh/1000h
Item No. 550074 | 20.70 GBP

Lamp details

2x max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 3.5 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
anthracite	**231505**	**126.00**

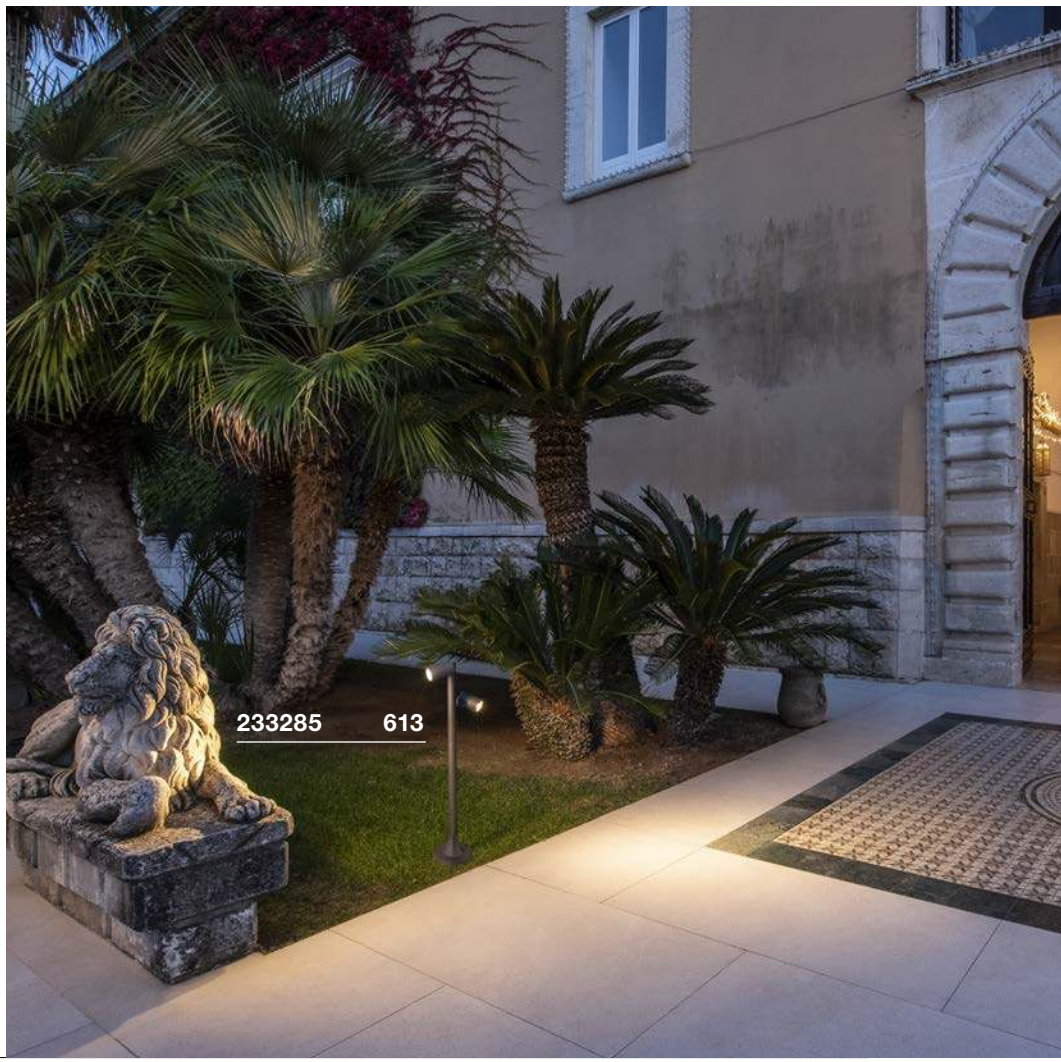

MYRA SPOT
Double, GU10

SOCKET INSIDE







- Extendable
- Unusual design to light the way safely

Product details

220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Tip

The height of the light can be increased by a maximum of 2 extension rods.
Open cable end

Accessory recommendation

Screw set
Item No. 228752 | 5.00 GBP



Concrete anchor
Item No. 228712 | 47.70 GBP



Extension rod 30cm
Item No. 233164 | 19.80 GBP



Pedestal
Item No. 233144 | 19.80 GBP



Extension rod 30cm
Item No. 233165 | 19.80 GBP



Pedestal
Item No. 233145 | 19.80 GBP



Recommended lamp

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details

2x max. 4.5W LED GU10 51mm
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | LED GU10 51mm		
grey	233184	153.00
GU10 | LED GU10 51mm		
anthracite	233185	153.00

HELIA
Pole, single, PHASE

LED INSIDE







- High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium
Dimmable: C, L





Dimensional drawing



Tip

The height of the light can be increased by a maximum of 2 extension rods.
Open cable end

Accessory recommendation

Extension rod 30cm
Item No. 233165 | 19.80 GBP



Pedestal
Item No. 233145 | 19.80 GBP



Screw set
Item No. 228752 | 5.00 GBP



Concrete anchor
Item No. 228712 | 47.70 GBP



Variant	Item No.	GBP
450lm | 3000K | CRI>80		
anthracite	233275	162.00

HELIA
Pole, double, PHASE

LED INSIDE





- High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 16W
Material: aluminium
Dimmable: C, L





Dimensional drawing



Tip

The height of the light can be increased by a maximum of 2 extension rods.
Open cable end

Accessory recommendation

Extension rod 30cm
Item No. 233165 | 19.80 GBP



Pedestal
Item No. 233145 | 19.80 GBP



Screw set
Item No. 228752 | 5.00 GBP



Concrete anchor
Item No. 228712 | 47.70 GBP



Variant	Item No.	GBP
900lm | 3000K | CRI>80		
anthracite	233285	202.50

THE SUN'S COMING UP.

FLOODLIGHTS CREATE DYNAMIC LIGHT EMPHASIS.

Do you want effective outdoor lighting?
If so, discover the wide range of floodlights which make individual lighting possible. On buildings, squares, pavements and in gardens.





1004757 619


233570 630

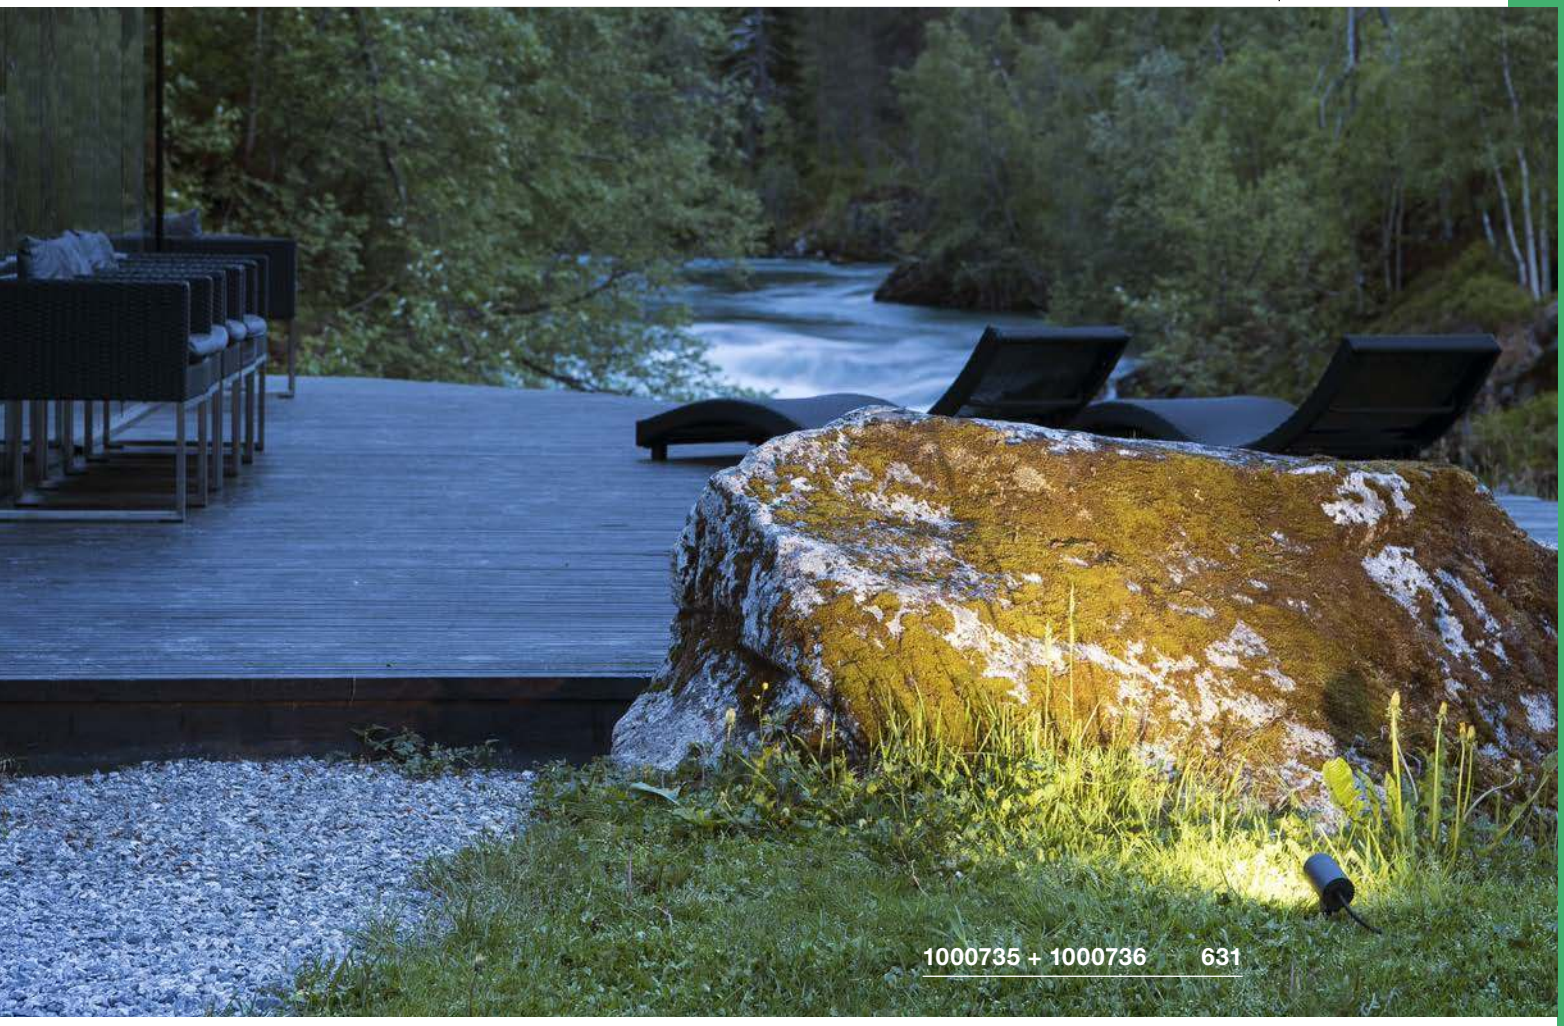

SPOTLIGHT


618


618

NEW

619


620

NEW

620


621


622


622


623


623


625


625


627


629


629


629


630


630


631


631


633


633


633


634


635


636

NEW

637

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

NAUTILUS 10
SP, round, QPAR51

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium

IP 65 | 0,75 | 150 | 180°

Dimensional drawing



Tip
IP safety plug
Earthspike included

Recommended lamp
LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

Lamp details
max. 35W QPAR51
L: 5.7 cm max.

Variant	Item No.	GBP
GU10 | QPAR51 grey	227418	27.00

BIG NAUTILUS
SP, round, QPAR51

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium

IP 65 | 0,63 | 150 | 180° | IK06

Dimensional drawing



Tip
IP safety plug
Earthspike included

Recommended lamp
LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details
max. 11W QPAR51
Diameter: 5 cm max. L: 8.3 cm max.

Variant	Item No.	GBP
GU10 | LED GU10 51mm black	227410	31.50
GU10 | LED GU10 51mm brown	1001964	31.50
GU10 | LED GU10 51mm green	1001965	31.50



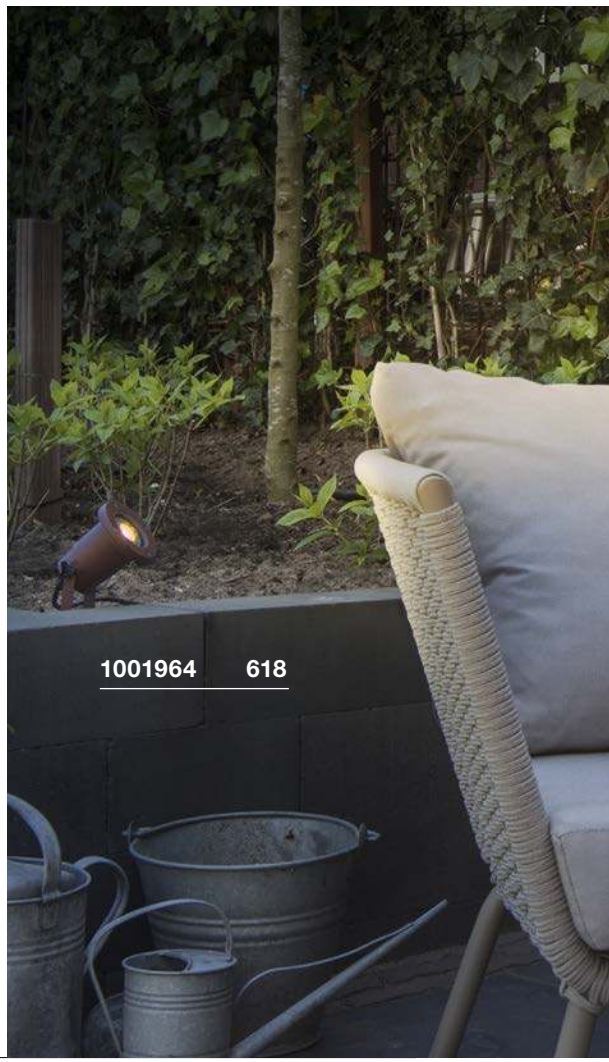



SAMRINA
SP, single, GU10

NEW

SOCKET INSIDE







- Contains recycled material

Product details

220-240V ~50/60Hz
Material: plastic/glass



Dimensional drawing



Tip

IP safety plug
Earthspike included

Recommended lamp

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Variant	Item No.	GBP
GU10		
■ matt black	**1004757**	**32.90**

NAUTILUS 10
SP, round, QPAR51

SOCKET INSIDE







- Stainless steel 316

Product details
230V -50Hz
Material: stainless steel 316

IP 55 | 0,6 | 150 | 180°

Dimensional drawing



Tip
IP safety plug
Earthspike included

Recommended lamp
LED GU10 3.7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details
max. 25W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
stainless steel	**229740**	**90.00**

THEO BRACKET
SP

NEW

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium/glass

IP 65 | 1 | 150 | 70°

Dimensional drawing



Tip
IP safety plug
Earthspike included

Recommended lamp
LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP

Lamp details
max. 7W LED GU10 51mm
Diameter: 5.1cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | LED GU10 51mm		
anthracite	**1004652**	**51.30**





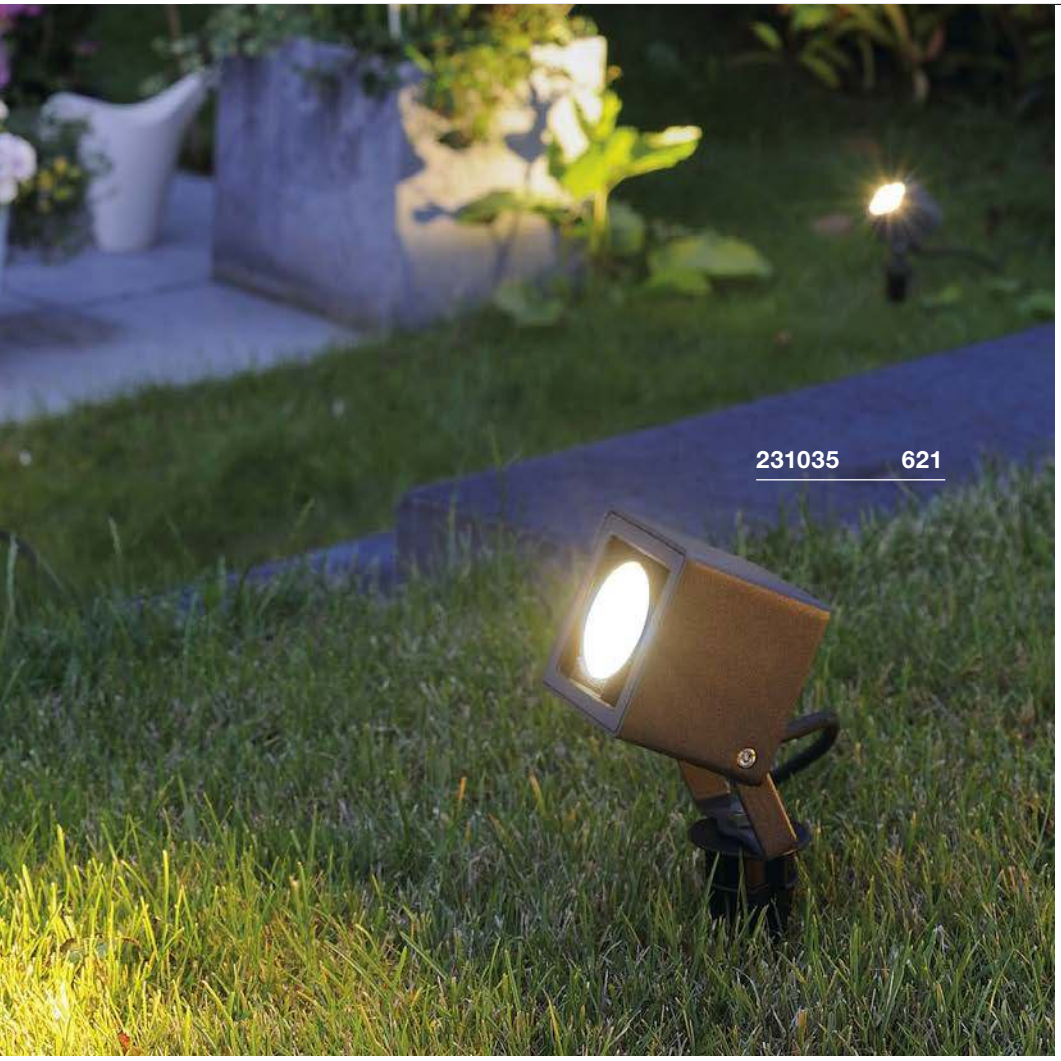

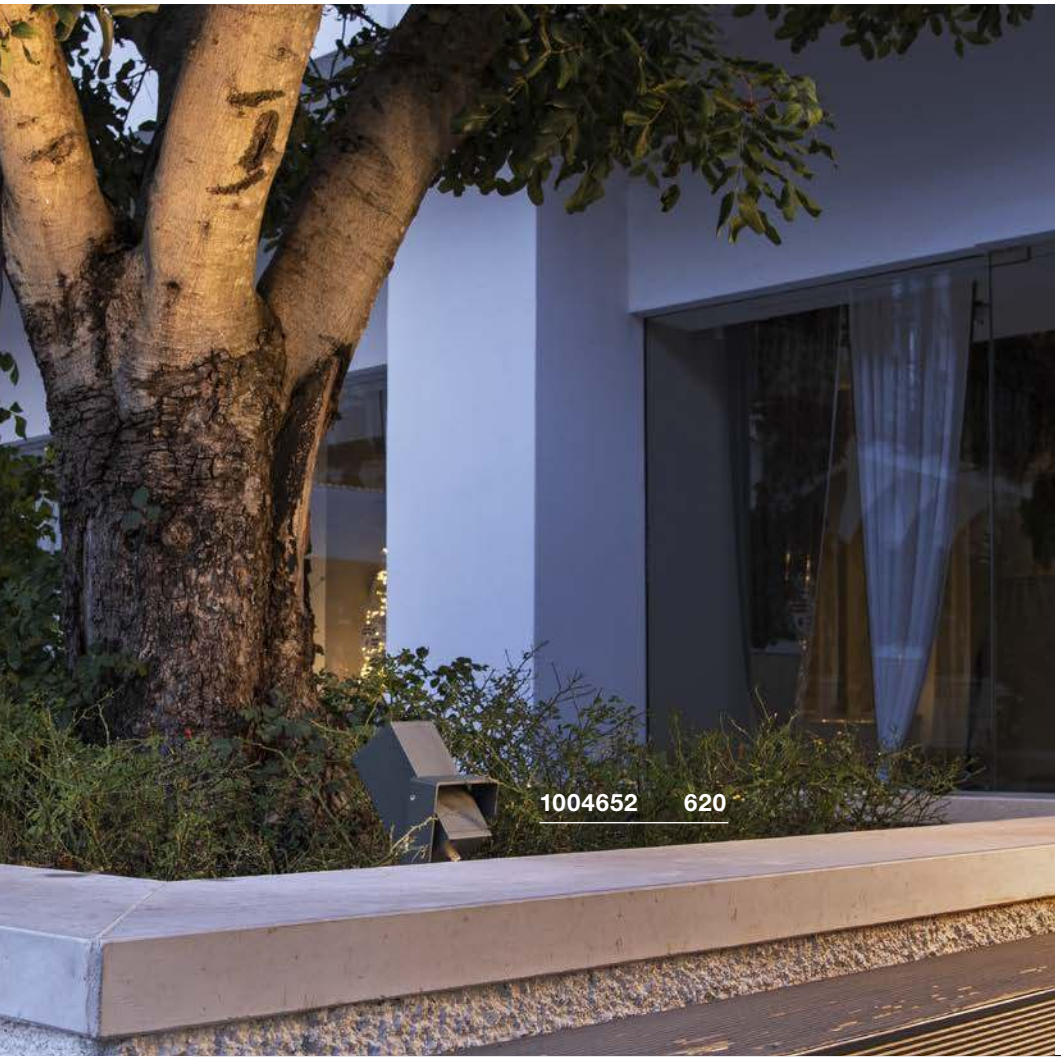

NAUTILUS 10
SP, square

LED INSIDE







- Perfectly for targeted accentuation of objects and areas

Product details

100-240V ~50/60Hz | 700mA
Total wattage: 8.5W
Material: aluminium/glass

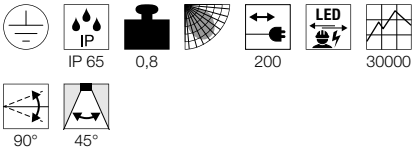

Dimensional drawing



Tip

IP safety plug
Earthspike included

Variant	Item No.	GBP
620lm | 3000K | CRI>80 anthracite	**231035**	**126.00**
620lm | 3000K | CRI>80 brown	**1001937**	**126.00**
620lm | 3000K | CRI>80 green	**1001938**	**126.00**

LED SPIKE
SP







- Perfectly for targeted accentuation of objects and areas

Product details

100-240V ~50/60Hz | 240mA
Total wattage: 6W
Material: aluminium/glass

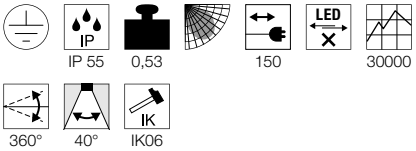

Dimensional drawing



Tip

IP safety plug
Earthspike included

Variant	Item No.	GBP
400lm | 3000K | CRI>80 anthracite	1002201	54.00
400lm | 3000K | CRI>80 brown	1002203	54.00
400lm | 3000K | CRI>80 green	1002202	54.00

SYNA
SP







- High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 8.6W
Material: aluminium/glass

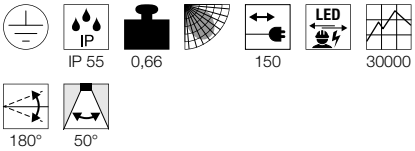

Dimensional drawing



Tip

IP safety plug
Earthspike included

Variant	Item No.	GBP
470lm | 3000K | CRI>80 grey	227504	63.00
470lm | 3000K | CRI>80 anthracite	227505	63.00
470lm | 3000K | CRI>80 brown	227507	63.00
470lm | 3000K | CRI>80 green	227508	63.00









SITRA 360 SPIKE
SP, single, TCR-TSE

SOCKET INSIDE





Product details
230V -50Hz
Material: aluminium/glass



Dimensional drawing



Tip
IP safety plug
Earthspike included

Recommended lamp
LED GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP

LED GX53 8.2W 120°
4000K 620lm
9kWh/1000h
Item No. 550074 | 20.70 GBP

Lamp details
max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 3.5 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE anthracite	231525	49.50

SITRA 360 SPIKE
SP, double, TCR-TSE

SOCKET INSIDE





Product details
230V -50Hz
Material: aluminium/glass



Dimensional drawing



Tip
IP safety plug
Earthspike included

Recommended lamp
LED GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP

LED GX53 8.2W 120°
4000K 620lm
9kWh/1000h
Item No. 550074 | 20.70 GBP

Lamp details
2x max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 3.5 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE anthracite	231535	153.00


231682 625



CV SPOT
SP, short

SOCKET INSIDE







- Stainless steel 304

Product details

230V -50Hz
Material: stainless steel 304



Dimensional drawing



Tip

IP safety plug
Earthspike included

Recommended lamp

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details

max. 4W LED GU10 51mm
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
stainless steel	**231672**	**156.60**

CV SPOT
SP, long

SOCKET INSIDE







- Stainless steel 304

Product details

230V -50Hz
Material: stainless steel 304



Dimensional drawing



Tip

IP safety plug
Earthspike included

Recommended lamp

LED GU10 3.7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP



Lamp details

max. 4W LED GU10 51mm
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
stainless steel	**231682**	**165.60**



229090 627



NAUTILUS
SP, QR-C51

SOCKET INSIDE







- Stainless steel 304

Product details

12V ~50Hz
Material: stainless steel 304/glass



Dimensional drawing



Accessory recommendation

■ Transformer 12V AC | 60VA IP44
Item No. 227160 | 38.70 GBP

■ Transformer 12V AC | 105VA IP44
Item No. 227140 | 34.60 GBP

Recommended lamp

LED GU5.3 5.5W 36°
2700K 450lm
7kWh/1000h
Item No. 1001574 | 29.70 GBP

LED GU5.3 5.5W 36°
3000K 460lm
7kWh/1000h
Item No. 1001575 | 29.70 GBP

Lamp details

max. 35W QR-C51

Variant	Item No.	GBP
GX5.3 | QR-C51		
■ stainless steel	**229090**	**81.00**



229741 629

NAUTILUS 10 SPOT
SP, QPAR51

SOCKET INSIDE







• Stainless steel 316

Product details
230V -50Hz
Material: stainless steel 316



Dimensional drawing



Tip
Open cable end

Accessory recommendation
■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Recommended lamp

LED GU10 3.7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



LED GU10 5.6W 60°
2200-6700K 350lm
6kWh/1000h
Item No. 1001919 | 49.50 GBP

ZIGBEE



Lamp details
max. 25W QPAR51
Diameter: 5 cm max. L: 6 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
stainless steel	**229741**	**90.00**

NAUTILUS 10 SPOT LED
SP

LED INSIDE







• Stainless steel 316

Product details
220-240V ~50/60Hz
Total wattage: 9W
Material: stainless steel 316

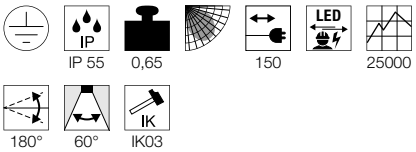

Dimensional drawing



Tip
IP safety plug

Accessory recommendation
■ Mounting plate
Item No. 1001963 | 6.80 GBP



■ Plastic ground spike
Item No. 900011 | 3.00 GBP



Lamp details
520lm | 3000K | CRI>80

Variant	Item No.	GBP
stainless steel	**1001962**	**99.00**

NAUTILUS SPOT
SP, PAR38, E27

SOCKET INSIDE







• Stainless steel 304

Product details
230V -50Hz
Material: stainless steel 304



Dimensional drawing



Tip
Open cable end

Accessory recommendation
■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Recommended lamp

LED E27 17W 45°
3000K 1430lm
17kWh/1000h
Item No. 560473 | 60.30 GBP



Lamp details
max. 80W PAR38
optional: QPAR30

Variant	Item No.	GBP
E27 | PAR38		
stainless steel	**229100**	**117.00**

DASAR® PROJECTOR
SP, 12/24V

LED INSIDE



Product details

12V/24V DC
Material: stainless steel 316/glass

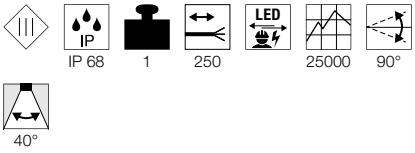

Dimensional drawing



Tip

Open cable end

Accessory recommendation

LED power supply 24V DC | 12W
Item No. 470502 |20.70 GBP

LED power supply 12V DC | 12W
Item No. 470507 |20.70 GBP

Stainless steel 316 ground spike
Item No. 233580 |14.40 GBP

Stainless steel 316 mounting plate
Item No. 233582 |19.80 GBP

Plastic ground spike
Item No. 900011 |3.00 GBP

Variant	Item No.	GBP
360lm | 3000K | CRI>80 stainless steel	233570	188.10

DASAR® PROJECTOR
SP, 230V

LED INSIDE



Product details

220-240V ~50/60Hz | 400mA
Total wattage: 5.5W
Material: stainless steel 316/glass

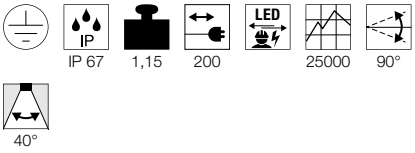

Dimensional drawing



Tip

IP safety plug

Accessory recommendation

Stainless steel 316 ground spike
Item No. 233580 |14.40 GBP

Stainless steel 316 mounting plate
Item No. 233582 |19.80 GBP

Plastic ground spike
Item No. 900011 |3.00 GBP

Variant	Item No.	GBP
300lm | 3000K | CRI>80 stainless steel	233571	242.10

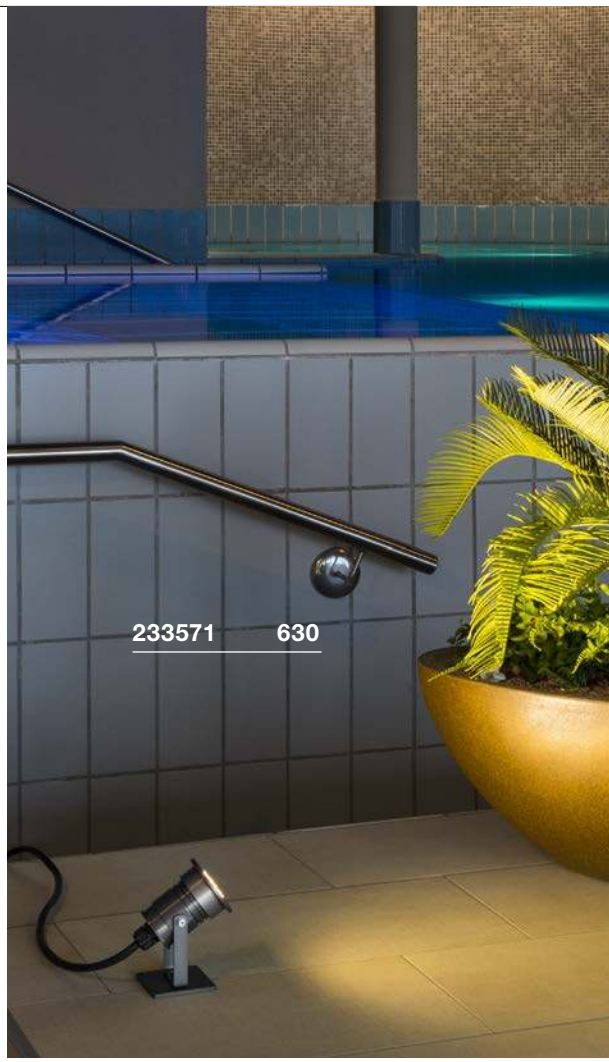



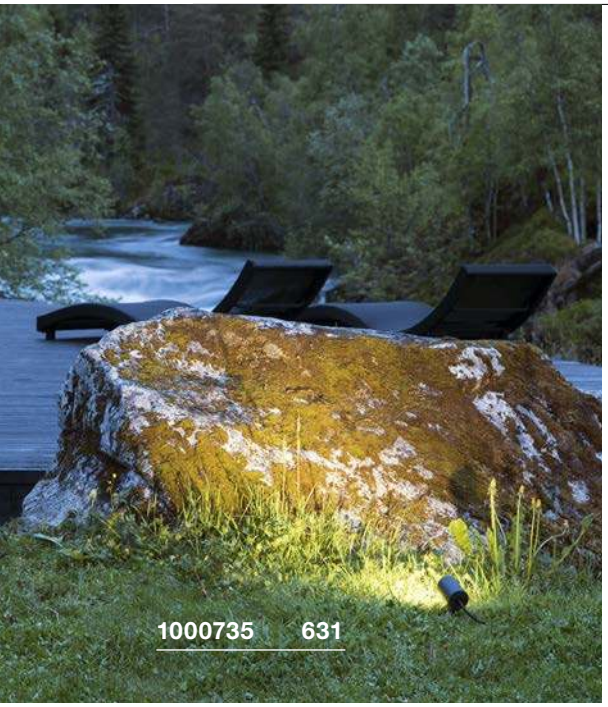



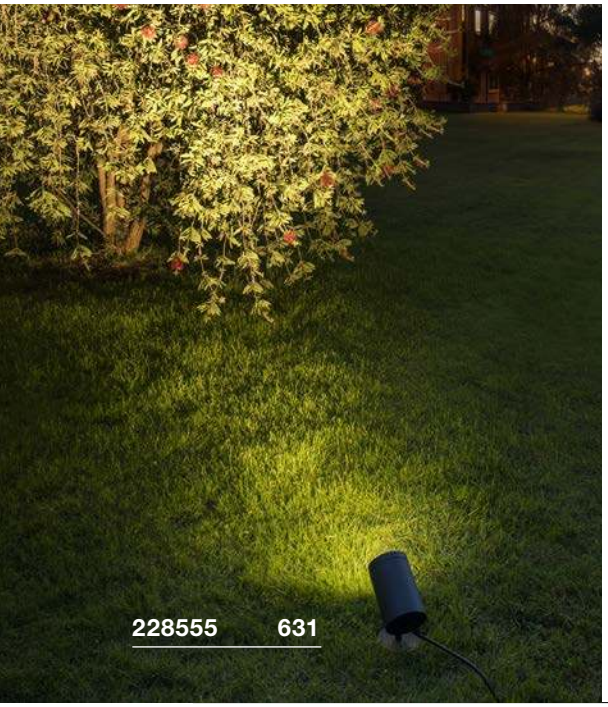

HELIA SPOT S
SP, single, PHASE

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium
Dimmable: C, L

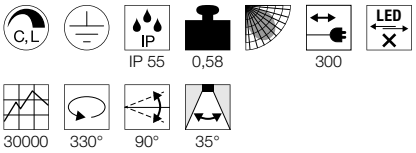

Dimensional drawing



Tip

IP safety plug

Accessory recommendation

Ground spike
Item No. 1000736 |16.20 GBP



Variant	Item No.	GBP
480lm | 3000K | CRI>80 anthracite	**1000735**	**153.00**

HELIA SPOT L
SP, single, PHASE

LED INSIDE







- High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 17W
Material: aluminium/glass
Dimmable: C, L

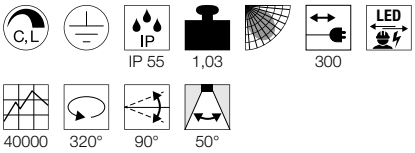

Dimensional drawing



Tip

IP safety plug

Accessory recommendation

Ground spike
Item No. 228560 |19.80 GBP



Variant	Item No.	GBP
1050lm | 3000K | CRI>80 anthracite	**228555**	**197.10**


232840 633
LOUNGE
vivoo

SPOODI 31
SP







Product details

230V -50Hz
Total wattage: 60W
Material: aluminium/glass

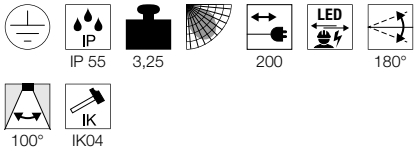

Dimensional drawing



Tip

IP safety plug

Accessory recommendation

■ Wall bracket 50cm
Item No. 234340 | 38.70 GBP



■ Wall bracket 80cm
Item No. 234350 | 47.70 GBP



Variant	Item No.	GBP
5100lm | 3000K | CRI>80 ■ black	**232840** ▼	**185.40**

SPOODI 13
SP, SENSOR







- Integrated infrared sensor
- Convenient sensor setting with remote control

Product details

220-240V ~50/60Hz
Total wattage: 11W
Material: aluminium/glass

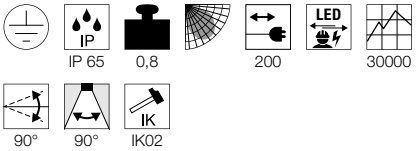

Dimensional drawing



Tip

Detection angle 110°, max. detection distance 8m, day/night mode, adjustable operating time
IP safety plug
Remote control included

Variant	Item No.	GBP
800lm | 3000K | CRI>80 ■ black	**232860** ▼	**58.50**
800lm | 3000K | CRI>80 ■ grey	**232864** ▼	**58.50**
870lm | 4000K | CRI>80 ■ black	**232870** ▼	**58.50**
870lm | 4000K | CRI>80 ■ grey	**232874** ▼	**58.50**

SPOODI 20
SP, SENSOR







- Integrated infrared sensor
- Convenient sensor setting with remote control

Product details

220-240V ~50/60Hz
Total wattage: 30W
Material: aluminium/glass

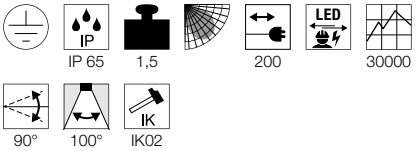

Dimensional drawing



Tip

Detection angle 110°, max. detection distance 8m, day/night mode, adjustable operating time
IP safety plug
Remote control included

Variant	Item No.	GBP
2250lm | 3000K | CRI>80 ■ black	**232880** ▼	**92.70**
2250lm | 3000K | CRI>80 ■ grey	**232884** ▼	**92.70**
2500lm | 4000K | CRI>80 ■ black	**232890** ▼	**92.70**
2500lm | 4000K | CRI>80 ■ grey	**232894** ▼	**92.70**

FLAC BEAM®
SP

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 27W
Material: aluminium

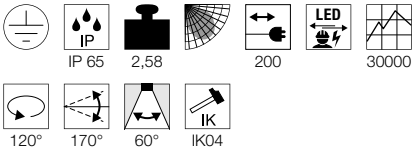

Dimensional drawing



Tip

IP safety plug

Variant	Item No.	GBP
1800lm | 3000K | CRI>80 grey	231072	366.30





227734 635



227744 635

VANO WING
SP, 1-10V

LED INSIDE







- Asymmetrical light distribution
- For even illumination of vertical areas

Product details

120-277V ~50/60Hz | 525mA
Material: aluminium/glass
Dimmable: 1-10V

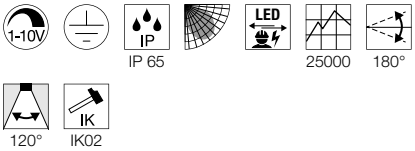

Dimensional drawing



Variant	Item No.	GBP
1500lm | 3000K | CRI>80 35W | W: 63.5 cm | 3.29 kg grey	227734	342.00
3340lm | 3000K | CRI>80 48W | W: 119.5 cm | 6 kg grey	227744	432.00

GALEN 100
SP





Product details

24V DC
Total wattage: 25W
Material: aluminium/glass

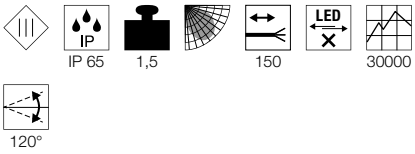

Dimensional drawing



Tip

Open cable end

Accessory recommendation

■ LED power supply 24V DC | 36W
Item No. 470544 | 72.00 GBP



□ LED power supply 24V DC | 60W
Item No. 470506 | 81.00 GBP



Variant	Item No.	GBP
1070lm | 6500K | CRI>70		
grey	**229481**	**269.10**
970lm | 3000K | CRI>70		
grey	**229482**	**269.10**



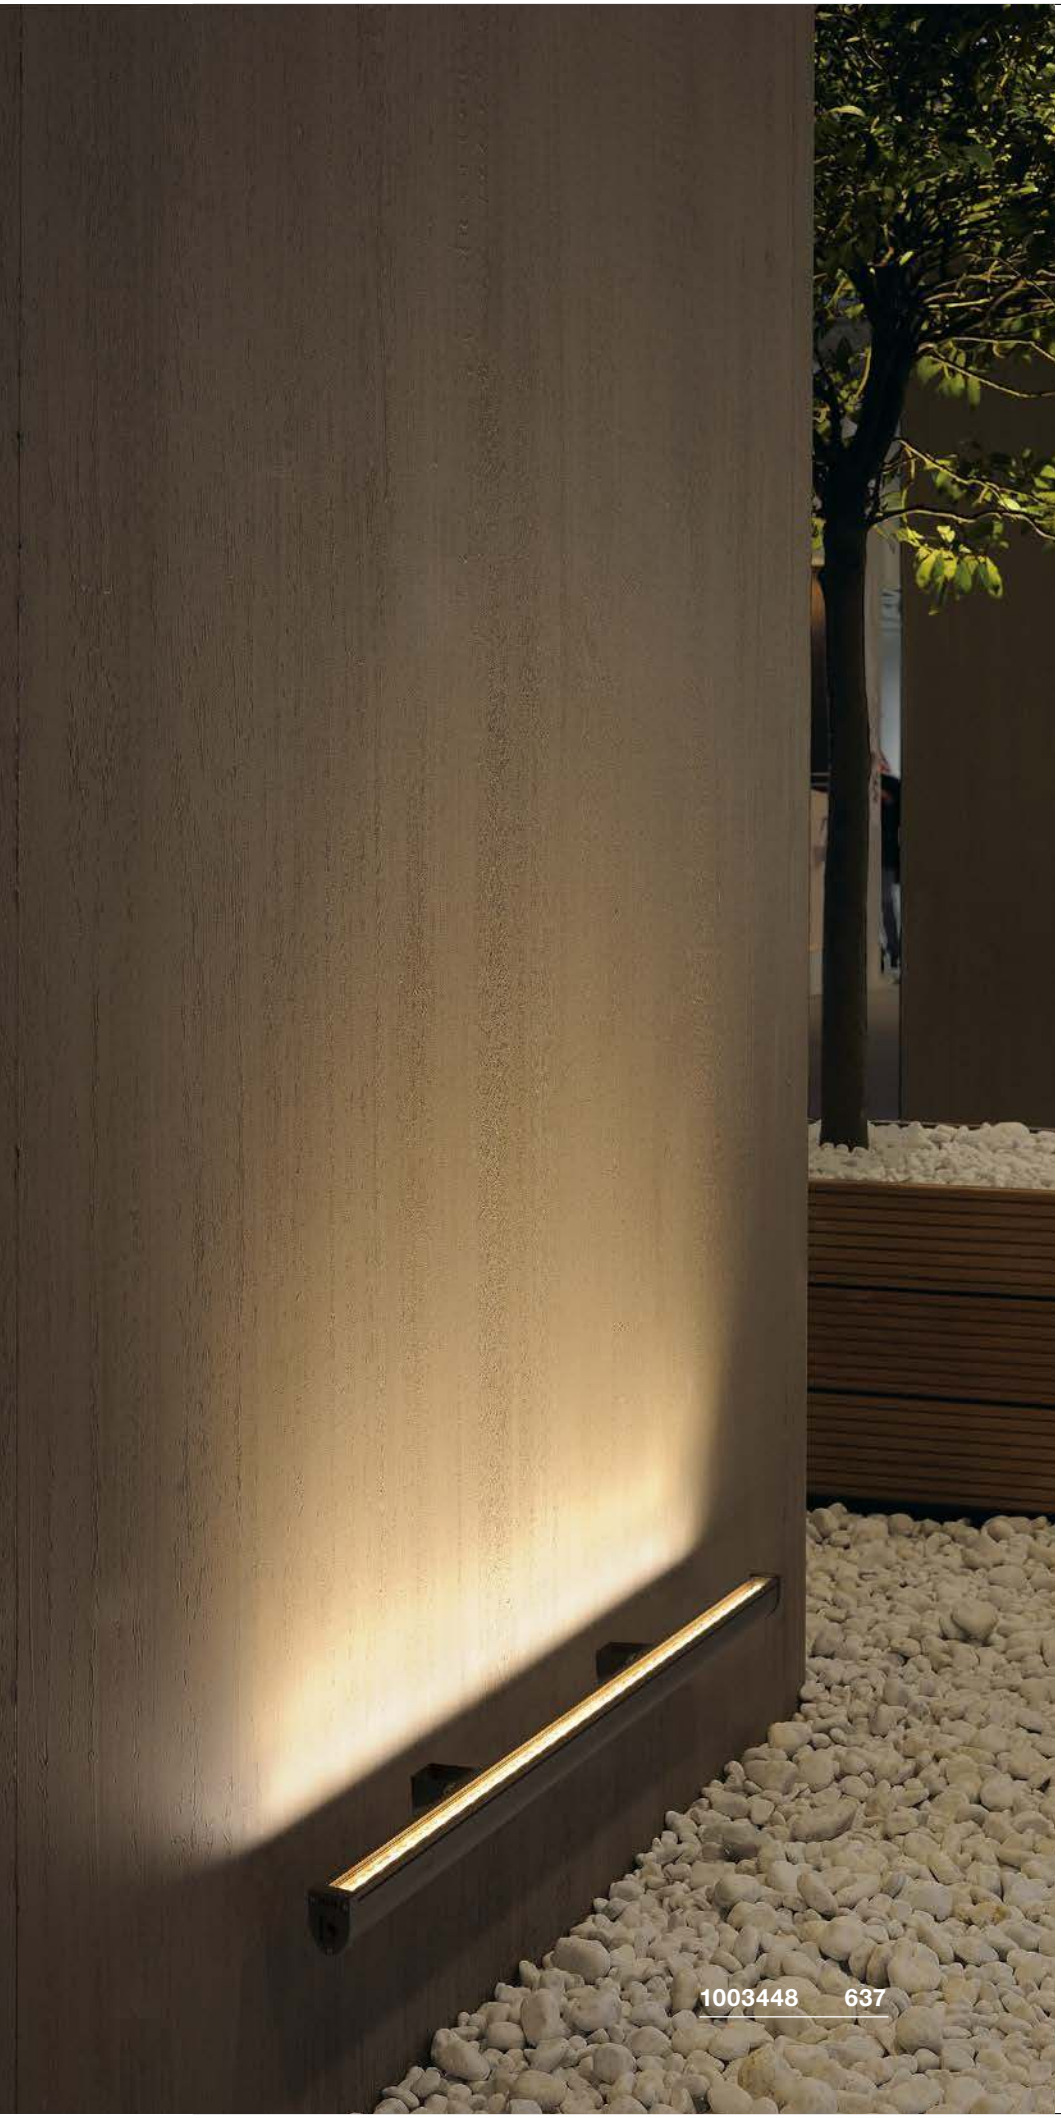

GALEN 60/120
SP

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 900mA
Material: aluminium/glass

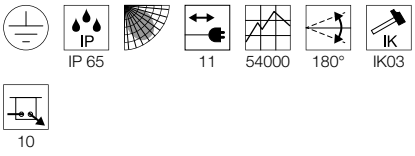

Dimensional drawing

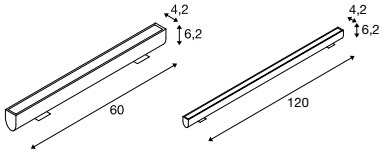

Accessory recommendation

■ Connection cable 5m
Item No. 231960 | 22.50 GBP



■ Connection cable 1.5m
Item No. 231961 | 14.40 GBP



Variant	Item No.	GBP
1570/1570lm | 3000/4000K | CRI>80 | 18W L: 60cm | 1.4 kg		
■ anthracite	**1003447**	**178.20**
3000/3100lm | 3000/4000K | CRI>80 | 34W L: 120cm | 2.5 kg		
■ anthracite	**1003448**	**256.50**

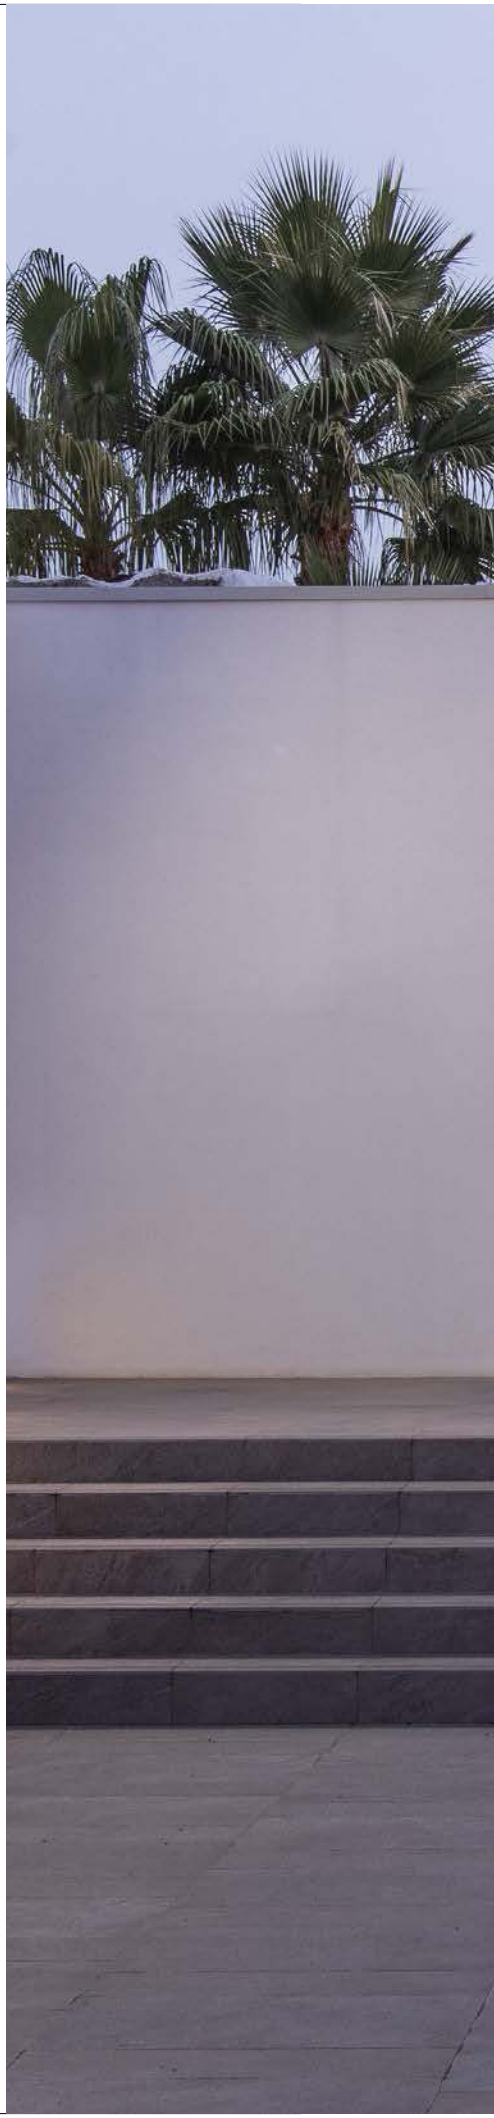

BRINGING LIGHT INTO THE DARK.

PRACTICAL WALL AND CEILING LIGHTS.

They beam out, even under the worst weather conditions: Our wall and ceiling lights are robust, energy-efficient and powerful. However, as well as all of the functionality you can also choose between different designs. Do you prefer modern? Traditional? Round? Or would you like square?



1002902 688



WALL AND CEILING LIGHTS




681


681

NEW

682


683


683

NEW

684

NEW

684

NEW

684

NEW

685

NEW

685

NEW

685


686


687


687


687

NEW

688


688


689


689


690

NEW

690


691


691


692


693


693


694


695

NEW

696

NEW

696

NEW

696

NEW

697

NEW

697

NEW

697


698


699


700


700


700


701

702

702

NEW

703

704

NEW

705

NEW

705

NEW

705

706

706

706

707

709

709

NEW

710

NEW

710

NEW

710

711

712

712

NEW VARIANT

713

NEW VARIANT

713

714

715

715

716

717

717

717

NEW

718

NEW

719

NEW

719

720

720

720

721

721

722

722

722

723

723

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

PHOTONIA
WL, E27

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium/glass

IP 55 | 1,44 | IK03

Dimensional drawing



Recommended lamp

LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP

Lamp details
max. 60W
Diamter: 9 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27		
anthracite	**232045**	**166.50**

GLOO PURE
WL, E27

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/glass

IP 44 | 1,6 | IK02

Dimensional drawing



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details
max. 23 W
Diameter: 4.8 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27		
anthracite	**1002002**	**72.00**

MOLAT
WL, E27

SOCKET INSIDE







Product details
230V ~50/60Hz
Material: aluminium/glass

IP 44 | 0,95 | IK02

Dimensional drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details
max. 60W
Diameter: 6.5 cm max. L: 14.5 cm max.

Variant	Item No.	GBP
E27		
anthracite	**1000820**	**81.00**

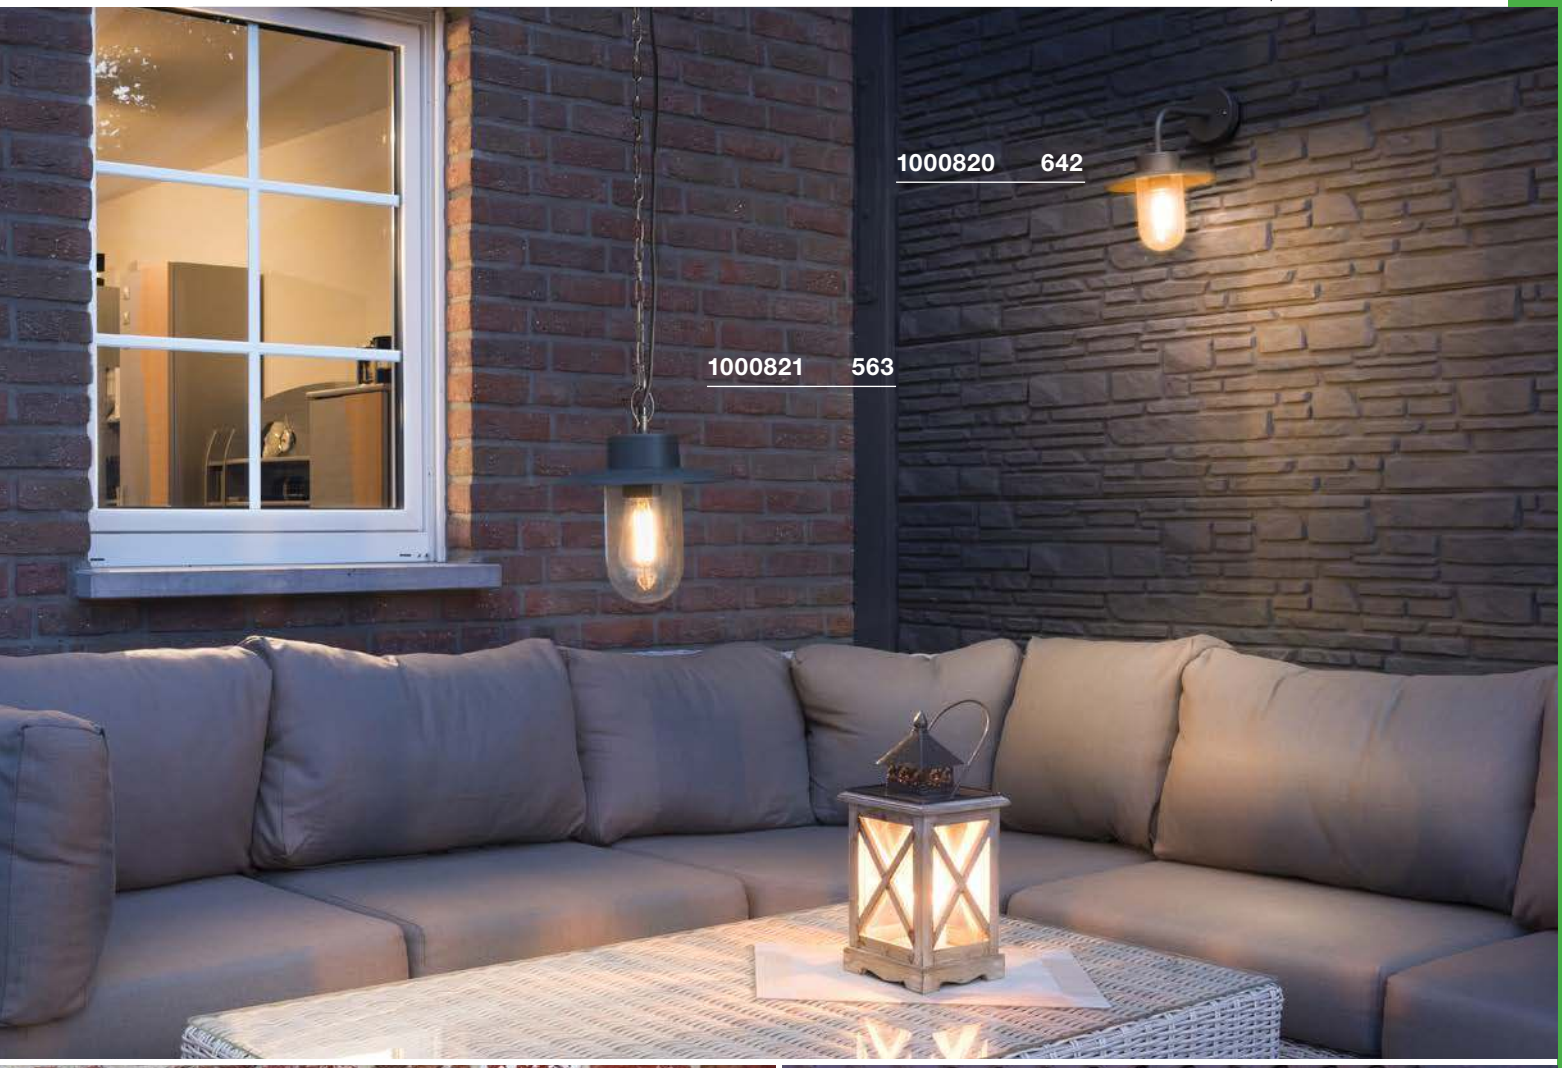
1000820 642
1000821 563

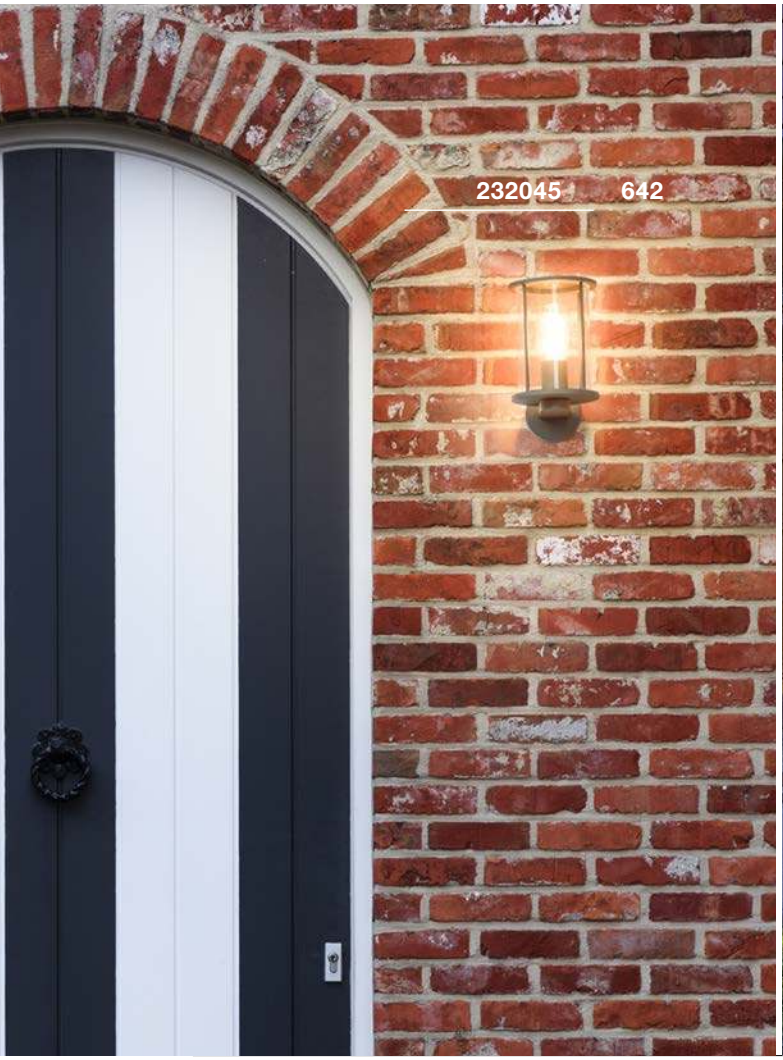
232045 642

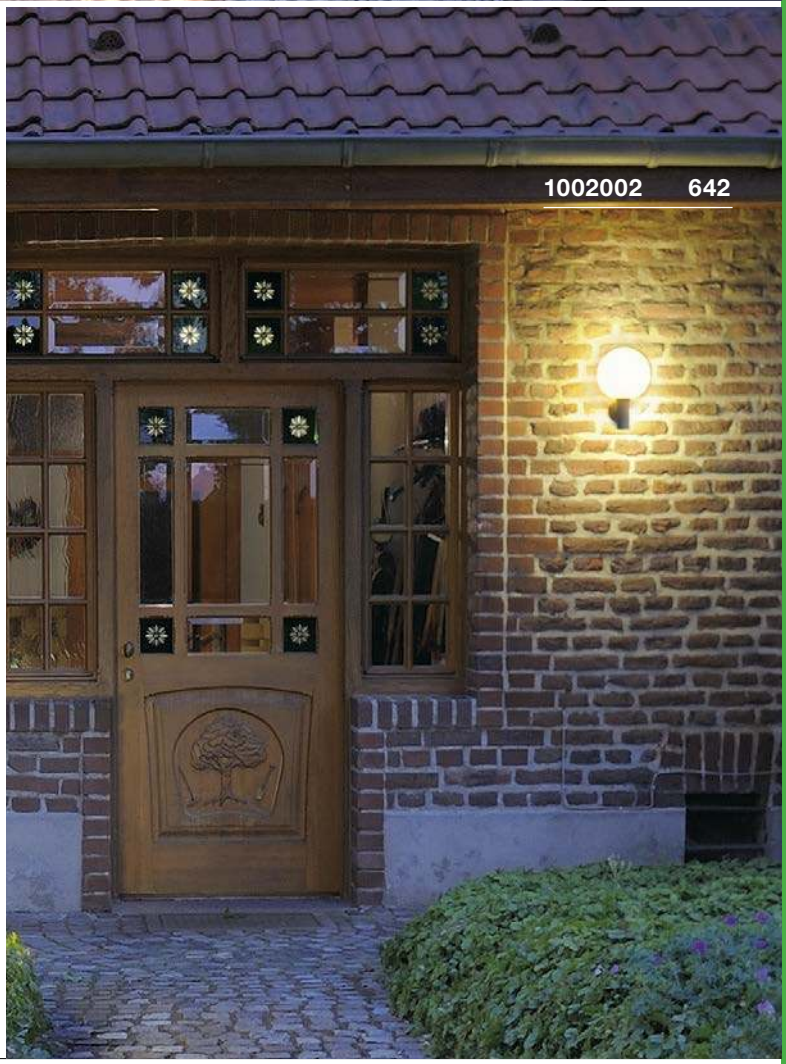
1002002 642

SLOTS
WL







Product details

220-240V ~50/60Hz
Total wattage: 6.3W
Material: aluminium/glass

IP 44 0,85 25000

Dimensional drawing



Variant	Item No.	GBP
140lm | 3000K | CRI>80		
anthracite	231805	126.00
140lm | 3000K | CRI>80		
rust	231807	126.00

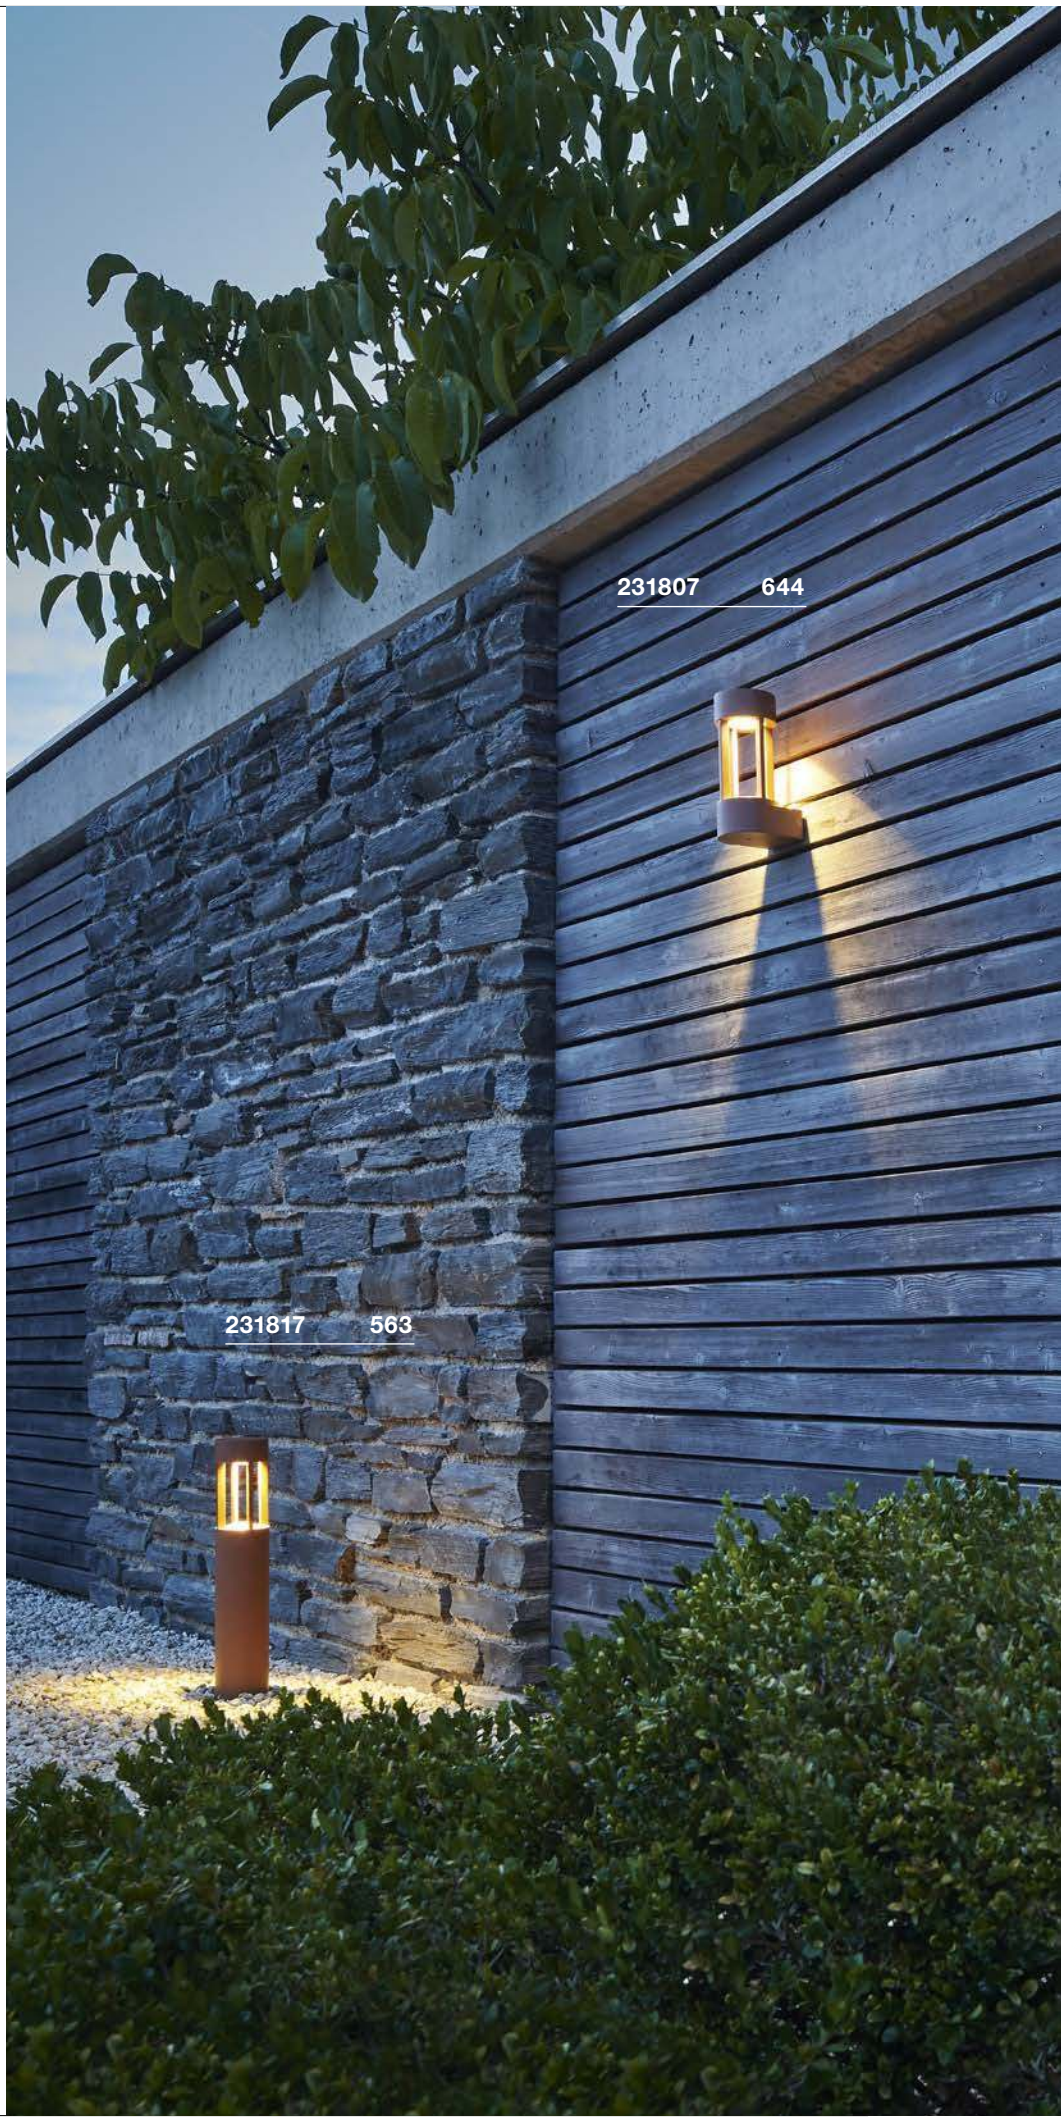



APONI
WL, PHASE

LED INSIDE







• High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium
Dimmable: L



IP 65 0,876 30000

Dimensional drawing



Variant	Item No.	GBP
440lm | 3000K | CRI>80 anthracite	1000681	152.10

F-POL
WL, E27

SOCKET INSIDE







- High-polish reflector for effective illumination
- Diffuse light distribution to illuminate your building environment

Product details
230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 54 1,6

Dimensional drawing



Recommended lamp

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

Lamp details
max. 20W
Diameter: 5 cm max. L: 14 cm max.

Variant	Item No.	GBP
E27		
anthracite	**231585**	**108.00**

C-POL
WL, E27

SOCKET INSIDE







- High-polish reflector for effective illumination
- Diffuse light distribution to illuminate your building environment

Product details
230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 54 1,55

Dimensional drawing



Recommended lamp

LED E27 15W 240°
4000K 1600lm
15kWh/1000h
Item No. 1002828 | 25.20 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details
max. 24 W
Diameter: 5.2 cm max. L: 17.3 cm max.

Variant	Item No.	GBP
E27		
anthracite	**231465**	**117.00**



231585 **646**



231465 **646**





BIG NAILS
WL, E27

SOCKET INSIDE







- Stainless steel 304
- Slim design, glare-free outdoor illumination

Product details

230V -50Hz
Material: stainless steel 304/polycarbonate (PC)



Dimensional drawing



Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details

max. 15W
Diameter: 4.5 cm max. L: 17 cm max.

Variant	Item No.	GBP
E27		
stainless steel	**229182**	**130.50**

GRAFIT
WL, E27

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/plastic

IP 44 0,52

Dimensional drawing



Recommended lamp

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



Lamp details
max. 11W
Diameter: 6 cm max. L: 11.5 cm max.

Variant	Item No.	GBP
E27		
anthracite	**231205**	**63.00**

SQUARE
WL, E27

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: stainless steel 304

IP 44 1,15 IK02

Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP



LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP



Lamp details
max. 20W
Diameter: 7 cm max. L: 13 cm max.

Variant	Item No.	GBP
E27		
stainless steel	**1000336**	**171.00**

SQUARE
WL, PHASE

LED INSIDE







- Lights made from high-quality 316 stainless steel
- Modern design
- Diffuse light distribution to illuminate your building environment

Product details
220-240V ~50/60Hz
Total wattage: 12W
Material: stainless steel 316
Dimmable: C, L

C,L IP 44 1,662 LED 30000
IK02

Dimensional drawing



Variant	Item No.	GBP
760lm | 3000K | CRI>80		
stainless steel	**1000834**	**188.10**


1000336 648




1000336 648

OVALISK
WL







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/glass

IP 65 | 2 | IK02

Dimensional drawing



Variant	Item No.	GBP
560/600lm | 3000/4000K | CRI>80		
anthracite	1004678	202.50

OVALISK SENSOR
WL







- The light colour can be selected during installation using a switch
- With motion sensor

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 9.6W
Material: aluminium/glass

IP 65 | 2,1 | IK02

Dimensional drawing



Variant	Item No.	GBP
560/600lm | 3000/4000K | CRI>80		
anthracite	1004679	216.00







KERAS ELT
WL, E27

SOCKET INSIDE







• Unusual design

Product details

230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 54 1,6

Dimensional drawing



Recommended lamp

LED E27 14.5W 200°
2700K 1521lm
15kWh/1000h
Item No. 560422 | 29.70 GBP

LED E27 15W 240°
4000K 1600lm
15kWh/1000h
Item No. 1002828 | 25.20 GBP

Lamp details

max. 25W
Diameter: 7 cm max. L: 17.5 cm max.

Variant	Item No.	GBP
E27		
grey	**227174**	**120.60**
E27		
anthracite	**227176**	**120.60**

MERIDIAN
WL, E27

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 54 1,25

Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP

LED E27 7W
2700K 810lm
7kWh/1000h
Item No. 1003090 | 7.70 GBP

Lamp details

max. 25W
Diameter: 7 cm max. L: 17.5 cm max.

Variant	Item No.	GBP
E27		
grey	**230444**	**63.00**
E27		
anthracite	**230445**	**63.00**

QUADRULO SENSOR
WL, E27

SOCKET INSIDE

IR









Product details

230V -50Hz
Material: aluminium/glass

IP 44 2,24

Dimensional drawing



Recommended lamp

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP



Lamp details

max. 15W
Diameter: 8 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27		
anthracite	**1002402**	**135.00**



QUADRULO
WL, E27

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass

IP 44 2,21

Dimensional drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP

LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002127 | 11.70 GBP

Lamp details

max. 15W
Diameter: 8 cm max. L: 18 cm max.

Variant	Item No.	GBP
E27		
anthracite	**1002403**	**117.00**

MERIDIAN BOX
WL, E27

SOCKET INSIDE









Product details

230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 54 1,7

Dimensional drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP

LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP

Lamp details

max. 25W
Diameter: 7 cm max. L: 17.5 cm max.

Variant	Item No.	GBP
E27 anthracite	230655	90.00
E27 rust	230657	90.00

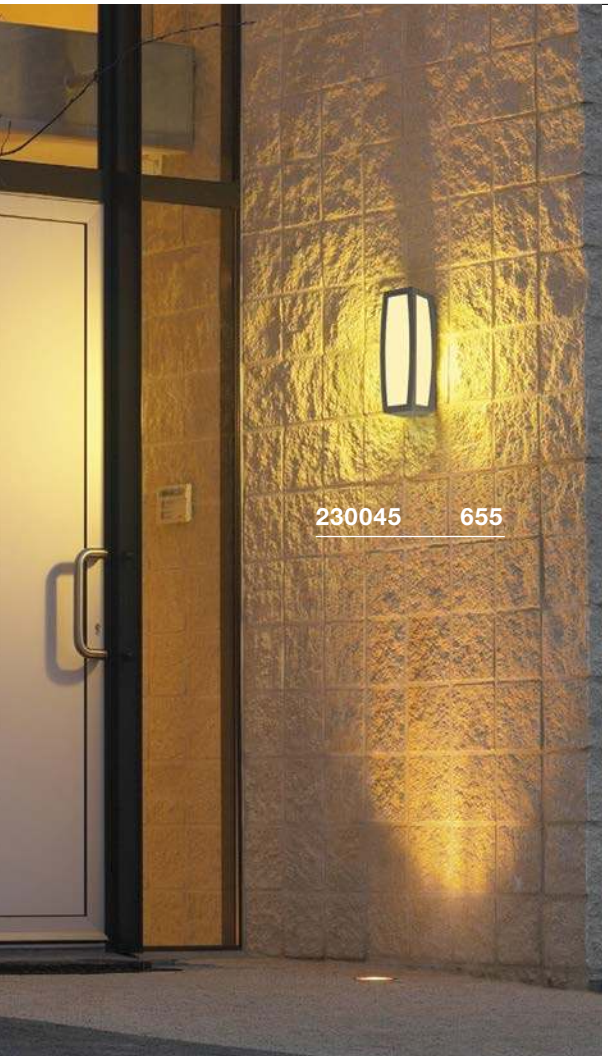



MERIDIAN BOX
WL, E27

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 54 1,7

Dimensional drawing



Recommended lamp

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

LED E27 15W 240°
4000K 1600lm
15kWh/1000h
Item No. 1002828 | 25.20 GBP

Lamp details

max. 25W
Diameter: 7 cm max. L: 17.5 cm max.

Variant	Item No.	GBP
E27		
grey	**230044**	**81.00**
E27		
anthracite	**230045**	**81.00**

MERIDIAN BOX SENSOR
WL, E27

SOCKET INSIDE

MR







- Motion detector with MR (microwave) technology integrated in the light housing

Product details

230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 54 1,75

Dimensional drawing



Tip

Motion sensor: Detection angle:
180° Detection range: 1-5 m
The ambient brightness and operational time can be adjusted.

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details

max. 25W
Diameter: 7 cm max. L: 17.5 cm max.

Variant	Item No.	GBP
E27		
grey	**230084**	**135.00**
E27		
anthracite	**230085**	**135.00**

SITRA
WL, TCR-TSE

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass

IP 44 | 1

Dimensional drawing



Recommended lamp

LED GX53 4.2W 35°
3000K 200lm
5kWh/1000h
Item No. 550092 | 40.50 GBP

LED GX53 8.2W 120°
3000K 600lm
9kWh/1000h
Item No. 550073 | 20.70 GBP

Lamp details

max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 3.5 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
■ anthracite	**230355**	**54.00**

SITRA
WL

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 9W
Material: aluminium/glass

IP 44 | 0,27 | LED | 35000 | 55° | IK03

Dimensional drawing



Variant	Item No.	GBP
450lm | 3000K | CRI>80		
■ anthracite	**1002016**	**67.50**
450lm | 3000K | CRI>80		
□ white	**1002017**	**67.50**







ROX
WL, QPAR111

SOCKET INSIDE







- High-quality brushed surface

Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP



LED GU10 7.3W 13°
2700K 660lm
8kWh/1000h
Item No. 1000939 | 20.70 GBP



Lamp details

max. 50W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 aluminium	**1000333**	**117.00**

POLE PARC
WL

LED INSIDE







- Perfectly suitable for the effective accentuation of building architecture
- Rotationally symmetrical light distribution

Product details

100-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/glass

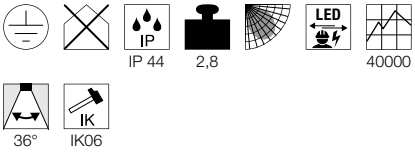

Dimensional drawing



Variant	Item No.	GBP
2900lm | 3000K | CRI>80 anthracite	**1000448**	**193.50**

DOWNUNDER OUT
Round







- The light colour can be selected during installation using a switch

Product details

100-277V ~50/60Hz | 500mA
Total wattage: 4.5W
Material: aluminium

IP 65 0,38 LED 30000

Dimensional drawing



Variant	Item No.	GBP
140lm | 3000/4000K | CRI>80		
anthracite	1002868	101.70

DOWNUNDER OUT
Square







- The light colour can be selected during installation using a switch

Product details

100-277V ~50/60Hz | 500mA
Total wattage: 4.5W
Material: aluminium

IP 65 0,43 LED 30000

Dimensional drawing



Variant	Item No.	GBP
150lm | 3000/4000K | CRI>80		
anthracite	1002869	101.70







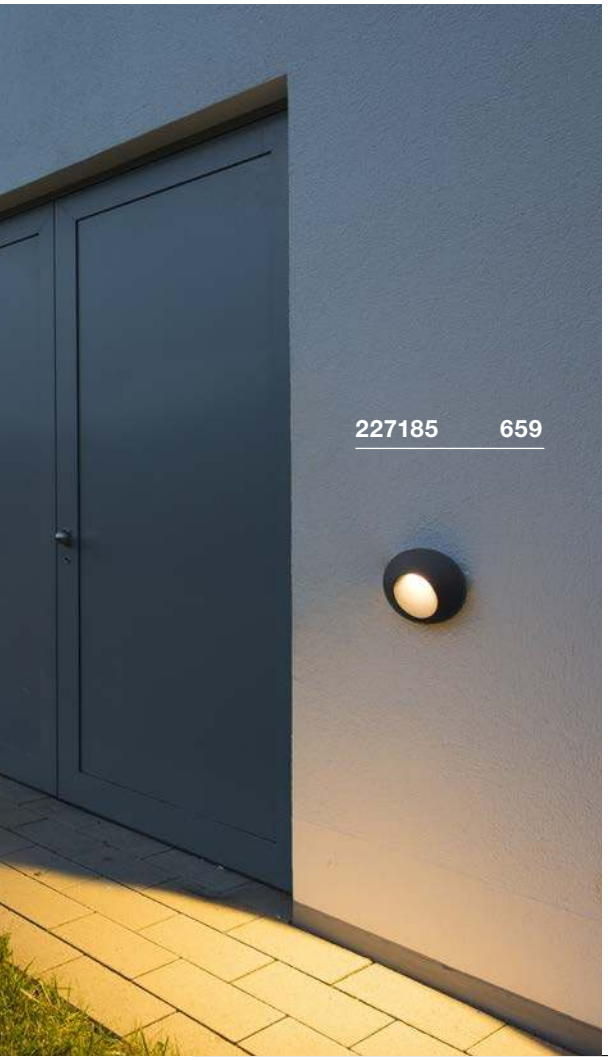

PEMA®
WL

LED INSIDE







Product details

230V -50Hz
Total wattage: 4.7W
Material: aluminium



Dimensional drawing



Tip

Protection rating IP44 only when mounted with light emission downwards.

Variant	Item No.	GBP
125lm | 3000K | CRI>80		
white	231010	90.00
125lm | 3000K | CRI>80		
grey	231012	90.00
125lm | 3000K | CRI>80		
anthracite	231015	90.00

DELO
WL

LED INSIDE







Product details

100-240V ~50/60Hz | 500mA
Total wattage: 5.8W
Material: aluminium/glass



Dimensional drawing



Tip

Protection rating IP55 only when mounted with mission downwards.

Variant	Item No.	GBP
170lm | 3000K | CRI>80		
anthracite	227185	156.60

RASCALI
WL

LED INSIDE







- Unusual design
- Aesthetic accentuation of outdoor areas



Product details

220-240V ~50Hz
Total wattage: 8W
Material: aluminium



Dimensional drawing



Variant	Item No.	GBP
330lm | 3000K | CRI>80 anthracite	**1000797**	**99.00**

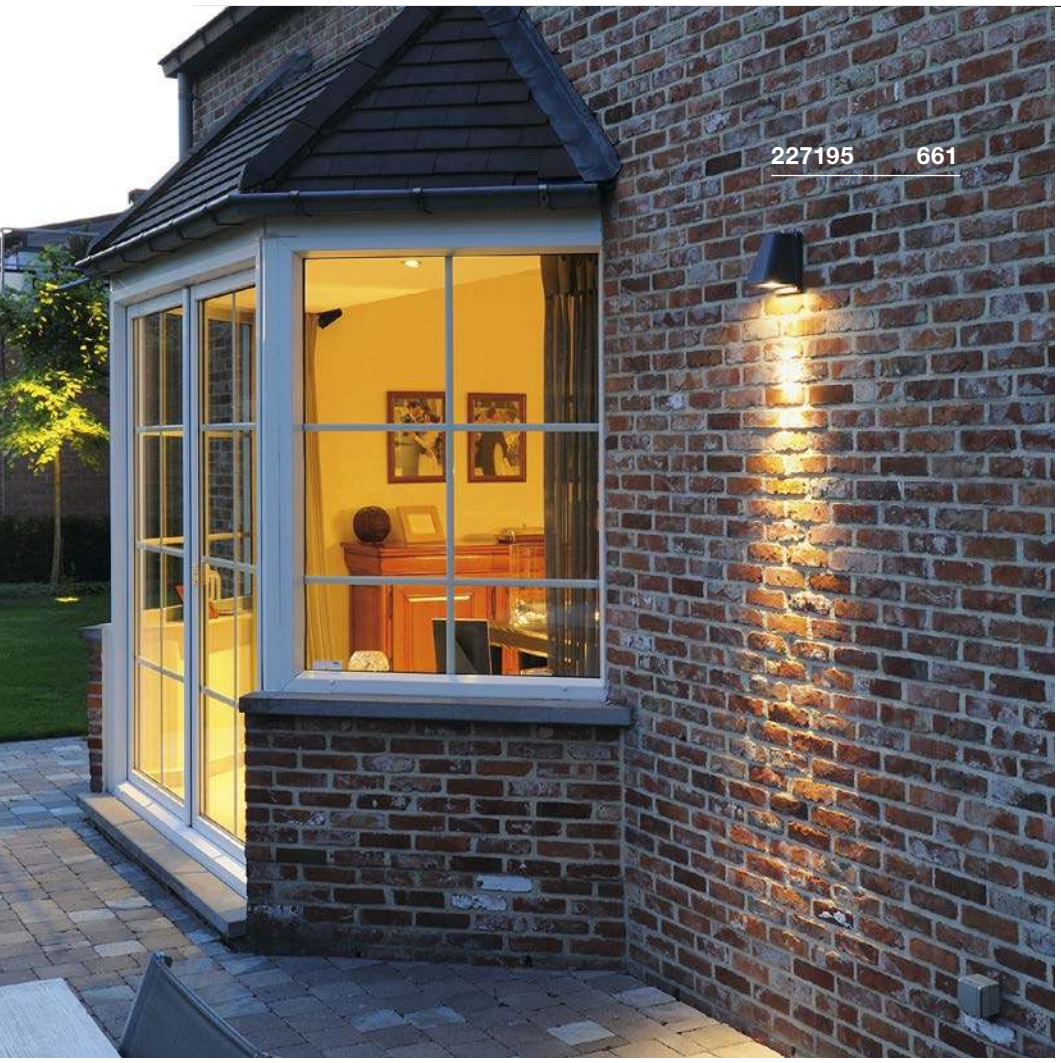

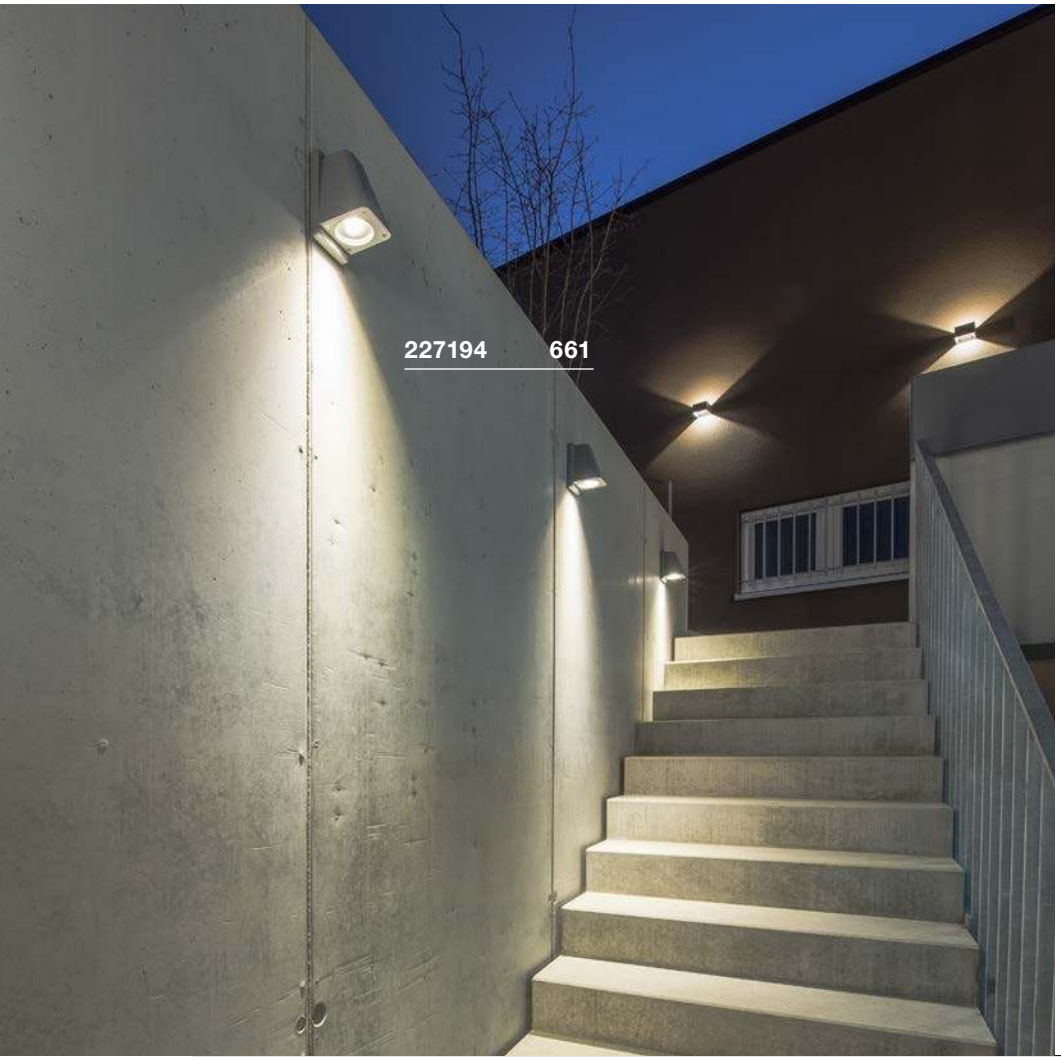

WALLYX
WL, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 44

0,67

Dimensional drawing



Recommended lamp

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

Lamp details

max. 50W QPAR51
L: 7.6 cm max.

Variant	Item No.	GBP
GU10 | QPAR51 grey	227194	90.00
GU10 | QPAR51 anthracite	227195	86.40
GU10 | QPAR51 bronze	227198	90.00

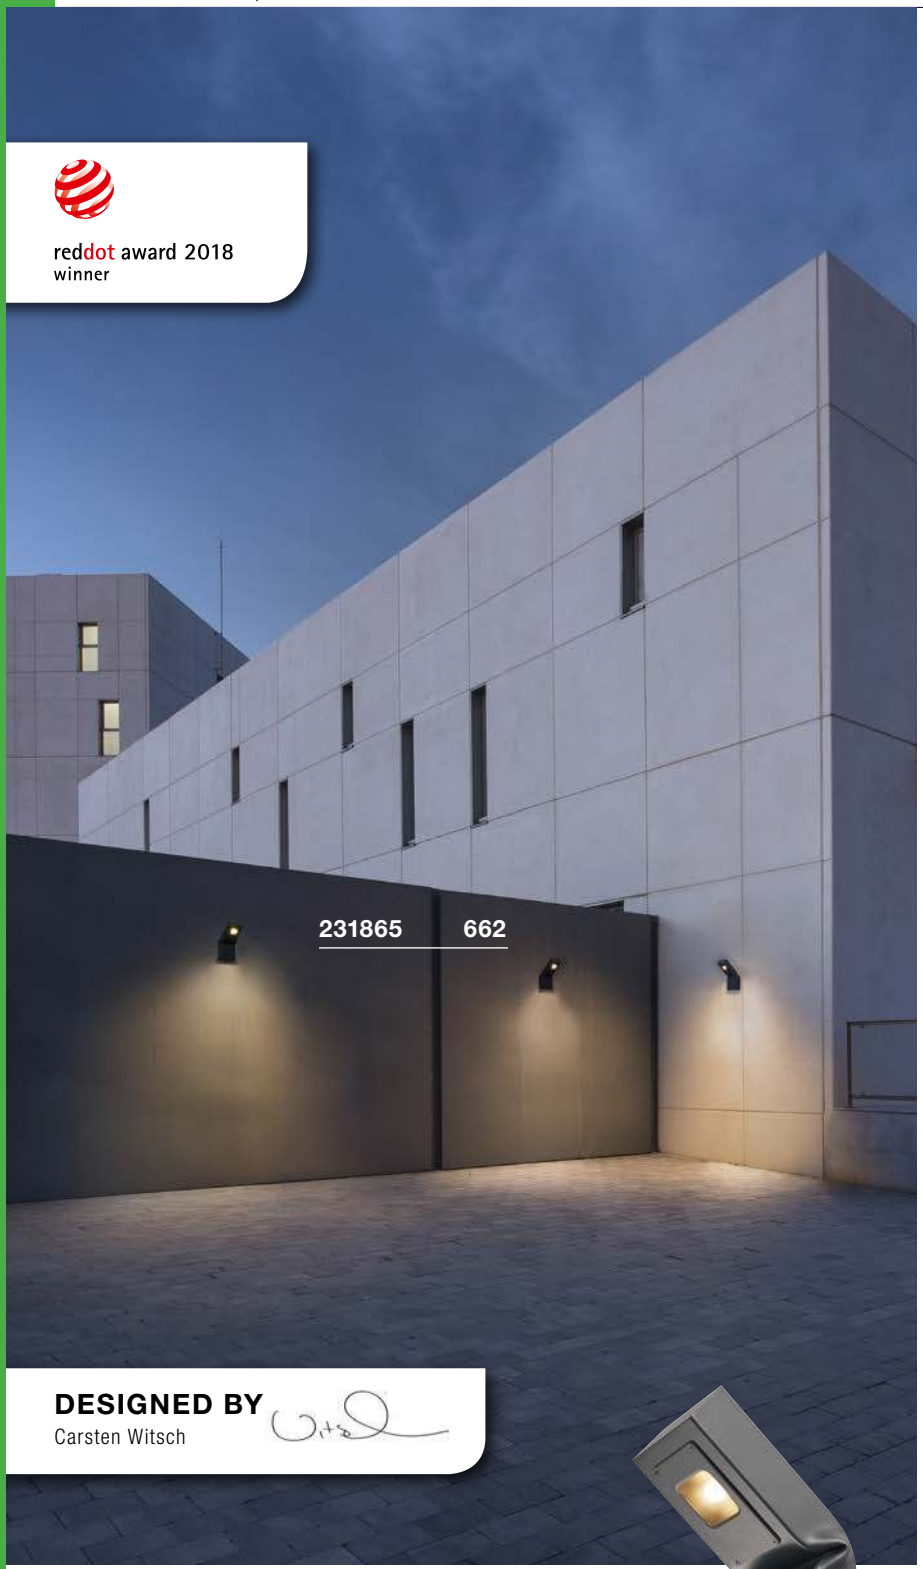



"Form, function, processing and ease of use should be harmonious in a product. Good design is characterized not only by the appearance of the products, but also by its functionality."

BENDO
WL, PHASE

LED INSIDE

reddot award 2018 winner







• High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 12W
Material: aluminium/glass
Dimmable: C, L

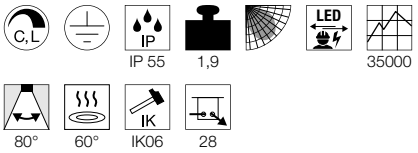

Dimensional drawing



Variant	Item No.	GBP
820lm | 3000K | CRI>80 anthracite	231865	296.10



1004747 663

ESKINA FRAME
WL

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium
Dimmable: C

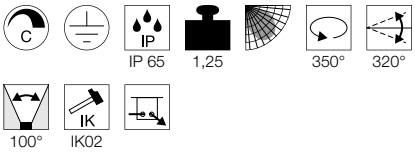

Dimensional drawing



Variant	Item No.	GBP
1100/1200lm | 3000/4000K | CRI>80 anthracite	1004747	166.50

ESKINA FRAME
WL, double

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium



Dimensional drawing



Variant	Item No.	GBP
Spot 1: 1100/1200lm | 3000/4000K | CRI>80 Spot 2: 1100/1200lm | 3000/4000K | CRI>80 anthracite	1004748	207.00

ABRIDOR
WL







- The light colour can be selected during installation using a switch
- Pivoting light head

Product details

100-277V ~50/60Hz | 300mA
Total wattage: 14W
Material: aluminium

IP 55 | 1,2 | 45° | IK03

Dimensional drawing



Variant	Item No.	GBP
750lm | 3000/4000K | CRI>80		
anthracite	**1002989**	**143.10**

ABRIDOR SENSOR
WL







- The light colour can be selected during installation using a switch
- Pivoting light head
- With integrated infrared movement sensor

Product details

100-277V ~50/60Hz | 500mA
Total wattage: 14W
Material: aluminium

IP 54 | 1,2 | 45° | IK03

Dimensional drawing



Tip

Sensor range adjustable from 6m to 9m, detection angle 120°

Variant	Item No.	GBP
750lm | 3000/4000K | CRI80		
anthracite	**1002990**	**161.10**

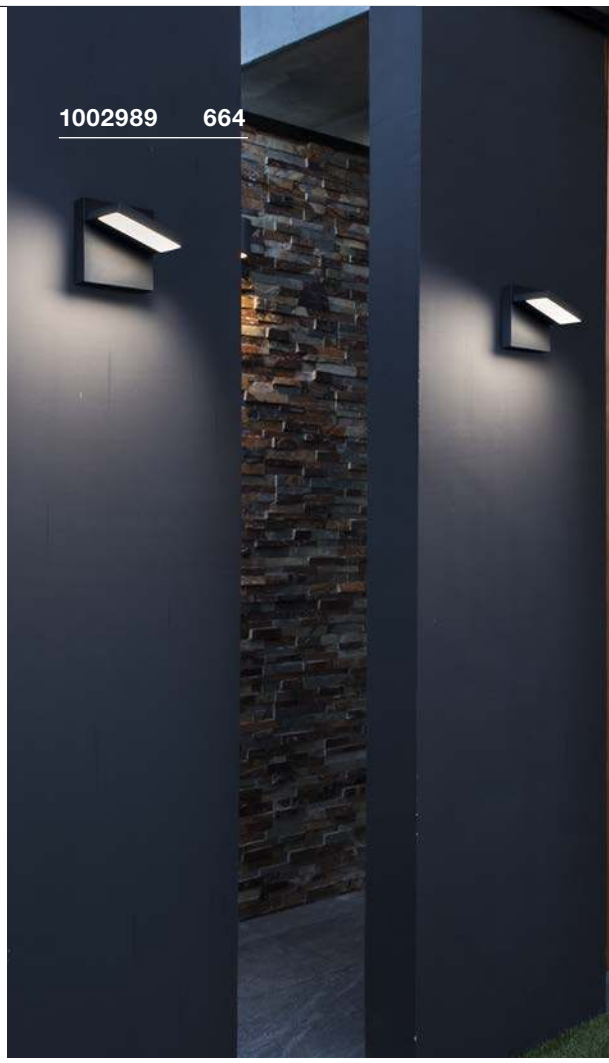







FLATT
WL

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

100-277V ~50/60Hz | 300mA
Total wattage: 14W
Material: aluminium/aluminium

IP 65 | 1,94 | LED | IK03

Dimensional drawing



Variant	Item No.	GBP
460lm | 3000/4000K | CRI80		
anthracite/anthracite	**1002952**	**130.50**
500lm | 3000/4000K | CRI80		
anthracite/brown	**1002953**	**130.50**

FLATT SENSOR
WL

LED INSIDE

CCT

IR







- The light colour can be selected during installation using a switch
- With integrated infrared movement sensor

Product details

100-277V ~50/60Hz | 500mA
Total wattage: 16W
Material: aluminium/aluminium

IP 54 | 1,98 | LED | IK03

Dimensional drawing



Tip

Sensor range adjustable from 6m to 9m, detection angle 120°

Variant	Item No.	GBP
600lm | 3000/4000K | CRI80		
anthracite/anthracite	**1002954**	**158.40**
600lm | 3000/4000K | CRI80		
anthracite/brown	**1002955**	**158.40**

ORDI
WL

LED INSIDE







Product details

220-240V ~50/60Hz
Total wattage: 9W
Material: aluminium



Dimensional drawing



Variant	Item No.	GBP
500lm | 3000K | CRI>80		
■ anthracite	**232905**	**99.00**

ORDI SENSOR
WL

LED INSIDE

IR







- With integrated infrared movement sensor

Product details

220-240V ~50/60Hz
Total wattage: 9W
Material: aluminium



Dimensional drawing



Tip

Sensor range adjustable up to 9m,
detection angle 120°

Variant	Item No.	GBP
500lm | 3000K | CRI>80		
■ anthracite	**232915**	**121.50**

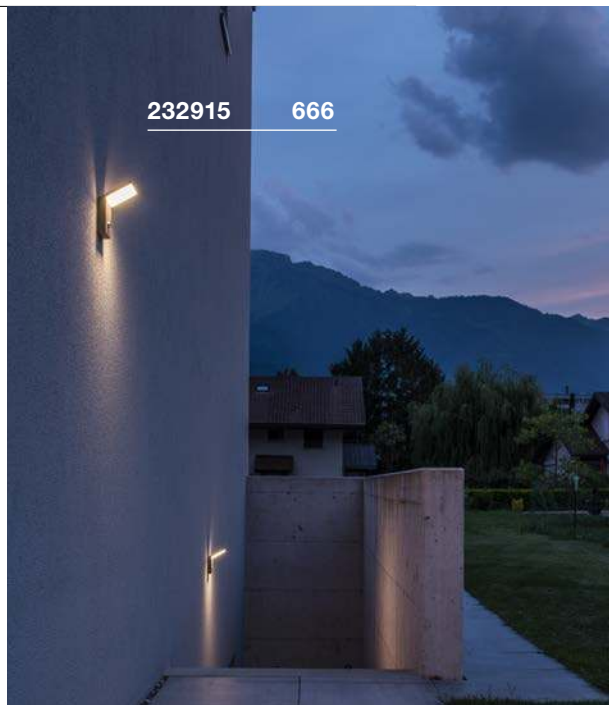





ANGOLUX
WL







Product details

220-240V ~50/60Hz | 80mA
Total wattage: 7.6W
Material: aluminium/plastic



Dimensional drawing



Tip

Protection rating IP44 only when mounted with light emission downwards.

Variant	Item No.	GBP
500lm | 3000K | CRI>80		
white	**231351**	**126.00**
500lm | 3000K | CRI>80		
anthracite	**231355**	**126.00**

ANGOLUX SENSOR
WL







- Integrated infrared sensor

Product details

100-240V ~50/60Hz | 240mA
Total output: 9.8W
Material: aluminium/plastic

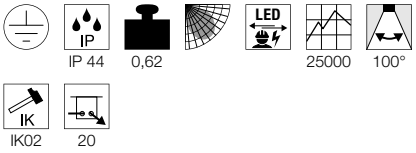

Dimensional drawing



Tip

Detection angle 120°, max. detection distance 9m, sensitivity and operating time adjustable
Protection rating IP44 only when mounted with light emission downwards.

Variant	Item No.	GBP
560lm | 3000K | CRI>80		
white	**1001970**	**144.00**
560lm | 3000K | CRI>80		
anthracite	**1001969**	**144.00**

ANGOLUX SOLAR
WL







- Convenient charging via integrated solar technology
- Integrated infrared sensor

Product details

Battery operation
Total output: 9.8W
Material: aluminium



Dimensional drawing



Tip

Movement sensor & solar panel inc. battery 3.7V 2200mAh

Variant	Item No.	GBP
150lm | 3000K | CRI>80		
anthracite	**1002597**	**153.00**

IPERI
WL

LED INSIDE







Product details

230V -50Hz
Total wattage: 5W
Material: aluminium/plastic

IP 44 | 0,5 | LED | 25000

Dimensional drawing



Tip

Protection rating IP44 only when mounted with light emission downwards.

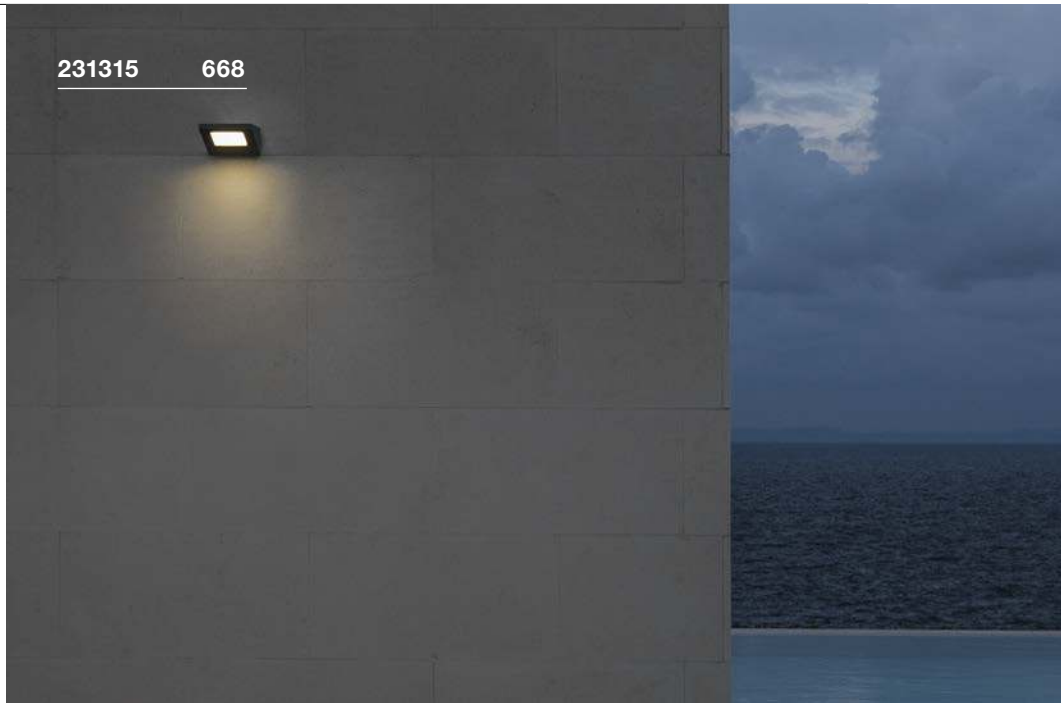





Variant	Item No.	GBP
320lm | 4000K | CRI>70		
anthracite	231315	94.50

PEMA®
WL, E27

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Tip

Protection rating IP44 only when mounted with light emission downwards.

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details

max. 15W
Diameter: 4.5 cm max. L: 21 cm max.

Variant	Item No.	GBP
E27		
■ black	**230030**	**81.00**
E27		
■ grey	**230034**	**81.00**

PEMA®
WL

NEW VARIANT

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

100-277V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium/glass

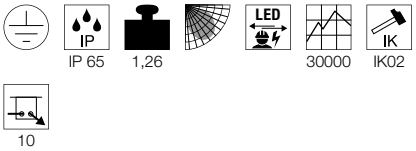

Dimensional drawing



Variant	Item No.	GBP
1260/1400lm | 3000/4000K | CRI>80		
■ black	**1003453**	**112.50**
1260/1400lm | 3000/4000K | CRI>80		
■ grey	**1003454**	**112.50**

PEMA®
WL

LED INSIDE







Product details

230V -50Hz
Total wattage: 7.7W
Material: aluminium/glass

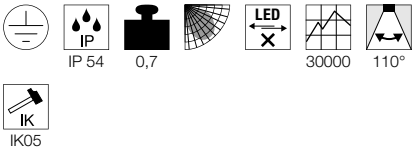

Dimensional drawing



Tip

Protection rating IP54 only when mounted with light emission downwards.

Variant	Item No.	GBP
450lm | 3000K | CRI>80		
■ anthracite	**1002069**	**99.00**
450lm | 3000K | CRI>80		
□ white	**1002070**	**99.00**
450lm | 3000K | CRI>80		
■ grey	**1002071**	**99.00**

MALU
WL

LED INSIDE

reddot award 2019 winner







- Unusual design
- For even illumination
- Especially wide light distribution

Product details

220-240V ~50/60Hz
Total wattage: 9.2W
Material: aluminium/glass





Dimensional drawing



Variant	Item No.	GBP
360lm | 3000K | CRI>80		
anthracite	1002155	170.10

TRAPECCO DOWN
WL

LED INSIDE







Product details

230V -50Hz
Total wattage: 10W
Material: aluminium



Dimensional drawing



Variant	Item No.	GBP
850lm | 3000K | CRI>80		
anthracite	231745 ▼	126.00









QUADRASYL
WL, TCR-TSE

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass

IP 44 0,86

Dimensional drawing



Recommended lamp

LED GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP

Lamp details

max. 11W TCR-TSE
Diameter: 7.5 cm max. L: 2.7 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
anthracite	**232285**	**49.50**

QUADRASYL
CW, TCR-TSE

SOCKET INSIDE







- Shade: stainless steel 304

Product details

230V -50Hz
Material: aluminium/stainless steel 304

IP 44 0,45

Dimensional drawing



Tip

Fixture on the reverse

Recommended lamp

LED GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP

Lamp details

max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 2.7 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
grey	**111482**	**71.10**

QUAD
WL

LED INSIDE







Product details

200-240V ~50/60Hz | 700mA
Total wattage: 4.6W
Material: aluminium/glass



Dimensional drawing



Variant	Item No.	GBP
100lm | 3000K | CRI>80		
white	232461	72.00
80lm | 3000K | CRI>80		
anthracite	232465	72.00

BIG QUAD
WL

LED INSIDE







Product details

100-277V ~50/60Hz | 350mA
Total wattage: 4.5W
Material: aluminium/glass



Dimensional drawing



Variant	Item No.	GBP
290lm | 3000K | CRI>80		
white	232431	103.50
260lm | 3000K | CRI>80		
anthracite	232435	103.50

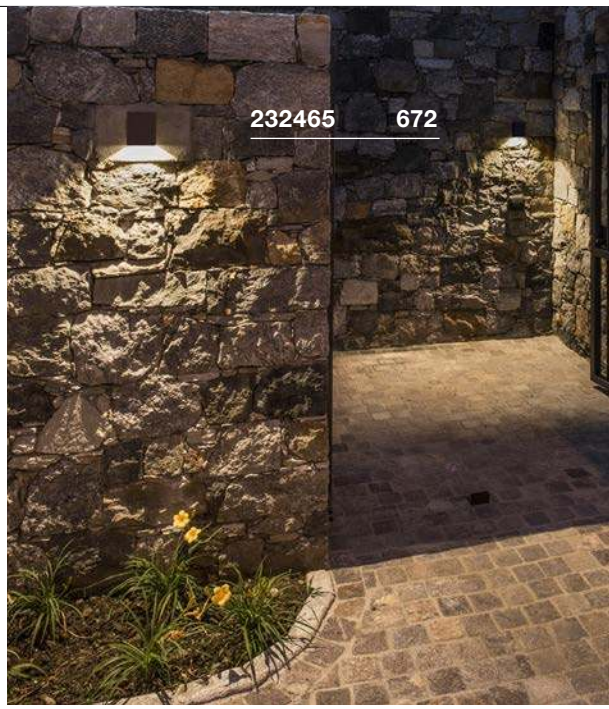





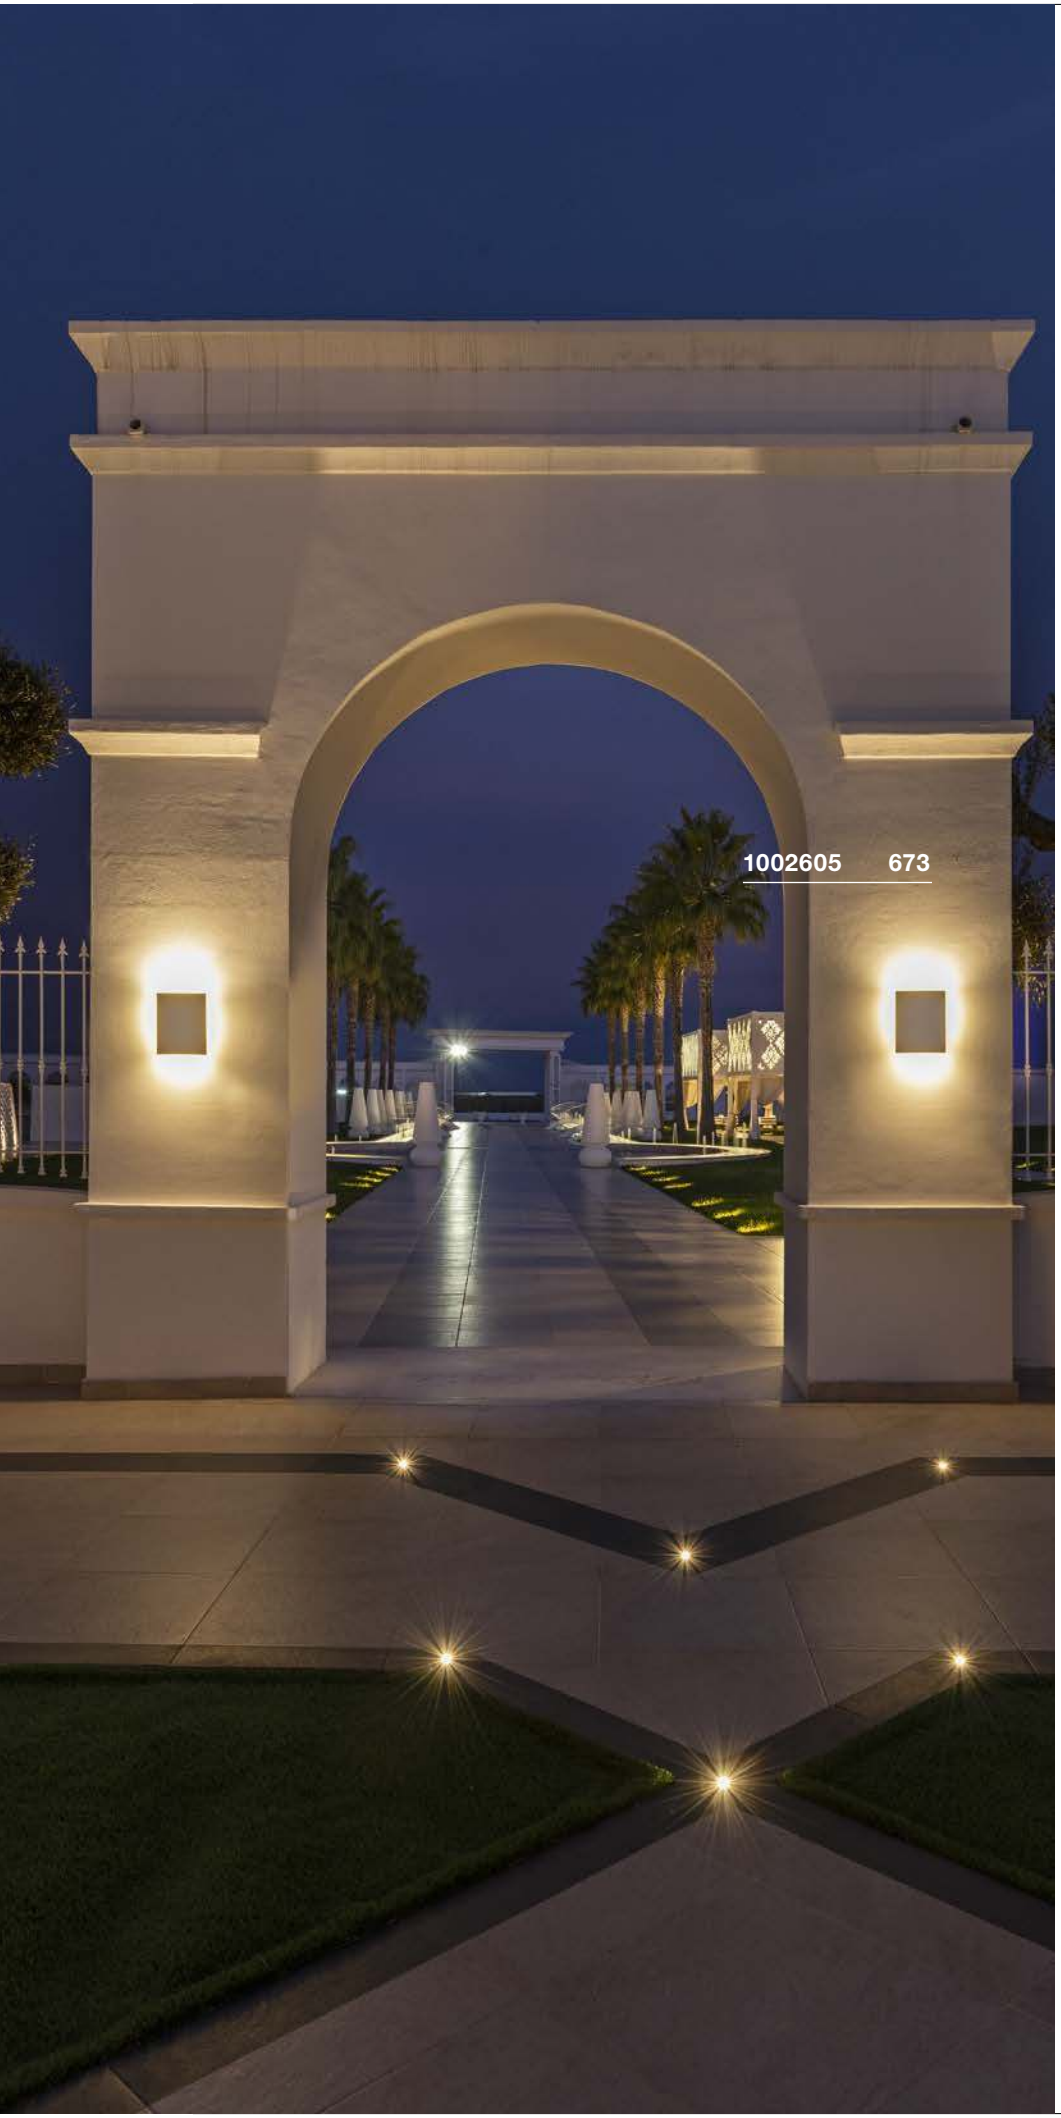

SAIL
WL

LED INSIDE







Product details

200-240V ~50Hz
Total wattage: 18W
Material: aluminium



IP 54 | 1,9 | 70° | IK06

Dimensional drawing



Variant	Item No.	GBP
400lm | 3000K | CRI>80		
■ anthracite	**1002605**	**143.10**
590lm | 3000K | CRI>80		
□ white	**1002606**	**143.10**

VILUA S
WL

LED INSIDE







Product details

100-277V ~50/60Hz | 700mA
Total wattage: 8.3W
Material: aluminium/glass



IP 54 | 0,55 | 100° | IK02

Dimensional drawing







Variant	Item No.	GBP
405lm | 3000K | CRI>80 anthracite	**1002503**	**119.70**





VILUA L
WL

LED INSIDE







Product details

100-277V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium/glass



Dimensional drawing



Variant	Item No.	GBP
810lm | 3000K | CRI>80 anthracite	**1002504**	**156.60**

VILUA
UP/DOWN, WL

LED INSIDE







Product details

100-277V ~50/60Hz | 700mA
Total wattage: 16W
Material: aluminium/glass

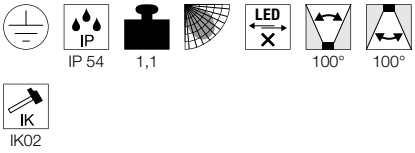

Dimensional drawing



Variant	Item No.	GBP
Up: 392lm | 3000K | CRI>80 Down: 392lm | 3000K | CRI>80 anthracite	**1002505**	**156.60**

THEO
WL, QPAR51

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass

IP 44 0,66

Dimensional drawing



Recommended lamp

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005077 | 6.10 GBP



Lamp details

max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	229521	67.50
GU10 | QPAR51 grey	229524	67.50
GU10 | QPAR51 anthracite	229525	67.50

BIG THEO
WL, QPAR111

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass

IP 44 1

Dimensional drawing



Recommended lamp

GU10 7W 13°
3000K 660lm
8kWh/1000h
Item No. 1001568 | 20.70 GBP



LED GU10 13W 140°
2700K 1000lm
13kWh/1000h
Item No. 1001244 | 71.10 GBP



Lamp details

max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 white	229561	90.00
GU10 | QPAR111 grey	229564	90.00
GU10 | QPAR111 anthracite	229565	90.00







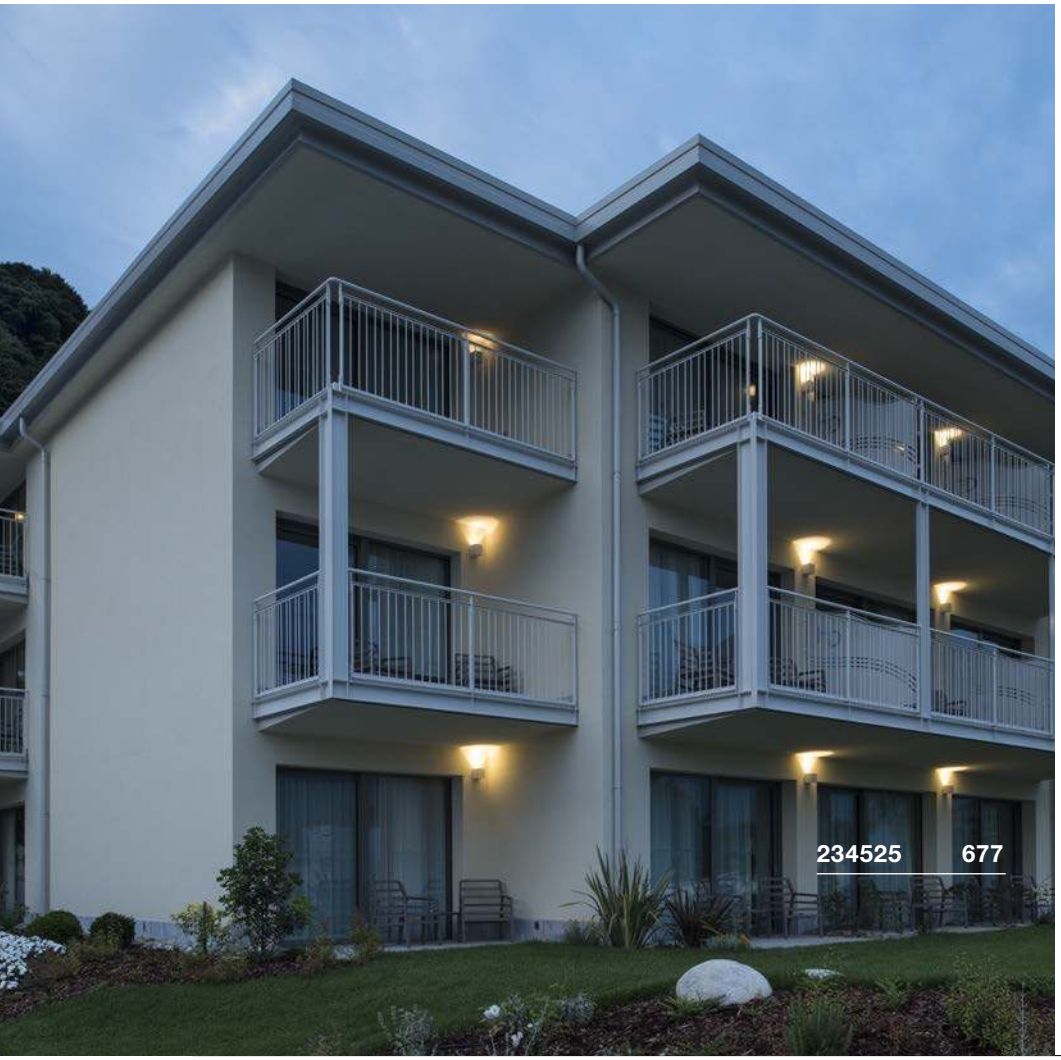

BIG THEO
WL

LED INSIDE







Product details

100-277V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/glass





Dimensional drawing



Variant	Item No.	GBP
2000lm | 3000K | CRI>80		
■ anthracite	**234525**	**180.00**

DELWA
WL







Product details

100-240V ~50/60Hz | 700mA
Total wattage: 10W
Material: aluminium/glass



IP 44 | 0,8 | 30000 | 100°



IK02

Dimensional drawing





1000340 **678**

Variant	Item No.	GBP
910lm | 3000K | CRI>80 white	**1000340**	**166.50**
910lm | 3000K | CRI>80 anthracite	**1000342**	**166.50**



MYRA UP/DOWN
WL, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 55 | 0,58 | IK02

Dimensional drawing



Recommended accessories

Surface mounting frames
Item No. 233214 | 16.20 GBP

Surface mounting frames
Item No. 233215 | 16.20 GBP

Recommended lamp

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP

Lamp details

2x max. 35W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
grey	233114	99.00
GU10 | QPAR51		
anthracite	233115	99.00

SITRA UP/DOWN
WL, TCR-TSE

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/glass

IP 44 1,4

Dimensional drawing



Recommended lamp

LED GX53 4.2W 35°
3000K 200lm
5kWh/1000h
Item No. 550092 | 40.50 GBP



LED GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP



Lamp details
2x max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 3.5 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
anthracite	**230365**	**76.50**

SITRA UP/DOWN
WL

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Total wattage: 17W
Material: aluminium/glass

IP 44 1,1 LED 35000 55°

Dimensional drawing



Lamp details
2x max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 3.5 cm max.

Variant	Item No.	GBP
Up: 488lm | 3000K | CRI>80		
Down: 488lm | 3000K | CRI>80		
anthracite	**1002018**	**117.00**
Up: 488lm | 3000K | CRI>80		
Down: 488lm | 3000K | CRI>80		
white	**1002041**	**117.00**

ASTINA
WL, QPAR51

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/glass

IP 44 0,8

Dimensional drawing



Recommended lamp

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP



Lamp details
2x max. 11W LED GU10
L: 9cm max.

Variant	Item No.	GBP
GU10 | TCR50-SE		
white	**228771**	**63.00**
GU10 | TCR50-SE		
anthracite	**228775**	**63.00**
GU10 | TCR50-SE		
aluminium	**228776**	**67.50**





ASTINA STEEL
WL, QPAR51

SOCKET INSIDE







- Lights made from stainless steel 304

Product details

230V -50Hz
Material: stainless steel 304

IP 44 1,02

Dimensional drawing



Recommended lamp

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP



Lamp details

2x max. 35W QPAR51
Diameter: 5.1cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51 stainless steel	**233302**	**94.50**

ASTINA STEEL
WL

LED INSIDE







- Lights made from high-quality 316 stainless steel

Product details

100-277V ~50/60Hz | 350mA
Total wattage: 8.7W
Material: stainless steel 316

IP 44 1,38 25000 24° 24°

Dimensional drawing



Variant	Item No.	GBP
510lm | 3000K | CRI>80 stainless steel	**233312**	**184.50**

RUSTY® UP/DOWN
WL, round

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch



Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: FeCSi stainless steel/aluminium



IP 65 | 3,55 | 65° | 65° | IK02

Dimensional drawing



Variant	Item No.	GBP
Up: 249/254lm | 3000/4000K | CRI>80 Down: 267/271lm | 3000/4000K | CRI>80		
rust	1004651 NEW	216.00



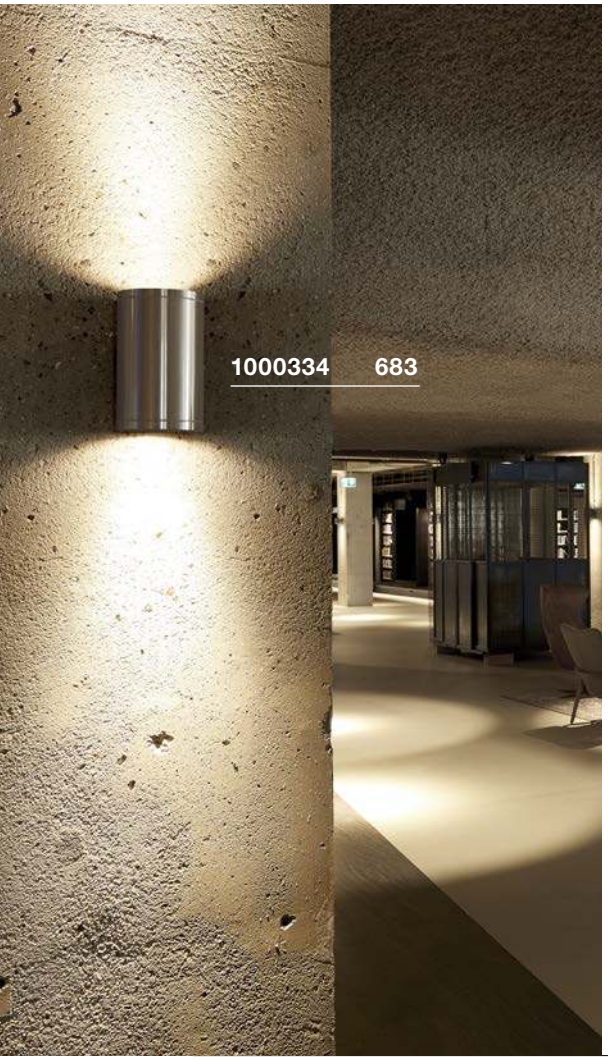

ROX UP/DOWN
WL, QPAR111

SOCKET INSIDE







- High-quality brushed surface

Product details

230V -50Hz
Material: aluminium/glass



Dimensional drawing



Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 |71.10 GBP



LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 |80.10 GBP



Lamp details

2x max. 50W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
aluminium	**1000334**	**144.00**

POLE PARC UP/DOWN
WL

LED INSIDE







- Perfectly suitable for the effective accentuation of building architecture

Product details

100-240V ~50/60Hz | 700mA
Total wattage: 56W
Material: aluminium/glass

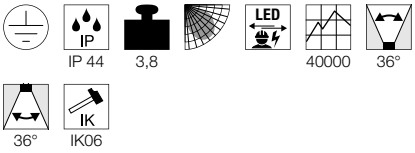

Dimensional drawing



Variant	Item No.	GBP
Up: 2900lm | 3000K | CRI>80 Down: 2900lm | 3000K | CRI>80		
anthracite	**1000446**	**386.10**

ENOLA ROUND S
WL, single







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/glass

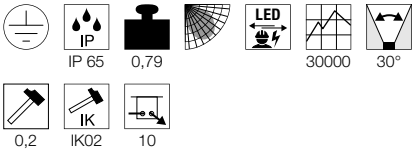

Dimensional drawing



Variant	Item No.	GBP
390/450lm | 3000/4000K | CRI>90		
anthracite	1003422	175.50

ENOLA ROUND M
WL, single







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium/glass

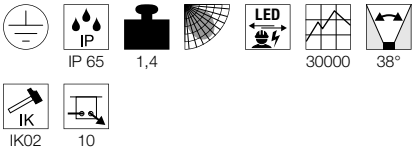

Dimensional drawing



Variant	Item No.	GBP
720/820lm | 3000/4000K | CRI>90		
anthracite	1003423	211.50

ENOLA ROUND L
WL, single







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 900mA
Total wattage: 35W
Material: aluminium/glass

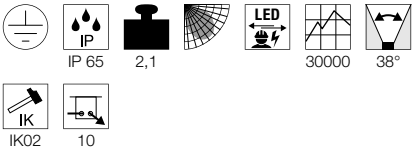

Dimensional drawing



Variant	Item No.	GBP
3100/3400lm | 3000/4000K | CRI>90		
anthracite	1003440	261.00

ENOLA L ROUND UP/DOWN S
WL







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/glass

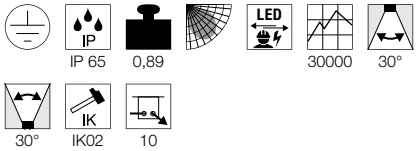

Dimensional drawing



Variant	Item No.	GBP
Up: 285/320lm | 3000/4000K | CRI>90 Down: 285/320lm | 3000/4000K | CRI>90		
anthracite	1003424	211.50

ENOLA L ROUND UP/DOWN M
WL







- The light colour can be selected during installation using a switch

Product details

120-277V ~50/60Hz | 500mA
Total wattage: 19W
Material: aluminium/glass

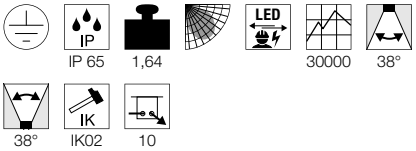

Dimensional drawing



Variant	Item No.	GBP
Up: 740/840lm | 3000/4000K | CRI>90 Down: 740/840lm | 3000/4000K | CRI>90		
anthracite	1003425	261.00

ENOLA L ROUND UP/DOWN L
WL







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 53W
Material: aluminium/glass

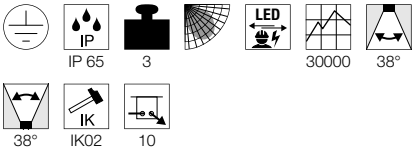

Dimensional drawing



Variant	Item No.	GBP
Up: 2700/3000lm | 3000/4000K | CRI>90 Down: 2700/3000lm | 3000/4000K | CRI>90		
anthracite	1003441	360.00

SQUARE TURN
WL, G9

SOCKET INSIDE







• Front part can be rotated 360°

Product details

230V -50Hz
Material: aluminium/glass

IP 44 1,3 360°

Dimensional drawing



Recommended lamp

LED G9 2.7W
2600K 250lm
3kWh/1000h
Item No. 1003102 | 29.70 GBP



LED G9 2.5W
2700K 180lm
3kWh/1000h
Item No. 560302 | 10.80 GBP



Lamp details

max. 42W QT14
Diameter: 3.5 cm max. L: 8 cm max.

Variant	Item No.	GBP
G9 | QT14		
grey	1000335	162.00

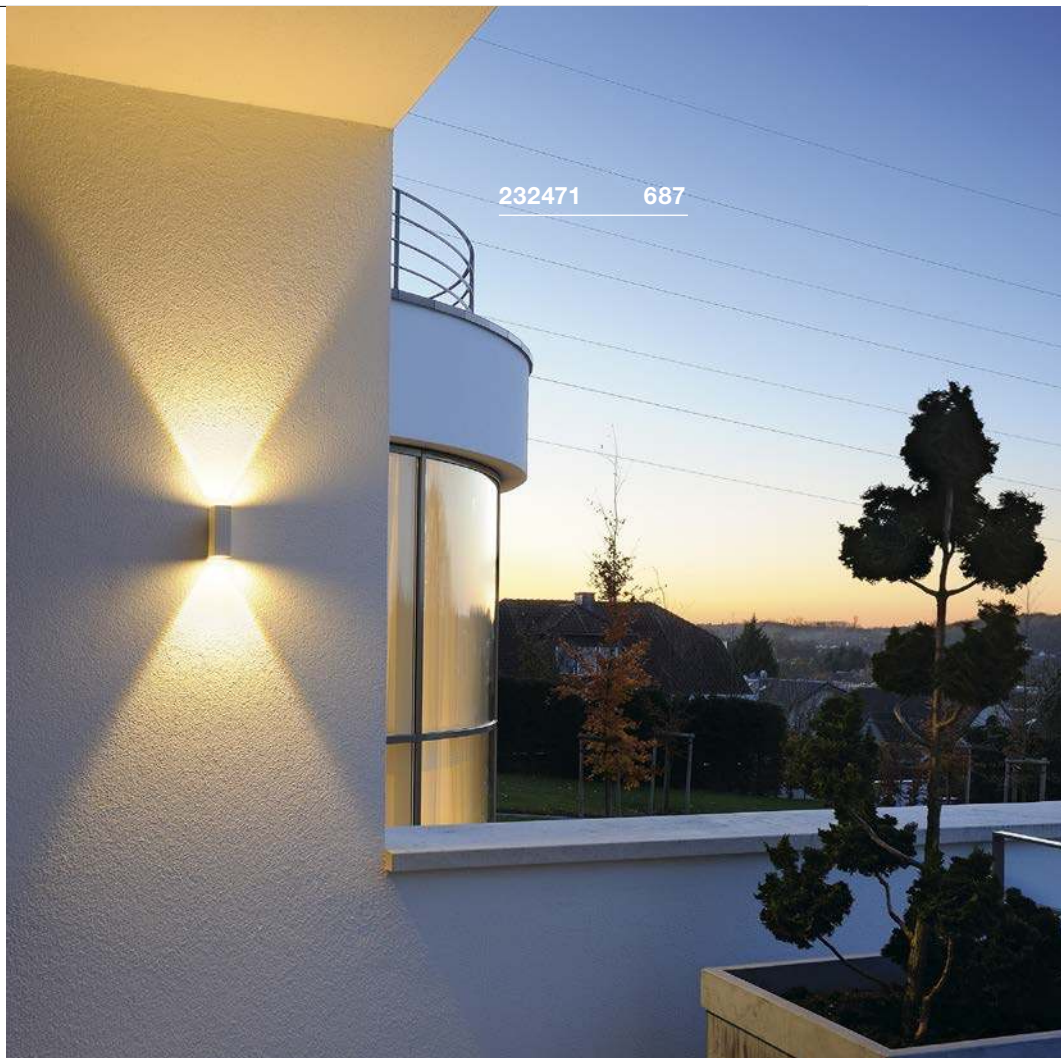

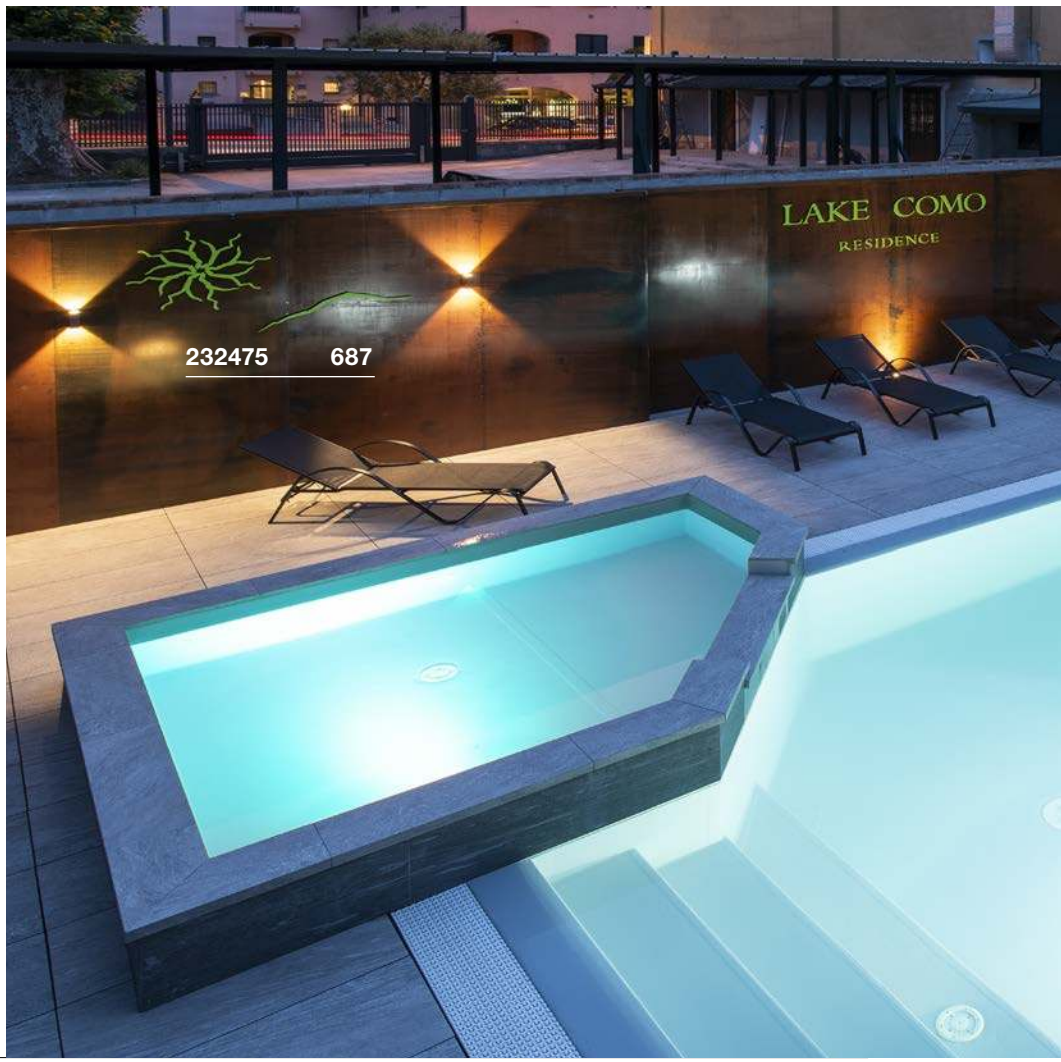

QUAD UP/DOWN 12
WL

LED INSIDE







Product details

200-240V ~50/60Hz | 700mA
Total wattage: 6.8W
Material: aluminium/glass



Dimensional drawing



Tip

Mounting surface located on the narrow side of the housing

Variant	Item No.	GBP
175lm | 3000K | CRI>80		
white	232471	99.00
140lm | 3000K | CRI>80		
anthracite	232475	99.00

QUAD UP/DOWN 15
WL

LED INSIDE







Product details

100-277V ~50/60Hz | 350mA
Total wattage: 8.6W
Material: aluminium/glass



Dimensional drawing



Tip

Mounting surface located on the narrow side of the housing

Variant	Item No.	GBP
290lm | 3000K | CRI>80		
white	232441	117.00
260lm | 3000K | CRI>80		
anthracite	232445	117.00

BIG QUAD UP/DOWN
WL

LED INSIDE







Product details

200-240V ~50/60Hz | 350mA
Total wattage: 8.8W
Material: aluminium/glass



Dimensional drawing



Variant	Item No.	GBP
240lm | 3000K | CRI>80		
white	232451	132.30
240lm | 3000K | CRI>80		
anthracite	232455	132.30

L-LINE OUT 15
WL, vertical

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)



Dimensional drawing



Variant	Item No.	GBP
500/570lm | 3000/4000K | CRI>80		
anthracite	1003539	108.00

MANA OUT
WL, PHASE

LED INSIDE







- Narrower light beam possible thanks to the included accessories

Product details

220-240V ~50/60Hz
Total wattage: 12W
Material: aluminium/steel
Dimmable: C, L

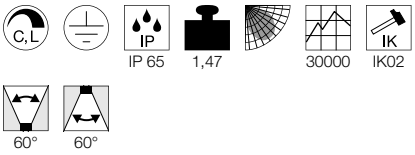

Dimensional drawing



Variant	Item No.	GBP
650lm | 3000K | CRI>80		
anthracite	1002900	197.10
650lm | 3000K | CRI>80		
rust	1002902	215.10



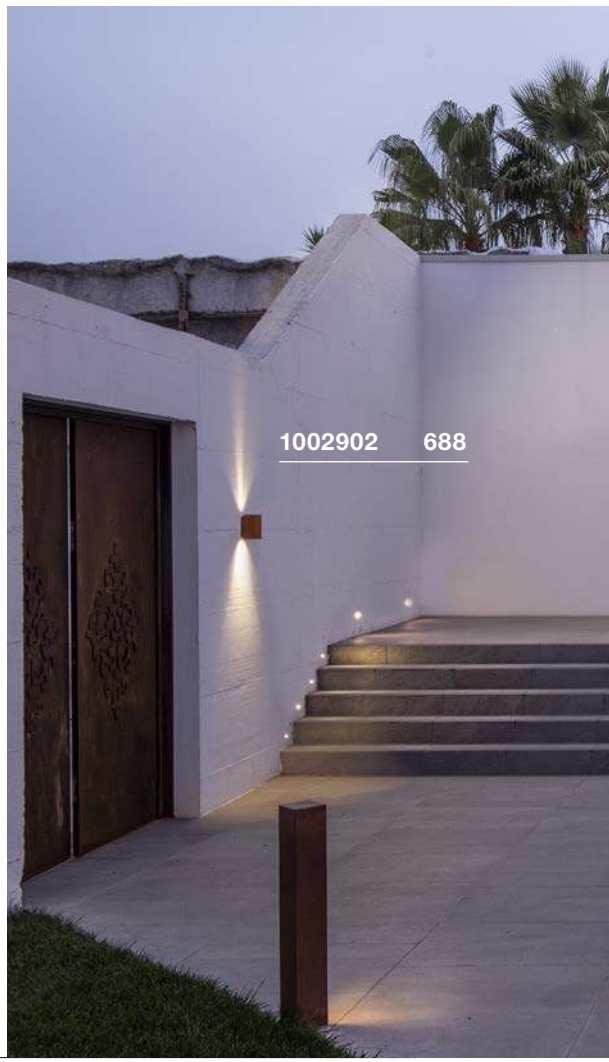





BOX-L
WL, E27

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/acrylic

IP 44 | 1,1

Dimensional drawing



Recommended lamp

LED E27 9.1W 240°
2700K 760lm
10kWh/1000h
Item No. 560402 | 15.30 GBP

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

Lamp details

max. 18W
Diameter: 6 cm max. L: 17.5 cm max.

Variant	Item No.	GBP
E27		
white	**232491**	**81.00**
E27		
anthracite	**232495**	**81.00**
E27		
brown	**232497**	**81.00**

BOX-L
WL

LED INSIDE







- Light offering direct/indirect light distribution with additional light emission to the front
- Accentuated wall lighting and even ground illumination in one

Product details

220-240V ~50/60Hz
Total wattage: 19W
Material: aluminium/acrylic

IP 44 | 1,2 | LED | 30000 | IK05

Dimensional drawing



Variant	Item No.	GBP
480lm | 3000K | CRI>80		
white	**1002037**	**99.00**
480lm | 3000K | CRI>80		
anthracite	**1002035**	**99.00**
480lm | 3000K | CRI>80		
brown	**1002036**	**99.00**

BOX UP/DOWN
WL, QT-DE12

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 44 1,26

Dimensional drawing



Recommended lamp

R7s 78mm 55W 330°
3000K 530lm
6kWh/1000h
Item No. 560332 | 9.90 GBP

Lamp details

max. 80W QT-DE12

Variant	Item No.	GBP
R7s 78mm | QT-DE12		
white	**232481**	**76.50**
R7s 78mm | QT-DE12		
anthracite	**232485**	**76.50**

RUSTY® UP/DOWN
WL, square

NEW

LED INSIDE

CCT







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: FeCSi stainless steel/aluminium

IP 65 4,65 65° 65° IK02

Dimensional drawing



Variant	Item No.	GBP
Up: 259/260lm | 3000/4000K | CRI>80 Down: 285/288lm | 3000/4000K | CRI>80		
rust	**1004650**	**216.00**

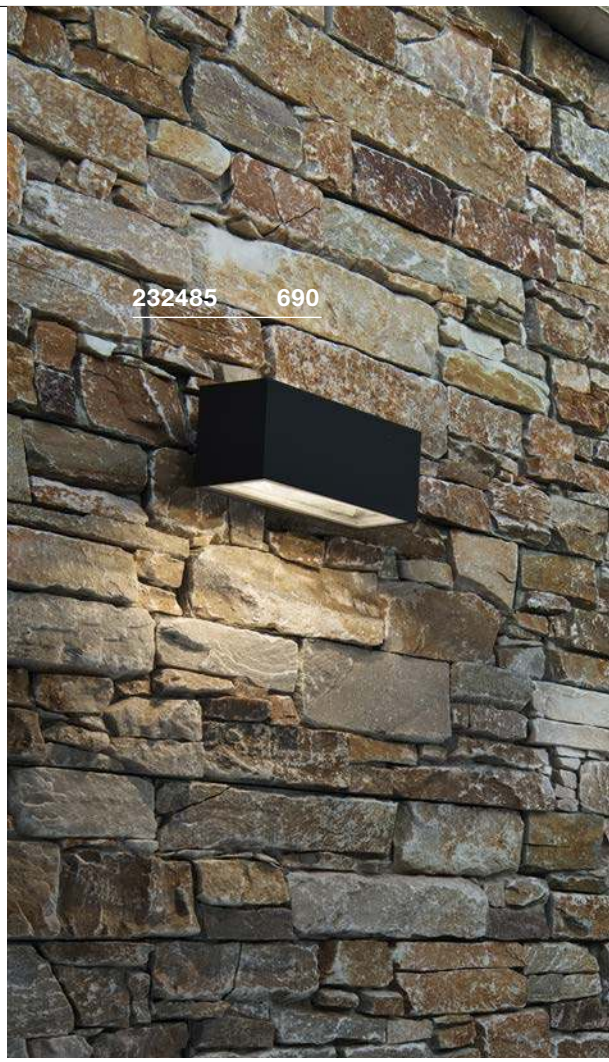

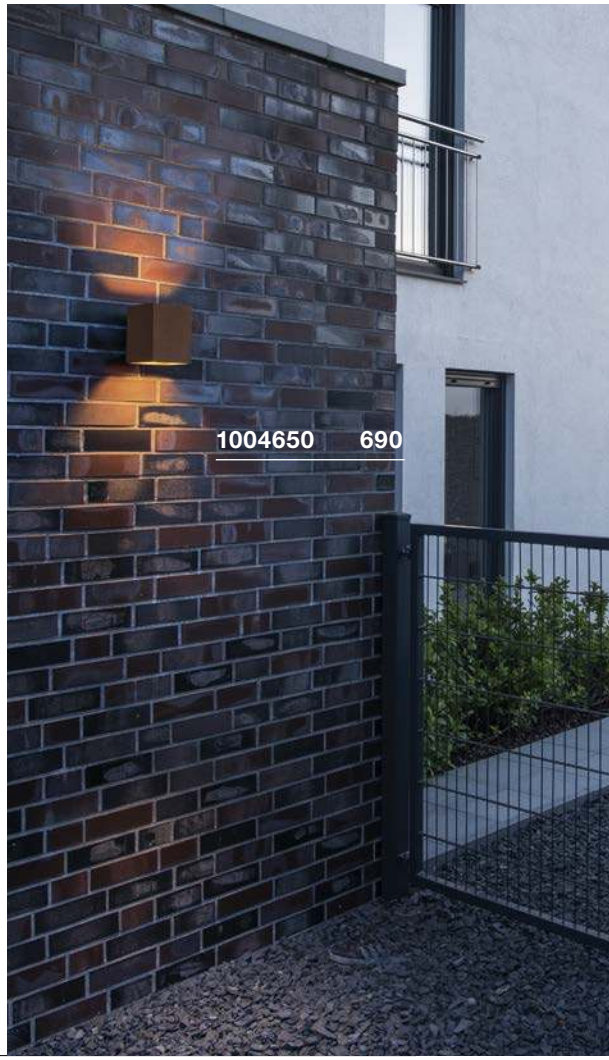

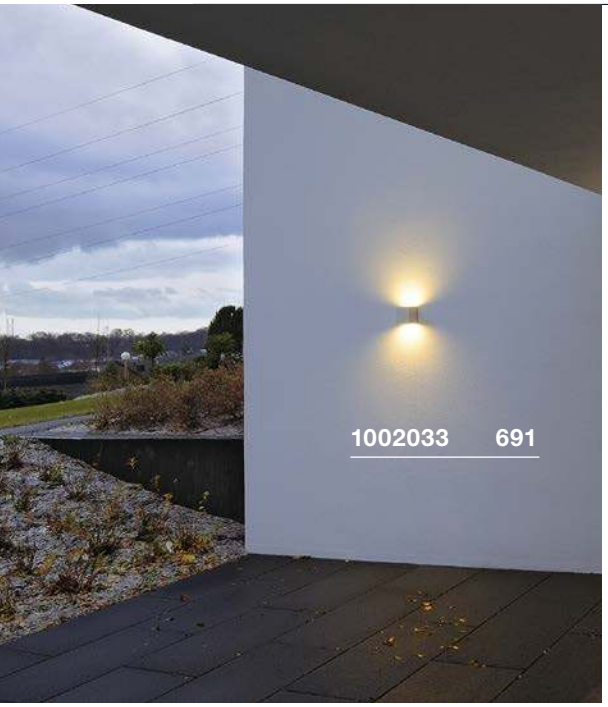



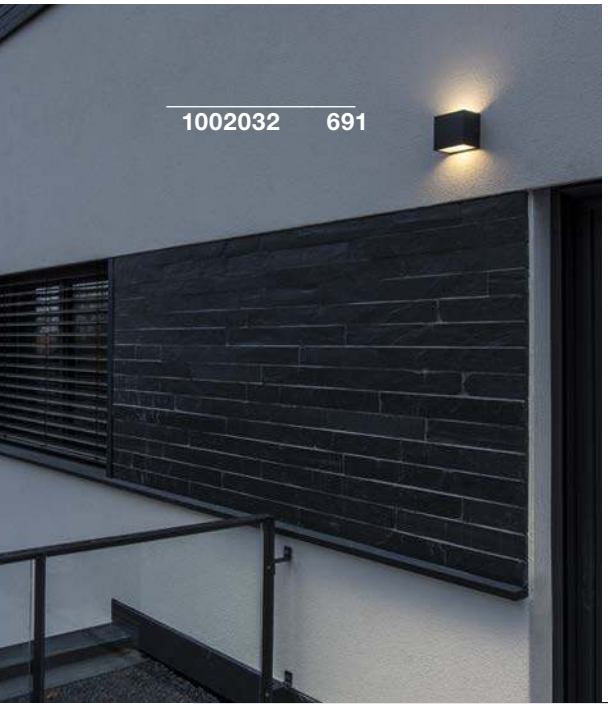

SITRA CUBE
WL, TCR-TSE

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 44 1,14

Dimensional drawing



Recommended lamp

LED GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP



Lamp details

2x max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 2.7 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE white	**232531**	**60.30**
GX53 | TCR-TSE anthracite	**232535**	**60.30**
GX53 | TCR-TSE brown	**232537**	**60.30**

SITRA CUBE
WL

LED INSIDE







Product details

100-277V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium/glass

IP 44 0,8 30000 IK05

105° 105°

Dimensional drawing



Variant	Item No.	GBP
Up: 560lm | 3000K | CRI>80 Down: 560lm | 3000K | CRI>80 anthracite	**1002032**	**90.00**
Up: 560lm | 3000K | CRI>80 Down: 560lm | 3000K | CRI>80 white	**1002033**	**90.00**
Up: 560lm | 3000K | CRI>80 Down: 560lm | 3000K | CRI>80 brown	**1002034**	**90.00**

LOGS
WL







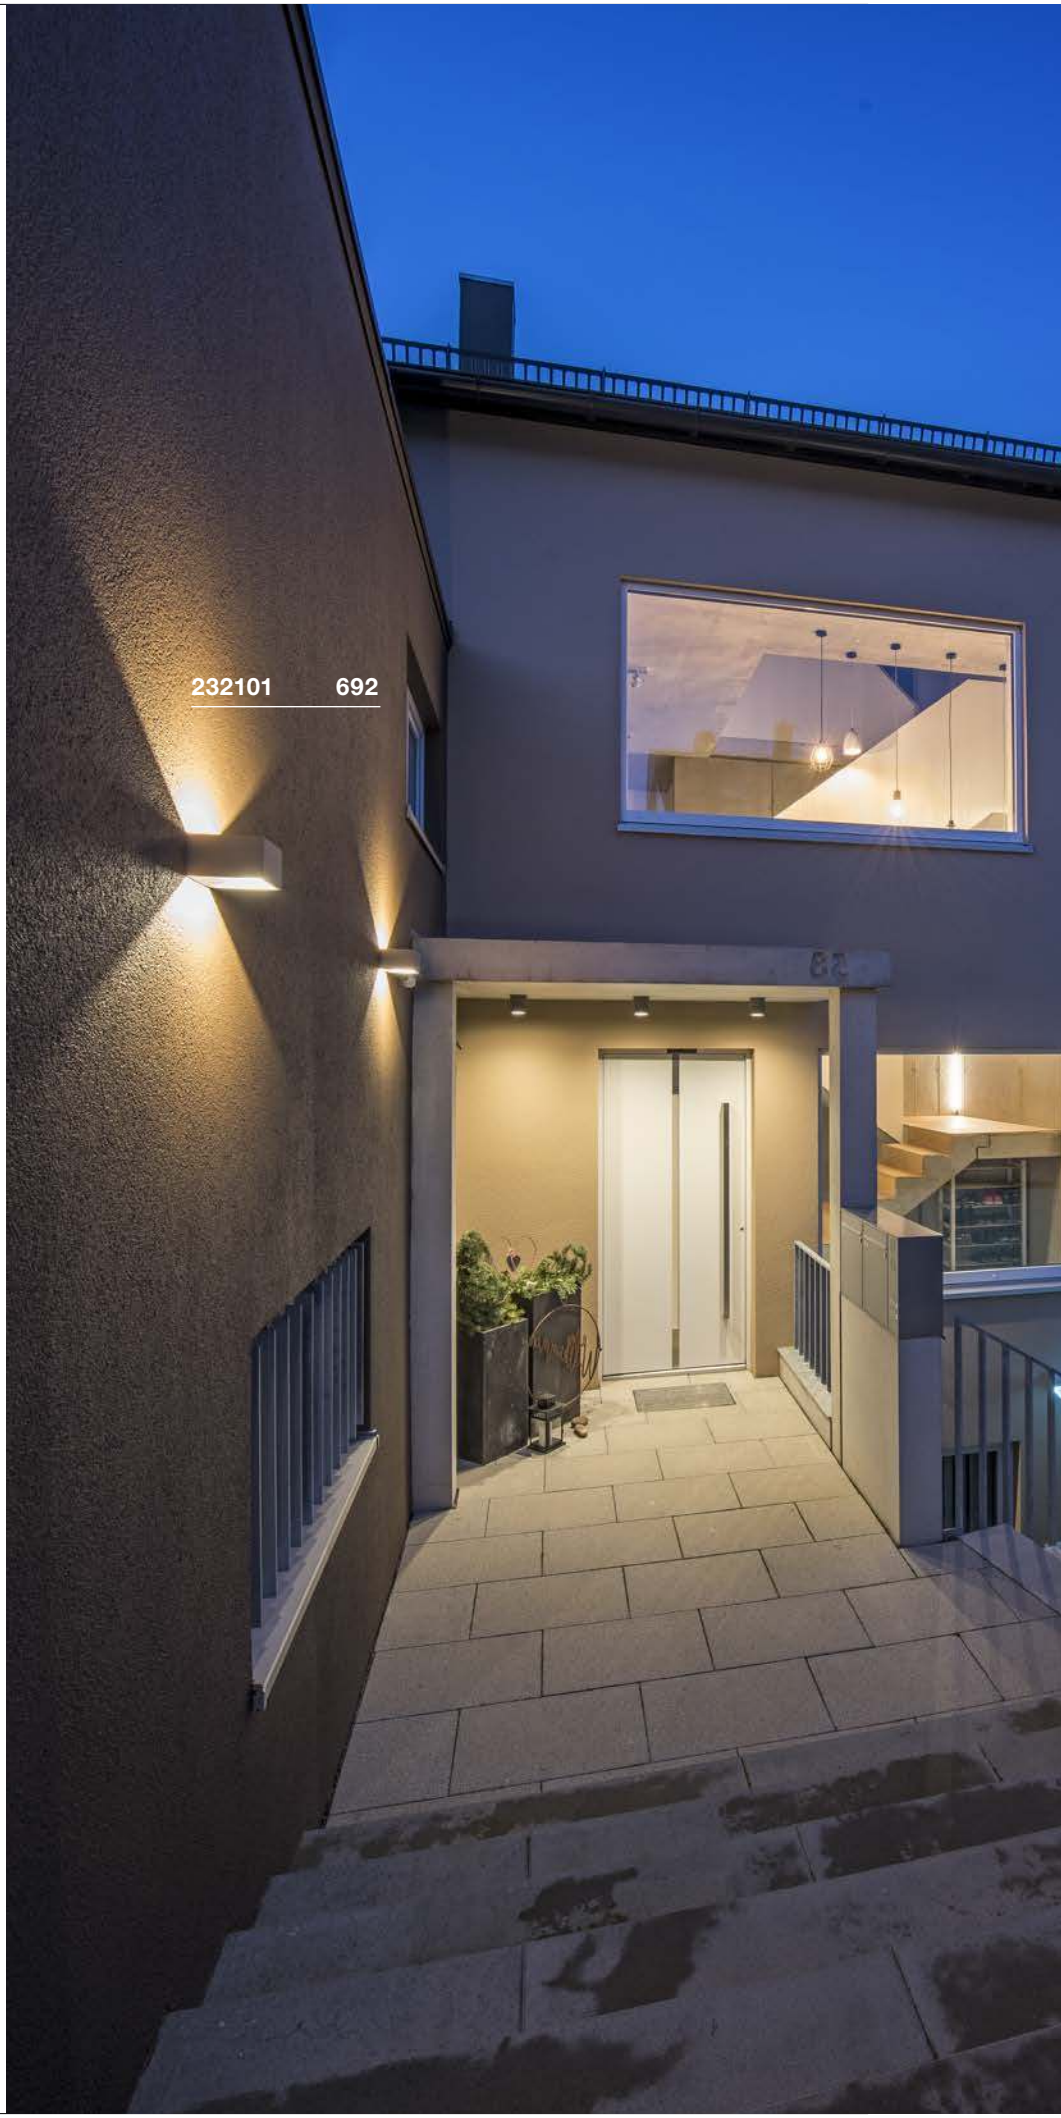

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 8W
Material: aluminium

IP 44 0,9 40000

Dimensional drawing



Variant	Item No.	GBP
650lm | 3000K | CRI>80 white	232101	180.00
550lm | 3000K | CRI>80 grey	232104	180.00
420lm | 3000K | CRI>80 anthracite	232105	180.00



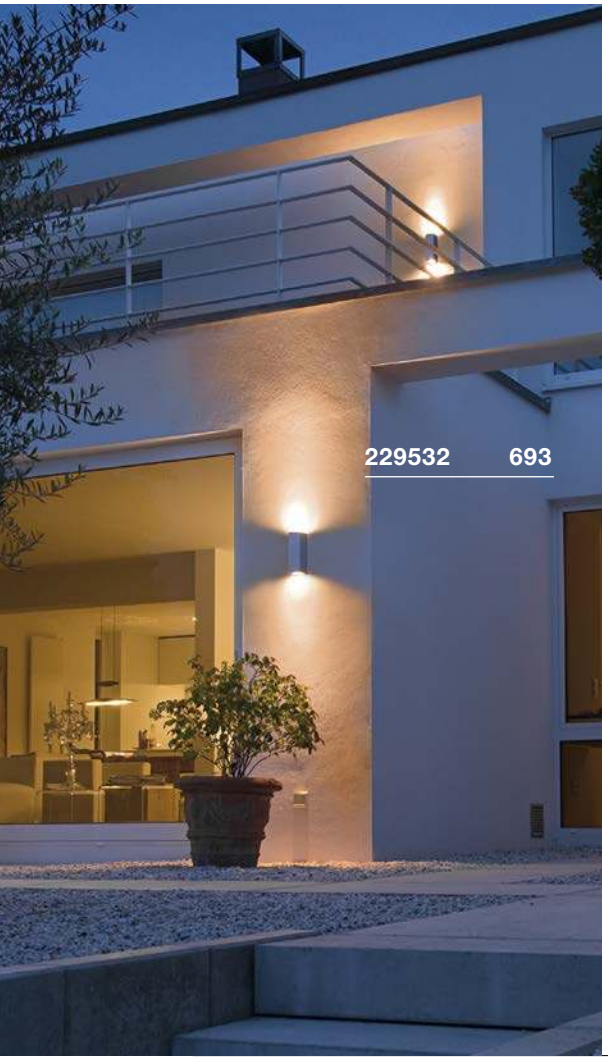

THEO UP/DOWN
WL, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 44 | 0,79 | IK02

Dimensional drawing



Recommended lamp

LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP

Lamp details

2x max. 35W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	229531	81.00
GU10 | QPAR51 grey	229532	81.00
GU10 | QPAR51 anthracite	229535	81.00
GU10 | QPAR51 aluminium	1000331	81.00

BIG THEO UP/DOWN
WL, QPAR111

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass

IP 44 | 1,7 | IK02

Dimensional drawing



Recommended lamp

LED GU10 13W 30°
2700K 1100lm
13kWh/1000h
Item No. 1001242 | 71.10 GBP

LED GU10 13W 140°
2700K 1000lm
13kWh/1000h
Item No. 1001244 | 71.10 GBP

Lamp details

2x max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111 white	229571	145.80
GU10 | QPAR111 grey	229574	145.80
GU10 | QPAR111 anthracite	229575	145.80

BIG THEO FLOOD UP/DOWN WL







Product details

100-240V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/glass

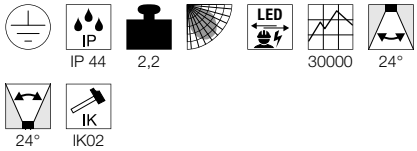

Dimensional drawing





Variant	Item No.	GBP
Up: 2000lm | 3000K | CRI>80 Down: 2000lm | 3000K | CRI>80		
anthracite	234505	251.10



BIG THEO
BEAM UP/FLOOD DOWN
WL

LED INSIDE







Product details

120-240V ~50/60Hz | 500mA
Total wattage: 29W
Material: aluminium/glass

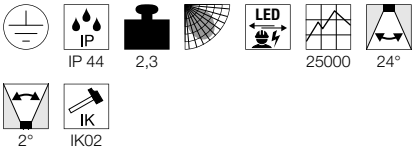

Dimensional drawing



Variant	Item No.	GBP
Flood: 2000lm | 3000K | CRI>80 Beam: 130lm | 3000K | CRI>80		
anthracite	234515	224.10

ENOLA SQUARE S
WL, single







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/glass

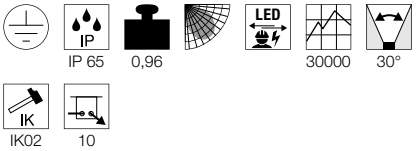

Dimensional drawing



Recommended accessories

Spacer set for outdoors
Item No. 1002853 |5.90 GBP

Variant	Item No.	GBP
390/450lm | 3000/4000K | CRI>90		
anthracite	**1003416**	**175.50**

ENOLA SQUARE M
WL, single







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium/glass

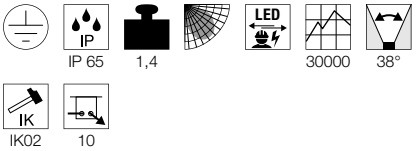

Dimensional drawing



Recommended accessories

Spacer set for outdoors
Item No. 1002853 |5.90 GBP

Variant	Item No.	GBP
720/820lm | 3000/4000K | CRI>90		
anthracite	**1003417**	**211.50**

ENOLA SQUARE L
WL, single







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 900mA
Total wattage: 35W
Material: aluminium/glass

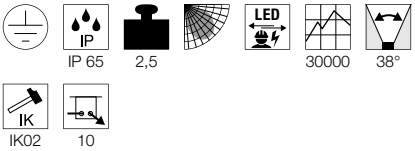

Dimensional drawing



Recommended accessories

Spacer set for outdoors
Item No. 1002853 |5.90 GBP

Variant	Item No.	GBP
3100/3400lm | 3000/4000K | CRI>90		
anthracite	**1003437**	**261.00**

ENOLA SQUARE S UP/DOWN
WL







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/glass

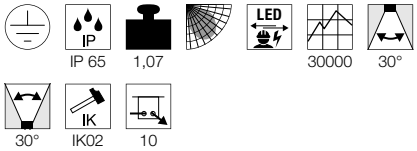

Dimensional drawing



Recommended accessories

Spacer set for outdoors
Item No. 1002853 | 5.90 GBP

Variant	Item No.	GBP
Up: 285/320lm | 3000/4000K | CRI>90 Down: 285/320lm | 3000/4000K | CRI>90		
matt anthracite	1003418	211.50

ENOLA SQUARE M UP/DOWN
WL







- The light colour can be selected during installation using a switch

Product details

120-277V ~50/60Hz | 500mA
Total wattage: 19W
Material: aluminium/glass

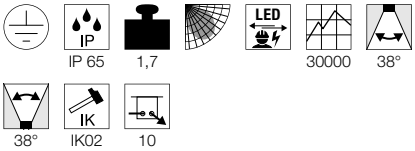

Dimensional drawing



Recommended accessories

Spacer set for outdoors
Item No. 1002853 | 5.90 GBP

Variant	Item No.	GBP
Up: 740/840lm | 3000/4000K | CRI>90 Down: 740/840lm | 3000/4000K | CRI>90		
matt anthracite	1003419	261.00

ENOLA SQUARE L UP/DOWN
WL







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 53W
Material: aluminium/glass

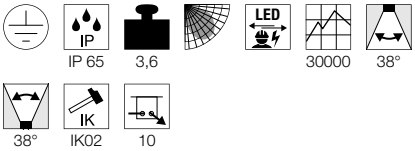

Dimensional drawing



Recommended accessories

Spacer set for outdoors
Item No. 1002853 | 5.90 GBP

Variant	Item No.	GBP
Up: 2700/3000lm | 3000/4000K | CRI>90 Down: 2700/3000lm | 3000/4000K | CRI>90		
matt anthracite	1003438	360.00

OUT-BEAM UP/DOWN
WL, QT-DE12

SOCKET INSIDE







Product details

230V ~50/60Hz
Material: aluminium/glass



Dimensional drawing



Lamp details

80W QT-DE12
L: 7.8 cm max.

Variant	Item No.	GBP
R7s 78mm | QT-DE12		
grey	1000587	99.00
R7s 78mm | QT-DE12		
anthracite	1000588	99.00



1000587 698

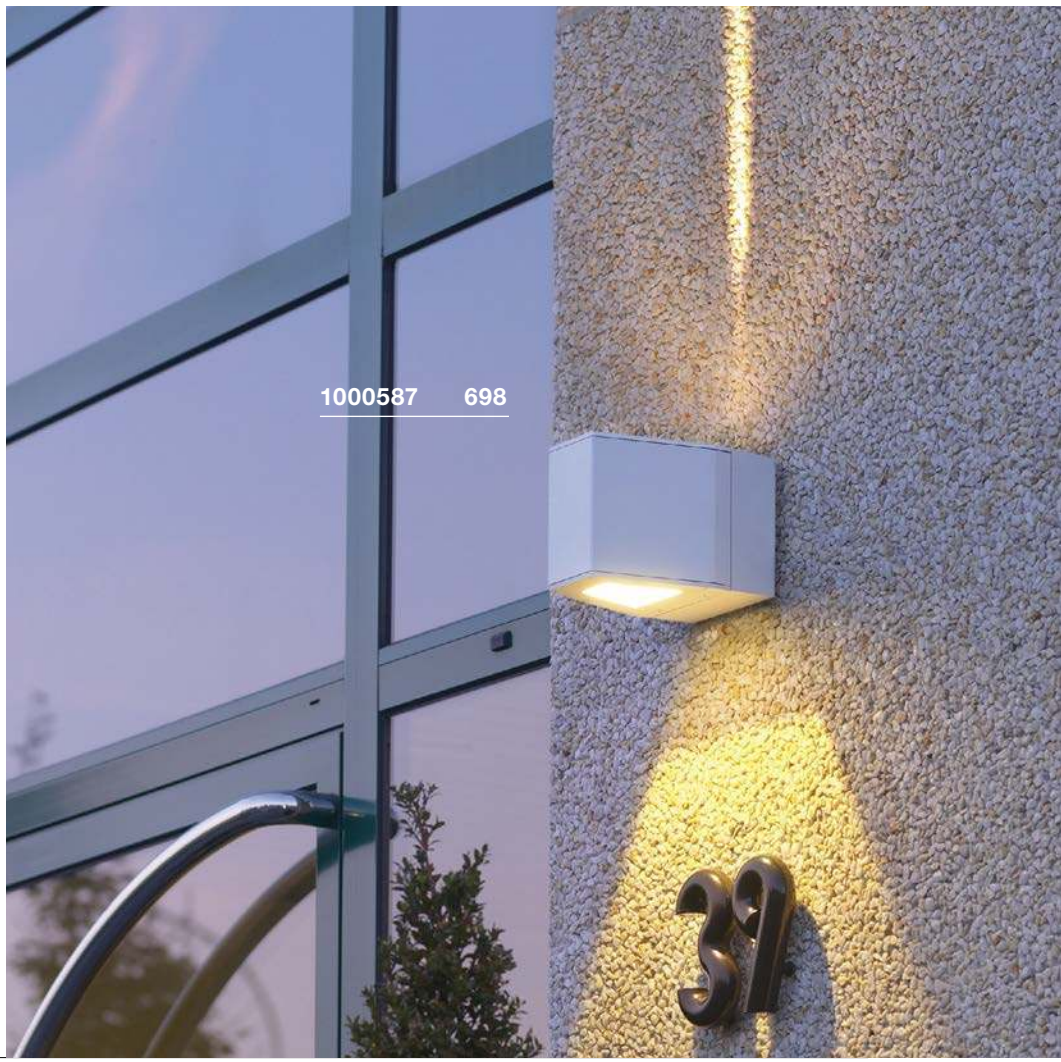

1000587 698



OUT-BEAM UP/FLOOD DOWN
WL

LED INSIDE







Product details

120-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/glass

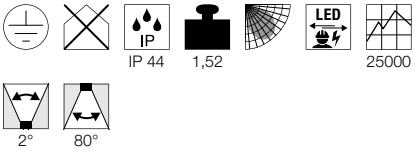

Dimensional drawing



Variant	Item No.	GBP
Flood: 690lm | 3000K | CRI>80 Beam: 50lm | 3000K | CRI>80		
grey	**229664**	**220.50**
Flood: 690lm | 3000K | CRI>80 Beam: 50lm | 3000K | CRI>80		
anthracite	**229665**	**220.50**

ESKINA D
Display, PHASE







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium
Dimmable: C

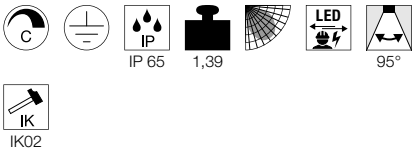

Dimensional drawing



Variant	Item No.	GBP
1000lm | 3000/4000K | CRI>80		
matt anthracite	**1002905**	**207.00**

TODAY PRO
Display







Product details

220-240V ~50/60Hz | 640mA
Total wattage: 29W
Material: aluminium

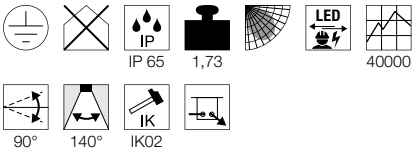

Dimensional drawing



Variant	Item No.	GBP
2800lm | 4000K | CRI>70		
black	**1000880**	**175.50**
2800lm | 4000K | CRI>70		
white	**1000881**	**175.50**

TODAY
Display







Product details

220-240V ~50/60Hz | 640mA
Total wattage: 29W
Material: aluminium

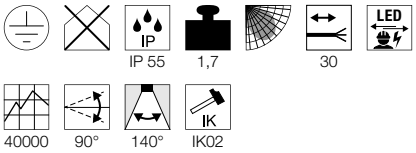

Dimensional drawing



Tip

Open cable end

Variant	Item No.	GBP
2800lm | 4000K | CRI>70		
black	**227700**	**175.50**
2800lm | 4000K | CRI>70		
white	**227701**	**175.50**



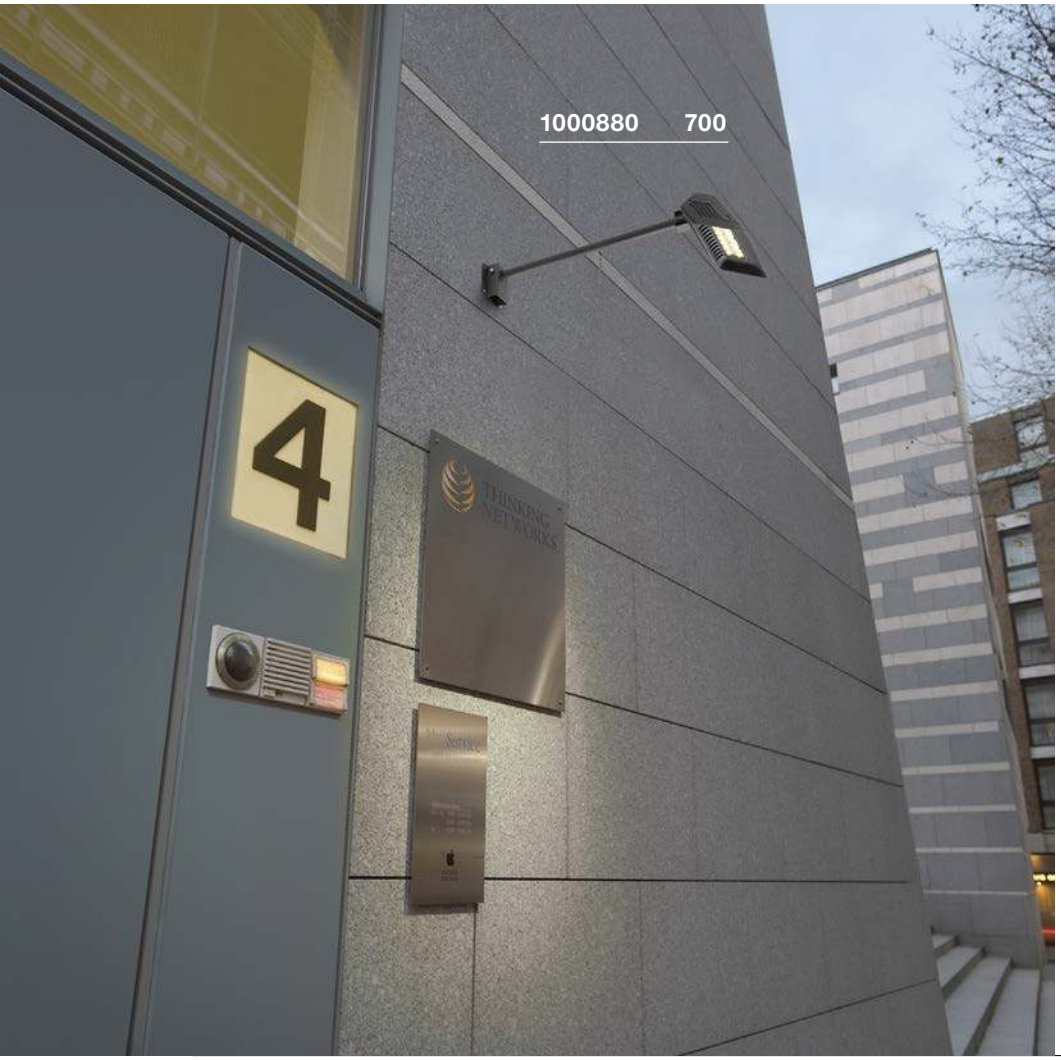

MYRA DISPLAY
WL, curved, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium

IP 55 | 0,73 | 340°

Dimensional drawing



Recommended accessories

Surface mounting frames
Item No. 233214 | 16.20 GBP

Surface mounting frames
Item No. 233215 | 16.20 GBP

Recommended lamp

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP

Lamp details

max. 50W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
grey	233134	144.00
GU10 | QPAR51		
anthracite	233135	144.00

PHOTONIA
CL, E27

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 44 1,26 IK03

Dimensional drawing



Recommended lamp

LED E27 7.1W 330°
2700K 806lm
8kWh/1000h
Item No. 1001756 | 20.70 GBP



LED E27 5W 330°
2000K 500lm
5kWh/1000h
Item No. 560741 | 25.20 GBP



Lamp details

max. 60W
Diamter: 9 cm max. L: 15 cm max.

Variant	Item No.	GBP
E27		
anthracite	**232055**	**157.50**

MOLAT
CL, E27

SOCKET INSIDE





Product details

230V ~50/60Hz
Material: aluminium/glass

IP 44 0,8 IK02

Dimensional drawing



Recommended lamp

LED E27 7W 280°
2200-2700K 830lm
7kWh/1000h
Item No. 1002126 | 17.10 GBP



LED E27 7W 280°
2700K 790lm
7kWh/1000h
Item No. 1002124 | 9.90 GBP



Lamp details

max. 60W
Diameter: 6.5 cm max. L: 14.5 cm max.

Variant	Item No.	GBP
E27		
anthracite	**1000823**	**99.00**







OVALISK
CL

NEW

LED INSIDE

CCT







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 350mA
Total wattage: 7.5W
Material: aluminium/glass

IP 65 | 1,7 | IK02

Dimensional drawing



Variant	Item No.	GBP
500/540lm | 3000/4000K | CRI>80		
anthracite	1004677	202.50

SITRA
CL, TCR-TSE

SOCKET INSIDE







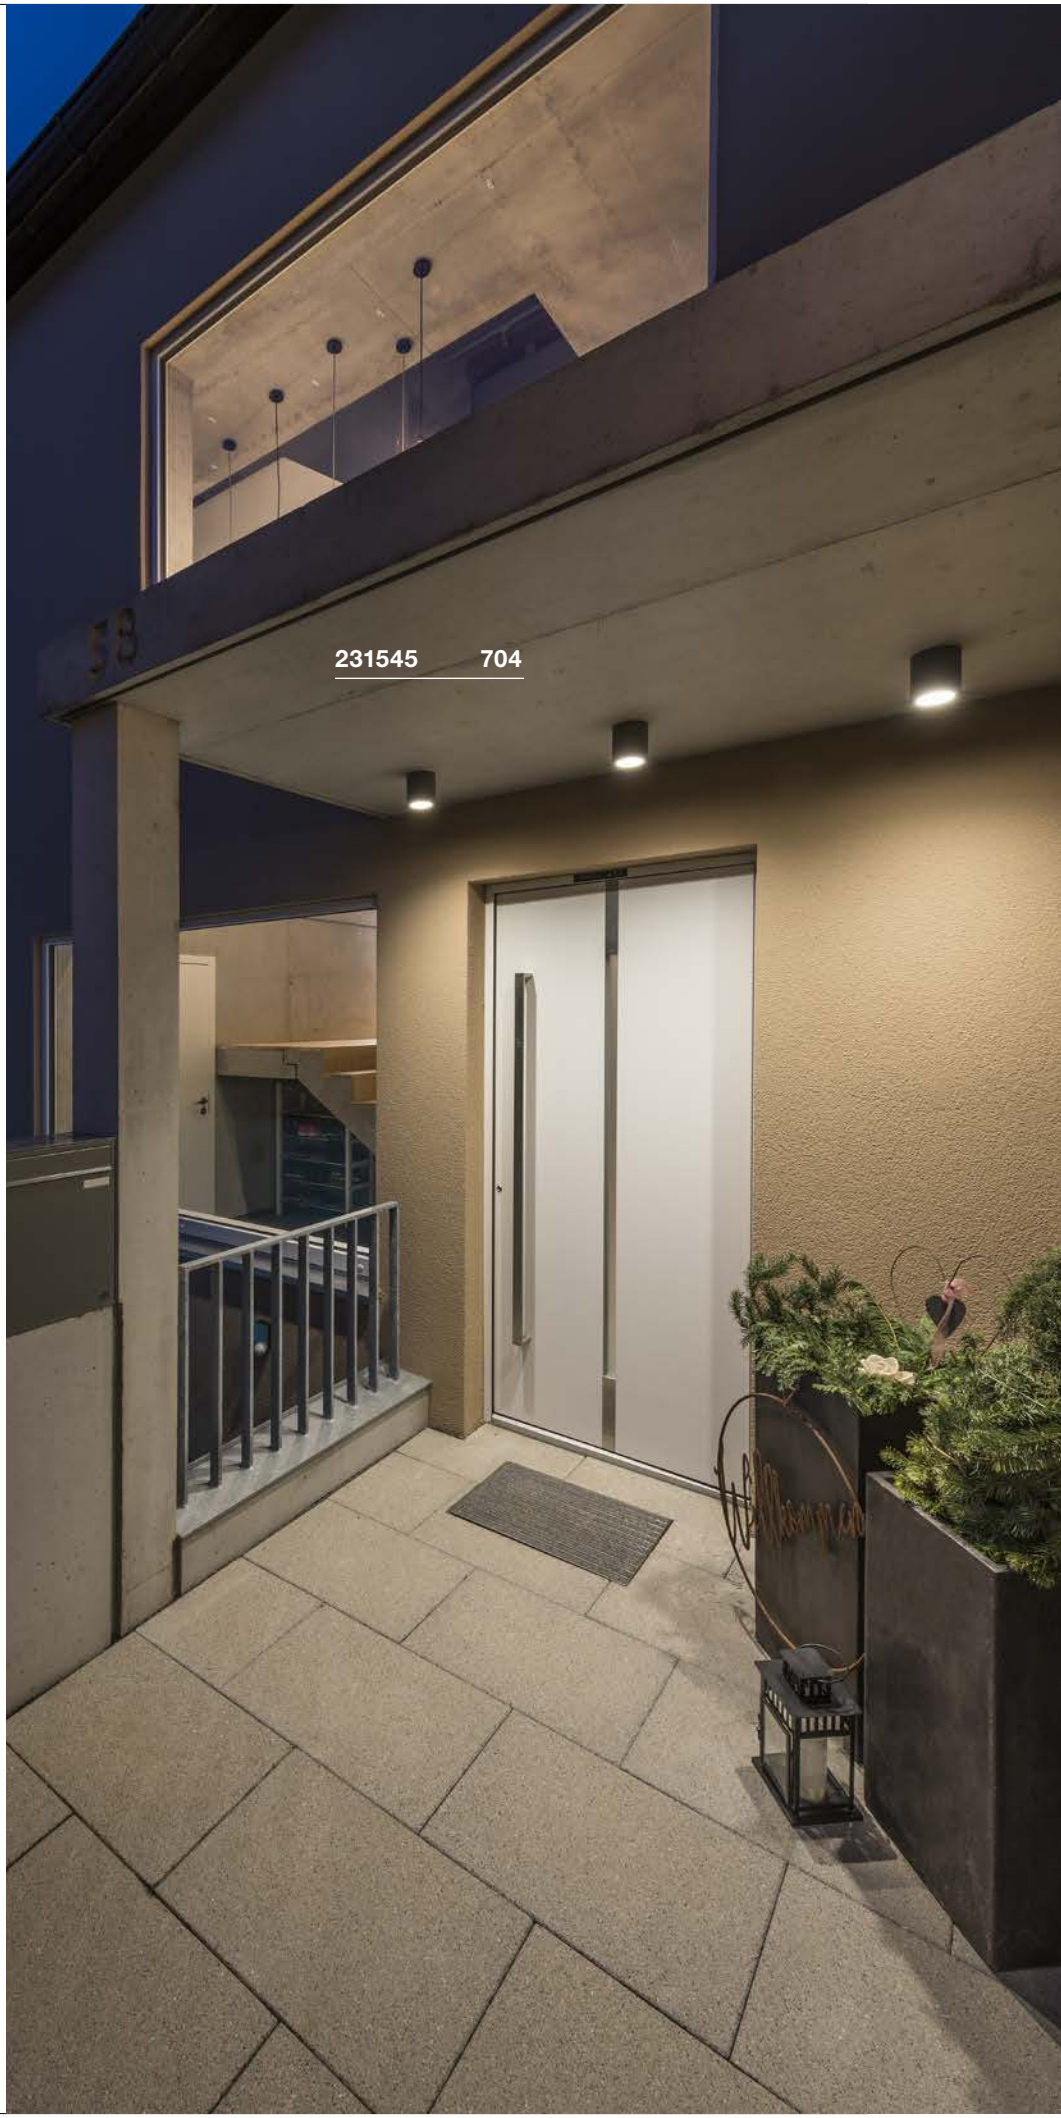

Product details

230V -50Hz
Material: aluminium/glass

IP 44 0,66

Dimensional drawing



Recommended lamp

GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP

LED GX53 8.2W 120°
4000K 620lm
9kWh/1000h
Item No. 550074 | 20.70 GBP

Lamp details

max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 3.5 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
white	231541	72.00
GX53 | TCR-TSE		
anthracite	231545	72.00

ENOLA ROUND S
CL







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/glass

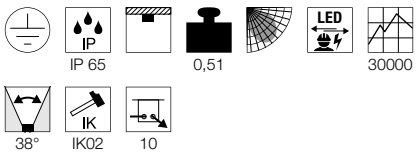

Dimensional drawing



Variant	Item No.	GBP
510/580lm | 3000/4000K | CRI>90		
matt anthracite	1003426	148.50

ENOLA ROUND M
CL







- The light colour can be selected during installation using a switch

Product details

100-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium/glass

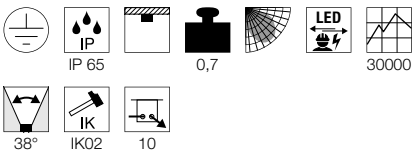

Dimensional drawing



Variant	Item No.	GBP
700/800lm | 3000/4000K | CRI>90		
matt anthracite	1003427	189.00

ENOLA ROUND L
CL







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 900mA
Total wattage: 35W
Material: aluminium/glass

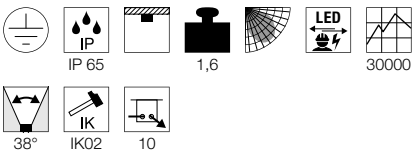

Dimensional drawing



Variant	Item No.	GBP
2500/2800lm | 3000/4000K | CRI>90		
matt anthracite	1003442	238.50

POLE PARC
CL

LED INSIDE





Product details

100-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/glass

IP 44 | 1,8 | LED | 40000 | 36°

IK06

Dimensional drawing



Variant	Item No.	GBP
2900lm | 3000K | CRI>80		
anthracite	1000447	193.50

ROX
CL, GX53

SOCKET INSIDE







• High-quality brushed surface

Product details

230V -50Hz
Material: aluminium/glass

IP 44 | 0,63

Dimensional drawing



Recommended lamp

LED GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP



Lamp details

max. 11W TCR-TSE
Diameter: 7.5 cm max. L: 3.5 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
aluminium	1000339	126.00

ROX
CL, QPAR111

SOCKET INSIDE







• High-quality brushed surface

Product details

230V -50Hz
Material: aluminium/glass

IP 44 | 0,8

Dimensional drawing



Recommended lamp

LED GU10 7.9W 25°
2700K 730lm
8kWh/1000h
Item No. 560702 | 20.70 GBP



LED GU10 6.5W 38°
2700K 390lm
7kWh/1000h
Item No. 551882 | 40.50 GBP



Lamp details

max. 50W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
aluminium	1000332	99.00



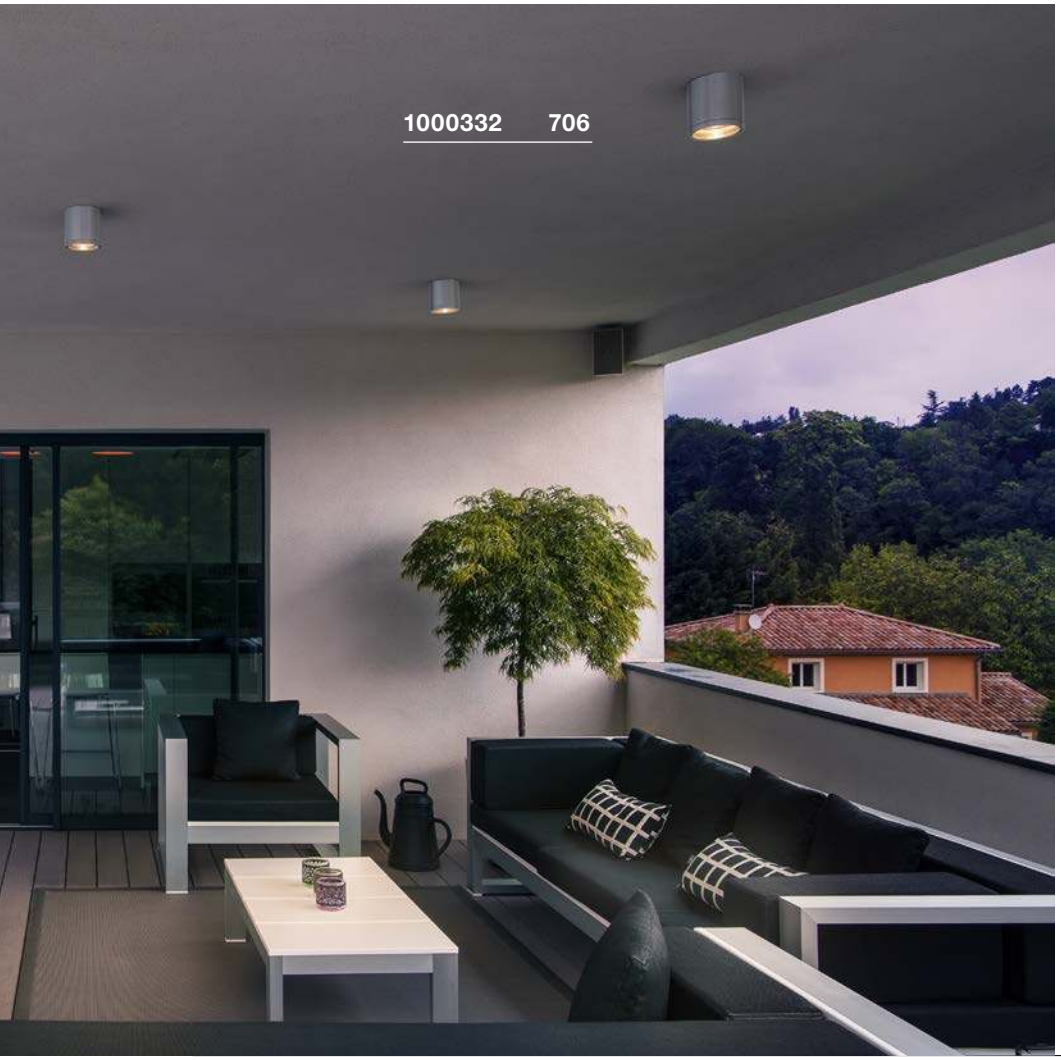

SQUARE
CL, PHASE

LED INSIDE







- Lights made from high-quality 316 stainless steel
- Modern design
- Diffuse light distribution for even ground illumination

Product details

220-240V ~50/60Hz
Total wattage: 12W
Material: stainless steel 316
Dimmable: C, L





Dimensional drawing



Variant	Item No.	GBP
760lm | 3000K | CRI>80 stainless steel	1000835	188.10


234535 709



BIG THEO
CL, QPAR111

SOCKET INSIDE







Product details

230V -50Hz
Material: aluminium/glass

IP 44 1

Dimensional drawing



Recommended lamp

LED GU10 6.5W 38°
2700K 390lm
7kWh/1000h
Item No. 551882 | 40.50 GBP



LED GU10 7.9W 40°
4000K 760lm
8kWh/1000h
Item No. 560724 | 20.70 GBP



Lamp details

max. 75W QPAR111

Variant	Item No.	GBP
GU10 | QPAR111		
white	**229551**	**99.00**
GU10 | QPAR111		
grey	**229554**	**99.00**
GU10 | QPAR111		
anthracite	**229555**	**99.00**

BIG THEO
CL

LED INSIDE





Product details

100-277V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/glass

IP 44 1,3 LED 30000 24°

IK IK02

Dimensional drawing



Variant	Item No.	GBP
2000lm | 3000K | CRI>80		
anthracite	**234535**	**165.60**

ENOLA SQUARE S
CL







Product details

100-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/glass

IP 65 | 0,68 | LED | 30000 | 38° | IK02 | 10

Dimensional drawing



Variant	Item No.	GBP
510/580lm | 3000/4000K | CRI>90		
anthracite	1003420	148.50

ENOLA SQUARE M
CL







Product details

100-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium/glass

IP 65 | 0,7 | LED | 30000 | 38° | IK02 | 10

Dimensional drawing



Variant	Item No.	GBP
700/800lm | 3000/4000K | CRI>90		
anthracite	1003421	189.00

ENOLA SQUARE L
CL







Product details

220-240V ~50/60Hz | 900mA
Total wattage: 35W
Material: aluminium/glass

IP 65 | 2 | LED | 30000 | 38° | IK02 | 10

Dimensional drawing



Variant	Item No.	GBP
2500/2800lm | 3000/4000K | CRI>90		
anthracite	1003439	238.50

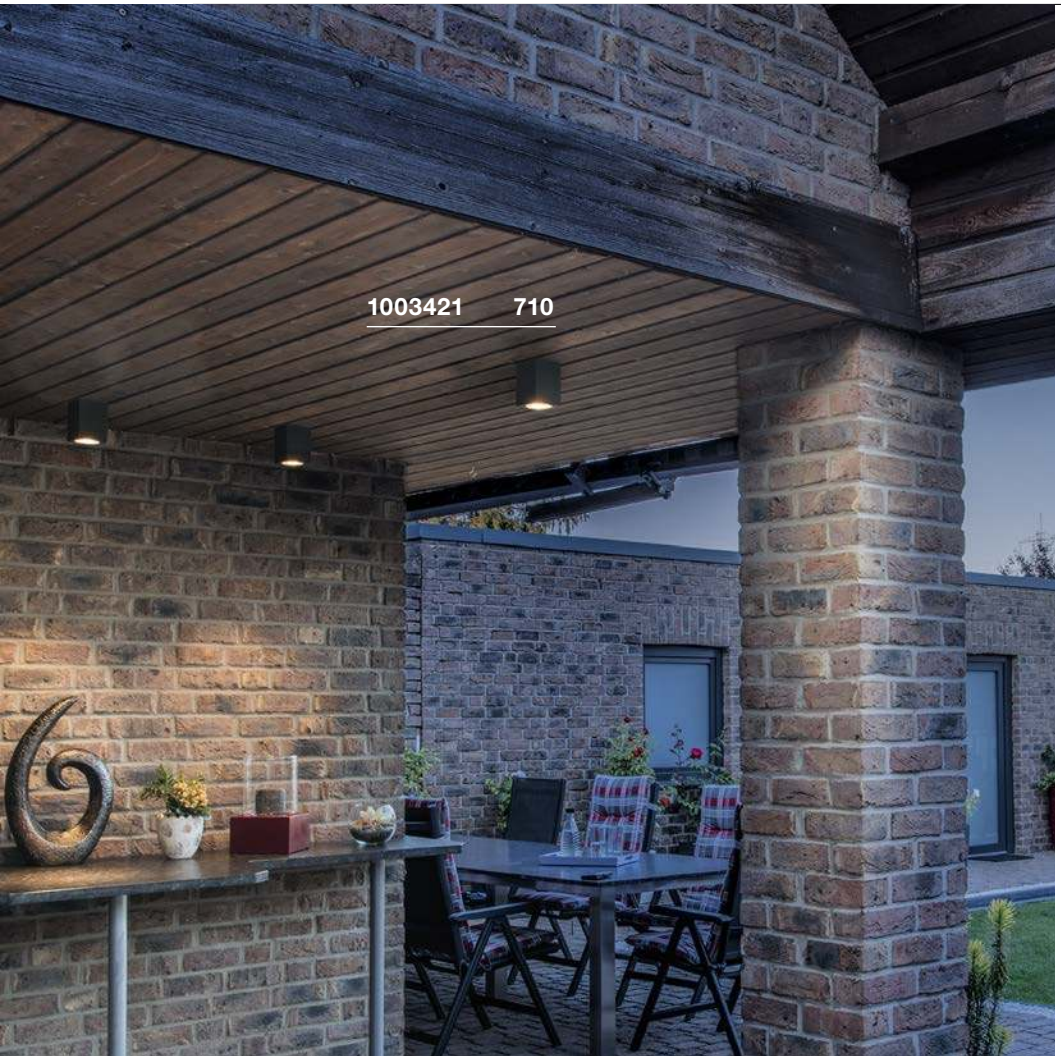



MALU
CL

LED INSIDE

reddot award 2019
winner







- Unusual design
- For even illumination

Product details

220-240V ~50/60Hz
Total wattage: 9.2W
Material: aluminium/glass

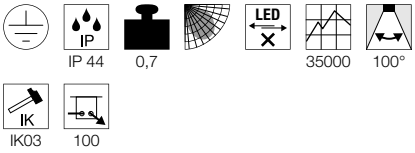

Dimensional drawing



Variant	Item No.	GBP
360lm | 3000K | CRI>80 anthracite	1002157	156.60

AINOS
CW

LED INSIDE





Product details

100-277V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/polycarbonate (PC)



IP 44 1,5 25000 120°



IK02

Dimensional drawing



Variant	Item No.	GBP
1430lm | 3000K | CRI>80		
white	**229961**	**117.00**
1430lm | 3000K | CRI>80		
anthracite	**229965**	**117.00**

AINOS
CW SENSOR

LED INSIDE

MR







- Motion detector with microwave technology integrated in the light housing

Product details

100-277V ~50/60Hz | 500mA
Total wattage: 22W
Material: aluminium/polycarbonate (PC)



IP 44 1,6 25000 120°



IK02

Dimensional drawing



Tip

Movement sensor: the detection angle is 360°. The detection distance, ambient brightness, and operational time can be adjusted.

Variant	Item No.	GBP
1430lm | 3000K | CRI>80		
white	**229971**	**153.00**
1430lm | 3000K | CRI>80		
anthracite	**229975**	**153.00**



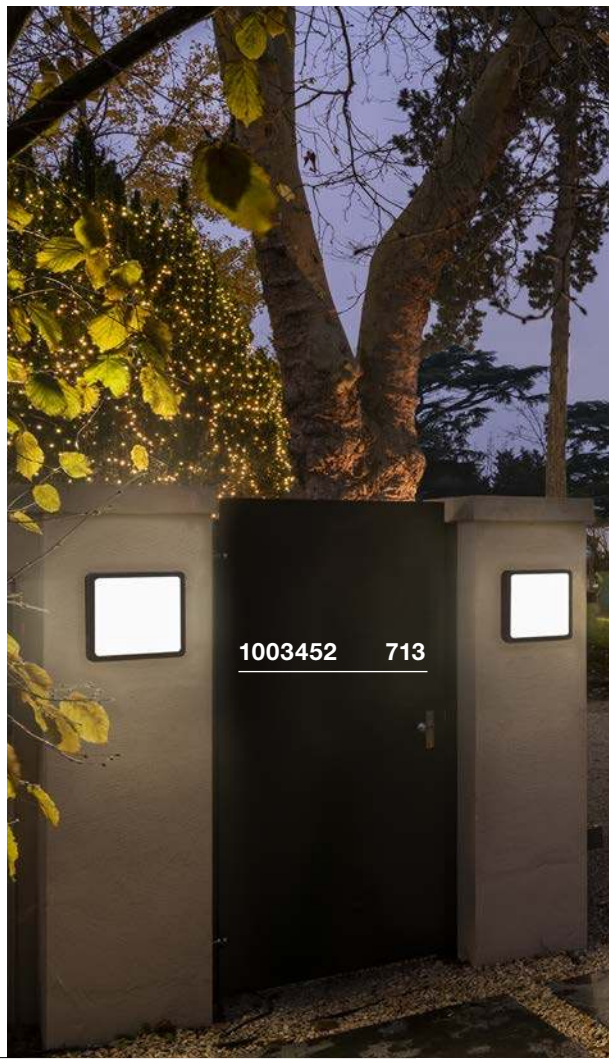

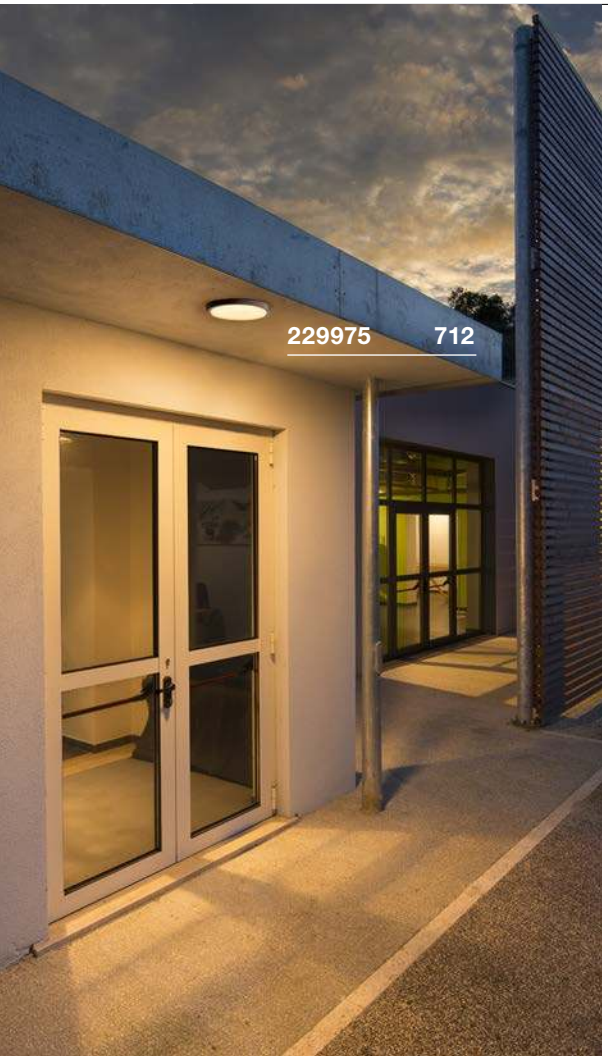



AINOS
CW, square

NEW VARIANT

LED INSIDE

CCT





- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 17W
Material: aluminium/polycarbonate (PC)

IP 65 | 2,1 | LED | 54000

Dimensional drawing



Variant	Item No.	GBP
1300lm | 3000/4000K | CRI>80		
matt white	**1003449**	**126.00**
1300lm | 3000/4000K | CRI>80		
anthracite	**1003450**	**126.00**

AINOS
CW SENSOR, square

NEW VARIANT

LED INSIDE

CCT

MR







- The light colour can be selected during installation using a switch
- Motion detector with microwave technology integrated in the light housing

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)

IP 65 | 2,2 | LED | 54000

Dimensional drawing



Tip

Movement sensor: the detection angle is 360°. The detection distance, ambient brightness, and operational time can be adjusted.

Variant	Item No.	GBP
1300lm | 3000/4000K | CRI>80		
matt white	**1003451**	**162.00**
1300lm | 3000/4000K | CRI>80		
anthracite	**1003452**	**162.00**

RUBA 27/42
CW







- The light colour can be selected during installation using a switch
- Contains recycled material

Product details

220-240V ~50/60Hz| 600mA
Material: Polycarbonate (PC)



IP 65 | 30000 | 120° | IK08 | 10

Dimensional drawing





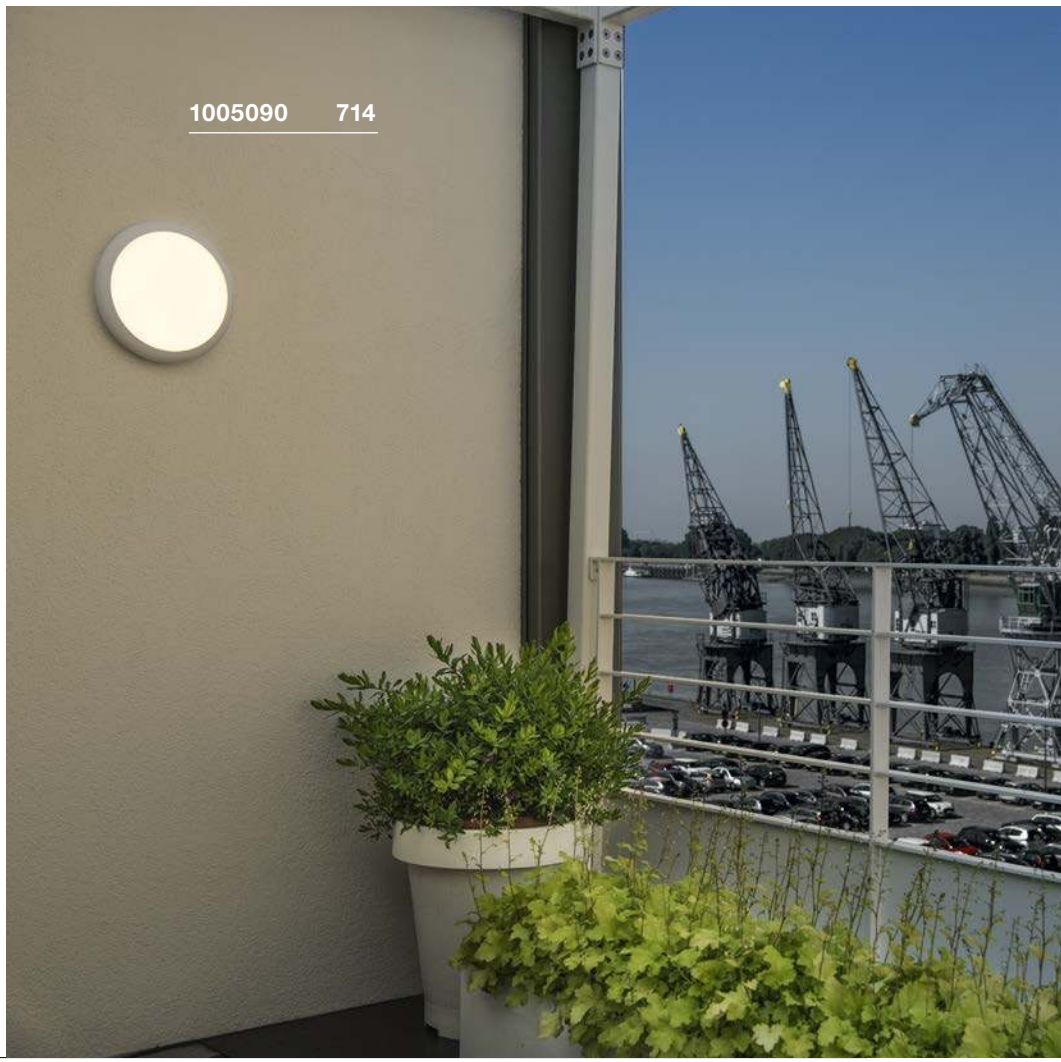

Variant	Item No.	GBP
985/1100lm | 3000/4000K | CRI>90 | 12W Diameter: 27 cm | 0.75 kg		
white	1005089	85.50
2000/2270lm | 3000/4000K | CRI>90 | 22W Diameter: 42 cm | 1.67 kg		
white	1005090	171.00





BULAN GRID
CW, E27

SOCKET INSIDE







- Subtle design for a wide range of uses

Product details
230V -50Hz
Material: aluminium/polycarbonate (PC)

IP 44 1,3

Dimensional drawing



Recommended lamp

E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP

LED E27 15W 240°
3000K 1521lm
15kWh/1000h
Item No. 1001033 | 25.20 GBP

Lamp details
2x max. 25W
Diameter: 5.2 cm max. L: 17.3 cm max.

Variant	Item No.	GBP
E27		
white	**229081**	**49.50**
E27		
anthracite	**229085**	**49.50**

BULAN
CW, E14

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/glass

IP 44 1,7

Dimensional drawing



Recommended lamp

LED E14 4.5W 280°
2700K 470lm
5kWh/1000h
Item No. 1002128 | 7.20 GBP

LED E14 6.5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP

Lamp details
max. 60W C35
Diameter: 4.8 cm max. L: 13 cm max.

Variant	Item No.	GBP
E14 | C35		
white	**229071**	**49.50**
E14 | C35		
grey	**229072**	**49.50**
E14 | C35		
anthracite	**229075**	**49.50**

LIPA
CW, PHASE







- Colour temperature (3000K/4000K) can be adjusted using the switch
- unusual design

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 24W
Material: aluminium/polycarbonate (PC)
Dimmable: C

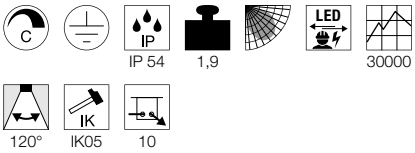

Dimensional drawing



Variant	Item No.	GBP
1600lm | 3000/4000K | CRI>80		
white	**1001855**	**228.60**
1500lm | 3000/4000K | CRI>80		
anthracite	**1001856**	**228.60**

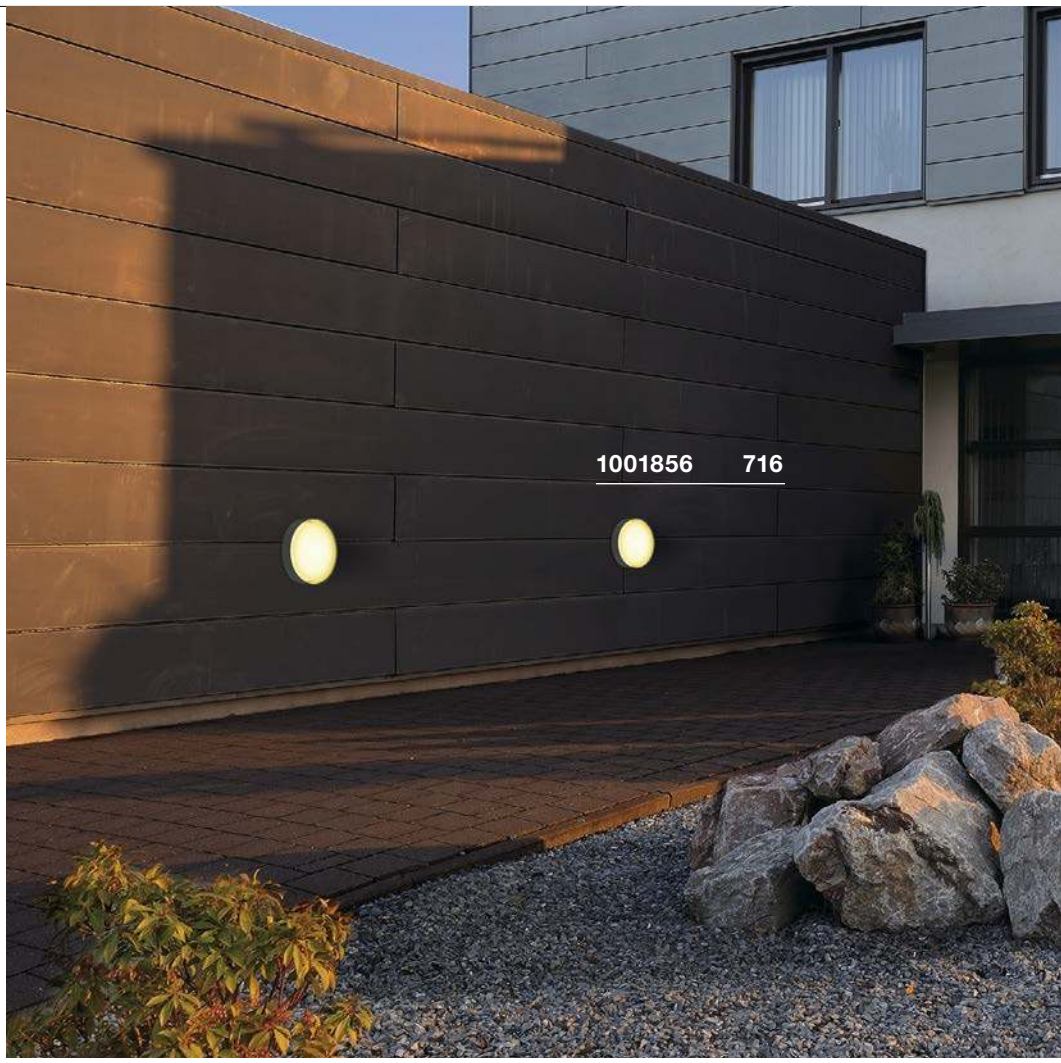

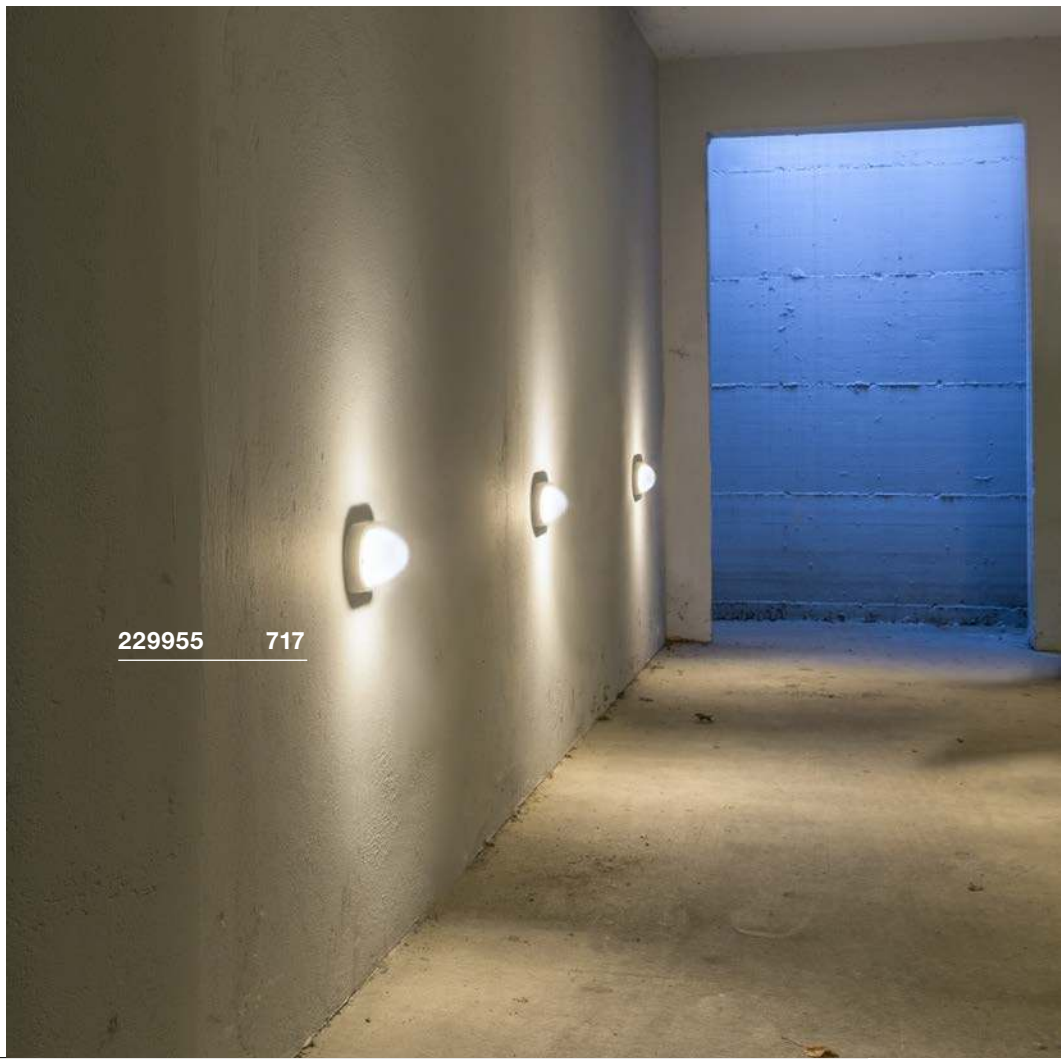

TERANG 200
CW







- High-voltage LED

Product details

220-240V ~50Hz
Total wattage: 11W
Material: aluminium/polycarbonate (PC)



Dimensional drawing



Variant	Item No.	GBP
680lm | 3000K | CRI>80		
white	**229931**	**58.50**
680lm | 3000K | CRI>80		
anthracite	**229935**	**58.50**

TERANG 270
CW







- High-voltage LED

Product details

220-240V ~50Hz
Total wattage: 22W
Material: aluminium/polycarbonate (PC)





Dimensional drawing



Variant	Item No.	GBP
1300lm | 3000K | CRI>80		
white	**229941**	**76.50**
1300lm | 3000K | CRI>80		
anthracite	**229945**	**76.50**

TERANG 270
CW SENSOR







- High-voltage LED
- Motion detector with microwave technology integrated in the light housing

Product details

220-240V ~50Hz
Total wattage: 23W
Material: aluminium/polycarbonate (PC)



Dimensional drawing



Tip

Movement sensor: the detection angle is 360°. The detection distance, ambient brightness, and operational time can be adjusted.

Variant	Item No.	GBP
1300lm | 3000K | CRI>80		
white	**229951**	**112.50**
1300lm | 3000K | CRI>80		
anthracite	**229955**	**112.50**

OUT-BEAM FRAME
SP

NEW

LED INSIDE





- Exciting lighting effect
- Light beam width 3°
- 180° light emission left and right

Product details

100-277V ~50/60Hz| 700mA
Total wattage: 3.5W
Material: aluminium/acrylic



IP 55 | 0,61 | 30000 | IK03



10

Dimensional drawing



Variant	Item No.	GBP
60lm | 3000K | CRI80		
anthracite	1003518	97.20
60lm | 3000K | CRI80		
white	1003519	97.20

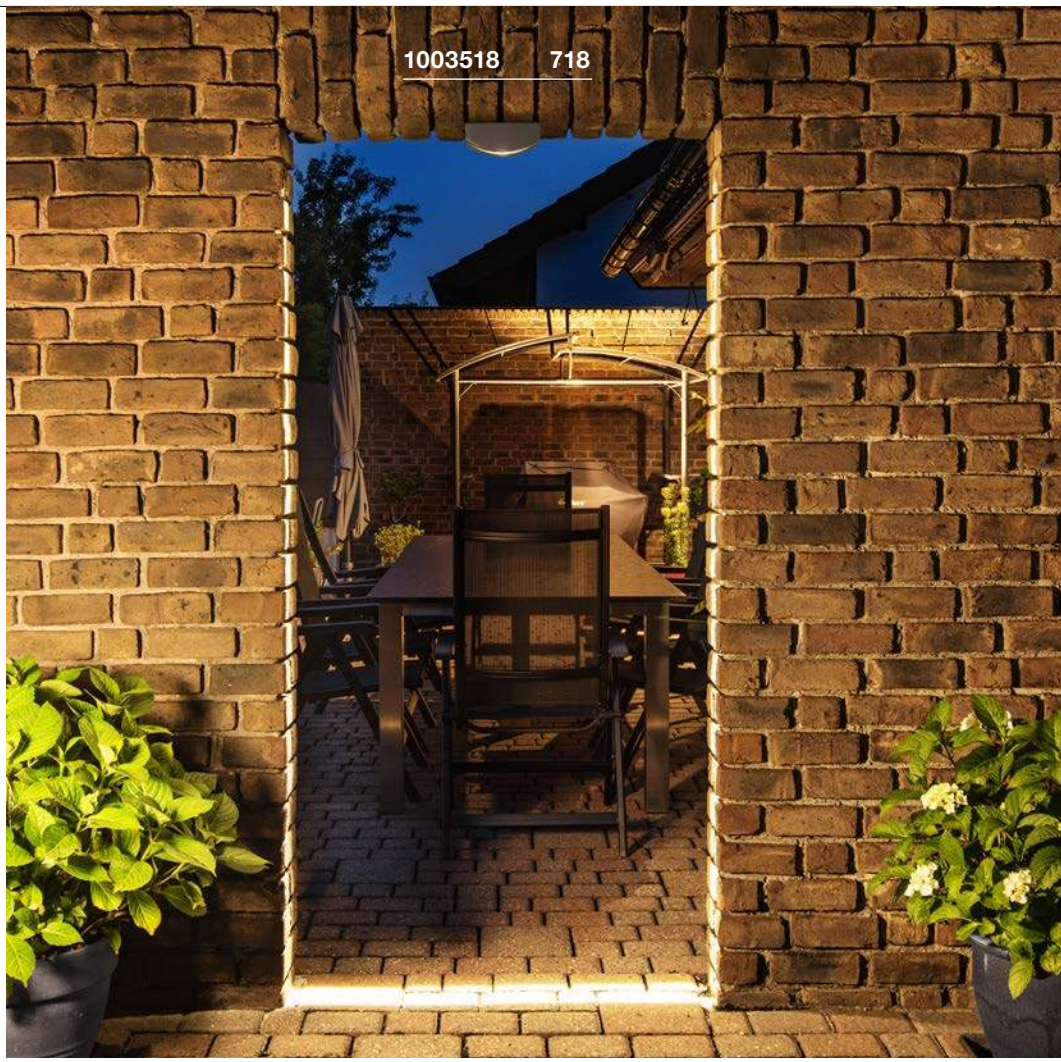



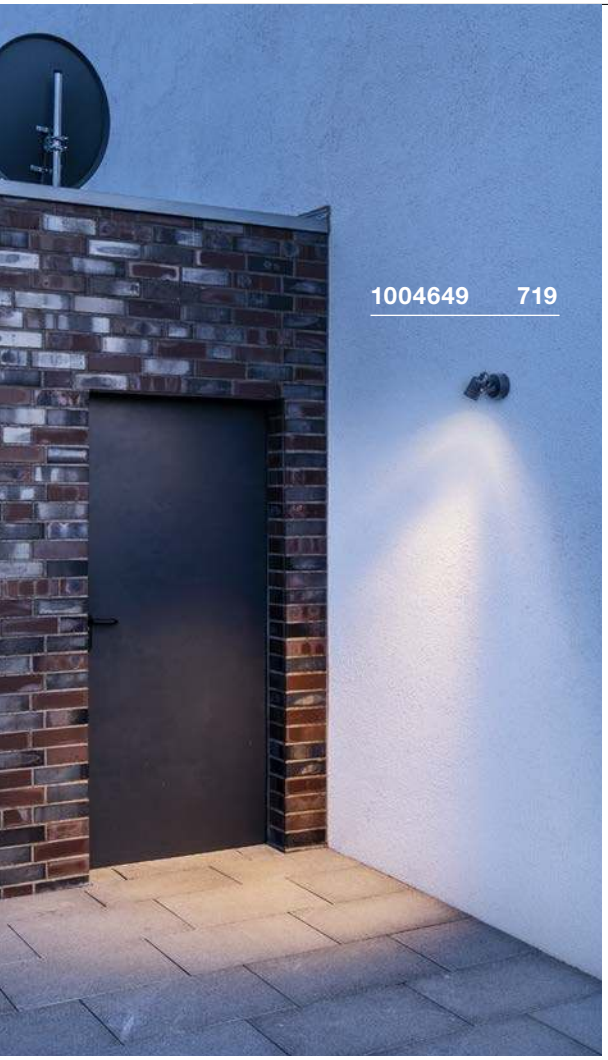



LED SPOT
SP

NEW

LED INSIDE







Product details

100-240V ~50/60Hz | 240mA
Total wattage: 6W
Material: aluminium/glass

IP 55 | 0,57 | LED | 30000 | 320° | 180° | 40° | IK06

Dimensional drawing



Recommended accessories

Mounting plate
Item No. 1002884 | 4.00 GBP

Variant	Item No.	GBP
400lm | 3000K | CRI>80		
anthracite	1004649	53.10
400lm | 3000K | CRI>80		
brown	1004957	53.10

THEO BRACKET
CW

NEW







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 65 | 1,1 | 340° | 70°

Dimensional drawing



Recommended lamp

GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP

Lamp details

max. 7W LED GU10 51mm
Diameter: 5.1cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10		
anthracite	1004653	60.30

NAUTILUS
WL, square

LED INSIDE







Product details
100-240V ~50/60Hz | 700mA
Total wattage: 9W
Material: aluminium/glass

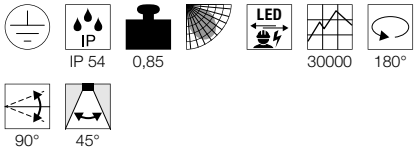

Dimensional drawing



Variant	Item No.	GBP
520lm | 3000K | CRI>80		
■ anthracite	**231045**	**135.00**

NAUTILUS 10
WL, square

LED INSIDE







Product details
100-277V ~50/60Hz | 350mA
Total wattage: 17W
Material: aluminium/glass

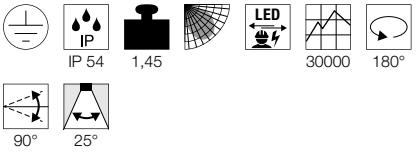

Dimensional drawing



Variant	Item No.	GBP
950lm | 3000K | CRI>80		
■ anthracite	**231055**	**197.10**

NAUTILUS 25
WL, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium



Dimensional drawing



Recommended accessories

■ Mounting plate
Item No. 1002884 | 4.00 GBP



Recommended lamp

GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



Lamp details
max. 11W
Diameter: 5 cm max. L: 8.3 cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
■ black	**1002867**	**49.50**



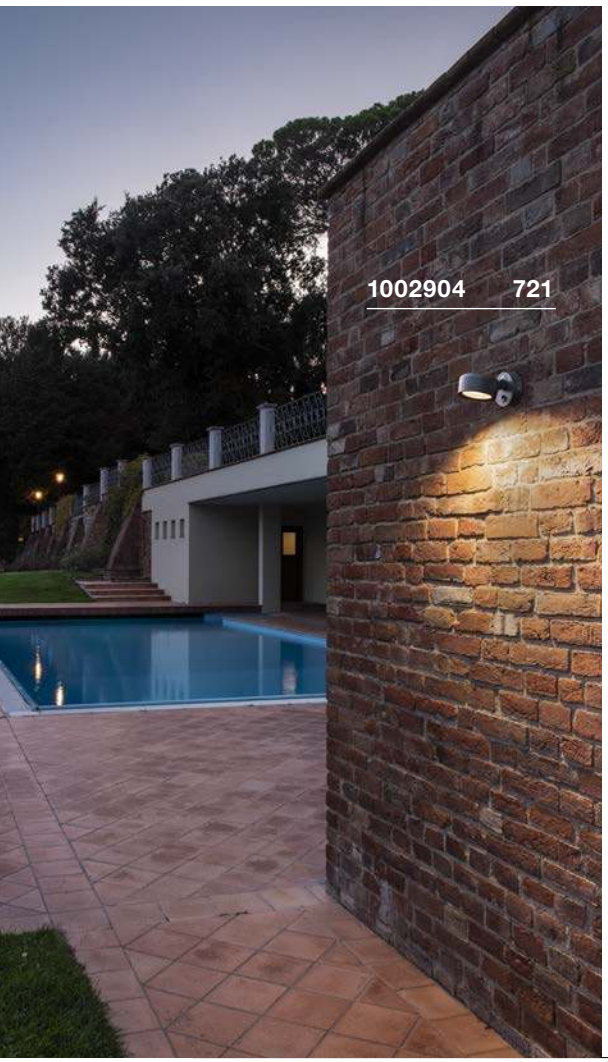

ESKINA SPOT
CW, PHASE







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium
Dimmable: C

IP 54 1,22 95°

IK02

Dimensional drawing



Variant	Item No.	GBP
1000lm | 3000/4000K | CRI>80		
anthracite	**1002903**	**189.00**

ESKINA SPOT SENSOR
CW, PHASE







- The light colour can be selected during installation using a switch

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium
Dimmable: C

IP 54 1,26 95°

IK02

Dimensional drawing



Tip

Motion sensor: Detection angle: 100°
Detection range: max. 10m
The ambient brightness and operational time can be adjusted.

Variant	Item No.	GBP
1000lm | 3000/4000K | CRI>80		
anthracite	**1002904**	**207.00**

SITRA 360
CW, TCR-TSE

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/glass

IP 44 | 0,79 | 90° | 90°

Dimensional drawing



Recommended lamp
LED GX53 3W 120°
3000K 250lm
3kWh/1000h
Item No. 551372 | 20.70 GBP

LED GX53 8.2W 120°
4000K 620lm
9kWh/1000h
Item No. 550074 | 20.70 GBP

Lamp details
max. 9W TCR-TSE
Diameter: 7.5 cm max. L: 3.5 cm max.

Variant	Item No.	GBP
GX53 | TCR-TSE		
anthracite	231515	60.30

MYRA
CW, single, QPAR51

SOCKET INSIDE







Product details
230V -50Hz
Material: aluminium/glass

IP 55 | 0,57 | 340° | 90°

Dimensional drawing



Tip
Adapter frame for surface mounting available

Recommended accessories
Surface mounting frames
Item No. 233214 | 16.20 GBP

Surface mounting frames
Item No. 233215 | 16.20 GBP

Recommended lamp
LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP

LED GU10 6W 36°
4000K 460lm
6kWh/1000h
Item No. 1005082 | 6.10 GBP

Lamp details
max. 50W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
grey	233104	81.00
GU10 | QPAR51		
anthracite	233105	81.00

MYRA
WL, double, QPAR51

SOCKET INSIDE







Product details
220-240V ~50/60Hz
Material: aluminium/glass

IP 55 | 0,95 | 340° | 45°

Dimensional drawing



Recommended lamp
LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP

Lamp details
2x max. 50W QPAR51
Diameter: 5cm max. L: 5.7cm max.

Variant	Item No.	GBP
GU10 | QPAR51		
grey	233094	153.00
GU10 | QPAR51		
anthracite	233095	153.00





HELIA
CW, single, PHASE

LED INSIDE







• High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium/glass
Dimmable: C, L

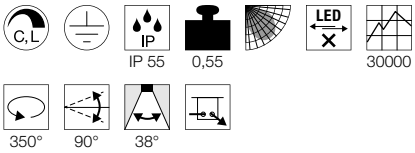

Dimensional drawing



Variant	Item No.	GBP
450lm | 3000K | CRI>80		
anthracite	233245	153.00
450lm | 3000K | CRI>80		
white	233241	153.00

HELIA
CW, double, PHASE

LED INSIDE







• High-voltage LED

Product details

220-240V ~50/60Hz
Total wattage: 16W
Material: aluminium/glass
Dimmable: C, L

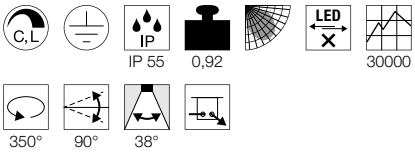

Dimensional drawing



Variant	Item No.	GBP
900lm | 3000K | CRI>80		
anthracite	233255	269.10
900lm | 3000K | CRI>80		
white	233251	269.10

TOUGH COOKIE.

RECESSED FITTINGS – THE RELIABLE WAY OF LIGHTING.

Recessed fittings are a good alternative to suspended luminaires, particularly in the outdoor area, since they are individually adjustable and can be set, directed and flooded statically. And they are equipped to cope with any weather. Thanks to high-quality workmanship and materials and individual IP protection classes.





229320 759


1001017 743

RECESSED LIGHTS


730

730

731

731

731

732

733

733

733

737

737

737

738

738

739

740

740

741

741

742

742

743

746

746

747

747

748

749

749

750

751

751

751

752

753

753

753

754

755

757

757

757

759

759

759

760

760

760

763

763

763

764

764

Other luminaires and variants can be found online at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lightbulbs', from page 844

RECESSED WALL LIGHTS

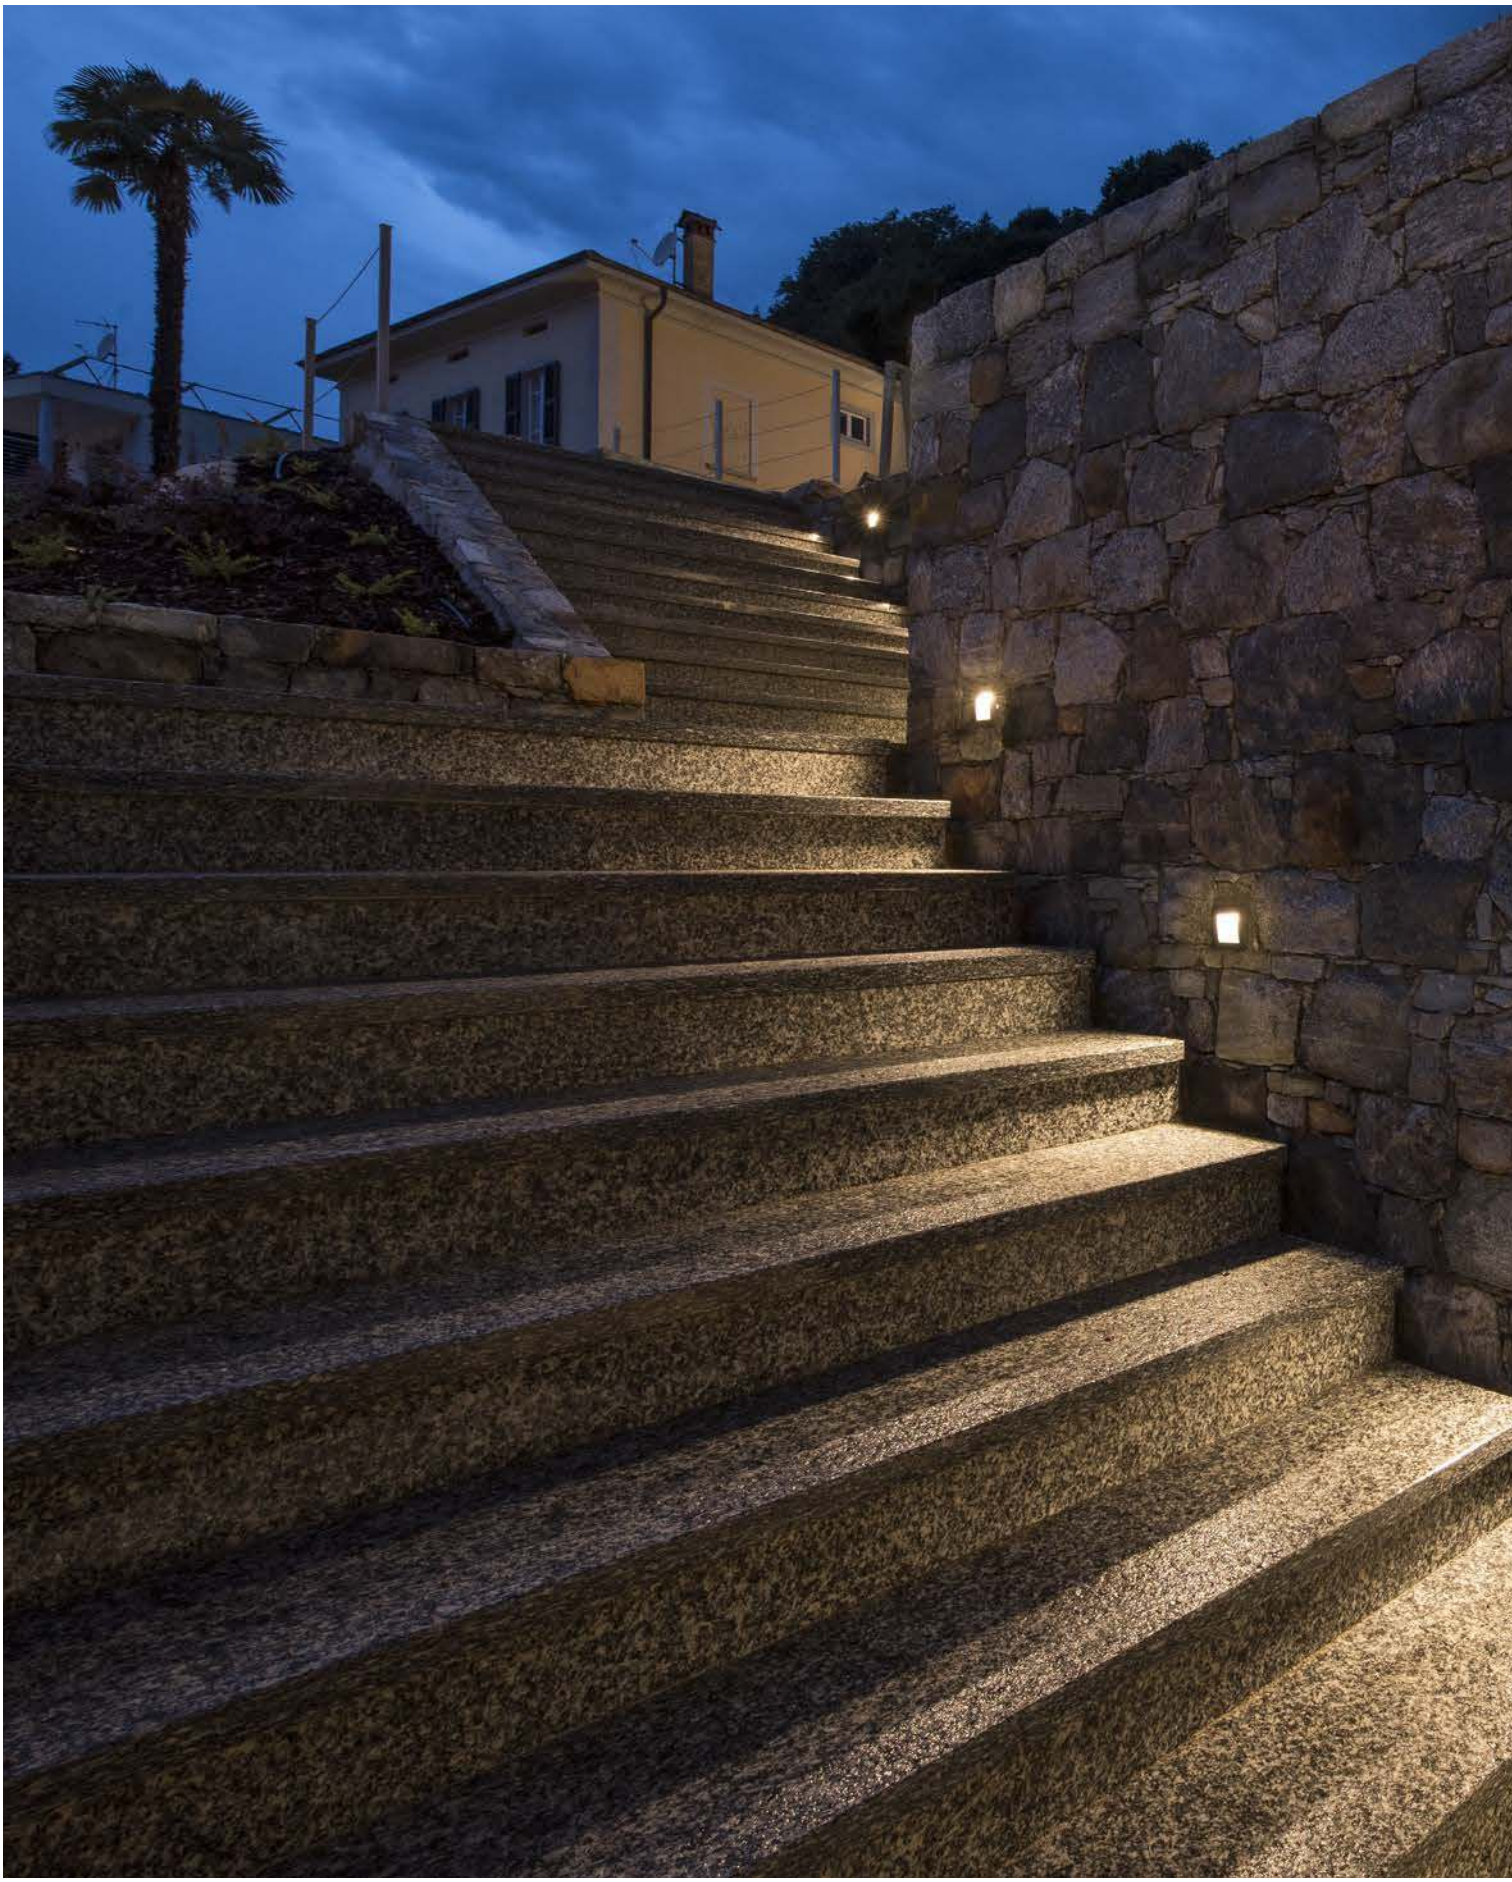

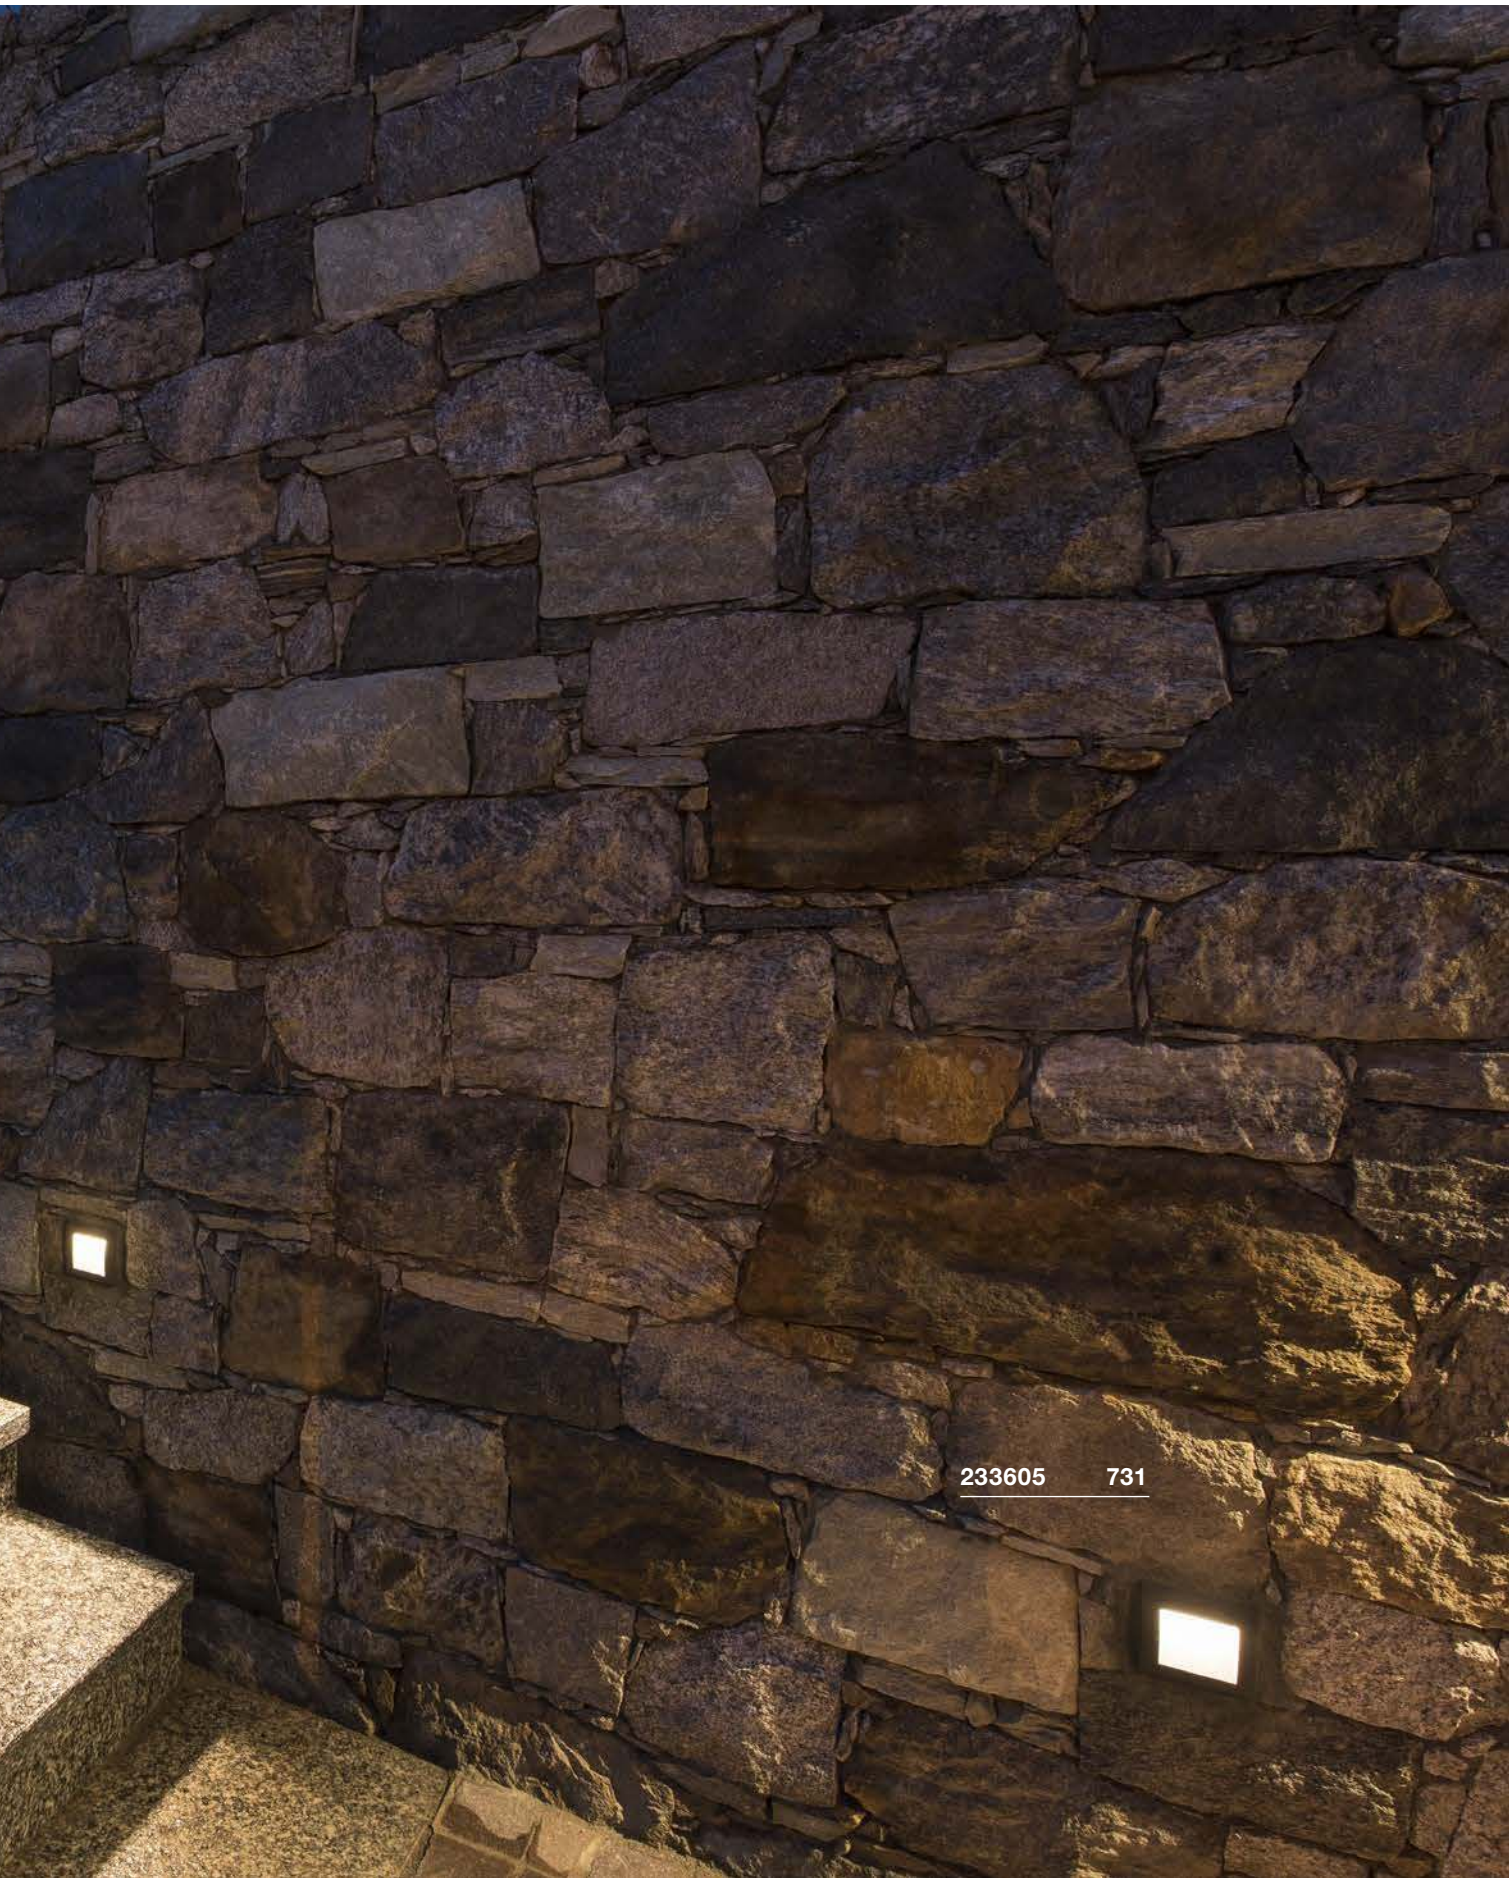
233605 731

BRICK DOWNUNDER
EL, E14

SOCKET INSIDE



Product details

230V -50Hz
Material: aluminium/glass

IP 44 0,6

Dimensional drawing



Tip

No recessed fixing kit required.

Recommended lamp

LED E14 4.5W 280°
2700K 470lm+
5kWh/1000h
Item No. 1002128 | 7.20 GBP

LED E14 6.5W 280°
2700K 480lm
7kWh/1000h
Item No. 560372 | 13.50 GBP

Lamp details

max. 40W C35
Diameter: 4.3 cm max. L: 12 cm max.

Variant	Item No.	GBP
E14 | C35		
grey	229062	31.50

BRICK DOWNUNDER
EL, E14

LED INSIDE







Product details

230V -50Hz
Total wattage: 1.4W
Material: aluminium/glass

IP 54 0,8 LED 20000

Dimensional drawing



Tip

Mounting box included

Variant	Item No.	GBP
30lm | 3000K | CRI>80		
grey	229702	49.50





DOWNUNDER OUT S
EL







Product details

220-240V ~50/60Hz | 20mA
Total wattage: 1.7W
Material: aluminium/plastic



Dimensional drawing



Tip

Mount the light only with the light beam pointing downwards. Max. diameter of connection cable 8.5 mm.
Mounting box included

Variant	Item No.	GBP
40lm | 3000K | CRI>80		
white	**233601**	**47.70**
25lm | 3000K | CRI>80		
anthracite	**233605**	**47.70**

DOWNUNDER OUT M
EL







Product details

220-240V ~50/60Hz | 20mA
Total wattage: 3.3W
Material: aluminium/plastic



Dimensional drawing



Tip

Mount the light only with the light beam pointing downwards. Max. diameter of connection cable 8.5 mm.
Mounting box included

Variant	Item No.	GBP
155lm | 3000K | CRI>80		
white	**233621**	**56.70**
85lm | 3000K | CRI>80		
anthracite	**233625**	**56.70**

DOWNUNDER OUT L
EL







Product details

220-240V ~50/60Hz | 20mA
Total wattage: 3.3W
Material: aluminium/plastic



Dimensional drawing



Tip

Mount the light only with the light beam pointing downwards. Max. diameter of connection cable 8.5 mm.
Mounting box included

Variant	Item No.	GBP
155lm | 3000K | CRI>80		
white	**233611**	**67.50**
85lm | 3000K | CRI>80		
anthracite	**233615**	**67.50**

ADI
EL











Product details

100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)



IP 55 | 1,5 | 25000 | IK02

Dimensional drawing



Tip

Mount the light only with the light beam pointing downwards.

Recommended accessories

■ Recessed fixing kit
Item No. 233639 | 14.40 GBP



Variant	Item No.	GBP
870lm | 3000K | CRI>80		
■ anthracite	**233635**	**195.30**

BRICK MESH
EL





- Shade: stainless steel 316

Product details

100-240V ~50/60Hz | 24V DC
Total wattage: 3.7W
Material: stainless steel 316/glass



Dimensional drawing



Tip

Mounting box included

Variant	Item No.	GBP
52lm | 3000K | CRI>80		
stainless steel	229110	188.10

BRICK
EL, symmetrical







- Symmetrical light emission
- Stainless steel 316L shade with aluminium housing

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 11W
Material: aluminium/stainless steel 316

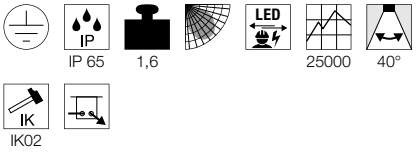

Dimensional drawing



Tip

Mounting box included

Variant	Item No.	GBP
950lm | 3000K | CRI>80		
stainless steel	233650	244.80

BRICK
EL, asymmetrical







- Asymmetrical light emission
- Stainless steel 316L shade with aluminium housing

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 11W
Material: aluminium/stainless steel 316



Dimensional drawing



Tip

Mounting box included

Variant	Item No.	GBP
850lm | 3000K | CRI>80		
stainless steel	233660	244.80

RECESSED CEILING LIGHT





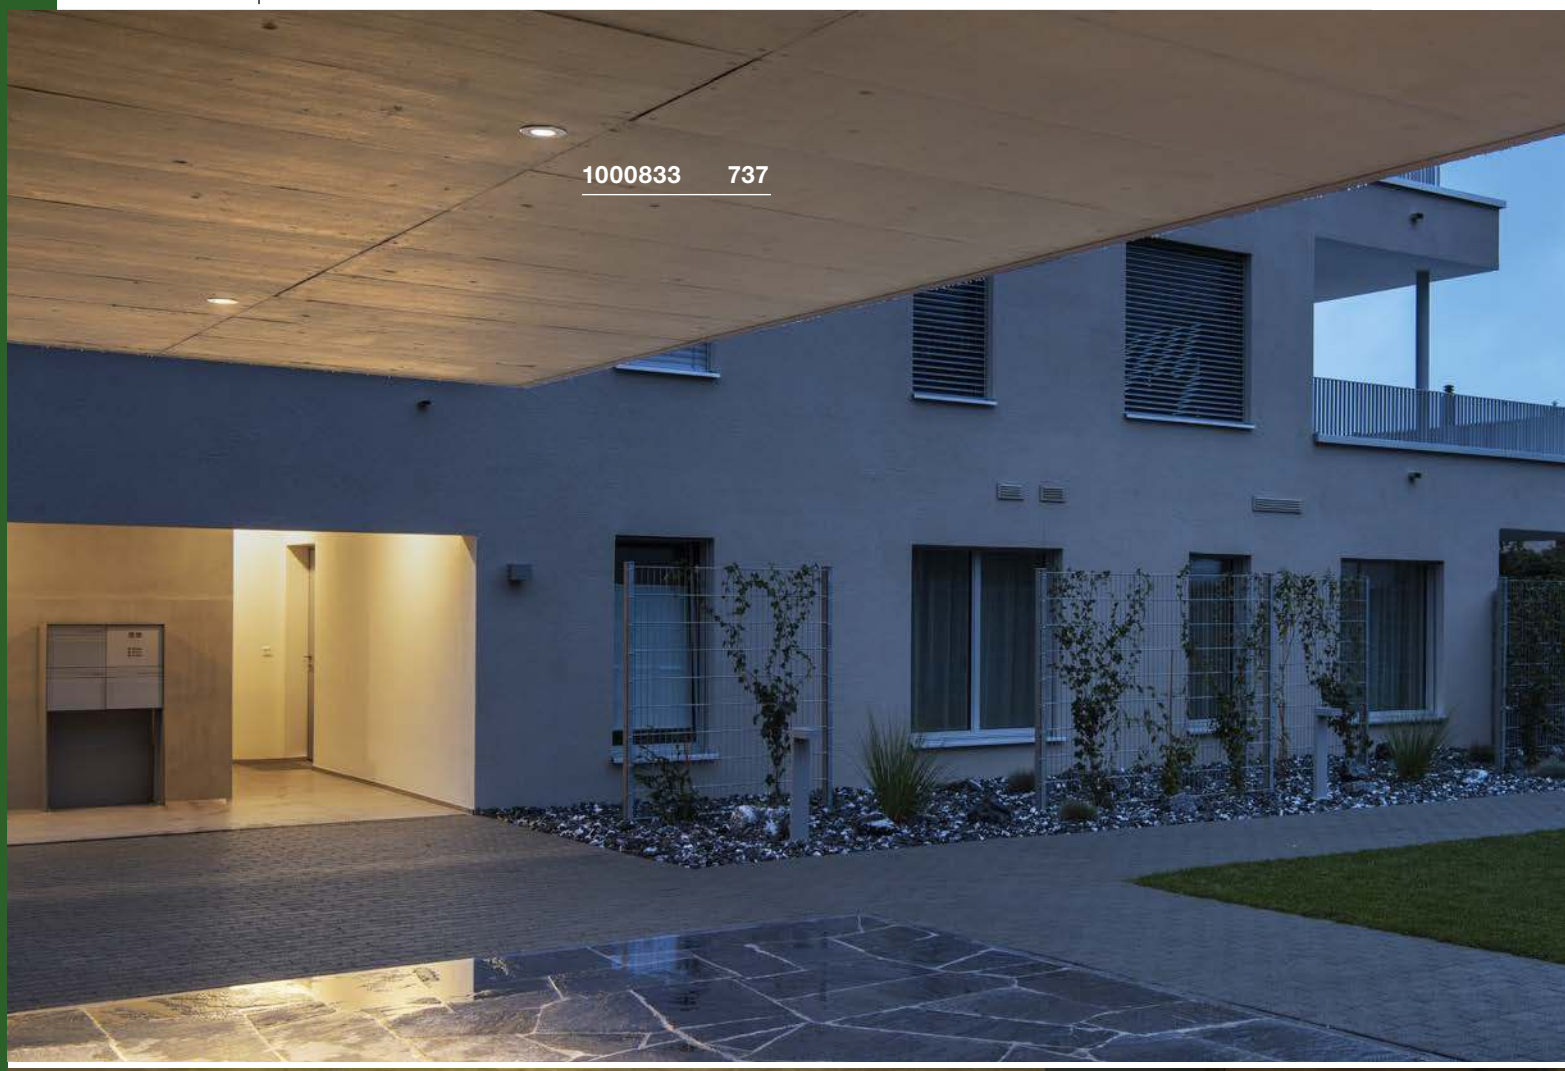

1000833 737

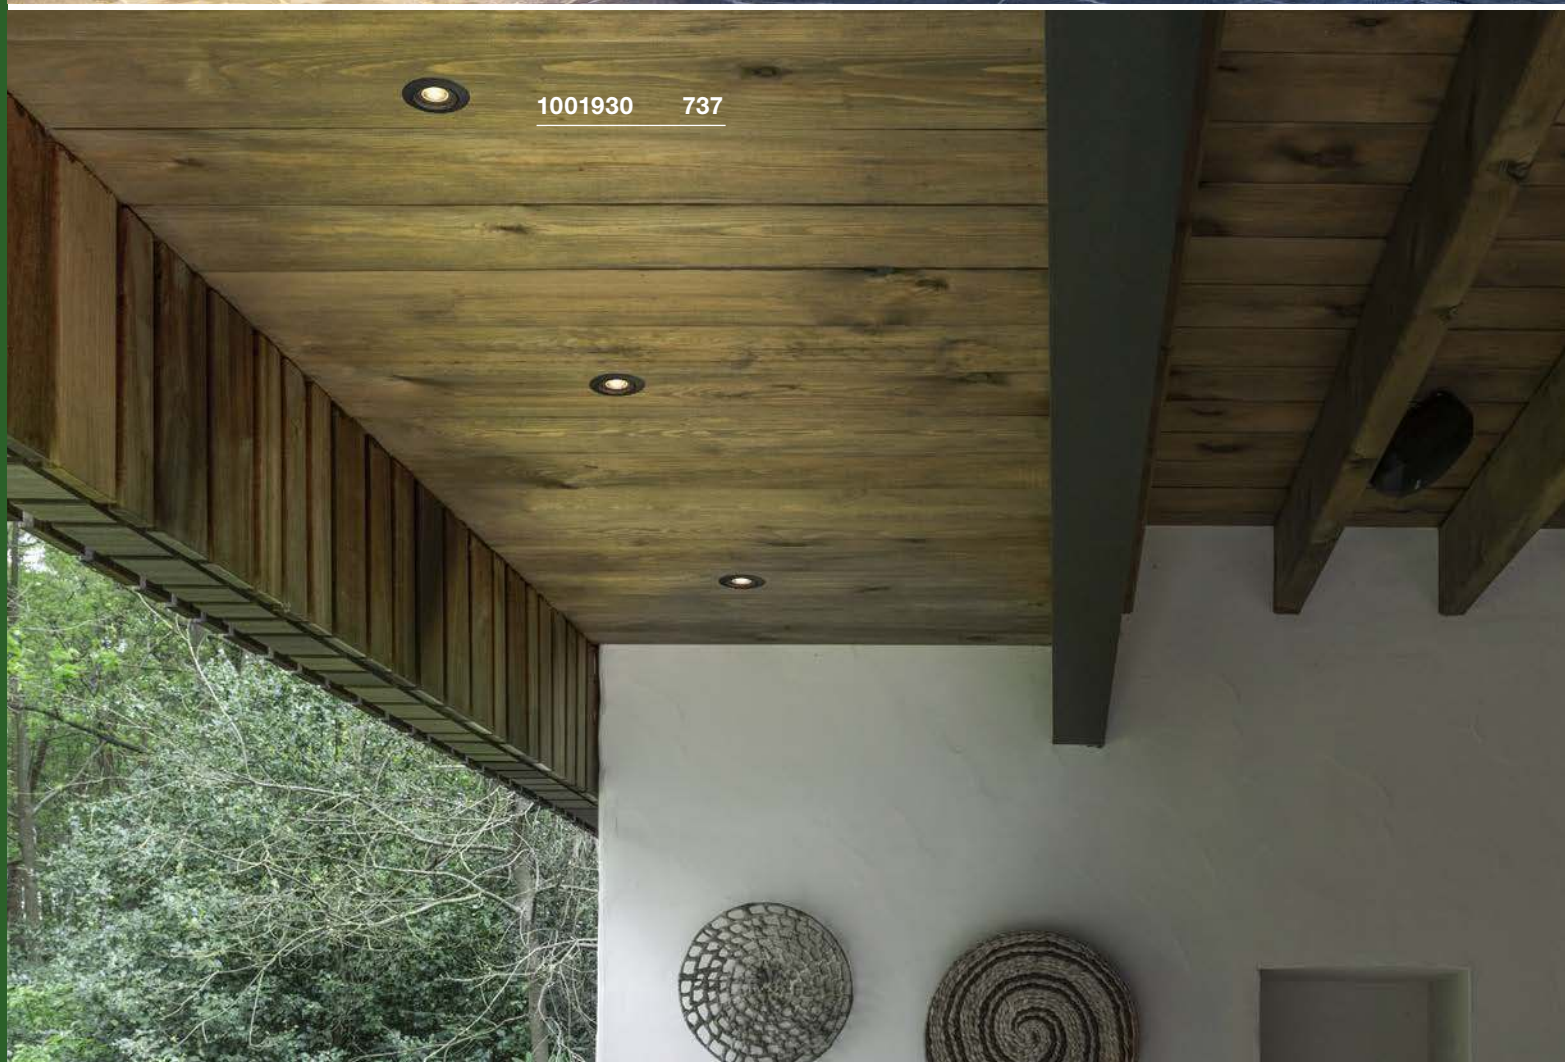

1001930 737

VARU
EL, QPAR51

SOCKET INSIDE







- High IP rating
- Resilient housing

Product details
230V~50Hz
Material: aluminium/glass



Dimensional drawing



Tip
Material thickness of mounting surface: 15 mm

Recommended lamp
LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details
max. 5W LED GU10 51mm
Diameter: 5 cm max. L: 4.6 cm max.

Variant	Item No.	GBP
GU10 | LED GU10 51mm		
■ black	**1001930**	**30.60**
GU10 | LED GU10 51mm		
□ white	**1001931**	**30.60**

VARU
EL

LED INSIDE







- High IP rating
- Resilient housing
- Glare reduction thanks to recessed LED

Product details
350mA | 5W
Material: aluminium/glass

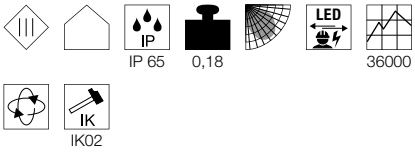

Dimensional drawing



Tip
Material thickness of mounting surface: 15 mm
Driver not included

Recommended accessories
□ LED driver 350mA | 9W
Item No. 464109 | 25.20 GBP



□ Honeycomb filter
Item No. 1001934 | 5.00 GBP



Variant	Item No.	GBP
400lm | 2700K | CRI>80		
■ black	**1001932**	**49.50**
400lm | 2700K | CRI>80		
□ white	**1001933**	**49.50**

KINI
EL, PHASE

LED INSIDE







- Suitable for wet rooms
- Pivoting

Product details
220-240V ~50/60Hz | 260mA
Total wattage: 12W
Material: aluminium/polycarbonate (PC)
Dimmable: C, L

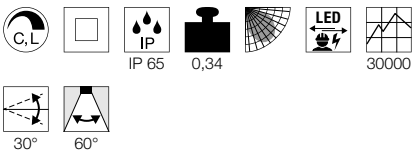

Dimensional drawing



Tip
Material thickness of mounting surface: 5-20 mm

Variant	Item No.	GBP
850lm | 3000K | CRI>80		
□ white	**1000833**	**92.70**

DOLIX OUT
EL, round, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 65 | 0,17 | IK02

Dimensional drawing



Tip

Material thickness of mounting surface: 20 mm

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	1001165	27.90
GU10 | QPAR51 chrome	1001166	30.60
GU10 | QPAR51 silver grey	1001167	27.90
GU10 | QPAR51 aluminium	1001168	30.60

DOLIX OUT
EL, square, QPAR51

SOCKET INSIDE







Product details

220-240V ~50/60Hz
Material: aluminium/glass

IP 65 | 0,19 | IK02

Dimensional drawing



Tip

Material thickness of mounting surface: 20 mm

Recommended lamp

LED GU10 3.7W 36°
2700K 260lm
4kWh/1000h
Item No. 560122 | 15.30 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

max. 50W QPAR51

Variant	Item No.	GBP
GU10 | QPAR51 white	1001169	27.90
GU10 | QPAR51 chrome	1001170	30.60
GU10 | QPAR51 silver grey	1001171	27.90
GU10 | QPAR51 aluminium	1001172	30.60





OUT 65
EL, round, PHASE

LED INSIDE







- High IR protection rating

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass
Dimmable: C, L

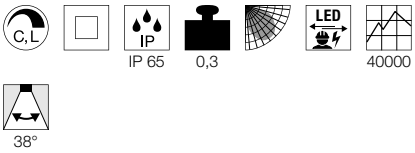

Dimensional drawing



Tip

Material thickness of mounting surface: 20 mm

Variant	Item No.	GBP
510lm | 3000K | CRI>80		
■ black	**114460**	**78.30**
640lm | 3000K | CRI>80		
□ white	**114461**	**78.30**

PATTA-F
EL, round, PHASE







• High IR protection rating

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass
Dimmable: C, L

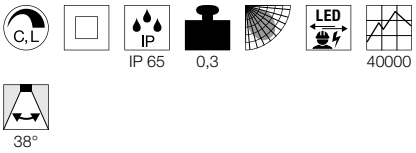

Dimensional drawing



Tip

Material thickness of mounting surface: 20 mm

Variant	Item No.	GBP
745lm | 3000K | CRI>80		
■ black	**114440**	**76.50**
860lm | 3000K | CRI>80		
□ white	**114441**	**76.50**

PATTA-F
EL, square, PHASE







• High IR protection rating

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass
Dimmable: C, L

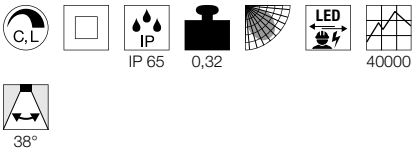

Dimensional drawing



Tip

Material thickness of mounting surface: 20 mm

Variant	Item No.	GBP
745lm | 3000K | CRI>80		
■ black	**114450**	**76.50**
860lm | 3000K | CRI>80		
□ white	**114451**	**76.50**





PATTA-I
EL, round, PHASE





- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- High IR protection rating

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass
Dimmable: C, L

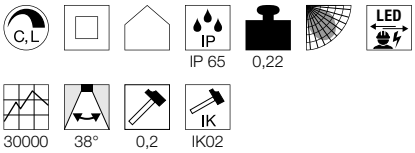

Dimensional drawing



Tip

Products are delivered with spring clips.
Leaf springs are included with the product and can be replaced.
Material thickness of mounting surface: 20 mm

Variant	Item No.	GBP
440lm | 1800-3000K | CRI>95		
■ black	**1002098**	**67.50**
440lm | 1800-3000K | CRI>95		
□ white	**1002099**	**67.50**
440lm | 1800-3000K | CRI>95		
▨ aluminium	**1002100**	**70.20**

PATTA-I
EL, square, PHASE





- Premium LED with CRI>90
- Dim to Warm (1800-3000K)
- High IR protection rating

Product details

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass
Dimmable: C, L

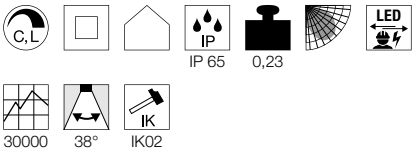

Dimensional drawing



Tip

Products are delivered with spring clips.
Leaf springs are included with the product and can be replaced.
Material thickness of mounting surface: 20 mm

Variant	Item No.	GBP
440lm | 1800-3000K | CRI95		
■ black	**1002101**	**67.50**
440lm | 1800-3000K | CRI95		
□ white	**1002102**	**67.50**
440lm | 1800-3000K | CRI95		
▨ aluminium	**1002103**	**70.20**

PATTA-I
EL, round, PHASE

LED INSIDE







- High IR protection rating

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass
Dimmable: C, L





Dimensional drawing



Tip

Material thickness of mounting surface: 25 mm

Variant	Item No.	GBP
910lm | 3000K | CRI>80		
■ black	**114420**	**76.50**
910lm | 3000K | CRI>80		
□ white	**114421**	**76.50**
910lm | 3000K | CRI>80		
▨ aluminium	**114426**	**81.00**

PATTA-I
EL, square, PHASE

LED INSIDE







- High IR protection rating

Product details

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass
Dimmable: C, L





Dimensional drawing



Tip

Material thickness of mounting surface: 25 mm

Variant	Item No.	GBP
910lm | 3000K | CRI>80		
■ black	**114430**	**76.50**
910lm | 3000K | CRI>80		
□ white	**114431**	**76.50**
910lm | 3000K | CRI>80		
▨ aluminium	**114436**	**81.00**



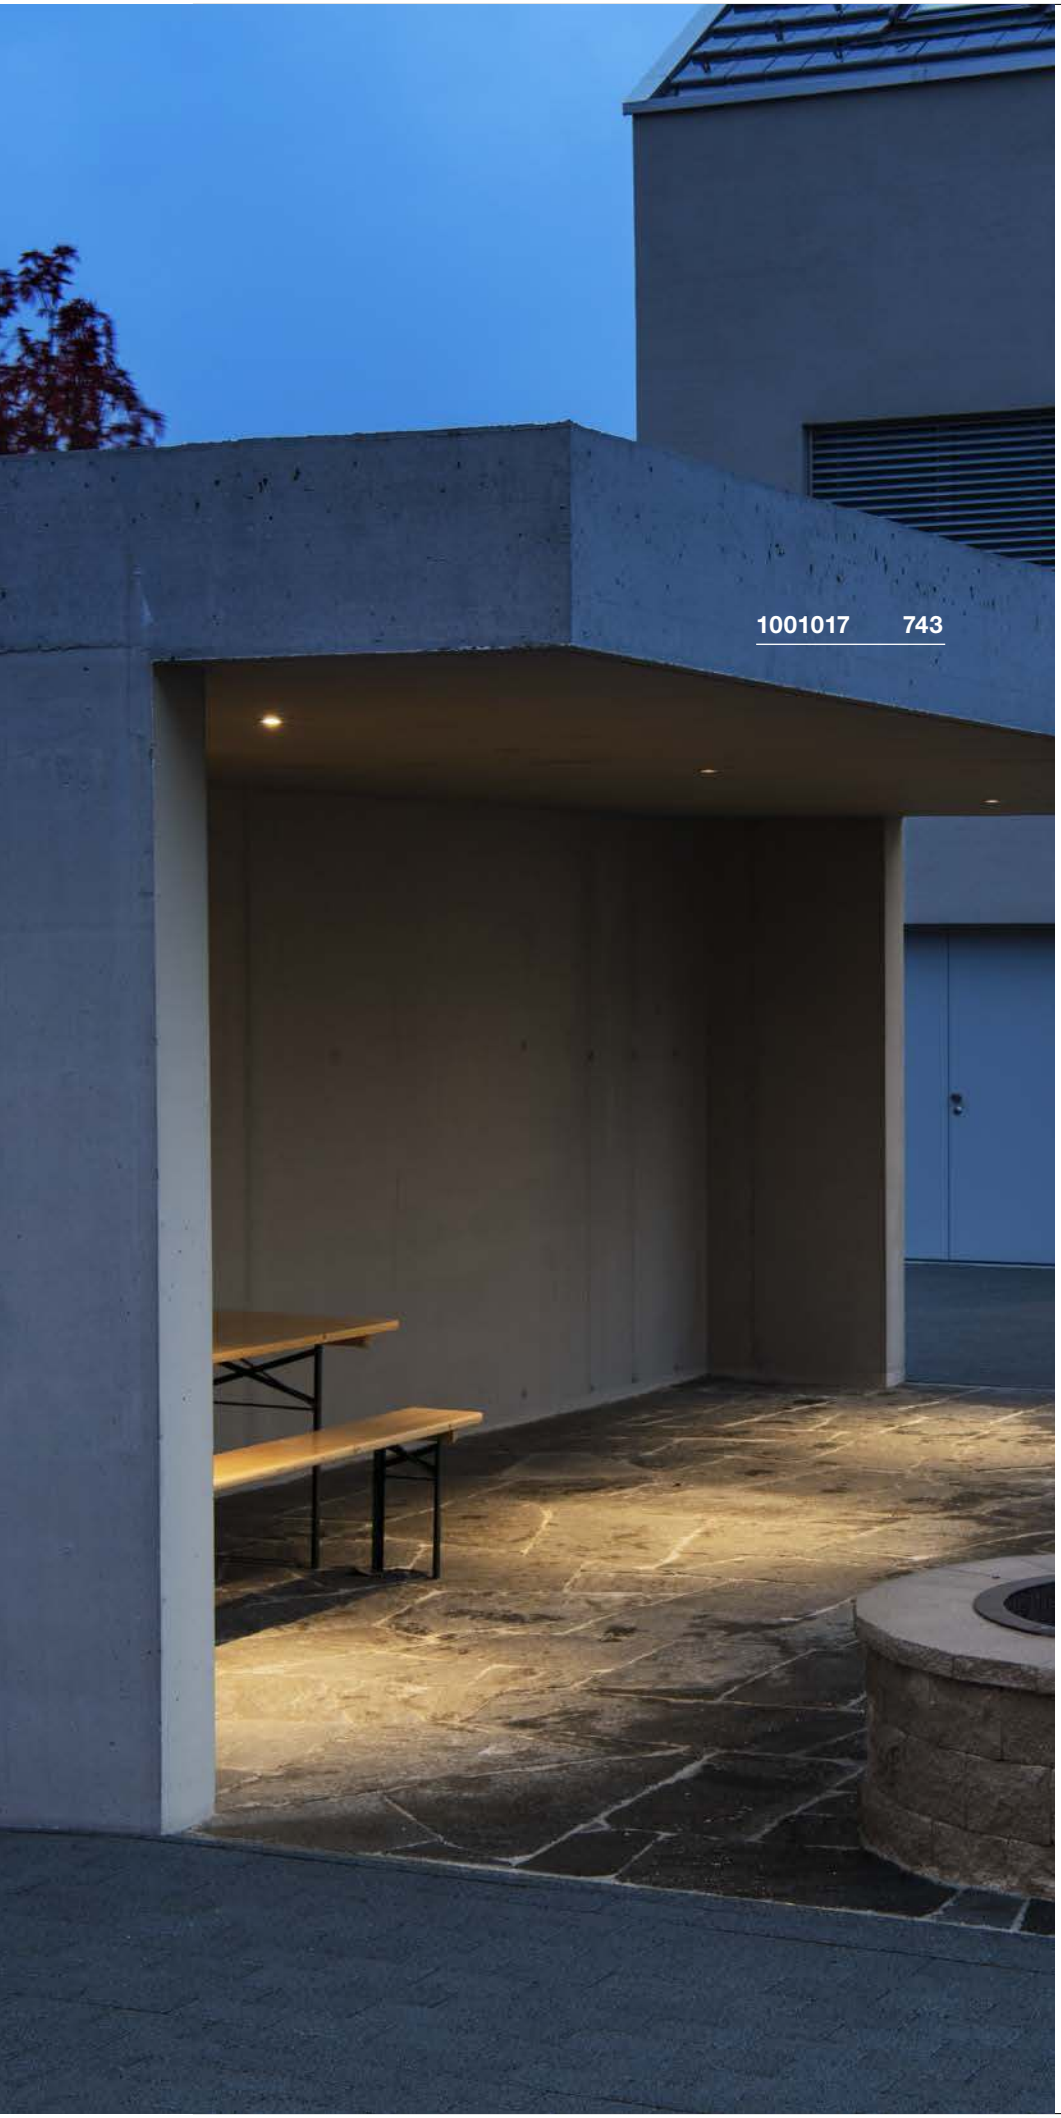

KAMUELA ECO
EL, round, PHASE

LED INSIDE







- Fire resistant for at least 90 minutes compliant with BS 476-21
- IP 65 light with efficient LED technology

Product details

220-240V ~50Hz
Total wattage: 6.5W
Material: aluminium/plastic
Dimmable: C, L

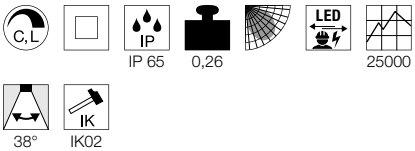

Dimensional drawing



Tip

Material thickness of mounting surface: max. 40 mm

Variant	Item No.	GBP
400lm | 3000K | CRI>80 ■ black	**1001015**	**27.00**
400lm | 3000K | CRI>80 □ white	**1001016**	**27.00**
400lm | 4000K | CRI>80 ■ black	**1001017**	**27.00**
400lm | 4000K | CRI>80 □ white	**1001018**	**27.00**

RECESSED FLOOR LIGHT





BIG PLOT
Module

LED INSIDE





- Especially high IP protection rating
- A different light effect can be obtained with suitable covers

Product details

220-240V ~50/60Hz | 16mA
Total wattage: 5.5W
Material: aluminium/PMMA



IP 67 0,34 35000 IK06

Dimensional drawing



Tip

Open cable end
This product is delivered without a cover.
You can find suitable covers on page 747.

Recommended accessories

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
460lm | 3000K | CRI>80 ■ silver grey	**1001256**	**68.40**

BIG PLOT
Module

LED INSIDE





- Stainless steel 316
- Especially high IP protection rating
- A different light effect can be obtained with suitable covers

Product details

220-240V ~50/60Hz | 16mA
Total wattage: 5.5W
Material: stainless steel 316L/PMMA



IP 67 0,53 35000 IK06

Dimensional drawing



Tip

Open cable end
This product is delivered without a cover.
You can find suitable covers on page 747.

Recommended accessories

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
460lm | 3000K | CRI>80 ■ stainless steel	**1001359**	**99.00**

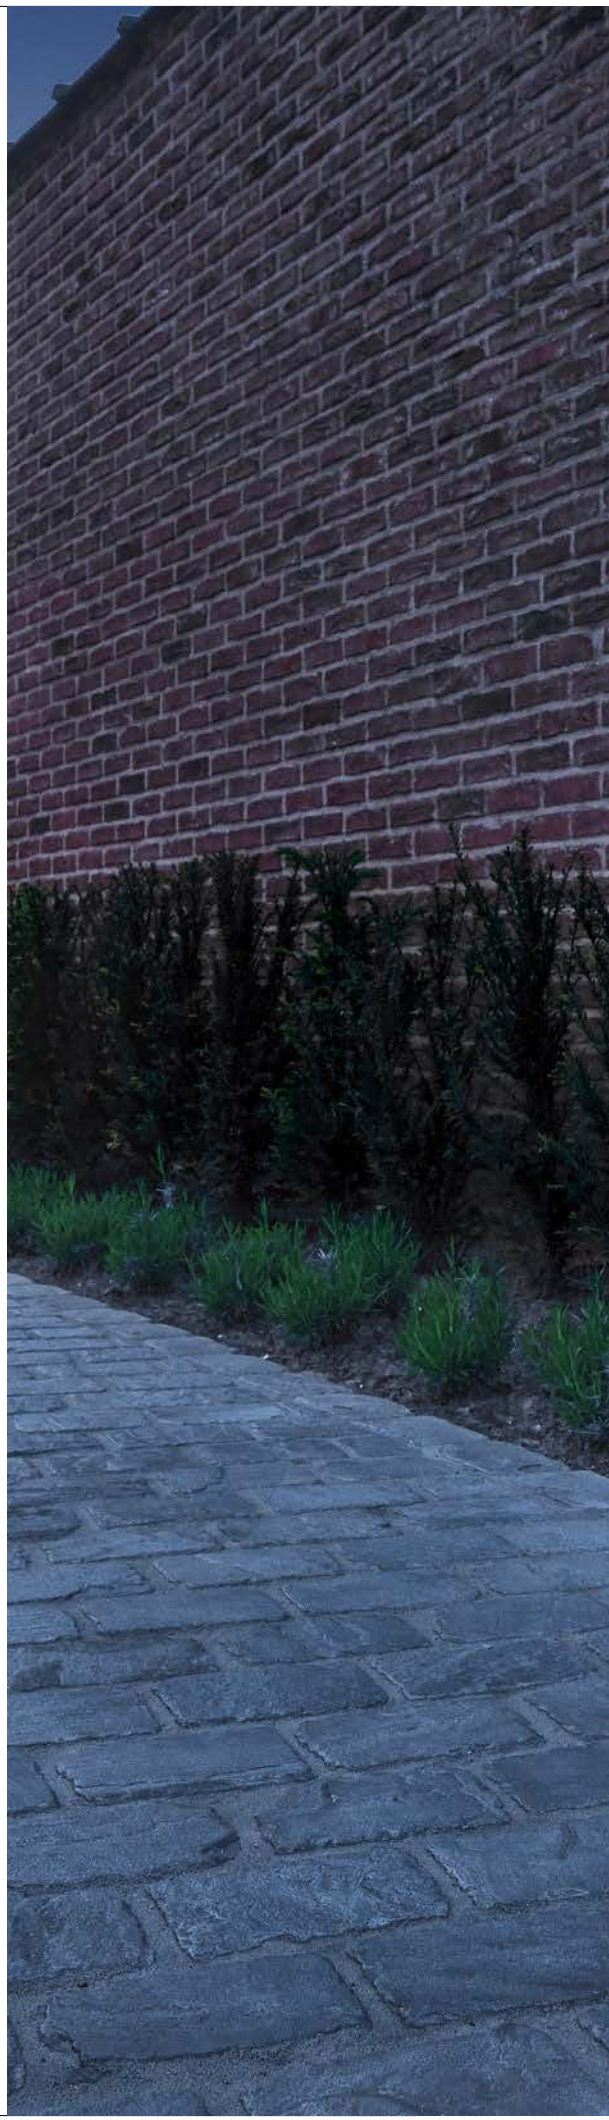



BIG PLOT
Cover, 2 slots







Product details

Material: 1001254/stainless steel 316
Material 1001252/1001262: aluminium

Dimensional drawing



Tip

1001524 loadable up to 0.8t
1001252 loadable up to 0.5t
1001262 loadable up to 0.5t

Variant	Item No.	GBP
0.91 kg		
stainless steel	**1001254**	**148.50**
0.34 kg		
silver grey	**1001252**	**41.40**
0.34 kg		
anthracite	**1001262**	**41.40**

BIG PLOT
Cover, 4 slots







Product details

Material1001255: Edelstahl316
Material 1001253/1001263: aluminium

Dimensional drawing



Tip

1001255 loadable up to 0.8t
1001253 loadable up to 0.5t
1001263 loadable up to 0.5t

Variant	Item No.	GBP
0.85 kg		
stainless steel	**1001255**	**148.50**
0.33 kg		
silver grey	**1001253**	**41.40**
0.33 kg		
anthracite	**1001263**	**41.40**

TRAIL-LITE® 60
EL

SOCKET INSIDE







• Shade: stainless steel 316

Product details

12V/0.3W
Material: stainless steel 316/glass



IP 65 0,15 20000

Dimensional drawing



Tip

Operate only with conventional transformer.
Mounting box included
This light is suitable for installation in wood.
Power adapter not included

Recommended accessories

■ Transformer 12V AC | 105VA IP44
Item No. 227140 |34.60 GBP

Variant	Item No.	GBP
10lm | 6500K | CRI>80		
stainless steel	**227461**	**51.30**
10lm | 3000K | CRI>80		
stainless steel	**227462**	**51.30**

228332 749





POWER TRAIL-LITE®
EL, round

SOCKET INSIDE







- Shade: stainless steel 316
- Premium LED

Product details

350mA | 1.4W
Material: stainless steel 316/glass



IP 67 | 0,29 | 60° | 30

Dimensional drawing



Tip

Operate only with 350mA driver. Only wire together multiple PowerLEDs in series!
Mounting box included
This light is suitable for installation in wood.
LED driver not included

Recommended accessories

LED driver 350mA | 3W inc. strain relief
Item No. 464108 | 20.70 GBP



LED driver 350mA | 9W
Item No. 464109 | 25.20 GBP



Variant	Item No.	GBP
45lm | 3000K | CRI>90 stainless steel	228332	58.50
48lm | 4000K | CRI>90 stainless steel	1002189	58.50

POWER TRAIL-LITE®
EL, square

SOCKET INSIDE







- Shade: stainless steel 316

Product details

350mA | 1.4W
Material: stainless steel 316/glass



IP 67 | 0,3 | 60° | 30

Dimensional drawing



Tip

Operate only with 350mA driver. Only wire together multiple PowerLEDs in series!
Mounting box included
This light is suitable for installation in wood.
LED driver not included

Recommended accessories

LED driver 350mA | 3W inc. strain relief
Item No. 464108 | 20.70 GBP



LED driver 350mA | 9W
Item No. 464109 | 25.20 GBP



Variant	Item No.	GBP
45lm | 3000K | CRI>90 stainless steel	228342	58.50

SOLASTO
EL, square/round

SOCKET INSIDE



Product details

230V -50Hz
Material: plastic/stainless steel 304/glass



Dimensional drawing

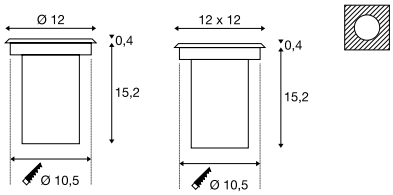

Tip

Mounting box included

Recommended lamp

LED GU10 4W 36°
3000K 300lm
4kWh/1000h
Item No. 1004973 | 5.40 GBP



LED GU10 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



Lamp details

6W max.

Variant	Item No.	GBP
GU10 | QPAR51 stainless steel	227680	58.50
GU10 | QPAR51 stainless steel	227684	58.50



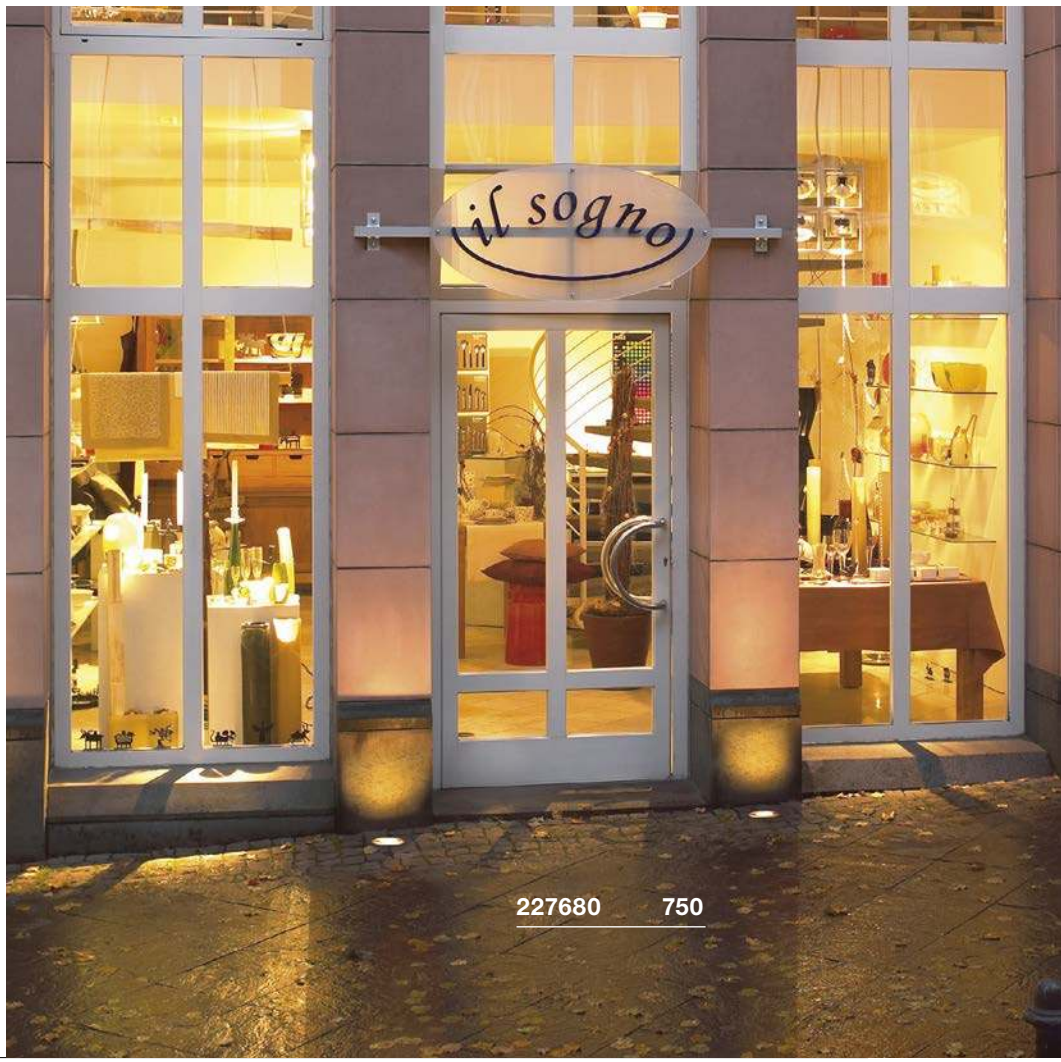

WETSY
EL, square/round



- Shade: stainless steel 316

Product details

220-240V ~50/60Hz
Total wattage: 6.3W
Material: stainless steel 316/aluminium/glass



Dimensional drawing

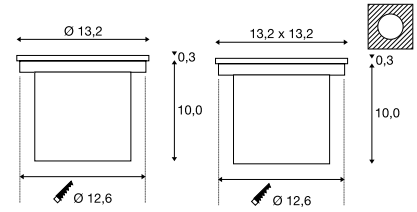

Tip

Mounting box included

ROCCI
EL, round



- Shade: stainless steel 316
- Premium LED
- Must not be mounted in walking areas. (not safe to walk on)

Product details

200-240V ~50/60Hz 700mA
Total output: 9.8W
Material: stainless steel 316/aluminium/glass

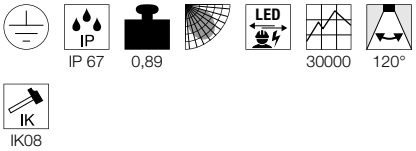

Dimensional drawing



Tip

Mounting box included

ROCCI
EL, square



- Shade: stainless steel 316
- Premium LED
- Must not be mounted in walking areas. (not safe to walk on)

Product details

200-240V ~50/60Hz 700mA
Total output: 9.8W
Material: stainless steel 316/aluminium/glass

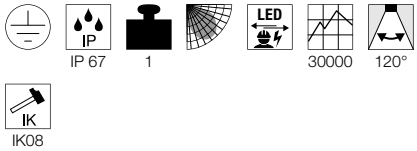

Dimensional drawing



Tip

Mounting box included

Recommended accessories

■ Connection box IP68, 3-pole
Item No. 228730 |13.50 GBP



Variant	Item No.	GBP
300lm | 3000K | CRI>80		
○ ◧ stainless steel	**230170**	**180.00**
300lm | 3000K | CRI>80		
□ ◧ stainless steel	**230174**	**180.00**

Variant	Item No.	GBP
580lm | 3000K | CRI>80		
◧ stainless steel	**227600**	**126.00**
630lm | 4000K | CRI>80		
◧ stainless steel	**1002185**	**126.00**

Variant	Item No.	GBP
580lm | 3000K | CRI>80		
◧ stainless steel	**227604**	**126.00**
630lm | 4000K | CRI>80		
◧ stainless steel	**1002186**	**126.00**

GIMBLE OUT
EL







- Housing and shade: stainless steel 316L
- Premium LED

Product details

220-240V ~50/60Hz 600mA
Total wattage: 13W
Material: stainless steel 316L/glass

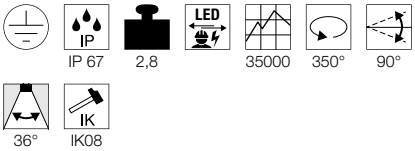

Dimensional drawing



Tip

Open cable end

Recommended accessories

Installation pipe DN160
Item No. 233792 | 40.50 GBP

Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP

Floor-recessed fixing kit
Item No. 1000655 | 54.00 GBP

Variant	Item No.	GBP
1000lm | 3000K | CRI>80		
stainless steel	**1000384**	**287.10**



ADJUST 135
EL, square/round, QPAR51

SOCKET INSIDE







- Shade: stainless steel 304

Product details
230V -50Hz
Material: plastic



Dimensional drawing

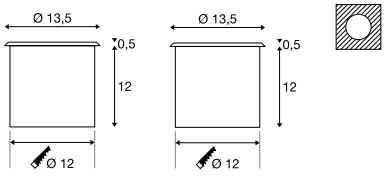

Tip
Mounting box included

Recommended lamp
LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005078 | 6.10 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP



Variant	Item No.	GBP
GU10 | QPAR51		
stainless steel	228210	99.00
GU10 | QPAR51		
stainless steel	228214	99.00

ADJUST 190
EL, square/round, QR111

SOCKET INSIDE







- Shade: stainless steel 304
- Pivoting

Product details
230V ~50Hz 12V AC
Material: stainless steel 304/aluminium/glass



Dimensional drawing

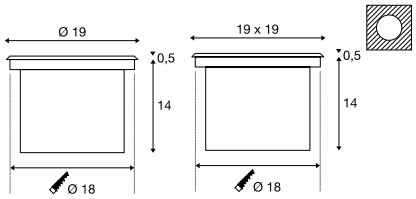

Tip
Mounting box included

Recommended lamp
LED G53 15W 24°
2700K 760lm
17kWh/1000h
Item No. 560231 | 85.50 GBP



LED G53 15W 24°
3000K 770lm
17kWh/1000h
Item No. 560233 | 85.50 GBP



Lamp details
50W max.
optional: LED

Variant	Item No.	GBP
G53 | QR111		
stainless steel	227090	206.10
G53 | QR111		
stainless steel	227092	206.10

ADJUST 265
EL, round, HIT-CE

SOCKET INSIDE







- Shade: stainless steel 304

Product details
230V -50Hz
Material: stainless steel 304/aluminium/glass



Dimensional drawing



Tip
Mounting box included

Lamp details
70W

Variant	Item No.	GBP
G12 | HIT-CE		
stainless steel	228240	299.70

DASAR® FLAT 80
EL

SOCKET INSIDE







- Shade: stainless steel 304
- Ultra-flat design

Product details

230V ~50/60Hz
Total wattage: 4.3W
Material: stainless steel 304/aluminium/glass

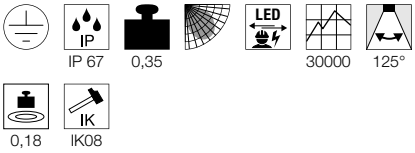

Dimensional drawing



Tip

Mounting box included

Recommended accessories

■ Connection box IP68, 3-pole
Item No. 228730 | 13.50 GBP



Variant	Item No.	GBP
140lm | 3000K | CRI>80 stainless steel	**228412**	**99.00**
140lm | 4000K | CRI>80 stainless steel	**1002188**	**99.00**
150lm | 5000K | CRI>80 stainless steel	**228411**	**99.00**

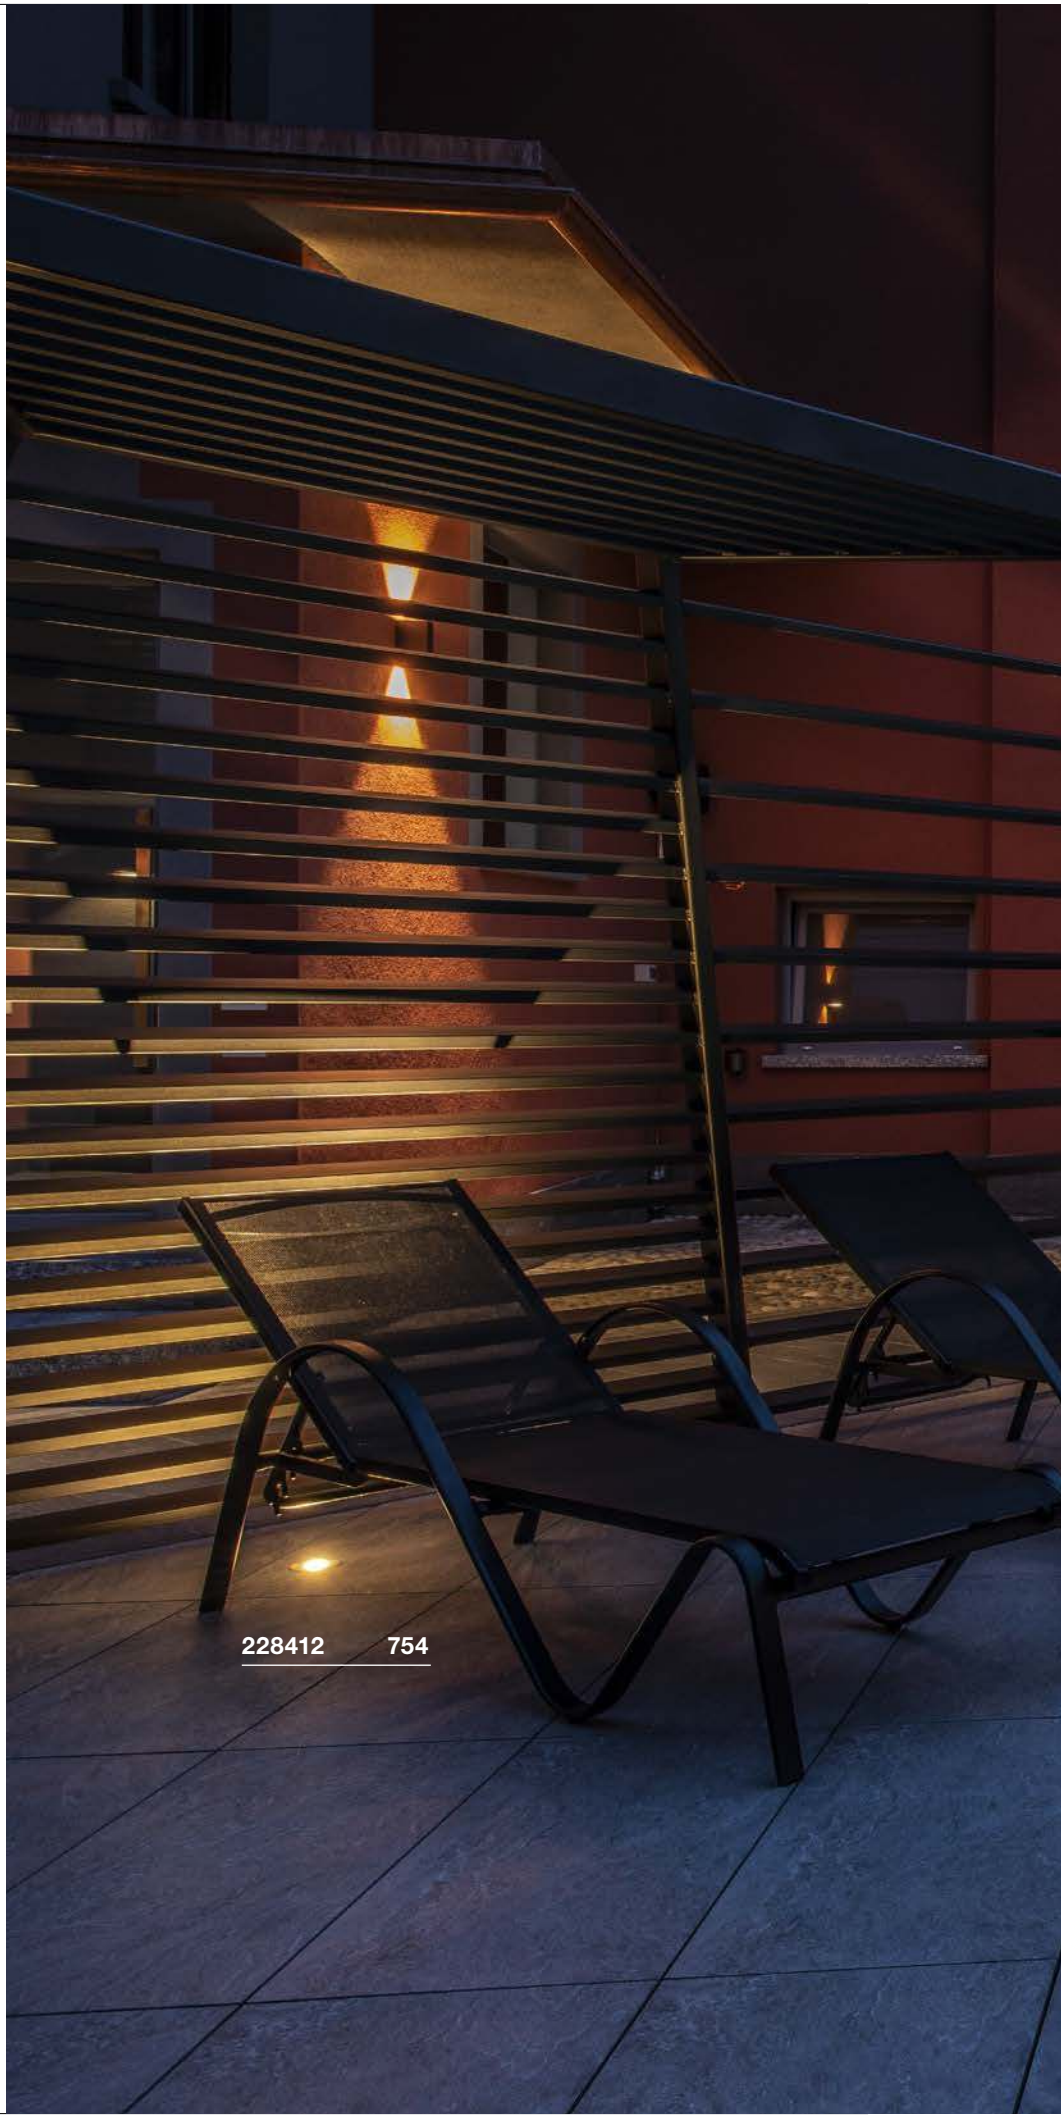



DASAR® 370
EL, round

LED INSIDE



- Housing and shade: stainless steel 316L
- Premium LED

Product details

12V/24V DC | 2W
Material: stainless steel 316L/glass

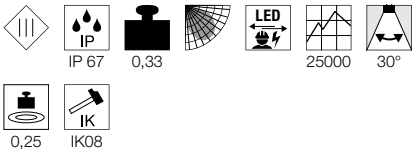

Dimensional drawing



Tip

Open cable end
Power adapter not included

Recommended accessories

LED power supply 24V DC | 12W
Item No. 470502 | 20.70 GBP



LED Netzteil12V DC | 12W
Item No. 470507 | 20.70 GBP



Variant	Item No.	GBP
120lm | 3000K | CRI>80		
stainless steel	**233540**	**135.00**



233500 757

DASAR® 920
EL





- Shade: stainless steel 316
- Premium LED

Product details

12V DC / 24V DC | 7W
Material: stainless steel 316/aluminium/glass

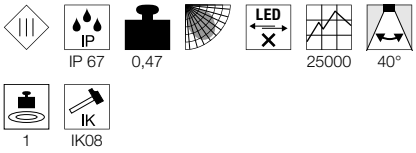

Dimensional drawing



Tip

Mounting box included
Open cable end

Recommended accessories

LED power supply 24V DC | 12W
Item No. 470502 | 20.70 GBP



LED power supply 12V DC | 12W
Item No. 470507 | 20.70 GBP



Variant	Item No.	GBP
360lm | 3000K | CRI>80 stainless steel	**233500**	**117.00**

DASAR® 920
EL





- Shade: stainless steel 316
- Premium LED

Product details

220-240V ~50/60Hz | 400mA
Total wattage: 5.5W
Material: stainless steel 316/aluminium/glass

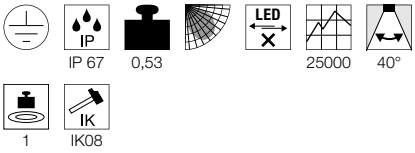

Dimensional drawing



Tip

Mounting box included
Open cable end

Variant	Item No.	GBP
300lm | 3000K | CRI>80 stainless steel	**233520**	**153.00**

DASAR® 920
EL





- Housing and shade: stainless steel 316
- Premium LED

Product details

220-240V ~50/60Hz | 400mA
Total wattage: 5.5W
Material: stainless steel 316/glass

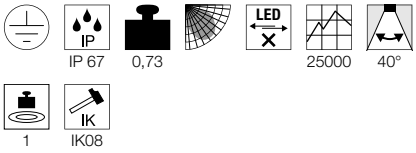

Dimensional drawing



Tip

Mounting box included
Open cable end

Variant	Item No.	GBP
300lm | 3000K | CRI>80 stainless steel	**233530**	**188.10**
360lm | 4000K | CRI>80 stainless steel	**1002187**	**188.10**

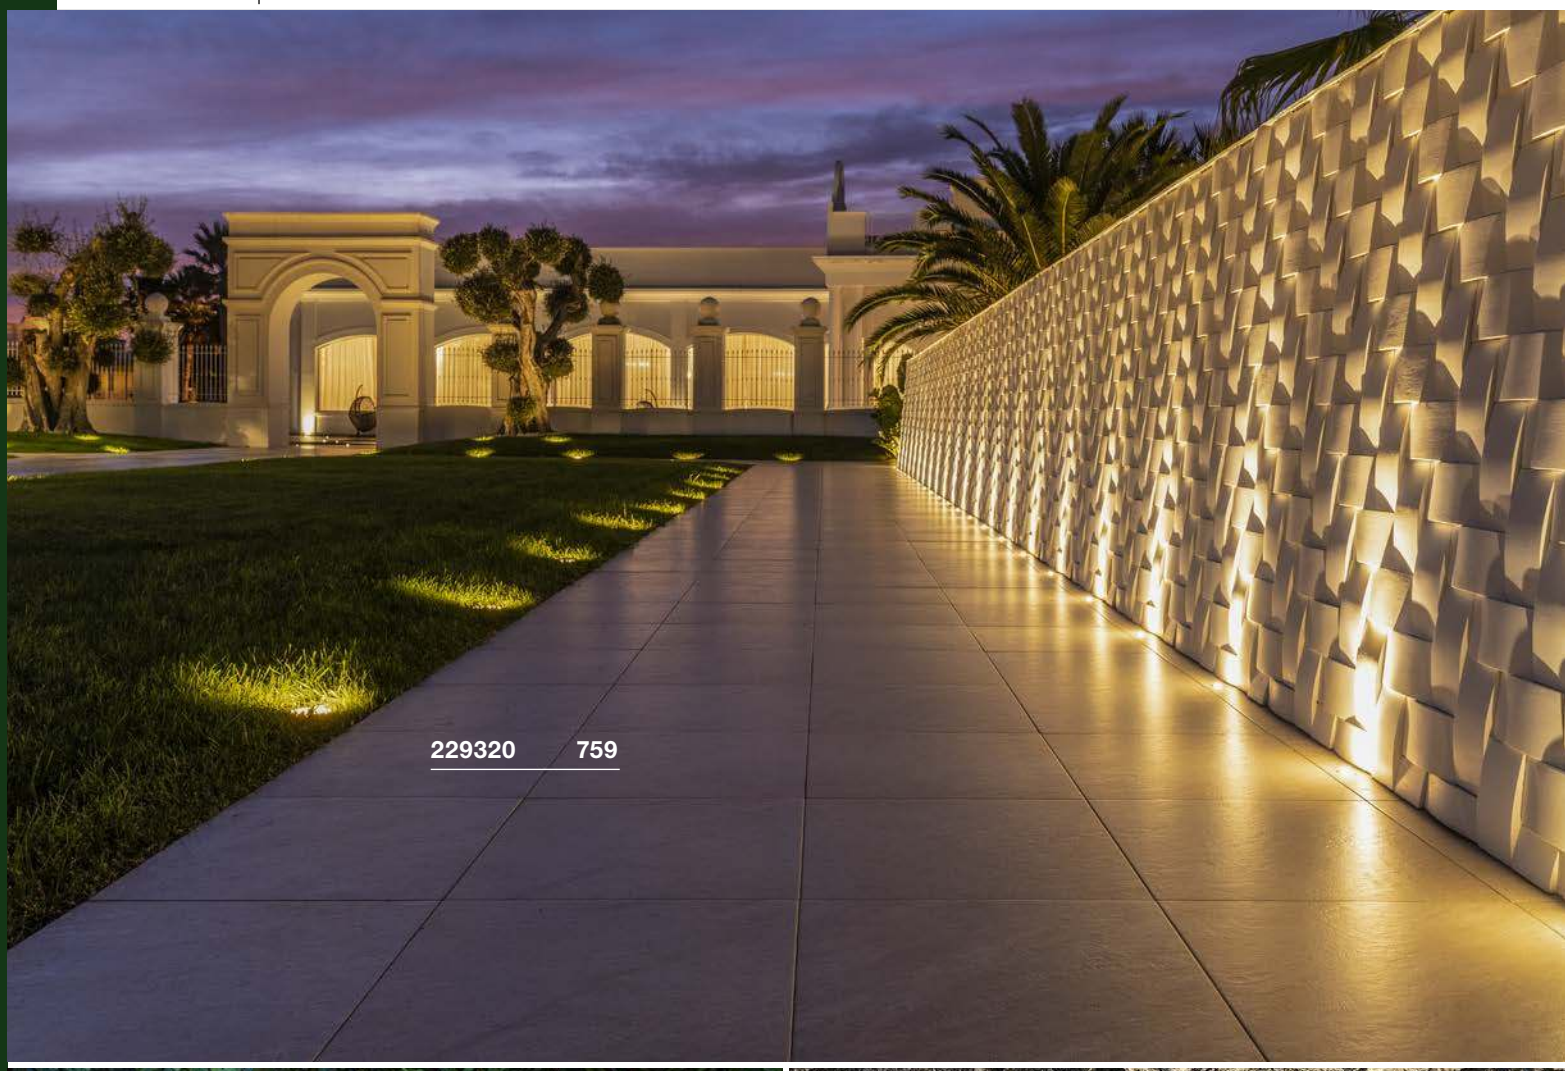
229320 759

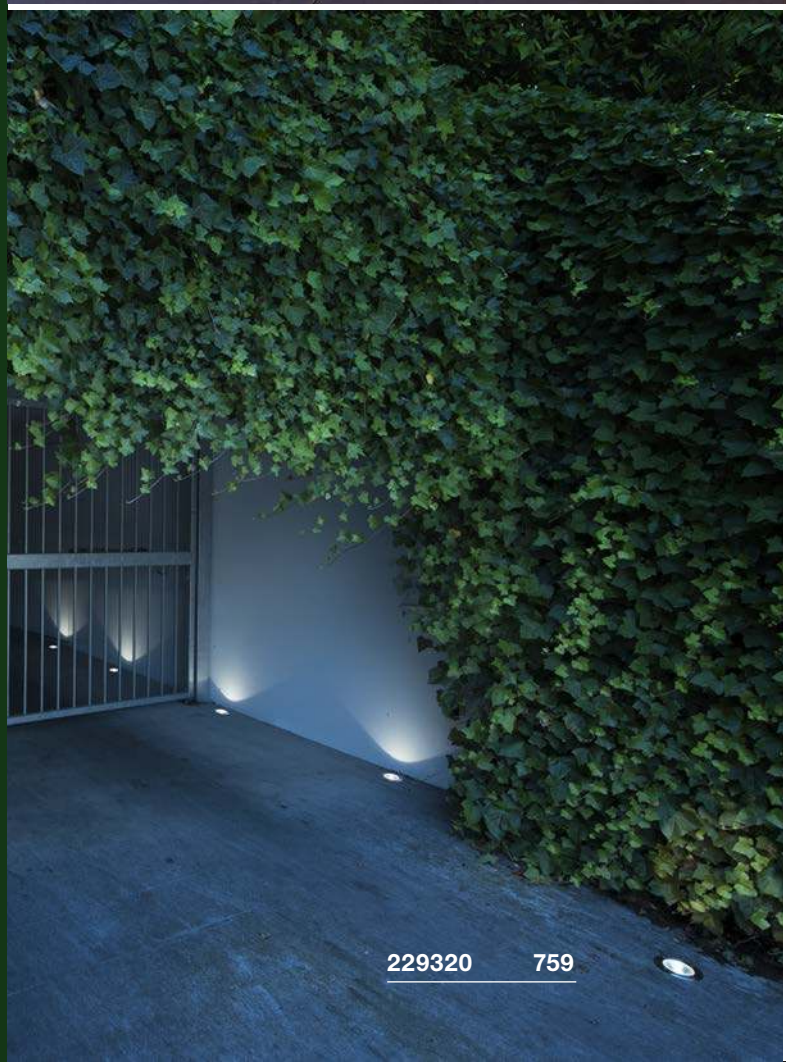
229320 759

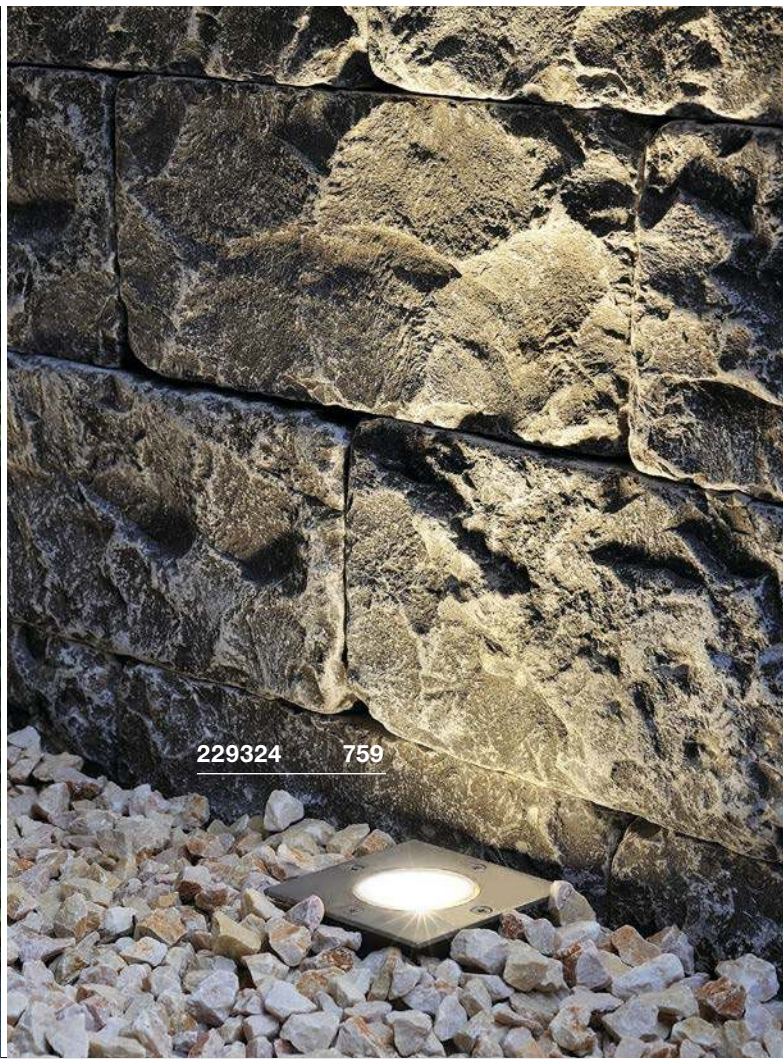
229324 759

DASAR® 80
EL, square/round, QPAR51

SOCKET INSIDE



- Shade: stainless steel 316

Product details

230V -50Hz
Material: stainless steel 316/aluminium/glass



Dimensional drawing

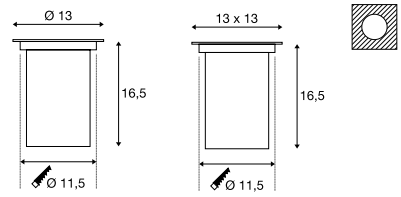

Tip

Mounting box included
Driver not included

Recommended lamp

LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005080 | 6.10 GBP



LED GU10 4W 36°
4000K 300lm
4kWh/1000h
Item No. 1004974 | 5.40 GBP



Variant	Item No.	GBP
GU10 | QPAR51 stainless steel	229320	99.00
GU10 | QPAR51 stainless steel	229324	99.00

DASAR® 70
EL, square, QPAR51

SOCKET INSIDE



- Shade: stainless steel 304

Product details

230V -50Hz
Material: stainless steel 304/aluminium/glass



Dimensional drawing



Tip

Mounting box included

Recommended lamp

LED 6W 36°
2700K 460lm
6kWh/1000h
Item No. 1005075 | 6.10 GBP



LED GU10 4W 36°
2700K 300lm
4kWh/1000h
Item No. 1004972 | 5.40 GBP



Lamp details

35W max.
Diameter: 5 cm max. L: 6 cm max.
optional: LED

Variant	Item No.	GBP
GU10 | QPAR51 stainless steel	229374	99.00

DASAR® EXACT 116
EL, square/round, QPAR51

SOCKET INSIDE



- Shade: stainless steel 316
- For installation flush with the floor

Product details

230V -50Hz
Material: stainless steel 316/aluminium/glass



Dimensional drawing



Tip

Mounting box included

Recommended lamp

LED GU10 5.5W 38°
2700K 400lm
6kWh/1000h
Item No. 1001030 | 15.30 GBP



LED GU10 6W 36°
3000K 460lm
6kWh/1000h
Item No. 1005079 | 6.10 GBP



Lamp details

35W max.
Diameter: 5 cm max. L: 6 cm max.
optional: LED

Variant	Item No.	GBP
GU10 | QPAR51 stainless steel	228430	108.00
GU10 | QPAR51 stainless steel	228434	108.00

DASAR® 215
EL, square/round, QPAR111

SOCKET INSIDE



- Shade: stainless steel 316
- Linear, high-quality design for the highest level of adaptability

Product details
230V -50Hz
Material: stainless steel 316/aluminium/glass



Dimensional drawing



Tip
Mounting box included

Recommended lamp

LED GU10 13W 30°
4000K 1100lm
13kWh/1000h
Item No. 1003087 | 80.10 GBP



LED GU10 13W 140°
4000K 1000lm
13kWh/1000h
Item No. 1003088 | 80.10 GBP



Lamp details
75W max.
optional: LED

Variant	Item No.	GBP
GU10 | QPAR111		
stainless steel	**229230**	**215.10**
GU10 | QPAR111		
stainless steel	**229234**	**215.10**

DASAR® 218
EL, QR111

SOCKET INSIDE





- Shade: stainless steel 316
- Larger swivel range than conventional recessed floor spots

Product details
230V ~50Hz 12V AC
Material: stainless steel 316/aluminium/glass

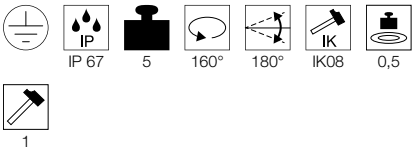

Dimensional drawing



Tip
Mounting box included

Recommended lamp

LED G53 15W 24°
2700K 760lm
17kWh/1000h
Item No. 560231 | 85.50 GBP



LED G53 15W 24°
3000K 770lm
17kWh/1000h
Item No. 560233 | 85.50 GBP



Lamp details
50W max.
optional: LED

Variant	Item No.	GBP
G53 | QR111		
stainless steel	**228370**	**260.10**

DASAR® 215
EL, round, E27

SOCKET INSIDE





- Shade: stainless steel 316
- Linear, high-quality design for the highest level of adaptability

Product details
230V -50Hz
Material: stainless steel 316/aluminium/glass



Dimensional drawing



Tip
Surface temperature: Energysaver = 48°C/
PAR 30 = 119°C/ PAR 38 = 108°C
Mounting box included

Recommended lamp

LED E27 9W 240°
3000K 810lm
10kWh/1000h
Item No. 1001031 | 15.30 GBP



LED E27 9W 240°
4000K 850lm
9kWh/1000h
Item No. 1002827 | 15.30 GBP

Lamp details
11W max.
Diameter: 4.5 cm max. L: 13.4 cm max.
optional: LED PAR30 PAR38

Variant	Item No.	GBP
E27 | TC(…)SE		
stainless steel	**229200**	**206.10**

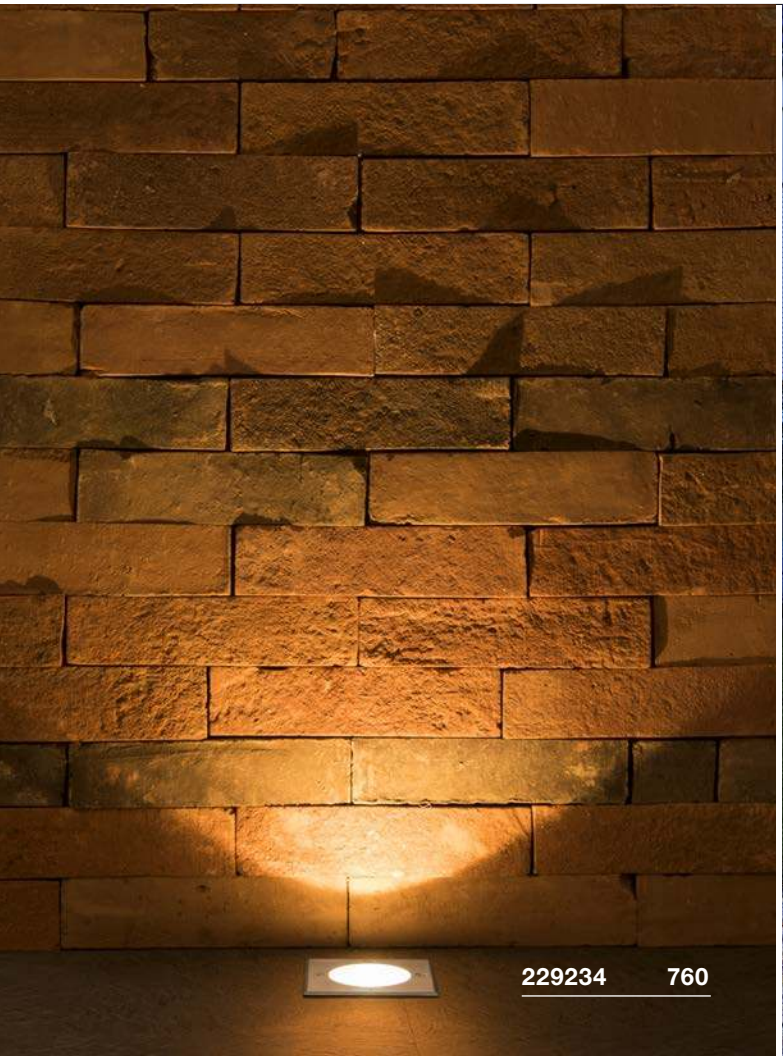
229234 760


228370 760


229230 760



1002893 763

DASAR® 255
EL







- Shade: stainless steel 316
- Asymmetrical reflector

Product details

220-240V ~50/60Hz 750mA
Total wattage: 34W
Material: stainless steel 316/aluminium/glass



Dimensional drawing



Tip

Mounting box included

Variant	Item No.	GBP
1620lm | 4000K | CRI>80		
stainless steel	**229381**	**314.10**
1620lm | 3000K | CRI>80		
stainless steel	**229383**	**314.10**

DASAR® 270
EL, asymmetrical







- Asymmetrical light distribution

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/stainless steel 316



Dimensional drawing



Tip

Mounting box included

Variant	Item No.	GBP
2000lm | 3000K | CRI>80		
stainless steel	**1002893**	**359.10**
2100lm | 4000K | CRI>80		
stainless steel	**1002895**	**359.10**

DASAR® 270
EL, symmetrical







- Symmetrical light distribution
- Pivoting light head

Product details

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/stainless steel 316



Dimensional drawing



Tip

Mounting box included

Recommended accessories

Glare protection
Item No. 1002899 | 9.90 GBP



Variant	Item No.	GBP
250lm · 3000K · CRI>80		
stainless steel	**1002897**	**359.10**
2600lm · 4000K · CRI>80		
stainless steel	**1002898**	**359.10**

DASAR®
EL, T16

SOCKET INSIDE





• Shade: stainless steel 316

Product details

230V -50Hz
Total wattage: 13.6W
Material: stainless steel 316/aluminium/glass



Dimensional drawing



Tip

Mounting box included

Recommended lamp

G5 14W
3000K 1200lm
16kWh/1000h
Item No. 548014 ▼| 9.00 GBP

Lamp details

14W

Variant	Item No.	GBP
G5 | T16		
stainless steel	**230100**	**377.10**

DASAR®
EL, T16

SOCKET INSIDE





• Shade: stainless steel 316

Product details

230V -50Hz
Total wattage: 23.3W
Material: stainless steel 316/aluminium/glass



Dimensional drawing



Tip

Mounting box included

Recommended lamp

G5 21W
3000K 1900lm
23kWh/1000h
Item No. 548021 ▼| 9.90 GBP

Lamp details

21W

Variant	Item No.	GBP
G5 | T16		
stainless steel	**230110**	**422.10**



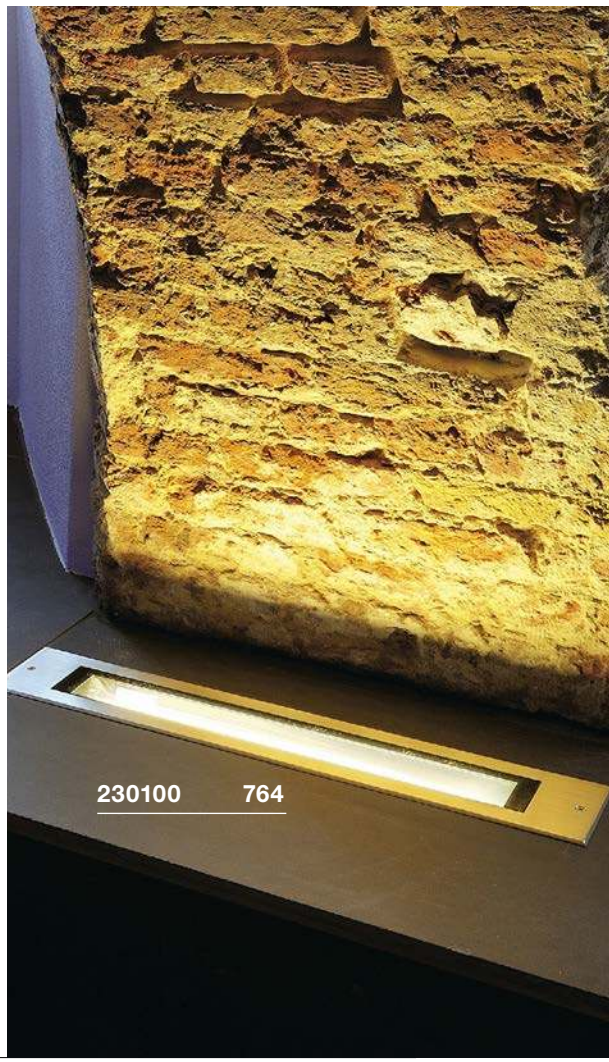


230100 764


230110 764

LED PROFILE

OVERVIEW



LED profile			Installation type			Cross-section	Beam angle	Page
			Surface-mounted	Recessed	Pendant			
GRAZIA 10	Standard		✓	–	–			769
	Flat		✓	–	–			769
	Recessed		–	✓	–			769
GRAZIA 10 EDGE	Surface-mounted		✓	–	–			772
GRAZIA 20	Standard		✓	–	✓			775
	Flat		✓	–	✓			775
	Recessed		–	✓	–			776
GRAZIA 60	Surface-mounted		✓	–	–			781
	Recessed		–	✓	–			781
H-PROFIL			✓	–	✓			785

You can find suitable strips and components from page 788 and suitable accessories (mains adapters, drivers, etc.) from page 824

GRAZIA 10

SURFACE-MOUNTED AND RECESSED PROFILE





SURFACE-MOUNTED PROFILE, STANDARD





Surface-mounted, standard, aluminium, white, black

Length	Colour	Weight (kg)	Item No.	GBP
200 cm	aluminium	0,35	**1000463**	**23.40**
	white	0,46	**1000464**	**23.40**
	black	0,46	**1000465**	**23.40**

Material: aluminium, Width/height: 1.75/1.62 cm, max. width LED strip: 1.0 cm, cover not included

SURFACE-MOUNTED PROFILE, FLAT





Surface-mounted, flat, aluminium, white, black

Length	Colour	Weight (kg)	Item No.	GBP
200 cm	aluminium	0,27	**1000460**	**23.40**
	white	0,36	**1000461**	**23.40**
	black	0,36	**1000462**	**23.40**

Material: aluminium, Width/height: 1.75/1.1 cm, max. width LED strip: 1.0 cm, cover not included

RECESSED PROFILE





Recessed profile, anodised aluminium, white, black

Length	Colour	Weight (kg)	Item No.	GBP
200 cm	aluminium	0,42	**1000457**	**23.40**
	white	0,53	**1000458**	**23.40**
	black	0,53	**1000459**	**23.40**

Material: aluminium, Width/height: 3.0/1.62 cm, max. width LED strip: 1.0 cm, cover not included

GRAZIA 10
ACCESSORIES

COVERS

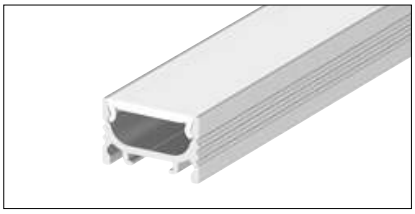
flat, opaque

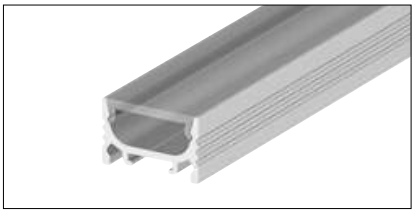
flat, transparent

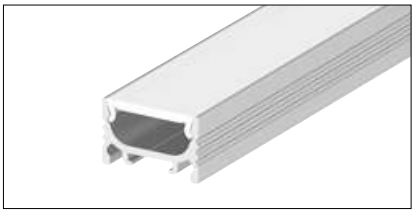
flat, transparent

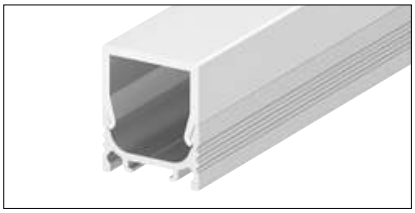
high, opaque
(only suitable for surface-mounted profile)

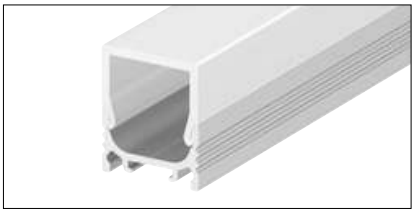
high, transparent
(only suitable for surface-mounted profile)

Length	Colour	Material	Item No.	GBP
200 cm	flat, opaque	Plastic PC	**1000466**	**14.20**
	flat, opaque	Plastic PMMA	**1000468**	**18.90**
	flat, transparent	Plastic PC	**1000467**	**14.20**
	flat, transparent	Plastic PMMA	**1000469**	**18.90**
	high, opaque *	Plastic PC	**1000470**	**18.90**
	high, transparent *	Plastic PC	**1000471**	**21.80**

Plastic PMMA/PC:
Profile covers made of PMMA are especially uniform.
Profile covers made of PC are break-proof and especially suitable for use in contexts requiring high resilience.

* The high covers are only suitable for GRAZIA 10 surface-mounted profiles, not for recessed profiles.

MOUNTING CLIPS

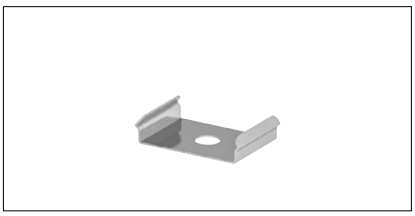
Mounting clip, not visible

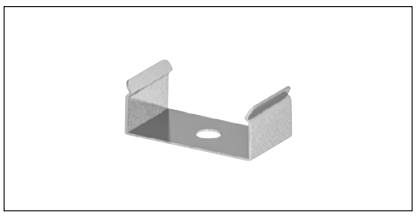
Mounting clip, visible

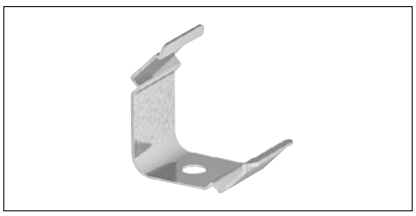
Mounting clip, 45°

Description	Dimensions	Item No.	GBP
Mounting clip, not visible	W/H/D: 1.53/0.3/1 cm	**1000487**	**3.40**
Mounting clip, visible	W/H/D: 1.87/0.7/1 cm	**1000488**	**4.30**
Mounting clip, 45°	W/H/D: 1.62/1.62/1 cm	**1000489**	**4.50**

Material: stainless steel, Packaging contents: 2 pieces

END CAPS FOR SURFACE-MOUNTED PROFILE

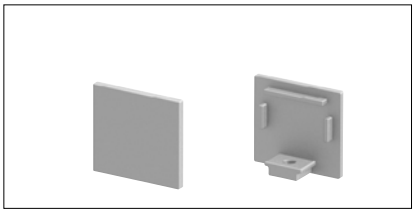
for standard profile, flat cover

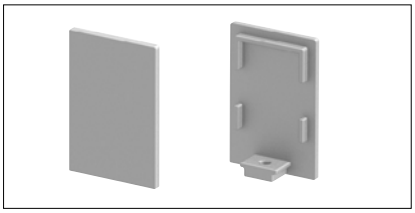
for standard profile, high cover

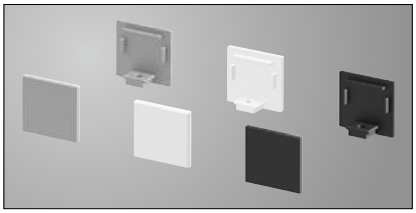
available colour variants

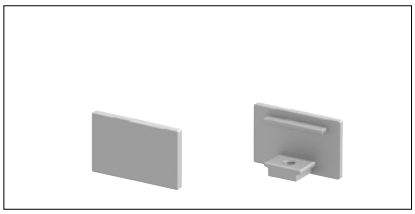
for flat profile, flat cover

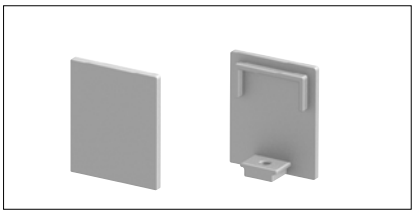
for flat profile, high cover

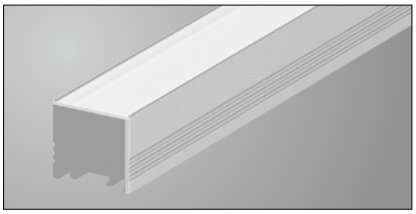
Profile with mounted end caps

Description	Colour	visible depth	Item No.	GBP
End caps for standard profile, flat cover	aluminium	0.2 cm	**1000478**	**5.40**
	white		**1000479**	**5.40**
	black		**1000480**	**5.40**
End caps for standard profile, high cover	aluminium	0.2 cm	**1000484**	**5.40**
	white		**1000485**	**5.40**
	black		**1000486**	**5.40**
End caps for flat profile, flat cover	aluminium	0.2 cm	**1000475**	**5.40**
	white		**1000476**	**5.40**
	black		**1000477**	**5.40**
End cap for flat profile, high cover	aluminium	0.2 cm	**1000481**	**5.40**
	white		**1000482**	**5.40**
	black		**1000483**	**5.40**

Material: aluminium, Packaging contents: 2 pieces

END CAPS FOR RECESSED PROFILE

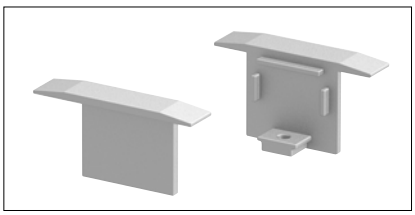
for recessed profile

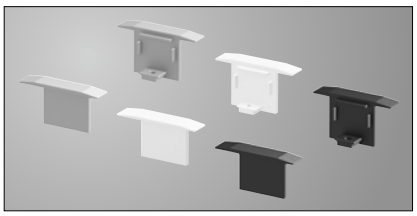
available colour variants

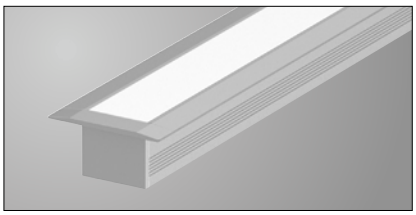
Profile with mounted end caps

Description	Colour	visible depth	Item No.	GBP
End cap for recessed profile	aluminium	0.7 cm	**1000472**	**5.40**
	white		**1000473**	**5.40**
	black		**1000474**	**5.40**

Material: aluminium, Packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
visible depth of end caps + profile length = total length

GRAZIA 10 EDGE NEW

SURFACE-MOUNTED PROFILES



SURFACE-MOUNTED PROFILES

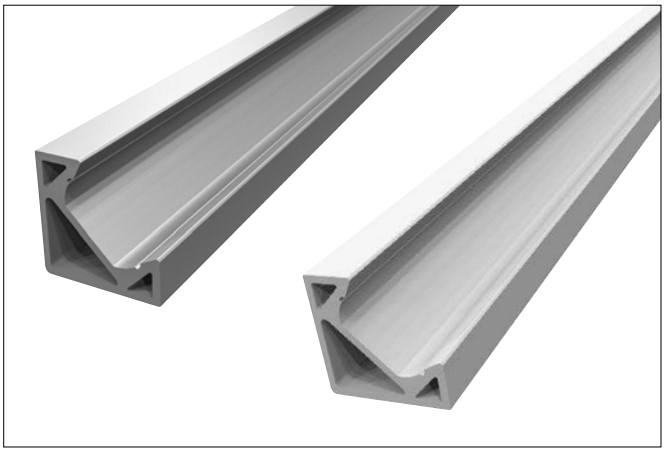



Surface-mounted, aluminium, white

Length	Colour	Weight (kg)	Item No.	GBP
200 cm	aluminium	0,43	1004889 NEW	22.50
	white	0,43	1004890 NEW	22.50

Material: aluminium, Width/height: 1.95/1.95 cm, max. width LED strip: 1.0 cm

GRAZIA 10 EDGE NEW

ACCESSORIES

COVERS

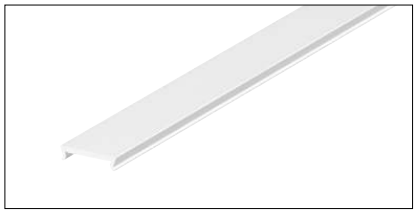

white, plastic PC

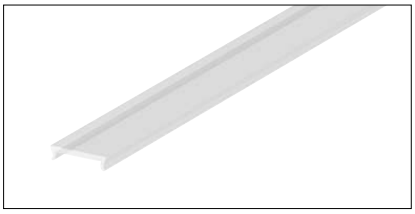

transparent, plastic PC

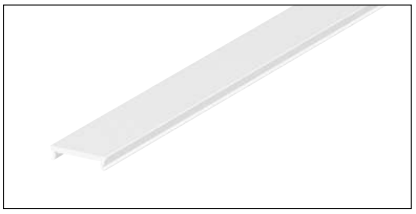

white, plastic PMMA

Length	Colour	Material	Item No.	GBP
200 cm	white	Plastic PC	1000466 NEW	14.20
	transparent	Plastic PC	1000467 NEW	14.20
	white	Plastic PMMA	1000468 NEW	18.90
	transparent	Plastic PMMA	1000469 NEW	18.90

Plastic PMMA/PC:
Profile covers made of PMMA are especially uniform.
Profile covers made of PC are break-proof and especially suitable for use in contexts requiring high resilience.

END CAPS

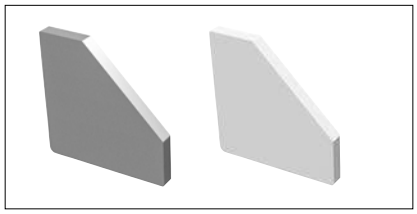

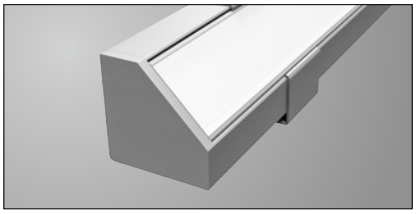

Description	Colour	visible depth	Item No.	GBP
End caps	aluminium	2 mm	1004893 NEW	2.00
	white	2 mm	1004894 NEW	2.00

Material: aluminium, Packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
visible depth of end caps + profile length = total length

MOUNTING CLIPS

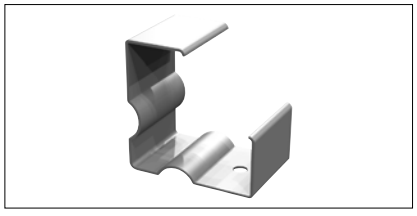

Description	Colour	Dimensions	Item No.	GBP
Mounting clips	stainless steel	L/B/H: 2.25/15/3.25 cm	1004895 NEW	2.90

Material: steel, Packaging contents: 4 pieces

GRAZIA 20

SURFACE-MOUNTED PROFILES





can also be used as a pendant light (pendant suspension p. 779)



high-quality powder-coated aluminium surface

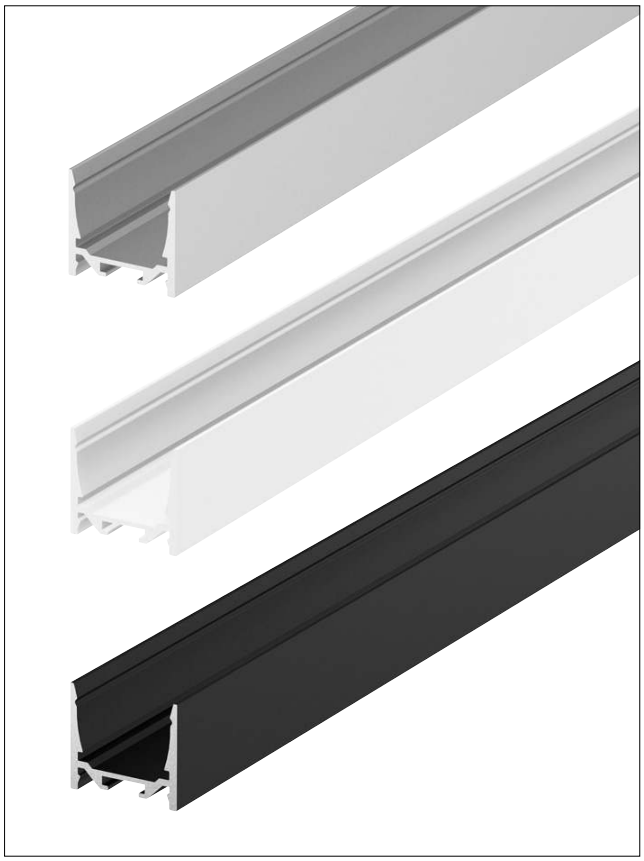

available colour variants: aluminium, white, black

GRAZIA 20

SURFACE-MOUNTED PROFILES

STANDARD



smooth



grooved



Description	Length	Colour	Weight (kg)	Item No.	GBP
Standard smooth	150 cm	aluminium	0,9	**1004918**	**37.80**
		white	0,9	**1004919**	**37.80**
		black	0,9	**1004920**	**37.80**
	300 cm	aluminium	2,49	**1000523**	**75.60**
		white	2,55	**1000524**	**75.60**
		black	2,55	**1000525**	**75.60**
Standard grooved	300 cm	aluminium	2,4	**1000514**	**75.60**
		white	2,46	**1000515**	**75.60**
		black	2,46	**1000516**	**75.60**

Material: aluminium, Width/height: 3.5/3.2 cm, max. width LED strip: 2.0 cm, cover not included

FLAT



smooth



grooved



Description	Length	Colour	Weight (kg)	Item No.	GBP
Flat smooth	150 cm	aluminium	0,9	**1004921**	**37.80**
		white	0,9	**1004922**	**37.80**
		black	0,9	**1004923**	**37.80**
	300 cm	aluminium	1,56	**1000532**	**57.60**
		white	1,62	**1000533**	**57.60**
		black	1,62	**1000534**	**57.60**
Flat grooved	300 cm	aluminium	1,47	**1000505**	**57.60**
		white	1,53	**1000506**	**57.60**
		black	1,53	**1000507**	**57.60**

Material: aluminium, Width/height: 3.5/2.2 cm, max. width LED strip: 2.0 cm, cover not included

GRAZIA 20

RECESSED PROFILE



RECESSED PROFILE

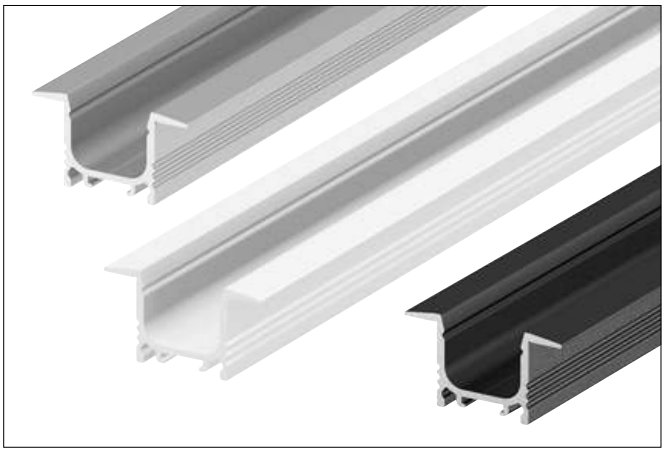

Recessed, aluminium, white, black



Length	Colour	Weight (kg)	Item No.	GBP
150 cm	aluminium	1,05	**1004924**	**42.30**
	white	1,05	**1004925**	**42.30**
	black	1,05	**1004926**	**42.30**
300 cm	aluminium	2,28	**1000496**	**84.60**
	white	2,34	**1000497**	**84.60**
	black	2,34	**1000498**	**84.60**

Material: aluminium, Width/height: 5.2/3.2 cm, max. width LED strip: 2.0 cm, cover not included

GRAZIA 20

ACCESSORIES

COVERS

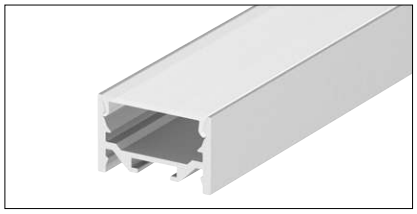
flat, transparent

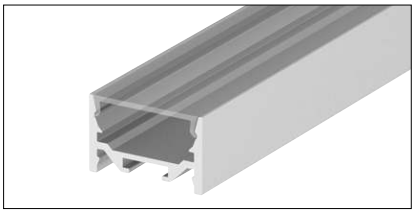
flat, transparent

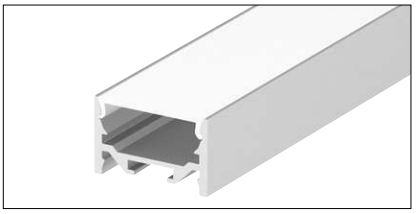
flat, opaque

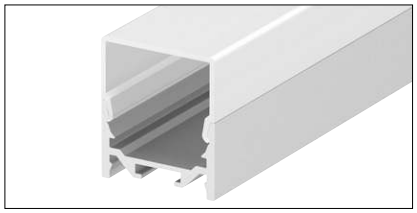
high, transparent

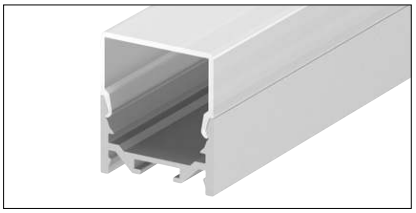
high, opaque

Length	Colour	Material	Item No.	GBP
150 cm	flat, frosted	Plastic PC	1004927	7.10
	flat, frosted	Plastic PMMA	1004928	10.30
	flat, opaque	Plastic PMMA	1004929	10.30
	high, frosted*	Plastic PC	1004930	16.10
	high, frosted*	Plastic PMMA	1004931	26.60
300 cm	flat, frosted	Plastic PC	1000540	23.60
	flat, frosted	Plastic PMMA	1000546	33.10
	flat, opaque	Plastic PMMA	1000549	33.10
	high, frosted*	Plastic PMMA	1000555	40.50
	high, frosted*	Plastic PC	1000552	33.10

Plastic PMMA/PC:
Profile covers made of PMMA are especially uniform.
Profile covers made of PC are break-proof and especially suitable for use in contexts requiring high resilience.

* The high covers are only suitable for GRAZIA 20 surface-mounted profiles, not for recessed profiles.

LONGITUDINAL CONNECTOR

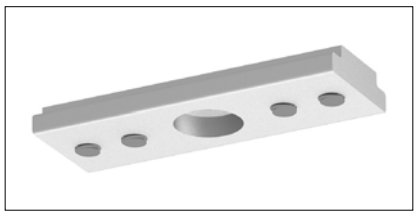

Description	Colour	Dimensions	Item No.	GBP
Longitudinal connector	aluminium	L/W/H: 3.8/1.4/0.4 cm	1000571	9.90

Material: aluminium, Packaging contents: 2 pieces

GRAZIA 20
ACCESSORIES

END CAPS FOR SURFACE-MOUNTED PROFILE

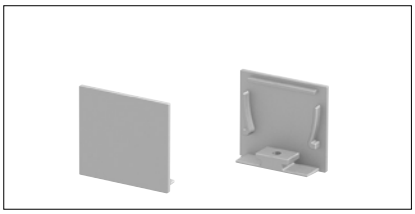
for standard profile, flat cover

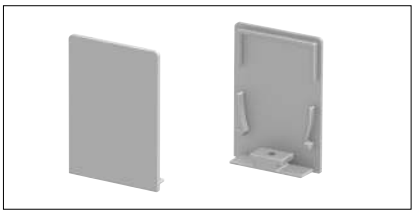
for standard profile, high cover

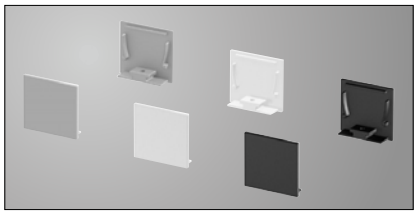
available colour variants

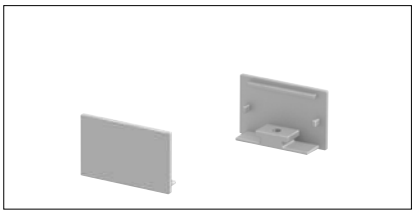
for flat profile, flat cover

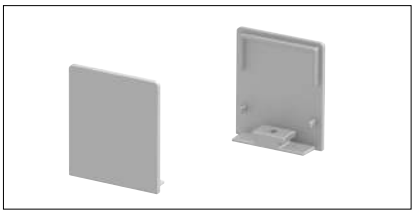
for flat profile, high cover

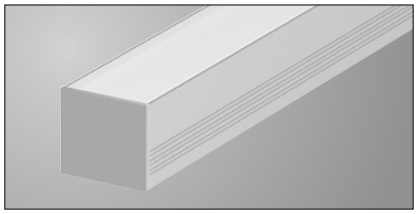
Profile with mounted end caps

Description	Colour	visible depth	Item No.	GBP
Standard profile, flat cover	aluminium	0.25 cm	1000565	7.70
	white		1000566	7.70
	black		1000567	7.70
Standard profile, high cover	aluminium	0.25 cm	1000568	7.70
	white		1000569	7.70
	black		1000570	7.70
Flat profile, flat cover	aluminium	0.25 cm	1000559	7.70
	white		1000560	7.70
	black		1000561	7.70
Flat profile, high cover	aluminium	0.25 cm	1000562	7.70
	white		1000563	7.70
	black		1000564	7.70

Material: aluminium, Packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
visible depth of end caps + profile length = total length

END CAPS FOR RECESSED PROFILE

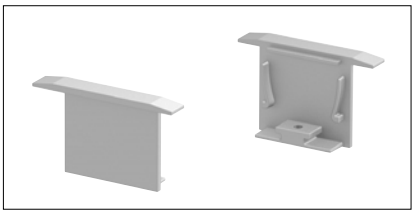
for recessed profile

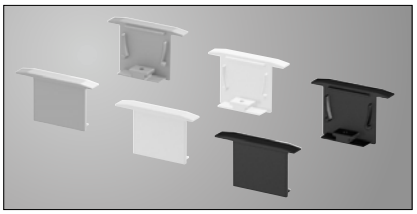
available colour variants

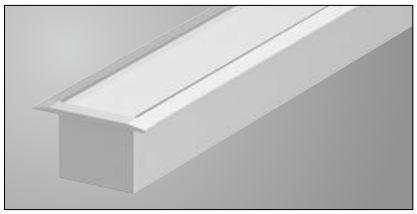
Profile with mounted end caps

Description	Colour	visible depth	Item No.	GBP
End cap for recessed profile	aluminium	0.085 cm	1000556	7.70
	white	0.085 cm	1000557	7.70
	black	0.085 cm	1000558	7.70

Material: aluminium, Packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
visible depth of end caps + profile length = total length

PENDANT SUSPENSION FOR MOUNTING CLIPS



Pendant suspension
(only for surface-mounted profile)

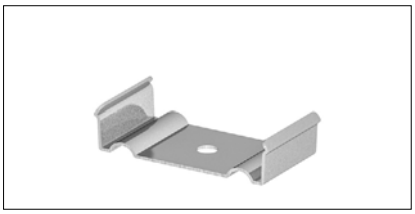

Mounting clip, not visible

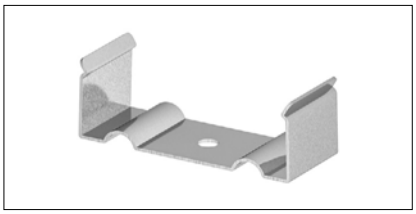

Mounting clip, visible
(only for grooved surface-mounted profile)

Description	Dimensions	Item No.	GBP
Pendant suspension*	Pendant L: 200 cm	**1000535**	**22.50**
Mounting clip, not visible	L/W/H: 2.82/1.2/1.4 cm	**1000536**	**3.40**
Mounting clip, visible**	L/W/H: 3.65/6.2/1.5 cm	**1000537**	**3.40**

Material: stainless steel, Packaging contents: 2 pieces

* The pendant suspension is only suitable for the surface-mounted profile.
The visible mounting clip is only suitable for the **GRAZIA 20 Standard, grooved profile and the **GRAZIA 20 Flat, grooved** profile.



GRAZIA 60 NEW

SURFACE-MOUNTED AND RECESSED PROFILE



SURFACE-MOUNTED PROFILE

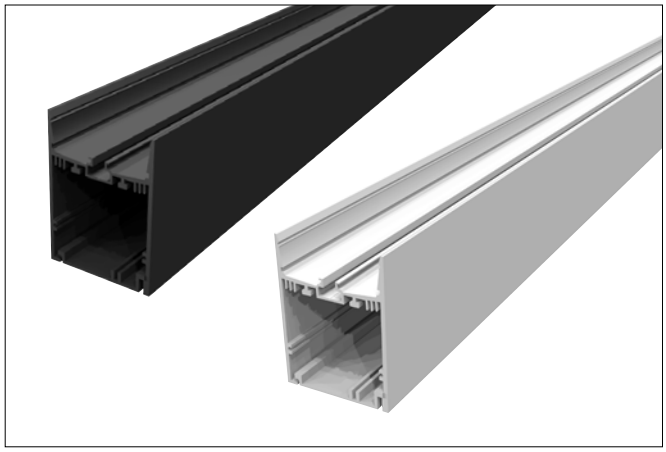

Surface-mounted profile, black, white



Length	Colour	Weight (kg)	Item No.	GBP
150 cm	black	3,36	**1004896**	**88.20**
	white	3,36	**1004897**	**88.20**
300 cm	black	6,72	**1004898**	**178.20**
	white	6,72	**1004899**	**178.20**

Material: aluminium, Width/height: 7/9.5 cm, max. width LED strip: 2.0 cm, cover not included

RECESSED PROFILE

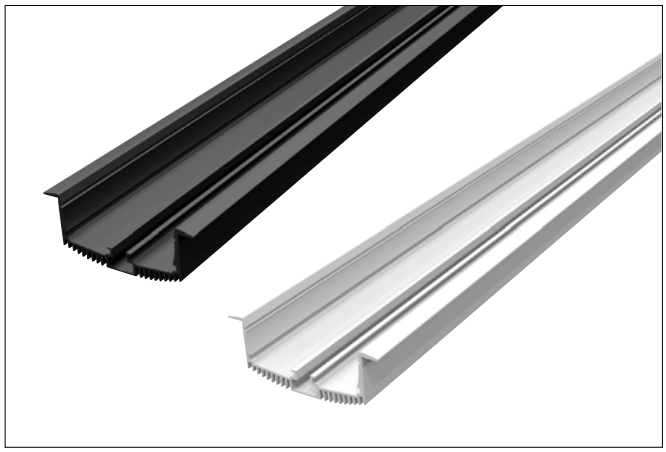

Recessed profile, black, white



Length	Colour	Weight (kg)	Item No.	GBP
150 cm	black	1,55	**1004905**	**44.10**
	white	1,55	**1004906**	**55.80**
300 cm	black	6,72	**1004907**	**88.20**
	white	6,72	**1004908**	**111.60**

Material: aluminium, Width/height: 8.5/3.3 cm, max. width LED strip: 2.0 cm, cover not included

GRAZIA 60 NEW

ACCESSORIES

COVERS

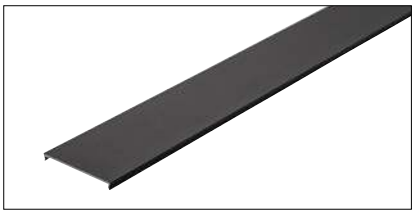
black, aluminium, 150 cm


white, aluminium, 150 cm

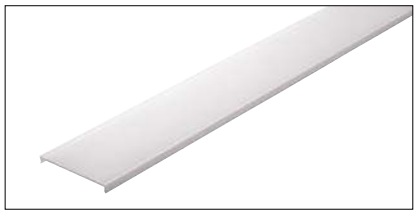
frosted, plastic PC, 150 cm


frosted, plastic PMMA, 150 cm


frosted, plastic PC, 300 cm


frosted, plastic PC, 300 cm

Length	Colour	Material	Item No.	GBP
150 cm	black	aluminium	1004912 NEW	26.10
	white	aluminium	1004913 NEW	26.10
	frosted	Plastic PC	1004914 NEW	13.10
	frosted	Plastic PMMA	1004916 NEW	16.70
300 cm	frosted	Plastic PC	1004915 NEW	26.10
	frosted	Plastic PC	1004917 NEW	33.30

Plastic PMMA/PC:
Profile covers made of PMMA are especially uniform.
Profile covers made of PC are break-proof and especially suitable for use in contexts requiring high resilience.

END CAPS

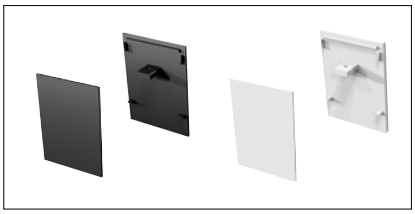
for surface-mounted profile

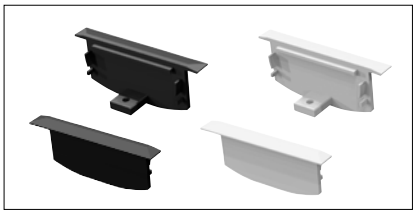
for recessed profile

Description	Colour	visible depth	Item No.	GBP
End cap for surface-mounted profile	black	0.085 cm	1004900 NEW	8.00
	white	0.085 cm	1004901 NEW	8.00
End cap for recessed profile	black	0.085 cm	1004909 NEW	5.30
	white	0.085 cm	1004910 NEW	5.30

Material: aluminium, Packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
visible depth of end caps + profile length = total length

GRAZIA 60 NEW

ACCESSORIES

MOUNTING ACCESSORIES FOR SURFACE-MOUNTED PROFILE



Description	Colour	Dimensions	Item No.	GBP
Mounting accessories	aluminium	L/W/H: 150/7/9.5 cm	**1004902** NEW	**31.50**

Material: aluminium, Packaging contents: 1 piece

LONGITUDINAL CONNECTOR

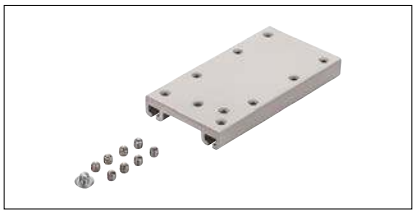

Description	Colour	Dimensions	Item No.	GBP
Longitudinal connector	aluminium	L/W/H: 8/4.2/1 cm	**1004903** NEW	**8.00**

Material: aluminium, Packaging contents: 2 pieces

FEED-IN

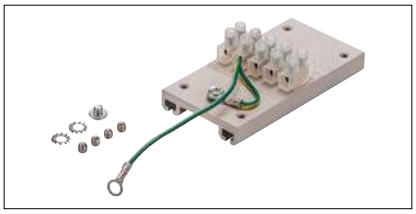

Description	Colour	Dimensions	Item No.	GBP
Feed-in	aluminium	L/W/H: 8/4.2/2.4 cm	**1004904** NEW	**8.90**

Material: aluminium, Packaging contents: 1 piece

MOUNTING CLIP FOR RECESSED PROFILE



Description	Colour	Dimensions	Item No.	GBP
Mounting clip	chrome	L/W/H: 13/17/4 cm	**1004911** NEW	**11.30**

Material: steel, Packaging contents: 2 pieces

H-PROFIL

2m



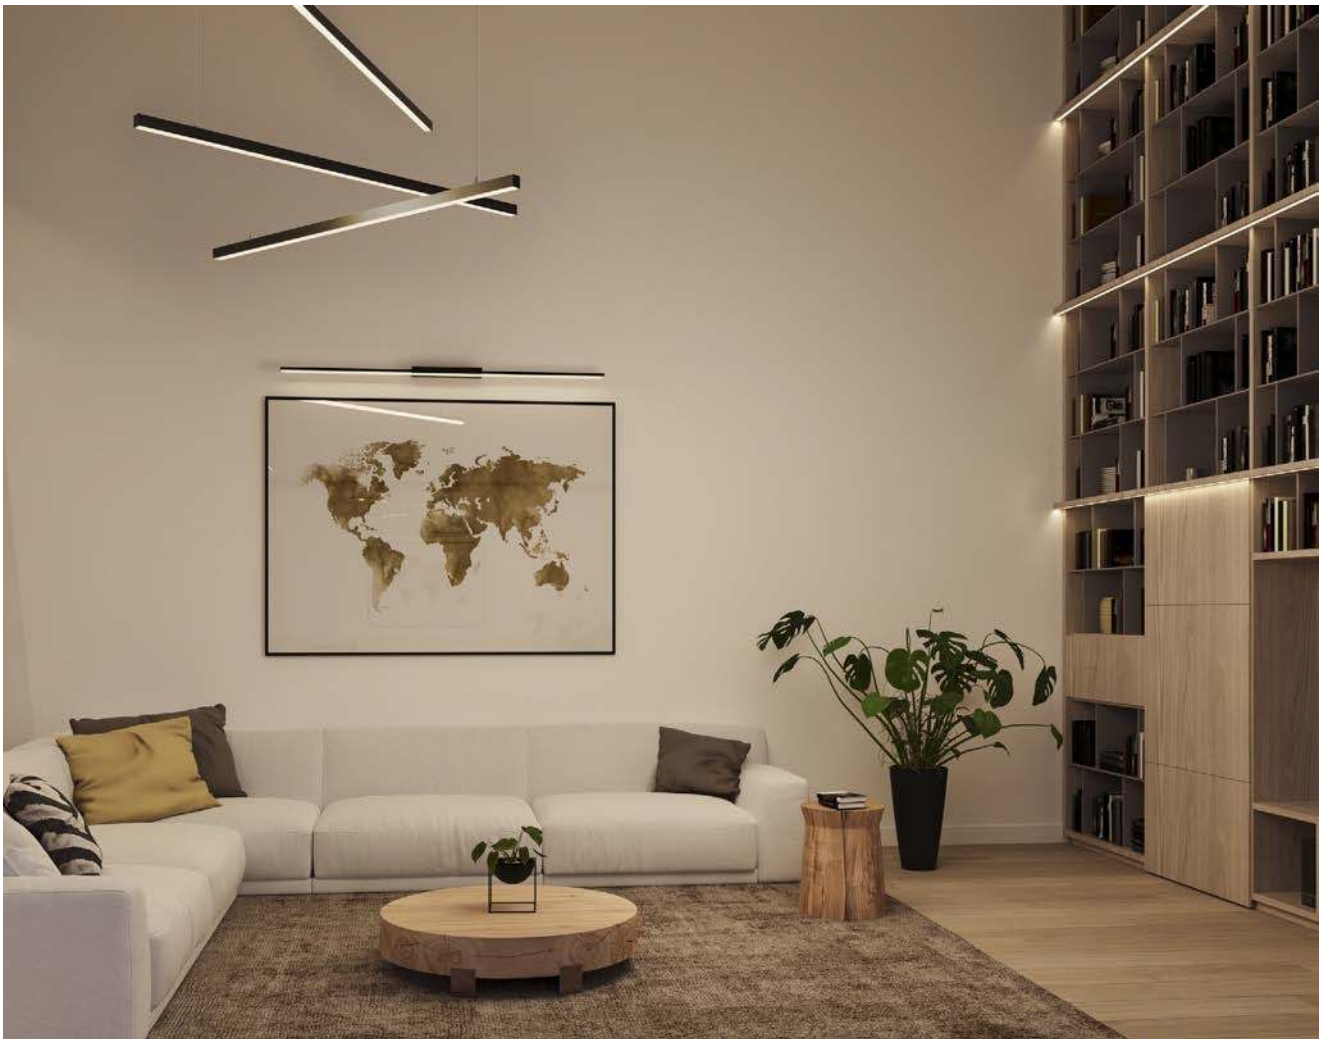

H-PROFIL 2m

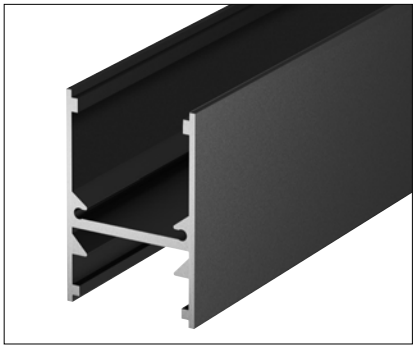



Length	Colour	Weight (kg)	Item No.	GBP
200 cm	black	1	**1001814**	**46.80**
	white		**1001816**	**46.80**
	aluminium		**1001817**	**46.80**

Material: aluminium, Width/height: 2.7/4.1 cm, max. width LED strip: 1.6 cm, cover not included

H-PROFIL

2m – ACCESSORIES

COVER

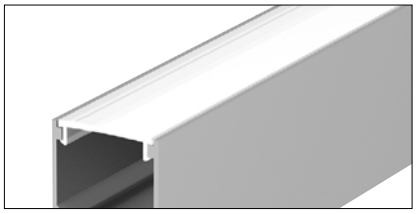

Cover, opaque

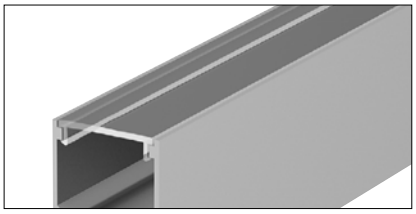

Cover, transparent

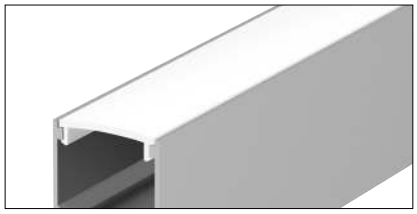

Cover, satin-finish

Length	Colour	Material	Item No.	GBP
200 cm	opaque	Plastic PC	**1001813**	**17.10**
	transparent	Plastic PC	**1001815**	**17.10**
	transparent	Plastic PMMA	**214350**	**25.20**
	transparent	Plastic PMMA	**214351**	**25.20**

Packaging contents: 1 piece

END CAPS



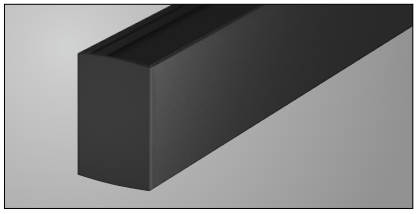

Description	Colour	visible depth	Item No.	GBP
End caps	black	0.14 cm	**1001807**	**29.70**
	white	0.14 cm	**1001808**	**29.70**
	grey	0.14 cm	**1001809**	**29.70**

Material: aluminium, Packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
visible depth of end caps + profile length = total length

CONNECTOR

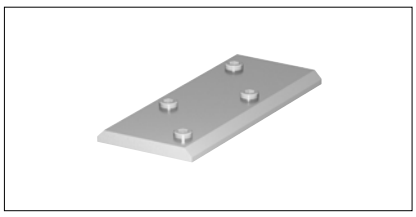

Description	Colour	Dimensions	Item No.	GBP
Connector	grey	L/W/H: 5.6/2.4/0.3 cm	**1001806**	**6.80**

Material: aluminium

MOUNTING ACCESSORIES

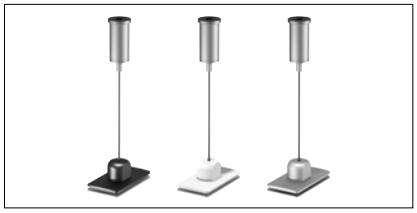

Pendant suspension

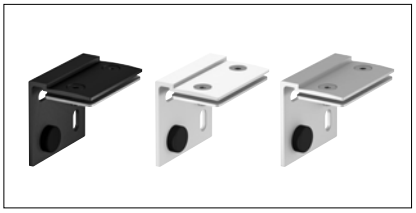

Wall bracket



Adapter for track

Description	Colour	Material	Dimensions	Item No.	GBP
Pendant suspension, 2 pieces	black	Aluminium/steel	L/W/H: 4.4/2.4/2 cm Pendant L: 200 cm	1001796	29.70
	white			1001797	29.70
	aluminium			1001798	29.70
Wall bracket, 2 pieces	black	Aluminium/plastic	L/W/H: 4.4/3.2/4 cm	1001802	10.80
	white			1002236	10.80
	aluminium			1002237	10.80

STRAIN RELIEF

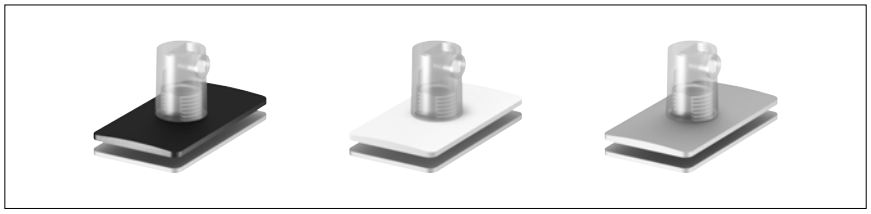

Description	Colour	Dimensions	Item No.	GBP
Strain relief	black	L/W/H: 4.4/2.4/2.6 cm	1001799	13.50
	white		1001800	13.50
	aluminium		1001801	13.50

Material: aluminium/steel, Cable diameter max. 6.5 mm, Packaging contents: 1 piece

CONNECTION BOX

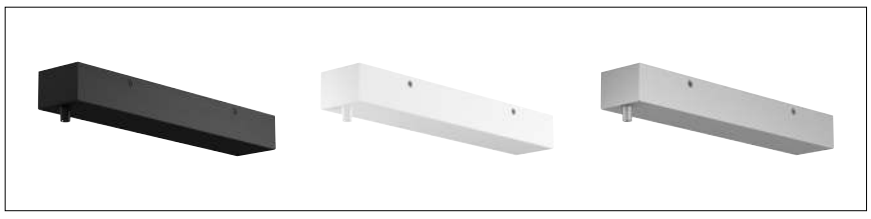

Description	Colour	Dimensions	Item No.	GBP
Connection box	black	L/W/H: 37.6/6.6/4.7 cm	1001803	40.50
	white		1001804	40.50
	grey		1001805	40.50

Material: aluminium/steel, The ceiling rose is prepared for the installation of control devices and cables. Control devices and cables are available separately. Available installation space for driver max. 6.2 x 25 x 4 cm. Packaging contents: 1 piece

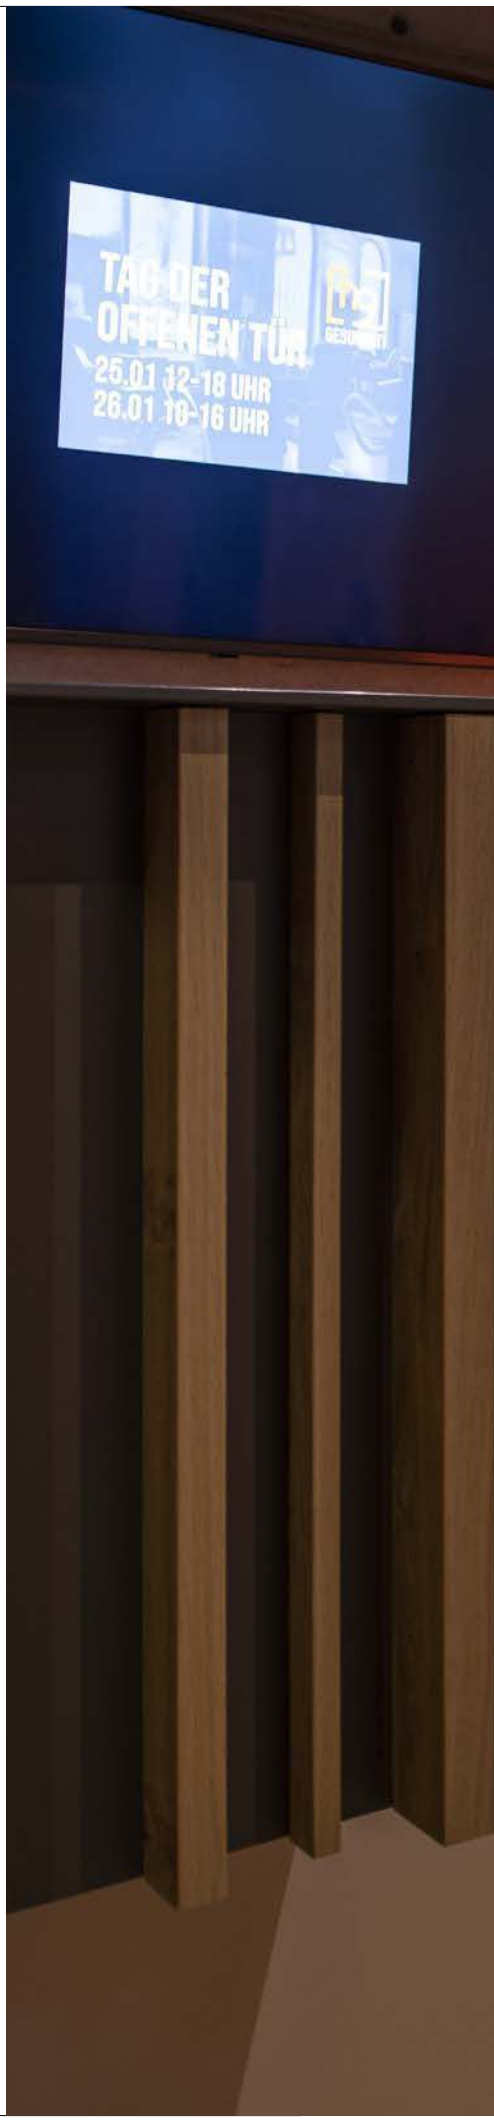

IMPRESSIVE LINE-UP.

LED STRIP LIGHTS AND LIGHT BARS FOR A SPECIAL ATMOSPHERE.

Want to introduce a bit of variety? LED strip lights and light bars are modern and extraordinary design elements giving rooms a special atmosphere. The elongated luminaires with many different colours make a good impression as signposts.



1004727 799

WHICH LED STRIP DO I NEED?

LED strips and profiles for your project.
Everything at a glance.

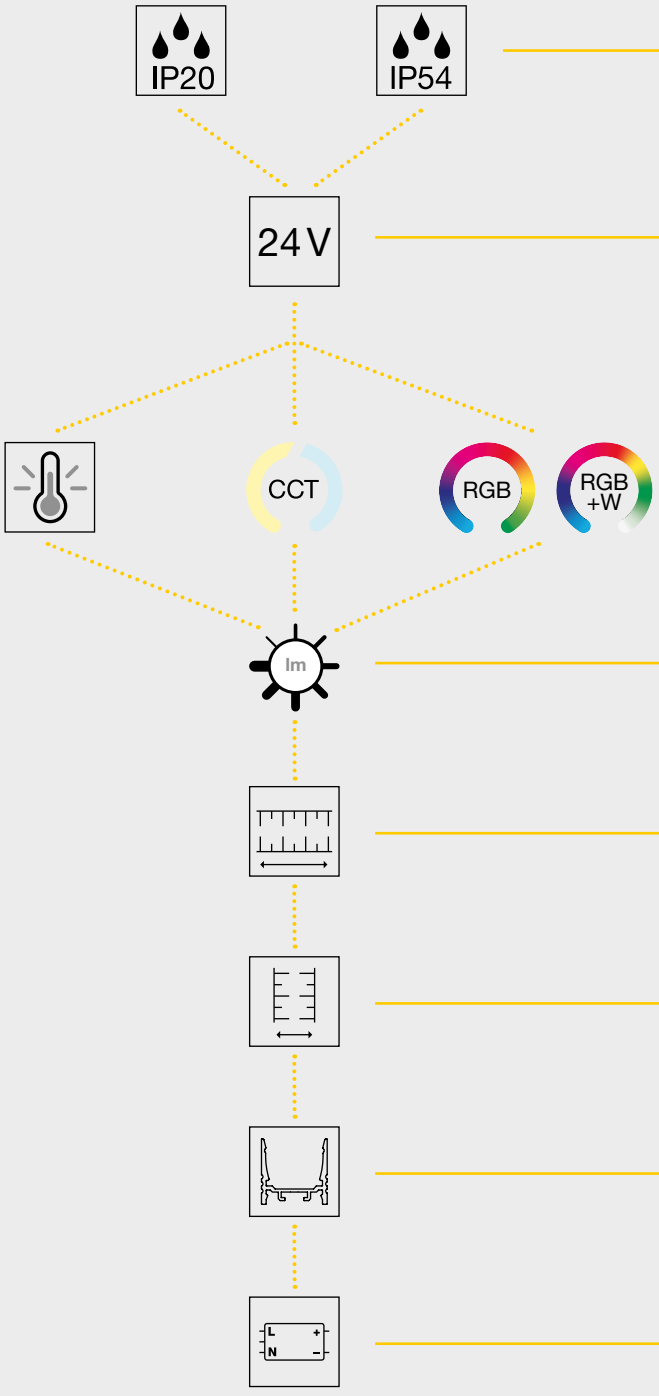

For indoors, outdoors, and wet rooms.
With IP20 and IP54, equipped for all applications.

When you need extra length.
Create long lengths with fewer feed-in points. Thanks to 24V technology.

Add a touch of colour.
LED strips available in white, as CCT (Tunable White) or RGBW version

Create accent lighting or illuminate entire rooms.
Up to 7000lm across 5m possible.

Stay flexible.
With lengths of 5-80m.

That fits.
LED strip widths for almost every profile.

The perfect combination.
You can find suitable profiles on p. 772-776

Tailored to your project.
You can find suitable drivers on p. 833-839

IP	24 V		CCT	RGB / RGB +W	lm			LED strips	Profile
20	✓	2200-4000K	–	–	17600-21600lm	80 m	1 cm	GRAZIA FLEXSTRIP LED, 24V p. 792	GRAZIA 10 p. 769 GRAZIA 10 EDGE from p. 772
20	✓	2700-4000K	–	–	3500-3750lm	5 m	1 cm	GRAZIA FLEXSTRIP LED, 24V p. 793	GRAZIA 10 p. 769 GRAZIA 10 EDGE from p. 772
20	✓	2700-4000K	–	–	6500-7000lm	5 m	1 cm	GRAZIA PRO FLEXSTRIP, 24V p. 794	GRAZIA 10 p. 769 GRAZIA 10 EDGE from p. 772
20	✓	2700-6500K	–	–	8500-9100K	5 m	1 cm	GRAZIA PRO FLEXSTRIP, 24V p. 795	GRAZIA 10 p. 769 GRAZIA 10 EDGE from p. 772
20	✓	3000-4000K	–	–	12500-13000lm	5 m	2 cm	GRAZIA PRO MAX FLEXSTRIP, 24V p. 796	GRAZIA 20 surface-mounted p. 775 GRAZIA 20 Recessed p. 776
20	✓	3000-4000K	–	–	20000-21400lm	5 m	2 cm	GRAZIA PRO MAX FLEXSTRIP, 24V p. 797	GRAZIA 20 surface-mounted p. 775 GRAZIA 20 Recessed p. 776
20	✓	2700-6500K	✓	–	3400-3700lm	5 m	1 cm	GRAZIA PRO FLEXSTRIP, Tunable white, 24V p. 798	GRAZIA 10 p. 769 GRAZIA 10 EDGE from p. 772
20	✓	3000K	–	✓	2050-2500lm	5 m	2 cm	GRAZIA PRO FLEXSTRIP, RGBW, 24V p. 799	GRAZIA 20 surface-mounted p. 775 GRAZIA 20 Recessed p. 776
54	✓	2700-4000K	–	–	3350-3600lm	5 m	2 cm	GRAZIA IP FLEXSTRIP, 24V p. 800	GRAZIA 20 surface-mounted p. 775 GRAZIA 20 Recessed p. 776
54	✓	2700-6500K	–	–	3210-3500lm	5 m	2 cm	GRAZIA IP FLEXSTRIP, Tunable white, 24V p. 801	GRAZIA 20 surface-mounted p. 775 GRAZIA 20 Recessed p. 776
54	✓	3000K	–	✓	1940-2350lm	5 m	2 cm	GRAZIA IP FLEXSTRIP, RGBW, 24V p. 802	GRAZIA 20 surface-mounted p. 775 GRAZIA 20 Recessed p. 776

GRAZIA FLEXSTRIP LED

24V



GRAZIA FLEXSTRIP LED, 24V



48 LEDs pro m
Width/Height: 1/0.12 cm
LED gap: 1.7 cm
Can be separated every 10 cm
minimum bending radius: 3 cm

80 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
2200K	17600	211,2	>90	4SDCM	8000	**1002996**	**899.10**
2700K	19200					**1002997**	**899.10**
3000K	19200					**1002998**	**899.10**
4000K	21600					**1002999**	**899.10**

In order to obtain a consistent light output from a length of 30 m, we recommend feeding the strips on both sides.
With single-sided feed-in, a new feed-in must be provided from a length of 40 m.



Extra-long strip **80 m**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

GRAZIA FLEXSTRIP LED NEW

24V

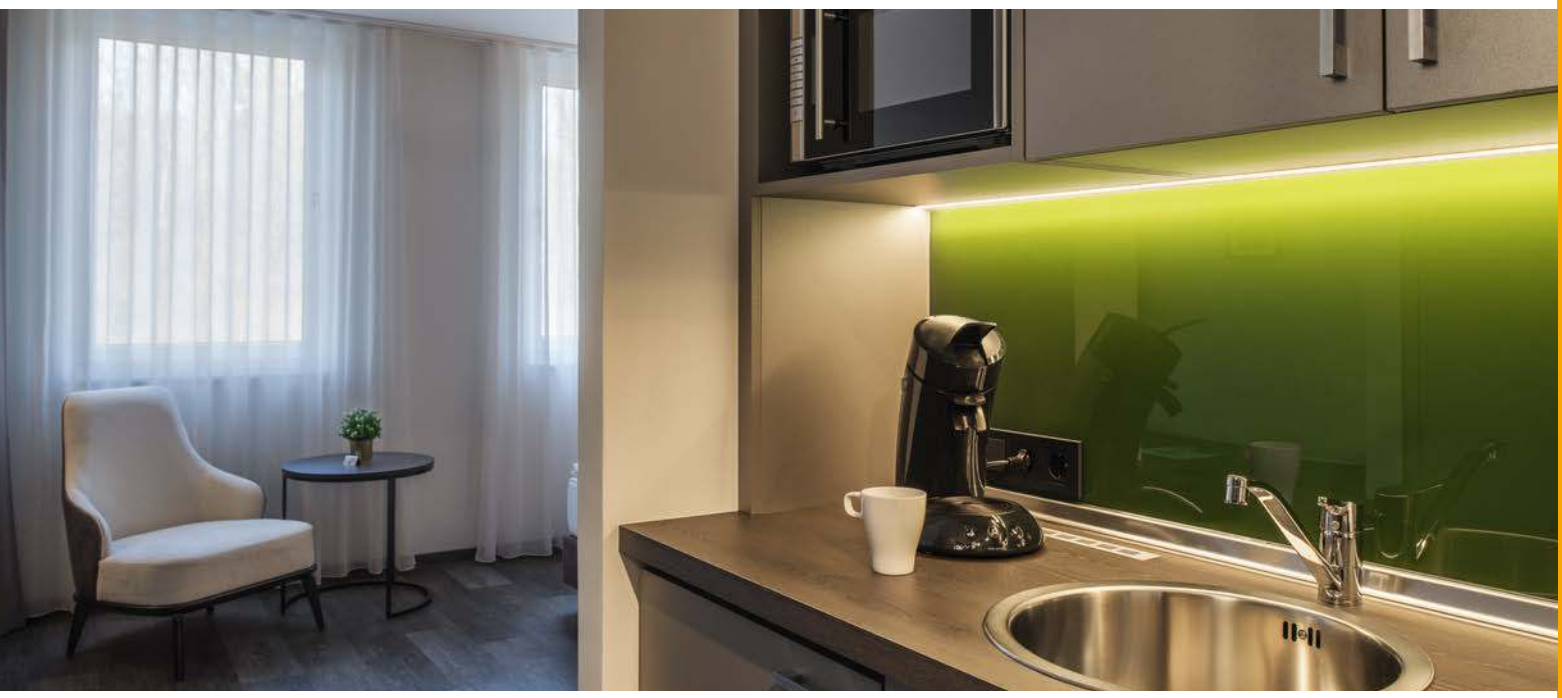

GRAZIA FLEXSTRIP LED, 24V

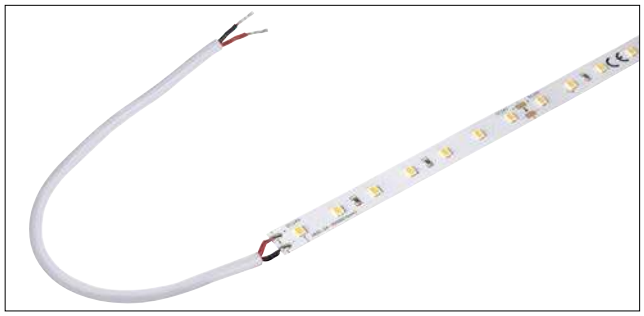

70 LEDs pro m
Width/Height: 1/0.12 cm
LED gap: 1.4 cm
Can be separated every 10 cm
minimum bending radius: 3 cm

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
2700K	3500	44	>90	3SDCM	500	1004708 NEW	62.10
3000K	3500					1004709 NEW	62.10
4000K	3750					1004710 NEW	62.10

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

GRAZIA PRO FLEXSTRIP NEW

24V



GRAZIA PRO FLEXSTRIP, 24V

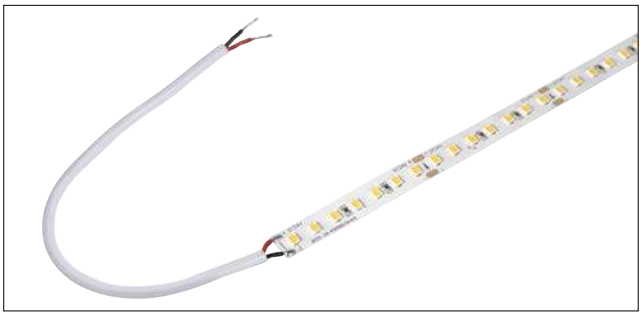

126 LED pro m
Width/Height: 1/0.12 cm
LED gap: 0.8 cm
Can be separated every 5.6 cm
minimum bending radius: 3 cm

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
2700K	6500	73	>90	3SDCM	500	1004712	108.00
3000K	6500					1004713	108.00
4000K	7000					1004714	108.00

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

GRAZIA PRO FLEXSTRIP NEW

24V



GRAZIA PRO FLEXSTRIP, 24V

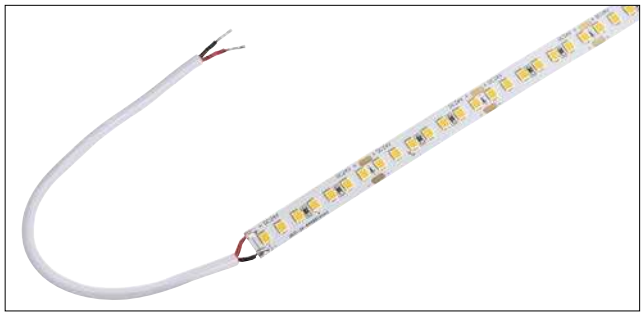

168 LEDs pro m
Width/Height: 1/0.12 cm
LED gap: 0.6 cm
Can be separated every 4.2 cm
minimum bending radius: 3 cm

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
2700K	8500	91	>90	3SDCM	500	1004716 NEW	124.20
3000K	8500					1004717 NEW	124.20
4000K	9100					1004718 NEW	124.20
6500K	9100					1004719 NEW	124.20

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

GRAZIA PRO MAX FLEXSTRIP NEW

24V

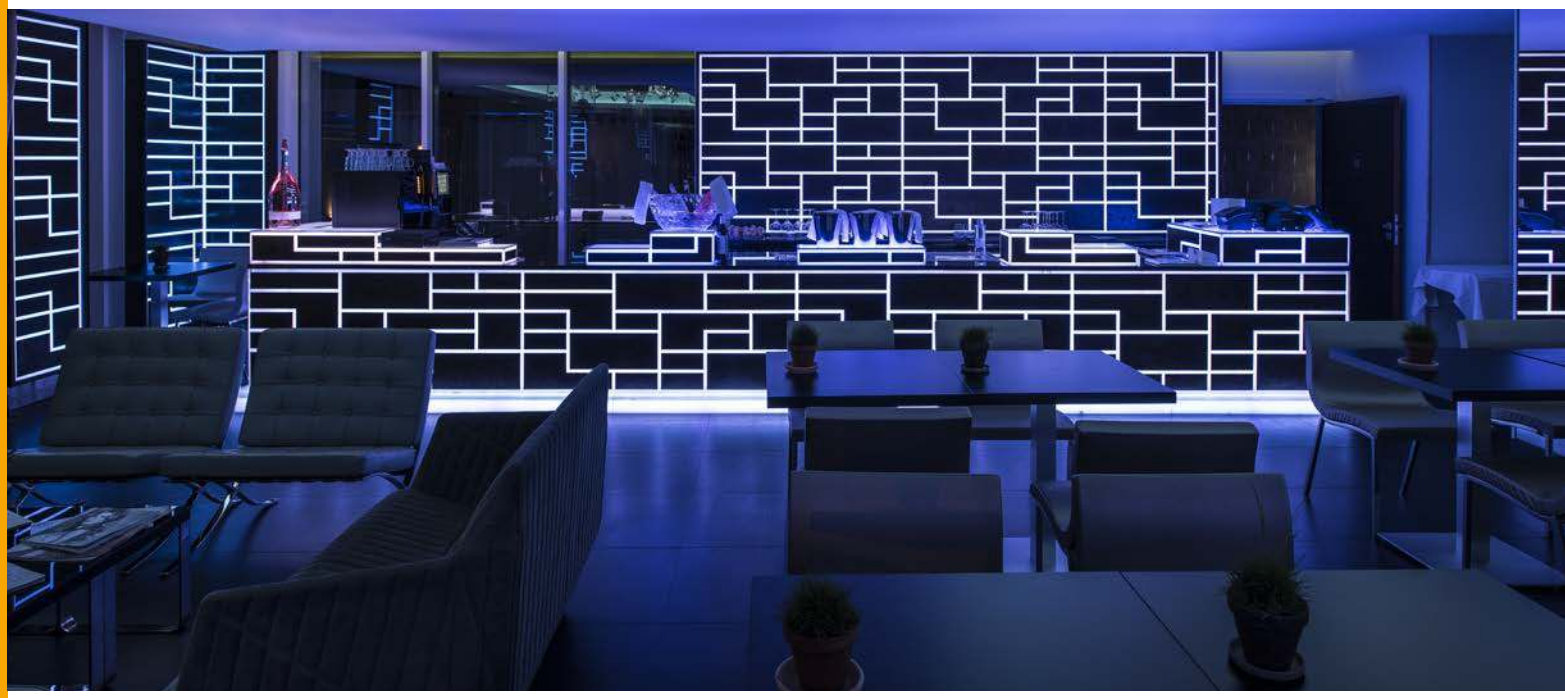

GRAZIA PRO MAX FLEXSTRIP, 24V

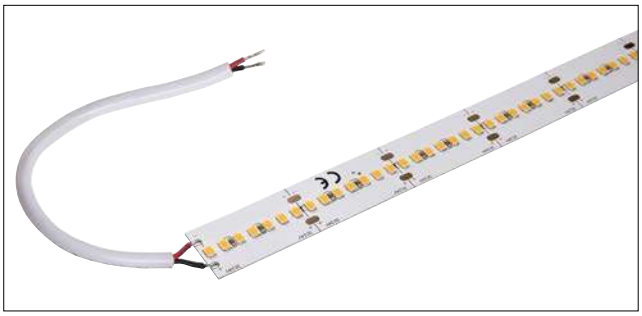

196 LED pro m
Width/Height: 2/0.15 cm
LED gap: 0.5 cm
Can be separated every 3.6 cm
minimum bending radius: 3 cm

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
3000K	12500	126	>90	3SDCM	500	1004720	178.20
4000K	13000					1004721	178.20

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

GRAZIA PRO MAX FLEXSTRIP NEW

24V



GRAZIA PRO MAX FLEXSTRIP, 24V

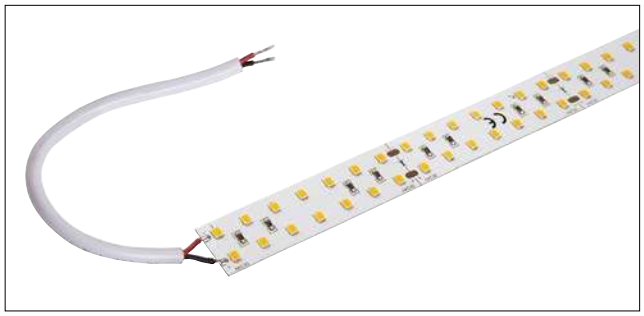

196 LEDs pro m
Width/Height: 2/0.15 cm
LED gap: 1 cm
Can be separated every 7.1 cm
minimum bending radius: 3 cm

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
3000K	20000	193	>90	3SDCM	500	1004722 NEW	358.20
4000K	21400					1004723 NEW	358.20

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

GRAZIA PRO FLEXSTRIP NEW

TUNABLE WHITE, 24V



GRAZIA PRO FLEXSTRIP, TUNABLE WHITE, 24V

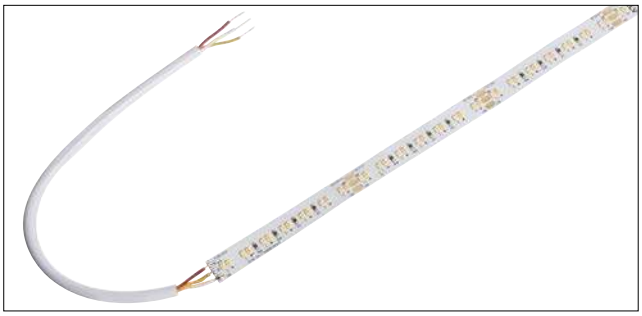

224 LEDs pro m
Width/Height: 1/0.1 cm
LED gap: 0.9 cm
Can be separated every 6.3 cm
minimum bending radius: 3 cm

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
2700-6500K	3400-3700	80	>90	6SDCM	500	**1004725** NEW	**130.50**

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

GRAZIA PRO FLEXSTRIP NEW

RGBW, 24V



GRAZIA PRO FLEXSTRIP, RGBW, 24V

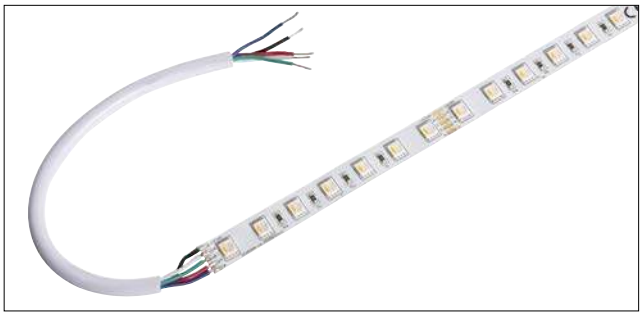

70 LEDs pro m
Width/Height: 1.2/0.22 cm
LED gap: 1.4 cm
Can be separated every 10 cm
minimum bending radius: 3 cm

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
RGB	2500	60			500	**1004727** NEW	**124.20**
W | 3000K	2050	27	>90	6SDCM			

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

GRAZIA IP FLEXSTRIP NEW

24V



GRAZIA IP FLEXSTRIP, 24V



70 LEDs pro m
Width/Height: 1.2/0.4 cm
LED gap: 1.4 cm
Can be separated every 10 cm
minimum bending radius: 3 cm
IP54

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
2700K	3350	44	>90	4SDCM	500	**1004734** NEW	**88.20**
3000K	3350					**1004735** NEW	**88.20**
4000K	3600					**1004736** NEW	**88.20**

inc. 2 end caps and fittings

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

FITU
MIX & MATCH

Position

070

Position

085

Pendant

094

Pendant

095

Pendant

096

Pendant

097

Wall
NEW

196

Wall/ceiling

200

Wall/ceiling
NEW

200

Wall/ceiling

333

FLATT

Paths/position

599

Wall

665

Wall

665

FORCHINI

Pendant

118

Pendant

118

Pendant

119

Pendant

119

3-circuit track

499

1-circuit track

525

F-POL

Paths/position

583

Wall

646

GLOO PURE

Paths/position

574

Wall/ceiling

642

GRAPHITE

Paths/position

586

Wall

648

GRAZIA IP FLEXSTRIP NEW

TUNABLE WHITE, 24V

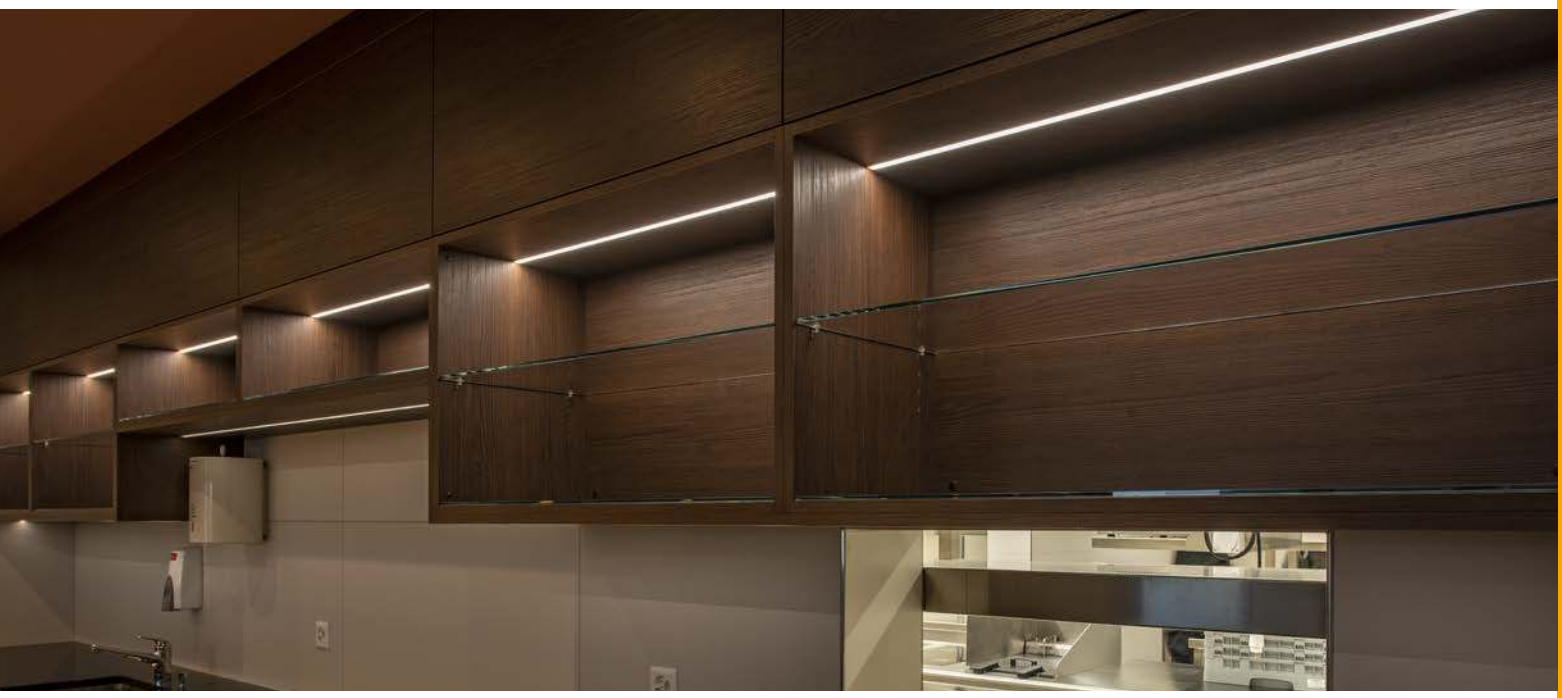

GRAZIA IP FLEXSTRIP, TUNABLE WHITE, 24V

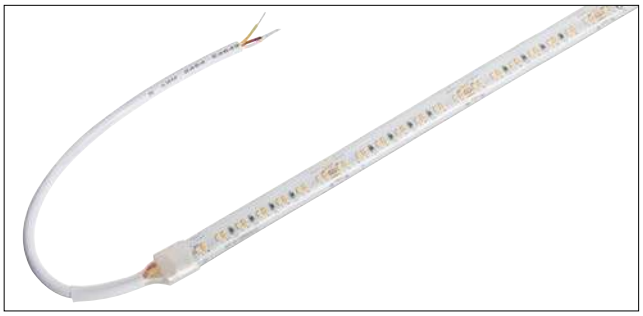

224 LEDs pro m
Width/Height: 1.2/0.4 cm
LED gap: 0.9 cm
Can be separated every 6.3 cm
minimum bending radius: 3 cm
IP54

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
2700-6500K	3210-3500	80	>90	4SDCM	500	**1004726** NEW	**156.60**

inc. 2 end caps and fittings

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.

GRAZIA IP FLEXSTRIP NEW

RGBW, 24V



GRAZIA IP FLEXSTRIP, RGBW, 24V

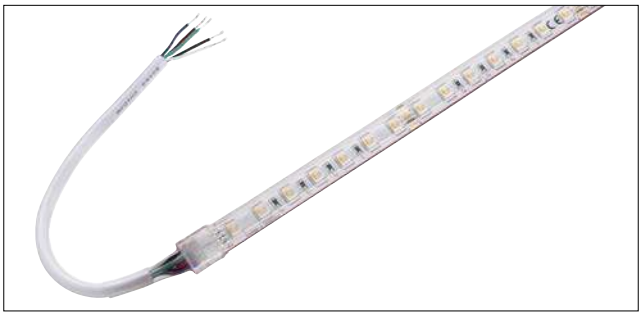

70 LEDs pro m
Width/Height: 1.4/0.46 cm
LED gap: 1.4 cm
Can be separated every 10 cm
minimum bending radius: 3 cm
IP54

5 m, CRI>90

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Colour consistency	Length (cm)	Item No.	GBP
RGB	2350	60			500	**1004737** NEW	**170.10**
W | 3000K	1940	27	>90	6SDCM			

inc. 2 end caps and fittings

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
From a length of 5 m, a new feed-in must be provided.

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
Reverse of the LED strip with adhesive tape.



BATTEN LED

220-240V ~50/60HZ



BATTEN LED 220-240V ~50/60Hz



220-240V ~50/60Hz 67V DC
Width/height: 2.5/3.5cm
Material: plastic PC
Protection class: II
Ambient temperature: -20°C bis 40°C
Half beam angle 155°

Can be extended without the use of tools

matt white

Colour temperature	Luminous flux (lm)	Wattage (W)	Colour rendering index (CRI)	Length (cm)	Weight (kg)	Item No.	GBP
3000K	735	8,1	>80	57,5	0,17	**631313**	**35.10**
	1065	12,4		87,5	0,23	**631315**	**41.40**
	1470	16,5		117,5	0,29	**631317**	**45.90**
4000K	855	8,1		57,5	0,17	**631323**	**35.10**
	1235	12,4		87,5	0,23	**631325**	**41.40**
	1710	16,5		117,5	0,28	**631327**	**45.90**

ACCESSORIES BATTEN LED 220-240V ~50/60Hz



Feed-in cable with switch, 1.5 m cable



Feed-in cable, 1.5 m cable



Connection cable, 15 cm cable



Connection cable, 15 cm cable



Mounting brackets 45°



Connector

Variant	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Item No.	GBP
Feed-in cable with switch, 1 piece	2A	Plastic	150	–	–	**631300**	**9.90**
Feed-in cable, 1 piece	2A	Plastic	150	–	–	**631301**	**8.10**
Connection cable, 1 piece	2A	Plastic	15	–	–	**631302**	**5.00**
Connection cable, 1 piece	2A	Plastic	50	–	–	**631303**	**5.90**
Mounting brackets 45°, 3 piece	–	Steel	2,5	1,3	1,2	**631304**	**1.50**
Connector, 1 piece	2A	Plastic	2,2	2	1,1	**631305**	**1.40**



DISCOVER DALI AND NETWORK LIGHTING.

Familiarise yourself with the protocol that makes it possible to easily install, manage and communicate with individual lights and lighting installations.

Already familiar with the terms smart home or smart building? Do you want to install flexible lighting scenarios and sequences? Unveiling DALI and suitable SLV products: the Digital Adressable Lighting Interface (DALI) simplifies digital communication between electronic ballasts, transformers and corresponding actuators: flexible light management for modern buildings combined with typical SLV light diversity.

- Flexible and intelligent light management.
- Centrally controlled with other building systems.
- Easy to install, universal use.

The basis for intelligent lighting.
DALI – an excellent basis for flexible and intelligent light management in modern buildings. With DALI 2.0, it is now also possible to integrate sensors into the network. These can independently access the bus, communicate with a master controller, lighting controllers or other sensor controls and control the lights.

SAFELY COMBINABLE: SLV, DALI AND SCHNEIDER ELECTRIC PRODUCTS.

Working in close collaboration with Schneider Electric, we offer a tailored and easily installable solution. You benefit from SLV DALI lights, which largely already support DALI 2.0. Extensive testing guarantees compatibility between the KNX DALI Gateway of Schneider Electric and SLV DALI products.

This means you can easily and seamlessly integrate all SLV DALI lights into a streamlined building management system via the Schneider Electric Gateway. The newly introduced NUMINOS lighting system along with our MEDO family offer an excellent choice of combinations and applications. Discover more about SLV lighting that can be networked with DALI on the following pages.

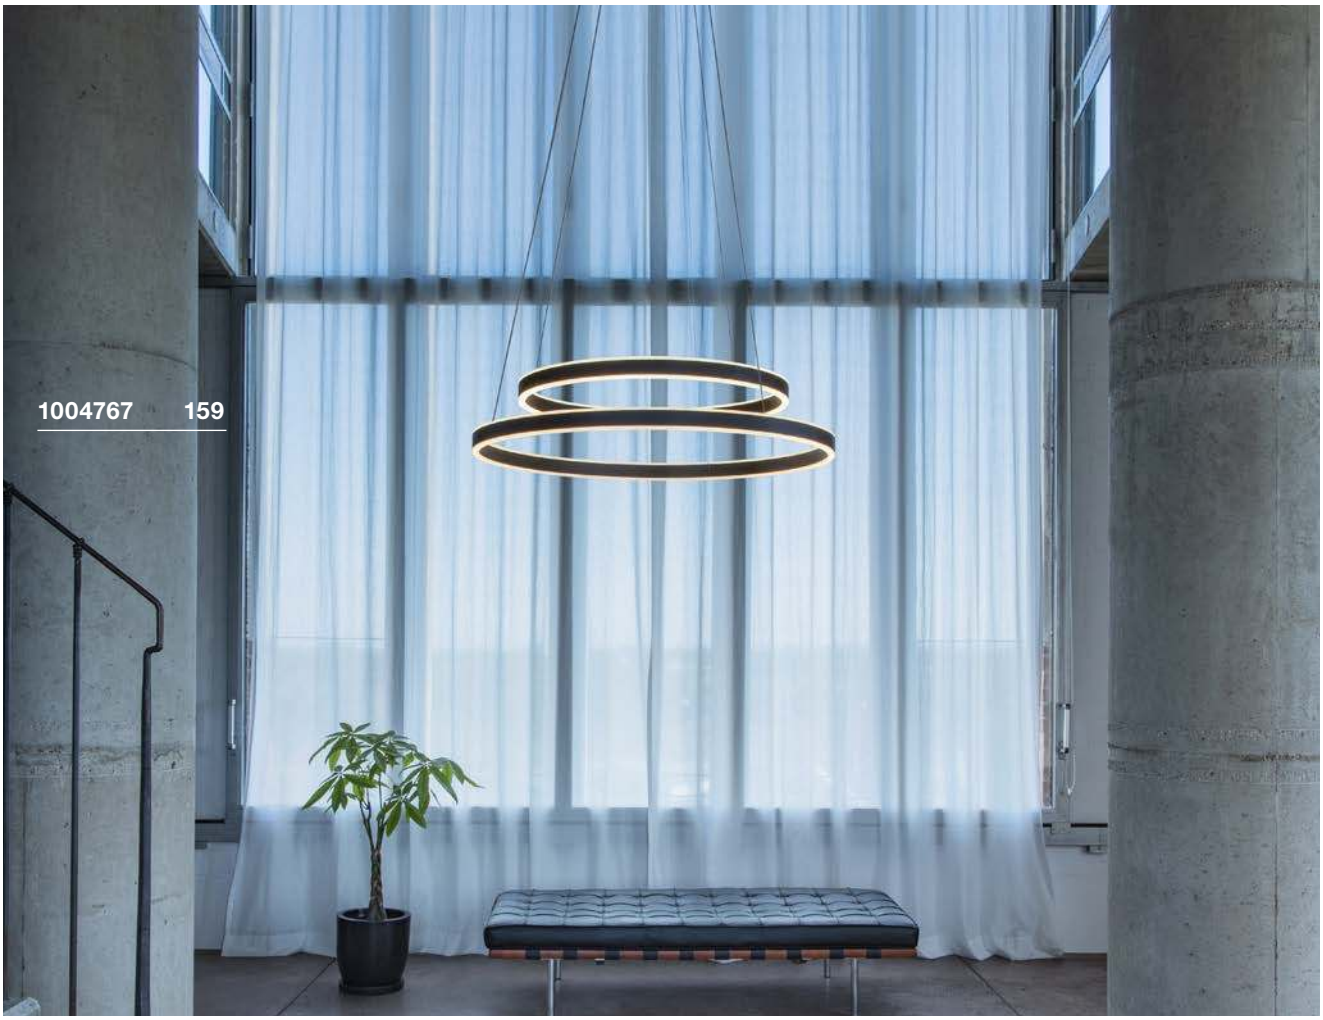

Lights	Page	DALI Version	Compatible with Schneider Electric KNX/Dali Gateway
NUMINOS, 3-circuit	42-47	DALI 2	☺
NUMINOS CW	48-53	DALI 2	☺
NUMINOS CL	54-59	DALI 2	☺
NUMINOS PD	60-65	DALI 2	☺
ONE 60/80/TRIPLE PD	157	DALI 2	☺
ONE 60/80/DOUBLE PD UP/DOWN	158-159	DALI 2	☺
ONE 40 WL	194	DALI 2	☺
ONE 40 TRACK	473	DALI 2	☺
WORKLIGHT PD DALI	176	DALI 2	☺
MEDO 30/40/60/90 AMBIENT CW	150-151, 300	DALI DALI 2	☺ ☺
MEDO 60 CL, square	153	DALI	☺
MEDO RING 60 PD	155	DALI	☺
MEDO 90 AMBIENT CL	301	DALI	☺
STRUCTEC 3-circuit	470	DALI 2	☺
FERA 25 CL	289	DALI 2	☺
I-PENDANT PRO PD	163	DALI	☺
LIPSY® 40/50 CW Drum	359	DALI 2	☺
PANEL 60 CL round	161	DALI	☺
PANEL CL 1200x300mm	305	DALI	☺
PANEL 60 PD round	161	DALI	☺
PARA FLAC PD/CL	185	DALI 2	☺
Q-LINE® PD single	169	DALI 2	☺
SIGHT TRACK 3-circuit	472	DALI 2	☺
SIGHT MOVE 3-circuit	471	DALI 2	☺

DALI. TECHNICALLY LIT.

All lighting components must feature a DALI interface. This allows up to 64 addresses, 16 groups and 16 scenes to be centrally managed. The status of a light or lighting control device is displayed and set using bi-directional data exchange via a DALI control device.

- The voltage ranges from 9.5 to 22.5V
- The system voltage is a maximum of 250 mA
- The data transmission rate is 1,200 baud
- DALI is optionally expandable

Heating appliances, air-conditioning units, blind systems and much more – if the 64 available addresses are not enough and additional building system components need to be centrally managed along with the lighting, that's no problem: DALI-based applications can be networked via a Gateway throughout different rooms and higher-level controls. A KNX system such as the new Schneider Electric KNX/ DALI Gateway is typically used.

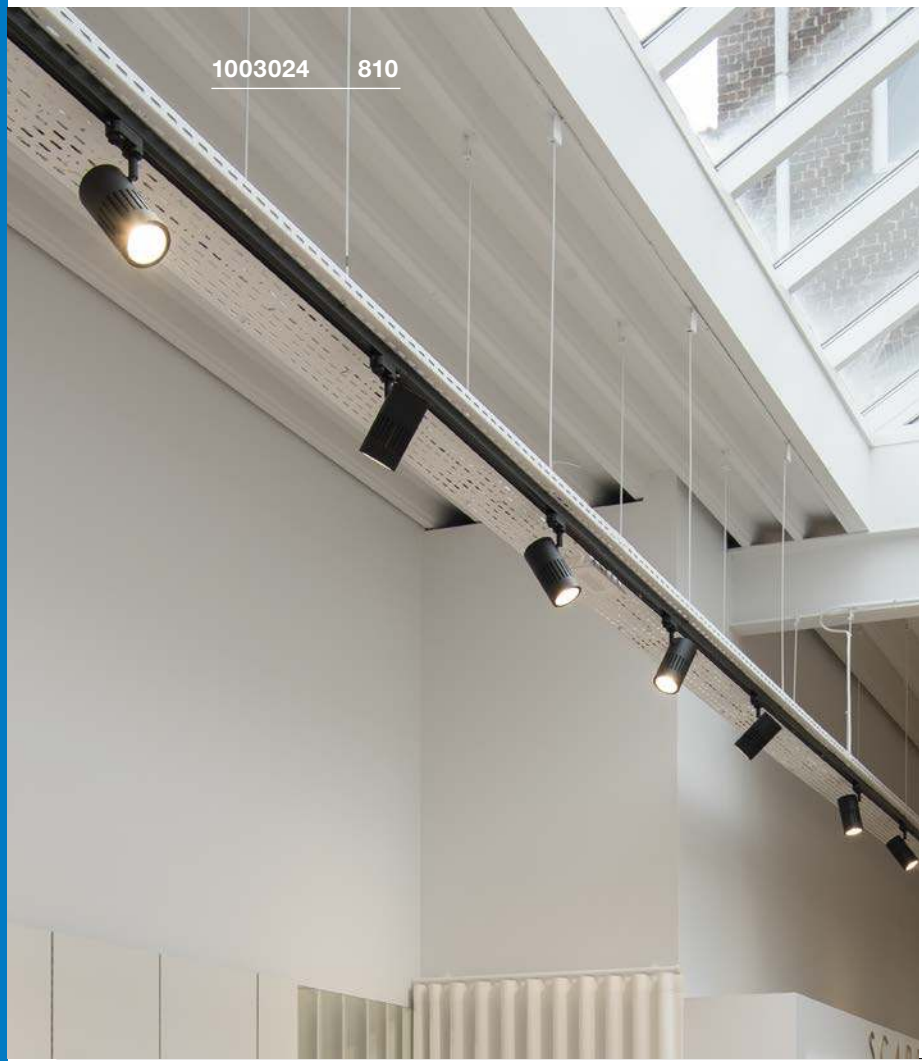

STRUCTEC
3-circuit, DALI







• Premium LED with CRI>90

Product details

200-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium
Dimmable: Dali

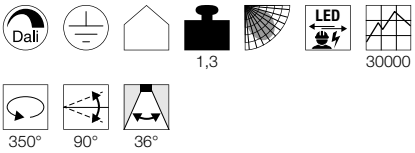

Dimensional drawing



Variant	Item No.	GBP
2500lm | 3000K | CRI97		
■ matt black	**1003024**	**256.50**
2500lm | 3000K | CRI97		
□ matt white	**1003025**	**256.50**
2600lm | 4000K | CRI97		
■ matt black	**1003026**	**256.50**
2600lm | 4000K | CRI97		
□ matt white	**1003027**	**256.50**

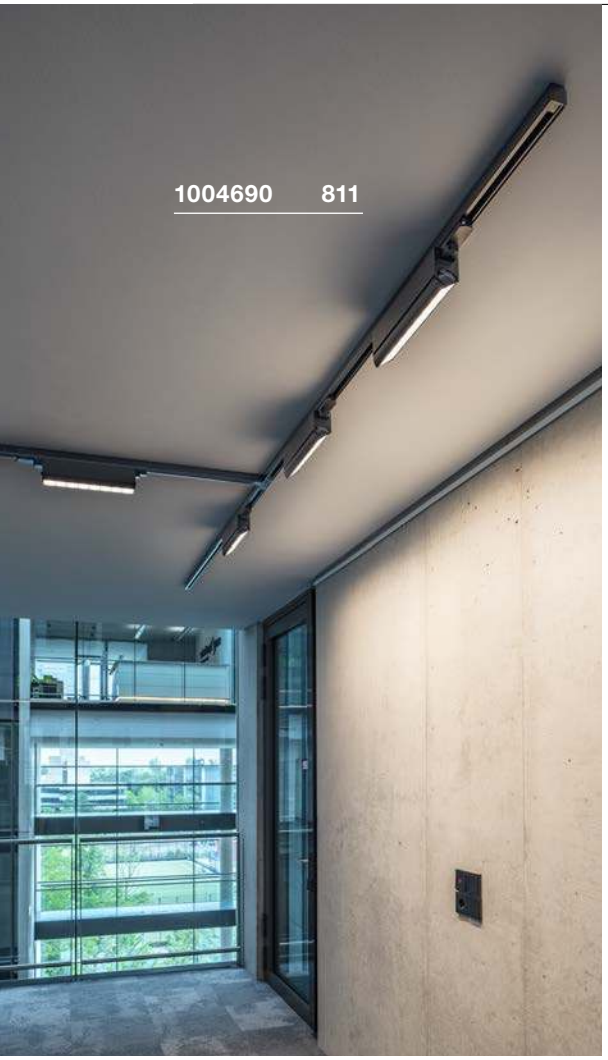

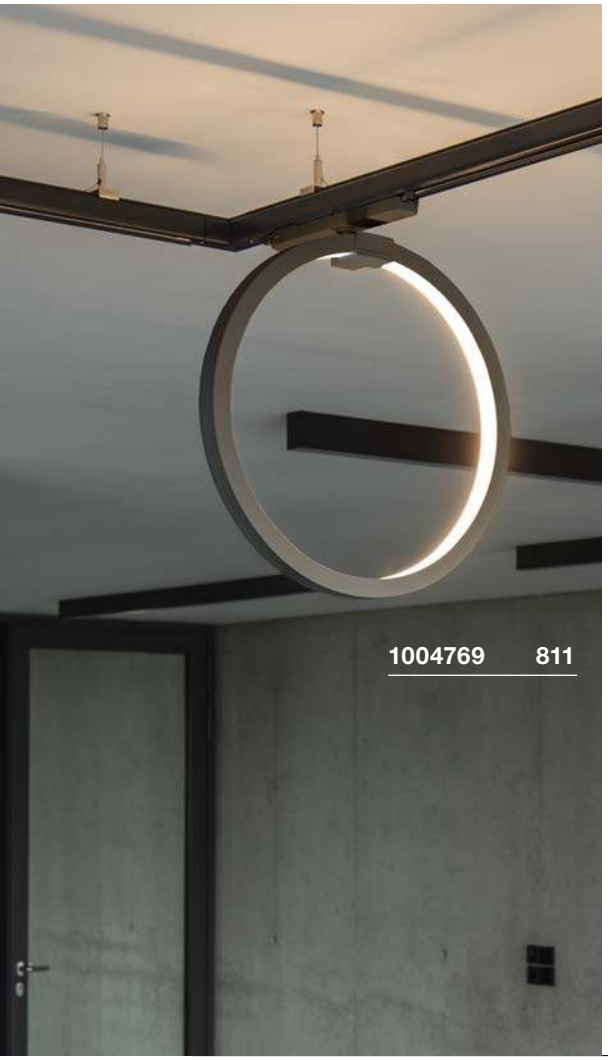

SIGHT MOVE
3-circuit, DALI

NEW

LED INSIDE

DALI







Product details

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material: aluminium/polymethylacrylate (PMMA)
Dimmable: Dali

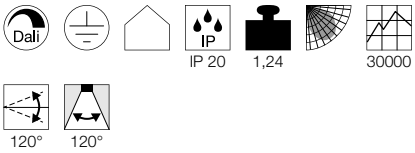

Dimensional drawing



Variant	Item No.	GBP
2700lm | 3000K | CRI>90		
■ matt black	**1004690**	**211.50**
2700lm | 3000K | CRI>90		
□ matt white	**1004691**	**211.50**
3100lm | 4000K | CRI>90		
■ matt black	**1004692**	**211.50**
3100lm | 4000K | CRI>90		
□ matt white	**1004693**	**211.50**

ONE 40 TRACK
3-circuit, DALI

NEW VARIANT

LED INSIDE

DALI







Product details

220-240V ~50/60Hz | 350mA
System output: 15.2W
Material: aluminium
Dimmable: Dali

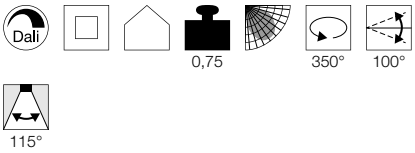

Dimensional drawing



Variant	Item No.	GBP
650lm | 3000K | CRI90		
■ matt black	**1004769**	**256.50**
650lm | 3000K | CRI90		
□ matt white	**1004770**	**256.50**
670lm | 4000K | CRI90		
■ matt black	**1004771**	**256.50**
670lm | 4000K | CRI90		
□ matt white	**1004772**	**256.50**

MEDO LIGHTING SERIES.
CEILING OR PENDANT LIGHTS.

	MEDO 30 AMBIENT CW, DALI	MEDO 40 AMBIENT CW, DALI	MEDO 60 AMBIENT CW, DALI	MEDO 90 AMBIENT CL, DALI
Example				
Lightbulb	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Luminosity	Down: 1230/1280lm Up: 20lm	Down:2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	DALI	DALI	DALI	DALI
Suspension kit	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

All DALI-compatible products are identified with an icon in the BIG WHITE 2021.







DALI INTERFACE
1-10V + on/off



0,02

Product details

220-240V ~50/60Hz
Material: plastic
L: 5.85 cm W: 3.25 cm H: 1.5 cm

Tip

For controlling electronic ballasts with 1-10V control input. Switching relay for additional on/off switching of the EB power supply. Galvanic isolation of DALI input and 1-10V output

Wattage up to	1000W

Variant	Item No.	GBP
grey	1002218	112.50

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

DALI UNIVERSAL DIMMER
3-25W



0,02

Product details

220-240V ~50/60Hz
Material: plastic
L: 5.85 cm W: 3.25 cm H: 1.5 cm

Tip

Suitable for R, L, and C load thanks to automatic loaddetection. DALI current consumption: 6mA

Wattage of	3W
Wattage up to	25W

Variant	Item No.	GBP
grey	1002220	97.20

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

DALI UNIVERSAL DIMMER
10-300W



0,05

Product details

220-240V ~50/60Hz
Material: plastic
L: 12.02 cm W: 3.02 cm H: 2.16 cm

Tip

Suitable for R, L, and C load thanks to automatic loaddetection. DALI current consumption: 6mA

Wattage of	10W
Wattage up to	300W

Variant	Item No.	GBP
white	1002221	153.00

Manufacturer:
LUNATONE Industrielle Elektronik GmbH



SIMPLE. COMPATIBLE. SMART.

ZigBee® 3.0 – the smart wireless system.

Dimmers, changing colours, lighting moods at the push of a button: it's not only lighting systems that are based on the standard ZigBee® 3.0. The wireless standard is versatile, with minimum energy consumption and is easy to install, making it suitable for anyone who wants to easily network lights without having to deal with complicated technology. A theoretical range of up to 100 metres is possible for all types of living areas, houses and commercial buildings.

The SLV VALETO® SMART LIGHT SYSTEM

The intelligent lighting solution for homes, hotels, restaurants and shops. Thanks to the ZigBee® 3.0 standard, you can enjoy compatibility with various common smart home systems:

Schneider Electric | Philips Hue | Amazon Alexa | and much more

It is easily managed via remote control, app or Amazon Alexa. The SLV VALETO® SMART LIGHT SYSTEM is of course easy to integrate into existing electrical installations.

Highly compatible.
Tested with Schneider Electric products.

With the VALETO® SMART LIGHT SYSTEM, SLV offers a variety of system-compatible lighting management based on the ZigBee® 3.0 standard.

Schneider Electric PlusLink products, which support switch actuators, dimmers, blinds, motion sensors and 1-10V DALI interfaces, are easily integrated into the system.
This enables seamless integration of the switch design with various switch programmes. You can also look forward to many other application solutiosn as part of our future collaboration with Schneider Electric.

Scalable:
Installations with up to 200 lights can be realised with the SLV VALETO® Gateway.

Integrable:
SLV VALETO® is, thanks to the ZigBee® 3.0 standard, compatible with other manufacturers' products and systems.

Controllable:
Easy to control via app, remote control or voice assistance systems.

Coverage:
By integrating an own mesh network, SLV VALETO® products can also be controlled from large distances.*

Secure:
The Gateway only stores your data locally, never in the cloud.

SLV VALETO®

*Excluding battery-operated devices.

SIMPLE.

The ideal starting point for smart lighting management: simply couple our SLV VALETO® remote controls (e.g.: 1002994) with the SLV VALETO® lights (e.g.: 1001917) and see how easy smart can be.





Remote control
Item No. 1002994

Lightbulb
Item No. 1001917

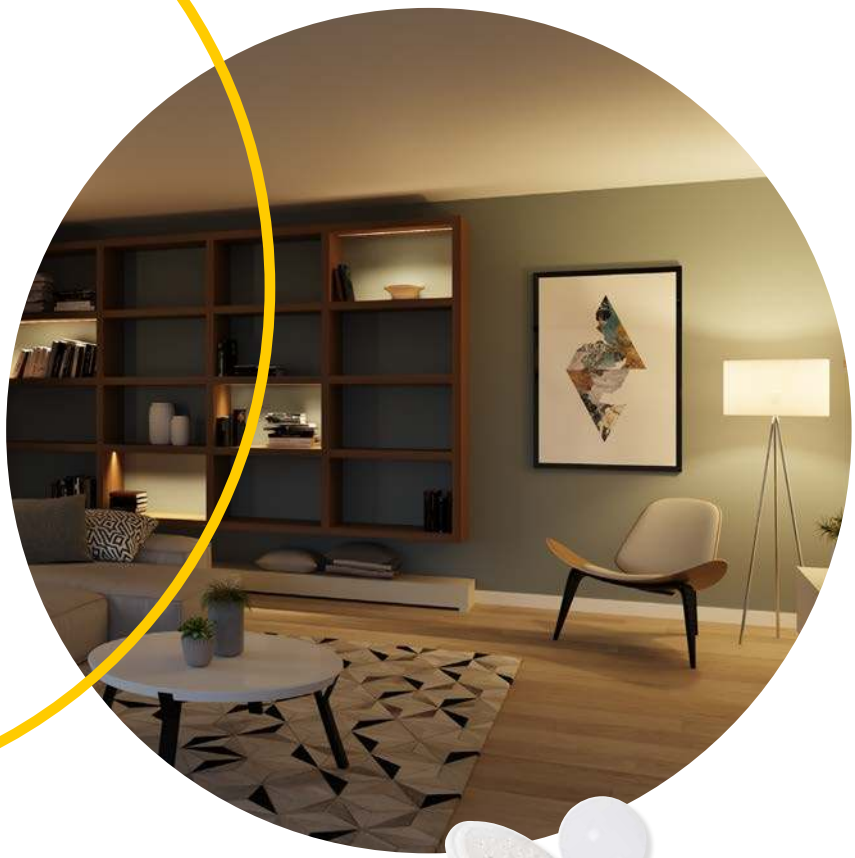

ADVANCE.

Would you like something more?
The choice is yours when it comes to the SLV VALETO® SMART LIGHT SYSTEM: manage your home lighting using our SLV VALETO® remote control (1002994), or an app on your smartphone via our SLV VALETO® Gateway (1002411). There are no limits when it comes to managing your smart lighting thanks to the latest ZigBee standard (ZigBee® 3.0).



12/24V Strip, control module
Item No. 1001859



Lightbulb



Remote control
Item No. 1002994



Gateway
Item No. 1002411



PROFESSIONAL.

Major plans?
Easily integrate more than 150 smart products into a smart lighting management with our SLV VALETO® SMART LIGHT SYSTEM. Simply manage your lighting at any time, using any device, and perfectly showcase your projects.



12/24V Strip, control module
Item No. 1001859

Lightbulb

Recessed wall dimmer
Item No. 1002995

Gateway
Item No. 1002411

MORE COMFORT AND SECURITY

The perfect solution for wireless control and monitoring of individual lights, specific rooms or the entire home.

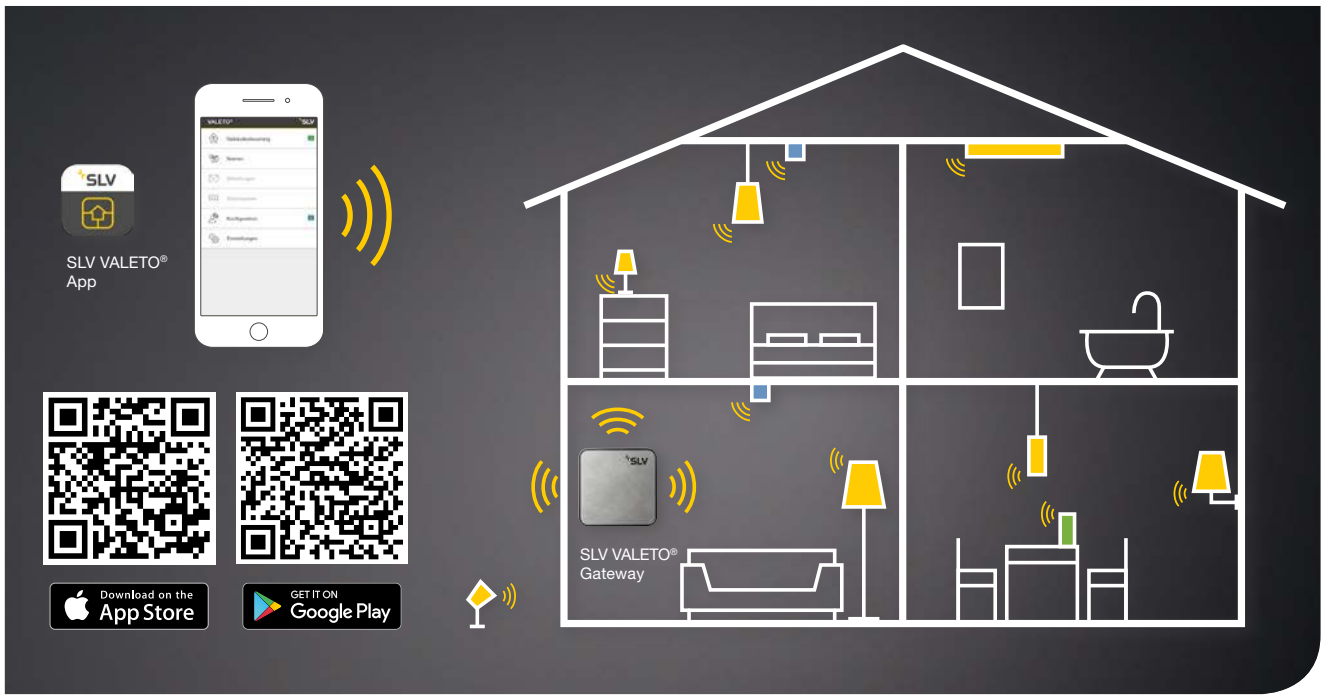

COMMUNICATION.

The SLV VALETO® Gateway is at the heart of the smart lighting system

SLV VALETO®
Gateway

0,19





Product details

220-240V ~50/60Hz
Operating voltage: 5V DC
Wattage: <1W
L: 10.6 cm W: 10.6 cm H: 2.6 cm
Material: aluminium/plastic

Tip

ZigBee® 3.0 certified product. A router connection via a LAN cable is required to manage the Gateway.

Scope of delivery

SLV VALETO® Gateway
Steckernetzteil 5V, 1A
Network cable, CAT6, 2m, black

Variant	Item No.	GBP
Brushed/black metal	1002411	359.10

INTEGRABLE

GERMAN ENGINEERING

BANDWIDTH

SECURE

LIGHTING.

LED A60
E27, CCT



25000 0,07 240°

Product details

220-240V ~50/60Hz
Wattage: 9W
Diameter: 6 cm H: 12 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.052A
Wattage	9W
Energy consumption/1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	806lm
Colour rendering index	>80

Variant	Item No.	GBP
	1001916	40.50

LED A60
E27, RGBW



25000 0,07 240°

Product details

220-240V ~50/60Hz
Wattage: 9.5W
Diameter: 6 cm H: 12 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.054A
Wattage	9.5W
Energy consumption/1000h	10kWh
Colour temperature	RGBW
Luminous flux	806lm
Colour rendering index	>80

Variant	Item No.	GBP
	1001917	49.50

LED QPAR51
GU10, CCT



25000 0,04 48°

Product details

220-240V ~50/60Hz
Wattage: 5.1W
Diameter: 5 cm H: 5.4 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.027A
Wattage	5.1W
Energy consumption/1000h	6kWh
Colour temperature	2700-6500K
Luminous flux	350lm
max. luminosity	500cd
Colour rendering index	>80

Variant	Item No.	GBP
	1001918	49.50

LIGHTING.

LED QPAR51
GU10, RGBW



25000 0,04 60°

Product details

220-240V ~50/60Hz
Wattage: 5.6W
Diameter: 5 cm H: 5.4 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.041A
Wattage	5.6W
Energy consumption/1000h	6kWh
Colour temperature	RGBW
Luminous flux	350lm
Colour rendering index	>80

Variant	Item No.	GBP
	1001919	49.50

LED QPAR111
GU10, CCT



25000 0,15 25°

Product details

220-240V ~50/60Hz
Wattage: 9W
Diameter: 11.1 cm H: 7 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Wattage	9W
Energy consumption/1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	800lm
max. luminosity	3300cd
Colour rendering index	>80

Variant	Item No.	GBP
	1001920	49.50

LED QPAR111
GU10, CCT



25000 0,15 40°

Product details

220-240V ~50/60Hz
Wattage: 9W
Diameter: 11.1 cm H: 7 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Wattage	9W
Energy consumption/1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	800lm
max. luminosity	1900cd
Colour rendering index	>80

Variant	Item No.	GBP
	1001921	49.50

LED QPAR111
GU10, RGBW



25000 0,15 25°

Product details

220-240V ~50/60Hz
Wattage: 9W
Diameter: 11.1 cm H: 7 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Wattage	9W
Energy consumption/1000h	9kWh
Colour temperature	RGBW
Luminous flux	800lm
Colour rendering index	>80

Variant	Item No.	GBP
	1001922	49.50

LED QPAR111
GU10, RGBW



25000 0,15 40°

Product details

220-240V ~50/60Hz
Wattage: 9W
Diameter: 11.1 cm H: 7 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Wattage	9W
Energy consumption/1000h	9kWh
Colour temperature	RGBW
Luminous flux	800lm
Colour rendering index	>80

Variant	Item No.	GBP
	1001923	49.50

CONTROLS.

SLV VALETO®
remote control, CCT/RGBW



IP 20 0,068

Product details

Voltage: 3V battery operation
L: 6.5 cm W: 6.5 cm H: 1.95 cm
Material: plastic PC

Tip

The SLV VALETO® CCT/RGBW remote control can manage up to 20 ZigBee® devices in three groups. CCT and RGBW settings available.

Variant	Item No.	GBP
white	1002994	43.20



CONTROL DEVICE.

SLV VALETO®
Recessed wall dimmer



IP 20 0,04

Product details

220-240V ~50/60Hz
Wattage: max. 200W
L: 4.5 cm W: 4.5 cm H: 2.2 cm
Material: plastic PC

Tip

Controllable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411] Can be used as an independent dimmer without ZigBee®. Dimmer process: phase control. Dimmer for resistive (high-voltage halogen lamps) and capacitive loads (LED drivers). Suitable for all 60mm UP switch boxes with a depth of 42mm. 200W LED load.

Rated voltage	220-240V ~50/60Hz
Output voltage	220-240V ~50/60Hz
LED rated power	200W
Environmental temp. max.	50°C

Variant	Item No.	GBP
black	1002995	171.00

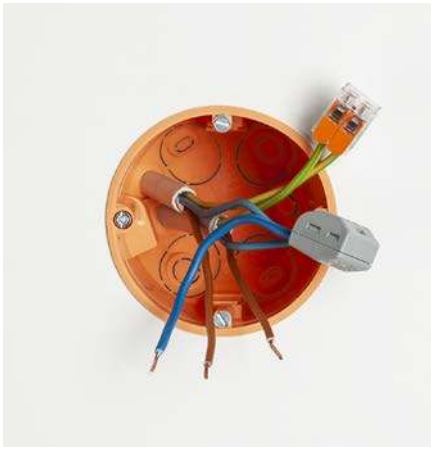

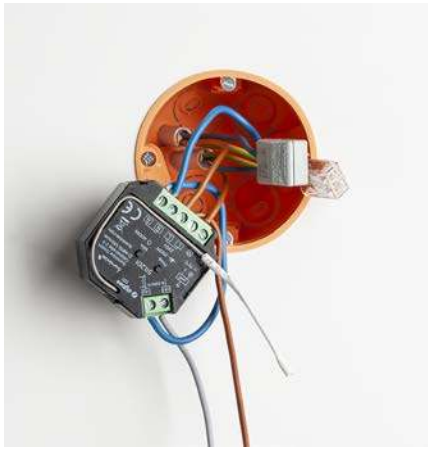





CONTROL DEVICE.

SLV VALETO®
12/24V Strip control module | CCT



IP 20 0,063

Product details

12V/24V DC
Wattage: max. 192W per channel
L: 13.4 cm W: 3.9 cm H: 2.4 cm
Material: plastic

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411] The control module is suitable for managing CCT LED strips.

Output voltage	12/24V
Number of outputs sec.	2
Wattage of	1W
Wattage up to	192W
Environmental temp. min.	-30°C
Environmental temp. max.	60°C
Protection in the event of a fault	electronic

Variant	Item No.	GBP
white	1001859	126.00

SLV VALETO®
12/24V Strip control module| RGBW



IP 20 0,063

Product details

12V/24V DC
Wattage: max. 96W per channel
L: 13.4 cm W: 3.9 cm H: 2.4 cm
Material: plastic

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411] The control module is suitable for managing RGBW LED strips.

Output voltage	12/24V
Number of outputs sec.	4
Wattage of	1W
Wattage up to	96W
Environmental temp. min.	-30°C
Environmental temp. max.	60°C
Protection in the event of a fault	electronic

Variant	Item No.	GBP
white	1002892	135.00

SLV VALETO®
15W, LED driver



IP 20 0,16

Product details

220-240V~50/60Hz
Wattage: 15W
L: 19 cm W: 6.1 cm H: 3 cm
Material: plastic

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Output current	350mA, 500mA, 700mA
Number of outputs sec.	1
Wattage	15W
Environmental temp. min.	-20°C
Environmental temp. max.	40°C
Protection in the event of a fault	electronic

Variant	Item No.	GBP
white	1002082	72.00



LED power supply 24V DC | 60W
Item No. 470506

12/24V Strip control module | RGBW
Item No. 1002892

GRAZIA PRO FLEXSTRIP RGBW 24V
Item No. 1004727



Remote control
Item No. 1002994

SLV BLUETOOTH® CONTROL

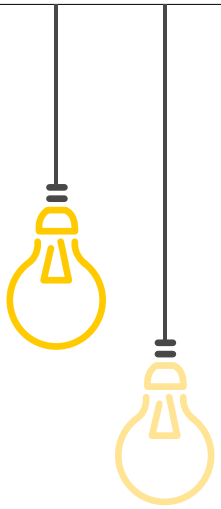

BLUETOOTH

Advanced wireless light management simply based on Bluetooth® Low Energy (BLE).
The SLV BLUETOOTH® CONTROL solution enables lighting installations to be switched on and off and adjust the brightness. Lighting installations can be managed in groups or individually via the app.



Download on the App Store

GET IT ON Google Play

SLV BLUETOOTH®
Recessed wall dimmer, PHASE



IP 40 0,04

Product details

220-240V ~50/60Hz
Wattage: 300W
L: 4.5 cm W: 4.5 cm H: 2.2 cm
Material: plastic PC
Dimmable: C, L

Tip

Can be used as an independent dimmer without Bluetooth. Dimmer process: phase control. Dimmer for resistive (high-voltage halogen lamps) and capacitive loads (LED drivers). Suitable for all 60mm UP switch boxes with a depth of 42mm. Low minimum load of 2W.

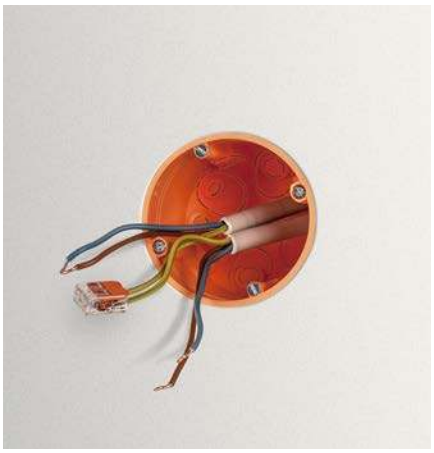

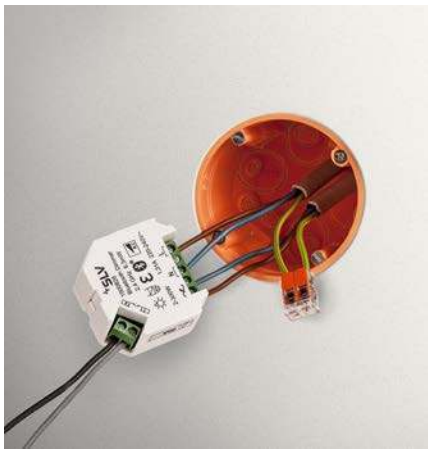





Voltage prim.	220-240V ~50/60Hz
Voltage sec.	220-240VAC
Output current	1.31 mA
Number of outputs sec.	1
Wattage	300W
Wattage of	2W
Wattage up to	300W
Wattage/outlet	300W
Environmental temp. max.	40°C
Protection in the event of a fault	electronic

Variant	Item No.	GBP
white	1000826	81.00

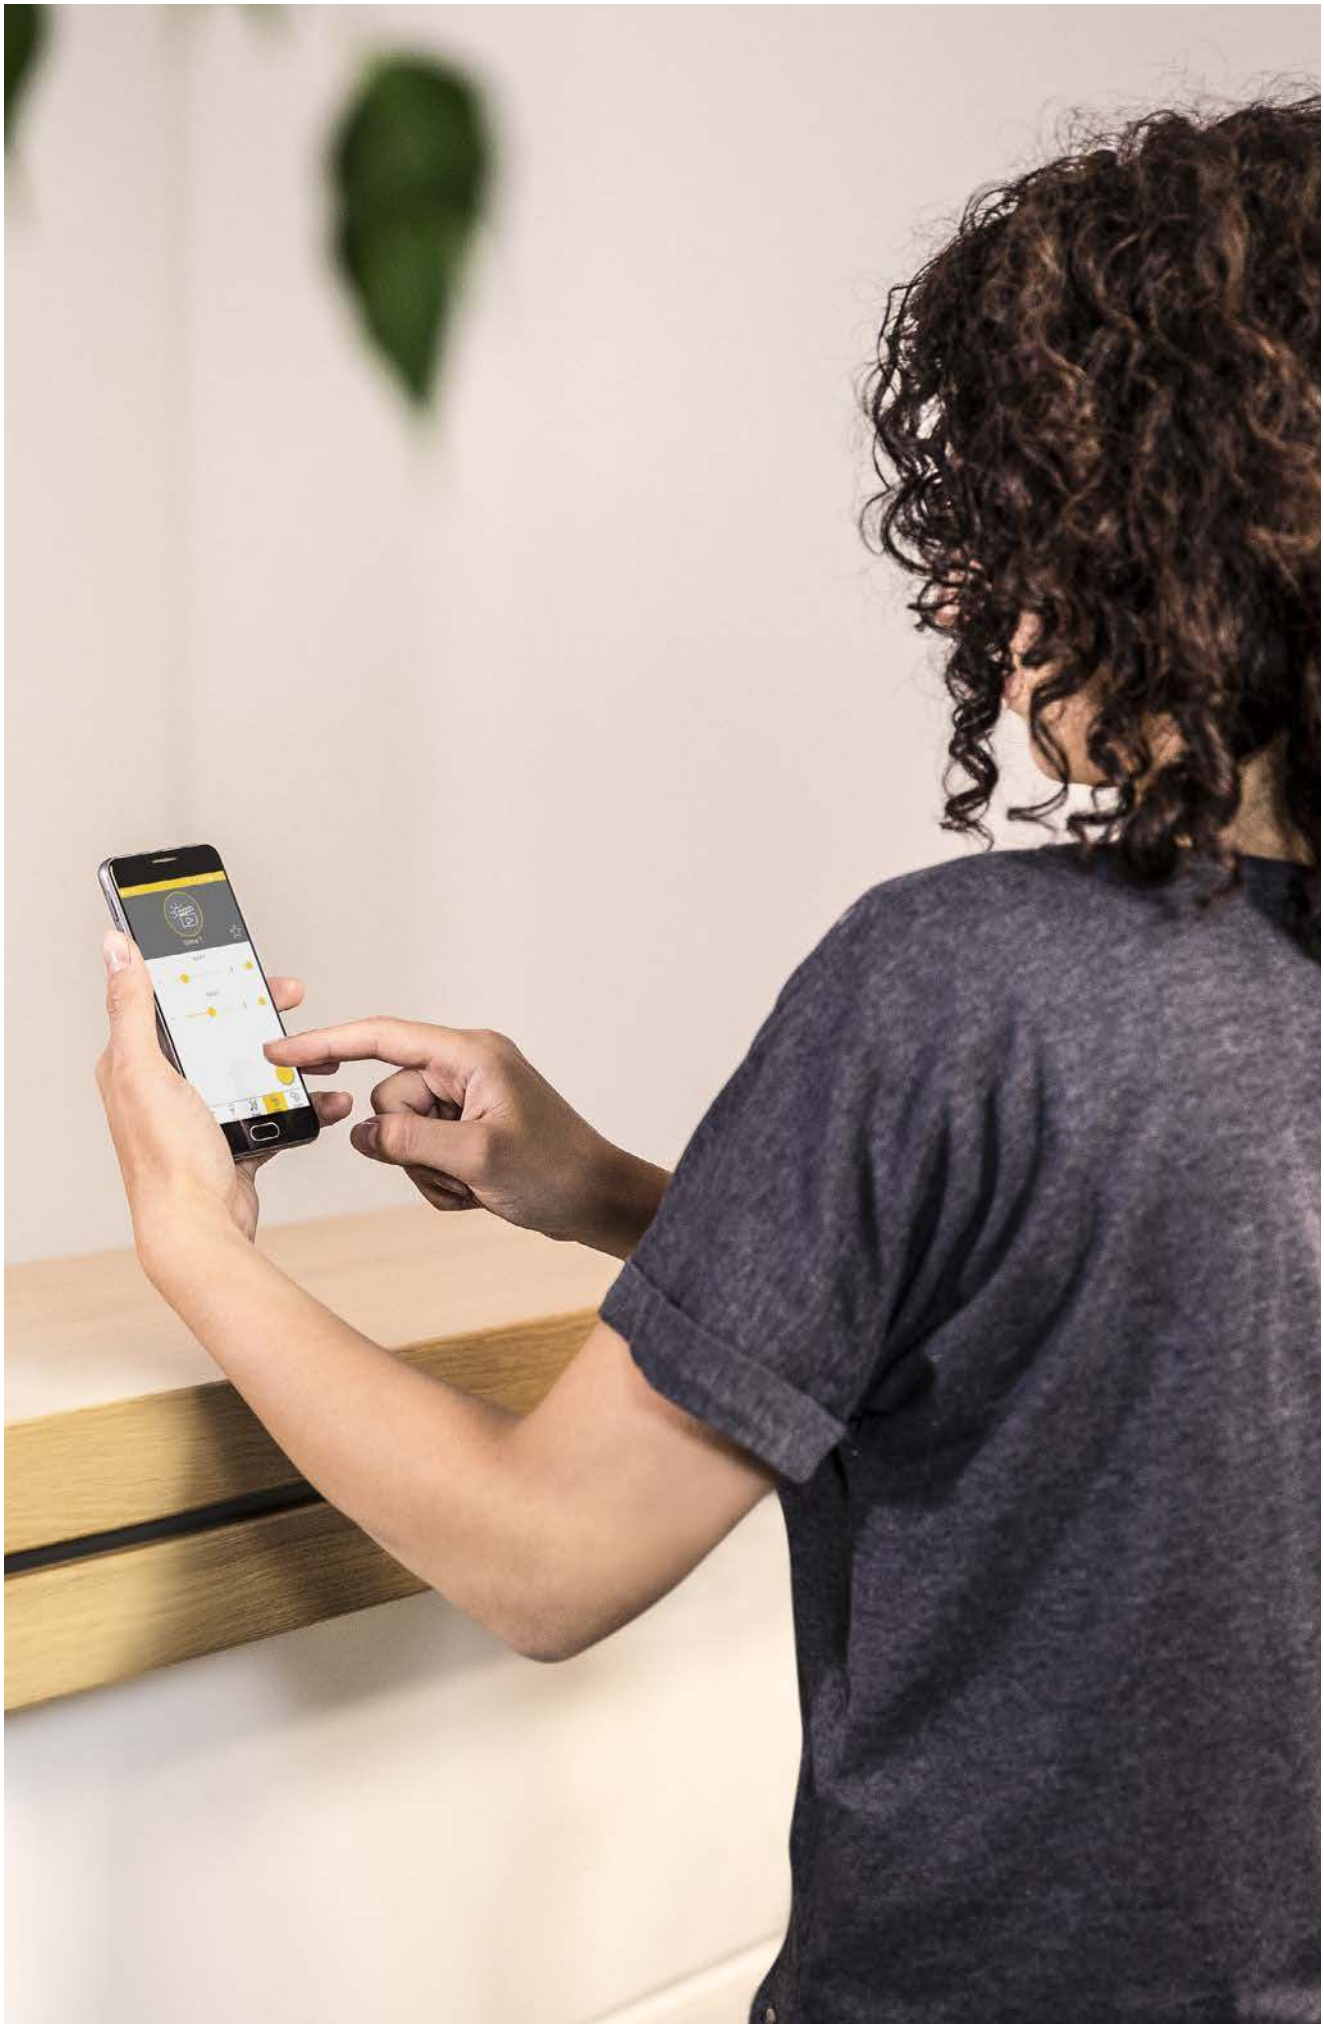

YOUR BEAMING COMPANION.

ACCESSORIES FOR INDIVIDUAL LIGHT AESTHETICS.

There are many different aspects to light. The possibilities are just as numerous when it is a case of lighting rooms and outside areas. These options can be extended with our accessories, and environments can literally be immersed in new light with different light installations.




232435 239

FIND A DIMMER. GOOD COMBINATION.

ATMOSPHERIC ROOM LIGHTING THANKS TO THE PERFECT COMBINATION OF LUMINAIRE AND DIMMER. **AT FIND-A-DIMMER.SLV.COM**

Attention must be paid to the compatibility of the luminaires or lamps with the dimmer when dimming. And particularly with LED lamps, it must be checked beforehand which dimmer is required. In view of the many different products, it is not always easy to find the best combination. Our "Find a Dimmer" overview should help you to do this. As well as numerous combinations consisting of different luminaires and lamps and dimmers, at **find-a-dimmer.slv.com** you will also find more information about the minimum number of luminaires or lamps that are needed for problem-free operation. **The overview is updated and extended at regular intervals.**

For specific enquiries , please contact our technical support at **service@slv.de**.



1 Suitable

- Ideal dimming behaviour
- The minimum number of luminaires/ lamps that are needed for problem-free operation is specified as a number.

Conditionally suitable

- No optimum dimming behaviour
- Flickering possible

Not compatible



find-a-dimmer.slv.com

ACCESSORIES

Transformers
12V AC

828

Transformers IP44
12V AC

828

Transformers TENSEO
12V AC

829

Transformers
12V AC

830

Transformers
12V AC

830

DALI interface
1-10V

830

DALI Universal Dimmer

830

DALI Controller

830

1-10V Dimmer

831

LED mains adapter
12V/24V DC

831

LED mains adapter
24V DC

831

LED mains adapter
24V DC

832

Compensation module

833

LED driver
Dimmable

833-835

LED driver
VALETO®

835, 839

LED driver
DALI dimmable

837

LED driver
not dimmable

838-839

Ceiling hook

840

Cable clamp

840

Ceiling roses

841

Textile cable
10 m

841

cable
10 m clear

841

Wire rope suspension

841

Stopper
for wire rope

841

Connector strip
3 outlets

842

socket
GU10

842

Cable extensions
1 m
2 m

842

socket
GU10

842

Double-sided tape

842

Connection boxes

843

T-connector boxes

843

You can find additional accessories at www.slv.com

TRANSFORMER
12V AC | 105VA



2,5 IP 40

Product details

230V -50Hz
L: 11 cm W: 7.5 cm H: 8 cm
Dimmable: L

Voltage sec.	12V AC
Number of outputs sec.	1
Nominal wattage VA	105
Wattage up to	105W
Thermal protection	110°C

Variant	Item No.	GBP
white	**451105**	**49.50**

Manufacturer:
Elektromaschinenbau Wittlich GmbH

TRANSFORMER
12V AC | 300VA



3,9 IP 40

Product details

230V -50Hz
L: 9 cm W: 13 cm H: 11 cm
Dimmable: L

Voltage sec.	12V AC
Number of outputs sec.	1
Nominal wattage VA	300
Wattage up to	300W
Thermal protection	110°C

Variant	Item No.	GBP
white	**451301**	**135.00**

Manufacturer:
Elektromaschinenbau Wittlich GmbH

TRANSFORMER
12V AC | 10VA IP44



0,7 IP 44

Product details

230V -50Hz
Material: plastic
L: 7.5 cm W: 5 cm H: 4.5 cm
Dimmable: L

Voltage sec.	12V AC
Number of outputs sec.	1
Nominal wattage VA	10
Wattage up to	10W
Thermal protection	133°C

Variant	Item No.	GBP
black	**227140**	**34.60**

Manufacturer:
Elektromaschinenbau Wittlich GmbH

TRANSFORMER
12V AC | 60VA IP44



1,3 IP 44

Product details

230V -50Hz
Material: plastic
L: 6 cm W: 10 cm H: 6.3 cm
Dimmable: L

Voltage sec.	12V AC
Number of outputs sec.	1
Nominal wattage VA	60
Wattage up to	60W
Thermal protection	133°C

Variant	Item No.	GBP
black	**227160**	**38.70**

Manufacturer:
Elektromaschinenbau Wittlich GmbH

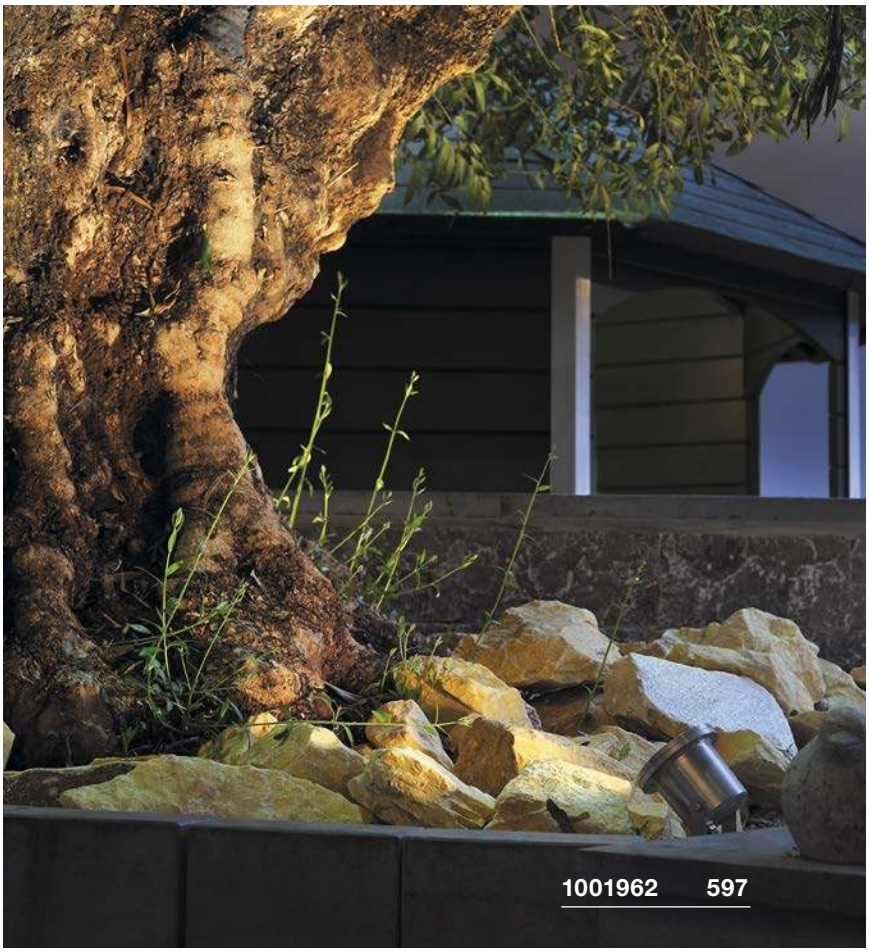

TRANSFORMER TENSEO
12V AC | 50VA



1,88

Product details

230V -50Hz
Material: steel/brass
Diameter: 11.1 cm H: 11cm
Dimmable: L

Voltage sec.	12V AC
Number of outputs sec.	1
Nominal wattage VA	50
Wattage up to	50W
Thermal protection	130°C
Protection prim.	1.6A

Variant	Item No.	GBP
black	1002691	81.00
white	1002692	81.00
chrome	1002693	83.70

TRANSFORMER TENSEO
12V AC | 105VA



2,2

Product details

230V -50Hz
Material: steel/brass
Diameter: 11 cm H: 11 cm
Dimmable: L

Voltage sec.	12V AC
Number of outputs sec.	1
Nominal wattage VA	105
Wattage up to	105W
Thermal protection	130°C
Protection prim.	1.6A

Variant	Item No.	GBP
black	138980	99.00
white	138981	99.00
chrome	138982	108.00

TRANSFORMER TENSEO
12V AC | 210VA



3,05

Product details

230V -50Hz
Material: steel/brass
Diameter: 13.5 cm H: 11 cm
Dimmable: L

Voltage sec.	12V AC
Number of outputs sec.	1
Nominal wattage VA	210
Wattage up to	210W
Thermal protection	130°C
Protection prim.	3.15A

Variant	Item No.	GBP
black	138990	151.20
white	138991	151.20
chrome	138992	156.60

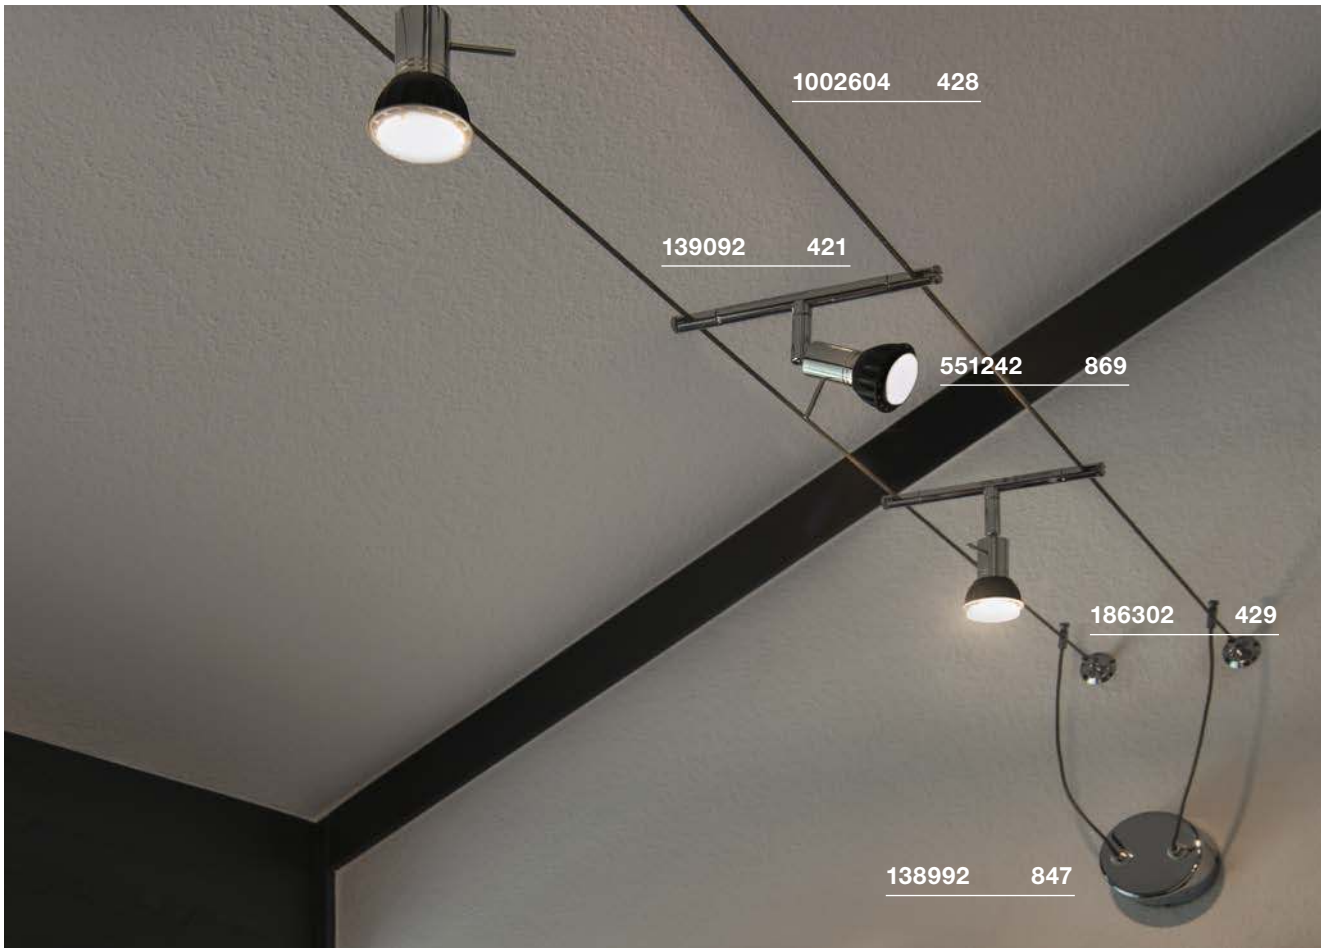

TRANSFORMER
12V AC | 60VA



0,06

Product details

230V -50Hz
Material: plastic PC
L: 10.5 cm W: 3.3 cm H: 2.2 cm
Dimmable: C

Voltage sec.	12V AC
Number of outputs sec.	1
Wattage of	10W
Wattage up to	60W
Power factor	0,98
Thermal protection	110°C

Variant	Item No.	GBP
white	461060	15.30

Manufacturer:
WeiSen Electronic Co., Ltd

TRANSFORMER
12V AC | 150VA



0,18

Product details

230V -50Hz
Material: plastic
L: 16.6 cm W: 3.9 cm H: 3.3 cm
Dimmable: C

Voltage sec.	12V AC
Number of outputs sec.	3
Wattage of	50W
Wattage up to	150W
Thermal protection	110°C
Protection prim.	3.15A

Variant	Item No.	GBP
black	461157	40.50

Manufacturer:
WeiSen Electronic Co., Ltd

DALI INTERFACE
1-10V + on/off



0,02

Product details

220-240V ~50/60Hz
Material: plastic
L: 5.85 cm W: 3.25 cm H: 1.5 cm

Tip

For controlling electronic ballasts with 1-10V control input. Switching relay for additional on/off switching of the EB power supply. Galvanic isolation of DALI input and 1-10V output

Wattage up to	1000W

Variant	Item No.	GBP
grey	1002218	112.50

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

DALI UNIVERSAL DIMMER
3-25W



0,02

Product details

220-240V ~50/60Hz
Material: plastic
L: 5.85 cm W: 3.25 cm H: 1.5 cm

Tip

Suitable for R, L, and C load thanks to automatic loaddetection. DALI current consumption: 6mA

Wattage of	3W
Wattage up to	25W

Variant	Item No.	GBP
grey	1002220	97.20

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

DALI UNIVERSAL DIMMER
10-300W



0,05

Product details

220-240V ~50/60Hz
Material: plastic
L: 12.02 cm W: 3.02 cm H: 2.16 cm

Tip

Suitable for R, L, and C load thanks to automatic loaddetection. DALI current consumption: 6mA

Wattage of	10W
Wattage up to	300W

Variant	Item No.	GBP
white	1002221	153.00

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

DALI CONTROLLER
24V DC



0,051

Product details

10-24V DC
Material: plastic PC
L: 11.6 cm W: 4.2 cm H: 1.8 cm

Tip

Suitable for controlling LEDs with a constant voltage of 10-24V / DC - Controlsignal DALI or Push-Dim

Variant	Item No.	GBP
white/grey	1003106	47.70

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

1-10V DIMMER
10W



0,04

Product details

10W
Material: plastic PC
L: 2.3 cm W: 3.9 cm H: 2 cm

Tip

Suitable for dimming of
1-10V electronic ballasts

Variant	Item No.	GBP
white	**470505**	**9.90**

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
12V/24V DC | 12W round



0,06

Product details

100-240V ~50/60Hz
Material: plastic PC
Diameter: 5.5 cm H: 2.2 cm

Voltage sec.	12V/24V DC
Number of outputs sec.	1
Nominal wattage VA	12
Wattage up to	12W
Thermal protection	110°C

Variant	Item No.	GBP
white | 12V	**470545**	**20.70**
white | 24V	**470546**	**20.70**

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
12V/24V DC | 12W



0,06

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4 cm H: 2.2 cm

Voltage sec.	12V/24V DC
Number of outputs sec.	2
Wattage up to	12W
Thermal protection	110°C

Variant	Item No.	GBP
white | 12V	**470507**	**20.70**
white | 24V	**470502**	**20.70**

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
12V/24V DC | 20W



0,13

Product details

230V -50Hz
Material: plastic PC
L: 16.6 cm W: 3.9 cm H: 3.3 cm

Voltage sec.	12V/24V DC
Number of outputs sec.	1
Wattage up to	20W
Thermal protection	110°C

Variant	Item No.	GBP
white | 12V	**470541**	**40.50**
white | 24V	**470542**	**40.50**

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
24V DC | 36W



0,35

Product details

100-240 V~50/60Hz
Material: plastic PC
L: 12.9 cm W: 7.5 cm H: 3.2 cm

Voltage sec.	24V DC
Number of outputs sec.	1
Wattage up to	36W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
black	**470544**	**72.00**

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
24V DC | 60W



0,3

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 17.5 cm W: 7.8 cm H: 3.5 cm

Voltage sec.	24V DC
Number of outputs sec.	2
Wattage up to	60W
Power factor	0,95
Thermal protection	110°C

Variant	Item No.	GBP
white	**470506**	**81.00**

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
24V | 100W



0,6

Product details

220-240V ~50/60Hz
Material: metal
L: 34.7 cm W: 4 cm H: 2.2 cm
Dimmable: Dali

Voltage sec.	24V
Wattage of	1W
Wattage up to	100W
Thermal protection	110°C
Power factor	0,9

Variant	Item No.	GBP
silver	1004776	94.50

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
24V DC | 100W



0,6

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 18.2 cm W: 8.8 cm H: 3.5 cm

Voltage sec.	24V DC
Number of outputs sec.	2
Wattage up to	100W
Power factor	0,95
Thermal protection	110°C

Variant	Item No.	GBP
black	470500	108.00

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
24V DC | 150W



0,73

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 20.7 cm W: 11 cm H: 4.5 cm

Voltage sec.	24V DC
Number of outputs sec.	1
Wattage up to	150W
Thermal protection	110°C

Variant	Item No.	GBP
black	470549	144.00

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
24V DC | 150W



0,82 IP 44

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 23.4 cm W: 11.4 cm H: 4.9 cm

Voltage sec.	24V DC
Number of outputs sec.	1
Wattage up to	150W
Thermal protection	110°C

Variant	Item No.	GBP
black	470548	153.00

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
24V DC | 20W



0,12

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 14.6 cm W: 5.5 cm H: 1.9 cm
Dimmable: 1-10V

Voltage sec.	24V DC
Number of outputs sec.	1
Wattage up to	20W
Thermal protection	100°C

Variant	Item No.	GBP
white	470547	40.50

Manufacturer:
TCI Telecomunicazioni Italia Srl

LED MAINS ADAPTER
24V DC | 100W



0,51

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 19 cm W: 13 cm H: 3.5 cm
Dimmable: 1-10V

Voltage sec.	24V DC
Number of outputs sec.	3
Wattage up to	100W
Wattage/outlet	33W
Power factor	0,95
Thermal protection	110°C
Protection in the event of a fault	Short circuit protected & open circuit proof °C

Variant	Item No.	GBP
black	470540	242.10

Manufacturer:
WeiSen Electronic Co., Ltd

LED MAINS ADAPTER
24V DC | 50W



0,24

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 18.4 cm W: 6.1 cm H: 3.2 cm
Dimmable: C

Voltage sec.	24V DC
Wattage of	12W
Wattage up to	50W
Thermal protection	110°C

Variant	Item No.	GBP
white/blue	**1003104**	**38.70**

LED MAINS ADAPTER
24V DC | 100W



0,36

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 21 cm W: 6.7 cm H: 3.4 cm
Dimmable: C

Voltage sec.	24V DC
Wattage of	34W
Wattage up to	100W
Thermal protection	110°C

Variant	Item No.	GBP
white/blue	**1003105**	**94.50**

COMPENSATION MODULE



0,035

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 9.5 cm Diameter: 1.5 cm

Tip

Reduces or eradicates problems encountered when dimming, such as flickering or flashing, or if the LED illumination is not 100% eliminated when switched off The compensator is always connected after the dimmer or switch and parallel to the downlight spot or LED driver.

Variant	Item No.	GBP
black	**1002785**	**38.70**

LED ADAPTER
350mA | 6W



0,045

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 6.3 cm W: 4 cm H: 2.3 cm
Dimmable: C

Voltage sec.	10-17V DC
Wattage of	3.5W
Wattage up to	5.9W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	**1002791**	**22.50**

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
350mA | 10W



0,08

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

Voltage sec.	17-29V DC
Output current	350mA
Wattage	10W
Wattage of	5.95W
Wattage up to	10.15W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	**464140**	**29.70**

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
350mA | 15W



0,08

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

Voltage sec.	18-30V DC
Output current	350mA
Wattage of	9W
Wattage up to	15W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	**1002803**	**30.60**

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
500mA | 15W



0,08

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

Voltage sec.	26-43V DC
Output current	500mA
Wattage of	9.1W
Wattage up to	15W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	**464144**	**29.70**

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
700mA | 6W



0,045

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 6.3 cm W: 4 cm H: 2.3 cm
Dimmable: C

Tip

Suitable with mounting boxes with a diameter of 60 mm and a min. installation depth of 42 mm

Voltage sec.	4.8-8.6V
Output current	700mA
Wattage of	3.4W
Wattage up to	6W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	**1002792**	**22.50**

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
700mA | 10W inc. strain relief



0,08

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Dimmable: C

Voltage sec.	40~57V
Output current	700mA
Wattage of	6W
Wattage up to	10.5W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	**464142**	**29.70**

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
700mA | 39W inc. strain relief



0,17

Product details

220-240V ~50/60Hz
Material: PC
L: 16.6 cm W: 5.2 cm H: 2.4 cm
Dimmable: C

Voltage sec.	28-56V
Output current	700mA
Wattage of	20W
Wattage up to	39W
Power factor	0,95
Thermal protection	110°C

Variant	Item No.	GBP
white/blue	**1001267**	**52.20**

LED DRIVER
700mA | 40W inc. strain relief



0,2

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 15.3 cm W: 6.7 cm H: 3 cm
Dimmable: C

Voltage sec.	40~57V
Output current	700mA
Wattage of	28W
Wattage up to	39.9W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	**1001114**	**67.50**

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
1000mA | 40W



0,2

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 15.3 cm W: 6.7 cm H: 3 cm
Dimmable: C

Voltage sec.	28~40V
Output current	1000mA
Number of outputs sec.	1
Wattage of	28W
Wattage up to	40W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	**1001115**	**67.50**

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
1050mA | 40W inc. strain relief



0,2

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 16.6 cm W: 5.2 cm H: 2.4 cm
Dimmable: C

Voltage sec.	19-38
Output current	1050mA
Number of outputs sec.	2
Wattage up to	40W
Power factor	0,95
Thermal protection	110°C

Variant	Item No.	GBP
white	464804	45.00

LED DRIVER
200mA | 6-8.4W inc. strain relief

NEW



0,06

Product details

220-240V ~50/60Hz
Material: Polycarbonate (PC)
L: 8.5 cm W: 4.1 cm H: 2.2 cm

Voltage sec.	30-42V
Output current	250mA
Number of outputs sec.	1
Wattage of	6W
Wattage up to	8.4W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	1003254	28.40

LED DRIVER
250mA | 10W

NEW



0,05

Product details

220-240V ~50/60Hz
Material: Polycarbonate (PC)
L: 6.5 cm W:3.9 cm H: 2 cm

Voltage sec.	26-40V DC
Output current	250mA
Number of outputs sec.	1
Wattage of	6.5W
Wattage up to	10W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	1004780	20.70

Manufacturer:
WeiSen Electronic Co., Ltd

SLV VALETO®
350/500/700mA | 15W, LED driver

ZIGBEE



IP 20

0,16

Product details

220-240V~50/60Hz
Wattage: 15W
L: 19 cm W: 6.1 cm H: 3 cm
Material: plastic

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Output current	350/500/700mA
Number of outputs sec.	1
Wattage	15W
Environmental temp. min.	-20°C
Environmental temp. max.	40°C
Protection in the event of a fault	electronic

Variant	Item No.	GBP
white	1002082	72.00

LED DRIVER
500/600/700mA | 30W inc. strain relief

NEW



0,105

Product details

220-240V ~50/60Hz
Material: Polycarbonate (PC)
L: 14.7 cm W: 4.3 cm H: 3 cm

Voltage sec.	30-42V DC
Output current	500/600/700 mA
Number of outputs sec.	1
Wattage of	21W
Wattage up to	29.5W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	1004781	24.30

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
800/900/1050mA | 40W inc. strain relief

NEW



0,13

Product details

220-240V ~50/60Hz
Material: Polycarbonate (PC)
L: 14.7 cm W: 4.3 cm H: 3 cm

Voltage sec.	30-42V DC
Output current	800/900/1050 mA
Number of outputs sec.	1
Wattage of	31.5W
Wattage up to	44W
Power factor	0,9
Thermal protection	110°C

Variant	Item No.	GBP
white	1004782	29.70

Manufacturer:
WeiSen Electronic Co., Ltd



DALI – THE FLEXIBLE LIGHTING SOLUTION

What is DALI? DALI is a system for freely configuring flexible light scenarios and arrangements. This bus-compatible system makes it possible to individually access, control and evaluate light and all components of a lighting system. Luminaires, groups of luminaires and even the lighting of entire buildings are controlled in this way.

You can create a special atmosphere in your retail premises with our DALI system. Your lighting is configured in a flexible way by using DALI spotlights in conjunction with our special DALI adapters and tracks. Thanks to the wide range of accessories, any configuration that is required can be realised. Be it ceiling or wall installation, or as a pendant.
The tracks consist of an extruded aluminium profile that is painted in white or black. The tracks are available in different lengths with an integrated 2-core DALI cable, and can be cut to length in accordance with requirements. Suitable luminaires with a high CRI of >90 are also available for this system.

LED DRIVER DALI
250-700mA | 20W inc. strain relief



0,2

Product details

220-240V ~50/60Hz
Material: PC
L: 15 cm W: 5.2 cm H: 2.8 cm
Dimmable: 1-10V / Dali

Tip

250/350/500/700mA
Output current can be adjusted using DIP switch

Voltage sec.	6-60V
Wattage of	1.5W
Wattage up to	20W
Thermal protection	110°C
Power factor	0,9

Variant	Item No.	GBP
white	1002423	67.50

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER DALI
250-700mA | 40W inc. strain relief



0,2

Product details

220-240V ~50/60Hz
Material: PC
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Dimmable: 1-10V / Dali

Tip

250/350/500/700mA
Output current can be adjusted using DIP switch

Voltage sec.	6-58V
Wattage of	1.5W
Wattage up to	40W
Thermal protection	110°C
Power factor	0,9

Variant	Item No.	GBP
white	1002424	72.00

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER DALI
350-1050mA | 60W inc. strain relief



0,21

Product details

220-240V ~50/60Hz
Material: PC
L: 12.4 cm W: 7.9 cm H: 2.2 cm
Dimmable: 1-10V / Dali

Tip

350/500/550/650/700/750/
850/900/1000/1050mA
Output current can be adjusted using DIP switch

Voltage sec.	2-74V
Wattage of	1W
Wattage up to	60W
Thermal protection	110°C
Power factor	0,95

Variant	Item No.	GBP
white	464032	117.00

Manufacturer:
TCI Telecomunicazioni Italia Srl

LED DRIVER DALI
700-1500mA | 50W inc. strain relief



0,21

Product details

220-240V ~50/60Hz
Material: PC
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Dimmable: 1-10V / Dali

Tip

700/800/900/1050/1200/1300/1400mA
Output current can be adjusted using DIP switch

Voltage sec.	6-58V
Wattage of	4.2W
Wattage up to	50W
Thermal protection	110°C
Power factor	0,9

Variant	Item No.	GBP
white	1002425	76.50

Manufacturer:
WeiSen Electronic Co., Ltd



LED DRIVER
320mA | 3W inc. strain relief



0,05

Product details

100-240V ~50/60Hz
Material: plastic PC
L: 5.5 cm W: 3.9 cm H: 2 cm

Voltage sec.	3-9V
Output current	320mA
Wattage of	1W
Wattage up to	3W
Power factor	0,4
Thermal protection	110°C
Wattage-L sec. max.	2 m

Variant	Item No.	GBP
white	464108	20.70

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
350mA | 3W inc. strain relief



0,04

Product details

230V -50Hz
Material: plastic PC
L: 5.6 cm W: 3.9 cm H: 2 cm

Tip

350mA AMP plug included



Voltage sec.	3-9V
Output current	350mA
Wattage of	1W
Wattage up to	3W
Power factor	0,4
Thermal protection	110°C
Wattage-L sec. max.	2 m

Variant	Item No.	GBP
white	464107	17.10

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
350mA | 9W inc. strain relief



0,06

Product details

230V -50Hz
Material: plastic PC
L: 8.5 cm W: 4.1 cm H: 2.2 cm

Voltage sec.	3-26V
Output current	350mA
Wattage of	1W
Wattage up to	9W
Power factor	0,4
Thermal protection	110°C
Wattage-L sec. max.	2 m

Variant	Item No.	GBP
white	464109	25.20

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
350mA inc. strain relief



0,05

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 15.8 cm W: 2.2 cm H: 1.9 cm

Output current	350mA
Number of outputs sec.	1
Wattage up to	15W
Power factor	0,6
Thermal protection	100°C

Variant	Item No.	GBP
white	464031	36.00

Manufacturer:
TCI Telecomunicazioni Italia Srl

LED DRIVER
500mA | 9W inc. strain relief



0,05

Product details

100-240V ~50/60Hz
Material: plastic PC
L: 6.5 cm W:3.9 cm H: 2 cm

Voltage sec.	12-19V
Output current	500mA
Number of outputs sec.	1
Wattage of	6W
Wattage up to	9W
Power factor	0,9
Thermal protection	110°C
Wattage-L sec. max.	2 m

Variant	Item No.	GBP
white	464091	20.70

Manufacturer:
WeiSen Electronic Co., Ltd

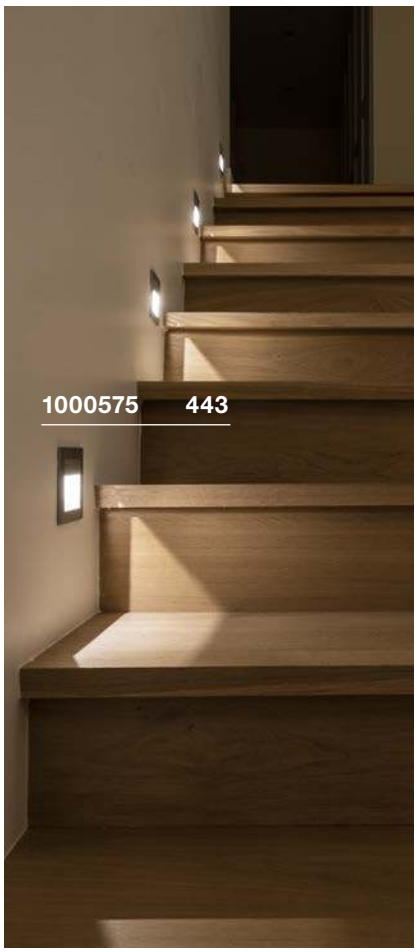

LED DRIVER
700mA | 3W inc. strain relief



0,03

Product details

230V -50Hz
Material: plastic PC
L: 5.5 cm W: 3.9 cm H: 2 cm

Voltage sec.	4-5V
Output current	700mA
Wattage up to	3W
Power factor	0,4
Thermal protection	110°C
Wattage-L sec. max.	2 m

Variant	Item No.	GBP
white	464200	20.70

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER
700mA | 11W inc. strain relief



0,06

Product details

220-240V ~50/60Hz
Material: plastic PC
L: 15.5 cm W: 2.2 cm H: 1.9 cm

Output current	700mA
Wattage up to	11W
Power factor	0,6
Thermal protection	100°C

Variant	Item No.	GBP
white	464030	34.20

Manufacturer:
TCI Telecomunicazioni Italia Srl

LED DRIVER
700mA | 40W inc. strain relief



0,2

Product details

100-240V ~50/60Hz
Material: plastic PC
L: 12.9 cm W: 7.5 cm H: 3.2 cm

Voltage sec.	29-58V
Output current	700mA
Wattage of	20W
Wattage up to	40W
Power factor	0,9
Thermal protection	110°C
Wattage-L sec. max.	2 m

Variant	Item No.	GBP
black	464168	40.50

Manufacturer:
WeiSen Electronic Co., Ltd

LED DRIVER VALETO®
1050mA | 45W inc. strain relief

ZIGBEE



0,21

Product details

100-240V ~50/60Hz
Material: plastic
L: 19 cm W: 6.1 cm H: 3 cm

Tip

Remote control and dimming with gateway [1002411]

Voltage sec.	30-42V
Output current	1050mA
Number of outputs sec.	1
Wattage	42W
Wattage of	31.5W
Wattage up to	45W
Power factor	0,95
Thermal protection	110°C
Wattage-L sec. max.	2 m

Variant	Item No.	GBP
white	1001249	76.50

LED DRIVER
1000mA | 40W inc. strain relief



0,2

Product details

100-240V ~50/60Hz
Material: plastic PC
L: 12.9 cm W: 7.5 cm H: 3.2 cm

Voltage sec.	20-40V
Output current	1000mA
Number of outputs sec.	1
Wattage of	20W
Wattage up to	40W
Power factor	0,9
Thermal protection	110°C
Wattage-L sec. max.	2 m

Variant	Item No.	GBP
black	464170	40.50

Manufacturer:
WeiSen Electronic Co., Ltd



CEILING HOOK



0,04

Product details

Material: aluminium
Diameter: 1.8 cm L: 4.6 cm

Variant	Item No.	GBP
black	132670	15.30
white	132671	15.30



CABLE CLAMP



0,01

Product details

Material: aluminium
Diameter: 1.4 cm L: 3.1 cm

Variant	Item No.	GBP
black	132680	9.90
white	132681	9.90



CEILING ROSE



0,36

Product details

230V -50Hz
Material: aluminium
L: 8.5 cm W: 8.5 cm H: 2.7 cm

Max. current load 8.5A

Variant	Item No.	GBP
black matt	210060	25.20
white matt	210061	25.20
silver	210064	25.20

TEXTILE CABLE
3-pole, 3 x 0.75 mm², 10m



0,58

Product details

Max. voltage 300V
Material: PVC
Diameter: 0.6cm L: 1000 cm

Variant	Item No.	GBP
black	961270	40.50
white	961271	40.50
red	961276	40.50

CABLE
3-pole, 3x0.75mm², 10m



0,04

Product details

Max. voltage 300V
L: 1000 cm

Variant	Item No.	GBP
transparent	961250	20.70

WIRE ROPE SUSPENSION



0,02

Product details

Material: steel/plastic
Diameter: 0.15cm L: 500 cm

mech. Max. load 40 kg

Variant	Item No.	GBP
silver	961037	15.30

Manufacturer:
Reutlinger GmbH

STOPPER FOR WIRE ROPE



0,01

Product details

Material: steel
Diameter: 0.8 cm
10 piece

Variant	Item No.	GBP
silver	961034	20.70



CONNECTOR STRIP
3 outlets



0,02

Product details

Material: plastic
L: 5.2 cm W: 1.4 cm H: 1.3 cm

Tip

For 350mA plug-in system

Variant	Item No.	GBP
black	111850	9.90

CABLE EXTENSION



0,02

Product details

Material: plastic
L: 100 cm

Tip

With AMP plug and socket
For 350mA plug-in system

Variant	Item No.	GBP
	111861	5.90

GU10 SOCKET
with connection box and quick clamp



0,065

Product details

L: 27 cm

Variant	Item No.	GBP
white/black	1000909	5.90

GU10 SOCKET



0,02

Product details

230V -50Hz
Material: ceramic
L: 300 cm W: 0.9 cm

Variant	Item No.	GBP
white	955135	1.50

DOUBLE-SIDED TAPE



Product details

L: 300 cm W: 0.9 cm

Variant	Item No.	GBP
clear	220000	11.70



CONNECTOR BOX



0,02 IP 68

Product details

230V -50Hz
Material: PA66 GF
Diameter: 2.7 cm L: 11.5 cm

Tip

3-pole

Max. voltage	450V
Max. current load	17.5mA

Variant	Item No.	GBP
■ black	228730	13.50

CONNECTOR BOX



0,07 IP 68

Product details

230V -50Hz
Material: PA66 GF
Diameter: 3.2 cm L: 13 cm

Tip

5-pole

Max. voltage	450V
Max. current load	32mA

Variant	Item No.	GBP
■ black	228725	13.50

T-CONNECTOR BOX



0,11 IP 68

Product details

230V -50Hz
Material: PA66
L: 11 cm W: 6.4 cm H: 3 cm

Tip

3-pole

Max. voltage	500V
Max. current load	17.5mA

Variant	Item No.	GBP
■ black	228726	20.70

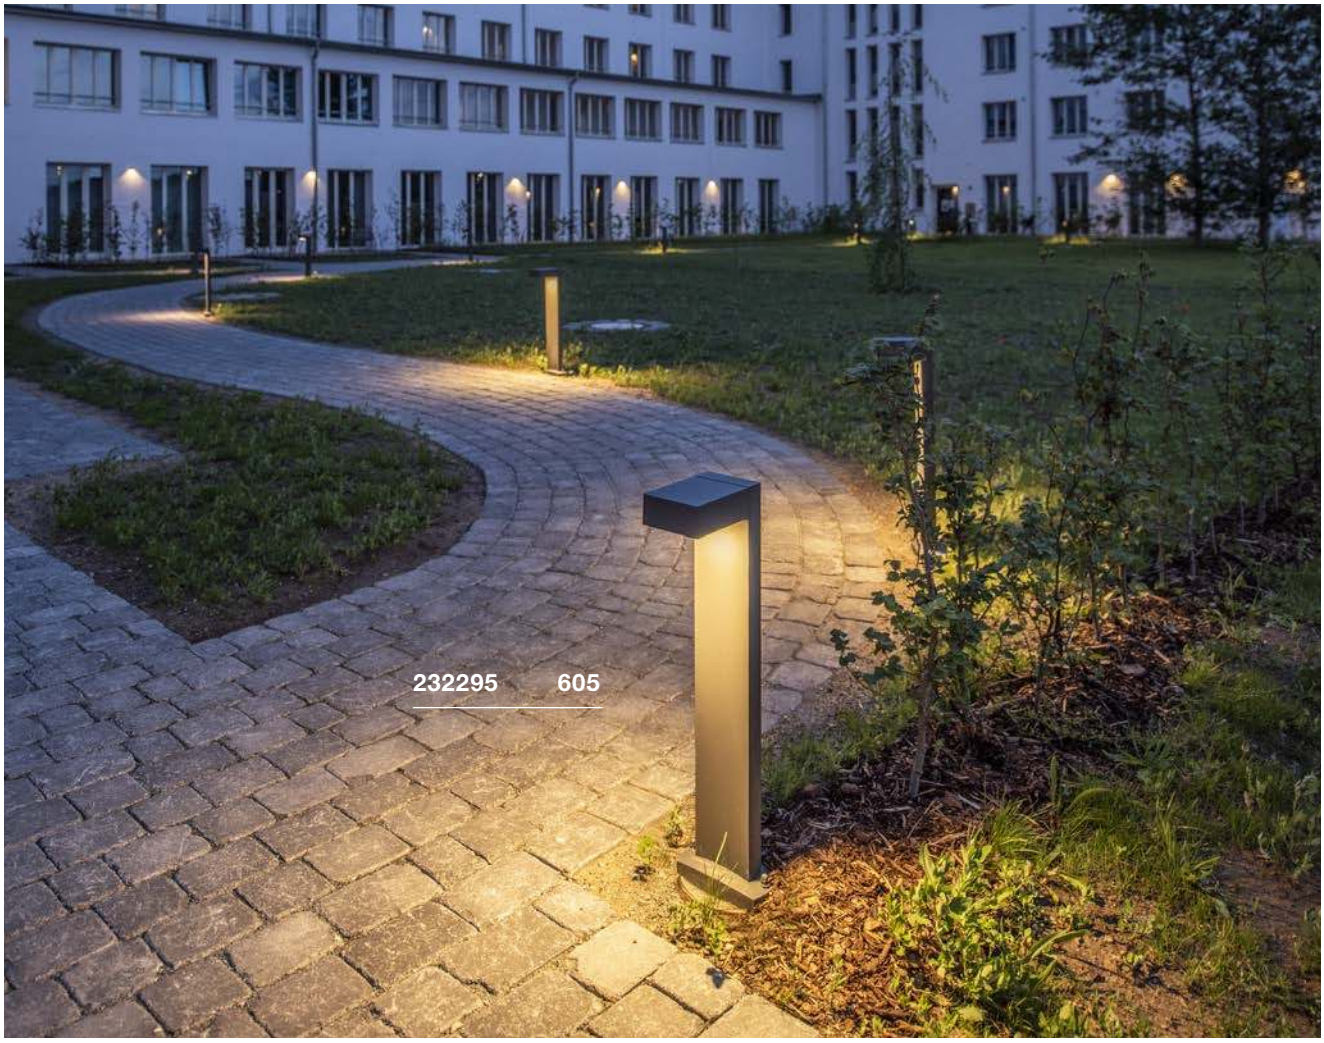

THE SOURCE OF ALL LIGHT.

THE RIGHT LAMP FOR ANY LIGHTING SOLUTION.

The right lighting effect is the result of perfect interaction between the luminaire and the lamp. As well as the design, energy efficiency is also an important criterion. Many alternatives to the classic light bulb have gained a foothold on the market in recent years. This means that the right lighting element is available for every kind of application or luminaire.

LAMPS

GENERAL INFORMATION.

• Operating in open luminaires without protection glass is only permitted with low-pressure lamps. Lamps with this symbol (IEC 357 standard) are suitable for use in luminaires without protection glass.

• Halogen lamps and metal halide discharge lamps (HID) can cause the lamp housing to heat up. The latter may therefore only be touched when they have cooled down. Adjustable luminaires or lamp heads which do not have an adjusting handle fitted or which are used with lamps at the maximum wattage meaning that the maximum housing temperature permitted is exceeded on the obvious adjustment point, must be installed out of hands' reach. You can find corresponding solutions in this chapter.

• Low-voltage lamps can be operated using suitable LED retrofit lamps in many cases. However, not every combination of luminaires with apparently suitable lamps is possible due to the conflicting individual cases, where there are transformer and LED technology-specific issues. If you have any questions about compatibility, visit slv.com or contact our sales department.

• The dimensions specified for the lamps always refer to the complete exterior dimensions of a lamp. This means that the threaded base is included.

• All bulbs must be disposed of separately and do not belong in the household waste.



LED QT14
G9



15000 0,01

Product details

220-240V ~50/60Hz
Wattage: 2.5W
Diameter: 1.6 cm L: 4.8 cm

Lamp current	0.012A
Wattage	2.5W
Energy consumption/1000h	3kWh
Colour temperature	2700K
Luminous flux	180lm
Colour rendering index	>80

Variant	Item No.	GBP
	560302	10.80

LED FILAMENT
G9



C 15000 0,013

Product details

220-240V ~50/60Hz
Wattage: 2.7 W
Diameter: 1.4 cm L: 6.8 cm
Dimmable: C

Lamp current	0.0135A
Wattage	2.7W
Energy consumption/1000h	3kWh
Colour temperature	2600K
Luminous flux	250lm
Colour rendering index	>90

Variant	Item No.	GBP
	1003102	29.70

Manufacturer: Segula GmbH

LED QT-DE12
R7S 78mm



15000 0,02 330°

Product details

220-240V ~50/60Hz
Wattage: 5.5W
Diameter: 2.5 cm L: 7.8 cm

Lamp current	0.044A
Wattage	5.5W
Energy consumption/1000h	6kWh
Colour temperature	2700K
Luminous flux	530lm
Colour rendering index	>80

Variant	Item No.	GBP
	560332	9.90

LED QT-DE12
R7S 118mm



C, L 15000 0,09

Product details

220-240V ~50/60Hz
Wattage: 14W
Diameter: 2.9 cm L: 11.8 cm
Dimmable: C, L

Lamp current	0.075A
Wattage	14W
Energy consumption/1000h	14kWh
Colour temperature	3000K
Luminous flux	2000lm
Colour rendering index	>80

Variant	Item No.	GBP
	1002135	60.30

Manufacturer: Signify B.V.

LED QR51
GU5.3



25000 0,05 36°

Product details

12V AC
Wattage: 5.5W
Diameter: 5 cm H: 4.5 cm

Tip

Operate only with conventional transformer.

Lamp current	0.63A
Wattage	5.5W
Energy consumption/1000h	7kWh
max. luminosity	1000cd
Colour rendering index	>80

Variant	Item No.	GBP
2700K | 450lm	1001574	29.70
3000K | 460lm	1001575	29.70

Manufacturer: Signify B.V.



139082 **544**

1001575 **846**

LED T32 FILAMENT
GU10



C | 20000 | 0,06 | 38°

Product details

220-240V ~50/60Hz
Wattage: 4W
Diameter: 3.2 cm L: 10 cm
Dimmable: C

Lamp current	0.02A
Wattage	4W
Energy consumption/1000h	4kWh
Colour temperature	2600K
Luminous flux	260lm
max. luminosity	700cd
Colour rendering index	>90

Variant	Item No.	GBP
	1003101	**39.60**

Manufacturer: Segula GmbH

LED QPAR51
GU10

ZIGBEE | CCT | RGB +W



25000 | 0,04

Product details

220-240V ~50/60Hz
Diameter: 5 cm L: 5.4 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Energy consumption/1000h	6kWh
Luminous flux	350lm
Colour rendering index	>80

Variant	Item No.	GBP
CCT | 2700-6500K 5.1W | 48°	**1001918**	**49.50**
RGBW | 5.6W | 60°	**1001919**	**49.50**

LED QPAR51
GU10



C,L | 25000 | 0,04 | 36°

Product details

220-240V ~50/60Hz
Wattage: 3.7W
Diameter: 5 cm H: 5.4 cm
Dimmable: C, L

Lamp current	0.02A
Wattage	3.7W
Energy consumption/1000h	4kWh
Colour temperature	2700K
Luminous flux	260lm
max. luminosity	500cd
Colour rendering index	>90

Variant	Item No.	GBP
	560122	**15.30**

Manufacturer: Signify B.V.

LED
GU10

NEW



20000 | 0,033 | 36°

Product details

220-240V ~50/60Hz
Wattage: 4W
Diameter: 5 cm H: 5.5 cm

Tip

Contains recycled material

Lamp current	0.035A
Wattage	4W
Energy consumption/1000h	4kWh
Luminous flux	300lm
max. luminosity	400cd
Colour rendering index	>80

Variant	Item No.	GBP
2700K	**1004972**	**5.40**
3000K	**1004973**	**5.40**
4000K	**1004974**	**5.40**

LED
GU10

NEW



C,L | 25000 | 0,028 | 36°

Product details

220-240V ~50/60Hz
Wattage: 6W
Diameter: 5 cm H: 5.4 cm
Dimmable: C, L

Lamp current	0.037A
Wattage	6W
Energy consumption/1000h	6kWh
Colour temperature	2700K
Luminous flux	460lm
max. luminosity	830cd
Colour rendering index	>90

Variant	Item No.	GBP
Grey housing	**1005075**	**6.10**
White housing	**1005076**	**6.10**
Black housing	**1005077**	**6.10**

LED
GU10

NEW



C,L | 25000 | 0,028 | 36°

Product details

220-240V ~50/60Hz
Wattage: 6W
Diameter: 5 cm H: 5.4 cm
Dimmable: C, L

Lamp current	0.037A
Wattage	6W
Energy consumption/1000h	6kWh
Colour temperature	3000K
Luminous flux	460lm
max. luminosity	830cd
Colour rendering index	>90

Variant	Item No.	GBP
Grey housing	**1005078**	**6.10**
White housing	**1005079**	**6.10**
Black housing	**1005080**	**6.10**

LED
GU10



25000 0,028 36°

Product details

220-240V ~50/60Hz
Wattage: 6W
Diameter: 5 cm H: 5.4 cm
Dimmable: C, L

Lamp current	0.037A
Wattage	6W
Energy consumption/1000h	6kWh
Colour temperature	4000K
Luminous flux	460lm
max. luminosity	830cd
Colour rendering index	>90

Variant	Item No.	GBP
Grey housing	1005081	6.10
White housing	1005082	6.10
Black housing	1005083	6.10

LED QPAR51
GU10



20000 0,06 38°

Product details

220-240V ~50/60Hz
Wattage: 5.5W
Diameter: 5 cm H: 5.5 cm
Dimmable: switch

Tip

3 dimming levels with normal wall switch.
Switching the switch on and off causes
the light to dim gradually.

Lamp current	0.038A
Wattage	5.5W
Energy consumption/1000h	6kWh
Colour temperature	2700K
Luminous flux	400lm
max. luminosity	700cd
Colour rendering index	>80

Variant	Item No.	GBP
	1001030	15.30



LED QPAR111
GU10



C 40000 0,19 55°

Product details

220-240V ~50/60Hz
Wattage: 13W
Diameter: 11 cm L: 7 cm
Dimmable: C

Lamp current	0.052A
Wattage	13W
Energy consumption/1000h	13kWh
Colour rendering index	>90

Variant	Item No.	GBP
2700K | 840lm	**1003094**	**80.10**
4000K | 950lm	**1003095**	**80.10**

LED QPAR111
GU10, CCT



25000 0,15

Product details

220-240V ~50/60Hz
Wattage: 9W
Diameter: 11.1 cm H: 7 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Wattage	9W
Energy consumption/1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	800lm
Colour rendering index	>80

Variant	Item No.	GBP
3300cd | 25°	**1001920**	**49.50**
1900cd | 40°	**1001921**	**49.50**

LED QPAR111
GU10, RGBW



25000 0,15

Product details

220-240V ~50/60Hz
Wattage: 9W
Diameter: 11.1 cm H: 7 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.048A
Wattage	9W
Energy consumption/1000h	9kWh
Colour temperature	RGBW
Luminous flux	800lm
max. luminosity	3700cd
Colour rendering index	>80

Variant	Item No.	GBP
25°	**1001922**	**49.50**
40°	**1001923**	**49.50**

LED QPAR111
GU10



C 40000 0,19

Product details

230V -50Hz
Wattage: 13W
Diameter: 11.1 cm H: 7.1 cm
Dimmable: C

Lamp current	0.052A
Wattage	13W
Energy consumption/1000h	13kWh
Colour temperature	2700K
Colour rendering index	>80

Variant	Item No.	GBP
1100lm | 30°	**1001242**	**71.10**
1000lm | 140°	**1001244**	**71.10**

LED QPAR111
GU10



C 35000 0,2

Product details

220-240V ~50/60Hz
Wattage: 13W
Diameter: 11 cm H: 7.1 cm
Dimmable: C

Lamp current	0.052A
Wattage	13W
Energy consumption/1000h	13kWh
Colour temperature	4000K
Colour rendering index	>90

Variant	Item No.	GBP
1100lm | 30°	**1003087**	**80.10**
1000lm | 140°	**1003088**	**80.10**

LED QPAR111
GU10



30000 0,2 38°

Product details

220-240V ~50/60Hz
Wattage: 6.5W
Diameter: 11 cm H: 7 cm

Lamp current	0.046A
Wattage	6.5W
Energy consumption/1000h	7kWh
Colour temperature	2700K
Luminous flux	390lm
max. luminosity	785cd
Colour rendering index	>80

Variant	Item No.	GBP
	551882	**40.50**

LED QPAR111
GU10





Product details

220-240V ~50/60Hz
Diameter: 11.1 cm H: 7.3 cm

Energy consumption/1000h	8kWh
Luminous flux	730lm
max. luminosity	5600cd
Colour rendering index	>80

Variant	Item No.	GBP
2700K | 7.3W | 0.069A	**1000939**	**20.70**
3000K | 7W | 0.04A	**1001568**	**20.70**
4000K | 7.3W | 0.069A	**1000940**	**20.70**

LED QPAR111
GU10





Product details

220-240V ~50/60Hz
Diameter: 11.1 cm

Energy consumption/1000h	8kWh
Colour rendering index	>80

Variant	Item No.	GBP
2700K | 730lm | 7.9W | 0.039A | 1900cd H: 7 cm	**560702**	**20.70**
3000K | 730lm | 7W | 0.04A | 1800cd H: 7.3 cm	**1001570**	**20.70**
4000K | 760lm | 7.9W | 0.04A | 1800cd H: 7 cm	**560704**	**20.70**

LED QPAR111
GU10





Product details

220-240V ~50/60Hz
Diameter: 11.1 cm

Energy consumption/1000h	8kWh
Colour rendering index	>80

Variant	Item No.	GBP
2700K | 730lm | 7,9W | 0,039A | 1800cd 0.13 kg | H: 7 cm	**560722**	**20.70**
3000K | 730lm | 7W | 0.04A | 870cd 0.14 kg | H: 7.3 cm	**1001572**	**20.70**
4000K | 760lm | 7.9W | 0.039A | 920cd 0.12 kg | H: 7 cm	**560724**	**20.70**

LED QR111
G53





Product details

12V AC
Wattage: 15W
Diameter: 11.1 cm H: 6.2 cm

Lamp current	1.8A
Wattage	15W
Energy consumption/1000h	17kWh
Colour temperature	2700K
Colour rendering index	>90

Variant	Item No.	GBP
760lm | 3900cd | 24°	**560231**	**85.50**
750lm | 1400cd | 40°	**560232**	**85.50**

Manufacturer: Signify B.V.

LED QR111
G53





Product details

12V AC
Wattage: 15W
Diameter: 11.1 cm H: 6.2 cm

Lamp current	1.8A
Wattage	15W
Energy consumption/1000h	17kWh
Colour temperature	3000K
Colour rendering index	>90

Variant	Item No.	GBP
770lm | 4000cd | 24°	**560233**	**85.50**
760lm | 1450cd | 40°	**560234**	**85.50**

Manufacturer: Signify B.V.

LED QR111
G53

▼





Product details

12V AC
Wattage: 19.5 W
Diameter: 11 cm H: 6.1 cm

Lamp current	1.85A
Wattage	19.5W
Energy consumption/1000h	21kWh
Colour temperature	2700K
max. luminosity	1625cd
Luminous flux	1070lm
max. luminosity	1625cd
Colour rendering index	>80

Variant	Item No.	GBP
	551402 ▼	**85.50**

LED C35
E14



C, L | 15000 | 0,03 | 280°

Product details

220-240V ~50/60Hz
Performance: 4.5 W
Diameter: 3.5 cm H: 12.1 cm
Dimmable: C, L

Lamp current	0.022A
Wattage	4.5W
Energy consumption/1000h	5kWh
Colour temperature	2700K
Luminous flux	490lm
Colour rendering index	>80

Variant	Item No.	GBP
	1002128	7.20

LED C35
E14



C, L | 15000 | 0,04 | 280°

Product details

220-240V ~50/60Hz
Wattage: 6.5W
Diameter: 3.8 cm H: 11 cm
Dimmable: C, L

Lamp current	0.033A
Wattage	6.5W
Energy consumption/1000h	7kWh
Colour temperature	2700K
Luminous flux	480lm
Colour rendering index	>80

Variant	Item No.	GBP
	560372	13.50

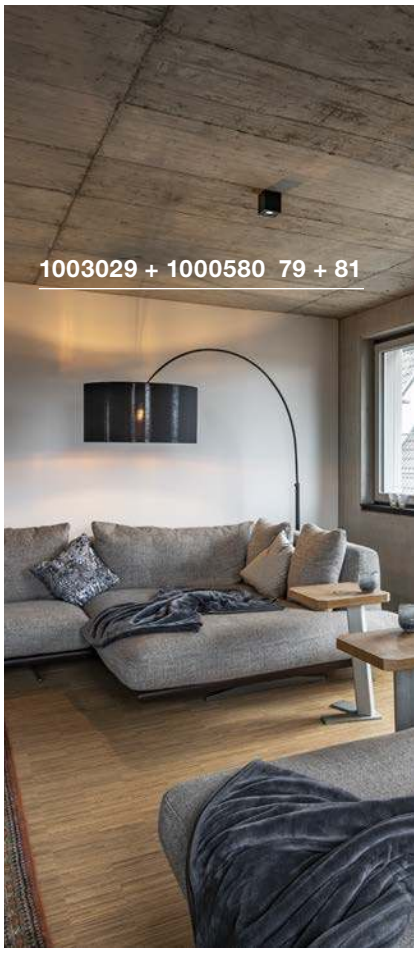

LED A60
E27, CCT

ZIGBEE | CCT



25000 | 0,07 | 240°

Product details

220-240V ~50/60Hz
Wattage: 9W
Diameter: 6 cm H: 12 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.052A
Wattage	9W
Energy consumption/1000h	9kWh
Colour temperature	2700K-6500K
Luminous flux	806lm
Colour rendering index	>80

Variant	Item No.	GBP
	1001916	40.50

LED A60
E27, RGBW

ZIGBEE | RGB +W



25000 | 0,07 | 240°

Product details

220-240V ~50/60Hz
Wattage: 9.5W
Diameter: 6 cm H: 12 cm

Tip

Remote-controllable and dimmable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411]

Lamp current	0.054A
Wattage	9.5W
Energy consumption/1000h	10kWh
Colour temperature	RGBW
Luminous flux	806lm
Colour rendering index	>80

Variant	Item No.	GBP
	1001917	49.50

LED A60
E27



C, L | 15000 | 0,06 | 240°

Product details

220-240V ~50/60Hz
Wattage: 9.1W
Diameter: 6 cm H: 11 cm
Dimmable: C, L

Lamp current	0.043A
Wattage	9.1W
Energy consumption/1000h	10kWh
Colour temperature	2700K
Luminous flux	760lm
Colour rendering index	>80

Variant	Item No.	GBP
	560402	15.30

LED A60
E27





Product details

220-240V ~50/60Hz
Wattage: 14.5W
Diameter: 6 cm H: 12.2 cm
Dimmable: C, L

Lamp current	0.064A
Wattage	14.5W
Energy consumption/1000h	15kWh
Colour temperature	2700K
Luminous flux	1521lm
Colour rendering index	>80

Variant	Item No.	GBP
	560422	**29.70**

LED A60
E27





Product details

220-240V ~50/60Hz
Wattage: 7W
Diameter: 6 cm L: 10.5 cm
Dimmable: C, L

Lamp current	0.032A
Wattage	7W
Energy consumption/1000h	7kWh
Colour temperature	2700K
Luminous flux	810lm
Colour rendering index	>80

Variant	Item No.	GBP
	1003090	**7.70**

LED T38
E27





Product details

100-240V ~50/60Hz
Wattage: 9W
Diameter: 3.8 cm H: 11.5 cm

Lamp current	0.046A
Wattage	9W
Energy consumption/1000h	10kWh
Colour rendering index	>80

Variant	Item No.	GBP
3000K | 810lm	**1001031**	**15.30**
4000K | 850lm	**1002827**	**15.30**

LED T45
E27





Product details

100-240V ~50/60Hz
Wattage: 15W
Diameter: 4.5 cm H: 13.6 cm

Lamp current	0.063A
Wattage	15W
Energy consumption/1000h	15kWh
Colour rendering index	>80

Variant	Item No.	GBP
3000K | 1521lm	**1001033**	**25.20**
4000K | 1600lm	**1002828**	**25.20**

Manufacturer: GE Lighting GmbH

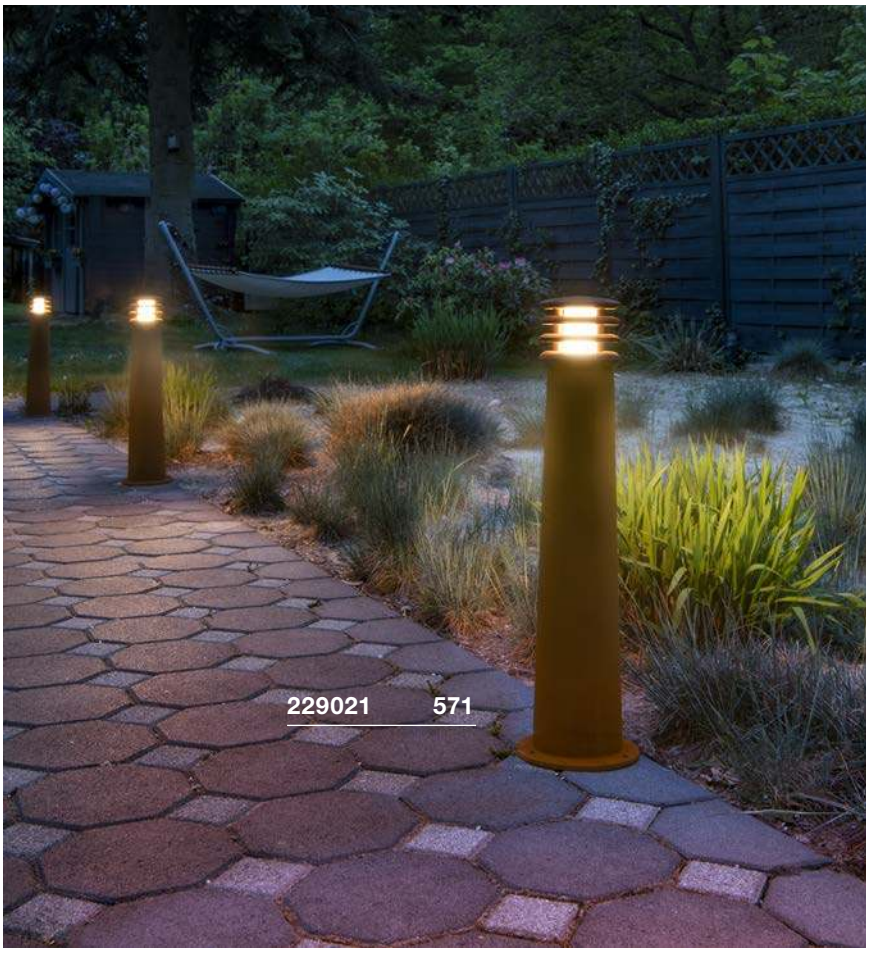

LED FRISBEE
E27



C 25000 0,2

Product details

220-240V ~50/60Hz
Wattage: 10.5W
Diameter: 19.2 cm L: 11.8 cm
Dimmable: C

Lamp current	0.055A
Wattage	10.5W
Energy consumption/1000h	10.5kWh
Colour temperature	2700K
Luminous flux	1000lm
Colour rendering index	>80

Variant	Item No.	GBP
	1003093	24.30

LED A60
E27



C, L 15000 0,03 280°

Product details

220-240V ~50/60Hz
Wattage: 7W
Diameter: 6 cm H: 10.5 cm
Dimmable: C, L

Lamp current	0.031A
Wattage	7W
Energy consumption/1000h	7kWh
Colour temperature	2700K
Luminous flux	790lm
Colour rendering index	>80

Variant	Item No.	GBP
	1002124	9.90

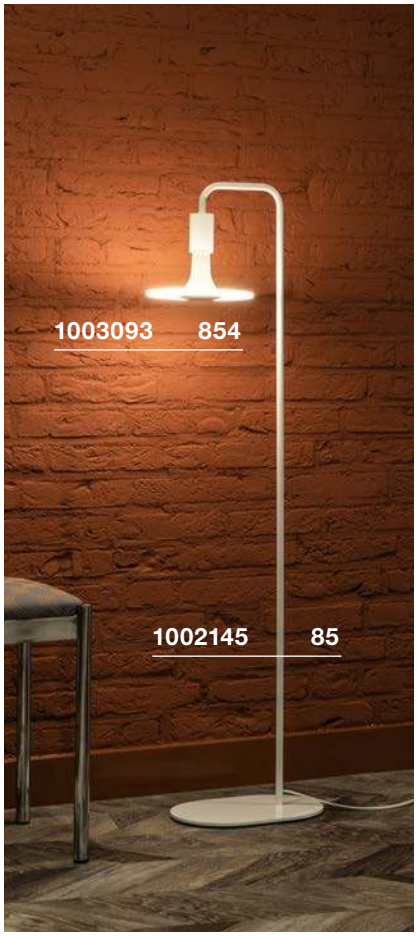

LED A60
E27

SWITCH DIM



Switch 15000 0,03 280°

Product details

220-240V ~50/60Hz
Wattage: 7W
Diameter: 6 cm H: 10.5 cm
Dimmable: switch

Tip

3 dimming levels with normal wall switch.
Switching the switch on and off causes
the light to dim gradually.

Lamp current	0.053A
Wattage	7W
Energy consumption/1000h	7kWh
Colour temperature	2700K
Luminous flux	790lm
Colour rendering index	>80

Variant	Item No.	GBP
	1002127	11.70

LED A60
E27

DIM TO WARM



C, L 15000 0,04 280°

Product details

220-240V ~50/60Hz
Wattage: 7W
Diameter: 6 cm H: 11.4 cm
Dimmable: C, L

Lamp current	0.031A
Wattage	7W
Energy consumption/1000h	7kWh
Colour temperature	2200-2700K
Luminous flux	830lm
Colour rendering index	>80

Variant	Item No.	GBP
	1002126	17.10

LED A60
E27



C 15000 0,15

Product details

220-240V ~50/60Hz
Wattage: 15W
Diameter: 9 cm L: 23 cm
Dimmable: C

Lamp current	0.09A
Wattage	15W
Energy consumption/1000h	15kWh
Colour temperature	2700K
Luminous flux	1600lm
Colour rendering index	>90

Variant	Item No.	GBP
	1003097	85.50

Manufacturer: Segula GmbH

LED ST58
E27



C, L | 15000 | 0,04 | 330°

Product details

220-240V ~50/60Hz
Wattage: 7.1W
Diameter: 5.8 cm H: 12.8 cm
Dimmable: C, L

Lamp current	0.035A
Wattage	7.1W
Energy consumption/1000h	8kWh
Colour temperature	2700K
Luminous flux	806lm
Colour rendering index	>80

Variant	Item No.	GBP
	1001756	20.70

LED ST64
E27



15000 | 0,05 | 330°

Product details

220-240V ~50/60Hz
Wattage: 5W
Diameter: 6.4 cm H: 14.5 cm

Lamp current	0.043A
Wattage	5W
Energy consumption/1000h	5kWh
Colour temperature	2000K
Luminous flux	500lm
Colour rendering index	>80

Variant	Item No.	GBP
	560741	25.20

LED T32
E27



C | 25000 | 0,05 | 350°

Product details

220-240V ~50/60Hz
Wattage: 8W
Diameter: 3.2 cm H: 18.5 cm
Dimmable: C

Lamp current	0.03A
Wattage	8W
Energy consumption/1000h	8kWh
Colour temperature	2200K
Luminous flux	250lm
Colour rendering index	>95

Variant	Item No.	GBP
	1003100	52.20

Manufacturer: Segula GmbH

LED A60
E27, Mirrorhead, Chrome



C, L | 15000 | 0,031

Product details

220-240V ~50/60Hz
Wattage: 7W
Diameter: 6 cm H: 10.5 cm
Dimmable: C, L

Lamp current	0.032A
Wattage	7W
Energy consumption/1000h	7kWh
Colour temperature	2700K
Luminous flux	640lm
Colour rendering index	>80

Variant	Item No.	GBP
	1003085	8.10

LED A60
E27, Mirrorhead, Gold

DIM TO WARM



C | 20000 | 0,04 | 180°

Product details

220-240V ~50/60Hz
Wattage: 4W
Diameter: 6 cm L: 10.6 cm
Dimmable: C

Lamp current	0.02A
Wattage	4W
Energy consumption/1000h	4kWh
Colour temperature	2000-2900K
Luminous flux	200lm
Colour rendering index	>90

Variant	Item No.	GBP
	1003098	47.70



LED G95/G125
E27



C, L | 15000 | 330°

Product details

220-240V ~50/60Hz
Wattage: 7W
Dimmable: C, L

Lamp current	0.043A
Wattage	7W
Energy consumption/1000h	8kWh
Colour temperature	2700K
Luminous flux	806lm
Colour rendering index	>80

Variant	Item No.	GBP
Diameter: 9.5 cm | H: 13.2 cm		
0.06 kg	**1001035**	**15.30**
Diameter: 12.5 cm | H: 17.8 cm		
0.1 kg	**1001038**	**20.70**

LED G95/G125
E27, Smoked glass



C | 15000

Product details

220-240V ~50/60Hz
Wattage: 7W
Dimmable: C

Lamp current	0.032A
Wattage	7W
Energy consumption/1000h	7kWh
Colour temperature	2700K
Colour rendering index	>80

Variant	Item No.	GBP
360lm | Diameter: 9.5 cm | H: 13.5 cm		
0.054 kg	**1003091**	**9.90**
440lm | Diameter: 12.4 cm | H: 16.8 cm		
0.124 kg	**1003092**	**11.70**

LED G125
E27



C, L | 15000 | 0,1 | 330°

Product details

220-240V ~50/60Hz
Wattage: 7W
Diameter: 12.5 cm H: 17.8 cm
Dimmable: C, L

Lamp current	0.043A
Wattage	7W
Energy consumption/1000h	8kWh
Colour temperature	2700K
Luminous flux	630lm
Colour rendering index	>80

Variant	Item No.	GBP
	1001357	**29.70**

LED G125
E27, Mirrorhead, gold

DIM TO WARM



C | 20000 | 0,1 | 180°

Product details

220-240V ~50/60Hz
Wattage: 8W
Diameter: 12.5 cm H: 17.8 cm
Dimmable: C

Lamp current	0.04A
Wattage	8W
Energy consumption/1000h	8kWh
Colour temperature	2000-2900K
Luminous flux	400lm
Colour rendering index	>90

Variant	Item No.	GBP
	1003099	**67.50**

Manufacturer: Segula GmbH

LED G125
E27, Smoked glass

DIM TO WARM



C | 20000 | 0,11

Product details

220-240V ~50/60Hz
Wattage: 8W
Diameter: 12.5 cm H: 17.8 cm
Dimmable: C

Lamp current	0.032A
Wattage	8W
Energy consumption/1000h	8kWh
Colour temperature	2000-2900K
Luminous flux	500lm
Colour rendering index	>90

Variant	Item No.	GBP
	1003096	**67.50**

Manufacturer: Segula GmbH



LED PAR38
E27



40000 0,39 45°

Product details

220-240V ~50/60Hz
Wattage: 17W
Diameter: 12.2 cm H: 13.5 cm

Lamp current	0.079A
Wattage	17W
Energy consumption/1000h	17kWh
Colour temperature	3000K
Luminous flux	1430lm
max. luminosity	1630cd
Colour rendering index	>80

Variant	Item No.	GBP
	560473	60.30

LED TCR-TSE
GX53



25000 0,05 120°

Product details

230V -50Hz
Wattage: 3W
Diameter: 7.6 cm H: 2.6 cm

Lamp current	0.03A
Wattage	3W
Energy consumption/1000h	3kWh
Colour temperature	3000K
Luminous flux	250lm
Colour rendering index	>80

Variant	Item No.	GBP
	551372	20.70

LED TCR-TSE
GX53



20000 0,1 35°

Product details

230V -50Hz
Wattage: 4.2W
Diameter: 7.5 cm H: 3.5 cm

Lamp current	0.041A
Wattage	4.2W
Energy consumption/1000h	5kWh
Colour temperature	3000K
Luminous flux	200lm
max. luminosity	550cd
Colour rendering index	>80

Variant	Item No.	GBP
	550092	40.50

LED TCR-TSE
GX53



25000 0,08 120°

Product details

220-240V ~50/60Hz
Wattage: 8.2W
Diameter: 7.5 cm H: 2.9 cm

Lamp current	0.062A
Wattage	8.2W
Energy consumption/1000h	9kWh
Colour rendering index	>80

Variant	Item No.	GBP
3000K | 600lm	550073	20.70
4000K | 620lm	550074	20.70

T16
G5

24000 0,04

Product details

220-240V ~50/60Hz
Wattage: 14W
Diameter: 1.6 cm H: 54.9 cm

Wattage	14W
Energy consumption/1000h	9kWh
Colour temperature	3000K
Luminous flux	1200lm
Colour rendering index	>85

Variant	Item No.	GBP
	548014 ▼	9.00

Manufacturer: Feilo Sylvania Germany GmbH

T16
G5

24000 0,07

Product details

220-240V ~50/60Hz
Wattage: 21W
Diameter: 1.6 cm H: 85 cm

Wattage	21W
Energy consumption/1000h	9kWh
Colour temperature	3000K
Luminous flux	1900lm
Colour rendering index	>85

Variant	Item No.	GBP
	548021 ▼	9.90

Manufacturer: Feilo Sylvania Germany GmbH



IT'S A FAMILY AFFAIR:

OUR SLV LUMINAIRE FAMILIES.

Particularly when visual continuity is required, our range of luminaires is ideal for designing different rooms or room situations in a uniform way, yet still remain versatile.

ABRIDOR

Paths/position	Paths/position	Wall	Wall
			
604	**604**	**664**	**664**

ACCANTO

Pendant	Wall	Wall	Ceiling
			
139	**246**	**247**	**284**

AIXLIGHT®

Installation  **438**

Installation  **438**

Installation  **439**

Installation  **438**

Installation  **438**

Installation  **439**

Installation  **439**

AIXLIGHT® R2

Pendant  **173**

Pendant  **174**

Pendant  **174**

Pendant  **174**

ALTRA DICE

Wall  **316**

Wall/ceiling  **316**

1-circuit track  **479**

3-circuit track  **517**

ANELA

Pendant **130**

Wall/display  **275**

Ceiling  **313**

APONI

Paths/position  **577**

Paths/position  **577**

Wall  **645**

ASTINA

Pendant  **123**

Wall  **232**

Ceiling  **312**

Wall  **680**

Wall  **681**

Wall  **681**

AVO

Wall/ceiling  **345**

Wall/ceiling  **345**

Wall/ceiling  **345**

Wall/ceiling  **345**

3-circuit track  **478**

1-circuit track  **511**

BATO

Pendant

116

Pendant

116

Pendant

116

Pendant

117

Wall

191

Wall

191

Ceiling

286

Ceiling

286

BENDO

reddot award 2018 winner

Paths/position

602

Paths/position

602

Wall

662

BIG NAILS

Paths/position

579

Paths/position

580

Paths/position

580

Wall

647

BIG THEO

Wall

676

Wall

693

Ceiling

709

BIG THEO LED

Wall

677

Wall

694

Wall

695

Ceiling

709

BIMA

3-circuit track

485

3-circuit track

485

1-circuit track

515

1-circuit track

515

Easytec® II

535

Easytec® II

535

C-POL

Paths/position



583

Wall



646

ENOLA

Pendant



125

Wall NEW



684

Wall NEW



684

Wall NEW



684

Wall NEW



685

Wall NEW



685

Wall NEW



685

Wall NEW



696

Wall NEW



696

Wall NEW



696

Wall NEW



697

Wall NEW



697

Wall NEW



697

Wall NEW



705

Wall NEW



705

Wall NEW



705

Wall NEW



710

Wall NEW



710

Wall NEW



710

ENOLA B

Pendant



124

Wall



232

Wall



252

Ceiling



313

Wall/ceiling



337

Wall/ceiling



337

Wall/ceiling



338

1-circuit track



514

1-circuit track



523

ENOLA C

Ceiling



315

Ceiling



315

3-circuit track



483

1-circuit track



521

Paths/position



607

ESKINA

Paths/position

607

Wall

700

Wall

721

Wall

721

ESKINA FRAME

Paths/position NEW

585

Paths/position NEW

585

Wall NEW

663

Wall NEW

663

EURO SPOT

3-circuit track

494

3-circuit track

494

3-circuit track

495

3-circuit track NEW VARIANT

495

3-circuit track

495

1-circuit track

516

1-circuit track

516

FENDA

MIX & MATCH

Table

078

Position

078

Table

079

Position

079

Position

079

Pendant

102

Wall

202

Wall

244

Wall

245

Ceiling

282

Shades

080, 104

Shades

080, 081, 105, 283

Shades

081, 102

Shades

102

Shades

202

Shades

245

HELIA

Pendant

126

Pendant

126

Pendant

127

Pendant

127

Pendant
NEW VARIANT

128

Pendant
NEW VARIANT

129

Wall/ceiling

339

Wall/ceiling

339

Installation

391

3-circuit track

482

1-circuit track

521

Paths/position

610

Paths/position

610

Paths/position

611

Paths/position

613

Paths/position

613

Spotlight

631

Spotlight

631

Wall

723

Wall

723

IPERI

Paths/position

605

Wall

668

KALU LED

Wall/ceiling

352

Wall/ceiling

352

Wall/ceiling

352

Wall/ceiling

353

3-circuit track

493

3-circuit track

493

1-circuit track

519

KALU QPAR111

Wall/ceiling

350

Wall/ceiling

350

Wall/ceiling

350

Wall/ceiling

350

3-circuit track

492

1-circuit track

519

KALU QR111

3-circuit track

492

KARPO

Table

082

Position

083

Wall
NEW

250

Wall

253

Wall

253

Wall/ceiling

334

Wall/ceiling

334

Installation

391

LED SAIL

Wall

229

Wall/ceiling

673

LENITO

Wall

242

Wall

275

3-circuit track

481

LIGHT EYE 150

Pendant

108

3-circuit track

480

3-circuit track

499

1-circuit track

523

Easytec® II

537

Easytec® II

537

LIGHT EYE 90

Pendant

108

1-circuit track

512

LISENNE

Pendant

131

Wall

197

Paths/position

572

Paths/position

572

L-LINE

Paths/position NEW

595

Paths/position NEW

595

Paths/position NEW

595

Wall NEW

688

LOGS

Wall

212

Wall

212

Wall

213

Wall

213

Paths/position

586

Paths/position

586

Wall

692

MAGANDA

Table FOLLOWER

072

Wall FOLLOWER

260

MALU

Position

606

Wall/ceiling

670

Wall/ceiling

711

MANA

Wall NEW

192

Wall NEW

192

Wall NEW

193

Wall NEW

193

Wall

204

Shade

205

Shade

205

Wall

206

Wall

206

Shade

207

Shade

207

Wall

688

MEDO LED

Pendant/ceiling  144, 294

Pendant/ceiling  145, 295

Pendant/ceiling  146, 296

Pendant/ceiling  146, 296

Pendant/ceiling  146, 296

Pendant/ceiling  147, 297

Pendant/ceiling  148, 298

Pendant/ceiling  149, 299

Pendant/ceiling  149, 299

Pendant/ceiling  149, 299

Pendant/ceiling  150, 300

Pendant/ceiling  150, 300

Pendant/ceiling  150, 300

Pendant/ceiling  151, 301

Pendant/ceiling  152, 302

Pendant/ceiling  153, 303

Pendant  154

Pendant  154

Pendant  155

Installation 454, 455

Installation 456, 457

MERADO FLOOD

Wall  243

3-circuit track  481

MOLAT

Pendant  563

Paths/position  578

Wall  642

Ceiling  702

MYRA

Paths/position  613

Wall  679

Wall  701

Wall/ceiling  722

Wall/ceiling  722

NAUTILUS

Spike  618

Spike  618

Spike  620

Spike  621

Spotlight  627

Spotlight  629

Spotlight  629

Spotlight  629

Wall/ceiling 720

Wall/ceiling 720

Wall/ceiling 720

NOBLO

Wall/ceiling

343

Wall/ceiling

343

Wall/ceiling

343

3-circuit track

482

1-circuit track

510

1-circuit track

520

Low-voltage cable system

550

NUMINOS

Installation NEW

026

Installation NEW

028

Installation NEW

030

Installation NEW

032

Installation NEW

034

Installation NEW

036

Installation NEW

038

3-circuit track NEW

042

3-circuit track NEW

044

3-circuit track NEW

046

Wall/ceiling NEW

048

Ceiling NEW

050

Ceiling NEW

052

Ceiling NEW

054

Ceiling NEW

056

Ceiling NEW

058

Pendant NEW

060

Pendant NEW

062

Pendant NEW

064

OCCULDAS

Design:
David Morgan

Ceiling

311

Ceiling

311

Installation

411

Installation

411

OCULUS

Installation NEW

107

Wall NEW

233

Ceiling NEW

315

Wall/ceiling NEW

331

Installation NEW

445

ONE

Pendant

157

Pendant

157

Pendant

157

Pendant NEW VARIANT

158

Pendant NEW VARIANT

158

Pendant NEW VARIANT

158

Pendant NEW VARIANT

159

Pendant NEW VARIANT

159

Wall

194

Wall

194

3-circuit track NEW VARIANT

473, 811

OVALISK

Paths/position NEW

575

Wall NEW

650

Wall NEW

650

Ceiling NEW

703

PARA CONE

Pendant

120

Pendant

120

3-circuit track

480

3-circuit track

499

1-circuit track

513

1-circuit track

524

PHELIA

Design:
Markus Becker

Table

084

Free-standing light

084

Pendant

114

Pendant

115

Pendant

115

Pendant

115

Wall

251

PHOTONIA

Pendant

562

Table

568

Paths/position

573

Wall

642

Ceiling

702

PLASTRA


Pendant
106


Pendant
124

Wall
190


Wall
190


Wall
NEW
208


Wall
209


Wall
210


Wall
NEW
211


Wall
215


Wall
215

Wall
227

Wall
230


Wall
231


Wall
236


Wall
236


Ceiling
288


Ceiling
288


Ceiling
288


Ceiling
322


Installation
394


Installation
395

P-LIGHT


Wall/ceiling
372


Wall/ceiling
373


Wall/ceiling
375


Installation
405

POLE PARC


Paths/position
584


Paths/position
584


Paths/position
584


Wall
657


Wall
683


Ceiling
706

PURI


Wall/ceiling
349


Wall/ceiling
349


Wall/ceiling
349


Wall/ceiling
349


3-circuit track
484


3-circuit track
485


1-circuit track
510


1-circuit track
511


1-circuit track
512

Q-LINE

Pendant

169

Pendant

169

Pendant

170

Pendant

170

Wall

269

Ceiling

306

Ceiling

307

QUAD

Wall

214

Wall

214

Wall NEW

238

Wall NEW

238

Wall

239, 672

Wall

239, 672

Wall NEW

389

Paths/position

609

Wall

687

Wall

687

Wall

687

QUADRASYL

Paths/position

605

Wall/ceiling

671

Wall/ceiling

671

RASCALI

Paths/position

593

Wall

660

ROTOBALL

Pendant

137

Pendant

137

Pendant

137

Ceiling

308

Ceiling

308

Position

565

Position

565

Position

565

ROX

Wall

234, 657

Wall

234, 683

Ceiling

314, 706

Ceiling

706

Paths/position

581

Paths/position

581

Paths/position

581

SENSOR

Wall/ceiling NEW VARIANT  366

Wall/ceiling NEW VARIANT  366

Wall/ceiling NEW VARIANT  366

Wall/ceiling NEW VARIANT 367

Wall/ceiling NEW VARIANT 367

Wall/ceiling NEW VARIANT  367

Installation NEW 449

Installation NEW 449

Installation NEW 449

Installation NEW 448

Installation NEW 448

Installation NEW 448

SIGHT LED

Wall/ceiling  370

Wall/ceiling  370

3-circuit track NEW  471, 811

3-circuit track 472

3-circuit track 483

3-circuit track NEW  496

3-circuit track  497

SITRA

Paths/position  612

Spike  623

Spike  623

Wall  656

Wall  656

Wall  680

Wall  680

Wall  691

Wall  691

Ceiling  704

Wall/ceiling  722

SLOTS

Paths/position  591

Paths/position  591

Wall  644

SOPRANA

Pendant  138

Ceiling  285

SPOT E27

Wall  273

3-circuit track  478

1-circuit track  512

SQUARE

Paths/position	Paths/position	Paths/position	Wall	Wall	Ceiling
					
587	587	587	648	686	707

STRUCTEC

3-circuit track	3-circuit track	3-circuit track	3-circuit track	3-circuit track	3-circuit track	1-circuit track
						
470, 810	490	490	491	491	491	522

SUPROS

Pendant	Pendant	Ceiling	3-circuit track	Installation	Installation
FOLLOWER	FOLLOWER	FOLLOWER	FOLLOWER	FOLLOWER	FOLLOWER
					
179	179	325	489	442	443

SUPROS 78

Pendant	Wall	Ceiling	3-circuit track	Installation	Installation
					
178	235	325	488	440	441

TEC KALU

Wall/ceiling	Wall/ceiling	3-circuit track	3-circuit track
			
317	317	486	486

THEO

Wall	Paths/position	Paths/position	Wall	Wall
				
216	608	608	676	693

THEO BRACKET

Paths/position	Spike	Ceiling
NEW	NEW	NEW
		
608	620	719

TONGA

Pendant

132

1-circuit track

524

Easytec® II



538

TRAPECCO

Paths/position



606

Wall



670

VINCELLI D

Table



072

Pendant



111

Wall



271

Wall



271

WORKLIGHT

Position



088

Position



089

Pendant



176

Pendant



177


1000446 683
EINGANG
1000760 584
KUNDEN

Note: The 7-digit product no. can be found on page 881 onwards

111000
111260 386
111262 386
111290 385
111292 385
111360 423
111361 423
111362 424
111380 425
111381 425
111382 425
111482 671
111710 422
111711 422
111716 422
111720 422
111721 422
111726 422
111850 842
111861 842

112000
112161 393
112162 393
112165 393
112221 393
112222 393
112225 393
112240 393
112242 393
112682 451
112692 451
112702 451
112731 386
112732 386
112771 385
112772 385
112780 385, 386, 389
112781 385, 386, 389
112910 415
112911 415

113000
113110 415
113111 415
113140 413
113141 413
113150 413
113151 413
113160 413
113161 413
113170 414
113171 414
113260 386
113262 386
113290 385
113292 385
113440 421
113441 421
113446 421
113450 421
113451 421
113456 421
113490 423
113491 423
113492 424
113510 423
113511 423
113512 424
113540 425
113541 425
113550 425
113830 425
113840 425
113841 425
113870 430
113871 430
113876 430
113880 430
113881 430
113886 430
113890 431
113891 431
113896 431
113900 430
113901 430
113906 430
113910 430
113911 430
113916 430
113920 431
113921 431
113926 431
113930 321
113931 321
113940 321
113941 321
113951 427
113956 427
113961 427
113966 427
113970 426
113971 426
113976 426

114000
114102 179, 325, 442, 443, 489
114104 179, 325, 442, 443, 489
114220 432
114221 432
114230 432
114231 432
114240 433
114241 433
114250 433
114251 433
114260 433
114261 433
114270 433
114271 433
114280 433
114281 433
114290 433
114291 433
114380 428
114381 428
114386 428
114390 428
114391 428
114396 428
114400 426
114401 426
114406 426
114420 409, 742
114421 409, 742
114426 409, 742
114430 409, 742
114431 409, 742
114436 409, 742
114440 407, 740
114441 407, 740
114450 407, 740
114451 407, 740
114460 739
114461 739
114480 400
114481 400
114490 400
114491 400
114500 401
114501 401

115000
115011 439
115014 439
115151 439
115152 439
115351 438
115352 438
115414 438
115510 434
115511 434
115516 434
115520 434
115521 434
115526 434
115530 434
115531 434
115536 434
115540 435
115541 435
115546 435
115550 435
115551 435
115556 435
115700 436
115701 436
115706 436
115710 436
115711 436
115716 436
115720 436
115721 436
115726 436
115730 437
115731 437
115736 437
115740 437
115741 437
115746 437

116000
116302 178, 235, 325, 440, 441, 488
116304 178, 178, 235, 325, 440, 441, 488
116310 440
116311 440
116320 441
116321 441
116330 325
116331 325
116340 235
116341 235

117000
117100 323
117101 323
117110 323
117111 323
117160 324
117161 324
117180 324
117181 324
117311 411
117321 311
117331 411
117351 311

132000
132020 330
132021 330
132024 330
132600 098
132601 098
132605 098
132610 098
132611 098
132615 098
132620 098
132621 098
132625 098
132650 094

132651 094
132660 102
132661 102
132662 102
132670 840
132671 840
132680 840
132681 840
132690 095
132691 095
132832 569
132835 569

133000
133001 120
133005 120
133009 120
133011 120
133015 120
133019 120
133050 120
133060 120
133120 178
133121 178
133300 115
133310 115
133320 115
133330 114
133341 122
133351 122
133444 132
133481 108
133482 108
133489 108
133490 108
133491 108
133840 154
133841 154
133850 154
133851 154

135000
135020 144, 294
135021 144, 294
135024 144, 294
135070 145, 295
135071 145, 295
135074 145, 295
135120 146, 296
135121 146, 296
135124 146, 296
135170 147, 297
135171 147, 297
135174 147, 297
135250 121, 144-153, 294-303
135251 121, 144-153, 294-303
135254 121, 144-153, 294-303

138000
138980 555, 829
138981 555, 829
138982 555, 829
138990 555, 829
138991 555, 829
138992 555, 829

139000
139004 554
139006 555
139024 554
139026 554
139030 554
139031 554
139040 554
139041 554
139050 554
139051 554
139060 555
139061 555
139070 544
139071 544
139072 544
139080 544
139081 544
139082 544
139090 545
139091 545
139092 545
139100 545
139101 545
139102 545
139110 547
139111 547
139112 547
139120 551
139121 551
139122 551
139130 546
139131 546
139132 546

143000
143010 528
143011 528
143012 528
143020 528
143021 528
143022 528
143030 529
143031 529
143032 529
143040 529
143041 529
143042 529
143050 529
143051 529
143052 529
143060 529
143061 529
143062 529
143070 529
143071 529
143072 529
143080 529
143081 529
143082 529
143090 529
143091 529
143092 529
143100 529
143101 529
143102 529
143110 529
143111 529
143112 529
143120 098, 526, 529
143121 098, 526, 529
143124 098, 526, 529
143130 529
143131 529
143132 529
143151 529
143152 526
143160 529
143161 529
143162 529
143169 529
143170 526
143171 526
143172 526
143190 510
143191 510
143194 510
143221 526
143230 526
143231 526
143241 526
143251 526
143261 526
143271 526
143281 526
143350 517
143351 517
143354 517
143380 529
143381 529
143382 529
143390 512
143391 512
143392 512
143430 515
143431 515
143432 515
143440 515
143441 515
143442 515
143450 511
143451 511
143454 511
143540 519
143541 519
143544 519
143580 521
143581 521
143594 524
143620 523
143621 523
143731 519
143811 516
143930 525
143931 525
143932 525
143941 521
143951 521
143960 523
143961 523
143964 523
143990 524
143991 524

144000
144010 512
144011 512
144013 512
144019 512
144200 511
144201 511
144204 511

145000
145100 501
145102 501
145200 501
145202 501
145300 501
145302 501
145510 502
145514 502
145520 502
145524 502
145530 502
145534 502
145551 505
145560 502
145564 502
145580 503
145584 503
145590 503
145594 503
145600 503
145604 503
145630 502
145634 502
145640 502
145644 502
145660 502
145664 502
145670 502
145674 502
145680 503

145684 503
145690 503
145694 503
145700 503
145710 503
145714 503
145720 503
145724 503
145730 503
145734 503
145830 503
145834 503
145990 098, 503
145994 098, 503

146000
146000 084
146010 084
146111 075
146242 390
146252 390
146260 390
146332 273
146452 272
146472 276
146512 259
146680 258
146682 258
146692 257
146700 256
146701 256
146704 256
146800 267
146801 267
146804 267
146942 308

147000
147301 350
147306 350
147311 350
147316 350
147321 350
147326 350
147360 349
147361 349
147370 349
147371 349
147380 349
147381 349
147411 341
147412 341
147414 341
147441 347
147442 347
147443 347
147444 347
147529 199
147550 330
147551 330
147559 330
147566 218

148000
148001 288
148002 288
148004 322
148005 288
148010 215
148012 236
148013 236
148015 215
148016 230
148018 210
148019 190
148042 124
148060 231
148062 227
148070 394
148071 395
148091 190
148540 251

149000
149381 125
149385 125
149387 125
149388 125
149452 248
149471 219
149472 219
149511 219
149512 219
149762 261
149772 261

151000
151040 108, 257, 512
151041 108, 257, 273, 512
151049 108, 257, 273, 512
151271 223
151275 223
151282 264
151311 222
151315 222
151320 212
151321 212
151325 212
151410 224
151411 224
151416 224
151450 224
151451 224
151456 224
151511 316
151514 316
151531 316, 332
151534 316, 332
151553 262
151591 199
151610 229
151611 229
151710 228
151711 228
151740 228
151741 228
151781 220
151786 220
151791 220
151796 220
151800 232
151801 232
151803 232
151804 232
151810 313
151811 313
151813 313
151814 313
151830 338
151831 338
151840 232, 252, 313, 337, 338
151850 124
151851 124
151853 124
151854 124
151950 383
151951 383
151952 383
151960 383
151961 383
151962 383

152000
152010 337
152011 337
152013 337
152020 337
152021 337
152023 337
152101 315
152200 478
152201 478
152230 485
152231 485
152232 485
152240 485
152241 485
152242 485
152320 479
152321 479
152330 334
152331 334
152340 253
152341 253
152360 127
152361 127
152370 127
152371 127
152380 391
152381 391
152420 483
152421 483
152430 483
152431 483
152600 493
152601 493
152610 492
152611 492
152614 492
152640 478
152641 478
152660 488
152661 488
152750 487
152751 487
152754 487
152760 487
152761 487
152764 487
152780 487
152781 487
152784 487
152790 487
152791 487
152794 487
152960 482
152961 482

153000
153112 499
153130 499
153131 499
153140 499
153141 499
153420 494
153421 494
153424 494
153560 484
153561 484
153564 484
153580 492
153581 492
153584 492
153600 493
153850 494
153851 494
153854 494

155000
155152 360
155156 360
155180 361
155236 360
155372 285
155373 285
155462 138

155463 ... 138
155490 ... 079
155492 ... 079
155520 ... 118
155530 ... 118
155531 ... 118
155540 ... 079
155550 ... 282
155551 ... 282
155552 ... 282
155570 ... 105, 283
155582 ... 080, 105, 283
155583 ... 080, 105, 283
155592 ... 080, 105, 283
155670 ... 246
155673 ... 246
155714 ... 131
155752 ... 197
155780 ... 078
155785 ... 078
155790 ... 078
155795 ... 078
155870 ... 139
155871 ... 139
155910 ... 119
155911 ... 119
155930 ... 119
155931 ... 119
155960 ... 113
155970 ... 113

156000
156050 ... 285
156051 ... 285
156100 ... 081, 105, 283
156111 ... 081, 105, 283
156113 ... 081, 105, 283
156122 ... 081, 105, 283
156141 ... 080, 104
156143 ... 080, 104
156152 ... 080, 104
156268 ... 111
156420 ... 336
156421 ... 336
156500 ... 339
156501 ... 339
156510 ... 339
156511 ... 339
156530 ... 391
156531 ... 391

157000
157671 ... 172
157901 ... 088
157905 ... 088

158000
158400 ... 126
158401 ... 126
158410 ... 126
158411 ... 126
158723 ... 163
158724 ... 163
158733 ... 163
158734 ... 163

159000
159140 ... 173
159141 ... 173
159144 ... 173
159210 ... 174
159211 ... 174
159220 ... 174
159221 ... 174
159230 ... 174
159231 ... 174

160000
160900 ... 164
160901 ... 164
160904 ... 164

161000
161271 ... 399
161281 ... 399
161291 ... 399
161301 ... 399
161461 ... 289
161464 ... 289

165000
165100 ... 183
165221 ... 183
165222 ... 183
165350 ... 182
165356 ... 182
165358 ... 182
165359 ... 182
165390 ... 137
165400 ... 137
165410 ... 137

175000
175060 ... 477
175080 ... 477
175160 ... 477
175180 ... 477
175190 ... 477
175210 ... 477

181000
181530 ... 555
181531 ... 555
181532 ... 555

184000
184000 ... 539
184002 ... 539
184004 ... 539
184010 ... 539
184012 ... 539
184020 ... 539
184022 ... 539
184030 ... 539
184032 ... 539
184060 ... 539
184062 ... 539
184071 ... 536
184140 ... 539
184142 ... 539
184170 ... 539
184172 ... 539
184290 ... 539
184292 ... 539
184300 ... 539
184302 ... 539
184330 ... 539
184332 ... 539
184440 ... 535
184450 ... 535
184452 ... 535
184530 ... 538
184534 ... 538
184590 ... 537
184630 ... 536
184634 ... 536

185000
185580 ... 537
185590 ... 537

186000
186300 ... 555
186301 ... 555
186302 ... 555
186310 ... 555
186311 ... 555
186312 ... 555
186330 ... 555
186331 ... 555
186332 ... 555
186340 ... 555
186341 ... 555
186342 ... 555
186350 ... 555
186351 ... 555
186352 ... 555
186360 ... 555
186361 ... 555
186362 ... 555
186640 ... 555
186641 ... 555
186642 ... 555

188000
188500 ... 557
188510 ... 557
188520 ... 557
188530 ... 556
188550 ... 556

210000
210060 ... 841
210061 ... 841
210064 ... 841
214350 ... 786
214351 ... 786

220000
220000 ... 842

227000
227090 ... 753
227092 ... 753
227140 ... 828
227160 ... 828
227174 ... 651
227176 ... 651
227185 ... 659
227194 ... 661
227195 ... 661
227198 ... 661
227219 ... 565
227220 ... 565
227221 ... 565
227410 ... 618
227418 ... 618
227461 ... 748
227462 ... 748
227504 ... 622
227505 ... 622
227507 ... 622
227508 ... 622
227600 ... 751
227604 ... 751
227680 ... 750
227684 ... 750
227700 ... 700
227701 ... 700
227734 ... 635
227744 ... 635
227922 ... 579, 580

228000
228100 ... 579
228110 ... 579
228130 ... 579
228210 ... 753
228214 ... 753
228240 ... 753
228332 ... 749
228342 ... 749
228370 ... 760
228411 ... 754
228412 ... 754
228430 ... 759

228434 ... 759
228545 ... 607
228555 ... 631
228560 ... 631
228712 ... 575, 576, 613
228722 ... 575, 576
228725 ... 843
228726 ... 843
228730 ... 843
228752 ... 586, 613
228753 ... 573, 591
228754 ... 586
228771 ... 680
228775 ... 680
228776 ... 680
228922 ... 576
228925 ... 576
228935 ... 576
228945 ... 576
228960 ... 567
228965 ... 567

229000
229020 ... 571
229021 ... 571
229022 ... 571
229050 ... 582
229054 ... 582
229057 ... 582
229059 ... 582
229062 ... 730
229071 ... 715
229072 ... 715
229075 ... 715
229081 ... 715
229085 ... 715
229090 ... 627
229100 ... 629
229110 ... 733
229162 ... 580
229172 ... 580
229182 ... 647
229200 ... 760
229230 ... 760
229234 ... 760
229320 ... 759
229324 ... 759
229374 ... 759
229381 ... 763
229383 ... 763
229410 ... 601
229411 ... 601
229420 ... 588
229421 ... 588
229422 ... 572, 588, 589, 603
229423 ... 570
229430 ... 570
229431 ... 570
229432 ... 570
229481 ... 636
229482 ... 636
229521 ... 676
229524 ... 676
229525 ... 676
229531 ... 693
229532 ... 693
229535 ... 693
229551 ... 709
229554 ... 709
229555 ... 709
229561 ... 676
229564 ... 676
229565 ... 676
229571 ... 693
229574 ... 693
229575 ... 693
229664 ... 699
229665 ... 699
229702 ... 730
229740 ... 620
229741 ... 629
229931 ... 717
229935 ... 717
229941 ... 717
229945 ... 717
229951 ... 717
229955 ... 717
229961 ... 712
229965 ... 712
229971 ... 712
229975 ... 712

230000
230030 ... 669
230034 ... 669
230044 ... 655
230045 ... 655
230060 ... 578, 582, 607, 612
230061 ... 582
230063 ... 582
230066 ... 582
230069 ... 582
230084 ... 655
230085 ... 655
230090 ... 603
230100 ... 764
230110 ... 764
230170 ... 751
230174 ... 751
230355 ... 656
230365 ... 680
230435 ... 569
230444 ... 651
230445 ... 651
230465 ... 573
230655 ... 654
230657 ... 654

231000
231010 ... 240, 659
231012 ... 240, 659
231015 ... 240, 659
231035 ... 621
231045 ... 720
231055 ... 720
231072 ... 634
231205 ... 648
231215 ... 586
231225 ... 586
231230 ... 586, 601
231231 ... 605
231233 ... 590
231234 ... 574, 581, 587
231235 ... 600
231305 ... 605
231315 ... 668
231351 ... 667
231355 ... 667
231370 ... 600
231371 ... 600
231410 ... 589
231411 ... 589
231420 ... 590
231440 ... 600
231455 ... 591
231457 ... 591
231465 ... 646
231475 ... 583
231505 ... 612
231515 ... 722
231525 ... 623
231535 ... 623
231541 ... 704
231545 ... 704
231585 ... 646
231595 ... 583
231602 ... 579
231612 ... 579
231672 ... 625
231682 ... 625
231745 ... 670
231765 ... 606
231805 ... 644
231807 ... 644
231815 ... 591
231817 ... 591
231835 ... 602
231845 ... 602
231849 ... 602
231855 ... 592
231865 ... 662
231960 ... 637
231961 ... 637

232000
232045 ... 642
232055 ... 702
232065 ... 562
232075 ... 573
232085 ... 573
232095 ... 568
232101 ... 692
232104 ... 692
232105 ... 692
232115 ... 586
232119 ... 586
232125 ... 586
232135 ... 598
232145 ... 598
232155 ... 596
232165 ... 596
232175 ... 597
232185 ... 597
232195 ... 596, 597
232285 ... 671
232294 ... 605
232295 ... 605
232431 ... 239, 672
232435 ... 239, 672
232441 ... 214, 687
232445 ... 214, 687
232451 ... 687
232455 ... 687
232461 ... 239, 672
232465 ... 239, 672
232471 ... 214, 687
232475 ... 214, 687
232481 ... 690
232485 ... 690
232491 ... 689
232495 ... 689
232497 ... 689
232531 ... 691
232535 ... 691
232537 ... 691
232840 ... 633
232860 ... 633
232864 ... 633
232870 ... 633
232874 ... 633
232880 ... 633
232884 ... 633
232890 ... 633
232894 ... 633
232905 ... 666
232915 ... 666

233000
233094 ... 722
233095 ... 722
233104 ... 722
233105 ... 722
233114 ... 679
233115 ... 679
233134 ... 701
233135 ... 701
233144 ... 613
233145 ... 613
233164 ... 613
233165 ... 613

233184 613
233185 613
233214 679, 701, 722
233215 679, 701, 722
233241 723
233245 723
233251 723
233255 723
233275 613
233285 613
233302 681
233312 681
233407 571
233417 571
233427 588
233437 588
233447 601
233457 601
233500 757
233520 757
233530 757
233540 755
233570 630
233571 630
233580 630
233582 630
233601 731
233605 731
233611 731
233615 731
233621 731
233625 731
233635 732
233639 732
233650 733
233660 733
233792 752
234340 633
234350 633
234401 087, 578
234411 087, 578
234421 087, 578
234430 087, 578
234431 087, 578
234441 087, 578
234505 694
234515 695
234525 677
234535 709

240000
240000 372
240002 373
240004 375
240006 405
240007 372
240008 373
240009 375
240010 375
240020 372
240021 373
240022 375
240024 405

451000
451105 828
451301 828

461000
461060 830
461157 830

464000
464030 839
464031 838
464032 837
464091 838
464108 838
464109 838
464140 833
464142 834
464144 834
464168 839
464170 839
464200 839
464804 835

470000
470500 832
470502 831
470505 831
470506 831
470540 832
470541 831
470542 831
470544 831
470545 831
470546 831
470547 832
470548 832
470549 832

548000
548014 857
548021 857

550000
550073 857
550074 857
550092 857

551000
551372 857
551402 851
551882 850
560122 848

560000
560231 851
560232 851
560233 851
560234 851
560302 846
560332 846
560372 852
560402 852
560422 853
560473 857
560702 851
560704 851
560722 851
560724 851
560741 855

631000
631300 805
631301 805
631302 805
631303 805
631304 805
631305 805
631313 805
631315 805
631317 805
631323 805
631325 805
631327 805
631337 369
631339 369
631347 369
631349 369

900000
900011 629, 630

955000
955135 842

961000
961034 841
961037 841
961250 841
961270 841
961271 841
961276 841

1000100
1000127 352
1000128 352
1000129 352
1000130 352
1000131 352
1000132 352
1000135 353
1000136 353

1000300
1000324 251
1000326 251
1000327 216
1000328 216
1000329 216
1000330 216
1000331 693
1000332 314, 706
1000333 234, 657
1000334 234, 683
1000335 686
1000336 648
1000339 706
1000340 236, 678
1000342 236, 678
1000343 587
1000344 587
1000345 587
1000346 587
1000384 752
1000387 453
1000390 453
1000398 562, 563

1000400
1000416 587
1000417 587
1000418 587
1000422 241
1000423 241
1000426 335
1000427 335
1000433 117
1000434 116
1000435 116
1000436 116
1000437 286
1000438 117
1000439 116
1000440 116
1000441 116
1000442 286
1000443 286
1000445 286
1000446 683
1000447 706
1000448 657
1000449 579
1000457 769
1000458 769
1000459 769
1000460 769
1000461 769
1000462 769
1000463 769
1000464 769
1000465 769
1000466 770, 773
1000467 770, 773
1000468 770, 773
1000469 770, 773
1000470 770
1000471 770

1000472 771
1000473 771
1000474 771
1000475 771
1000476 771
1000477 771
1000478 771
1000479 771
1000480 771
1000481 771
1000482 771
1000483 771
1000484 771
1000485 771
1000486 771
1000487 770
1000488 770
1000489 770
1000496 776
1000497 776
1000498 776

1000500
1000505 775
1000506 775
1000507 775
1000514 775
1000515 775
1000516 775
1000523 775
1000524 775
1000525 775
1000532 775
1000533 775
1000534 775
1000535 779
1000536 779
1000537 779
1000540 777
1000546 777
1000549 777
1000552 777
1000555 777
1000556 778
1000557 778
1000558 778
1000559 778
1000560 778
1000561 778
1000562 778
1000563 778
1000564 778
1000565 778
1000566 778
1000567 778
1000568 778
1000569 778
1000570 778
1000571 777
1000574 385
1000575 385
1000576 386
1000577 386
1000579 081, 105, 283
1000580 081, 105, 283
1000587 698
1000588 698

1000600
1000613 204
1000614 206
1000615 206
1000616 205
1000618 205
1000619 205
1000621 207
1000623 207
1000624 207
1000631 315
1000634 223
1000635 223
1000636 223
1000637 223
1000638 212
1000639 212
1000640 212
1000655 752
1000656 491
1000657 491
1000658 491
1000665 572
1000666 572
1000668 269
1000669 269
1000670 269
1000677 488
1000678 488
1000681 645
1000682 577
1000683 577
1000685 306
1000686 306
1000687 306
1000688 306
1000689 306
1000690 306
1000691 307
1000692 307
1000693 307
1000694 307
1000695 307
1000696 307

1000700
1000702 350
1000703 350
1000704 350
1000707 480
1000708 480
1000709 499
1000710 499
1000711 521
1000712 521
1000713 523
1000714 396
1000715 396
1000716 396
1000717 396
1000718 397
1000719 397
1000720 397
1000721 397
1000725 152, 302
1000726 152, 302
1000727 152, 302
1000729 252
1000730 252
1000731 252
1000732 252
1000733 275
1000734 275
1000735 631
1000736 610, 611, 631
1000743 191
1000745 191
1000746 191
1000748 191
1000760 584
1000761 584
1000762 584
1000763 079
1000764 081, 102
1000769 493
1000773 102
1000777 265
1000778 265
1000780 265
1000781 265
1000783 304
1000784 304
1000785 304
1000786 304
1000792 452
1000794 452
1000797 660
1000799 593

1000800
1000801 593
1000807 313
1000808 313
1000809 130, 313
1000810 130, 313
1000811 130, 313
1000812 130, 313
1000813 130
1000814 130
1000820 642
1000821 563
1000822 578
1000823 702
1000824 205
1000825 207
1000827 184
1000828 184
1000833 737
1000834 648
1000835 707
1000855 146, 296
1000856 146, 296
1000857 146, 296
1000864 146, 296
1000865 146, 296
1000866 146, 296
1000880 700
1000881 700
1000886 345
1000887 345
1000888 345
1000889 345
1000890 345
1000891 345
1000892 345
1000893 345
1000894 345
1000895 345
1000896 345
1000897 345

1000900
1000909 842
1000910 210
1000911 210
1000914 416
1000915 416
1000917 416
1000918 184, 185
1000926 170
1000927 170
1000928 170
1000929 170
1000930 170
1000931 170
1000932 170
1000933 170
1000934 170
1000935 170
1000936 170
1000937 170
1000939 234, 657, 851
1000940 851
1000957 105, 283
1000974 522
1000975 522
1000977 522
1000978 522
1000980 490
1000981 490
1000983 490
1000984 490

1000986 490
1000987 490
1000989 490
1000990 490
1000992 491
1000993 491
1000995 491
1000996 491
1000998 491
1000999 491

1001000
1001001 491
1001002 491
1001009 275
1001010 275
1001015 404, 743
1001016 404, 743
1001017 404, 743
1001018 404, 743
1001019 371
1001020 371
1001030 849
1001031 853
1001033 853
1001035 856
1001038 856

1001100
1001114 834
1001115 834
1001132 453
1001133 453
1001136 453
1001155 392
1001156 392
1001165 402, 738
1001166 402, 738
1001167 402, 738
1001168 402, 738
1001169 402, 738
1001170 402, 738
1001171 402, 738
1001172 402, 738

1001200
1001242 850
1001244 850
1001249 839
1001250 458
1001251 459
1001252 747
1001253 747
1001254 747
1001255 747
1001256 746
1001262 747
1001263 747
1001264 406
1001265 117
1001266 116
1001267 834
1001272 202
1001273 202
1001274 202
1001275 202
1001276 202
1001283 370
1001284 370
1001285 370
1001286 370
1001287 370
1001288 370
1001289 483
1001290 483
1001292 483
1001295 172
1001296 172
1001297 172
1001299 268

1001300
1001300 268
1001301 268
1001303 268
1001304 268
1001305 268
1001306 169
1001307 169
1001308 169
1001309 169
1001310 169
1001312 169
1001314 365
1001315 365
1001316 365
1001317 365
1001344 160
1001345 160
1001347 160
1001348 160
1001350 116
1001351 116
1001357 856
1001359 746
1001367 495
1001368 495
1001369 495
1001380 477
1001382 477
1001390 477
1001392 477
1001393 477
1001395 477

1001400
1001400 168
1001401 168
1001403 168
1001404 168
1001406 168
1001407 168
1001409 168
1001410 168
1001419 486
1001420 486
1001421 486
1001422 486
1001423 317
1001424 317
1001425 317
1001426 317
1001427 486
1001428 486
1001429 486
1001430 486
1001431 317
1001432 317
1001433 317
1001434 317
1001435 317
1001436 317
1001447 163
1001448 163
1001449 244
1001450 244
1001451 245
1001452 245
1001453 245
1001454 245
1001460 082
1001461 082
1001462 083
1001463 083
1001464 275
1001465 275
1001466 481
1001467 481
1001468 243
1001469 243
1001470 481
1001471 481
1001472 243
1001473 243
1001474 481
1001475 481
1001476 495
1001477 495
1001478 495
1001479 495
1001480 495
1001481 495
1001482 495
1001483 495
1001484 495
1001485 516
1001486 516
1001488 581
1001489 581
1001490 581
1001491 581
1001492 581
1001493 581
1001494 581
1001495 334
1001496 334

1001500
1001505 305
1001506 305
1001508 305
1001509 305
1001510 501
1001511 501
1001512 501
1001513 502
1001514 502
1001515 502
1001516 502
1001517 502
1001518 502
1001519 502
1001520 502
1001521 503
1001522 503
1001523 503
1001524 503
1001525 503
1001526 503
1001527 503
1001528 503
1001529 503
1001530 503
1001531 505
1001532 505
1001533 505
1001534 505
1001536 505
1001537 505
1001538 505
1001539 505
1001542 098, 503
1001568 851
1001570 851
1001572 851
1001574 846
1001575 846

1001600
1001647 163
1001648 163
1001676 070
1001677 070
1001678 070
1001691 184, 185
1001692 184, 185

1001700
1001701 118
1001756 855
1001778 564

1001796 787
1001797 787
1001798 787
1001799 787

1001800
1001800 787
1001801 787
1001802 787
1001803 787
1001804 787
1001805 787
1001806 786
1001807 786
1001808 786
1001809 786
1001813 786
1001814 785
1001815 786
1001816 785
1001817 785
1001818 098
1001819 098
1001820 098
1001821 098
1001823 603
1001824 603
1001855 716
1001856 716
1001857 276
1001858 276
1001861 516
1001862 520
1001863 520
1001864 520
1001865 482
1001866 482
1001867 482
1001868 511
1001869 511
1001870 511
1001871 485
1001872 485
1001874 512
1001875 512
1001876 512
1001877 148, 298
1001878 149, 299
1001879 149, 299
1001880 149, 299
1001881 148, 298
1001882 148, 298
1001883 149, 299
1001884 149, 299
1001885 149, 299
1001886 149, 299
1001887 149, 299
1001888 149, 299
1001889 150, 300
1001890 151, 301
1001891 151, 301
1001892 151, 301
1001893 150, 300
1001894 150, 300
1001895 150, 300
1001896 150, 300
1001897 150, 300
1001898 150, 300
1001899 150, 300

1001900
1001900 150, 300
1001901 454
1001902 455
1001903 455
1001904 455
1001905 456
1001906 456
1001907 456
1001908 457
1001916 852
1001917 852
1001918 848
1001919 848
1001920 850
1001921 850
1001922 850
1001923 850
1001924 416
1001925 416
1001927 416
1001930 403, 737
1001931 403, 737
1001932 403, 737
1001933 403, 737
1001934 737
1001937 621
1001938 621
1001939 289
1001940 111
1001941 111
1001942 111
1001943 111
1001944 111
1001945 111
1001950 121, 144-153, 294-303
1001951 121, 144-153, 294-303
1001952 121, 144-153, 294-303
1001962 629
1001963 629
1001964 618
1001965 618
1001968 524
1001969 667
1001970 667
1001978 429
1001980 420
1001981 420
1001982 420
1001989 429
1001990 429
1001991 429
1001992 429
1001993 429
1001994 420
1001995 420
1001996 420
1001997 580
1001998 580
1001999 574

1002000
1002000 574
1002001 574
1002002 642
1002003 321
1002004 319
1002005 319
1002006 319
1002008 321
1002010 319
1002011 319
1002012 319
1002013 319
1002015 319
1002016 656
1002017 656
1002018 680
1002020 357
1002021 357
1002022 357
1002023 350
1002024 350
1002025 350
1002029 349
1002030 349
1002032 691
1002033 691
1002034 691
1002035 689
1002036 689
1002037 689
1002041 680
1002045 137
1002046 137
1002047 106
1002048 497
1002049 497
1002050 497
1002051 308
1002052 308
1002053 181
1002054 181
1002055 181
1002056 181
1002057 181
1002058 181
1002059 181
1002066 271
1002067 271
1002068 072
1002069 669
1002070 669
1002071 669
1002075 358
1002076 358
1002077 358
1002082 835
1002098 408, 741
1002099 408, 741

1002100
1002100 408, 741
1002101 408, 741
1002102 408, 741
1002103 408, 741
1002110 514
1002111 514
1002113 514
1002116 258
1002117 258
1002118 258
1002119 258
1002124 854
1002126 854
1002127 854
1002132 356
1002133 356
1002134 356
1002135 846
1002136 115
1002137 115
1002138 115
1002139 114
1002140 253
1002145 085
1002146 085
1002147 200
1002148 200
1002149 200
1002150 085
1002151 528
1002152 528
1002153 528
1002155 670
1002157 711
1002158 606
1002159 096
1002160 096
1002161 096
1002162 096
1002163 098
1002164 098
1002165 098
1002167 094
1002168 095
1002169 126
1002170 126
1002171 127
1002172 127

1002173 253
1002185 751
1002186 751
1002187 757
1002188 754
1002189 749
1002190 262
1002191 262
1002192 262
1002198 610
1002199 610

1002200
1002200 611
1002201 622
1002202 622
1002203 622
1002204 397
1002205 397
1002206 397
1002207 397
1002208 397
1002209 397
1002210 397
1002211 397
1002215 316, 332
1002216 316
1002217 102
1002218 830
1002220 830
1002221 830
1002228 263
1002229 263
1002232 454, 456
1002236 787
1002237 787
1002238 209
1002239 225
1002240 225
1002264 098
1002265 098

1002400
1002402 652
1002403 653
1002404 086
1002405 086
1002420 454, 456
1002422 455, 456, 457
1002423 837
1002424 837
1002430 258
1002431 258
1002432 258
1002494 566

1002500
1002503 674
1002504 675
1002505 675
1002558 097
1002562 097
1002563 097
1002564 097
1002582 071
1002583 071
1002584 333
1002585 333
1002591 416
1002592 416
1002594 416
1002596 416
1002597 667
1002598 438
1002599 438

1002600
1002600 438
1002601 438
1002602 554
1002603 554
1002604 554
1002605 673
1002606 673
1002607 257
1002608 257
1002610 510
1002611 510
1002612 510
1002631 475
1002632 475
1002633 475
1002634 475
1002635 475
1002636 475
1002637 476
1002638 476
1002639 476
1002640 476
1002641 476
1002642 476
1002643 476
1002644 476
1002645 476
1002646 476
1002647 476
1002648 477
1002649 476
1002650 477
1002651 477
1002652 477
1002653 477
1002654 477
1002655 477
1002656 477
1002657 477
1002658 477
1002659 477
1002660 477
1002661 472
1002662 472
1002681 495
1002682 495
1002683 495
1002686 499
1002688 551
1002689 551
1002690 551
1002691 829
1002692 829
1002693 829
1002694 550
1002695 550
1002696 550
1002697 555
1002698 555
1002699 555

1002700
1002700 555
1002701 555
1002702 555
1002703 555
1002704 555
1002705 555
1002785 833
1002791 833
1002792 834

1002800
1002803 833
1002827 853
1002828 853
1002838 176
1002839 176
1002842 213
1002843 213
1002844 213
1002845 477, 503, 526, 529
1002847 089
1002848 089
1002849 177
1002850 177
1002853 696, 697
1002854 519
1002855 246
1002856 246
1002858 121
1002859 249
1002860 273
1002861 548
1002862 548
1002863 548
1002864 549
1002865 549
1002866 549
1002867 720
1002868 658
1002869 658
1002870 608
1002871 608
1002873 513
1002874 513
1002875 513
1002876 480
1002877 480
1002878 480
1002879 446
1002880 446
1002881 447
1002882 153, 303
1002884 719, 720
1002885 446
1002886 446
1002887 447
1002888 446
1002889 446
1002890 155
1002891 155
1002893 763
1002895 763
1002897 763
1002898 763
1002899 763

1002900
1002900 688
1002902 688
1002903 721
1002904 721
1002905 700
1002906 607
1002907 607
1002909 157
1002910 157
1002911 157
1002912 157
1002913 157
1002914 157
1002915 194
1002917 194
1002918 194
1002919 194
1002920 242
1002921 242
1002922 388
1002925 198
1002926 198
1002927 198
1002928 213
1002929 213
1002930 213
1002931 232
1002932 232
1002933 232
1002934 312
1002935 312
1002936 312
1002937 123
1002938 123

1002939 123
1002940 359
1002941 359
1002942 247
1002943 247
1002944 284
1002945 284
1002946 139
1002947 139
1002948 115
1002949 115
1002950 115
1002951 114
1002952 665
1002953 665
1002954 665
1002955 665
1002956 599
1002957 599
1002958 599
1002959 599
1002960 271
1002961 271
1002962 220
1002964 220
1002965 312
1002967 289
1002968 289
1002969 343
1002970 343
1002971 343
1002973 343
1002974 343
1002975 343
1002976 343
1002977 343
1002978 343
1002979 382
1002980 382
1002981 382
1002982 388
1002983 388
1002984 388
1002985 273
1002986 273
1002987 273
1002989 664
1002990 664
1002991 604
1002992 604
1002993 199
1002994 820
1002996 792
1002997 792
1002998 792
1002999 792

1003000
1003001 609
1003006 135
1003007 135
1003008 448
1003009 448
1003010 448
1003011 449
1003012 449
1003013 449
1003014 367
1003015 367
1003016 367
1003017 366
1003018 366
1003019 366
1003022 226
1003023 226
1003024 470
1003025 470
1003026 470
1003027 470
1003028 079
1003029 079
1003030 078
1003031 078
1003032 079
1003033 079
1003034 245
1003035 245
1003036 399
1003037 399
1003038 399
1003039 399
1003040 305
1003041 305
1003042 305
1003043 305
1003044 161
1003045 161
1003046 161
1003047 161
1003048 163
1003049 163
1003050 163
1003051 163
1003052 305
1003053 305
1003054 305
1003055 305
1003057 427
1003058 427
1003059 427
1003060 427
1003061 427
1003062 427
1003063 427
1003064 427
1003065 428
1003066 428
1003067 428
1003068 428
1003069 428
1003070 428
1003073 461
1003074 460
1003075 461
1003076 463
1003077 463
1003078 463
1003079 463
1003080 463
1003081 463
1003083 461
1003084 461
1003085 855
1003087 850
1003088 850
1003090 853
1003091 856
1003092 856
1003093 854
1003094 850
1003095 850
1003096 856
1003097 854
1003098 855
1003099 856

1003100
1003100 855
1003101 848
1003102 846
1003104 833
1003105 833
1003106 830
1003107 185

1003200
1003254 835
1003275 179
1003276 179
1003277 179
1003278 179
1003279 179
1003280 179
1003281 179
1003282 179
1003283 325
1003284 325
1003285 325
1003286 325
1003287 325
1003288 325
1003289 325
1003290 325
1003291 489
1003292 489
1003293 489
1003294 489
1003295 489
1003296 489
1003297 489
1003298 489
1003299 442

1003300
1003300 442
1003301 442
1003302 442
1003303 442
1003304 442
1003305 442
1003306 442
1003307 443
1003308 443
1003309 443
1003310 443
1003311 443
1003312 443
1003313 443
1003314 443
1003316 218
1003317 218

1003400
1003416 696
1003417 696
1003418 697
1003419 697
1003420 710
1003421 710
1003422 684
1003423 684
1003424 685
1003425 685
1003426 705
1003427 705
1003428 201
1003429 201
1003430 201
1003431 201
1003432 133
1003435 128
1003436 129
1003437 696
1003438 697
1003439 710
1003440 684
1003441 685
1003442 705
1003443 136
1003444 136
1003447 637
1003448 637
1003449 713
1003450 713
1003451 713
1003452 713
1003453 669
1003454 669
1003455 254
1003456 254

1003457 254
1003458 254
1003459 255
1003460 255
1003466 389
1003467 238
1003468 238
1003492 277
1003493 277

1003500
1003518 718
1003519 718
1003520 088
1003521 088
1003523 089
1003524 089
1003525 176
1003526 176
1003527 177
1003528 177
1003530 165
1003532 165
1003535 595
1003536 595
1003537 595
1003538 595
1003539 688

1004600
1004649 719
1004650 690
1004651 682
1004652 620
1004653 719
1004654 608
1004655 608
1004657 192
1004660 193
1004661 193
1004662 193
1004663 193
1004664 331
1004665 331
1004666 315
1004667 315
1004668 445
1004669 445
1004670 233
1004671 233
1004672 107
1004673 107
1004674 098
1004675 098
1004676 098
1004677 703
1004678 650
1004679 650
1004680 575
1004681 575
1004682 200
1004683 200
1004684 477
1004685 477
1004686 496
1004687 496
1004688 496
1004689 496
1004690 471
1004691 471
1004692 471
1004693 471
1004694 448
1004695 448
1004696 448
1004697 449
1004698 449
1004699 449

1004700
1004700 367
1004701 367
1004702 367
1004703 366
1004704 366
1004705 366
1004706 250
1004707 250
1004708 793
1004709 793
1004710 793
1004712 794
1004713 794
1004714 794
1004716 795
1004717 795
1004718 795
1004719 795
1004720 796
1004721 796
1004722 797
1004723 797
1004725 798
1004726 801
1004727 799
1004730 261
1004731 261
1004732 208
1004733 211
1004734 800
1004735 800
1004736 800
1004737 802
1004738 196
1004739 196
1004740 217
1004741 217
1004742 217
1004743 217
1004744 098
1004745 098
1004746 098
1004747 663
1004748 663
1004749 585
1004750 585
1004751 585
1004757 619
1004759 158
1004760 158
1004761 158
1004762 158
1004763 158
1004764 158
1004765 159
1004766 159
1004767 159
1004768 159
1004769 473
1004770 473
1004771 473
1004772 473
1004776 832
1004780 835
1004781 835
1004782 835
1004783 529
1004784 529
1004785 529

1004800
1004889 772
1004890 772
1004893 773
1004894 773
1004895 773
1004896 781
1004897 781
1004898 781
1004899 781

1004900
1004900 782
1004901 782
1004902 783
1004903 783
1004904 783
1004905 781
1004906 781
1004907 781
1004908 781
1004909 782
1004910 782
1004911 783
1004912 782
1004913 782
1004914 782
1004915 782
1004916 782
1004917 782
1004918 775
1004919 775
1004920 775
1004921 775
1004922 775
1004923 775
1004924 776
1004925 776
1004926 776
1004927 777
1004928 777
1004929 777
1004930 777
1004931 777
1004937 474
1004938 474
1004939 477
1004940 477
1004941 477
1004942 477
1004943 477
1004944 477
1004957 719
1004969 192
1004970 072
1004971 260
1004972 848
1004973 848
1004974 848

1005000
1005075 848
1005076 848
1005077 848
1005078 848
1005079 848
1005080 848
1005081 849
1005082 849
1005083 849
1005085 362
1005086 362
1005087 363
1005088 363
1005089 714
1005090 714


1001896 300
1001900 300
1001891 301
1001893 300

NEW NUMINOS

LIGHTING SYSTEM

NUMINOS S, DL 26-27
NUMINOS M, DL 28-29
NUMINOS L, DL 30-31
NUMINOS XL, DL 32-33

NUMINOS MOVE M, DL 34-35
NUMINOS MOVE L, DL 36-37
NUMINOS MOVE XL, DL 38-39
NUMINOS, DL accessories 40-41

NUMINOS S, 3-circuit 42-43
NUMINOS M, 3-circuit 44-45
NUMINOS L, 3-circuit 46-47

NUMINOS S, CW 48-49
NUMINOS M, CL 50-51
NUMINOS L, CL 52-53

NUMINOS S, CL. 54-55
NUMINOS M, CL 56-57
NUMINOS L, CL 58-59

NUMINOS S, PD 60-61
NUMINOS M, PD 62-63
NUMINOS L, PD 64-65

1-CIRCUIT

1-CIRCUIT RECESSED TRACK 526
1-CIRCUIT RECESSED TRACK accessories 526
1-CIRCUIT SURFACE-MOUNTED TRACK 528
1-CIRCUIT SURFACE-MOUNTED TRACK accessories 529

3-CIRCUIT

EUTRAC®

EUTRAC® 3-CIRCUIT SURFACE-MOUNTED TRACK 501
EUTRAC® 3-CIRCUIT SURFACE-MOUNTED TRACK accessories 502, 503
EUTRAC® 3-CIRCUIT RECESSED TRACK 505
EUTRAC® 3-CIRCUIT RECESSED TRACK accessories 505

S-TRACK

S-TRACK 3-CIRCUIT SURFACE-MOUNTED TRACK DALI 474, 475
S-TRACK 3-CIRCUIT SURFACE-MOUNTED TRACK DALI accessories 476, 477

A

ABRIDOR 60/100 Pole 604
ABRIDOR SENSOR WL 664
ABRIDOR WL 664
ACCANTO CL, E27 284
ACCANTO PD, E27 139
ACCANTO SPOT SQUARE WL, E27 246
ACCANTO WL, E27 247

ACCESSORIES

1-10V Dimmer 10W 831
Cable clamp 840
Cable extension 842
Ceiling hook 840
Ceiling rosette 841
COMPENSATION MODULE 833
Connector box 843
Connector strip 3 outlets 842
DALI Controller 24V DC 830
DALI Interface 0-10V + on/off 830
DALI Universal Dimmer 10-300W 830
DALI Universal Dimmer 3-25W 830
Double-sided tape 842
GU10 socket 842
GU10 socket with connection box and quick clamp 842
LED driver 1000mA | 40W 834
LED driver 1000mA | 40W incl. strain relief 839
LED driver 1050mA | 40W incl. strain relief 835
LED driver 200mA | 6-8.4W incl. strain relief 835
LED driver 250mA | 10W 835
LED driver 320mA | 3W incl. strain relief 838
LED driver 350mA | 10W 833
LED driver 350mA | 15W 833
LED driver 350mA | 3W incl. strain relief 838
LED driver 350mA | 6W 833
LED driver 350mA | 9W incl. strain relief 838
LED driver 350mA incl. strain relief 838
LED driver 500/600/700mA | 30W incl. strain relief 835
LED driver 500mA | 15W 834
LED driver 500mA | 9W incl. strain relief 838
LED driver 700mA | 10W incl. strain relief 834
LED driver 700mA | 11W incl. strain relief 839
LED driver 700mA | 39W incl. strain relief 834
LED driver 700mA | 3W incl. strain relief 839
LED driver 700mA | 40W incl. strain relief 834
LED driver 700mA | 40W incl. strain relief 839
LED driver 700mA | 6W 834
LED driver 800/900/1050mA | 40W incl. strain relief 835
LED driver DALI 250-700mA | 20W incl. strain relief 837
LED driver DALI 250-700mA | 40W incl. strain relief 837
LED driver DALI 350-1050mA | 60W incl. strain relief 837
LED driver DALI 700-1500mA | 50W incl. strain relief 837
LED driver VALETO® 1050mA | 45W incl. strain relief 839
SLV VALETO® 350/500/700mA | 15W, LED driver 835
LED power supply 12V/24V DC | 12W 831
LED power supply 12V/24V DC | 12W round 831
LED power supply 12V/24V DC | 20W 831
LED power supply 24V | 100W 832
LED power supply 24V | 100W 833
LED power supply 24V | 50W 833
LED power supply 24V DC | 100W 832
LED power supply 24V DC | 100W 832
LED power supply 24V DC | 150W 832
LED power supply 24V DC | 150W 832
LED power supply 24V DC | 20W 832
LED power supply 24V DC | 36W 831
LED power supply 24V DC | 60W 831
Stopper for wire rope 841
Textile cable 3-pole, 3 x 0.75 mm², 10m 841
Transformer 12V AC | 10VA IP44 828
Transformer 12V AC | 60VA 830
Transformer 12V AC | 60VA IP44 828
Transformer 12V AC | 150VA 830
Transformer 12V AC | 105VA 828
Transformer 12V AC | 300VA 828
Transformer TENSEO 12V AC | 50VA 829
Transformer TENSEO 12V AC | 105VA 829
Transformer TENSEO 12V AC | 210VA 829
T-connector box 843
Wire rope suspension 841

ADEGAN FL, E27 567
ADEGAN MANILA FL, E27 566
ADI EL 732
ADJUST 135 EL, square/round, QPAR51 753
ADJUST 190 EL, square/round, QR111 753
ADJUST 265 EL, round, HIT-CE 753
AINOS CW 712
AINOS CW SENSOR 712
AINOS CW SENSOR, square 713
AINOS CW, square 713

AIXLIGHT®

AIXLIGHT® 150 PD, R2 Office, PHASE 173
AIXLIGHT® PD, R2, double, QPAR111 174
AIXLIGHT® PD, R2, quad, QPAR111 174
AIXLIGHT® PRO 50 LED Module 438
AIXLIGHT® PRO 50 QPAR51 Module 438
AIXLIGHT® PRO 50 accessories 438
AIXLIGHT® PRO EL, QPAR111 Module 439
AIXLIGHT® PRO accessories 439
AKALO D83 EL, PHASE 406
ALAMEA EL 452
ALPA CONE 100 Pole, E27 576
ALPA MUSHROOM 45/75 Pole, E27 576
ALTRA DICE CL, QPAR51 316
ALTRA DICE CW, double, QPAR51 ..... 316, 332
ALTRA DICE TRACK 1-circuit, QPAR51 517
ALTRA DICE TRACK 3-circuit, QPAR51 479
ANDREAS WL, QT-DE12 198
ANELA CL, PHASE 313
ANELA Display 275
ANELA PD, PHASE 130
ANGOLUX SENSOR WL 667
ANGOLUX SOLAR WL 667
ANGOLUX WL 667
ANILA EASYTEC® II, QPAR51 536
ANINDA 120 EL 453
ANINDA 60 EL 453
APONI 90/120 Pole, PHASE 577
APONI WL, PHASE 645
ARLINA 60/130 WL 225
AROSA PD, 1.25m, PHASE 111
AROSA PD, 2m, PHASE 111
ARROCK ARC Pole, QPAR51 590
ARROCK GRANITE 40/70 Pole, square, E27 589
ARROCK SLOT Pole, QPAR51 600
ARROCK STONE 50/75 Pole 600
ASMARA LV, QR-C51 544
ASSO 300 WL 223
ASSO 300 WL, PHASE 223
ASSO 70 WL 222
ASSO WL, PHASE 223
ASTINA CL, QPAR51 312
ASTINA PD, QPAR51 123
ASTINA STEEL WL 681
ASTINA STEEL WL, QPAR51 681
ASTINA UP/DOWN WL, QPAR51 232
ASTINA WL, QPAR51 680
ASTO CW, double, QPAR51 347
ASTO CW, quad, QPAR51 347
ASTO CW, single, QPAR51 347
ASTO CW, triple, QPAR51 347
ASTO QPAR51 347
ASTO TUBE CW, double, QPAR51 341
ASTO TUBE CW, QPAR51 341
ASTO TUBE CW, single, QPAR51 341
ASTO TUBE CW, triple, QPAR51 341
AVENTO 110 PD 113
AVENTO 30 PD 113
AVO CW, double, QPAR51 345
AVO CW, QPAR51 345
AVO CW, quad, QPAR51 345
AVO CW, single, QPAR51 345
AVO CW, triple, QPAR51 345
AVO TRACK 1Ph., QPAR51 511
AVO TRACK 3Ph., QPAR51 478

B

BASKET WL, E27 199
BATO 35 CW, E27 191
BATO 35 CW, PHASE 191
BATO 35 PD, E27 116
BATO 35 PD, PHASE 116
BATO 45 CW, E27 286
BATO 45 CW, PHASE 286
BATO 45 PD, E27 117
BATO 45 PD, PHASE 116

BATTEN LED

BATTEN LED 220-240V ~50/60Hz 805
BATTEN LED 220-240V ~50/60Hz accessories 805

BEDSIDE EL, left 390
BEDSIDE EL, right 390
BENA 120 CW 369
BENA 150 CW 369
BENDO 80/220 Pole, PHASE 602
BENDO WL, PHASE 662
BIG NAILS 50/80 Pole 580
BIG NAILS 50/80 Pole, E27 580
BIG NAILS PLUS 50/80 Pole, E27 579
BIG NAILS WL, E27 647
BIG NAUTILUS SP, round, QPAR51 618

BIG PLOT Cover, 2 slots 747
BIG PLOT Cover, 4 slots 747
BIG PLOT Module 746
BIG QUAD UP/DOWN WL 687
BIG QUAD WL 239, 672
BIG SUN PD, E27 137
BIG THEO FLOOD UP/DOWN WL 694
BIG THEO BEAM UP/ FLOOD DOWN WL 695
BIG THEO CL 709
BIG THEO CL, QPAR111 709
BIG THEO Up/Down WL, QPAR111 693
BIG THEO WL 677
BIG THEO WL, QPAR111 676
BILAS CW, single, PHASE 336
BIMA 1Ph., double, QPAR51 515
BIMA 1Ph., single, QPAR51 515
BIMA 2 EASYTEC® II, double, QPAR51 535
BIMA 3Ph., double, QPAR51 485
BIMA 3-circuit, single, QPAR51 485
BIMA EASYTEC® II, single, QPAR51 535
BOOKAT Pole, PHASE 592
BOX UP/DOWN WL, QT-DE12 690
BOX-L WL 689
BOX-L WL, E27 689
BRENDA TL, Wireless charging 075
BRICK DOWNUNDER EL 730
BRICK DOWNUNDER EL, E14 730
BRICK EL, asymmetrical 733
BRICK EL, symmetrical 733
BRICK MESH EL 733
BULAN CW, E14 715
BULAN GRID CW, E27 715

C

C-POL Pole, E27 583
C-POL WL, E27 646
CARISO WL, PHASE 228
CHROMBO WL, PHASE 218
COMET LED LV 551
COMET LV, QR-C51 551
CONE FL, E27 569
CONNECTED LED PANEL 595x595mm, UGR<19 458
CONNECTED LED PANEL 620x620mm, UGR<19 459
CONTONE® EL, round/square, rigid, PHASE 399
CONTONE® EL, round/square, adjustable, PHASE 399
COSMIC LV, QR-C51 545
COUPA FLEX WL 248
COUPA WL, QT14 249
CUBIX FL, QPAR51 569
CV SPOT SP, short 625
CV SPOT SP, long 625

D

DASAR®

DASAR® 70 EL, square, QPAR51 759
DASAR® 80 EL, square/round, QPAR51 759
DASAR® 215 EL, square/round, QPAR111 760
DASAR® 215 EL, round, E27 760
DASAR® 218 EL, QR111 760
DASAR® 255 EL 763
DASAR® 270 EL, asymmetrical 763
DASAR® 270 EL, symmetrical 763
DASAR® 370 EL, round 755
DASAR® 920 EL 757
DASAR® EL, T16 764
DASAR® EXACT 116 EL, square/round, QPAR51 759
DASAR® FLAT 80 EL 754
DASAR® PROJECTOR SP, 12/24V 630
DASAR® PROJECTOR SP, 230V 630

DEKLED EL 393
DELO WL 659
DELWA WL 236, 678
DENA 30 WL, E14 199
DEVIN WL, Double, PHASE 262
DINGILO EL, round, adjustable 399
DIO FLEX PLATE WL 258
DIO FLEX PLATE WL QPAR51 257
DIRETO 60 WL, PHASE 217
DIRETO 90 WL, PHASE 217
DISPLAY 277
DISPLAY ADL 50 QPAR51 273
DL 126 EL 393
DOLIX OUT EL, square, QPAR51 ..... 402, 738
DOLIX OUT EL, round, QPAR51 ..... 402, 738
DORISA 30 265
DORISA 50 265
DOWNUNDER OUT S EL 731
DOWNUNDER OUT M EL 731
DOWNUNDER OUT L EL 731
DOWNUNDER OUT square 658
DOWNUNDER OUT round 658
DOWNUNDER PUR 120 EL 383
DOWNUNDER PUR 150 EL 383
DOWNUNDER PUR 80 EL 383
DURNO 548

E

EASYTEC® II

EASYTEC® II, TRACK 539
EASYTEC® II, TRACK accessories 539

ENOLA

ENOLA B CL, QPAR51 313
ENOLA B CW, double, QPAR51 ..... 337, 338
ENOLA B CW, single, QPAR51 337
ENOLA B PD, QPAR51 ..... 124, 523
ENOLA B TRACK 1-circuit, QPAR51 514
ENOLA B WL, QPAR51 ..... 232, 252
ENOLA C CL 315
ENOLA C CL, PHASE 315
ENOLA C Pole 607
ENOLA C TRACK 1-circuit 521
ENOLA C TRACK 3-circuit 483
ENOLA L ROUND UP/DOWN S WL 685
ENOLA L ROUND UP/DOWN M WL 685
ENOLA L ROUND UP/DOWN L WL 685
ENOLA PD, E27 125
ENOLA ROUND S CL 705
ENOLA ROUND S WL, single 684
ENOLA ROUND M CL 705
ENOLA ROUND M WL, single 684
ENOLA ROUND L CL 705
ENOLA ROUND L WL, single 684
ENOLA SQUARE S CL 710
ENOLA SQUARE S UP/DOWN WL 697
ENOLA SQUARE S WL, single 696
ENOLA SQUARE M CL 710
ENOLA SQUARE M UP/DOWN WL 697
ENOLA SQUARE M WL, single 696
ENOLA SQUARE L UP/DOWN WL 697
ENOLA SQUARE L CL 710
ENOLA SQUARE L WL, single 696

ESKINA 30/80 Pole, PHASE 607
ESKINA D Display, PHASE 700
ESKINA FRAME 45/75 Pole, single 585
ESKINA FRAME 75 Pole, double 585
ESKINA FRAME WL 663
ESKINA FRAME WL, double 663
ESKINA SPOT CW, PHASE 721
ESKINA SPOT SENSOR CW, PHASE 721
EURO CUBE 3-circuit 487
EURO SPOT TRACK 1-circuit 516
EURO SPOT TRACK 1-circuit QPAR51 516
EURO SPOT TRACK 3-circuit 495
EURO SPOT TRACK 3Ph., QPAR111 494
EURO SPOT TRACK 3-circuit, QPAR51 494

F

F-POL Pole, E27 583
F-POL WL, E27 646

FENDA

FENDA BOW BASIS FL, E27 079
FENDA ceiling rosette, E27 282
FENDA FL, E27 ..... 078, 079
FENDA glass shade 102
FENDA half shade 202
FENDA Ø 15 cm, round 080, 104
FENDA Ø 20cm, round 245
FENDA Ø 30 cm, round 080, 105, 283
FENDA Ø 40 cm, round 081, 102
FENDA Ø 45 cm, round 081, 105, 283
FENDA Ø 70 cm, round 081, 105, 283
FENDA PD, E27 102
FENDA TL, E27 ..... 078, 079
FENDA WL, Basis, E27 ..... 202, 244
FENDA WL, E27 245

FERA 25 CL 289
FERA 25 CL, DALI 289
FILI, Terminal WL, QPAR51 272
FITU CUBE WL, E27 196
FITU CW, E27 333
FITU FL, E27 085
FITU MIX & MATCH accessories 098
FITU PD, E27 ..... 094, 095, 096, 097
FITU TL, E27 070
FITU wall bracket 200
FITU WL, E27 200
FLAC BEAM® SP 634
FLAT FRAME BASIC EL, QT9 386
FLAT FRAME CURVE EL, QT9 385
FLATT 65/100 Pole 599
FLATT SENSOR WL 665
FLATT WL 665
FORCHINI 50 PD, E27 118
FORCHINI 70 PD, E27 118
FORCHINI M 40 PD, E27 119
FORCHINI M 40 TRACK 1-circuit, E27 525
FORCHINI M 40 TRACK 3-circuit, PD, E27 499
FORCHINI M 50 PD, E27 119
FRAME BASIC EL 386
FRAME BASIC EL, HV 386
FRAME CURVE EL 385
FRAME CURVE EL, HV 385

G

GALEN 60/120 SP 637
GALEN 100 SP 636
GIMBLE IN 68 EL 446
GIMBLE IN 100 EL 446
GIMBLE IN 150 EL 446
GIMBLE IN 175 EL 447
GIMBLE OUT EL 752
GLASSA CW, square, E27 361
GLENOS PD, 1m, 1-10V 168
GLENOS PD, 2m, 1-10V 168
GLENOS® 60 267
GLOO PURE 27/44/70 Pole, E27 574
GLOO PURE WL, E27 642
GRAFIT 30/60 Pole, E27 586
GRAFIT WL, E27 648

GRAZIA Profile

GRAZIA 10 Surface-mounted profile, flat 769
GRAZIA 10 Surface-mounted profile, standard 769
GRAZIA 10 EDGE surface-mounted profile 772
GRAZIA 10 EDGE accessories 773
GRAZIA 10 Recessed profile 769
GRAZIA 10 Accessories 770, 771
GRAZIA 20 Surface-mounted profile, flat 775
GRAZIA 20 Surface-mounted profile, standard 775
GRAZIA 20 Recessed profile 776
GRAZIA 20 Accessories 777, 778, 779
GRAZIA 60 Surface-mounted profile 781
GRAZIA 60 Recessed profile 781
GRAZIA 60 Accessories 782, 783

GRAZIA LED strips

GRAZIA FLEXSTRIP LED, 24V 792, 793
GRAZIA IP FLEXSTRIP, 24V 800
GRAZIA IP FLEXSTRIP, RGBW, 24V 802
GRAZIA IP FLEXSTRIP, Tunable white, 24V 801
GRAZIA PRO FLEXSTRIP, 24V 794, 795
GRAZIA PRO FLEXSTRIP, RGBW, 24V 799
GRAZIA PRO FLEXSTRIP, Tunable white, 24V 798
GRAZIA PRO MAX FLEXSTRIP, 24V 796, 797

H

H-LIGHT EL, oval, PHASE ... 400
H-LIGHT EL, PHASE ... 401
H-LIGHT EL, round, PHASE ... 400
H-POL 30/60 Pole ... 596
H-POL Twin 30/60 Pole ... 597

H-PROFIL

H-PROFIL 2m ... 785
H-PROFIL 2m accessories ... 786, 787

HANG UP 120 PD, PHASE ... 164
HELIA 30 PD ... 126
HELIA 30 PD, PHASE ... 127
HELIA 40 PD ... 126
HELIA 40 PD, PHASE ... 127
HELIA 50 TRACK 1-circuit ... 521
HELIA 50 TRACK 3-circuit ... 482
HELIA AMBIENT 35 PD ... 128
HELIA AMBIENT 35 PD, PHASE ... 129
HELIA CW, double, PHASE ... 339, 723
HELIA CW, single, PHASE ... 339, 723
HELIA EL ... 391
HELIA Pole, double, PHASE ... 611, 613
HELIA Pole, single, PHASE ... 610, 613
HELIA SENSOR Single ... 610
HELIA SPOT L SP, single, PHASE ... 631
HELIA SPOT S SP, single, PHASE ... 631
HORN EL, QPAR51 ... 415
HORN MAGNA EL ... 416
HORN MEDI EL ... 416
HORN MINI EL ... 416
HORN-A EL, QPAR51 ... 413
HORN-O EL, QPAR51 ... 413
HORN-T EL, QPAR111 ... 414
HORN-T EL, QPAR51 ... 413

I

I-PENDANT PRO PD, 1195x295mm, 1-10V ... 163
I-PENDANT PRO PD, 1195x295mm, DALI ... 163
I-PENDANT PRO PD, 1195x295mm, UGR<19, 1-10V ... 163
IMPERVA 120 CW ... 365
IMPERVA 150 CW ... 365
INDA CW, QPAR51 ... 330
IPERI 50 Pole ... 605
IPERI WL ... 668
IVED GOOSE WL, Rosette ... 259

K

KADUX EL, double, 1-10V ... 437
KADUX EL, double, PHASE ... 436
KADUX EL, double, QPAR111 ... 435
KADUX EL, double, QPAR51 ... 434
KADUX EL, single, 1-10V ... 437
KADUX EL, single, PHASE ... 436
KADUX EL, single, QPAR111 ... 435
KADUX EL, single, QPAR51 ... 434
KADUX EL, triple, PHASE ... 436
KADUX EL, triple, QPAR51 ... 434
KALU CW, double, PHASE ... 352
KALU CW, double, QPAR111 ... 350
KALU CW, PHASE ... 352
KALU CW, QPAR111 ... 350
KALU CW, quad, PHASE ... 353
KALU CW, quad, QPAR111 ... 350
KALU CW, single, PHASE ... 352
KALU CW, single, QPAR111 ... 350
KALU CW, triple, PHASE ... 352
KALU CW, triple, QPAR111 ... 350
KALU TRACK 1-circuit, QPAR111 ... 519
KALU TRACK 1-circuit, PHASE ... 519
KALU TRACK 3-circuit, PHASE ... 493
KALU TRACK 3-circuit, QPAR111 ... 492
KALU TRACK 3-circuit, QR111 ... 492
KAMUELA ECO EL, round, PHASE ... 404, 743
KANO EASYTEC® II, QPAR51 ... 536
KARDAMOD CL, square, double, QPAR111 ... 323
KARDAMOD CL, square, single, QPAR111 ... 323
KARDAMOD CL, round, double, QPAR111 ... 324
KARDAMOD CL, round, single, QPAR111 ... 324
KARPO 30 CW, single ... 253, 334
KARPO 30 CW, single, PHASE ... 334
KARPO 30 EL ... 391
KARPO FL ... 083
KARPO MAGN CW, single, PHASE ... 250
KARPO TL ... 082
KARPO WL ... 253
KENKUA SPOT WL, E27 ... 246
KENKUA WL, E27 ... 246
KERAS ELT WL, E27 ... 651
KINI EL, PHASE ... 737
KIROCONE TL, E27 ... 564

L

L-LINE 120 ... 268
L-LINE 60 ... 268
L-LINE OUT 15 WL, vertical ... 688
L-LINE OUT 30 FL, vertical ... 595
L-LINE OUT 50/80 Pole, horizontal ... 595
L-LINE OUT 60 FL, vertical ... 595
LED PANEL 300x120mm ... 461
LED PANEL 600x600mm ... 461
LED PANEL 620x620mm ... 460, 461
LED SAIL WL ... 229
LED SPIKE SP ... 622
LED SPOT SP ... 719
LENITO TRACK 3-circuit ... 481
LENITO WL ... 242, 275
LIGHT EYE® 150 3Ph., PD, QPAR111 ... 499
LIGHT EYE® 150 PD, QPAR111 ... 108, 523
LIGHT EYE® 150 TRACK 3-circuit, QPAR111 ... 480
LIGHT EYE® 150 TRACK EASYTEC® II, PD, QPAR111 ... 537
LIGHT EYE® 150 TRACK EASYTEC® II, QPAR111 ... 537
LIGHT EYE® 90 1Ph., QPAR51 ... 512
LIGHT EYE® 90 PD, GU10 ... 108
LIGHT PIPE 60/90/140 Pole, PHASE ... 087, 578
LIGHTPOINT EL ... 392

LIGHTBULB

LED A60 E27 ... 852, 853, 854
LED A60 E27, CCT ... 852
LED A60 E27, Mirrorhead, chrome ... 855
LED A60 E27, Mirrorhead, gold ... 855
LED A60 E27, RGBW ... 852
LED C35 E14 ... 852
LED Filament G9 ... 846
LED FRISBEE E27 ... 854
LED G125 E27 ... 856
LED G125 E27, Mirrorhead, gold ... 856
LED G125 E27, Smoked glass ... 856
LED G95/G125 E27 ... 856
LED G95/G125 E27, Smoked glass ... 856
LED GU10 ... 848, 849
LED PAR38 E27 ... 857
LED QPAR111 GU10 ... 850, 851
LED QPAR111 GU10, CCT ... 850
LED QPAR111 GU10, RGBW ... 850
LED QPAR51 GU10 ... 848, 849
LED QR111 G53 ... 851
LED QR51 GU5.3 ... 846
LED QT14 G9 ... 846
LED QT-DE12 R7S 118mm ... 846
LED QT-DE12 R7S 78mm ... 846
LED ST58 E27 ... 855
LED ST64 E27 ... 855
LED T32 E27 ... 855
LED T32 FILAMENT GU10 ... 848
LED T38 E27 ... 853
LED T45 E27 ... 853
LED TCR-TSE GX53 ... 857
T16 G5 ... 857

LIPA CW, PHASE ... 716
LIPSY® 30 CW, Connected ... 356
LIPSY® 30 CW, Dome ... 357
LIPSY® 30 CW, Drum ... 358
LIPSY® 40 CW, Connected ... 356
LIPSY® 40 CW, Dome ... 357
LIPSY® 40 CW, Drum ... 358
LIPSY® 40 CW, Drum, DALI ... 359
LIPSY® 50 CW, Connected ... 356
LIPSY® 50 CW, Dome ... 357
LIPSY® 50 CW, Drum ... 358
LIPSY® 50 CW, Drum, DALI ... 359
LIPSY® CW, Connected ... 356
LIPSY® CW, Dome ... 357
LIPSY® CW, Drum ... 358
LIPSY® CW, Drum, DALI ... 359
LISENNE 40/70 Pole, E27 ... 572
LISENNE PD, E27 ... 131
LISENNE WL, E27 ... 197
LOGS 40/70 Pole ... 586
LOGS IN L WL, PHASE ... 213
LOGS IN WL ... 212
LOGS IN WL, PHASE ... 212
LOGS WL ... 692
LONG GRILL CW ... 371

M

M-TRACK

M-TRACK adjustable ... 556
M-TRACK Spot ... 556
M-TRACK TRACK ... 557
M-TRACK TRACK accessories ... 557

MAGANDA TL ... 072
MAGANDA WL ... 260
MALANG CL, E27 ... 308
MALANG CW ... 121
MALO Display WL ... 276
MALU CL ... 711
MALU Pole ... 606
MALU WL ... 670
MANA 40 Shade, round ... 193
MANA 60 Shade, round ... 193
MANA BASE Round ... 192
MANA BASE WL, round, PHASE ... 192
MANA OUT WL, PHASE ... 688
MANA Shade ... 205, 207
MANA WL, Basis ... 206
MANA WL, Basis, PHASE ... 204, 206
MARONA CW, PHASE ... 360
MARYLIN 40/60/90 WL ... 262
MECANICA PLUS FL ... 086
MECANICA PLUS TL ... 086

MEDO

MEDO 30 AMBIENT CW, DALI ... 150, 300
MEDO 30 AMBIENT CW, PHASE ... 148, 298
MEDO 30 CL, 1-10V ... 146, 296
MEDO 30 CL, PHASE ... 144, 294
MEDO 30 EL, FRAME ... 456
MEDO 30 EL, frameless ... 454
MEDO 40 AMBIENT CW, DALI ... 150, 300
MEDO 40 AMBIENT CW, PHASE ... 149, 299
MEDO 40 CL, 1-10V ... 146, 296
MEDO 40 CL, PHASE ... 145, 295
MEDO 40 EL, FRAME ... 456
MEDO 40 EL, frameless ... 455
MEDO 60 AMBIENT CW, DALI ... 150, 300
MEDO 60 AMBIENT CW, PHASE ... 149, 299
MEDO 60 CL, 1-10V ... 146, 296
MEDO 60 CL, square ... 302
MEDO 60 CL, square, 1-10V ... 152
MEDO 60 CL, square, DALI ... 153, 303
MEDO 60 EL, FRAME ... 456
MEDO 60 EL, frameless ... 455
MEDO 90 AMBIENT CL, DALI ... 151, 301
MEDO 90 AMBIENT CL, PHASE ... 149, 299
MEDO 90 CL, 1-10V ... 147, 297
MEDO 90 EL, FRAME ... 457
MEDO 90 EL, frameless ... 455
MEDO RING 60 PD, DALI ... 155
MEDO RING 60 PD,1-10V ... 154
MEDO RING 90 PD,1-10V ... 154

MELAN CW, E27 ... 360
MERADO FLOOD TRACK 3-circuit, PHASE ... 481
MERADO FLOOD WL, PHASE ... 243
MERIDIAN BOX SENSOR WL, E27 ... 655
MERIDIAN BOX WL, E27 ... 654, 655
MERIDIAN WL, E27 ... 651
MIBO UP/DOWN WL, QT14 ... 264
MOBALA EL ... 388

MOLAT CL, E27 ... 702
MOLAT PD, E27 ... 563
MOLAT Pole, E27 ... 578
MOLAT WL, E27 ... 642
MYRA CW, single, QPAR51 ... 722
MYRA DISPLAY WL, curved, QPAR51 ... 701
MYRA SPOT Double, GU10 ... 613
MYRA UP/DOWN WL, QPAR51 ... 679
MYRA WL, double, QPAR51 ... 722

N

NAGY 75 CL, QPAR51 ... 312
NAUTILUS 10 SP, square ... 621
NAUTILUS 10 SP, round, QPAR51 ... 618, 620
NAUTILUS 10 SPOT LED SP ... 629
NAUTILUS 10 SPOT SP, QPAR51 ... 629
NAUTILUS 10 WL, square ... 720
NAUTILUS 25 WL, QPAR51 ... 720
NAUTILUS SP, QR-C51 ... 627
NAUTILUS SPOT SP, PAR38, E27 ... 629
NAUTILUS WL, square ... 720
NEPRO DISPLAY QT-DE12 ... 276
NEW FLAT WL, RGB-W ... 226

NEW TRIA

NEW TRIA 110 Single, square, CS, PHASE ... 433
NEW TRIA 110 Single, round, CS, PHASE ... 432
NEW TRIA 150 Single, square, CS, 1-10V ... 433
NEW TRIA 150 Single, square, LS, QPAR111 ... 425
NEW TRIA 150 Single, round, CS, 1-10V ... 433
NEW TRIA 150 Single, round, LS, QPAR111 ... 425
NEW TRIA 155 Double, CS ... 431
NEW TRIA 155 Double, CS, QPAR51 ... 424
NEW TRIA 300 Double, CS, QPAR111 ... 425
NEW TRIA 45 Single, square, CS ... 426
NEW TRIA 45 Single, round, CS ... 426
NEW TRIA 68 EL, Single, round, CS, PHASE ... 428
NEW TRIA 68 Single, square, CS ... 427
NEW TRIA 68 Single, square, CS, PHASE ... 428
NEW TRIA 68 Single, square, CS/LS, PHASE ... 429
NEW TRIA 68 Single, square, CS/LS, QPAR51 ... 420
NEW TRIA 68 Single, round, CS ... 427
NEW TRIA 68 Single, round, CS/LS, PHASE ... 429
NEW TRIA 68 Single, round, CS/LS, QPAR51 ... 420
NEW TRIA 77 Single, square, CS ... 430
NEW TRIA 77 Single, round, CS ... 430
NEW TRIA 78 Single, square, CS, QPAR51 ... 423
NEW TRIA 78 Single, square, LS, QPAR51 ... 422
NEW TRIA 78 Single, round, CS, QPAR51 ... 423
NEW TRIA 78 Single, round, LS, QPAR51 ... 422
NEW TRIA 78 XL Single, square, CS, QPAR51 ... 421
NEW TRIA 78 XL Single, round, CS, QPAR51 ... 421

NOBLO CW, double, PHASE ... 343
NOBLO CW, PHASE ... 343
NOBLO CW, single, PHASE ... 343
NOBLO CW, triple, PHASE ... 343
NOBLO SPOT 1-circuit ... 520
NOBLO SPOT 1-circuit, Triple Track Set ... 510
NOBLO SPOT 3-circuit ... 482
NOBLO SPOT LV, Rope Track ... 550
NOTAPO WL ... 382
NOYA PD, PHASE ... 165

O

OCCULDAS 13 DL, Indirect, PHASE ... 311
OCCULDAS 14 EL, Indirect, PHASE ... 411
OCCULDAS 23 DL, Indirect, PHASE ... 311
OCCULDAS 23 EL, Indirect, PHASE ... 411
OCULUS CL, Move, PHASE ... 445
OCULUS CL, PHASE ... 315
OCULUS CW, PHASE ... 331
OCULUS PD, single, PHASE ... 107
OCULUS UP/DOWN WL, PHASE ... 233
ONE 40 TRACK 3-circuit, DALI ... 473
ONE 40 WL, DALI ... 194
ONE 60 PD, DALI ... 157
ONE 60 PD, DALI, up/down ... 158
ONE 60 PD, PHASE, up/down ... 158
ONE 60 WL, DALI ... 194
ONE 80 PD, DALI ... 157
ONE 80 PD, DALI, up/down ... 158
ONE DOUBLE PD, DALI, up/down ... 159
ONE DOUBLE PD, PHASE, up/down ... 159
ONE TRIPLE PD, DALI ... 157
OPEN GRILL PD, Double, rotatable ... 172
OPEN GRILL PD, Single, rotatable ... 172
ORBIT LV, QR111 ... 547
ORDI SENSOR WL ... 666
ORDI WL ... 666
OSSA 180 WL, QT-DE12 ... 224
OSSA 300 WL, QT-DE12 ... 224
OTOS GLAS Pole, E27 ... 573
OUT 65 EL, round, PHASE ... 739
OUT-BEAM FRAME SP ... 718
OUT-BEAM UP/DOWN WL, QT-DE12 ... 698
OUT-BEAM UP/FLOOD Down WL ... 699
OVALISK 75/100 Pole ... 575
OVALISK CL ... 703
OVALISK Sensor WL ... 650
OVALISK WL ... 650

P

P-LIGHT CW ... 372, 373, 375
P-LIGHT CW accessories ... 372, 373, 375
P-LIGHT EL ... 405

PANEL 60 CL, round, DALI ... 305
PANEL 60 CL, round, PHASE ... 304
PANEL 60 PD, 1-10V ... 160
PANEL 60 PD, round, DALI ... 161
PANEL CL, 1200x300mm, DALI ... 305
PANEL CL, 1200x300mm, PHASE ... 305
PANTILO 28 PD, E27 ... 135
PANTILO CONVEX 29 PD, E27 ... 136
PANTILO CONVEX 40 PD, E27 ... 136
PARA 380 PD, E27 ... 182
PARA CONE 14 1-circuit, PD, QPAR51 ... 524
PARA CONE 14 1-circuit, QPAR51 ... 513
PARA CONE 14 3-circuit, PD, QPAR51 ... 499
PARA CONE 14 3-circuit, QPAR111 ... 480
PARA CONE 20 PD, E27 ... 120
PARA CONE 30 PD, E27 ... 120
PARA DOME PD, E27 ... 181, 183
PARA DOME Shade ... 181
PARA FLAC PD/CL ... 184
PARA FLAC PD/CL, DALI ... 185
PARA MULTI PD, DLMI ... 183
PATTA-F EL, square, PHASE ... 407, 740
PATTA-F EL, round, PHASE ... 407, 740
PATTA-I EL, square, PHASE ... 408, 409, 741, 742
PATTA-I EL, round, PHASE ... 408, 409, 741, 742
PAVANO 300x1200mm ... 463
PAVANO 600x600mm ... 463
PAVANO 620x620mm ... 463
PEMA® WL ... 240, 659, 669
PEMA® WL, E27 ... 669
PHELIA 10 PD, E27 ... 114
PHELIA 20 PD, E27 ... 115
PHELIA 25 PD, E27 ... 115
PHELIA 30 PD, E27 ... 115
PHELIA FL, E27 ... 084
PHELIA TL, QPAR51 ... 084
PHELIA WL, QPAR51 ... 251
PHOTONIA CL, E27 ... 702
PHOTONIA PD, E27 ... 562
PHOTONIA Pole, E27 ... 573
PHOTONIA TL, E27 ... 568
PHOTONIA WL, E27 ... 642
PIKA EL, square, QPAR51, tiltable ... 397
PIKA EL, square, QPAR51, rigid ... 397
PIKA EL, round, QPAR51 ... 397
PIKA EL, round, QPAR51, rigid ... 396
PIPOFLEX WL ... 256

PLASTRA

PLASTRA 101 WL, E14 ... 236
PLASTRA 104 CL, E27 ... 288
PLASTRA 104 WL, QT14 ... 230
PLASTRA 105 CL, E27 ... 288
PLASTRA 25 PD, round, TCR-TSE ... 106
PLASTRA CL, PHASE ... 288
PLASTRA CL, QPAR51 ... 322
PLASTRA EL, square, QPAR51 ... 395
PLASTRA EL, round, QPAR51 ... 394
PLASTRA PD, QPAR51 ... 124
PLASTRA SLOT WL, E14 ... 215
PLASTRA WL, Cube, QT14 ... 210
PLASTRA WL, Cubes ... 211
PLASTRA WL, Curve, PHASE ... 227
PLASTRA WL, Curve, QT-DE12 ... 236
PLASTRA WL, semicircle ... 208
PLASTRA WL, QPAR51 ... 215, 231
PLASTRA WL, square ... 190
PLASTRA WL, rectangular, QT-DE12 ... 209
PLASTRA WL, round ... 190

PLYTTA ... 549
POLE PARC 90/150/200 Pole ... 584
POLE PARC CL ... 706
POLE PARC UP/DOWN WL ... 683
POLE PARC WL ... 657
POWER TRAIL-LITE® EL, square ... 749
POWER TRAIL-LITE® EL, round ... 749
PURI 3-circuit, QPAR51 ... 484
PURI CW, double, QPAR51 ... 349
PURI CW, QPAR51 ... 349
PURI CW, quad, QPAR51 ... 349
PURI CW, single, QPAR51 ... 349
PURI CW, triple, QPAR51 ... 349
PURI TRACK 1-circuit, QPAR51 ... 511, 512
PURI TRACK 1-circuit, Triple Track Set ... 510
PURI TRACK 3-circuit, QPAR51 ... 485
PURIA TRACK 1-circuit, QPAR51 ... 511
PURISA WL, E27 ... 199

Q

Q-LINE® CL, 1m, BAP, PHASE ... 306
Q-LINE® CL, 2m, BAP, PHASE ... 307
Q-LINE® PD, 1m, BAP, PHASE ... 170
Q-LINE® PD, 2m, BAP, PHASE ... 170
Q-LINE® PD, DALI, single ... 169
Q-LINE® PD, single ... 169
Q-LINE® WL ... 269
QUAD FRAME 14 WL ... 238
QUAD FRAME 19 WL ... 238
QUAD FRAME 9 WL ... 389
QUAD Pole ... 609
QUAD UP/DOWN 12 WL ... 214, 687
QUAD UP/DOWN 15 WL ... 214, 687
QUAD WL ... 239, 672
QUADRASS PD, E27 ... 133
QUADRASS SPOT WL, E27 ... 201
QUADRASS WL, E27 ... 201
QUADRASYL 75 Pole, TCR-TSE ... 605
QUADRASYL CW, TCR-TSE ... 671
QUADRASYL WL, TCR-TSE ... 671
QUADRULO SENSOR WL, E27 ... 652
QUADRULO WL, E27 ... 653

R

RASCALI 45/65 Pole ... 593
RASCALI WL ... 660
RETRATO WL, PHASE ... 271
ROCCI EL, square ... 751
ROCCI EL, round ... 751
ROTOBALL 25 CL, E27 ... 308
ROTOBALL 25/40/50 FL, E27 ... 565
ROTOBALL 25/40/50 PD, E27 ... 137
ROTOBALL 40 CL, E27 ... 308
ROX ACRYL 30/60/90 Pole, E27 ... 581
ROX ACRYL 30/60/90 Pole, PHASE ... 581
ROX CL, GX53 ... 706
ROX CL, QPAR111 ... 314, 706
ROX UP/DOWN WL, QPAR111 ... 234, 683
ROX WL, QPAR111 ... 234, 657
RUBA 27/42 CW ... 714

RUSTY® UP/DOWN WL, square ... 690
RUSTY® UP/DOWN WL, round ... 682
RUSTY® 40/70 Pole ... 571, 588
RUSTY® 40/70 Pole, E27 ... 571, 588
RUSTY® CONE 24 FL, E14 ... 570
RUSTY® CONE 40/70 Pole, E27 ... 570
RUSTY® PATHLIGHT 40/70 Pole ... 603
RUSTY® PATHLIGHT Pole, TCR-TSE ... 603
RUSTY® SLOT 50/80 Pole ... 601
RUSTY® SLOT 50/80 Pole, E27 ... 601

S

SAIL WL ... 673
SALUNA LV, QR-C51 ... 546
SAMRINA SP, single, GU10 ... 619
SEDO 7 WL ... 220
SEDO 14 WL ... 220
SEDO 21 WL ... 220
SENSER 12 CW, square, PHASE ... 366
SENSER 12 CW, round, PHASE ... 367
SENSER 12 EL, square ... 449
SENSER 12 EL, round ... 448
SENSER 18 CW, square, PHASE ... 366
SENSER 18 CW, round, PHASE ... 367
SENSER 18 EL, square ... 449
SENSER 18 EL, round ... 448
SENSER 24 CW, square, PHASE ... 366
SENSER 24 CW, round, PHASE ... 367
SENSER 24 EL, square ... 449
SENSER 24 EL, round ... 448
SENSER CW, square, PHASE ... 366
SENSER CW, round, PHASE ... 367
SHELL 15 WL, PHASE ... 241
SHELL 30 WL, PHASE ... 241
SIGHT 115 CW ... 370
SIGHT 60 CW ... 370
SIGHT MOVE 3-circuit ... 496
SIGHT MOVE 3-circuit, DALI ... 471
SIGHT TRACK 3-circuit ... 483
SIGHT TRACK 3-circuit, DALI ... 472
SIGHT TRACK 3-circuit, PD ... 497
SIMA CW, square, PHASE ... 363
SIMA CW, square, Sensor ... 363
SIMA CW, round, PHASE ... 362
SIMA CW, round, Sensor ... 362
SITRA 360 CW, TCR-TSE ... 722
SITRA 360 Pole, TCR-TSE ... 612
SITRA 360 SPIKE SP, double, TCR-TSE ... 623
SITRA 360 SPIKE SP, single, TCR-TSE ... 623
SITRA CL, TCR-TSE ... 704
SITRA CUBE WL ... 691
SITRA CUBE WL, TCR-TSE ... 691
SITRA UP/DOWN WL ... 680
SITRA UP/DOWN WL, TCR-TSE ... 680
SITRA WL ... 656
SITRA WL, TCR-TSE ... 656
SLOTBOX 40/70 Pole ... 598
SLOTS 45 Pole ... 591
SLOTS 65 Pole ... 591
SLOTS WL ... 644
SOLASTO EL, square/round ... 750
SOLID CUBE WL, QT14 ... 210
SOMNILA FLEX WL, left ... 255
SOMNILA FLEX WL, right ... 255
SOMNILA SPOT WL, left ... 254
SOMNILA SPOT WL, right ... 254
SOPRANA CL, E27 ... 285
SOPRANA PD, E27 ... 138
SPHERA 45 PD, PHASE ... 122
SPHERA 75 PD, PHASE ... 122
SPOODI 13 SP, SENSOR ... 633
SPOODI 20 SP, SENSOR ... 633
SPOODI 31 SP ... 633
SPOT 79 CW, QPAR51 ... 330
SPOT DISPLAY E27 ... 273
SPOT TRACK 1-circuit, E27 ... 512
SPOT TRACK 3-circuit, E27 ... 478
SQUARE CL, PHASE ... 707
SQUARE Pole 30/60/90 Pole, E27 ... 587
SQUARE Pole 30/60/90 Pole, PHASE ... 587
SQUARE TURN WL, G9 ... 686
SQUARE WL, E27 ... 648
SQUARE WL, PHASE ... 648
STIX WL ... 251
STRUCTEC 1-circuit ... 522
STRUCTEC 3-circuit ... 490, 491
STRUCTEC 3-circuit, DALI ... 470
STRUCTEC ZOOM 3-circuit ... 491
SUN PD, E27 ... 137
SUPROS 78 CL, PHASE ... 325
SUPROS 78 EL, Move, PHASE ... 441
SUPROS 78 EL, PHASE ... 440
SUPROS 78 PD ... 178
SUPROS 78 TRACK 3-circuit, PHASE ... 488
SUPROS 78 Up/Down WL, PHASE ... 235
SUPROS CL, Move ... 325
SUPROS DL ... 442
SUPROS DL, Move ... 443
SUPROS PD ... 179
SUPROS TRACK 3-circuit ... 489
SYNA SP ... 622
SYROS LV, QR-C51 ... 545

T

TANI WL, QT-DE12 ... 218
TEC KALU CL, double, PHASE ... 317
TEC KALU CL, quad, PHASE ... 317
TEC KALU TRACK 3-circuit, double, PHASE ... 486
TEC KALU TRACK 3-circuit, quad, PHASE ... 486
TELESKOP LV, QR-C51 ... 544
TENORA CL, E27 ... 285

TENSEO low-voltage cord
TENSEO low-voltage cord ... 554, 555
TENSEO low-voltage cord accessories ... 555

TERANG 200 CW ... 717
TERANG 270 CW ... 717
TERANG 270 CW SENSOR ... 717
THEO BRACKET 50/70 Pole ... 608
THEO BRACKET CW ... 719
THEO BRACKET SP ... 620
THEO PATHLIGHT Pole, double ... 608
THEO PATHLIGHT Pole, single ... 608
THEO UP/DOWN WL, QPAR51 ... 216, 693
THEO WL, QPAR51 ... 676
TODAY Display ... 700
TODAY PRO Display ... 700
TONGA® 1-circuit, PD, E14 ... 524
TONGA® EASYTEC® II, PD, E14 ... 538
TONGA® PD, E14 ... 132
TONILA TL ... 071
TOTHEE CW, PHASE ... 335
TRAIL-LITE® 60 EL ... 748
TRAPECCO DOWN WL ... 670
TRAPECCO Pole ... 606
TRIADEM PD, E27 ... 139
TRILEDO CL, double, square ... 321
TRILEDO CL, double, square, QPAR51 ... 319
TRILEDO CL, single, square ... 321
TRILEDO CL, single, square, QPAR51 ... 319
TRILEDO CL, single, round ... 321
TRILEDO CL, single, round, QPAR51 ... 319
TRUKKO 60/90 WL ... 261
TRUKKO WL, rectangular ... 261
TRUKKO WL, round ... 261
TRUST 30/60 Pole ... 579

V

VANO WING SP, 1-10V ... 635
VAP 40/70/100 Pole, E27 ... 582
VAP SLIM 30/60/90 Pole, E27 ... 582
VARU EL ... 403, 737
VARU EL, QPAR51 ... 403, 737
VERLUX EL, square, PHASE ... 451
VILUA S WL ... 674
VILUA L WL ... 675
VILUA UP/DOWN, WL ... 675
VINCELLI D PD, PHASE ... 111
VINCELLI D TL ... 072
VINCELLI D WL, PHASE ... 271

W

WALLYX WL, QPAR51 ... 661
WETSY EL, square/round ... 751
WL 106 E14 ... 263
WL 149 WL ... 219
WL 149 WL, QT-DE12 ... 219
WORKLIGHT FL ... 088
WORKLIGHT PD, DALI ... 176
WORKLIGHT PLUS FL ... 089
WORKLIGHT PLUS PD, Switch ... 177
WORO EL ... 388


1000799 593

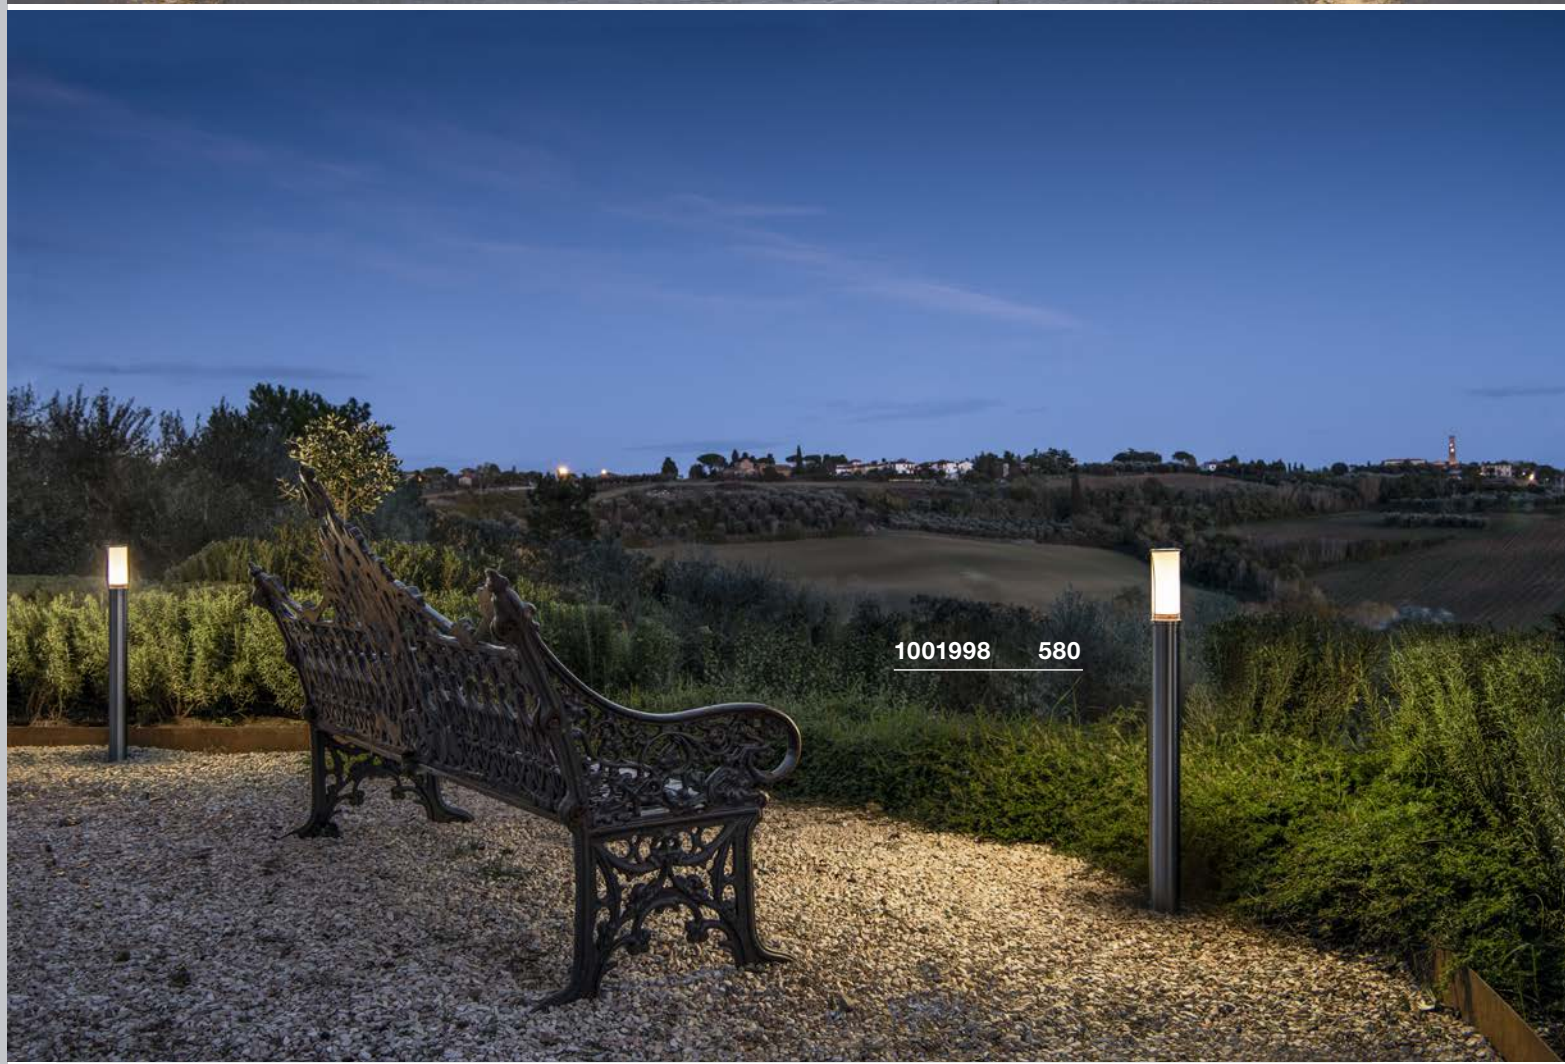
1001998 580


1000682 577


1003001 609

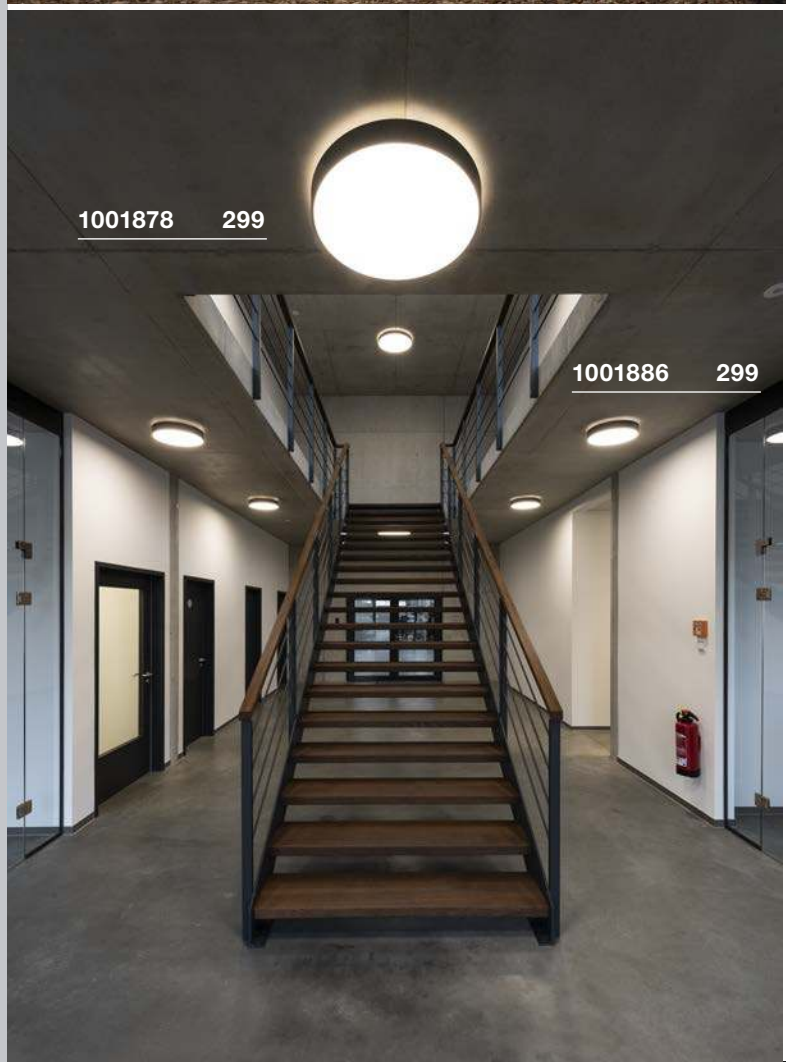
1001878 299
1001886 299


139112 547

SLV WORLDWIDE.

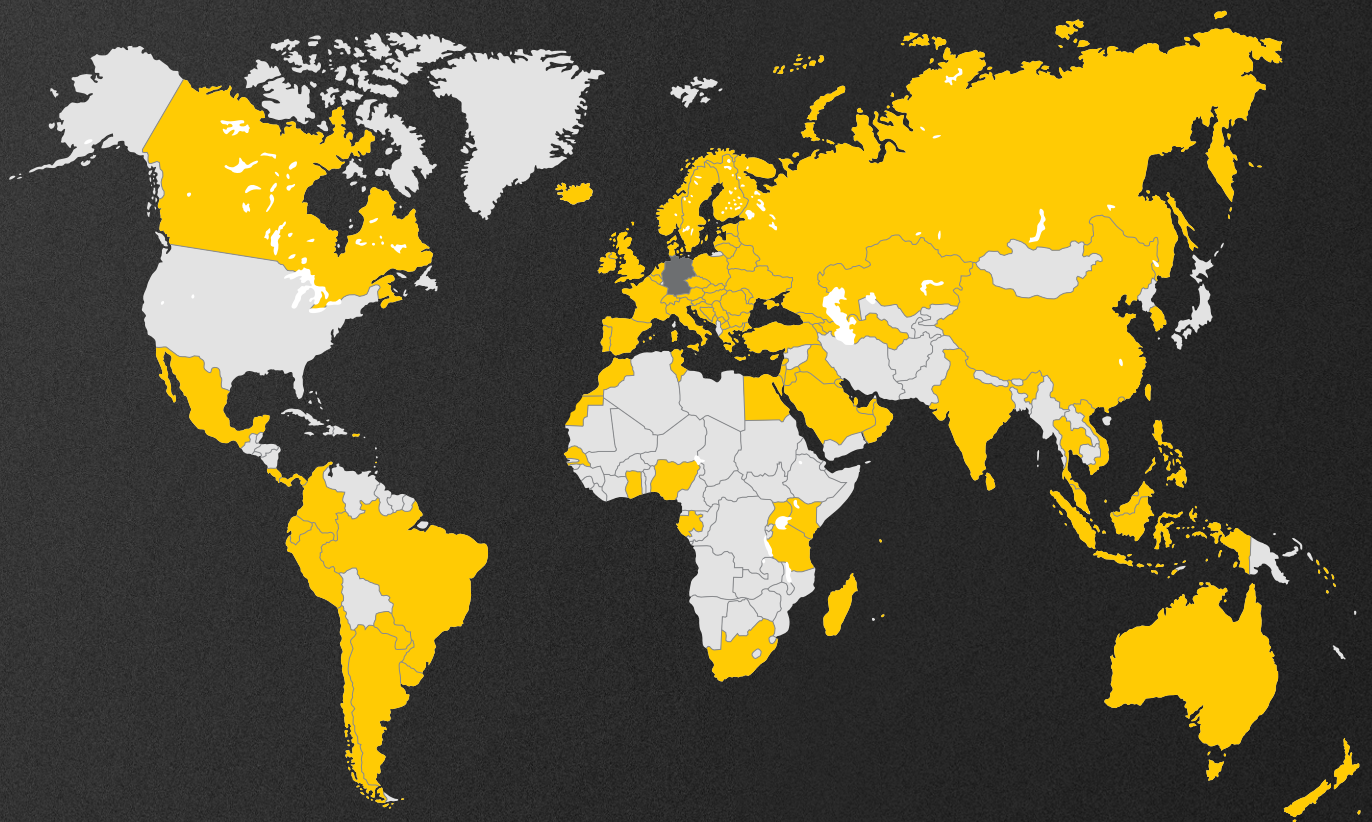

MORE THAN 100 COUNTRIES – ONE SHARED LANGUAGE: EXPERIENCE LIGHT.

Our SLV lights illuminate **the dark, all over the** world.
Our lights are already in use in more than 100 countries.

And the journey continues: together with you, we want to inspire people **all over the world** to experience light in the best way possible.

SYMBOLS KEY

PRODUCT CHARACTERISTICS

Information regarding the possible **replacement** of light sources and control equipment by end users or qualified persons **without permanent damage to the light.**



· Light source can be replaced by a qualified person
· LED can be replaced by a qualified person
· Control equipment can be replaced by a qualified person



· Light source can be replaced by the end user
· LED can be replaced by the end user
· Control equipment can be replaced by the end user



· Light source cannot be replaced
· Control equipment cannot be replaced



Dimmable with...
· C = leading-edge **phase** dimmer
· L = trailing-edge **phase** dimmer
· Uni = universal dimmer
· 1–10 V
· Dali = Dali busbar system
· Switch = switch or button



Dim to warm
With dimmers, the light colour can be altered from cold white to warm white.



Weight of the product in kilogrammes (kg)



Rotating and pivoting capacity in degrees:
· Rotation range
· Pivot range
· Gimballed



The half beam angle
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



Pendant cable length in cm



Power cable length in cm
Feed-in length in cm (with open cable ends)



Average lifespan of a lightbulb or light source in hours



Lumen maintenance
Describes the amount by which the luminous flux of an LED decreases during a specified period.



Indicates products that can be operated via **remote control**



UGR = Unified Glare Rating
The lower the UGR value, the lower the psychological glare.

SAFETY DETAILS



Protection categories
· Protection category I/protective conductor
· Protection class II/protection through double or strengthened insulation
· Protection category III/protection through low voltage



The **IK degree of shock resistance** is a measure of the resistance of the housing of electrical equipment to mechanical stress, especially impact stress.

APPLICATION AREA · ASSEMBLY



IP protection class
Indicates the suitability of electrical equipment for different environmental conditions.



Allows the installation of electrical control equipment on materials whose **flammability** is not known.



Through-wiring possible.



Independent converter
(control equipment also for use outside of lights)



Short circuit protected **safety control equipment**



· For indoor use **only**
· **Not suitable**for use **indoors**

SPECIFIC DETAILS - RECESSED LIGHTS



Shape of the installation opening



Product suitability for being driven over given



weight capacity of the product up to specified value in tons. Measurements based on concrete installation.

SPECIAL SYMBOLS



Indicates **products** that have been added to the catalogue for the first time



Indicates **new versions** of existing products
· New colour variant
· New product variant
· Successor



Items with this symbol are **discontinued models**



Indicates products
· with **integrated** LEDs
· with **lightbulb socket**

Connected lighting
Indicates smart products that use the following protocols:
· Zigbee® · DALI · Bluetooth



Indicates **lights with a movement sensor** (microwave technology (MR)/infrared/radio)

Using the integrated **CCT** switch, the light colour can be switched between 3000K and 4000K during installation.



Indicates **lights with RGB+W** and **RGB** (Red-Green-Blue + White and Red-Green-Blue)



· **USB charging function**
· **Inductive (wireless) charging function** for Smartphones



Indicates products that **can be combined**



Indicates lights that, after priming **can be individually covered with wall paint or wallpaper**.



Indicates lights from a single **lighting family**



Award-winning lights
· Red Dot Design Award
· German Design Award

CUSTOMER INFORMATION

Information regarding light housing heat generation
Halogen lightbulbs operate at high temperatures and can lead to the heating of the light housing. They should therefore only be touched once the housing has cooled down. Adjustable lights and light heads that do not feature insulated positioning levers, or which exceed the maximum permissible housing temperature at the positioning point when operated at maximum wattage, should also be mounted out of reach. LED retrofit lightbulbs offer a low-temperature alternative to most of our halogen lights.

Luminous flux
The total amount of light produced by a light source is given in lumens (lm).

Luminosity
The luminosity is the luminous flux indicated per solid angle and is expressed in candelas (cd).

Colour rendering index
The colour rendering property of a light source is indicated by the Colour Rendering Index (CRI). A CRI of 80 or higher is required for light sources used indoors. Light sources used outdoors must have a CRI of at least 65.

Light colour
The light colour of a light source is indicated in K (Kelvin).

Standard LED
This is the classic version of the LED (3 mm or 5 mm LED). These were originally developed for indication purposes, e.g. in instrument panels.

Standard SMD LED
SMD means "Surface Mounted Device". This is a compact LED that is soldered directly onto the circuit board without wire connections. SMDs are available in different sizes and are suitable for lighting purposes.

PowerLED
PowerLED is a high-performance LED with a performance of 1W or more. It places increased demands on current constancy and should therefore always be operated with constant current sources. If you with to connect several LEDs, they must therefore be connected in series. A parallel connection is not permitted. Please ensure that you observe the installation sequence so that the LEDs are not exposed to high current for a short time, which could damage them. Ultimately, the following rule applies: first you should completely connect the secondary circuit (LEDs to driver), then you should close the primary circuit (driver to power source).

Chip On Board LED (COB LED); Area LED
This is an LED with an exceptionally flat shape. The advantage of COB LEDs is good heat dissipation when technically implemented with cooling surfaces, which enables high light output and a long lifespan.

Stainless Steel 304
(1.4301) Good resistance to corrosion is shown in natural environmental media (water, urban and rural atmosphere) in the absence of significant chlorine and salt concentrations. 1.4301 is, however, not suitable for use in areas where there is contact with seawater, salt water or a salty atmosphere, or for use in swimming pools or similar contexts.

Stainless Steel 316
(1.4404) In natural environmental media (water, urban and rural atmosphere) as well as in industrial areas with moderate chlorine and salt concentration, in the food and pharmaceutical industry and in the agricultural food sector, 1.4404 shows excellent resistance to corrosion. 1.4404 is not resistant to seawater.

Please note:
A large part of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. All product descriptions and specifications are subject to alteration and errors.
All of the products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards.
All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical alterations!

The presentation of our lights with realistic photos showing examples of use is possible thanks to the kind cooperation and agreement of the owners or designers of the environments depicted in the images. We would like to take this opportunity to thank all those who contributed to the creation and use of our photos by giving their consent!

With the appearance of this catalogue, the prices stated in previous lists and catalogues are rendered invalid.

All prices specified are recommended retail prices (RRP) given in GBP and without VAT.

Publisher
SLV GmbH, Germany
Daimlerstrasse 21-23
52531 Uebach-Palenberg
T +49 2451 4833-355
slv.com

Copyright
© SLV GmbH, 2020

Image credits
SLV GmbH
External photographers: Andreas Fein, Anja Lynen, Gerd Arnolds, Günther Preissler, Marc Derkum, Dirk Hoffmann

SLV

EXPERIENCE LIGHT

SLV LIGHTING UK LTD
Unit E Chiltern Park,
Boscombe Road
Dunstable
LU5 4LT

T + 44 (0)203 968 11 00
F + 44 (0)203 968 11 09

sales@uk.slv.com
slv.com

PEFC™
PEFC/04-31-1033

minus 52% CO_2

Innovative use of combined heat and power technology when printing this product reduced CO_2 emissions by up to 52% in comparison to conventional methods in Germany.

1004985